




### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

<Ant.1>


<1Mbps>

#### Hopping Mode Low Band Edge Plot

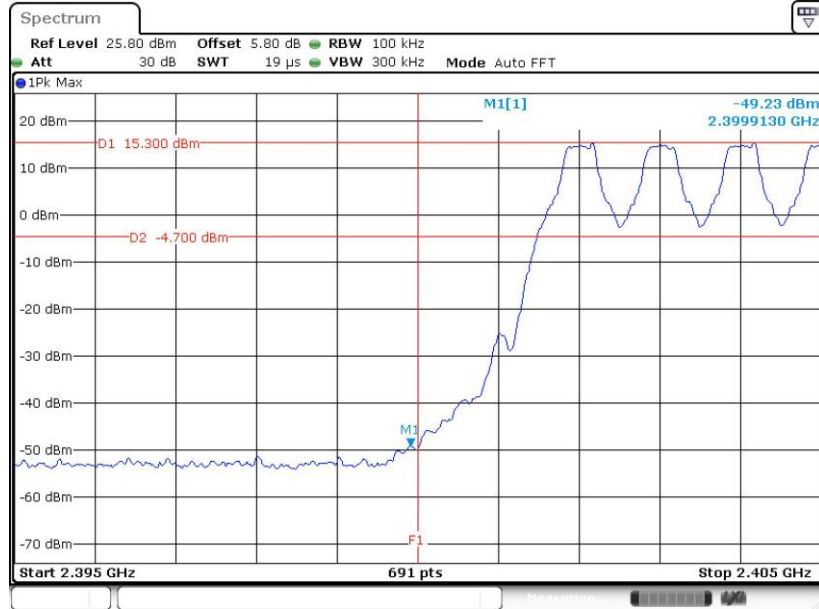

Date: 29.MAY.2021 12:24:02

#### Hopping Mode High Band Edge Plot

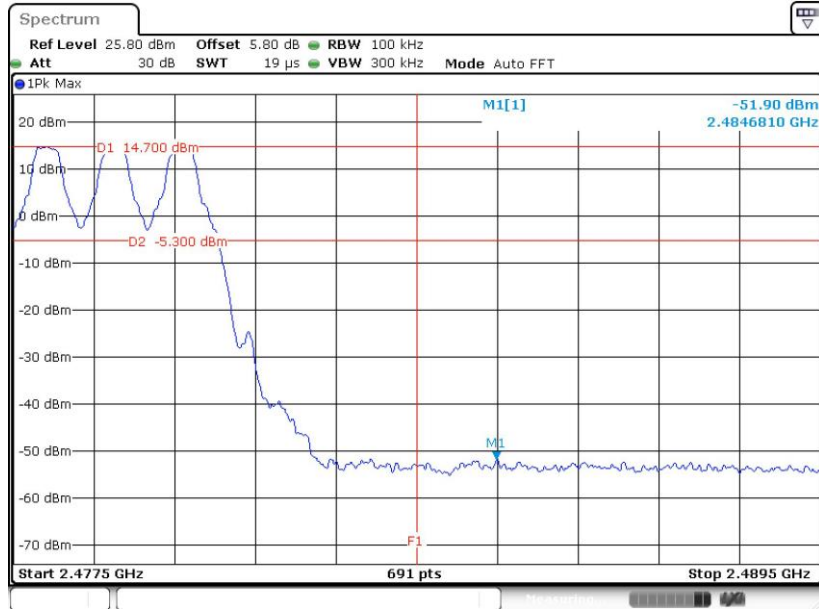


Date: 29.MAY.2021 12:24:20




<2Mbps>

Hopping Mode Low Band Edge Plot

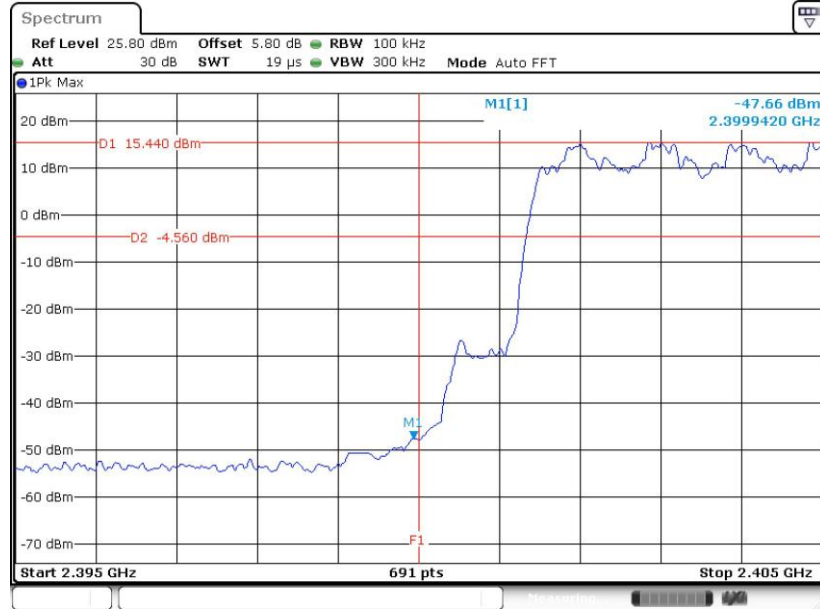

Date: 29 MAY 2021 12:52:36

Hopping Mode High Band Edge Plot

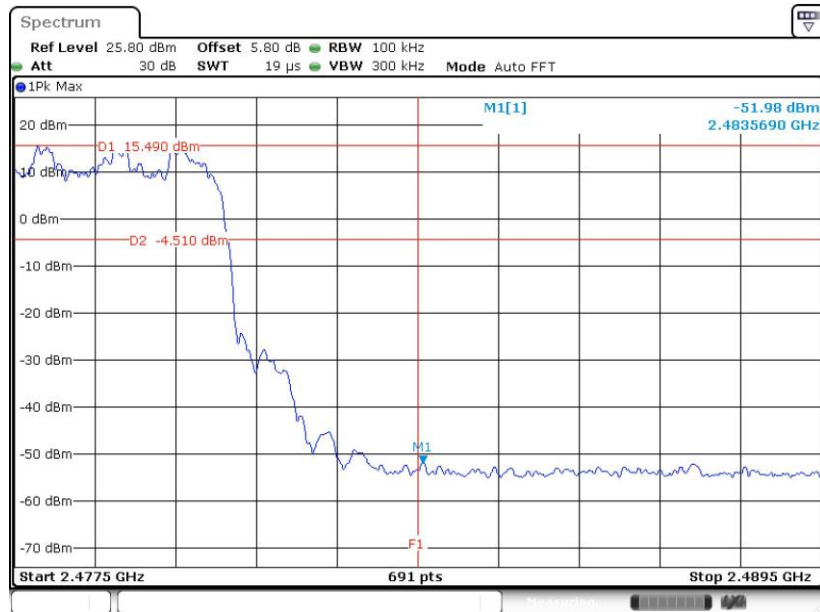


Date: 29 MAY 2021 12:52:58




<3Mbps>

Hopping Mode Low Band Edge Plot

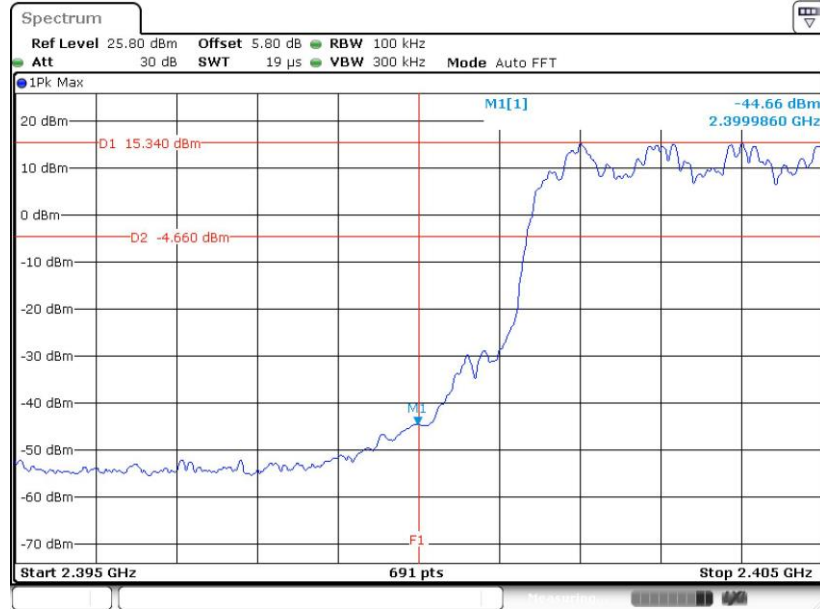

Date: 29 MAY 2021 13:22:57

Hopping Mode High Band Edge Plot

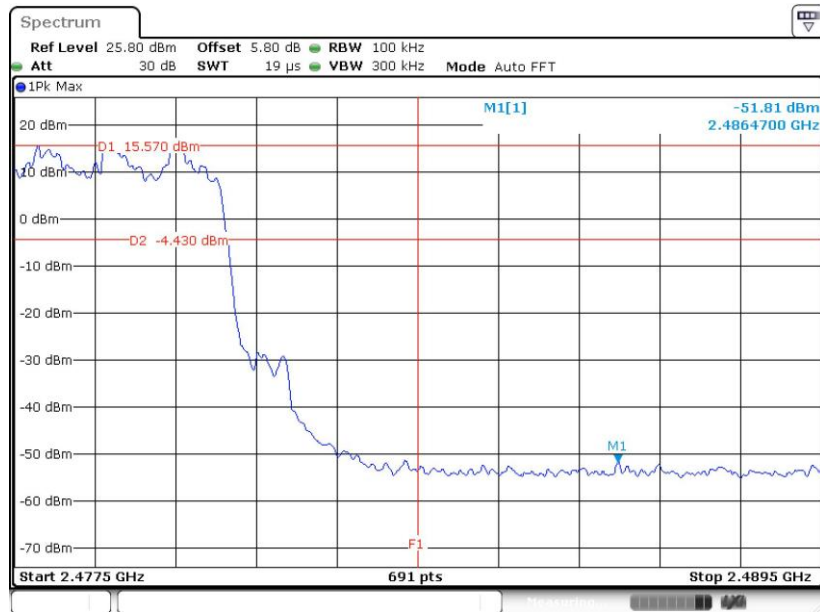


Date: 29 MAY 2021 13:23:30



<Ant.2>


<1Mbps>

Hopping Mode Low Band Edge Plot

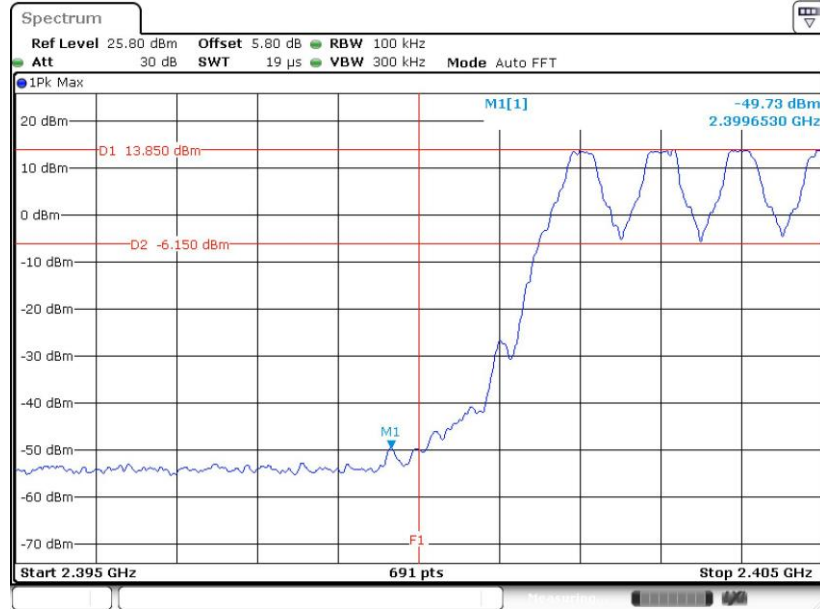

Date: 29 MAY 2021 14:13:43

Hopping Mode High Band Edge Plot

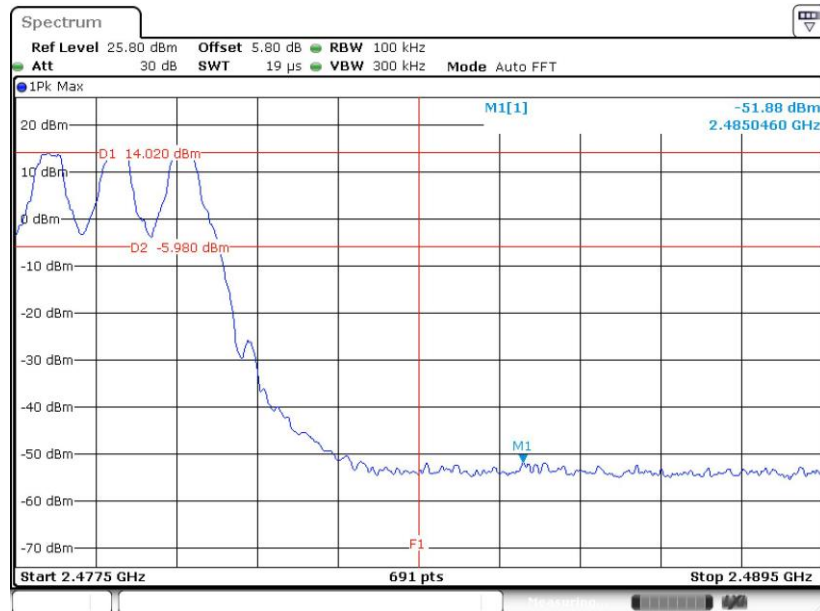


Date: 29 MAY 2021 14:14:29




<2Mbps>

Hopping Mode Low Band Edge Plot

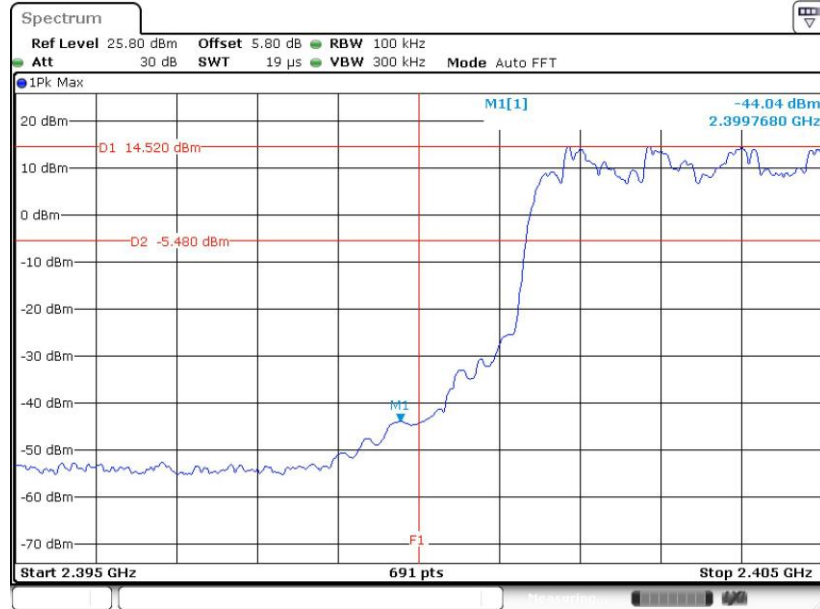

Date: 29 MAY 2021 14:35:55

Hopping Mode High Band Edge Plot

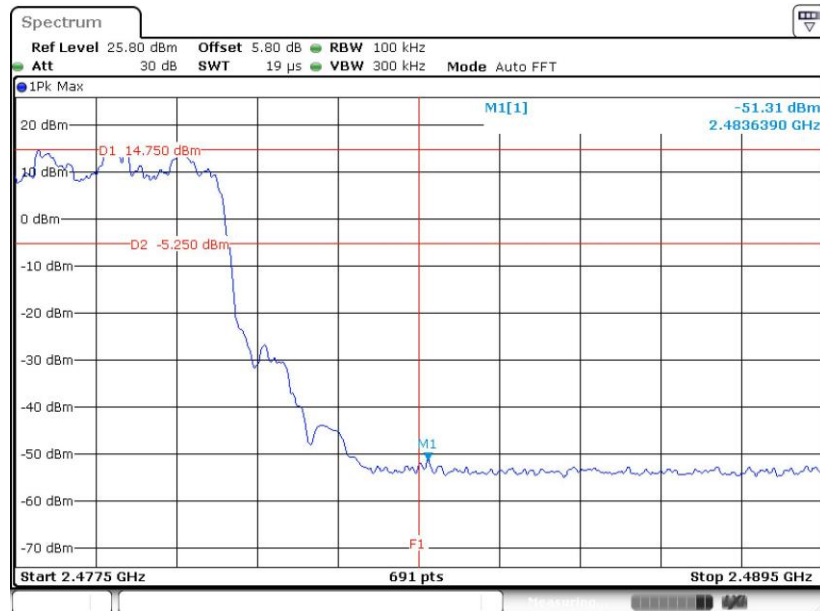


Date: 29 MAY 2021 14:36:44




<3Mbps>

Hopping Mode Low Band Edge Plot

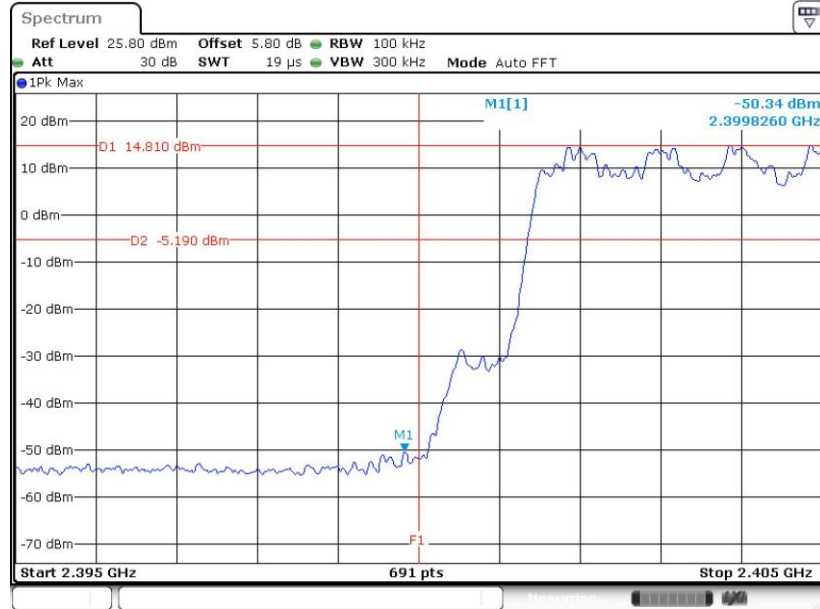

Date: 29 MAY 2021 14:58:31

Hopping Mode High Band Edge Plot

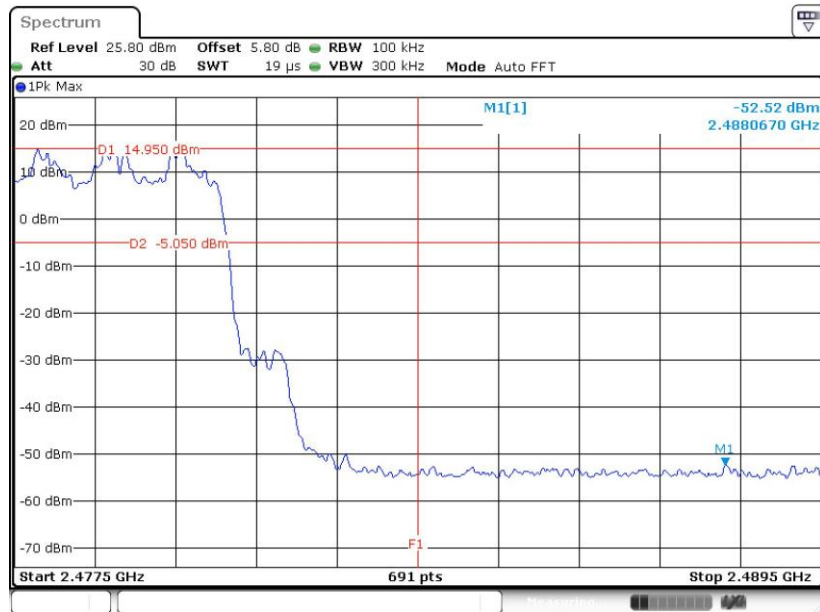

Date: 29 MAY 2021 14:59:00

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup






### 3.7.5 Test Result of Conducted Spurious Emission

<Ant.1>


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

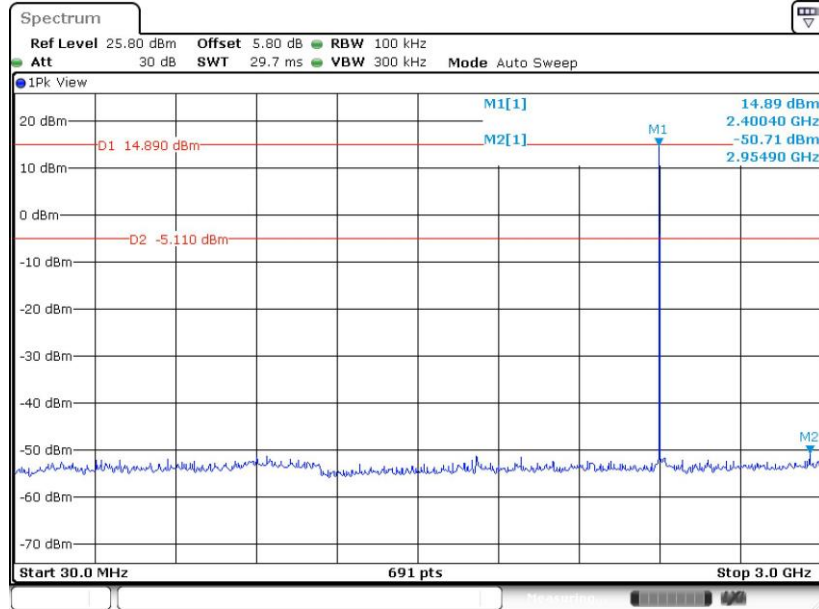

Date: 29.MAY.2021 12:17:14

CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

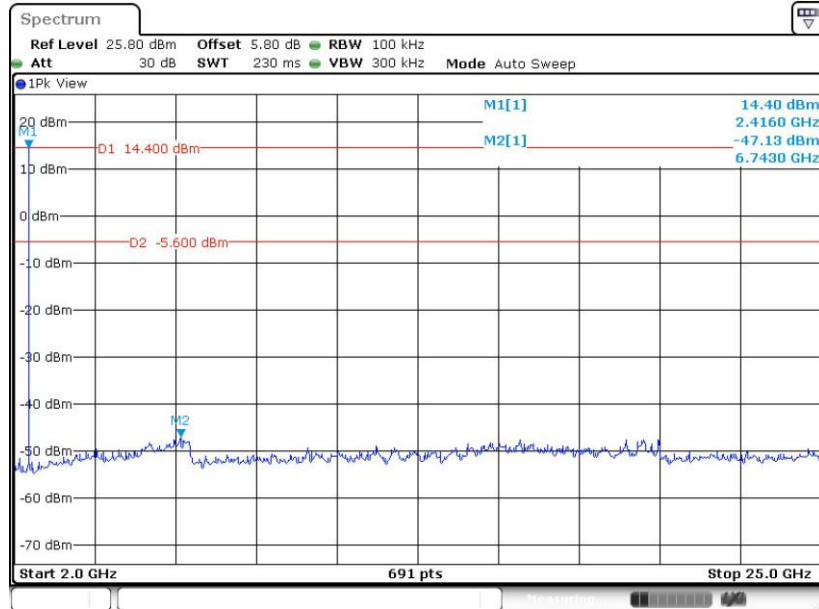


Date: 29.MAY.2021 12:17:41






CSE Plot on Ch 39 between 30MHz ~ 3 GHz

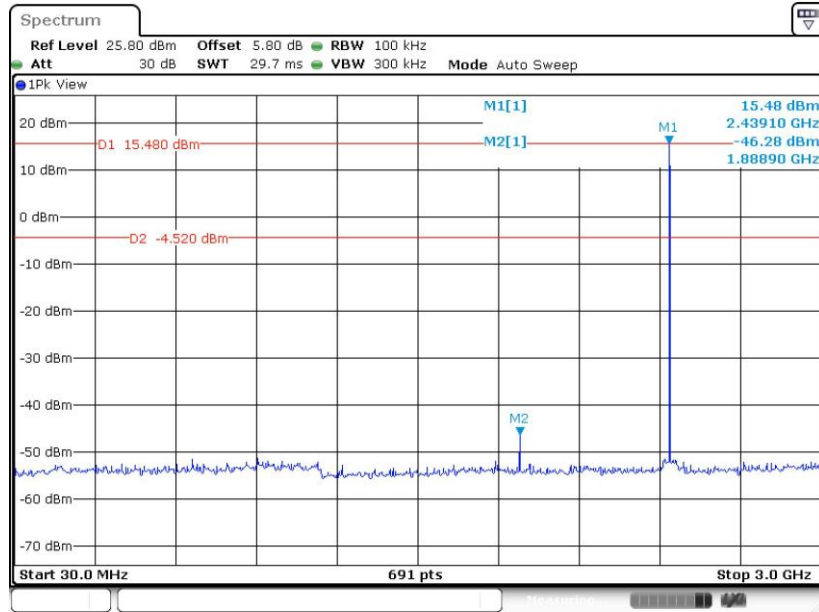

Date: 29 MAY 2021 12:27:21


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

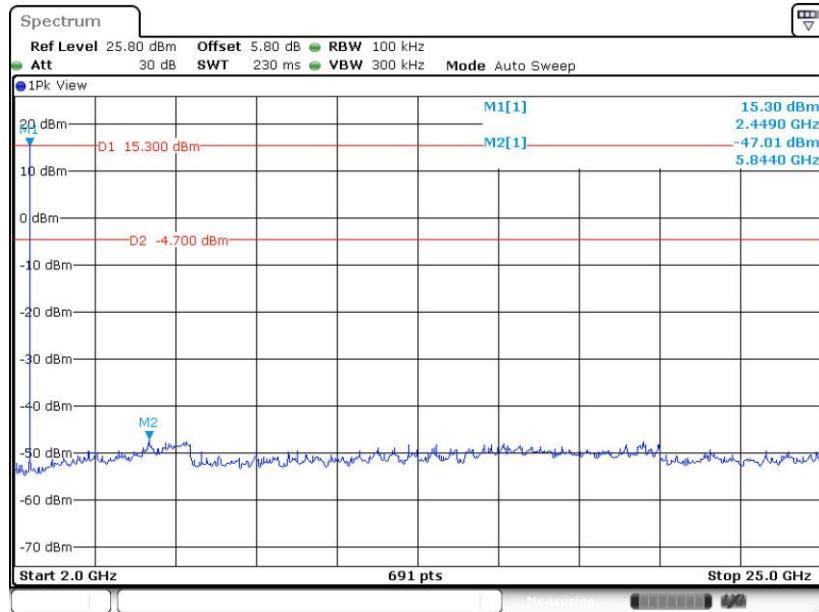

Date: 29 MAY 2021 12:28:37




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

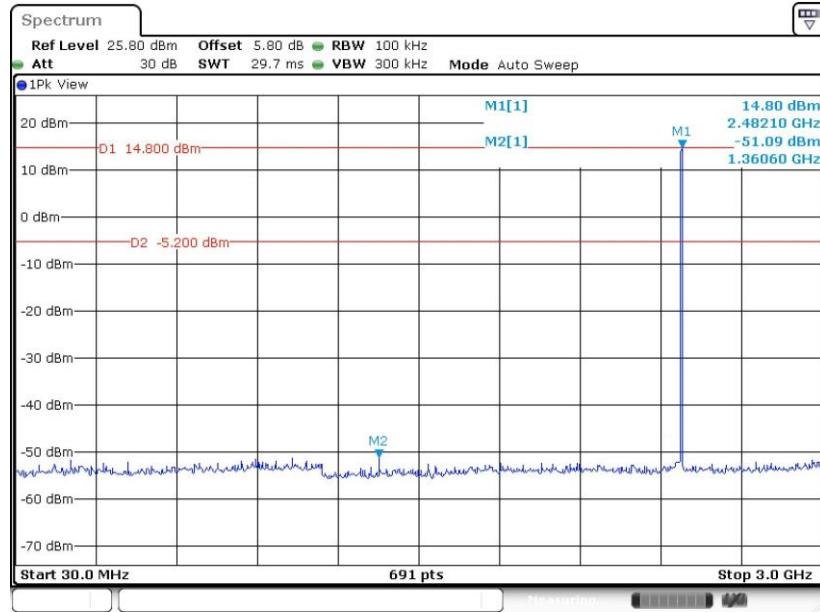

Date: 29 MAY 2021 12:35:33

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

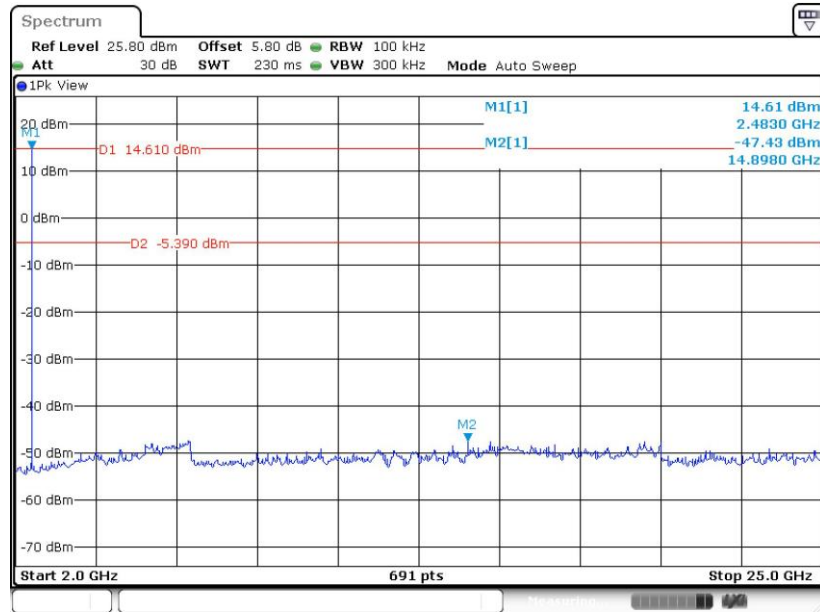


Date: 29 MAY 2021 12:36:00




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

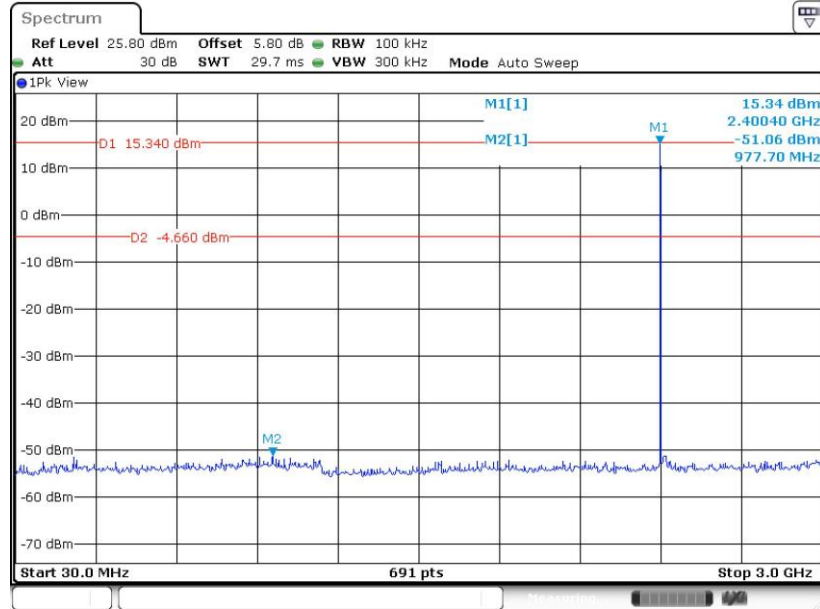

Date: 29 MAY 2021 12:49:38


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

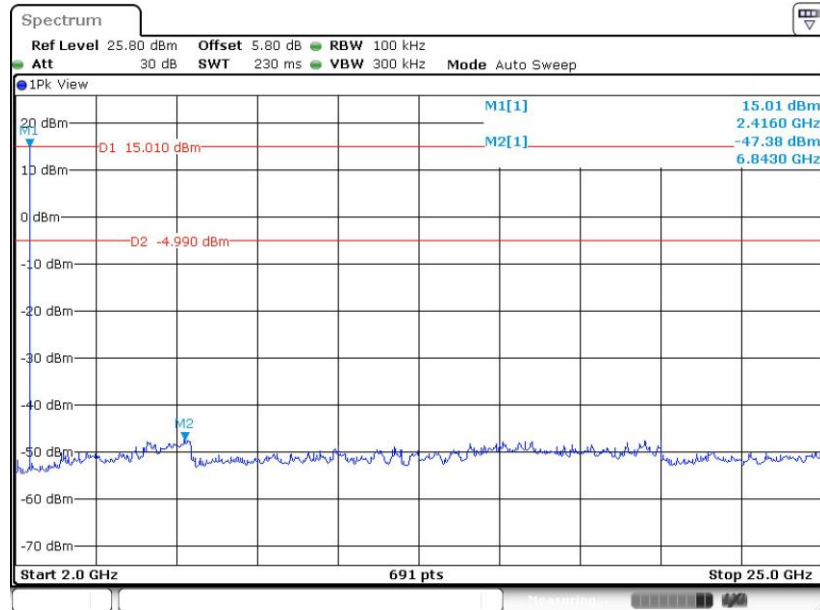

Date: 29 MAY 2021 12:50:09




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

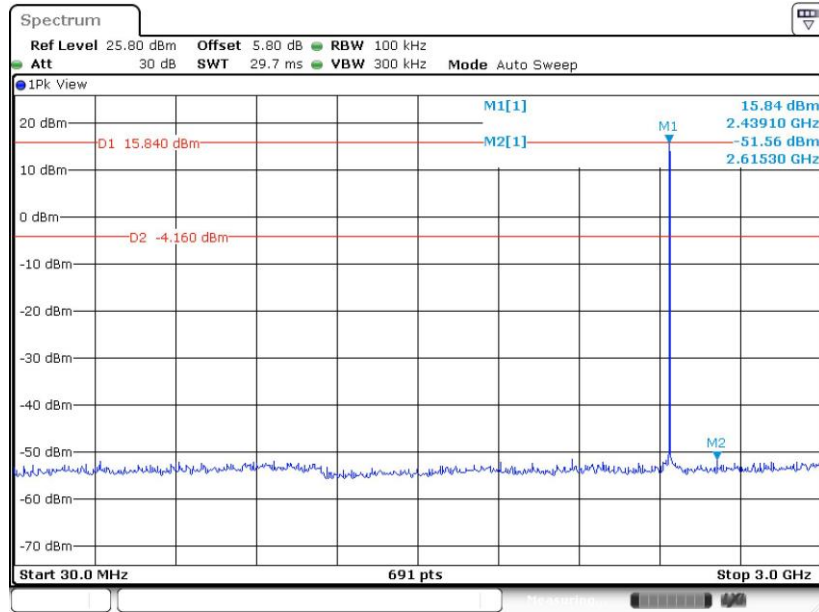

Date: 29 MAY 2021 13:03:33


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

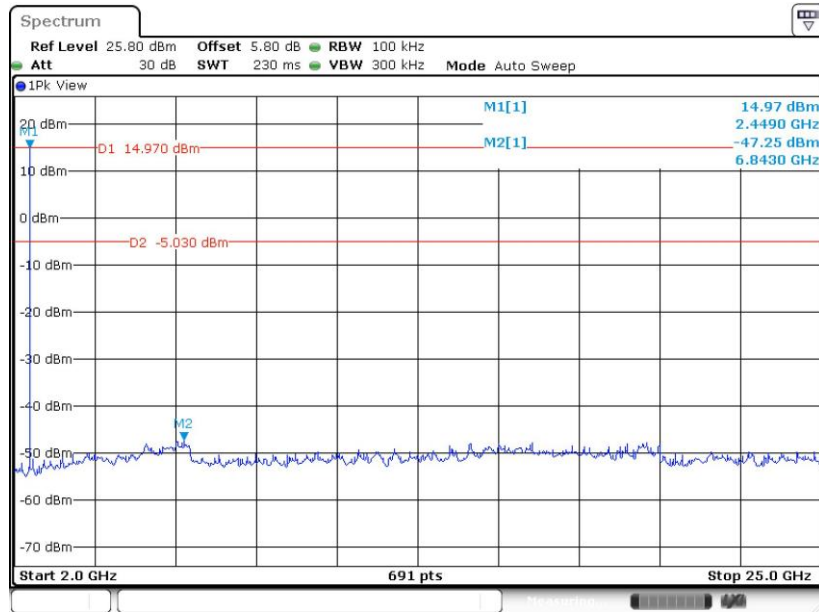

Date: 29 MAY 2021 13:04:00




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

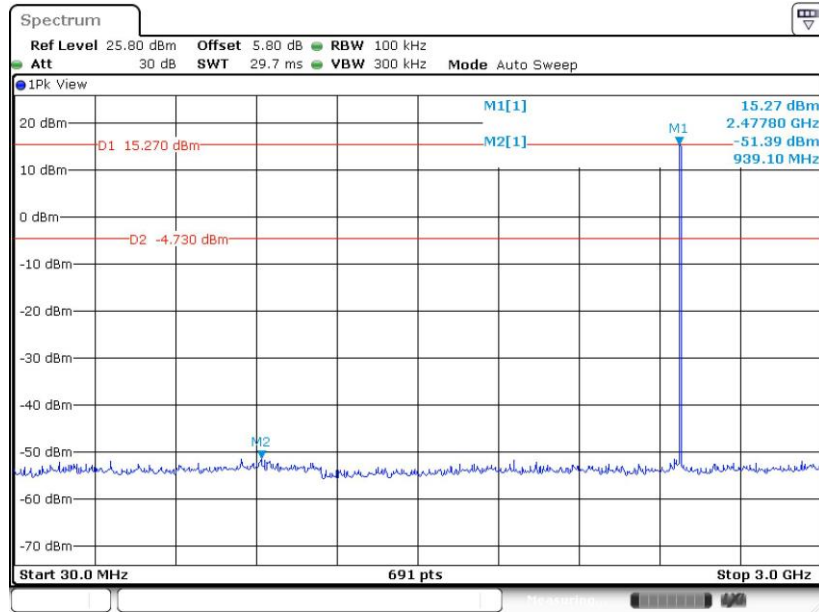

Date: 29 MAY.2021 12:58:17

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

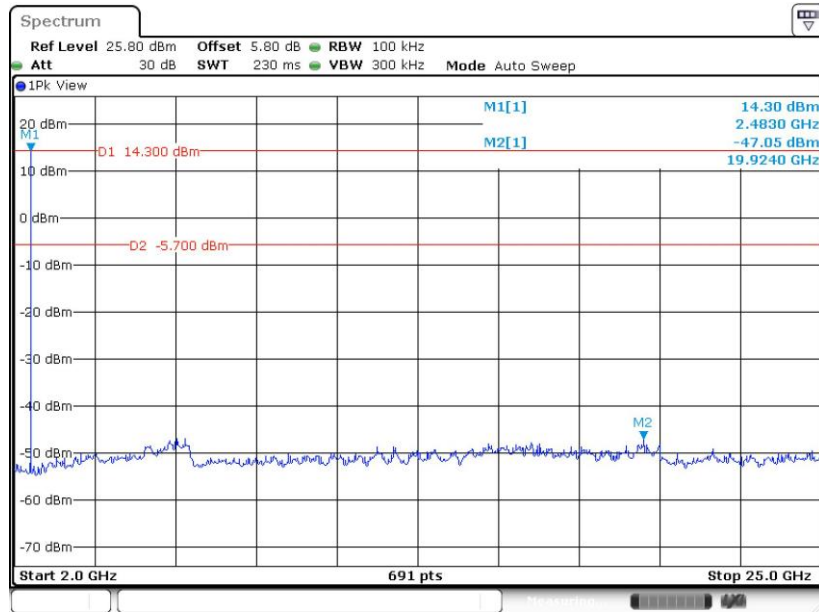


Date: 29 MAY.2021 12:58:43




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

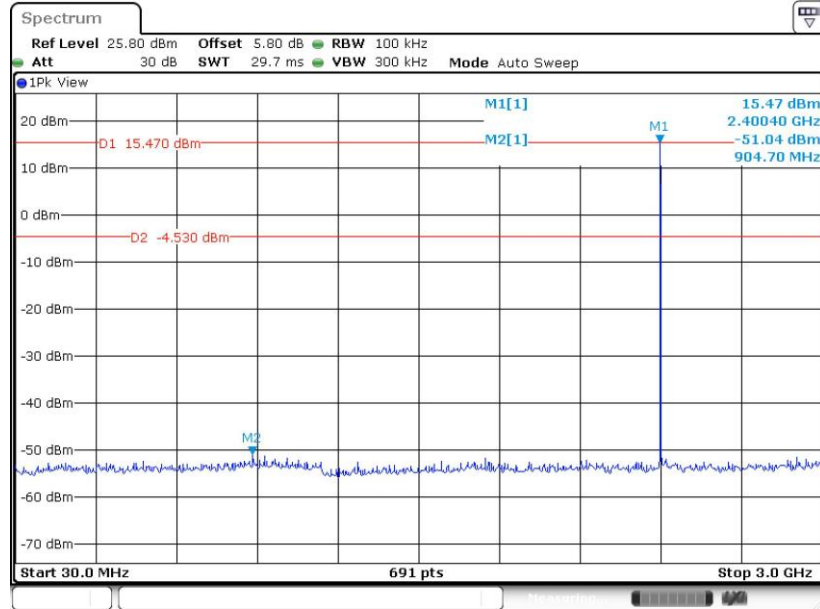

Date: 29 MAY 2021 13:13:17


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

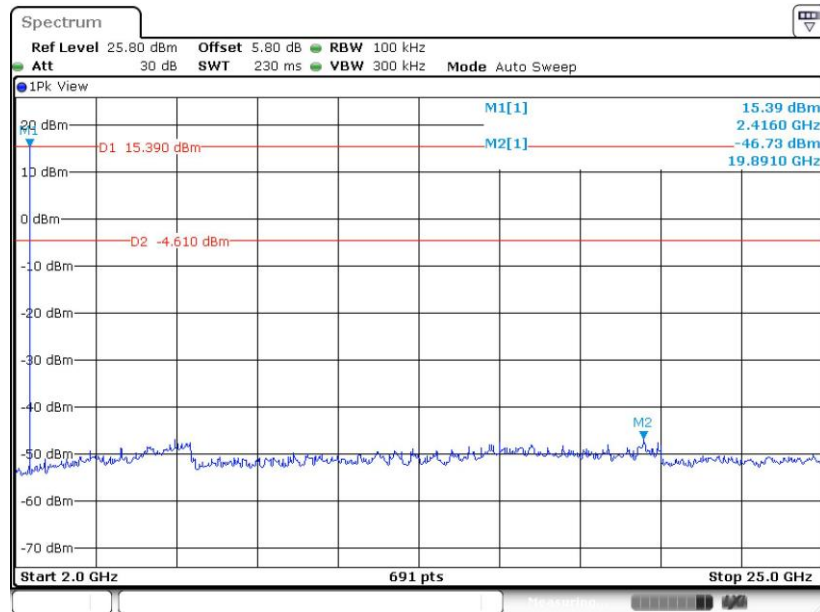

Date: 29 MAY 2021 13:13:44




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

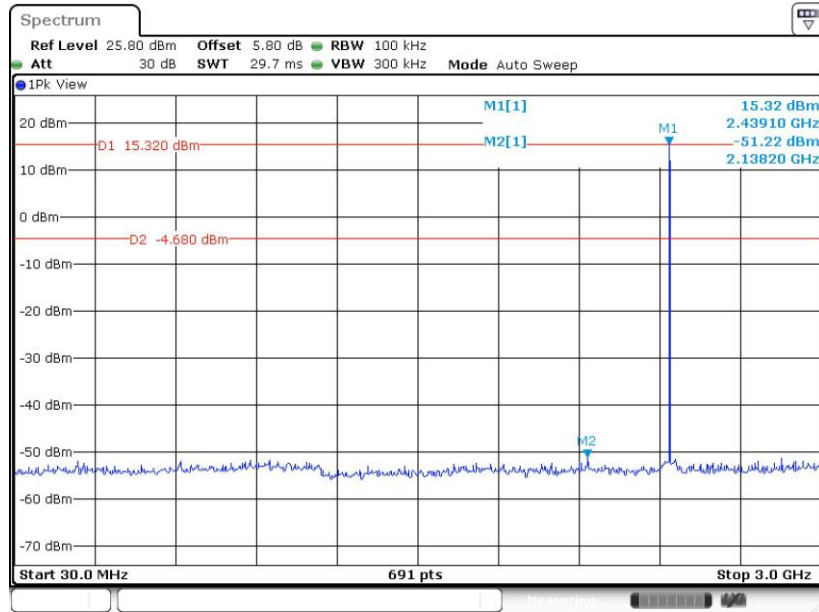

Date: 29 MAY 2021 13:42:34


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

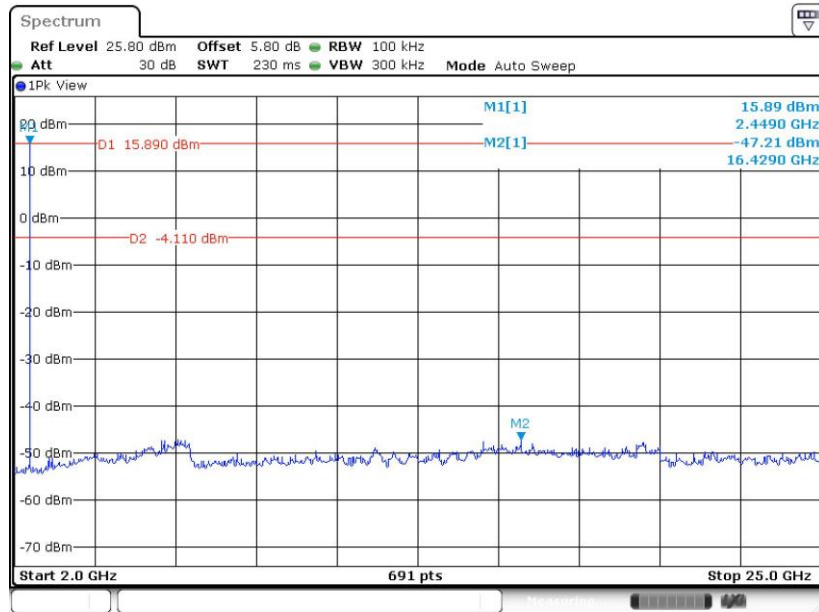

Date: 29 MAY 2021 13:43:01




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

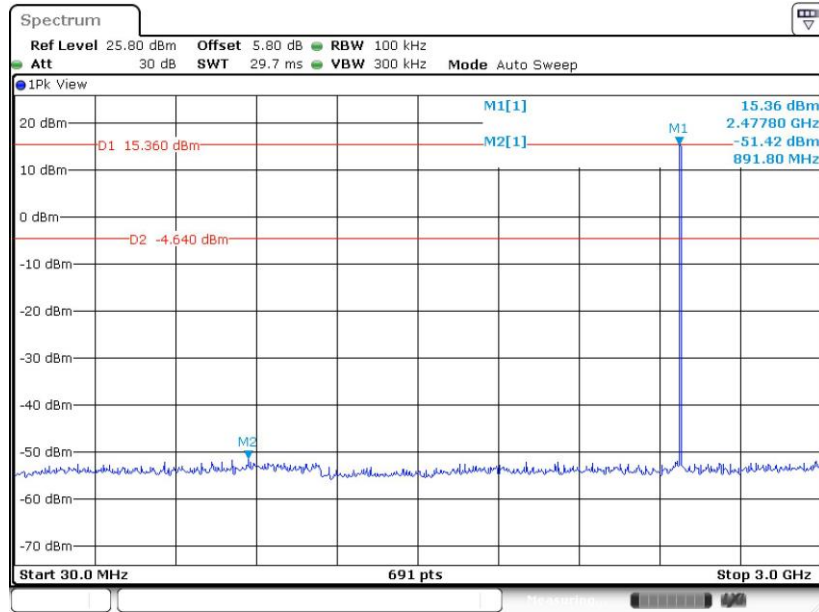

Date: 29 MAY 2021 13:34:21

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

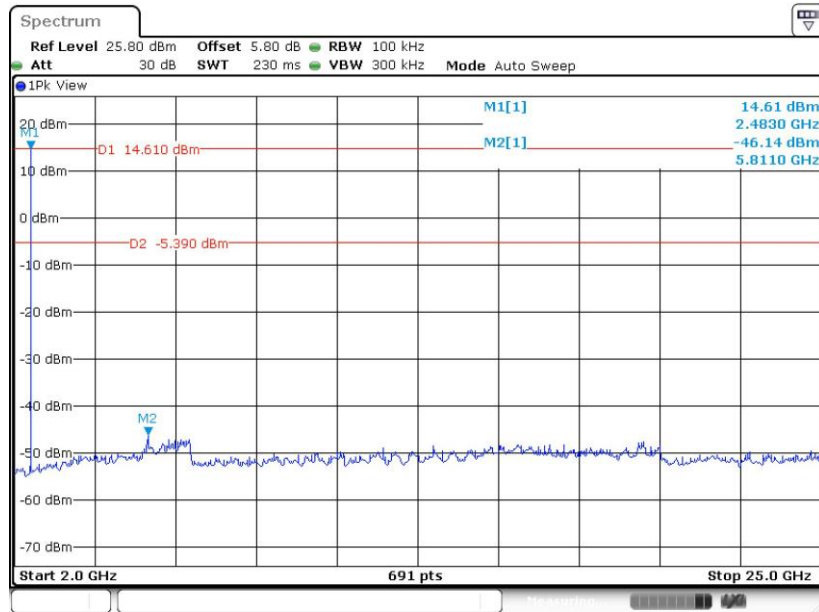

Date: 29 MAY 2021 13:35:05







<Ant.2>

<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

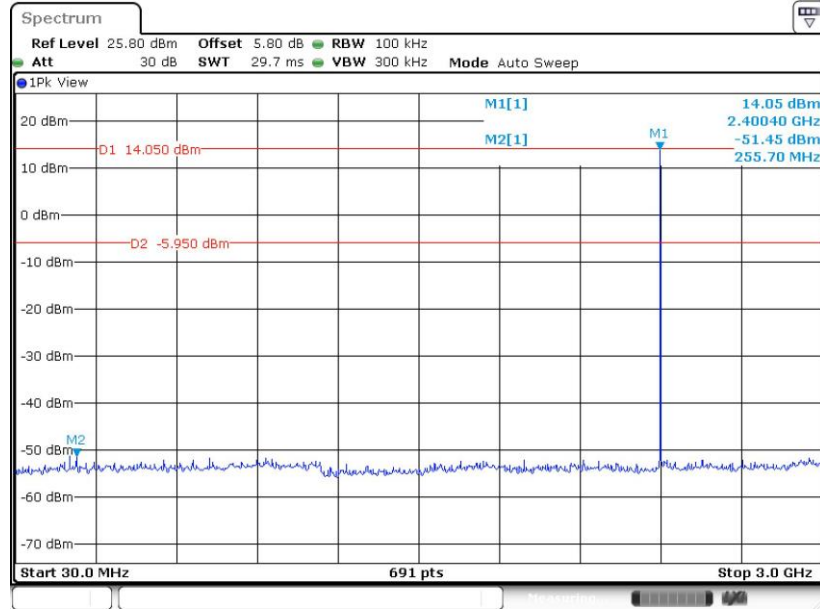


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

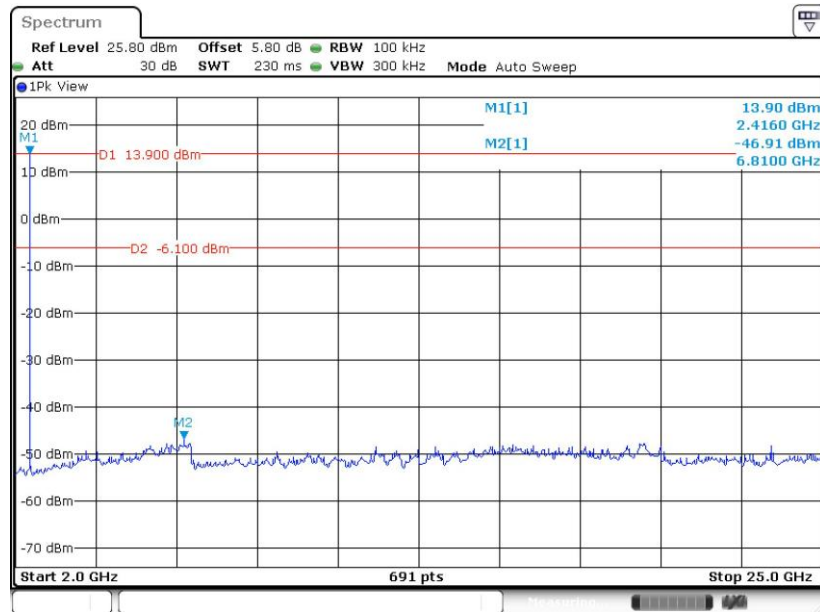




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

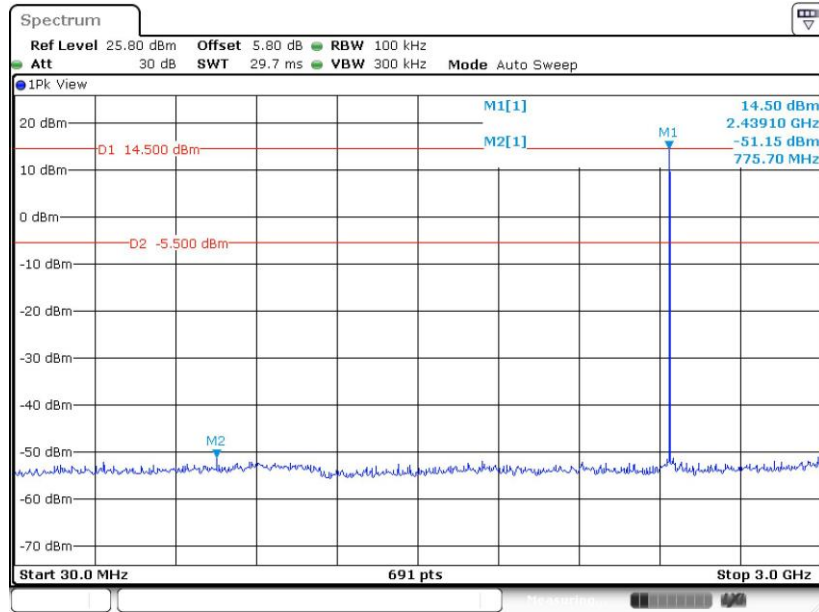

Date: 29 MAY 2021 14:25:48


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

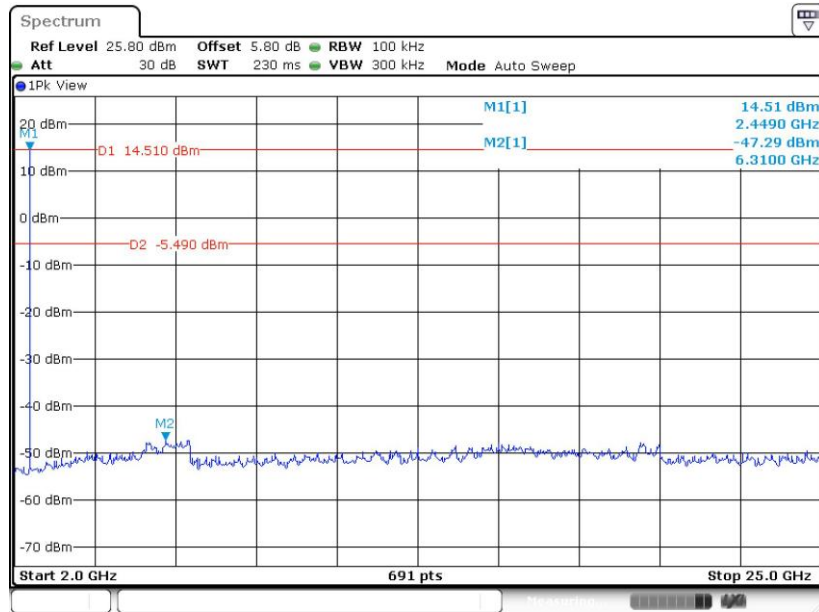

Date: 29 MAY 2021 14:26:22




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

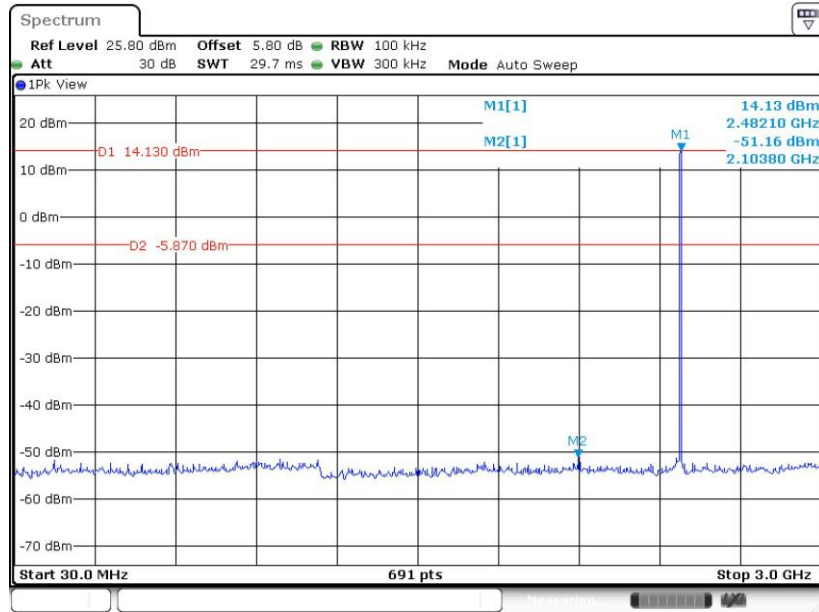

Date: 29 MAY 2021 14:17:23

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

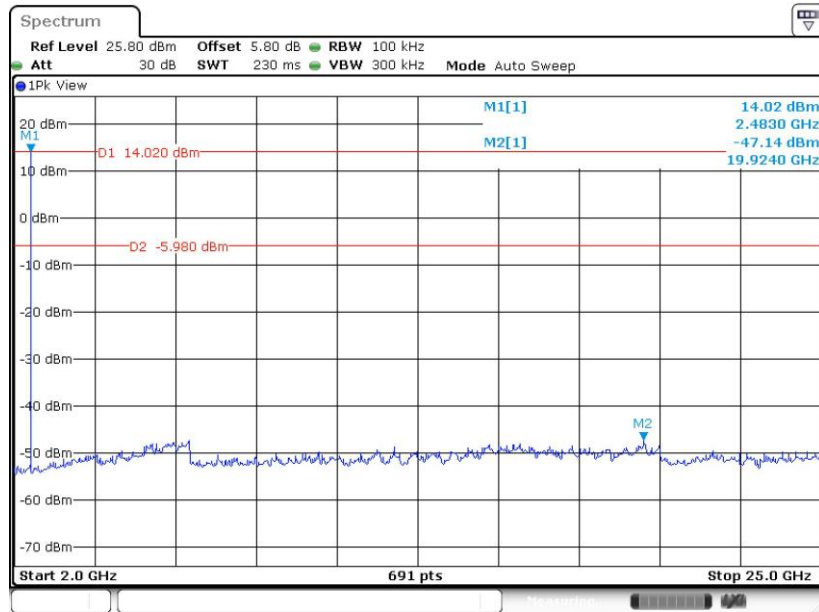


Date: 29 MAY 2021 14:17:50




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

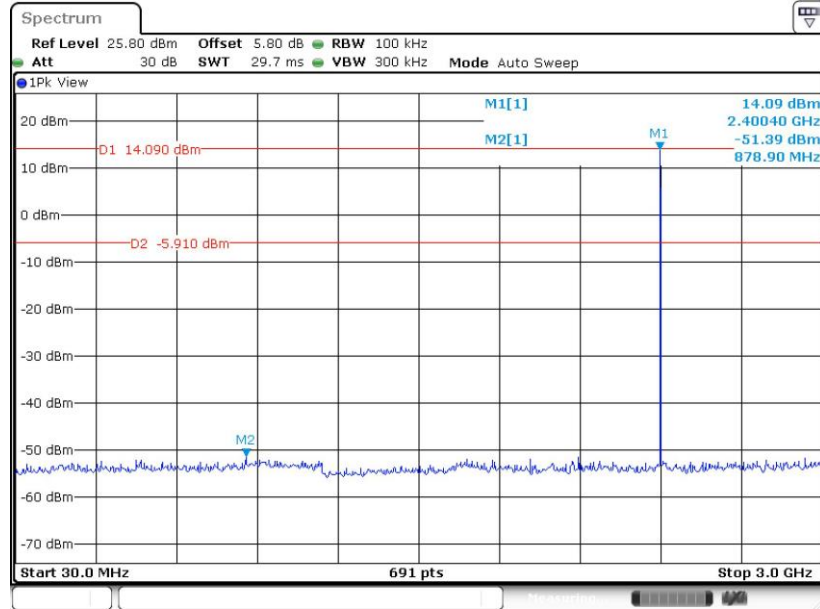

Date: 29 MAY 2021 14:33:30


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

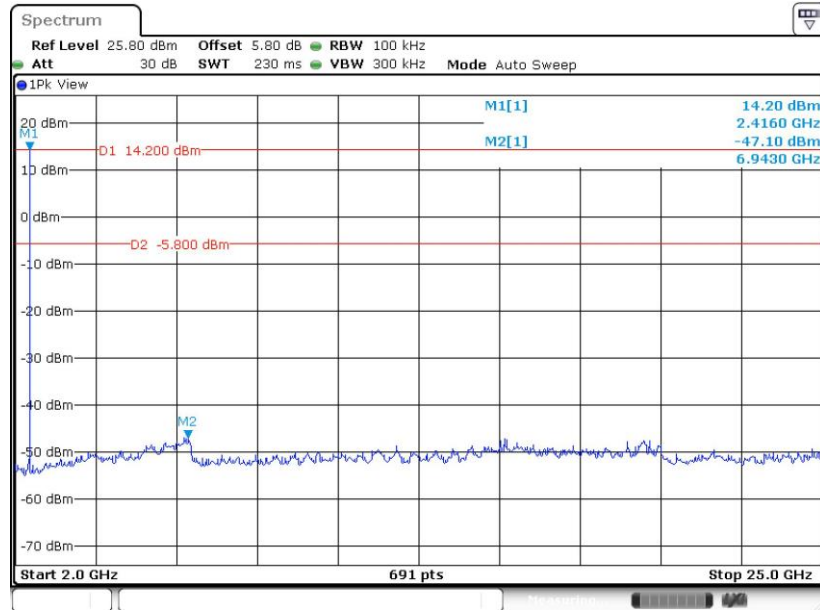

Date: 29 MAY 2021 14:33:57




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

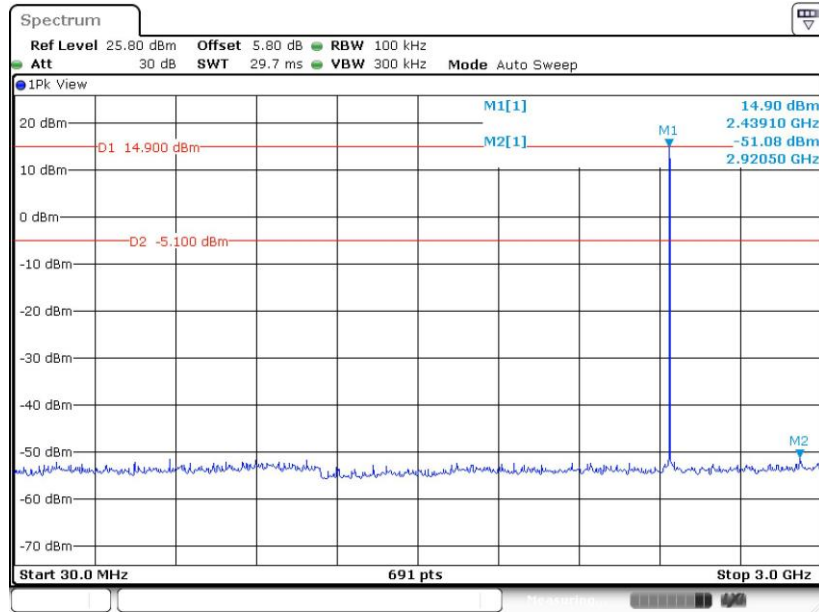

Date: 29 MAY 2021 14:50:04


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

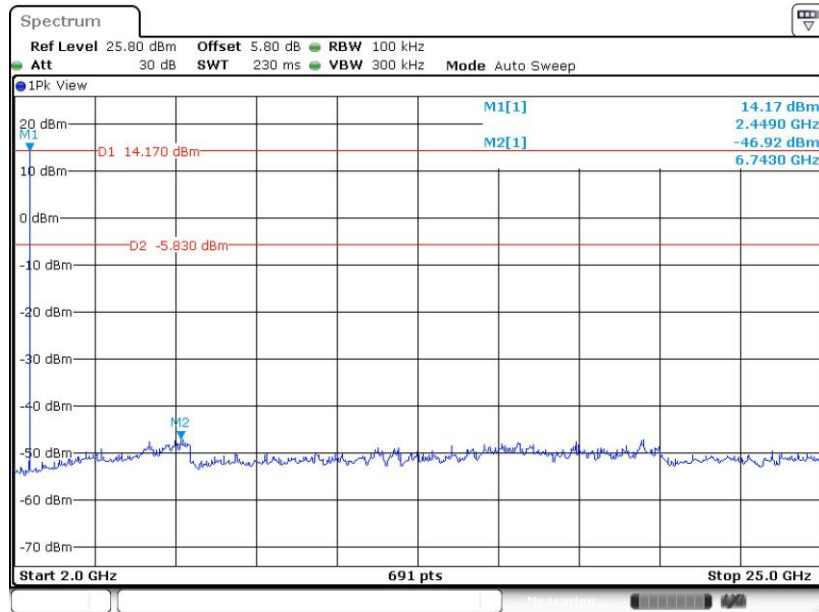

Date: 29 MAY 2021 14:50:31




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

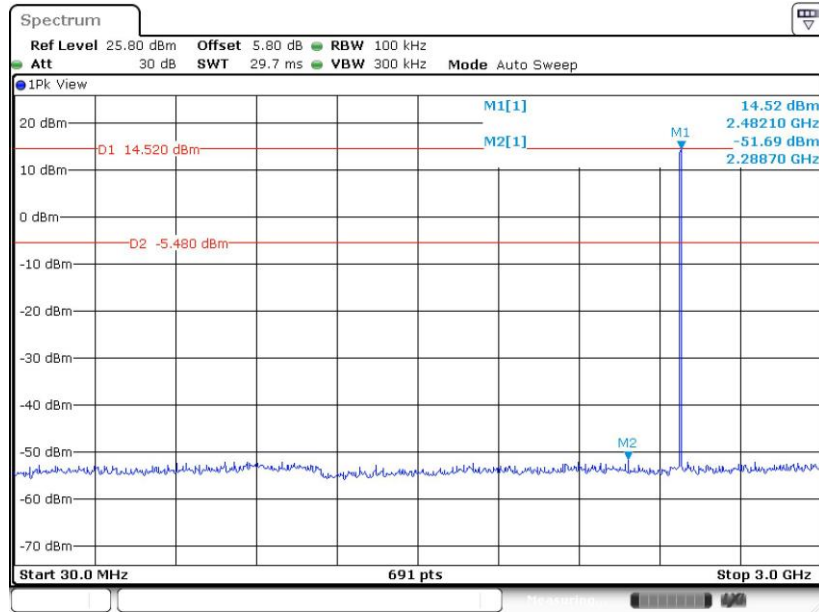

Date: 29 MAY 2021 14:44:35

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

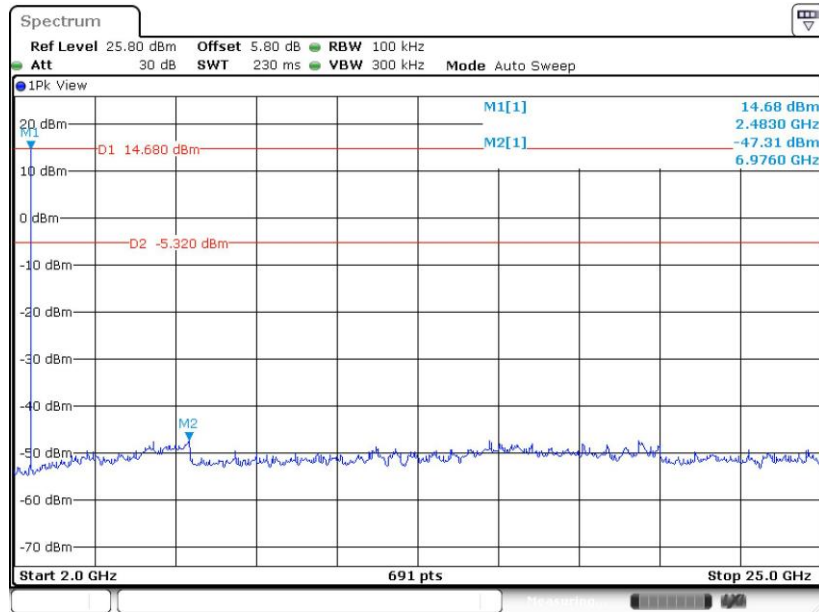


Date: 29 MAY 2021 14:45:02




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

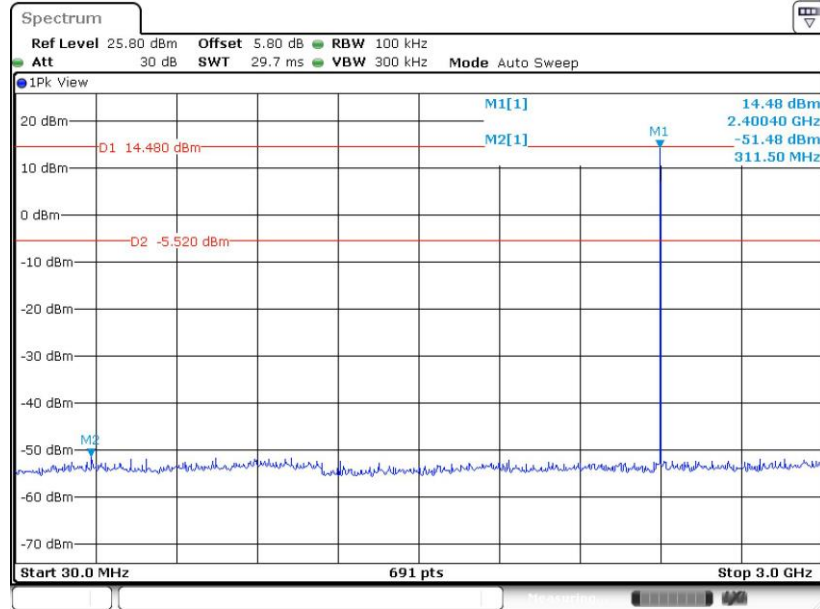

Date: 29 MAY 2021 15:08:19


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

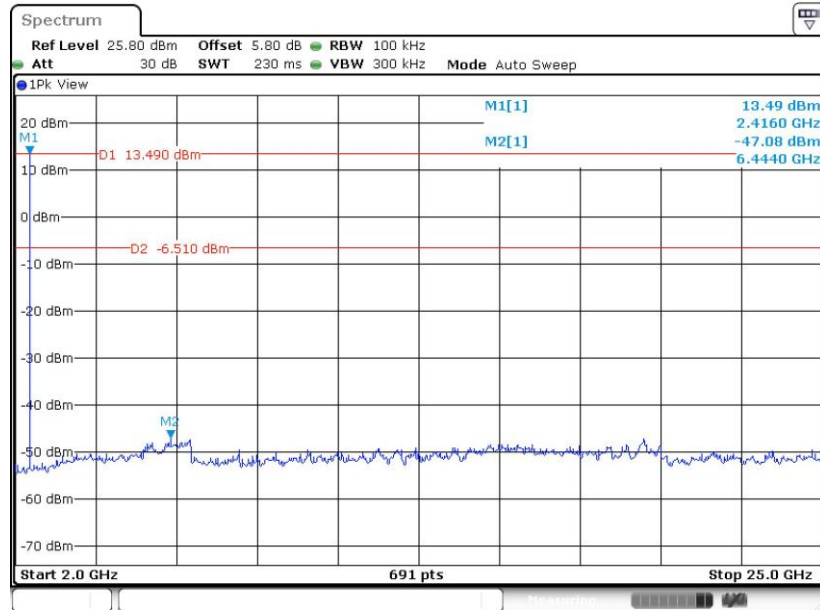

Date: 29 MAY 2021 15:08:47




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

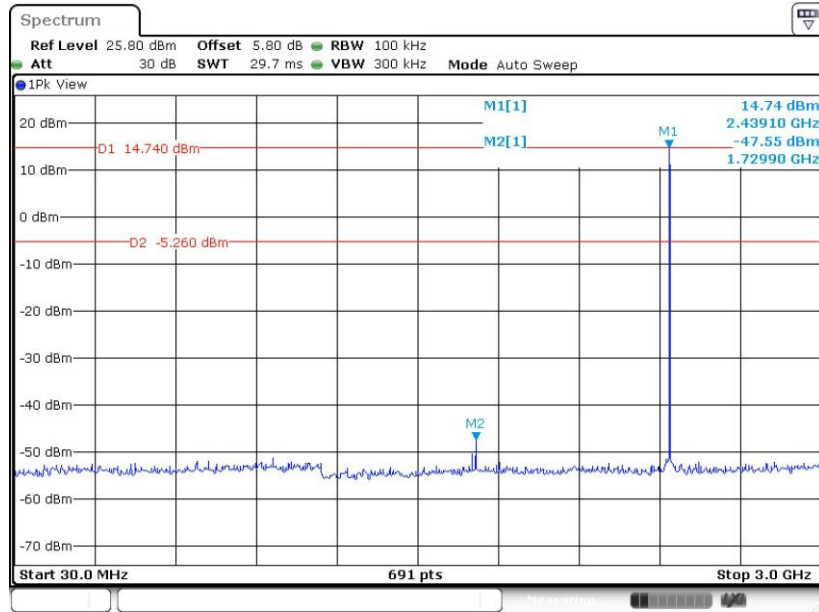

Date: 29 MAY 2021 15:15:30

CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

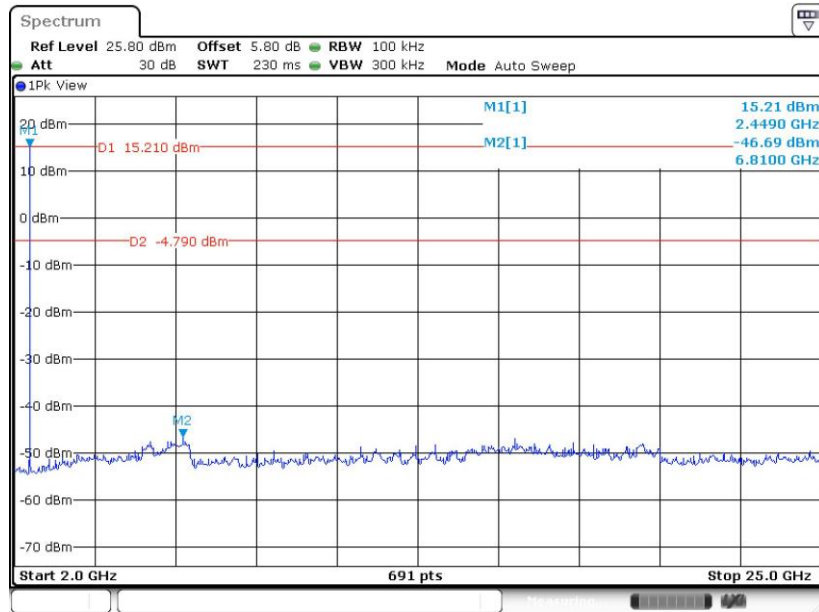


Date: 29 MAY 2021 15:15:59






CSE Plot on Ch 78 between 30MHz ~ 3 GHz

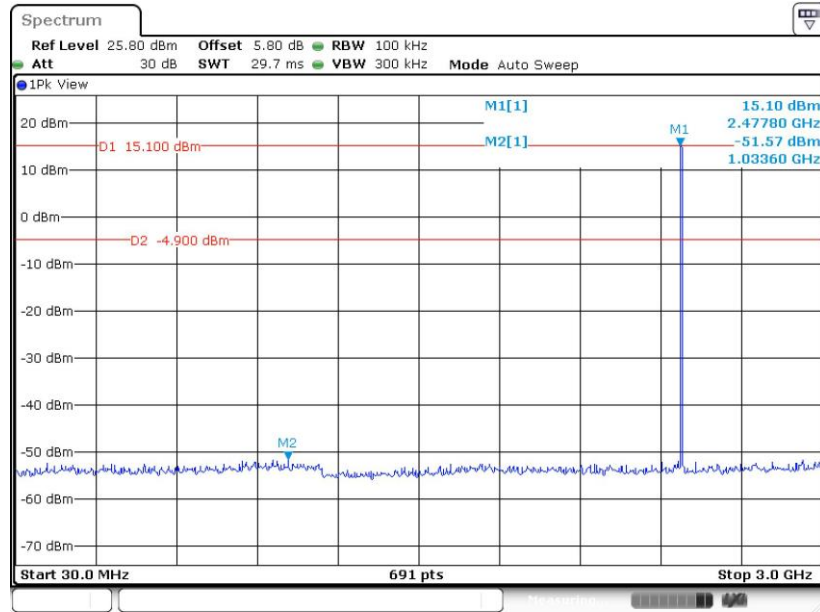

Date: 29 MAY 2021 15:04:46

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

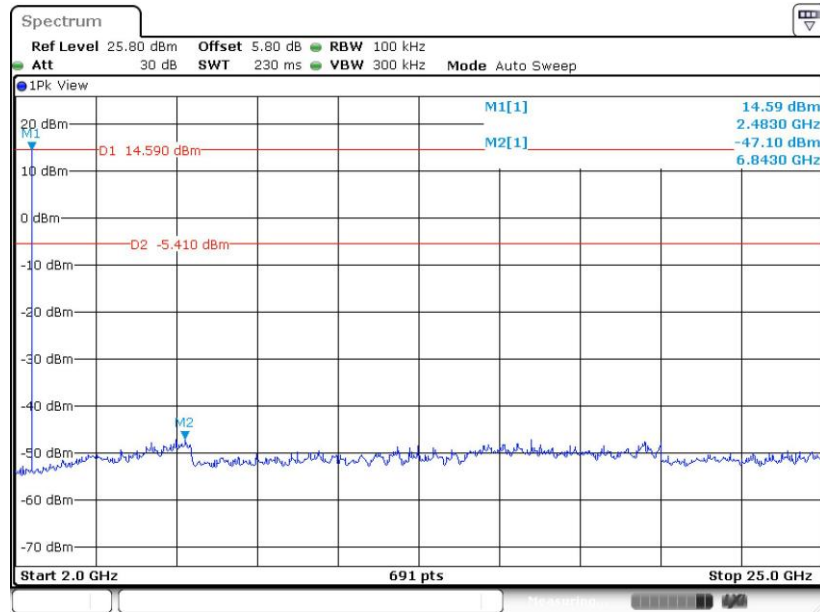

Date: 29 MAY 2021 15:05:13



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Note: For Ant.1, The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

For Ant.2, The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

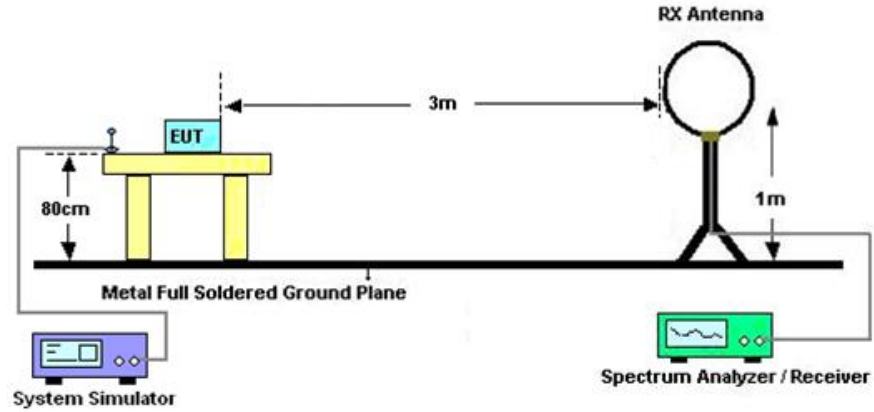

For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

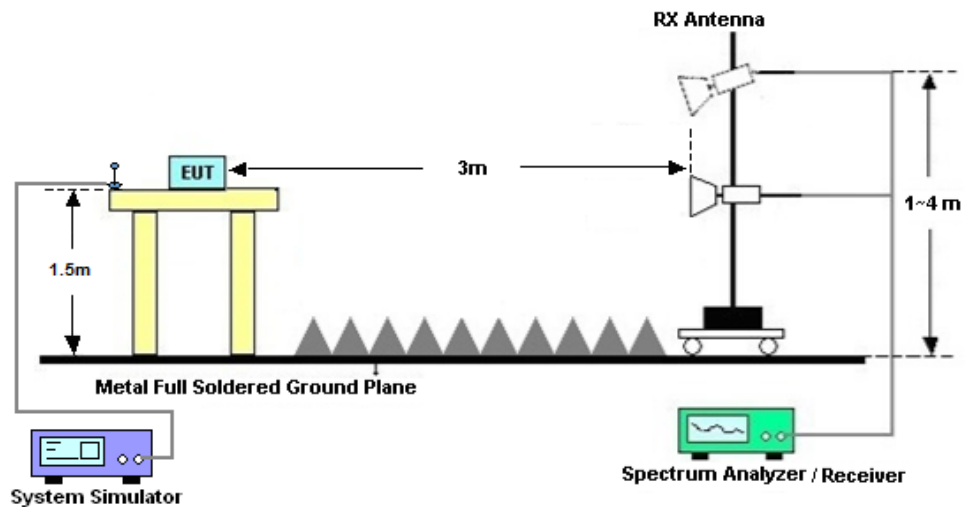



### **3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.8.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

### **3.8.8 Duty cycle correction factor for average measurement**

Please refer to Appendix D.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup



### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	May 24, 2021 ~Jun. 04, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	May 24, 2021 ~Jun. 04, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	May 24, 2021 ~Jun. 04, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Jun. 16, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 13, 2021	Jun. 16, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Jun. 16, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2021	Jun. 16, 2021	May 29, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Jun. 16, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Jun. 16, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 13, 2021	Jun. 16, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Jun. 16, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz-18Ghz	Oct. 17, 2020	Jun. 16, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Jun. 16, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 16, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 16, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 16, 2021	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Jun. 04, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jun. 04, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	Jun. 04, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jun. 04, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------



## Appendix A. Conducted Test Results

Ant.1

**Bluetooth**

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2021/05/24/2021/06/04	Relative Humidity:	40~51	%

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.834	1002.900	0.6252	Pass
DH	1Mbps	1	39	2441	0.938	0.836	994.200	0.6252	Pass
DH	1Mbps	1	78	2480	0.938	0.834	998.600	0.6252	Pass
2DH	2Mbps	1	0	2402	1.285	1.166	998.600	0.8567	Pass
2DH	2Mbps	1	39	2441	1.289	1.166	998.600	0.8596	Pass
2DH	2Mbps	1	78	2480	1.285	1.164	1002.900	0.8567	Pass
3DH	3Mbps	1	0	2402	1.233	1.146	998.600	0.8220	Pass
3DH	3Mbps	1	39	2441	1.229	1.149	998.600	0.8191	Pass
3DH	3Mbps	1	78	2480	1.229	1.149	998.600	0.8191	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

<b>TEST RESULTS DATA</b>						
<b>Peak Power Table</b>						
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	
DH1	0	1	14.56	20.97	Pass	
	39	1	15.52	20.97	Pass	
	78	1	14.47	20.97	Pass	
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	
2DH1	0	1	16.40	20.97	Pass	
	39	1	17.27	20.97	Pass	
	78	1	16.30	20.97	Pass	
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	
3DH1	0	1	16.91	20.97	Pass	
	39	1	17.75	20.97	Pass	
	78	1	16.74	20.97	Pass	

<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

Ant.2

**Bluetooth**

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2021/05/24/2021/06/04	Relative Humidity:	40~51	%

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.834	1002.900	0.6252	Pass
DH	1Mbps	1	39	2441	0.938	0.836	994.200	0.6252	Pass
DH	1Mbps	1	78	2480	0.938	0.834	998.600	0.6252	Pass
2DH	2Mbps	1	0	2402	1.285	1.166	998.600	0.8567	Pass
2DH	2Mbps	1	39	2441	1.285	1.166	998.600	0.8596	Pass
2DH	2Mbps	1	78	2480	1.285	1.164	1002.900	0.8567	Pass
3DH	3Mbps	1	0	2402	1.229	1.149	998.600	0.8220	Pass
3DH	3Mbps	1	39	2441	1.233	1.152	998.600	0.8191	Pass
3DH	3Mbps	1	78	2480	1.229	1.149	998.600	0.8191	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass


<b>TEST RESULTS DATA</b>					
<b>Peak Power Table</b>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	13.60	20.97	Pass
	39	1	<b>14.33</b>	20.97	Pass
	78	1	13.78	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	15.55	20.97	Pass
	39	1	<b>16.31</b>	20.97	Pass
	78	1	15.60	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	16.05	20.97	Pass
	39	1	<b>16.77</b>	20.97	Pass
	78	1	16.02	20.97	Pass

<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

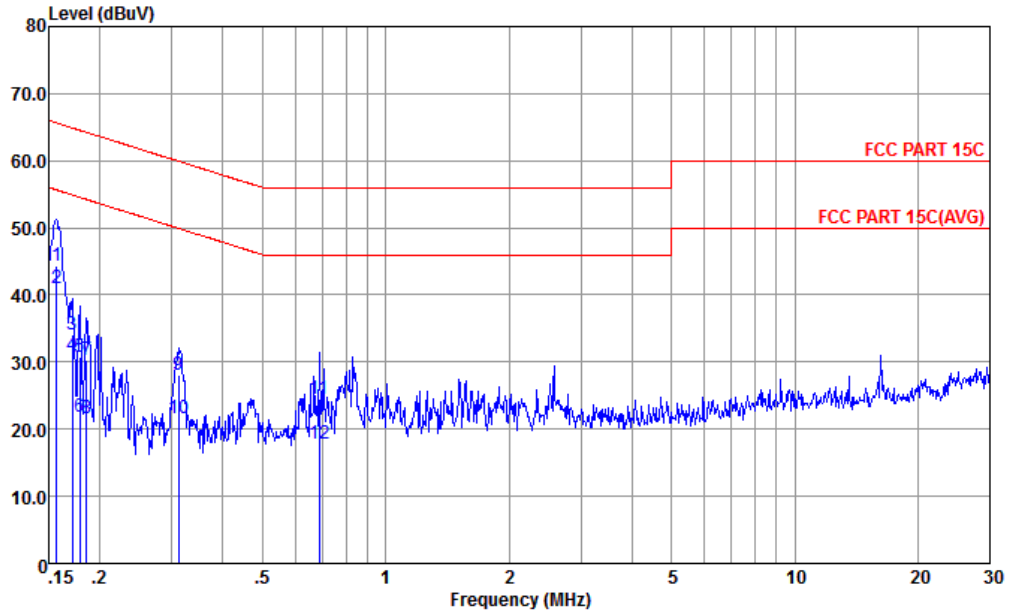


Site : CO01-KS  
 Condition : FCC PART 15C TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.166	44.30	-21.35	65.65	24.20	9.64	10.46	QP
2 *	0.166	41.00	-14.65	55.65	20.90	9.64	10.46	Average
3	0.171	34.17	-30.73	64.90	14.10	9.64	10.43	QP
4	0.171	30.97	-23.93	54.90	10.90	9.64	10.43	Average
5	0.179	30.65	-33.90	64.55	10.60	9.64	10.41	QP
6	0.179	21.85	-32.70	54.55	1.80	9.64	10.41	Average
7	0.185	30.24	-34.00	64.24	10.21	9.64	10.39	QP
8	0.185	21.64	-32.60	54.24	1.61	9.64	10.39	Average
9	0.312	28.14	-31.79	59.93	8.20	9.64	10.30	QP
10	0.312	21.54	-28.39	49.93	1.60	9.64	10.30	Average
11	0.686	24.50	-31.50	56.00	4.60	9.66	10.24	QP
12	0.686	17.80	-28.20	46.00	-2.10	9.66	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

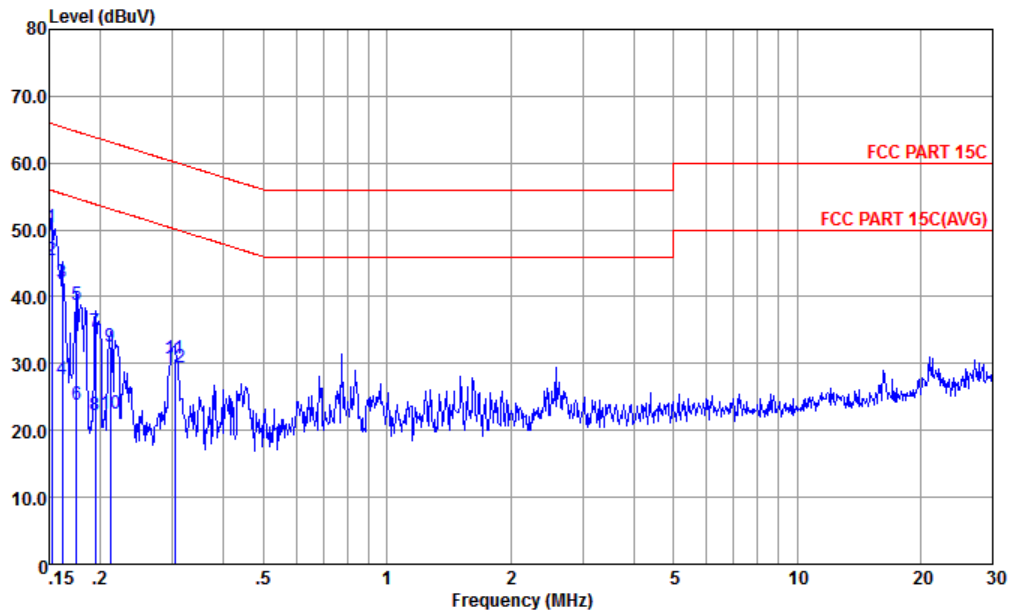

Site : CO01-KS  
 Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	50.37	-15.50	65.87	30.10	9.80	10.47	QP
2 *	0.152	45.37	-10.50	55.87	25.10	9.80	10.47	Average
3	0.162	42.17	-23.21	65.38	21.90	9.82	10.45	QP
4	0.162	27.57	-27.81	55.38	7.30	9.82	10.45	Average
5	0.175	38.87	-25.85	64.72	18.60	9.85	10.42	QP
6	0.175	23.77	-30.95	54.72	3.50	9.85	10.42	Average
7	0.194	34.76	-29.08	63.84	14.51	9.88	10.37	QP
8	0.194	22.36	-31.48	53.84	2.11	9.88	10.37	Average
9	0.212	32.44	-30.70	63.14	12.20	9.88	10.36	QP
10	0.212	22.44	-30.70	53.14	2.20	9.88	10.36	Average
11	0.303	30.69	-29.46	60.15	10.59	9.79	10.31	QP
12	0.303	29.39	-20.76	50.15	9.29	9.79	10.31	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT ANT1 (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH00 2402MHz		2312.08	55.23	-18.77	74	47.5	31.97	7.44	31.68	345	309	P	H
	*	2312.08	30.47	-23.53	54	-	-	-	-	-	-	A	H
		2402	108.10	-	-	99.96	32.2	7.59	31.65	345	309	P	H
		2402	83.34	-	-	-	-	-	-	-	-	A	H
		2357.84	55.64	-18.36	74	47.67	32.11	7.53	31.67	245	360	P	V
	*	2357.84	30.88	-23.12	54	-	-	-	-	-	-	A	V
		2402	102.77	-	-	94.63	32.2	7.59	31.65	245	360	P	V
		2402	78.01	-	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		2483.56	64.05	-9.95	74	55.78	32.12	7.73	31.58	100	96	P	H
	*	2483.56	39.29	-14.71	54	-	-	-	-	-	-	A	H
		2480	104.38	-	-	96.11	32.12	7.73	31.58	100	96	P	H
		2480	79.62	-	-	-	-	-	-	-	-	A	H
		2487.7	55.45	-18.55	74	47.17	32.1	7.76	31.58	338	45	P	V
	*	2487.7	30.69	-23.31	54	-	-	-	-	-	-	A	V
		2480	102.88	-	-	94.61	32.12	7.73	31.58	338	45	P	V
		2480	78.12	-	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





2.4GHz 2400~2483.5MHz

BT ANT 2(Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH00 2402MHz		2347.57	55.56	-18.44	74	47.67	32.06	7.5	31.67	106	95	P	H
	*	2347.57	30.77	-23.23	54	-	-	-	-	-	-	A	H
		2402	106.54	-	-	98.4	32.2	7.59	31.65	106	95	P	H
		2402	81.75	-	-	-	-	-	-	-	-	A	H
		2360.7	55.3	-18.7	74	47.32	32.11	7.53	31.66	310	79	P	V
	*	2360.7	30.51	-23.49	54	-	-	-	-	-	-	A	V
		2402	104.89	-	-	96.75	32.2	7.59	31.65	310	79	P	V
		2402	80.10	-	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		2485.84	55.61	-18.39	74	47.34	32.12	7.73	31.58	129	103	P	H
	*	2485.84	30.82	-23.18	54	-	-	-	-	-	-	A	H
		2480	106.82	-	-	98.55	32.12	7.73	31.58	129	103	P	H
		2480	82.03	-	-	-	-	-	-	-	-	A	H
		2484.28	55.89	-18.11	74	47.62	32.12	7.73	31.58	366	82	P	V
	*	2484.28	31.10	-22.90	54	-	-	-	-	-	-	A	V
		2480	104.58	-	-	96.31	32.12	7.73	31.58	366	82	P	V
		2480	79.79	-	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT ANT 1 (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4806	40.11	-33.89	74	54.79	34.3	11.06	60.04	300	0	P	H
		4806	39.85	-34.15	74	54.53	34.3	11.06	60.04	100	360	P	V
BT CH 39 2441MHz		4884	41.05	-32.95	74	55.7	34.34	11.04	60.03	300	0	P	H
		7320	43.12	-30.88	74	54.22	35.93	13.49	60.52	300	0	P	H
		4884	41.4	-32.6	74	56.05	34.34	11.04	60.03	100	360	P	V
		7320	43.08	-30.92	74	54.18	35.93	13.49	60.52	100	360	P	V
BT CH 78 2480MHz		4962	39.47	-34.53	74	54.08	34.38	11.02	60.01	300	0	P	H
		7440	41.04	-32.96	74	52.09	35.91	13.58	60.54	300	0	P	H
		4962	40.56	-33.44	74	55.17	34.38	11.02	60.01	100	360	P	V
		7440	41.79	-32.21	74	52.84	35.91	13.58	60.54	100	360	P	V

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.



2.4GHz 2400~2483.5MHz

BT ANT 2 (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4806	40.39	-33.61	74	55.07	34.3	11.06	60.04	300	0	P	H
		4806	40.03	-33.97	74	54.71	34.3	11.06	60.04	100	360	P	V
BT CH 39 2441MHz		4884	41.5	-32.5	74	56.15	34.34	11.04	60.03	300	0	P	H
		7320	42.72	-31.28	74	53.82	35.93	13.49	60.52	300	0	P	H
		4884	42.65	-31.35	74	57.3	34.34	11.04	60.03	100	360	P	V
BT CH 78 2480MHz		7320	43.26	-30.74	74	54.36	35.93	13.49	60.52	100	360	P	V
		4962	40.42	-33.58	74	55.03	34.38	11.02	60.01	300	0	P	H
		7440	41.51	-32.49	74	52.56	35.91	13.58	60.54	300	0	P	H
		4962	39.48	-34.52	74	54.09	34.38	11.02	60.01	100	360	P	V
		7440	41.31	-32.69	74	52.36	35.91	13.58	60.54	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BT LF		41.64	25.41	-14.59	40	38.42	18.86	0.97	32.84	100	0	P	H
		127.97	16.54	-26.96	43.5	29.89	17.77	1.72	32.84	-	-	P	H
		345.25	23.35	-22.65	46	32.14	21.28	2.83	32.9	-	-	P	H
		550.89	25.73	-20.27	46	28.86	25.89	3.58	32.6	-	-	P	H
		797.27	27.47	-18.53	46	28.79	26.88	4.31	32.51	-	-	P	H
		844.8	28.28	-17.72	46	29.26	27.17	4.44	32.59	-	-	P	H
		41.64	29.03	-10.97	40	42.04	18.86	0.97	32.84	100	360	P	V
		56.19	24.89	-15.11	40	42.91	14.04	1.12	33.18	-	-	P	V
		254.07	17.63	-28.37	46	28.81	19.46	2.44	33.08	-	-	P	V
		445.16	23.45	-22.55	46	29.43	23.51	3.22	32.71	-	-	P	V
		536.34	25.34	-20.66	46	28.93	25.52	3.54	32.65	-	-	P	V
		883.6	30.79	-15.21	46	31.45	27.33	4.54	32.53	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**


1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**


## Appendix D. Duty Cycle Plots

<Ant.1>

### 3DH5 on time (One Pulse) Plot on Channel 39

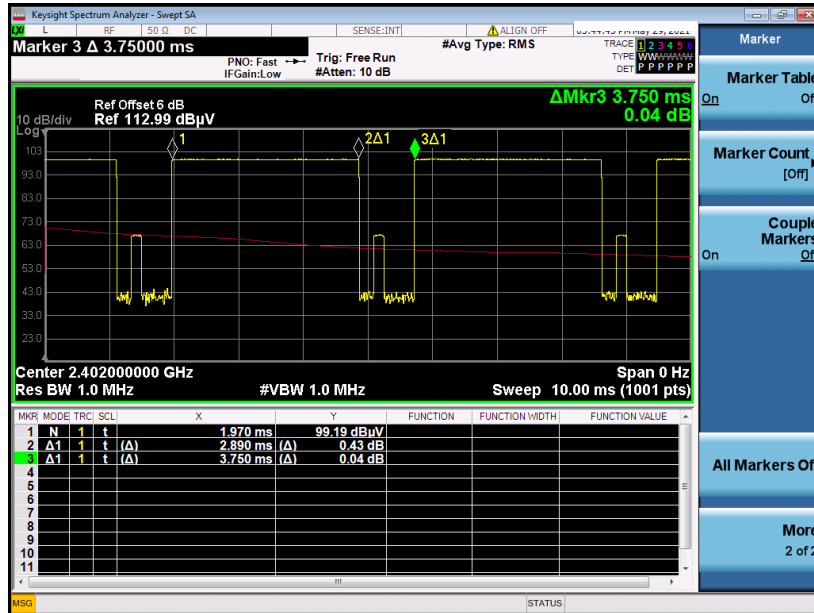

### 3DH5 on time (Count Pulses) Plot on Channel 39

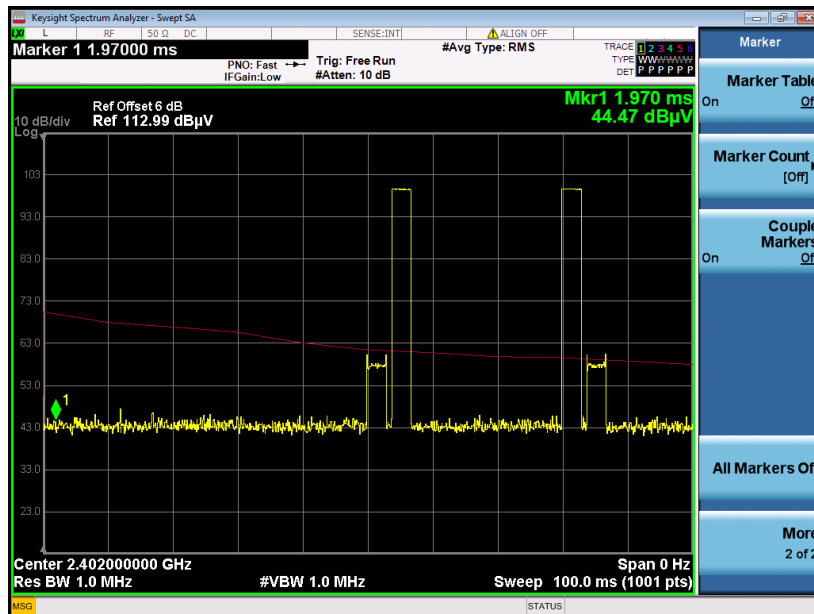


**Note:**


1. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.89 / 100 = 5.78 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.76 dB
3. 3DH5 has the highest duty cycle worst case and is reported.

<Ant.2>

3DH5 on time (One Pulse) Plot on Channel 39

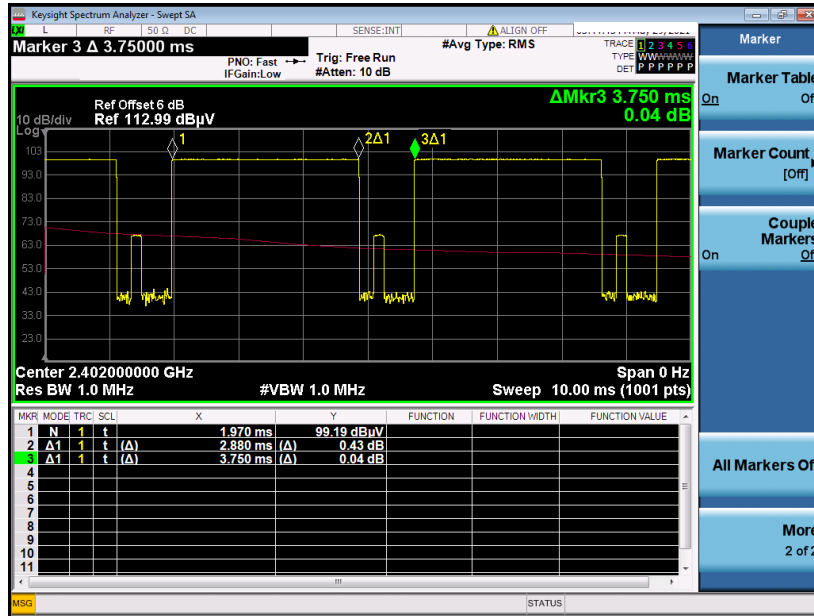

3DH5 on time (Count Pulses) Plot on Channel 39

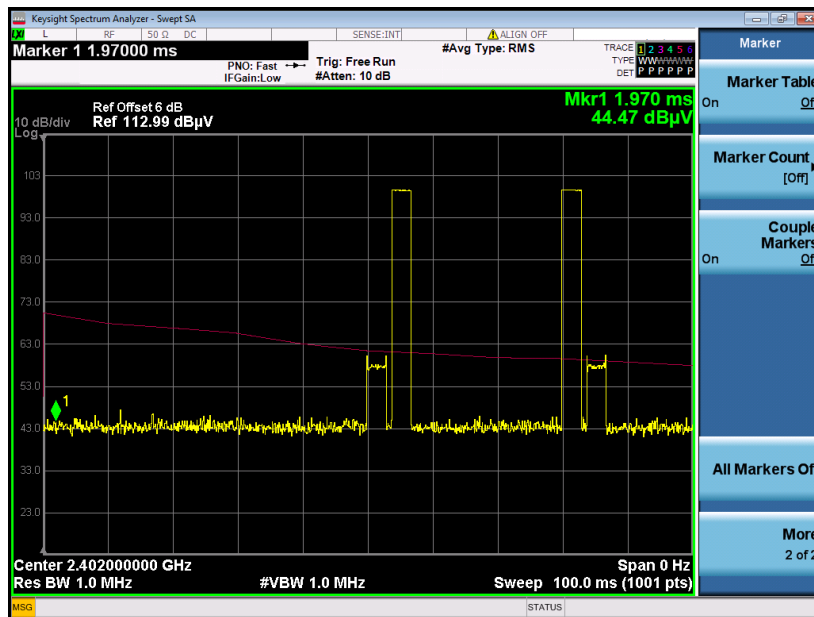

Note:

4. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.88 / 100 = 5.76 %
5. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.79 dB
6. 3DH5 has the highest duty cycle worst case and is reported.