



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : XIAOMI
MODEL NAME : 2107113SG
FCC ID : 2AFZZ113SG
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : May 29, 2021 ~ Jun. 17, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Test Software 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 8

 2.3 Connection Diagram of Test System 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 16

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement..... 23

 3.6 Automatically Discontinue Transmission 25

 3.7 Antenna Requirements 26

4 LIST OF MEASURING EQUIPMENT 27

5 UNCERTAINTY OF EVALUATION 28

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 10.85 dB at 5928.800 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.46 dB at 0.152 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	XIAOMI
Model Name	2107113SG
FCC ID	2AFZZ113SG
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n/ax HT20/HT40/HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR / EDR / LE NFC and GNSS
IMEI Code	Conducted: 868253050049325/868253050049300 Conduction: 868253050044789/868253050044797 Radiation: 868253050048343/868253050048350
HW Version	P2
SW Version	MIUI12.5
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification							
Tx/Rx Channel Frequency Range	5725 MHz ~ 5850 MHz						
Maximum Output Power	MIMO <Ant.1+2> <5725 MHz ~ 5850 MHz> 802.11a : 20.80 dBm / 0.1202 W 802.11n HT20 : 21.08 dBm / 0.1282 W 802.11n HT40 : 21.10 dBm / 0.1288 W 802.11ac VHT20: 20.77 dBm / 0.1194 W 802.11ac VHT40: 20.99 dBm / 0.1256 W 802.11ac VHT80: 20.04 dBm / 0.1009 W 802.11ax HE20 : 21.32 dBm / 0.1355 W 802.11ax HE40 : 21.48 dBm / 0.1406 W 802.11ax HE80 : 20.48 dBm / 0.1117 W						
99% Occupied Bandwidth	802.11a : 17.13 MHz 802.11ax HE20 : 19.48 MHz 802.11ax HE40 : 37.96 MHz 802.11ax HE80 : 77.08 MHz						
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)						
Antenna Type / Gain	<Ant. 1> : PIFA Antenna with gain 2.00 dBi <Ant. 2> : PIFA Antenna with gain -2.60 dBi						
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac/ax MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11 a/n/ac/ax MIMO	V	V
	Ant. 1	Ant. 2					
802.11 a/n/ac/ax MIMO	V	V					

Note:

1. For 802.11n HT20 / ac VHT20 / ax HE20 and 802.11n HT40 / ac VHT40 / ax HE40 mode, the whole testing have assessed only ax HE20 / HE40 by referring to their maximum conducted power.
2. For 802.11ac VHT80 / ax HE80 and 802.11ac HT160 / ax HE160 mode, the whole testing have assessed only ax HE80 / HE160 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
- 2. The above Frequency and Channel in "#n" were 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : WCDMA 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 2(Charging from Adapter)
Remark: For Radiated Test Cases, the tests were performance with Adapter, Battery and USB Cable 1.	


Ch. #		U-NII-3 : 5725-5850 MHz			
		802.11a	802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

For Conducted Emission:

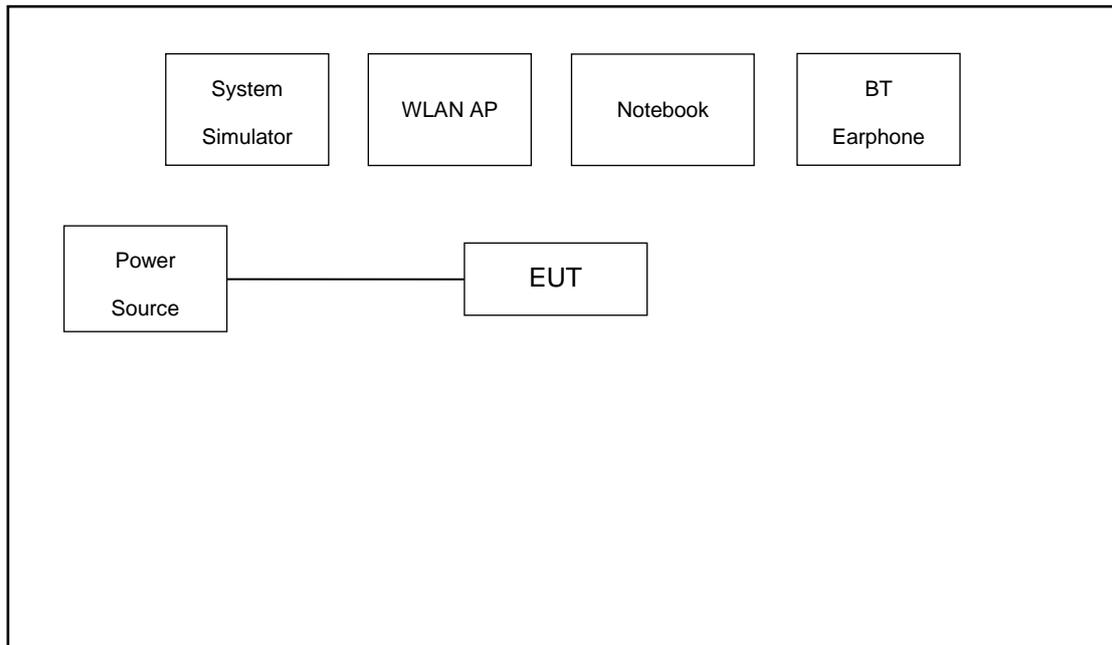

For Radiated Emission:

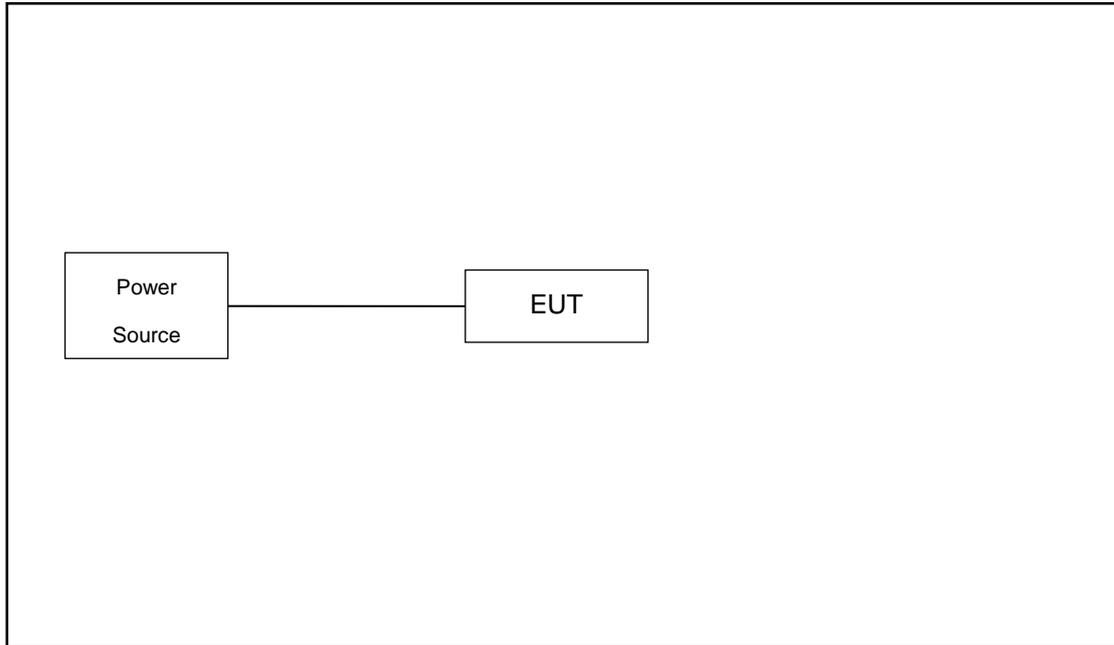

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritus	MT8821C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.2 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

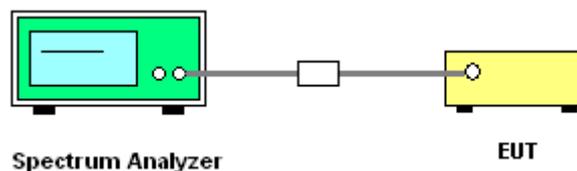

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

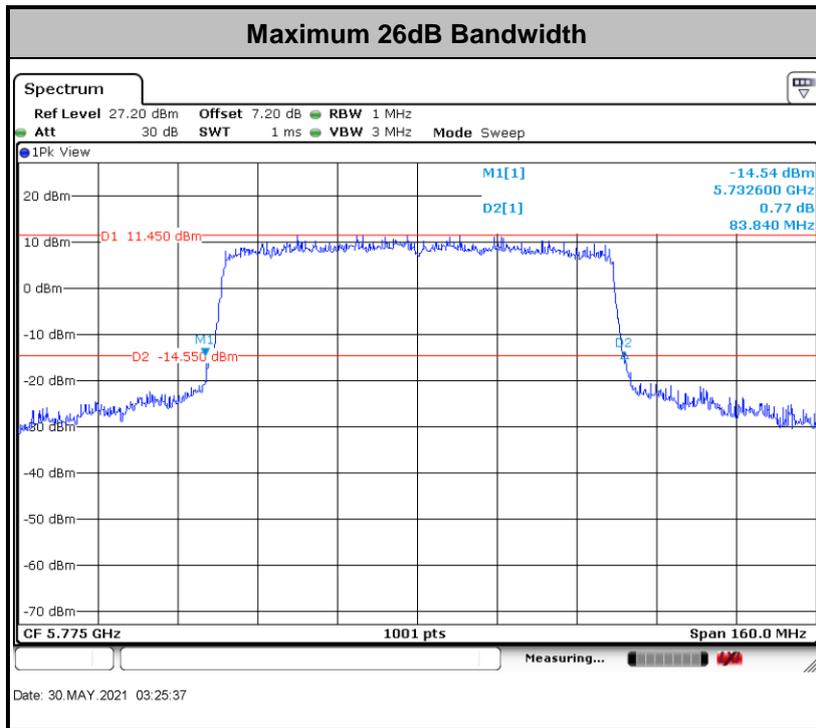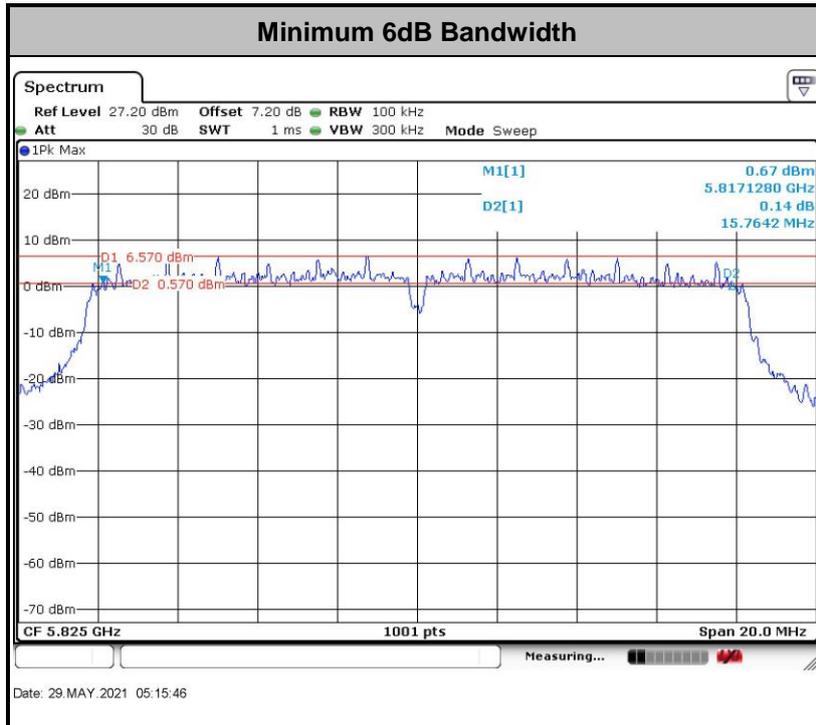

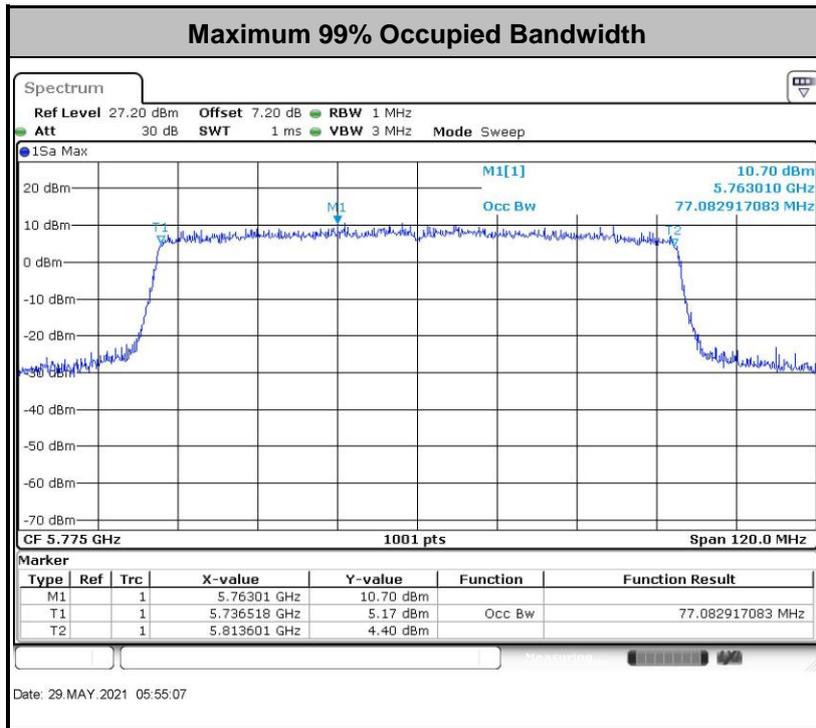

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
- 4.

3.2.4 Test Setup

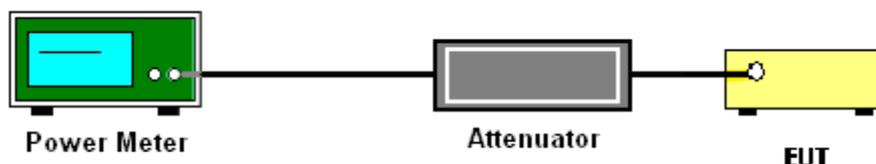

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{\text{th}}$ of the PSD limit.



3.3.4 Test Setup

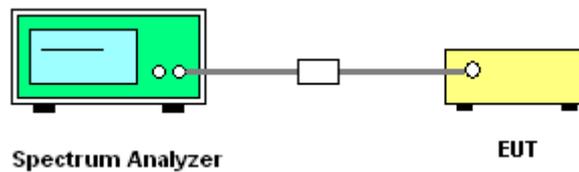



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

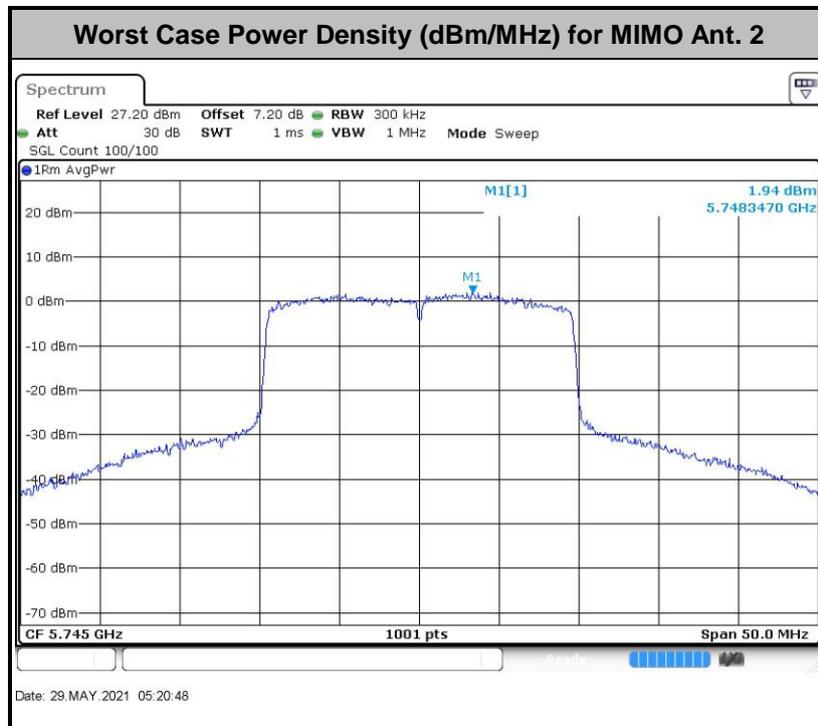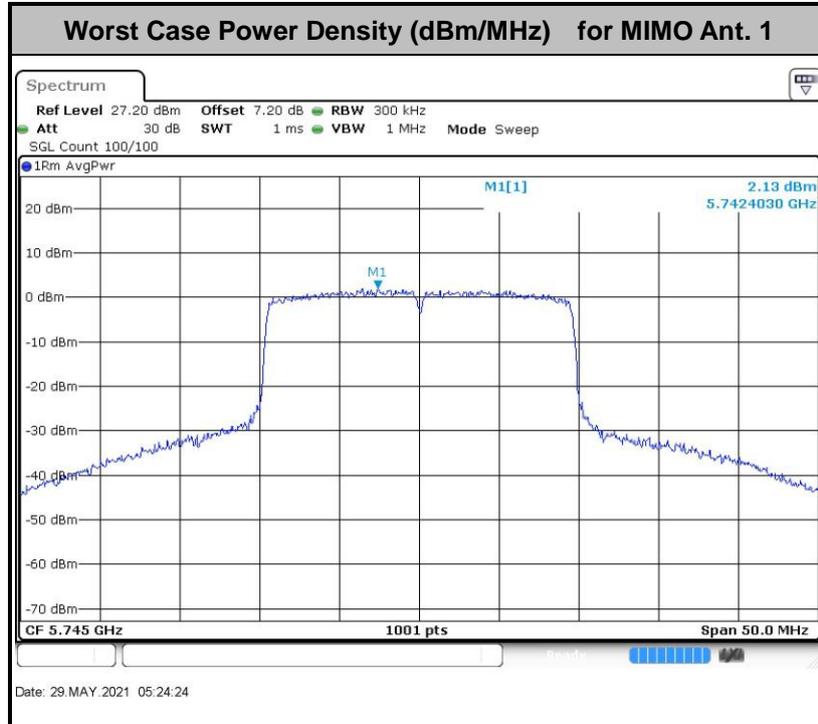

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

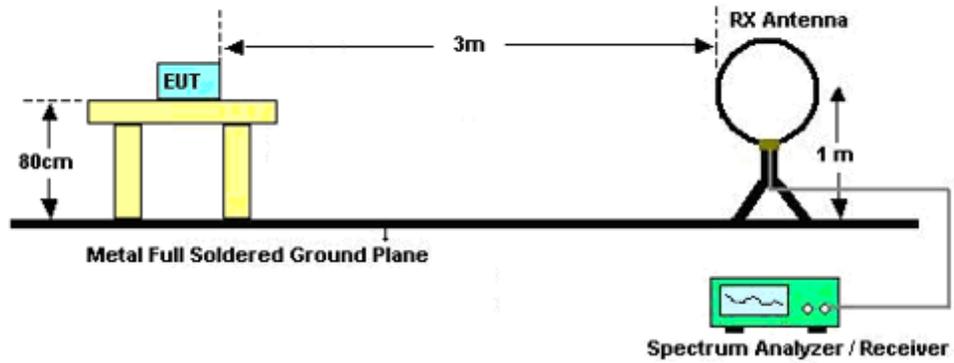

For radiated emissions from 30MHz to 1GHz

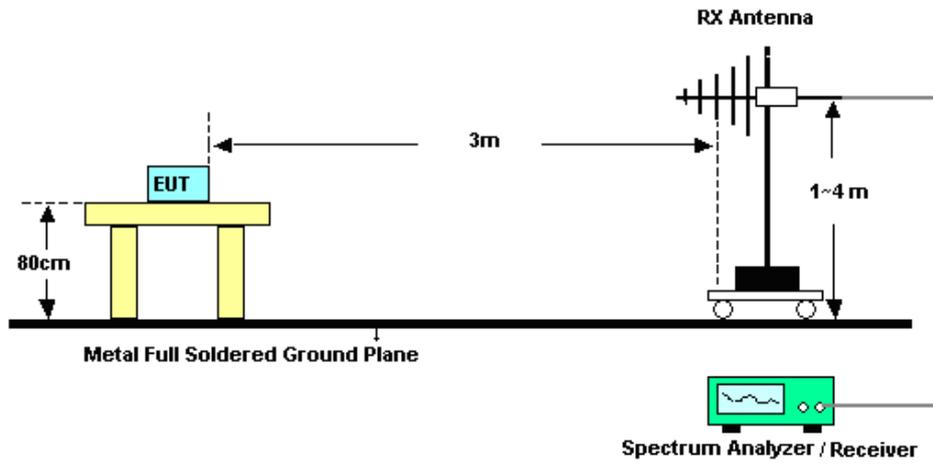

For radiated emissions above 1GHz

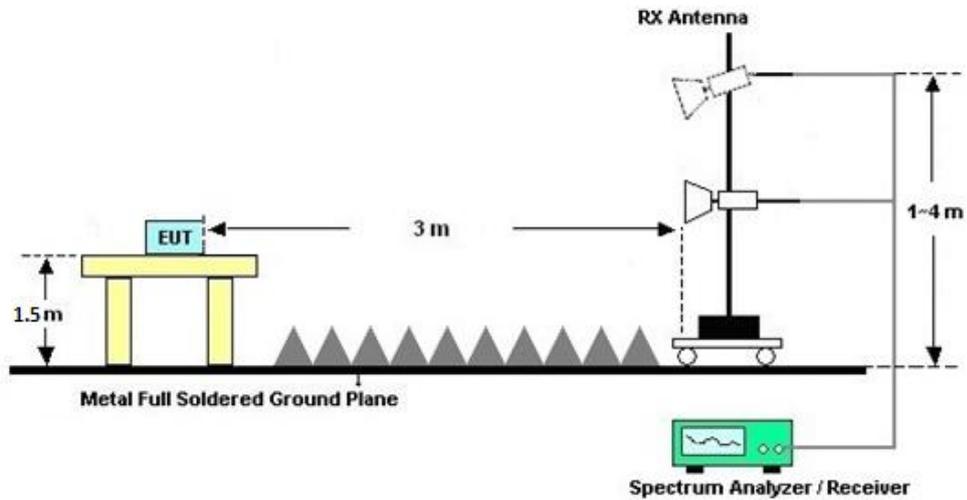

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

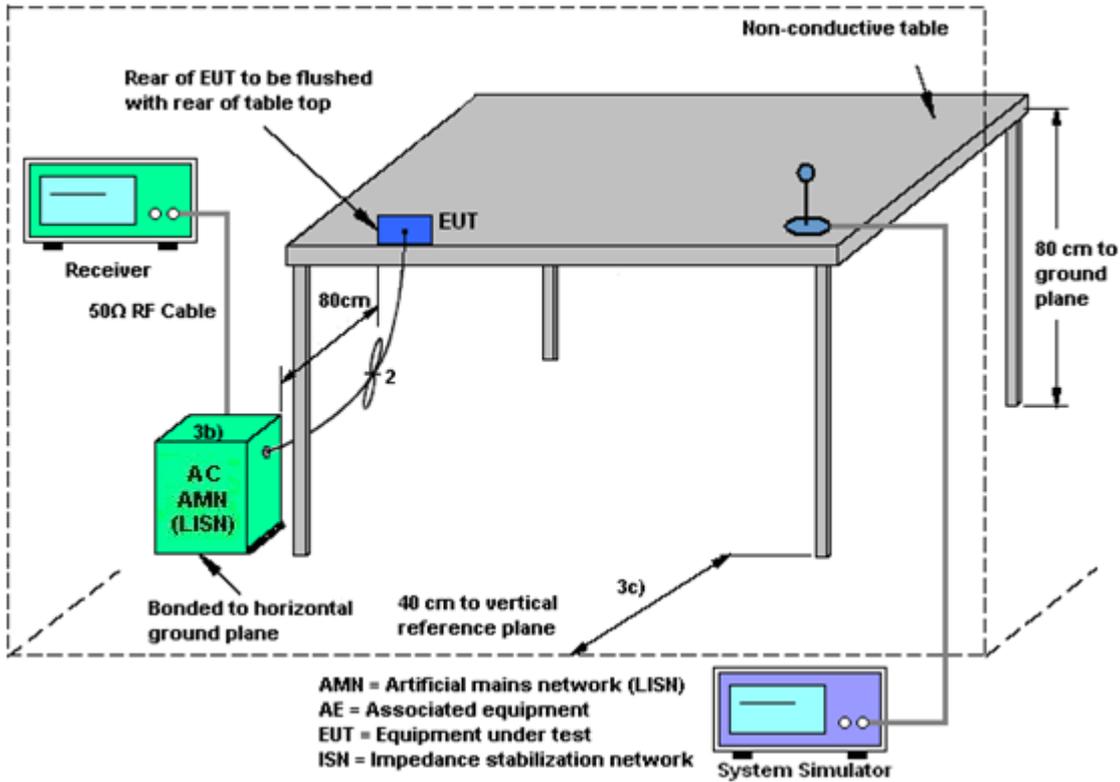

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
	Ant. 1	Ant. 2	for	for	Limit	Limit
	(dBi)	(dBi)	Power	PSD	Reduction	Reduction
			(dBi)	(dBi)	(dB)	(dB)
Band IV	2.00	-2.60	2.00	3.01	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	May 29, 2021~ May 30, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	May 29, 2021~ May 30, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	May 29, 2021~ May 30, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Jun. 17, 2021	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 12, 2021	Jun. 17, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Jun. 17, 2021	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 28, 2021	Jun. 17, 2021	May 27, 2022	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 25, 2021	Jun. 17, 2021	Apr. 24, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Jun. 17, 2021	Nov. 09, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 12, 2021	Jun. 17, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 06, 2021	Jun. 17, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Jun. 17, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 13, 2021	Jun. 17, 2021	Apr. 12, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 17, 2021	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 17, 2021	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 17, 2021	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Jun. 04, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jun. 04, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 17, 2020	Jun. 04, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jun. 04, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2021/5/29~2021/5/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	5745	17.03	17.13	24.00	23.70	16.26	16.30	0.5	Pass
11a	6Mbps	2	157	5785	16.98	17.08	23.80	24.30	16.24	16.30	0.5	Pass
11a	6Mbps	2	165	5825	17.03	17.03	23.75	23.70	15.76	16.28	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	17.86	17.71	20.80	30.00	2.00		Pass	
11a	6Mbps	2	157	5785	17.81	17.56	20.70	30.00	2.00		Pass	
11a	6Mbps	2	165	5825	17.52	17.55	20.55	30.00	2.00		Pass	
HT20	MCS0	2	149	5745	17.92	17.77	20.86	30.00	2.00		Pass	
HT20	MCS0	2	157	5785	18.16	17.97	21.08	30.00	2.00		Pass	
HT20	MCS0	2	165	5825	17.87	17.66	20.78	30.00	2.00		Pass	
HT40	MCS0	2	151	5755	18.15	18.03	21.10	30.00	2.00		Pass	
HT40	MCS0	2	159	5795	18.07	17.98	21.04	30.00	2.00		Pass	
VHT20	MCS0	2	149	5745	17.70	17.53	20.63	30.00	2.00		Pass	
VHT20	MCS0	2	157	5785	17.86	17.66	20.77	30.00	2.00		Pass	
VHT20	MCS0	2	165	5825	17.38	17.29	20.35	30.00	2.00		Pass	
VHT40	MCS0	2	151	5755	17.89	17.87	20.89	30.00	2.00		Pass	
VHT40	MCS0	2	159	5795	18.05	17.90	20.99	30.00	2.00		Pass	
VHT80	MCS0	2	155	5775	17.08	16.97	20.04	30.00	2.00		Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.04	0.04	2.22	4.12	4.29	7.30	30.00	30.00	3.01	3.01	Pass	
11a	6Mbps	2	157	5785	0.04	0.04	2.22	4.01	3.92	7.02	30.00	30.00	3.01	3.01	Pass	
11a	6Mbps	2	165	5825	0.04	0.04	2.22	3.92	3.72	6.93	30.00	30.00	3.01	3.01	Pass	

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	149	5745	Full	19.38	19.48	22.40	22.60	18.66	18.52	0.5	Pass
HE20	MCS0	2	157	5785	Full	19.38	19.38	22.45	22.50	18.72	18.14	0.5	Pass
HE20	MCS0	2	165	5825	Full	19.28	19.38	22.30	22.25	18.02	18.34	0.5	Pass
HE40	MCS0	2	151	5755	Full	37.96	37.96	41.40	41.67	37.80	37.36	0.5	Pass
HE40	MCS0	2	159	5795	Full	37.96	37.96	41.85	41.76	36.96	35.88	0.5	Pass
HE80	MCS0	2	155	5775	Full	77.08	77.08	82.40	83.84	77.76	76.72	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	18.41	18.21	21.32	30.00		2.00		Pass
HE20	MCS0	2	149	5745	26/0	9.45	9.97	12.73	30.00		2.00		Pass
HE20	MCS0	2	149	5745	52/37	12.21	12.28	15.26	30.00		2.00		Pass
HE20	MCS0	2	149	5745	106/53	15.34	15.42	18.39	30.00		2.00		Pass
HE20	MCS0	2	157	5785	Full	18.35	18.25	21.31	30.00		2.00		Pass
HE20	MCS0	2	157	5785	26/4	9.61	9.57	12.60	30.00		2.00		Pass
HE20	MCS0	2	157	5785	52/38	12.34	12.24	15.30	30.00		2.00		Pass
HE20	MCS0	2	157	5785	106/53	15.20	15.08	18.15	30.00		2.00		Pass
HE20	MCS0	2	165	5825	Full	17.94	18.17	21.07	30.00		2.00		Pass
HE20	MCS0	2	165	5825	26/8	9.65	9.59	12.63	30.00		2.00		Pass
HE20	MCS0	2	165	5825	52/40	12.08	12.13	15.12	30.00		2.00		Pass
HE20	MCS0	2	165	5825	106/54	15.11	15.29	18.21	30.00		2.00		Pass
HE40	MCS0	2	151	5755	Full	18.54	18.39	21.48	30.00		2.00		Pass
HE40	MCS0	2	151	5755	242/61	15.88	16.05	18.98	30.00		2.00		Pass
HE40	MCS0	2	159	5795	Full	18.47	18.44	21.47	30.00		2.00		Pass
HE40	MCS0	2	159	5795	242/62	15.76	15.99	18.89	30.00		2.00		Pass
HE80	MCS0	2	155	5775	Full	17.53	17.41	20.48	30.00		2.00		Pass
HE80	MCS0	2	155	5775	484/65	14.91	14.95	17.94	30.00		2.00		Pass
HE80	MCS0	2	155	5775	484/66	14.90	14.92	17.92	30.00		2.00		Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-3 MIMO																	
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	0.00	0.00	2.22	4.35	4.16	7.36	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	149	5745	26/0	0.00	0.00	2.22	3.73	4.23	7.24	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	149	5745	52/37	0.00	0.00	2.22	3.76	3.88	6.89	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	149	5745	106/53	0.00	0.00	2.22	3.88	4.10	7.11	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	157	5785	Full	0.00	0.00	2.22	4.09	3.89	7.10	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	157	5785	26/4	0.00	0.00	2.22	3.78	3.98	6.99	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	157	5785	52/38	0.00	0.00	2.22	3.67	3.58	6.68	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	157	5785	106/53	0.00	0.00	2.22	3.75	3.72	6.76	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	165	5825	Full	0.00	0.00	2.22	3.65	3.89	6.90	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	165	5825	26/8	0.00	0.00	2.22	3.82	3.74	6.83	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	165	5825	52/40	0.00	0.00	2.22	3.49	3.57	6.58	30.00	30.00	3.01	3.01	Pass	
HE20	MCS0	2	165	5825	106/54	0.00	0.00	2.22	3.59	3.75	6.76	30.00	30.00	3.01	3.01	Pass	
HE40	MCS0	2	151	5755	Full	0.00	0.00	2.22	1.50	1.53	4.54	30.00	30.00	3.01	3.01	Pass	
HE40	MCS0	2	151	5755	242/61	0.00	0.00	2.22	0.95	1.20	4.21	30.00	30.00	3.01	3.01	Pass	
HE40	MCS0	2	159	5795	Full	0.00	0.00	2.22	1.36	1.34	4.37	30.00	30.00	3.01	3.01	Pass	
HE40	MCS0	2	159	5795	242/62	0.00	0.00	2.22	0.86	1.15	4.16	30.00	30.00	3.01	3.01	Pass	
HE80	MCS0	2	155	5775	Full	0.00	0.00	2.22	-2.48	-2.76	0.53	30.00	30.00	3.01	3.01	Pass	
HE80	MCS0	2	155	5775	484/65	0.04	0.04	2.22	-3.10	-2.90	0.11	30.00	30.00	3.01	3.01	Pass	
HE80	MCS0	2	155	5775	484/66	0.04	0.04	2.22	-3.04	-2.88	0.13	30.00	30.00	3.01	3.01	Pass	

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

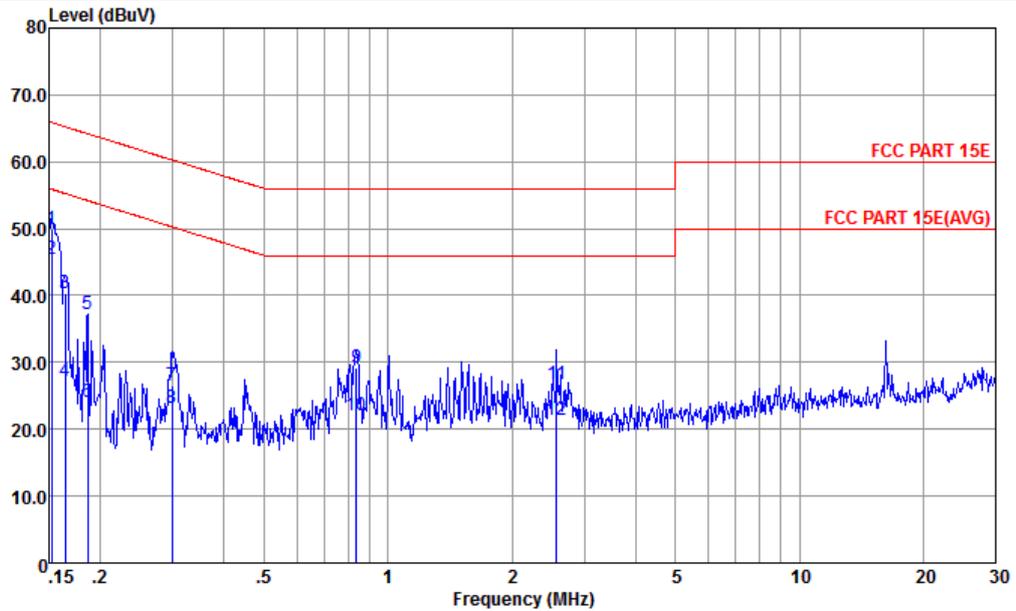


Site : CO01-KS
 Condition : FCC PART 15E TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	49.91	-15.96	65.87	29.80	9.64	10.47	QP
2 *	0.152	45.41	-10.46	55.87	25.30	9.64	10.47	Average
3	0.164	40.28	-24.97	65.25	20.20	9.64	10.44	QP
4	0.164	27.18	-28.07	55.25	7.10	9.64	10.44	Average
5	0.186	37.23	-26.97	64.20	17.20	9.64	10.39	QP
6	0.186	24.13	-30.07	54.20	4.10	9.64	10.39	Average
7	0.299	26.55	-33.73	60.28	6.60	9.64	10.31	QP
8	0.299	23.25	-27.03	50.28	3.30	9.64	10.31	Average
9	0.839	29.12	-26.88	56.00	9.20	9.68	10.24	QP
10	0.839	22.02	-23.98	46.00	2.10	9.68	10.24	Average
11	2.567	26.85	-29.15	56.00	6.60	10.01	10.24	QP
12	2.567	21.45	-24.55	46.00	1.20	10.01	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

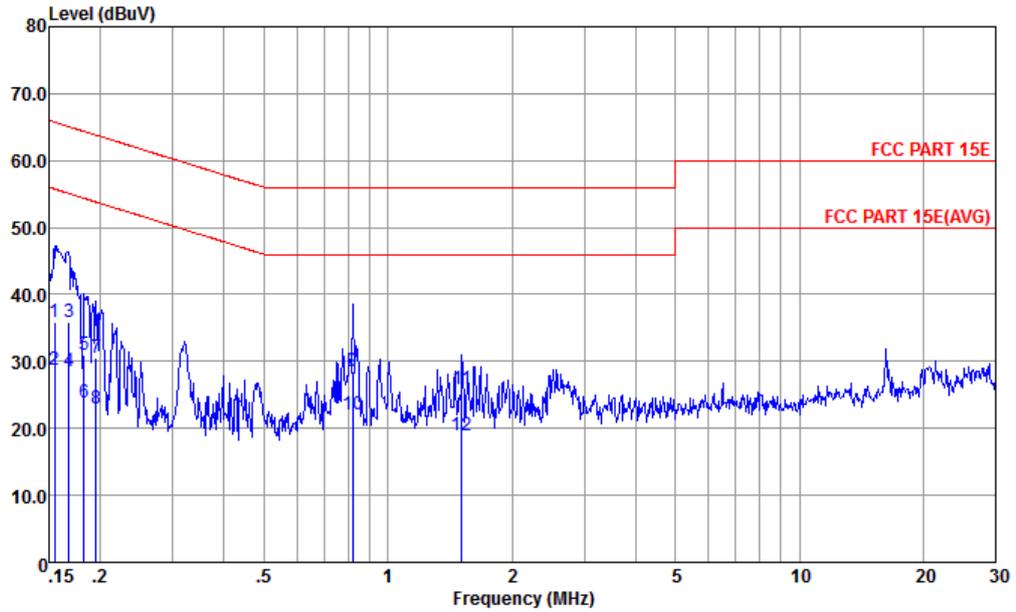

Site : CO01-KS
 Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.155	35.77	-29.97	65.74	15.49	9.81	10.47	QP
2	0.155	28.77	-26.97	55.74	8.49	9.81	10.47	Average
3	0.168	35.77	-29.31	65.08	15.50	9.84	10.43	QP
4	0.168	28.47	-26.61	55.08	8.20	9.84	10.43	Average
5	0.182	30.86	-33.51	64.37	10.60	9.86	10.40	QP
6	0.182	23.76	-30.61	54.37	3.50	9.86	10.40	Average
7	0.195	30.46	-33.34	63.80	10.21	9.88	10.37	QP
8	0.195	23.06	-30.74	53.80	2.81	9.88	10.37	Average
9	0.822	28.46	-27.54	56.00	8.50	9.72	10.24	QP
10 *	0.822	22.16	-23.84	46.00	2.20	9.72	10.24	Average
11	1.511	25.87	-30.13	56.00	5.80	9.84	10.23	QP
12	1.511	18.87	-27.13	46.00	-1.20	9.84	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

UNII 3 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5642	55.25	-13.05	68.3	39.78	35.6	12.54	32.67	100	106	P	H
		5666	56.39	-23.79	80.18	40.9	35.62	12.56	32.69	100	106	P	H
		5718	60.66	-49.68	110.34	45.03	35.7	12.65	32.72	100	106	P	H
		5722.8	68.09	-49.19	117.28	52.44	35.72	12.65	32.72	100	106	P	H
		5746	111.5	-	-	95.81	35.75	12.67	32.73	100	106	P	H
		5746	105	-	-	89.31	35.75	12.67	32.73	100	106	A	H
		5623.2	55.44	-12.86	68.3	40.21	35.38	12.51	32.66	286	84	P	V
		5650.8	56.03	-12.86	68.89	40.76	35.38	12.56	32.67	286	84	P	V
		5717.6	60.56	-49.67	110.23	45.31	35.32	12.65	32.72	286	84	P	V
		5723.2	67.01	-51.19	118.2	51.76	35.32	12.65	32.72	286	84	P	V
		5746	111.58	-	-	96.33	35.31	12.67	32.73	286	84	P	V
		5746	102.83	-	-	87.58	35.31	12.67	32.73	286	84	A	V



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5850.4	62.41	-58.98	121.39	46.53	35.9	12.79	32.81	100	121	P	H
		5857.2	59.31	-50.97	110.28	43.41	35.9	12.81	32.81	100	121	P	H
		5879.2	56.95	-45.23	102.18	41.05	35.9	12.82	32.82	100	121	P	H
		5935.2	56.42	-11.88	68.3	40.51	35.89	12.87	32.85	100	121	P	H
		5818	111.11	-	-	95.29	35.85	12.75	32.78	100	121	P	H
		5818	103.78	-	-	87.96	35.85	12.75	32.78	100	121	A	H
		5850	60.79	-61.51	122.3	45.59	35.22	12.79	32.81	322	84	P	V
		5855.3	57.7	-53.12	110.82	42.5	35.2	12.81	32.81	322	84	P	V
		5896.4	56.3	-33.13	89.43	41.09	35.21	12.84	32.84	322	84	P	V
		5934.4	56.56	-11.74	68.3	41.32	35.22	12.87	32.85	322	84	P	V
		5818	111.2	-	-	95.98	35.25	12.75	32.78	322	84	P	V
		5818	102.83	-	-	87.61	35.25	12.75	32.78	322	84	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



UNII 3 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11489.48	45.63	-28.37	74	47.93	39.19	19	60.49	300	0	P	H
		11489.48	45.51	-28.49	74	48.41	38.59	19	60.49	100	360	P	V
802.11a CH 157 5785MHz		11569.56	46.7	-27.3	74	48.74	39.42	19.07	60.53	300	0	P	H
		11569.56	45.63	-28.37	74	48.41	38.68	19.07	60.53	100	360	P	V
802.11a CH 165 5825MHz		11649.64	47.05	-26.95	74	48.86	39.64	19.12	60.57	300	0	P	H
		11649.64	45.04	-28.96	74	47.72	38.77	19.12	60.57	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 3 5725~5850MHz
WIFI 802.11ax20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies like 5607.6, 5696, 5719.6, 5722.8, 5740, 5740, 5637.2, 5660.4, 5720, 5722, 5746, 5746.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 165 5825MHz		5851.6	67.29	-51.36	118.65	51.41	35.9	12.79	32.81	100	119	P	H
		5858.8	57.85	-51.98	109.83	41.95	35.9	12.81	32.81	100	119	P	H
		5889.2	57.39	-37.37	94.76	41.47	35.9	12.84	32.82	100	119	P	H
		5970	56.39	-11.91	68.3	40.47	35.89	12.91	32.88	100	119	P	H
		5818	111.87	-	-	96.05	35.85	12.75	32.78	100	119	P	H
		5818	103.56	-	-	87.74	35.85	12.75	32.78	100	119	A	H
		5850.4	64.49	-56.9	121.39	49.29	35.22	12.79	32.81	321	84	P	V
		5871.2	56.75	-49.61	106.36	41.55	35.2	12.82	32.82	321	84	P	V
		5876.8	56.74	-47.22	103.96	41.54	35.2	12.82	32.82	321	84	P	V
		5942	55.59	-12.71	68.3	40.35	35.22	12.89	32.87	321	84	P	V
		5830	110.06	-	-	94.85	35.23	12.77	32.79	321	84	P	V
		5830	102.68	-	-	87.47	35.23	12.77	32.79	321	84	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



UNII 3 5725~5850MHz
WIFI 802.11ax20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 149, 157, and 165 at various frequencies.



UNII 3 5725~5850MHz
WIFI 802.11ax40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5643.2 to 5925.2 MHz and 5752 MHz, with various antenna positions and peak/polarization values.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 CH 159 5795MHz		5624.4	55.83	-12.47	68.3	40.39	35.59	12.51	32.66	101	120	P	H
		5665.6	55.89	-23.99	79.88	40.4	35.62	12.56	32.69	101	120	P	H
		5719.2	55.91	-54.77	110.68	40.28	35.7	12.65	32.72	101	120	P	H
		5721.6	56.39	-58.16	114.55	40.76	35.7	12.65	32.72	101	120	P	H
		5850	58.64	-63.66	122.3	42.76	35.9	12.79	32.81	101	120	P	H
		5860	58.1	-51.4	109.5	42.2	35.9	12.81	32.81	101	120	P	H
		5918.4	56.66	-16.51	73.17	40.76	35.89	12.86	32.85	101	120	P	H
		5960.8	57.24	-11.06	68.3	41.31	35.89	12.91	32.87	101	120	P	H
		5794	109.74	-	-	93.93	35.83	12.74	32.76	101	120	P	H
		5794	100.94	-	-	85.13	35.83	12.74	32.76	101	120	A	H
		5626.8	55.42	-12.88	68.3	40.19	35.38	12.51	32.66	279	85	P	V
		5698.4	55.86	-48.26	104.12	40.61	35.35	12.6	32.7	279	85	P	V
		5711.6	56.15	-52.4	108.55	40.9	35.34	12.63	32.72	279	85	P	V
		5721.6	55.05	-59.5	114.55	39.8	35.32	12.65	32.72	279	85	P	V
		5851.2	57.13	-62.43	119.56	41.93	35.22	12.79	32.81	279	85	P	V
		5860.8	55.64	-53.63	109.27	40.44	35.2	12.81	32.81	279	85	P	V
		5900.4	56.88	-29.58	86.46	41.67	35.21	12.84	32.84	279	85	P	V
		5944.4	55.08	-13.22	68.3	39.84	35.22	12.89	32.87	279	85	P	V
	5812	109.71	-	-	94.49	35.25	12.75	32.78	279	85	P	V	
	5812	100.47	-	-	85.25	35.25	12.75	32.78	279	85	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 3 5725~5850MHz
WIFI 802.11ax40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40		11509.5	45.78	-28.22	74	48.06	39.2	19.01	60.49	300	0	P	H
CH 151 5755MHz		11509.5	46.14	-27.86	74	49.02	38.6	19.01	60.49	100	360	P	V
802.11ax HE40		11589.58	46.05	-27.95	74	48.03	39.48	19.08	60.54	300	0	P	H
CH 159 5795MHz		11589.58	44.44	-29.56	74	47.2	38.7	19.08	60.54	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 3 5725~5850MHz
WIFI 802.11ax80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 CH 155 5775MHz		5645.6	56.64	-11.66	68.3	41.17	35.6	12.54	32.67	104	119	P	H
		5699.6	63.25	-41.76	105.01	47.68	35.67	12.6	32.7	104	119	P	H
		5719.2	67.71	-42.97	110.68	52.08	35.7	12.65	32.72	104	119	P	H
		5720	66.41	-44.49	110.9	50.78	35.7	12.65	32.72	104	119	P	H
		5850.4	62.35	-59.04	121.39	46.47	35.9	12.79	32.81	104	119	P	H
		5862.4	60.39	-48.44	108.83	44.49	35.9	12.81	32.81	104	119	P	H
		5878.8	56.65	-45.83	102.48	40.75	35.9	12.82	32.82	104	119	P	H
		5949.2	56.06	-12.24	68.3	40.15	35.89	12.89	32.87	104	119	P	H
		5758	105.34	-	-	89.62	35.78	12.69	32.75	104	119	P	H
		5758	97.07	-	-	81.35	35.78	12.69	32.75	104	119	A	H
		5627.2	55.58	-12.72	68.3	40.35	35.38	12.51	32.66	281	86	P	V
		5698.8	61.11	-43.31	104.42	45.86	35.35	12.6	32.7	281	86	P	V
		5720	65.03	-45.87	110.9	49.78	35.32	12.65	32.72	281	86	P	V
		5723.2	65.19	-53.01	118.2	49.94	35.32	12.65	32.72	281	86	P	V
		5851.2	60.15	-59.41	119.56	44.95	35.22	12.79	32.81	281	86	P	V
		5858.4	59.02	-50.93	109.95	43.82	35.2	12.81	32.81	281	86	P	V
		5880.8	56.12	-44.87	100.99	40.92	35.2	12.82	32.82	281	86	P	V
		5968	55.54	-12.76	68.3	40.29	35.22	12.91	32.88	281	86	P	V
		5758	106.76	-	-	91.53	35.29	12.69	32.75	281	86	P	V
	5758	96.49	-	-	81.26	35.29	12.69	32.75	281	86	A	V	

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



UNII 3 5725~5850MHz
WIFI 802.11ax80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). It contains two rows of test data and a Remark section.



UNII 3 5725~5850MHz
WIFI 802.11ax HE20_RU26 Left/Right (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements for 802.11ax HE20 RU26 Left CH 149 5745MHz.



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 RU26 Right CH 165 5825MHz		5851.2	58.39	-61.17	119.56	42.51	35.9	12.79	32.81	100	119	P	H
		5856.8	57.49	-52.91	110.4	41.59	35.9	12.81	32.81	100	119	P	H
		5914	57.6	-18.81	76.41	41.69	35.89	12.86	32.84	100	119	P	H
		5932	56.96	-11.34	68.3	41.05	35.89	12.87	32.85	100	119	P	H
		5836	116.26	-	-	100.4	35.88	12.77	32.79	100	119	P	H
		5836	109.21	-	-	93.35	35.88	12.77	32.79	100	119	A	H
		5850.4	57.76	-63.63	121.39	42.56	35.22	12.79	32.81	317	81	P	V
		5872.4	55.67	-50.36	106.03	40.47	35.2	12.82	32.82	317	81	P	V
		5879.6	55.73	-46.15	101.88	40.53	35.2	12.82	32.82	317	81	P	V
		5940.8	55.29	-13.01	68.3	40.05	35.22	12.89	32.87	317	81	P	V
		5830	115.46	-	-	100.25	35.23	12.77	32.79	317	81	P	V
		5830	108.96	-	-	93.75	35.23	12.77	32.79	317	81	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



UNII 3 5725~5850MHz
WIFI 802.11ax HE20_RU52 Left/Right(Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements for 802.11ax HE20 RU52 Left CH 149 5745MHz.



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 RU52 Right CH 165 5825MHz		5850	56.96	-65.34	122.3	41.08	35.9	12.79	32.81	104	95	P	H
		5862.4	56.43	-52.4	108.83	40.53	35.9	12.81	32.81	104	95	P	H
		5894	56.69	-34.51	91.2	40.8	35.89	12.84	32.84	104	95	P	H
		5935.6	57	-11.3	68.3	41.09	35.89	12.87	32.85	104	95	P	H
		5830	116	-	-	100.14	35.88	12.77	32.79	104	95	P	H
		5830	109.41	-	-	93.55	35.88	12.77	32.79	104	95	A	H
		5851.2	56.83	-62.73	119.56	41.63	35.22	12.79	32.81	300	89	P	V
		5855.6	55.97	-54.76	110.73	40.77	35.2	12.81	32.81	300	89	P	V
		5916.4	57.89	-16.75	74.64	42.66	35.21	12.86	32.84	300	89	P	V
		5938.4	56.28	-12.02	68.3	41.04	35.22	12.87	32.85	300	89	P	V
		5830	116.8	-	-	101.59	35.23	12.77	32.79	300	89	P	V
		5830	109.64	-	-	94.43	35.23	12.77	32.79	300	89	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



UNII 3 5725~5850MHz
WIFI 802.11ax HE20_ RU106 Left/Right (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5645.6 to 5740 MHz.



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 RU106 Right CH 165 5825MHz		5850.8	59.38	-61.1	120.48	43.5	35.9	12.79	32.81	103	113	P	H
		5873.6	56.51	-49.18	105.69	40.61	35.9	12.82	32.82	103	113	P	H
		5890	57.17	-37	94.17	41.25	35.9	12.84	32.82	103	113	P	H
		5928.8	57.45	-10.85	68.3	41.54	35.89	12.87	32.85	103	113	P	H
		5830	116.28	-	-	100.42	35.88	12.77	32.79	103	113	P	H
		5830	106.2	-	-	90.34	35.88	12.77	32.79	103	113	A	H
		5850.4	59.01	-62.38	121.39	43.81	35.22	12.79	32.81	299	91	P	V
		5859.6	55.84	-53.77	109.61	40.64	35.2	12.81	32.81	299	91	P	V
		5922.8	56.61	-13.31	69.92	41.37	35.22	12.87	32.85	299	91	P	V
		5925.2	56.6	-11.7	68.3	41.36	35.22	12.87	32.85	299	91	P	V
	5830	114.08	-	-	98.87	35.23	12.77	32.79	299	91	P	V	
	5830	105.19	-	-	89.98	35.23	12.77	32.79	299	91	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



UNII 3 5725~5850MHz
WIFI 802.11ax HE40_RU242 Left/Right(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 RU242 Left CH 151 5755MHz		5649.2	55.62	-12.68	68.3	40.15	35.6	12.54	32.67	110	112	P	H
		5700	62.48	-42.82	105.3	46.91	35.67	12.6	32.7	110	112	P	H
		5717.2	83.29	-26.83	110.12	67.68	35.7	12.63	32.72	110	112	P	H
		5721.2	76.72	-36.92	113.64	61.09	35.7	12.65	32.72	110	112	P	H
		5854.4	56.56	-55.71	112.27	40.66	35.9	12.81	32.81	110	112	P	H
		5870.4	57.14	-49.45	106.59	41.25	35.9	12.81	32.82	110	112	P	H
		5899.2	56.44	-30.91	87.35	40.55	35.89	12.84	32.84	110	112	P	H
		5981.6	57.02	-11.28	68.3	41.1	35.88	12.92	32.88	110	112	P	H
		5752	113.33	-	-	97.62	35.75	12.69	32.73	110	112	P	H
		5752	103.05	-	-	87.34	35.75	12.69	32.73	110	112	A	H
		5634.8	56.06	-12.24	68.3	40.79	35.4	12.54	32.67	321	91	P	V
		5682.8	58.25	-34.36	92.61	43	35.37	12.58	32.7	321	91	P	V
		5720	71.19	-39.71	110.9	55.94	35.32	12.65	32.72	321	91	P	V
		5723.6	81.1	-38.01	119.11	65.85	35.32	12.65	32.72	321	91	P	V
		5850.4	55.02	-66.37	121.39	39.82	35.22	12.79	32.81	321	91	P	V
		5868.4	56.73	-50.42	107.15	41.53	35.2	12.81	32.81	321	91	P	V
		5919.2	56.67	-15.91	72.58	41.45	35.21	12.86	32.85	321	91	P	V
		5992	56.08	-12.22	68.3	40.81	35.23	12.94	32.9	321	91	P	V
		5752	113.68	-	-	98.43	35.29	12.69	32.73	321	91	P	V
	5752	104.66	-	-	89.41	35.29	12.69	32.73	321	91	A	V	



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 RU242 Right CH 159 5795MHz		5626.4	55.95	-12.35	68.3	40.51	35.59	12.51	32.66	100	114	P	H
		5687.2	56.53	-39.33	95.86	40.98	35.65	12.6	32.7	100	114	P	H
		5716.8	59.87	-50.14	110.01	44.26	35.7	12.63	32.72	100	114	P	H
		5722.8	55.84	-61.44	117.28	40.19	35.72	12.65	32.72	100	114	P	H
		5851.6	57.4	-61.25	118.65	41.52	35.9	12.79	32.81	100	114	P	H
		5864	61.12	-47.26	108.38	45.22	35.9	12.81	32.81	100	114	P	H
		5923.6	56.43	-12.9	69.33	40.52	35.89	12.87	32.85	100	114	P	H
		5966.8	57.15	-11.15	68.3	41.23	35.89	12.91	32.88	100	114	P	H
		5812	114.2	-	-	98.38	35.85	12.75	32.78	100	114	P	H
		5812	105.79	-	-	89.97	35.85	12.75	32.78	100	114	A	H
		5620.8	56.64	-11.66	68.3	41.41	35.38	12.51	32.66	315	81	P	V
		5652.4	56.33	-13.75	70.08	41.06	35.38	12.56	32.67	315	81	P	V
		5707.6	55.73	-51.7	107.43	40.48	35.34	12.63	32.72	315	81	P	V
		5721.2	55.38	-58.26	113.64	40.13	35.32	12.65	32.72	315	81	P	V
		5850	58.49	-63.81	122.3	43.29	35.22	12.79	32.81	315	81	P	V
		5872.8	55.34	-50.58	105.92	40.14	35.2	12.82	32.82	315	81	P	V
		5880.4	58.32	-42.97	101.29	43.12	35.2	12.82	32.82	315	81	P	V
		5934	55.64	-12.66	68.3	40.4	35.22	12.87	32.85	315	81	P	V
	5800	113.67	-	-	98.45	35.26	12.74	32.78	315	81	P	V	
	5800	105.15	-	-	89.93	35.26	12.74	32.78	315	81	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 3 5725~5850MHz
WIFI 802.11ax HE80_RU484 Left/Right (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 RU484 Left CH 155 5775MHz		5602	56.49	-11.81	68.3	41.07	35.57	12.49	32.64	100	114	P	H
		5686.8	72.21	-23.35	95.56	56.66	35.65	12.6	32.7	100	114	P	H
		5712.8	75.45	-33.44	108.89	59.84	35.7	12.63	32.72	100	114	P	H
		5722.4	79.57	-36.8	116.37	63.94	35.7	12.65	32.72	100	114	P	H
		5850	58.18	-64.12	122.3	42.3	35.9	12.79	32.81	100	114	P	H
		5857.2	57.66	-52.62	110.28	41.76	35.9	12.81	32.81	100	114	P	H
		5883.2	59.04	-40.17	99.21	43.14	35.9	12.82	32.82	100	114	P	H
		5935.6	56.68	-11.62	68.3	40.77	35.89	12.87	32.85	100	114	P	H
		5758	109.52	-	-	93.8	35.78	12.69	32.75	100	114	P	H
		5758	102.34	-	-	86.62	35.78	12.69	32.75	100	114	A	H
		5608.4	56.38	-11.92	68.3	41.16	35.37	12.49	32.64	294	84	P	V
		5687.2	69.93	-25.93	95.86	54.68	35.35	12.6	32.7	294	84	P	V
		5719.6	75.88	-34.91	110.79	60.63	35.32	12.65	32.72	294	84	P	V
		5721.2	75.73	-37.91	113.64	60.48	35.32	12.65	32.72	294	84	P	V
		5850	57.62	-64.68	122.3	42.42	35.22	12.79	32.81	294	84	P	V
		5872.4	56.9	-49.13	106.03	41.7	35.2	12.82	32.82	294	84	P	V
		5880	56.76	-44.83	101.59	41.56	35.2	12.82	32.82	294	84	P	V
		5964.4	56.19	-12.11	68.3	40.94	35.22	12.91	32.88	294	84	P	V
	5770	109.92	-	-	94.67	35.28	12.72	32.75	294	84	P	V	
	5770	101.58	-	-	86.33	35.28	12.72	32.75	294	84	A	V	

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 RU484 Right CH 155 5775MHz		5648.8	56.06	-12.24	68.3	40.59	35.6	12.54	32.67	100	111	P	H
		5681.2	66.88	-24.55	91.43	51.34	35.65	12.58	32.69	100	111	P	H
		5707.2	72.12	-35.2	107.32	56.51	35.7	12.63	32.72	100	111	P	H
		5722	80.5	-34.96	115.46	64.87	35.7	12.65	32.72	100	111	P	H
		5852.4	60.44	-56.39	116.83	44.56	35.9	12.79	32.81	100	111	P	H
		5860.4	58.67	-50.72	109.39	42.77	35.9	12.81	32.81	100	111	P	H
		5899.6	57.32	-29.74	87.06	41.43	35.89	12.84	32.84	100	111	P	H
		5928.4	56.79	-11.51	68.3	40.88	35.89	12.87	32.85	100	111	P	H
		5812	109.87	-	-	94.05	35.85	12.75	32.78	100	111	P	H
		5812	100.13	-	-	84.31	35.85	12.75	32.78	100	111	A	H
		5650	55.91	-12.39	68.3	40.64	35.38	12.56	32.67	321	82	P	V
		5688	70.6	-25.85	96.45	55.35	35.35	12.6	32.7	321	82	P	V
		5706	73.56	-33.42	106.98	58.31	35.34	12.63	32.72	321	82	P	V
		5722	75.16	-40.3	115.46	59.91	35.32	12.65	32.72	321	82	P	V
		5854.4	69.94	-42.33	112.27	54.74	35.2	12.81	32.81	321	82	P	V
		5868.4	70.82	-36.33	107.15	55.62	35.2	12.81	32.81	321	82	P	V
		5901.2	56.15	-29.72	85.87	40.94	35.21	12.84	32.84	321	82	P	V
		5956.8	56.56	-11.74	68.3	41.3	35.22	12.91	32.87	321	82	P	V
	5800	109.34	-	-	94.12	35.26	12.74	32.78	321	82	P	V	
	5800	101.49	-	-	86.27	35.26	12.74	32.78	321	82	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802. 11ax HE20_ RU106 Left (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 RU106 LF		483.96	19.7	-26.3	46	25.44	23.46	3.57	32.77	-	-	P	H
		565.44	22.12	-23.88	46	25.66	25.16	3.87	32.57	-	-	P	H
		675.05	22.92	-23.08	46	26.25	25.19	4.23	32.75	-	-	P	H
		780.78	24.72	-21.28	46	26.82	25.94	4.54	32.58	-	-	P	H
		888.45	26.2	-19.8	46	27.16	26.7	4.86	32.52	-	-	P	H
		935.98	26.83	-19.17	46	27.14	27.06	4.98	32.35	115	37	P	H
		30	17.12	-22.88	40	23.74	25.5	0.58	32.7	-	-	P	V
		471.35	20.83	-25.17	46	26.06	23.98	3.53	32.74	-	-	P	V
		542.16	22.5	-23.5	46	25.67	25.68	3.78	32.63	-	-	P	V
		655.65	23.4	-22.6	46	26.06	25.88	4.17	32.71	-	-	P	V
		800.18	25.65	-20.35	46	26.65	26.9	4.6	32.5	-	-	P	V
	926.28	27.4	-18.6	46	27.17	27.66	4.96	32.39	152	67	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	98.97	-	-	10Hz
1+2	802.11ax HE20	100	-	-	10Hz
1+2	802.11ax HE40	100	-	-	10Hz
1+2	802.11ax HE80	100	-	-	10Hz


<MIMO Ant.1+2>

802.11a

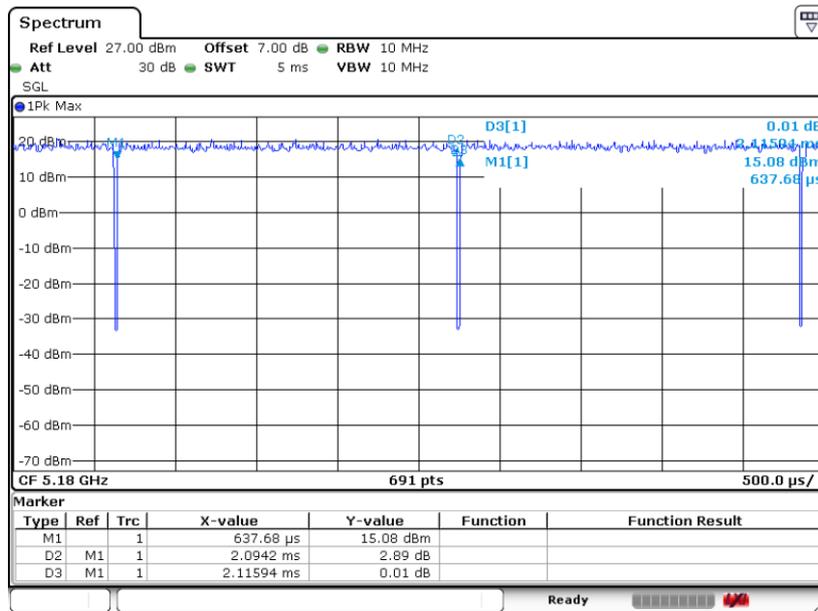




802.11ax HE20

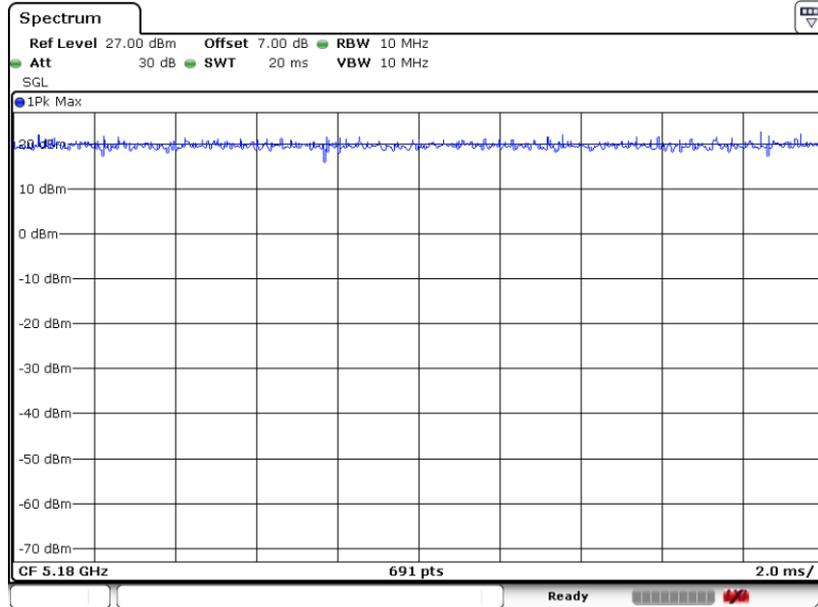

802.11ax HE40

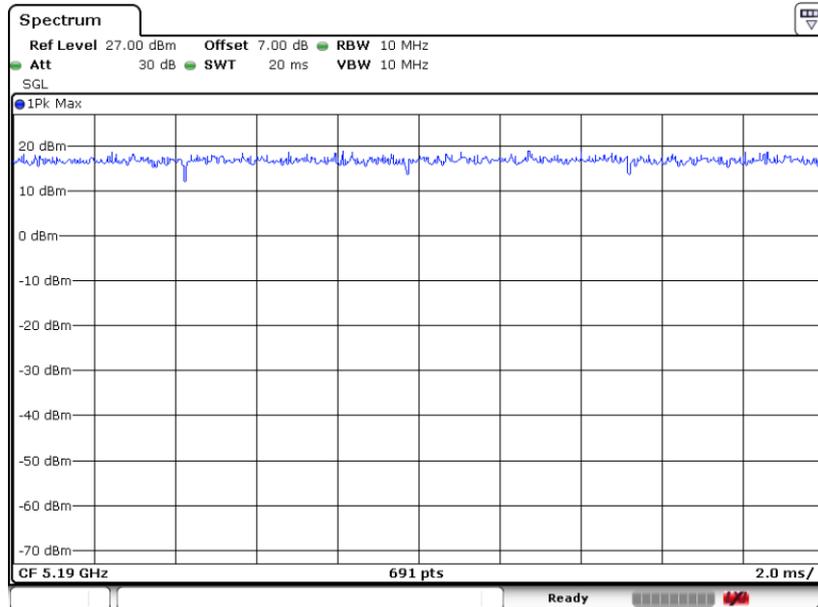



802.11ax HE80

