



15.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA V					RMC 12.2Kbps	Left Cheek	0mm	Ant 3	DSI 1	4182	836.4	22.14	22.50	1.086	-	-	0.05	0.866	1	0.941
2nd	WCDMA V					RMC 12.2Kbps	Left Cheek	0mm	Ant 3	DSI 1	4182	836.4	22.14	22.50	1.086	-	-	0.03	0.846	1.024	0.919
1st	LTE Band 4	20M	QPSK	50	0		Right Cheek	0mm	Ant 4	DSI 1	20175	1732.5	22.57	23.00	1.104	-	-	-0.09	0.927	1	1.023
2nd	LTE Band 4	20M	QPSK	50	0		Right Cheek	0mm	Ant 4	DSI 1	20175	1732.5	22.57	23.00	1.104	-	-	0.04	0.915	1.013	1.010
1st	LTE Band 42	20M	QPSK	1	0		Left Tilted	0mm	Ant 6	DSI 1	42990	3540	18.94	20.00	1.276	62.9	1.006	-0.08	0.841	1	1.080
2nd	LTE Band 42	20M	QPSK	1	0		Left Tilted	0mm	Ant 6	DSI 1	42990	3540	18.94	20.00	1.276	62.9	1.006	0.05	0.836	1.006	1.074
1st	FR1 n77	100M	QPSK	1	137	DFT-s-OFDM SCS30KHz	Right Tilted	0mm	Ant 13	DSI 1	656000	3840	15.60	16.50	1.230	-	-	-0.06	0.871	1	1.072
2nd	FR1 n77	100M	QPSK	1	137	DFT-s-OFDM SCS30KHz	Right Tilted	0mm	Ant 13	DSI 1	656000	3840	15.60	16.50	1.230	-	-	0.05	0.865	1.007	1.064
1st	WLAN5GHz					802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 7+9	standalone	155	5775	14.99	16.00	1.262	100	1.000	0.05	0.853	1	1.076
2nd	WLAN5GHz					802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 7+9	standalone	155	5775	14.99	16.00	1.262	100	1.000	0.03	0.824	1.035	1.040

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + 2.4GHz WLAN SISO	Yes	Yes	Yes	Yes
2.	WWAN + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
3.	WWAN + 5GHz WLAN SISO	Yes	Yes	Yes	Yes
4.	WWAN + 5GHz WLAN MIMO	Yes	Yes	Yes	Yes
5.	WWAN + Bluetooth Ant 7	Yes	Yes	Yes	Yes
6.	WWAN + Bluetooth Ant 9	Yes	Yes	Yes	Yes
7.	5GHz WLAN SISO + Bluetooth Ant 7	Yes	Yes	Yes	Yes
8.	5GHz WLAN MIMO + Bluetooth Ant 7	Yes	Yes	Yes	Yes
9.	5GHz WLAN SISO + Bluetooth Ant 9	Yes	Yes	Yes	Yes
10.	5GHz WLAN MIMO + Bluetooth Ant 9	Yes	Yes	Yes	Yes
11.	WWAN + 5GHz WLAN SISO + Bluetooth Ant 7	Yes	Yes	Yes	Yes
12.	WWAN + 5GHz WLAN MIMO + Bluetooth Ant 7	Yes	Yes	Yes	Yes
13.	WWAN + 5GHz WLAN SISO + Bluetooth Ant 9	Yes	Yes	Yes	Yes
14.	WWAN + 5GHz WLAN MIMO + Bluetooth Ant 9	Yes	Yes	Yes	Yes
15.	2.4GHz WLAN SISO + 5GHz WLAN SISO	Yes	Yes	Yes	Yes
16.	2.4GHz WLAN SISO + 5GHz WLAN MIMO	Yes	Yes	Yes	Yes
17.	2.4GHz WLAN MIMO + 5GHz WLAN SISO	Yes	Yes	Yes	Yes
18.	2.4GHz WLAN MIMO + 5GHz WLAN MIMO	Yes	Yes	Yes	Yes
19.	WWAN + 2.4GHz WLAN SISO + 5GHz WLAN SISO	Yes	Yes	Yes	Yes
20.	WWAN + 2.4GHz WLAN SISO + 5GHz WLAN MIMO	Yes	Yes	Yes	Yes
21.	WWAN + 2.4GHz WLAN MIMO + 5GHz WLAN SISO	Yes	Yes	Yes	Yes
22.	WWAN + 2.4GHz WLAN MIMO + 5GHz WLAN MIMO	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- WWAN above includes 5G NR bands.
- EN-DC SAR summed the standalone 5G NR SAR and LTE standalone SAR more conservatively.
- EUT will choose each GSM, WCDMA, LTE and 5G NR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- WLAN2.4GHz and Bluetooth share the same antenna, so can't transmit simultaneously.
- According to the characteristic of EUT, WLAN5GHz and Bluetooth can transmit simultaneously.
- WLAN2.4GHz/WLAN5GHz MIMO SAR can represent SISO SAR to do co-located SAR analysis.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position.
- WWAN antenna always chose the worst position SAR among all WWAN bands base on head and body to do co-located with WLAN/Bluetooth. It is the most conservatively evaluation.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

16.1 Head Exposure Conditions

WLAN Band		Exposure Position	1	2	1+2
			2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
2.4GHz WLAN(DBS)	5GHz WLAN(DBS)	Right Cheek	0.210	0.610	0.82
		Right Tilted	0.196	0.520	0.72
		Left Cheek	0.782	0.743	1.53
		Left Tilted	0.509	0.683	1.19

WWAN Band	Exposure Position	1	2	3	4	5	1+2	1+3	1+4	1+5
		WWAN	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
standalone Band	Right Cheek	1.023	0.127	0.399	0.121	0.073	1.15	1.42	1.14	1.10
	Right Tilted	0.862	0.118	0.340	0.151	0.011	0.98	1.20	1.01	0.87
	Left Cheek	0.919	0.471	0.497	0.215	0.152	1.39	1.42	1.13	1.07
	Left Tilted	1.080	0.306	0.470	0.249	0.030	1.39	1.55	1.33	1.11

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3	1+3+4	1+3+5
		WWAN	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
standalone Band	Right Cheek	1.023	0.047	0.164	0.121	0.073	1.23	1.31	1.26
	Right Tilted	0.862	0.044	0.139	0.151	0.011	1.05	1.15	1.01
	Left Cheek	0.919	0.175	0.202	0.215	0.152	1.30	1.34	1.27
	Left Tilted	1.080	0.113	0.191	0.249	0.030	1.38	1.52	1.30

<Inter-Band UL CA>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+2+4	1+2+5	1+2+6
		LTE Band 4 Ant 4&5	LTE Band 7 Ant 2&8	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
UL CA-4A-7A	Right Cheek	1.023	0.144	0.127	0.399	0.121	0.073	1.29	1.57	1.29	1.24
	Right Tilted	0.500	0.211	0.118	0.340	0.151	0.011	0.83	1.05	0.86	0.72
	Left Cheek	0.412	0.491	0.471	0.497	0.215	0.152	1.37	1.40	1.12	1.06
	Left Tilted	0.346	0.211	0.306	0.470	0.249	0.030	0.86	1.03	0.81	0.59

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+4	1+2+4+5	1+2+4+6
		LTE Band 4 Ant 4&5	LTE Band 7 Ant 2&8	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
UL CA-4A-7A	Right Cheek	1.023	0.144	0.047	0.164	0.121	0.073	1.38	1.45	1.40
	Right Tilted	0.500	0.211	0.044	0.139	0.151	0.011	0.89	1.00	0.86
	Left Cheek	0.412	0.491	0.175	0.202	0.215	0.152	1.28	1.32	1.26
	Left Tilted	0.346	0.211	0.113	0.191	0.249	0.030	0.86	1.00	0.78

<5G NR ENDC>

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+2+4	1+2+5	1+2+6
			WWAN	FR1	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
ENDC (2A&7A&41A(38A)&66A&5A(26A))	ENDC (N41&N66&N5&N7&N78)	Right Cheek	0.505	0.582	0.127	0.399	0.121	0.073	1.21	1.49	1.21	1.16
		Right Tilted	0.500	0.595	0.118	0.340	0.151	0.011	1.21	1.44	1.25	1.11
		Left Cheek	0.495	0.471	0.471	0.497	0.215	0.152	1.44	1.46	1.18	1.12
		Left Tilted	0.346	0.528	0.306	0.470	0.249	0.030	1.18	1.34	1.12	0.90

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	6	1+2+3+4	1+2+4+5	1+2+4+6
			WWAN	FR1	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
ENDC (2A&7A&41A(38A)&66A&5A(26A))	ENDC (N41&N66&N5&N7&N78)	Right Cheek	0.505	0.582	0.047	0.164	0.121	0.073	1.30	1.37	1.32
		Right Tilted	0.500	0.595	0.044	0.139	0.151	0.011	1.28	1.39	1.25
		Left Cheek	0.495	0.471	0.175	0.202	0.215	0.152	1.34	1.38	1.32
		Left Tilted	0.346	0.528	0.113	0.191	0.249	0.030	1.18	1.31	1.10

16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	1+2	1+3	1+4	1+5
		WWAN	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
standalone Band	Front	0.858	0.376	0.394	0.114	0.126	1.23	1.25	0.97	0.98
	Back	1.060	0.295	0.462	0.088	0.107	1.36	1.52	1.15	1.17
	Left side	0.757					0.76	0.76	0.76	0.76
	Right side	0.294	0.372	0.379	0.031	0.233	0.67	0.67	0.33	0.53
	Top side	0.365	0.329	0.419	0.162	0.026	0.69	0.78	0.53	0.39
	Bottom side	1.090					1.09	1.09	1.09	1.09

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3	1+3+4	1+3+5
		WWAN	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
standalone Band	Front	0.858	0.244	0.204	0.114	0.126	1.31	1.18	1.19
	Back	1.060	0.191	0.240	0.088	0.107	1.49	1.39	1.41
	Left side	0.757					0.76	0.76	0.76
	Right side	0.294	0.241	0.197	0.031	0.233	0.73	0.52	0.72
	Top side	0.365	0.214	0.217	0.162	0.026	0.80	0.74	0.61
	Bottom side	1.090					1.09	1.09	1.09

<Inter-Band UL CA>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+2+4	1+2+5	1+2+6
		LTE Band 4 Ant 4&5	LTE Band 7 Ant 2&8	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
UL CA-4A-7A	Front	0.247	0.512	0.376	0.394	0.114	0.126	1.14	1.15	0.87	0.89
	Back	0.347	0.567	0.295	0.462	0.088	0.107	1.21	1.38	1.00	1.02
	Left side	0.393	0.171					0.56	0.56	0.56	0.56
	Right side		0.129	0.372	0.379	0.031	0.233	0.50	0.51	0.16	0.36
	Top side	0.232		0.329	0.419	0.162	0.026	0.56	0.65	0.39	0.26
	Bottom side		0.577					0.58	0.58	0.58	0.58

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+4	1+2+4+5	1+2+4+6
		LTE Band 4 Ant 4&5	LTE Band 7 Ant 2&8	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
UL CA-4A-7A	Front	0.247	0.512	0.244	0.204	0.114	0.126	1.21	1.08	1.09
	Back	0.347	0.567	0.191	0.240	0.088	0.107	1.35	1.24	1.26
	Left side	0.393	0.171					0.56	0.56	0.56
	Right side		0.129	0.241	0.197	0.031	0.233	0.57	0.36	0.56
	Top side	0.232		0.214	0.217	0.162	0.026	0.66	0.61	0.48
	Bottom side		0.577					0.58	0.58	0.58



<5G NR ENDC>

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+2+4	1+2+5	1+2+6
			WWAN	FR1	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
ENDC (2A&7A&41A(38A)&66A&5A(26A))	ENDC (N41&N66&N5&N7&N78)	Front	0.421	0.386	0.376	0.394	0.114	0.126	1.18	1.20	0.92	0.93
		Back	0.471	0.441	0.295	0.462	0.088	0.107	1.21	1.37	1.00	1.02
		Left side	0.285	0.374					0.66	0.66	0.66	0.66
		Right side	0.129	0.144	0.372	0.379	0.031	0.233	0.65	0.65	0.30	0.51
		Top side	0.232	0.638	0.329	0.419	0.162	0.026	1.20	1.29	1.03	0.90
		Bottom side	0.581	0.458					1.04	1.04	1.04	1.04

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	6	1+2+3+4	1+2+4+5	1+2+4+6
			WWAN	FR1	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
ENDC (2A&7A&41A(38A)&66A&5A(26A))	ENDC (N41&N66&N5&N7&N78)	Front	0.421	0.386	0.244	0.204	0.114	0.126	1.26	1.13	1.14
		Back	0.471	0.441	0.191	0.240	0.088	0.107	1.34	1.24	1.26
		Left side	0.285	0.374					0.66	0.66	0.66
		Right side	0.129	0.144	0.241	0.197	0.031	0.233	0.71	0.50	0.70
		Top side	0.232	0.638	0.214	0.217	0.162	0.026	1.30	1.25	1.11
		Bottom side	0.581	0.458					1.04	1.04	1.04

16.3 Body-Worn Accessory Exposure Conditions

WLAN Band		Exposure Position	1	2	1+2
			2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
2.4GHz WLAN(DBS)	5GHz WLAN(DBS)	Front	0.181	0.635	0.82
		Back	0.130	0.378	0.51

WWAN Band	Exposure Position	1	2	3	4	5	1+2	1+3	1+4	1+5
		WWAN	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
standalone Band	Front	0.461	0.181	0.496	0.053	0.056	0.64	0.96	0.51	0.52
	Back	0.543	0.130	0.378	0.051	0.057	0.67	0.92	0.59	0.60

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4	1+2+5
		WWAN	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
standalone Band	Front	0.461	0.181	0.235	0.053	0.056	0.88	0.70	0.70
	Back	0.543	0.130	0.178	0.051	0.057	0.85	0.72	0.73

<Inter-Band UL CA>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+2+4	1+2+5	1+2+6
		LTE Band4 Ant 4&5	LTE Band7 Ant 2&8	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
UL_4A_7A	Front	0.330	0.404	0.181	0.496	0.053	0.056	0.92	1.23	0.79	0.79
	Back	0.411	0.503	0.130	0.378	0.051	0.057	1.04	1.29	0.97	0.97

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+4	1+2+4+5	1+2+4+6
		LTE Band4 Ant 4&5	LTE Band7 Ant 2&8	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
UL_4A_7A	Front	0.330	0.404	0.181	0.235	0.053	0.056	1.15	1.02	1.03
	Back	0.411	0.503	0.130	0.178	0.051	0.057	1.22	1.14	1.15



<5G NR ENDC>

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+2+4	1+2+5	1+2+6
			WWAN	FR1	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
ENDC (2A&7A&41A(38A)&66A&5A(26A))	ENDC (N41&N66&N5&N7&N78)	Front	0.467	0.494	0.181	0.496	0.053	0.056	1.14	1.46	1.01	1.02
		Back	0.548	0.498	0.130	0.378	0.051	0.057	1.18	1.42	1.10	1.10

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	6	1+2+3+4	1+2+4+5	1+2+4+6
			WWAN	FR1	2.4GHz WLAN Ant 7+9	5GHz WLAN Ant 7+9	Bluetooth Ant 7	Bluetooth Ant 9	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
ENDC (2A&7A&41A(38A)&66A&5A(26A))	ENDC (N41&N66&N5&N7&N78)	Front	0.467	0.494	0.181	0.235	0.053	0.056	1.38	1.25	1.25
		Back	0.506	0.498	0.130	0.178	0.051	0.057	1.31	1.23	1.24

16.4 Product specific 10g SAR Exposure Conditions

WWAN Band	Exposure Position	1	2	1+2
		WWAN	5GHz WLAN Ant 1	Summed
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
WCDMA IV	Front		1.962	1.96
	Back		1.043	1.04
	Left side			0.00
	Right side		1.411	1.41
	Top side	1.906	0.993	2.90
	Bottom side			0.00
LTE Band 2	Front		1.962	1.96
	Back		1.043	1.04
	Left side			0.00
	Right side		1.411	1.41
	Top side		0.993	0.99
	Bottom side	2.319		2.32

Test Engineer : Nick Hu, Seven Xu, Bruce Li

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. *Plots of System Performance Check*

The plots are shown as follows.

System Check_Head_750MHz**DUT: D750V3 - SN:1087**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.769$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.06, 9.06, 9.06); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.582 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.47 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

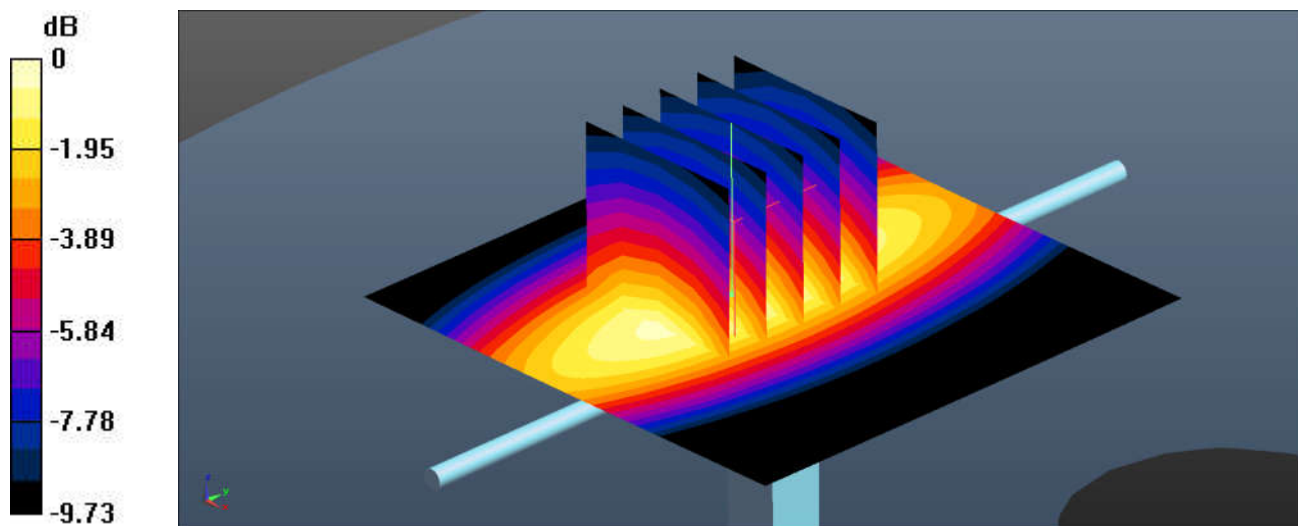

0 dB = 0.601 W/kg = -2.21 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d258**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 42.535$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(8.69, 8.69, 8.69); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.667 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.43 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

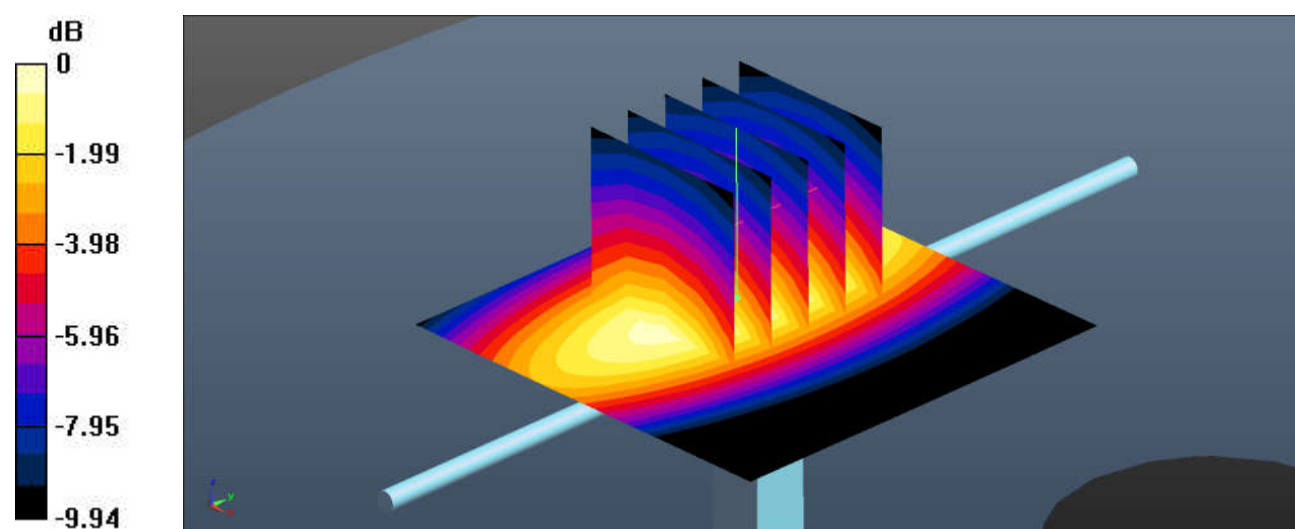

0 dB = 0.672 W/kg = -1.72 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 39.045$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.72, 7.72, 7.72); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.88 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.12 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 1.99 W/kg; SAR(10 g) = 1.05 W/kg

Maximum value of SAR (measured) = 3.05 W/kg

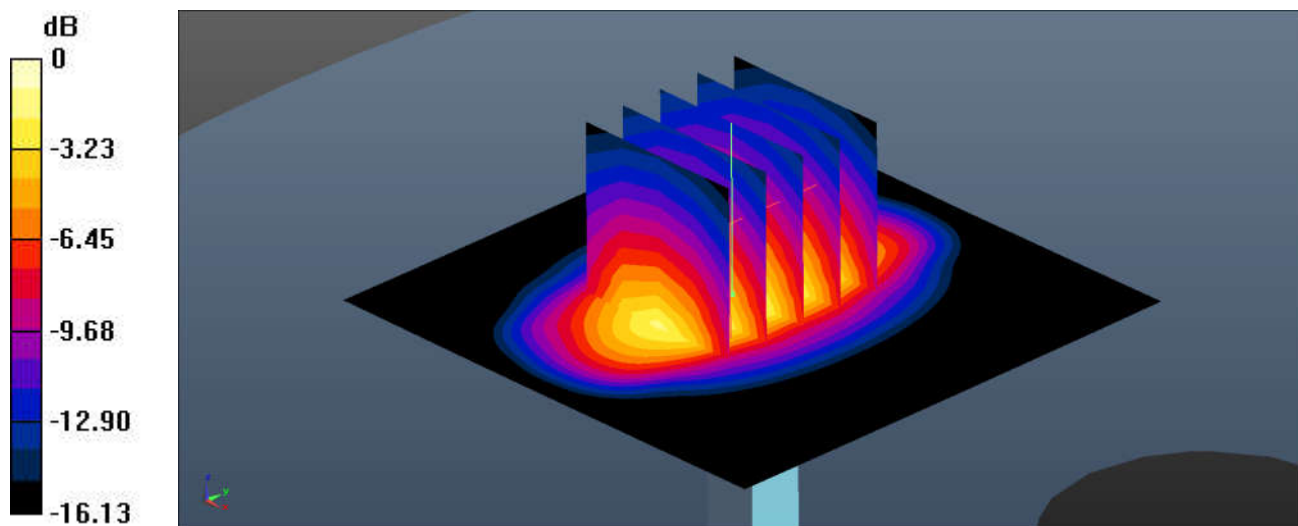

0 dB = 3.05 W/kg = 4.84 dBW/kg

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.41, 7.41, 7.41); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.42 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.67 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.10 W/kg

Maximum value of SAR (measured) = 3.49 W/kg

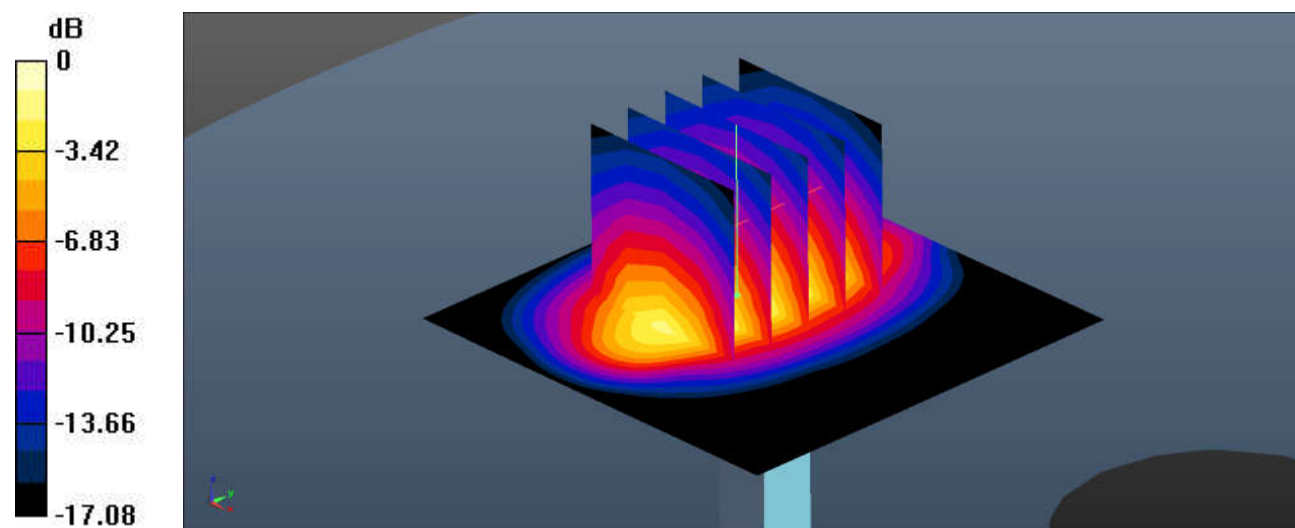

0 dB = 3.49 W/kg = 5.43 dBW/kg

System Check_Head_2450MHz**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 40.581$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.86, 7.86, 7.86); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.80 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.51 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 6.08 W/kg

SAR(1 g) = 2.81 W/kg; SAR(10 g) = 1.3 W/kg

Maximum value of SAR (measured) = 4.78 W/kg

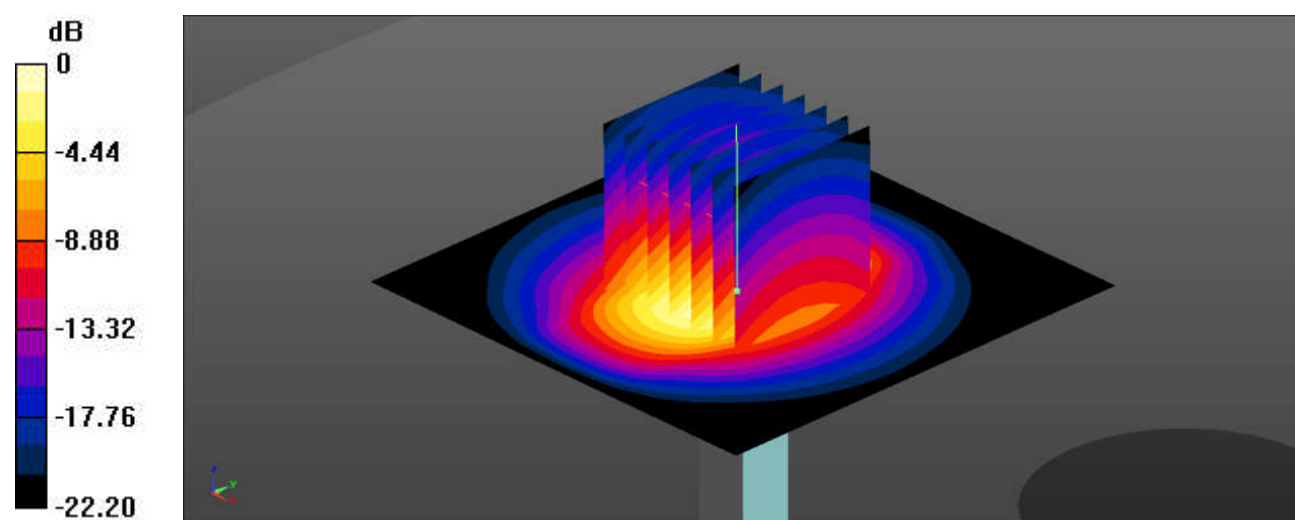

0 dB = 4.78 W/kg = 6.79 dBW/kg

System Check_Head_2600MHz**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.012$ S/m; $\epsilon_r = 40.557$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.76, 6.76, 6.76); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.98 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 45.19 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 2.94 W/kg; SAR(10 g) = 1.34 W/kg

Maximum value of SAR (measured) = 4.94 W/kg

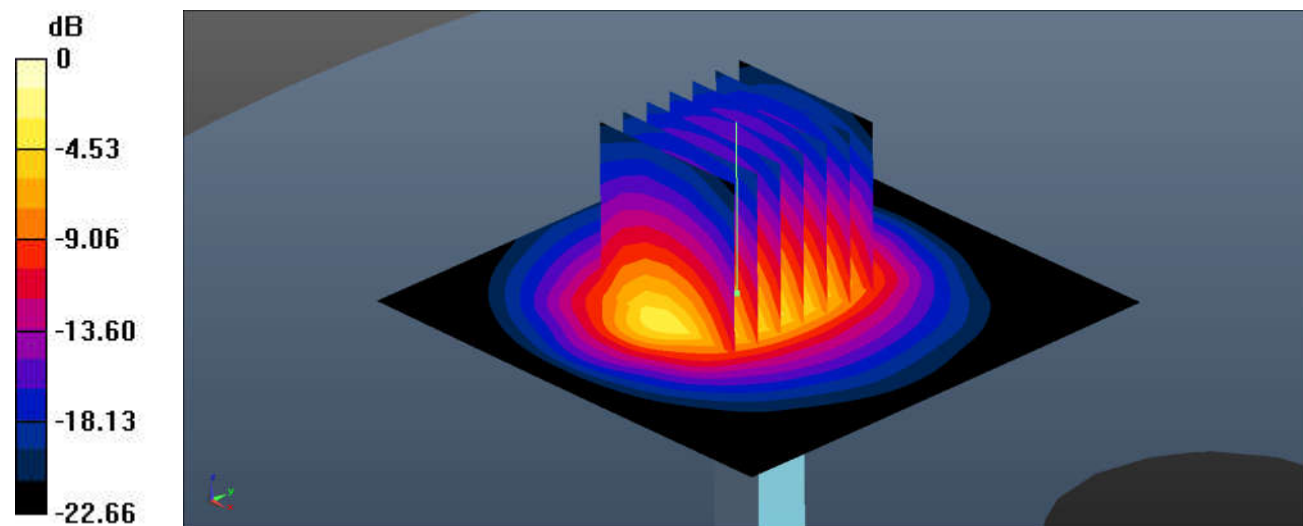

System Check_Head_3500MHz**DUT: D3500V2 - SN:1037**

Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL_3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.833$ S/m; $\epsilon_r = 39.056$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.16, 7.16, 7.16); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.82 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 35.90 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 9.68 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.31 W/kg

Maximum value of SAR (measured) = 6.80 W/kg

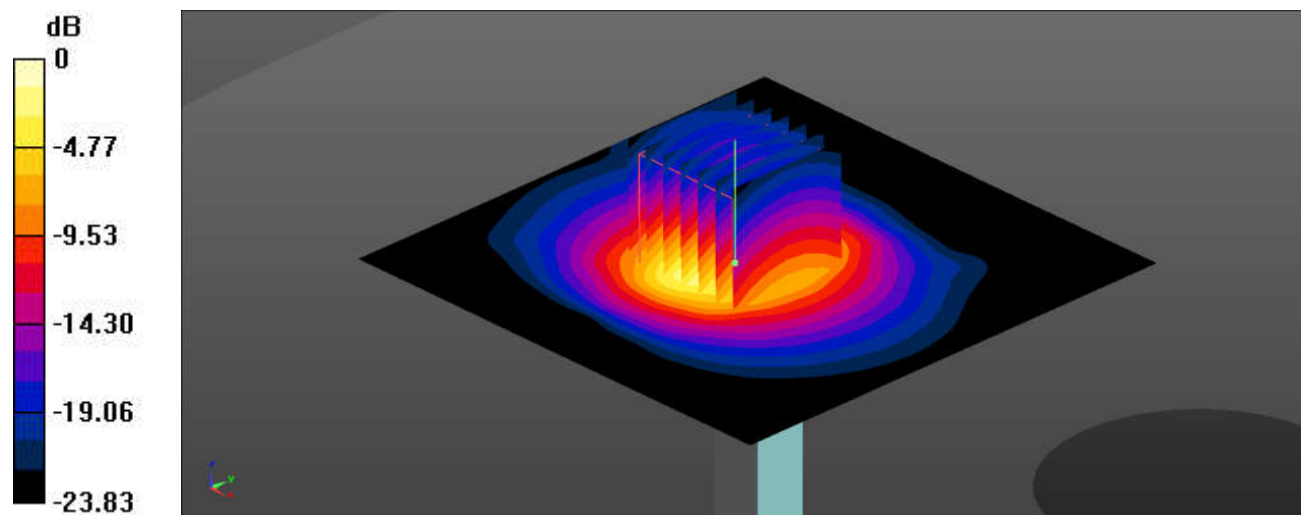

0 dB = 6.80 W/kg = 8.33 dBW/kg

System Check_Head_3700MHz**DUT: D3700V2 - SN:1008**

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: HSL_3700 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.024$ S/m; $\epsilon_r = 38.72$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.03, 7.03, 7.03); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.81 W/kg


Pin=50mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.32 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.97 W/kg

SAR(1 g) = 3.49 W/kg; SAR(10 g) = 1.29 W/kg

Maximum value of SAR (measured) = 7.05 W/kg

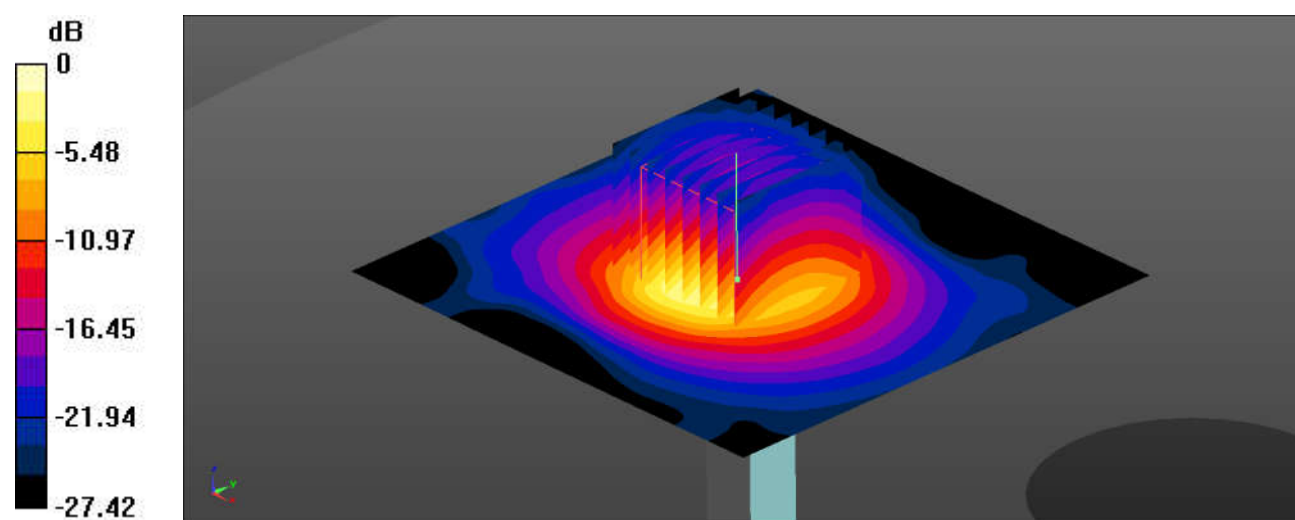

0 dB = 7.05 W/kg = 8.48 dBW/kg

System Check_Head_3900MHz**DUT: D3900V2 - SN:1048**

Communication System: UID 0, CW (0); Frequency: 3900 MHz; Duty Cycle: 1:1

Medium: HSL_3900 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.227$ S/m; $\epsilon_r = 38.419$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(6.99, 6.99, 6.99); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.07 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.06 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 3.42 W/kg; SAR(10 g) = 1.21 W/kg

Maximum value of SAR (measured) = 7.16 W/kg

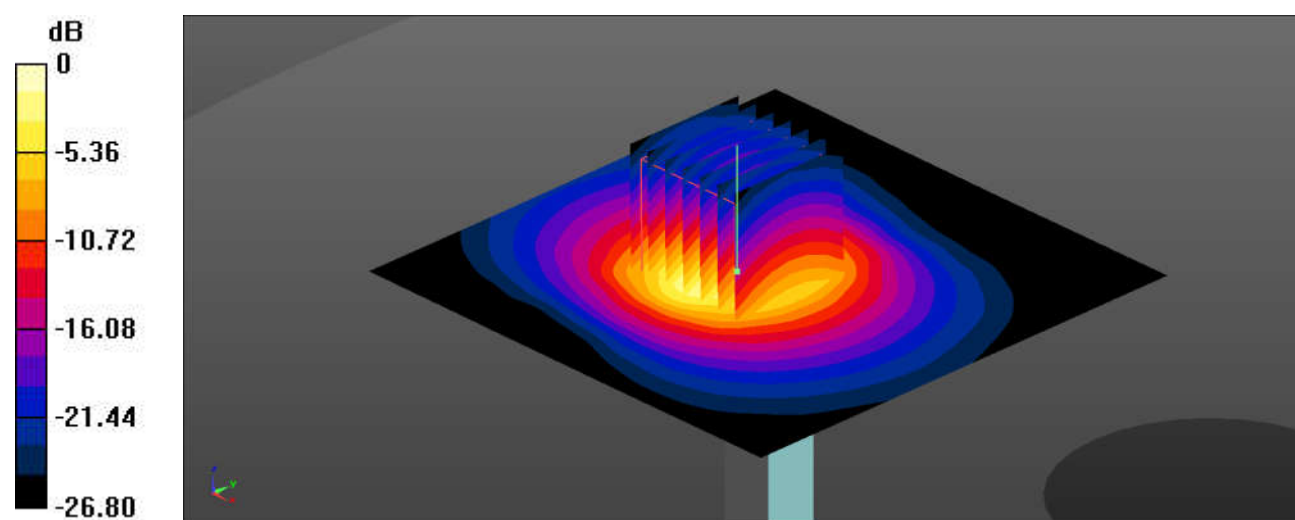

0 dB = 7.16 W/kg = 8.55 dBW/kg

System Check_Head_4100MHz**DUT: D3900V2 - SN:1048**

Communication System: UID 0, CW (0); Frequency: 4100 MHz; Duty Cycle: 1:1

Medium: HSL_4100 Medium parameters used: $f = 4100$ MHz; $\sigma = 3.446$ S/m; $\epsilon_r = 38.091$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(6.87, 6.87, 6.87); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.94 W/kg


Pin=50mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 30.36 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 9.36 W/kg

SAR(1 g) = 3.24 W/kg; SAR(10 g) = 1.13 W/kg

Maximum value of SAR (measured) = 5.61 W/kg

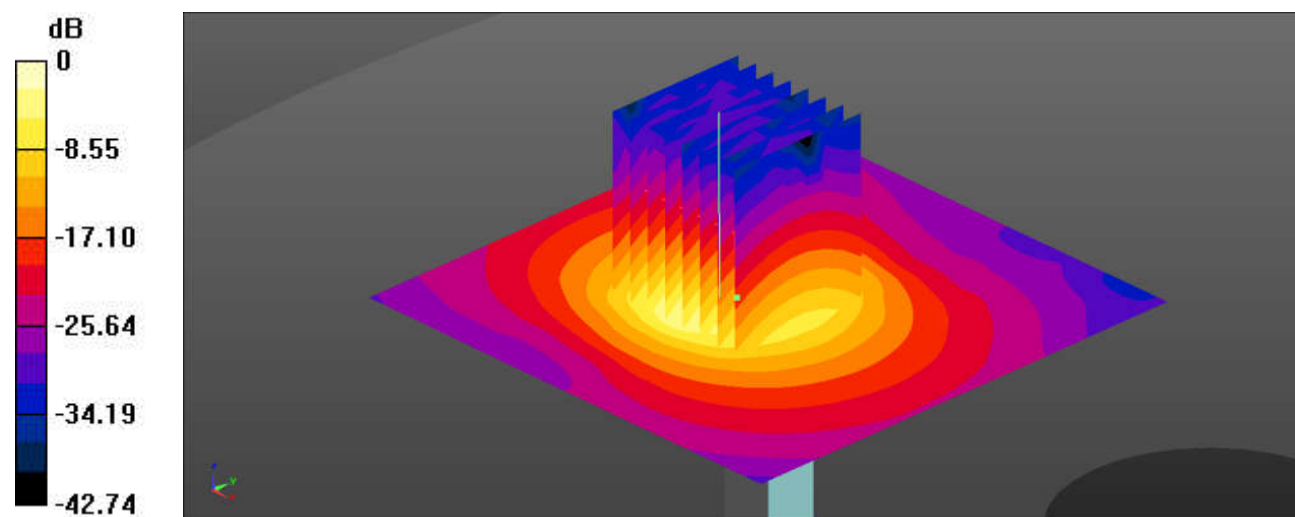

0 dB = 5.61 W/kg = 7.49 dBW/kg

System Check_Head_5250MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.597$ S/m; $\epsilon_r = 35.936$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(5.04, 5.04, 5.04); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.1 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.43 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 4.31 W/kg; SAR(10 g) = 1.23 W/kg

Maximum value of SAR (measured) = 10.8 W/kg

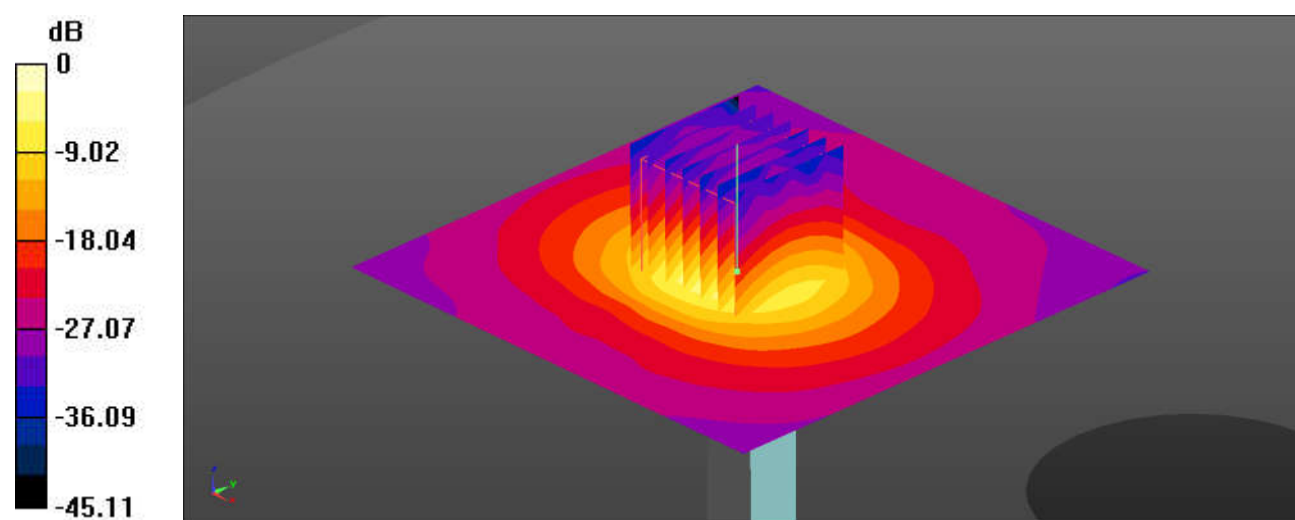

0 dB = 10.8 W/kg = 10.33 dBW/kg

System Check_Head_5600MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.997$ S/m; $\epsilon_r = 35.371$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(4.69, 4.69, 4.69); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.9 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.27 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 19.9 W/kg

SAR(1 g) = 4.49 W/kg; SAR(10 g) = 1.27 W/kg

Maximum value of SAR (measured) = 11.6 W/kg

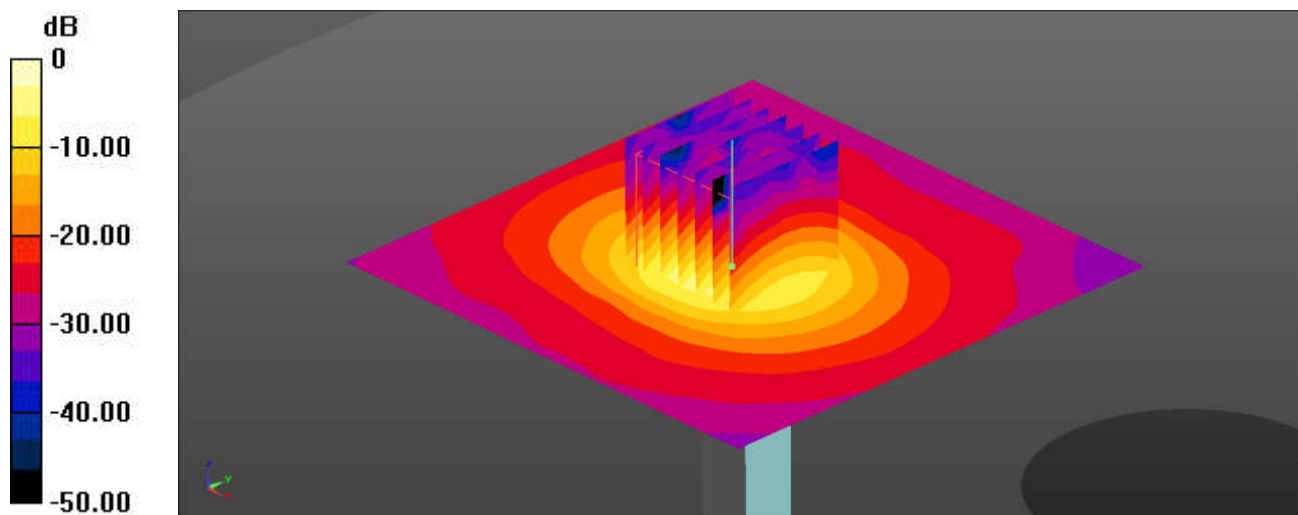

0 dB = 11.6 W/kg = 10.64 dBW/kg

System Check_Head_5750MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 35.206$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(4.71, 4.71, 4.71); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.0 W/kg


Pin=50mW/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.63 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 4.23 W/kg; SAR(10 g) = 1.21 W/kg

Maximum value of SAR (measured) = 11.1 W/kg

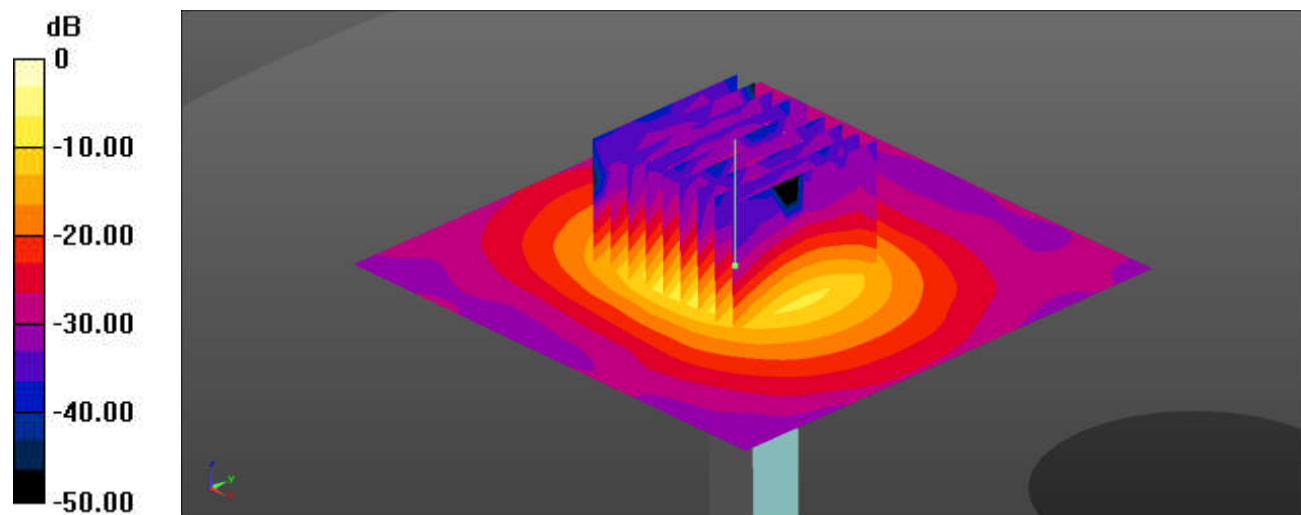

0 dB = 11.1 W/kg = 10.45 dBW/kg

System Check_Head_750MHz**DUT: D750V3 - SN:1087**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.629$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.59, 10.59, 10.59); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.553 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.13 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.571 W/kg

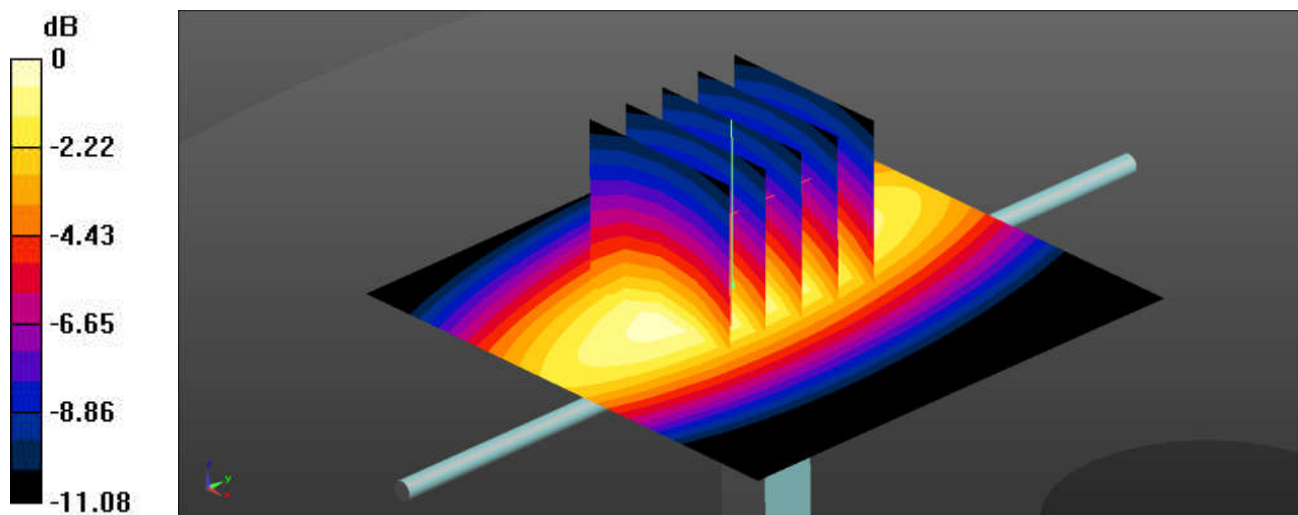

0 dB = 0.571 W/kg = -2.43 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d258**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.369$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.27, 10.27, 10.27); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.630 W/kg**Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.54 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

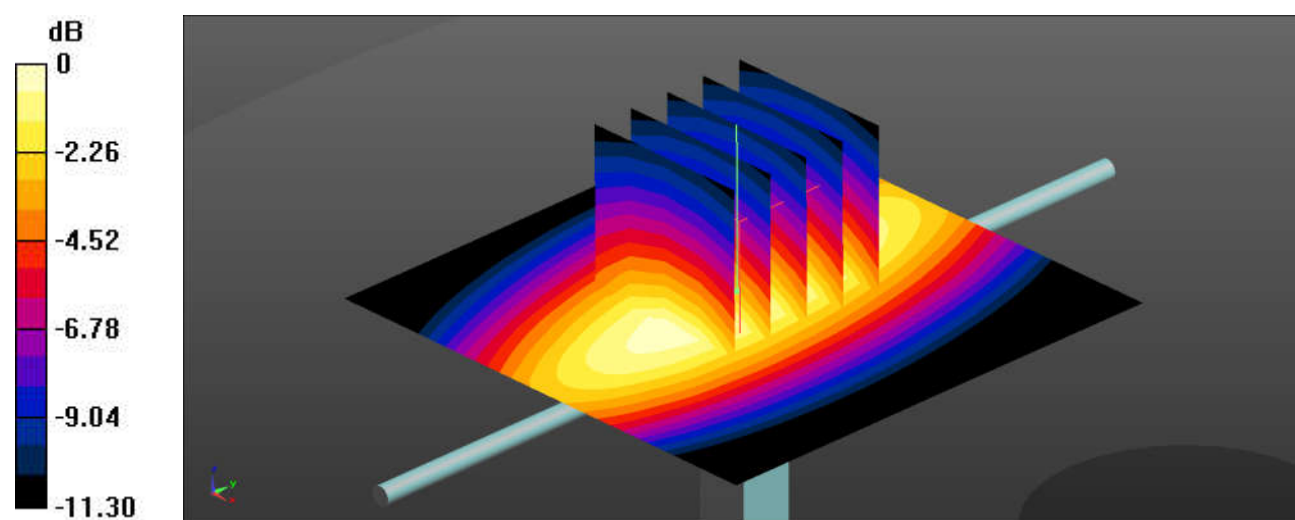

0 dB = 0.636 W/kg = -1.97 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 40.533$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.9, 8.9, 8.9); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.92 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 1.83 W/kg; SAR(10 g) = 0.958 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

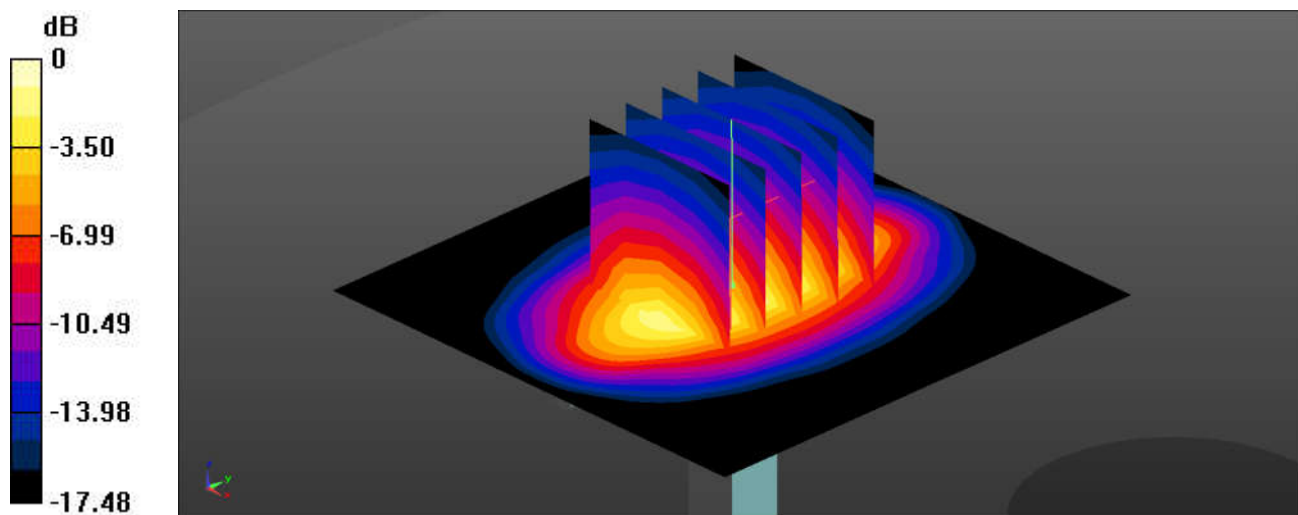

0 dB = 2.93 W/kg = 4.67 dBW/kg

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.287$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.61, 8.61, 8.61); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.34 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.90 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.06 W/kg

Maximum value of SAR (measured) = 3.34 W/kg

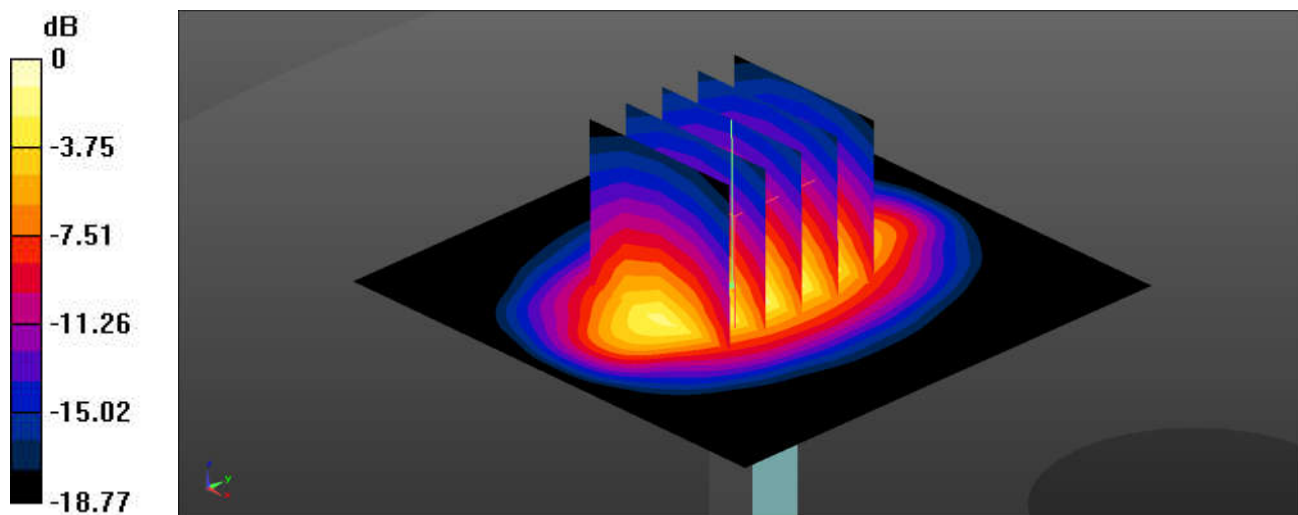

0 dB = 3.34 W/kg = 5.24 dBW/kg

System Check_Head_2450MHz**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 40.832$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.86, 7.86, 7.86); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.89 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.99 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 6.12 W/kg

SAR(1 g) = 2.8 W/kg; SAR(10 g) = 1.29 W/kg

Maximum value of SAR (measured) = 4.82 W/kg

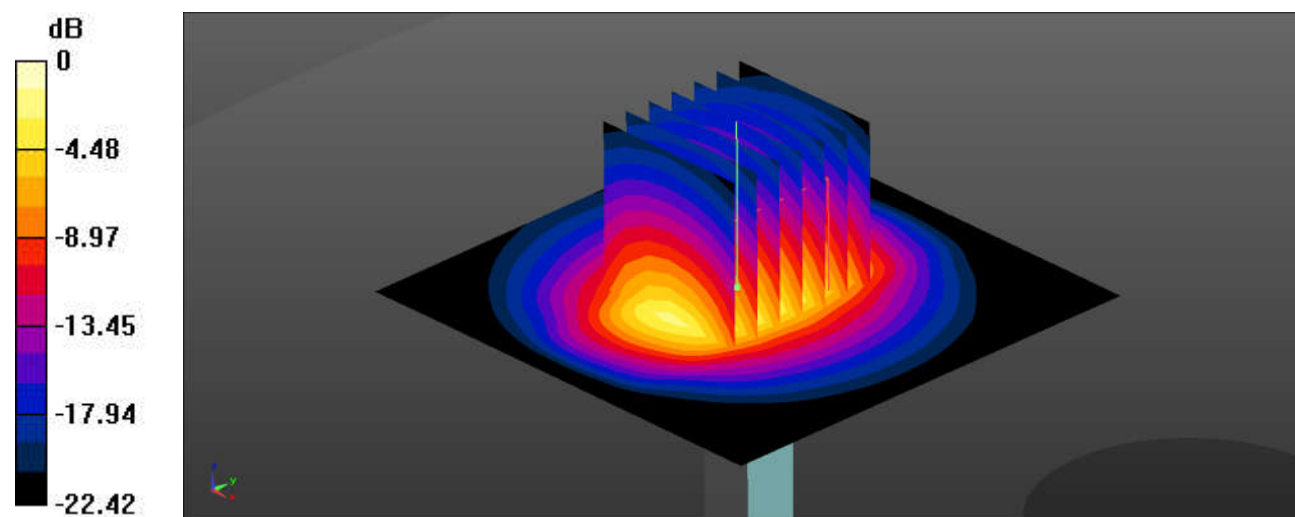

0 dB = 4.82 W/kg = 6.83 dBW/kg

System Check_Head_2600MHz**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 40.629$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.66, 7.66, 7.66); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.86 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.05 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.25 W/kg

SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.24 W/kg

Maximum value of SAR (measured) = 4.90 W/kg

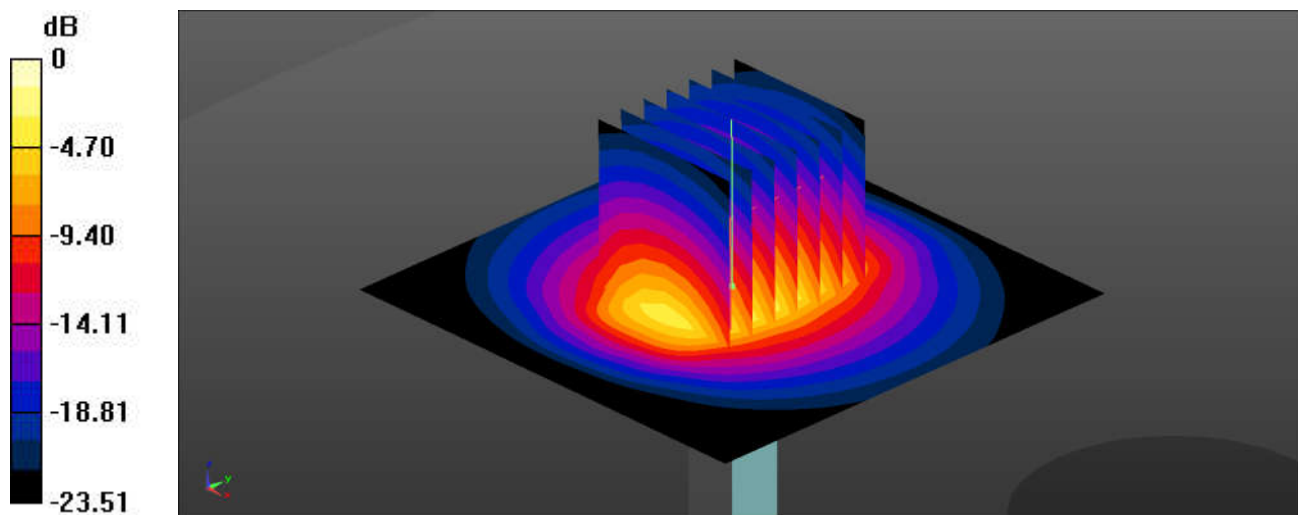

0 dB = 4.90 W/kg = 6.90 dBW/kg

System Check_Head_3500MHz**DUT: D3500V2 - SN:1037**

Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL_3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.768$ S/m; $\epsilon_r = 39.132$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.16, 7.16, 7.16); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.72 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 35.78 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.47 W/kg

SAR(1 g) = 3.38 W/kg; SAR(10 g) = 1.28 W/kg

Maximum value of SAR (measured) = 6.67 W/kg

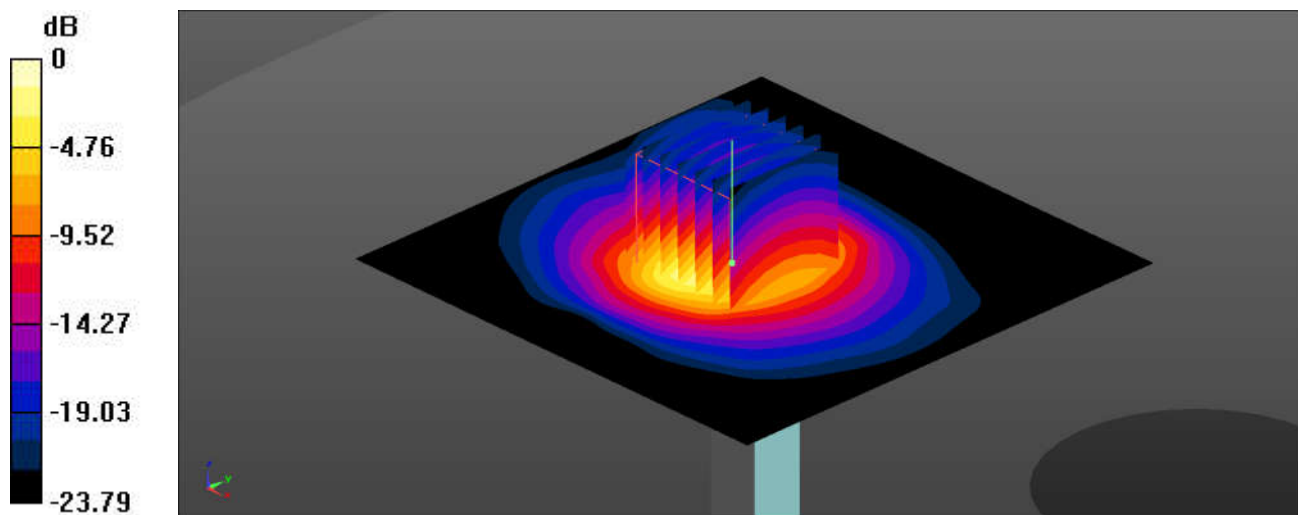

0 dB = 6.67 W/kg = 8.24 dBW/kg

System Check_Head_3700MHz**DUT: D3700V2 - SN:1008**

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: HSL_3700 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.978$ S/m; $\epsilon_r = 38.621$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.03, 7.03, 7.03); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.86 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.98 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 9.76 W/kg

SAR(1 g) = 3.44 W/kg; SAR(10 g) = 1.27 W/kg

Maximum value of SAR (measured) = 6.91 W/kg

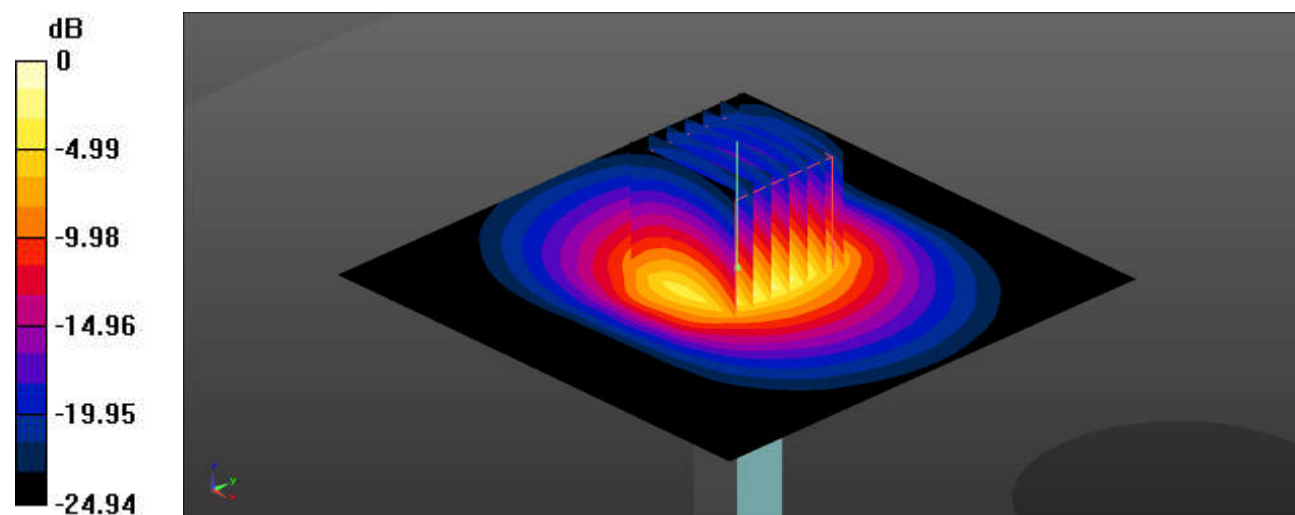

System Check_Head_3900MHz**DUT: D3900V2 - SN:1048**

Communication System: UID 0, CW (0); Frequency: 3900 MHz; Duty Cycle: 1:1

Medium: HSL_3900 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.169$ S/m; $\epsilon_r = 38.63$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(6.99, 6.99, 6.99); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 7.33 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 49.74 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 10.3 W/kg
SAR(1 g) = 3.47 W/kg; SAR(10 g) = 1.23 W/kg
Maximum value of SAR (measured) = 7.24 W/kg

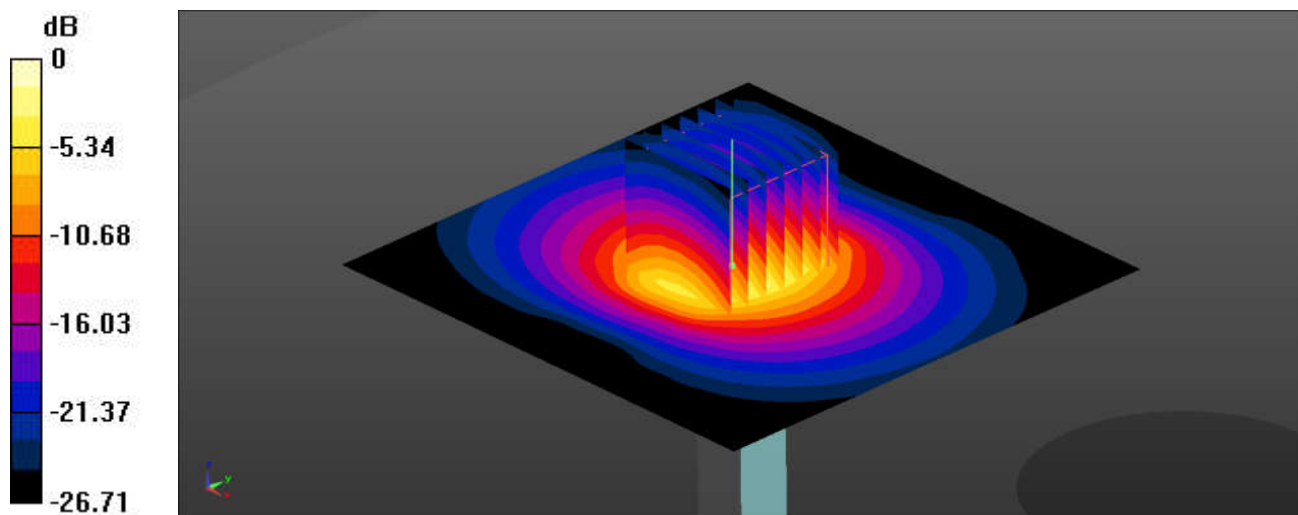

0 dB = 7.24 W/kg = 8.60 dBW/kg

System Check_Head_4100MHz**DUT: D3900V2 - SN:1048**

Communication System: UID 0, CW (0); Frequency: 4100 MHz; Duty Cycle: 1:1

Medium: HSL_4100 Medium parameters used: $f = 4100$ MHz; $\sigma = 3.373$ S/m; $\epsilon_r = 38.332$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(6.87, 6.87, 6.87); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.78 W/kg


Pin=50mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 30.20 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 9.19 W/kg

SAR(1 g) = 3.17 W/kg; SAR(10 g) = 1.1 W/kg

Maximum value of SAR (measured) = 5.51 W/kg

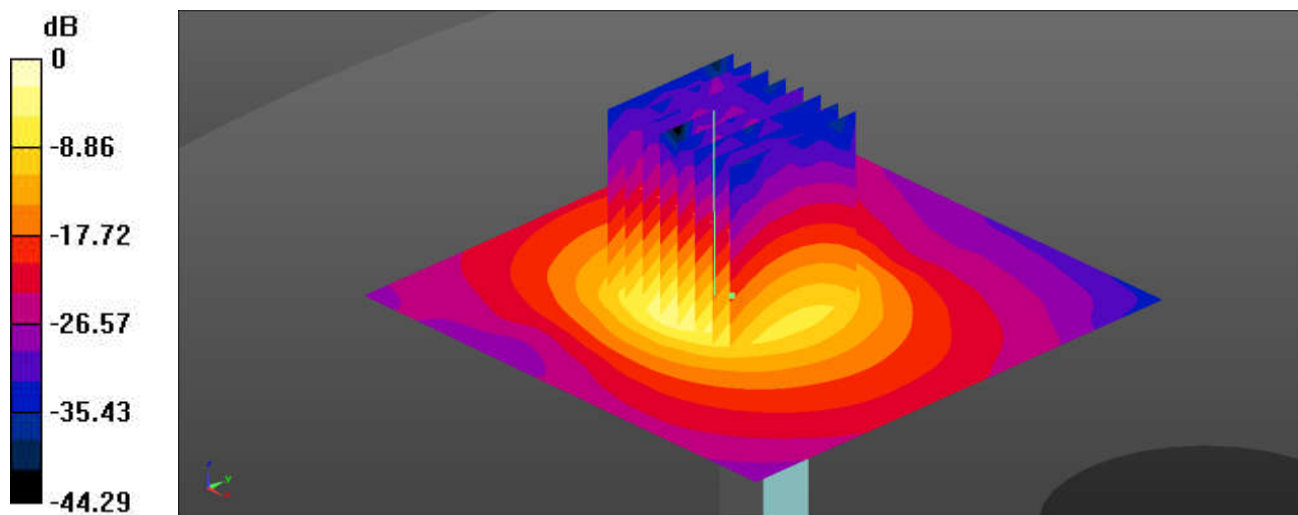

0 dB = 5.51 W/kg = 7.41 dBW/kg

System Check_Head_5250MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.586$ S/m; $\epsilon_r = 36.276$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(5.04, 5.04, 5.04); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.8 W/kg


Pin=50mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.63 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 4.42 W/kg; SAR(10 g) = 1.27 W/kg

Maximum value of SAR (measured) = 11.1 W/kg

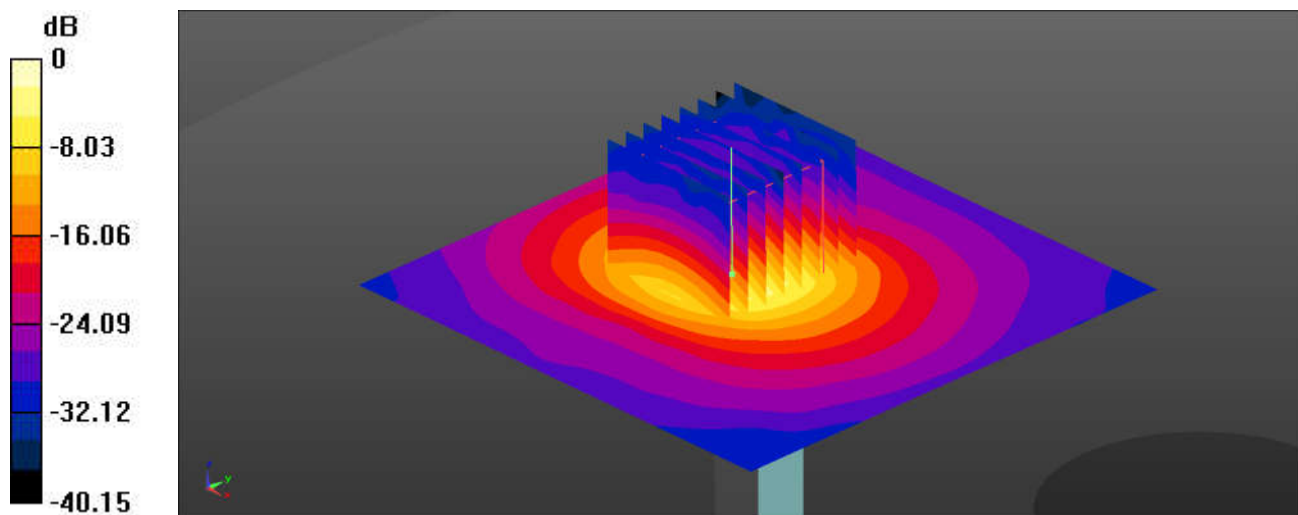

0 dB = 11.1 W/kg = 10.45 dBW/kg

System Check_Head_5600MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.965$ S/m; $\epsilon_r = 35.757$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(4.69, 4.69, 4.69); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.6 W/kg


Pin=50mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.81 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 21.1 W/kg

SAR(1 g) = 4.58 W/kg; SAR(10 g) = 1.30 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

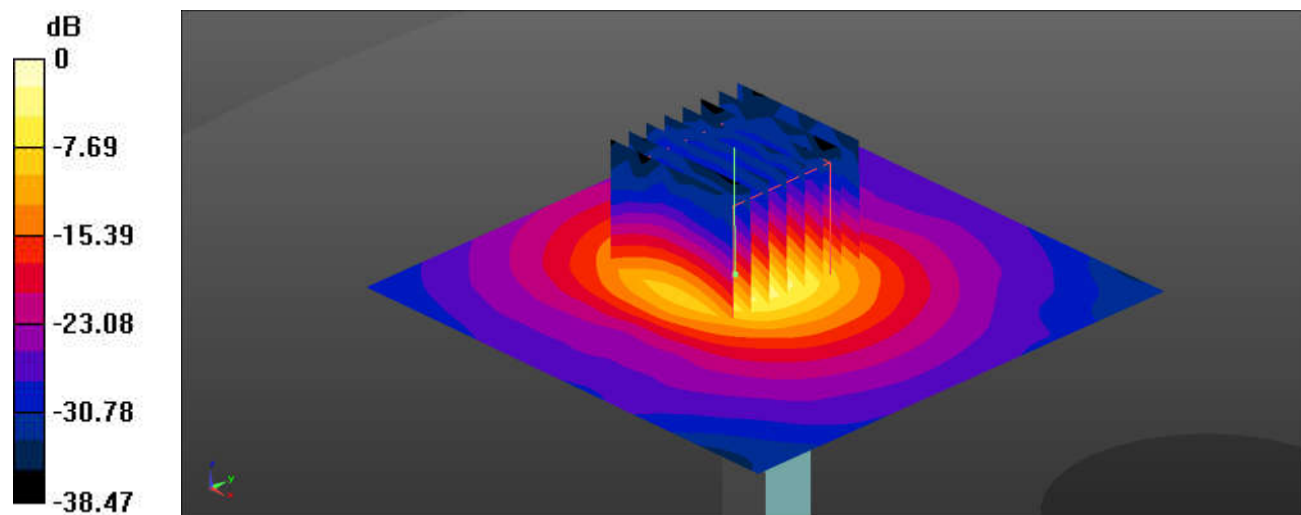

0 dB = 12.1 W/kg = 10.83 dBW/kg

System Check_Head_5750MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.138$ S/m; $\epsilon_r = 35.562$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(4.71, 4.71, 4.71); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.8 W/kg


Pin=50mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 39.32 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 20.1 W/kg

SAR(1 g) = 4.25 W/kg; SAR(10 g) = 1.22 W/kg

Maximum value of SAR (measured) = 11.2 W/kg

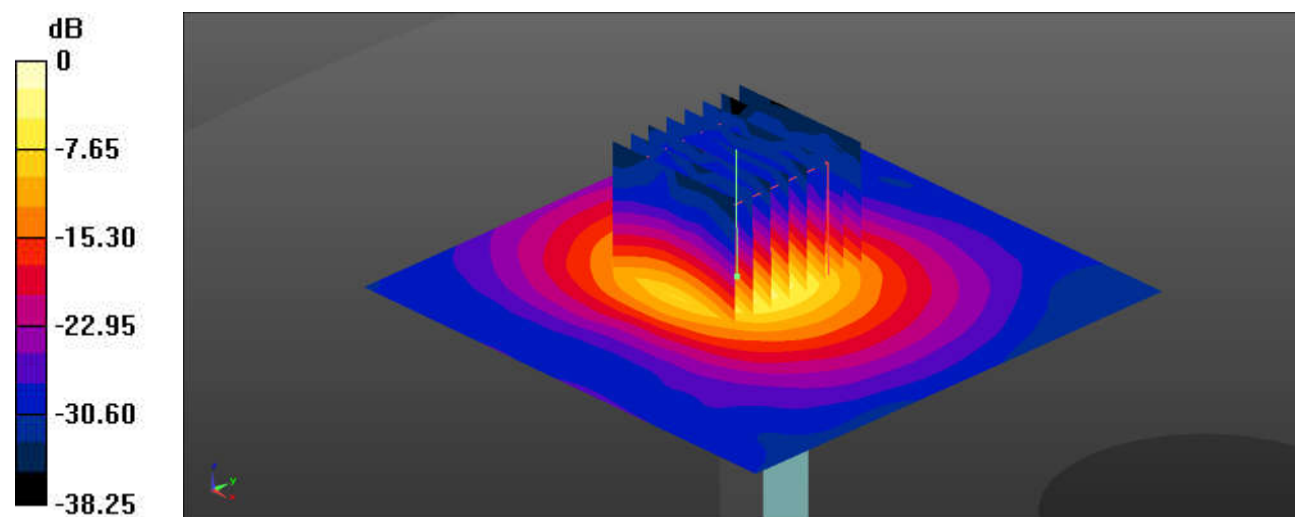

0 dB = 11.2 W/kg = 10.49 dBW/kg



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.

01_GSM850_Ant 3_GPRS 4 Tx slots_Left Cheek_0mm_Ch189

Communication System: UID 0, GSM850 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08

Medium: HSL_835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 42.526$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(8.69, 8.69, 8.69); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.612 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.09 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.806 W/kg

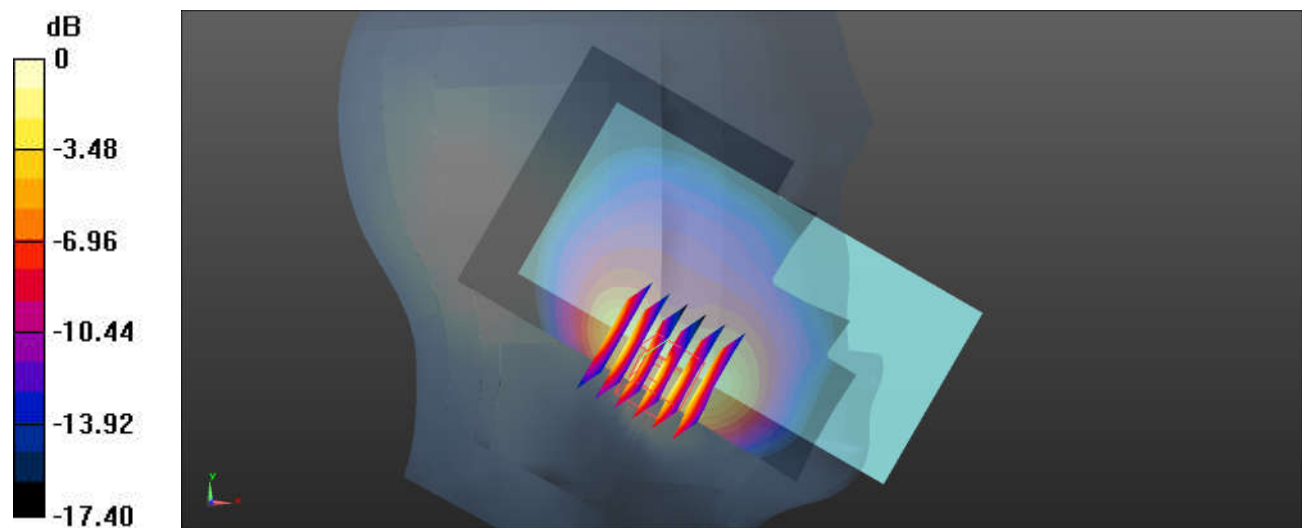

0 dB = 0.806 W/kg = -0.94 dBW/kg

02_GSM1900_Ant 5_GPRS 1 Tx slots_Right Cheek_0mm_Ch661

Communication System: UID 0, PCS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.827$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.41, 7.41, 7.41); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.45 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.78 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

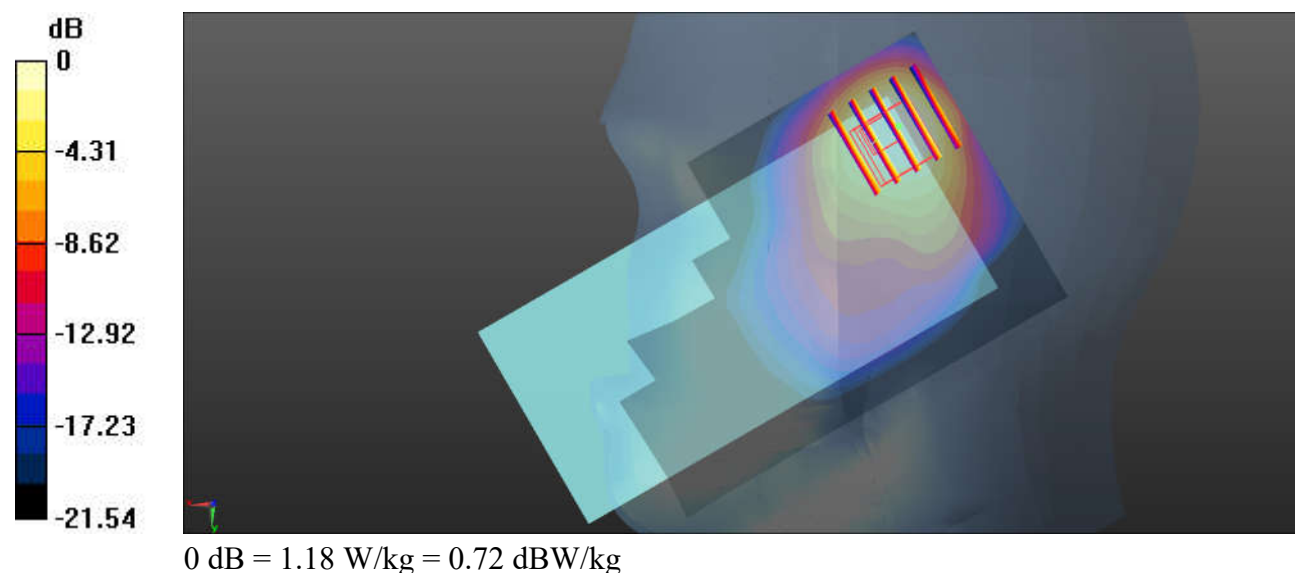

03_WCDMA II_Ant 5_RMC 12.2Kbps_Right Cheek_0mm_Ch9400

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.827$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.41, 7.41, 7.41); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.56 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.432 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

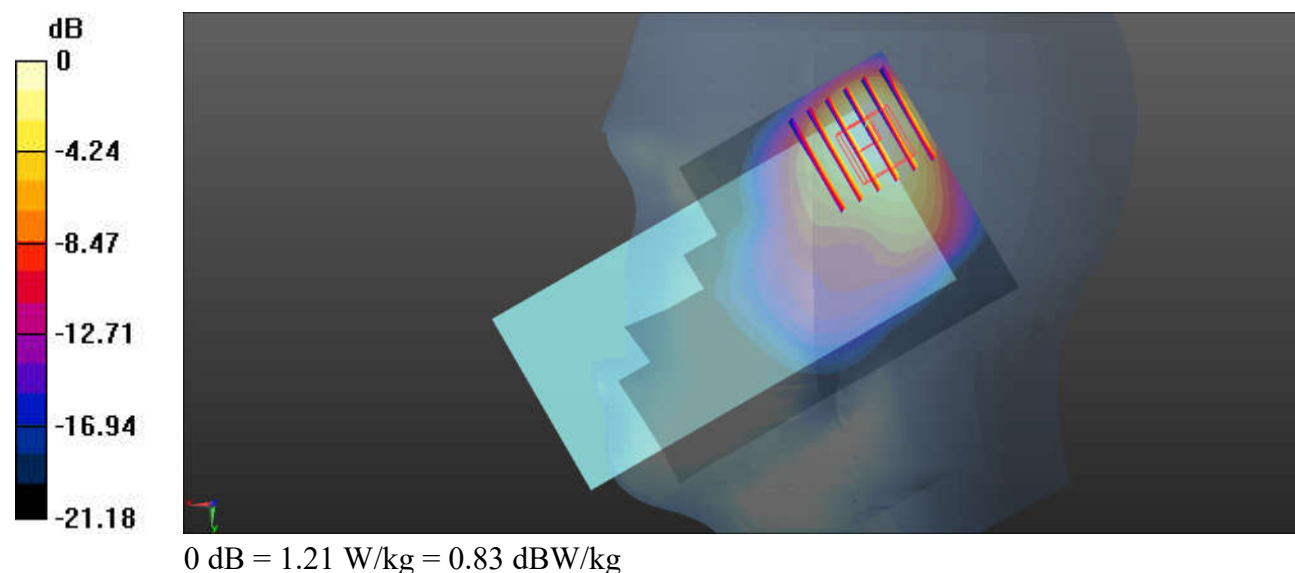

04_WCDMA IV_Ant 5_RMC 12.2Kbps_Right Cheek_0mm_Ch1513

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.355$ S/m; $\epsilon_r = 39.05$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.72, 7.72, 7.72); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.28 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.35 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

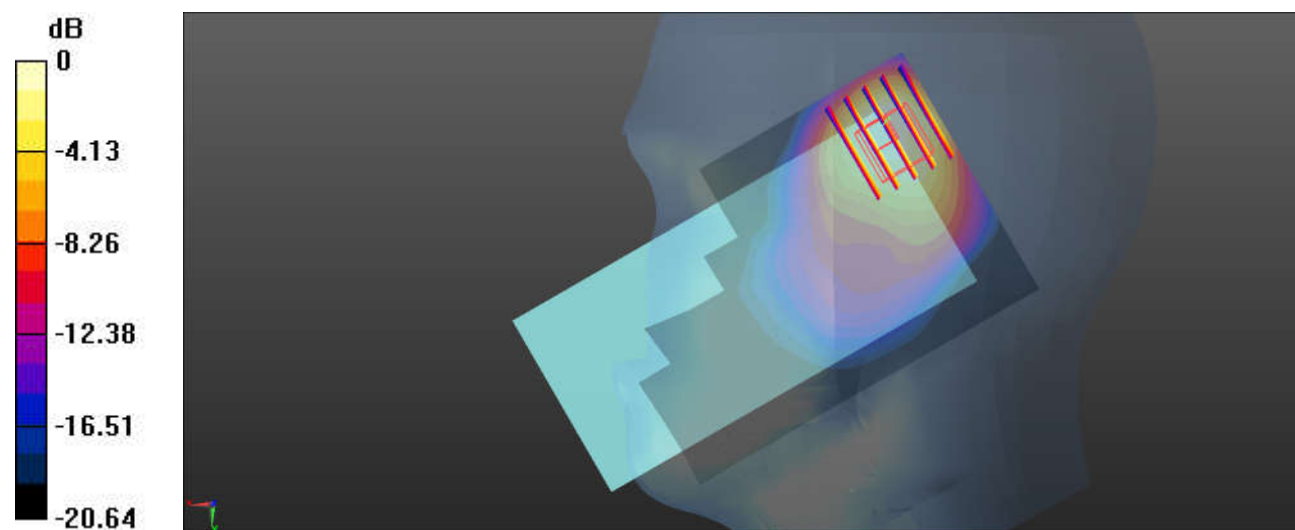

0 dB = 1.17 W/kg = 0.68 dBW/kg

05_WCDMA V_Ant 3_RMC 12.2Kbps_Left Cheek_0mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 42.526$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(8.69, 8.69, 8.69); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.44 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.54 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.438 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

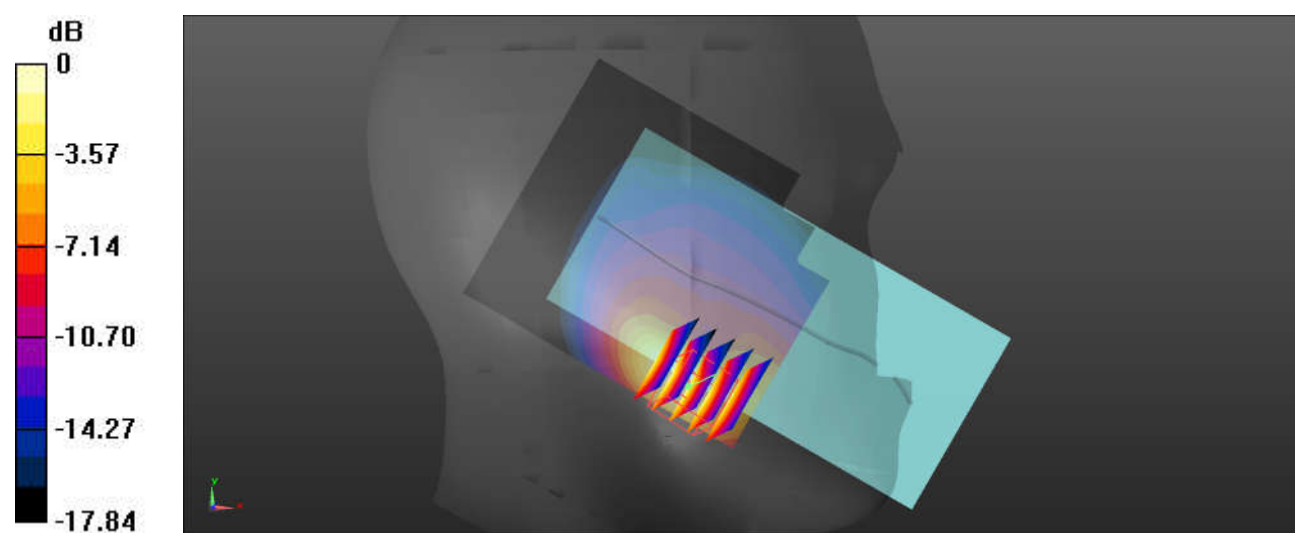

0 dB = 1.52 W/kg = 1.82 dBW/kg

06_LTE Band 2_Ant 8_20M_QPSK_50RB_0Offset_Left Cheek_0mm_Ch18900

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.827$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.41, 7.41, 7.41); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.973 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.27 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.933 W/kg

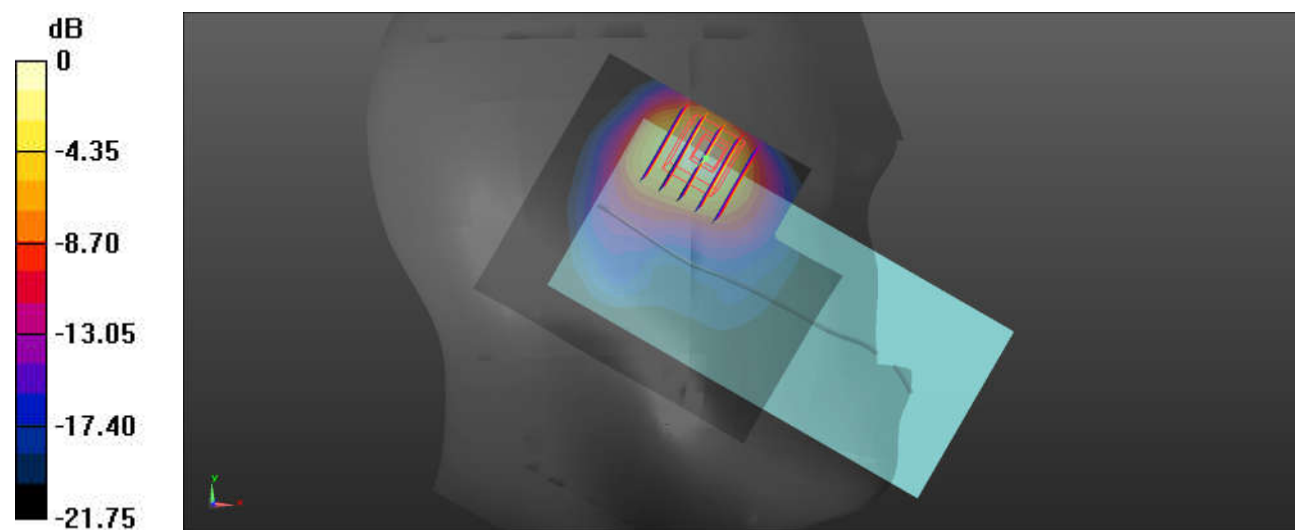

0 dB = 0.933 W/kg = -0.30 dBW/kg

07_LTE Band 4_Ant 4_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch20175

Communication System: UID 0, LTE-FDD (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 38.96$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.72, 7.72, 7.72); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.55 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.18 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.437 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

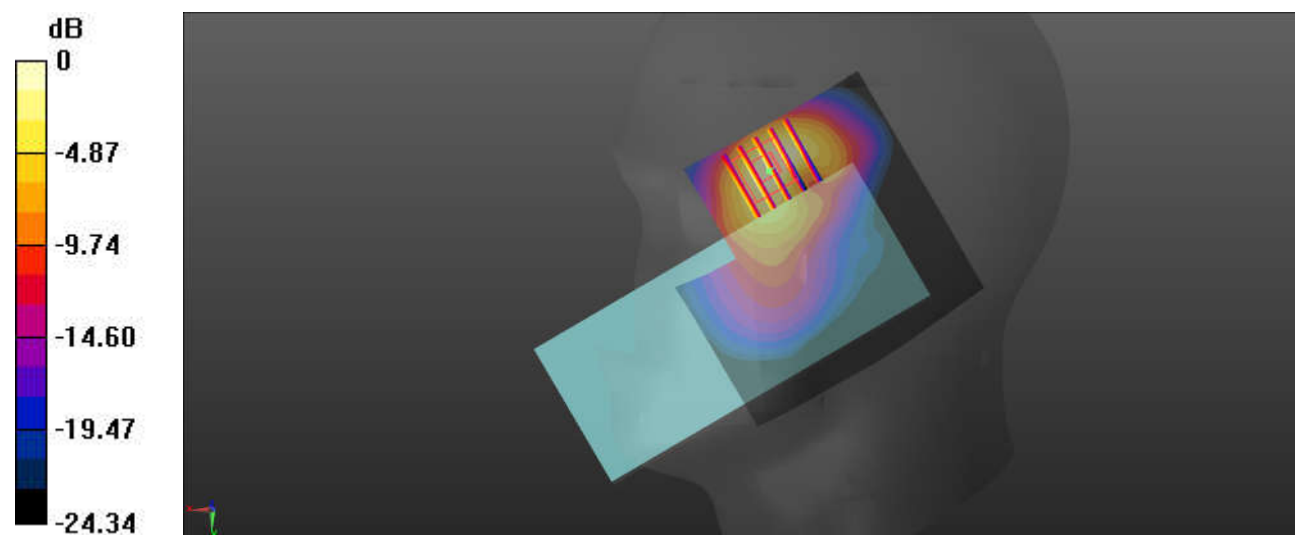

0 dB = 1.60 W/kg = 2.04 dBW/kg

08_LTE Band 7_Ant 8_20M_QPSK_50RB_50Offset_Left Cheek_0mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 40.668$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.76, 6.76, 6.76); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.879 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.61 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

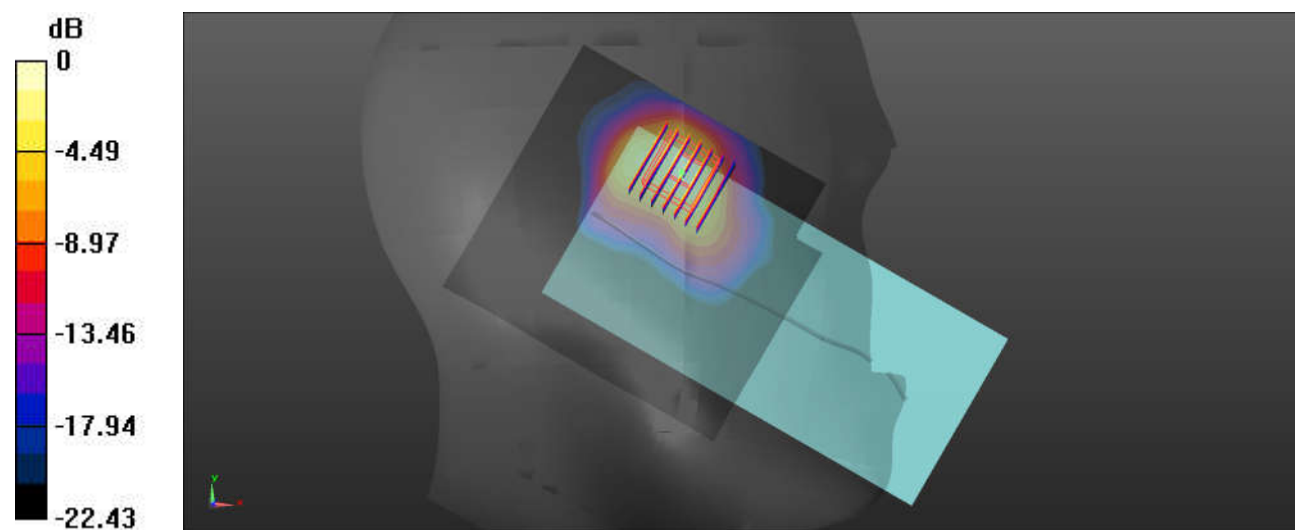

0 dB = 0.844 W/kg = -0.74 dBW/kg

09_LTE Band 12_Ant 3_10M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch23095

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.903$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.06, 9.06, 9.06); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.79 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

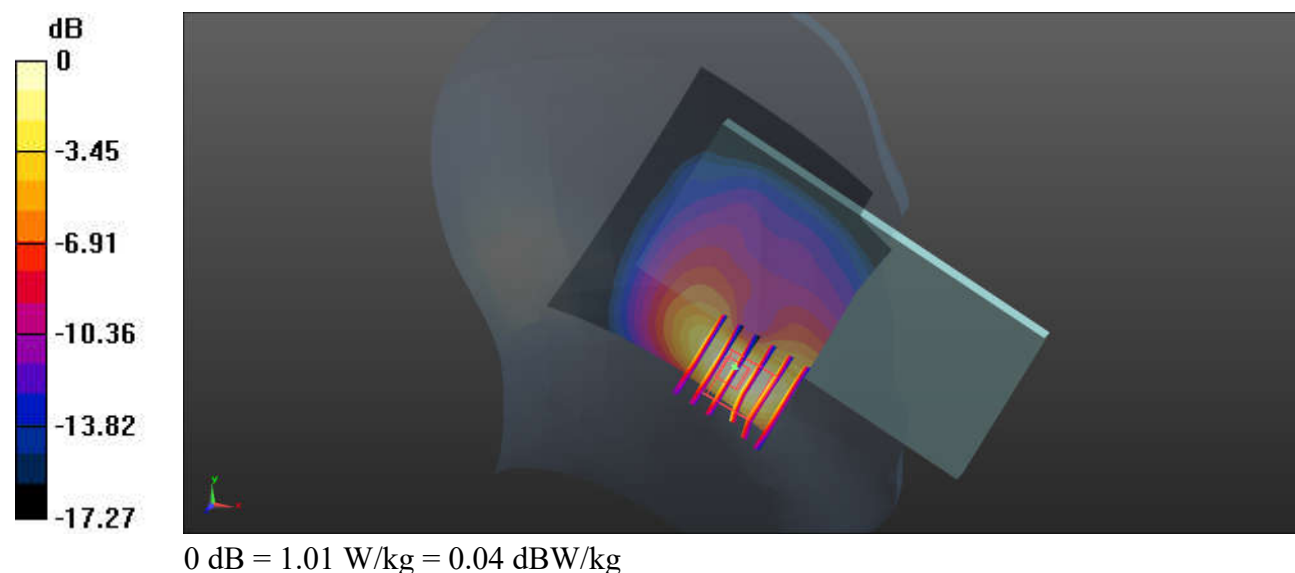

10_LTE Band 13_Ant 3_10M_QPSK_25RB_0Offset_Left Cheek_0mm_Ch23230

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 782$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.686$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.06, 9.06, 9.06); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.792 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.41 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

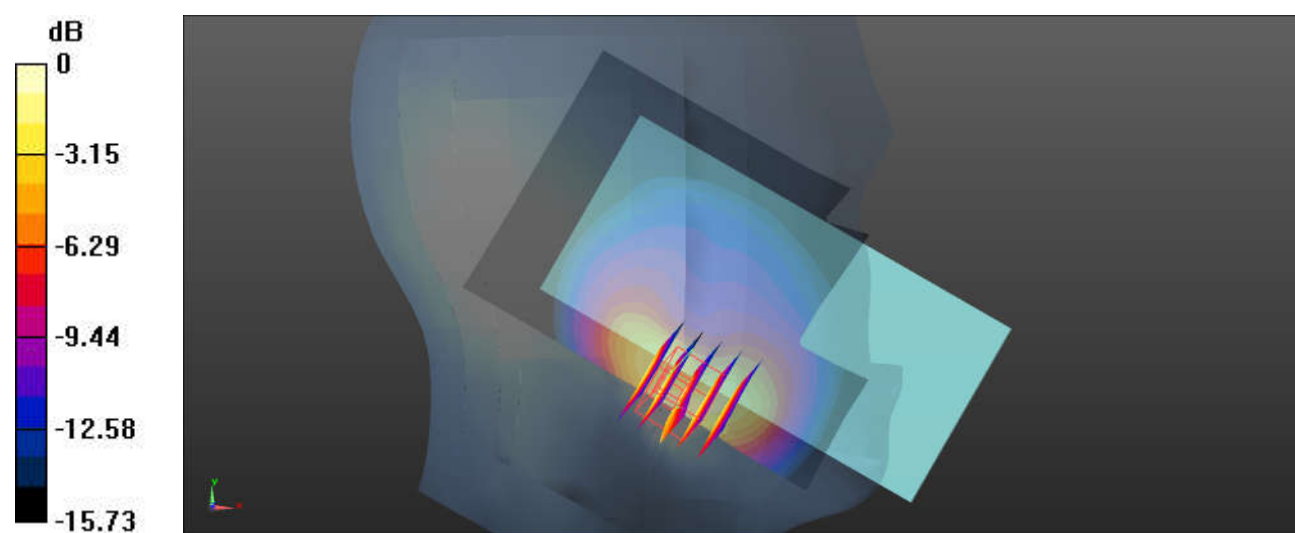

0 dB = 1.15 W/kg = 0.61 dBW/kg

11_LTE Band 26_Ant 1_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.544$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(8.69, 8.69, 8.69); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.310 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.40 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

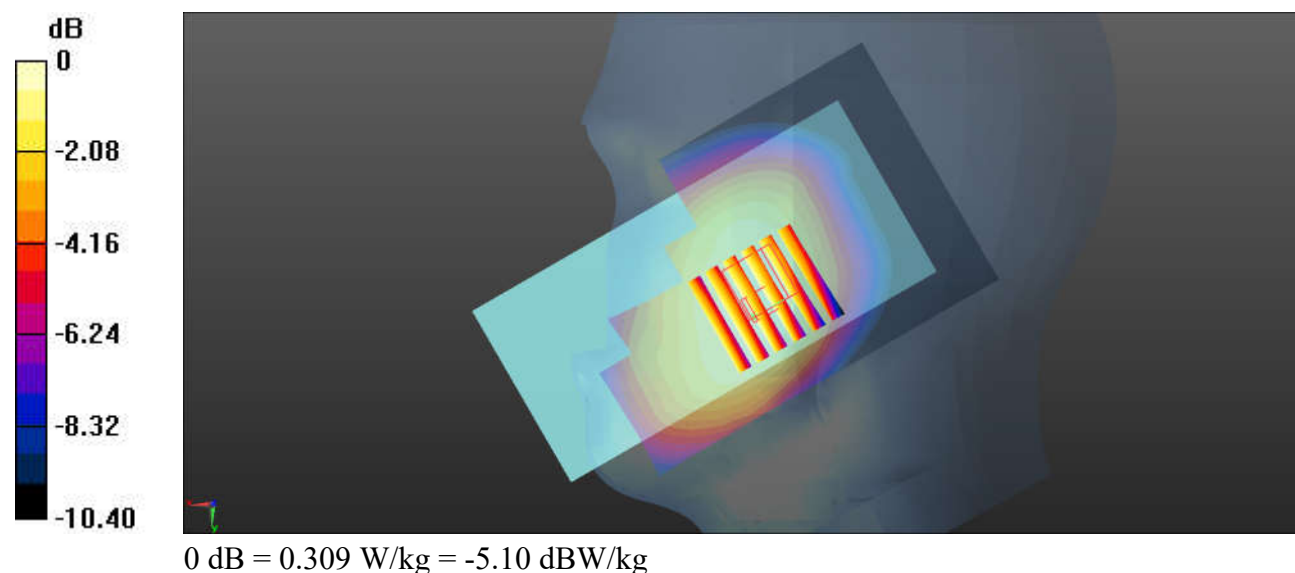

12_LTE Band 66_Ant 5_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch132572

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 39.014$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.72, 7.72, 7.72); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.820 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.67 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

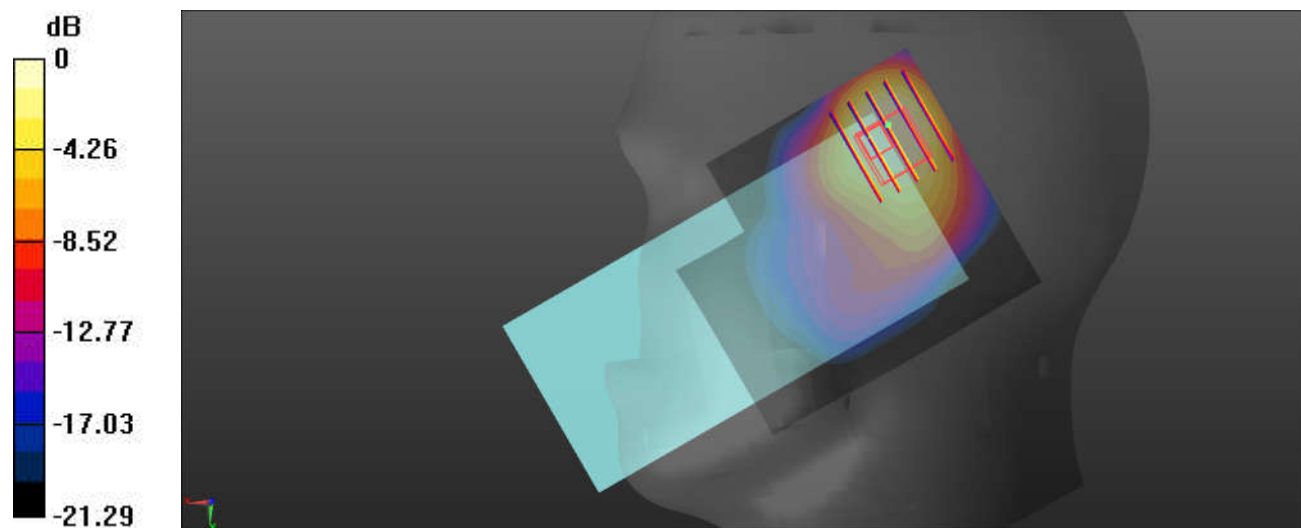

0 dB = 0.623 W/kg = -2.06 dBW/kg

13_LTE Band 41_Ant 5_20M_QPSK_50RB_0Offset_Right Tilted_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.007$ S/m; $\epsilon_r = 40.569$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.76, 6.76, 6.76); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.839 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.67 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.769 W/kg

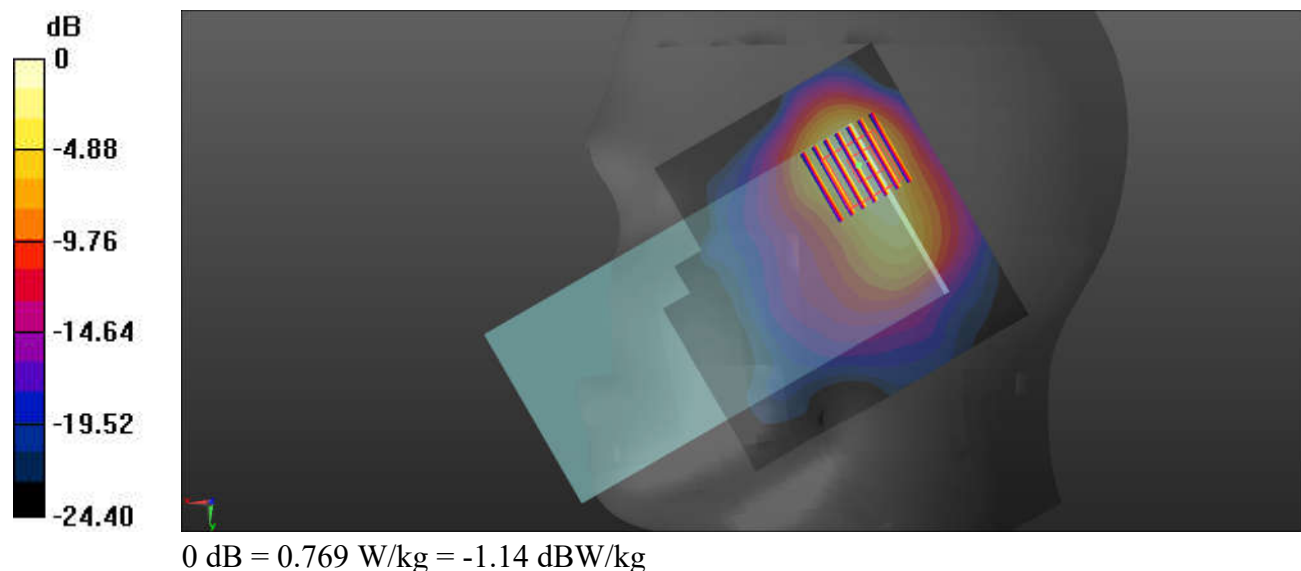

14_LTE Band 42_Ant 6_20M_QPSK_1RB_0Offset_Left Tilted_0mm_Ch42990

Communication System: UID 0, LTE-TDD (0); Frequency: 3540 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 38.981$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.16, 7.16, 7.16); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.68 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.37 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

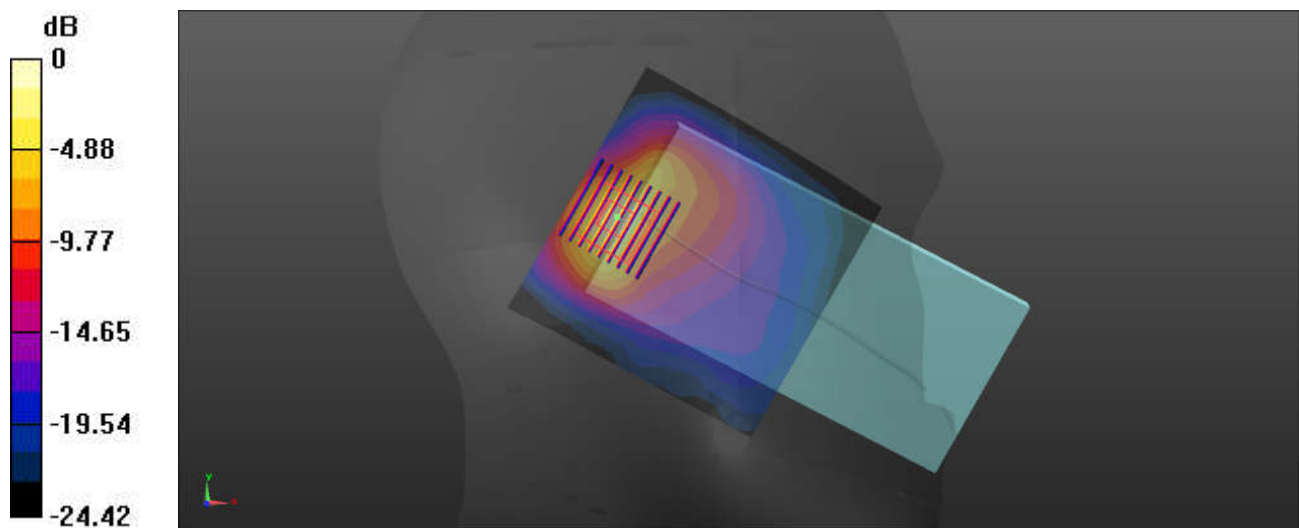

0 dB = 1.70 W/kg = 2.30 dBW/kg

15_FR1 n5_Ant 3_20M_QPSK_1RB_53Offset_Left Cheek_0mm_Ch167300

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 42.525$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(8.69, 8.69, 8.69); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.598 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.98 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.730 W/kg

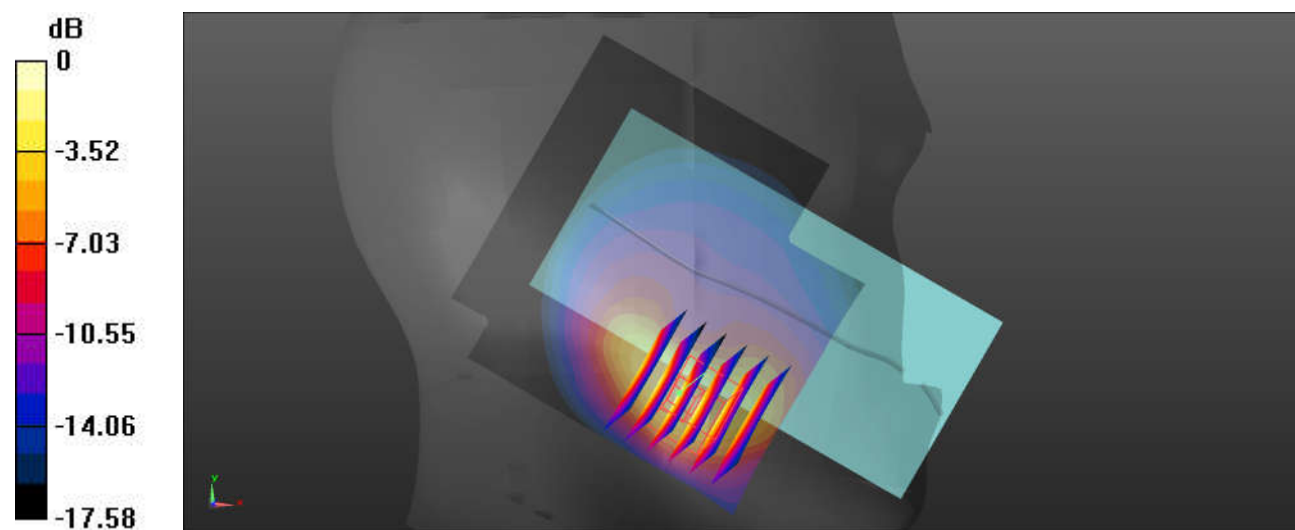

0 dB = 0.730 W/kg = -1.37 dBW/kg

16_FR1 n7_Ant 8_40M_QPSK_108RB_54Offset_Left Cheek_0mm_Ch507000

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 40.668$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.76, 6.76, 6.76); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.897 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.36 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.922 W/kg

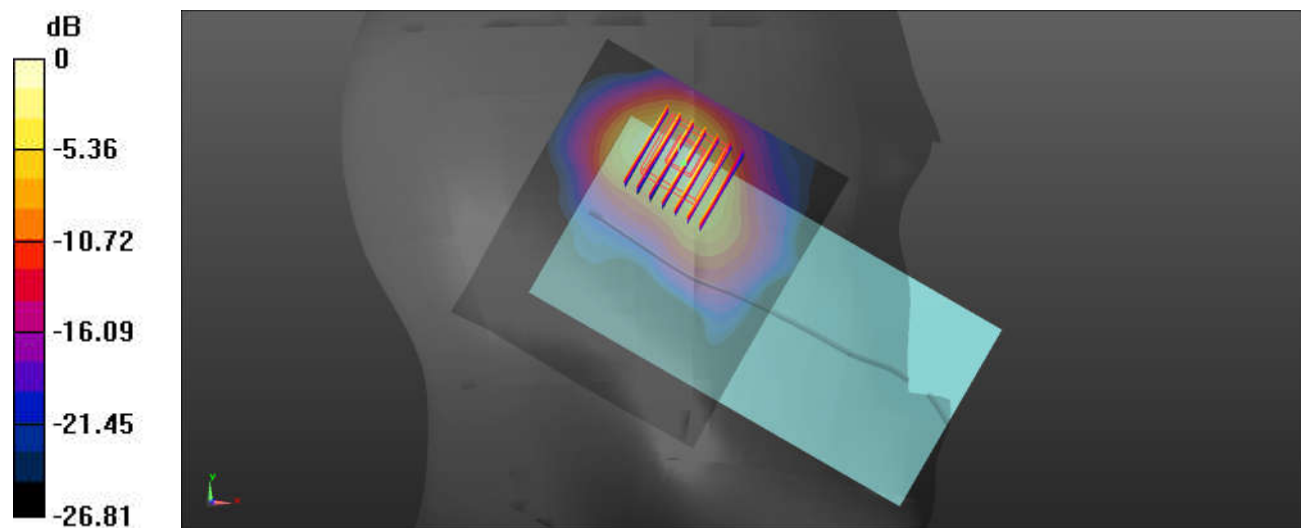

0 dB = 0.922 W/kg = -0.35 dBW/kg

**17_FR1 n66_Ant 4_40M_QPSK_108RB_54Offset_Right
Cheek_0mm_Ch349000**

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 39.025$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.72, 7.72, 7.72); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.626 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.21 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.637 W/kg

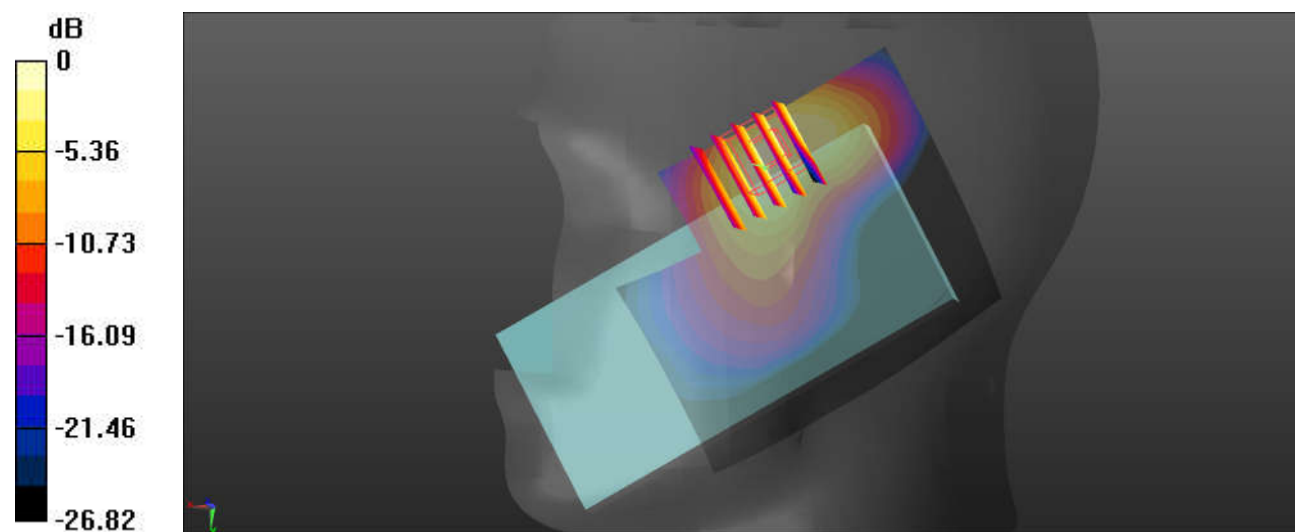

0 dB = 0.637 W/kg = -1.96 dBW/kg

18_FR1 n41_Ant 5_100M_QPSK_1RB_137Offset_Right Tilted_0mm_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.007$ S/m; $\epsilon_r = 40.569$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.76, 6.76, 6.76); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn799; Calibrated: 2021.3.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.778 W/kg


Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.05 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.729 W/kg

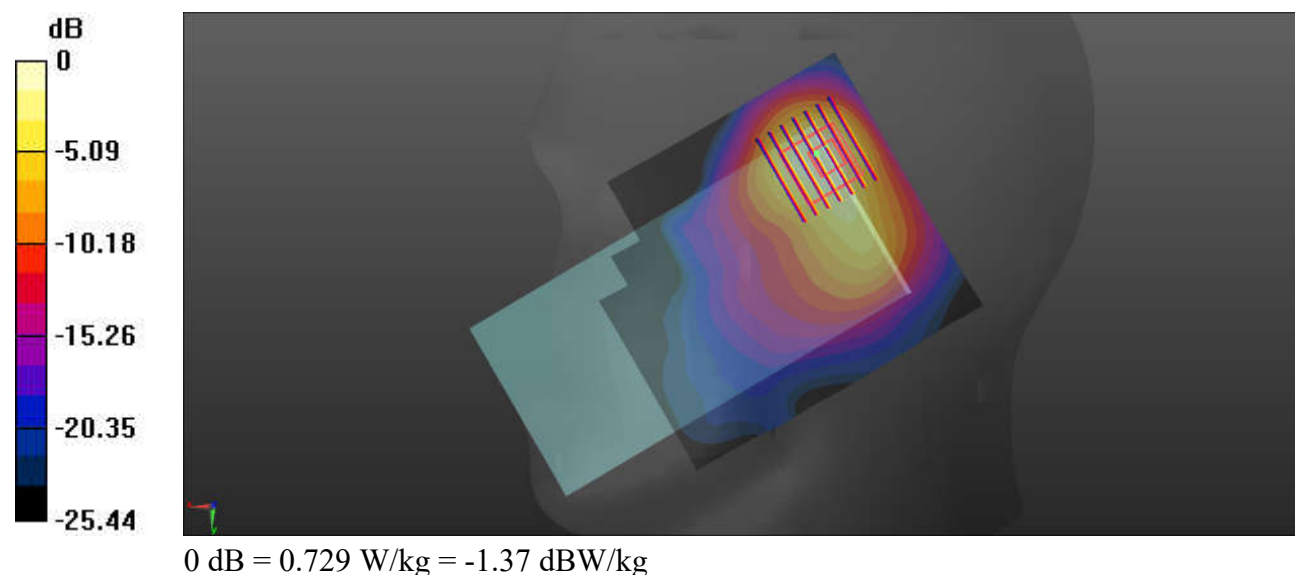

19_FR1 n77_Ant 13_100M_QPSK_1RB_137Offset_Right Tilted_0mm_Ch656000

Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL_3900 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.163$ S/m; $\epsilon_r = 38.504$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(6.99, 6.99, 6.99); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.07 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.02 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 2.14 W/kg

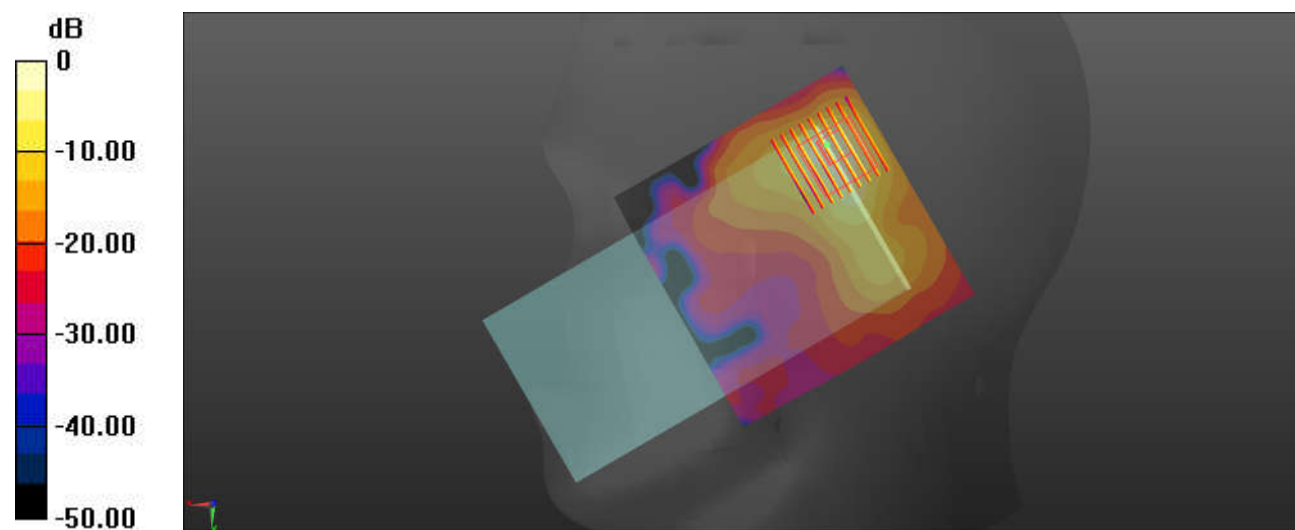

0 dB = 2.14 W/kg = 3.30 dBW/kg

20_FR1 n78_Ant 6_100M_QPSK_135RB_69Offset_Right Tilted_0mm_Ch650000

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL_3700 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.073$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.03, 7.03, 7.03); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.761 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.45 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

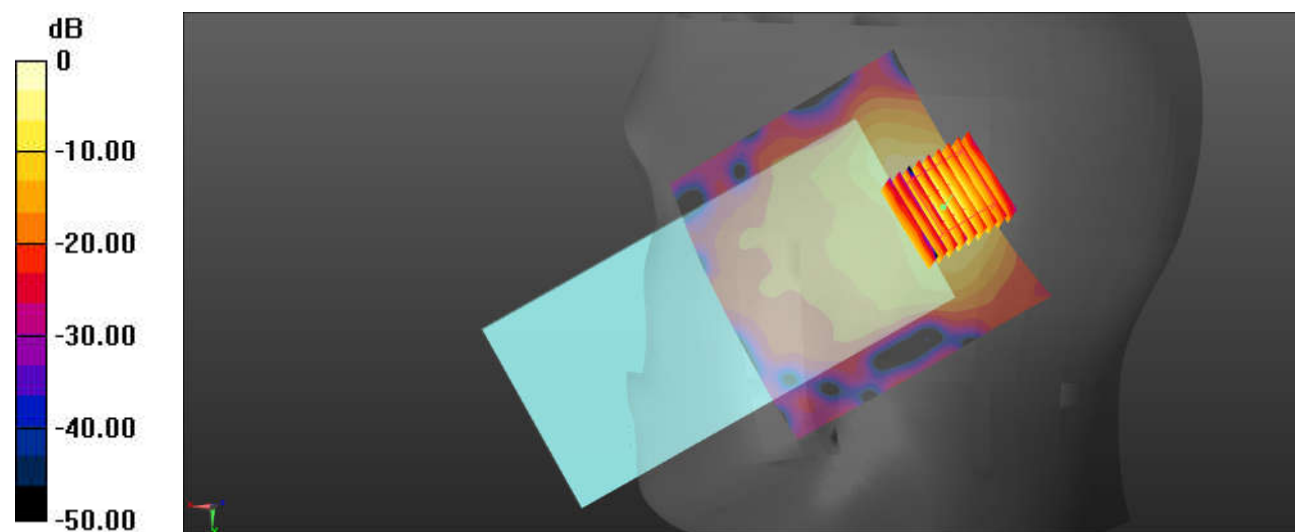

0 dB = 0.844 W/kg = -0.74 dBW/kg

21_WLAN2.4GHz_Ant 7+9_802.11b 1Mbps_Left Cheek_0mm_Ch6

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.673$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.86, 7.86, 7.86); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.55 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

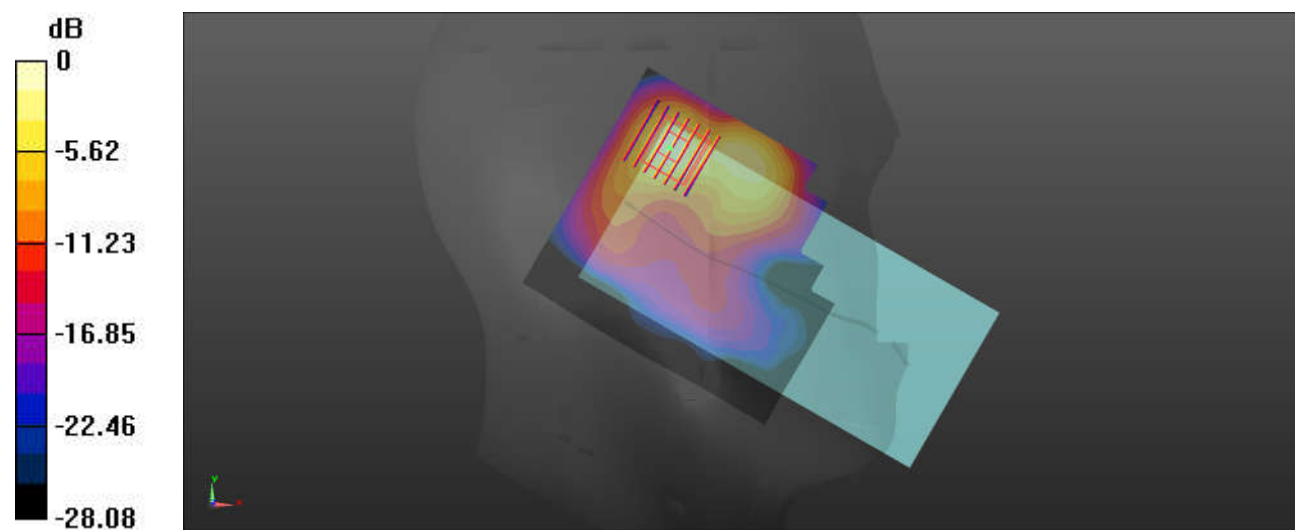

0 dB = 1.23 W/kg = 0.90 dBW/kg

22_Bluetooth_Ant 7_1Mbps_Left Tilted_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 40.615$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.86, 7.86, 7.86); Calibrated: 2021.4.29
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.226 W/kg


Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.410 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

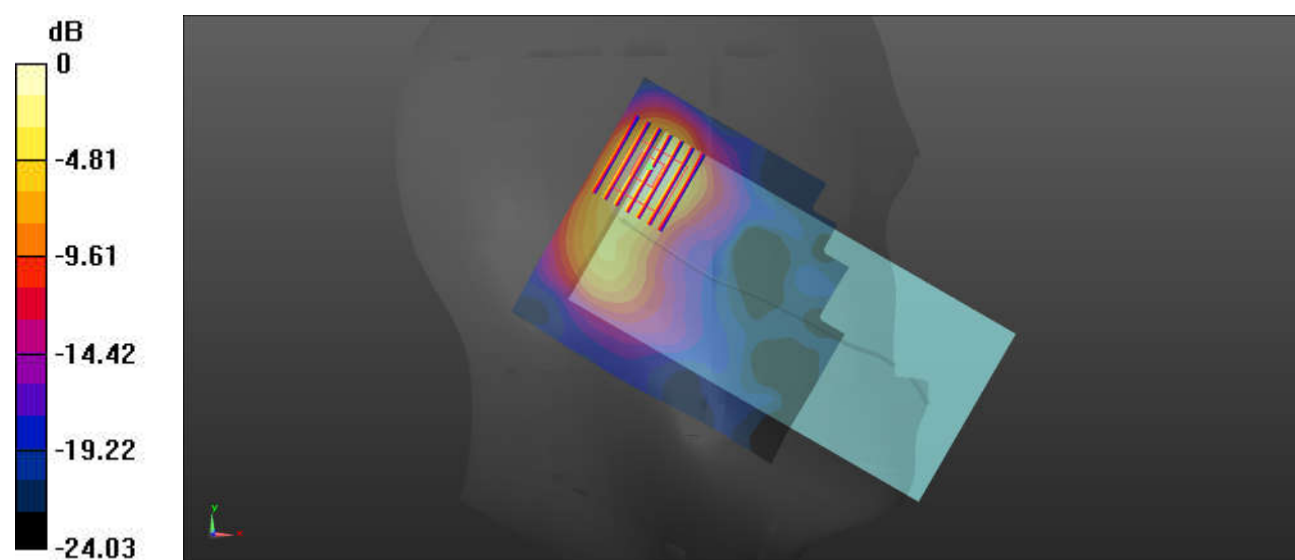

0 dB = 0.194 W/kg = -7.12 dBW/kg

23_WLAN5GHz_Ant 7+9_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch58

Communication System: UID 0, WLAN5GHz (0); Frequency: 5290 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.659$ S/m; $\epsilon_r = 35.881$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(5.04, 5.04, 5.04); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.83 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 19.70 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

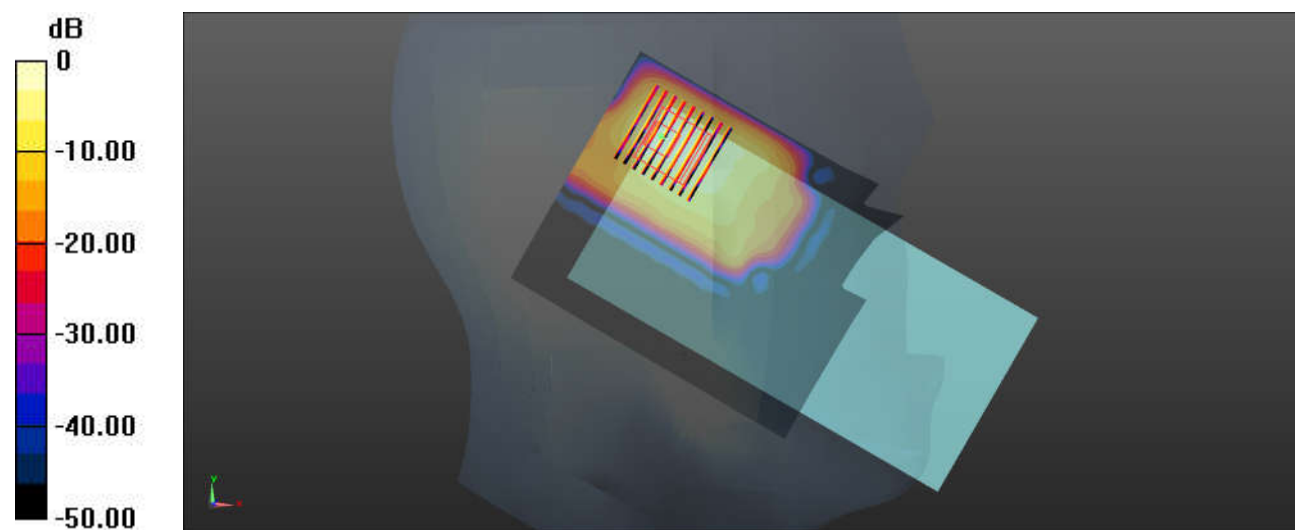

0 dB = 1.69 W/kg = 2.28 dBW/kg

24_WLAN5GHz_Ant 7+9_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch138

Communication System: UID 0, WLAN5GHz (0); Frequency: 5690 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5690$ MHz; $\sigma = 5.095$ S/m; $\epsilon_r = 35.281$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(4.69, 4.69, 4.69); Calibrated: 2021.4.29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2021.4.26
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.70 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.533 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

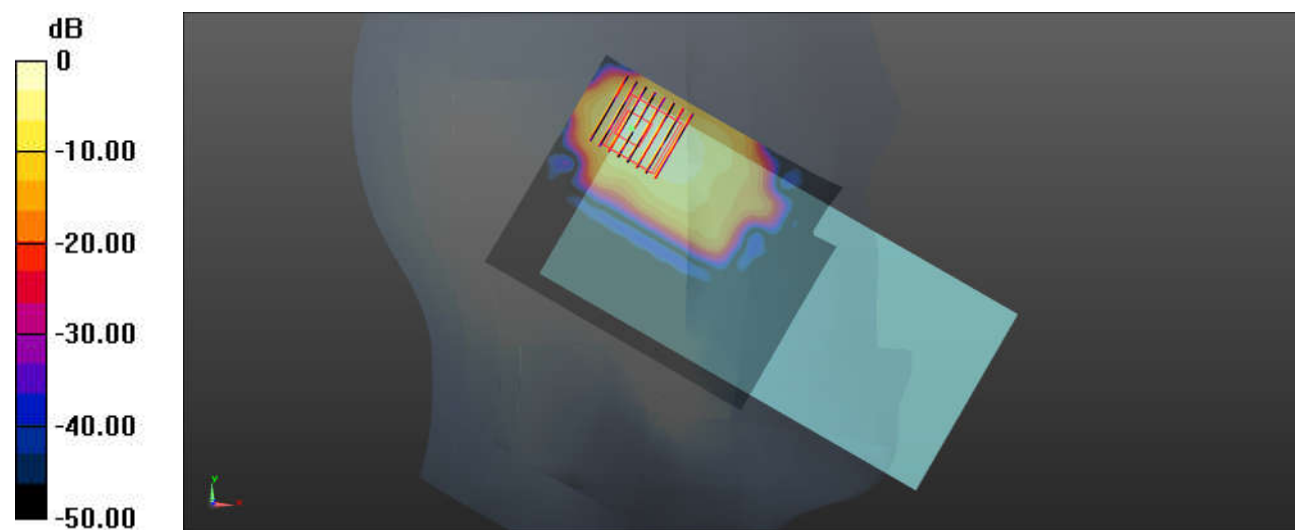

0 dB = 1.62 W/kg = 2.10 dBW/kg