

P13 WLAN5G_802.11ac80_Left Tilted_Ch58


Communication System: 802.11ac_VHT80; Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium: HSL5G_1125 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.756$ S/m; $\epsilon_r = 36.068$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.8, 4.8, 4.8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (121x201x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.918 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 4.283 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 1.75 W/kg
SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.098 W/kg
 Maximum value of SAR (measured) = 1.04 W/kg

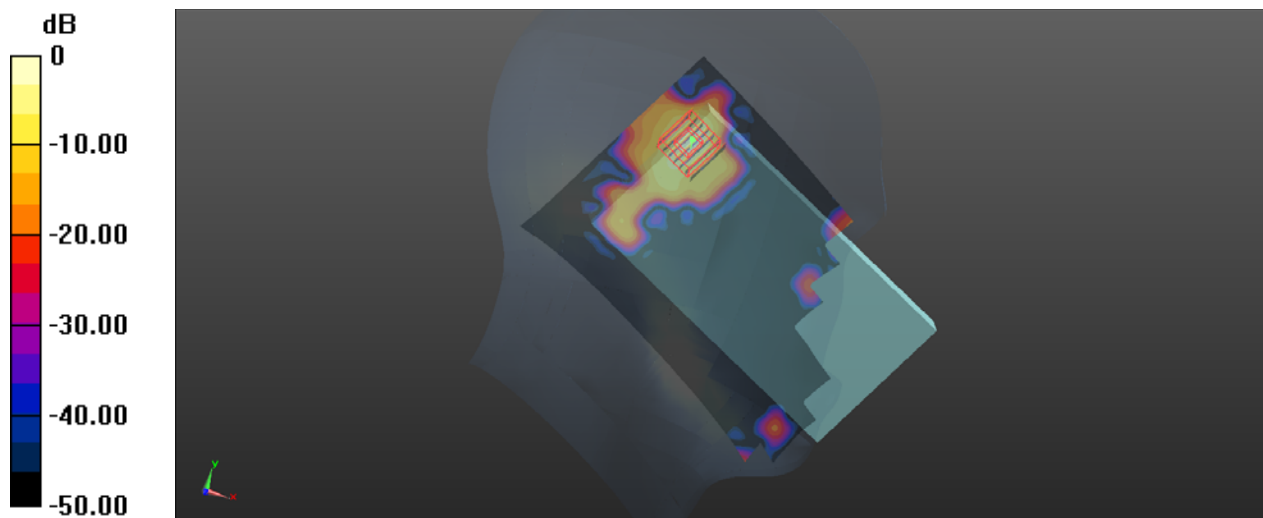

0 dB = 1.04 W/kg

P14 WLAN5G_802.11ac80_Left Tilted_Ch106


Communication System: 802.11ac_VHT80; Frequency: 5530 MHz; Duty Cycle: 1:1
Medium: HSL5G_1125 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.044$ S/m; $\epsilon_r = 35.637$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.6, 4.6, 4.6); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (121x201x1)**: Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.916 W/kg

- **Zoom Scan (7x7x12)/Cube 0**: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.094 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.100 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

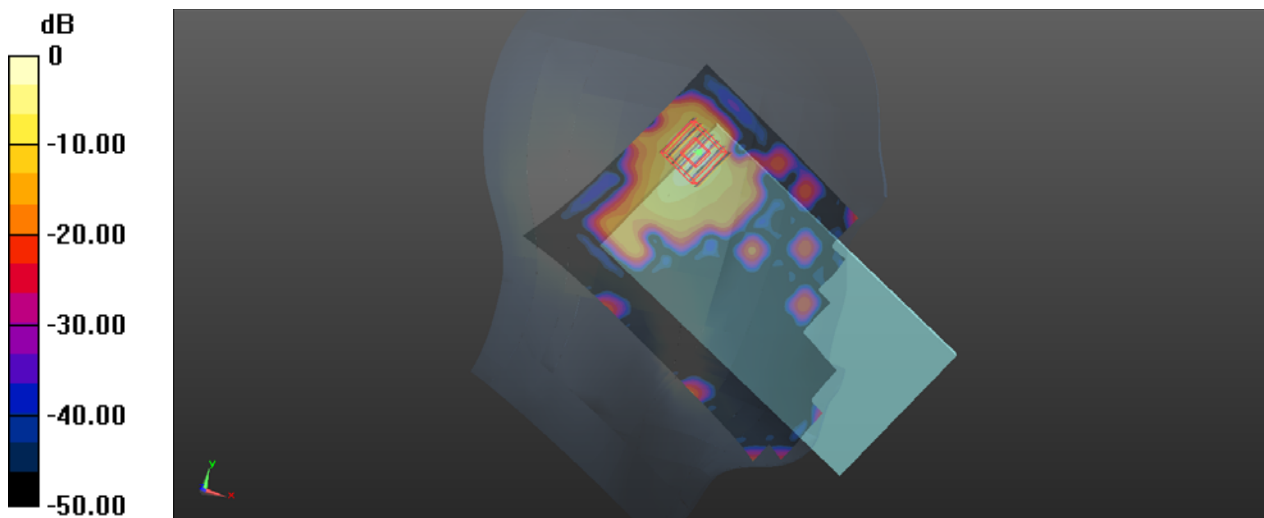

0 dB = 1.05 W/kg

P15 WLAN5G_802.11ac80_Left Tilted_Ch155


Communication System: 802.11ac_VHT80; Frequency: 5775 MHz; Duty Cycle: 1:1
Medium: HSL5G_1125 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.328$ S/m; $\epsilon_r = 35.188$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.45, 4.45, 4.45); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (121x201x1)**: Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.02 W/kg

- **Zoom Scan (7x7x12)/Cube 0**: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.508 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 2.09 W/kg
SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.103 W/kg
Maximum value of SAR (measured) = 1.14 W/kg

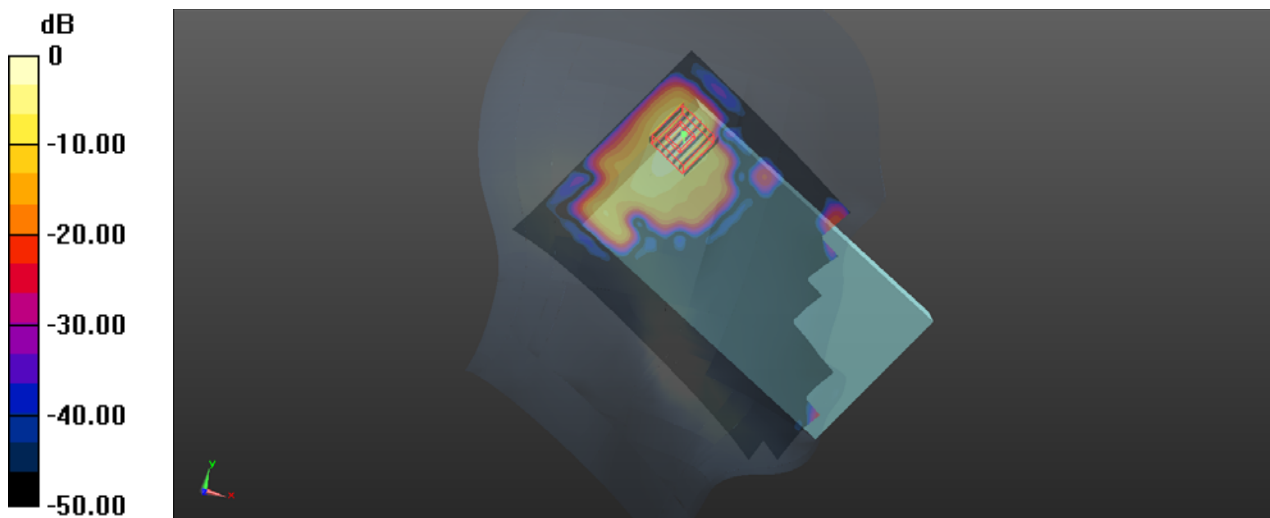

P16 BT_GFSK_Left Cheek_Ch39

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL2450_1122 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.611$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.106 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.370 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0755 W/kg

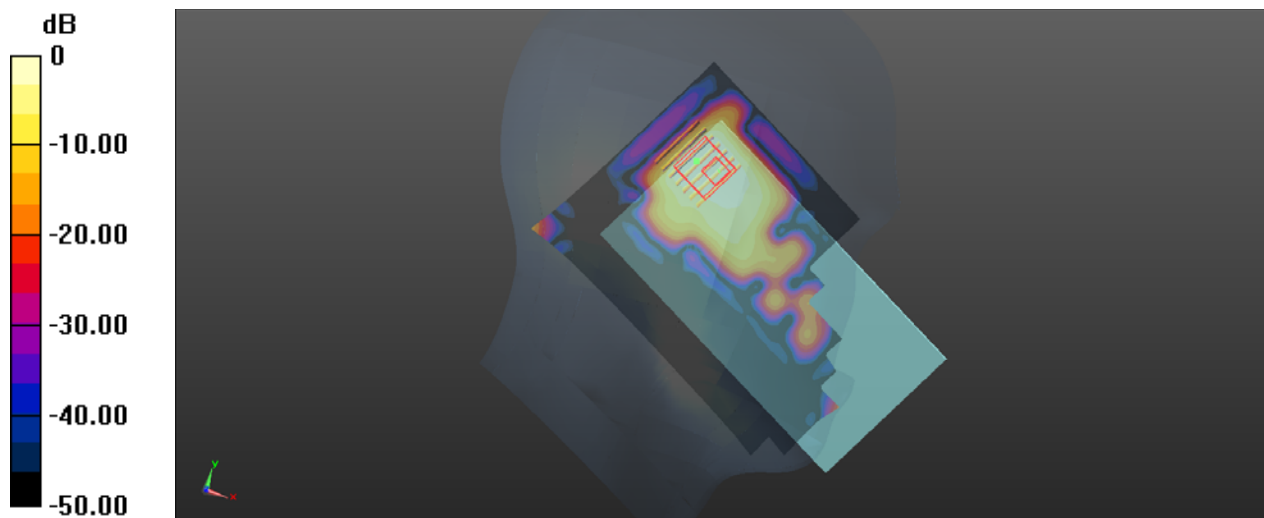

0 dB = 0.0755 W/kg

P17 GSM850_GPRS11_Rear Face_1cm_Ch189_Ant0

Communication System: GPRS11; Frequency: 836.4 MHz; Duty Cycle: 1:2.77
Medium: HSL835_1117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.391$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.8°C


DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.403 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.86 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.481 W/kg
SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.154 W/kg
Maximum value of SAR (measured) = 0.383 W/kg

- **Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.86 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.328 W/kg
SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.192 W/kg
Maximum value of SAR (measured) = 0.304 W/kg

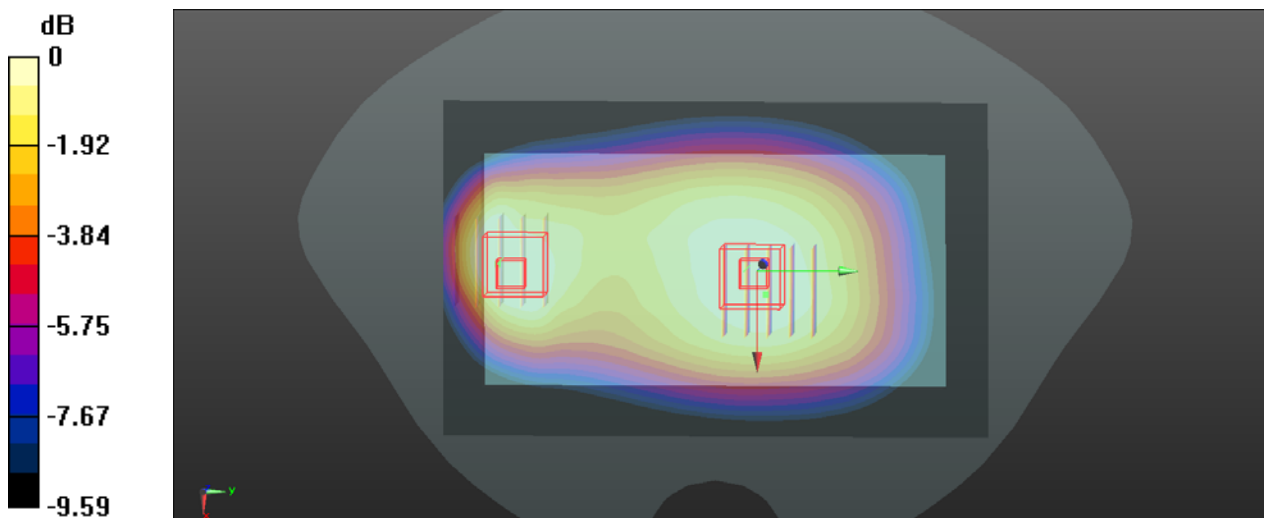

0 dB = 0.304 W/kg

P18 GSM1900_GPRS8_Rear Face_1cm_Ch810_Ant1

Communication System: GPRS8; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_1121 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.469$ S/m; $\epsilon_r = 41.474$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.536 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.258 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

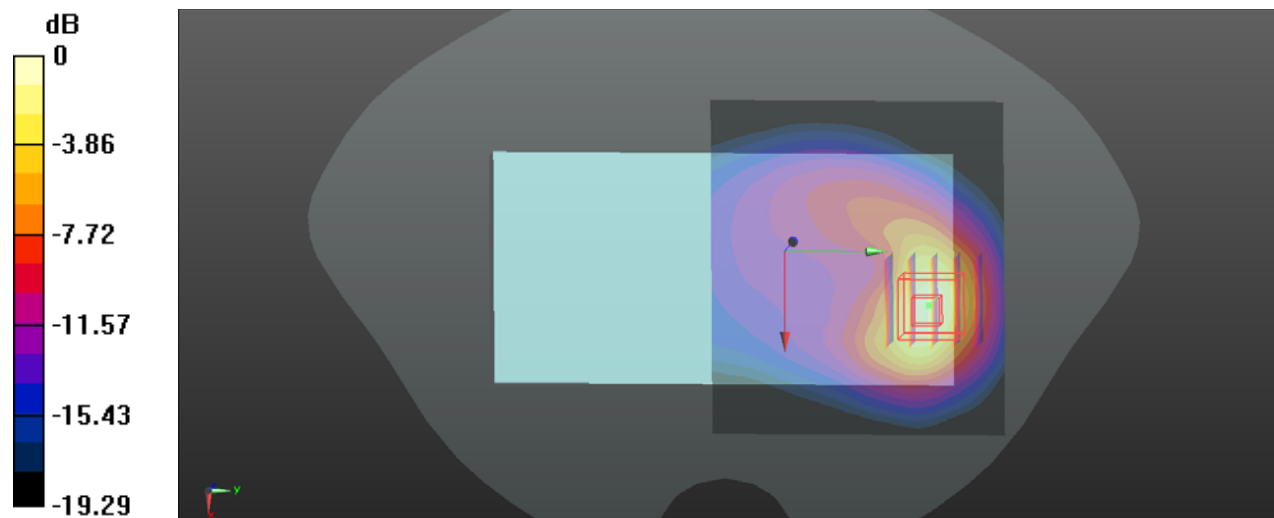

0 dB = 0.551 W/kg

P19 WCDMA II_RMC12.2K_Front Face_1cm_Ch9538_Ant0


Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL1900_1121 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.467 \text{ S/m}$; $\epsilon_r = 41.481$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.4°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.07 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.41 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.762 W/kg ; SAR(10 g) = 0.448 W/kg
 Maximum value of SAR (measured) = 1.08 W/kg

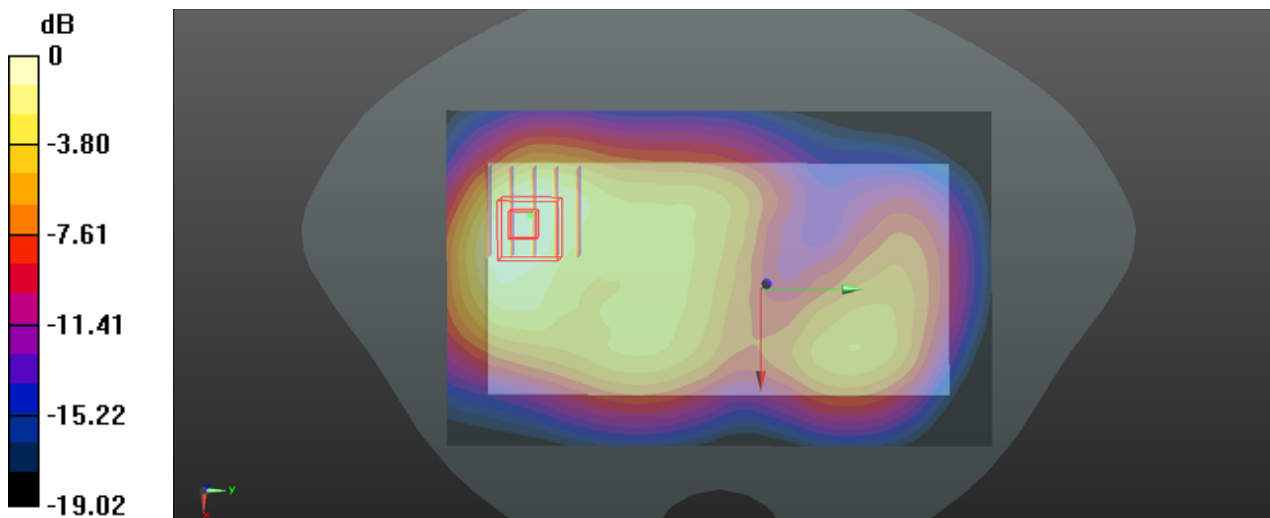

0 dB = 1.08 W/kg

P20 WCDMA IV_RMC12.2K_Front Face_1cm_Ch1312_Ant1


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL1750_1119 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 41.411$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x71x1)**: Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.658 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.320 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.316 W/kg
Maximum value of SAR (measured) = 0.674 W/kg

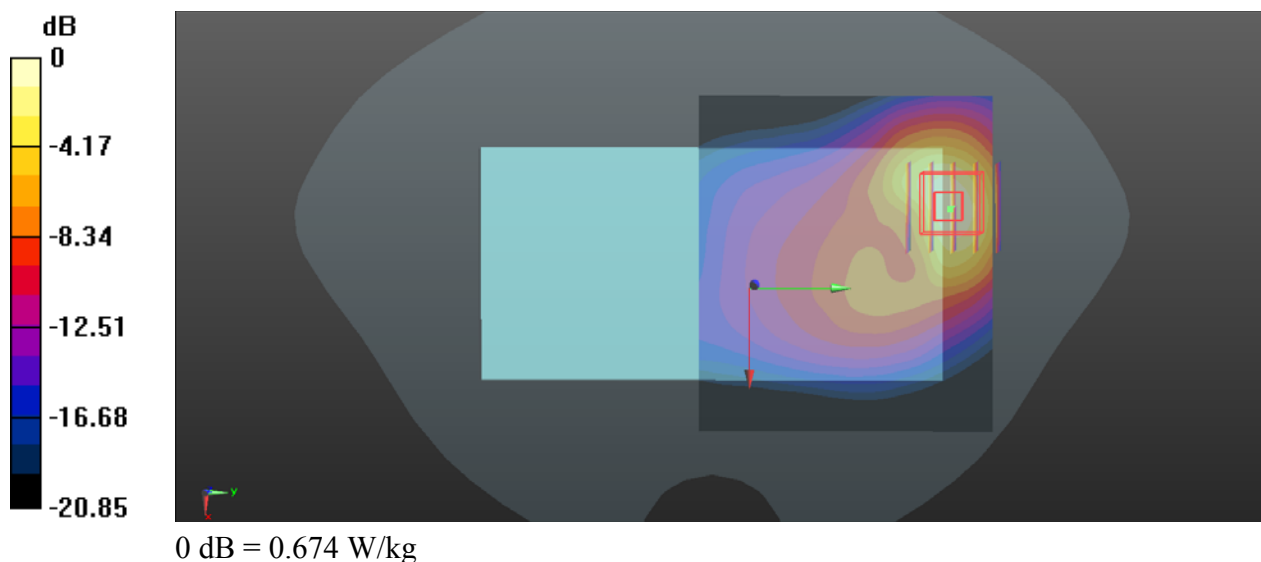

P21 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4132_Ant0


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: HSL835_1117 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.364 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.03 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.430 W/kg
SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.146 W/kg
 Maximum value of SAR (measured) = 0.343 W/kg

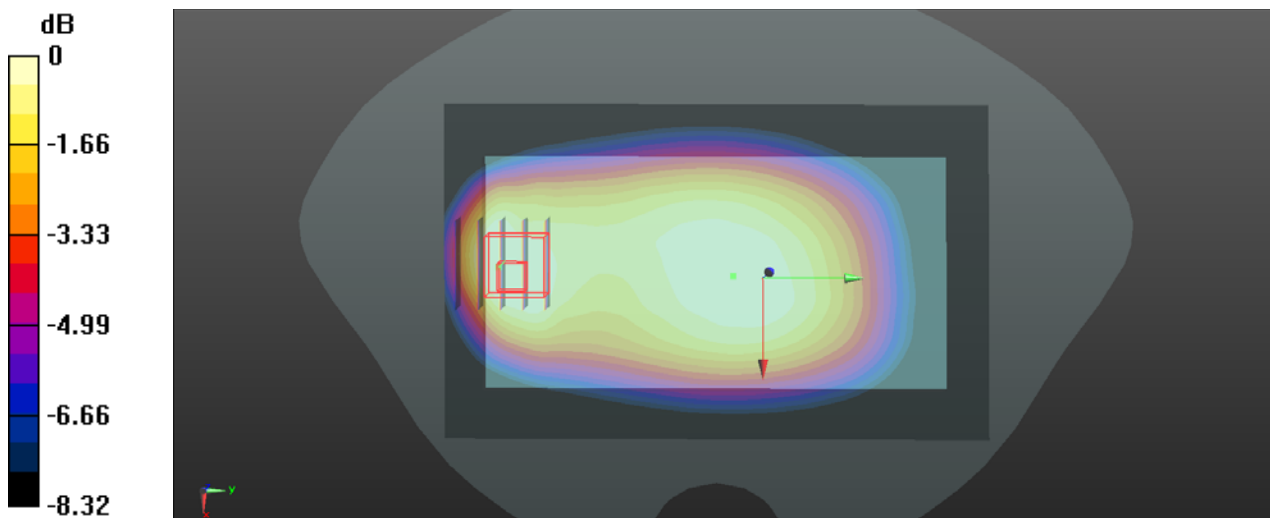

0 dB = 0.297 W/kg

P22 LTE 2_QPSK20M_Front Face_1cm_Ch19100_1RB_OS50_Ant0


Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900_1121 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 41.517$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.766 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.69 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.407 W/kg
Maximum value of SAR (measured) = 0.744 W/kg

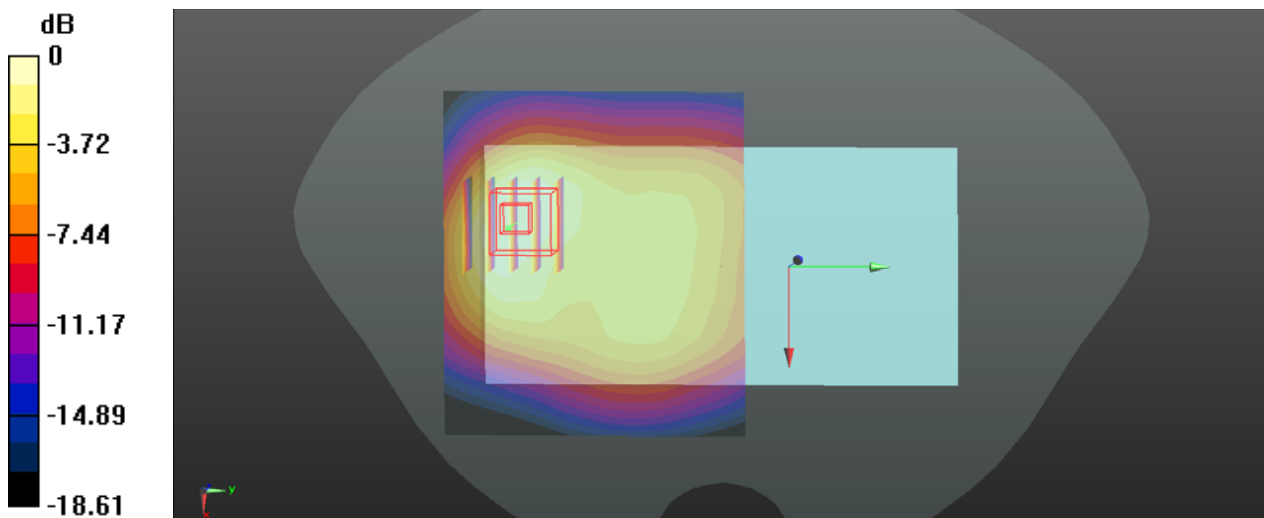

0 dB = 0.744 W/kg

P23 LTE 4_QPSK20M_Front Face_1cm_Ch20050_50RB_OS25_Ant1

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL1750_1119 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 41.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.692 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.459 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.61 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.679 W/kg

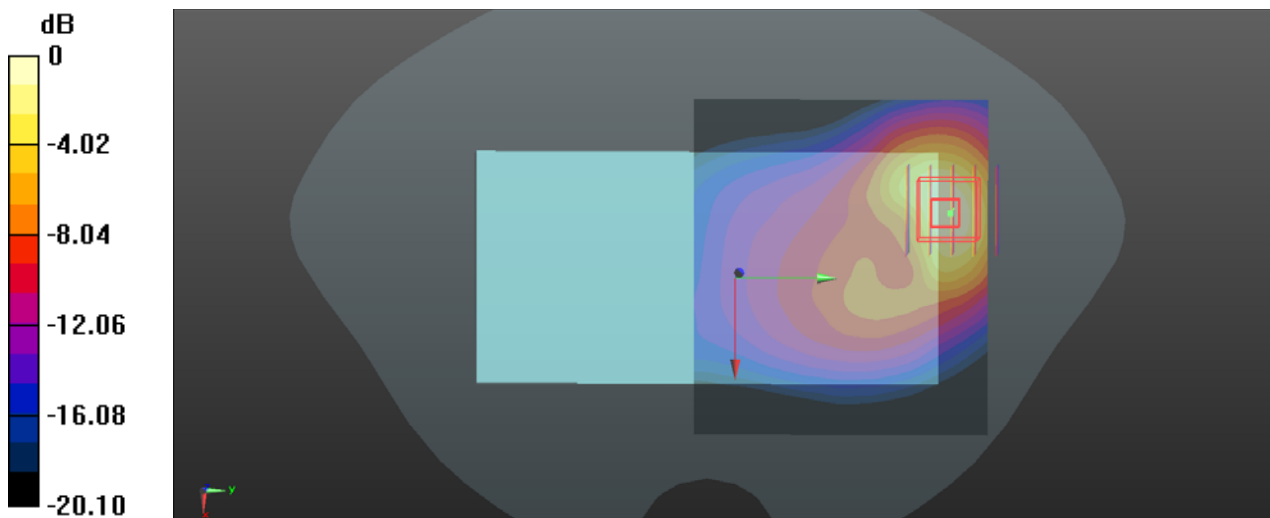

0 dB = 0.679 W/kg

P24 LTE 5_QPSK10M_Rear Face_1cm_Ch20525_1RB_OS0_Ant0

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835_1117 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.389$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.356 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.25 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

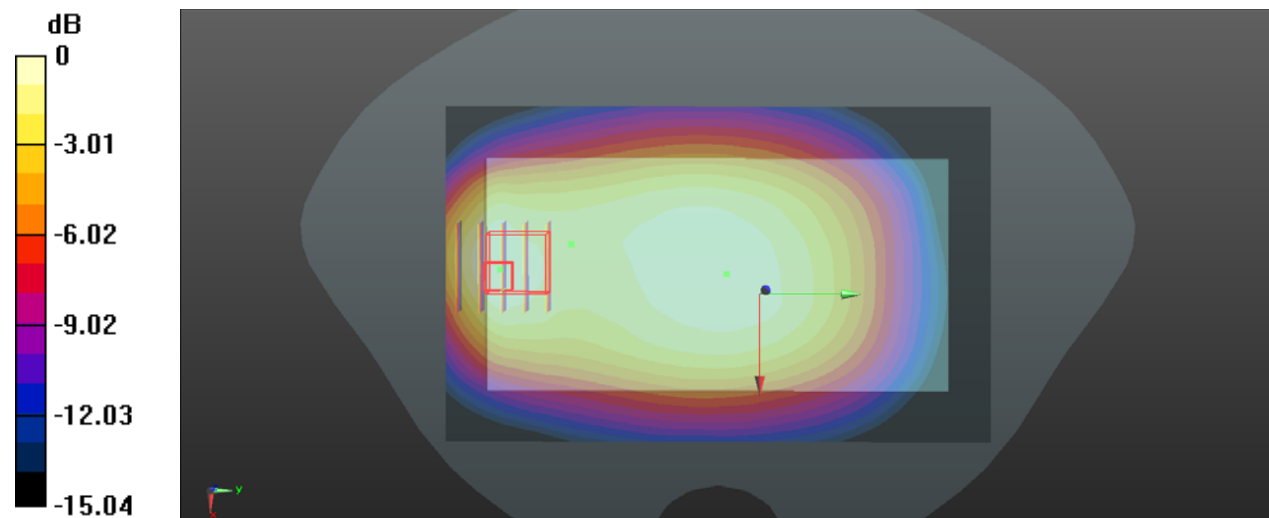

0 dB = 0.324 W/kg

P25 LTE 7_QPSK20M_Rear Face_1.5cm_Ch21350_1RB_OS50_Ant0


Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL2600_1124 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 39.197$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.897 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.123 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.399 W/kg
Maximum value of SAR (measured) = 0.862 W/kg

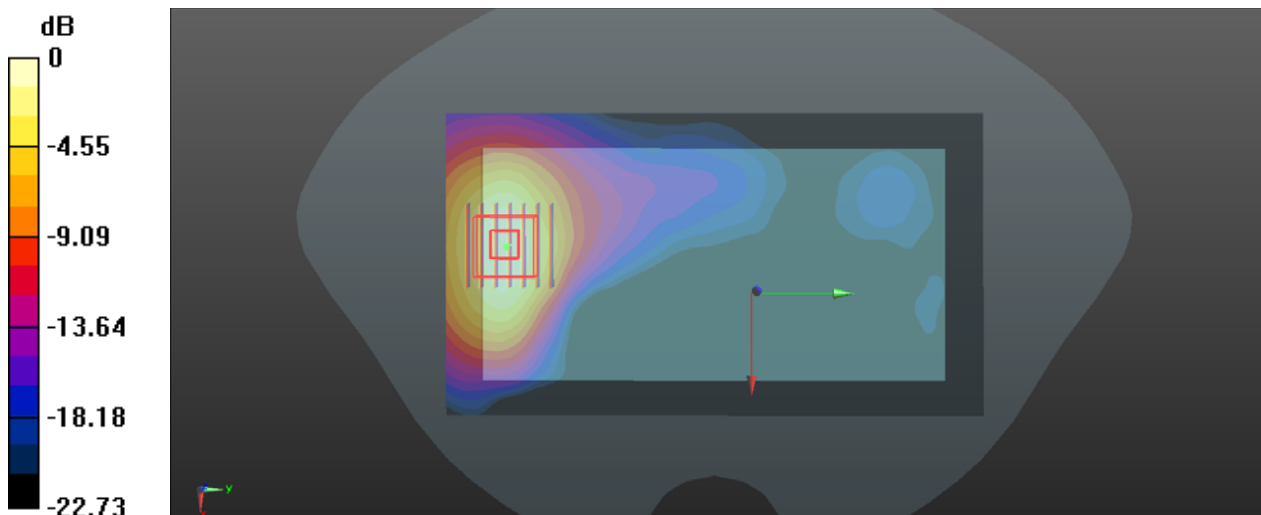

0 dB = 0.862 W/kg

P26 LTE 38_QPSK20M_Rear Face_1.5cm_Ch37850_1RB_OS50_Ant0

Communication System: LTE TDD; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1124 Medium parameters used: $f = 2580$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 39.165$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.722 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.207 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.733 W/kg

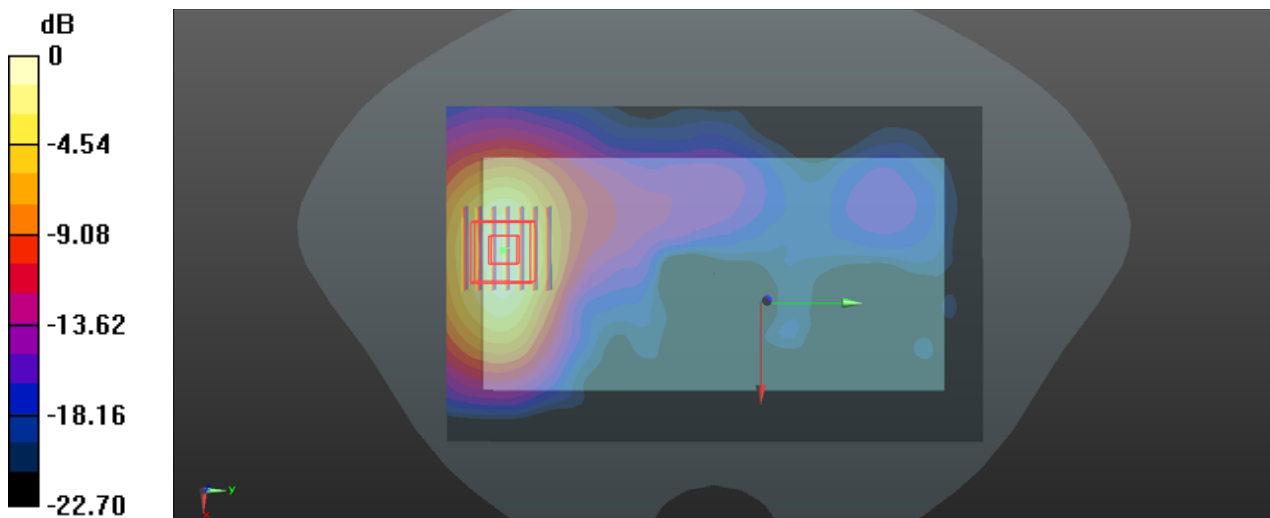

0 dB = 0.733 W/kg

P27 LTE 41_QPSK20M_Rear Face_1.5cm_Ch40140_1RB_OS50_Ant0

Communication System: LTE TDD; Frequency: 2545 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1124 Medium parameters used: $f = 2545$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.226$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (91x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.806 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 1.345 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.992 W/kg
SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.264 W/kg
 Maximum value of SAR (measured) = 0.797 W/kg

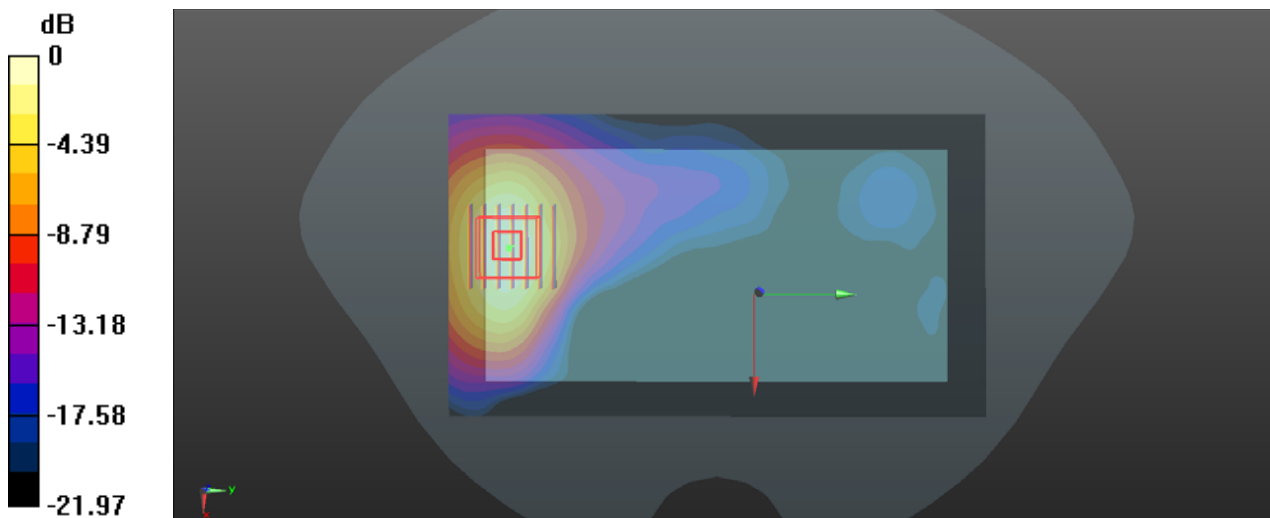

0 dB = 0.797 W/kg

P28 WLAN2.4G_802.11b_Rear Face_1cm_Ch11

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_1122 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 39.584$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.314 W/kg


- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.411 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

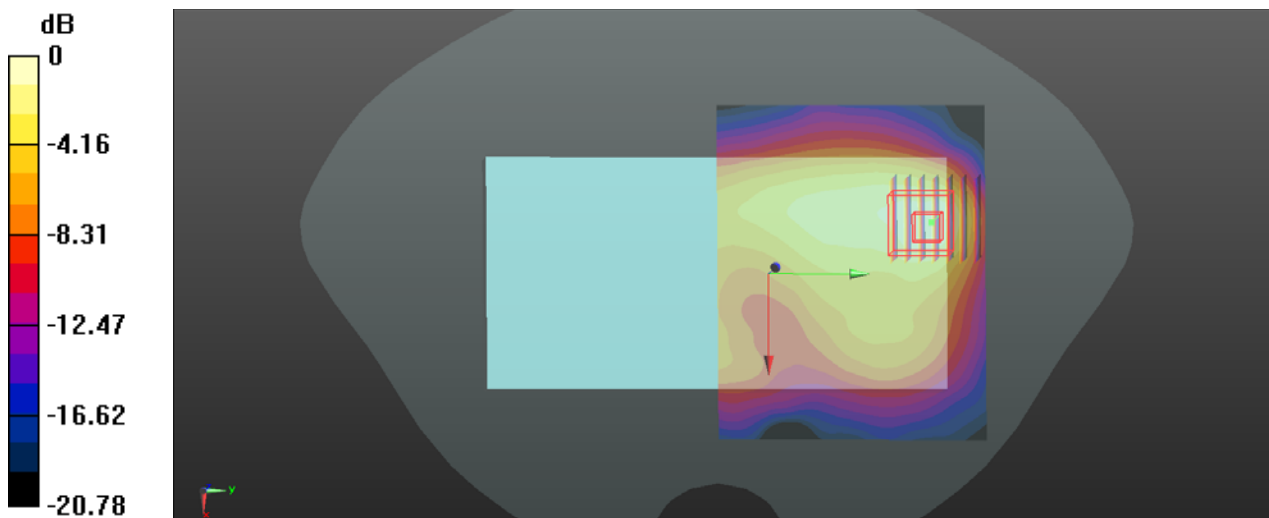

0 dB = 0.312 W/kg

P29 WLAN5G_802.11ac80_Rear Face_1cm_Ch58


Communication System: 802.11ac_VHT80; Frequency: 5290 MHz; Duty Cycle: 1:1.12
Medium: HSL5G_1125 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.756$ S/m; $\epsilon_r = 36.068$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.8, 4.8, 4.8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (111x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.624 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.4420 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.977 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.087 W/kg
Maximum value of SAR (measured) = 0.630 W/kg

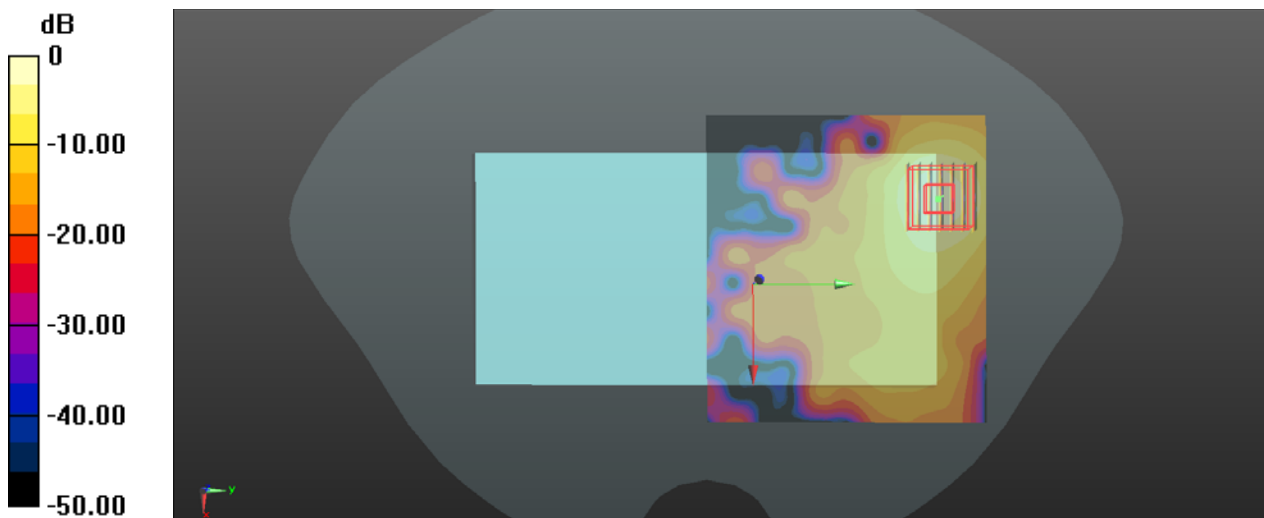

0 dB = 0.630 W/kg

P30 WLAN5G_802.11ac80_Rear Face_1cm_Ch106


Communication System: 802.11ac_VHT80; Frequency: 5530 MHz; Duty Cycle: 1:1.12
Medium: HSL5G_1125 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.044$ S/m; $\epsilon_r = 35.637$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.6, 4.6, 4.6); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (111x101x1)**: Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.684 W/kg

- **Zoom Scan (7x7x12)/Cube 0**: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.183 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.094 W/kg
Maximum value of SAR (measured) = 0.687 W/kg

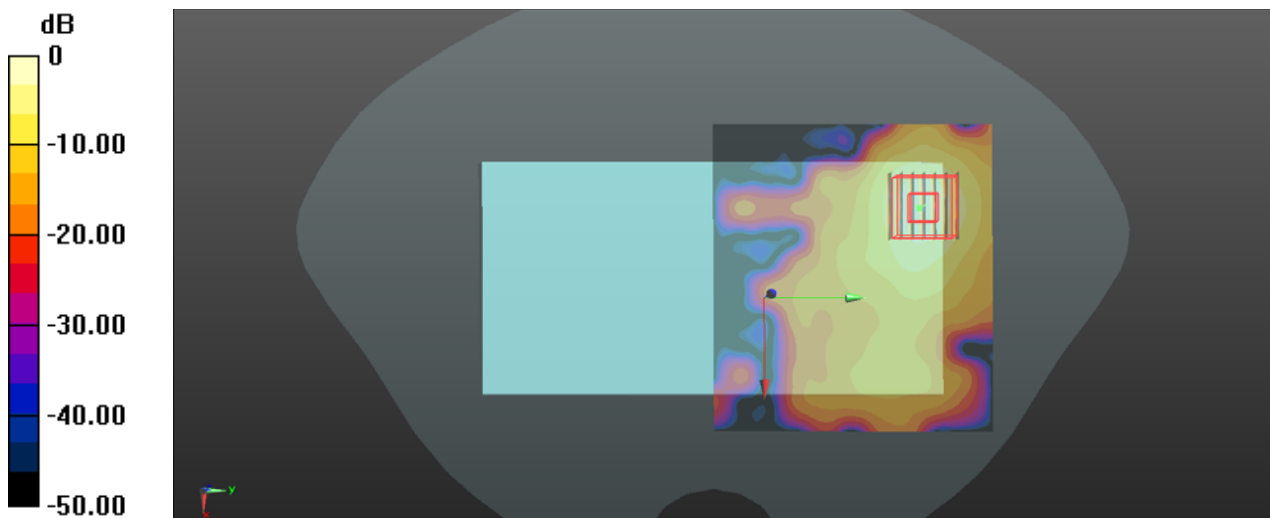

0 dB = 0.687 W/kg

P31 WLAN5G_802.11ac80_Rear Face_1cm_Ch155


Communication System: 802.11ac_VHT80; Frequency: 5775 MHz; Duty Cycle: 1:1.12
 Medium: HSL5G_1125 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.328$ S/m; $\epsilon_r = 35.188$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.49, 4.49, 4.49); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (111x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.616 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 0 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.083 W/kg
 Maximum value of SAR (measured) = 0.607 W/kg

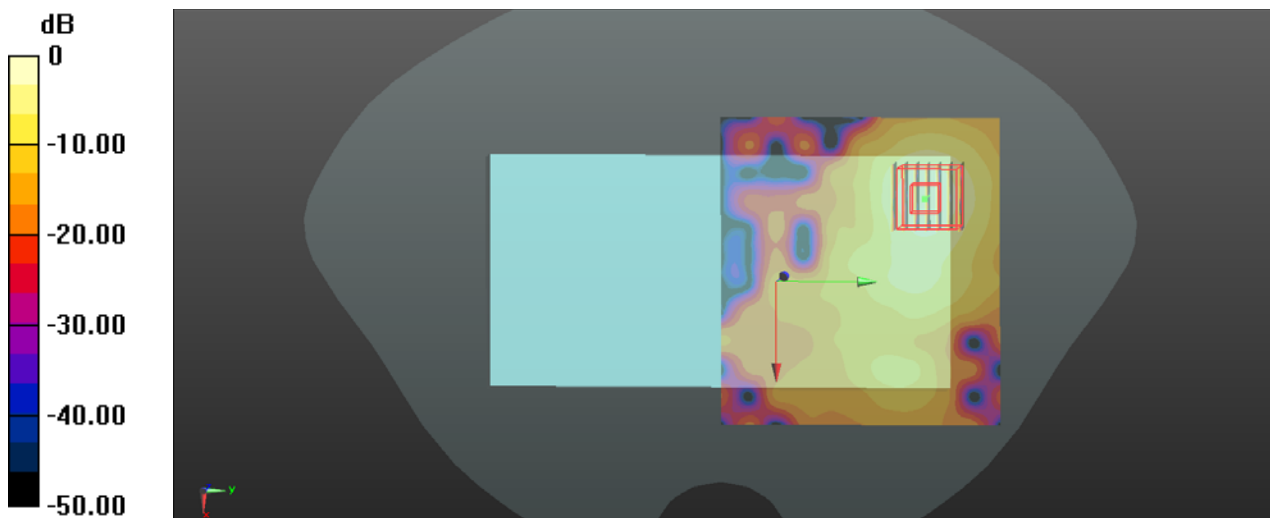

0 dB = 0.607 W/kg

P32 BT_GFSK_Rear Face_1cm_Ch39

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL2450_1122 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.611$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.0339 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 1.328 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.0400 W/kg
SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00836 W/kg
 Maximum value of SAR (measured) = 0.0303 W/kg

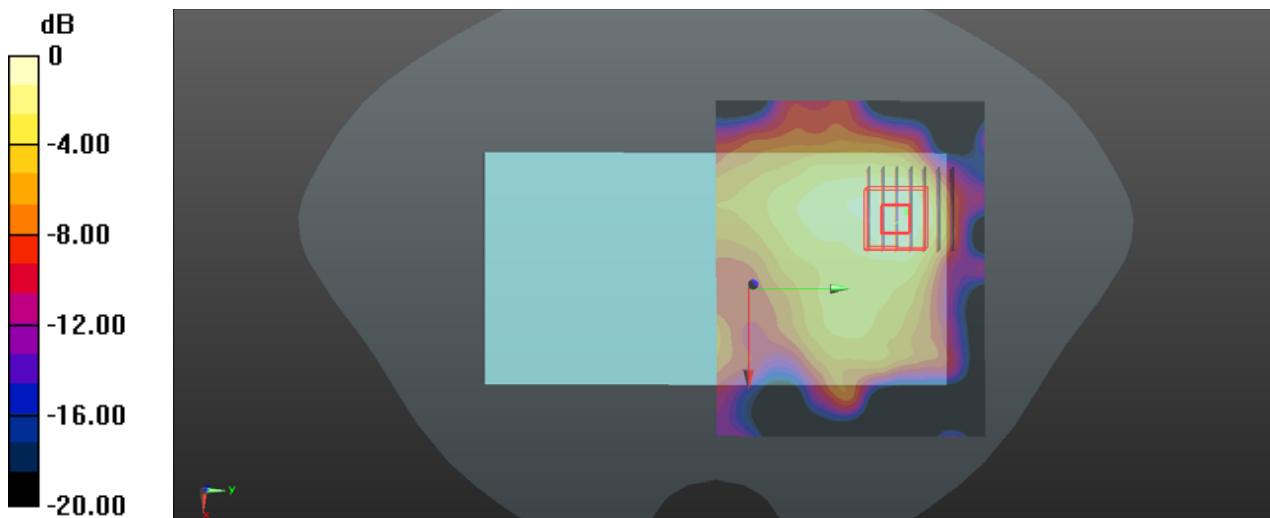

0 dB = 0.0303 W/kg

P33 GSM850_GPRS11_Rear Face_1cm_Ch189_Ant0

Communication System: GPRS11; Frequency: 836.4 MHz; Duty Cycle: 1:2.77

Medium: HSL835_1117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.391$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.8°C


DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.403 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.86 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.481 W/kg
SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.154 W/kg
Maximum value of SAR (measured) = 0.383 W/kg

- **Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.86 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.328 W/kg
SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.192 W/kg
Maximum value of SAR (measured) = 0.304 W/kg

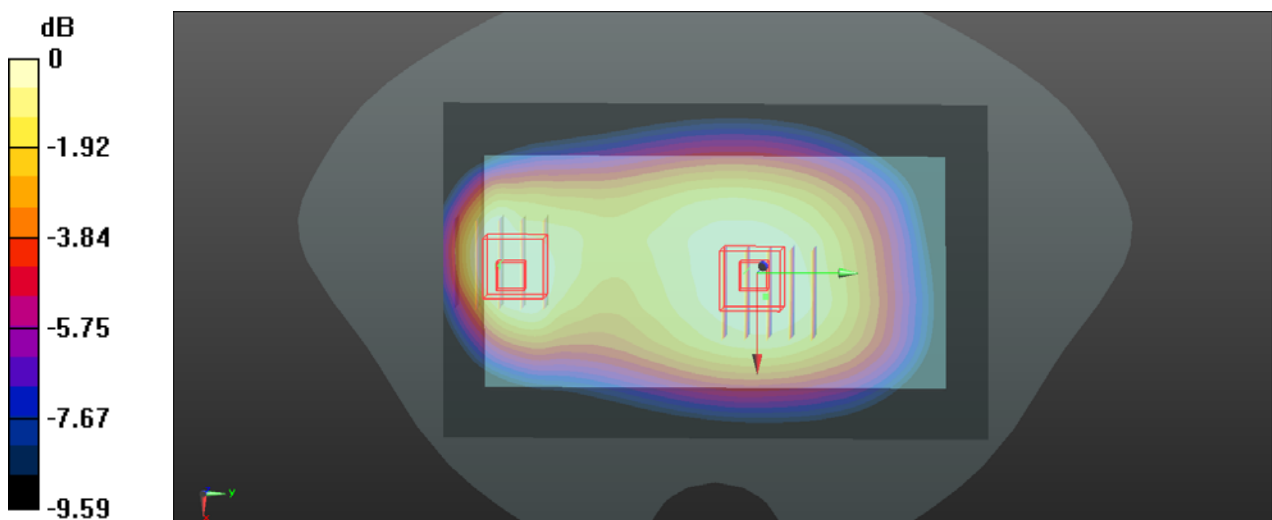

0 dB = 0.304 W/kg

P34 GSM1900_GPRS8_Top Side_1cm_Ch810_Ant1

Communication System: GPRS8; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_1121 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.469$ S/m; $\epsilon_r = 41.474$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.640 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.02 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

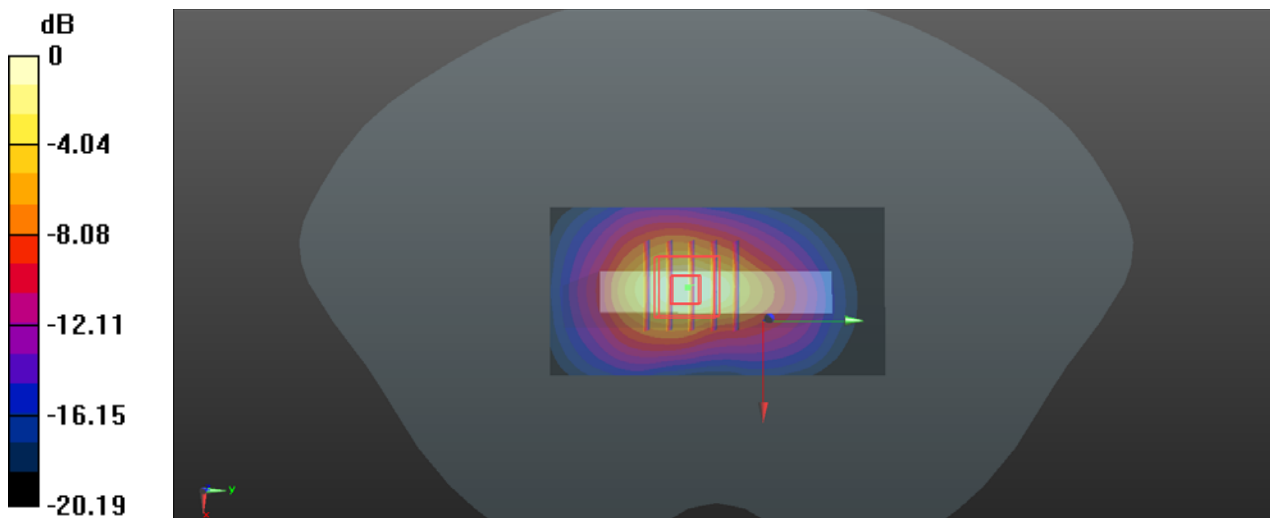

0 dB = 0.627 W/kg

P35 WCDMA II_RMC12.2K_Top Side_1.5cm_Ch9400_Ant1


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: HSL1900_1121 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 41.584$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.08 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 23.97 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.95 W/kg; SAR(10 g) = 0.519 W/kg
 Maximum value of SAR (measured) = 1.06 W/kg

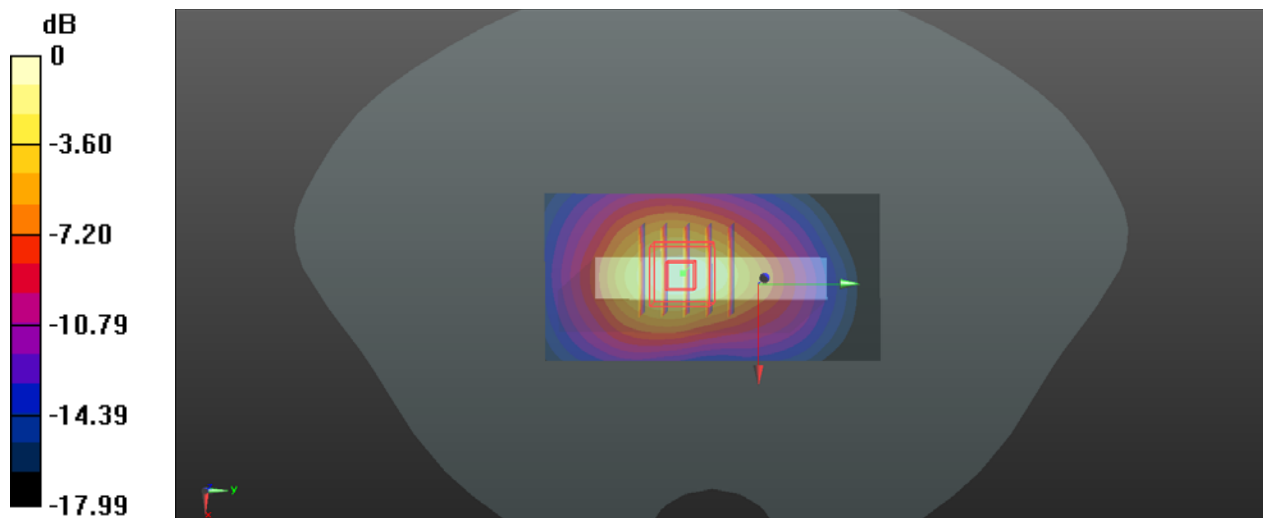

0 dB = 1.06 W/kg

P36 WCDMA IV_RMC12.2K_Top Side_1.5cm_Ch1312_Ant1


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL1750_1119 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 41.411$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.724 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.50 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.10 W/kg
SAR(1 g) = 0.64 W/kg; SAR(10 g) = 0.351 W/kg
Maximum value of SAR (measured) = 0.721 W/kg

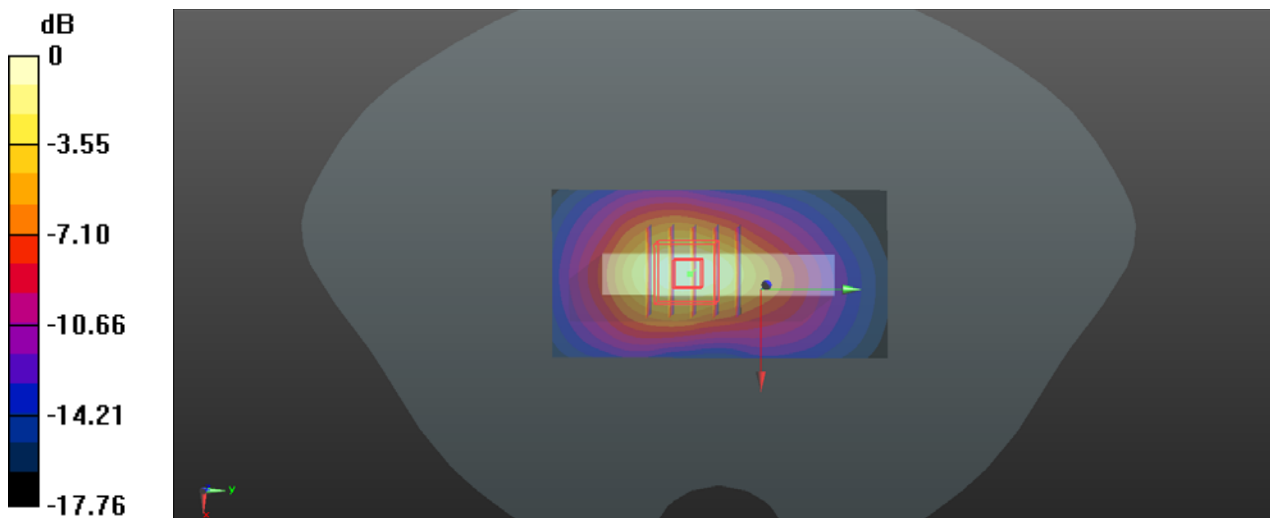

P37 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4132_Ant0


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: HSL835_1117 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.364 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.03 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.430 W/kg
SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.146 W/kg
 Maximum value of SAR (measured) = 0.343 W/kg

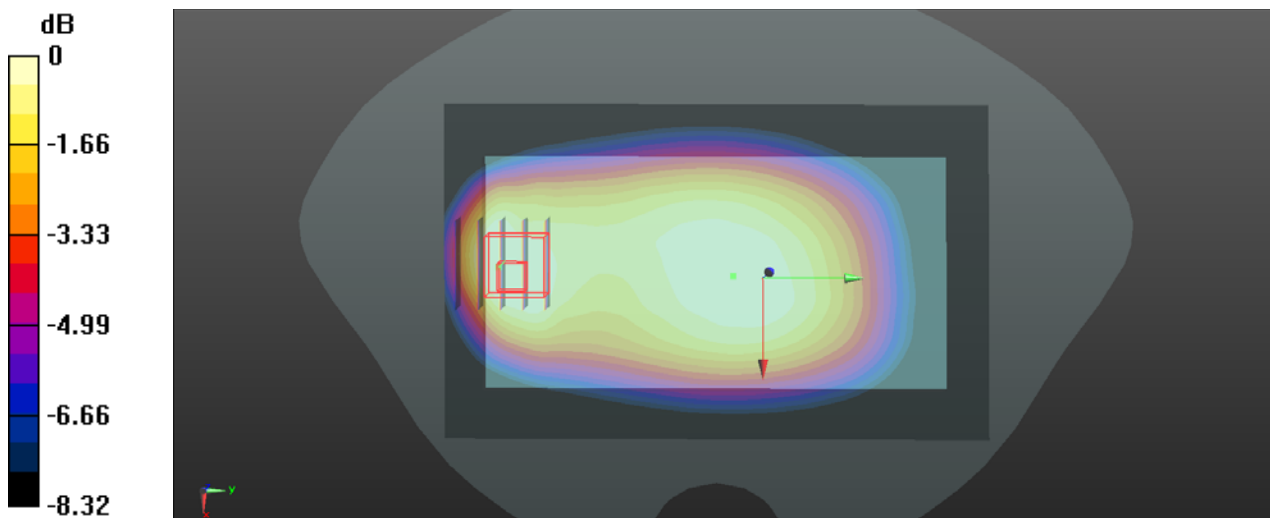

0 dB = 0.297 W/kg

P38 LTE 2_QPSK20M_Top Side_1.5cm_Ch18900_50RB_OS25_Ant1


Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL1900_1121 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 41.584$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.992 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.49 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.89 W/kg; SAR(10 g) = 0.484 W/kg
Maximum value of SAR (measured) = 0.990 W/kg

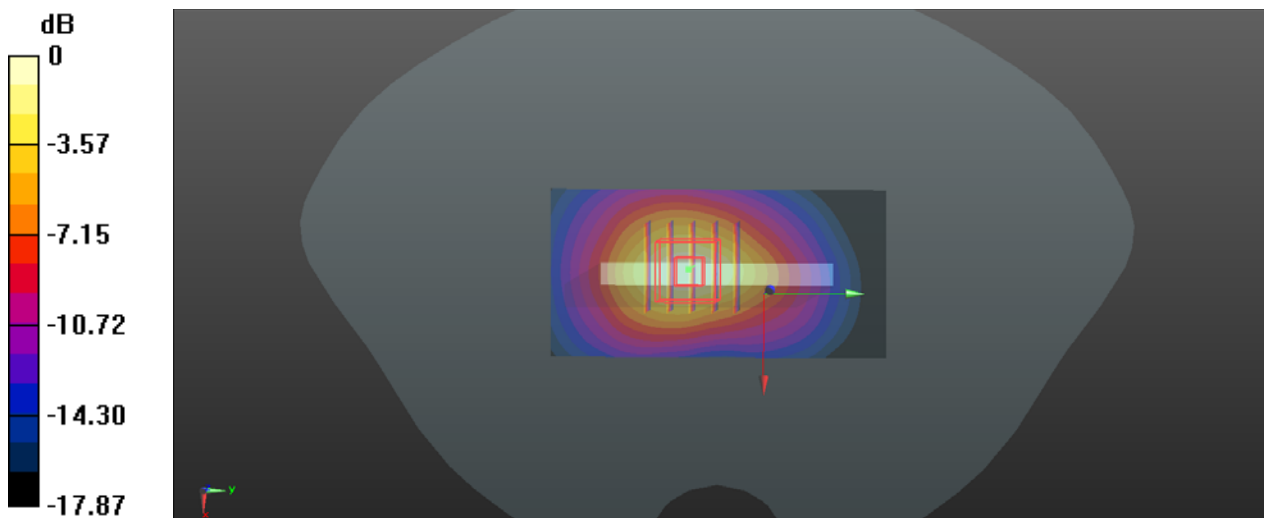

P39 LTE 4_QPSK20M_Top Side_1.5cm_Ch20175_50RB_OS25_Ant1

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750_1119 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 41.242$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.882 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.01 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.424 W/kg

Maximum value of SAR (measured) = 0.876 W/kg

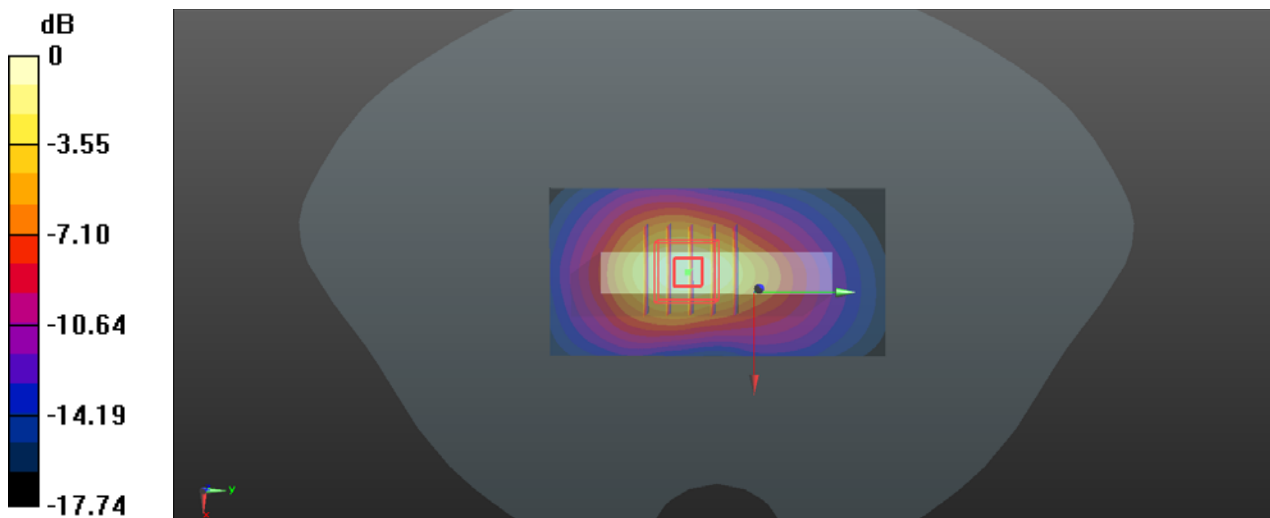

0 dB = 0.876 W/kg

P40 LTE 5_QPSK10M_Rear Face_1cm_Ch20525_1RB_OS0_Ant0

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835_1117 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.389$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.356 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.25 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.398 W/kg
SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.140 W/kg
 Maximum value of SAR (measured) = 0.324 W/kg

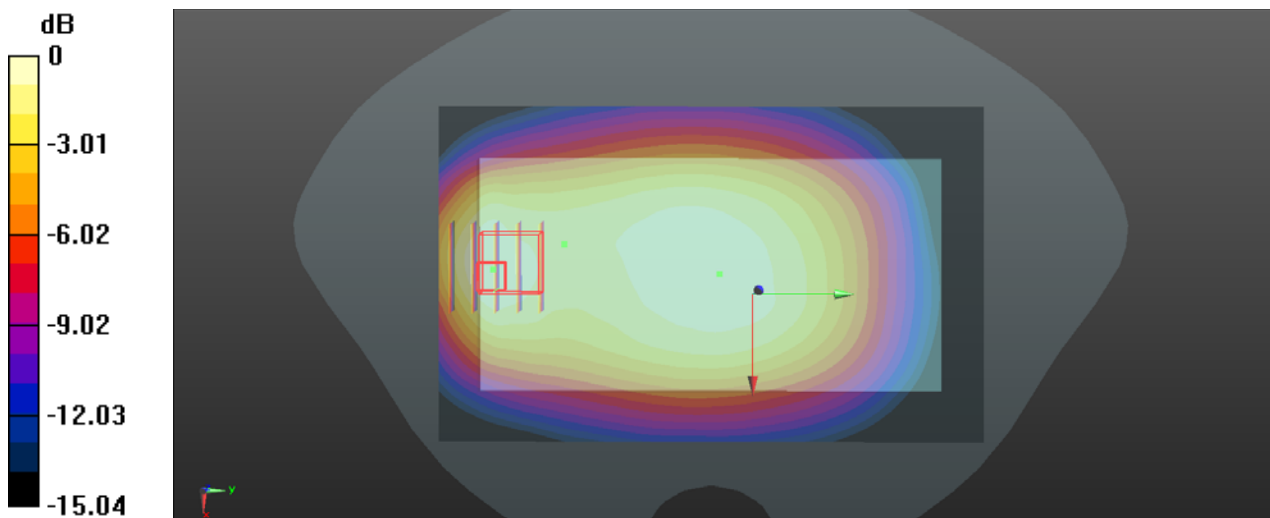

0 dB = 0.324 W/kg

P41 LTE 7_QPSK20M_Bottom Side_1.9cm_Ch21350_1RB_OS50_Ant0

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600_1124 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 39.197$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (51x101x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.894 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.39 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.431 W/kg

Maximum value of SAR (measured) = 0.885 W/kg

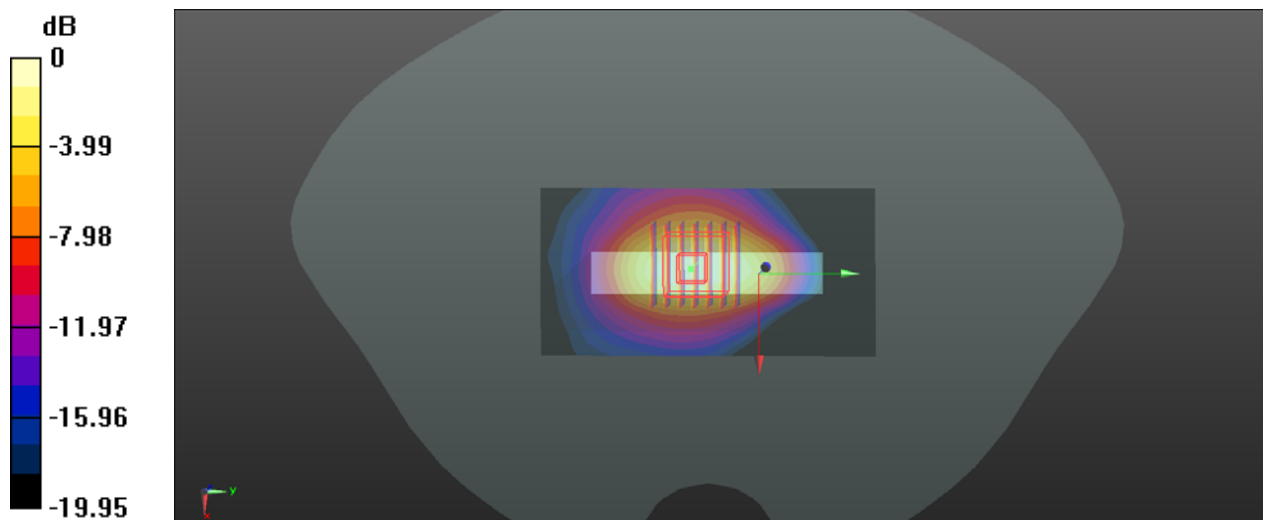

0 dB = 0.885 W/kg

P42 LTE 38_QPSK20M_Bottom Side_1.9cm_Ch37850_1RB_OS50_Ant0

Communication System: LTE TDD; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1124 Medium parameters used: $f = 2580$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 39.165$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.808 W/kg


- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.84 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.794 W/kg

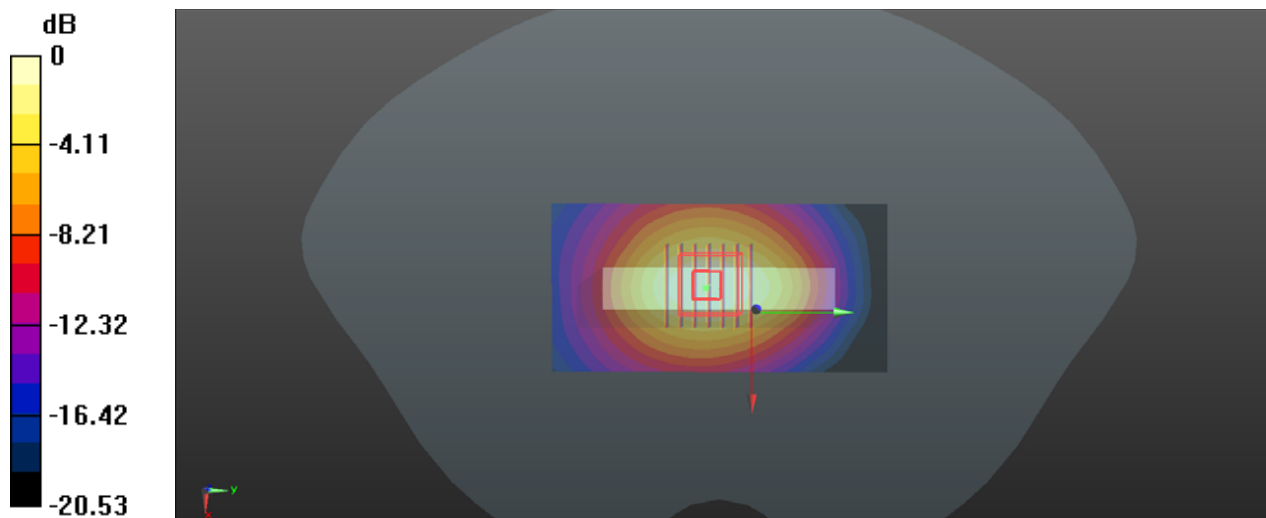

0 dB = 0.794 W/kg

P43 LTE 41_QPSK20M_Bottom Side_1cm_Ch40140_1RB_OS50_Ant0

Communication System: LTE TDD; Frequency: 2545 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1124 Medium parameters used: $f = 2545$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.226$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


- **Area Scan (51x101x1)**: Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.02 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 18.09 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.971 W/kg

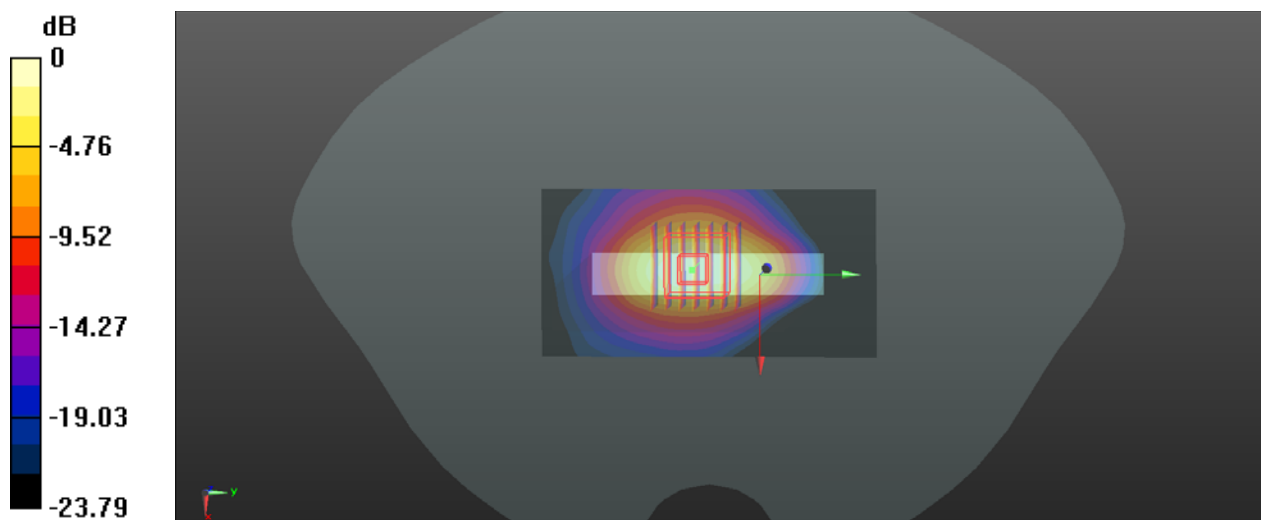

P44 WLAN2.4G_802.11b_Rear Face_1cm_Ch11

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_1122 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 39.584$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x81x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.314 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.411 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

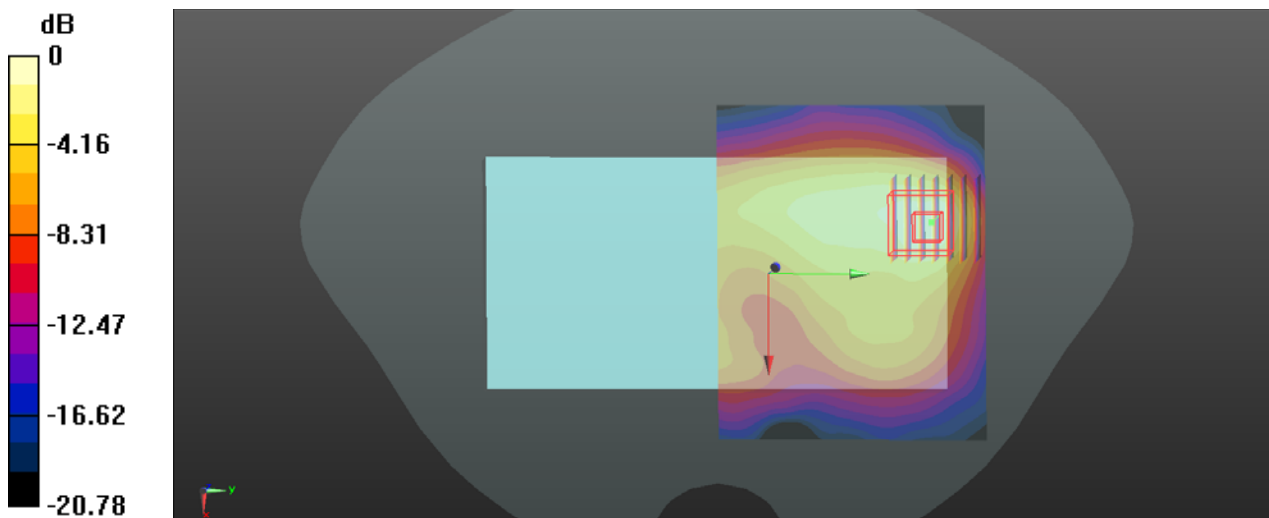

0 dB = 0.312 W/kg

P45 WLAN5G_802.11ac80_Rear Face_1cm_Ch42


Communication System: 802.11ac_VHT80; Frequency: 5210 MHz; Duty Cycle: 1:1
Medium: HSL5G_1125 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.661$ S/m; $\epsilon_r = 36.188$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.9, 4.9, 4.9); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (111x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.513 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.5020 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.814 W/kg
SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.076 W/kg
Maximum value of SAR (measured) = 0.528 W/kg

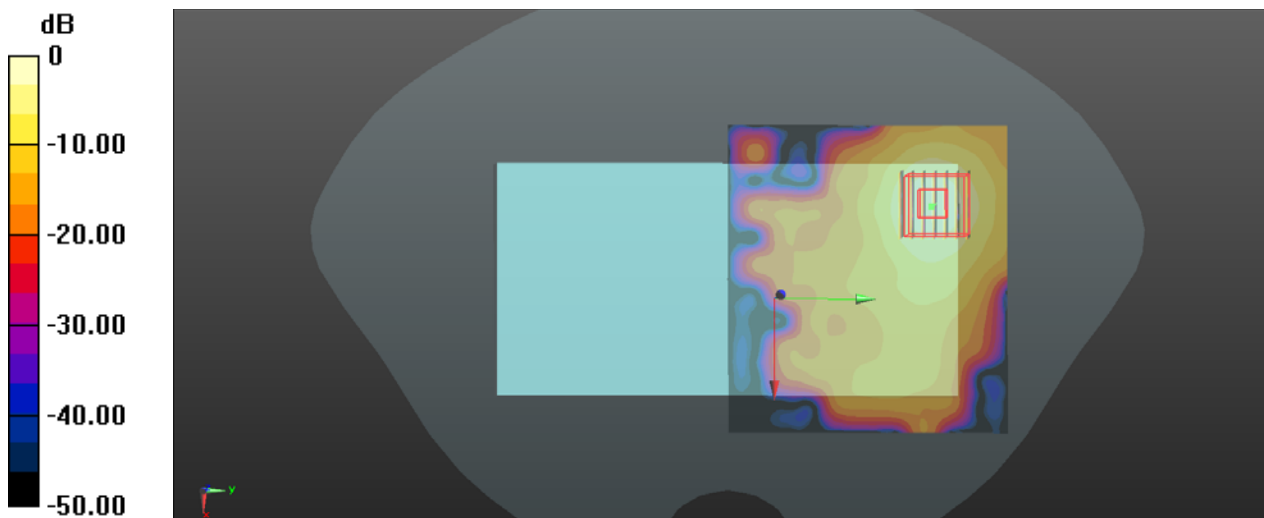

0 dB = 0.528 W/kg

P46 WLAN5G_802.11ac80_Top Side_1cm_Ch155


Communication System: 802.11ac_VHT80; Frequency: 5775 MHz; Duty Cycle: 1:1
Medium: HSL5G_1125 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.328$ S/m; $\epsilon_r = 35.188$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.49, 4.49, 4.49); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.686 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.314 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.102 W/kg
Maximum value of SAR (measured) = 0.717 W/kg

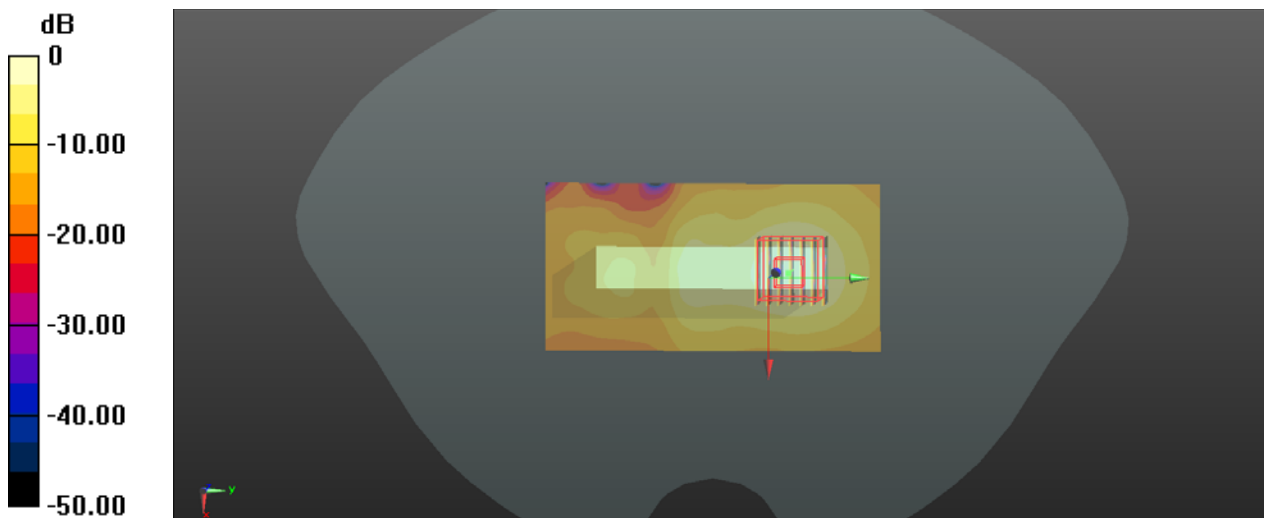

0 dB = 0.717 W/kg

P47 BT_GFSK_Rear Face_1cm_Ch39

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL2450_1122 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.611$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0339 W/kg


- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.328 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00836 W/kg

Maximum value of SAR (measured) = 0.0303 W/kg

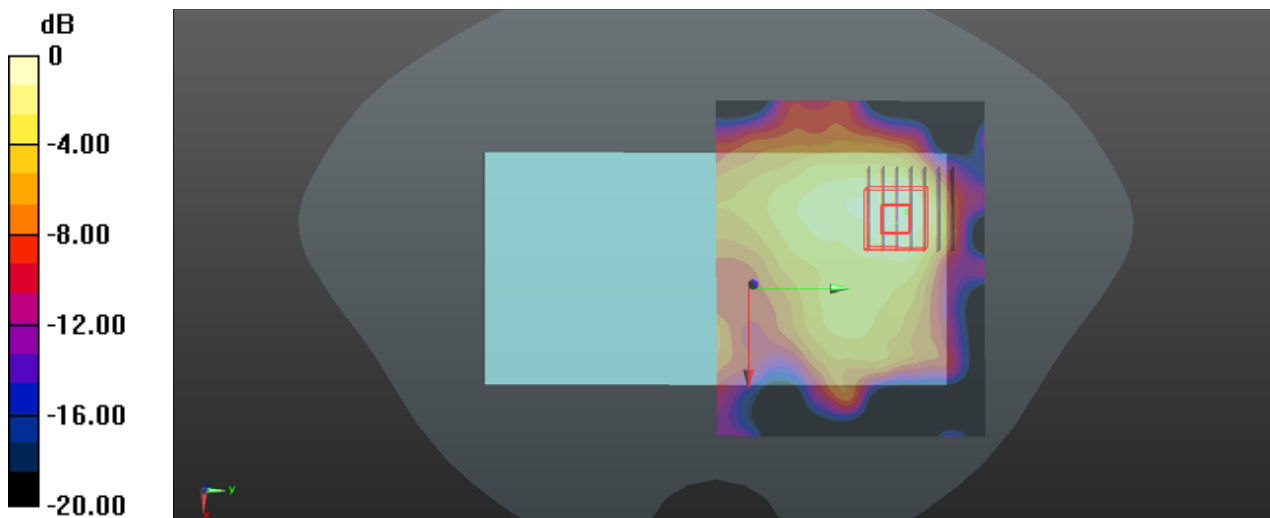

0 dB = 0.0303 W/kg

P48 GSM1900_GPRS8_Rear Face_0cm_Ch810_Ant1

Communication System: GPRS8; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900_1121 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.469$ S/m; $\epsilon_r = 41.474$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.08 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.713 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.85 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 0.935 W/kg

Maximum value of SAR (measured) = 3.84 W/kg

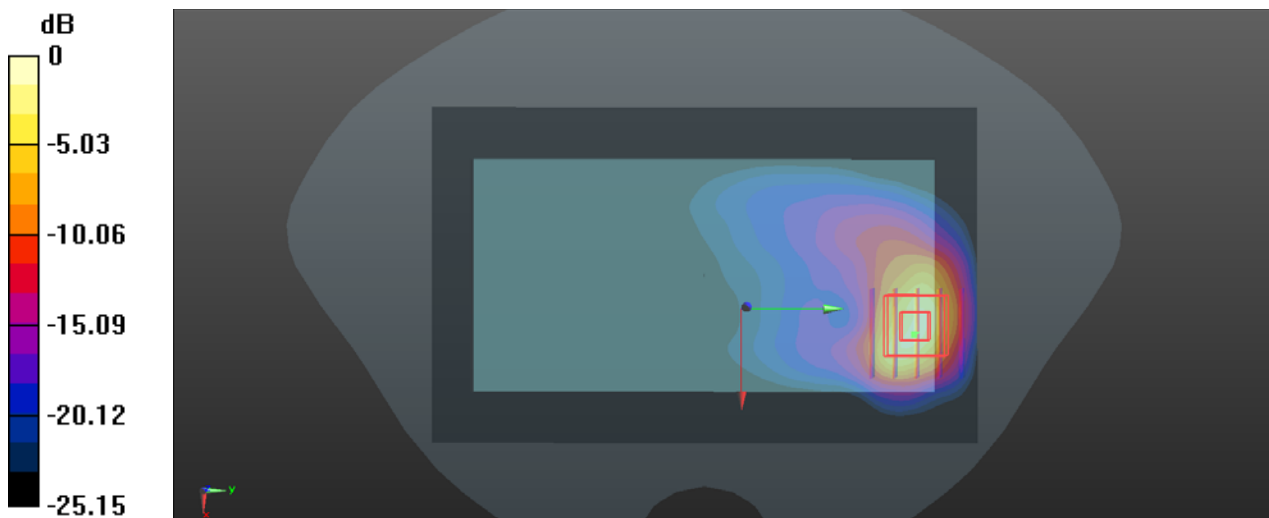

0 dB = 3.84 W/kg

P49 WCDMA II_RMC12.2K_Bottom Side_0cm_Ch9538_Ant0


Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL1900_1121 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.467$ S/m; $\epsilon_r = 41.481$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 4.48 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 45.17 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 5.80 W/kg
SAR(1 g) = 2.74 W/kg; SAR(10 g) = 1.25 W/kg
Maximum value of SAR (measured) = 4.69 W/kg

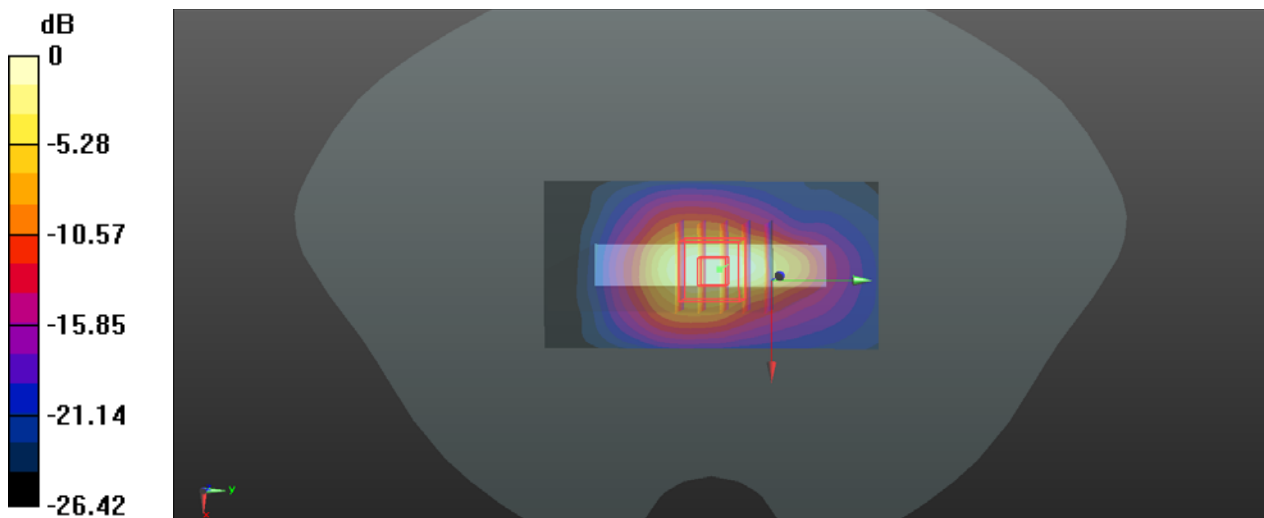

0 dB = 4.69 W/kg

P50 WCDMA IV_RMC12.2K_Bottom Side_0cm_Ch1312_Ant0


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL1750_1119 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 41.411$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 5.75 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.76 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 6.76 W/kg
SAR(1 g) = 3.21 W/kg; SAR(10 g) = 1.45 W/kg
Maximum value of SAR (measured) = 5.51 W/kg

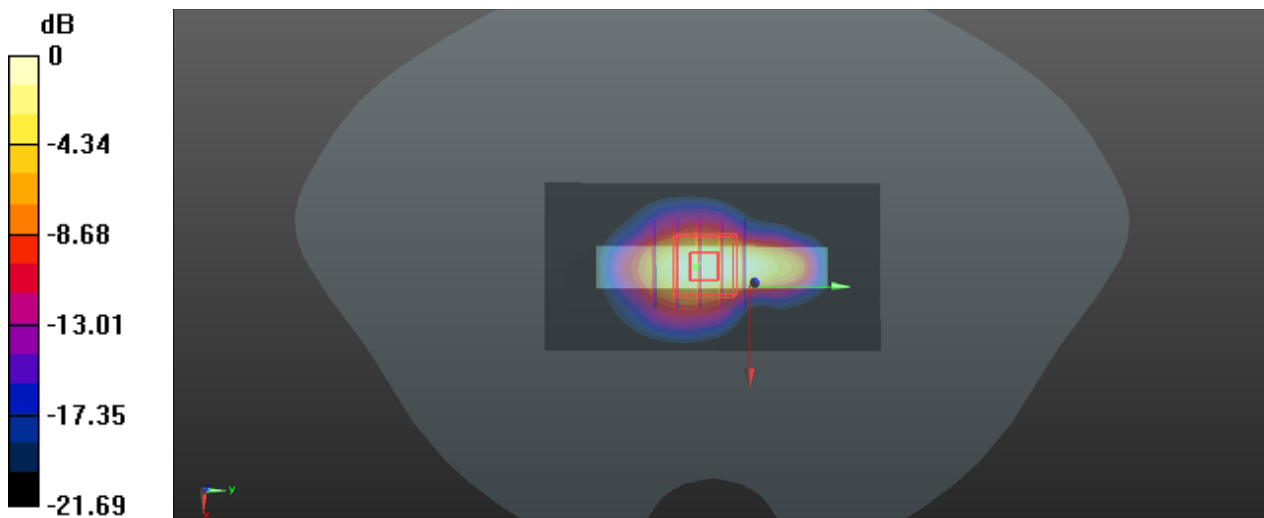

0 dB = 5.51 W/kg

P51 LTE 2_QPSK20M_Bottom Side_0cm_Ch18900_50RB_OS25_Ant0

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_1121 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 41.584$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.28 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.26 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 5.56 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.17 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

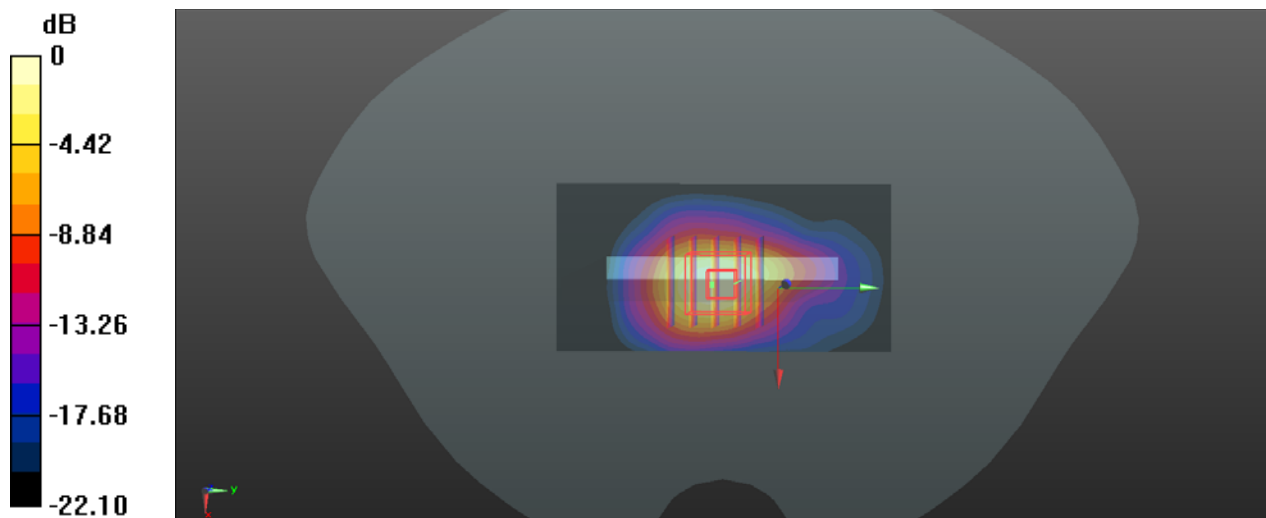

0 dB = 2.93 W/kg

P52 LTE 4_QPSK20M_Bottom Side_0cm_Ch20050_50RB_OS25_Ant0

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL1750_1119 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 41.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (41x81x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.75 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.68 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 6.64 W/kg

SAR(1 g) = 3.08 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 5.38 W/kg

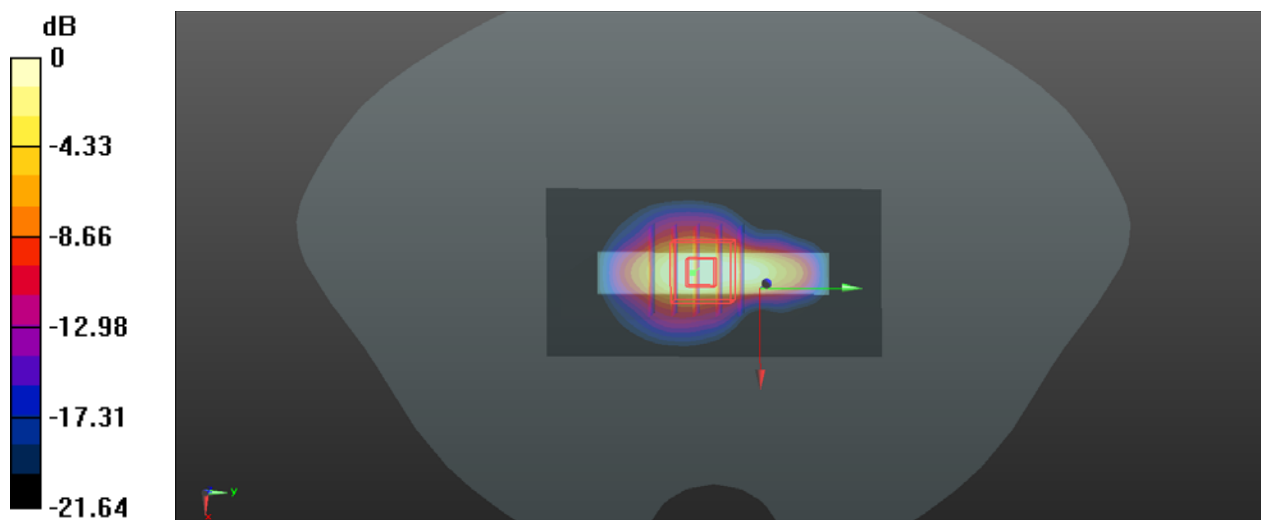

0 dB = 5.38 W/kg

P53 LTE 7_QPSK20M_Rear Face_0cm_Ch21350_50RB_OS25_Ant0


Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL2600_1124 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x91x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 3.15 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 7.61 W/kg
SAR(1 g) = 2.86 W/kg; SAR(10 g) = 1.1 W/kg
Maximum value of SAR (measured) = 3.62 W/kg

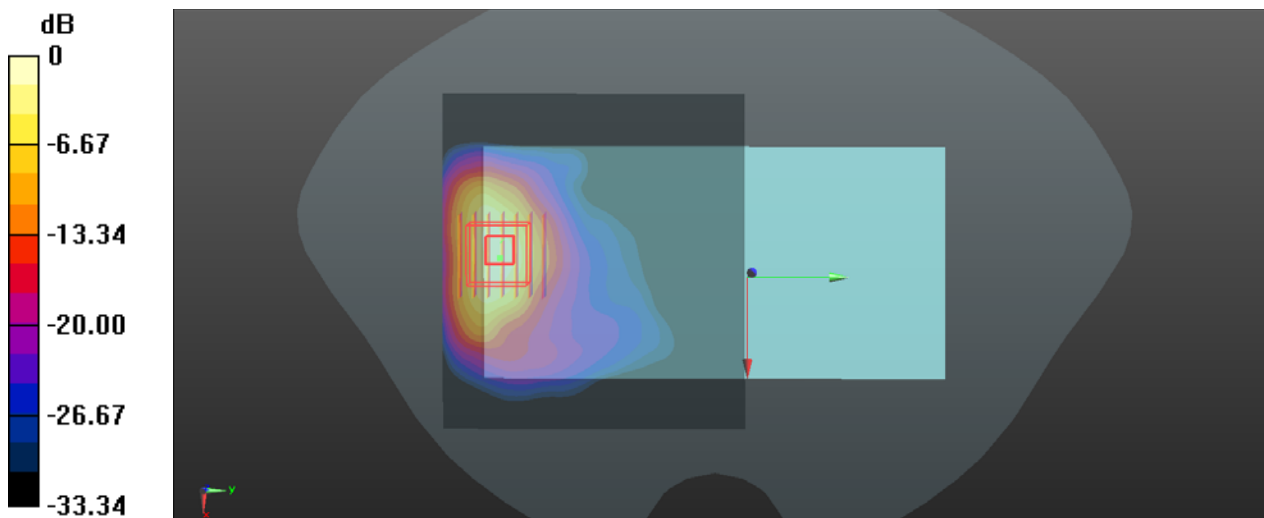

0 dB = 3.62 W/kg

P54 LTE 38_QPSK20M_Rear Face_0cm_Ch37850_50RB_OS25_Ant0

Communication System: LTE TDD; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1124 Medium parameters used: $f = 2580$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 38.467$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x91x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.33 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 8.19 W/kg

SAR(1 g) = 3.02 W/kg; SAR(10 g) = 1.15 W/kg

Maximum value of SAR (measured) = 3.66 W/kg

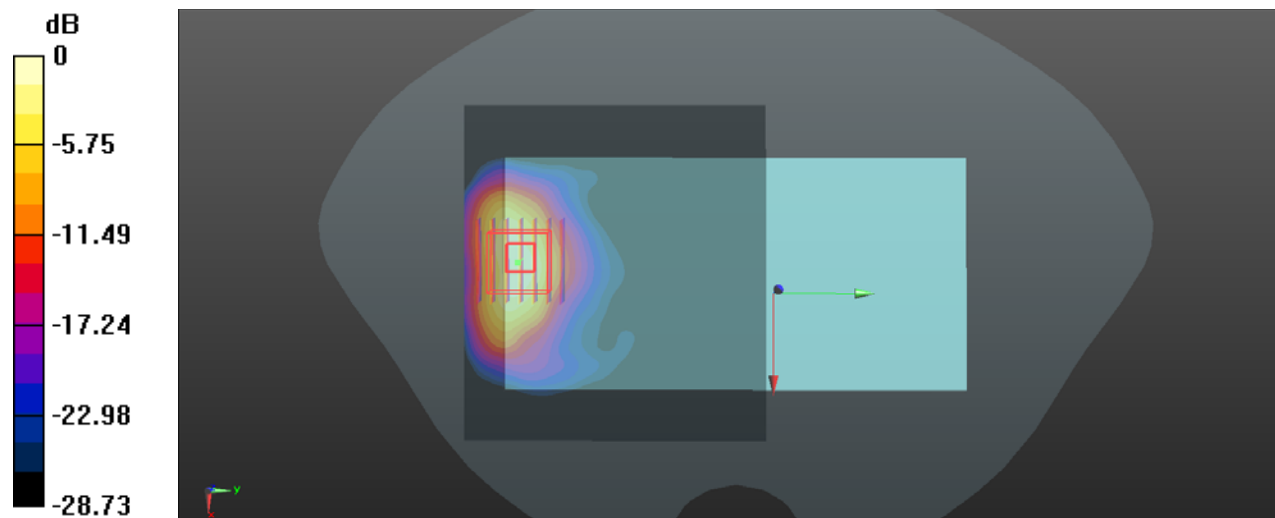

0 dB = 3.66 W/kg

P55 LTE 41_QPSK20M_Rear Face_0cm_Ch40140_50RB_OS25_Ant0

Communication System: LTE TDD; Frequency: 2545 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1124 Medium parameters used: $f = 2545$ MHz; $\sigma = 1.987$ S/m; $\epsilon_r = 38.608$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (101x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.67 W/kg


- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.2960 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 8.61 W/kg

SAR(1 g) = 3.25 W/kg; SAR(10 g) = 1.26 W/kg

Maximum value of SAR (measured) = 4.08 W/kg

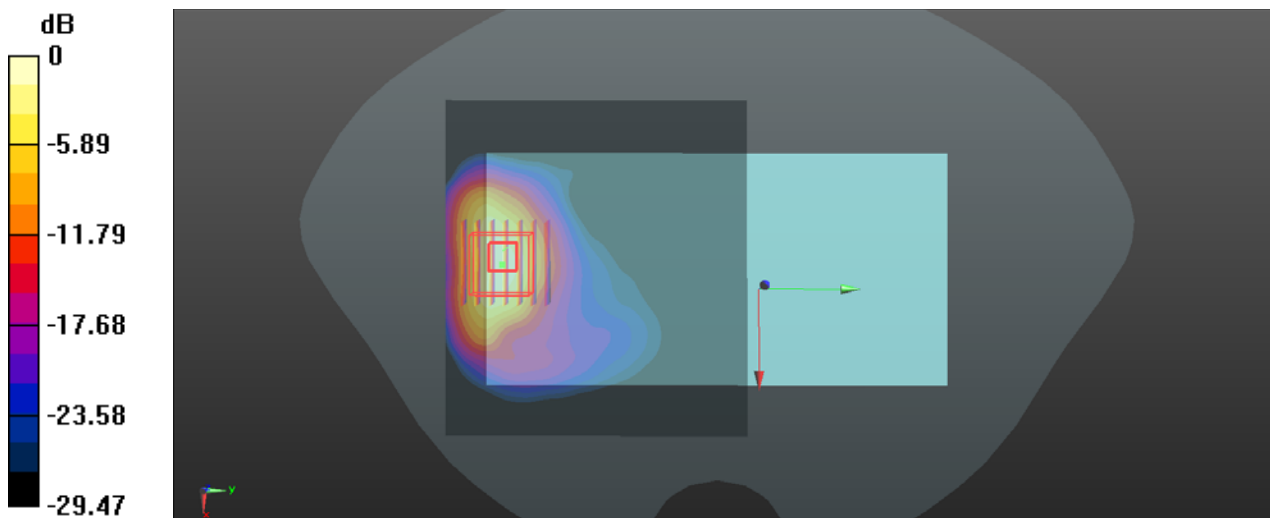

0 dB = 4.08 W/kg

P56 WLAN5G_802.11ac80_Top Side_0cm_Ch58


Communication System: 802.11ac_VHT80; Frequency: 5290 MHz; Duty Cycle: 1:1.12
Medium: HSL5G_1125 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.756$ S/m; $\epsilon_r = 36.068$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.8, 4.8, 4.8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 9.85 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 9.722 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 16.3 W/kg
SAR(1 g) = 2.81 W/kg; SAR(10 g) = 0.564 W/kg
Maximum value of SAR (measured) = 9.25 W/kg

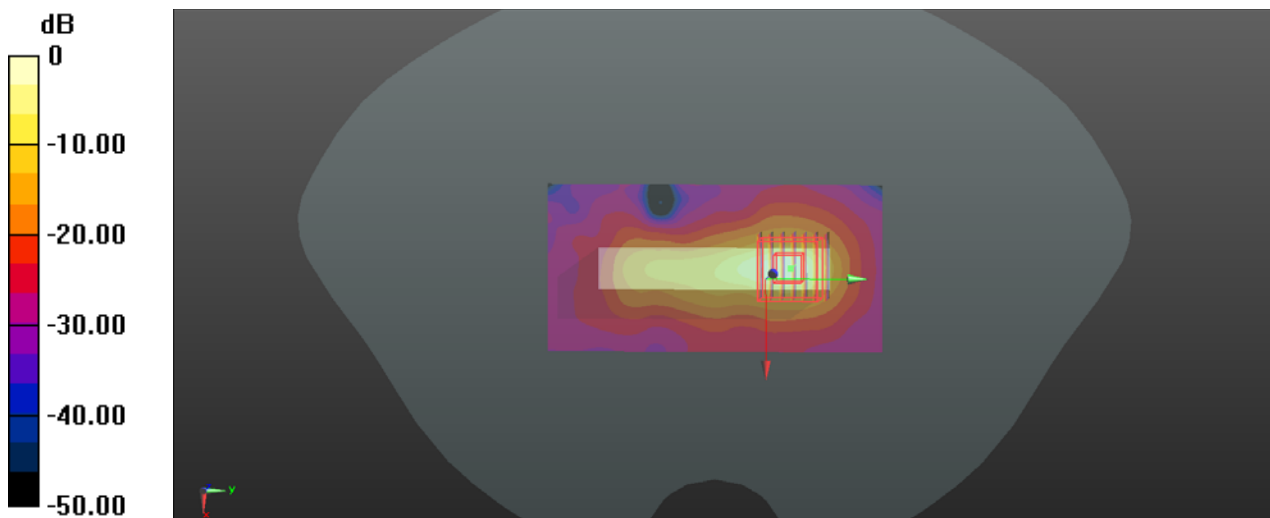

0 dB = 9.25 W/kg

P57 WLAN5G_802.11ac80_Top Side_0cm_Ch106


Communication System: 802.11ac_VHT80; Frequency: 5530 MHz; Duty Cycle: 1:1.12
Medium: HSL5G_1125 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.044$ S/m; $\epsilon_r = 35.637$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.6, 4.6, 4.6); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 7.30 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 10.11 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 15.1 W/kg
SAR(1 g) = 2.44 W/kg; SAR(10 g) = 0.550 W/kg
Maximum value of SAR (measured) = 7.99 W/kg

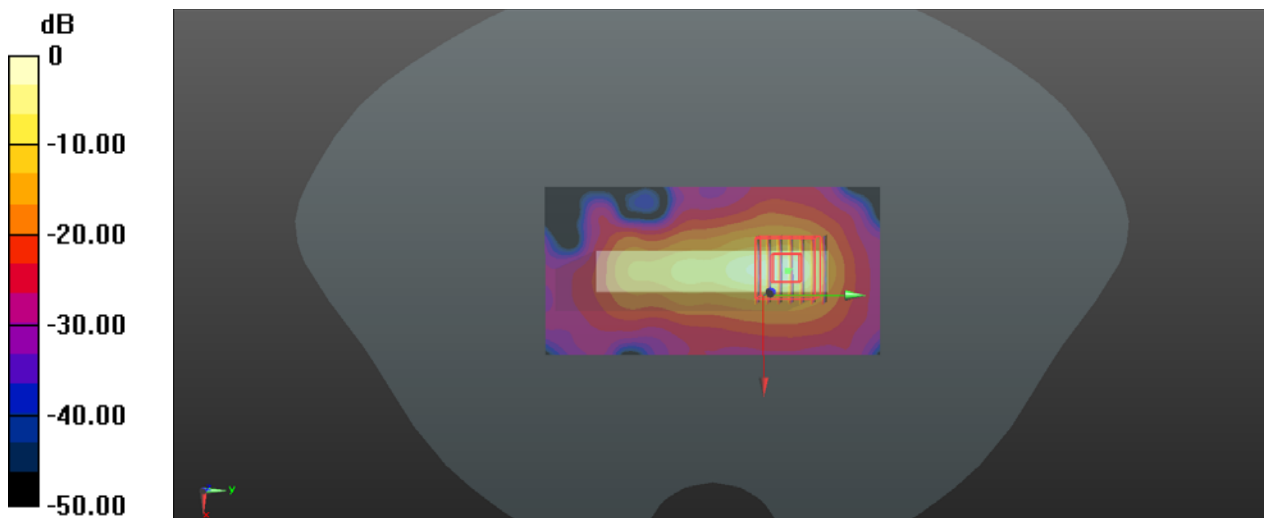

0 dB = 7.99 W/kg



Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.