

# FCC TEST REPORT (PART 24)



Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer or Supplier:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Product:	Mobile Phone
Brand Name:	Redmi
Model Name:	2201117SG
FCC ID:	2AFZZ117SG
Date of tests:	Nov. 01, 2021 ~ Nov. 29, 2021

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**  
  **FCC PART 2**  
 **ANSI/TIA/EIA-603-D**  
  **ANSI/TIA/EIA-603-E**  
  **ANSI C63.26-2015**

**CONCLUSION:** The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
  Date: Nov. 29, 2021	  Date: Nov. 29, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 7**

**1 SUMMARY OF TEST RESULTS ..... 8**

1.1 MEASUREMENT UNCERTAINTY ..... 8

1.2 TEST SITE AND INSTRUMENTS ..... 9

**2 GENERAL INFORMATION ..... 10**

2.1 GENERAL DESCRIPTION OF EUT ..... 10

2.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 13

2.3 DESCRIPTION OF SUPPORT UNITS ..... 14

2.4 TEST ITEM AND TEST CONFIGURATION ..... 14

2.5 EUT OPERATING CONDITIONS ..... 17

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 17

**3 TEST TYPES AND RESULTS ..... 18**

3.1 OUTPUT POWER MEASUREMENT ..... 18

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 18

3.1.2 TEST PROCEDURES ..... 18

3.1.3 TEST SETUP ..... 19

3.1.4 TEST RESULTS ..... 19

3.2 FREQUENCY STABILITY MEASUREMENT ..... 47

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT ..... 47

3.2.2 TEST PROCEDURE ..... 47

3.2.3 TEST SETUP ..... 47

3.2.4 TEST RESULTS ..... 48

3.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 49

3.3.1 TEST PROCEDURES ..... 49

3.3.2 TEST SETUP ..... 49

3.3.3 TEST RESULTS ..... 50

3.4 BAND EDGE MEASUREMENT ..... 51

3.4.1 LIMITS OF BAND EDGE MEASUREMENT ..... 51

3.4.2 TEST SETUP ..... 51

3.4.3 TEST PROCEDURES ..... 52

3.4.4 TEST RESULTS ..... 53

3.5 CONDUCTED SPURIOUS EMISSIONS ..... 54

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 54

3.5.2 TEST PROCEDURE ..... 54

3.5.3 TEST SETUP ..... 54

3.5.4 TEST RESULTS ..... 55

3.6 RADIATED EMISSION MEASUREMENT ..... 56

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 56

3.6.2 TEST PROCEDURES ..... 56

3.6.3 DEVIATION FROM TEST STANDARD ..... 56



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

3.6.4 TEST SETUP .....57

3.6.5 TEST RESULTS .....58

3.7 PEAK TO AVERAGE RATIO .....94

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....94

3.7.2 TEST SETUP .....94

3.7.3 TEST PROCEDURES .....94

3.7.4 TEST RESULTS .....95

**4 INFORMATION ON THE TESTING LABORATORIES .....96**

**5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....97**

APPENDIX C: .....97

PCS1900 .....97

FREQUENCY STABILITY .....97

PCS1900 .....97

TEST RESULT.....97

PCS1900\_OBW.....98

TEST RESULT.....98

TEST GRAPH.....99

PCS1900\_XDB .....102

TEST RESULT.....102

TEST GRAPH.....103

PEAK-AVERAGE RATIO.....106

PCS1900 .....106

TEST RESULT.....106

TEST GRAPH.....107

SPURIOUS EMISSION .....110

PCS1900 .....110

TEST RESULT.....110

TEST GRAPH.....111

WCDMA BAND2.....116

FREQUENCY STABILITY .....116



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

BAND2..... 116

TEST RESULT..... 116

99% & 26DB BANDWIDTH ..... 117

WCDMA \_OBW ..... 117

TEST RESULT..... 117

TEST GRAPH..... 118

BAND2\_XDB ..... 120

TEST RESULT..... 120

TEST GRAPH..... 121

PEAK-AVERAGE RATIO ..... 123

BAND2..... 123

TEST RESULT..... 123

TEST GRAPH..... 124

SPURIOUS EMISSION ..... 126

BAND2..... 126

TEST RESULT..... 126

TEST GRAPH..... 127

LTE BAND 2 ..... 130

FREQUENCY STABILITY ..... 130

B2\_1.4MHZ ..... 130

TEST RESULT..... 130

B2\_3MHZ..... 132

TEST RESULT..... 132

B2\_5MHZ..... 134

TEST RESULT..... 134

B2\_10MHZ ..... 136

TEST RESULT..... 136

B2\_20MHZ ..... 140



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

TEST RESULT..... 140

TEST GRAPH..... 144

BAND2\_XDB ..... 171

TEST RESULT..... 171

TEST GRAPH..... 173

PEAK-AVERAGE RATIO ..... 200

B2\_1.4MHZ ..... 200

TEST RESULT..... 200

TEST GRAPH..... 201

B2\_3MHZ..... 206

TEST RESULT..... 206

TEST GRAPH..... 207

B2\_5MHZ..... 212

TEST RESULT..... 212

TEST GRAPH..... 213

B2\_10MHZ ..... 218

TEST RESULT..... 218

TEST GRAPH..... 219

B2\_15MHZ ..... 224

TEST RESULT..... 224

TEST GRAPH..... 225

B2\_20MHZ ..... 230

TEST RESULT..... 230

TEST GRAPH..... 231

SPURIOUS EMISSION ..... 236

B2\_1.4MHZ ..... 236

TEST RESULT..... 236

TEST GRAPH..... 237



**BUREAU**  
**VERITAS**

**Test Report No.: W7L-P21100026RF14**

B2\_3MHZ..... 248

TEST RESULT..... 248

TEST GRAPH..... 249

B2\_5MHZ..... 260

TEST RESULT..... 260

TEST GRAPH..... 261

B2\_10MHZ ..... 272

TEST RESULT..... 272

TEST GRAPH..... 273

B2\_15MHZ ..... 284

TEST RESULT..... 284

TEST GRAPH..... 285

B2\_20MHZ ..... 296

TEST RESULT..... 296

TEST GRAPH..... 297



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21100026RF14	Original release	Nov. 29, 2021

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	1.1.1.1.1 TEST TYPE	RESULT
2.1046 24.232	Equivalent Isotropic Radiated Power	Compliance
2.1055 24.235	Frequency Stability	Compliance
2.1049 24.238(b)	Occupied Bandwidth	Compliance
24.232(d)	Peak to average ratio	Compliance
24.238(b)	Band Edge Measurements	Compliance
2.1051 24.238	Conducted Spurious Emissions	Compliance
2.1053 24.238	Radiated Spurious Emissions	Compliance

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



**1.2 TEST SITE AND INSTRUMENTS**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Cal.</b>	<b>Next Cal.</b>
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
Bilog Antenna 2	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna 2	ETS-LINDGREN	3117	00168692	Apr. 02,21	Apr. 01,22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 25,21	Feb. 24,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
Power Meter	Anritsu	ML2495A	1506002	Apr. 07,21	Apr. 06,22
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 05,21	Mar. 04,22
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Mobile Phone	
<b>BRAND NAME</b>	Redmi	
<b>MODEL NAME</b>	2201117SG	
<b>NOMINAL VOLTAGE</b>	5.0V/9.0V/11.0V/12.0V/20.0Vdc(adapter or host equipment) 3.87Vdc (Li-ion, battery)	
<b>MODULATION TYPE</b>	<b>GSM/GPRS:</b> GMSK <b>EDGE:</b> 8PSK <b>WCDMA:</b> QPSK <b>LTE Band 2:</b> QPSK, 16QAM, 64QAM	
<b>FREQUENCY RANGE</b>	<b>GSM/GPRS, EDGE</b>	1850.2MHz ~ 1909.8MHz
	<b>WCDMA</b>	1852.4MHz ~ 1907.6MHz
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	1850.7MHz ~ 1909.3MHz
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	1851.5MHz ~ 1908.5MHz
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	1852.5MHz ~ 1907.5MHz
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	1855.0MHz ~ 1905.0MHz
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	1857.5MHz ~ 1902.5MHz
	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	1860.0MHz ~ 1900.0MHz
	<b>MAX. EIRP POWER</b>	<b>GSM/GPRS</b>
<b>EDGE</b>		292.42mW
<b>WCDMA</b>		169.04mW
<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>		154.88mW
<b>LTE Band 2 Channel Bandwidth: 3MHz</b>		155.24mW
<b>LTE Band 2 Channel Bandwidth: 5MHz</b>		154.17mW
<b>LTE Band 2 Channel Bandwidth: 10MHz</b>		154.17mW
<b>LTE Band 2 Channel Bandwidth: 15MHz</b>		155.96mW



	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	157.04mW	
<b>EMISSION DESIGNATOR</b>	<b>GSM/GPRS</b>	248KGXW	
	<b>EDGE</b>	246KG7W	
	<b>WCDMA</b>	4M17F9W	
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	QPSK: 1M12G7D	
		16QAM: 1M12W7D	
		64QAM: 1M12W7D	
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	QPSK: 2M73G7D	
		16QAM: 2M74W7D	
		64QAM: 2M74W7D	
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	QPSK: 4M56G7D	
		16QAM: 4M56W7D	
		64QAM: 4M56W7D	
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	QPSK: 9M06G7D	
16QAM: 9M06W7D			
64QAM: 9M05W7D			
<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	QPSK: 13M6G7D		
	16QAM: 13M6W7D		
	64QAM: 13M6W7D		
<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	QPSK: 18M1G7D		
	16QAM: 18M1W7D		
	64QAM: 18M1W7D		
<b>ANTENNA TYPE</b>	Ant0:PIFA Antenna with -2.4dBi gain for GSM1900/ WCDMA II/LTE B2 Ant1:Fixed Internal Antenna with -0.9dBi gain for WCDMA II/LTE B2		
<b>HW VERSION</b>	P1.1		
<b>SW VERSION</b>	MIUI12.5		
<b>IMEI</b>	868909050050825		
<b>I/O PORTS</b>	Refer to user's manual		
<b>CABLE SUPPLIED</b>	USB1 cable: unshielded without ferrite, 1.0meter USB2 cable: unshielded without ferrite, 1.0meter		
<b>EXTREME TEMPERATURE</b>	0-40 °C		
<b>EXTREME VOLTAGE</b>	EUT 3.6V - EUT 4.2V		

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.


<b>MODULATION MODE</b>	<b>TX FUNCTION</b>
<b>GSM/GPRS/EDGE</b>	1TX/1RX
<b>WCDMA</b>	1TX/1RX
<b>LTE</b>	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

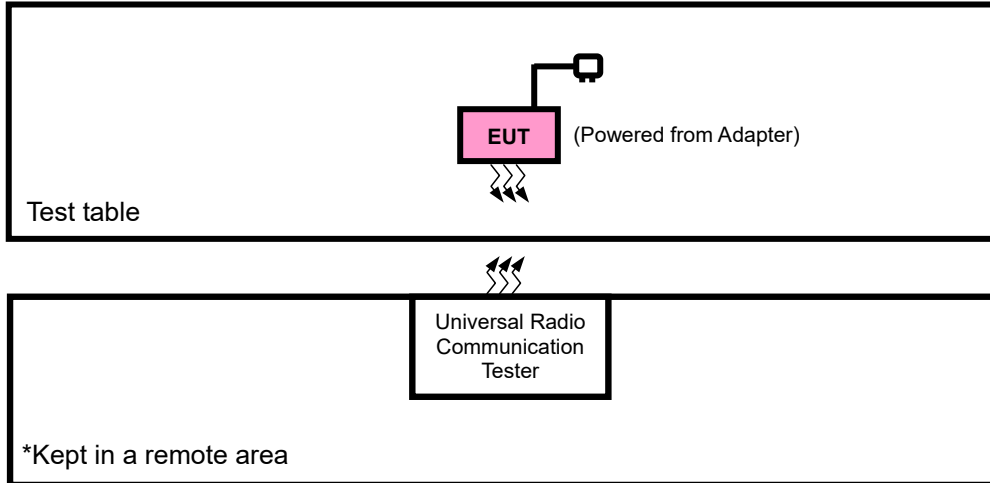



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	1.1.1.1.1.2DESCRIPTION
A	EUT + Adapter with GSM or WCDMA or LTE link

#### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	512 to 810	512, 661, 810	GSM, EDGE
A	FREQUENCY STABILITY	512 to 810	512, 661, 810	GSM, EDGE
A	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
A	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM, EDGE
A	BAND EDGE	512 to 810	512, 810	GSM, EDGE
A	CONDCUDETED EMISSION	512 to 810	512, 661, 810	GSM, EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GSM, EDGE



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**WCDMA**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
A	FREQUENCY STABILITY	9262 to 9538	9262, 9538	WCDMA
A	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
A	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
A	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
A	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

**LTE BAND 2 MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
A	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

A	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK, 16QAM, 64QAM	1 RB / 5 RB Offset		
			19185	3MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
			19175	5MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK, 16QAM, 64QAM	1 RB / 14 RB Offset		
			19150	10MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
			19125	15MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset		
			19100	20MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		A	CONDCUDETED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
				18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
				18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18607, 18900, 19193	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		





**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 5V/9V/11V/12V/20V By Adapter	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 5V/9V/11V/12V/20V By Adapter	James Fu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC 5V/9V/11V/12V/20V By Adapter	James Fu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 5V/9V/11V/12V/20V By Adapter	James Fu
BAND EDGE	23deg. C, 61%RH	DC 5V/9V/11V/12V/20V By Adapter	James Fu
CONDCUDED EMISSION	23deg. C, 61%RH	DC 5V/9V/11V/12V/20V By Adapter	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC 3.87 By Battery	Jace Hu

**2.5 EUT OPERATING CONDITIONS**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 3 TEST TYPES AND RESULTS

### 3.1 OUTPUT POWER MEASUREMENT

#### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

#### 3.1.2 TEST PROCEDURES

##### **EIRP MEASUREMENT:**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_{\text{T}}$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_{\text{C}}$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

##### **CONDUCTED POWER MEASUREMENT:**


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



### 3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Ant0:

Band	GSM1900			Max. Tune-up Power
	512	661	810	
Channel	512	661	810	
Frequency	1850.2	1880	1909.8	
GSM (GMSK, 1Tx-slot)	29.12	29.01	28.93	30.50
GPRS (GMSK, 1Tx-slot)	29.10	28.98	28.89	30.50
GPRS (GMSK, 2Tx-slot)	26.43	26.29	26.40	28.00
GPRS (GMSK, 3Tx-slot)	24.88	24.73	24.89	26.50
GPRS (GMSK, 4Tx-slot)	23.23	23.13	23.30	25.00
EDGE (8PSK, 1Tx-slot)	25.43	25.15	25.37	27.00
EDGE (8PSK, 2Tx-slot)	22.72	22.68	23.04	24.50
EDGE (8PSK, 3Tx-slot)	21.19	21.13	21.28	23.00
EDGE (8PSK, 4Tx-slot)	20.04	19.90	20.05	21.50

Band	WCDMA II			Max. Tune-up Power
	9262	9400	9538	
Channel	9262	9400	9538	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	24.15	24.31	24.39	25.50
HSDPA Subtest-1	23.32	23.43	23.45	24.50
HSDPA Subtest-2	23.30	23.40	23.42	24.50
HSDPA Subtest-3	22.81	22.85	22.91	24.50
HSDPA Subtest-4	22.78	22.82	22.00	24.50
DC-HSDPA Subtest-1	23.28	23.33	23.40	25.00
DC-HSDPA Subtest-2	23.25	23.31	23.38	25.00
DC-HSDPA Subtest-3	22.79	22.85	22.88	24.50
DC-HSDPA Subtest-4	22.76	22.82	22.81	24.50
HSUPA Subtest-1	21.53	21.66	21.65	23.00
HSUPA Subtest-2	21.81	21.85	21.88	23.00
HSUPA Subtest-3	22.16	22.27	22.31	24.00
HSUPA Subtest-4	21.35	21.38	21.39	22.50
HSUPA Subtest-5	22.55	22.60	22.58	24.00



**LTE BAND 2**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	23.74	23.94	23.84	0
		1	2	23.87	24.04	24.00	0
		1	5	23.83	23.98	23.92	0
		3	0	23.81	23.99	24.04	0
		3	1	23.93	24.10	23.96	0
		3	3	23.79	23.96	23.98	0
		6	0	22.87	22.98	22.98	1
	16QAM	1	0	23.06	23.25	23.17	1
		1	2	23.17	23.29	23.33	1
		1	5	22.98	23.18	23.19	1
		3	0	22.92	23.04	23.06	1
		3	1	22.87	23.17	23.07	1
		3	3	22.94	23.09	23.12	1
		6	0	21.89	22.08	21.97	2
	64QAM	1	0	22.00	22.24	22.21	2
		1	2	22.10	22.30	22.24	2
		1	5	22.04	22.15	22.22	2
		3	0	21.91	22.11	21.98	2
		3	1	21.93	22.15	22.08	2
		3	3	21.95	22.12	22.11	2
		6	0	20.92	21.04	21.06	3



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/3	QPSK	1	0	23.76	23.96	23.83	0
		1	7	23.83	24.05	24.00	0
		1	14	23.79	23.98	23.92	0
		8	0	22.80	23.02	23.04	1
		8	3	22.86	23.10	22.98	1
		8	7	22.76	23.03	23.02	1
		15	0	22.84	22.99	22.92	1
	16QAM	1	0	23.03	23.31	23.20	1
		1	7	23.14	23.32	23.31	1
		1	14	23.01	23.18	23.19	1
		8	0	21.88	22.05	22.06	2
		8	3	21.92	22.12	22.10	2
		8	7	21.96	22.07	22.08	2
		15	0	21.89	22.02	22.00	2
	64QAM	1	0	22.06	22.27	22.15	2
		1	7	22.13	22.24	22.23	2
		1	14	22.05	22.17	22.22	2
		8	0	20.94	21.15	20.99	3
		8	3	20.97	21.09	21.13	3
		8	7	20.92	21.16	21.07	3
		15	0	20.94	21.01	21.10	3



Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2 / 5	QPSK	1	0	23.77	23.91	23.84	0
		1	12	23.88	24.02	24.00	0
		1	24	23.80	23.97	23.96	0
		12	0	22.83	23.02	23.01	1
		12	6	22.86	23.11	22.99	1
		12	13	22.80	22.99	23.03	1
		25	0	22.82	23.02	22.95	1
	16QAM	1	0	23.04	23.27	23.20	1
		1	12	23.11	23.35	23.30	1
		1	24	23.01	23.18	23.18	1
		12	0	21.88	22.03	22.03	2
		12	6	21.89	22.16	22.06	2
		12	13	21.91	22.09	22.11	2
		25	0	21.89	22.03	21.97	2
	64QAM	1	0	22.00	22.24	22.21	2
		1	12	22.10	22.30	22.23	2
		1	24	21.98	22.22	22.22	2
		12	0	20.95	21.12	20.98	3
		12	6	20.91	21.16	21.12	3
		12	13	20.96	21.15	21.04	3
		25	0	20.90	21.07	21.08	3



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2 / 10	QPSK	1	0	23.74	23.94	23.84	0
		1	24	23.88	24.02	24.01	0
		1	49	23.77	24.01	23.92	0
		25	0	22.84	23.01	23.04	1
		25	12	22.92	23.05	22.99	1
		25	25	22.78	22.96	23.02	1
		50	0	22.87	23.02	22.92	1
	16QAM	1	0	23.04	23.24	23.16	1
		1	24	23.16	23.31	23.33	1
		1	49	23.01	23.19	23.15	1
		25	0	21.90	22.01	22.09	2
		25	12	21.93	22.10	22.11	2
		25	25	21.90	22.10	22.08	2
		50	0	21.93	22.02	22.01	2
	64QAM	1	0	21.99	22.25	22.18	2
		1	24	22.15	22.26	22.27	2
		1	49	22.04	22.16	22.19	2
		25	0	20.93	21.09	21.04	3
		25	12	20.98	21.15	21.06	3
		25	25	20.95	21.12	21.06	3
		50	0	20.95	21.03	21.09	3



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	23.81	23.94	23.81	0
		1	37	23.86	24.07	23.96	0
		1	74	23.83	24.04	23.93	0
		36	0	22.81	23.02	23.05	1
		36	19	22.93	23.10	22.99	1
		36	39	22.76	22.97	23.02	1
		75	0	22.87	23.00	22.97	1
	16QAM	1	0	23.08	23.31	23.16	1
		1	37	23.15	23.32	23.33	1
		1	74	22.97	23.24	23.17	1
		36	0	21.94	22.01	22.10	2
		36	19	21.87	22.14	22.07	2
		36	39	21.95	22.08	22.11	2
		75	0	21.94	22.05	21.94	2
	64QAM	1	0	22.01	22.26	22.19	2
		1	37	22.16	22.25	22.24	2
		1	74	22.00	22.15	22.22	2
		36	0	20.98	21.15	20.98	3
		36	19	20.92	21.09	21.08	3
		36	39	20.98	21.19	21.08	3
		75	0	20.94	21.01	21.10	3





Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	23.82	23.98	23.89	0
		1	50	23.90	24.10	24.02	0
		1	99	23.85	24.05	23.97	0
		50	0	22.87	23.07	23.06	1
		50	25	22.94	23.12	23.04	1
		50	50	22.84	23.04	23.04	1
		100	0	22.88	23.04	23.00	1
	16QAM	1	0	23.11	23.32	23.22	1
		1	50	23.19	23.37	23.35	1
		1	99	23.03	23.26	23.20	1
		50	0	21.96	22.09	22.11	2
		50	25	21.95	22.18	22.12	2
		50	50	21.98	22.14	22.13	2
		100	0	21.95	22.10	22.02	2
	64QAM	1	0	22.07	22.29	22.23	2
		1	50	22.18	22.32	22.29	2
		1	99	22.06	22.23	22.24	2
		50	0	20.99	21.17	21.06	3
		50	25	20.99	21.17	21.14	3
		50	50	21.00	21.20	21.12	3
		100	0	20.96	21.09	21.11	3



**Ant1:**

Band	GSM1900			Max. Tune-up Power
	Channel	512	661	
Frequency	1850.2	1880	1909.8	
GSM (GMSK, 1Tx-slot)	28.95	28.78	28.75	30.50
GPRS (GMSK, 1Tx-slot)	28.93	28.75	28.73	30.50
GPRS (GMSK, 2Tx-slot)	26.43	26.34	26.33	28.00
GPRS (GMSK, 3Tx-slot)	24.84	24.82	25.02	26.50
GPRS (GMSK, 4Tx-slot)	23.23	23.26	23.51	25.00
EDGE (8PSK, 1Tx-slot)	25.43	25.33	25.56	27.00
EDGE (8PSK, 2Tx-slot)	23.01	22.94	23.27	24.50
EDGE (8PSK, 3Tx-slot)	21.41	21.35	21.62	23.00
EDGE (8PSK, 4Tx-slot)	20.13	20.15	20.30	21.50

Band	WCDMA II			Max. Tune-up Power
	Channel	9262	9400	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	22.84	22.91	23.18	23.50
HSDPA Subtest-1	21.64	21.70	21.83	23.50
HSDPA Subtest-2	21.61	21.74	21.72	23.50
HSDPA Subtest-3	21.10	21.12	21.27	23.50
HSDPA Subtest-4	21.11	21.07	20.29	23.50
DC-HSDPA Subtest-1	21.59	21.59	21.76	23.50
DC-HSDPA Subtest-2	21.62	21.62	21.65	23.50
DC-HSDPA Subtest-3	21.08	21.09	21.20	23.50
DC-HSDPA Subtest-4	21.14	21.14	21.11	23.50
HSUPA Subtest-1	19.81	19.96	19.92	23.50
HSUPA Subtest-2	20.16	20.11	20.25	23.50
HSUPA Subtest-3	20.45	20.57	20.64	23.50
HSUPA Subtest-4	19.66	19.65	19.73	23.50
HSUPA Subtest-5	20.83	20.94	20.88	23.50



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

**LTE BAND 2**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.51	22.66	22.53	0
		1	2	22.68	22.80	22.73	0
		1	5	22.56	22.66	22.57	0
		3	0	22.30	22.43	22.45	0
		3	1	22.46	22.58	22.41	0
		3	3	22.31	22.43	22.42	0
		6	0	22.34	22.40	22.37	1
	16QAM	1	0	22.42	22.56	22.45	1
		1	2	22.64	22.71	22.72	1
		1	5	22.42	22.57	22.55	1
		3	0	22.32	22.39	22.38	1
		3	1	22.30	22.55	22.42	1
		3	3	22.37	22.47	22.47	1
		6	0	22.32	22.46	22.32	2
	64QAM	1	0	22.23	22.42	22.36	2
		1	2	22.39	22.54	22.45	2
		1	5	22.25	22.31	22.35	2
		3	0	21.29	21.44	21.28	2
		3	1	21.33	21.50	21.40	2
		3	3	21.35	21.47	21.43	2
		6	0	21.32	21.39	21.38	3



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2 / 3	QPSK	1	0	22.53	22.68	22.52	0
		1	7	22.64	22.81	22.73	0
		1	14	22.52	22.66	22.57	0
		8	0	22.29	22.46	22.45	1
		8	3	22.39	22.58	22.43	1
		8	7	22.28	22.50	22.46	1
		15	0	22.31	22.41	22.31	1
	16QAM	1	0	22.39	22.62	22.48	1
		1	7	22.61	22.74	22.70	1
		1	14	22.45	22.57	22.55	1
		8	0	22.28	22.40	22.38	2
		8	3	22.35	22.50	22.45	2
		8	7	22.39	22.45	22.43	2
		15	0	22.32	22.40	22.35	2
	64QAM	1	0	22.29	22.45	22.30	2
		1	7	22.42	22.48	22.44	2
		1	14	22.26	22.33	22.35	2
		8	0	21.32	21.48	21.29	3
		8	3	21.37	21.44	21.45	3
		8	7	21.32	21.51	21.39	3
		15	0	21.34	21.36	21.42	3



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2 / 5	QPSK	1	0	22.54	22.63	22.53	0
		1	12	22.69	22.78	22.73	0
		1	24	22.53	22.65	22.61	0
		12	0	22.32	22.46	22.42	1
		12	6	22.39	22.59	22.44	1
		12	13	22.32	22.46	22.47	1
		25	0	22.29	22.44	22.34	1
	16QAM	1	0	22.40	22.58	22.48	1
		1	12	22.58	22.77	22.69	1
		1	24	22.45	22.57	22.54	1
		12	0	22.28	22.38	22.35	2
		12	6	22.32	22.54	22.41	2
		12	13	22.34	22.47	22.46	2
		25	0	22.32	22.41	22.32	2
	64QAM	1	0	22.23	22.42	22.36	2
		1	12	22.39	22.54	22.44	2
		1	24	22.19	22.38	22.35	2
		12	0	21.33	21.45	21.28	3
		12	6	21.31	21.51	21.44	3
		12	13	21.36	21.50	21.36	3
		25	0	21.30	21.42	21.40	3



Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.51	22.66	22.53	0
		1	24	22.69	22.78	22.74	0
		1	49	22.50	22.69	22.57	0
		25	0	22.33	22.45	22.45	1
		25	12	22.45	22.53	22.44	1
		25	25	22.30	22.43	22.46	1
		50	0	22.34	22.44	22.31	1
	16QAM	1	0	22.40	22.55	22.44	1
		1	24	22.63	22.73	22.72	1
		1	49	22.45	22.58	22.51	1
		25	0	22.30	22.36	22.41	2
		25	12	22.36	22.48	22.46	2
		25	25	22.33	22.48	22.43	2
		50	0	22.36	22.40	22.36	2
	64QAM	1	0	22.22	22.43	22.33	2
		1	24	22.44	22.50	22.48	2
		1	49	22.25	22.32	22.32	2
		25	0	21.31	21.42	21.34	3
		25	12	21.38	21.50	21.38	3
		25	25	21.35	21.47	21.38	3
		50	0	21.35	21.38	21.41	3



Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.58	22.66	22.50	0
		1	37	22.67	22.83	22.69	0
		1	74	22.56	22.72	22.58	0
		36	0	22.30	22.46	22.46	1
		36	19	22.46	22.58	22.44	1
		36	39	22.28	22.44	22.46	1
		75	0	22.34	22.42	22.36	1
	16QAM	1	0	22.44	22.62	22.44	1
		1	37	22.62	22.74	22.72	1
		1	74	22.41	22.63	22.53	1
		36	0	22.34	22.36	22.42	2
		36	19	22.30	22.52	22.42	2
		36	39	22.38	22.46	22.46	2
		75	0	22.37	22.43	22.29	2
	64QAM	1	0	22.24	22.44	22.34	2
		1	37	22.45	22.49	22.45	2
		1	74	22.21	22.31	22.35	2
		36	0	21.36	21.48	21.28	3
		36	19	21.32	21.44	21.40	3
		36	39	21.38	21.54	21.40	3
		75	0	21.34	21.36	21.42	3



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	22.59	22.70	22.58	0
		1	50	22.71	22.86	22.75	0
		1	99	22.58	22.73	22.62	0
		50	0	22.36	22.51	22.47	1
		50	25	22.47	22.60	22.49	1
		50	50	22.36	22.51	22.48	1
		100	0	22.35	22.46	22.39	1
	16QAM	1	0	22.47	22.63	22.50	1
		1	50	22.66	22.79	22.74	1
		1	99	22.47	22.65	22.56	1
		50	0	22.36	22.44	22.43	2
		50	25	22.38	22.56	22.47	2
		50	50	22.41	22.52	22.48	2
		100	0	22.38	22.48	22.37	2
	64QAM	1	0	22.30	22.47	22.38	2
		1	50	22.47	22.56	22.50	2
		1	99	22.27	22.39	22.37	2
		50	0	21.37	21.50	21.36	3
		50	25	21.39	21.52	21.46	3
		50	50	21.40	21.55	21.44	3
		100	0	21.36	21.44	21.43	3





**EIRP POWER (dBm)**

**Ant0:**

**GSM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.12	-2.4	26.72	469.89	2
661	1880.0	29.01	-2.4	26.61	458.14	2
810	1909.8	28.93	-2.4	26.53	449.78	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**EDGE**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	25.43	-2.4	23.03	200.91	2
661	1880.0	25.15	-2.4	22.75	188.36	2
810	1909.8	25.37	-2.4	22.97	198.15	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**WCDMA**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	24.15	-2.4	21.75	149.62	2
9400	1880	24.31	-2.4	21.91	155.24	2
9538	1907.6	24.39	-2.4	21.99	158.12	2



**LTE BAND 2**

**CHANNEL BANDWIDTH: 1.4MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.93	-2.4	21.53	142.23	2
18900	1880.0	24.1	-2.4	21.7	147.91	2
19193	1909.3	24.04	-2.4	21.64	145.88	2

**CHANNEL BANDWIDTH: 1.4MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.17	-2.4	20.77	119.4	2
18900	1880.0	23.29	-2.4	20.89	122.74	2
19193	1909.3	23.33	-2.4	20.93	123.88	2

**CHANNEL BANDWIDTH: 1.4MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.1	-2.4	19.7	93.33	2
18900	1880.0	22.3	-2.4	19.9	97.72	2
19193	1909.3	22.24	-2.4	19.84	96.38	2



**CHANNEL BANDWIDTH: 3MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.83	-2.4	21.43	139	2
18900	1880.0	24.05	-2.4	21.65	146.22	2
19185	1908.5	24	-2.4	21.6	144.54	2

**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.14	-2.4	20.74	118.58	2
18900	1880.0	23.32	-2.4	20.92	123.59	2
19185	1908.5	23.31	-2.4	20.91	123.31	2

**CHANNEL BANDWIDTH: 3MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.13	-2.4	19.73	93.97	2
18900	1880.0	22.27	-2.4	19.87	97.05	2
19185	1908.5	22.23	-2.4	19.83	96.16	2



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P21100026RF14

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.88	-2.4	21.48	140.6	2
18900	1880.0	24.02	-2.4	21.62	145.21	2
19175	1907.5	24	-2.4	21.6	144.54	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.11	-2.4	20.71	117.76	2
18900	1880.0	23.35	-2.4	20.95	124.45	2
19175	1907.5	23.3	-2.4	20.9	123.03	2

**CHANNEL BANDWIDTH: 5MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.1	-2.4	19.7	93.33	2
18900	1880.0	22.3	-2.4	19.9	97.72	2
19175	1907.5	22.23	-2.4	19.83	96.16	2



**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.88	-2.4	21.48	140.6	2
18900	1880.0	24.02	-2.4	21.62	145.21	2
19150	1905.0	24.01	-2.4	21.61	144.88	2

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.16	-2.4	20.76	119.12	2
18900	1880.0	23.31	-2.4	20.91	123.31	2
19150	1905.0	23.33	-2.4	20.93	123.88	2

**CHANNEL BANDWIDTH: 10MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.15	-2.4	19.75	94.41	2
18900	1880.0	22.26	-2.4	19.86	96.83	2
19150	1905.0	22.27	-2.4	19.87	97.05	2



**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.86	-2.4	21.46	139.96	2
18900	1880.0	24.07	-2.4	21.67	146.89	2
19125	1902.5	23.96	-2.4	21.56	143.22	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.15	-2.4	20.75	118.85	2
18900	1880.0	23.32	-2.4	20.92	123.59	2
19125	1902.5	23.33	-2.4	20.93	123.88	2

**CHANNEL BANDWIDTH: 15MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.16	-2.4	19.76	94.62	2
18900	1880.0	22.26	-2.4	19.86	96.83	2
19125	1902.5	22.24	-2.4	19.84	96.38	2



**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.9	-2.4	21.5	141.25	2
18900	1880	24.1	-2.4	21.7	147.91	2
19100	1900	24.02	-2.4	21.62	145.21	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.19	-2.4	20.79	119.95	2
18900	1880	23.37	-2.4	20.97	125.03	2
19100	1900	23.35	-2.4	20.95	124.45	2

**CHANNEL BANDWIDTH: 20MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.18	-2.4	19.78	95.06	2
18900	1880	22.32	-2.4	19.92	98.17	2
19100	1900	22.29	-2.4	19.89	97.5	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**Ant1:**

**GSM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	28.95	-0.9	28.05	638.26	2
661	1880.0	28.78	-0.9	27.88	613.76	2
810	1909.8	28.75	-0.9	27.85	609.54	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**EDGE**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	25.43	-0.9	24.53	283.79	2
661	1880.0	25.33	-0.9	24.43	277.33	2
810	1909.8	25.56	-0.9	24.66	292.42	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**WCDMA**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	22.84	-0.9	21.94	156.31	2
9400	1880	22.91	-0.9	22.01	158.85	2
9538	1907.6	23.18	-0.9	22.28	169.04	2





**LTE BAND 2**

**CHANNEL BANDWIDTH: 1.4MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.68	-0.9	21.78	150.66	2
18900	1880.0	22.8	-0.9	21.9	154.88	2
19193	1909.3	22.73	-0.9	21.83	152.41	2

**CHANNEL BANDWIDTH: 1.4MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.64	-0.9	21.74	149.28	2
18900	1880.0	22.71	-0.9	21.81	151.71	2
19193	1909.3	22.72	-0.9	21.82	152.05	2

**CHANNEL BANDWIDTH: 1.4MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.39	-0.9	21.49	140.93	2
18900	1880.0	22.54	-0.9	21.64	145.88	2
19193	1909.3	22.45	-0.9	21.55	142.89	2



**CHANNEL BANDWIDTH: 3MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.64	-0.9	21.74	149.28	2
18900	1880.0	22.81	-0.9	21.91	155.24	2
19185	1908.5	22.73	-0.9	21.83	152.41	2

**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.61	-0.9	21.71	148.25	2
18900	1880.0	22.74	-0.9	21.84	152.76	2
19185	1908.5	22.7	-0.9	21.8	151.36	2

**CHANNEL BANDWIDTH: 3MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.42	-0.9	21.52	141.91	2
18900	1880.0	22.48	-0.9	21.58	143.88	2
19185	1908.5	22.44	-0.9	21.54	142.56	2



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P21100026RF14

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.69	-0.9	21.79	151.01	2
18900	1880.0	22.78	-0.9	21.88	154.17	2
19175	1907.5	22.73	-0.9	21.83	152.41	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.58	-0.9	21.68	147.23	2
18900	1880.0	22.77	-0.9	21.87	153.82	2
19175	1907.5	22.69	-0.9	21.79	151.01	2

**CHANNEL BANDWIDTH: 5MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.39	-0.9	21.49	140.93	2
18900	1880.0	22.54	-0.9	21.64	145.88	2
19175	1907.5	22.44	-0.9	21.54	142.56	2



**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.69	-0.9	21.79	151.01	2
18900	1880.0	22.78	-0.9	21.88	154.17	2
19150	1905.0	22.74	-0.9	21.84	152.76	2

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.63	-0.9	21.73	148.94	2
18900	1880.0	22.73	-0.9	21.83	152.41	2
19150	1905.0	22.72	-0.9	21.82	152.05	2

**CHANNEL BANDWIDTH: 10MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.44	-0.9	21.54	142.56	2
18900	1880.0	22.5	-0.9	21.6	144.54	2
19150	1905.0	22.48	-0.9	21.58	143.88	2



**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.67	-0.9	21.77	150.31	2
18900	1880.0	22.83	-0.9	21.93	155.96	2
19125	1902.5	22.69	-0.9	21.79	151.01	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.62	-0.9	21.72	148.59	2
18900	1880.0	22.74	-0.9	21.84	152.76	2
19125	1902.5	22.72	-0.9	21.82	152.05	2

**CHANNEL BANDWIDTH: 15MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.45	-0.9	21.55	142.89	2
18900	1880.0	22.49	-0.9	21.59	144.21	2
19125	1902.5	22.45	-0.9	21.55	142.89	2



**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.71	-0.9	21.81	151.71	2
18900	1880	22.86	-0.9	21.96	157.04	2
19100	1900	22.75	-0.9	21.85	153.11	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.66	-0.9	21.76	149.97	2
18900	1880	22.79	-0.9	21.89	154.53	2
19100	1900	22.74	-0.9	21.84	152.76	2

**CHANNEL BANDWIDTH: 20MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.47	-0.9	21.57	143.55	2
18900	1880	22.56	-0.9	21.66	146.55	2
19100	1900	22.5	-0.9	21.6	144.54	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



### 3.2 FREQUENCY STABILITY MEASUREMENT

#### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 3.2.3 TEST SETUP

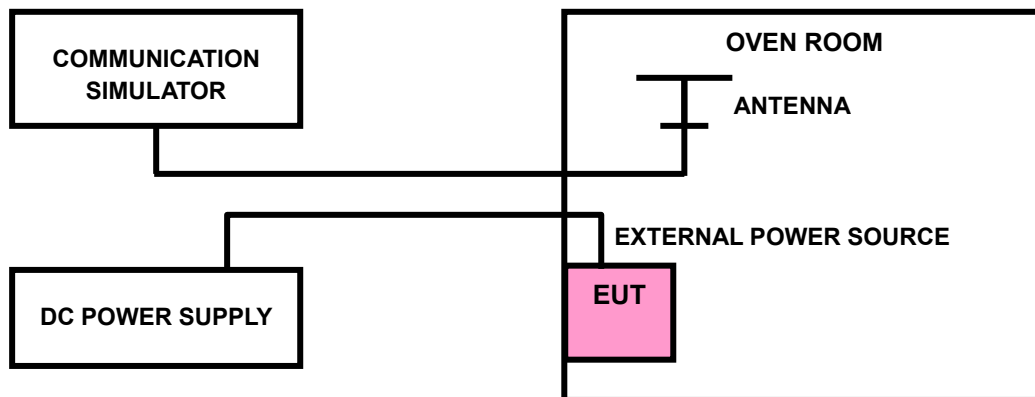



**BUREAU**  
**VERITAS**

**Test Report No.: W7L-P21100026RF14**

### 3.2.4 TEST RESULTS

Please Refer to Appendix C Of this test report.






### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 3.3.2 TEST SETUP

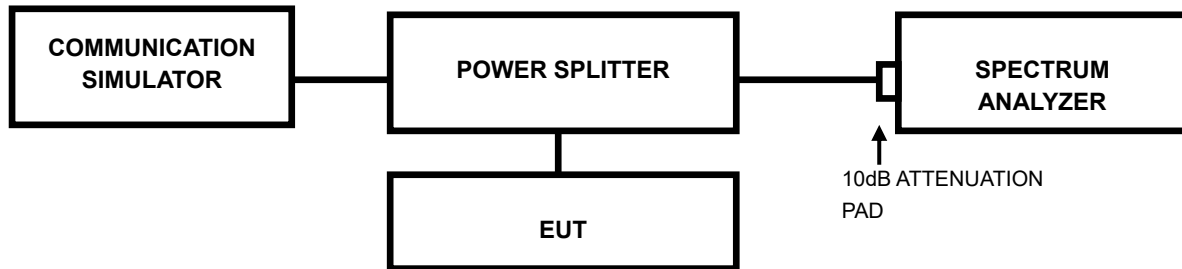



Test Report No.: W7L-P21100026RF14

### 3.3.3 TEST RESULTS

Please Refer to Appendix C Of this test report.




### 3.4 BAND EDGE MEASUREMENTC

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

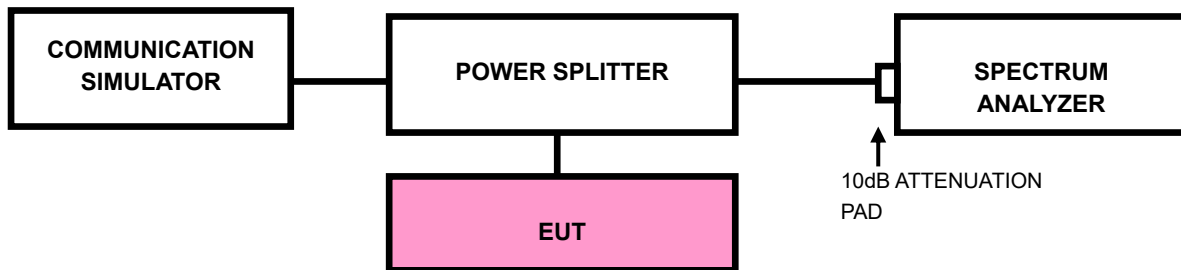

### 3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.



**BUREAU**  
**VERITAS**

**Test Report No.: W7L-P21100026RF14**

### 3.4.4. TEST RESULTS

Please Refer to Appendix C Of this test report.



### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

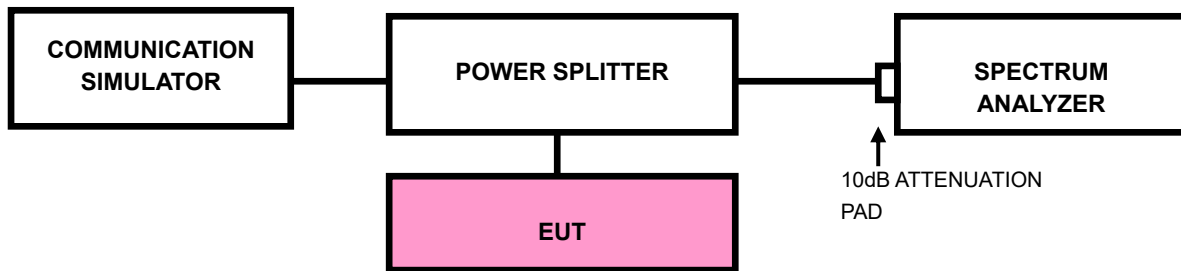



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

### 3.5.4 TEST RESULTS

Please Refer to Appendix C Of this test report.



### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 3.6.3 DEVIATION FROM TEST STANDARD


No deviation






### 3.6.4 TEST SETUP

#### < Frequency Range 30MHz~1GHz >

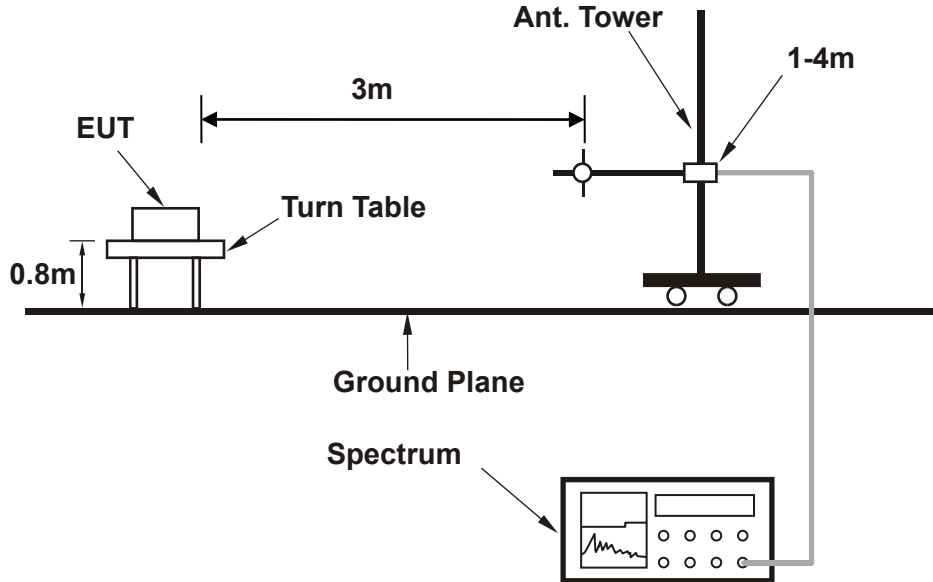

#### < Frequency Range above 1GHz >

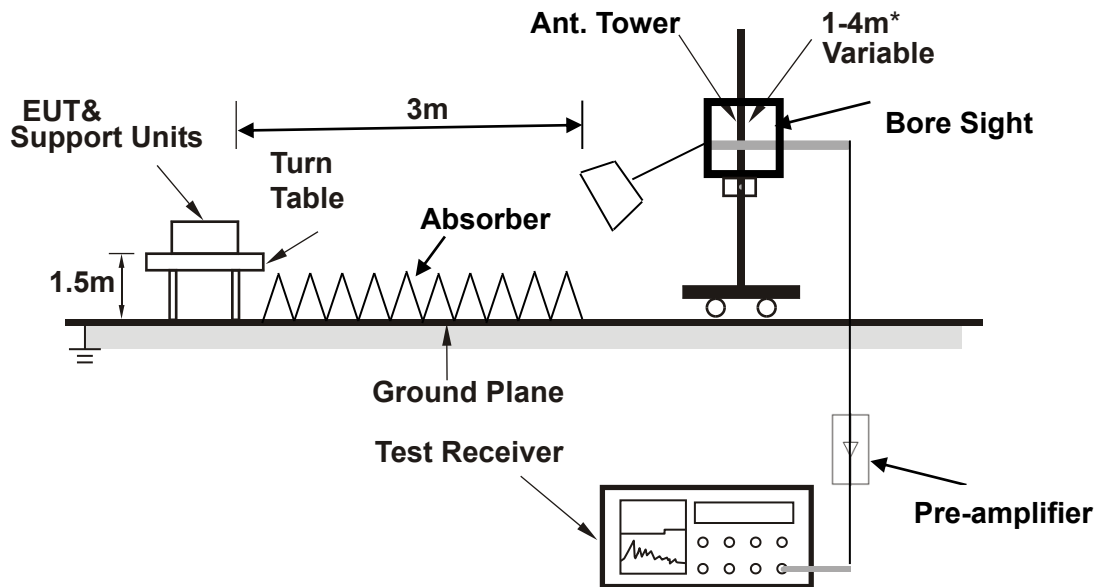

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

### 3.6.5 TEST RESULTS


#### BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

LTE Band 2(Ant0)

CHANNEL BANDWIDTH: 5MHz / QPSK

<b>MODE</b>	TX channel 18625	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

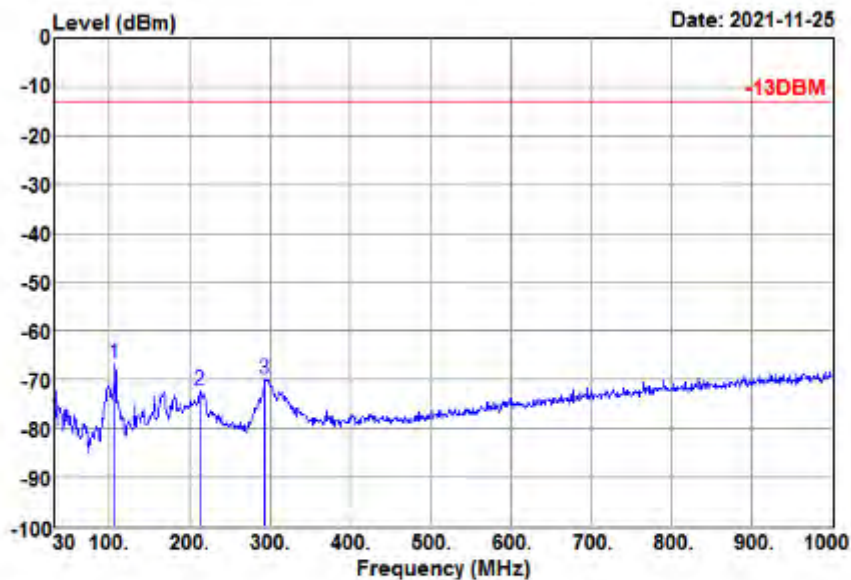


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
107.600	-60.30	-6.33	-66.63	-13.00	-53.63	Peak
213.330	-66.23	-5.95	-72.18	-13.00	-59.18	Peak
293.840	-66.93	-2.91	-69.84	-13.00	-56.84	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18625	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

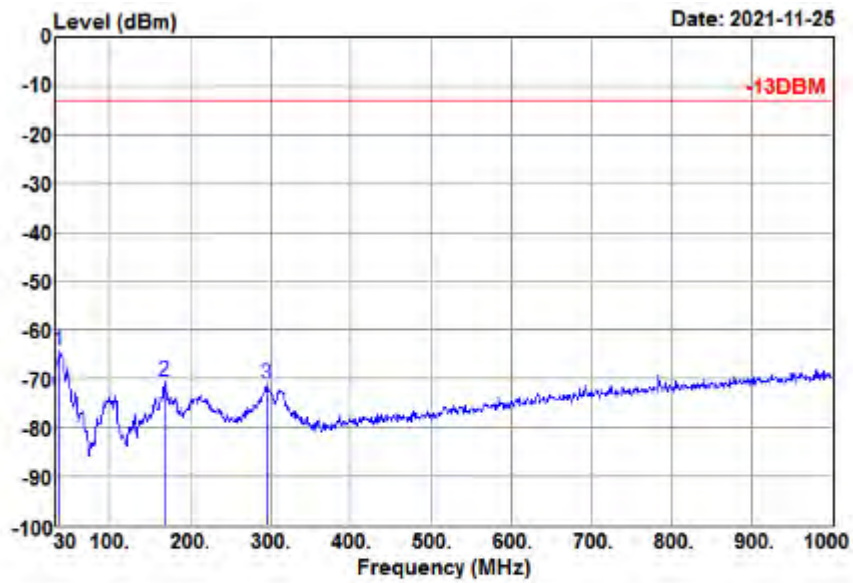

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
37.760	-59.47	-4.78	-64.25	-13.00	-51.25	Peak
168.710	-66.44	-4.00	-70.44	-13.00	-57.44	Peak
294.810	-68.28	-2.87	-71.15	-13.00	-58.15	Peak



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

**ABOVE 1GHz DATA**



**Note:** For higher frequency, the emission is too low to be detected.

**WORST-CASE DATA**

**GSM 1900(Ant1)**

**CH 512**

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

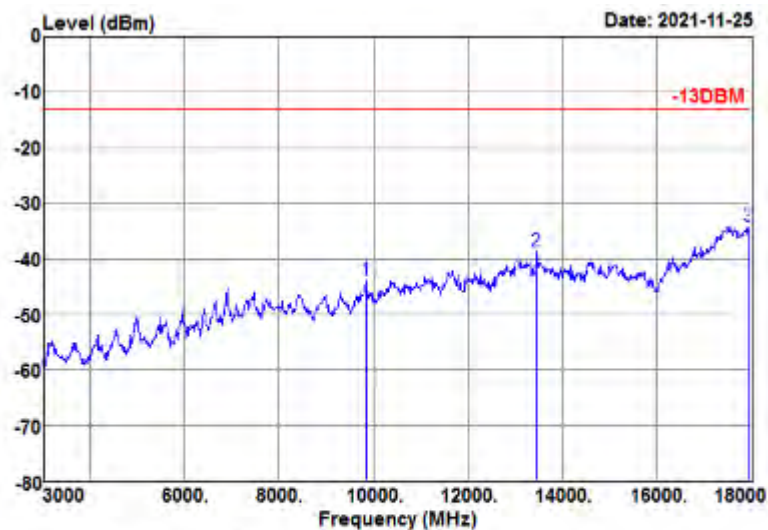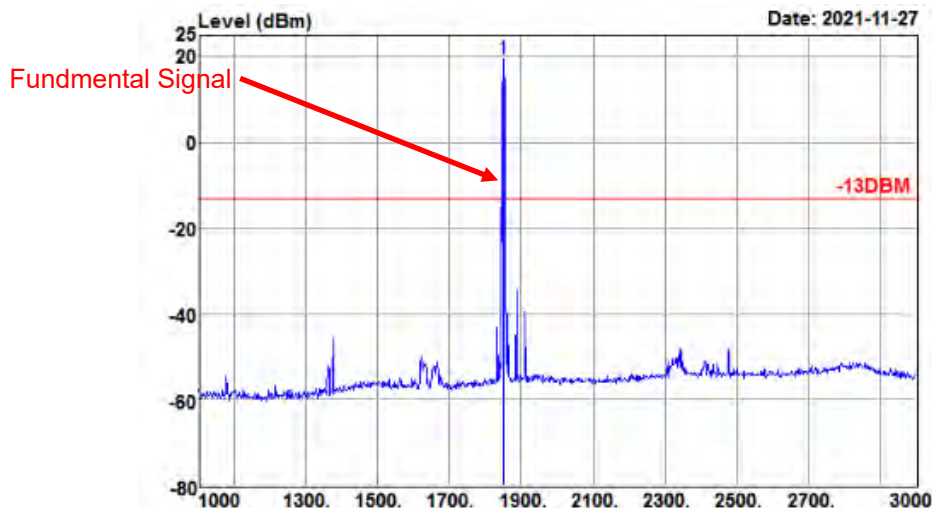



Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
9840.000	-65.03	21.16	-43.87	-13.00	-30.87	Peak
13455.000	-67.29	28.48	-38.81	-13.00	-25.81	Peak
17940.000	-69.37	35.19	-34.18	-13.00	-21.18	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

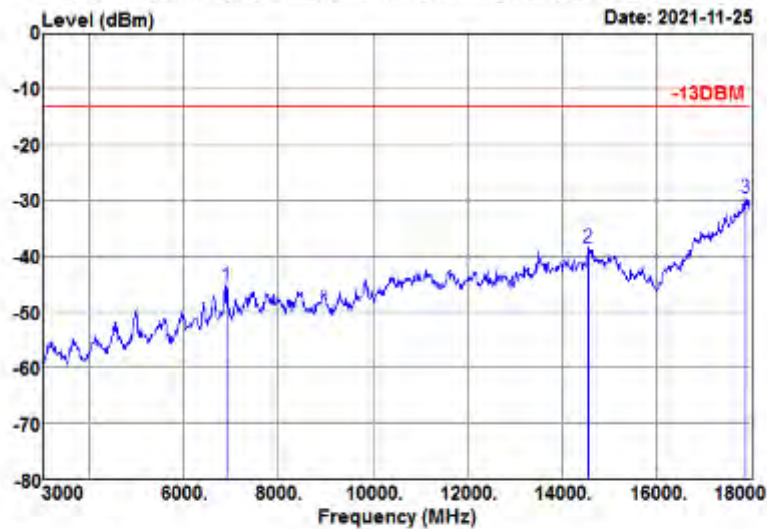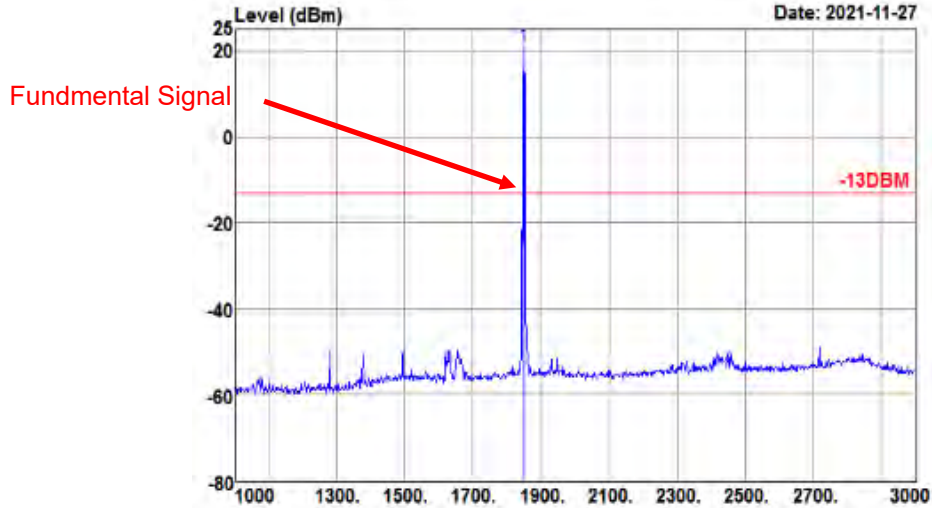

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-63.66	18.41	-45.25	-13.00	-32.25	Peak
14565.000	-66.80	28.24	-38.56	-13.00	-25.56	Peak
17880.000	-68.81	39.43	-29.38	-13.00	-16.38	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CH 661**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

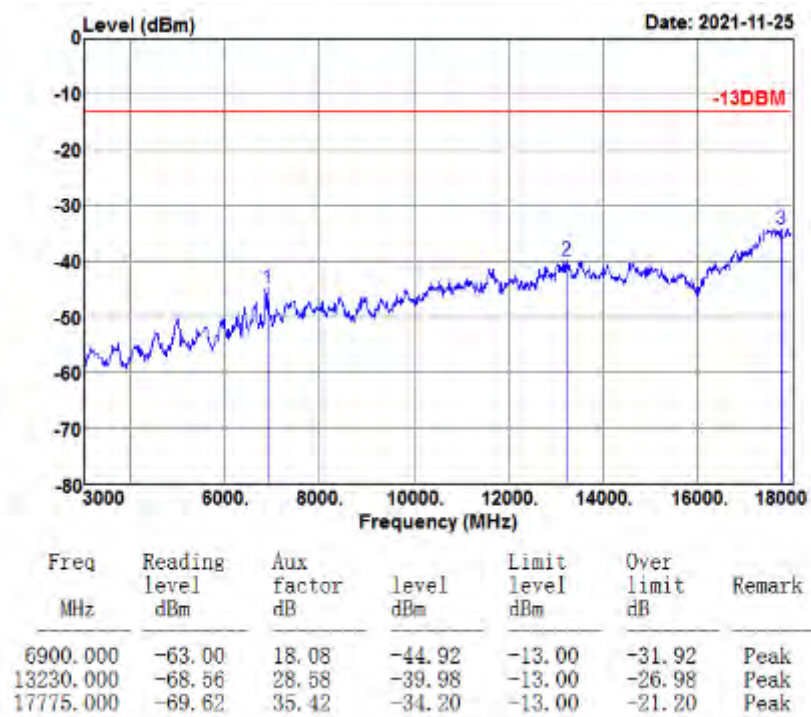






**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

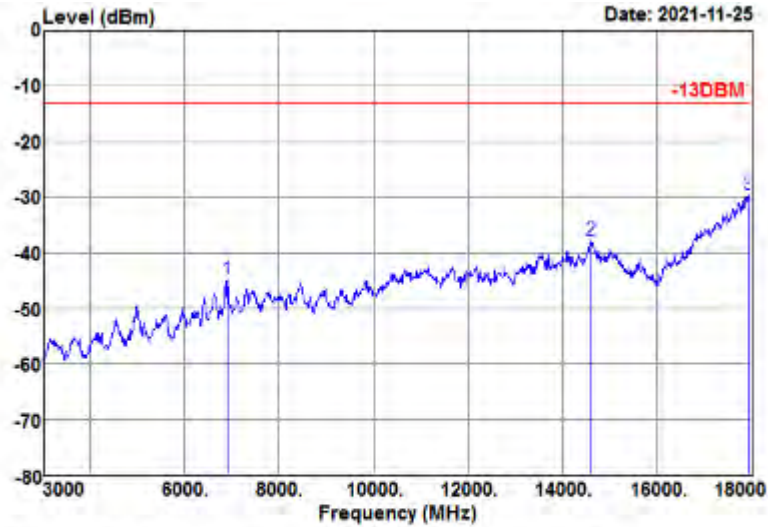

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-63.24	18.41	-44.83	-13.00	-31.83	Peak
14610.000	-66.10	28.30	-37.80	-13.00	-24.80	Peak
17940.000	-69.33	39.91	-29.42	-13.00	-16.42	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CH 810**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

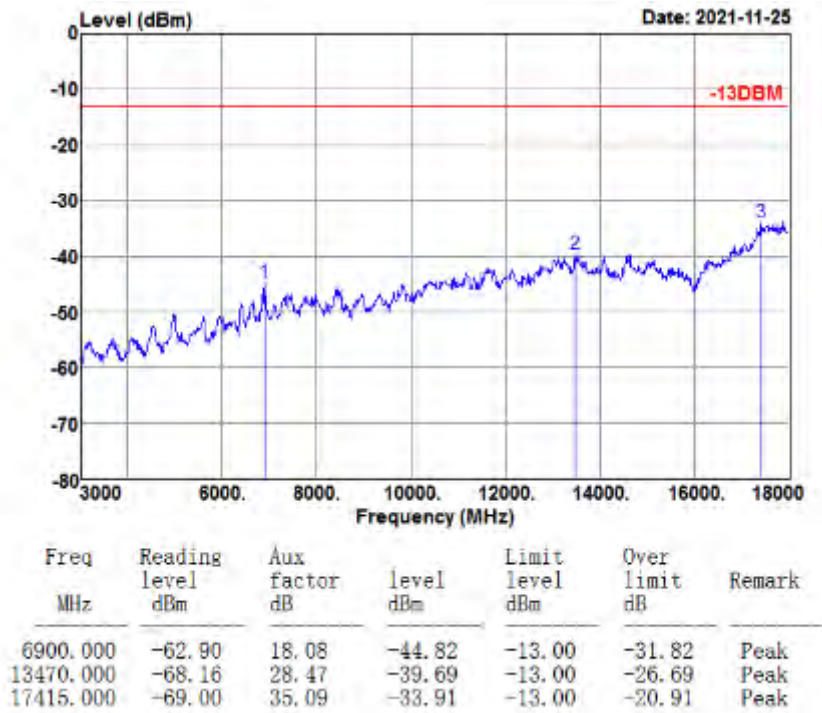






**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

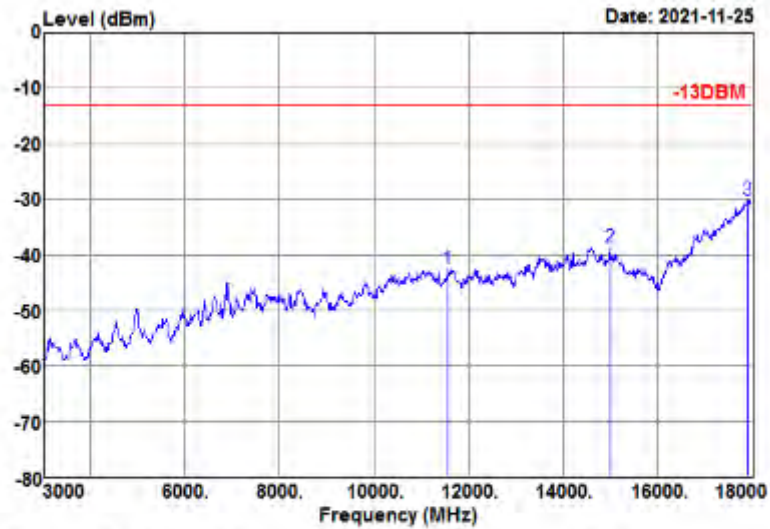

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
11580.000	-68.05	25.57	-42.48	-13.00	-29.48	Peak
15000.000	-67.60	28.81	-38.79	-13.00	-25.79	Peak
17925.000	-69.97	39.79	-30.18	-13.00	-17.18	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

EDGE 1900(Ant1)

CH 512

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

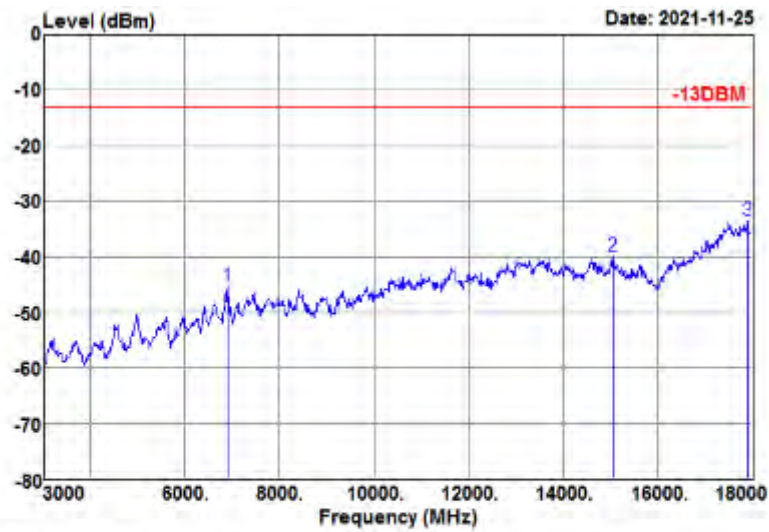


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-63.33	18.08	-45.25	-13.00	-32.25	Peak
15060.000	-67.18	27.37	-39.81	-13.00	-26.81	Peak
17910.000	-68.68	35.23	-33.45	-13.00	-20.45	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

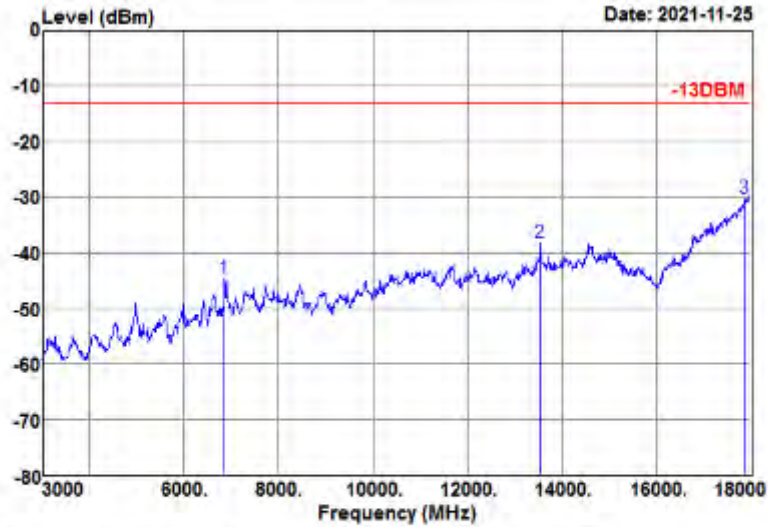

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6855.000	-62.90	18.25	-44.65	-13.00	-31.65	Peak
13545.000	-66.54	28.30	-38.24	-13.00	-25.24	Peak
17865.000	-69.56	39.31	-30.25	-13.00	-17.25	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CH 661**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

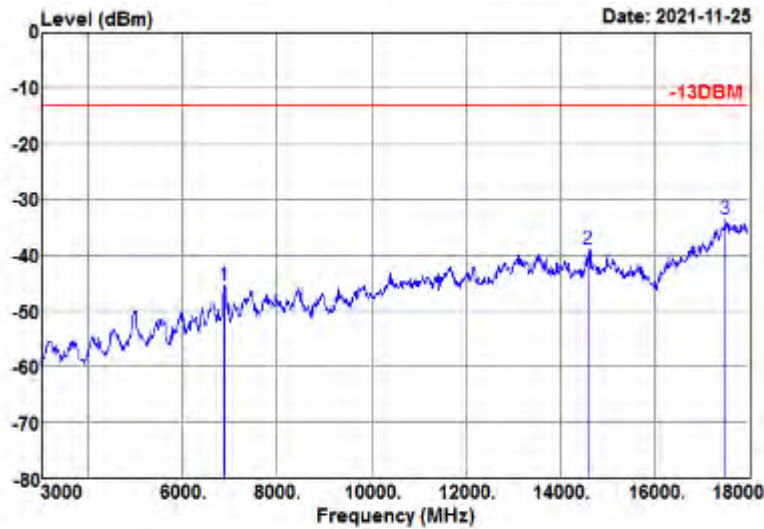


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6885.000	-63.63	18.03	-45.60	-13.00	-32.60	Peak
14595.000	-65.34	26.53	-38.81	-13.00	-25.81	Peak
17505.000	-69.40	35.81	-33.59	-13.00	-20.59	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

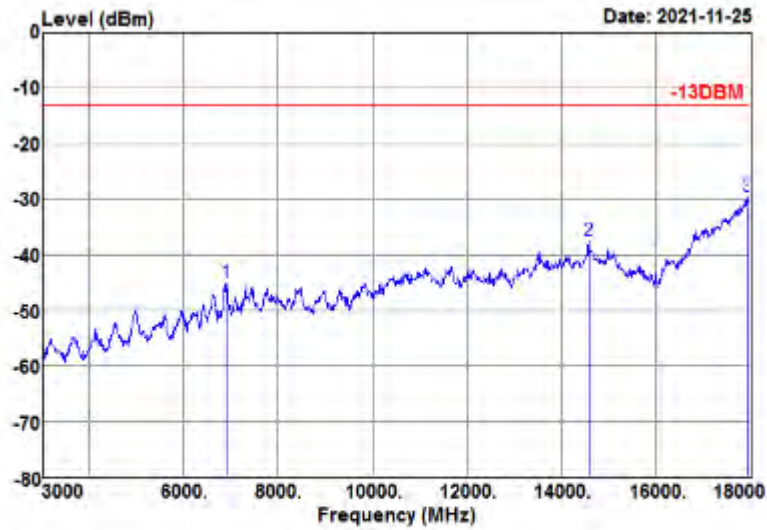

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-63.58	18.41	-45.17	-13.00	-32.17	Peak
14580.000	-65.85	28.26	-37.59	-13.00	-24.59	Peak
17940.000	-69.51	39.91	-29.60	-13.00	-16.60	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CH 810**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

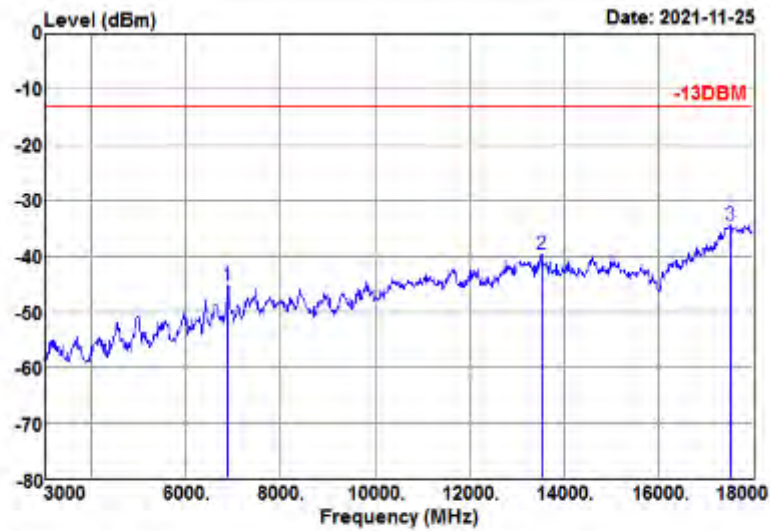


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6885.000	-63.38	18.03	-45.35	-13.00	-32.35	Peak
13530.000	-68.10	28.36	-39.74	-13.00	-26.74	Peak
17535.000	-70.12	35.77	-34.35	-13.00	-21.35	Peak



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

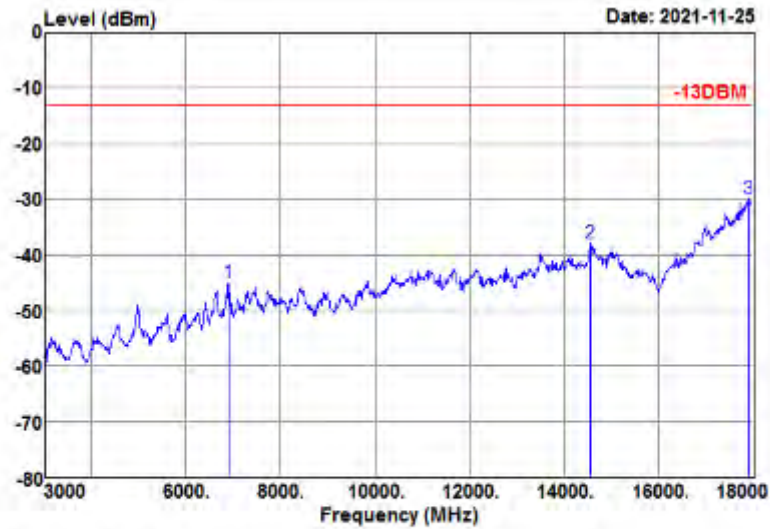

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-63.36	18.41	-44.95	-13.00	-31.95	Peak
14565.000	-66.33	28.24	-38.09	-13.00	-25.09	Peak
17925.000	-69.69	39.79	-29.90	-13.00	-16.90	Peak







**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

WCDMA Band II (Ant0)

CH 9262

<b>MODE</b>	TX channel 9262	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

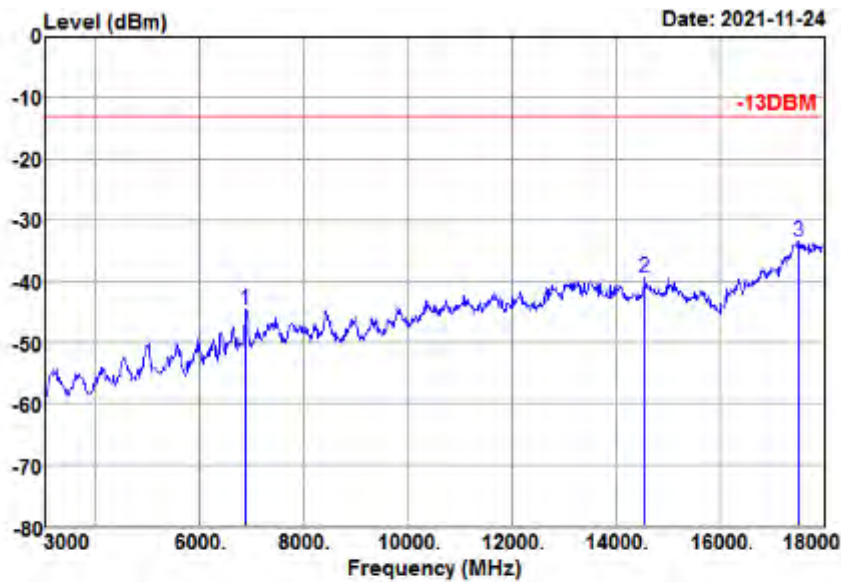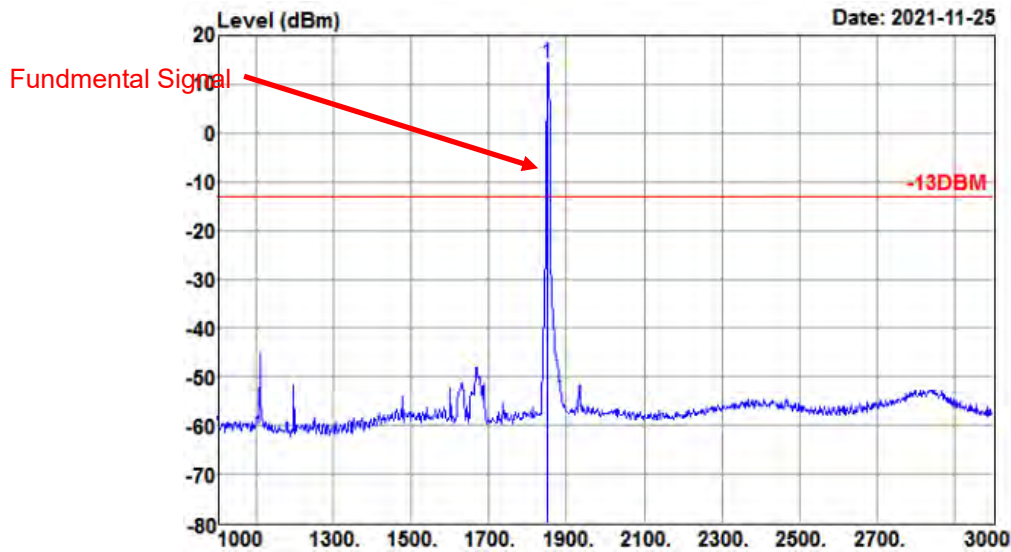

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6885.000	-62.59	18.03	-44.56	-13.00	-31.56	Peak
14565.000	-65.76	26.46	-39.30	-13.00	-26.30	Peak
17535.000	-69.19	35.77	-33.42	-13.00	-20.42	Peak







BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

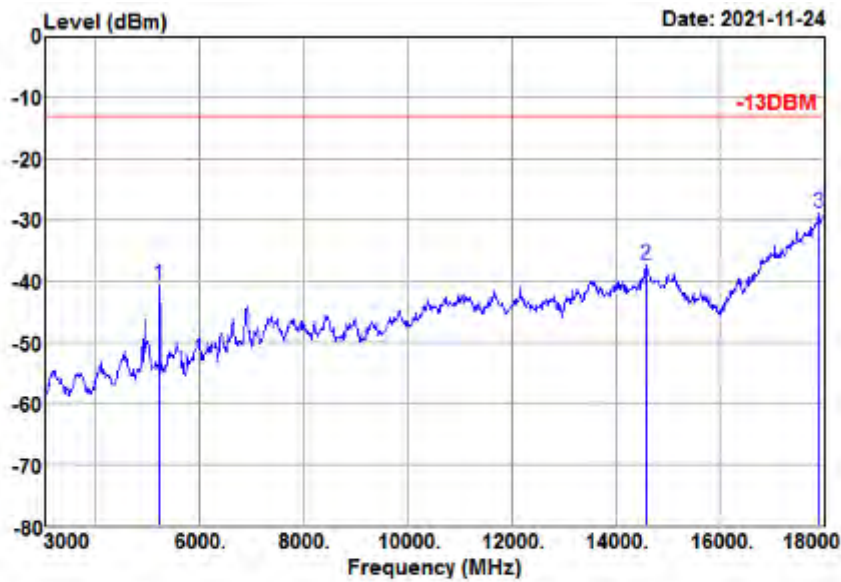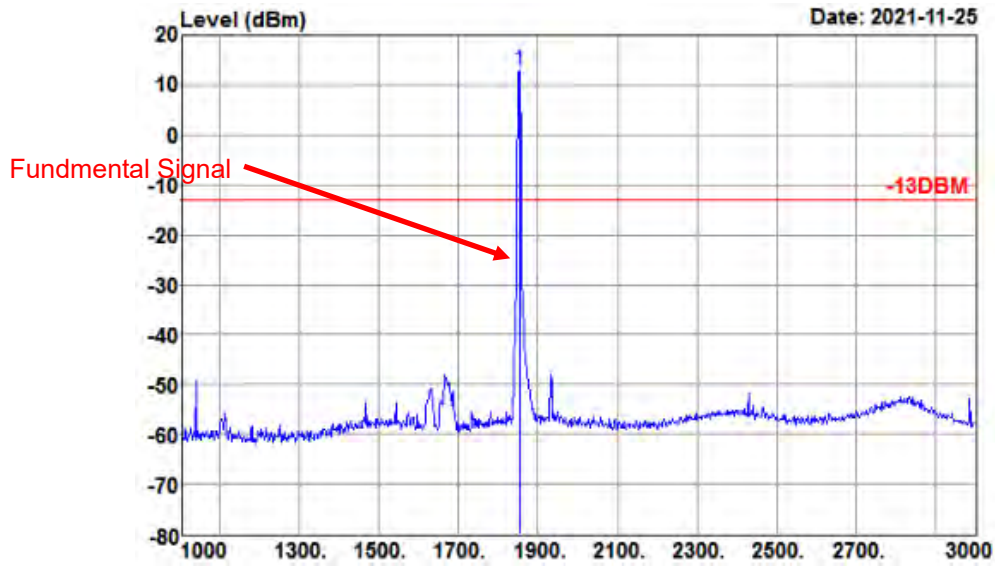

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
5220.000	-53.54	12.87	-40.67	-13.00	-27.67	Peak
14595.000	-65.65	28.28	-37.37	-13.00	-24.37	Peak
17910.000	-68.42	39.67	-28.75	-13.00	-15.75	Peak




**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

**CH 9400**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

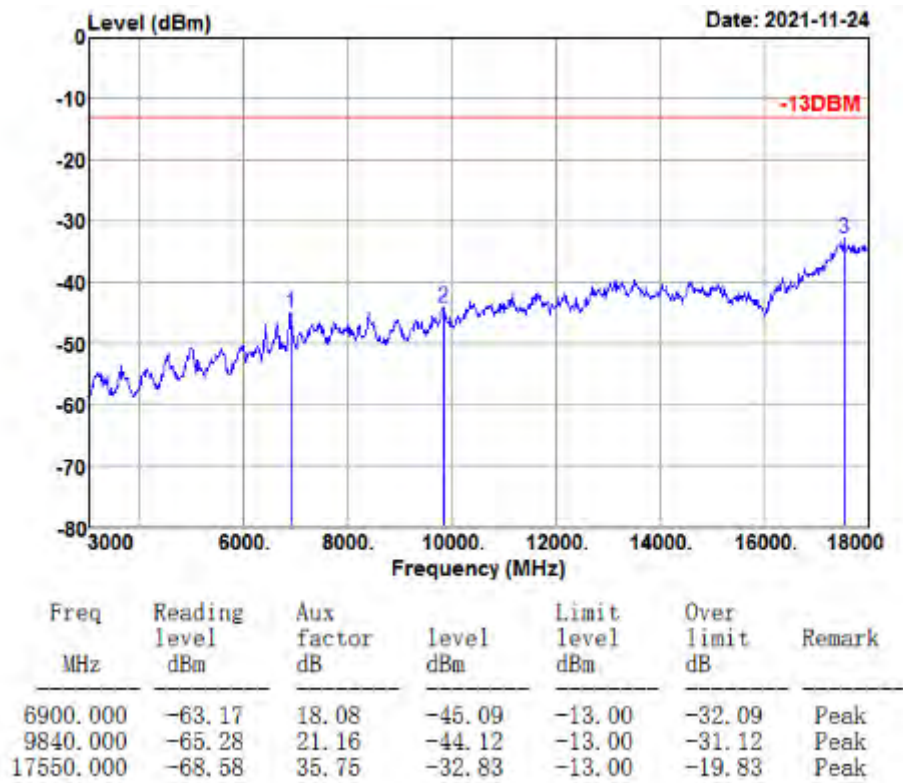




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

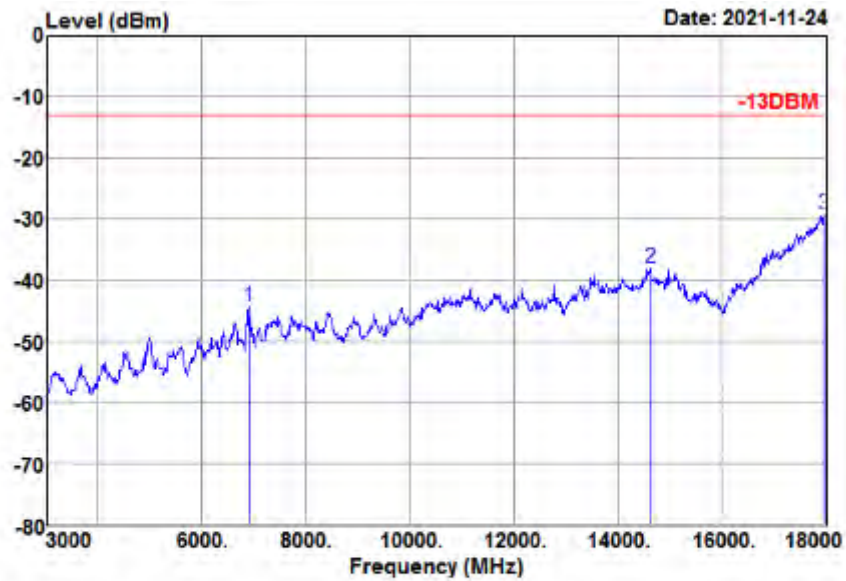

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-62.87	18.41	-44.46	-13.00	-31.46	Peak
14640.000	-66.44	28.34	-38.10	-13.00	-25.10	Peak
17970.000	-69.51	40.16	-29.35	-13.00	-16.35	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CH 9538**

<b>MODE</b>	TX channel 9538	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

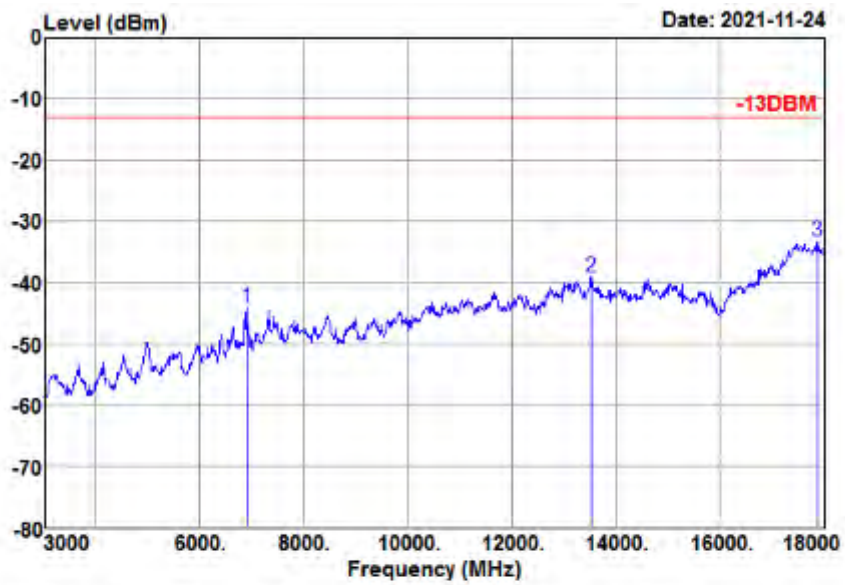


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-62.22	18.08	-44.14	-13.00	-31.14	Peak
13545.000	-67.47	28.31	-39.16	-13.00	-26.16	Peak
17895.000	-68.43	35.25	-33.18	-13.00	-20.18	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 9538	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

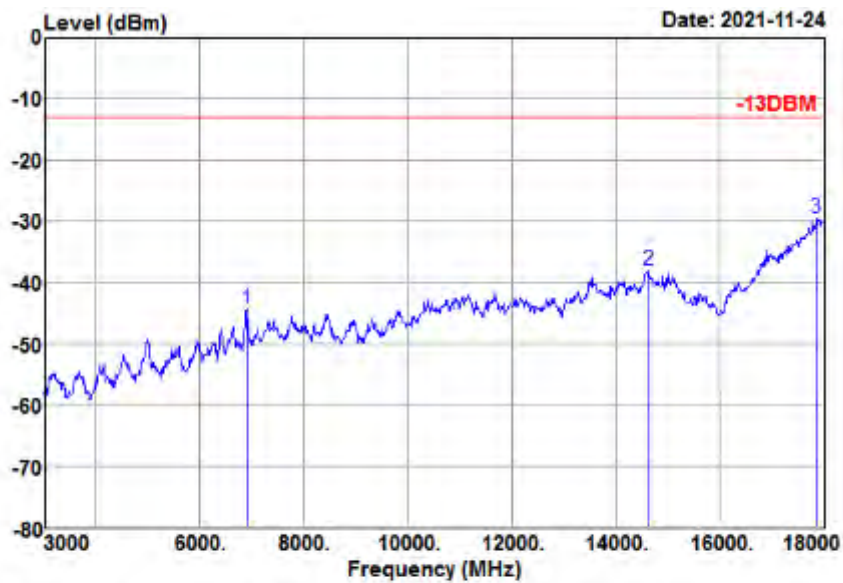

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-62.76	18.41	-44.35	-13.00	-31.35	Peak
14640.000	-66.31	28.34	-37.97	-13.00	-24.97	Peak
17865.000	-68.80	39.31	-29.49	-13.00	-16.49	Peak




Test Report No.: W7L-P21100026RF14

LTE Band 2(Ant0)

CHANNEL BANDWIDTH: 1.4MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

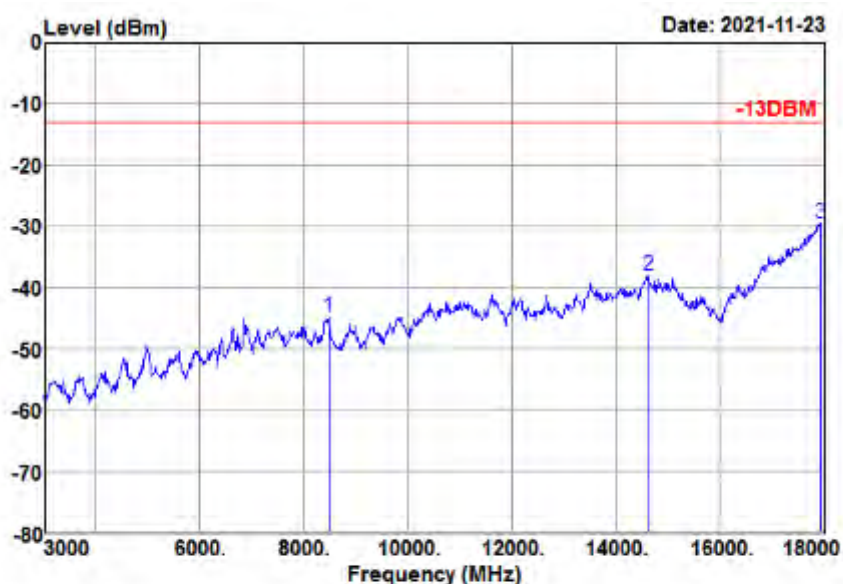

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8475.000	-64.12	19.32	-44.80	-13.00	-31.80	Peak
14640.000	-66.28	28.34	-37.94	-13.00	-24.94	Peak
17940.000	-69.40	39.91	-29.49	-13.00	-16.49	Peak






**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

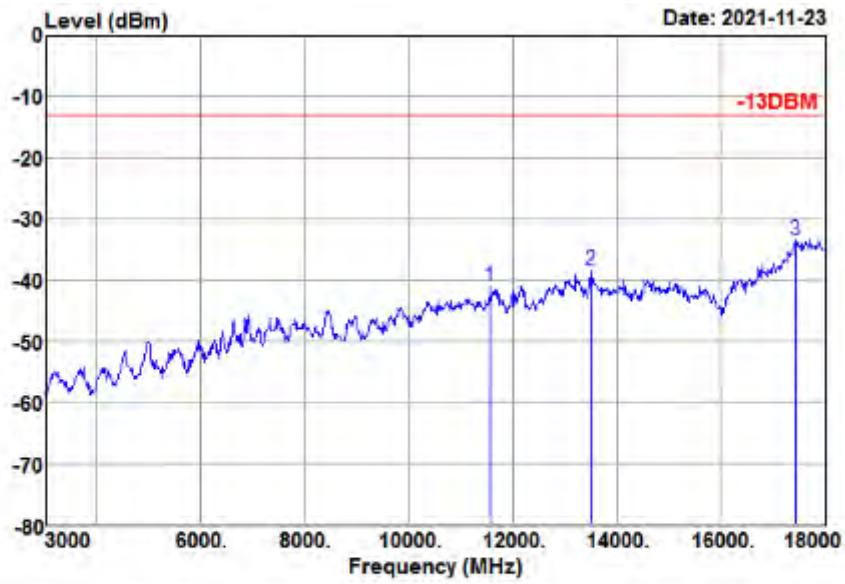

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
11580.000	-67.09	25.93	-41.16	-13.00	-28.16	Peak
13515.000	-66.85	28.41	-38.44	-13.00	-25.44	Peak
17445.000	-68.85	35.35	-33.50	-13.00	-20.50	Peak




**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

**CHANNEL BANDWIDTH: 3MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

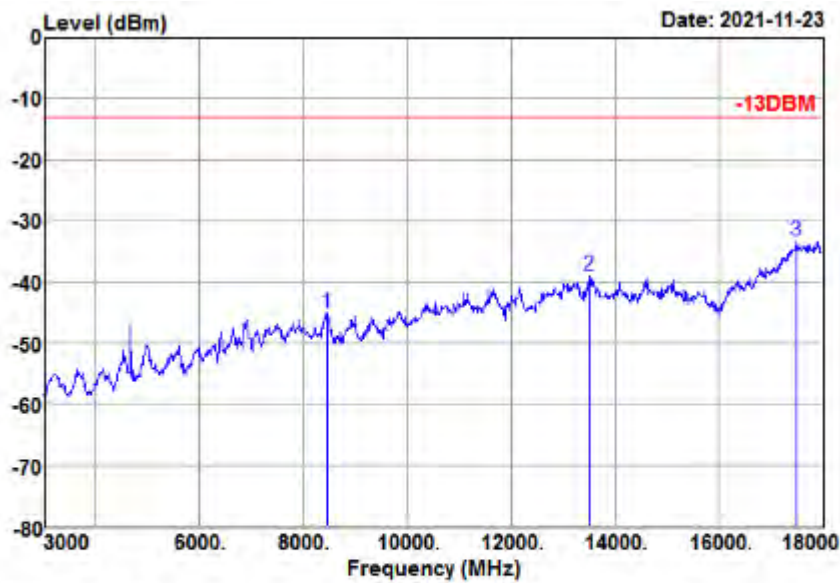

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8460.000	-64.31	19.21	-45.10	-13.00	-32.10	Peak
13515.000	-67.34	28.41	-38.93	-13.00	-25.93	Peak
17505.000	-69.01	35.81	-33.20	-13.00	-20.20	Peak






**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

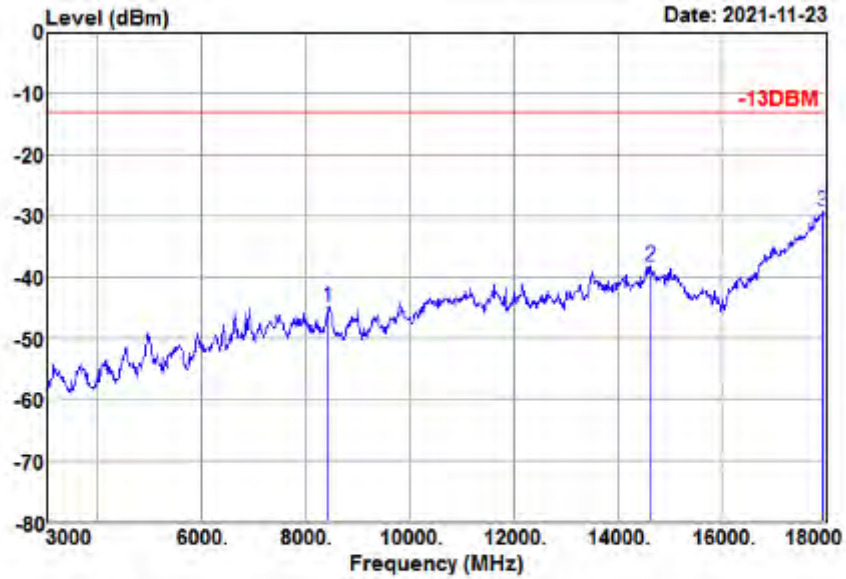

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8430.000	-64.20	19.33	-44.87	-13.00	-31.87	Peak
14640.000	-66.46	28.34	-38.12	-13.00	-25.12	Peak
17940.000	-69.17	39.91	-29.26	-13.00	-16.26	Peak





**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

CHANNEL BANDWIDTH: 5MHz / QPSK

CH18625

<b>MODE</b>	TX channel 18625	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

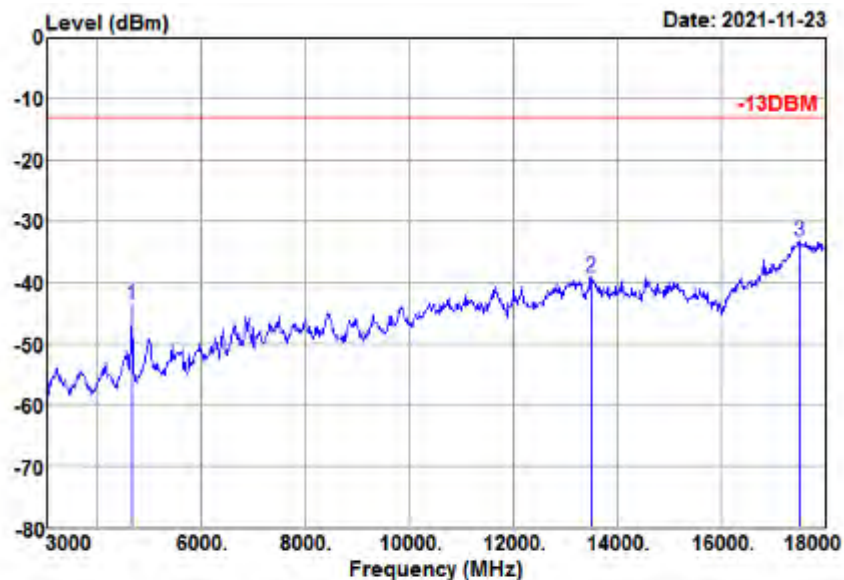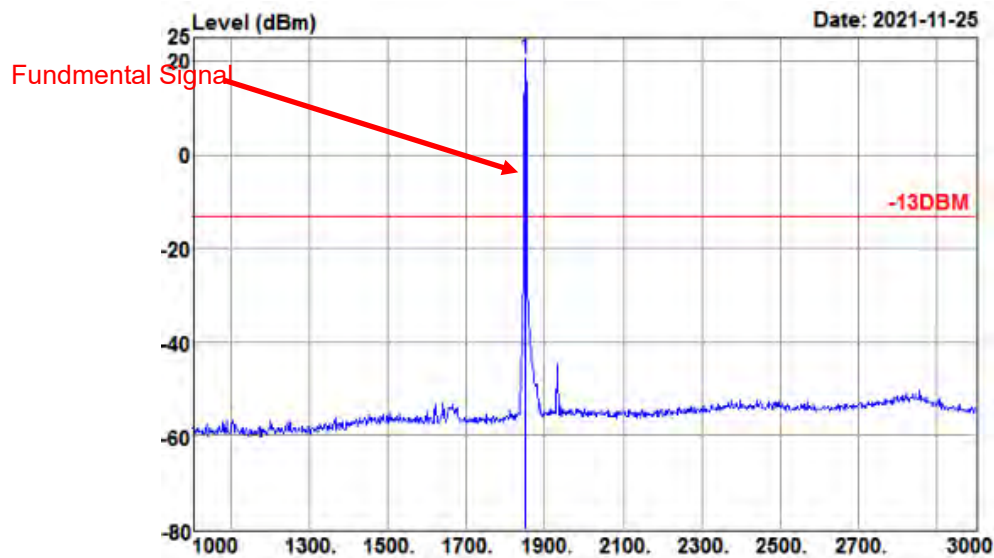



Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
4665.000	-55.22	11.67	-43.55	-13.00	-30.55	Peak
13515.000	-67.46	28.41	-39.05	-13.00	-26.05	Peak
17520.000	-69.15	35.79	-33.36	-13.00	-20.36	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18625	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

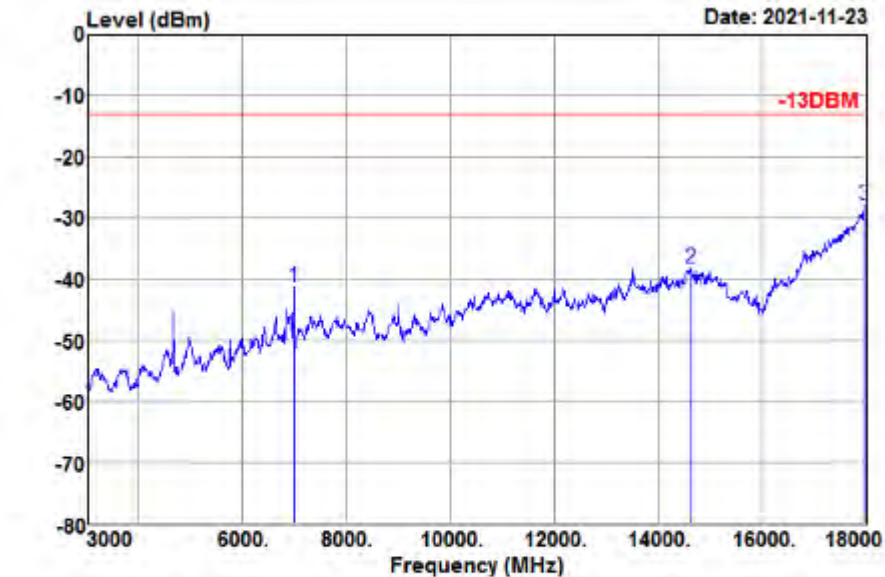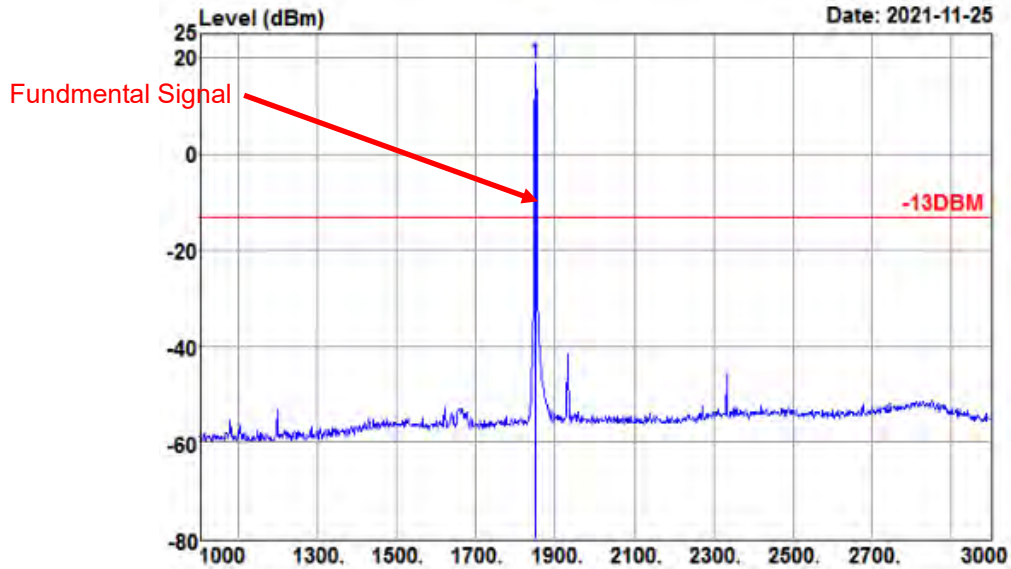

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6990.000	-60.14	18.73	-41.41	-13.00	-28.41	Peak
14640.000	-66.57	28.34	-38.23	-13.00	-25.23	Peak
17970.000	-68.10	40.16	-27.94	-13.00	-14.94	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

CH18900

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

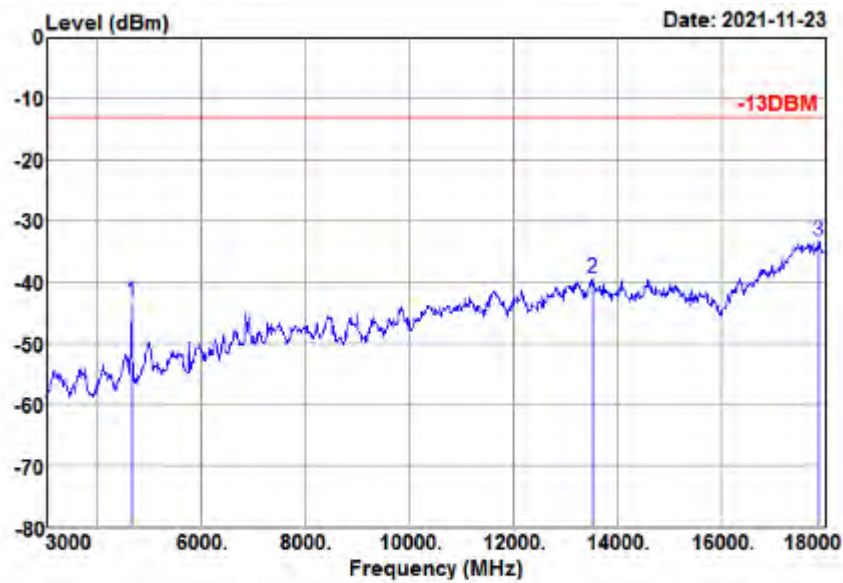


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
4650.000	-54.78	11.65	-43.13	-13.00	-30.13	Peak
13545.000	-67.61	28.31	-39.30	-13.00	-26.30	Peak
17880.000	-68.50	35.27	-33.23	-13.00	-20.23	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

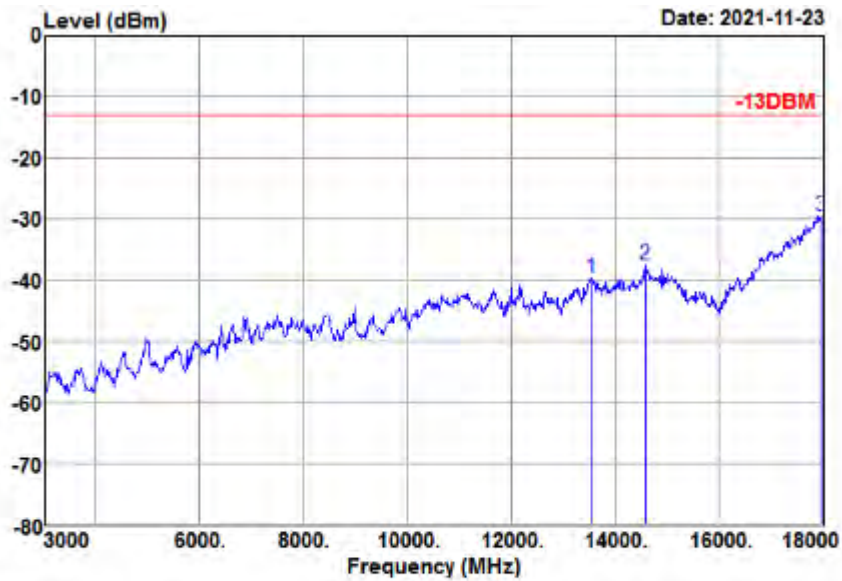

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
13575.000	-67.92	28.24	-39.68	-13.00	-26.68	Peak
14595.000	-65.88	28.28	-37.60	-13.00	-24.60	Peak
17970.000	-69.60	40.16	-29.44	-13.00	-16.44	Peak






**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

CH19175

<b>MODE</b>	TX channel 19175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

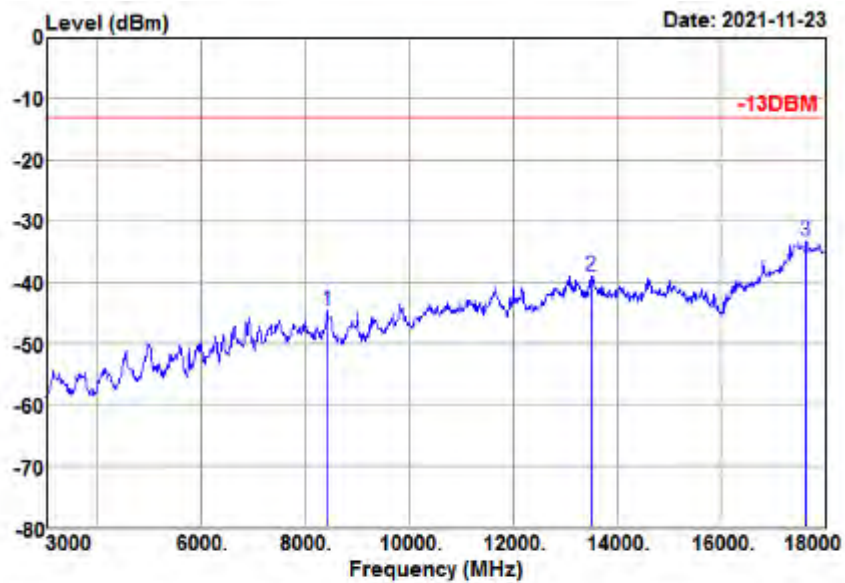


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8430.000	-63.85	19.21	-44.64	-13.00	-31.64	Peak
13515.000	-67.24	28.41	-38.83	-13.00	-25.83	Peak
17640.000	-68.89	35.62	-33.27	-13.00	-20.27	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 19175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

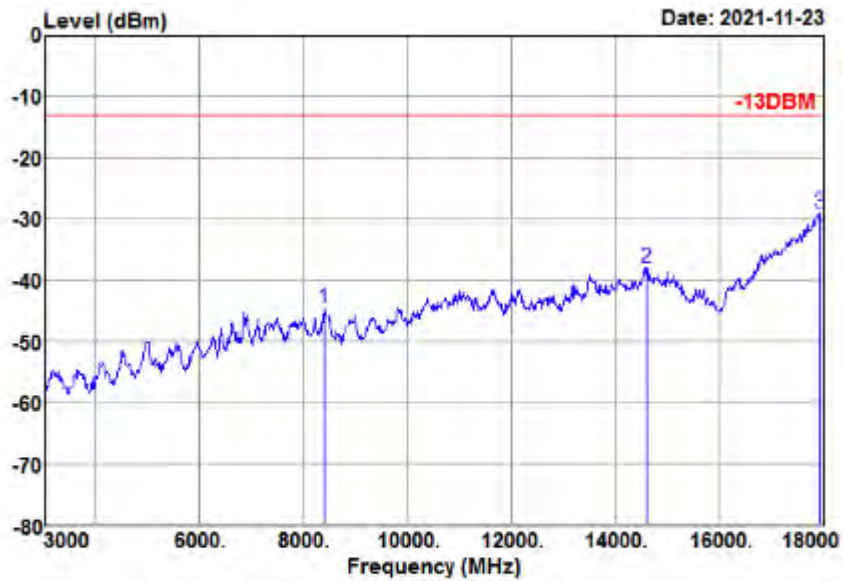

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8400.000	-64.03	19.34	-44.69	-13.00	-31.69	Peak
14610.000	-66.21	28.30	-37.91	-13.00	-24.91	Peak
17940.000	-68.82	39.91	-28.91	-13.00	-15.91	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CHANNEL BANDWIDTH: 10MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

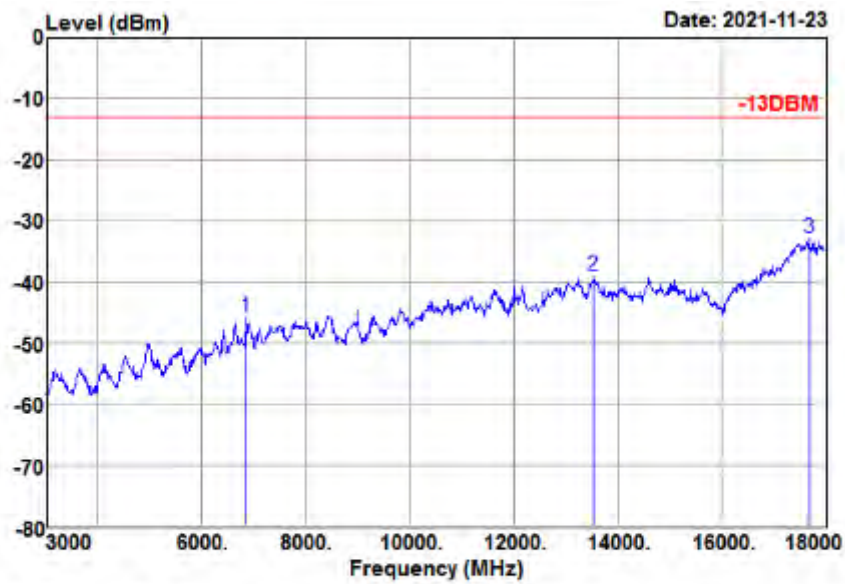

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6840.000	-63.74	17.86	-45.88	-13.00	-32.88	Peak
13545.000	-67.19	28.31	-38.88	-13.00	-25.88	Peak
17685.000	-68.31	35.55	-32.76	-13.00	-19.76	Peak






**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

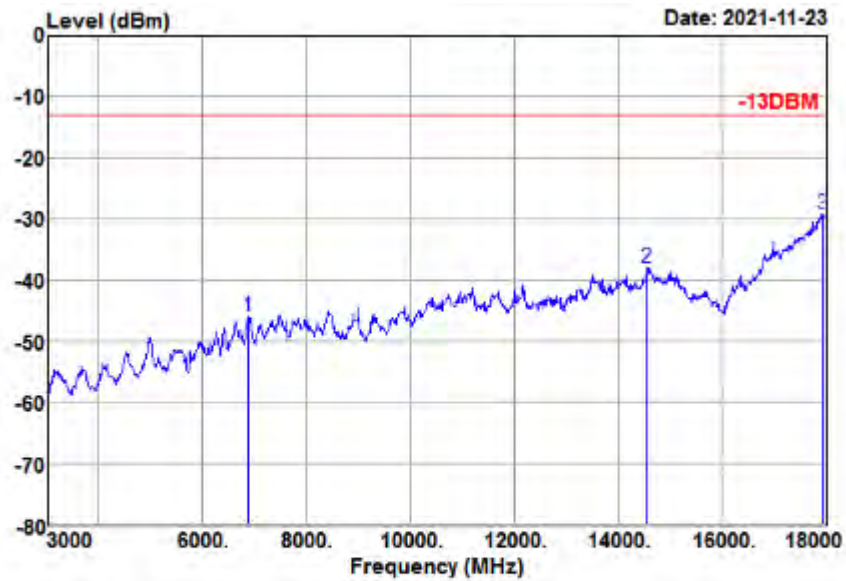

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over- limit dB	Remark
6885.000	-64.37	18.36	-46.01	-13.00	-33.01	Peak
14565.000	-66.16	28.24	-37.92	-13.00	-24.92	Peak
17940.000	-69.24	39.91	-29.33	-13.00	-16.33	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CHANNEL BANDWIDTH: 15MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

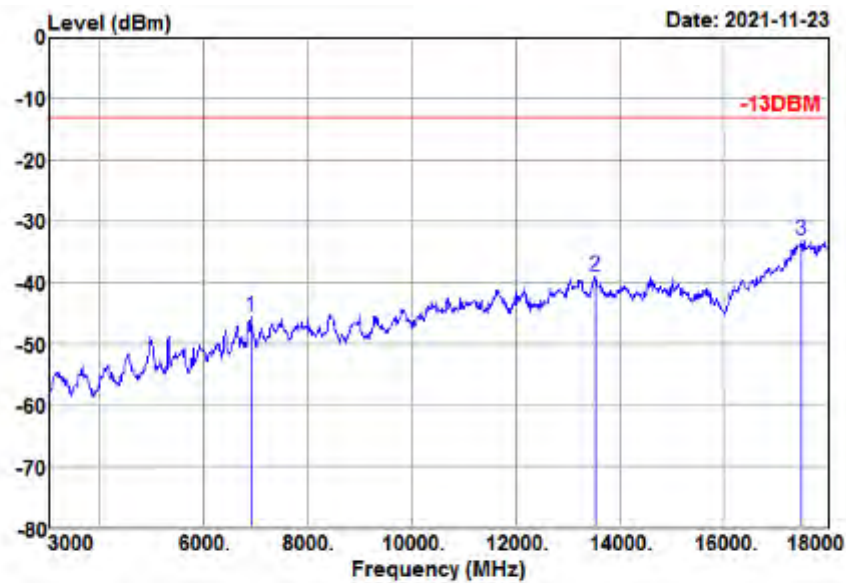


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
6900.000	-63.66	18.08	-45.58	-13.00	-32.58	Peak
13545.000	-67.33	28.31	-39.02	-13.00	-26.02	Peak
17490.000	-68.81	35.73	-33.08	-13.00	-20.08	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

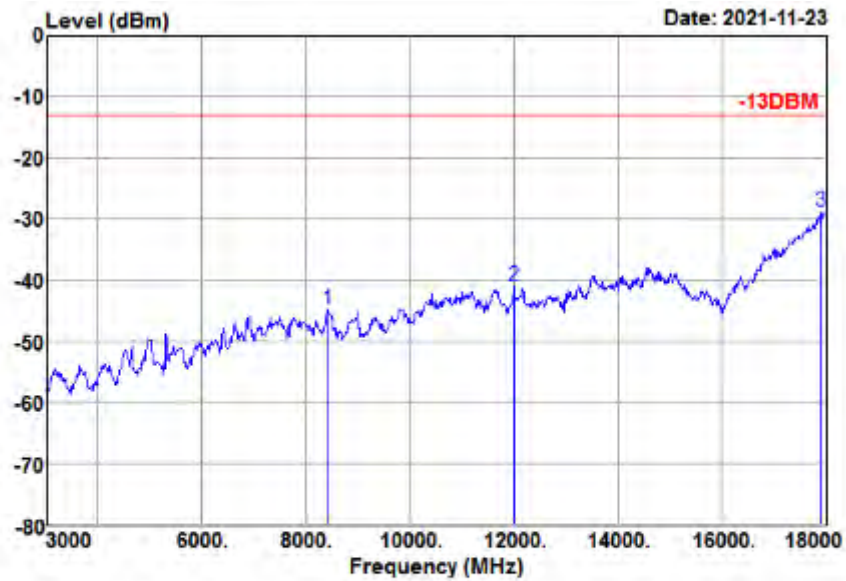

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8430.000	-64.15	19.33	-44.82	-13.00	-31.82	Peak
12000.000	-66.36	25.21	-41.15	-13.00	-28.15	Peak
17910.000	-68.47	39.67	-28.80	-13.00	-15.80	Peak




**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

**CHANNEL BANDWIDTH: 20MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

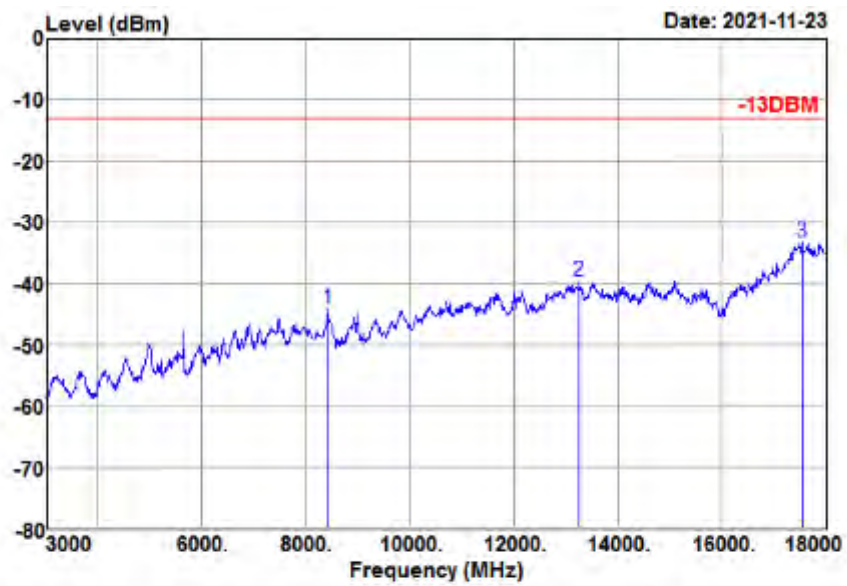


Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
8430.000	-63.43	19.21	-44.22	-13.00	-31.22	Peak
13260.000	-68.26	28.57	-39.69	-13.00	-26.69	Peak
17550.000	-69.09	35.75	-33.34	-13.00	-20.34	Peak



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

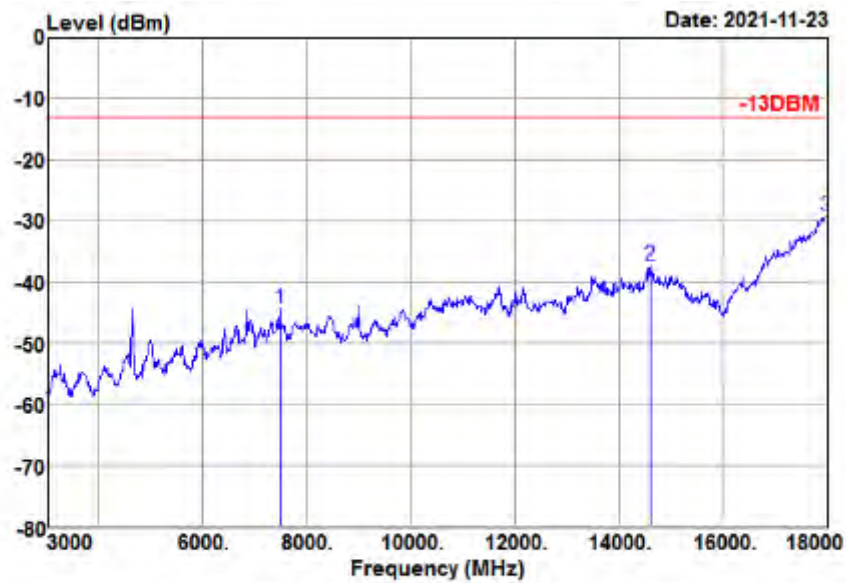

Freq MHz	Reading level dBm	Aux factor dB	level dBm	Limit level dBm	Over limit dB	Remark
7485.000	-65.31	20.92	-44.39	-13.00	-31.39	Peak
14610.000	-65.69	28.30	-37.39	-13.00	-24.39	Peak
17985.000	-69.49	40.28	-29.21	-13.00	-16.21	Peak




### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

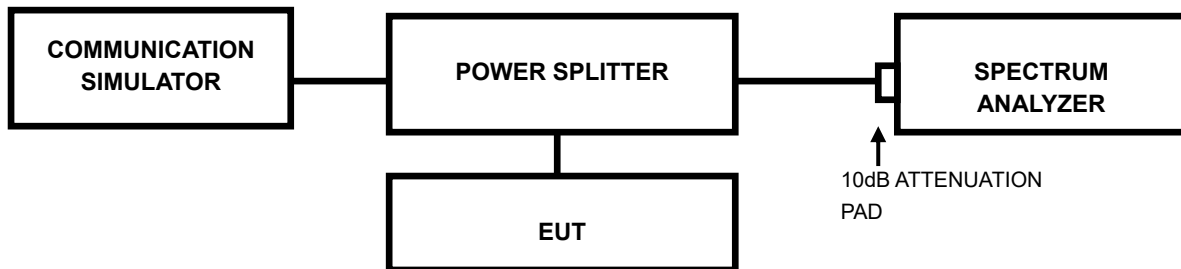

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



**BUREAU**  
**VERITAS**

**Test Report No.: W7L-P21100026RF14**

### 3.7.4 TEST RESULTS

Please Refer to Appendix C Of this test report.



**BUREAU  
VERITAS**

Test Report No.: W7L-P21100026RF14

## 4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Shenzhen EMC/RF Lab:**

Tel: +86-755-88696566

Fax: +86-755-88696577

**Email:** [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.





## 5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

Please Refer to Appendix C Of this test report.

Appendix C:

PCS1900

Frequency Stability

PCS1900

Test Result

Band: PCS1900							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
GSM	1850.2	20	3.27	-3.33	-0.00	-2.5 to 2.5	Pass
			3.85	-5.36	-0.00	-2.5 to 2.5	Pass
			4.43	-5.20	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-3.04	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-4.58	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-12.98	-0.01	-2.5 to 2.5	Pass
		0	3.85	-7.62	-0.00	-2.5 to 2.5	Pass
		10	3.85	-5.97	-0.00	-2.5 to 2.5	Pass
		30	3.85	-11.78	-0.01	-2.5 to 2.5	Pass
		40	3.85	-9.72	-0.01	-2.5 to 2.5	Pass
		50	3.85	-6.10	-0.00	-2.5 to 2.5	Pass
		1880	20	3.27	-10.59	-0.01	-2.5 to 2.5
	3.85			-4.29	-0.00	-2.5 to 2.5	Pass
	4.43			-11.88	-0.01	-2.5 to 2.5	Pass
	-30		3.85	-4.07	-0.00	-2.5 to 2.5	Pass
	-20		3.85	-8.59	-0.00	-2.5 to 2.5	Pass
	-10		3.85	-1.36	-0.00	-2.5 to 2.5	Pass
	0		3.85	-5.84	-0.00	-2.5 to 2.5	Pass
	10		3.85	-8.17	-0.00	-2.5 to 2.5	Pass
	30		3.85	-4.91	-0.00	-2.5 to 2.5	Pass
	40		3.85	-7.62	-0.00	-2.5 to 2.5	Pass
	50		3.85	-8.27	-0.00	-2.5 to 2.5	Pass
	1909.8		20	3.27	-6.39	-0.00	-2.5 to 2.5
		3.85		-8.78	-0.00	-2.5 to 2.5	Pass
		4.43		-7.55	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-5.65	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-6.81	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-6.65	-0.00	-2.5 to 2.5	Pass



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

EGPRS		0	3.85	-13.04	-0.01	-2.5 to 2.5	Pass
		10	3.85	-7.26	-0.00	-2.5 to 2.5	Pass
		30	3.85	-4.13	-0.00	-2.5 to 2.5	Pass
		40	3.85	-4.88	-0.00	-2.5 to 2.5	Pass
		50	3.85	-5.04	-0.00	-2.5 to 2.5	Pass
	1850.2	20	3.27	-7.04	-0.00	-2.5 to 2.5	Pass
			3.85	-7.46	-0.00	-2.5 to 2.5	Pass
			4.43	-5.71	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-4.71	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-3.13	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-10.91	-0.01	-2.5 to 2.5	Pass
		0	3.85	-4.10	-0.00	-2.5 to 2.5	Pass
		10	3.85	-3.16	-0.00	-2.5 to 2.5	Pass
		30	3.85	-6.36	-0.00	-2.5 to 2.5	Pass
		40	3.85	-8.91	-0.00	-2.5 to 2.5	Pass
	50	3.85	-4.55	-0.00	-2.5 to 2.5	Pass	
	1880	20	3.27	-4.97	-0.00	-2.5 to 2.5	Pass
			3.85	-5.78	-0.00	-2.5 to 2.5	Pass
			4.43	-4.04	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-5.10	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-5.94	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-3.46	-0.00	-2.5 to 2.5	Pass
		0	3.85	-5.75	-0.00	-2.5 to 2.5	Pass
		10	3.85	-6.13	-0.00	-2.5 to 2.5	Pass
		30	3.85	-5.58	-0.00	-2.5 to 2.5	Pass
		40	3.85	-6.13	-0.00	-2.5 to 2.5	Pass
	50	3.85	-11.95	-0.01	-2.5 to 2.5	Pass	
	1909.8	20	3.27	-2.39	-0.00	-2.5 to 2.5	Pass
			3.85	-3.20	-0.00	-2.5 to 2.5	Pass
			4.43	-5.17	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-6.49	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-5.20	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-4.20	-0.00	-2.5 to 2.5	Pass
0		3.85	-2.33	-0.00	-2.5 to 2.5	Pass	
10		3.85	-5.23	-0.00	-2.5 to 2.5	Pass	
30		3.85	-5.42	-0.00	-2.5 to 2.5	Pass	
40		3.85	1.52	0.00	-2.5 to 2.5	Pass	
50	3.85	-7.07	-0.00	-2.5 to 2.5	Pass		

**PCS1900\_OBW**

**Test Result**


Band: PCS1900					
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	/	1850.2	0.241	Pass
			1880	0.245	Pass
			1909.8	0.248	Pass
	EGPRS	/	1850.2	0.245	Pass
			1880	0.246	Pass
			1909.8	0.243	Pass



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Test Graph

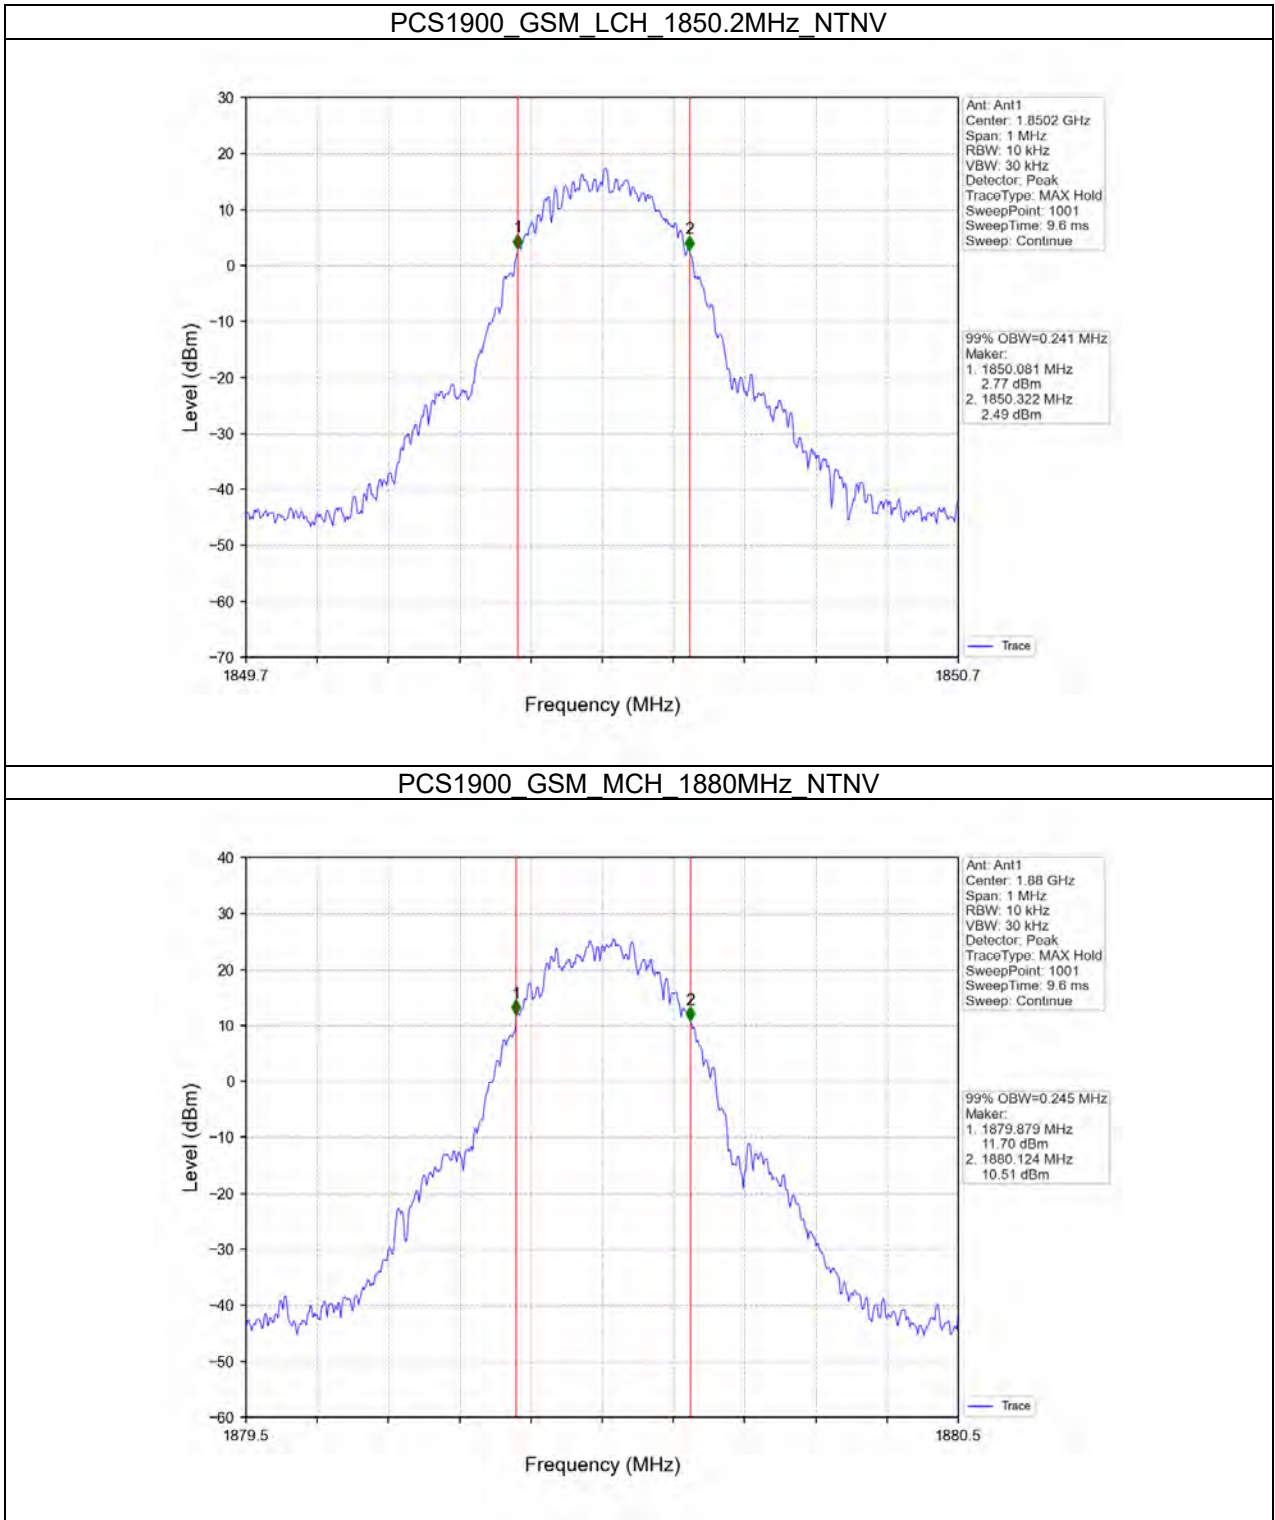





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_GSM\_HCH\_1909.8MHz\_NTNV

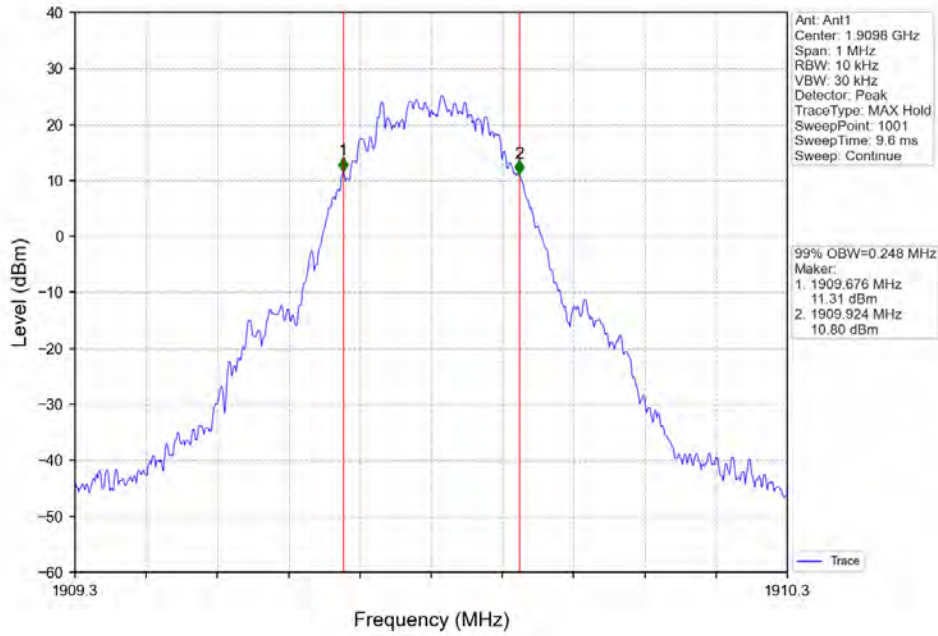

PCS1900 EGPRS LCH 1850.2MHz\_NTNV

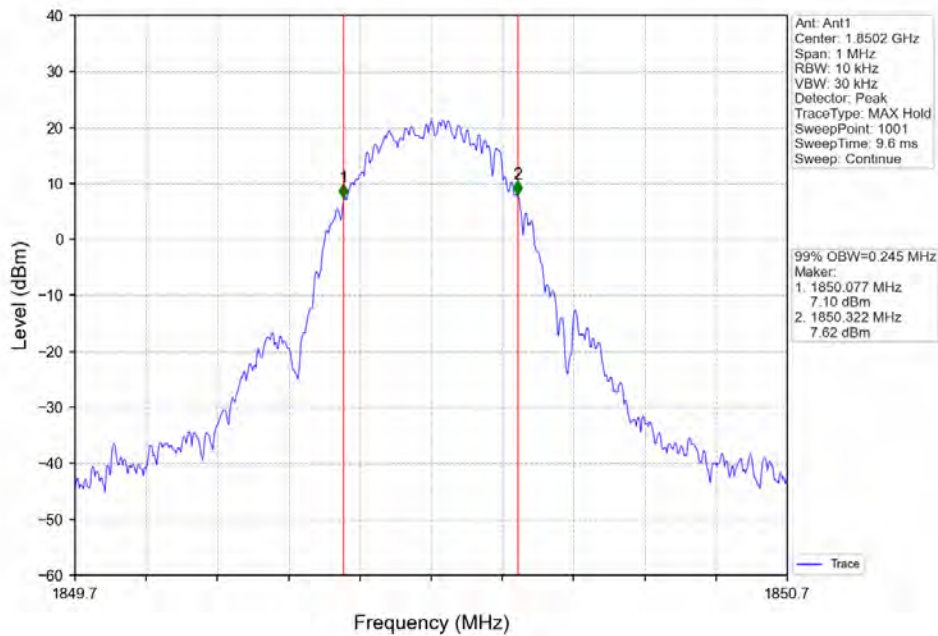





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_EGPRS\_MCH\_1880MHz\_NTNV

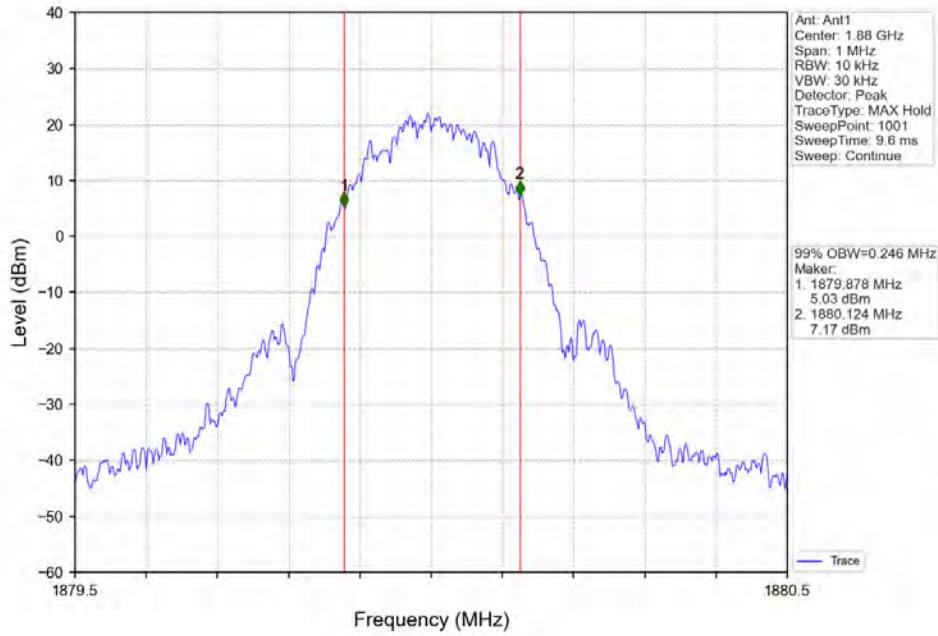

PCS1900 EGPRS HCH 1909.8MHz NTN

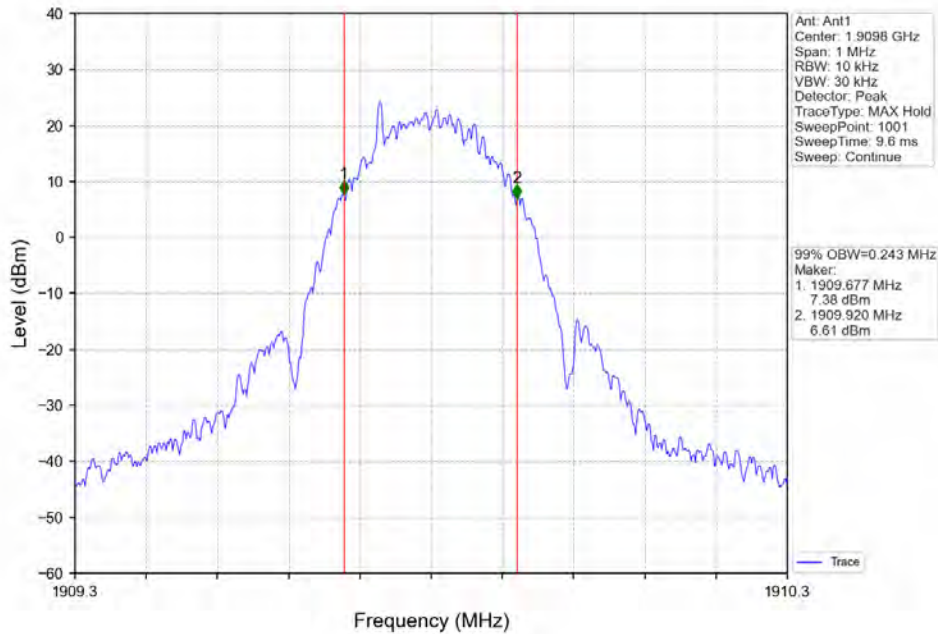



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_XDB

### Test Result

Band: PCS1900					
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	/	1850.2	0.308	Pass
			1880	0.319	Pass
			1909.8	0.311	Pass
	EGPRS	/	1850.2	0.310	Pass
			1880	0.309	Pass
			1909.8	0.300	Pass






BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Test Graph

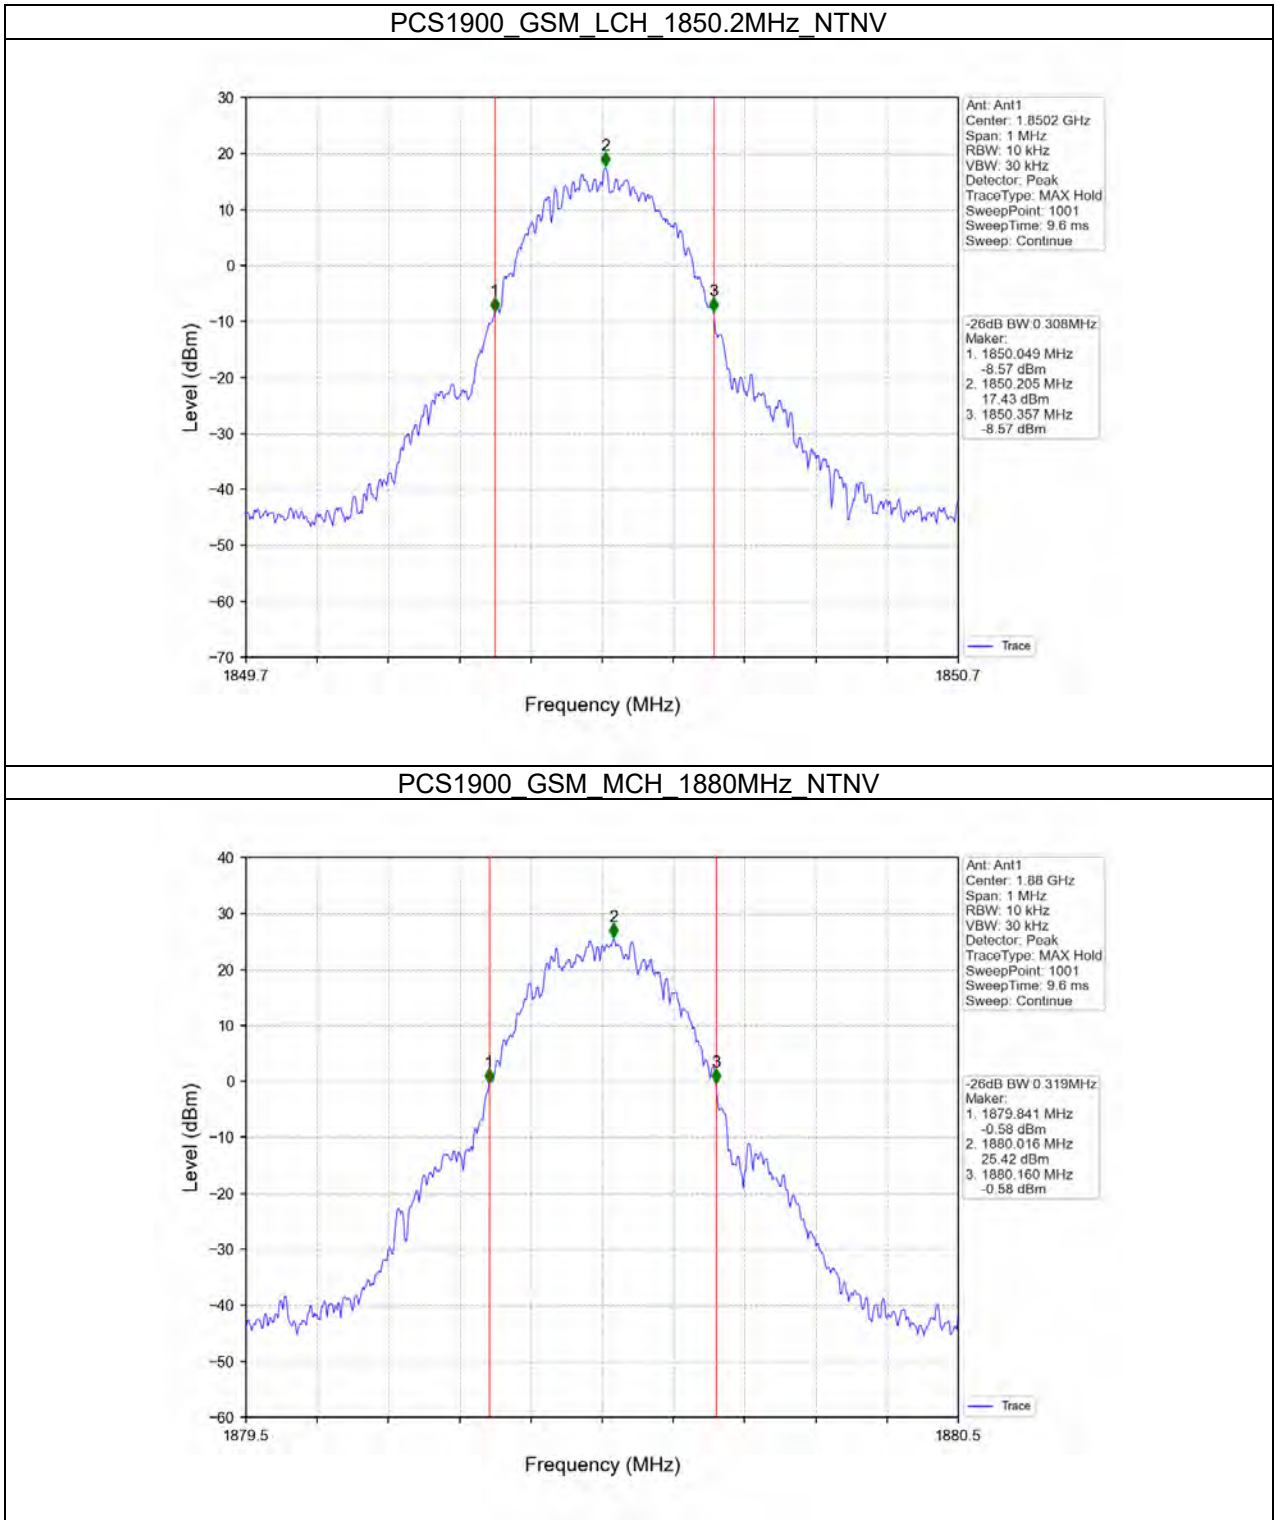





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_GSM\_HCH\_1909.8MHz\_NTNV

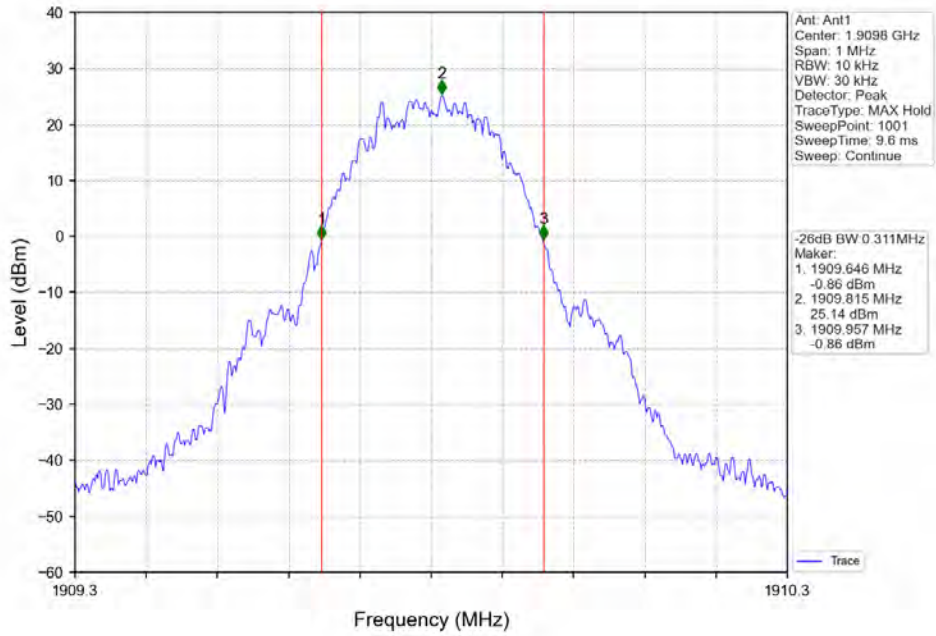

PCS1900 EGPRS LCH\_1850.2MHz\_NTNV

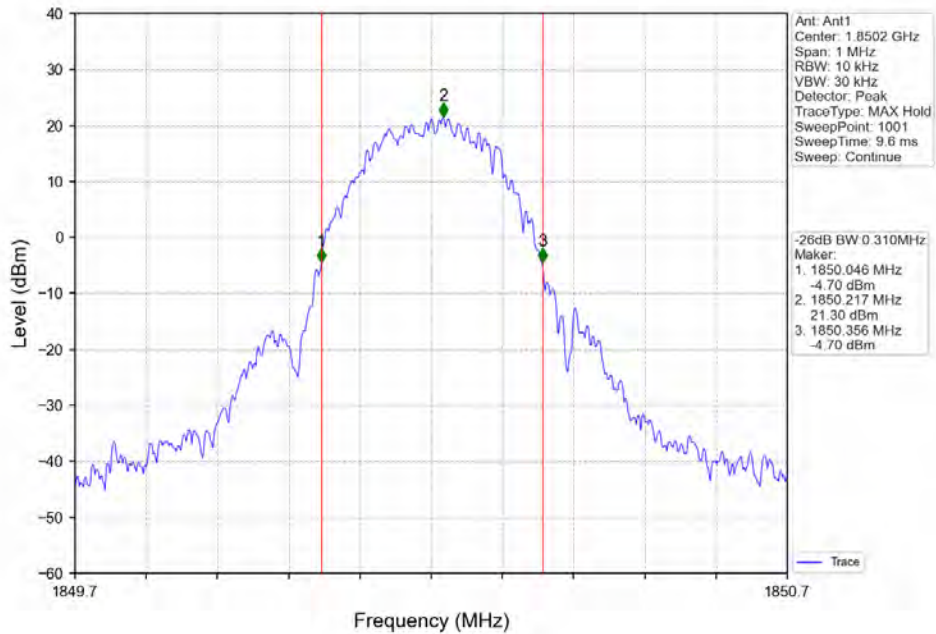







BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_EGPRS\_MCH\_1880MHz\_NTNV

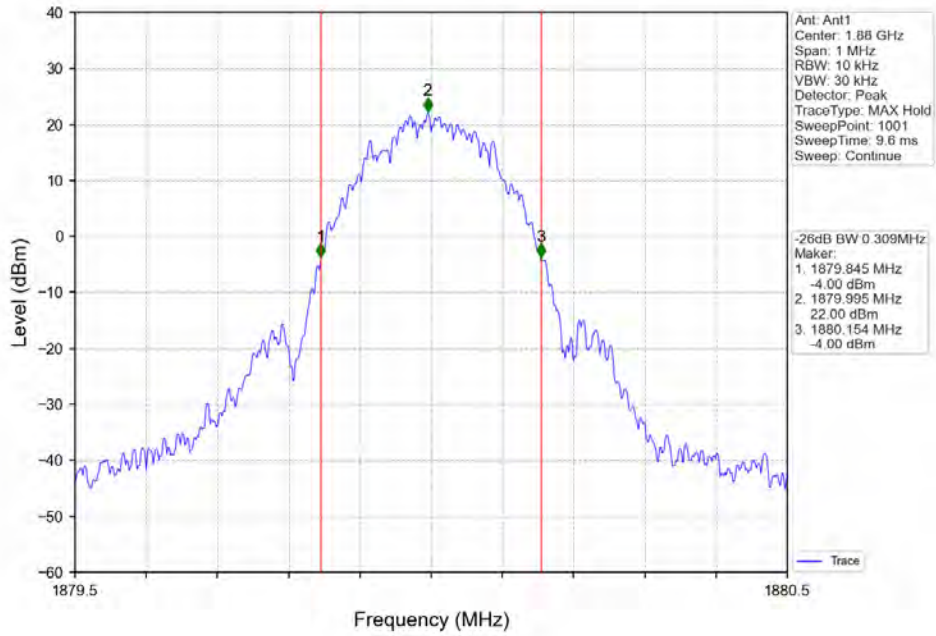

PCS1900 EGPRS HCH 1909.8MHz NTN

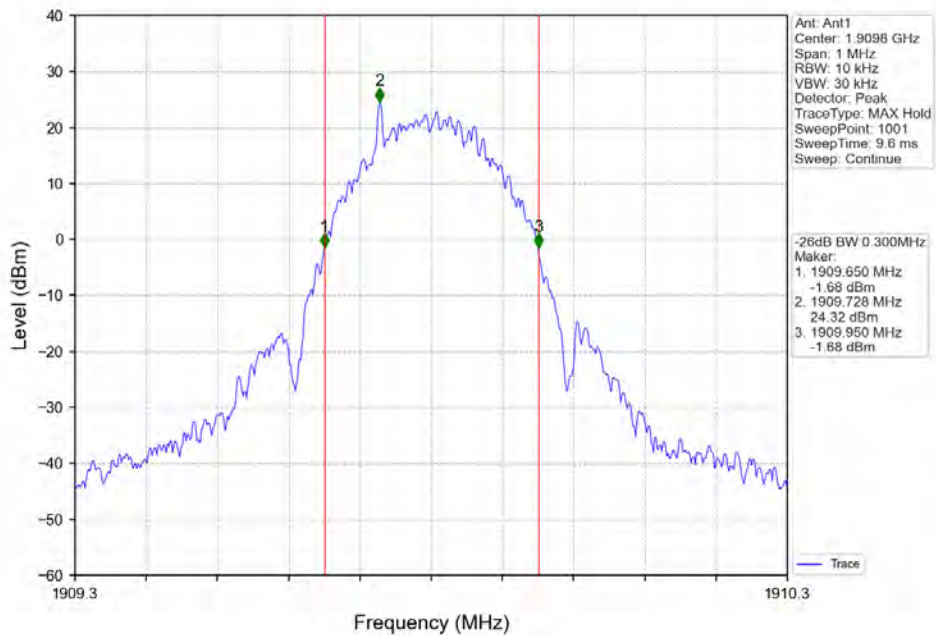



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Peak-Average Ratio

PCS1900

### Test Result


Band: PCS1900						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	/	1850.2	10.16	<=13	Pass
			1880	9.47	<=13	Pass
			1909.8	3.53	<=13	Pass
	EGPRS	/	1850.2	12.93	<=13	Pass
			1880	6.78	<=13	Pass
			1909.8	7.04	<=13	Pass



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Test Graph

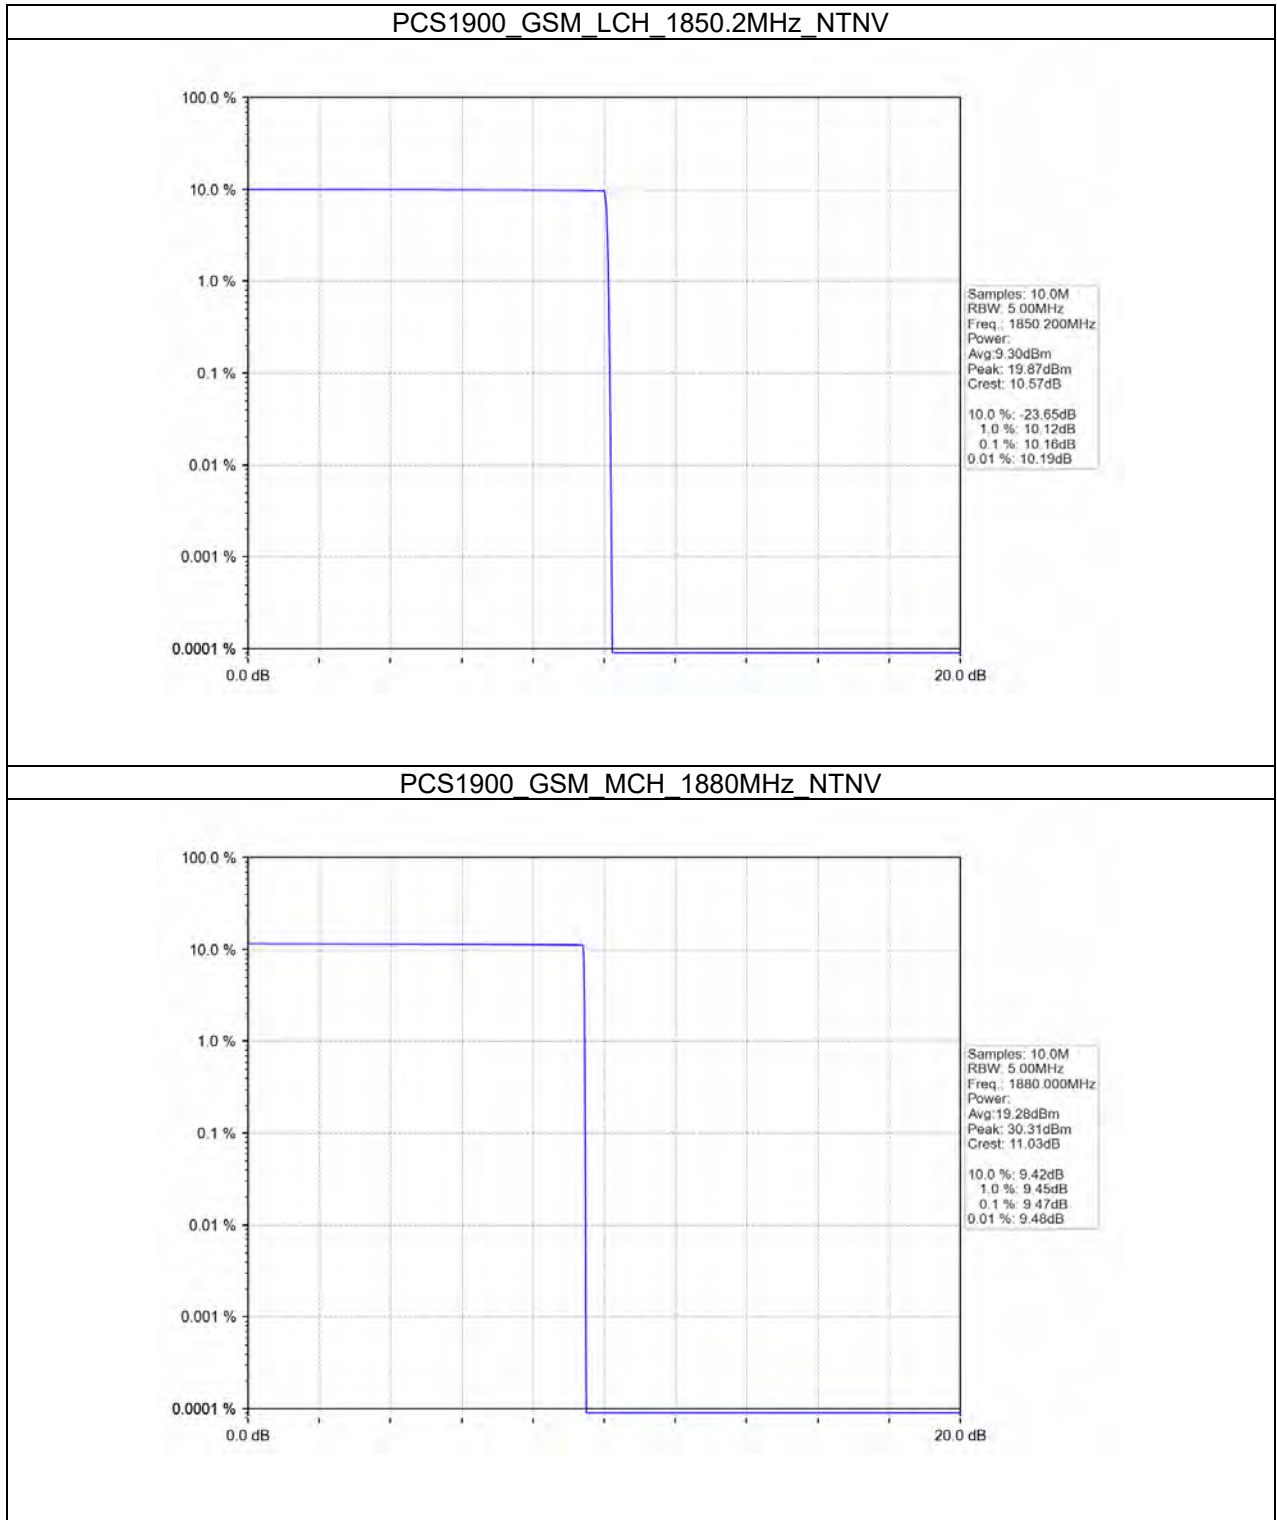





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_GSM\_HCH\_1909.8MHz\_NTNV

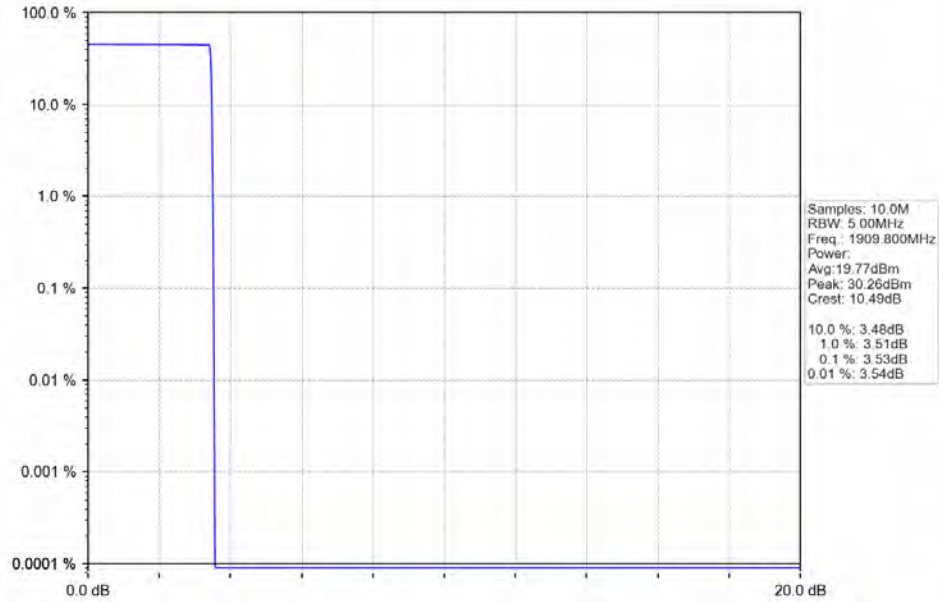

PCS1900\_EGPRS\_LCH\_1850.2MHz\_NTNV

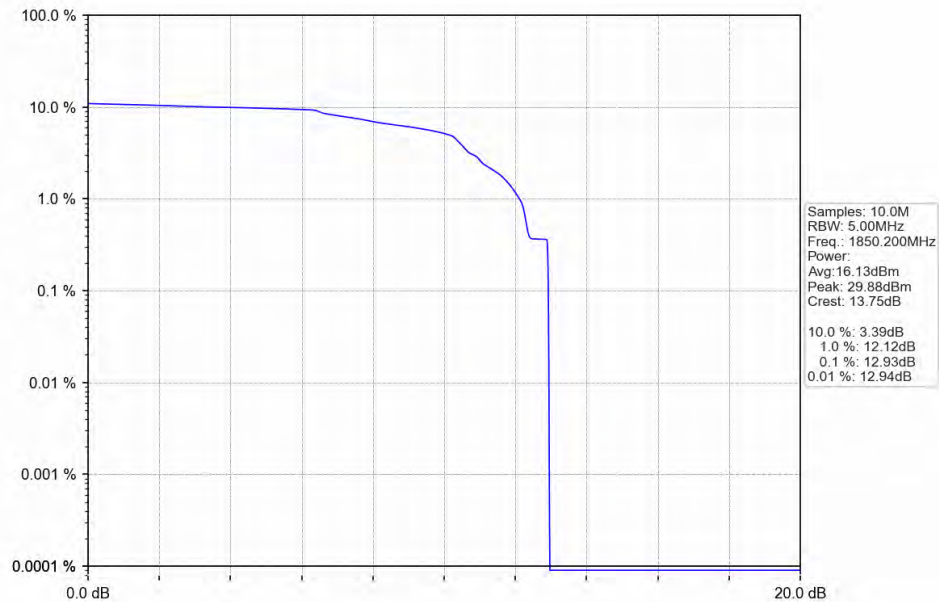





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_EGPRS\_MCH\_1880MHz\_NTNV

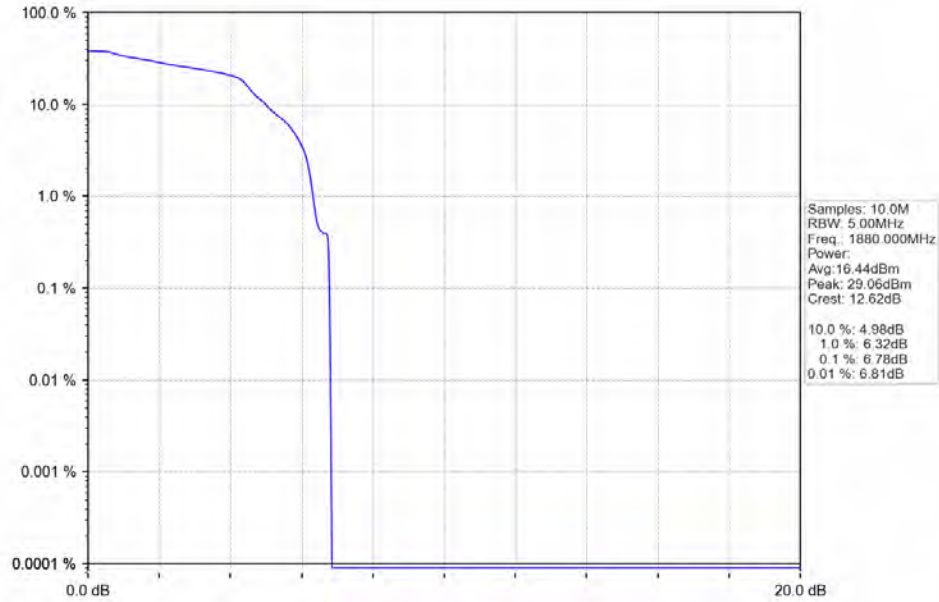

PCS1900 EGPRS HCH 1909.8MHz NTN

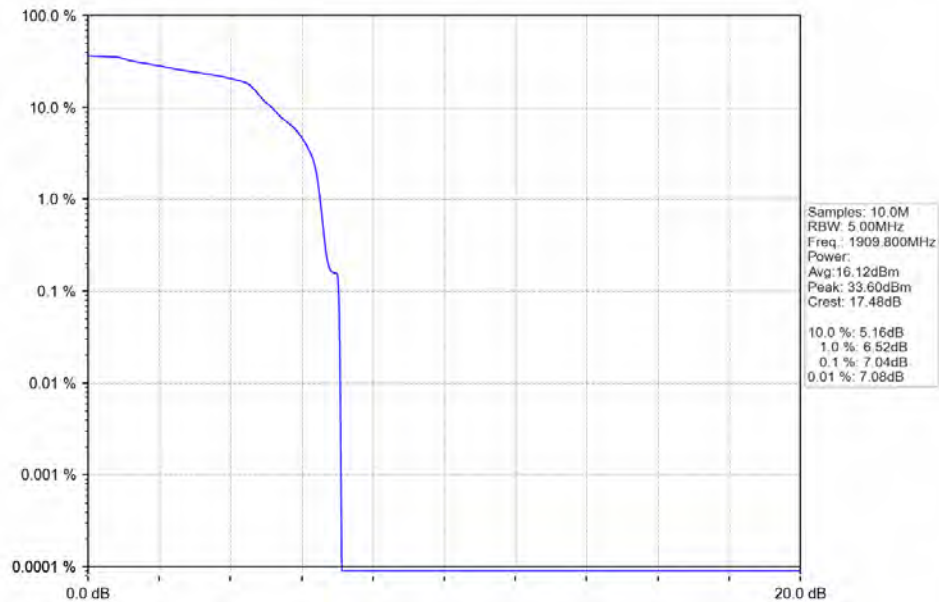



**BUREAU  
VERITAS**

**Test Report No.: W7L-P21100026RF14**

Spurious Emission

PCS1900

Test Result


Band: PCS1900						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	/	1850.2	Refer To Test Graph		Pass
			1880	Refer To Test Graph		Pass
			1909.8	Refer To Test Graph		Pass
	EGPRS	/	1850.2	Refer To Test Graph		Pass
			1880	Refer To Test Graph		Pass
			1909.8	Refer To Test Graph		Pass



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Test Graph

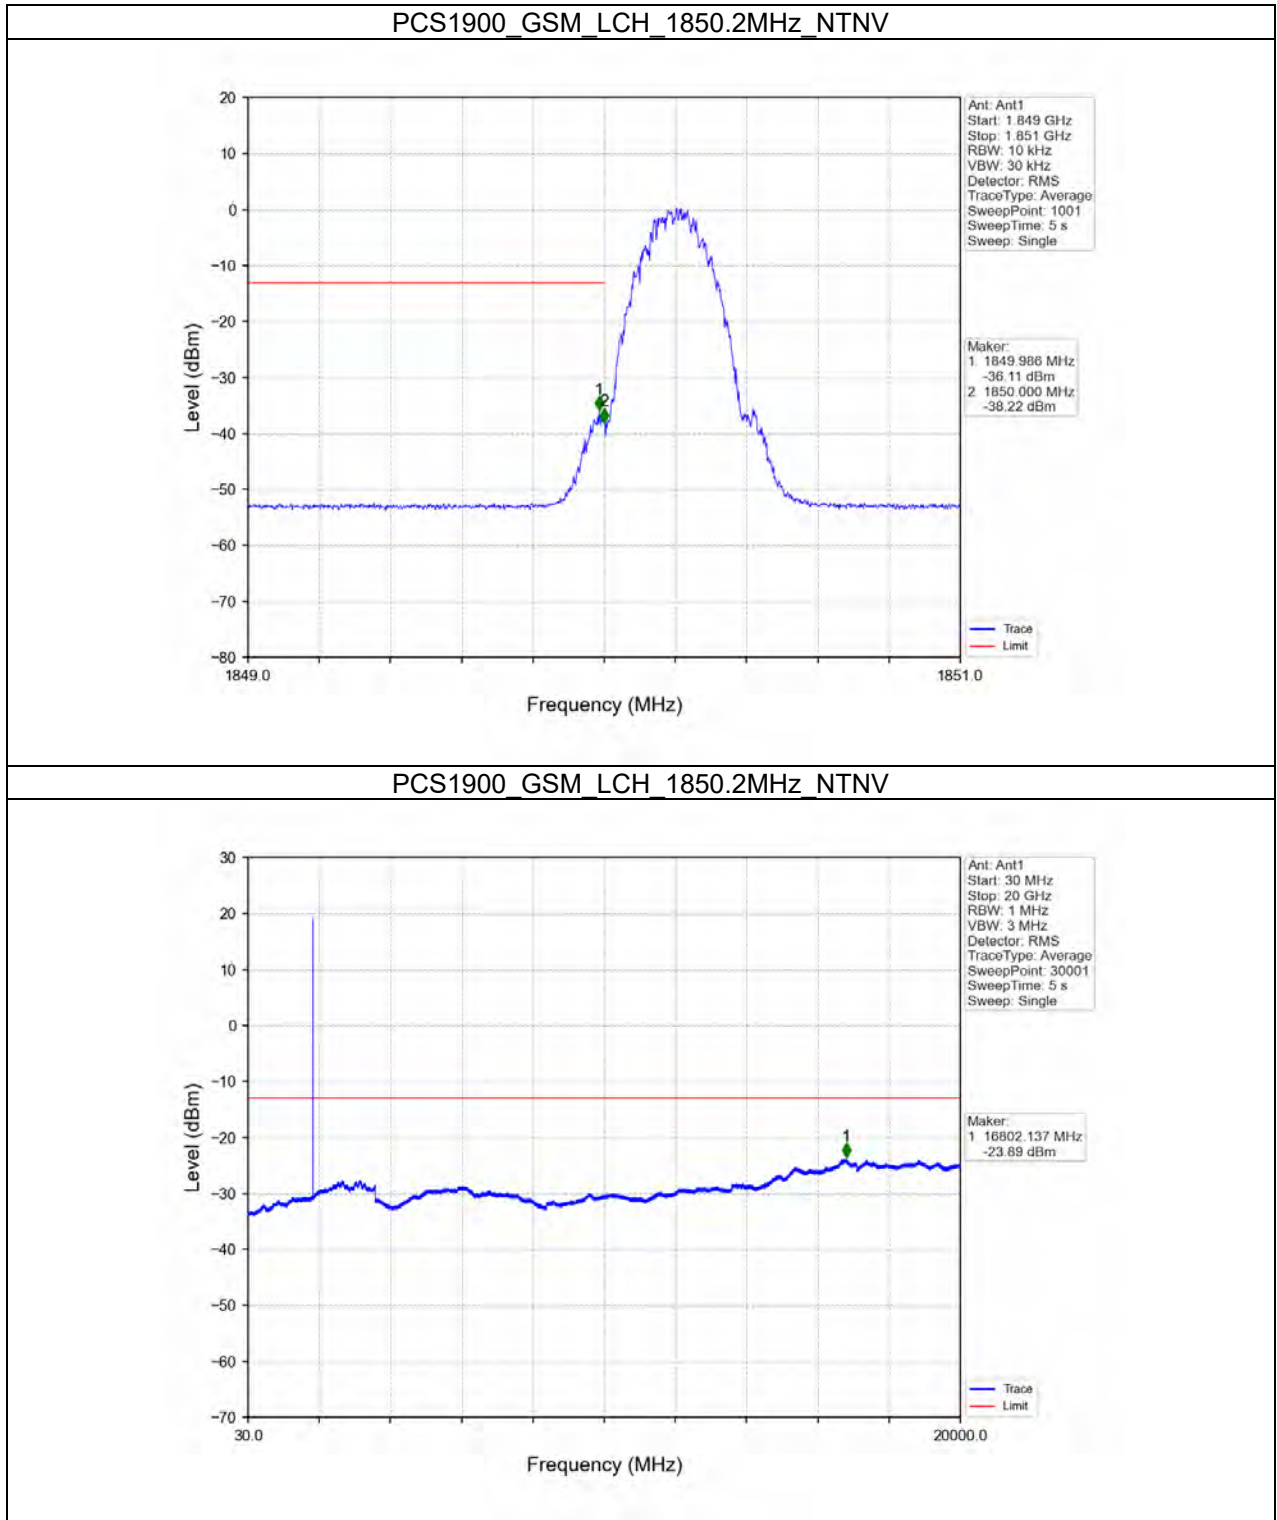







BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_GSM\_MCH\_1880MHz\_NTNV

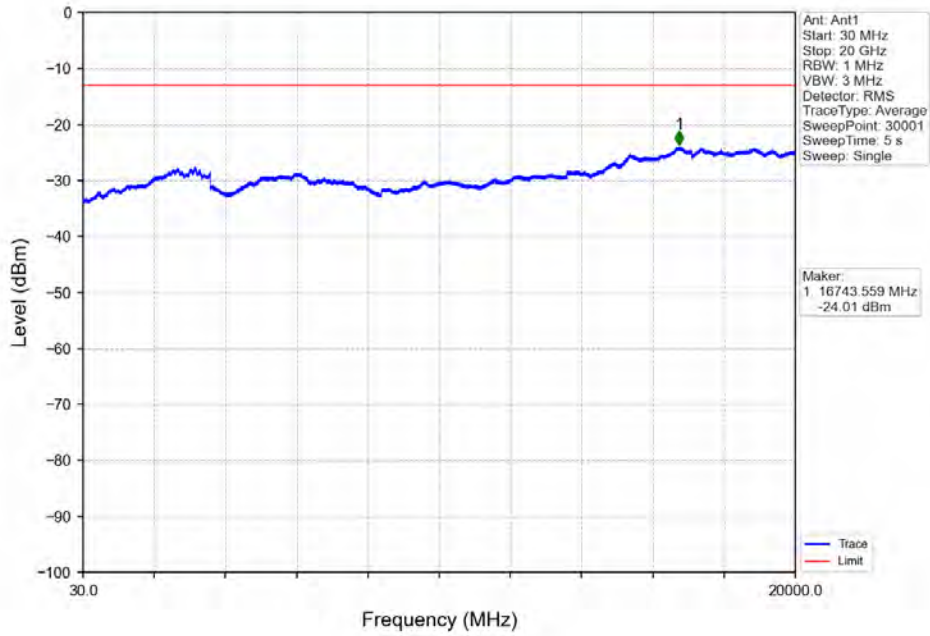

PCS1900 GSM HCH 1909.8MHz NTN

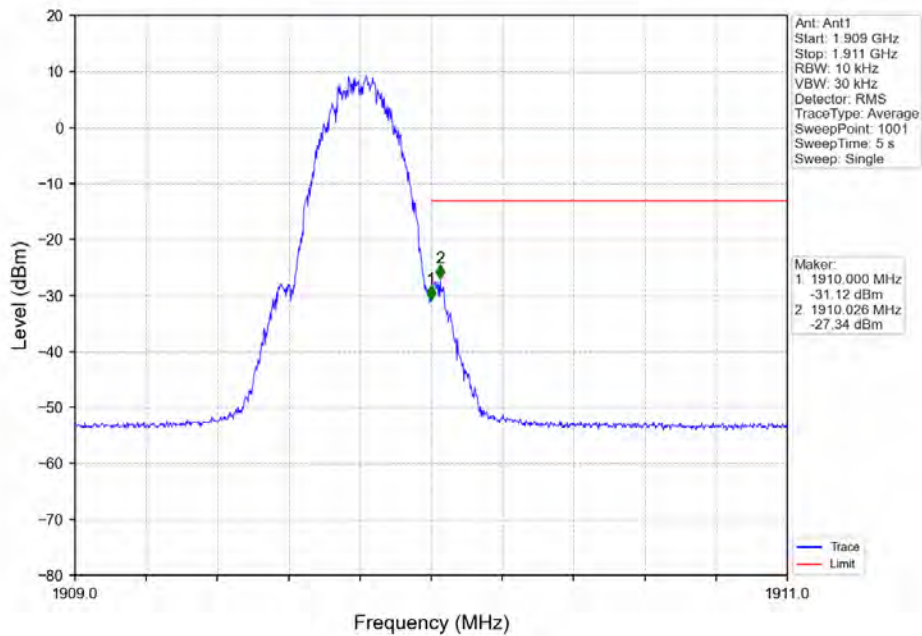







BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_GSM\_HCH\_1909.8MHz\_NTNV

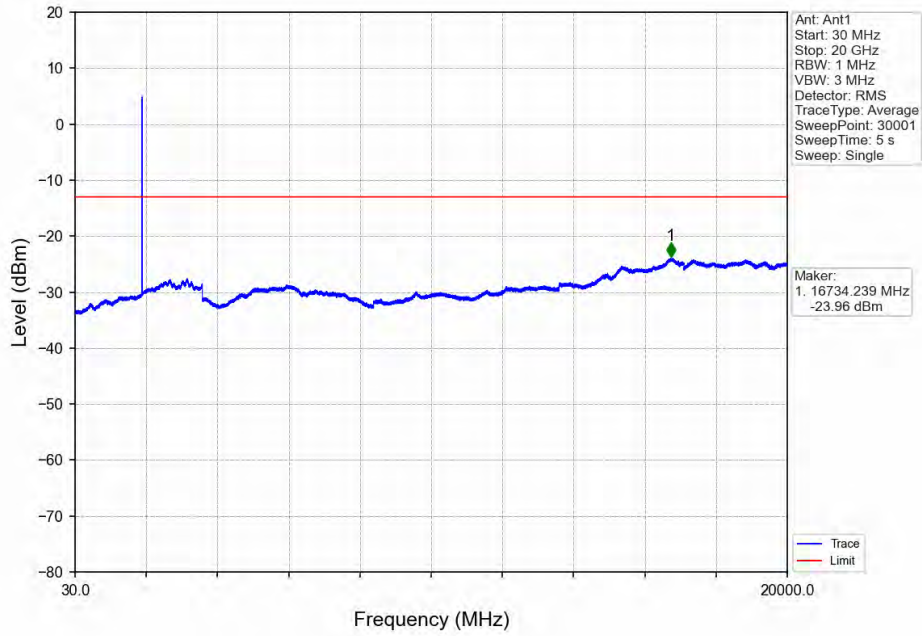

PCS1900 EGPRS LCH 1850.2MHz\_NTNV

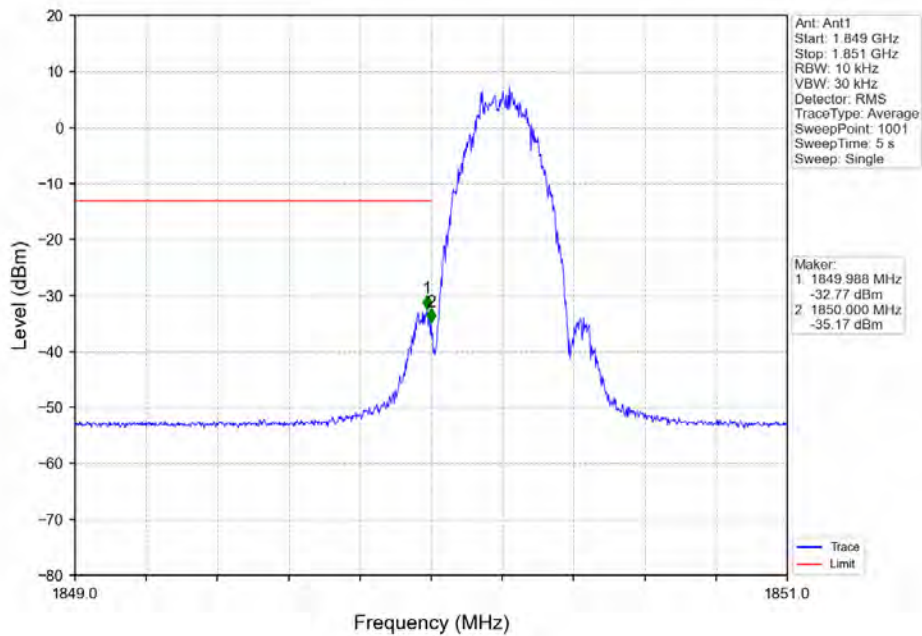





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_EGPRS\_LCH\_1850.2MHz\_NTNV

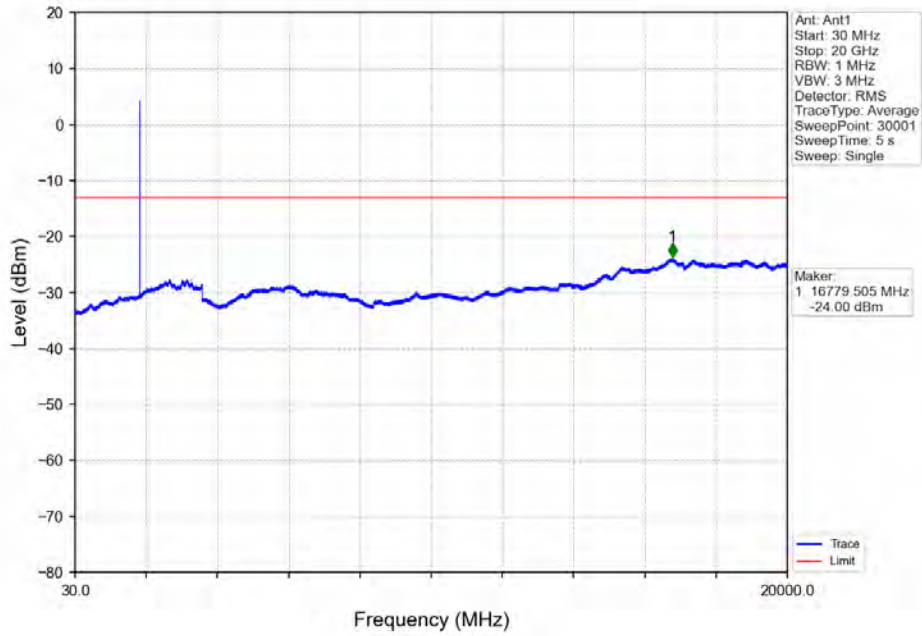

PCS1900\_EGPRS\_MCH\_1880MHz\_NTNV

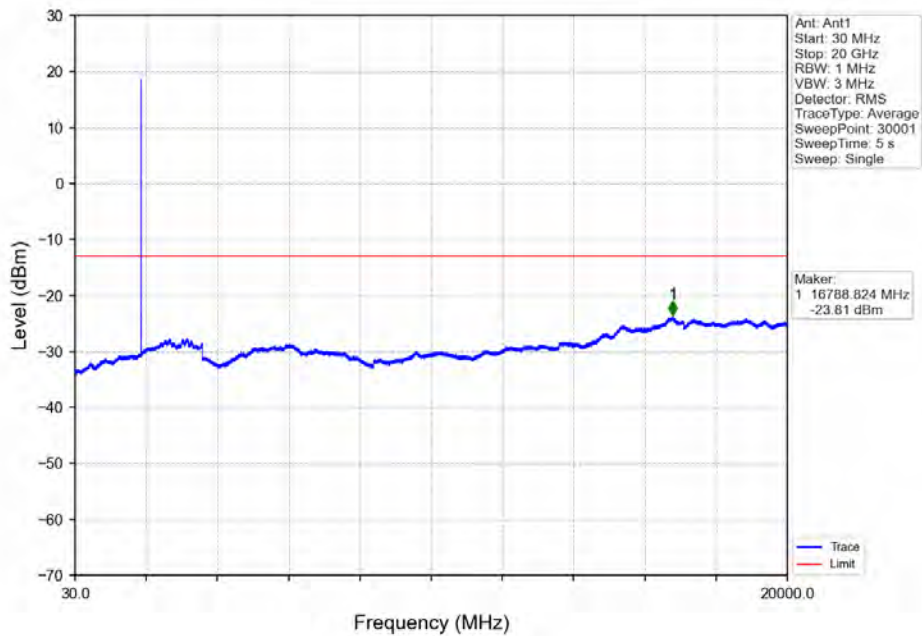





BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

PCS1900\_EGPRS\_HCH\_1909.8MHz\_NTNV

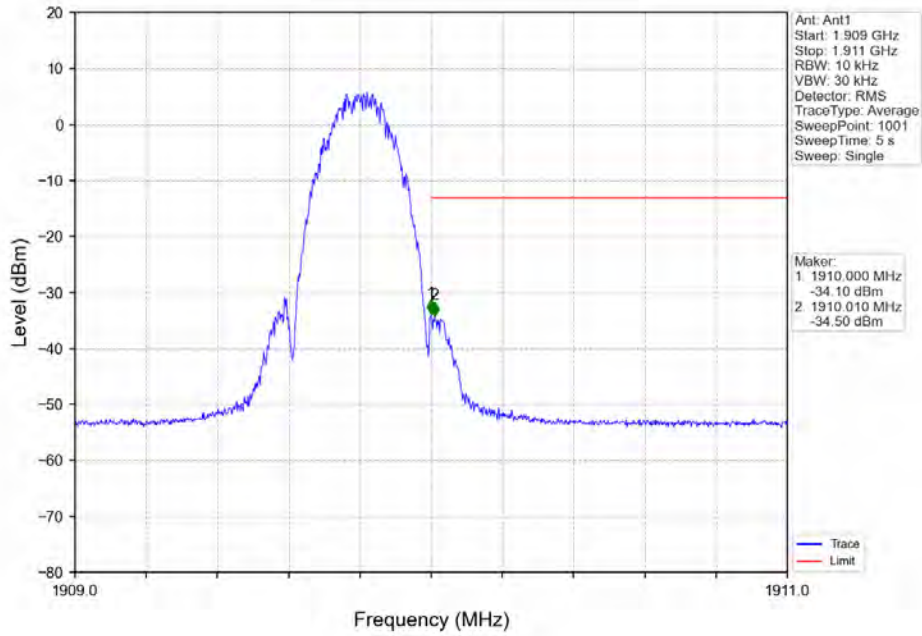

PCS1900 EGPRS HCH 1909.8MHz NTN

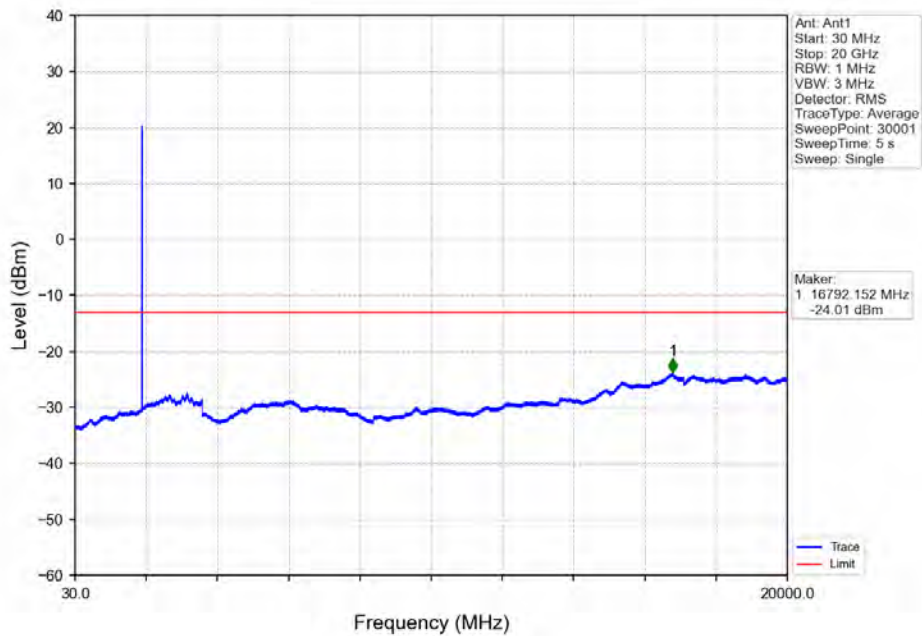



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

WCDMA Band2

Frequency Stability

Band2

Test Result

Band: 2							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
RMC	1852.4	20	3.27	-3.82	-0.00	-2.5 to 2.5	Pass
			3.85	-6.97	-0.00	-2.5 to 2.5	Pass
			4.43	-3.93	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-5.84	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-7.08	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-1.52	-0.00	-2.5 to 2.5	Pass
		0	3.85	-3.75	-0.00	-2.5 to 2.5	Pass
		10	3.85	-6.12	-0.00	-2.5 to 2.5	Pass
		30	3.85	-5.63	-0.00	-2.5 to 2.5	Pass
		40	3.85	-2.27	-0.00	-2.5 to 2.5	Pass
	50	3.85	-5.24	-0.00	-2.5 to 2.5	Pass	
	1880	20	3.27	-5.27	-0.00	-2.5 to 2.5	Pass
			3.85	-2.30	-0.00	-2.5 to 2.5	Pass
			4.43	0.55	0.00	-2.5 to 2.5	Pass
		-30	3.85	-5.15	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-6.57	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-7.94	-0.00	-2.5 to 2.5	Pass
		0	3.85	-2.50	-0.00	-2.5 to 2.5	Pass
		10	3.85	-2.48	-0.00	-2.5 to 2.5	Pass
		30	3.85	-2.81	-0.00	-2.5 to 2.5	Pass
		40	3.85	-1.42	-0.00	-2.5 to 2.5	Pass
	50	3.85	-11.33	-0.01	-2.5 to 2.5	Pass	
	1907.6	20	3.27	-6.02	-0.00	-2.5 to 2.5	Pass
			3.85	-5.04	-0.00	-2.5 to 2.5	Pass
			4.43	-3.05	-0.00	-2.5 to 2.5	Pass
		-30	3.85	-3.30	-0.00	-2.5 to 2.5	Pass
		-20	3.85	-3.40	-0.00	-2.5 to 2.5	Pass
		-10	3.85	-4.00	-0.00	-2.5 to 2.5	Pass
		0	3.85	-3.67	-0.00	-2.5 to 2.5	Pass
		10	3.85	-6.67	-0.00	-2.5 to 2.5	Pass
30		3.85	-7.60	-0.00	-2.5 to 2.5	Pass	
40		3.85	-1.78	-0.00	-2.5 to 2.5	Pass	
50	3.85	-3.02	-0.00	-2.5 to 2.5	Pass		



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P21100026RF14

99% & 26dB Bandwidth

WCDMA \_OBW

Test Result


Band: 2					
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	RMC	12.2kbps RMC	1852.4	4.165	Pass
			1880	4.163	Pass
			1907.6	4.167	Pass



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Test Graph

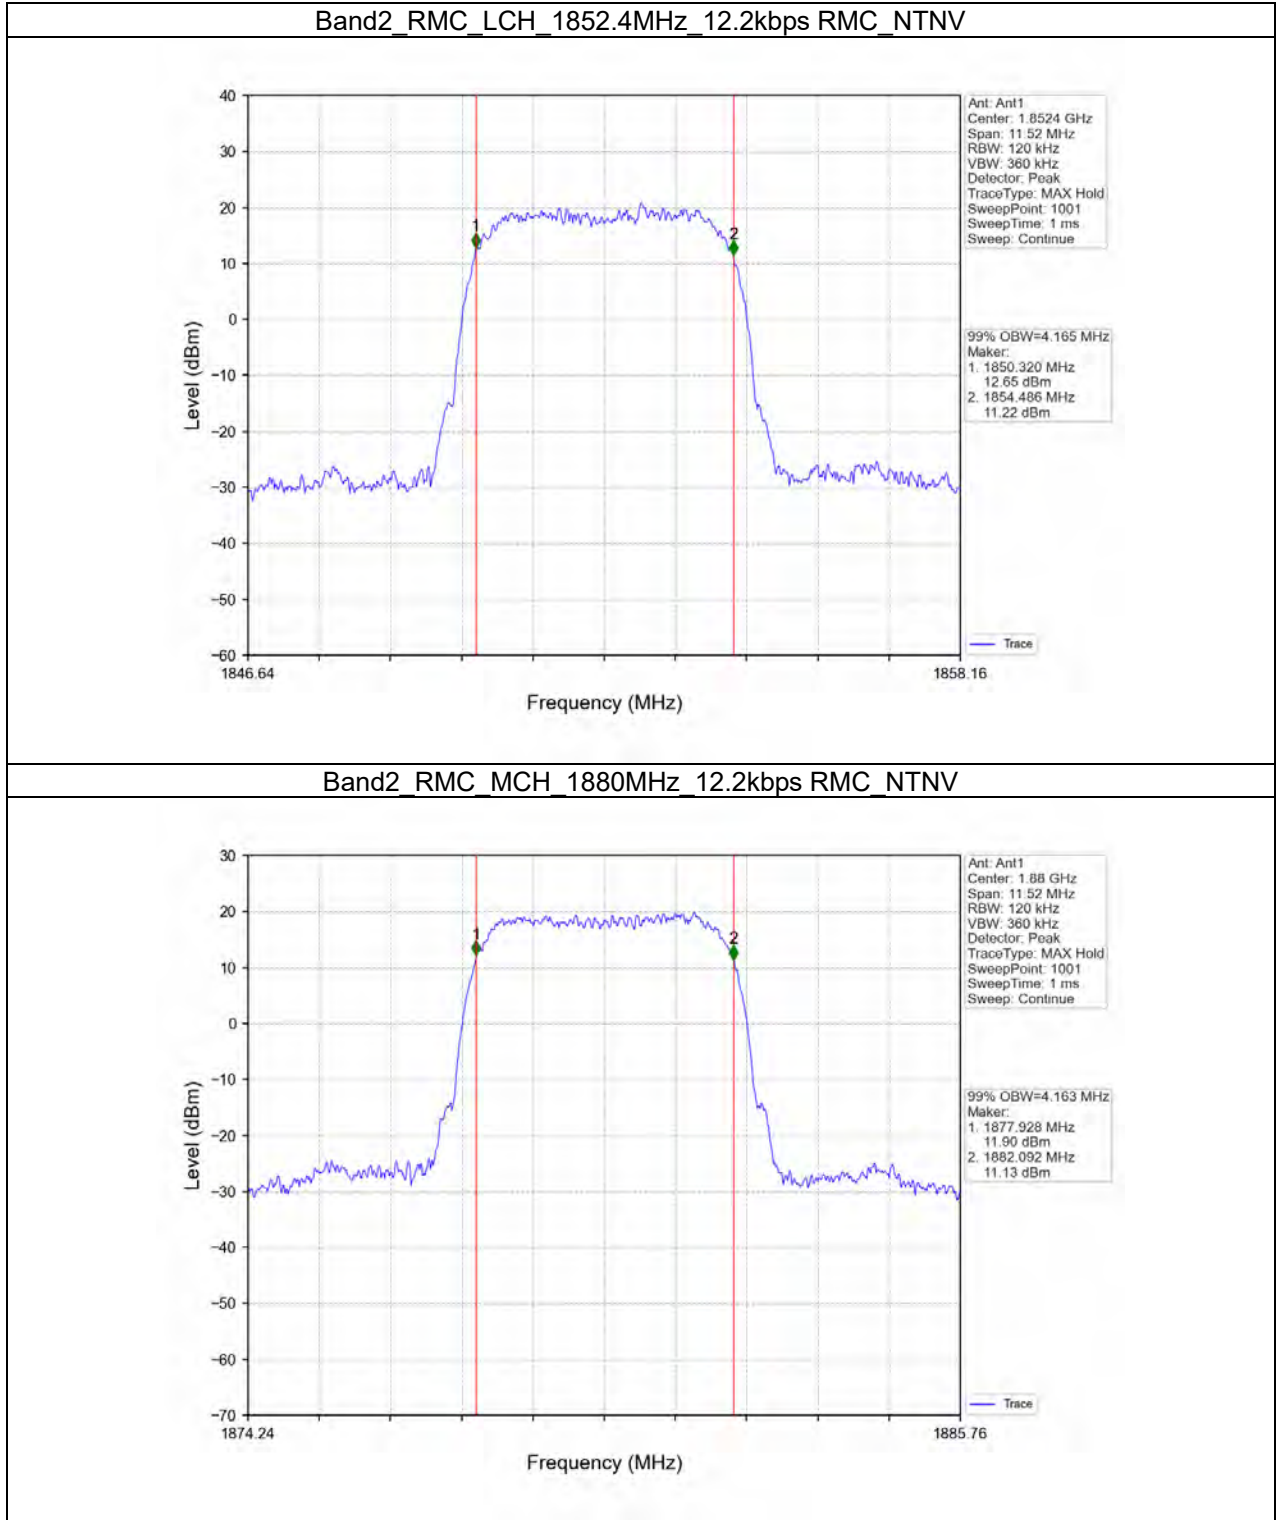






BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

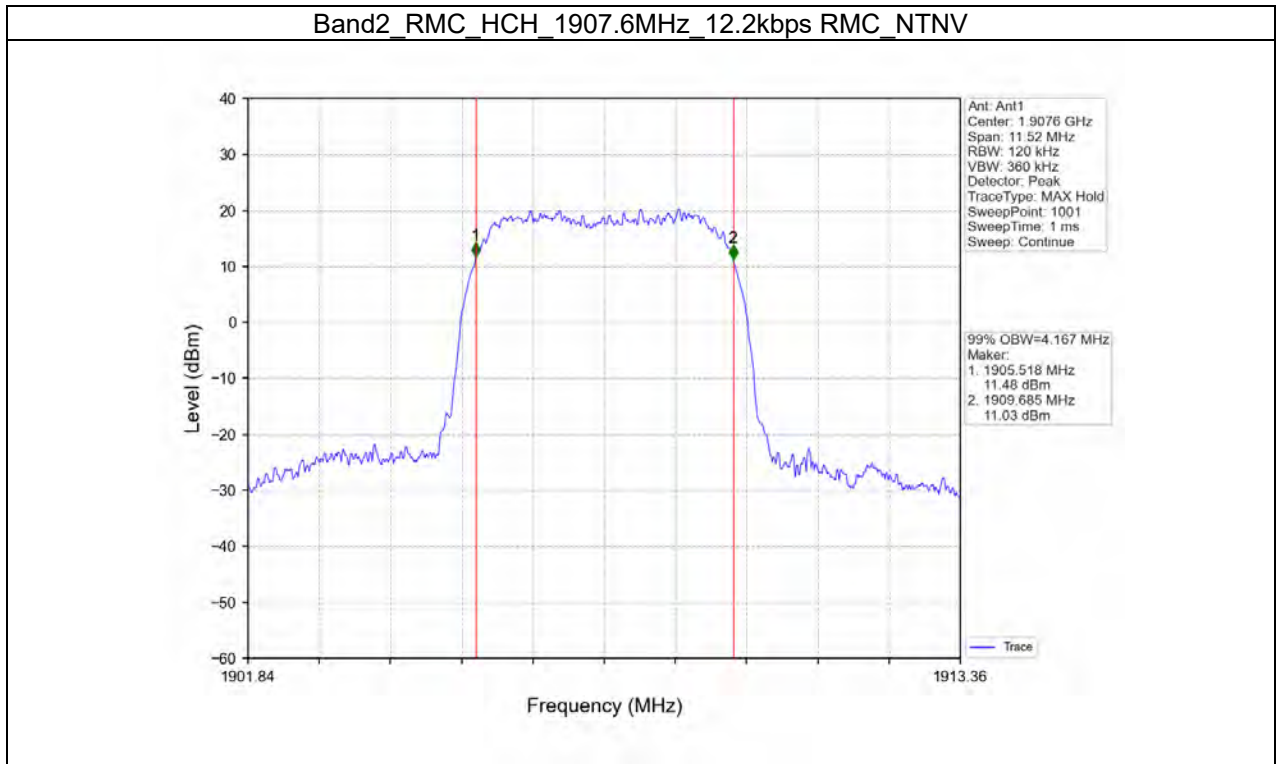



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P21100026RF14

Band2\_XDB

### Test Result

Band: 2					
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	RMC	12.2kbps RMC	1852.4	4.727	Pass
			1880	4.742	Pass
			1907.6	4.754	Pass






BUREAU VERITAS

Test Report No.: W7L-P21100026RF14


### Test Graph

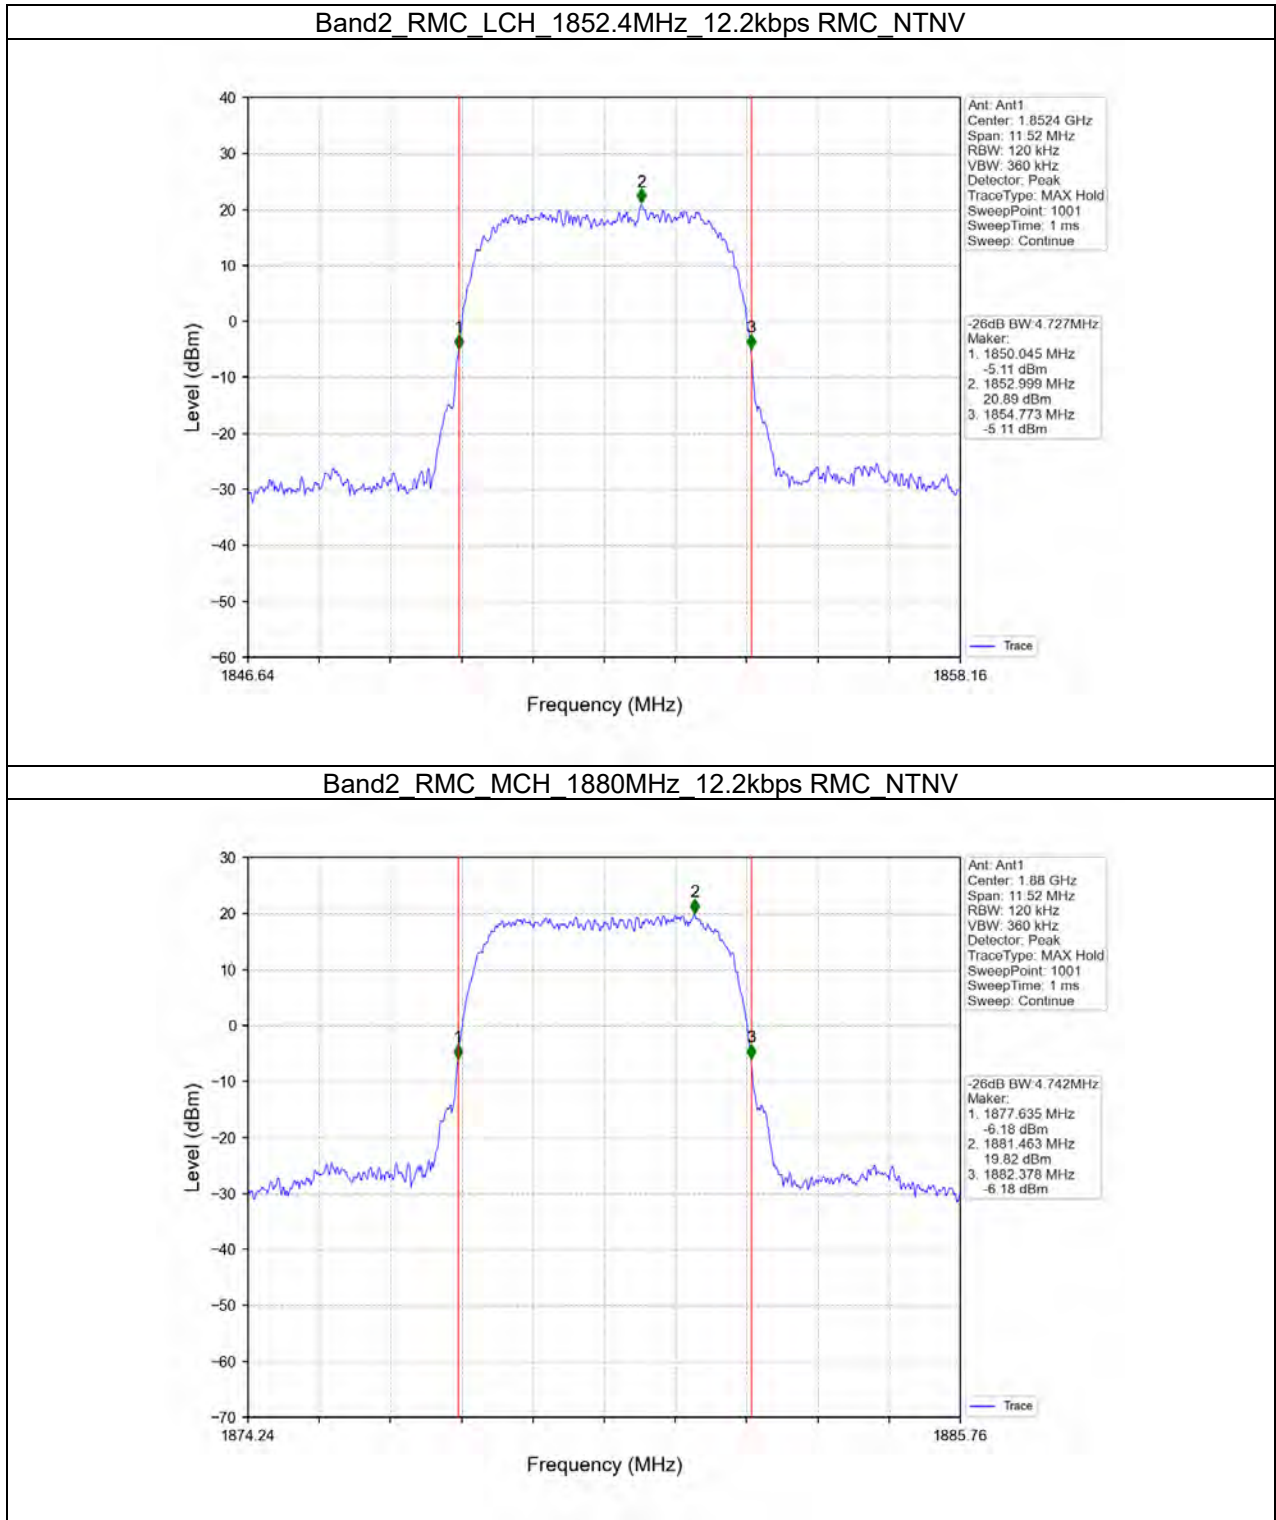



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

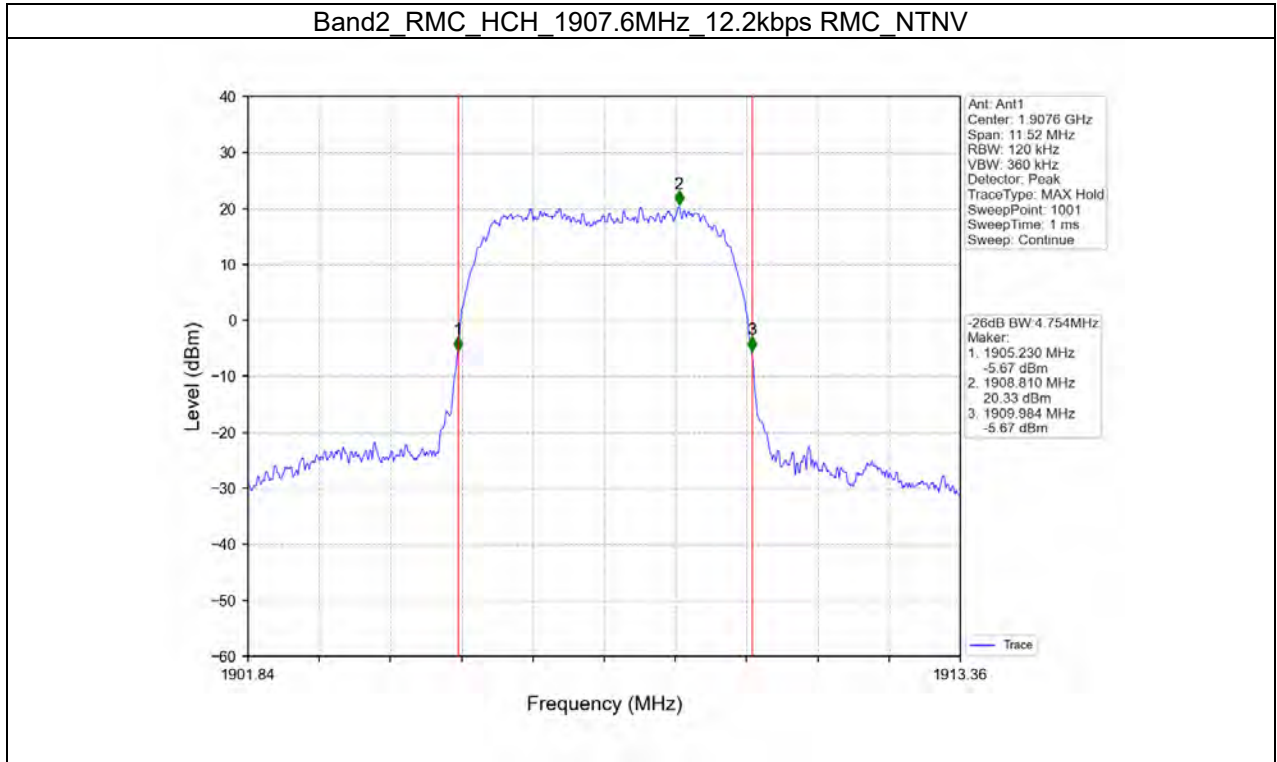



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P21100026RF14

Peak-Average Ratio


Band2

Test Result

Band: 2						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	RMC	12.2kbps RMC	1852.4	2.90	<=13	Pass
			1880	3.04	<=13	Pass
			1907.6	2.78	<=13	Pass




Test Graph

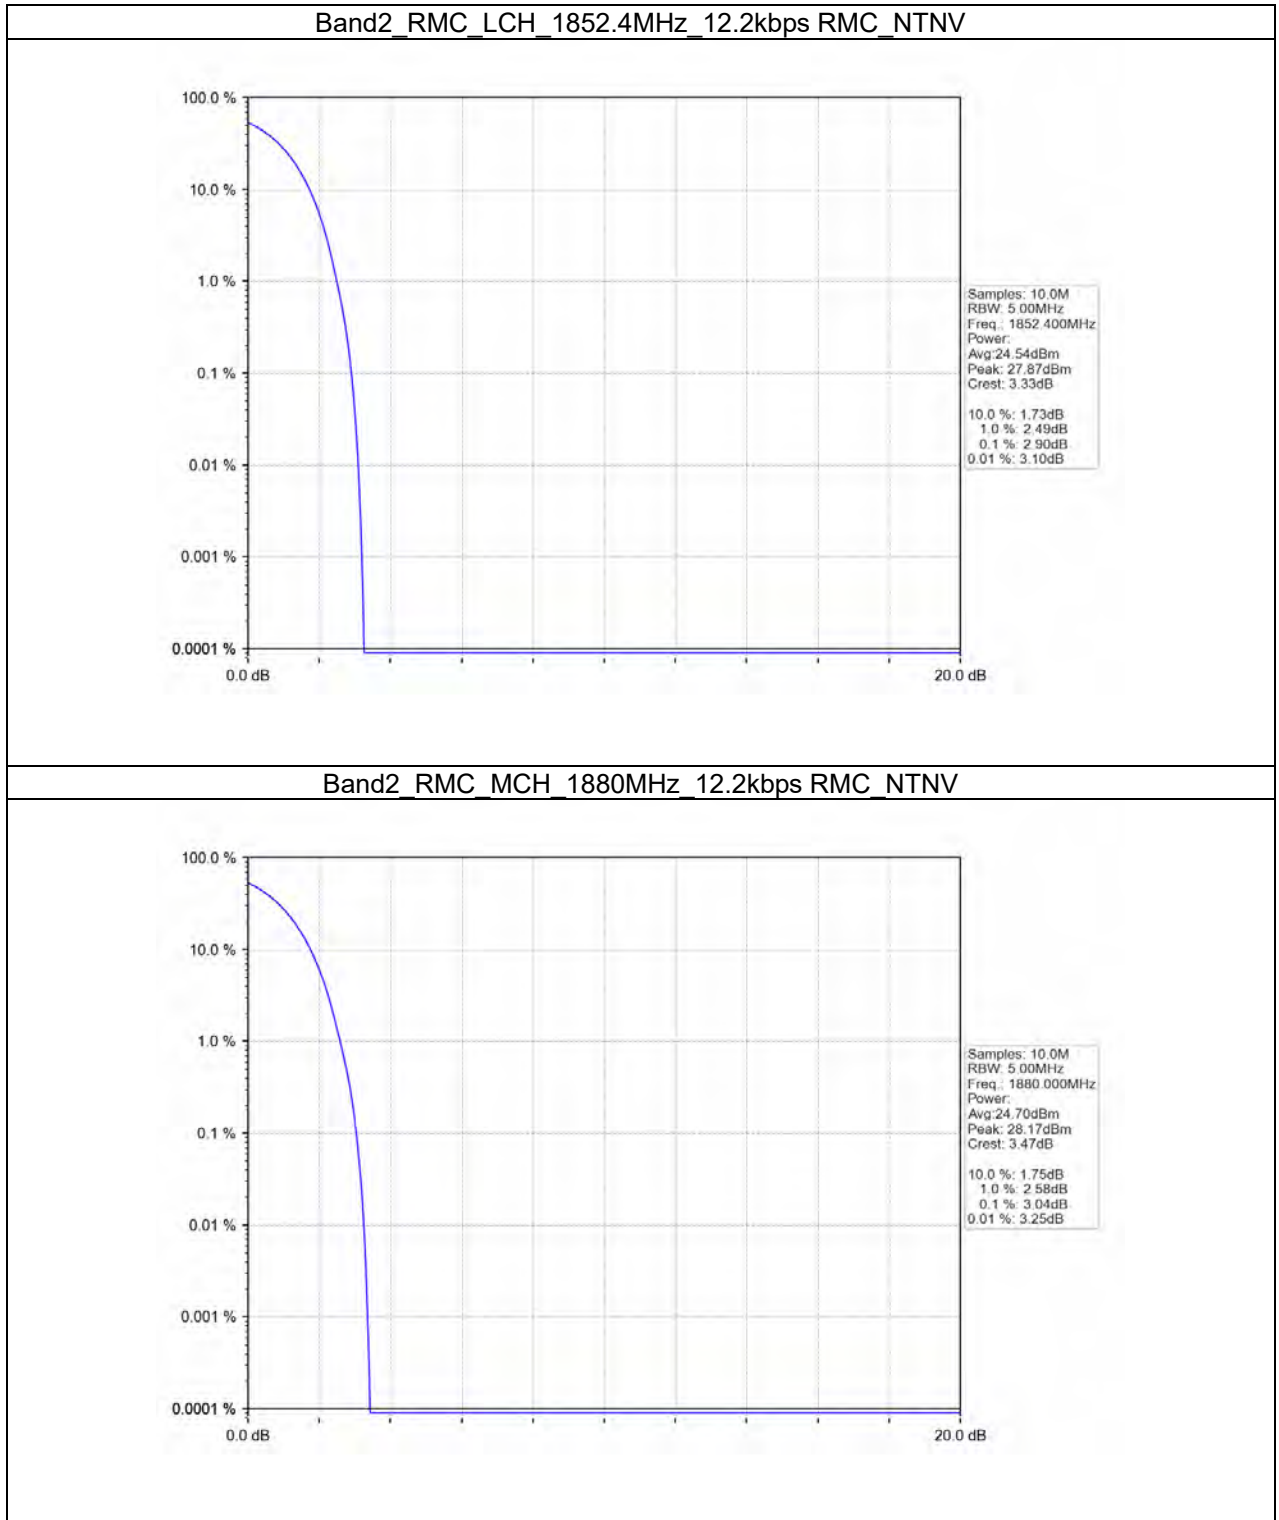



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

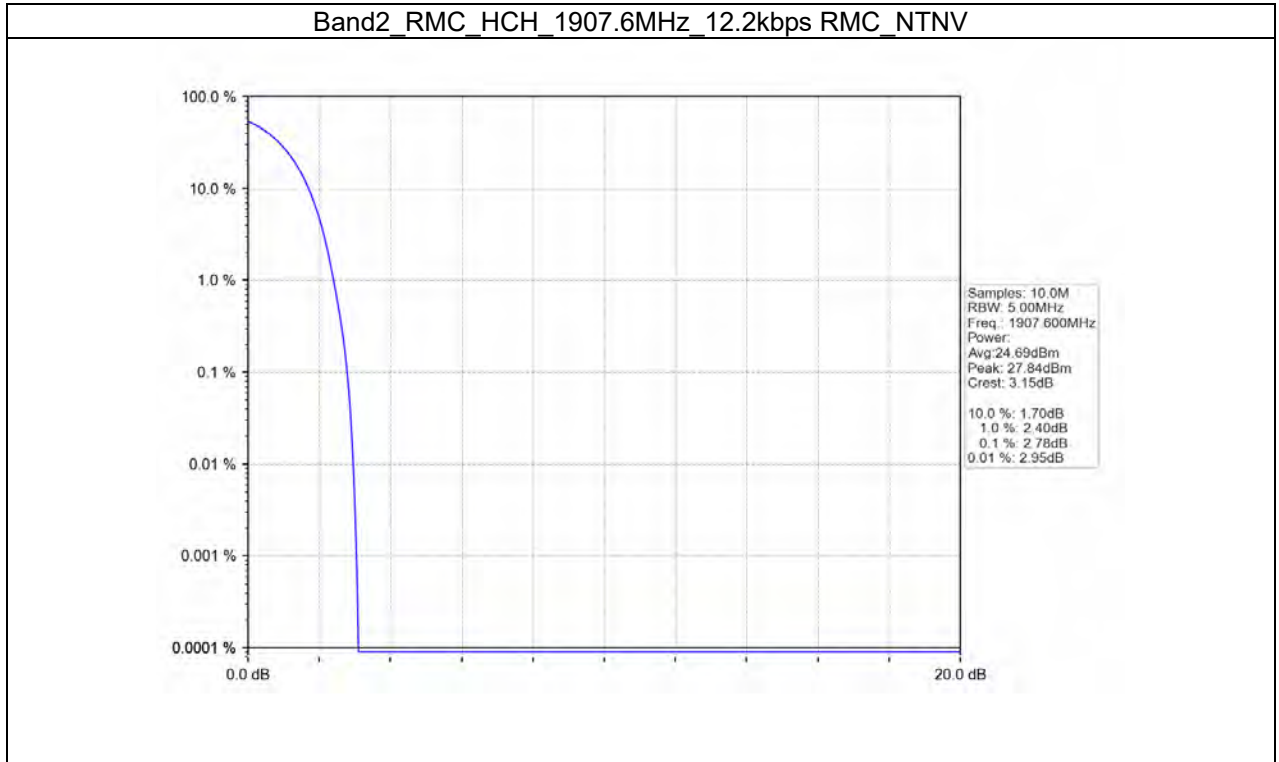



**BUREAU**  
**VERITAS**

**Test Report No.: W7L-P21100026RF14**

### Spurious Emission

### Band2

### Test Result

Band: 2						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	RMC	12.2kbps RMC	1852.4	Refer To Test Graph		Pass
			1880	Refer To Test Graph		Pass
			1907.6	Refer To Test Graph		Pass



BUREAU  
VERITAS

Test Report No.: W7L-P21100026RF14

### Test Graph

