



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Tablet Computer
BRAND NAME : XIAOMI
MODEL NAME : 21051182G
FCC ID : 2AFZZ1182G
STANDARD : FCC Part 15 Subpart C §15.209
CLASSIFICATION : (DCD) Part 15 Low Power Transmitter
Below 1705 kHz
TEST DATE(S) : Jun. 29, 2021 ~ Jul. 06, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Applicant.....5

 1.2 Manufacturer5

 1.3 Product Feature of Equipment Under Test5

 1.4 Modification of EUT5

 1.5 Test Location6

 1.6 Test Software6

 1.7 Applied Standards6

2 Test Configuration of Equipment Under Test7

 2.1 Test Mode7

 2.2 Connection Diagram of Test System7

 2.3 Support Unit used in test configuration and system7

3 Test Result8

 3.1 20dB and 99% Occupied Bandwidth Measurement8

 3.2 Radiated Emission Measurement10

 3.3 AC Conducted Emission Measurement16

 3.4 Antenna Requirements.....20

4 List of Measuring Equipment.....21

5 Uncertainty of Evaluation22

Appendix A. Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Reporting Only	-
3.1	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.2	15.209	Radiated Emission	Pass	Under limit 5.06 dB at 1.105 MHz for Quasi-Peak
3.3	15.207	AC Conducted Emission	Pass	Under limit 16.61 dB at 0.168 MHz
3.4	15.203	Antenna Requirements	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet Computer
Brand Name	XIAOMI
Model Name	21051182G
FCC ID	2AFZZ1182G
HW Version	P2
SW Version	MIUI 12.5
WPT Frequency	145KHz
WPT Type of Modulation	ASK
WPT Antenna Type	Rod coil Antenna
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.209, §15.207
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.


2 Test Configuration of Equipment Under Test

2.1 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 1000 MHz).
- b. AC power line Conducted Emission was tested under maximum output power.

Test Items	Function Type
AC Conducted Emission	Mode 1 : USB Cable (Charging from Adapter) + Keyboard + Stylus Charging from EUT
Radiated Emission	Mode 1 : USB Cable (Charging from Adapter) + Keyboard + Stylus Wireless Charging from EUT

2.2 Connection Diagram of Test System

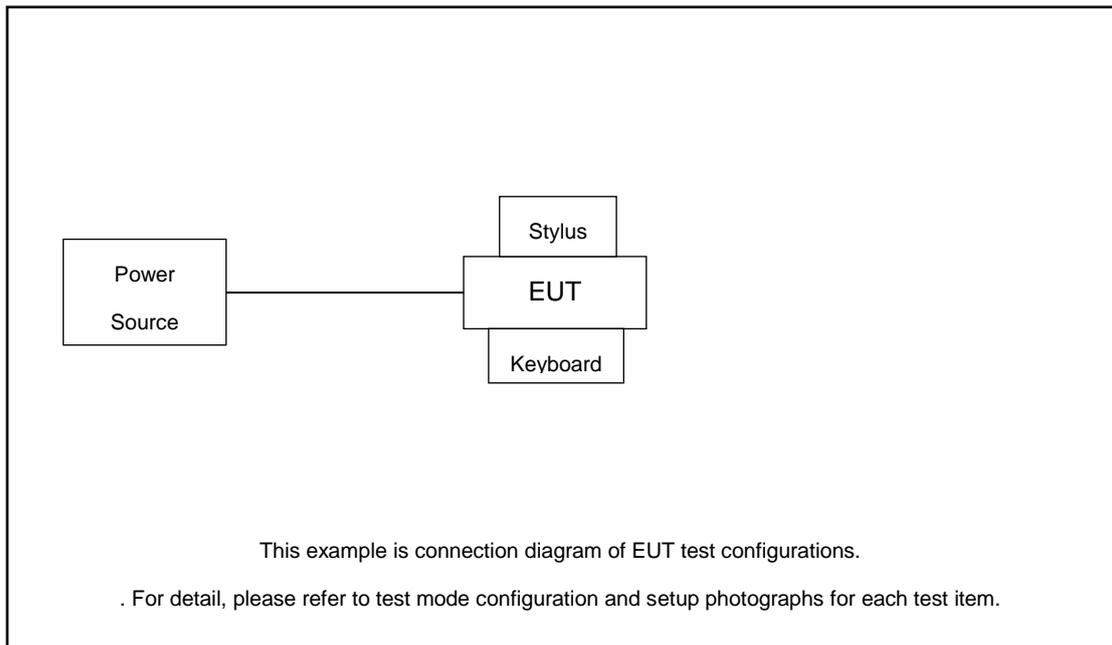

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Keyboard	N/A	N/A	N/A	N/A	N/A
2.	Stylus	N/A	N/A	N/A	N/A	N/A

3 Test Result

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while wirelessly charging a charging board.
2. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
3. Measure and record the results in the test report.

3.1.4 Test Setup

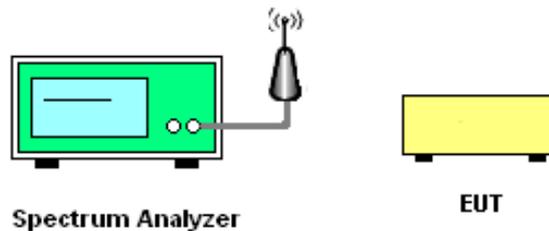




3.1.5 Test Result of 20dB and 99% Bandwidth


Test Engineer :	Long Wu	Temperature :	22~24°C
		Relative Humidity :	53~55%

20 dB Bandwidth Plot

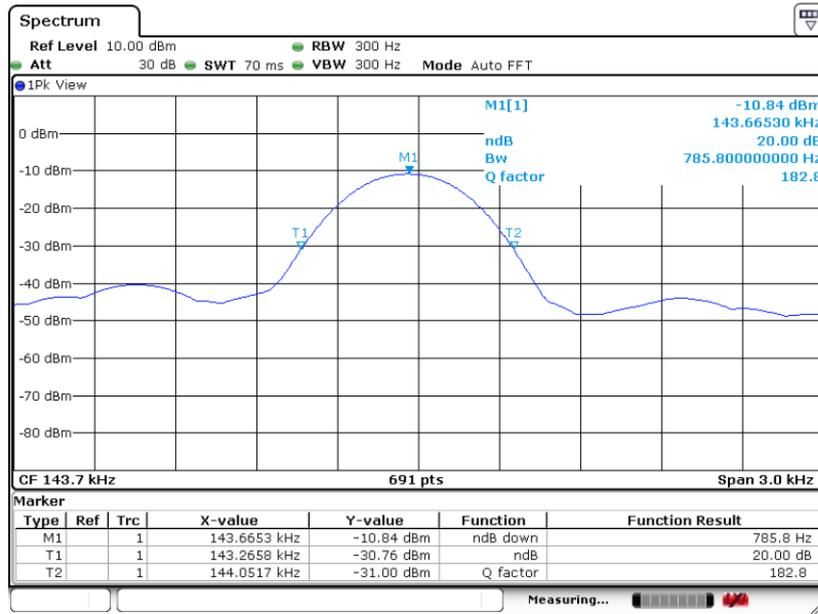

Date: 6 JUL 2021 15:50:49

99% Occupied Bandwidth Plot

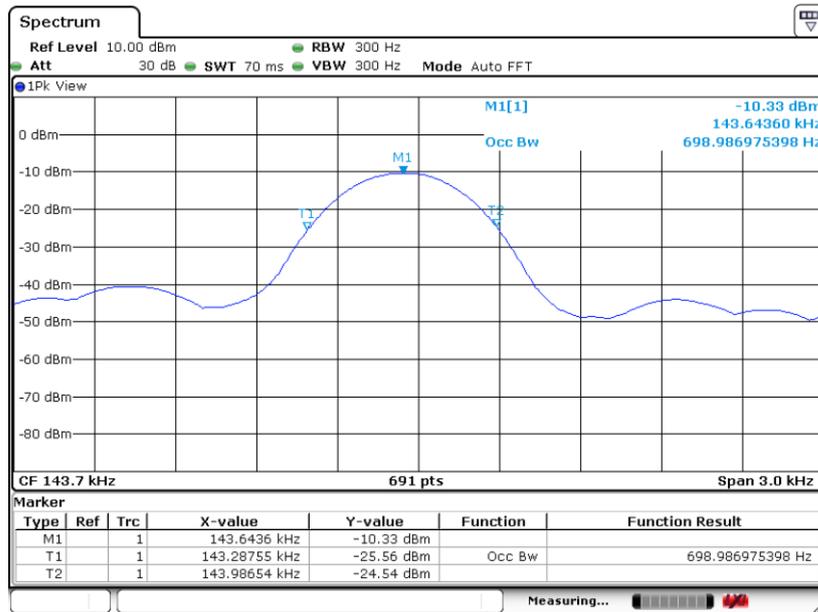

Date: 6 JUL 2021 15:55:50

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.



3.2 Radiated Emission Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. specific line (dBµV/m) = 20 log Emission level (µV/m)
4. Limit line = specific limits (dBµV/m) + distance extrapolation factor.

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.


3.2.4 Test Setup of Radiated Emission

For radiated emissions below 30MHz

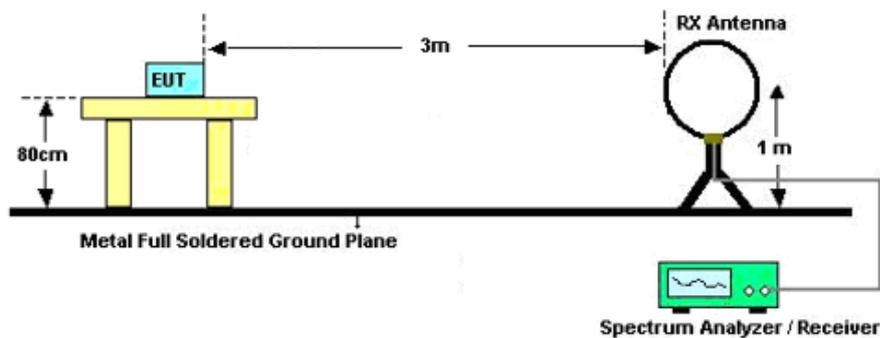

Note: There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.


For radiated emissions above 30MHz

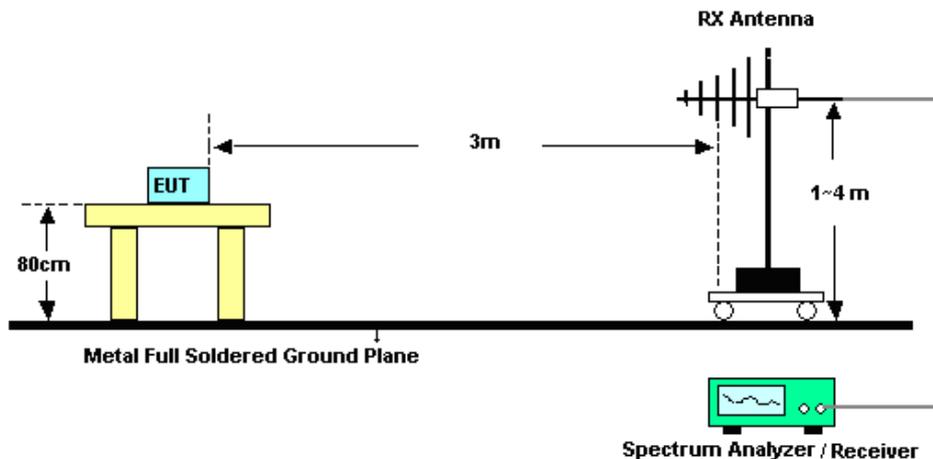



3.2.5 Test Result of Radiated Emission (9kHz ~ 30MHz)

Test Engineer :	Yoke Si	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	41~42%

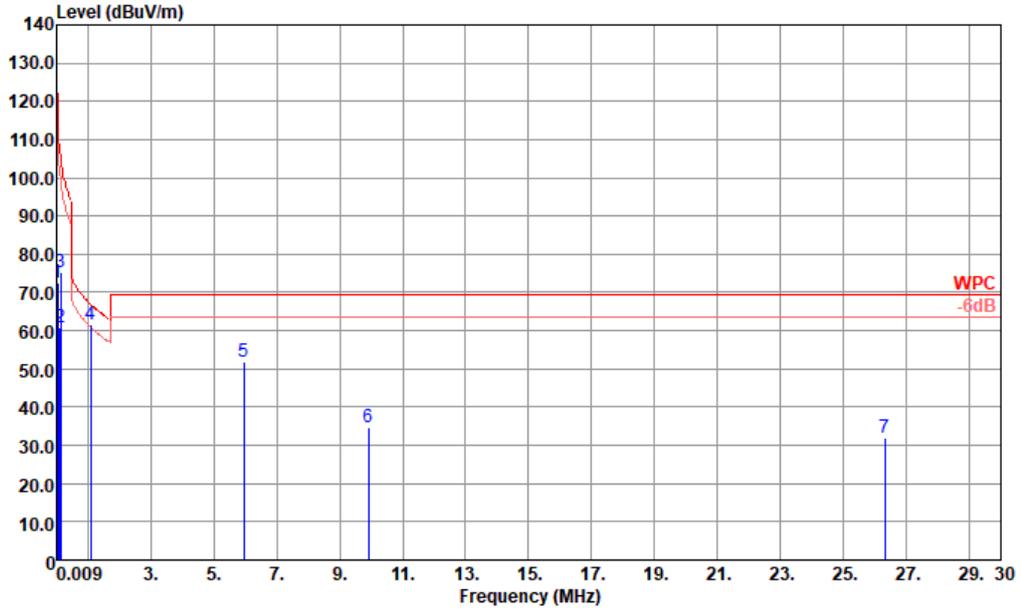


Site : 03CH02-KS
 Condition : WPC 3m NFC-ANTENNA HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	0.056	72.49	-40.15	112.64	51.82	20.60	0.07	---	---	Average
2	0.113	60.97	-45.57	106.54	40.70	20.20	0.07	---	---	Average
3	0.145	75.43	-28.95	104.38	55.02	20.34	0.07	---	---	Average
4	1.105	61.67	-5.06	66.73	40.74	20.81	0.12	---	---	QP
5	5.966	51.91	-17.63	69.54	31.26	20.10	0.55	---	---	QP
6	9.904	34.86	-34.68	69.54	13.86	20.29	0.71	---	---	QP
7	26.325	32.14	-37.40	69.54	11.73	19.26	1.15	---	---	QP



Test Engineer :	Yoke Si	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	41~42%

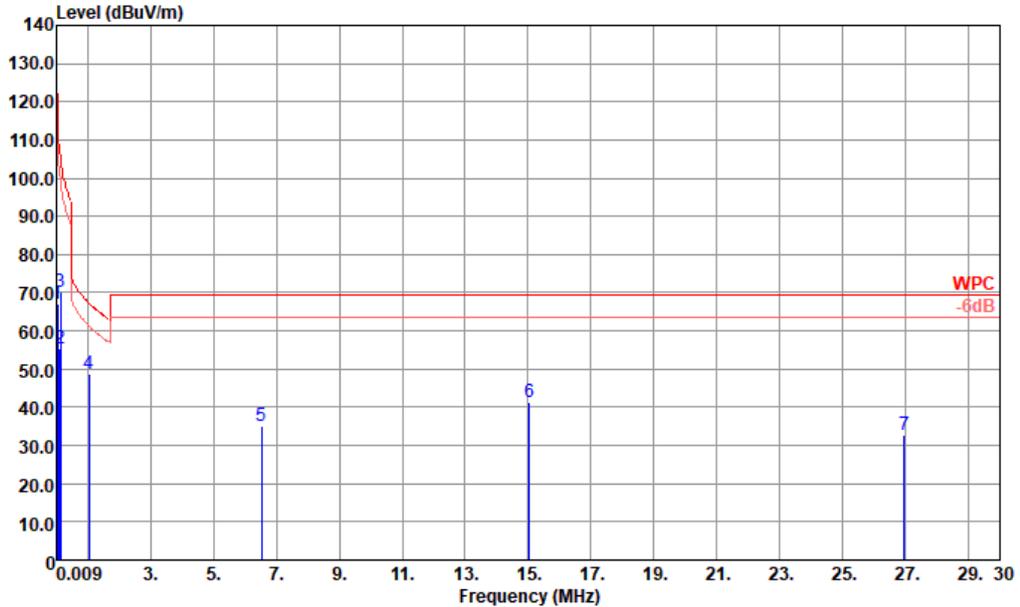


Site : 03CH02-KS
 Condition : WPC 3m NFC-ANTENNA VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	0.06	67.14	-45.41	112.55	46.47	20.60	0.07	---	---	Average
2	0.11	55.41	-51.05	106.46	35.14	20.20	0.07	---	---	Average
3	0.14	70.10	-34.28	104.38	49.69	20.34	0.07	---	---	Average
4	1.05	48.83	-18.30	67.13	27.90	20.81	0.12	---	---	QP
5	6.54	35.02	-34.52	69.54	14.33	20.10	0.59	---	---	QP
6	15.04	41.31	-28.23	69.54	20.74	19.70	0.87	---	---	QP
7	26.95	32.65	-36.89	69.54	12.15	19.33	1.17	---	---	QP



3.2.6 Test Result of Radiated Emission (30MHz ~ 1000MHz)

Test Engineer :	Yoke Si	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	41~42%

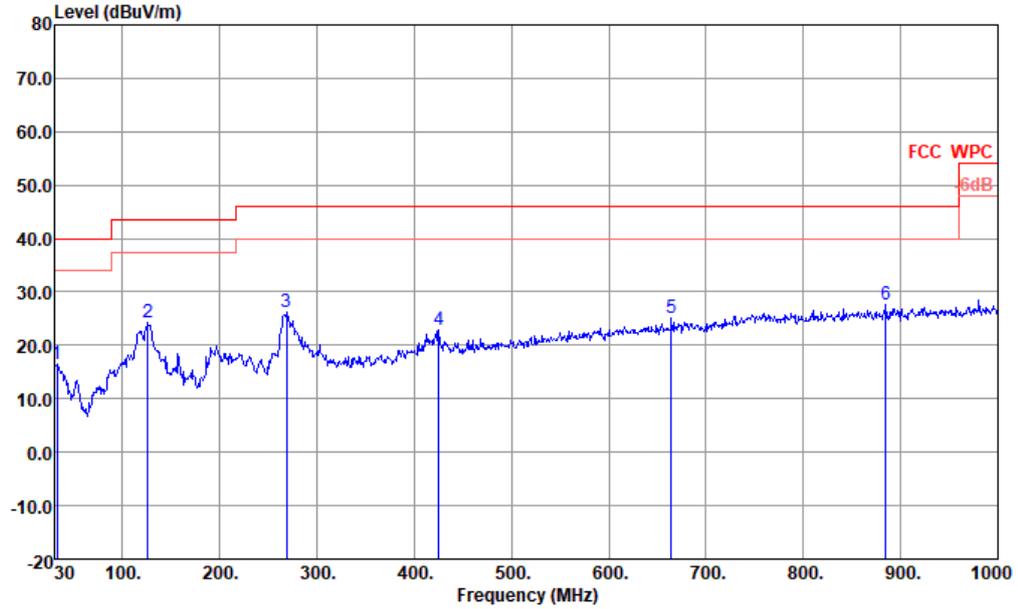


Site : 03CH02-KS
 Condition : FCC WPC 3m LF 49921 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	32.91	16.53	-23.47	40.00	25.62	22.22	0.89	32.20	---	---	Peak
2	126.03	24.21	-19.29	43.50	37.69	16.72	1.95	32.15	---	---	Peak
3	268.62	26.34	-19.66	46.00	36.78	18.86	2.86	32.16	---	---	Peak
4	424.79	22.91	-23.09	46.00	29.06	22.50	3.60	32.25	---	---	Peak
5	664.38	25.04	-20.96	46.00	26.13	26.63	4.48	32.20	---	---	Peak
6	884.57	27.63	-18.37	46.00	25.45	29.27	5.17	32.26	100	0	Peak



Test Engineer :	Yoke Si	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	41~42%

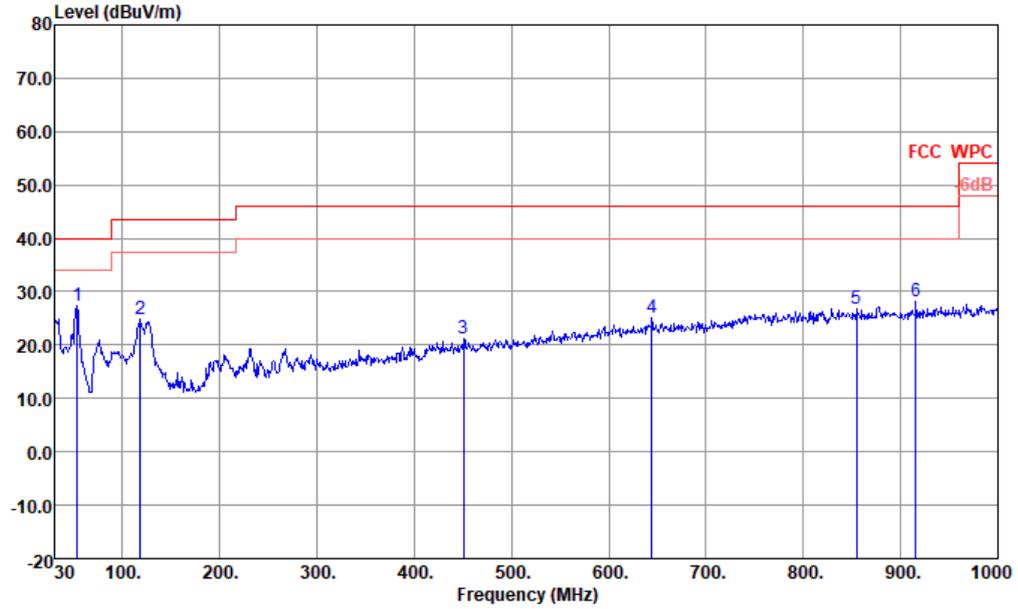

Site : 03CH02-KS
 Condition : FCC WPC 3m LF 49921 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	53.28	27.46	-12.54	40.00	44.70	13.70	1.26	32.20	100	0	Peak
2	118.27	24.77	-18.73	43.50	38.51	16.53	1.89	32.16	---	---	Peak
3	450.98	21.14	-24.86	46.00	26.53	23.10	3.71	32.20	---	---	Peak
4	644.01	25.07	-20.93	46.00	26.34	26.53	4.41	32.21	---	---	Peak
5	854.50	26.79	-19.21	46.00	24.88	29.21	5.08	32.38	---	---	Peak
6	915.61	28.10	-17.90	46.00	25.54	29.50	5.26	32.20	---	---	Peak



3.3 AC Conducted Emission Measurement

3.3.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

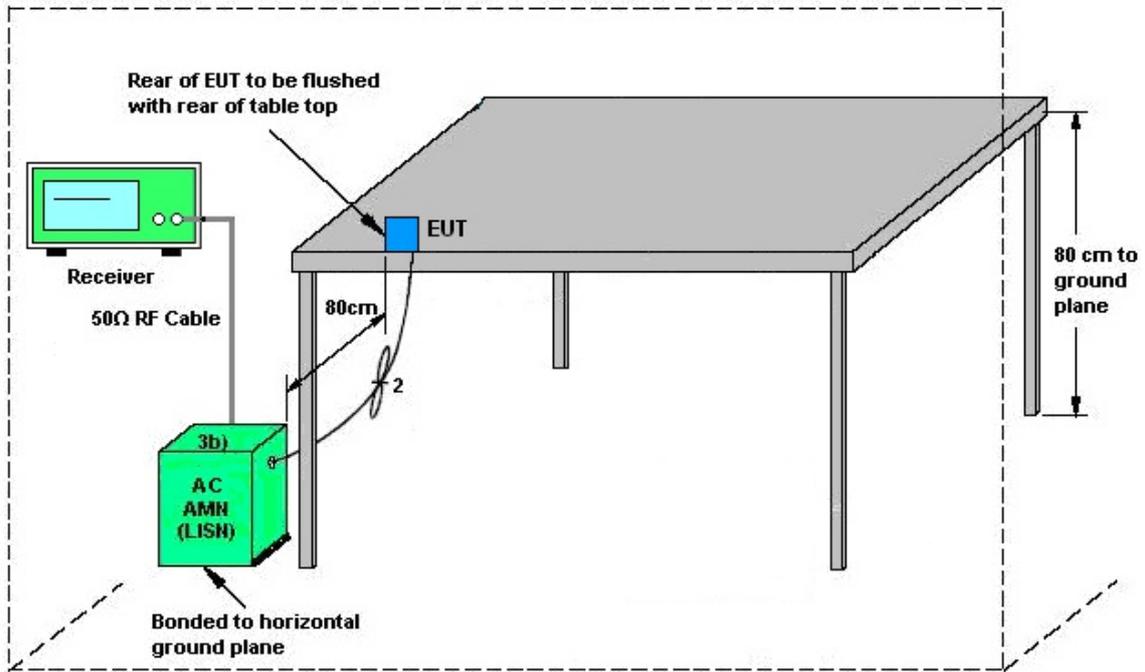


AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network



3.3.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

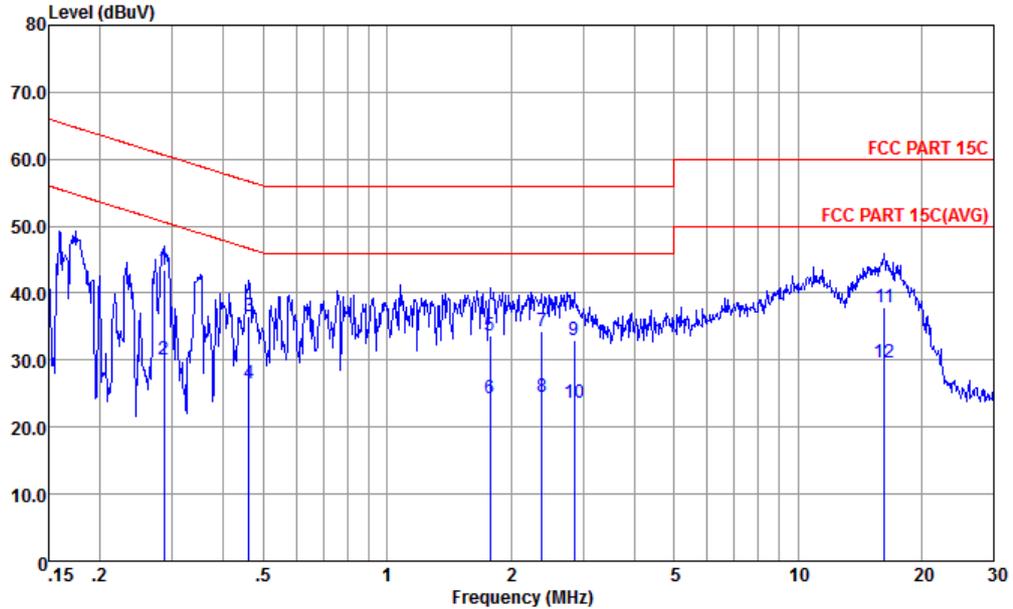


Site : CO01-KS
 Condition : FCC PART 15C TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.286	43.55	-17.08	60.63	23.60	9.64	10.31	QP
2	0.286	30.15	-20.48	50.63	10.20	9.64	10.31	Average
3	0.461	36.49	-20.18	56.67	16.59	9.65	10.25	QP
4	0.461	26.49	-20.18	46.67	6.59	9.65	10.25	Average
5	1.781	33.63	-22.37	56.00	13.50	9.90	10.23	QP
6	1.781	24.23	-21.77	46.00	4.10	9.90	10.23	Average
7	2.384	34.32	-21.68	56.00	14.10	9.99	10.23	QP
8	2.384	24.42	-21.58	46.00	4.20	9.99	10.23	Average
9	2.854	32.89	-23.11	56.00	12.60	10.05	10.24	QP
10	2.854	23.59	-22.41	46.00	3.30	10.05	10.24	Average
11	16.226	37.99	-22.01	60.00	16.60	10.97	10.42	QP
12	16.226	29.59	-20.41	50.00	8.20	10.97	10.42	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

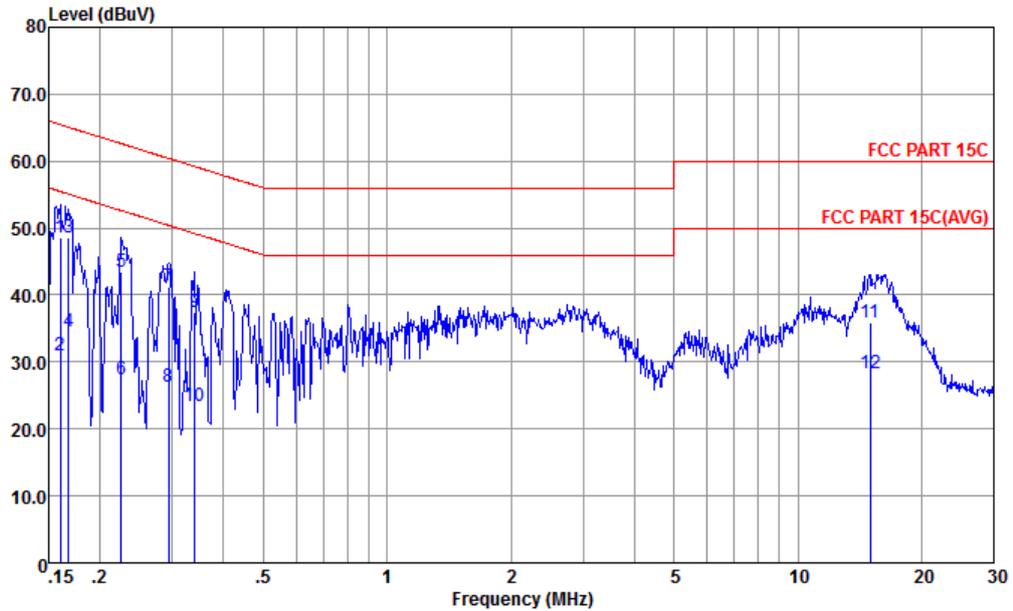

Site : CO01-KS
 Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	48.47	-17.00	65.47	28.20	9.82	10.45	QP
2	0.160	30.87	-24.60	55.47	10.60	9.82	10.45	Average
3 *	0.168	48.47	-16.61	65.08	28.20	9.84	10.43	QP
4	0.168	34.47	-20.61	55.08	14.20	9.84	10.43	Average
5	0.226	43.41	-19.20	62.61	23.20	9.86	10.35	QP
6	0.226	27.41	-25.20	52.61	7.20	9.86	10.35	Average
7	0.294	41.30	-19.11	60.41	21.20	9.79	10.31	QP
8	0.294	26.40	-24.01	50.41	6.30	9.79	10.31	Average
9	0.341	37.36	-21.82	59.18	17.29	9.78	10.29	QP
10	0.341	23.36	-25.82	49.18	3.29	9.78	10.29	Average
11	14.986	35.94	-24.06	60.00	14.51	11.04	10.39	QP
12	14.986	28.34	-21.66	50.00	6.91	11.04	10.39	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.4 Antenna Requirements

3.4.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Jul. 06, 2021	Oct. 31, 2021	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 17, 2020	Jun. 30, 2021	Oct. 16, 2021	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 17, 2020	Jun. 30, 2021	Oct. 16, 2021	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Jun. 30, 2021	Oct. 31, 2021	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 26, 2021	Jun. 30, 2021	Jan. 25, 2022	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 06, 2021	Jun. 30, 2021	Jan. 05, 2022	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jun. 30, 2021	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 30, 2021	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 30, 2021	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Jun. 29, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jun. 29, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	Jun. 29, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jun. 29, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

----- THE END -----