FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.

EQUIPMENT: Mobile Phone

BRAND NAME : Redmi

MODEL NAME : 22101316UG FCC ID : 2AFZZ1316UG

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

TEST DATE(S) : Sep. 03, 2022 ~ Sep. 16, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

JasonJia

Approved by: Jason Jia





Report No.: FG282003D

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 1 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

TABLE OF CONTENTS

RE	VISIO	ON HISTORY	3
SL	IMMA	RY OF TEST RESULT	4
1	GEN	IERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	5
	1.6	Maximum Conducted Power and Emission Designator	6
	1.7	Testing Site	6
	1.8	Test Software	6
	1.9	Applied Standards	7
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	8
	2.1	Test Mode	8
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	9
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	TES	T RESULT	11
	3.1	Conducted Output Power Measurement	11
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	13
	3.4	Emissions Mask – Out Of Band Emissions Measurement	15
	3.5	Field Strength of Spurious Radiation Measurement	16
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT	21
5	UNC	ERTAINTY OF EVALUATION	22
ΔΕ	PFNL	DIX A. TEST RESULTS OF CONDUCTED TEST	
AF	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
ΑF	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 2 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG282003D	Rev. 01	Initial issue of report	Oct. 25, 2022

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 3 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	_	Report only	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	_	Report only	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 45.77 dB at 2440.000 MHz
3.6	§2.1055 Frequency Stability §90.213 Temperature & Vol		< 2.5 ppm	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 4 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Report No.: FG282003D

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	22101316UG
FCC ID	2AFZZ1316UG
IMEI Code	Conducted: 868725060026815/868725060026823
liviei Code	Radiation: 868725060043950/868725060044578
HW Version	P2
SW Version	MIUI14
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	814 ~ 824 MHz						
Rx Frequency	859 ~ 869 MHz						
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz						
Maximum Output Power to Antenna	24.13 dBm						
Antenna Gain	<ant. 0=""> -6.8 dBi</ant.>						
Antenna Gam	<ant. 1=""> -3.9 dBi</ant.>						
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM(Downlink only)						

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

 Sporton International Inc. (Kunshan)
 Page Number
 : 5 of 21

 TEL: +86-512-57900158
 Report Issued Date
 : Oct. 25, 2022

 FAX: +86-512-57900958
 Report Version
 : Rev. 01

FCC ID: 2AFZZ1316UG Report Template No.: BU5-FWLTE Version 2.0

1.6 Maximum Conducted Power and Emission Designator

Ľ	TE Band 26	QP	sk	16QAM/64QAM			
BW Frequency Range (MHz)		Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)		
10	819.0	0.2588	9M01G7D	0.2037	9M01W7D		
15	824	0.2523	13M4G7D	0.2023	13M5W7D		

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)						
	No. 1098, Pengxi North Road, Kunshan Economic Development Zone						
Test Site Location	Jiangsu Province 215300 People's Republic of China						
Test Site Location	TEL: +86-512-57900158						
	FAX: +86-512-57900958						
	Sporton Site No.	FCC Designation No.	FCC Test Firm				
Test Site No.	Sporton Site No.	T CC Designation No.	Registration No.				
	03CH04-KS TH01-KS	CN1257	314309				

1.8 Test Software

Item	Site	Manufacturer	Name	Version	
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al	

Sporton International Inc. (Kunshan)
TEL: +86-512-57900158

FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 6 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 7 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Test Configuration of Equipment Under Test

Test Mode 2.1

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission(X plane).

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

		Bandwidth (MHz)			Modulation		RB#			Test Channel						
Test Items	Ban d	1.4	3	5	10	15	20	QPSK	16Q AM	64 QA M	1	Half	Full	L	М	н
Max. Output Power	26	v	>	v	v	v	-	v	v	v	v		v	v	>	v
26dB and 99% Bandwidth	26				v	٧	-	v	v				v	v		٧
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		٧
Emission masks – Out of band emissions	26	v	٧	v	v	v	-	v			v			v	٧	v
Frequency Stability	26				v		-	v					v		v	
Radiated Spurious Emission	26		Worst Case							v						
Note	 The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 															

part 22 also complies.


Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

: 8 of 21 Page Number Report Issued Date: Oct. 25, 2022 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

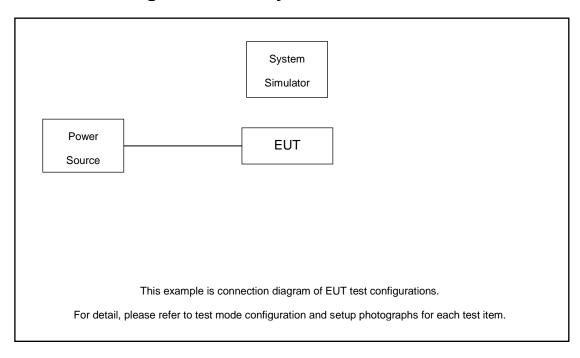

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

 $Offset = RF \ cable \ loss + attenuator \ factor.$

The following shows an offset computation example with RF cable loss 4.6 dB.

Example:

 $Offset(dB) = RF \ cable \ loss(dB).$

= 4.6 (dB)

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 9 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
10	Channel	-	26740	-					
10	Frequency	-	819	-					
5	Channel	26715	26740	26765					
5	Frequency	816.5	819	821.5					
3	Channel	26705	26740	26775					
3	Frequency	815.5	819	822.5					
1.4	Channel	26697	26740	26783					
1.4	Frequency	814.7	819	823.3					

LTE Band 26 Cross-rule Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	-	Middle	-						
15	Channel	-	26790	-						
15	Frequency	-	824	-						
10	Channel	-	26790	-						
10	Frequency	-	824	-						
5	Channel	-	26790	-						
5	Frequency	-	824	-						
3	Channel	-	26790	-						
S	Frequency	-	824	-						
1.4	Channel	-	26790	-						
1.4	Frequency	-	824	-						

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 10 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 11 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

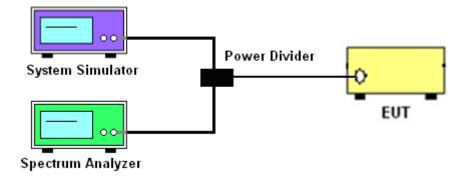

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 12 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

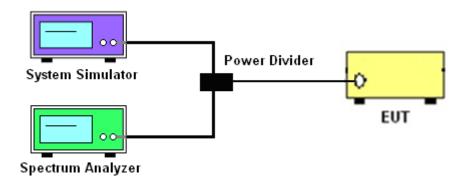

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 14 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

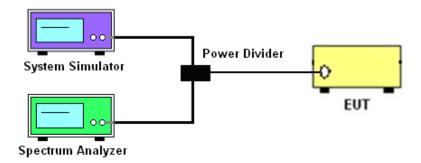

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 15 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 16 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01


Report No.: FG282003D

3.5.4 Test Setup

For radiated test from 30MHz

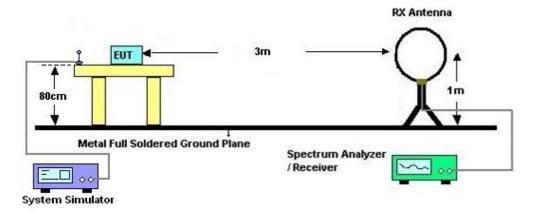


For radiated test from 30MHz to 1GHz

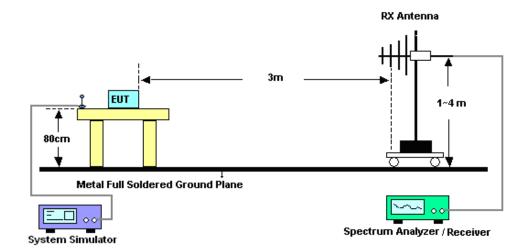

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 17 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

For radiated test above 1GHz

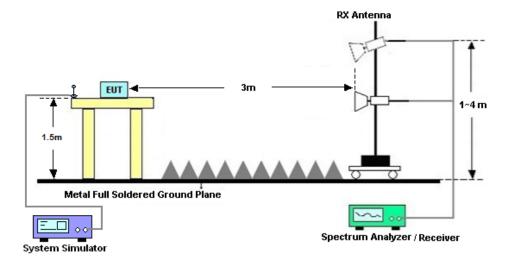

3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 18 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation


- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

Report No.: FG282003D

3.6.5 Test Setup

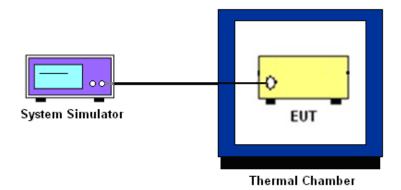

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 20 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Sep. 03, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2022	Sep. 03, 2022	Aug. 25, 2023	Conducted (TH01-KS)
Temperature &h umidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Sep. 03, 2022	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57541079	10Hz-44G,MAX 30dB	Oct. 14, 2021	Sep. 16, 2022	Oct. 13, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Sep. 16, 2022	May 23, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Sep. 16, 2022	Oct. 29, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Sep. 16, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Sep. 16, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060839	1Ghz-18Ghz	Oct. 14, 2021	Sep. 16, 2022	Oct. 13, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 13, 2021	Sep. 16, 2022	Oct. 12, 2022	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 16, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 16, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 16, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 21 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of	3 3 A D
Confidence of 95% (U = 2Uc(y))	3.3dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	2 0 4 5
Confidence of 95% (U = 2Uc(y))	2.8dB

----- THE END -----

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : 22 of 21
Report Issued Date : Oct. 25, 2022
Report Version : Rev. 01

Report No.: FG282003D

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
	Char	nel		26790			
	Frequenc	y (MHz)		824			
15	QPSK	1	0	24.02			
15	QPSK	1	74	23.94			
15	QPSK	75	0	22.96			
15	16QAM	1	0	23.06			
15	64QAM	1	0	21.99			
	Channel					26740	
	Frequenc	y (MHz)		824		819	
10	QPSK	1	0	24.00		24.13	
10	16QAM	1	0	22.90		23.09	
Channel				26790	26715	26740	26765
	Frequenc	y (MHz)		824	816.5	819	821.5
5	QPSK	1	0	23.98	23.90	24.03	23.92
5	16QAM	1	0	23.13	22.94	23.09	22.98
	Char	nel		26790	26705	26740	26775
Frequency (MHz)				824	815.5	819	822.5
3	QPSK	1	0	23.98	23.87	24.13	23.98
3	16QAM	1	0	23.13	23.01	23.04	23.07
Channel				26790	26697	26740	26783
Frequency (MHz)				824	814.7	819	823.3
1.4	QPSK	1	0	23.96	23.90	24.08	24.02
1.4	16QAM	1	0	22.92	22.95	23.11	23.04

Sporton International Inc. (Kunshan)


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG


LTE Band 26_Part 90S

Peak-to-Average Ratio

Mode	LTE Band 26 / 15MHz/ Highest channel			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Low CH	4.90	5.74	6.20	PASS

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG




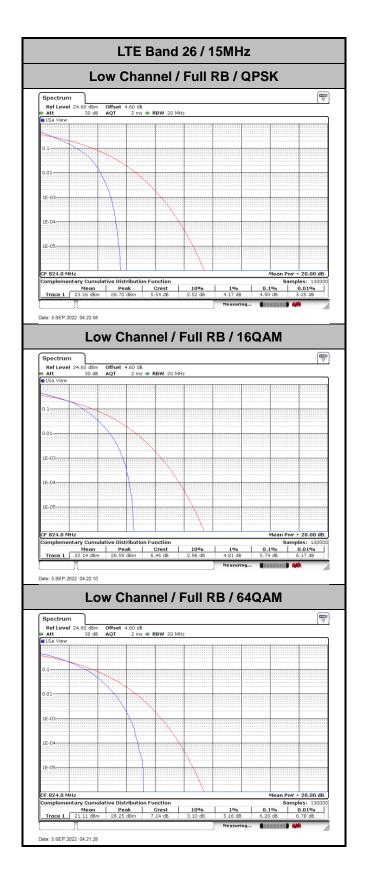

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

26dB Bandwidth


Mode	LTE Band 26 : 26dB BW(MHz)				
BW	10MHz				
Mod.	QPSK 16QAM				
Low CH	9.71	9.75			
BW	15MHz				
Mod.	QPSK	16QAM			
High CH	14.33	14.75			

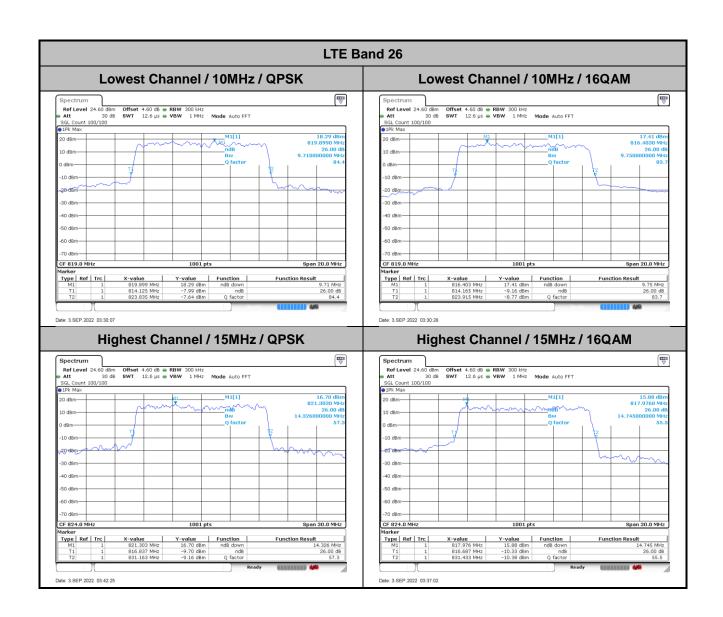

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG


Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)			
BW	10MHz			
Mod.	QPSK 16QAM			
Low CH	9.01	9.01		
BW	15MHz			
Mod.	QPSK	16QAM		
High CH	13.43	13.52		

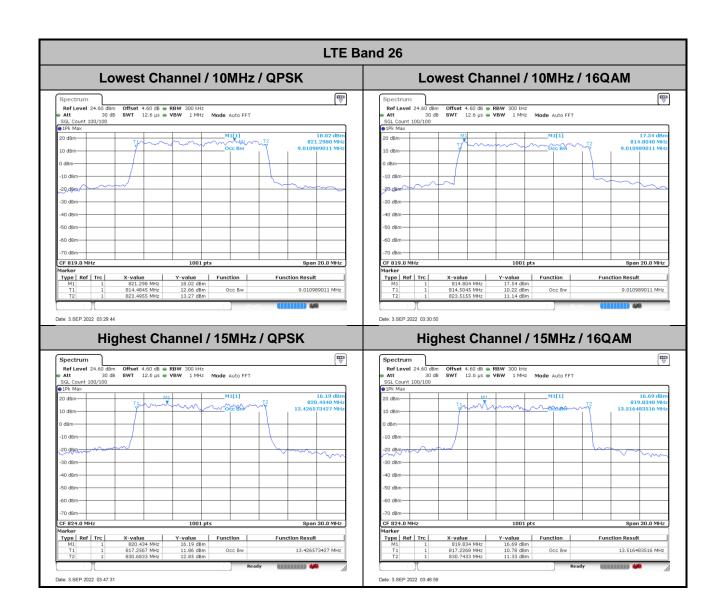


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

Conducted Band Edge

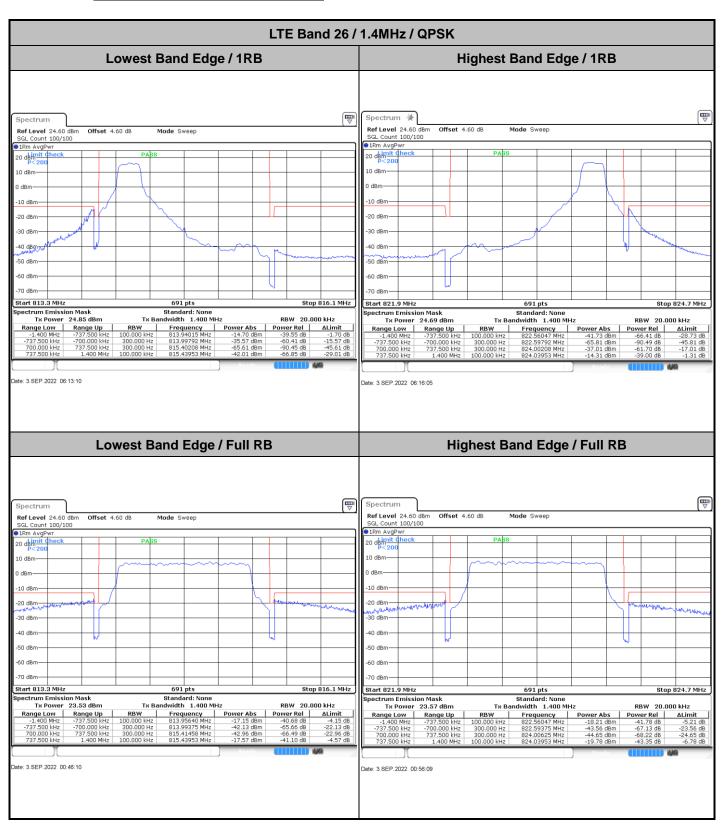


Sporton International Inc. (Kunshan)


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A6 of A25

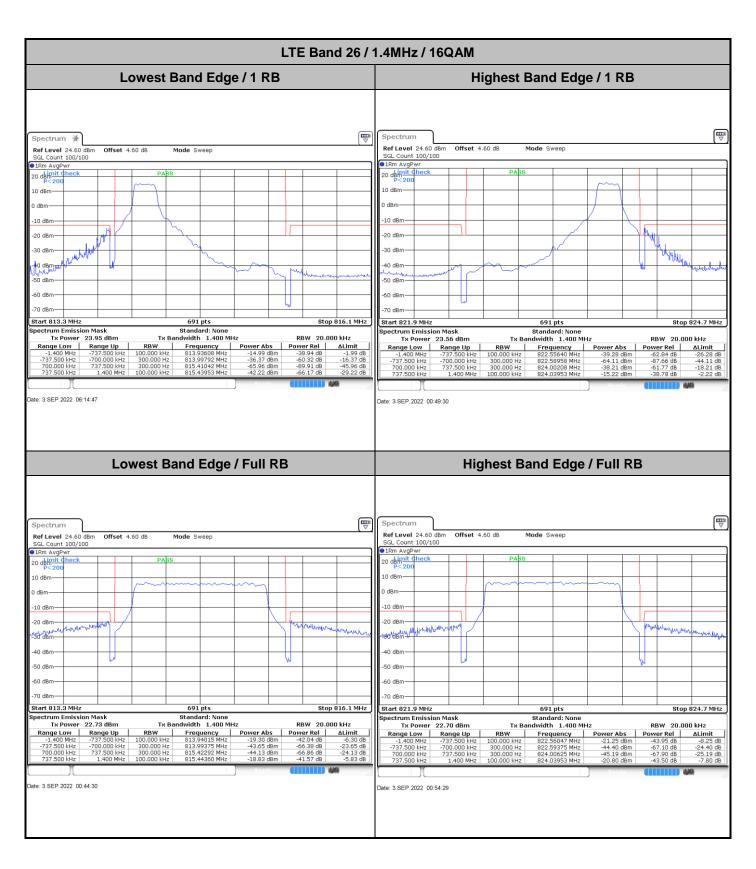


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

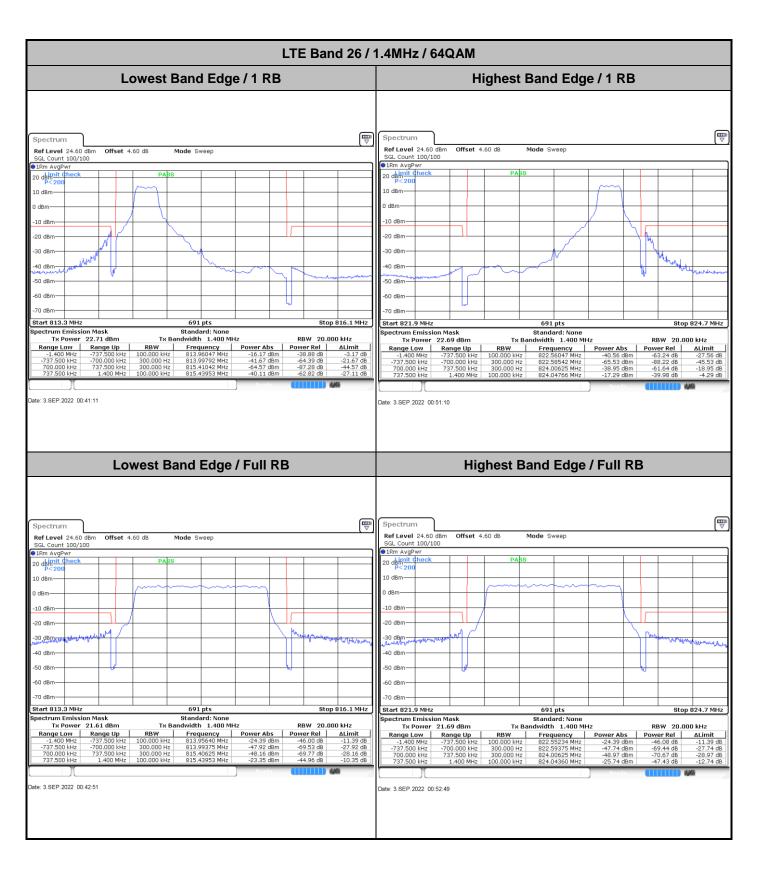


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

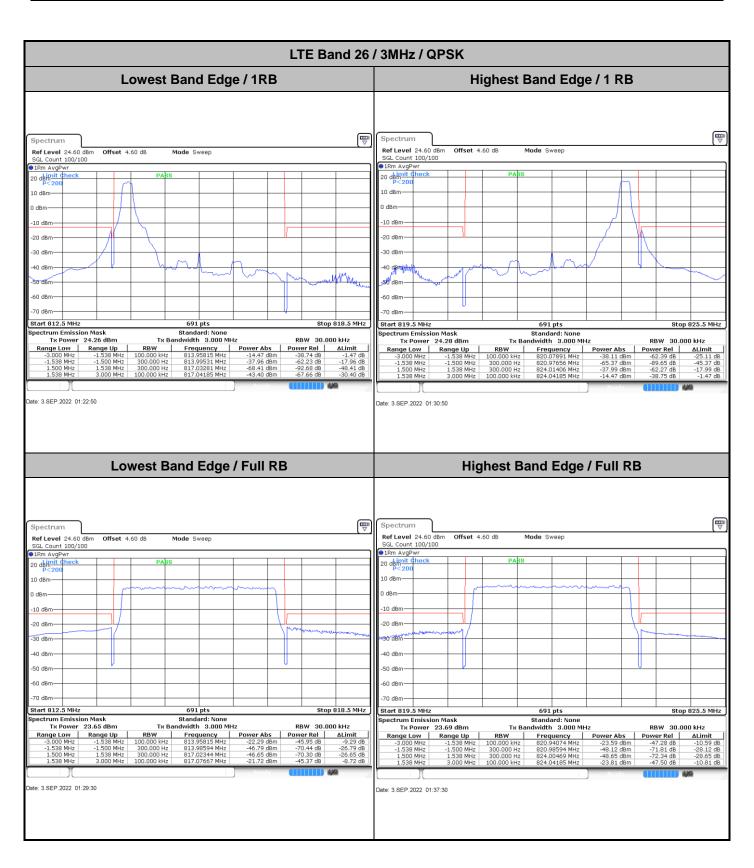


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

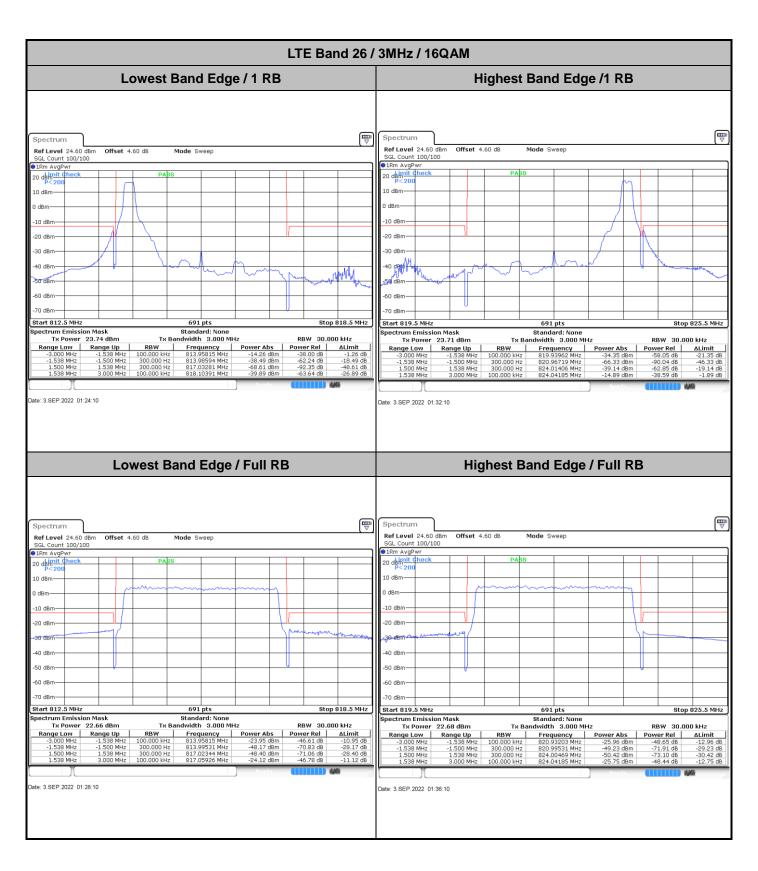


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

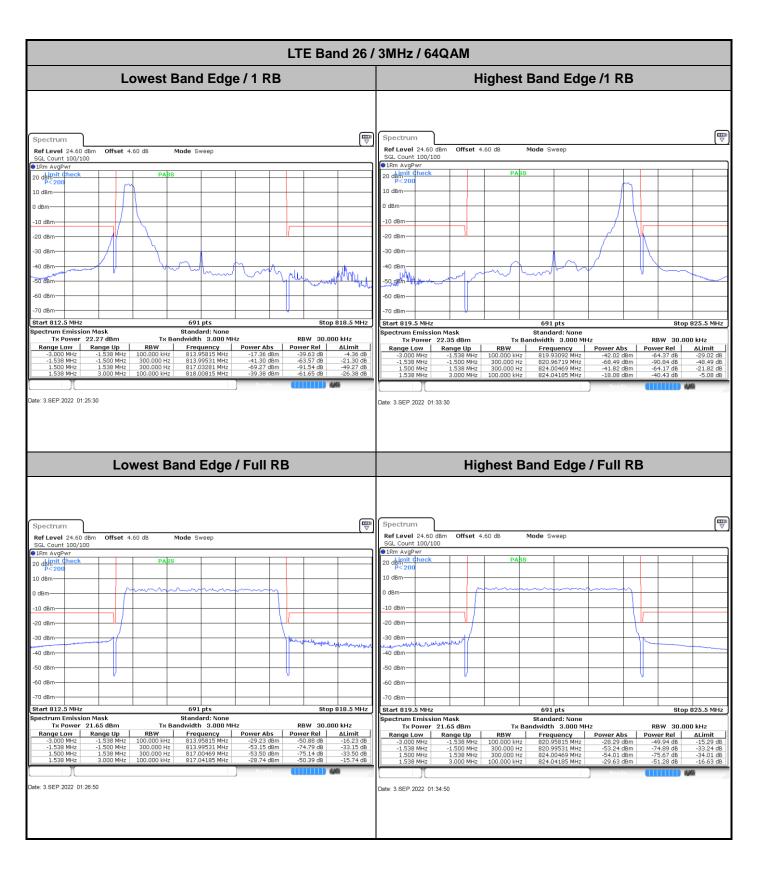


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

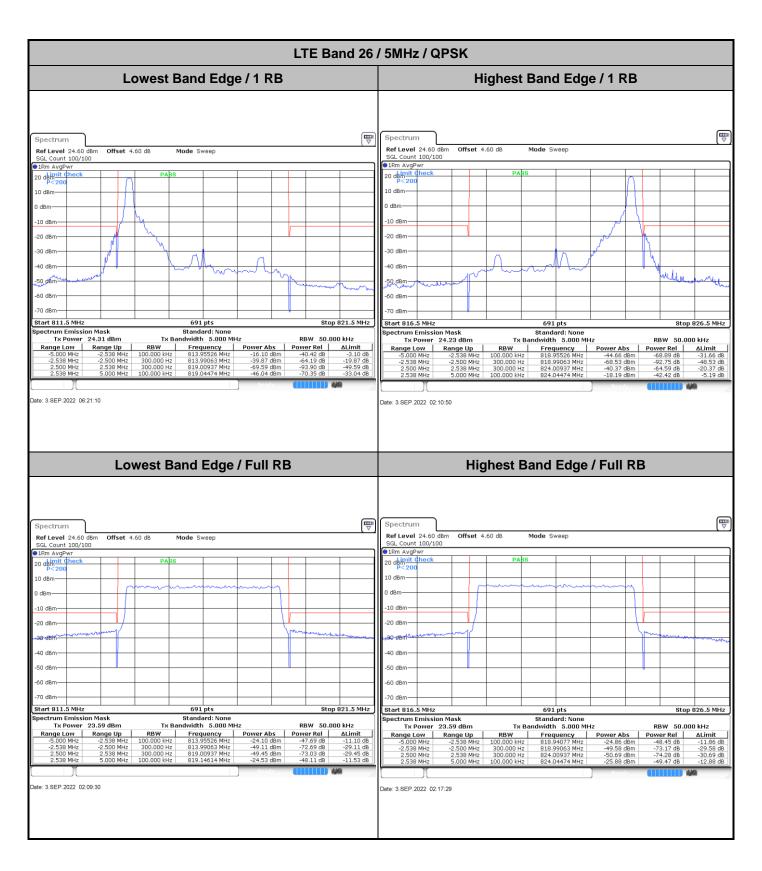


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

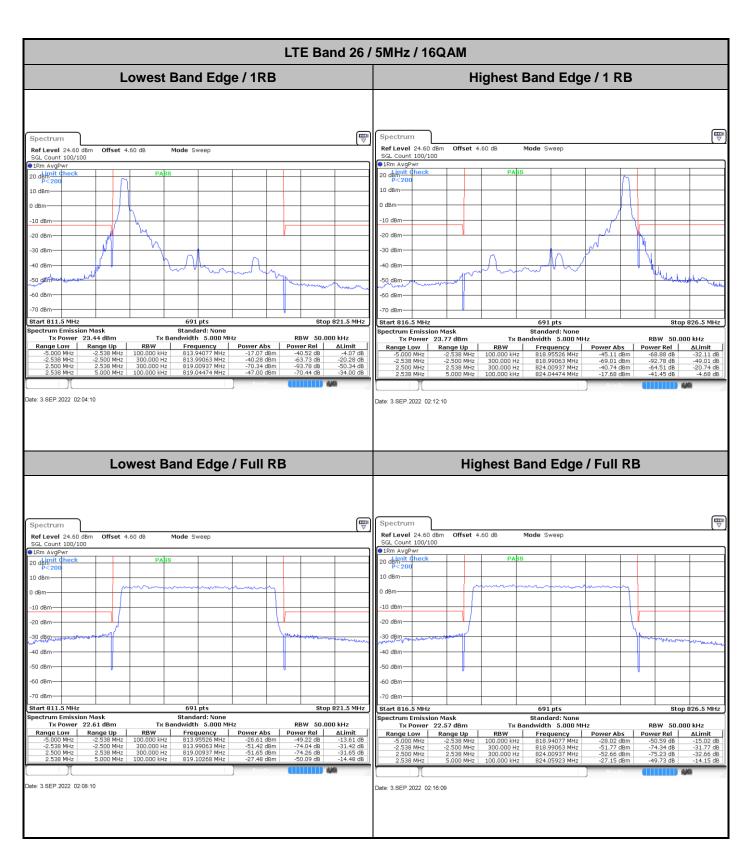


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

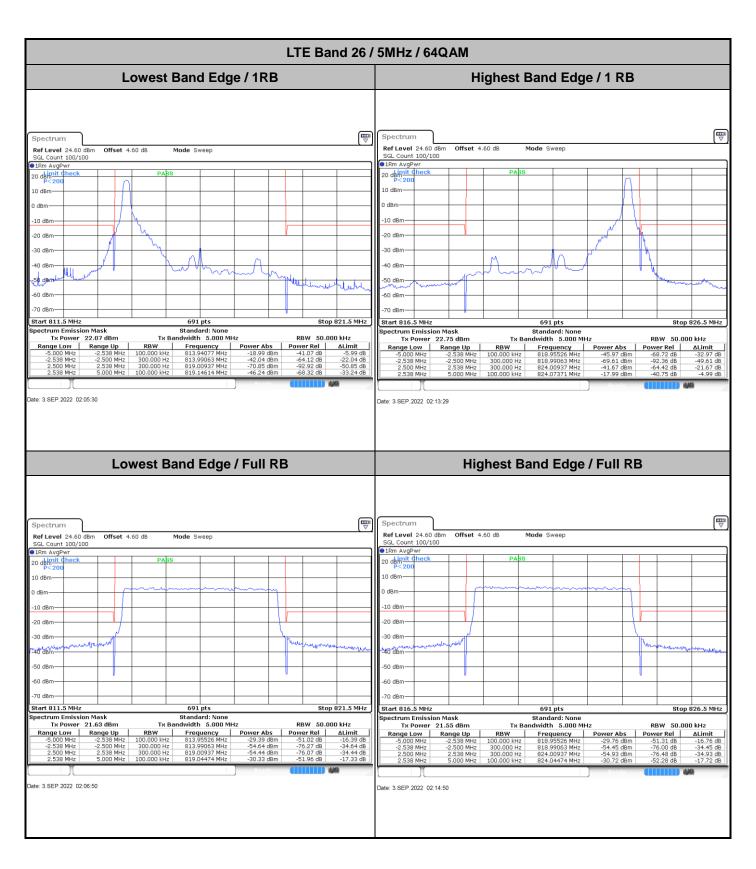

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

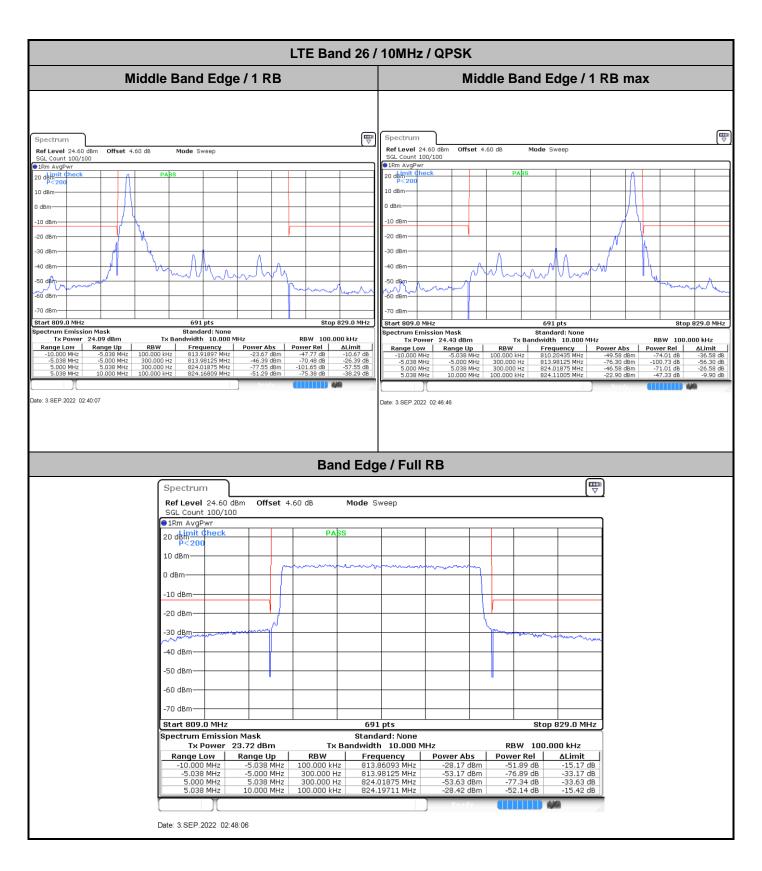

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A15 of A25

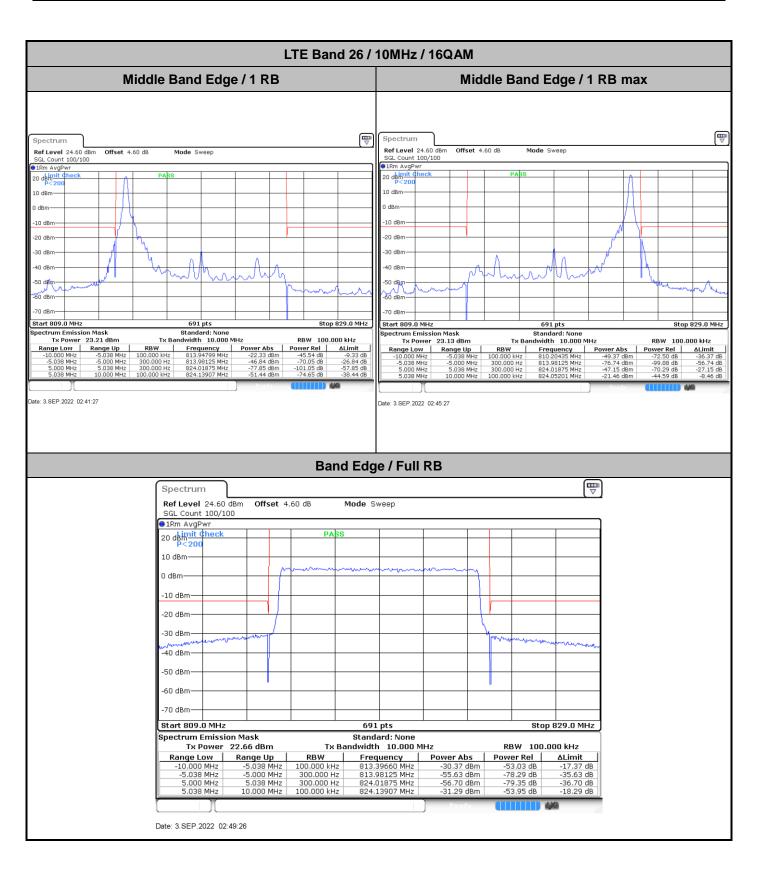


Report No.: FG282003D

: A16 of A25


Page Number

Sporton International Inc. (Kunshan)


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

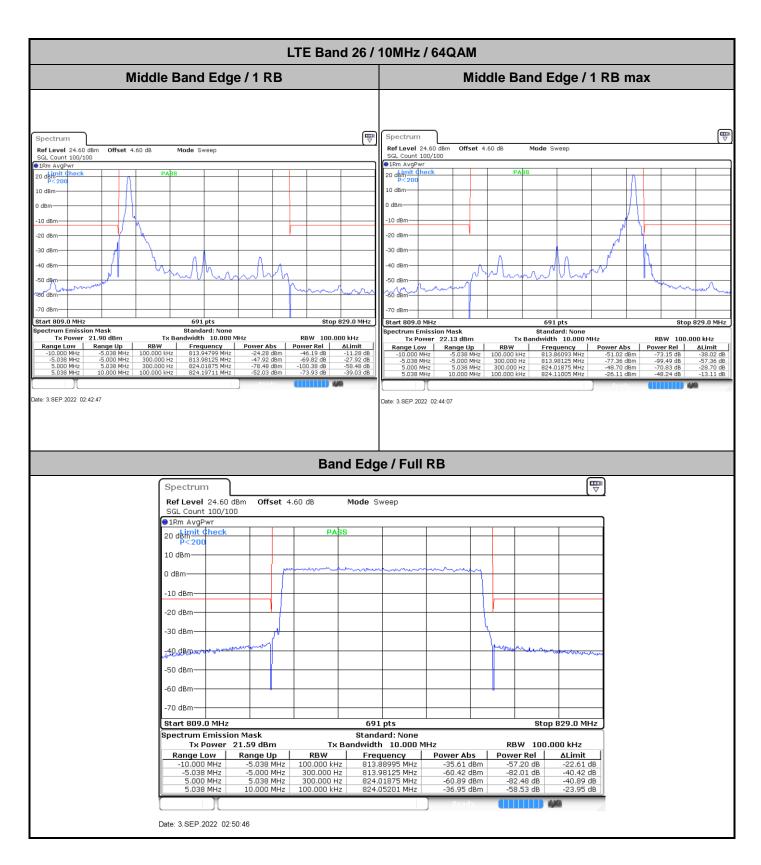


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A17 of A25

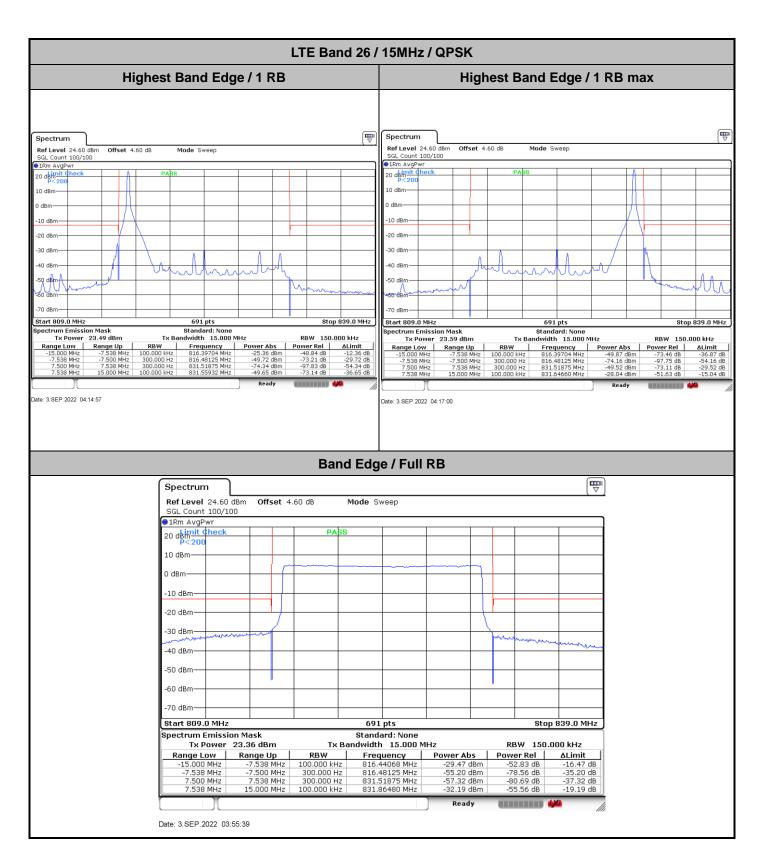

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A18 of A25

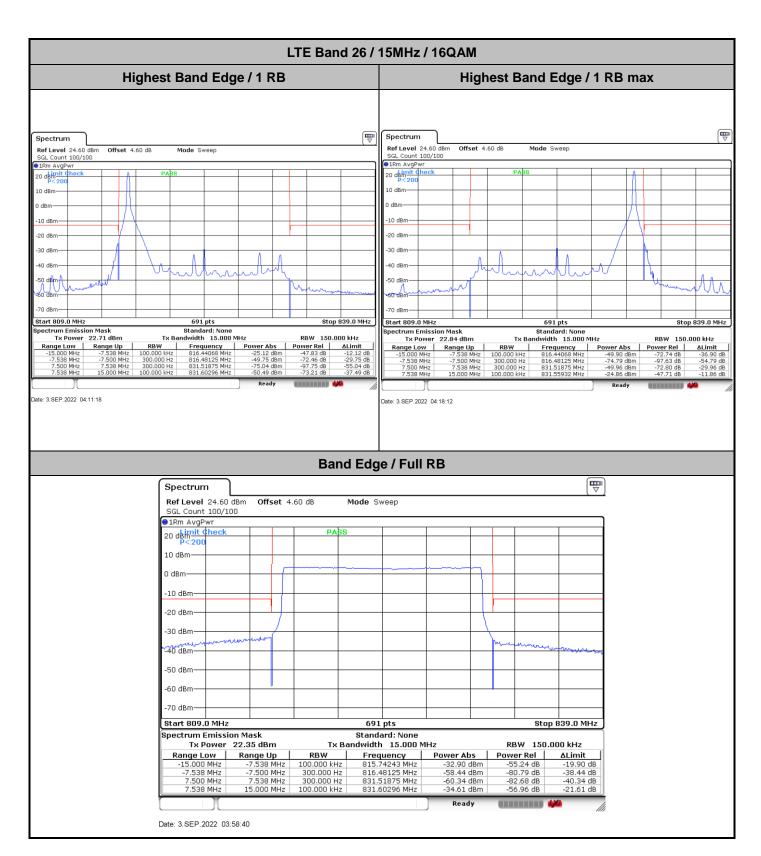

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A19 of A25

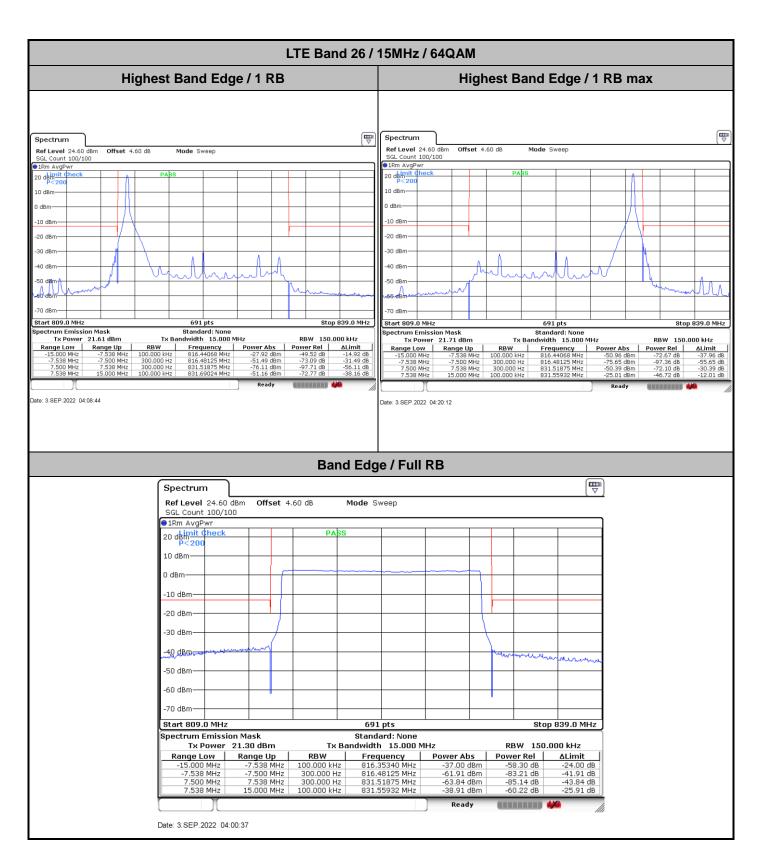


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A20 of A25

Conducted Spurious Emission




Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A21 of A25

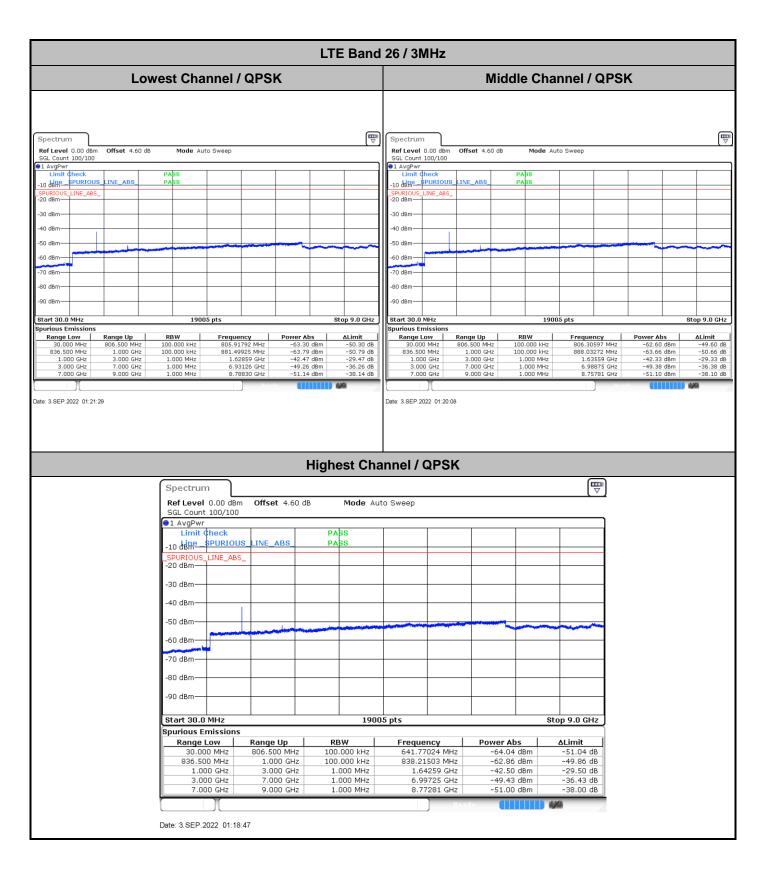

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG

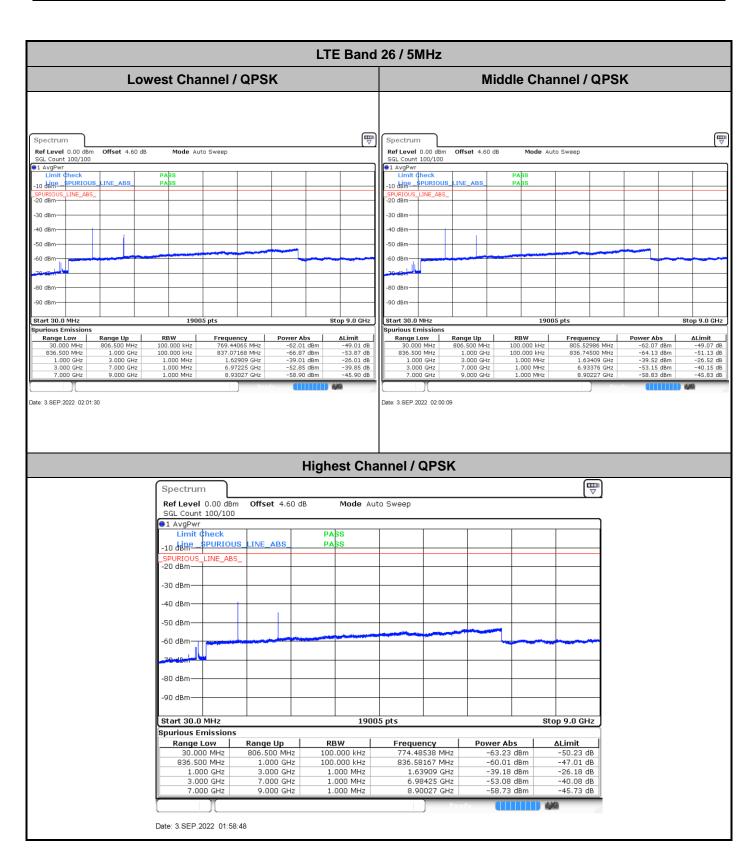

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ1316UG Page Number : A23 of A25