



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 2210132G
FCC ID : 2AFZZ132G
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Sep. 24, 2022~ Oct. 30, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Maximum EIRP Power and Emission Designator 6
1.7 Testing Site 8
1.8 Test Software 8
1.9 Applied Standards 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Test Mode 10
2.2 Connection Diagram of Test System 11
2.3 Support Unit used in test configuration and system 11
2.4 Measurement Results Explanation Example 11
2.5 Frequency List of Low/Middle/High Channels 12
3 CONDUCTED TEST ITEMS 13
3.1 Measuring Instruments 13
3.2 Test Setup 13
3.3 Test Result of Conducted Test 13
3.4 Conducted Output Power Measurement 14
3.5 Peak-to-Average Ratio 15
3.6 EIRP 16
3.7 Occupied Bandwidth 17
3.8 Conducted Band Edge Measurement 18
3.9 Conducted Spurious Emission Measurement 19
3.10 Frequency Stability Measurement 20
4 RADIATED TEST ITEMS 21
4.1 Measuring Instruments 21
4.2 Test Setup 21
4.3 Test Result of Radiated Test 22
4.4 Radiated Spurious Emission Measurement 23
5 LIST OF MEASURING EQUIPMENT 24
6 UNCERTAINTY OF EVALUATION 25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 31.96 dB at 10398.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	2210132G
FCC ID	2AFZZ132G
IMEI Code	Conducted : 862836060031790/862836060031808 Radiation : 862836060030511/862836060030529
HW Version	P2.0
SW Version	MIUI 14
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	5G NR n77/n78: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Antenna Gain	<Ant. 1> n77 : -2.20 dBi n78 : -2.20 dBi <Ant. 3> n77 : -0.60 dBi n78 : -0.60 dBi <Ant. 10> n77 : -3.20 dBi n78 : -3.20 dBi <Ant. 13> n77 : -1.40 dBi n78 : -1.40 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max Output power and antenna gain, only the maximum EIRP are shown in the report, 5G NR n77/n78 for Antenna 3 and n77 UL MIMO for Antenna 3+10.
2. 5G NR n77 support SA mode and n78 support SA&NSA mode. The whole testing has assessed SA mode for n77/n78 and n77 cover n78 by referring to the higher conducted power for conducted test items.
3. 5G NR n77/n78 support HPUE mode and UL MIMO mode, the MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.
4. 5G NR n77/n78 support MIMO Antenna Ant(10+3)/Ant(10+13)/Ant(1+3)/Ant(1+13), only the maximum Ant(3+10) is shown in the report.
5. For n77 MIMO mode, the conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{ANT})$ according to KDB 662911 D01.
6. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
7. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.4169	8M61G7D	0.3828	8M60W7D
15	3457.5 ~ 3542.49	0.4295	13M6G7D	0.4055	13M6W7D
20	3460.02 ~ 3540.00	0.4355	18M2G7D	0.3882	18M2W7D
30	3465.00 ~ 3534.99	0.4276	27M8G7D	0.3828	27M9W7D
40	3470.01 ~ 3529.98	0.4227	37M9G7D	0.3750	37M9W7D
50	3475.02 ~ 3525	0.4276	47M5G7D	0.3573	47M5W7D
60	3480.00 ~ 3519.99	0.4295	57M9G7D	0.3698	57M9W7D
70	3485.01 ~ 3514.98	0.4121	67M6G7D	0.3784	67M5W7D
80	3490.02 ~ 3510.00	0.4150	77M6G7D	0.3698	77M6W7D
90	3495 ~ 3504.99	0.4159	87M6G7D	0.3622	87M5W7D
100	3500.01 ~ 3500.01	0.4365	97M5G7D	0.3105	97M7W7D



5G NR n77 UL MIMO		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.3821	8M61G7D	0.3347	8M60W7D
15	3457.5 ~ 3542.49	0.4024	13M6G7D	0.3598	13M6W7D
20	3460.02 ~ 3540.00	0.4063	18M2G7D	0.3523	18M2W7D
30	3465.00 ~ 3534.99	0.4128	27M8G7D	0.3727	27M9W7D
40	3470.01 ~ 3529.98	0.4168	37M9G7D	0.3755	37M9W7D
50	3475.02 ~ 3525	0.4159	47M4G7D	0.353	47M5W7D
60	3480.00 ~ 3519.99	0.4098	57M8G7D	0.3723	57M9W7D
70	3485.01 ~ 3514.98	0.4018	57M5G7D	0.3494	67M5W7D
80	3490.02 ~ 3510.00	0.3974	77M5G7D	0.3606	77M6W7D
90	3495 ~ 3504.99	0.3977	87M4G7D	0.3501	87M6W7D
100	3500.01 ~ 3500.01	0.4185	97M4G7D	0.3116	97M8W7D

5G NR n78		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.3954	8M61G7D	0.3556	8M60W7D
15	3457.5 ~ 3542.49	0.3963	13M6G7D	0.3741	13M6W7D
20	3460.02 ~ 3540.00	0.4018	18M2G7D	0.3802	18M2W7D
30	3465.00 ~ 3534.99	0.399	27M8G7D	0.3899	27M9W7D
40	3470.01 ~ 3529.98	0.4009	37M9G7D	0.3945	37M9W7D
50	3475.02 ~ 3525.00	0.3846	47M5G7D	0.3648	47M5W7D
60	3480.00 ~ 3519.99	0.3972	57M9G7D	0.3673	57M9W7D
70	3485.01 ~ 3514.98	0.3846	67M6G7D	0.3606	67M5W7D
80	3490.02 ~ 3510.00	0.3793	77M6G7D	0.3548	77M6W7D
90	3495.00 ~ 3504.99	0.3837	87M6G7D	0.3565	87M5W7D
100	3500.01 ~ 3500.01	0.4027	97M5G7D	0.3357	97M7W7D

Note:

1. 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Site

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Location Site	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission (Y plane).

Test Items	5G NR	Bandwidth (MHz)											Modulation			RB #			Test Channel			
		10	15	20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16/64/256 QAM	1	Partial	Full	L	M	H	
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	n77			v									v	v				v	v	v	v	
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v			v		v		
Conducted Band Edge	n77	v					v						v	v	v			v	v		v	
Conducted Spurious Emission	n77	v					v						v	v	v				v	v	v	
Frequency Stability	n77			v										v				v		v		
E.R.P / E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																			v	
	n78	Worst Case																			v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "- " means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Based on engineering evaluation, only the worst modulations test results are shown in the report. 5. Frequency Stability : Normal Voltage = 3.89V ; Low Voltage =3.6V. ; High Voltage =4.48V																					

2.2 Connection Diagram of Test System

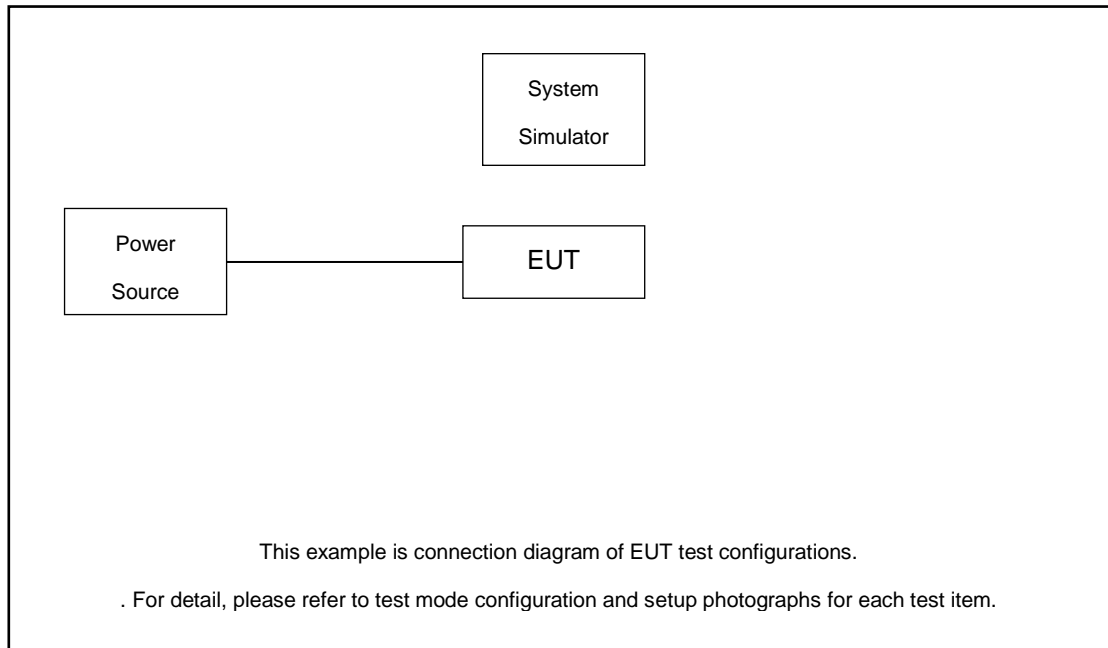

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

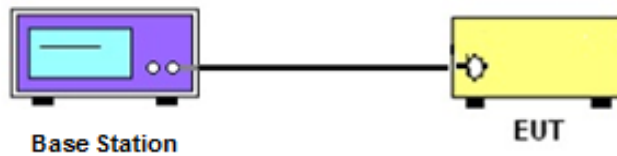

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

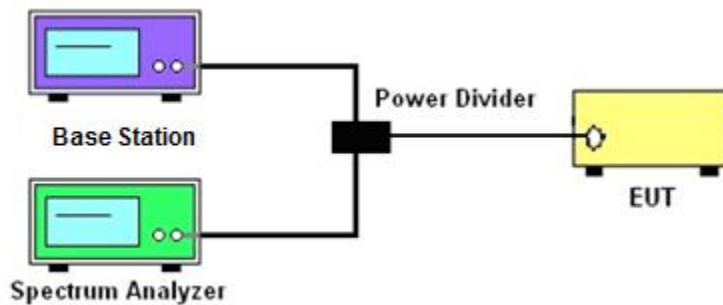

3.2.3 Frequency Stability

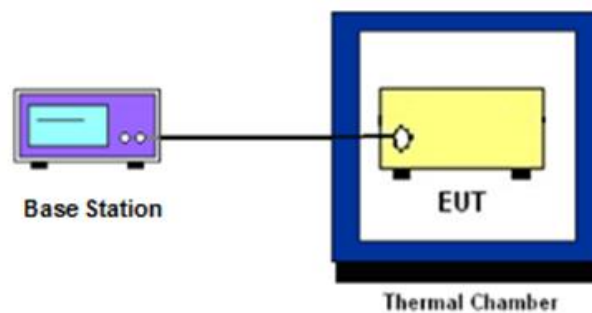

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Offset has included the duty factor for n77/n78. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
10. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

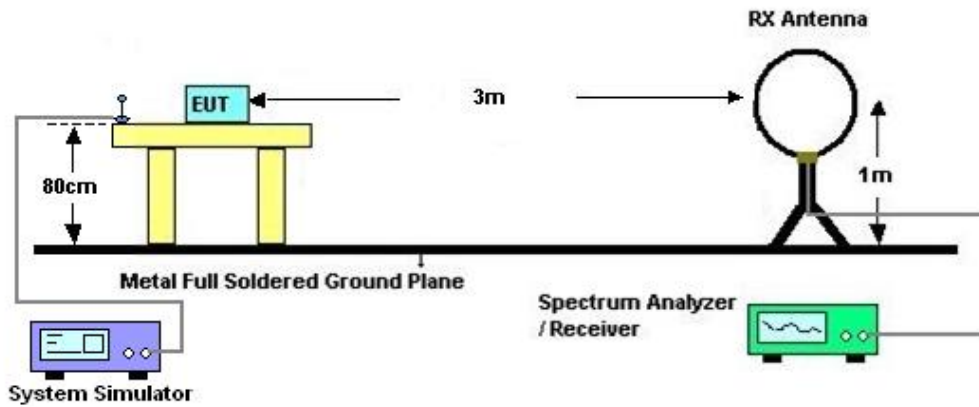

4.2.2 For radiated test from 30MHz to 1GHz

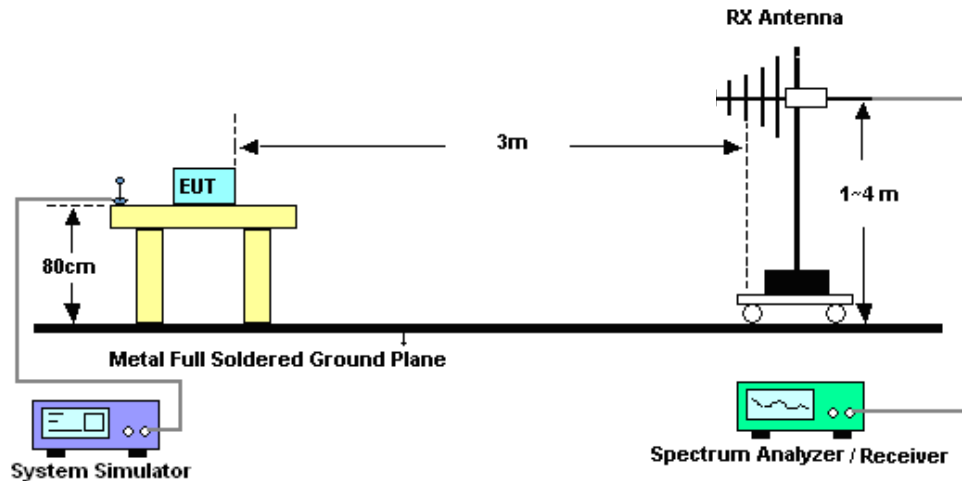

4.2.3 For radiated test above 1GHz

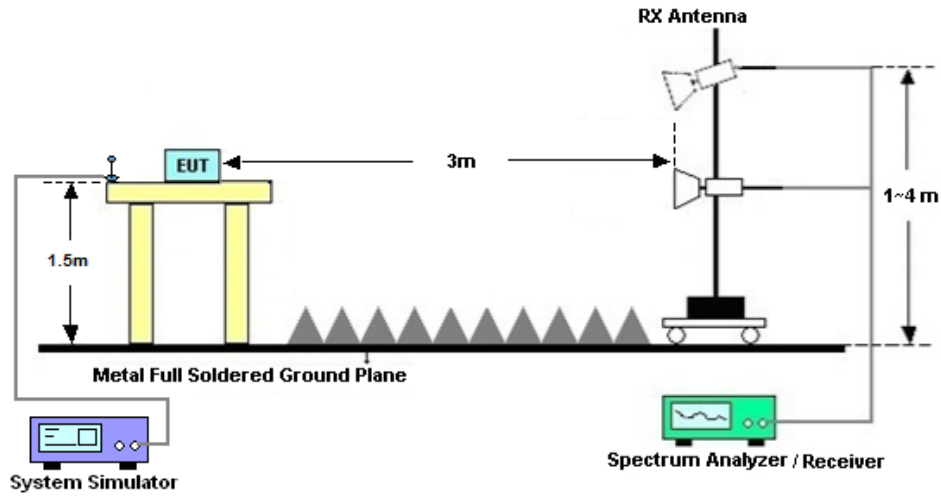

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Sep. 24, 2022~ Oct. 30, 2022	Dec. 26, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Sep. 24, 2022~ Oct. 30, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Sep. 24, 2022~ Oct. 30, 2022	Jul. 06, 2023	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Oct. 11, 2022	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1	1943528	1GHz~18GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Oct. 11, 2022	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 11, 2022	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 11, 2022	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Kuo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N77

Transmitter Conducted Output Power And ERP/EIRP, ($G_T - L_C$)=-0.6dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	26.68	26.08	0.4055
77	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	26.34	25.74	0.3750
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.77	26.17	0.4140
77	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.31	25.71	0.3724
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	26.8	26.2	0.4169
77	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	26.43	25.83	0.3828
77	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	26.92	26.32	0.4285
77	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	26.43	25.83	0.3828
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.93	26.33	0.4295
77	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.38	25.78	0.3784
77	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	26.91	26.31	0.4276
77	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	26.68	26.08	0.4055
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	26.92	26.32	0.4285
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	26.31	25.71	0.3724
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.99	26.39	0.4355
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.29	25.69	0.3707
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	26.94	26.34	0.4305
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	26.49	25.89	0.3882
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	26.91	26.31	0.4276
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	26.43	25.83	0.3828

77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.83	26.23	0.4198
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.24	25.64	0.3664
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	26.89	26.29	0.4256
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	26.31	25.71	0.3724
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	26.81	26.21	0.4178
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	26.34	25.74	0.3750
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.82	26.22	0.4188
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.12	25.52	0.3565
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	26.86	26.26	0.4227
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	26.3	25.7	0.3715
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	26.86	26.26	0.4227
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	26.08	25.48	0.3532
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.91	26.31	0.4276
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.13	25.53	0.3573
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	26.86	26.26	0.4227
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	26.13	25.53	0.3573
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	26.86	26.26	0.4227
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	26.24	25.64	0.3664
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.93	26.33	0.4295
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.28	25.68	0.3698
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	26.84	26.24	0.4207
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	26.15	25.55	0.3589
77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	26.71	26.11	0.4083
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	26.38	25.78	0.3784

77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.75	26.15	0.4121
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.18	25.58	0.3614
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	26.7	26.1	0.4074
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	26.24	25.64	0.3664
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	26.78	26.18	0.4150
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	26.28	25.68	0.3698
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.76	26.16	0.4130
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.16	25.56	0.3597
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	26.73	26.13	0.4102
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	26.14	25.54	0.3581
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	26.7	26.1	0.4074
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	26.19	25.59	0.3622
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.76	26.16	0.4130
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.16	25.56	0.3597
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	26.79	26.19	0.4159
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	26.06	25.46	0.3516
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	26.58	25.98	0.3963
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.66	26.06	0.4036
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	26.43	25.83	0.3828
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	26.56	25.96	0.3945
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	27	26.4	0.4365
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	26.45	25.85	0.3846
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	25.52	24.92	0.3105
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.45	24.85	0.3055

77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	25.47	24.87	0.3069
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	24.01	23.41	0.2193
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	24.33	23.73	0.2360
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	24.08	23.48	0.2228
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	23.11	22.51	0.1782
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	23.13	22.53	0.1791
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	22.79	22.19	0.1656
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	24.76	24.16	0.2606
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.81	24.21	0.2636
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	24.89	24.29	0.2685

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0069	PASS	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0028	PASS	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0055	PASS	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0054	PASS	-30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0060	PASS	-20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0025	PASS	-10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0023	PASS	0°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0044	PASS	10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0069	PASS	20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0052	PASS	30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0048	PASS	40°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0042	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	50@0	7.3	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@0	6.81	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	8.47	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	7.39	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	7.11	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	7.08	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	8.42	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	8.12	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	50@0	7.22	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	1@0	7.41	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	8.04	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	8.32	13	PASS


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH




N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

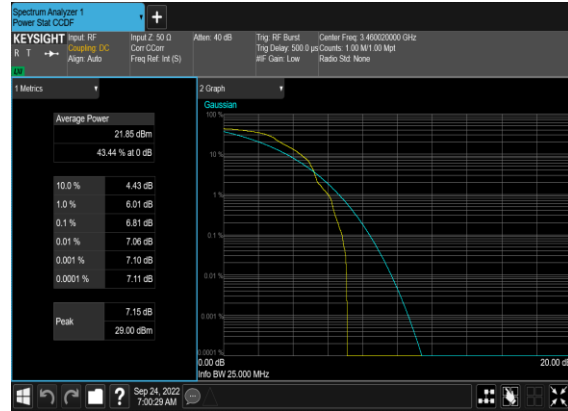


N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

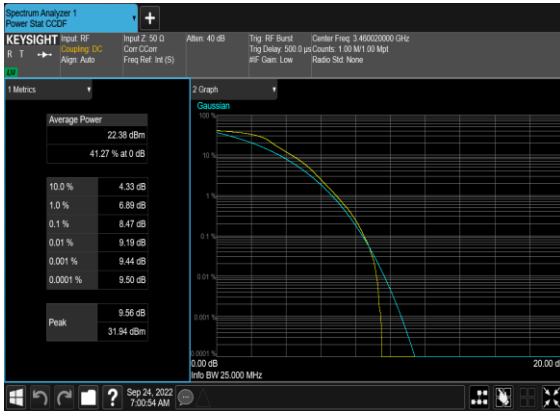


N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

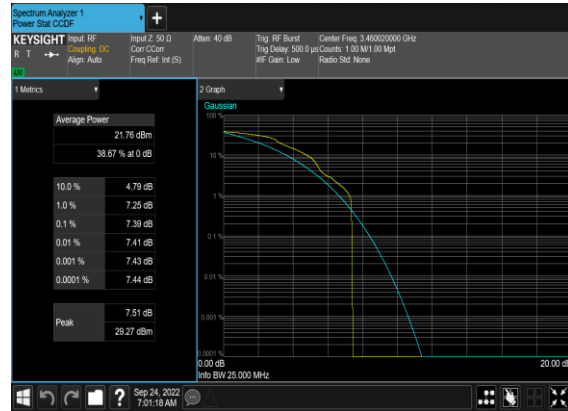


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

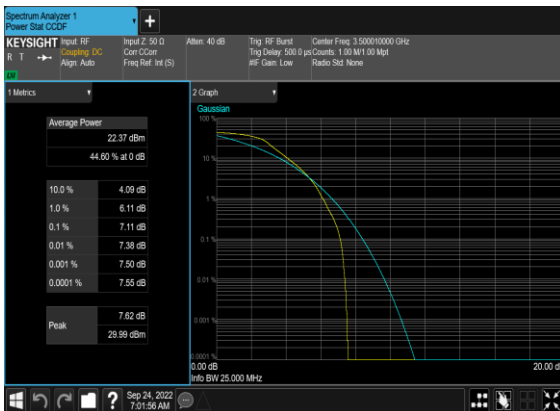

N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

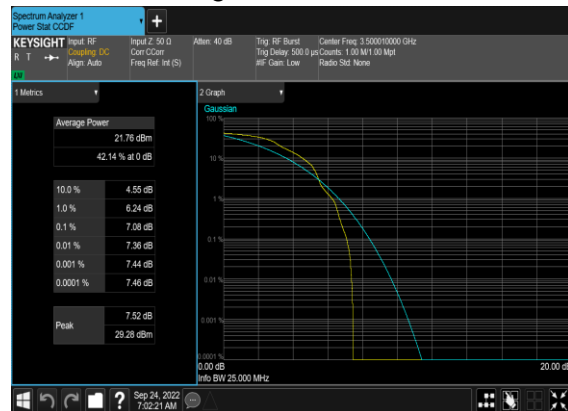

N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

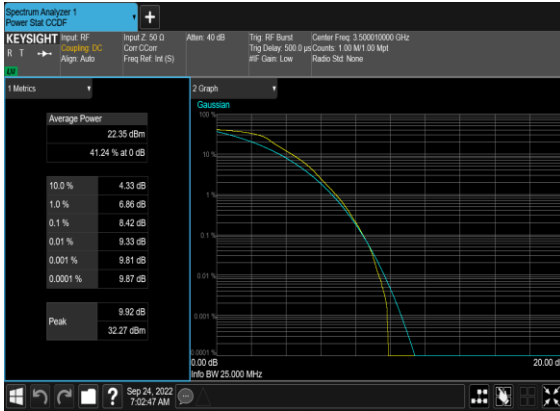


N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH



N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

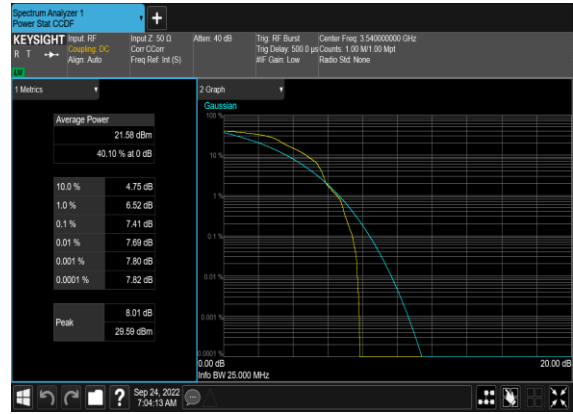

N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH



N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
77	30	10	633334	3500.01	DFT-s-OFDM PI/2 BPSK	24@0	8.6057	9.507
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	24@0	8.5925	9.683
77	30	10	633334	3500.01	CP-OFDM QPSK	24@0	8.5747	9.878
77	30	10	633334	3500.01	CP-OFDM 16 QAM	24@0	8.5893	9.637
77	30	10	633334	3500.01	CP-OFDM 64 QAM	24@0	8.5975	9.478
77	30	10	633334	3500.01	CP-OFDM 256 QAM	24@0	8.5672	9.622
77	30	15	633334	3500.01	DFT-s-OFDM PI/2 BPSK	36@0	12.858	14.1
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	36@0	12.839	14.08
77	30	15	633334	3500.01	CP-OFDM QPSK	38@0	13.597	14.95
77	30	15	633334	3500.01	CP-OFDM 16 QAM	38@0	13.573	14.8
77	30	15	633334	3500.01	CP-OFDM 64 QAM	38@0	13.587	14.93
77	30	15	633334	3500.01	CP-OFDM 256 QAM	38@0	13.571	14.71
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	17.818	19.09
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.829	19.31
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.238	19.94
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.2	19.71
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.202	19.56
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.214	19.48
77	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	75@0	26.713	28.56
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	75@0	26.773	28.28
77	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.832	29.52
77	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.883	29.68
77	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.849	29.3
77	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.909	29.64


77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	35.767	37.56
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	100@0	35.724	37.58
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.861	39.65
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.847	39.35
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.834	39.44
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.895	39.61
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	128@0	45.78	47.69
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	128@0	45.765	47.76
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.49	49.25
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.471	49.37
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.525	49.29
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.422	49.43
77	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	162@0	57.937	59.98
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	162@0	57.864	60.19
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.778	60.1
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.853	60.23
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.88	60.1
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.88	60.17
77	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	180@0	64.479	66.56
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	180@0	64.285	66.52
77	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.561	70.11
77	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.39	69.92
77	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.542	69.84
77	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.408	69.62
77	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	216@0	77.211	79.88
77	30	80	633334	3500.01	DFT-s-OFDM	216@0	77.256	79.89

QPSK								
77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.621	80.15
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.569	80.03
77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.502	80.38
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.481	80.08
77	30	90	633334	3500.01	DFT-s- OFDM PI/2 BPSK	240@0	85.794	88.7
77	30	90	633334	3500.01	DFT-s- OFDM QPSK	240@0	85.741	88.58
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.575	90.49
77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.383	90.35
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.45	90.66
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.539	90.46
77	30	100	633334	3500.01	DFT-s- OFDM PI/2 BPSK	270@0	96.598	99.71
77	30	100	633334	3500.01	DFT-s- OFDM QPSK	270@0	96.444	99.65
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.461	100.7
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.585	100.5
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.454	100.6
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.667	100.8

N77(10M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

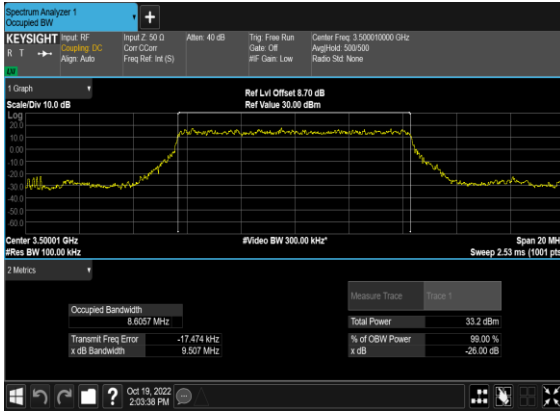

N77(10M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

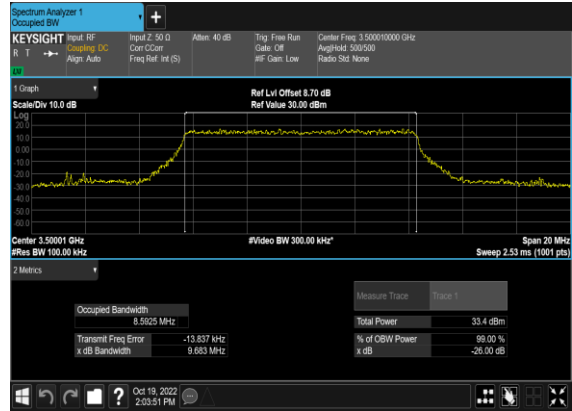


N77(10M)_CP- OFDM_QPSK_Outer_Full_Mid_CH




N77(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH




N77(10M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

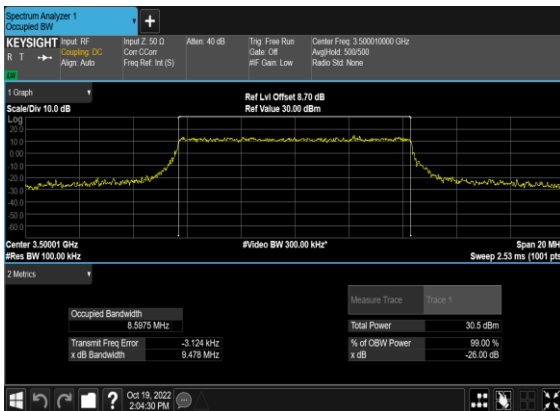


N77(10M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

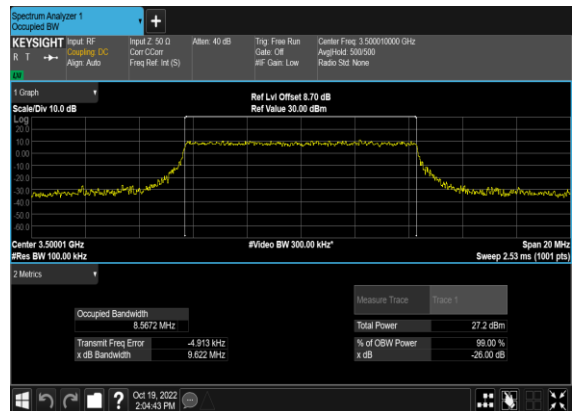


N77(15M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

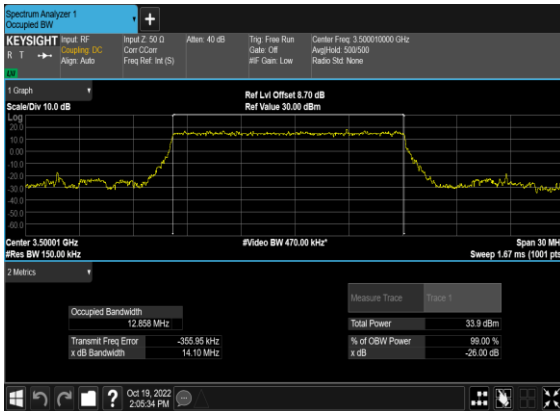


N77(15M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

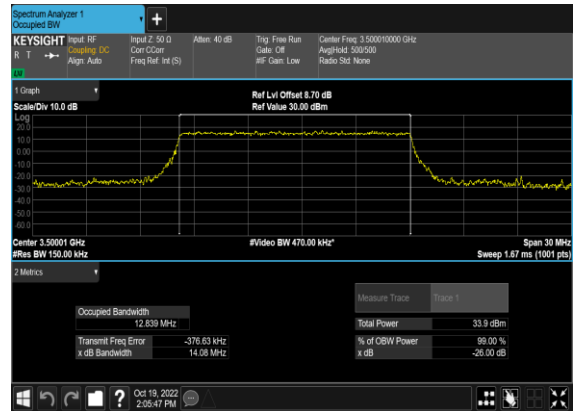


N77(15M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

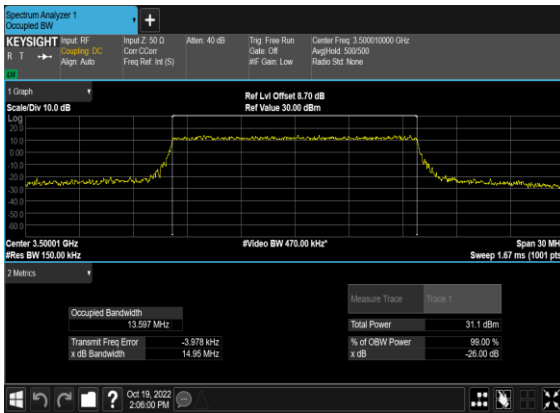


N77(15M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

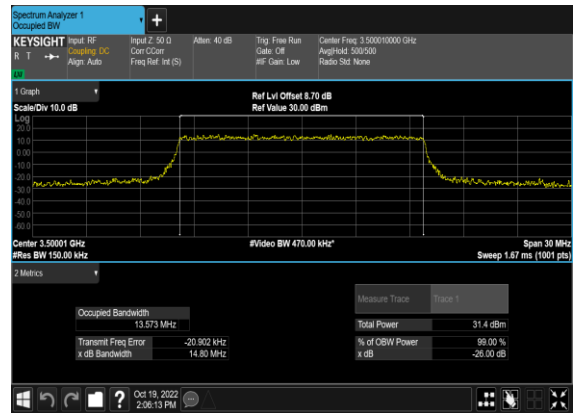


N77(15M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

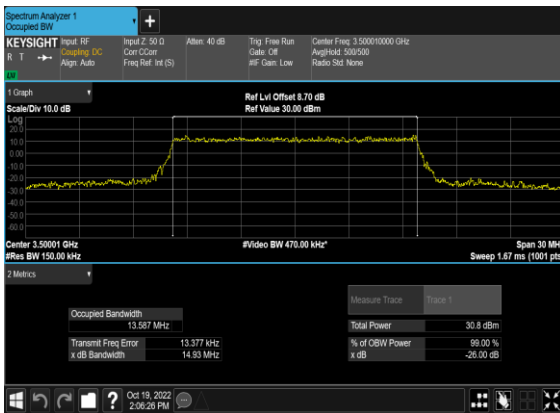


N77(15M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

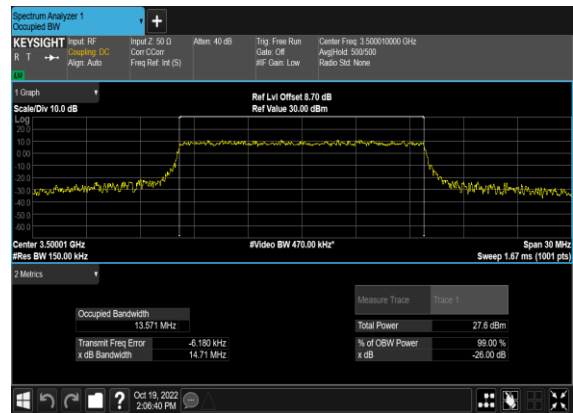

N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

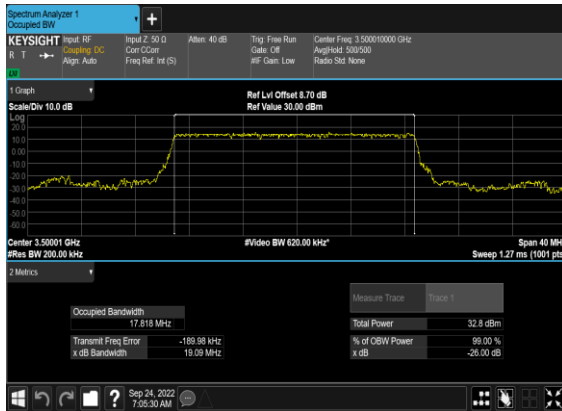

N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

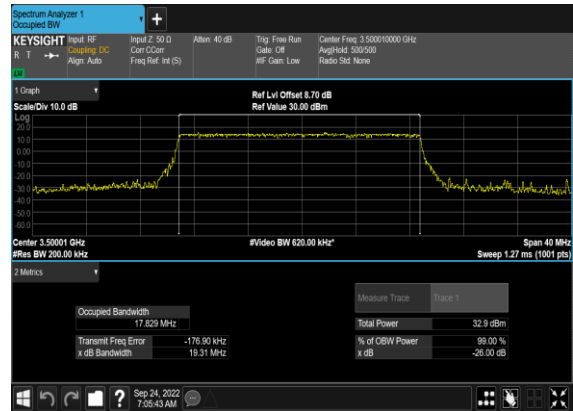


N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH




N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

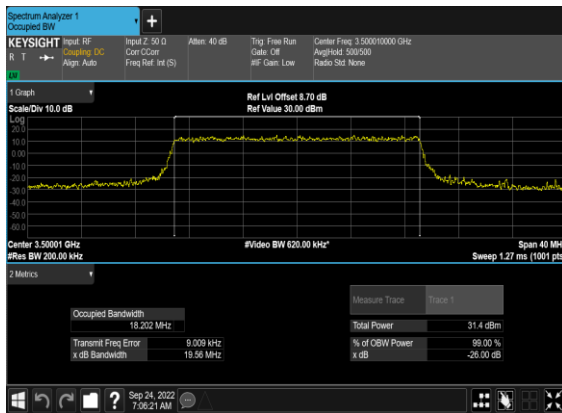


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

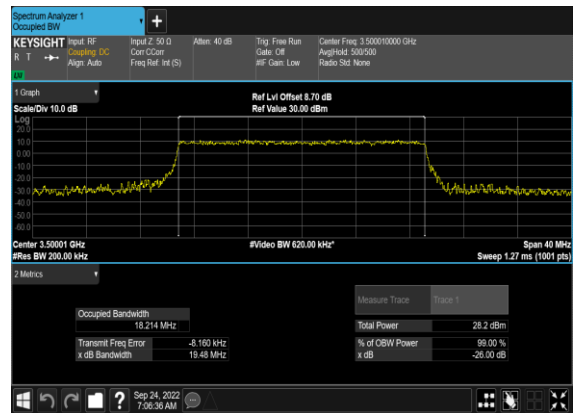

N77(30M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

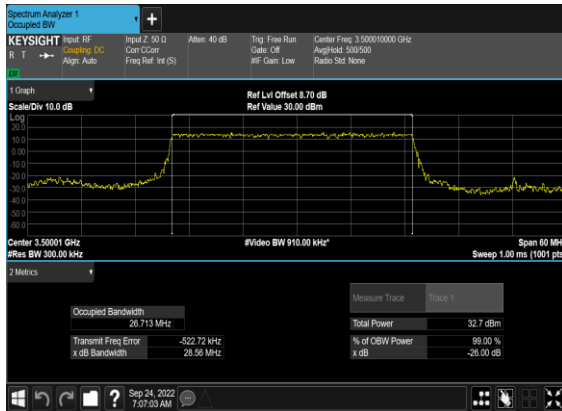


N77(30M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

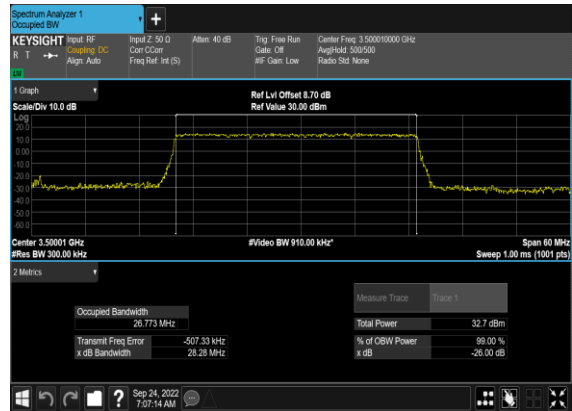


N77(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N77(30M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

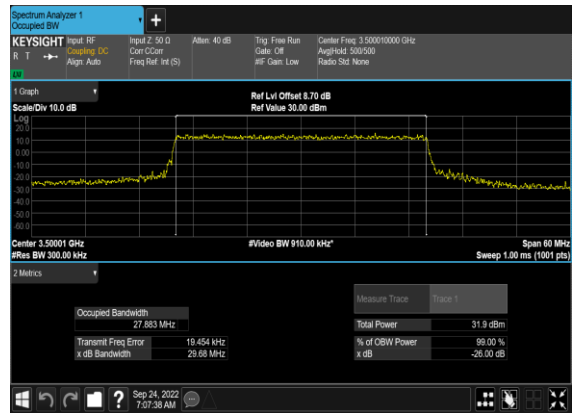


N77(30M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

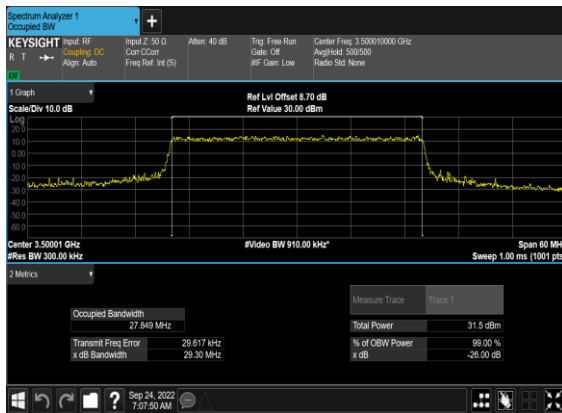


N77(30M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

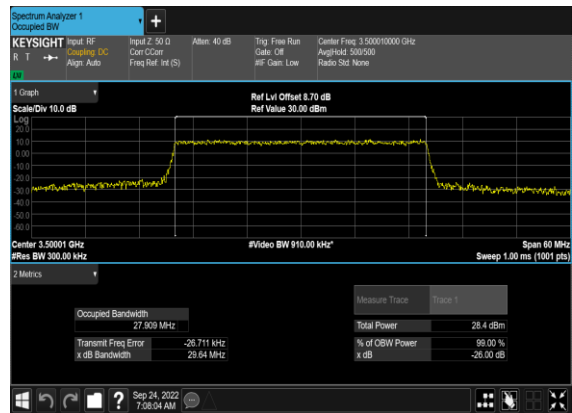

N77(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

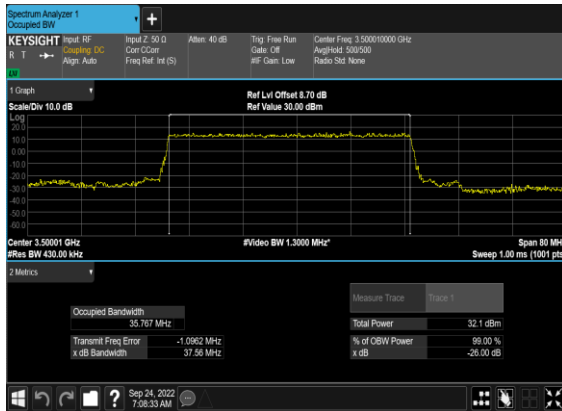

N77(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

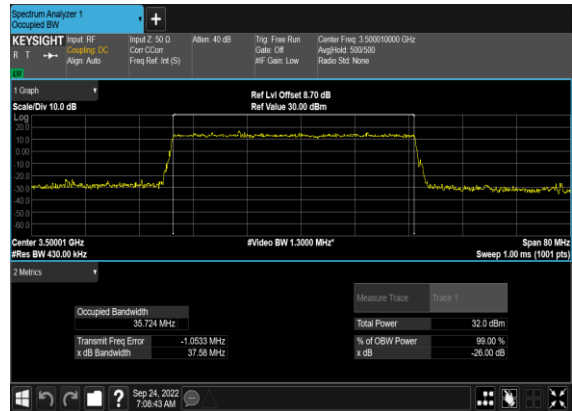


N77(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N77(40M)_CP-OFDM_16QAM_Outer_Full_Mid_CH




N77(40M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

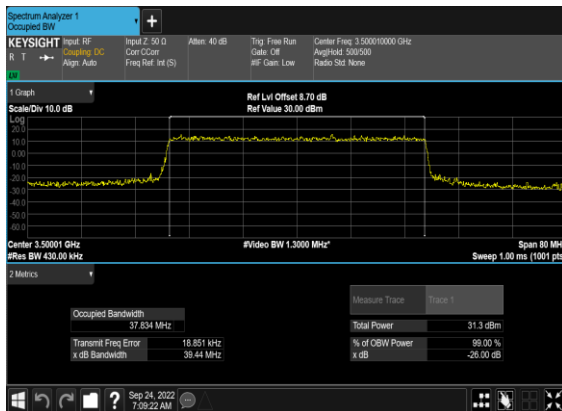


N77(40M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

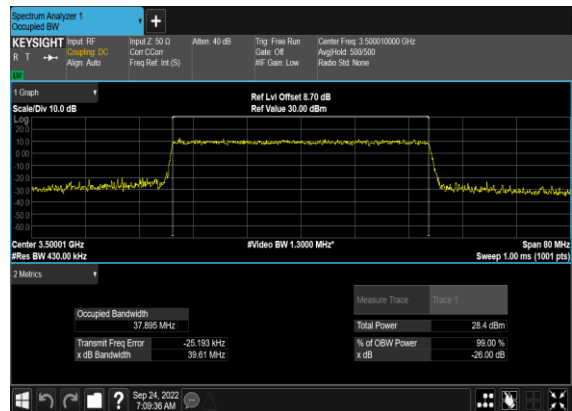


N77(50M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

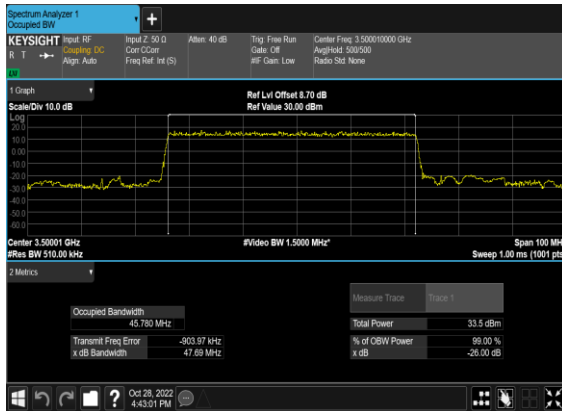


N77(50M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

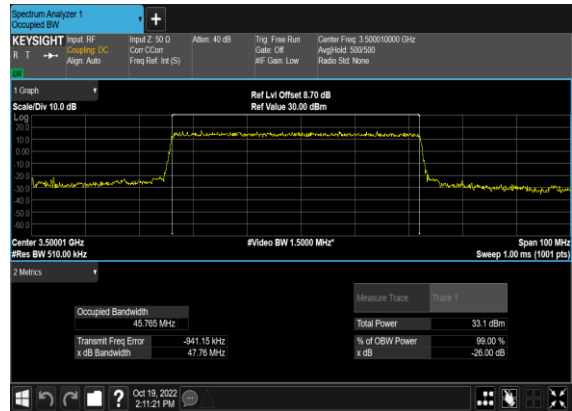


N77(50M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

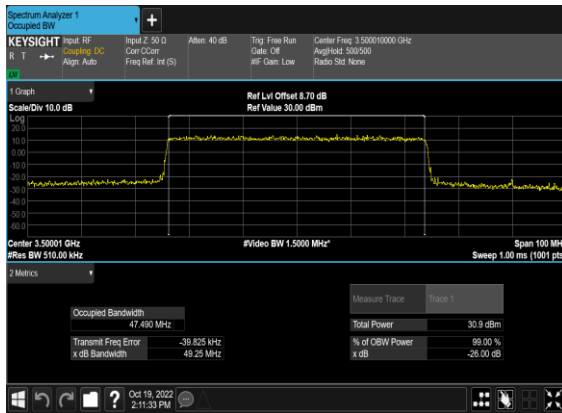


N77(50M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

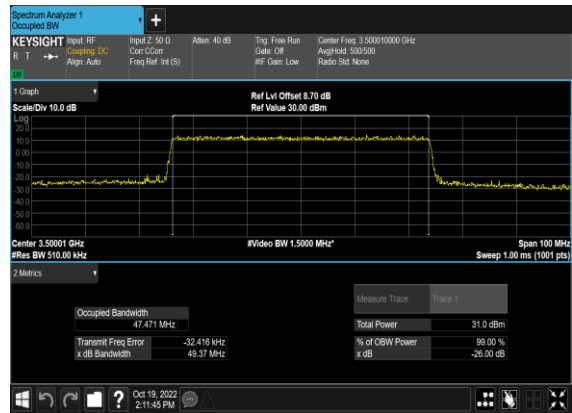


N77(50M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

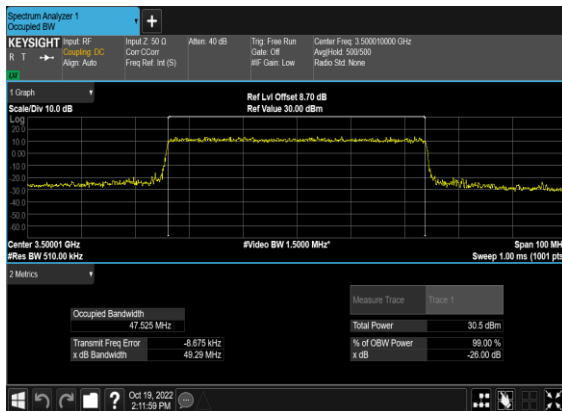


N77(50M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

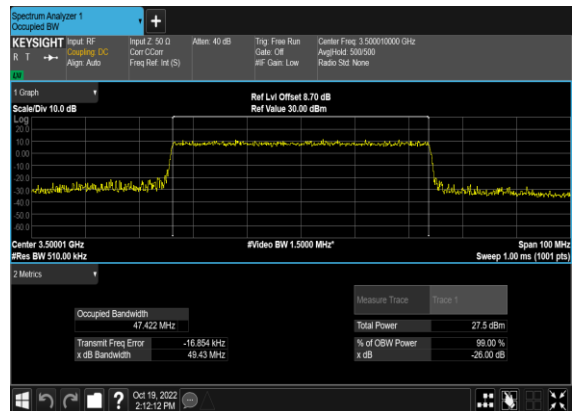


N77(60M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

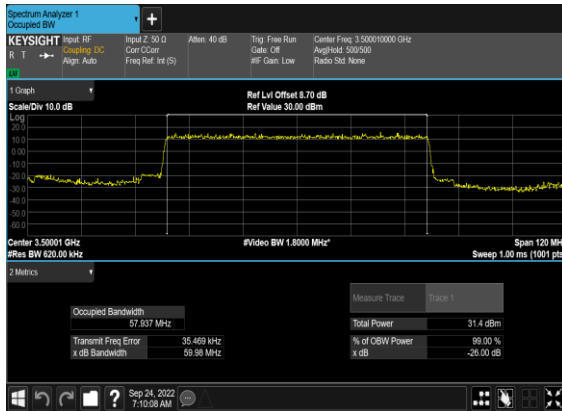


N77(60M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

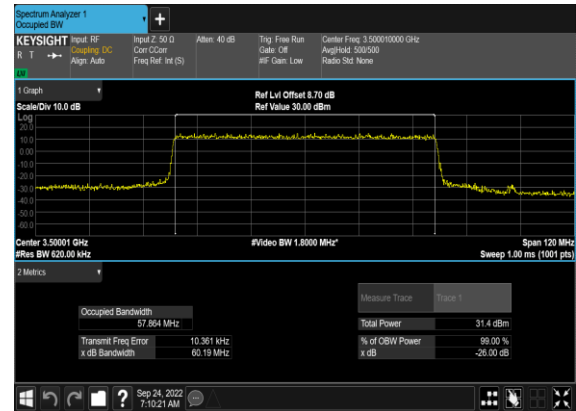


N77(60M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

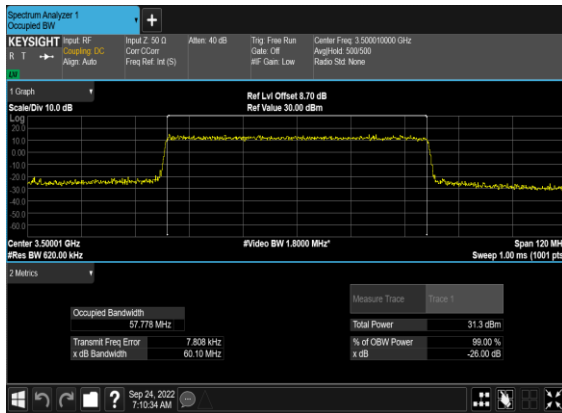


N77(60M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

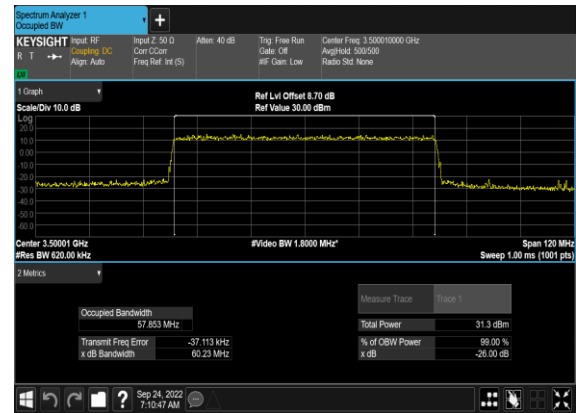


N77(60M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

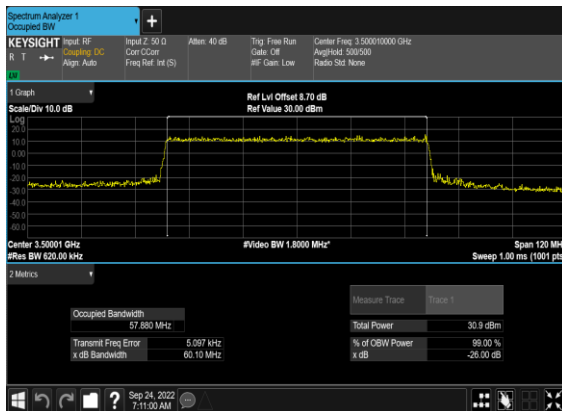


N77(60M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

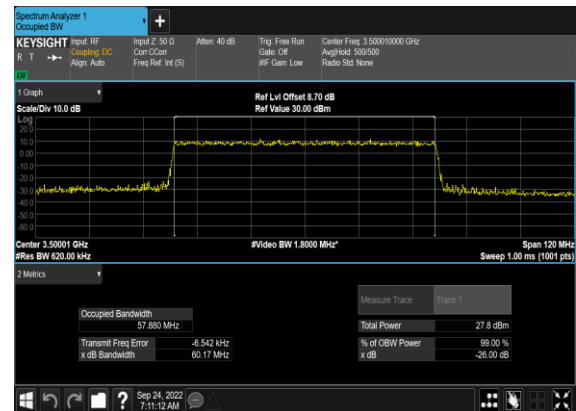


N77(70M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

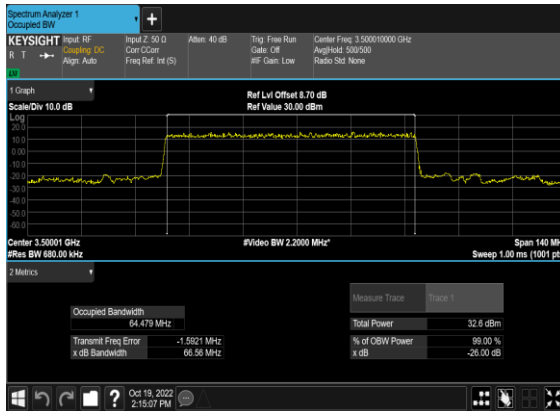


N77(70M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

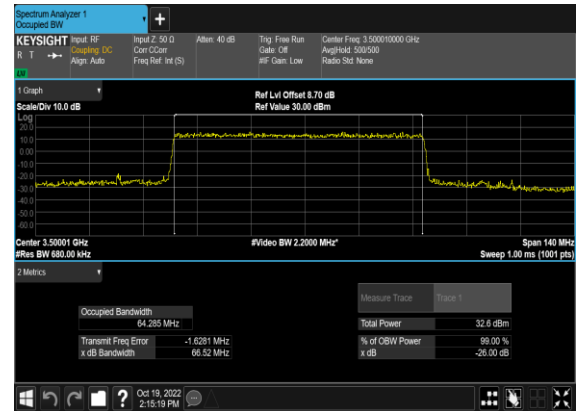


N77(70M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

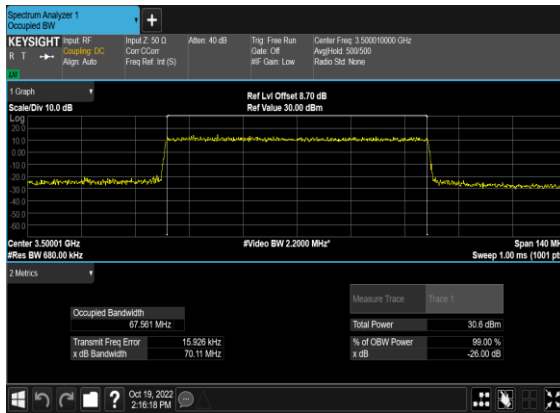


N77(70M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

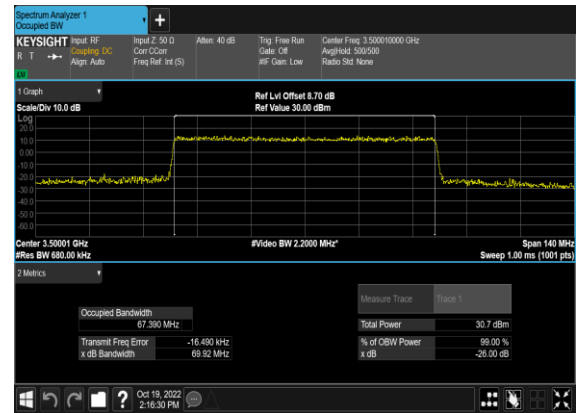


N77(70M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

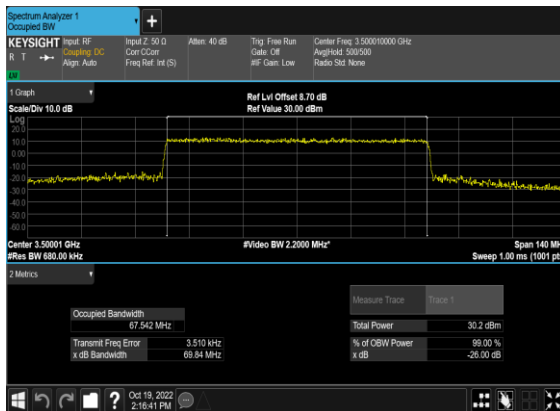


N77(70M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

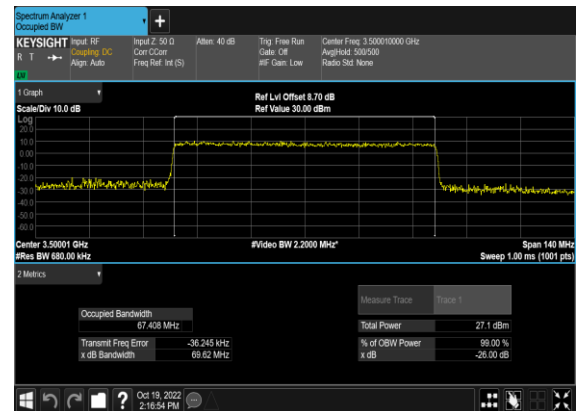


N77(80M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

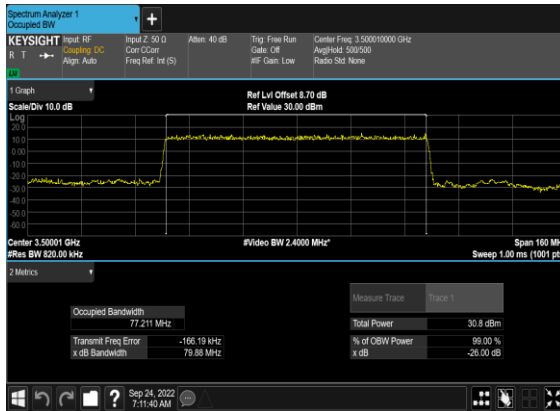


N77(80M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

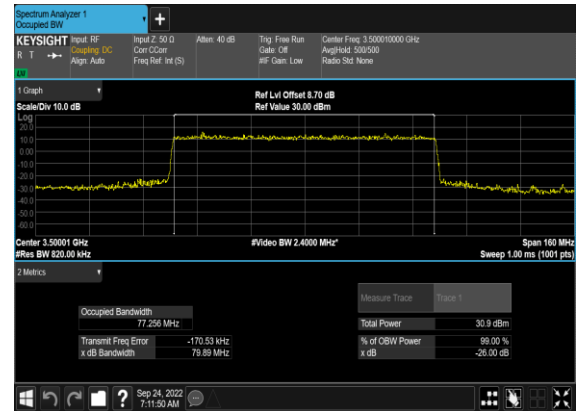


N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

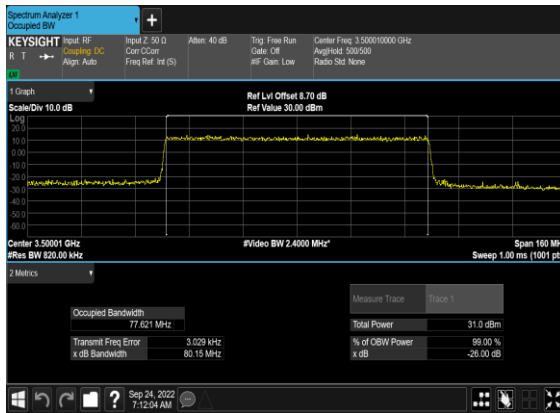


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

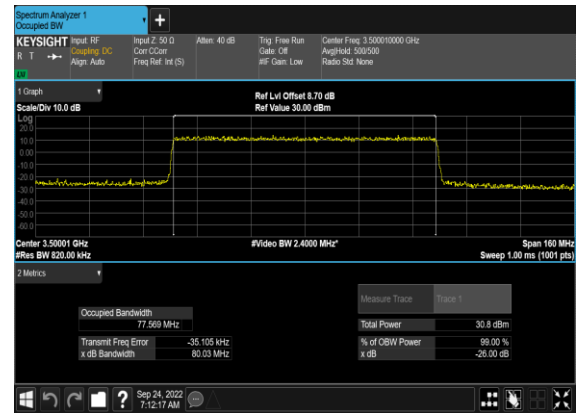


N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

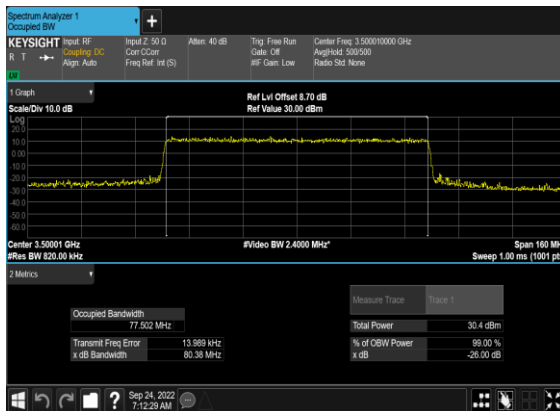


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

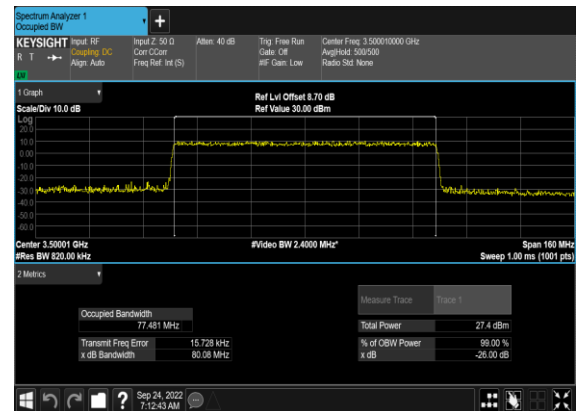


N77(90M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

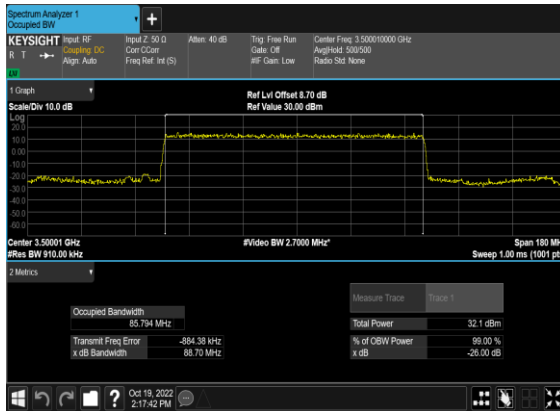


N77(90M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

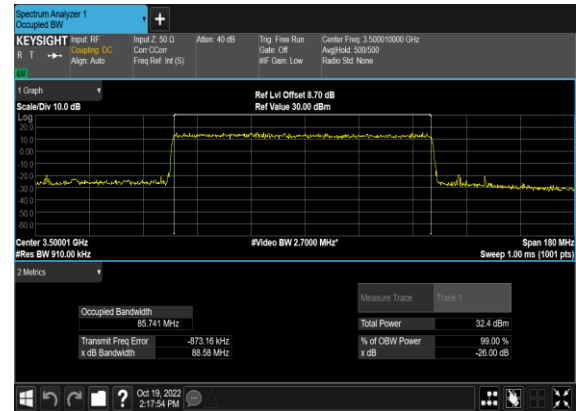


N77(90M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

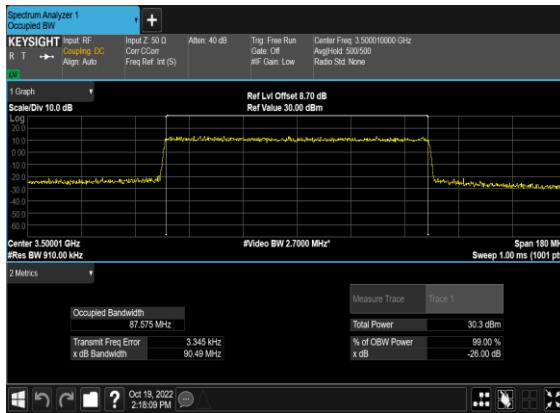


N77(90M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

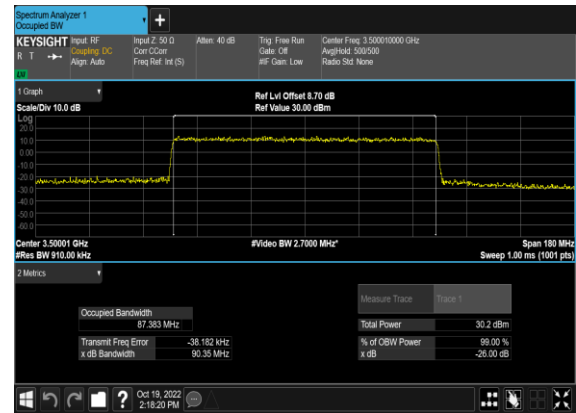


N77(90M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

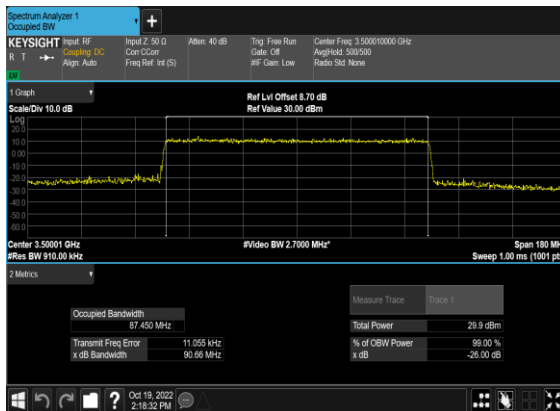

N77(90M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

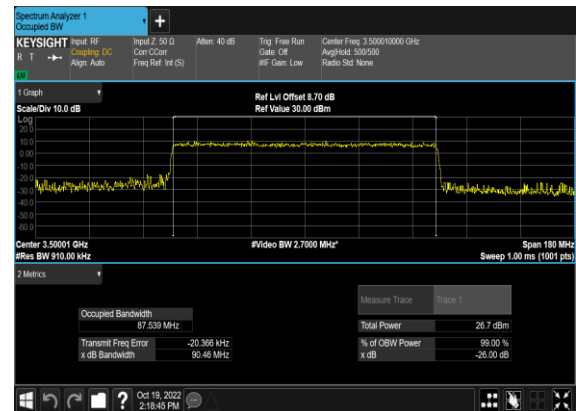


N77(100M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

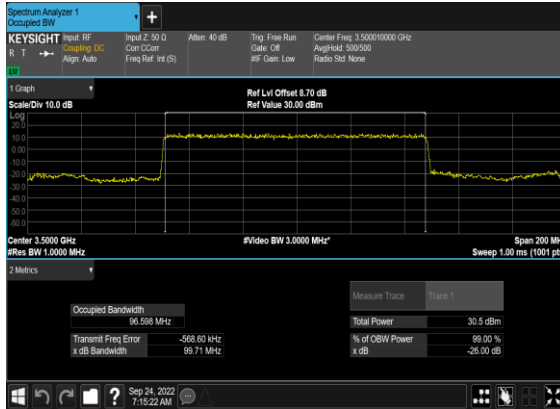


N77(100M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH




N77(100M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

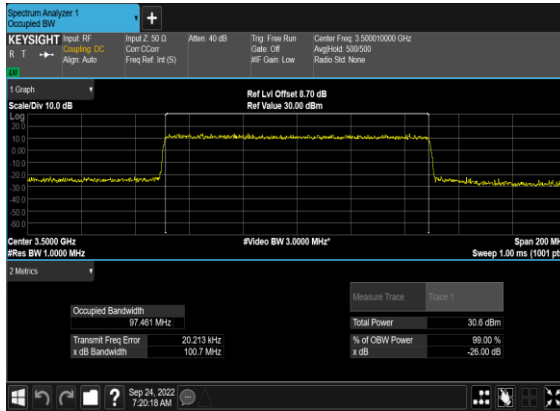


N77(100M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

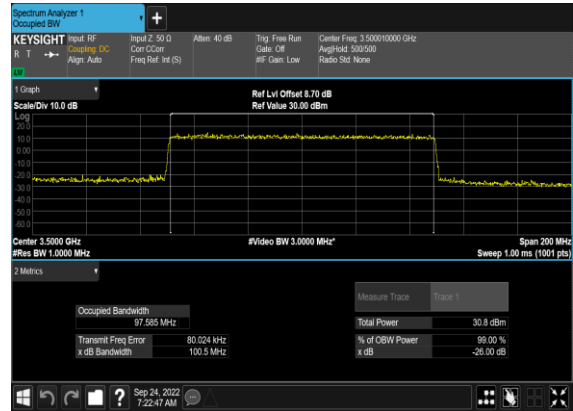

N77(100M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

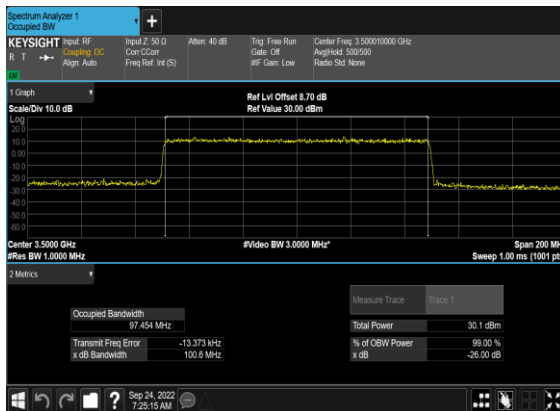

N77(100M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

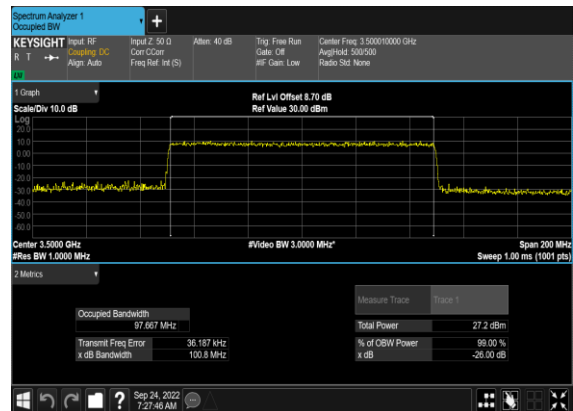


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	---

77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

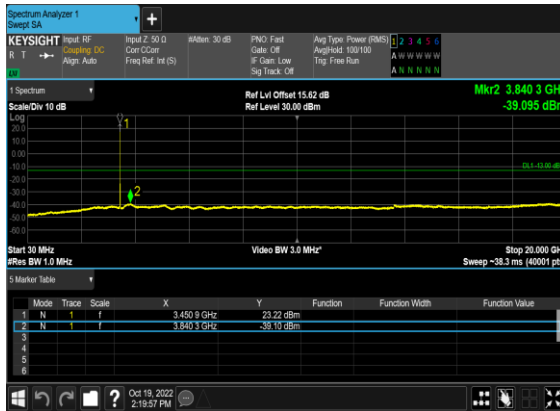


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

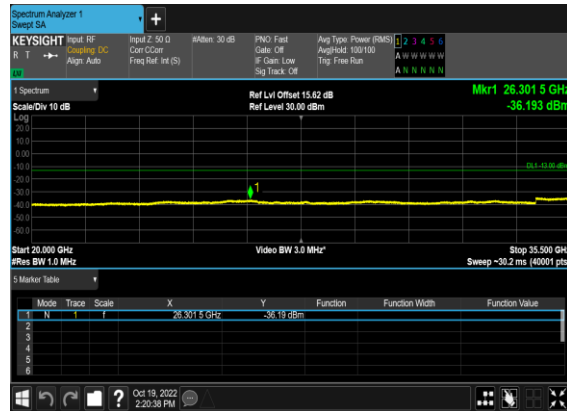


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

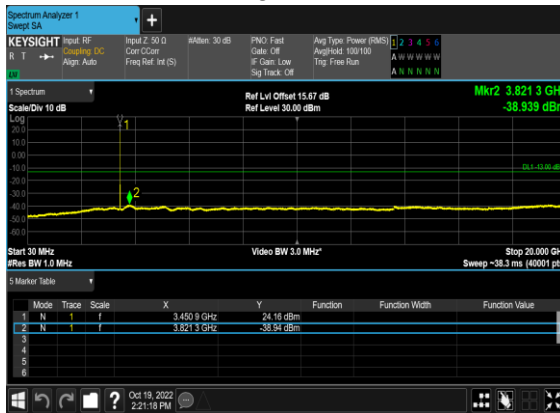


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

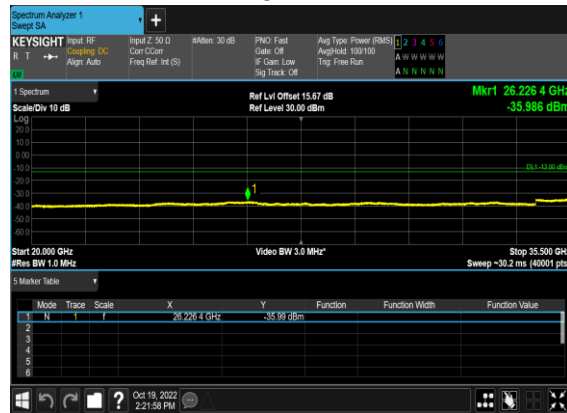


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

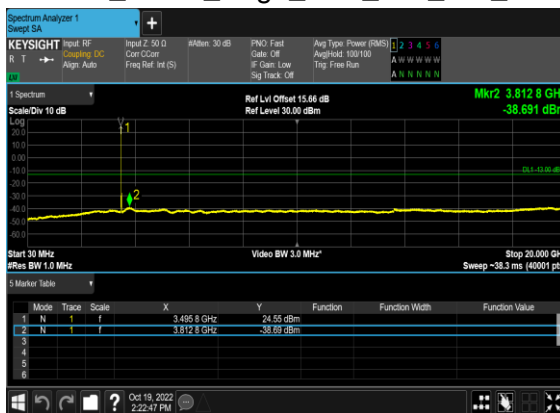


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

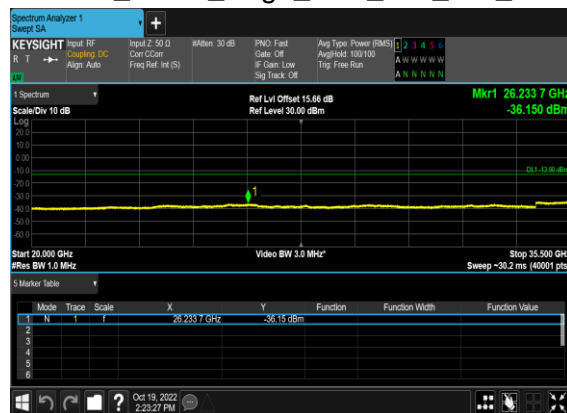


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

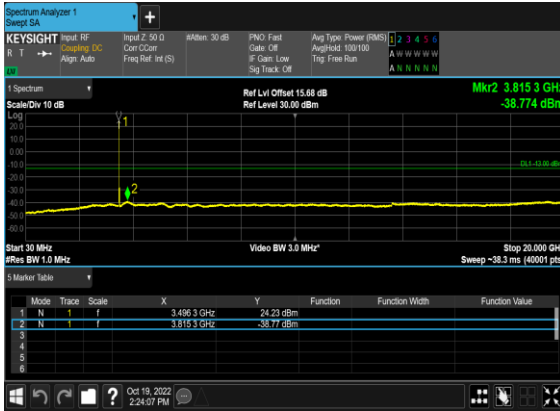


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

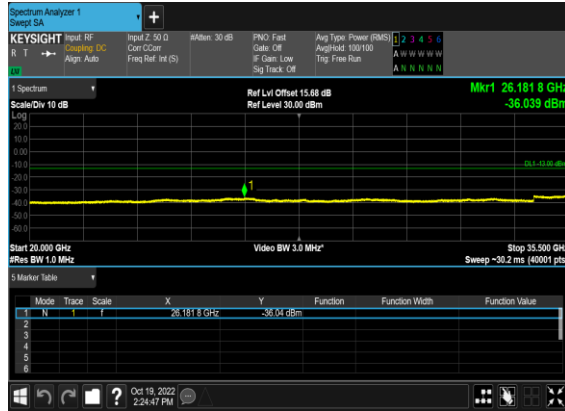


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

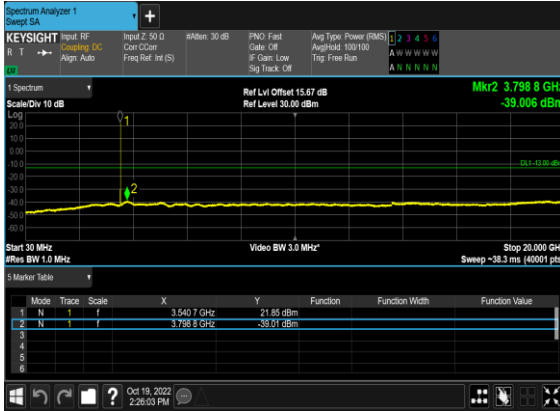

N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

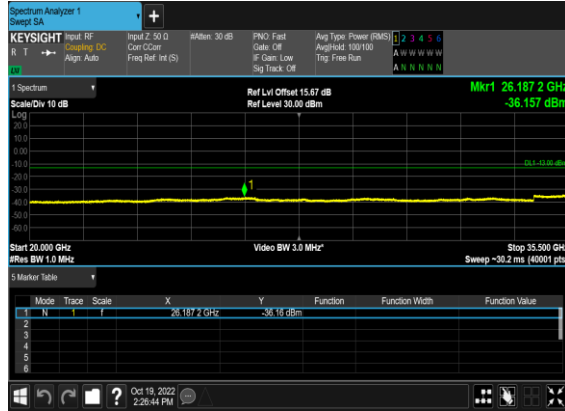

N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

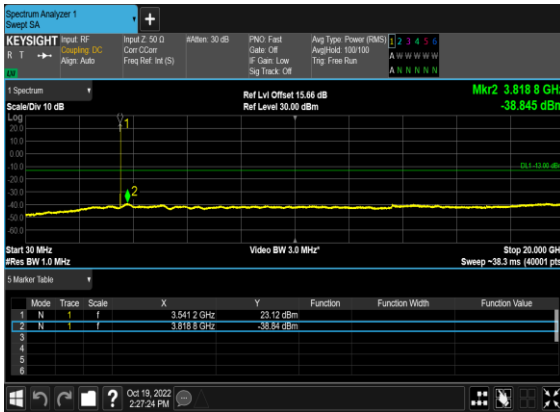

N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

