



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

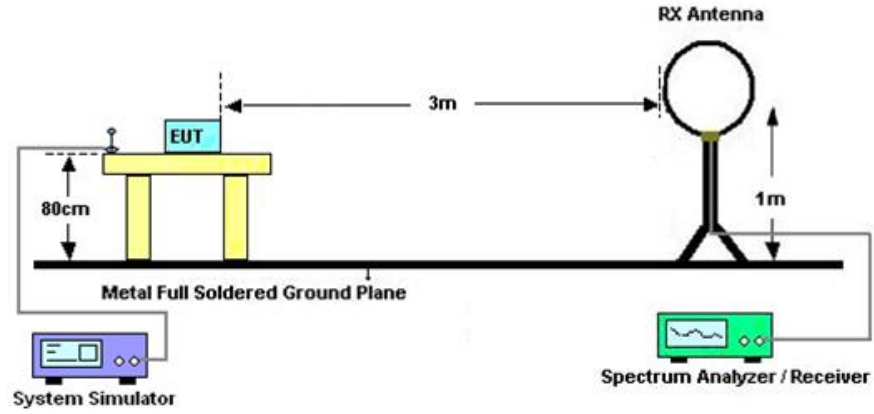

For radiated emissions from 30MHz to 1GHz

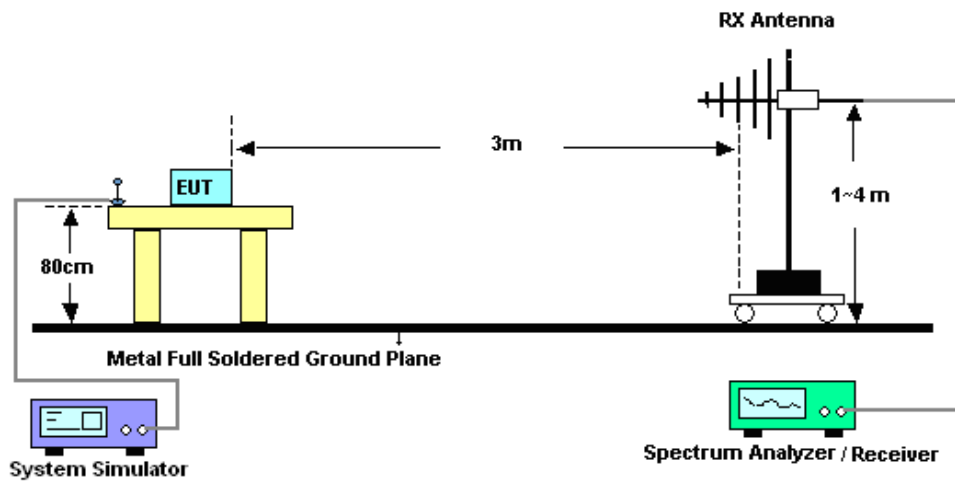

For radiated emissions above 1GHz

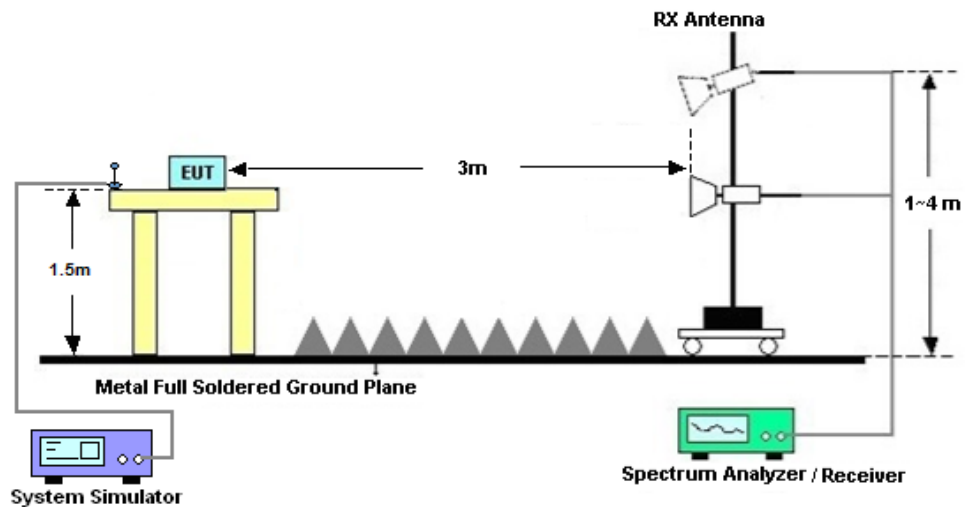



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

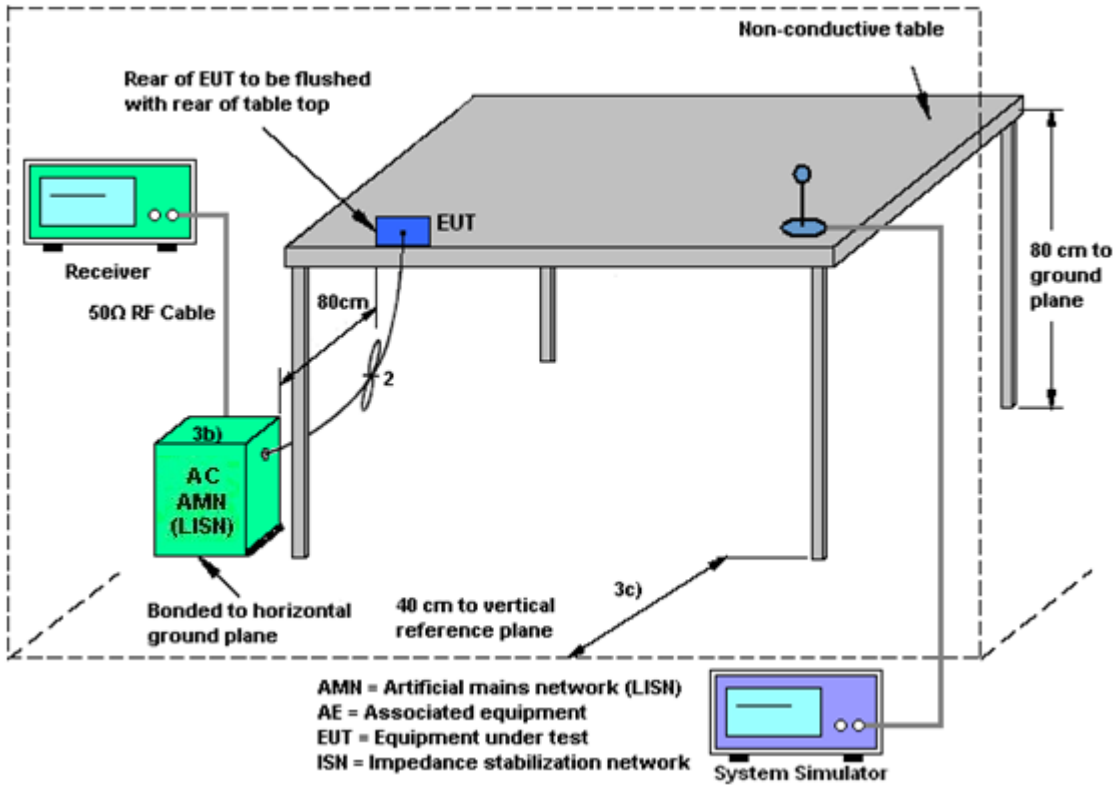

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for Bluetooth BR/EDR modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.



			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
BT BF	-3.50	-0.10	1.38	1.38	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Oct. 19, 2022~Nov. 05, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 19, 2022~Nov. 05, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 19, 2022~Nov. 05, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 12, 2022	Oct. 30, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 12, 2022	Oct. 30, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Oct. 30, 2022	Oct. 15, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 26, 2022	Oct. 30, 2022	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2022	Oct. 30, 2022	Apr. 05, 2023	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 12, 2022	Oct. 30, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Oct. 30, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 05, 2022	Oct. 30, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Oct. 12, 2022	Oct. 30, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Oct. 30, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Oct. 30, 2022	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Oct. 30, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Oct. 30, 2022	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Oct. 21, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Oct. 21, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Oct. 21, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Oct. 21, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.10 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Kib Shi	Temperature:	20~26	°C
Test Date:	2022/10/19~2022/11/5	Relative Humidity:	40~51	%

Bluetooth Ant.1

Test Engineer:	Kib Shi	Temperature:	20~26	°C
Test Date:	2022/10/19~2022/11/5	Relative Humidity:	40~51	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.949	0.854	1002.900	0.6329	Pass
DH	1Mbps	1	39	2441	0.949	0.851	1159.200	0.6329	Pass
DH	1Mbps	1	78	2480	0.947	0.851	1002.900	0.6310	Pass
2DH	2Mbps	1	0	2402	1.303	1.169	1159.200	0.8683	Pass
2DH	2Mbps	1	39	2441	1.303	1.169	972.500	0.8683	Pass
2DH	2Mbps	1	78	2480	1.303	1.169	1002.900	0.8683	Pass
3DH	3Mbps	1	0	2402	1.263	1.155	937.800	0.8423	Pass
3DH	3Mbps	1	39	2441	1.268	1.152	1159.200	0.8451	Pass
3DH	3Mbps	1	78	2480	1.263	1.152	994.200	0.8423	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.88	0.31	0.4	Pass
AFH	20	53.33	2.88	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	15.72	20.97	Pass
	39	1	16.48	20.97	Pass
	78	1	13.75	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	15.11	20.97	Pass
	39	1	16.15	20.97	Pass
	78	1	13.88	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	15.83	20.97	Pass
	39	1	16.86	20.97	Pass
	78	1	14.16	20.97	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

Bluetooth Ant.2

Test Engineer:	Kib Shi	Temperature:	20~26	°C
Test Date:	2022/10/19~2022/11/5	Relative Humidity:	40~51	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.949	0.854	998.600	0.6329	Pass
DH	1Mbps	1	39	2441	0.947	0.854	1007.200	0.6310	Pass
DH	1Mbps	1	78	2480	0.949	0.854	1002.900	0.6329	Pass
2DH	2Mbps	1	0	2402	1.298	1.172	1055.000	0.8654	Pass
2DH	2Mbps	1	39	2441	1.294	1.169	1167.900	0.8625	Pass
2DH	2Mbps	1	78	2480	1.298	1.169	1289.400	0.8654	Pass
3DH	3Mbps	1	0	2402	1.259	1.152	1159.200	0.8393	Pass
3DH	3Mbps	1	39	2441	1.259	1.155	1124.500	0.8393	Pass
3DH	3Mbps	1	78	2480	1.263	1.155	1028.900	0.8423	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	16.76	20.97	Pass
	39	1	17.32	20.97	Pass
	78	1	16.27	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	16.12	20.97	Pass
	39	1	16.63	20.97	Pass
	78	1	15.75	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	16.79	20.97	Pass
	39	1	17.29	20.97	Pass
	78	1	16.53	20.97	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

Bluetooth Ant.1

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2022/10/19~2022/11/5	Relative Humidity:	40~51	%

TEST RESULTS DATA									
20dB and 99% Occupied Bandwidth and Hopping Channel Separation									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.949	0.851	1002.900	0.6329	Pass
DH	1Mbps	1	39	2441	0.949	0.854	994.200	0.6329	Pass
DH	1Mbps	1	78	2480	0.949	0.857	998.600	0.6329	Pass
2DH	2Mbps	1	0	2402	1.303	1.172	998.600	0.8683	Pass
2DH	2Mbps	1	39	2441	1.303	1.169	1033.300	0.8683	Pass
2DH	2Mbps	1	78	2480	1.303	1.172	1198.300	0.8683	Pass
3DH	3Mbps	1	0	2402	1.263	1.152	916.100	0.8423	Pass
3DH	3Mbps	1	39	2441	1.263	1.152	1011.600	0.8423	Pass
3DH	3Mbps	1	78	2480	1.263	1.152	1163.500	0.8423	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

TEST RESULTS DATA					
Peak Power Table					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	8.55	20.97	Pass
	39	1	10.79	20.97	Pass
	78	1	10.48	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	7.79	20.97	Pass
	39	1	9.81	20.97	Pass
	78	1	9.05	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	8.27	20.97	Pass
	39	1	10.18	20.97	Pass
	78	1	9.61	20.97	Pass

TEST RESULTS DATA			
Number of Hopping Frequency			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

Bluetooth Ant.2

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2022/10/19~2022/11/5	Relative Humidity:	40~51	%

TEST RESULTS DATA									
20dB and 99% Occupied Bandwidth and Hopping Channel Separation									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.947	0.854	1002.900	0.6310	Pass
DH	1Mbps	1	39	2441	0.949	0.860	998.600	0.6329	Pass
DH	1Mbps	1	78	2480	0.949	0.860	998.600	0.6329	Pass
2DH	2Mbps	1	0	2402	1.298	1.169	1115.800	0.8654	Pass
2DH	2Mbps	1	39	2441	1.303	1.169	1007.200	0.8683	Pass
2DH	2Mbps	1	78	2480	1.298	1.169	998.600	0.8654	Pass
3DH	3Mbps	1	0	2402	1.259	1.155	998.600	0.8393	Pass
3DH	3Mbps	1	39	2441	1.263	1.155	1167.900	0.8423	Pass
3DH	3Mbps	1	78	2480	1.263	1.152	1228.700	0.8423	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

TEST RESULTS DATA					
Peak Power Table					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	8.55	20.97	Pass
	39	1	10.79	20.97	Pass
	78	1	10.48	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	7.79	20.97	Pass
	39	1	9.81	20.97	Pass
	78	1	9.05	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	8.27	20.97	Pass
	39	1	10.18	20.97	Pass
	78	1	9.61	20.97	Pass

TEST RESULTS DATA			
Number of Hopping Frequency			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

Bluetooth Ant.1+2

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2022/10/19~2022/11/5	Relative Humidity:	40~51	%

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	2	13.74	20.97	Pass
	39	2	14.58	20.97	Pass
	78	2	14.63	20.97	Pass


2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	2	12.48	20.97	Pass
	39	2	13.29	20.97	Pass
	78	2	12.48	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	2	12.81	20.97	Pass
	39	2	13.63	20.97	Pass
	78	2	12.95	20.97	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

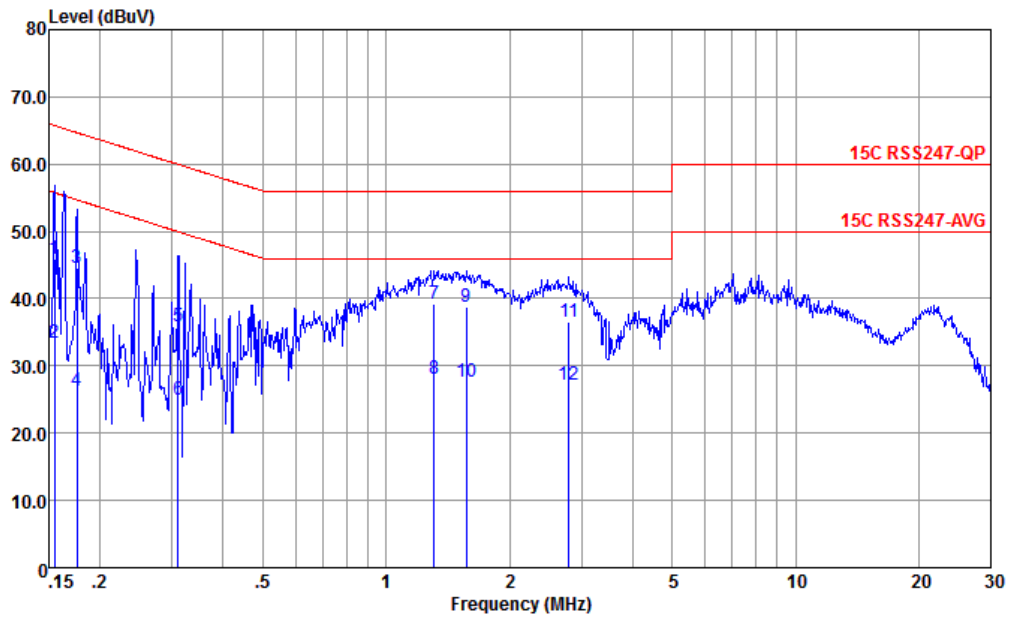


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.155	45.99	-19.75	65.74	35.50	0.06	10.43	QP
2	0.155	33.39	-22.35	55.74	22.90	0.06	10.43	Average
3	0.176	44.67	-20.01	64.68	34.21	0.04	10.42	QP
4	0.176	26.37	-28.31	54.68	15.91	0.04	10.42	Average
5	0.310	35.90	-24.07	59.97	25.51	0.05	10.34	QP
6	0.310	25.00	-24.97	49.97	14.61	0.05	10.34	Average
7 *	1.310	39.18	-16.82	56.00	29.20	-0.11	10.09	QP
8	1.310	28.18	-17.82	46.00	18.20	-0.11	10.09	Average
9	1.568	38.76	-17.24	56.00	28.79	-0.11	10.08	QP
10	1.568	27.56	-18.44	46.00	17.59	-0.11	10.08	Average
11	2.794	36.55	-19.45	56.00	26.59	-0.10	10.06	QP
12	2.794	27.15	-18.85	46.00	17.19	-0.10	10.06	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

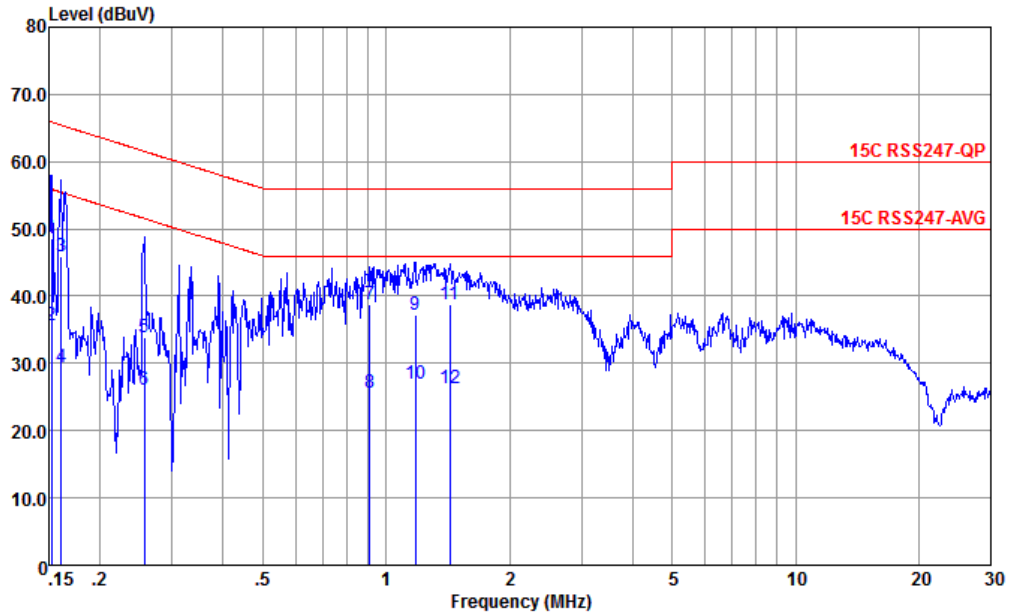

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	48.66	-17.21	65.87	38.20	0.03	10.43	QP
2	0.152	35.66	-20.21	55.87	25.20	0.03	10.43	Average
3	0.161	45.96	-19.47	65.43	35.50	0.03	10.43	QP
4	0.161	29.36	-26.07	55.43	18.90	0.03	10.43	Average
5	0.256	33.96	-27.60	61.56	23.59	-0.01	10.38	QP
6	0.256	25.96	-25.60	51.56	15.59	-0.01	10.38	Average
7 *	0.914	38.82	-17.18	56.00	28.81	-0.11	10.12	QP
8	0.914	25.52	-20.48	46.00	15.51	-0.11	10.12	Average
9	1.178	37.18	-18.82	56.00	27.19	-0.11	10.10	QP
10	1.178	26.88	-19.12	46.00	16.89	-0.11	10.10	Average
11	1.433	38.77	-17.23	56.00	28.81	-0.12	10.08	QP
12	1.433	26.27	-19.73	46.00	16.31	-0.12	10.08	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	15	Bluetooth EDR_8-DPSK	00	2402	3Mbps	-	-
Mode 2	2400-2483.5	15	Bluetooth EDR_8-DPSK	39	2441	3Mbps	-	-
Mode 3	2400-2483.5	15	Bluetooth EDR_8-DPSK	78	2480	3Mbps	-	-
Mode 4	2400-2483.5	18	Bluetooth EDR_8-DPSK	00	2402	3Mbps	-	-
Mode 5	2400-2483.5	18	Bluetooth EDR_8-DPSK	39	2441	3Mbps	-	-
Mode 6	2400-2483.5	18	Bluetooth EDR_8-DPSK	78	2480	3Mbps	-	-
Mode 7	2400-2483.5	BF 15+18	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 8	2400-2483.5	BF 15+18	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 9	2400-2483.5	BF 15+18	Bluetooth BR_GFSK	78	2480	1Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth EDR_8-DPSK	00	2384.1	47.1	74	-26.9	H	PEAK	Pass	Band Edge
2	Bluetooth EDR_8-DPSK	39	7323	43.53	74	-30.47	H	PEAK	Pass	Harmonic
3	Bluetooth EDR_8-DPSK	78	2483.62	54.42	74	-19.58	V	PEAK	Pass	Band Edge
4	Bluetooth EDR_8-DPSK	00	2389.56	50.14	74	-23.86	H	PEAK	Pass	Band Edge
5	Bluetooth EDR_8-DPSK	39	7323	44.48	74	-29.52	H	PEAK	Pass	Harmonic
6	Bluetooth EDR_8-DPSK	78	2488.18	48.05	74	-25.95	V	PEAK	Pass	Band Edge
7	Bluetooth BR_GFSK	00	2325.21	56.09	74	-17.91	H	PEAK	Pass	Band Edge
8	Bluetooth BR_GFSK	39	7323.00	45.89	74	-28.11	H	PEAK	Pass	Harmonic
9	Bluetooth BR_GFSK	78	2484.01	60.86	74	-13.14	H	PEAK	Pass	Band Edge



	1																																																																																																												
Mode	Band Edge																																																																																																												
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																																												
ANT	15																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																											
Peak																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.10</td> <td>47.10</td> <td>74.00</td> <td>-26.90</td> <td>33.05</td> <td>31.87</td> <td>7.11</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>63</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2384.10</td> <td>22.31</td> <td>54.00</td> <td>-31.69</td> <td>8.26</td> <td>31.87</td> <td>7.11</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Line	Limit	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.10	47.10	74.00	-26.90	33.05	31.87	7.11	30.93	6.00	100	63	Peak	2	2384.10	22.31	54.00	-31.69	8.26	31.87	7.11	30.93	6.00	100	63	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.00</td> <td>95.32</td> <td>74.00</td> <td>21.32</td> <td>81.17</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>100</td> <td>63</td> <td>Peak</td> </tr> <tr> <td>2 *</td> <td>2402.00</td> <td>70.53</td> <td>54.00</td> <td>16.53</td> <td>56.38</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>100</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Line	Limit	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 *	2402.00	95.32	74.00	21.32	81.17	31.90	7.13	30.88	6.00	100	63	Peak	2 *	2402.00	70.53	54.00	16.53	56.38	31.90	7.13	30.88	6.00	100	63
Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																					
Line	Limit	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2384.10	47.10	74.00	-26.90	33.05	31.87	7.11	30.93	6.00	100	63	Peak																																																																																																	
2	2384.10	22.31	54.00	-31.69	8.26	31.87	7.11	30.93	6.00	100	63	Average																																																																																																	
Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																					
Line	Limit	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 *	2402.00	95.32	74.00	21.32	81.17	31.90	7.13	30.88	6.00	100	63	Peak																																																																																																	
2 *	2402.00	70.53	54.00	16.53	56.38	31.90	7.13	30.88	6.00	100	63	Average																																																																																																	



	1																																																																																																	
Mode	Band Edge																																																																																																	
	2400-2483.5_ Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																																	
ANT	15																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.00</td> <td>46.79</td> <td>74.00</td> <td>-27.21</td> <td>32.69</td> <td>31.90</td> <td>7.13</td> <td>30.93</td> <td>6.00</td> <td>261</td> <td>360 Peak</td> </tr> <tr> <td>2</td> <td>2388.00</td> <td>22.00</td> <td>54.00</td> <td>-32.00</td> <td>7.90</td> <td>31.90</td> <td>7.13</td> <td>30.93</td> <td>6.00</td> <td>261</td> <td>360 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2388.00	46.79	74.00	-27.21	32.69	31.90	7.13	30.93	6.00	261	360 Peak	2	2388.00	22.00	54.00	-32.00	7.90	31.90	7.13	30.93	6.00	261	360 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1*</td> <td>2402.00</td> <td>99.36</td> <td>74.00</td> <td>25.36</td> <td>85.21</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>261</td> <td>360 Peak</td> </tr> <tr> <td>2*</td> <td>2402.00</td> <td>74.57</td> <td>54.00</td> <td>20.57</td> <td>60.42</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>261</td> <td>360 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1*	2402.00	99.36	74.00	25.36	85.21	31.90	7.13	30.88	6.00	261	360 Peak	2*	2402.00	74.57	54.00	20.57	60.42	31.90	7.13	30.88	6.00	261	360 Average
	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2388.00	46.79	74.00	-27.21	32.69	31.90	7.13	30.93	6.00	261	360 Peak																																																																																							
2	2388.00	22.00	54.00	-32.00	7.90	31.90	7.13	30.93	6.00	261	360 Average																																																																																							
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1*	2402.00	99.36	74.00	25.36	85.21	31.90	7.13	30.88	6.00	261	360 Peak																																																																																							
2*	2402.00	74.57	54.00	20.57	60.42	31.90	7.13	30.88	6.00	261	360 Average																																																																																							



Mode	1																																																																																										
	Harmonic																																																																																										
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																										
ANT	15																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.66</td> <td>74.00</td> <td>-33.34</td> <td>55.65</td> <td>34.30</td> <td>10.29</td> <td>65.58</td> <td>6.00</td> <td>100</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	40.66	74.00	-33.34	55.65	34.30	10.29	65.58	6.00	100	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.74</td> <td>74.00</td> <td>-32.26</td> <td>56.73</td> <td>34.30</td> <td>10.29</td> <td>65.58</td> <td>6.00</td> <td>300</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	41.74	74.00	-32.26	56.73	34.30	10.29	65.58	6.00	300
Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4804.00	40.66	74.00	-33.34	55.65	34.30	10.29	65.58	6.00	100	0 Peak																																																																																
Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4804.00	41.74	74.00	-32.26	56.73	34.30	10.29	65.58	6.00	300	0 Peak																																																																																



Mode	2																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz																																																																																													
ANT	15																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit Line</th> <th>Level</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>41.65</td> <td>74.00</td> <td>-32.35</td> <td>56.57</td> <td>34.14</td> <td>10.39</td> <td>65.45</td> <td>6.00</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>43.53</td> <td>74.00</td> <td>-30.47</td> <td>53.83</td> <td>35.52</td> <td>12.82</td> <td>64.64</td> <td>6.00</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit Line	Level	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	41.65	74.00	-32.35	56.57	34.14	10.39	65.45	6.00	100	360	Peak	2	7323.00	43.53	74.00	-30.47	53.83	35.52	12.82	64.64	6.00	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit Line</th> <th>Level</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.68</td> <td>74.00</td> <td>-31.32</td> <td>63.60</td> <td>34.14</td> <td>10.39</td> <td>65.45</td> <td>0.00</td> <td>300</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>42.14</td> <td>74.00</td> <td>-31.86</td> <td>58.44</td> <td>35.52</td> <td>12.82</td> <td>64.64</td> <td>0.00</td> <td>300</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit Line	Level	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	42.68	74.00	-31.32	63.60	34.14	10.39	65.45	0.00	300	360	Peak	2	7323.00	42.14	74.00	-31.86	58.44	35.52	12.82	64.64	0.00	300	360	Peak
Limit Line	Level	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																					
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4882.00	41.65	74.00	-32.35	56.57	34.14	10.39	65.45	6.00	100	360	Peak																																																																																		
2	7323.00	43.53	74.00	-30.47	53.83	35.52	12.82	64.64	6.00	100	360	Peak																																																																																		
Limit Line	Level	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																					
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	4882.00	42.68	74.00	-31.32	63.60	34.14	10.39	65.45	0.00	300	360	Peak																																																																																		
2	7323.00	42.14	74.00	-31.86	58.44	35.52	12.82	64.64	0.00	300	360	Peak																																																																																		



	3																																																																																																
Mode	Band Edge																																																																																																
	2400-2483.5_ Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																																
ANT	15																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak																																																																																																	
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.52</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>33.11</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>356 Peak</td> </tr> <tr> <td>2</td> <td>2484.52</td> <td>23.18</td> <td>54.00</td> <td>-30.82</td> <td>8.32</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>356 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.52	47.97	74.00	-26.03	33.11	32.23	7.28	30.65	6.00	100	356 Peak	2	2484.52	23.18	54.00	-30.82	8.32	32.23	7.28	30.65	6.00	100	356 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>97.06</td> <td>74.00</td> <td>23.06</td> <td>82.20</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>356 Peak</td> </tr> <tr> <td>2 *</td> <td>2480.00</td> <td>72.27</td> <td>54.00</td> <td>18.27</td> <td>57.41</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>356 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2480.00	97.06	74.00	23.06	82.20	32.23	7.28	30.65	6.00	100	356 Peak	2 *	2480.00	72.27	54.00	18.27	57.41	32.23	7.28	30.65	6.00	100
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2484.52	47.97	74.00	-26.03	33.11	32.23	7.28	30.65	6.00	100	356 Peak																																																																																						
2	2484.52	23.18	54.00	-30.82	8.32	32.23	7.28	30.65	6.00	100	356 Average																																																																																						
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1 *	2480.00	97.06	74.00	23.06	82.20	32.23	7.28	30.65	6.00	100	356 Peak																																																																																						
2 *	2480.00	72.27	54.00	18.27	57.41	32.23	7.28	30.65	6.00	100	356 Average																																																																																						



Mode	3																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																																	
ANT	15																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>54.42</td> <td>74.00</td> <td>-19.58</td> <td>39.56</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>246</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>2483.62</td> <td>29.63</td> <td>54.00</td> <td>-24.37</td> <td>14.77</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>246</td> <td>0 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.62	54.42	74.00	-19.58	39.56	32.23	7.28	30.65	6.00	246	0 Peak	2	2483.62	29.63	54.00	-24.37	14.77	32.23	7.28	30.65	6.00	246	0 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>95.87</td> <td>74.00</td> <td>21.87</td> <td>81.01</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>246</td> <td>0 Peak</td> </tr> <tr> <td>2 *</td> <td>2480.00</td> <td>71.08</td> <td>54.00</td> <td>17.08</td> <td>56.22</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>246</td> <td>0 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2480.00	95.87	74.00	21.87	81.01	32.23	7.28	30.65	6.00	246	0 Peak	2 *	2480.00	71.08	54.00	17.08	56.22	32.23	7.28	30.65	6.00	246	0 Average
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.62	54.42	74.00	-19.58	39.56	32.23	7.28	30.65	6.00	246	0 Peak																																																																																							
2	2483.62	29.63	54.00	-24.37	14.77	32.23	7.28	30.65	6.00	246	0 Average																																																																																							
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 *	2480.00	95.87	74.00	21.87	81.01	32.23	7.28	30.65	6.00	246	0 Peak																																																																																							
2 *	2480.00	71.08	54.00	17.08	56.22	32.23	7.28	30.65	6.00	246	0 Average																																																																																							



Mode	3																																																																									
	Harmonic																																																																									
	2400-2483.5 Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																									
ANT	15																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss Factor (dB/m)</th> <th>Preamp Loss Factor (dB)</th> <th>Aux Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.12</td> <td>74.00</td> <td>-32.88</td> <td>55.66</td> <td>34.23</td> <td>10.51</td> <td>65.28</td> <td>6.00</td> <td>100</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.11</td> <td>74.00</td> <td>-30.89</td> <td>53.36</td> <td>35.65</td> <td>12.88</td> <td>64.78</td> <td>6.00</td> <td>100</td> <td>0 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	4960.00	41.12	74.00	-32.88	55.66	34.23	10.51	65.28	6.00	100	0 Peak	2	7440.00	43.11	74.00	-30.89	53.36	35.65	12.88	64.78	6.00	100	0 Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss Factor (dB/m)</th> <th>Preamp Loss Factor (dB)</th> <th>Aux Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.59</td> <td>74.00</td> <td>-32.41</td> <td>56.13</td> <td>34.23</td> <td>10.51</td> <td>65.28</td> <td>6.00</td> <td>300</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.44</td> <td>74.00</td> <td>-30.56</td> <td>53.69</td> <td>35.65</td> <td>12.88</td> <td>64.78</td> <td>6.00</td> <td>300</td> <td>0 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	4960.00	41.59	74.00	-32.41	56.13	34.23	10.51	65.28	6.00	300	0 Peak	2	7440.00	43.44	74.00	-30.56	53.69	35.65	12.88	64.78	6.00	300	0 Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																														
1	4960.00	41.12	74.00	-32.88	55.66	34.23	10.51	65.28	6.00	100	0 Peak																																																															
2	7440.00	43.11	74.00	-30.89	53.36	35.65	12.88	64.78	6.00	100	0 Peak																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																															
1	4960.00	41.59	74.00	-32.41	56.13	34.23	10.51	65.28	6.00	300	0 Peak																																																															
2	7440.00	43.44	74.00	-30.56	53.69	35.65	12.88	64.78	6.00	300	0 Peak																																																															



Mode	4																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5 Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																																	
ANT	18																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>50.14</td> <td>74.00</td> <td>-23.86</td> <td>36.04</td> <td>31.90</td> <td>7.13</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>234 Peak</td> </tr> <tr> <td>2</td> <td>2389.56</td> <td>25.35</td> <td>54.00</td> <td>-28.65</td> <td>11.25</td> <td>31.90</td> <td>7.13</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>234 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Factor	Aux Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.56	50.14	74.00	-23.86	36.04	31.90	7.13	30.93	6.00	100	234 Peak	2	2389.56	25.35	54.00	-28.65	11.25	31.90	7.13	30.93	6.00	100	234 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.00</td> <td>99.63</td> <td>74.00</td> <td>25.63</td> <td>85.48</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>100</td> <td>234 Peak</td> </tr> <tr> <td>2 *</td> <td>2402.00</td> <td>74.84</td> <td>54.00</td> <td>20.84</td> <td>60.69</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>100</td> <td>234 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Factor	Aux Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2402.00	99.63	74.00	25.63	85.48	31.90	7.13	30.88	6.00	100	234 Peak	2 *	2402.00	74.84	54.00	20.84	60.69	31.90	7.13	30.88	6.00	100	234 Average
Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Factor	Aux Factor	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.56	50.14	74.00	-23.86	36.04	31.90	7.13	30.93	6.00	100	234 Peak																																																																																							
2	2389.56	25.35	54.00	-28.65	11.25	31.90	7.13	30.93	6.00	100	234 Average																																																																																							
Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Factor	Aux Factor	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 *	2402.00	99.63	74.00	25.63	85.48	31.90	7.13	30.88	6.00	100	234 Peak																																																																																							
2 *	2402.00	74.84	54.00	20.84	60.69	31.90	7.13	30.88	6.00	100	234 Average																																																																																							



Mode	4																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																																	
ANT	18																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2350.43</td> <td>46.95</td> <td>74.00</td> <td>-27.05</td> <td>33.08</td> <td>31.80</td> <td>7.06</td> <td>30.99</td> <td>6.00</td> <td>100</td> <td>130 Peak</td> </tr> <tr> <td>2</td> <td>2350.43</td> <td>22.16</td> <td>54.00</td> <td>-31.84</td> <td>8.29</td> <td>31.80</td> <td>7.06</td> <td>30.99</td> <td>6.00</td> <td>100</td> <td>130 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2350.43	46.95	74.00	-27.05	33.08	31.80	7.06	30.99	6.00	100	130 Peak	2	2350.43	22.16	54.00	-31.84	8.29	31.80	7.06	30.99	6.00	100	130 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.00</td> <td>96.40</td> <td>74.00</td> <td>22.40</td> <td>82.25</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>100</td> <td>130 Peak</td> </tr> <tr> <td>2 *</td> <td>2402.00</td> <td>71.61</td> <td>54.00</td> <td>17.61</td> <td>57.46</td> <td>31.90</td> <td>7.13</td> <td>30.88</td> <td>6.00</td> <td>100</td> <td>130 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2402.00	96.40	74.00	22.40	82.25	31.90	7.13	30.88	6.00	100	130 Peak	2 *	2402.00	71.61	54.00	17.61	57.46	31.90	7.13	30.88	6.00	100	130 Average
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2350.43	46.95	74.00	-27.05	33.08	31.80	7.06	30.99	6.00	100	130 Peak																																																																																							
2	2350.43	22.16	54.00	-31.84	8.29	31.80	7.06	30.99	6.00	100	130 Average																																																																																							
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 *	2402.00	96.40	74.00	22.40	82.25	31.90	7.13	30.88	6.00	100	130 Peak																																																																																							
2 *	2402.00	71.61	54.00	17.61	57.46	31.90	7.13	30.88	6.00	100	130 Average																																																																																							



Mode	4																																																																																			
	Harmonic																																																																																			
	2400-2483.5 Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																			
ANT	18																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.39</td> <td>74.00</td> <td>-32.61</td> <td>56.38</td> <td>34.30</td> <td>10.29</td> <td>65.58</td> <td>6.00</td> <td>300</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.39	74.00	-32.61	56.38	34.30	10.29	65.58	6.00	300	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.53</td> <td>74.00</td> <td>-32.47</td> <td>56.52</td> <td>34.30</td> <td>10.29</td> <td>65.58</td> <td>6.00</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.53	74.00	-32.47	56.52	34.30	10.29	65.58	6.00	100	0	Peak
	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4804.00	41.39	74.00	-32.61	56.38	34.30	10.29	65.58	6.00	300	0	Peak																																																																								
Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4804.00	41.53	74.00	-32.47	56.52	34.30	10.29	65.58	6.00	100	0	Peak																																																																								



Mode	5																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz																																																																																													
ANT	18																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>40.72</td> <td>74.00</td> <td>-33.28</td> <td>55.64</td> <td>34.14</td> <td>10.39</td> <td>65.45</td> <td>6.00</td> <td>300</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>44.48</td> <td>74.00</td> <td>-29.52</td> <td>54.78</td> <td>35.52</td> <td>12.82</td> <td>64.64</td> <td>6.00</td> <td>300</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4882.00	40.72	74.00	-33.28	55.64	34.14	10.39	65.45	6.00	300	360	Peak	2	7323.00	44.48	74.00	-29.52	54.78	35.52	12.82	64.64	6.00	300	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>41.13</td> <td>74.00</td> <td>-32.87</td> <td>56.05</td> <td>34.14</td> <td>10.39</td> <td>65.45</td> <td>6.00</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>44.17</td> <td>74.00</td> <td>-29.83</td> <td>54.47</td> <td>35.52</td> <td>12.82</td> <td>64.64</td> <td>6.00</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4882.00	41.13	74.00	-32.87	56.05	34.14	10.39	65.45	6.00	100	0	Peak	2	7323.00	44.17	74.00	-29.83	54.47	35.52	12.82	64.64	6.00	100	0	Peak
	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
1	4882.00	40.72	74.00	-33.28	55.64	34.14	10.39	65.45	6.00	300	360	Peak																																																																																		
2	7323.00	44.48	74.00	-29.52	54.78	35.52	12.82	64.64	6.00	300	360	Peak																																																																																		
Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
1	4882.00	41.13	74.00	-32.87	56.05	34.14	10.39	65.45	6.00	100	0	Peak																																																																																		
2	7323.00	44.17	74.00	-29.83	54.47	35.52	12.82	64.64	6.00	100	0	Peak																																																																																		



Mode	6																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																																
ANT	18																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak																																																																																																	
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.12</td> <td>47.70</td> <td>74.00</td> <td>-26.30</td> <td>32.65</td> <td>32.30</td> <td>7.32</td> <td>30.57</td> <td>6.00</td> <td>207</td> <td>285 Peak</td> </tr> <tr> <td>2</td> <td>2494.12</td> <td>22.91</td> <td>54.00</td> <td>-31.09</td> <td>7.86</td> <td>32.30</td> <td>7.32</td> <td>30.57</td> <td>6.00</td> <td>207</td> <td>285 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2494.12	47.70	74.00	-26.30	32.65	32.30	7.32	30.57	6.00	207	285 Peak	2	2494.12	22.91	54.00	-31.09	7.86	32.30	7.32	30.57	6.00	207	285 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>95.48</td> <td>74.00</td> <td>21.48</td> <td>80.62</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>207</td> <td>285 Peak</td> </tr> <tr> <td>2 *</td> <td>2480.00</td> <td>70.69</td> <td>54.00</td> <td>16.69</td> <td>55.83</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>207</td> <td>285 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2480.00	95.48	74.00	21.48	80.62	32.23	7.28	30.65	6.00	207	285 Peak	2 *	2480.00	70.69	54.00	16.69	55.83	32.23	7.28	30.65	6.00	207
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2494.12	47.70	74.00	-26.30	32.65	32.30	7.32	30.57	6.00	207	285 Peak																																																																																						
2	2494.12	22.91	54.00	-31.09	7.86	32.30	7.32	30.57	6.00	207	285 Average																																																																																						
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1 *	2480.00	95.48	74.00	21.48	80.62	32.23	7.28	30.65	6.00	207	285 Peak																																																																																						
2 *	2480.00	70.69	54.00	16.69	55.83	32.23	7.28	30.65	6.00	207	285 Average																																																																																						



Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																																	
ANT	18																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.18</td> <td>48.05</td> <td>74.00</td> <td>-25.95</td> <td>33.08</td> <td>32.30</td> <td>7.32</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>355 Peak</td> </tr> <tr> <td>2</td> <td>2488.18</td> <td>23.26</td> <td>54.00</td> <td>-30.74</td> <td>8.29</td> <td>32.30</td> <td>7.32</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>355 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2488.18	48.05	74.00	-25.95	33.08	32.30	7.32	30.65	6.00	100	355 Peak	2	2488.18	23.26	54.00	-30.74	8.29	32.30	7.32	30.65	6.00	100	355 Average	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>96.78</td> <td>74.00</td> <td>22.78</td> <td>81.92</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>355 Peak</td> </tr> <tr> <td>2 *</td> <td>2480.00</td> <td>71.99</td> <td>54.00</td> <td>17.99</td> <td>57.13</td> <td>32.23</td> <td>7.28</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>355 Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 *	2480.00	96.78	74.00	22.78	81.92	32.23	7.28	30.65	6.00	100	355 Peak	2 *	2480.00	71.99	54.00	17.99	57.13	32.23	7.28	30.65	6.00	100	355 Average
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2488.18	48.05	74.00	-25.95	33.08	32.30	7.32	30.65	6.00	100	355 Peak																																																																																							
2	2488.18	23.26	54.00	-30.74	8.29	32.30	7.32	30.65	6.00	100	355 Average																																																																																							
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 *	2480.00	96.78	74.00	22.78	81.92	32.23	7.28	30.65	6.00	100	355 Peak																																																																																							
2 *	2480.00	71.99	54.00	17.99	57.13	32.23	7.28	30.65	6.00	100	355 Average																																																																																							



Mode	6																																																																									
	Harmonic																																																																									
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																									
ANT	18																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>42.25</td> <td>74.00</td> <td>-31.75</td> <td>56.79</td> <td>34.23</td> <td>10.51</td> <td>65.28</td> <td>6.00</td> <td>300</td> <td>360 Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.39</td> <td>74.00</td> <td>-30.61</td> <td>53.64</td> <td>35.65</td> <td>12.88</td> <td>64.78</td> <td>6.00</td> <td>300</td> <td>360 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	4965.00	42.25	74.00	-31.75	56.79	34.23	10.51	65.28	6.00	300	360 Peak	2	7440.00	43.39	74.00	-30.61	53.64	35.65	12.88	64.78	6.00	300	360 Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>40.83</td> <td>74.00</td> <td>-33.17</td> <td>55.37</td> <td>34.23</td> <td>10.51</td> <td>65.28</td> <td>6.00</td> <td>100</td> <td>360 Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.24</td> <td>74.00</td> <td>-30.76</td> <td>53.49</td> <td>35.65</td> <td>12.88</td> <td>64.78</td> <td>6.00</td> <td>100</td> <td>360 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	4965.00	40.83	74.00	-33.17	55.37	34.23	10.51	65.28	6.00	100	360 Peak	2	7440.00	43.24	74.00	-30.76	53.49	35.65	12.88	64.78	6.00	100	360 Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																															
1	4965.00	42.25	74.00	-31.75	56.79	34.23	10.51	65.28	6.00	300	360 Peak																																																															
2	7440.00	43.39	74.00	-30.61	53.64	35.65	12.88	64.78	6.00	300	360 Peak																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																															
1	4965.00	40.83	74.00	-33.17	55.37	34.23	10.51	65.28	6.00	100	360 Peak																																																															
2	7440.00	43.24	74.00	-30.76	53.49	35.65	12.88	64.78	6.00	100	360 Peak																																																															



Mode	7																																																																																																																		
	Band Edge																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																		
ANT	BF 15+18																																																																																																																		
Pol.	Horizontal	Fundamental																																																																																																																	
Peak																																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2325.21</td> <td>56.09</td> <td>74.00</td> <td>-17.91</td> <td>42.17</td> <td>31.84</td> <td>7.02</td> <td>30.94</td> <td>6.00</td> <td>100</td> <td>103</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2325.21</td> <td>31.30</td> <td>54.00</td> <td>-22.70</td> <td>17.38</td> <td>31.84</td> <td>7.02</td> <td>30.94</td> <td>6.00</td> <td>100</td> <td>103</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2325.21	56.09	74.00	-17.91	42.17	31.84	7.02	30.94	6.00	100	103	PEAK	2	2325.21	31.30	54.00	-22.70	17.38	31.84	7.02	30.94	6.00	100	103	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>110.50</td> <td>-----</td> <td>-----</td> <td>96.24</td> <td>32.00</td> <td>7.13</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>103</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>85.71</td> <td>-----</td> <td>-----</td> <td>71.45</td> <td>32.00</td> <td>7.13</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>103</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	110.50	-----	-----	96.24	32.00	7.13	30.87	6.00	100	103	PEAK	2	2402.00	85.71	-----	-----	71.45	32.00	7.13	30.87	6.00	100	103
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2325.21	56.09	74.00	-17.91	42.17	31.84	7.02	30.94	6.00	100	103	PEAK																																																																																																							
2	2325.21	31.30	54.00	-22.70	17.38	31.84	7.02	30.94	6.00	100	103	AVERAGE																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2402.00	110.50	-----	-----	96.24	32.00	7.13	30.87	6.00	100	103	PEAK																																																																																																							
2	2402.00	85.71	-----	-----	71.45	32.00	7.13	30.87	6.00	100	103	AVERAGE																																																																																																							



Mode	7																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																													
ANT	BF 15+18																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.52</td> <td>55.61</td> <td>74.00</td> <td>-18.39</td> <td>41.42</td> <td>31.97</td> <td>7.11</td> <td>30.89</td> <td>6.00</td> <td>371</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2388.52</td> <td>30.82</td> <td>54.00</td> <td>-23.18</td> <td>16.63</td> <td>31.97</td> <td>7.11</td> <td>30.89</td> <td>6.00</td> <td>371</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.52	55.61	74.00	-18.39	41.42	31.97	7.11	30.89	6.00	371	116	PEAK	2	2388.52	30.82	54.00	-23.18	16.63	31.97	7.11	30.89	6.00	371	116	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>106.54</td> <td>-----</td> <td>-----</td> <td>92.28</td> <td>32.00</td> <td>7.13</td> <td>30.87</td> <td>6.00</td> <td>371</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>81.75</td> <td>-----</td> <td>-----</td> <td>67.49</td> <td>32.00</td> <td>7.13</td> <td>30.87</td> <td>6.00</td> <td>371</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.54	-----	-----	92.28	32.00	7.13	30.87	6.00	371	116	PEAK	2	2402.00	81.75	-----	-----	67.49	32.00	7.13	30.87	6.00	371	116	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2388.52	55.61	74.00	-18.39	41.42	31.97	7.11	30.89	6.00	371	116	PEAK																																																																																																		
2	2388.52	30.82	54.00	-23.18	16.63	31.97	7.11	30.89	6.00	371	116	AVERAGE																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	106.54	-----	-----	92.28	32.00	7.13	30.87	6.00	371	116	PEAK																																																																																																		
2	2402.00	81.75	-----	-----	67.49	32.00	7.13	30.87	6.00	371	116	AVERAGE																																																																																																		



Mode	7																																																																																			
	Harmonic																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																			
ANT	BF 15+18																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.20</td> <td>74.00</td> <td>-32.80</td> <td>62.24</td> <td>34.10</td> <td>10.29</td> <td>65.43</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.20	74.00	-32.80	62.24	34.10	10.29	65.43	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.65</td> <td>74.00</td> <td>-32.35</td> <td>62.69</td> <td>34.10</td> <td>10.29</td> <td>65.43</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.65	74.00	-32.35	62.69	34.10	10.29	65.43	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4804.00	41.20	74.00	-32.80	62.24	34.10	10.29	65.43	0.00	300	0	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4804.00	41.65	74.00	-32.35	62.69	34.10	10.29	65.43	0.00	100	0	PEAK																																																																								



Mode	8																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																													
ANT	BF 15+18																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>44.00</td> <td>74.00</td> <td>-30.00</td> <td>64.95</td> <td>34.10</td> <td>10.39</td> <td>65.44</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>45.89</td> <td>74.00</td> <td>-28.11</td> <td>62.52</td> <td>35.80</td> <td>12.82</td> <td>65.25</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	44.00	74.00	-30.00	64.95	34.10	10.39	65.44	0.00	300	0	PEAK	2	7323.00	45.89	74.00	-28.11	62.52	35.80	12.82	65.25	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.99</td> <td>74.00</td> <td>-31.01</td> <td>63.94</td> <td>34.10</td> <td>10.39</td> <td>65.44</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>44.68</td> <td>74.00</td> <td>-29.32</td> <td>61.31</td> <td>35.80</td> <td>12.82</td> <td>65.25</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.99	74.00	-31.01	63.94	34.10	10.39	65.44	0.00	100	0	PEAK	2	7323.00	44.68	74.00	-29.32	61.31	35.80	12.82	65.25	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4882.00	44.00	74.00	-30.00	64.95	34.10	10.39	65.44	0.00	300	0	PEAK																																																																																																		
2	7323.00	45.89	74.00	-28.11	62.52	35.80	12.82	65.25	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4882.00	42.99	74.00	-31.01	63.94	34.10	10.39	65.44	0.00	100	0	PEAK																																																																																																		
2	7323.00	44.68	74.00	-29.32	61.31	35.80	12.82	65.25	0.00	100	0	PEAK																																																																																																		



Mode	9																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	BF 15+18																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.01</td> <td>60.06</td> <td>74.00</td> <td>-13.14</td> <td>46.08</td> <td>32.13</td> <td>7.29</td> <td>30.64</td> <td>6.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2484.01</td> <td>36.07</td> <td>54.00</td> <td>-17.93</td> <td>21.29</td> <td>32.13</td> <td>7.29</td> <td>30.64</td> <td>6.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2484.01	60.06	74.00	-13.14	46.08	32.13	7.29	30.64	6.00	100	100	PEAK	2	2484.01	36.07	54.00	-17.93	21.29	32.13	7.29	30.64	6.00	100	100	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>111.09</td> <td>-----</td> <td>-----</td> <td>96.35</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>86.30</td> <td>-----</td> <td>-----</td> <td>71.56</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2480.00	111.09	-----	-----	96.35	32.12	7.28	30.66	6.00	100	100	PEAK	2	2480.00	86.30	-----	-----	71.56	32.12	7.28	30.66	6.00	100	100	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2484.01	60.06	74.00	-13.14	46.08	32.13	7.29	30.64	6.00	100	100	PEAK																																																																																																
2	2484.01	36.07	54.00	-17.93	21.29	32.13	7.29	30.64	6.00	100	100	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2480.00	111.09	-----	-----	96.35	32.12	7.28	30.66	6.00	100	100	PEAK																																																																																																
2	2480.00	86.30	-----	-----	71.56	32.12	7.28	30.66	6.00	100	100	AVERAGE																																																																																																



Mode	9																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	BF 15+18																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.29</td> <td>56.71</td> <td>74.00</td> <td>-17.29</td> <td>41.84</td> <td>32.15</td> <td>7.32</td> <td>30.60</td> <td>6.00</td> <td>352</td> <td>79</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2498.29</td> <td>31.92</td> <td>54.00</td> <td>-22.08</td> <td>17.05</td> <td>32.15</td> <td>7.32</td> <td>30.60</td> <td>6.00</td> <td>352</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2498.29	56.71	74.00	-17.29	41.84	32.15	7.32	30.60	6.00	352	79	PEAK	2	2498.29	31.92	54.00	-22.08	17.05	32.15	7.32	30.60	6.00	352	79	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>107.58</td> <td>-----</td> <td>-----</td> <td>92.84</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>352</td> <td>79</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>82.79</td> <td>-----</td> <td>-----</td> <td>68.05</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>352</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2480.00	107.58	-----	-----	92.84	32.12	7.28	30.66	6.00	352	79	PEAK	2	2480.00	82.79	-----	-----	68.05	32.12	7.28	30.66	6.00	352	79	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2498.29	56.71	74.00	-17.29	41.84	32.15	7.32	30.60	6.00	352	79	PEAK																																																																																																
2	2498.29	31.92	54.00	-22.08	17.05	32.15	7.32	30.60	6.00	352	79	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2480.00	107.58	-----	-----	92.84	32.12	7.28	30.66	6.00	352	79	PEAK																																																																																																
2	2480.00	82.79	-----	-----	68.05	32.12	7.28	30.66	6.00	352	79	AVERAGE																																																																																																



	9																																																																																																													
Mode	Harmonic																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	BF 15+18																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.41</td> <td>74.00</td> <td>-31.59</td> <td>63.26</td> <td>34.10</td> <td>10.50</td> <td>65.45</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7448.00</td> <td>45.22</td> <td>74.00</td> <td>-28.78</td> <td>61.88</td> <td>35.80</td> <td>12.87</td> <td>65.33</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.41	74.00	-31.59	63.26	34.10	10.50	65.45	0.00	300	0	PEAK	2	7448.00	45.22	74.00	-28.78	61.88	35.80	12.87	65.33	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.74</td> <td>74.00</td> <td>-31.26</td> <td>63.59</td> <td>34.10</td> <td>10.50</td> <td>65.45</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7448.00</td> <td>44.22</td> <td>74.00</td> <td>-29.78</td> <td>60.88</td> <td>35.80</td> <td>12.87</td> <td>65.33</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.74	74.00	-31.26	63.59	34.10	10.50	65.45	0.00	100	0	PEAK	2	7448.00	44.22	74.00	-29.78	60.88	35.80	12.87	65.33	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4960.00	42.41	74.00	-31.59	63.26	34.10	10.50	65.45	0.00	300	0	PEAK																																																																																																		
2	7448.00	45.22	74.00	-28.78	61.88	35.80	12.87	65.33	0.00	300	0	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4960.00	42.74	74.00	-31.26	63.59	34.10	10.50	65.45	0.00	100	0	PEAK																																																																																																		
2	7448.00	44.22	74.00	-29.78	60.88	35.80	12.87	65.33	0.00	100	0	PEAK																																																																																																		
Peak Avg																																																																																																														


Note: For 18GHz to 25GHz, only worst case is verified in this report.




	9																																																																																																																																																																																																
Mode	Emission below 1GHz																																																																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																
ANT	BF 15+18																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																															
Peak QP																																																																																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>21.57</td><td>40.00</td><td>-18.43</td><td>28.71</td><td>24.55</td><td>0.51</td><td>32.20</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>90.14</td><td>24.76</td><td>43.50</td><td>-18.74</td><td>41.14</td><td>14.60</td><td>1.32</td><td>32.30</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>214.30</td><td>24.13</td><td>43.50</td><td>-19.37</td><td>39.07</td><td>15.05</td><td>2.14</td><td>32.13</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>283.17</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>38.42</td><td>18.84</td><td>2.46</td><td>32.13</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>394.72</td><td>24.02</td><td>46.00</td><td>-21.98</td><td>31.84</td><td>21.57</td><td>2.90</td><td>32.29</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>525.67</td><td>27.74</td><td>46.00</td><td>-18.26</td><td>32.13</td><td>24.62</td><td>3.34</td><td>32.35</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	30.97	21.57	40.00	-18.43	28.71	24.55	0.51	32.20	0.00	---	Peak	2	90.14	24.76	43.50	-18.74	41.14	14.60	1.32	32.30	0.00	---	Peak	3	214.30	24.13	43.50	-19.37	39.07	15.05	2.14	32.13	0.00	---	Peak	4	283.17	27.59	46.00	-18.41	38.42	18.84	2.46	32.13	0.00	---	Peak	5	394.72	24.02	46.00	-21.98	31.84	21.57	2.90	32.29	0.00	---	Peak	6	525.67	27.74	46.00	-18.26	32.13	24.62	3.34	32.35	0.00	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>39.70</td><td>28.66</td><td>40.00</td><td>-11.34</td><td>40.48</td><td>19.68</td><td>0.62</td><td>32.12</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>45.52</td><td>26.97</td><td>40.00</td><td>-13.03</td><td>42.04</td><td>16.42</td><td>0.71</td><td>32.20</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>66.86</td><td>26.34</td><td>40.00</td><td>-13.66</td><td>45.30</td><td>12.17</td><td>1.01</td><td>32.14</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>282.20</td><td>24.46</td><td>46.00</td><td>-21.54</td><td>35.34</td><td>18.80</td><td>2.46</td><td>32.14</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>350.10</td><td>27.32</td><td>46.00</td><td>-18.68</td><td>36.50</td><td>20.29</td><td>2.73</td><td>32.20</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>502.39</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>33.13</td><td>23.91</td><td>3.27</td><td>32.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	39.70	28.66	40.00	-11.34	40.48	19.68	0.62	32.12	0.00	---	Peak	2	45.52	26.97	40.00	-13.03	42.04	16.42	0.71	32.20	0.00	---	Peak	3	66.86	26.34	40.00	-13.66	45.30	12.17	1.01	32.14	0.00	---	Peak	4	282.20	24.46	46.00	-21.54	35.34	18.80	2.46	32.14	0.00	---	Peak	5	350.10	27.32	46.00	-18.68	36.50	20.29	2.73	32.20	0.00	---	Peak	6	502.39	27.91	46.00	-18.09	33.13	23.91	3.27	32.40	0.00	---
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	30.97	21.57	40.00	-18.43	28.71	24.55	0.51	32.20	0.00	---	Peak																																																																																																																																																																																						
2	90.14	24.76	43.50	-18.74	41.14	14.60	1.32	32.30	0.00	---	Peak																																																																																																																																																																																						
3	214.30	24.13	43.50	-19.37	39.07	15.05	2.14	32.13	0.00	---	Peak																																																																																																																																																																																						
4	283.17	27.59	46.00	-18.41	38.42	18.84	2.46	32.13	0.00	---	Peak																																																																																																																																																																																						
5	394.72	24.02	46.00	-21.98	31.84	21.57	2.90	32.29	0.00	---	Peak																																																																																																																																																																																						
6	525.67	27.74	46.00	-18.26	32.13	24.62	3.34	32.35	0.00	---	Peak																																																																																																																																																																																						
Peak	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	39.70	28.66	40.00	-11.34	40.48	19.68	0.62	32.12	0.00	---	Peak																																																																																																																																																																																						
2	45.52	26.97	40.00	-13.03	42.04	16.42	0.71	32.20	0.00	---	Peak																																																																																																																																																																																						
3	66.86	26.34	40.00	-13.66	45.30	12.17	1.01	32.14	0.00	---	Peak																																																																																																																																																																																						
4	282.20	24.46	46.00	-21.54	35.34	18.80	2.46	32.14	0.00	---	Peak																																																																																																																																																																																						
5	350.10	27.32	46.00	-18.68	36.50	20.29	2.73	32.20	0.00	---	Peak																																																																																																																																																																																						
6	502.39	27.91	46.00	-18.09	33.13	23.91	3.27	32.40	0.00	---	Peak																																																																																																																																																																																						

Appendix D. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 00

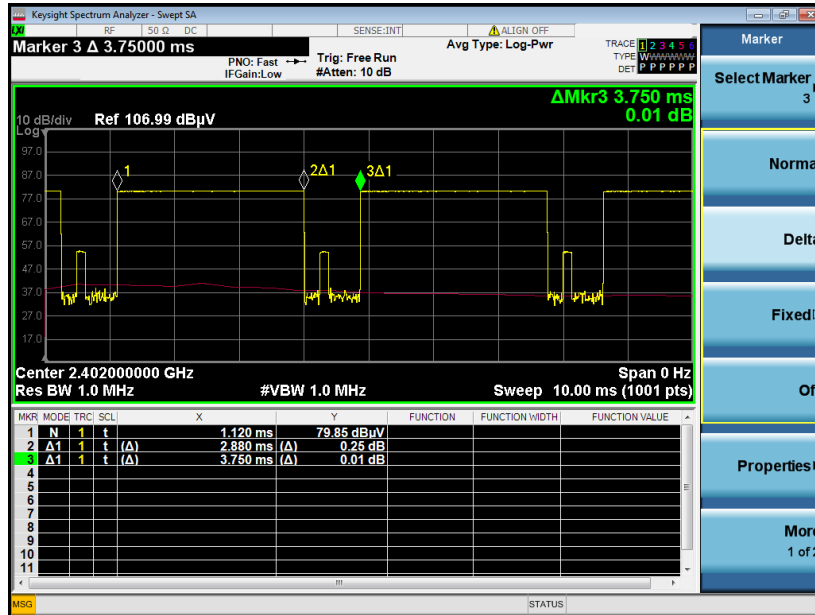

3DH5 on time (Count Pulses) Plot on Channel 00

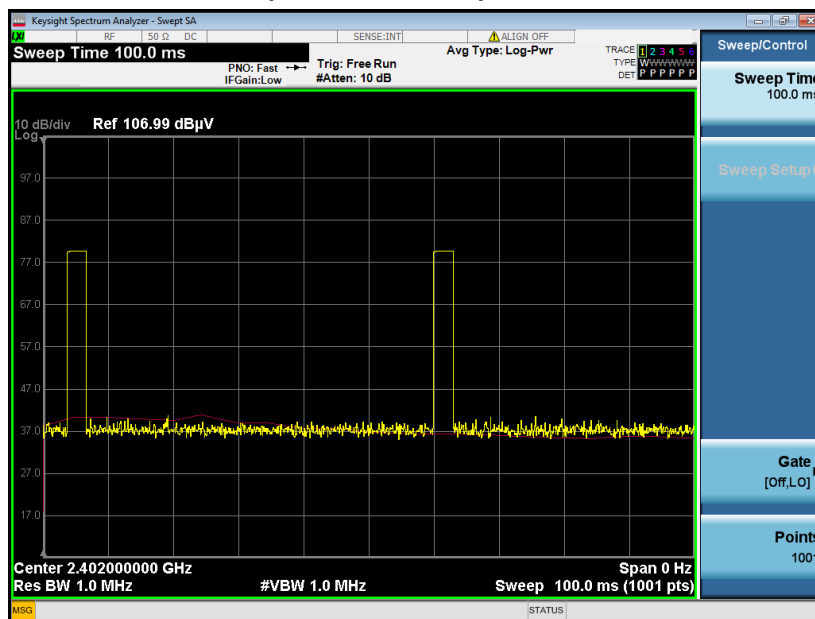

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. 3DH5 has the highest duty cycle worst case and is reported.