

FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.

EQUIPMENT: Mobile Phone

BRAND NAME : XIAOMI
MODEL NAME : 2211133G
FCC ID : 2AFZZ133G

STANDARD : 47 CFR Part 2, 96

CLASSIFICATION : Citizens Band End User Devices (CBE)

EQUIPMENT TYPE: End User Equipment

TEST DATE(S) : Sep. 28, 2022 ~ Oct. 09, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

JasonJia

Approved by: Jason Jia





Report No.: FG291706G

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 1 of 22 Issued Date : Nov. 11, 2022

Report Version : 01

Table of Contents

His	tory o	of this test report	3
Su	mmary	y of Test Result	4
1	Gene	eral Description	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	5
	1.4	Maximum EIRP Power and Emission Designator	6
	1.5	Testing Site	6
	1.6	Test Software	7
	1.7	Applied Standards	7
2	Test	Configuration of Equipment Under Test	8
	2.1	Test Mode	8
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration	9
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	Cond	lucted Test Items	11
	3.1	Measuring Instruments	11
	3.2	Conducted Output Power	12
	3.3	EIRP	13
	3.4	Occupied Bandwidth	14
	3.5	Conducted Band Edge	15
	3.6	Conducted Spurious Emission	16
	3.7	Frequency Stability	17
4	Radia	ated Test Items	18
	4.1	Measuring Instruments	18
	4.2	Test Setup	18
	4.3	Test Result of Radiated Test	19
	4.4	Radiated Spurious Emission	20
5	List	of Measuring Equipment	21
6	Unce	ertainty of Evaluation	22
Аp	pendi	x A. Test Results of Conducted Test	
Ар	pendi	x B. Test Results of Radiated Test	
Ар	pendi	x C. Test Setup Photographs	

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G

Report Version : 01

	E		
	7	T	
SP	ORTO	N L	AB.

History of this test report

Report No.	Version	Description	Issued Date
FG291706G	01	Initial issue of report	Nov. 11, 2022

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 3 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Required	Not applicable for End User Devices
	Maximum E.I.R.P		Pass	-
3.3	§96.41	Maximum Power Spectral Density	Not Required	Not applicable for End User Devices
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 13.91 dB at 10998.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 4 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



General Description 1

Applicant 1.1

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 **Manufacturer**

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Feature of Equipment Under Test 1.3

Product Feature							
Equipment	Mobile Phone						
Brand Name	XIAOMI						
Model Name	2211133G						
FCC ID	2AFZZ133G						
Tx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz						
Rx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz						
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz						
Maximum Output Power to Antenna	<pre><ant.1>LTE Band 48 : 20.60 dBm <ant.3>LTE Band 48 : 19.45 dBm <ant.10>LTE Band 48 : 22.94 dBm <ant.12>LTE Band 48 : 21.45 dBm</ant.12></ant.10></ant.3></ant.1></pre>						
Antenna Gain	<pre><ant.1>LTE Band 48 : -3.0 dBi <ant.3>LTE Band 48 : -1.6 dBi <ant.10>LTE Band 48 : -5.0 dBi <ant.12>LTE Band 48 : -3.6 dBi</ant.12></ant.10></ant.3></ant.1></pre>						
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM						
IMEI Code	Conducted: 866917060018858/866917060018866 Radiation: 866917060033675/866917060033683						
HW Version	P2						
SW Version	MIUI 14						
EUT Stage	Identical Prototype						

Remark:

- 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- 2. The maximum EIRP is calculated from maximum Output power and antenna gain, only the maximum EIRP of Ant 10 is shown in the report.

: 5 of 22 Sporton International Inc. (Kunshan) Page Number TEL: +86-512-57900158 Issued Date : Nov. 11, 2022

FAX: +86-512-57900958 Report Version : 01 FCC ID: 2AFZZ133G

Report Template No.: BU5-FGLTE96 Version 2.4

Report No.: FG291706G



1.4 Maximum EIRP Power and Emission Designator

Ľ	TE Band 48	QP	SK	16QAM/64QAM/256QAM			
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)		
5	3552.5~3697.5	0.0601	4M48G7D	0.0601	4M54W7D		
10	3555~3695	0.0607	9M03G7D	0.0622	9M01W7D		
15	3557.5~3692.5	0.0573	13M5G7D	0.0454	13M5W7D		
20	3560~3690	0.0463	18M3G7D	0.0394	18M5W7D		

Note:

- 1. Based on engineering evaluation, only the worst modulation test results are shown in the report.
- 2. Manufacturer declares that LTE Band 48 channels shall be set NS_27 to reduce the conducted power

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)						
	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China						
Test Site Location	TEL: +86-512-57900158 FAX: +86-512-57900958						
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.				
	TH01-KS	CN1257	314309				

Test Firm	Sporton International Ir	Sporton International Inc. (Shenzhen)						
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398							
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.					
	03CH01-SZ	CN1256	421272					

Note: Test data subcontracted: RSE test case in section 4.4 of this report

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 6 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

1.6 Test Software

ltem	Site	Manufacturer	Name	Version	
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24	

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- + ANSI C63.26-2015
- 47 CFR Part 2, 96
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 940660 D01 Part 96 CBRS v03
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- **1.** All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 7 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



Test Configuration of Equipment Under Test 2

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

		Bandwidth (MHz)				Modulation				RB#		Test Channel					
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	М	н
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v	٧		v	v	v	v
Adjacent Channel Leakage Ratio	48	-	-	v	v	v	v	v	v	v	v	٧		v	٧	v	v
26dB and 99% Bandwidth	48	-	-	v	v	٧	v	v	V					v		v	
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v	v	٧		v	٧		v
Conducted Spurious Emission	48	-	-	v	v	v	v	v				٧			٧	v	v
E.I.R.P	48	-	-	v	v	v	v	v	v	v	>	٧			٧	v	٧
Frequency Stability	48	-	-		v			v				٧				v	
Radiated Spurious Emission	48							Wo	rst Case							v	
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are						der										

reported.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G


Page Number : 8 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



2.2 Connection Diagram of Test System

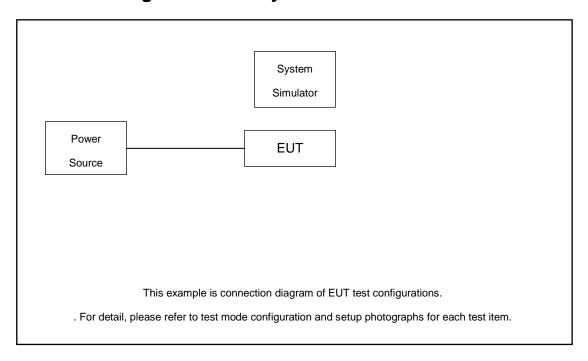

2.3 Support Unit used in test configuration

Item	Equipment Trade Name		Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	Base Station	Anritsu	MT8821C	Fcc DoC	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.72dB.

Example:

 $Offset(dB) = RF \ cable \ loss(dB).$

= 8.72(dB)

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 9 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
20	Channel	55340	55990	56640					
20	Frequency	3560.0	3625.0	3690.0					
15	Channel	55315	55990	56665					
15	Frequency	3557.5	3625.0	3692.5					
10	Channel	55290	55990	56690					
10	Frequency	3555.0	3625.0	3695.0					
5	Channel	55265	55990	56715					
o O	Frequency	3552.5	3625.0	3697.5					

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 10 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01




3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 PSD, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

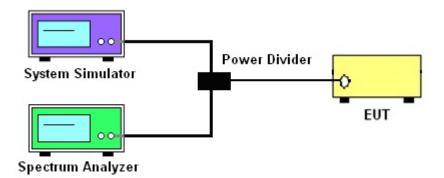

3.1.4 Frequency Stability

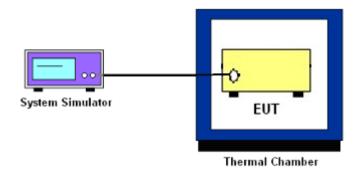

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 11 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 12 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



3.3 EIRP

3.3.1 Description of the EIRP Measurement

EIRP and PSD limits for CBRS equipment as below table:

De	evice	Maximum EIRP	Maximum PSD	
		(dBm/10 MHz)	(dBm/MHz)	
Applied	End User Device	23	n/a	
	Category A CBSD	30	20	
	Category B CBSD	47	37	

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.3.2 Test Procedures for EIRP

- Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
- Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$EIRP = P_T + G_T - L_C$$
, $ERP = EIRP - 2.15$, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 13 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the

total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and

one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB

below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit

bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of

the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.

2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.

The span range for the spectrum analyzer shall be between two and five times the anticipated

OBW.

3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated

OBW, and the VBW shall be at least 3 times the RBW.

4. Set the detection mode to peak, and the trace mode to max hold.

5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to

stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

6. Determine the "-26 dB down amplitude" as equal to (Reference Value – X).

7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of

the spectral display such that each marker is at or slightly below the "-X dB down amplitude"

determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the

two markers.

8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured

bandwidth.

Report No.: FG291706G

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ −13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ −13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
- 5. Offset has included the duty factor for LTE Band 48. Duty factor =10 log (1/x), where x is the measured duty cycle.
- 6. Set spectrum analyzer with RMS detector.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 15 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is -40dBm/MHz.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 16 of 22
Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency

Report No.: FG291706G

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- The EUT was placed in a temperature chamber at 25±5° C and connected with the system 1. simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

Sporton International Inc. (Kunshan) : 17 of 22 Page Number TEL: +86-512-57900158 Issued Date : Nov. 11, 2022

FAX: +86-512-57900958 Report Version : 01 FCC ID: 2AFZZ133G Report Template No.: BU5-FGLTE96 Version 2.4




4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

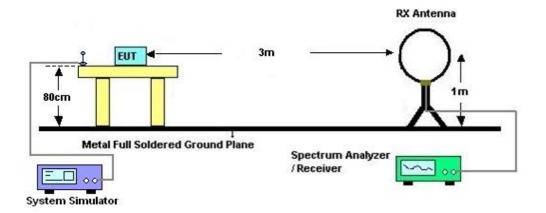

4.2.2 For radiated test from 30MHz to 1GHz

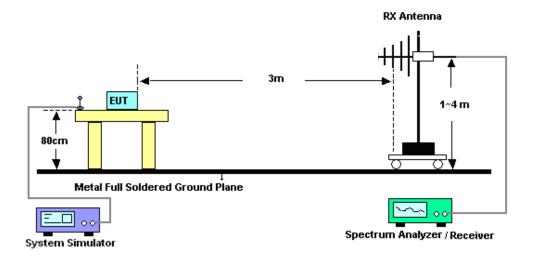

Sporton International Inc. (Kunshan)


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 18 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01



4.2.3 For radiated test above 1GHz

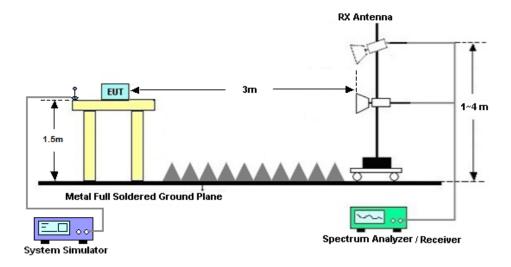

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 19 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- A horn antenna was substituted in place of the EUT and was driven by a signal generator.
 Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain<math>ERP (dBm) = EIRP - 2.15

8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 20 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Sep. 28, 2022~ Sep. 29, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 25, 2022	Sep. 28, 2022~ Sep. 29, 2022	Aug. 24, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011 440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Sep. 28, 2022~ Sep. 29, 2022	Jul. 14, 2023	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent	N9038A	MY52260 185	20Hz~26.5GHz	Dec.27, 2021	Oct. 09, 2022	Dec.26, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Oct. 09, 2022	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270 105	0.5GHz~26.5Ghz	Oct. 22, 2021	Oct. 09, 2022	Oct. 21, 2022	Radiation (03CH01-SZ
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Oct. 09, 2022	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Oct. 09, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Oct. 09, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Oct. 09, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Oct. 09, 2022	Oct. 21,2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 06, 2022	Oct. 09, 2022	Jul. 05, 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000 1985	N/A	NCR	Oct. 09, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 09, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 09, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 21 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

6 Uncertainty of Evaluation

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.10 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	
	2.48 dB
Confidence of 95% (U = 2Uc(y))	

<u>Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)</u>

Measuring Uncertainty for a Level of	3.53 dB
Confidence of 95% (U = 2Uc(y))	3.53 UB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	4.02 dB
Confidence of 95% (U = 2Uc(y))	4.02 UB

----- THE END -----

Sporton International Inc. (Kunshan)

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number : 22 of 22 Issued Date : Nov. 11, 2022

Report No.: FG291706G

Report Version : 01

Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
	Simile Wang	Relative Humidity :	40~42%

Report No.: FG291706G

Conducted Output Power(Average power) and EIRP

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel			55340	55990	56640	EIRP	EIRP	EIRP	
	Frequenc	cy (MHz)		3560	3625	3690	LIKP	LIKP	LIKP
20	QPSK	1	0	20.85	20.76	20.82	0.0385	0.0377	0.0382
20	QPSK	1	99	20.66	20.56	20.58	0.0368	0.0360	0.0361
20	QPSK	100	0	21.57	21.66	21.65	0.0454	0.0463	0.0462
20	16QAM	1	0	20.93	20.88	20.96	0.0392	0.0387	0.0394
20	16QAM	1	99	20.72	20.75	20.77	0.0373	0.0376	0.0378
20	16QAM	100	0	20.57	20.74	20.65	0.0361	0.0375	0.0367
20	64QAM	1	0	19.83	19.98	19.87	0.0304	0.0315	0.0307
20	64QAM	1	99	19.65	19.65	19.75	0.0292	0.0292	0.0299
20	64QAM	100	0	19.58	19.72	19.67	0.0287	0.0296	0.0293
20	256QAM	1	0	15.96	16.08	15.98	0.0125	0.0128	0.0125
20	256QAM	1	99	15.87	15.93	15.86	0.0122	0.0124	0.0122
20	256QAM	100	0	16.67	16.63	16.65	0.0147	0.0146	0.0146
Channel			55315	55990	56665	EIRP	EIRP	EIRP	
	Frequency (MHz)			3557.5	3625	3692.5	LIKP	EIRP	EIRP
15	QPSK	1	0	20.25	20.22	20.18	0.0335	0.0333	0.0330
15	QPSK	1	74	20.32	20.29	20.23	0.0340	0.0338	0.0333
15	QPSK	75	0	22.56	22.54	22.58	0.0570	0.0568	0.0573
15	16QAM	1	0	20.37	20.35	20.29	0.0344	0.0343	0.0338
15	16QAM	1	74	20.35	20.32	20.34	0.0343	0.0340	0.0342
15	16QAM	75	0	21.55	21.51	21.57	0.0452	0.0448	0.0454
15	64QAM	1	0	19.35	19.31	19.33	0.0272	0.0270	0.0271
15	64QAM	1	74	19.36	19.35	19.32	0.0273	0.0272	0.0270
15	64QAM	75	0	20.55	20.53	20.59	0.0359	0.0357	0.0362
15	256QAM	1	0	15.32	15.27	15.35	0.0108	0.0106	0.0108
15	256QAM	1	74	15.49	15.53	15.54	0.0112	0.0113	0.0113
15	256QAM	75	0	17.53	17.52	17.56	0.0179	0.0179	0.0180
	Channel			55290	55990	56690	EIRP	EIRP	EIRP
Frequency (MHz)			3555	3625	3695	LIIXF	LIIXF	_ LIKF	
10	QPSK	1	0	22.77	22.75	22.79	0.0598	0.0596	0.0601
10	QPSK	1	49	22.65	22.63	22.58	0.0582	0.0579	0.0573
10	QPSK	50	0	22.79	22.82	22.83	0.0601	0.0605	0.0607
10	16QAM	1	0	22.89	22.93	22.94	0.0615	0.0621	0.0622
10	16QAM	1	49	22.73	22.76	22.81	0.0593	0.0597	0.0604

Page Number

: A1 of A107

Sporton International Inc. (Kunshan)



FCC RF Test Report


10	16QAM	50	0	22.65	22.63	22.61	0.0582	0.0579	0.0577
10	64QAM	1	0	22.59	22.58	22.62	0.0574	0.0573	0.0578
10	64QAM	1	49	22.57	22.53	22.51	0.0571	0.0566	0.0564
10	64QAM	50	0	21.65	21.64	21.68	0.0462	0.0461	0.0466
10	256QAM	1	0	18.63	18.65	18.59	0.0231	0.0232	0.0229
10	256QAM	1	49	18.53	18.57	18.55	0.0225	0.0228	0.0226
10	256QAM	50	0	18.71	18.73	18.77	0.0235	0.0236	0.0238
	Cha	nnel		55265	55990	56715	EIRP	EIRP	EIDD
	Frequency (MHz)			3552.5	3625	3697.5	LIKP	LIKP	EIRP
5	QPSK	1	0	22.75	22.72	22.77	0.0596	0.0592	0.0598
5	QPSK	1	24	22.79	22.78	22.75	0.0601	0.0600	0.0596
5	QPSK	25	0	22.71	22.73	22.77	0.0590	0.0593	0.0598
5	16QAM	1	0	22.75	22.76	22.79	0.0596	0.0597	0.0601
5	16QAM	1	24	22.73	22.77	22.78	0.0593	0.0598	0.0600
5	16QAM	25	0	22.58	22.55	22.59	0.0573	0.0569	0.0574
5	64QAM	1	0	22.53	22.57	22.58	0.0566	0.0571	0.0573
5	64QAM	1	24	22.63	22.65	22.66	0.0579	0.0582	0.0583
5	64QAM	25	0	21.68	21.63	21.59	0.0466	0.0460	0.0456
5	256QAM	1	0	18.63	18.61	18.55	0.0231	0.0230	0.0226
5	256QAM	1	24	18.67	18.72	18.74	0.0233	0.0236	0.0237
5	256QAM	25	0	18.65	18.62	18.56	0.0232	0.0230	0.0227

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Report No.: FG291706G



LTE Band 48


ACLR

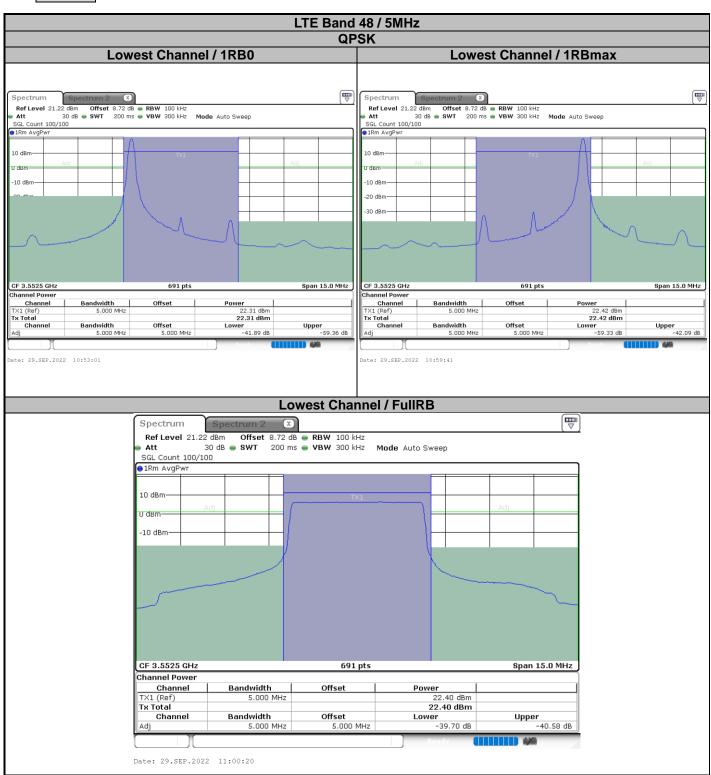

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Page Number :

: A3 of A107

Report No.: FG291706G

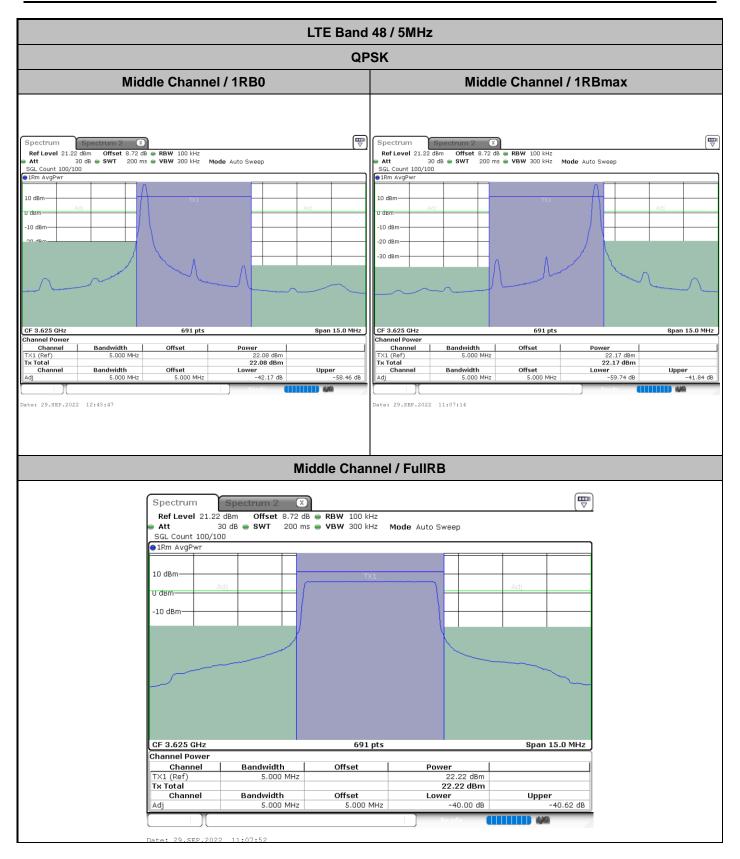









TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G : A8 of A107



TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G : A9 of A107





TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G

Report No.: FG291706G







TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G

Report No.: FG291706G

LTE Band 48 / 20MHz **QPSK** Middle Channel / 1RB0 Middle Channel / 1RBmax Spectrum Spectrum
 Offset
 8.72 dB
 ■ RBW
 300 kHz

 SWT
 100 ms
 ■ VBW
 1 MHz
 Mode
 Auto Sweep
 Ref Level 21.22 dBm Att 30 dB Ref Level 21.22 dBm
 Offset
 8.72 dB
 RBW
 300 kHz


 SWT
 100 ms
 VBW
 1 MHz
 Mode
 Auto Sweep
 2 dBm Offse 30 dB
SWT 30 dB . SWT SGL Count 100/100 • 1Rm AvgPwr SGL Count 100/100 CF 3.625 GHz Channel Power 691 pts Span 60.0 MHz CF 3.625 GHz Channel Power Span 60.0 MHz Bandwidth 20.000 MHz Channel
TX1 (Ref)
Tx Total
Channel 19.80 dBm 19.80 dBm Channel TX1 (Ref) Tx Total Power 19.87 dBm 19.87 dBm Bandwidth 20.000 MHz Offset Offset Upper -55.06 dB Lower -54.97 dB Bandwidth 20.000 MHz Bandwidth 20.000 MHz Offset 20.000 MHz Chan ate: 29.SEP.2022 12:38:36 Date: 29.SEP.2022 12:23:38 Middle Channel / FullRB Spectrum 2 Spectrum
 Ref Level
 21.22 dBm
 Offset
 8.72 dB
 RBW
 300 kHz

 Att
 30 dB
 SWT
 100 ms
 VBW
 1 MHz
 Att Mode Auto Sweep SGL Count 100/100 o1Rm AvgPwr 10 dBm u dBm--10 dBm -20 dBm CF 3.625 GHz 691 pts Span 60.0 MHz Channel Power Offset Channel Bandwidth Power 20.99 dBm 20.99 dBm 20.000 MHz Channel Bandwidth Lower -43.23 dB Upper -45.77 dB 20.000 MHz 20.000 MHz


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G Report No.: FG291706G





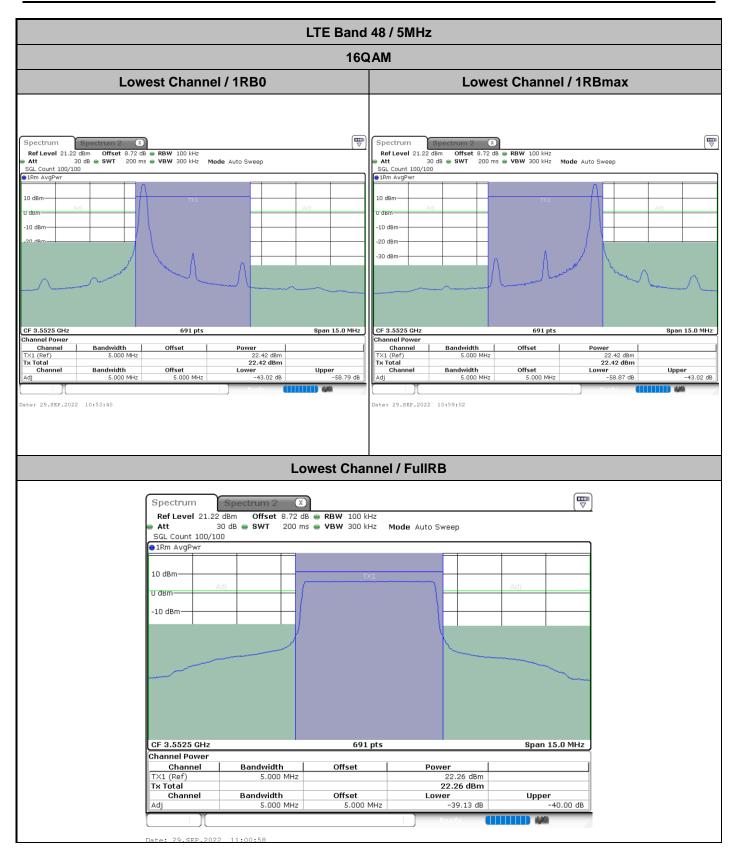




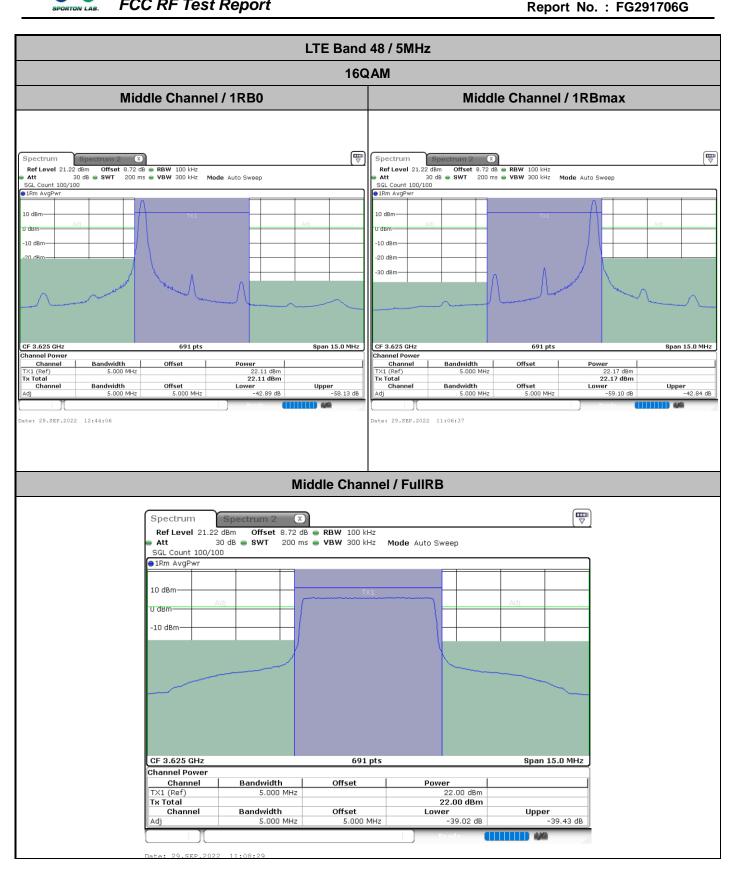



TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G : A17 of A107

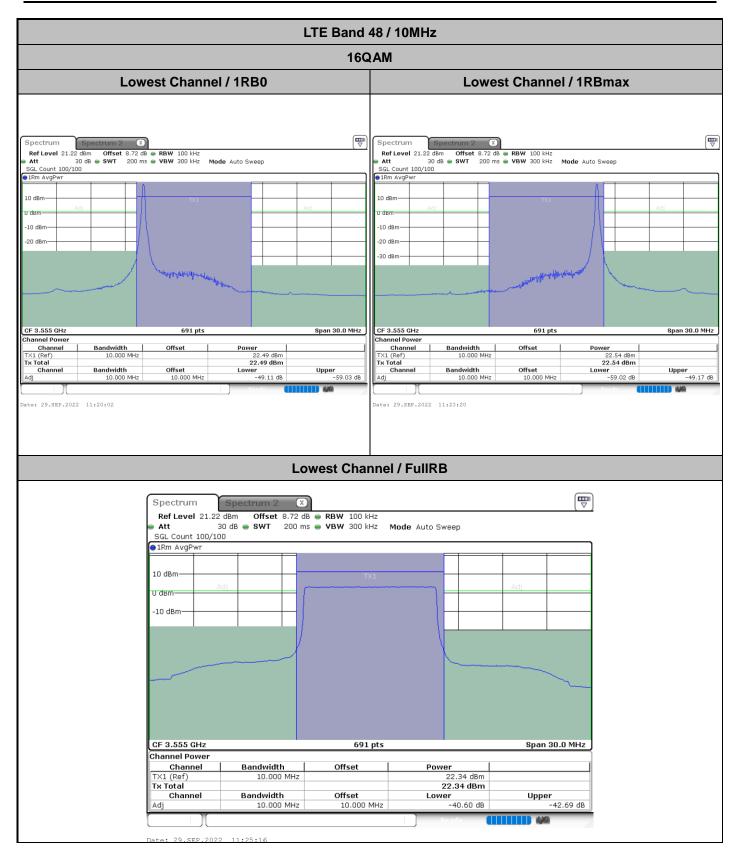


FCC RF Test Report Report No.: FG291706G LTE Band 48 / 10MHz **16QAM** MiddleChannel / 1RB0 Middle Channel / 1RBmax Spectrum Spectrum Offset 8.72 dB • RBW 100 kHz SWT 200 ms • VBW 300 kHz Mode Auto Sweep Ref Level 21.22 dBm Att 30 dB Ref Level 21.22 dBm
 Offset
 8.72 dB
 RBW
 100 kHz

 SWT
 200 ms
 VBW
 300 kHz
 Mode
 Auto Sweep
 2 dBm Offse 30 dB
SWT 30 dB . SWT SGL Count 100/100 • 1Rm AvgPwr SGL Count 100/100 CF 3.625 GHz Channel Power 691 pts Span 30.0 MHz CF 3.625 GHz Channel Power 691 pts Span 30.0 MHz Channel
TX1 (Ref)
Tx Total
Channel Channel TX1 (Ref) Tx Total 22.18 dBm 22.18 dBm Bandwidth 10.000 MHz Bandwidth 10.000 MHz Offset Power Offset 22.27 dBm Upper -59.33 dB Lower -59.12 dB Bandwidth 10.000 MHz Bandwidth 10.000 MHz Offset 10.000 MHz Chan ate: 29.SEP.2022 12:41:03 Date: 29.SEP.2022 11:30:23 Middle Channel / FullRB Spectrum 2 Spectrum
 Ref Level
 21.22 dBm
 Offset
 8.72 dB
 RBW
 100 kHz


 Att
 30 dB
 SWT
 200 ms
 VBW
 300 kHz
 Mode Auto Sweep SGL Count 100/100 o1Rm AvgPwr 10 dBm u dBm--10 dBm

CF 3.625 GHz 691 pts Span 30.0 MHz Channel Power Offset Channel Bandwidth Power 22.00 dBm 22.00 dBm 10.000 MHz Channel Lower -40.52 dB Bandwidth Upper -41.88 dB 10.000 MHz 10.000 MHz



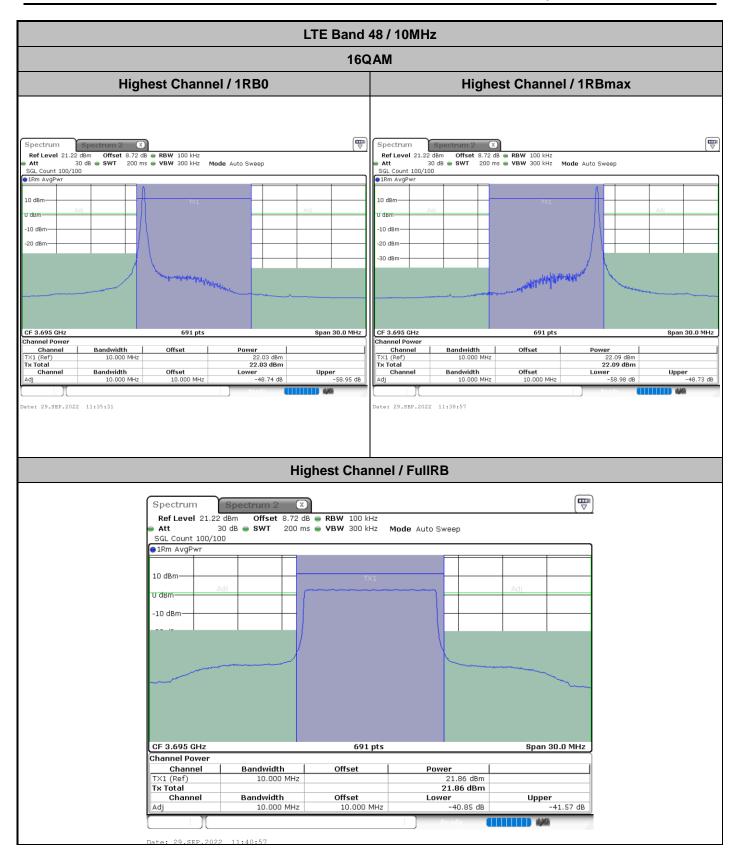




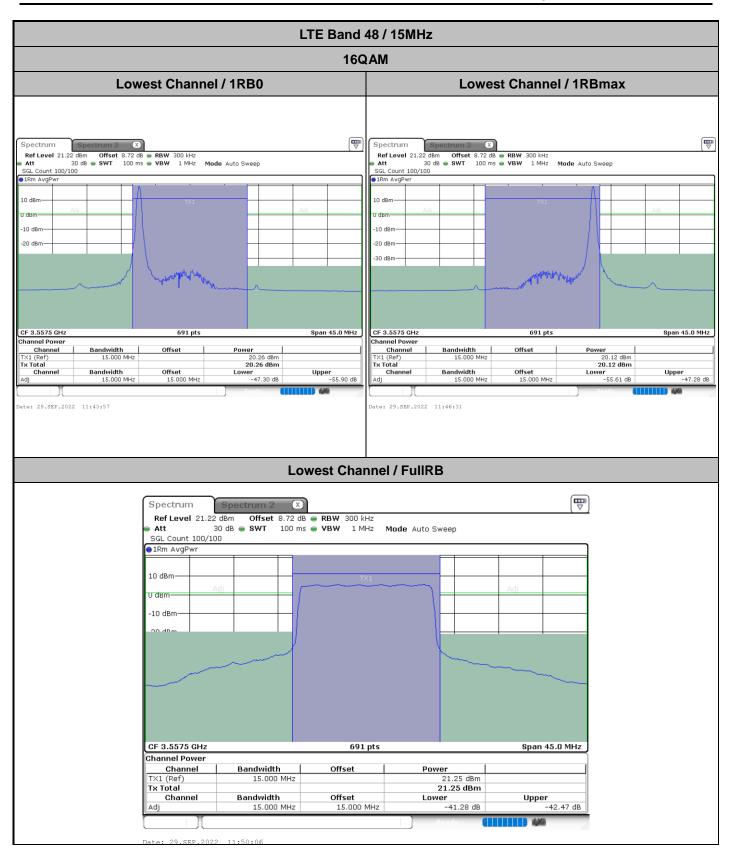





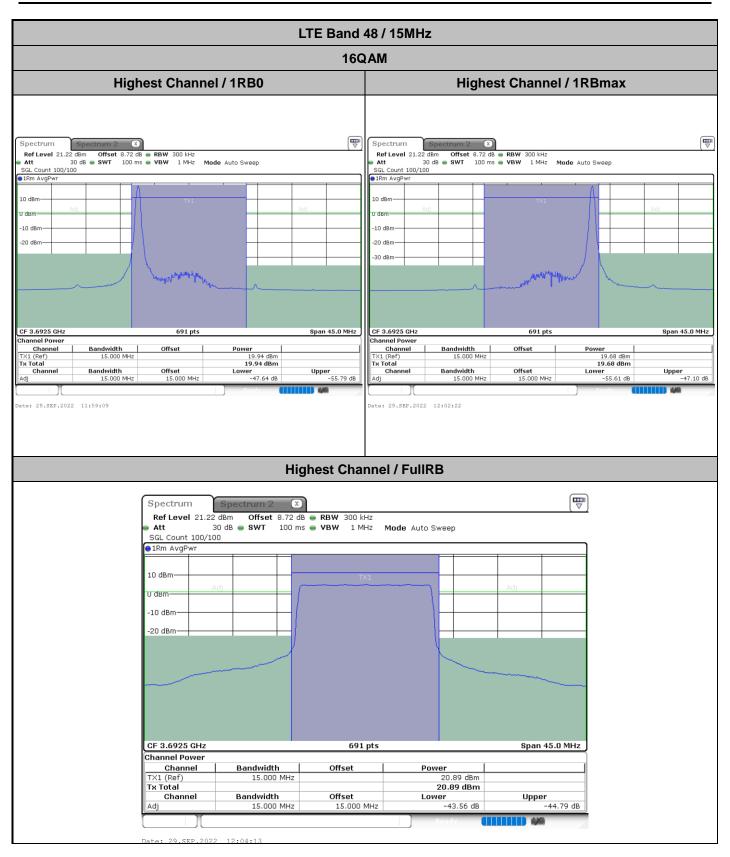

: A23 of A107



FCC RF Test Report Report No.: FG291706G LTE Band 48 / 20MHz **16QAM** Middle Channel / 1RB0 Middle Channel / 1RBmax Spectrum Spectrum Ref Level 21.22 dBm Att 30 dB Ref Level 21.22 dBm
 Offset
 8.72 dB
 RBW
 300 kHz

 SWT
 100 ms
 VBW
 1 MHz
 Mode
 Auto Sweep
 Offset 8.72 dB ● RBW 300 kHz SWT 100 ms ● VBW 1 MHz Mode Auto Sweep 2 dBm Offse 30 dB
SWT 30 dB . SWT SGL Count 100/100 • 1Rm AvgPwr CF 3.625 GHz Channel Power 691 pts Span 60.0 MHz CF 3.625 GHz Channel Power 691 pts Span 60.0 MHz Bandwidth 20.000 MHz Power 19.86 dBm 19.86 dBm Channel
TX1 (Ref)
Tx Total
Channel Power 19.88 dBm 19.88 dBm Channel TX1 (Ref) Tx Total Bandwidth 20.000 MHz Offset Offset Upper -55.15 dB Lower -54.97 dB Bandwidth 20.000 MHz Offset 20.000 MHz Bandwidth 20.000 MHz Offset 20.000 MHz Chan ate: 29.SEP.2022 12:20:01 Date: 29.SEP.2022 12:23:02 Middle Channel / FullRB Spectrum 2 Spectrum
 Ref Level
 21.22 dBm
 Offset
 8.72 dB
 RBW
 300 kHz

 Att
 30 dB
 SWT
 100 ms
 VBW
 1 MHz
 Att Mode Auto Sweep SGL Count 100/100 o1Rm AvgPwr 10 dBm u dBm--10 dBm -20 dBm

691 pts

20.000 MHz

Power

20.00 dBm 20.00 dBm

Lower -42.53 dB

Offset

Sporton International Inc. (Kunshan)

CF 3.625 GHz

Channel Power

Channel

Channel

Bandwidth

Bandwidth

20.000 MHz

20.000 MHz


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G

Span 60.0 MHz

Upper -44.89 dB







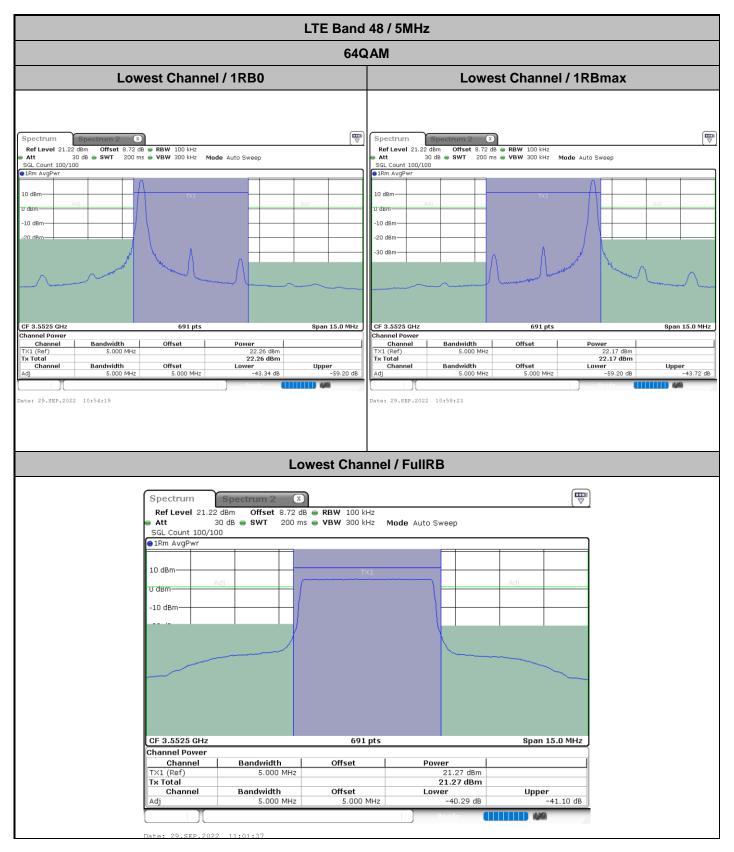

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G : A27 of A107



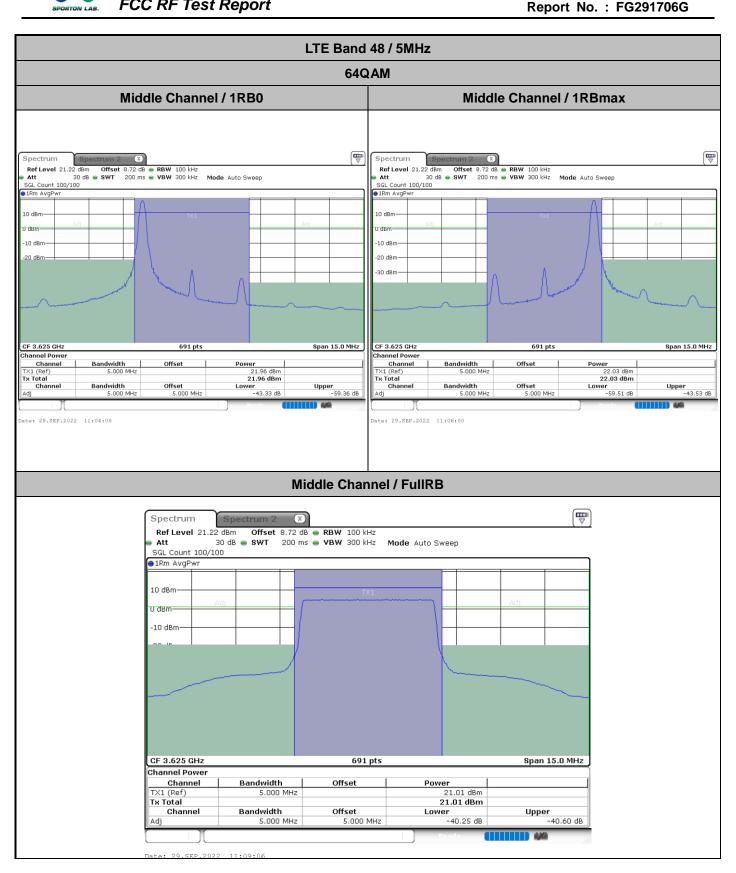

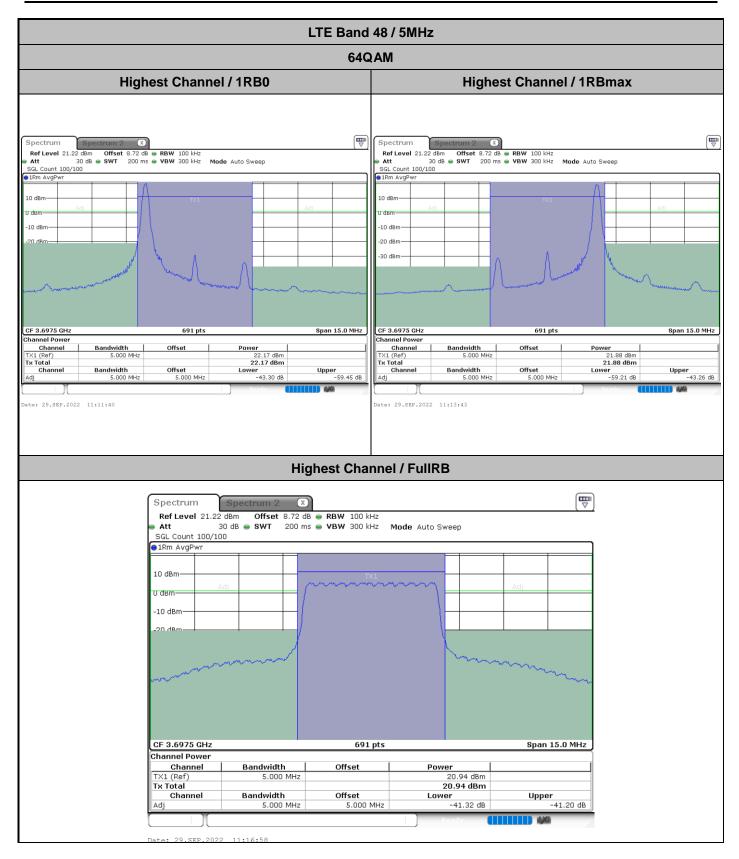

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G : A29 of A107





Report No.: FG291706G LTE Band 48 / 10MHz 64QAM MiddleChannel / 1RB0 Middle Channel / 1RBmax Spectrum Spectrum Offset 8.72 dB • RBW 100 kHz SWT 200 ms • VBW 300 kHz Mode Auto Sweep Ref Level 21.22 dBm Att 30 dB Ref Level 21.22 dBm
 Offset
 8.72 dB
 RBW
 100 kHz

 SWT
 200 ms
 VBW
 300 kHz
 Mode
 Auto Sweep
 2 dBm Offse 30 dB
SWT 30 dB . SWT SGL Count 100/100 • 1Rm AvgPwr SGL Count 100/100 CF 3.625 GHz Channel Power 691 pts Span 30.0 MHz CF 3.625 GHz Channel Power 691 pts Span 30.0 MHz Power 21.94 dBm Power 21.98 dBm 21.98 dBm Channel
TX1 (Ref)
Tx Total
Channel Channel TX1 (Ref) Tx Total Bandwidth 10.000 MHz Bandwidth 10.000 MHz Offset Offset Upper -59.18 dB -59.00 dB Bandwidth 10.000 MHz Bandwidth 10.000 MHz Offset 10.000 MHz Chan ate: 29.SEP.2022 11:28:28 Date: 29.SEP.2022 11:31:01 Middle Channel / FullRB Spectrum 2 Spectrum
 Ref Level
 21.22 dBm
 Offset
 8.72 dB
 RBW
 100 kHz

 Att
 30 dB
 SWT
 200 ms
 VBW
 300 kHz
 Mode Auto Sweep SGL Count 100/100 o1Rm AvgPwr 10 dBm u dBm--10 dBm CF 3.625 GHz 691 pts Span 30.0 MHz Channel Power Offset

Power

10.000 MHz

21.04 dBm 21.04 dBm

Lower -40.51 dB

Channel

Channel

Bandwidth

Bandwidth

10.000 MHz

10.000 MHz

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: 2AFZZ133G

Upper -41.73 dB



