



Email: customerservice.dg@cn.bureauveritas.com






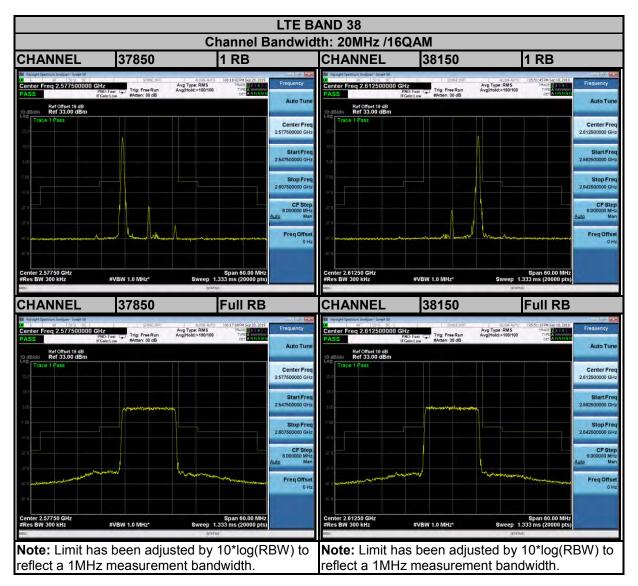


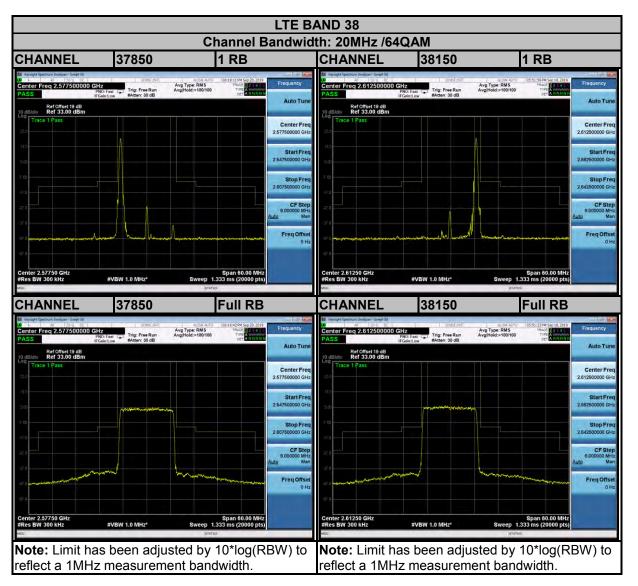




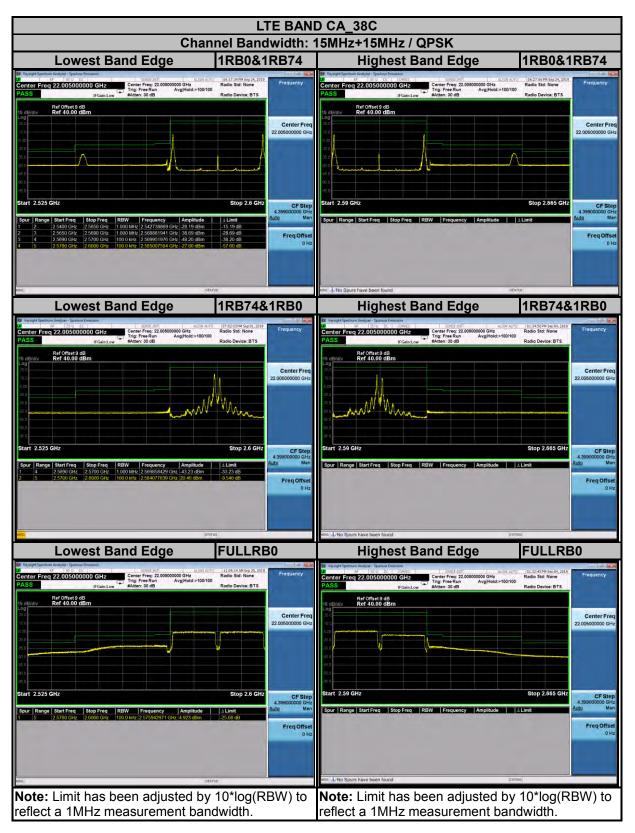




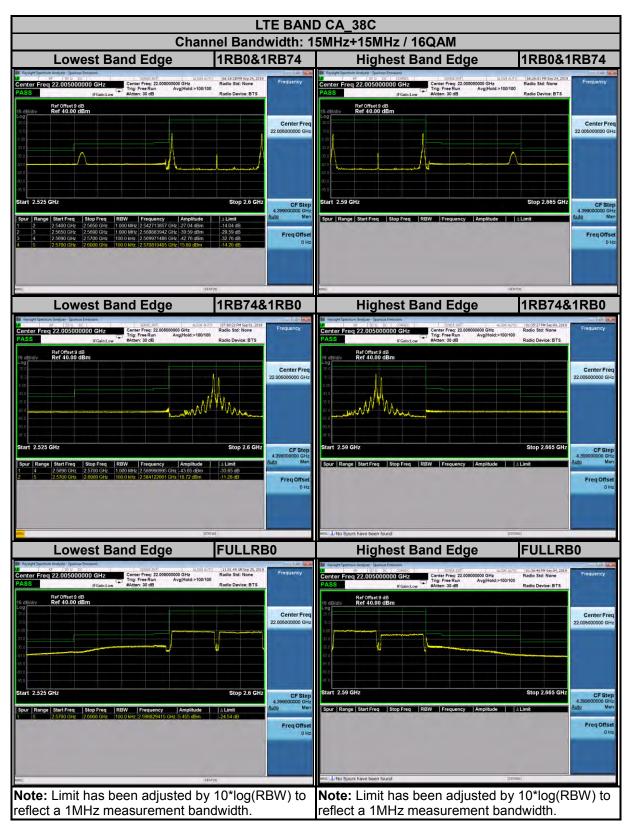




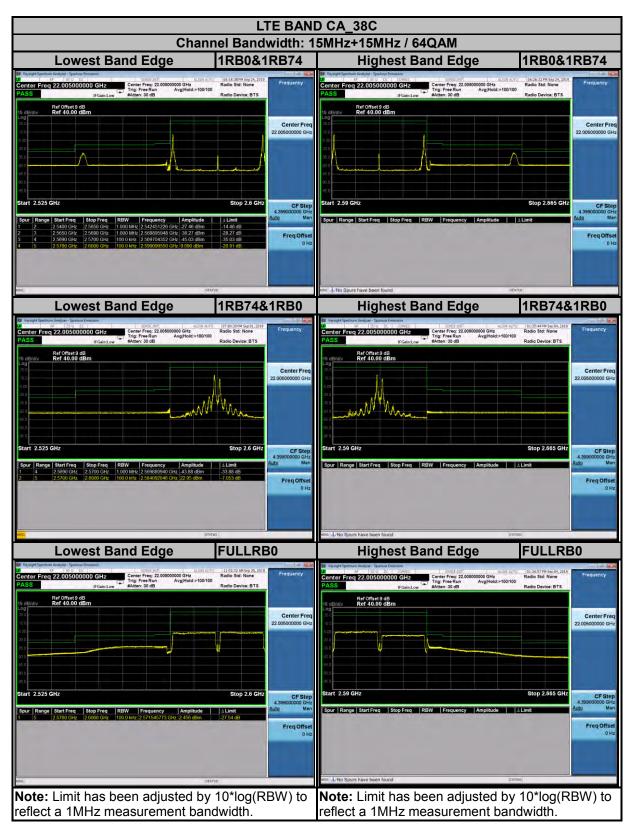




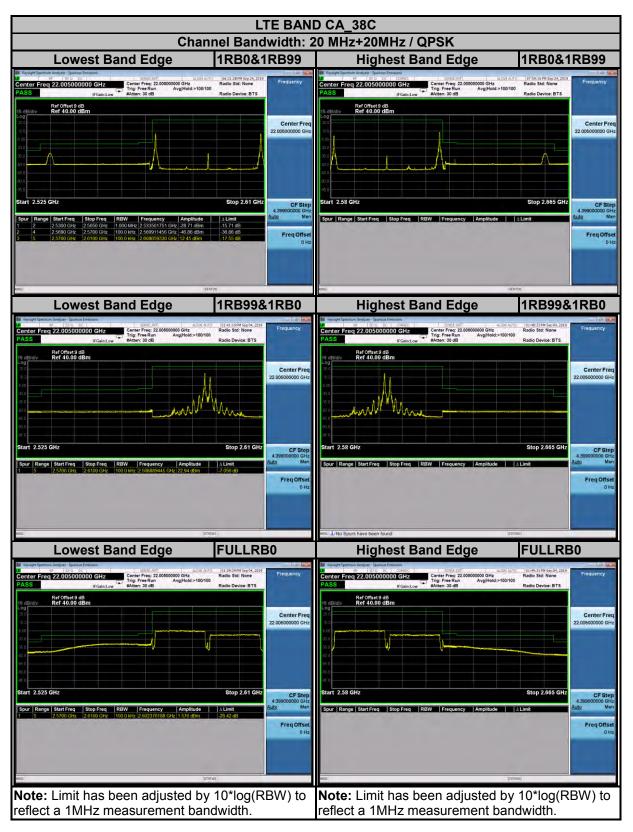



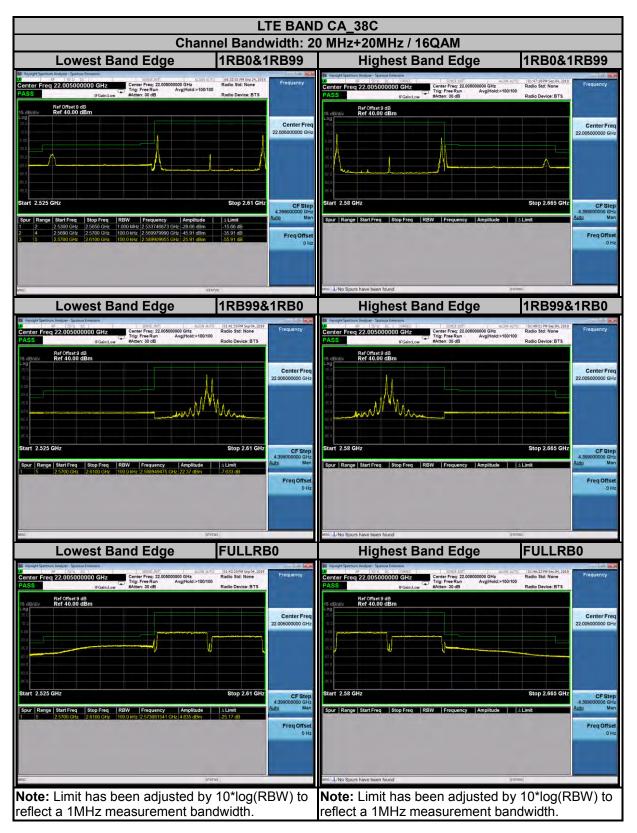



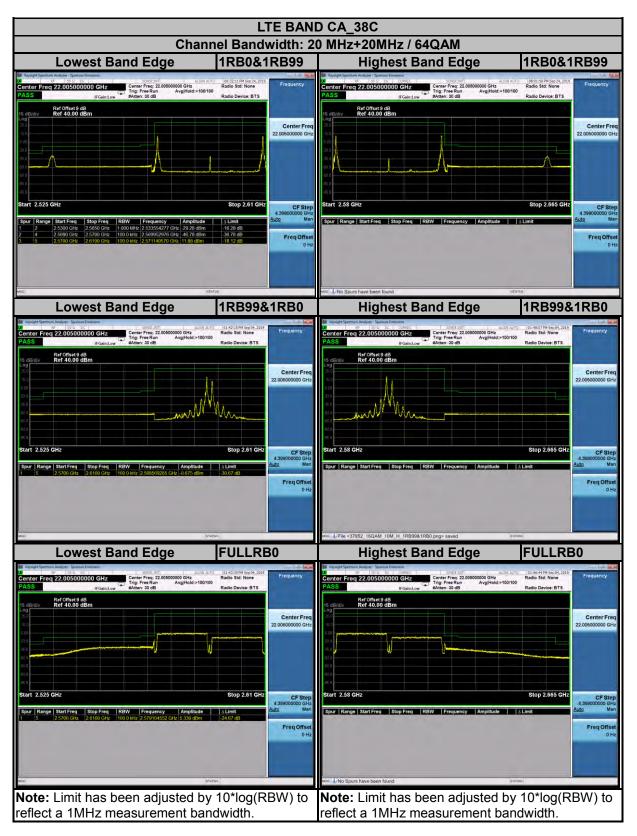



3.6 CONDUCTED SPURIOUS EMISSIONS


3.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least 55 +10 log10(P) dB. The limit of emission is equal to -25dBm.

3.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30MHz~26GHz for LTE Band 7 & 30MHz~27GHz for LTE Band 38. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.


3.6.3 TEST SETUP

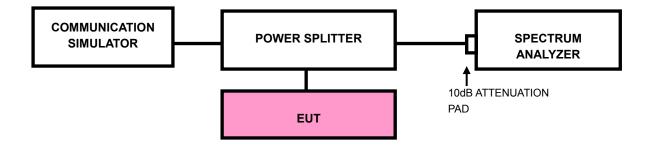




3.6.4 TEST RESULTS


LTE BAND 7

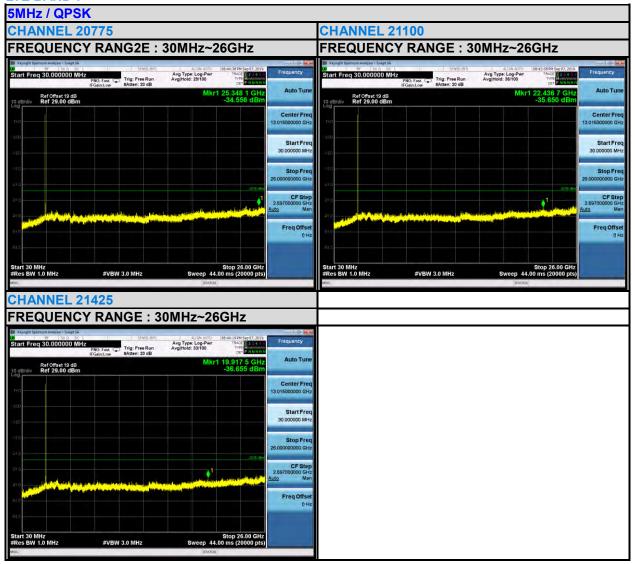



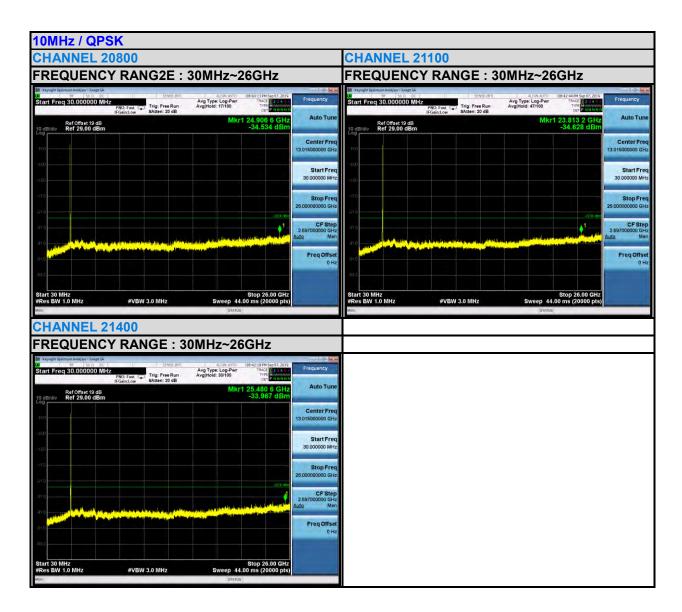




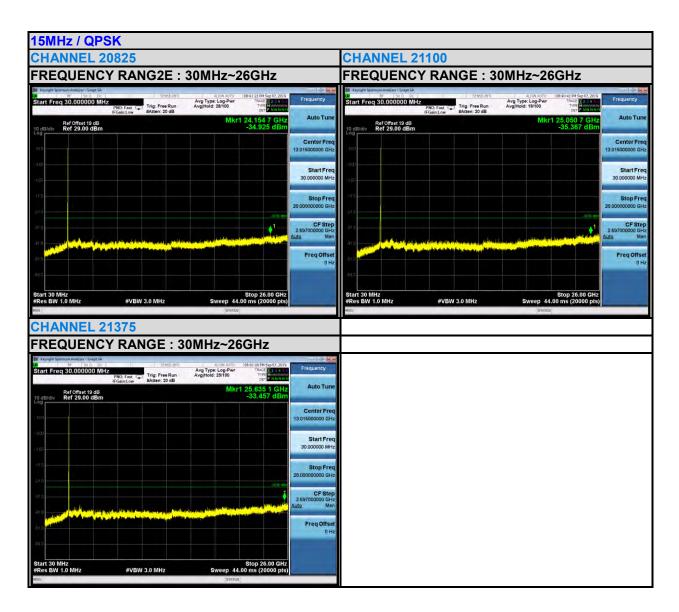


Email: customerservice.dg@cn.bureauveritas.com



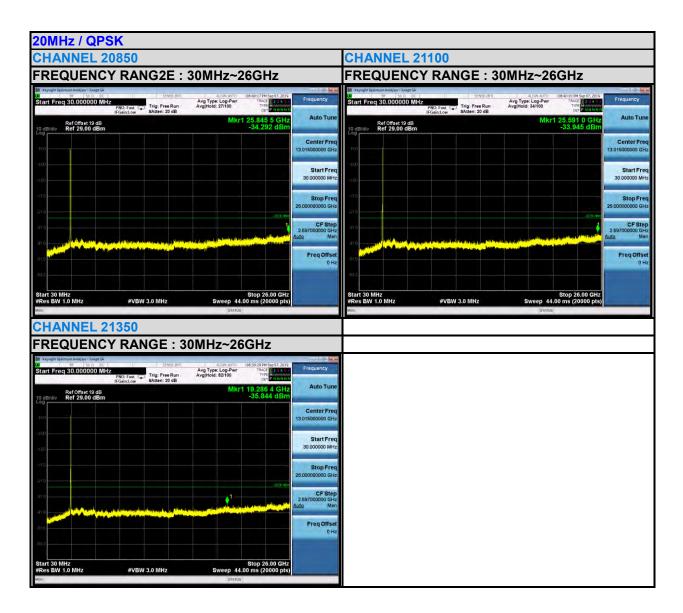





LTE BAND CA_7C

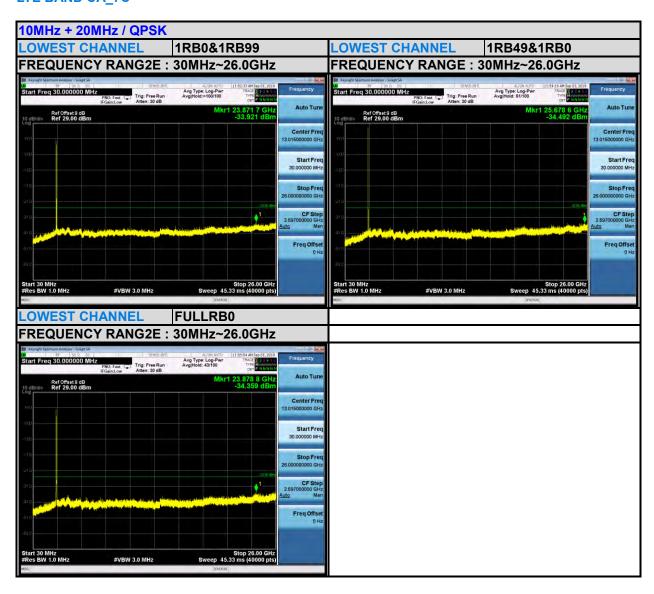



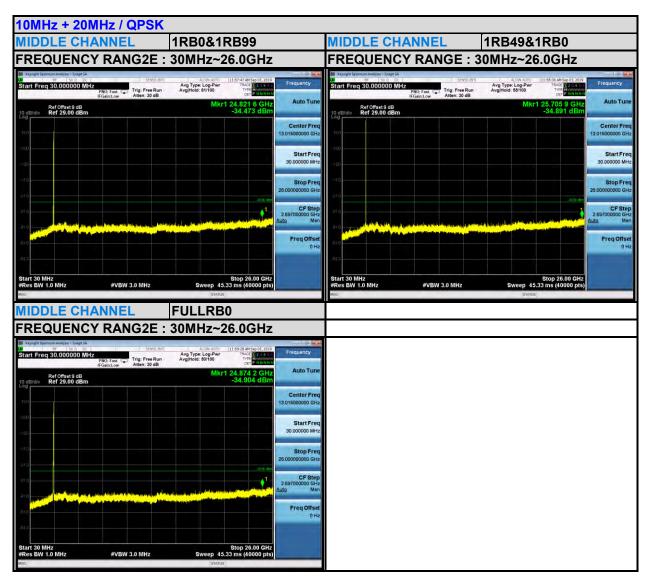



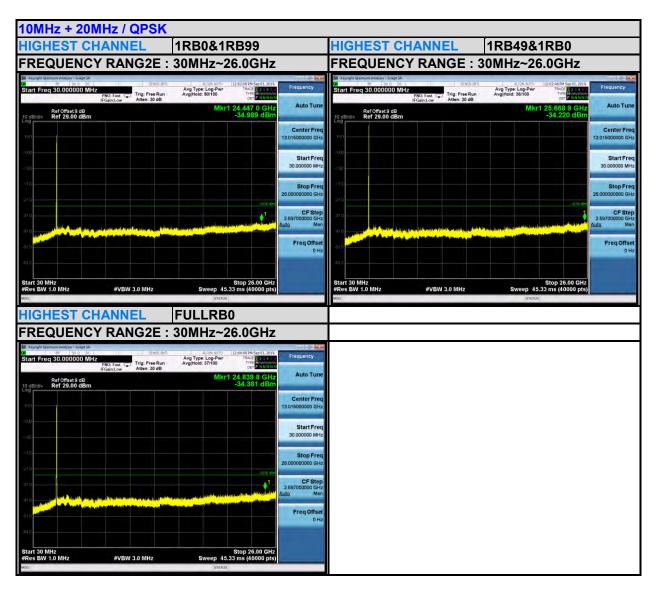

Email: customerservice.dg@cn.bureauveritas.com



