


FCC SAR Test Report


APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : XIAOMI
MODEL NAME : M1910F4G,M1910F4S
FCC ID : 2AFZZF4G
STANDARD : FCC 47 CFR PART 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Aug. 27, 2019 and testing was started from Sep. 05, 2019 and completed on Sep. 29, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations.....	8
5. Proximity Sensor Triggering Test.....	10
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)	10
5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4).....	14
6. RF Exposure Limits.....	15
6.1 Uncontrolled Environment.....	15
6.2 Controlled Environment.....	15
7. Specific Absorption Rate (SAR).....	16
7.1 Introduction	16
7.2 SAR Definition.....	16
8. System Description and Setup	17
8.1 E-Field Probe	18
8.2 Data Acquisition Electronics (DAE)	18
8.3 Phantom.....	19
8.4 Device Holder.....	20
9. Measurement Procedures	21
9.1 Spatial Peak SAR Evaluation.....	21
9.2 Power Reference Measurement.....	22
9.3 Area Scan	22
9.4 Zoom Scan.....	23
9.5 Volume Scan Procedures.....	23
9.6 Power Drift Monitoring.....	23
10. Test Equipment List.....	24
11. System Verification	25
11.1 Tissue Simulating Liquids	25
11.2 Tissue Verification	26
11.3 System Performance Check Results	27
12. RF Exposure Positions	28
12.1 Ear and handset reference point.....	28
12.2 Definition of the cheek position	29
12.3 Definition of the tilt position	30
12.4 Body Worn Accessory	31
12.5 Wireless Router.....	31
13. Conducted RF Output Power (Unit: dBm).....	32
14. Antenna Location	166
15. SAR Test Results	168
15.1 Head SAR	170
15.2 Hotspot SAR	177
15.3 Body Worn Accessory SAR.....	184
15.4 Product Specific SAR.....	187
15.5 Repeated SAR Measurement	188
16. Simultaneous Transmission Analysis.....	189
16.1 Head Exposure Conditions	190
16.2 Hotspot Exposure Conditions.....	193
16.3 Body-Worn Accessory Exposure Conditions	196
16.4 Product specific 10g SAR Exposure Conditions.....	198
17. Uncertainty Assessment	199
18. References.....	202
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA982703	Rev. 01	Initial issue of report	Oct. 16, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M1910F4G, M1910F4S**, are as follows.

Highest Standalone 1g SAR Summary						Highest Simultaneous Transmission 1g SAR (W/kg)
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.98	0.36	0.20	1.52
		GSM1900	1.00	1.18	0.35	
	WCDMA	Band V	1.06	0.54	0.24	
		Band IV	1.04	1.15	0.90	
		Band II	1.19	1.18	0.79	
	LTE	LTE Band 5/26	0.97	0.38	0.18	
		LTE Band 4	0.99	1.10	0.72	
		LTE Band 2	1.16	1.10	0.66	
		LTE Band 7	0.91	1.17	1.06	
		LTE Band 38	0.78	1.05	0.52	
DTS	WLAN	2.4GHz WLAN	1.11	0.42	0.10	1.46
NII		5GHz WLAN	1.17	0.47	0.27	1.52
DSS	Bluetooth	Bluetooth	0.24	<0.10	<0.10	1.52
Date of Testing:			2019/9/5~2019/9/29			
Remark: This device supports both LTE B5 and B26. Since the supported frequency span for LTE B5 falls completely within the supports frequency span for LTE B26, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B26.						

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM1900	3.19	3.60
	WCDMA	Band II	3.60	
	LTE	LTE Band 2	2.83	
NII	WLAN	5GHz WLAN	1.19	3.60
Date of Testing			2019/9/5~2019/9/29	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	XIAOMI
Model Name	M1910F4G,M1910F4S
FCC ID	2AFZZF4G
IMEI Code	SIM1: 868768040039955 SIM2: 868768040039963
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5805 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM is not support uplink) LTE: QPSK, 16QAM, 64QAM, 256QAM (Downlink only) WLAN 2.4GHz : 802.11b/g/n HT20/HT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	P2
SW Version	MIUI11
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: - This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. - This device does not support DTM operation and support GRPS/EGRPS mode up to multi-slot class 33. - This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications. - This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). - For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests. - This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously. - For top WWAN antenna: Reduced power level 1:	

When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850, WCDMA B2/B4/B5 and LTE B2/5/7/26/38/7C/38C.

Reduced power level 2:

For GSM850, WCDMA B5 and LTE B5/26 while the device WLAN or Bluetooth transmit simultaneously with the WWAN top antenna at head mode, power reduction enabled for this scenario.

a. When hotspot mode is enabled, power reduction will be activated to GSM850, WCDMA B2/B4/B5, LTE band B2/5/7/26/38/7C/38C, full power can perform pass, so no need to verify reduced power state.

8. For bottom WWAN antenna:

b. The device employs proximity sensors that detect the presence of the user's body at the front, back or bottom faces of the device. When front, back or bottom of handheld state is detected WCDMA B2/B4 and LTE B2/4/7/38/7C/38C for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active for handheld state.

c. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA B2/B4, LTE band B2/4/7/38/7C/38C

9. For WLAN antenna

Reduced power level 1:

When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately for WLAN 2.4GHz/ WLAN5.2/5.3/5.5/5.8GHz.

Reduced power level 2:

For WLAN 2.4GHz/ WLAN 5.2/5.3/5.5/5.8GHz, when it transmits simultaneously WWAN or Bluetooth for head mode, power reduction will be triggered for this scenario.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																													
FCC ID	2AFZZF4G																																																																												
Equipment Name	Mobile Phone																																																																												
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz																																																																												
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																																												
Uplink Modulations used	QPSK / 16QAM / 64QAM, 256QAM (Downlink only)																																																																												
LTE Voice / Data requirements	Voice and Data																																																																												
LTE Release Version	R12, Cat 13																																																																												
CA Support	Yes, Uplink and Downlink																																																																												
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																													
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																						
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																						
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																						
256 QAM	≥ 1						≤ 5																																																																						
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																												
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																												
Power reduction applied to satisfy SAR compliance	Yes, For top WWAN antenna: a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in LTE B2/5/7/26/38/7C/38C. b. For LTE B5/26 while the device WLAN or Bluetooth transmit simultaneously with the WWAN top antenna at head mode, power reduction enabled for this scenario. c. When hotspot mode is enabled, power reduction will be activated to LTE band B2/5/7/26/38/7C/38C For bottom WWAN antenna: a. The device employs proximity sensors that detect the presence of the user's body at the front, back or bottom faces of the device. When front, back or bottom of handheld state is detected LTE B2/4/7/38/7C/38C for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active for handheld state. b. When hotspot mode is enabled, power reduction will be activated to LTE B2/4/7/38/7C/38C.																																																																												
LTE Carrier Aggregation Combinations	Intra-Band and Inter-Band possible combinations and the detail power verification please referred to section 13.																																																																												
LTE Carrier Aggregation Additional Information	(1) This device supports LTE Carrier Aggregation (CA) in the uplink for LTE 7C /38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. (2) This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier																																																																												




Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

5. Proximity Sensor Triggering Test



5.1 Proximity sensor triggering distances(Per KDB616217§6.2)



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front, back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, WCDMA B2 / B4, and LTE B2/4/7/38/7C/38C reduced power will be active.
4. The sensors used to detect the proximity of the user's finger or hand at the front, back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).


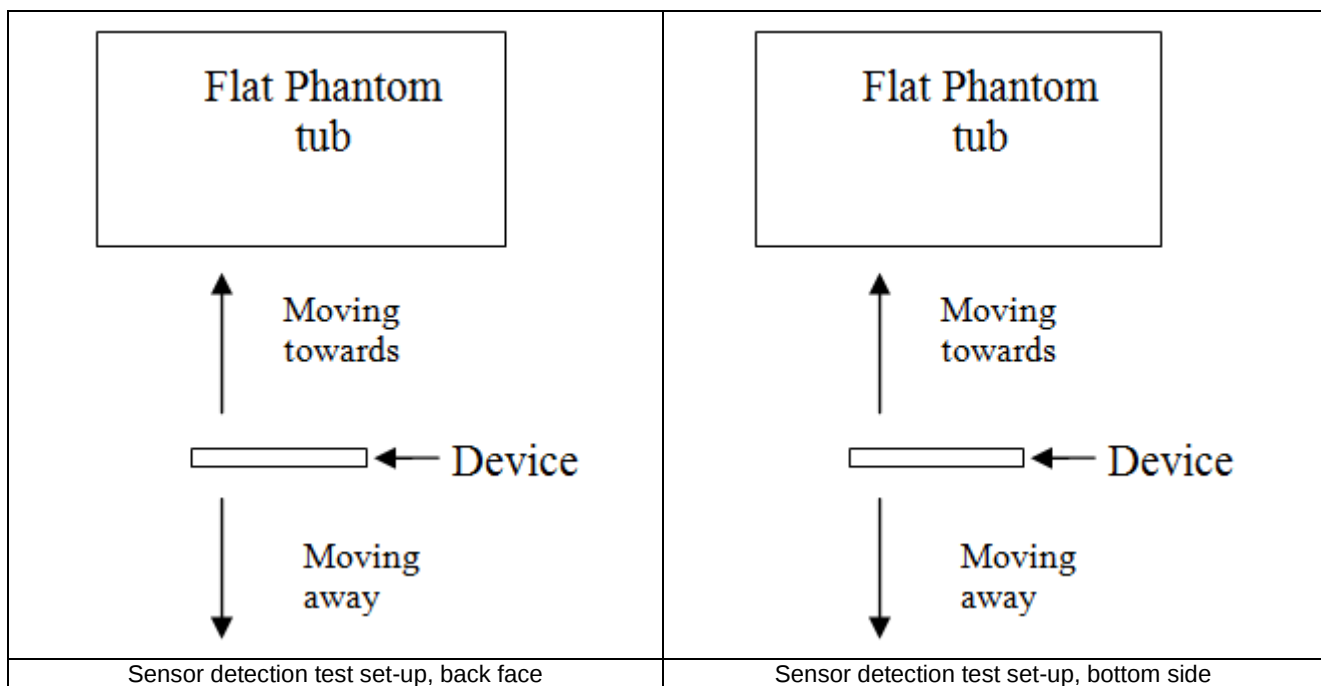


Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	7	8	8	11	11

<Sensor Trigger Distance and Measured Power>

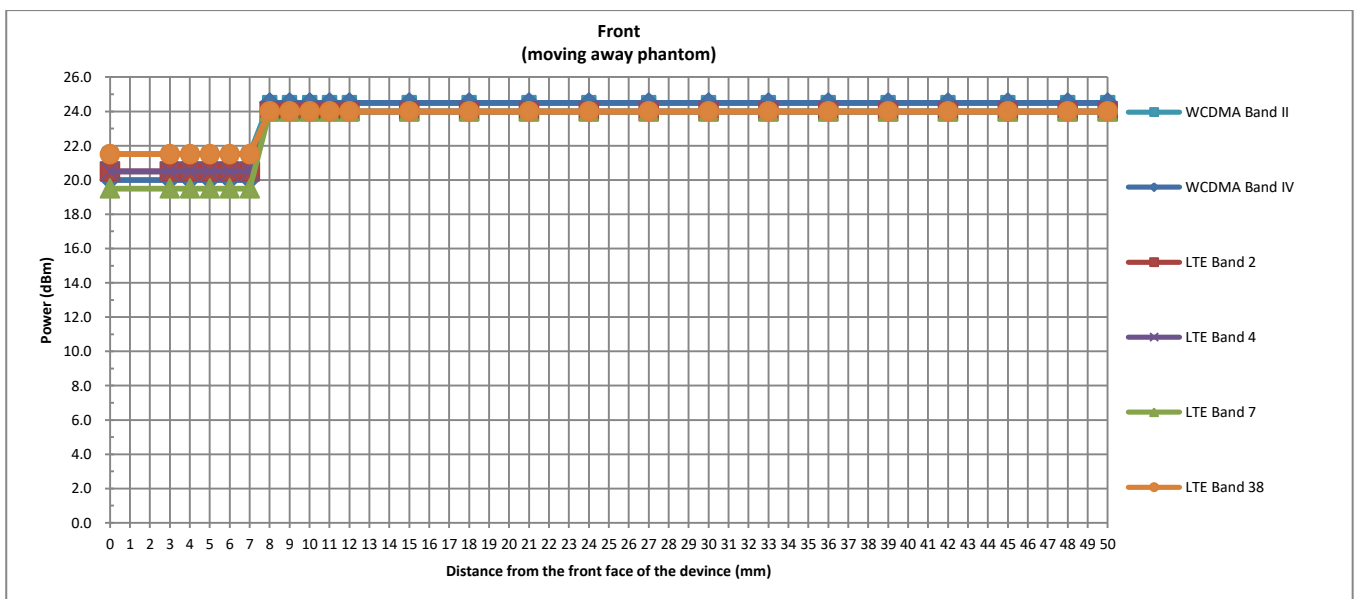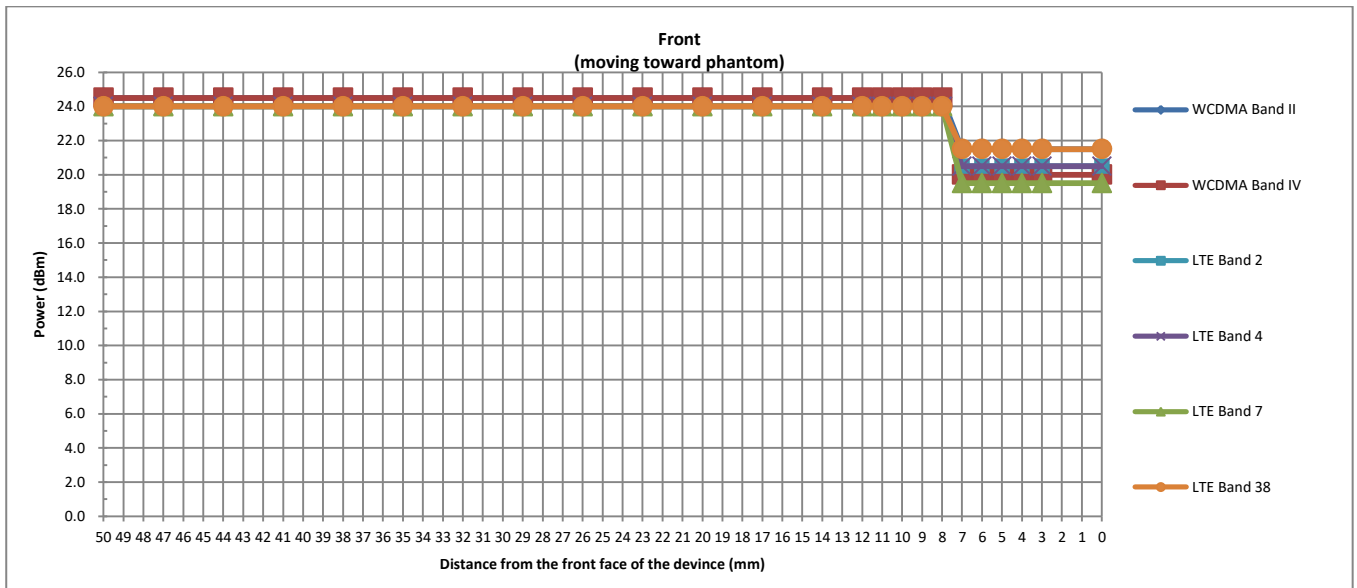

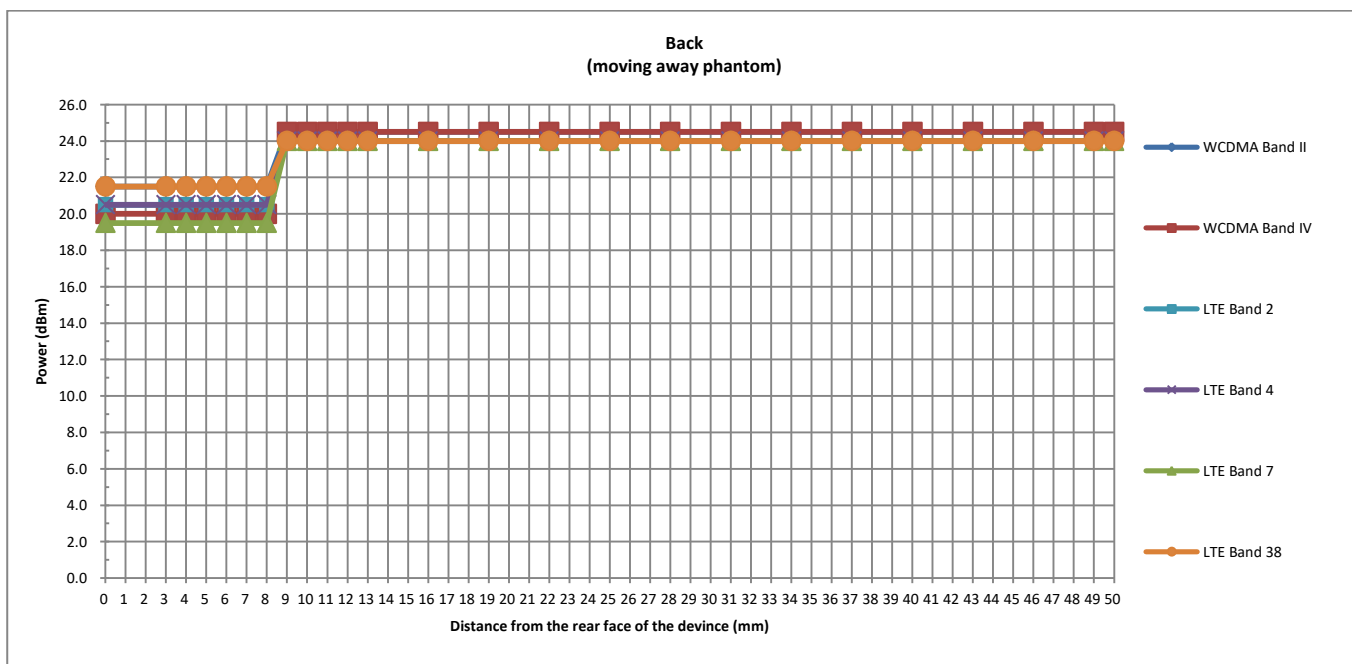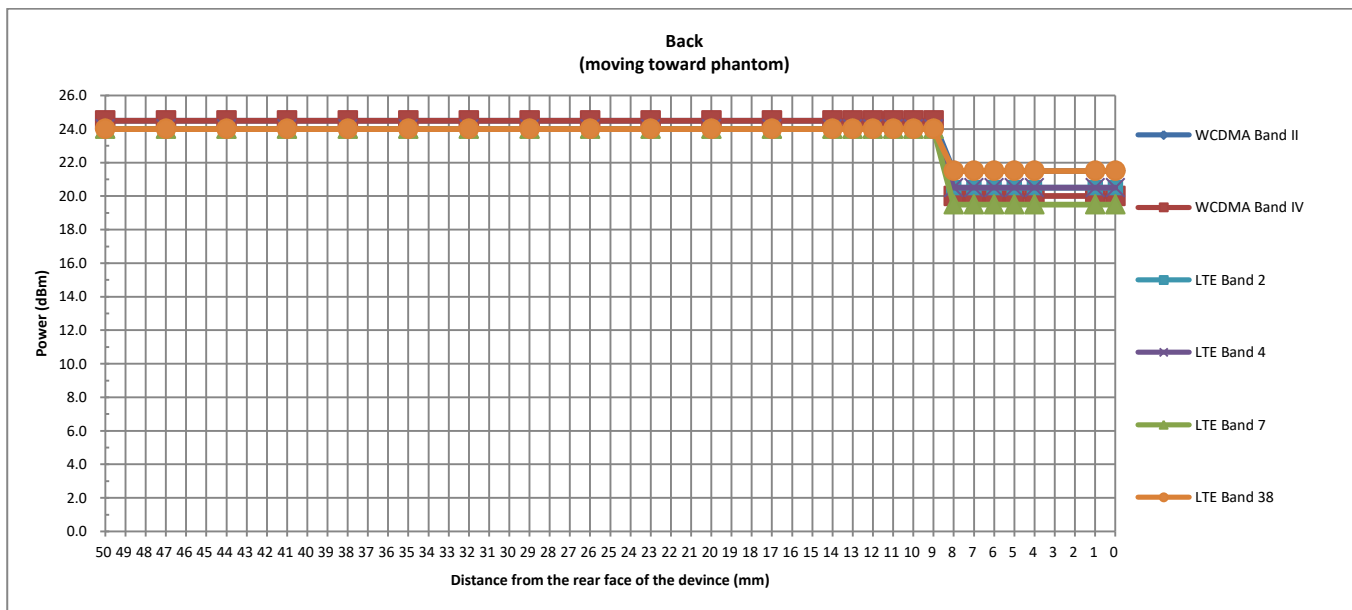


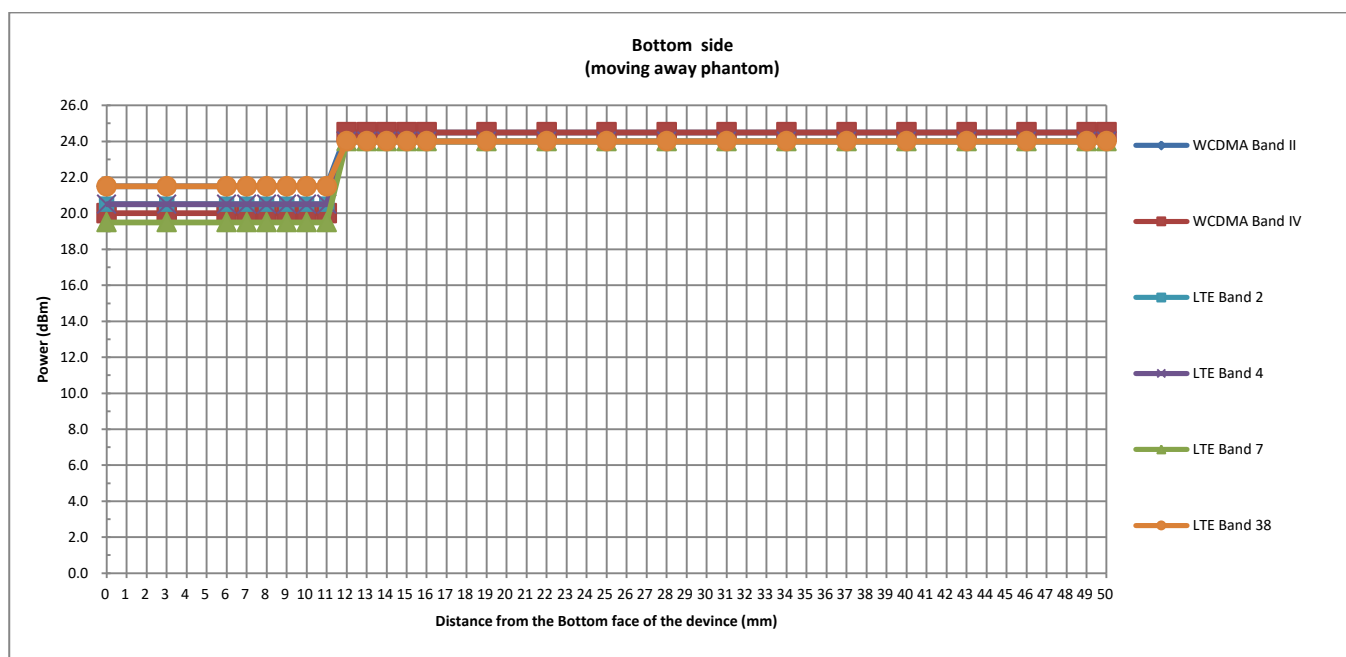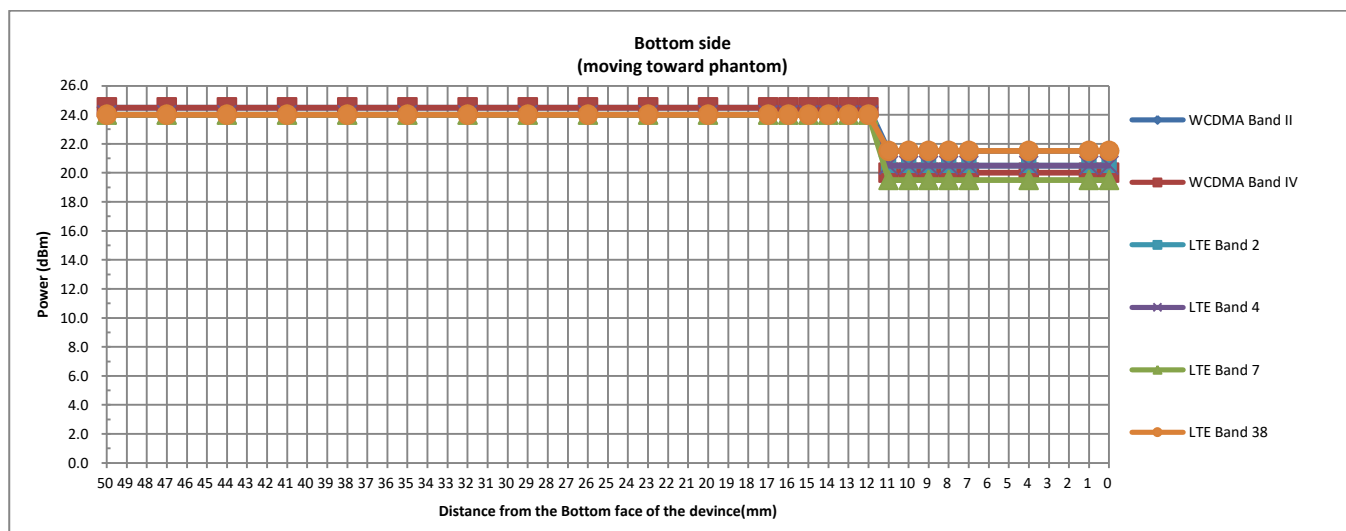

5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about bottom side for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

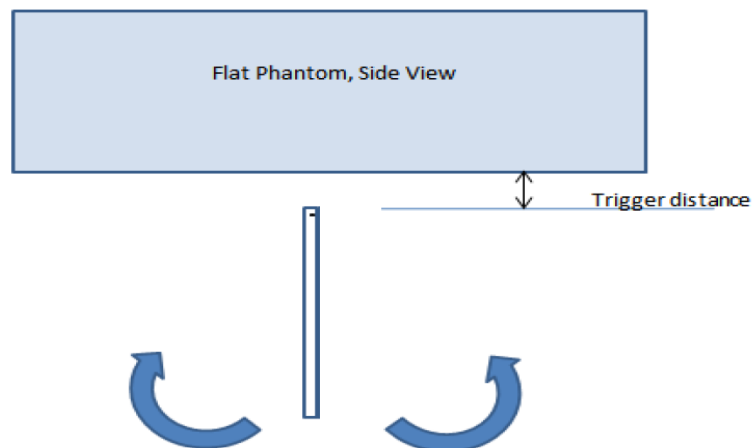

Proximity Sensor Coverage Assesment(Bottom Side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Bottom Side)

Main ant Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
WCDMA Band II	11mm	on	on	on	on	on	on	on	on	on	on	on	
WCDMA Band IV	11mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 2	11mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 4	11mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 7	11mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 38	11mm	on	on	on	on	on	on	on	on	on	on	on	

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

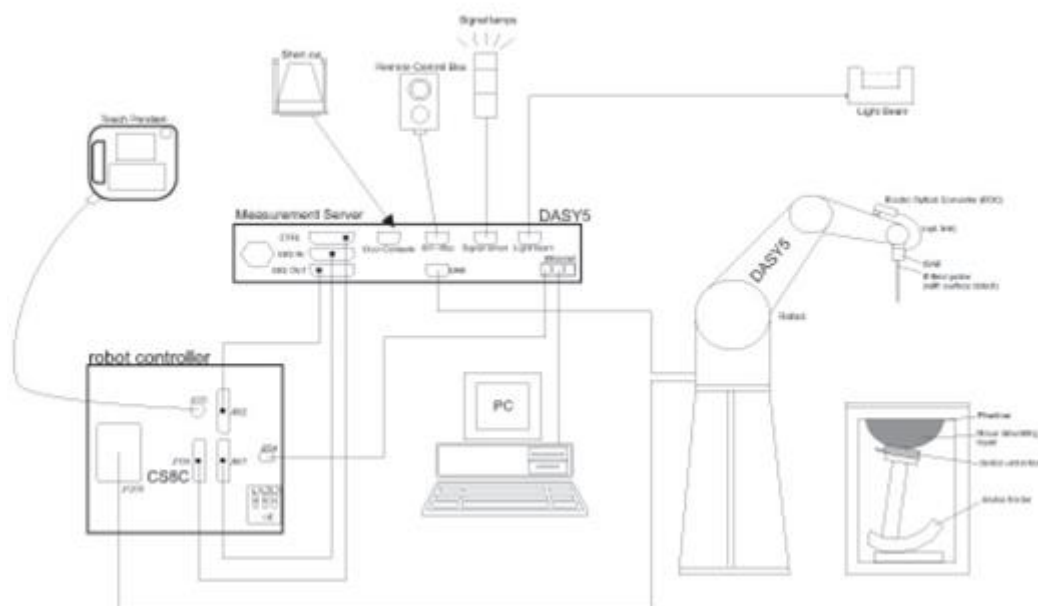

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1128	2019/3/5	2020/3/4
SPEAG	Data Acquisition Electronics	DAE4	1210	2019/7/23	2020/7/22
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2019/5/27	2020/5/26
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
R&S	Power Meter	NRVD	102081	2019/8/19	2020/8/18
R&S	Power Sensor	NRV-Z5	100538	2019/8/19	2020/8/18
R&S	Power Sensor	NRV-Z5	100539	2019/8/19	2020/8/18
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2019/8/20	2020/8/19
FLUKE	DIGITAC THERMOMETER	51II	97240029	2019/8/7	2020/8/6
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	

Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

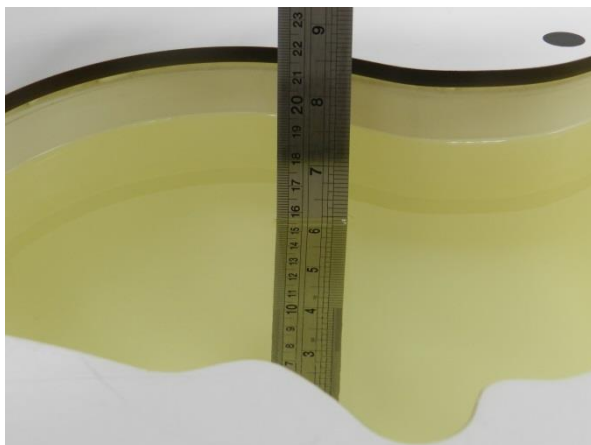


Fig 10.1Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.7	0.925	41.159	0.90	41.50	2.78	-0.82	±5	2019/9/20
1750	Head	22.8	1.368	41.380	1.37	40.10	-0.15	3.19	±5	2019/9/15
1900	Head	22.7	1.429	39.827	1.40	40.00	2.07	-0.43	±5	2019/9/5
2450	Head	22.3	1.869	38.887	1.80	39.20	3.83	-0.80	±5	2019/9/22
2600	Head	22.2	2.048	38.258	1.96	39.00	4.49	-1.90	±5	2019/9/24
5250	Head	22.3	4.555	34.771	4.71	35.90	-3.29	-3.14	±5	2019/9/28
5600	Head	22.3	4.897	34.296	5.07	35.50	-3.41	-3.39	±5	2019/9/29
5750	Head	22.3	5.049	34.067	5.22	35.40	-3.28	-3.77	±5	2019/9/29

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/9/20	835	Head	250	4d151	3857	1210	2.22	9.30	8.88	-4.52
2019/9/15	1750	Head	250	1090	3857	1210	8.93	36.40	35.72	-1.87
2019/9/5	1900	Head	250	5d170	3857	1210	10.00	39.00	40	2.56
2019/9/22	2450	Head	250	908	3857	1210	13.60	52.80	54.4	3.03
2019/9/24	2600	Head	250	1061	3857	1210	14.00	57.70	56	-2.95
2019/9/28	5250	Head	100	1128	3857	1210	7.81	76.20	78.1	2.49
2019/9/29	5600	Head	100	1128	3857	1210	8.03	79.90	80.3	0.50
2019/9/29	5750	Head	100	1128	3857	1210	7.92	77.80	79.2	1.80

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/9/20	835	Head	250	4d151	3857	1210	1.48	6.16	5.92	-3.90
2019/9/5	1900	Head	250	5d170	3857	1210	5.13	20.30	20.52	1.08
2019/9/28	5250	Head	100	1128	3857	1210	2.27	21.90	22.7	3.65
2019/9/29	5600	Head	100	1128	3857	1210	2.33	23.00	23.3	1.30

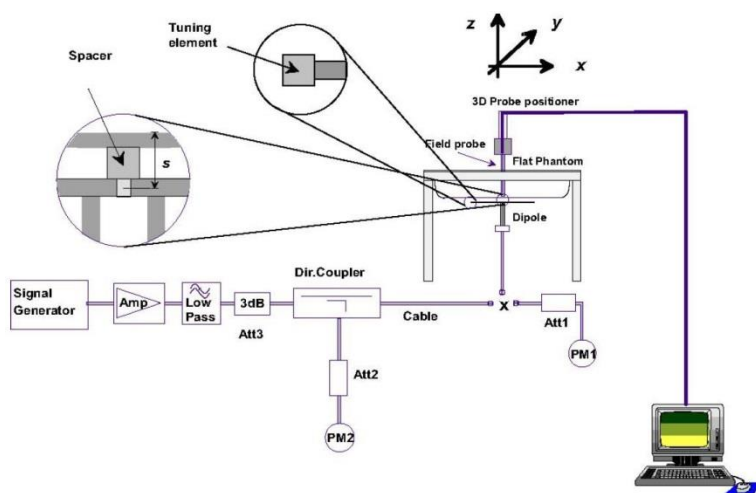


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

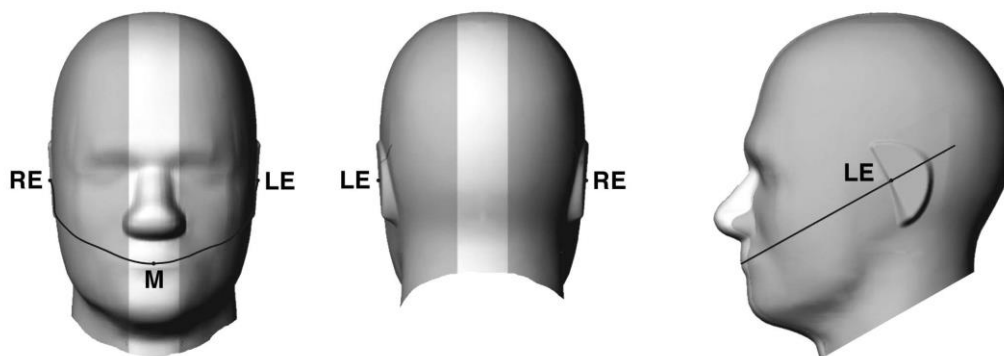


Fig 11.1.1 Front, back, and side views of SAM twin phantom

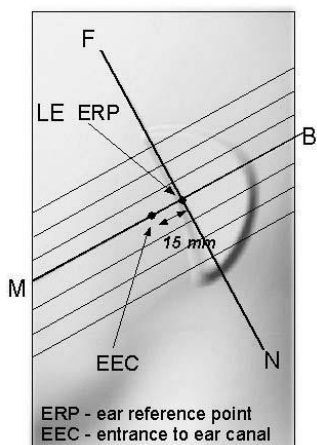


Fig 11.1.2 Close-up side view of phantom showing the ear region.

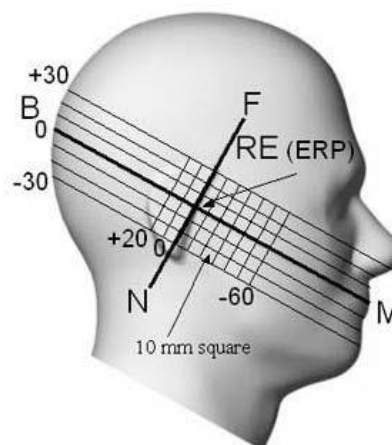


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

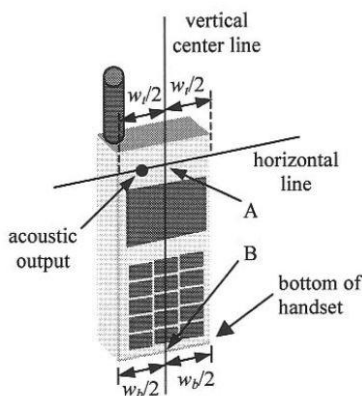


Fig 11.2.1 Handset vertical and horizontal reference lines—"fixed case"

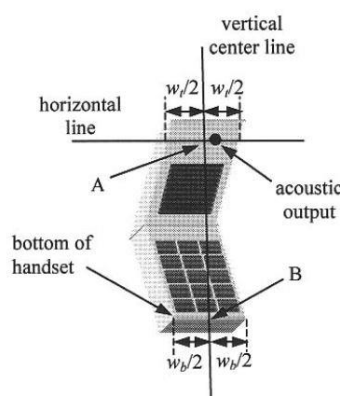


Fig 11.2.2 Handset vertical and horizontal reference lines—"clam-shell case"






Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

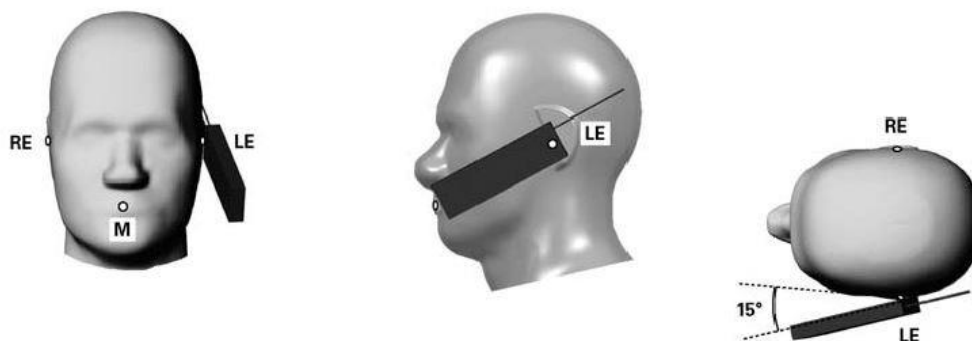


Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

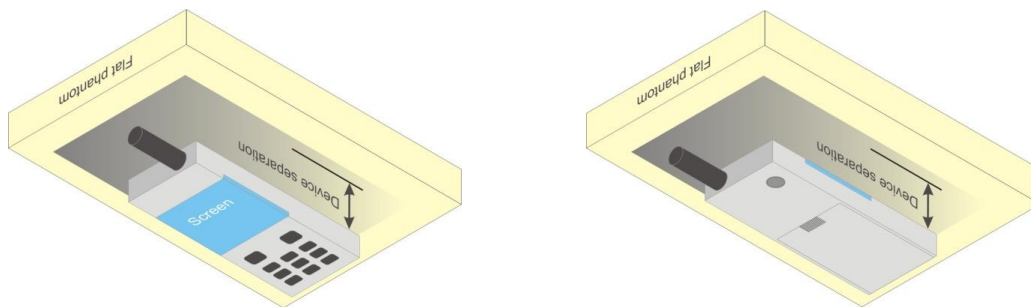


Fig 11.4 Body Worn Position

12.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WWAN Top Antenna--Full Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.38	32.10	32.48	33.00	23.38	23.10	23.48	24.00
GPRS 1 Tx slot	32.40	32.12	32.51	33.00	23.40	23.12	23.51	24.00
GPRS 2 Tx slots	29.12	29.22	29.16	30.00	23.12	23.22	23.16	24.00
GPRS 3 Tx slots	27.24	27.58	27.31	28.20	22.98	23.32	23.05	23.94
GPRS 4 Tx slots	25.82	26.02	26.01	27.00	22.82	23.02	23.01	24.00
EDGE 1 Tx slot	26.07	26.37	26.38	27.50	17.07	17.37	17.38	18.50
EDGE 2 Tx slots	23.20	23.42	23.33	24.50	17.20	17.42	17.33	18.50
EDGE 3 Tx slots	21.61	21.68	21.48	22.70	17.35	17.42	17.22	18.44
EDGE 4 Tx slots	20.23	20.34	20.08	21.50	17.23	17.34	17.08	18.50
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.00	29.01	28.85	29.50	20.00	20.01	19.85	20.50
GPRS 1 Tx slot	29.01	29.03	28.87	29.50	20.01	20.03	19.87	20.50
GPRS 2 Tx slots	25.83	25.39	25.81	26.50	19.83	19.39	19.81	20.50
GPRS 3 Tx slots	24.05	24.11	24.12	24.70	19.79	19.85	19.86	20.44
GPRS 4 Tx slots	22.67	22.78	22.80	23.50	19.67	19.78	19.80	20.50
EDGE 1 Tx slot	24.87	24.96	25.11	26.00	15.87	15.96	16.11	17.00
EDGE 2 Tx slots	21.85	22.10	22.01	23.00	15.85	16.10	16.01	17.00
EDGE 3 Tx slots	20.15	20.29	20.08	21.20	15.89	16.03	15.82	16.94
EDGE 4 Tx slots	18.81	19.02	18.78	20.00	15.81	16.02	15.78	17.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Bottom Antenna--Full Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.70	32.59	32.85	33.50	23.70	23.59	23.85	24.50
GPRS 1 Tx slot	32.69	32.55	32.84	33.50	23.69	23.55	23.84	24.50
GPRS 2 Tx slots	29.33	29.38	29.18	30.50	23.33	23.38	23.18	24.50
GPRS 3 Tx slots	27.34	27.24	27.69	28.70	23.08	22.98	23.43	24.44
GPRS 4 Tx slots	25.84	25.94	25.72	27.50	22.84	22.94	22.72	24.50
EDGE 1 Tx slot	26.53	26.55	26.55	28.00	17.53	17.55	17.55	19.00
EDGE 2 Tx slots	23.47	23.60	23.47	25.00	17.47	17.60	17.47	19.00
EDGE 3 Tx slots	21.32	21.59	21.32	23.20	17.06	17.33	17.06	18.94
EDGE 4 Tx slots	20.15	20.28	20.13	22.00	17.15	17.28	17.13	19.00
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.15	29.52	29.53	30.50	20.15	20.52	20.53	21.50
GPRS 1 Tx slot	29.12	29.51	29.50	30.50	20.12	20.51	20.50	21.50
GPRS 2 Tx slots	26.13	26.23	26.22	27.50	20.13	20.23	20.22	21.50
GPRS 3 Tx slots	24.25	24.30	24.28	25.70	19.99	20.04	20.02	21.44
GPRS 4 Tx slots	22.91	22.90	22.93	24.50	19.91	19.90	19.93	21.50
EDGE 1 Tx slot	25.32	25.18	25.30	27.00	16.32	16.18	16.30	18.00
EDGE 2 Tx slots	22.33	22.45	22.21	24.00	16.33	16.45	16.21	18.00
EDGE 3 Tx slots	20.42	20.35	20.82	22.20	16.16	16.09	16.56	17.94
EDGE 4 Tx slots	19.10	19.00	19.49	21.00	16.10	16.00	16.49	18.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Top Antenna--Reduced Power Level 1 for Head>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	31.05	31.18	31.26	32.00	22.05	22.18	22.26	23.00
GPRS 1 Tx slot	31.04	31.16	31.25	32.00	22.04	22.16	22.25	23.00
GPRS 2 Tx slots	27.68	27.81	27.80	29.00	21.68	21.81	21.80	23.00
GPRS 3 Tx slots	25.89	26.08	26.18	27.20	21.63	21.82	21.92	22.94
GPRS 4 Tx slots	24.67	24.90	24.89	26.00	21.67	21.90	21.89	23.00
EDGE 1 Tx slot	26.07	26.37	26.38	27.50	17.07	17.37	17.38	18.50
EDGE 2 Tx slots	23.20	23.42	23.33	24.50	17.20	17.42	17.33	18.50
EDGE 3 Tx slots	21.61	21.68	21.48	22.70	17.35	17.42	17.22	18.44
EDGE 4 Tx slots	20.23	20.34	20.08	21.50	17.23	17.34	17.08	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Top Antenna--Reduced Power Level 2 for Head/Hotspot On>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	29.52	30.43	30.28	31.00	20.52	21.43	21.28	22.00
GPRS 1 Tx slot	29.51	30.42	30.26	31.00	20.51	21.42	21.26	22.00
GPRS 2 Tx slots	26.60	26.77	26.82	28.00	20.60	20.77	20.82	22.00
GPRS 3 Tx slots	24.69	25.11	25.11	26.20	20.43	20.85	20.85	21.94
GPRS 4 Tx slots	23.55	24.16	24.08	25.00	20.55	21.16	21.08	22.00
EDGE 1 Tx slot	26.07	26.37	26.38	27.50	17.07	17.37	17.38	18.50
EDGE 2 Tx slots	23.20	23.42	23.33	24.50	17.20	17.42	17.33	18.50
EDGE 3 Tx slots	21.61	21.68	21.48	22.70	17.35	17.42	17.22	18.44
EDGE 4 Tx slots	20.23	20.34	20.08	21.50	17.23	17.34	17.08	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	27.56	27.66	27.78	29.00	18.56	18.66	18.78	20.00
GPRS 1 Tx slot	27.55	27.64	27.72	29.00	18.55	18.64	18.72	20.00
GPRS 2 Tx slots	24.42	24.50	24.49	26.00	18.42	18.50	18.49	20.00
GPRS 3 Tx slots	22.64	22.66	22.68	24.20	18.38	18.40	18.42	19.94
GPRS 4 Tx slots	21.36	21.33	21.38	23.00	18.36	18.33	18.38	20.00
EDGE 1 Tx slot	25.32	25.18	25.30	27.00	16.32	16.18	16.30	18.00
EDGE 2 Tx slots	22.33	22.45	22.21	24.00	16.33	16.45	16.21	18.00
EDGE 3 Tx slots	20.42	20.35	20.82	22.20	16.16	16.09	16.56	17.94
EDGE 4 Tx slots	19.10	19.00	19.49	21.00	16.10	16.00	16.49	18.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

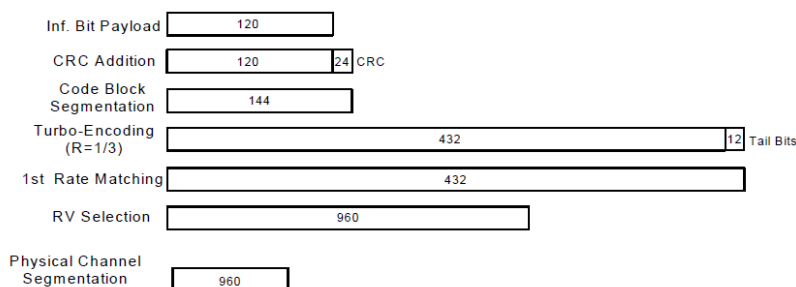


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<WWAN Top Antenna--Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.91	22.87	22.93	24.00	23.05	23.12	23.01	24.20	23.35	23.40	23.45	24.50
3GPP Rel 99	RMC 12.2Kbps	22.92	22.90	22.94	24.00	23.07	23.14	23.03	24.20	23.36	23.43	23.47	24.50
3GPP Rel 6	HSDPA Subtest-1	21.95	22.02	21.95	23.00	22.05	22.14	22.03	23.20	22.43	22.46	22.47	23.50
3GPP Rel 6	HSDPA Subtest-2	22.00	22.03	21.98	23.00	22.08	22.17	22.06	23.20	22.49	22.45	22.60	23.50
3GPP Rel 6	HSDPA Subtest-3	21.50	21.53	21.49	22.50	21.57	21.65	21.56	22.70	22.03	21.99	22.06	23.00
3GPP Rel 6	HSDPA Subtest-4	21.49	21.51	21.52	22.50	21.60	21.62	21.57	22.70	21.94	22.02	22.02	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.90	21.93	21.89	23.00	22.02	22.08	21.98	23.20	22.37	22.41	22.44	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.01	22.00	21.92	23.00	22.05	22.11	22.01	23.20	22.48	22.40	22.57	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.40	21.48	21.43	22.50	21.62	21.59	21.51	22.70	21.97	21.90	22.03	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.44	21.48	21.46	22.50	21.57	21.59	21.54	22.70	21.88	21.99	21.94	23.00
3GPP Rel 6	HSUPA Subtest-1	21.95	21.99	21.92	23.00	22.06	22.08	22.01	23.20	22.47	22.45	22.51	23.50
3GPP Rel 6	HSUPA Subtest-2	20.04	20.02	19.99	21.00	20.06	20.06	19.98	21.20	20.47	20.42	20.45	21.50
3GPP Rel 6	HSUPA Subtest-3	20.98	21.02	20.98	22.00	21.06	21.16	21.08	22.20	21.43	21.46	21.50	22.50
3GPP Rel 6	HSUPA Subtest-4	19.96	20.01	19.98	21.00	20.03	20.15	20.06	21.20	20.46	20.45	20.54	21.50
3GPP Rel 6	HSUPA Subtest-5	22.00	22.00	22.00	23.00	22.10	22.10	22.00	23.20	22.40	22.40	22.50	23.50

**<WWAN Bottom Antenna--Full Power Mode>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.60	23.70	23.77	24.50	23.42	23.67	23.54	24.50	23.83	23.90	23.95	24.50
3GPP Rel 99	RMC 12.2Kbps	23.63	23.71	23.79	24.50	23.45	23.69	23.57	24.50	23.85	23.92	23.97	24.50
3GPP Rel 6	HSDPA Subtest-1	22.78	22.80	22.87	23.50	22.65	22.78	22.75	23.50	22.97	22.97	23.05	23.50
3GPP Rel 6	HSDPA Subtest-2	22.81	22.85	22.86	23.50	22.69	22.80	22.74	23.50	23.04	22.97	23.06	23.50
3GPP Rel 6	HSDPA Subtest-3	22.29	22.31	22.35	23.00	22.15	22.26	22.27	23.00	22.57	22.53	22.56	23.00
3GPP Rel 6	HSDPA Subtest-4	22.30	22.33	22.37	23.00	22.19	22.28	22.30	23.00	22.49	22.52	22.58	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.75	22.73	22.82	23.50	22.57	22.73	22.72	23.50	22.92	22.94	22.97	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.71	22.77	22.80	23.50	22.61	22.75	22.71	23.50	22.99	22.94	22.98	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.26	22.23	22.30	23.00	22.07	22.21	22.24	23.00	22.52	22.50	22.48	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.31	22.25	22.39	23.00	22.11	22.23	22.27	23.00	22.44	22.49	22.50	23.00
3GPP Rel 6	HSUPA Subtest-1	22.71	22.80	22.83	23.50	22.62	22.71	22.68	23.50	22.97	22.97	23.02	23.50
3GPP Rel 6	HSUPA Subtest-2	20.74	20.82	20.81	21.50	20.62	20.66	20.66	21.50	20.97	20.90	21.05	21.50
3GPP Rel 6	HSUPA Subtest-3	21.71	21.80	21.81	22.50	21.63	21.66	21.71	22.50	22.01	21.96	22.09	22.50
3GPP Rel 6	HSUPA Subtest-4	20.74	20.74	20.80	21.50	20.63	20.81	20.63	21.50	21.00	20.91	20.99	21.50
3GPP Rel 6	HSUPA Subtest-5	22.70	22.80	22.80	23.50	22.60	22.70	22.70	23.50	23.00	22.90	23.00	23.50

<WWAN Top Antenna--Reduced Power Level 1 for Head>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	20.37	20.18	20.35	21.00	20.78	21.05	20.83	21.70	21.40	21.65	21.65	22.50
3GPP Rel 99	RMC 12.2Kbps	20.38	20.19	20.35	21.00	20.79	21.06	20.85	21.70	21.42	21.68	21.68	22.50
3GPP Rel 6	HSDPA Subtest-1	19.41	19.33	19.33	20.00	19.93	20.15	19.92	20.70	20.56	20.73	20.67	21.50
3GPP Rel 6	HSDPA Subtest-2	19.43	19.34	19.37	20.00	19.98	20.13	19.93	20.70	20.55	20.76	20.75	21.50
3GPP Rel 6	HSDPA Subtest-3	18.94	18.84	18.87	19.50	19.50	19.65	19.45	20.20	20.09	20.29	20.32	21.00
3GPP Rel 6	HSDPA Subtest-4	18.95	18.86	18.86	19.50	19.40	19.61	19.49	20.20	20.06	20.27	20.25	21.00
3GPP Rel 8	DC-HSDPA Subtest-1	19.35	19.33	19.32	20.00	19.91	20.10	19.91	20.70	20.50	20.71	20.58	21.50
3GPP Rel 8	DC-HSDPA Subtest-2	19.40	19.32	19.35	20.00	19.97	20.11	19.90	20.70	20.54	20.71	20.70	21.50
3GPP Rel 8	DC-HSDPA Subtest-3	18.90	18.84	18.85	19.50	19.50	19.61	19.40	20.20	20.01	20.31	20.31	21.00
3GPP Rel 8	DC-HSDPA Subtest-4	18.91	18.85	18.83	19.50	19.34	19.60	19.35	20.20	20.03	20.20	20.26	21.00
3GPP Rel 6	HSUPA Subtest-1	19.42	19.32	19.34	20.00	19.88	20.09	19.95	20.70	20.55	20.71	20.72	21.50
3GPP Rel 6	HSUPA Subtest-2	17.43	17.33	17.29	18.00	17.93	18.13	17.93	18.70	18.60	18.79	18.73	19.50
3GPP Rel 6	HSUPA Subtest-3	18.40	18.34	18.36	19.00	18.93	19.10	18.94	19.70	19.58	19.71	19.71	20.50
3GPP Rel 6	HSUPA Subtest-4	17.37	17.31	17.35	18.00	17.90	18.10	17.90	18.70	18.59	18.74	18.72	19.50
3GPP Rel 6	HSUPA Subtest-5	19.40	19.30	19.40	20.00	19.90	20.10	19.90	20.70	20.60	20.70	20.80	21.50

<WWAN Top Antenna--Reduced Power Level 2 for Head>

Band		WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	20.02	20.15	20.18	21.00
3GPP Rel 99	RMC 12.2Kbps	20.04	20.18	20.19	21.00
3GPP Rel 6	HSDPA Subtest-1	18.92	19.13	19.13	20.00
3GPP Rel 6	HSDPA Subtest-2	18.97	19.13	19.16	20.00
3GPP Rel 6	HSDPA Subtest-3	18.48	18.61	18.64	19.50
3GPP Rel 6	HSDPA Subtest-4	18.45	18.58	18.64	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	18.90	19.10	19.15	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	18.91	19.11	19.15	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.45	18.54	18.60	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.43	18.54	18.61	19.50
3GPP Rel 6	HSUPA Subtest-1	18.98	19.09	19.11	20.00
3GPP Rel 6	HSUPA Subtest-2	16.95	17.13	17.12	18.00
3GPP Rel 6	HSUPA Subtest-3	17.88	18.11	18.10	19.00
3GPP Rel 6	HSUPA Subtest-4	16.90	17.06	17.16	18.00
3GPP Rel 6	HSUPA Subtest-5	18.90	19.10	19.10	20.00

<WWAN Top Antenna --Reduced Power for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	20.37	20.18	20.35	21.00	20.78	21.05	20.83	21.70	20.02	20.15	20.18	21.00
3GPP Rel 99	RMC 12.2Kbps	20.38	20.19	20.35	21.00	20.79	21.06	20.85	21.70	20.04	20.18	20.19	21.00
3GPP Rel 6	HSDPA Subtest-1	19.41	19.33	19.33	20.00	19.93	20.15	19.92	20.70	18.92	19.13	19.13	20.00
3GPP Rel 6	HSDPA Subtest-2	19.43	19.34	19.37	20.00	19.98	20.13	19.93	20.70	18.97	19.13	19.16	20.00
3GPP Rel 6	HSDPA Subtest-3	18.94	18.84	18.87	19.50	19.50	19.65	19.45	20.20	18.48	18.61	18.64	19.50
3GPP Rel 6	HSDPA Subtest-4	18.95	18.86	18.86	19.50	19.40	19.61	19.49	20.20	18.45	18.58	18.64	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.35	19.33	19.32	20.00	19.91	20.10	19.91	20.70	18.90	19.10	19.15	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.40	19.32	19.35	20.00	19.97	20.11	19.90	20.70	18.91	19.11	19.15	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.90	18.84	18.85	19.50	19.50	19.61	19.40	20.20	18.45	18.54	18.60	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.91	18.85	18.83	19.50	19.34	19.60	19.35	20.20	18.43	18.54	18.61	19.50
3GPP Rel 6	HSUPA Subtest-1	19.42	19.32	19.34	20.00	19.88	20.09	19.95	20.70	18.98	19.09	19.11	20.00
3GPP Rel 6	HSUPA Subtest-2	17.43	17.33	17.29	18.00	17.93	18.13	17.93	18.70	16.95	17.13	17.12	18.00
3GPP Rel 6	HSUPA Subtest-3	18.40	18.34	18.36	19.00	18.93	19.10	18.94	19.70	17.88	18.11	18.10	19.00
3GPP Rel 6	HSUPA Subtest-4	17.37	17.31	17.35	18.00	17.90	18.10	17.90	18.70	16.90	17.06	17.16	18.00
3GPP Rel 6	HSUPA Subtest-5	19.40	19.30	19.40	20.00	19.90	20.10	19.90	20.70	18.90	19.10	19.10	20.00

<WWAN Bottom Antenna --Reduced Power for Handheld On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	20.80	20.79	20.85	21.50	18.84	19.05	18.93	20.00
3GPP Rel 99	RMC 12.2Kbps	20.85	20.83	20.86	21.50	18.85	19.07	18.95	20.00
3GPP Rel 6	HSDPA Subtest-1	19.91	19.85	19.79	20.50	18.08	18.27	18.14	19.00
3GPP Rel 6	HSDPA Subtest-2	19.92	19.86	19.83	20.50	18.13	18.29	18.18	19.00
3GPP Rel 6	HSDPA Subtest-3	19.41	19.35	19.32	20.00	17.62	17.79	17.65	18.50
3GPP Rel 6	HSDPA Subtest-4	19.41	19.34	19.34	20.00	17.56	17.79	17.60	18.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.71	19.64	19.61	20.50	18.07	18.20	18.12	19.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.80	19.68	19.65	20.50	18.10	18.26	18.17	19.00
3GPP Rel 8	DC-HSDPA Subtest-3	19.31	19.26	19.15	20.00	17.61	17.76	17.65	18.50
3GPP Rel 8	DC-HSDPA Subtest-4	19.25	19.21	19.20	20.00	17.50	17.65	17.54	18.50
3GPP Rel 6	HSUPA Subtest-1	19.87	19.86	19.80	20.50	18.04	18.29	18.10	19.00
3GPP Rel 6	HSUPA Subtest-2	17.91	17.86	17.78	18.50	16.03	16.31	16.12	17.00
3GPP Rel 6	HSUPA Subtest-3	18.93	18.87	18.81	19.50	17.07	17.27	17.17	18.00
3GPP Rel 6	HSUPA Subtest-4	17.94	17.83	17.81	18.50	16.03	16.22	16.13	17.00
3GPP Rel 6	HSUPA Subtest-5	19.90	19.80	19.90	20.50	18.00	18.20	18.10	19.00

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.07	18.03	18.05	19.00	18.84	19.05	18.93	20.00
3GPP Rel 99	RMC 12.2Kbps	18.08	18.04	18.08	19.00	18.85	19.07	18.95	20.00
3GPP Rel 6	HSDPA Subtest-1	17.28	17.21	17.15	18.00	18.08	18.27	18.14	19.00
3GPP Rel 6	HSDPA Subtest-2	17.31	17.26	17.18	18.00	18.13	18.29	18.18	19.00
3GPP Rel 6	HSDPA Subtest-3	16.81	16.75	16.67	17.50	17.62	17.79	17.65	18.50
3GPP Rel 6	HSDPA Subtest-4	16.76	16.78	16.66	17.50	17.56	17.79	17.60	18.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.21	17.19	17.15	18.00	18.07	18.20	18.12	19.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.29	17.21	17.16	18.00	18.10	18.26	18.17	19.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.80	16.65	16.61	17.50	17.61	17.76	17.65	18.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.75	16.70	16.65	17.50	17.50	17.65	17.54	18.50
3GPP Rel 6	HSUPA Subtest-1	17.25	17.16	16.65	18.00	18.04	18.29	18.10	19.00
3GPP Rel 6	HSUPA Subtest-2	15.28	15.23	15.17	16.00	16.03	16.31	16.12	17.00
3GPP Rel 6	HSUPA Subtest-3	16.26	16.23	16.18	17.00	17.07	17.27	17.17	18.00
3GPP Rel 6	HSUPA Subtest-4	15.28	15.23	15.19	16.00	16.03	16.22	16.13	17.00
3GPP Rel 6	HSUPA Subtest-5	17.30	17.20	17.20	18.00	18.00	18.20	18.10	19.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5 SAR test was covered by Band 26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64QAM and 16QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM

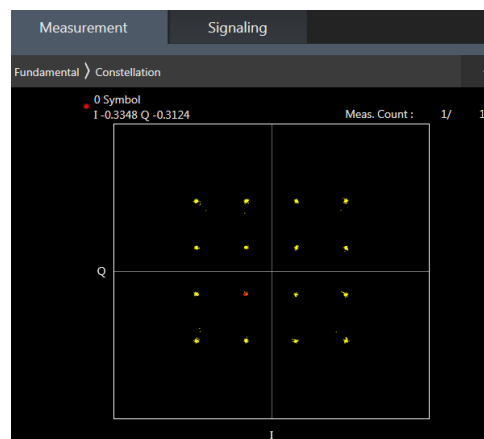

16QAM

<WWAN Top Antenna-- Full Power Mode>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.09	22.25	22.12	23.1	0
20	QPSK	1	49	22.02	22.10	22.01		
20	QPSK	1	99	21.99	21.93	21.84		
20	QPSK	50	0	21.07	21.05	21.00	22.1	1
20	QPSK	50	24	21.09	21.09	20.99		
20	QPSK	50	50	21.01	21.03	20.95		
20	QPSK	100	0	21.06	21.03	20.99	22.1	1
20	16QAM	1	0	21.27	21.36	21.17		
20	16QAM	1	49	21.28	21.33	21.28		
20	16QAM	1	99	21.25	21.22	21.12	21.1	2
20	16QAM	50	0	20.16	20.14	20.06		
20	16QAM	50	24	20.19	20.16	20.06		
20	16QAM	50	50	20.11	20.11	20.03	21.1	2
20	16QAM	100	0	20.14	20.09	20.05		
20	64QAM	1	0	20.27	20.39	20.22		
20	64QAM	1	49	20.32	20.32	20.29	20.1	3
20	64QAM	1	99	20.26	20.18	20.14		
20	64QAM	50	0	19.27	19.23	19.16		
20	64QAM	50	24	19.26	19.23	19.16	20.1	3
20	64QAM	50	50	19.18	19.19	19.12		
20	64QAM	100	0	19.22	19.22	19.16		



FCC SAR Test Report

Report No. : FA982703

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.94	21.98	21.94	23.1	0
15	QPSK	1	37	21.99	22.09	21.92		
15	QPSK	1	74	21.89	21.90	21.89		
15	QPSK	36	0	21.04	21.01	20.95	22.1	1
15	QPSK	36	20	21.10	21.04	20.95		
15	QPSK	36	39	21.01	20.97	20.90		
15	QPSK	75	0	21.04	21.04	20.93	22.1	1
15	16QAM	1	0	21.19	21.26	21.20		
15	16QAM	1	37	21.28	21.30	21.20		
15	16QAM	1	74	21.17	21.14	21.11	21.1	2
15	16QAM	36	0	20.18	20.08	20.04		
15	16QAM	36	20	20.16	20.11	20.06		
15	16QAM	36	39	20.08	20.05	19.97	21.1	2
15	16QAM	75	0	20.09	20.09	20.00		
15	64QAM	1	0	20.25	20.28	20.24		
15	64QAM	1	37	20.30	20.35	20.22	21.1	2
15	64QAM	1	74	20.17	20.20	20.14		
15	64QAM	36	0	19.23	19.19	19.11		
15	64QAM	36	20	19.28	19.23	19.15	20.1	3
15	64QAM	36	39	19.19	19.16	19.08		
15	64QAM	75	0	19.20	19.21	19.11		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.09	22.11	22.05	23.1	0
10	QPSK	1	25	22.03	22.10	21.91		
10	QPSK	1	49	22.04	22.02	21.96		
10	QPSK	25	0	21.10	21.07	20.96	22.1	1
10	QPSK	25	12	21.12	21.07	20.97		
10	QPSK	25	25	21.04	21.03	20.94		
10	QPSK	50	0	21.07	21.03	20.97	22.1	1
10	16QAM	1	0	21.31	21.34	21.31		
10	16QAM	1	25	21.33	21.33	21.16		
10	16QAM	1	49	21.30	21.25	21.13	21.1	2
10	16QAM	25	0	20.17	20.14	20.06		
10	16QAM	25	12	20.19	20.14	20.03		
10	16QAM	25	25	20.12	20.09	19.98	21.1	2
10	16QAM	50	0	20.15	20.11	20.03		
10	64QAM	1	0	20.35	20.40	20.35		
10	64QAM	1	25	20.34	20.37	20.18	21.1	2
10	64QAM	1	49	20.30	20.29	20.21		
10	64QAM	25	0	19.29	19.23	19.15		
10	64QAM	25	12	19.29	19.23	19.14	20.1	3
10	64QAM	25	25	19.22	19.20	19.10		
10	64QAM	50	0	19.26	19.20	19.15		



FCC SAR Test Report

Report No. : FA982703

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.95	22.01	21.90	23.1	0
5	QPSK	1	12	21.98	22.12	22.01		
5	QPSK	1	24	22.01	21.98	21.96		
5	QPSK	12	0	20.99	21.04	20.95	22.1	1
5	QPSK	12	7	20.98	21.13	21.05		
5	QPSK	12	13	21.03	21.02	21.02		
5	QPSK	25	0	21.08	21.04	20.94	22.1	1
5	16QAM	1	0	21.25	21.27	21.12		
5	16QAM	1	12	21.24	21.38	21.21		
5	16QAM	1	24	21.31	21.19	21.12	21.1	2
5	16QAM	12	0	20.07	20.12	20.01		
5	16QAM	12	7	20.03	20.20	20.09		
5	16QAM	12	13	20.11	20.08	20.02	21.1	2
5	16QAM	25	0	20.14	20.07	20.00		
5	64QAM	1	0	20.22	20.28	20.14		
5	64QAM	1	12	20.28	20.37	20.26	21.1	2
5	64QAM	1	24	20.26	20.23	20.16		
5	64QAM	12	0	19.15	19.21	19.11		
5	64QAM	12	7	19.11	19.28	19.17	20.1	3
5	64QAM	12	13	19.19	19.17	19.13		
5	64QAM	25	0	19.25	19.19	19.10		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.13	22.24	22.07	23.1	0
3	QPSK	1	8	22.10	22.15	22.10		
3	QPSK	1	14	22.09	22.10	22.05		
3	QPSK	8	0	21.14	21.26	21.06	22.1	1
3	QPSK	8	4	21.20	21.29	21.11		
3	QPSK	8	7	21.13	21.12	21.06		
3	QPSK	15	0	21.13	21.15	21.08	22.1	1
3	16QAM	1	0	21.37	21.46	21.29		
3	16QAM	1	8	21.36	21.51	21.25		
3	16QAM	1	14	21.36	21.34	21.23	21.1	2
3	16QAM	8	0	20.24	20.32	20.15		
3	16QAM	8	4	20.24	20.36	20.20		
3	16QAM	8	7	20.20	20.22	20.13	21.1	2
3	16QAM	15	0	20.21	20.22	20.17		
3	64QAM	1	0	20.37	20.48	20.32		
3	64QAM	1	8	20.41	20.51	20.34	21.1	2
3	64QAM	1	14	20.39	20.36	20.31		
3	64QAM	8	0	19.29	19.39	19.22		
3	64QAM	8	4	19.32	19.42	19.26	20.1	3
3	64QAM	8	7	19.29	19.27	19.20		
3	64QAM	15	0	19.30	19.33	19.25		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.05	22.21	22.02	23.1	0
1.4	QPSK	1	3	22.11	22.24	22.09		
1.4	QPSK	1	5	22.02	22.15	22.01		
1.4	QPSK	3	0	22.08	22.23	22.03		
1.4	QPSK	3	1	22.14	22.17	22.12		
1.4	QPSK	3	3	22.14	22.21	22.05		
1.4	QPSK	6	0	21.10	21.22	21.03	22.1	1
1.4	16QAM	1	0	21.34	21.43	21.23	22.1	1
1.4	16QAM	1	3	21.37	21.51	21.28		
1.4	16QAM	1	5	21.30	21.44	21.21		
1.4	16QAM	3	0	21.13	21.24	21.05		
1.4	16QAM	3	1	21.21	21.30	21.11		
1.4	16QAM	3	3	21.12	21.26	21.04		
1.4	16QAM	6	0	20.21	20.30	20.15	21.1	2
1.4	64QAM	1	0	20.30	20.46	20.24	21.1	2
1.4	64QAM	1	3	20.46	20.50	20.35		
1.4	64QAM	1	5	20.34	20.43	20.23		
1.4	64QAM	3	0	20.28	20.37	20.21		
1.4	64QAM	3	1	20.35	20.47	20.21		
1.4	64QAM	3	3	20.26	20.41	20.18		
1.4	64QAM	6	0	19.29	19.36	19.20	20.1	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.11	22.29	22.32	23.2	0
20	QPSK	1	49	22.16	22.23	22.25		
20	QPSK	1	99	22.04	22.18	22.02		
20	QPSK	50	0	21.21	21.29	21.34	22.2	1
20	QPSK	50	24	21.23	21.28	21.23		
20	QPSK	50	50	21.14	21.22	21.17		
20	QPSK	100	0	21.18	21.24	21.19	22.2	1
20	16QAM	1	0	21.41	21.60	21.68		
20	16QAM	1	49	21.52	21.58	21.62		
20	16QAM	1	99	21.43	21.53	21.32	21.2	2
20	16QAM	50	0	20.31	20.39	20.46		
20	16QAM	50	24	20.34	20.40	20.35		
20	16QAM	50	50	20.24	20.29	20.23	21.2	2
20	16QAM	100	0	20.29	20.37	20.31		
20	64QAM	1	0	20.43	20.63	20.71		
20	64QAM	1	49	20.51	20.58	20.61	21.2	2
20	64QAM	1	99	20.42	20.51	20.30		
20	64QAM	50	0	19.41	19.50	19.57	20.2	3
20	64QAM	50	24	19.44	19.51	19.45		
20	64QAM	50	50	19.35	19.41	19.31		
20	64QAM	100	0	19.41	19.45	19.41		



FCC SAR Test Report

Report No. : FA982703

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.10	22.22	22.21	23.2	0
15	QPSK	1	37	22.17	22.19	22.12		
15	QPSK	1	74	22.08	22.21	22.01		
15	QPSK	36	0	21.19	21.31	21.35	22.2	1
15	QPSK	36	20	21.24	21.34	21.22		
15	QPSK	36	39	21.20	21.21	21.16		
15	QPSK	75	0	21.21	21.27	21.19	22.2	1
15	16QAM	1	0	21.40	21.60	21.68		
15	16QAM	1	37	21.50	21.55	21.49		
15	16QAM	1	74	21.44	21.61	21.32	21.2	2
15	16QAM	36	0	20.28	20.42	20.45		
15	16QAM	36	20	20.34	20.42	20.30		
15	16QAM	36	39	20.27	20.33	20.21	21.2	2
15	16QAM	75	0	20.26	20.38	20.29		
15	64QAM	1	0	20.45	20.64	20.67		
15	64QAM	1	37	20.48	20.55	20.46	21.2	2
15	64QAM	1	74	20.40	20.60	20.34		
15	64QAM	36	0	19.41	19.53	19.52		
15	64QAM	36	20	19.44	19.51	19.42	20.2	3
15	64QAM	36	39	19.37	19.44	19.32		
15	64QAM	75	0	19.37	19.47	19.38		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.11	22.28	22.12	23.2	0
10	QPSK	1	25	22.17	22.26	22.15		
10	QPSK	1	49	22.14	22.26	22.06		
10	QPSK	25	0	21.25	21.29	21.22	22.2	1
10	QPSK	25	12	21.27	21.32	21.22		
10	QPSK	25	25	21.21	21.22	21.16		
10	QPSK	50	0	21.22	21.29	21.22	22.2	1
10	16QAM	1	0	21.42	21.65	21.62		
10	16QAM	1	25	21.48	21.61	21.50		
10	16QAM	1	49	21.44	21.61	21.38	21.2	2
10	16QAM	25	0	20.35	20.40	20.30		
10	16QAM	25	12	20.34	20.41	20.29		
10	16QAM	25	25	20.30	20.34	20.22	21.2	2
10	16QAM	50	0	20.33	20.39	20.28		
10	64QAM	1	0	20.45	20.63	20.63		
10	64QAM	1	25	20.52	20.62	20.45	21.2	2
10	64QAM	1	49	20.46	20.61	20.39		
10	64QAM	25	0	19.45	19.48	19.43		
10	64QAM	25	12	19.45	19.52	19.39	20.2	3
10	64QAM	25	25	19.40	19.45	19.33		
10	64QAM	50	0	19.42	19.47	19.39		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.10	22.25	22.16	23.2	0
5	QPSK	1	12	22.17	22.24	22.20		
5	QPSK	1	24	22.14	22.18	22.09		
5	QPSK	12	0	21.23	21.28	21.17	22.2	1
5	QPSK	12	7	21.23	21.32	21.22		
5	QPSK	12	13	21.18	21.29	21.17		
5	QPSK	25	0	21.22	21.28	21.18	22.2	1
5	16QAM	1	0	21.39	21.59	21.46		
5	16QAM	1	12	21.51	21.61	21.52		
5	16QAM	1	24	21.43	21.51	21.35	21.2	2
5	16QAM	12	0	20.31	20.39	20.24		
5	16QAM	12	7	20.30	20.41	20.28		
5	16QAM	12	13	20.27	20.38	20.22	21.2	2
5	16QAM	25	0	20.32	20.37	20.25		
5	64QAM	1	0	20.43	20.60	20.44		
5	64QAM	1	12	20.49	20.58	20.53	21.2	2
5	64QAM	1	24	20.45	20.54	20.37		
5	64QAM	12	0	19.41	19.48	19.33		
5	64QAM	12	7	19.41	19.54	19.36	20.2	3
5	64QAM	12	13	19.37	19.45	19.28		
5	64QAM	25	0	19.41	19.50	19.34		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.05	22.24	22.21	23.2	0
3	QPSK	1	8	22.19	22.23	22.12		
3	QPSK	1	14	22.13	22.19	22.08		
3	QPSK	8	0	21.22	21.29	21.17	22.2	1
3	QPSK	8	4	21.24	21.31	21.21		
3	QPSK	8	7	21.20	21.29	21.17		
3	QPSK	15	0	21.22	21.29	21.15	22.2	1
3	16QAM	1	0	21.36	21.55	21.50		
3	16QAM	1	8	21.47	21.58	21.42		
3	16QAM	1	14	21.42	21.52	21.36	21.2	2
3	16QAM	8	0	20.34	20.44	20.27		
3	16QAM	8	4	20.37	20.48	20.31		
3	16QAM	8	7	20.35	20.40	20.26	21.2	2
3	16QAM	15	0	20.33	20.38	20.26		
3	64QAM	1	0	20.39	20.57	20.51		
3	64QAM	1	8	20.49	20.63	20.41	21.2	2
3	64QAM	1	14	20.43	20.54	20.39		
3	64QAM	8	0	19.40	19.50	19.37		
3	64QAM	8	4	19.44	19.55	19.40	20.2	3
3	64QAM	8	7	19.38	19.50	19.33		
3	64QAM	15	0	19.42	19.45	19.36		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.99	22.15	22.05	23.2	0
1.4	QPSK	1	3	22.07	22.25	22.13		
1.4	QPSK	1	5	21.97	22.13	22.04		
1.4	QPSK	3	0	22.03	22.23	22.10		
1.4	QPSK	3	1	22.07	22.26	22.14		
1.4	QPSK	3	3	22.03	22.22	22.11		
1.4	QPSK	6	0	21.07	21.21	21.11	22.2	1
1.4	16QAM	1	0	21.27	21.50	21.36	22.2	1
1.4	16QAM	1	3	21.39	21.60	21.42		
1.4	16QAM	1	5	21.31	21.46	21.33		
1.4	16QAM	3	0	21.10	21.31	21.18		
1.4	16QAM	3	1	21.13	21.35	21.20		
1.4	16QAM	3	3	21.08	21.27	21.14		
1.4	16QAM	6	0	20.21	20.39	20.26	21.2	2
1.4	64QAM	1	0	20.34	20.48	20.41	21.2	2
1.4	64QAM	1	3	20.40	20.57	20.43		
1.4	64QAM	1	5	20.31	20.46	20.31		
1.4	64QAM	3	0	20.25	20.46	20.28		
1.4	64QAM	3	1	20.28	20.51	20.33		
1.4	64QAM	3	3	20.23	20.40	20.27		
1.4	64QAM	6	0	19.25	19.42	19.28	20.2	3

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.31	22.55	22.44	23.4	0
10	QPSK	1	25	22.49	22.46	22.46		
10	QPSK	1	49	22.28	22.46	22.49		
10	QPSK	25	0	21.42	21.53	21.44	22.4	1
10	QPSK	25	12	21.52	21.51	21.53		
10	QPSK	25	25	21.45	21.44	21.48		
10	QPSK	50	0	21.51	21.48	21.54	22.4	1
10	16QAM	1	0	21.70	21.92	21.76		
10	16QAM	1	25	21.84	21.82	21.85		
10	16QAM	1	49	21.62	21.83	21.83	21.4	2
10	16QAM	25	0	20.53	20.63	20.53		
10	16QAM	25	12	20.64	20.64	20.64		
10	16QAM	25	25	20.57	20.57	20.57	21.4	2
10	16QAM	50	0	20.60	20.62	20.61		
10	64QAM	1	0	20.68	20.90	20.78		
10	64QAM	1	25	20.83	20.86	20.86	21.4	2
10	64QAM	1	49	20.67	20.84	20.86		
10	64QAM	25	0	19.63	19.75	19.66	20.4	3
10	64QAM	25	12	19.76	19.76	19.75		
10	64QAM	25	25	19.68	19.68	19.67		
10	64QAM	50	0	19.69	19.72	19.70		



FCC SAR Test Report

Report No. : FA982703

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.44	22.38	22.45	23.4	0
5	QPSK	1	12	22.40	22.46	22.54		
5	QPSK	1	24	22.43	22.44	22.47		
5	QPSK	12	0	21.45	21.53	21.49	22.4	1
5	QPSK	12	7	21.47	21.53	21.57		
5	QPSK	12	13	21.42	21.50	21.57		
5	QPSK	25	0	21.42	21.49	21.45	22.4	1
5	16QAM	1	0	21.69	21.74	21.80		
5	16QAM	1	12	21.69	21.79	21.89		
5	16QAM	1	24	21.84	21.74	21.82	21.4	2
5	16QAM	12	0	20.57	20.60	20.57		
5	16QAM	12	7	20.62	20.61	20.71		
5	16QAM	12	13	20.55	20.57	20.67	21.4	2
5	16QAM	25	0	20.51	20.60	20.56		
5	64QAM	1	0	20.75	20.74	20.80		
5	64QAM	1	12	20.67	20.81	20.90	21.4	2
5	64QAM	1	24	20.84	20.76	20.83		
5	64QAM	12	0	19.65	19.70	19.68		
5	64QAM	12	7	19.75	19.72	19.80	20.4	3
5	64QAM	12	13	19.74	19.68	19.75		
5	64QAM	25	0	19.62	19.69	19.66		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.34	22.44	22.51	23.4	0
3	QPSK	1	8	22.41	22.46	22.51		
3	QPSK	1	14	22.29	22.44	22.48		
3	QPSK	8	0	21.45	21.49	21.57	22.4	1
3	QPSK	8	4	21.45	21.52	21.57		
3	QPSK	8	7	21.43	21.49	21.55		
3	QPSK	15	0	21.47	21.48	21.57	22.4	1
3	16QAM	1	0	21.82	21.79	21.89		
3	16QAM	1	8	21.80	21.84	21.86		
3	16QAM	1	14	21.63	21.74	21.82	21.4	2
3	16QAM	8	0	20.59	20.65	20.72		
3	16QAM	8	4	20.64	20.65	20.72		
3	16QAM	8	7	20.60	20.60	20.71	21.4	2
3	16QAM	15	0	20.54	20.60	20.65		
3	64QAM	1	0	20.70	20.85	20.93		
3	64QAM	1	8	20.87	20.80	20.90	21.4	2
3	64QAM	1	14	20.81	20.77	20.85		
3	64QAM	8	0	19.66	19.71	19.79		
3	64QAM	8	4	19.77	19.73	19.79	20.4	3
3	64QAM	8	7	19.75	19.68	19.77		
3	64QAM	15	0	19.62	19.70	19.74		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.28	22.39	22.45	23.4	0
1.4	QPSK	1	3	22.31	22.45	22.53		
1.4	QPSK	1	5	22.32	22.39	22.44		
1.4	QPSK	3	0	22.27	22.44	22.47		
1.4	QPSK	3	1	22.33	22.46	22.53		
1.4	QPSK	3	3	22.41	22.41	22.50		
1.4	QPSK	6	0	21.37	21.43	21.49	22.4	1
1.4	16QAM	1	0	21.65	21.76	21.80	22.4	1
1.4	16QAM	1	3	21.68	21.79	21.84		
1.4	16QAM	1	5	21.72	21.72	21.75		
1.4	16QAM	3	0	21.41	21.54	21.57		
1.4	16QAM	3	1	21.42	21.59	21.62		
1.4	16QAM	3	3	21.50	21.53	21.53		
1.4	16QAM	6	0	20.54	20.60	20.64	21.4	2
1.4	64QAM	1	0	20.61	20.72	20.80	21.4	2
1.4	64QAM	1	3	20.71	20.78	20.82		
1.4	64QAM	1	5	20.73	20.73	20.78		
1.4	64QAM	3	0	20.58	20.68	20.68		
1.4	64QAM	3	1	20.58	20.71	20.79		
1.4	64QAM	3	3	20.65	20.67	20.72		
1.4	64QAM	6	0	19.58	19.64	19.69	20.4	3

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.10	22.23	22.11	23	0
20	QPSK	1	49	22.27	22.22	22.12		
20	QPSK	1	99	22.37	22.24	21.98		
20	QPSK	50	0	21.29	21.28	21.20	22	1
20	QPSK	50	24	21.36	21.28	21.19		
20	QPSK	50	50	21.42	21.27	21.20		
20	QPSK	100	0	21.31	21.30	21.20	22	1
20	16QAM	1	0	21.42	21.52	21.40		
20	16QAM	1	49	21.51	21.60	21.42		
20	16QAM	1	99	21.69	21.53	21.38	21	2
20	16QAM	50	0	20.43	20.36	20.26		
20	16QAM	50	24	20.46	20.38	20.31		
20	16QAM	50	50	20.54	20.40	20.28	21	2
20	16QAM	100	0	20.41	20.38	20.28		
20	64QAM	1	0	20.35	20.53	20.40		
20	64QAM	1	49	20.57	20.57	20.43	21	2
20	64QAM	1	99	20.71	20.58	20.23		
20	64QAM	50	0	19.51	19.50	19.37	20	3
20	64QAM	50	24	19.46	19.47	19.40		
20	64QAM	50	50	19.56	19.49	19.37		
20	64QAM	100	0	19.53	19.49	19.40		



FCC SAR Test Report

Report No. : FA982703

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.06	22.24	22.12	23	0
15	QPSK	1	37	22.18	22.25	22.08		
15	QPSK	1	74	22.26	22.17	22.03		
15	QPSK	36	0	21.25	21.30	21.16	22	1
15	QPSK	36	20	21.28	21.33	21.18		
15	QPSK	36	39	21.23	21.28	21.16		
15	QPSK	75	0	21.27	21.30	21.18	22	1
15	16QAM	1	0	21.27	21.57	21.41		
15	16QAM	1	37	21.45	21.55	21.35		
15	16QAM	1	74	21.56	21.68	21.19	21	2
15	16QAM	36	0	20.31	20.41	20.25		
15	16QAM	36	20	20.34	20.40	20.28		
15	16QAM	36	39	20.35	20.41	20.23	21	2
15	16QAM	75	0	20.34	20.39	20.26		
15	64QAM	1	0	20.31	20.58	20.44		
15	64QAM	1	37	20.46	20.56	20.35	21	2
15	64QAM	1	74	20.55	20.72	20.40		
15	64QAM	36	0	19.43	19.50	19.37		
15	64QAM	36	20	19.46	19.50	19.41	20	3
15	64QAM	36	39	19.46	19.53	19.34		
15	64QAM	75	0	19.46	19.48	19.39		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.08	22.19	22.09	23	0
10	QPSK	1	25	22.11	22.20	21.99		
10	QPSK	1	49	22.20	22.32	21.99		
10	QPSK	25	0	21.15	21.27	21.11	22	1
10	QPSK	25	12	21.27	21.31	21.15		
10	QPSK	25	25	21.27	21.29	21.06		
10	QPSK	50	0	21.28	21.27	21.16	22	1
10	16QAM	1	0	21.25	21.51	21.33		
10	16QAM	1	25	21.32	21.53	21.20		
10	16QAM	1	49	21.46	21.60	21.14	21	2
10	16QAM	25	0	20.18	20.33	20.23		
10	16QAM	25	12	20.32	20.36	20.22		
10	16QAM	25	25	20.31	20.34	20.10	21	2
10	16QAM	50	0	20.34	20.37	20.19		
10	64QAM	1	0	20.31	20.53	20.37		
10	64QAM	1	25	20.36	20.54	20.25	21	2
10	64QAM	1	49	20.45	20.64	20.15		
10	64QAM	25	0	19.29	19.44	19.30		
10	64QAM	25	12	19.42	19.47	19.32	20	3
10	64QAM	25	25	19.43	19.45	19.20		
10	64QAM	50	0	19.43	19.47	19.31		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.08	22.19	21.96	23	0
5	QPSK	1	12	22.09	22.18	21.95		
5	QPSK	1	24	22.08	22.20	22.00		
5	QPSK	12	0	21.14	21.21	20.98	22	1
5	QPSK	12	7	21.17	21.26	21.01		
5	QPSK	12	13	21.15	21.24	21.03		
5	QPSK	25	0	21.17	21.25	21.04	22	1
5	16QAM	1	0	21.23	21.52	21.13		
5	16QAM	1	12	21.30	21.48	21.12		
5	16QAM	1	24	21.32	21.47	21.04	21	2
5	16QAM	12	0	20.17	20.33	20.07		
5	16QAM	12	7	20.23	20.37	20.09		
5	16QAM	12	13	20.21	20.36	20.05	21	2
5	16QAM	25	0	20.18	20.32	20.05		
5	64QAM	1	0	20.31	20.51	20.19		
5	64QAM	1	12	20.34	20.50	20.14	21	2
5	64QAM	1	24	20.34	20.53	20.11		
5	64QAM	12	0	19.26	19.44	19.13		
5	64QAM	12	7	19.34	19.48	19.18	20	3
5	64QAM	12	13	19.31	19.46	19.17		
5	64QAM	25	0	19.30	19.43	19.17		

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	23.4	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.54	22.63	22.60		
15	QPSK	1	37	22.55	22.62	22.57	22.4	1
15	QPSK	1	74	22.55	22.60	22.55		
15	QPSK	36	0	21.60	21.69	21.60		
15	QPSK	36	20	21.61	21.68	21.65	22.4	1
15	QPSK	36	39	21.61	21.58	21.54		
15	QPSK	75	0	21.64	21.62	21.63		
15	16QAM	1	0	21.93	21.99	21.95	22.4	1
15	16QAM	1	37	21.93	22.01	21.93		
15	16QAM	1	74	21.91	21.90	21.90		
15	16QAM	36	0	20.71	20.80	20.70	21.4	2
15	16QAM	36	20	20.84	20.81	20.77		
15	16QAM	36	39	20.75	20.70	20.68		
15	16QAM	75	0	20.77	20.73	20.71	21.4	2
15	64QAM	1	0	20.76	20.89	20.84		
15	64QAM	1	37	20.70	20.79	20.78		
15	64QAM	1	74	20.74	20.79	20.76	20.4	3
15	64QAM	36	0	19.58	19.74	19.71		
15	64QAM	36	20	19.71	19.74	19.70		
15	64QAM	36	39	19.66	19.66	19.69	20.4	3
15	64QAM	75	0	19.66	19.69	19.70		



FCC SAR Test Report

Report No. : FA982703

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.47	22.51	22.54	23.4	0
10	QPSK	1	25	22.50	22.55	22.60		
10	QPSK	1	49	22.55	22.55	22.53		
10	QPSK	25	0	21.58	21.60	21.58	22.4	1
10	QPSK	25	12	21.54	21.62	21.58		
10	QPSK	25	25	21.61	21.55	21.61		
10	QPSK	50	0	21.55	21.57	21.51	22.4	1
10	16QAM	1	0	21.85	21.90	21.87		
10	16QAM	1	25	21.92	21.97	21.97		
10	16QAM	1	49	21.93	21.92	21.86	21.4	2
10	16QAM	25	0	20.67	20.75	20.68		
10	16QAM	25	12	20.69	20.74	20.65		
10	16QAM	25	25	20.72	20.66	20.71	21.4	2
10	16QAM	50	0	20.63	20.70	20.67		
10	64QAM	1	0	20.76	20.89	20.84		
10	64QAM	1	25	20.70	20.79	20.78	21.4	2
10	64QAM	1	49	20.74	20.79	20.76		
10	64QAM	25	0	19.58	19.74	19.71		
10	64QAM	25	12	19.71	19.74	19.70	20.4	3
10	64QAM	25	25	19.66	19.66	19.69		
10	64QAM	50	0	19.66	19.69	19.70		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.46	22.59	22.60	23.4	0
5	QPSK	1	12	22.42	22.55	22.54		
5	QPSK	1	24	22.48	22.55	22.52		
5	QPSK	12	0	21.49	21.63	21.63	22.4	1
5	QPSK	12	7	21.59	21.62	21.61		
5	QPSK	12	13	21.54	21.59	21.60		
5	QPSK	25	0	21.54	21.57	21.59	22.4	1
5	16QAM	1	0	21.84	21.98	21.94		
5	16QAM	1	12	21.80	21.95	21.95		
5	16QAM	1	24	21.89	21.87	21.88	21.4	2
5	16QAM	12	0	20.60	20.75	20.70		
5	16QAM	12	7	20.73	20.74	20.72		
5	16QAM	12	13	20.67	20.72	20.68	21.4	2
5	16QAM	25	0	20.66	20.69	20.68		
5	64QAM	1	0	20.76	20.89	20.84		
5	64QAM	1	12	20.70	20.79	20.78	21.4	2
5	64QAM	1	24	20.74	20.79	20.76		
5	64QAM	12	0	19.58	19.74	19.71		
5	64QAM	12	7	19.71	19.74	19.70	20.4	3
5	64QAM	12	13	19.66	19.66	19.69		
5	64QAM	25	0	19.66	19.69	19.70		



Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.41	22.56	22.56	23.4	0
3	QPSK	1	8	22.43	22.55	22.52		
3	QPSK	1	14	22.41	22.51	22.52		
3	QPSK	8	0	21.44	21.59	21.57	22.4	1
3	QPSK	8	4	21.46	21.56	21.59		
3	QPSK	8	7	21.45	21.56	21.54		
3	QPSK	15	0	21.45	21.60	21.58	22.4	1
3	16QAM	1	0	21.79	21.92	21.91		
3	16QAM	1	8	21.82	21.86	21.92		
3	16QAM	1	14	21.81	21.86	21.83	21.4	2
3	16QAM	8	0	20.62	20.75	20.72		
3	16QAM	8	4	20.65	20.78	20.76		
3	16QAM	8	7	20.61	20.73	20.70	21.4	2
3	16QAM	15	0	20.56	20.68	20.73		
3	64QAM	1	0	20.70	20.80	20.79		
3	64QAM	1	8	20.70	20.78	20.78	21.4	2
3	64QAM	1	14	20.70	20.82	20.76		
3	64QAM	8	0	19.58	19.72	19.66		
3	64QAM	8	4	19.56	19.74	19.71	20.4	3
3	64QAM	8	7	19.53	19.70	19.66		
3	64QAM	15	0	19.55	19.69	19.68		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.37	22.48	22.44	23.4	0
1.4	QPSK	1	3	22.42	22.54	22.53		
1.4	QPSK	1	5	22.35	22.44	22.44		
1.4	QPSK	3	0	22.43	22.48	22.50	23.4	0
1.4	QPSK	3	1	22.45	22.53	22.50		
1.4	QPSK	3	3	22.39	22.49	22.47		
1.4	QPSK	6	0	21.38	21.52	21.48	23.4	0
1.4	16QAM	1	0	21.70	21.86	21.84	23.4	0
1.4	16QAM	1	3	21.75	21.88	21.87		
1.4	16QAM	1	5	21.72	21.80	21.74		
1.4	16QAM	3	0	21.51	21.64	21.61	23.4	0
1.4	16QAM	3	1	21.59	21.63	21.65		
1.4	16QAM	3	3	21.54	21.59	21.57		
1.4	16QAM	6	0	20.56	20.68	20.65	23.4	0
1.4	64QAM	1	0	20.66	20.76	20.70	23.4	0
1.4	64QAM	1	3	20.74	20.80	20.70		
1.4	64QAM	1	5	20.61	20.70	20.68		
1.4	64QAM	3	0	20.58	20.69	20.62	23.4	0
1.4	64QAM	3	1	20.60	20.71	20.66		
1.4	64QAM	3	3	20.54	20.60	20.63		
1.4	64QAM	6	0	19.47	19.60	19.59	23.4	0



<WWAN Bottom Antenna--Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.90	23.04	22.82	24	0
20	QPSK	1	49	22.92	22.98	22.89		
20	QPSK	1	99	22.93	22.80	22.79		
20	QPSK	50	0	21.94	21.92	21.86	23	1
20	QPSK	50	24	21.95	21.95	21.83		
20	QPSK	50	50	21.90	21.87	21.83		
20	QPSK	100	0	21.91	21.91	21.81		
20	16QAM	1	0	22.15	22.24	22.10	23	1
20	16QAM	1	49	22.20	22.18	22.25		
20	16QAM	1	99	22.16	22.05	21.95		
20	16QAM	50	0	21.06	21.00	20.96	22	2
20	16QAM	50	24	21.06	21.03	20.97		
20	16QAM	50	50	20.98	20.94	20.88		
20	16QAM	100	0	20.99	20.92	20.90		
20	64QAM	1	0	21.15	21.28	21.08	22	2
20	64QAM	1	49	21.19	21.18	21.22		
20	64QAM	1	99	21.17	21.02	20.97		
20	64QAM	50	0	20.14	20.08	19.99	21	3
20	64QAM	50	24	20.12	20.09	20.03		
20	64QAM	50	50	20.04	20.03	19.95		
20	64QAM	100	0	20.09	20.04	20.00		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.76	22.89	22.80	24	0
15	QPSK	1	37	22.80	23.01	22.77		
15	QPSK	1	74	22.71	22.75	22.81		
15	QPSK	36	0	21.88	21.90	21.85	23	1
15	QPSK	36	20	21.89	21.93	21.85		
15	QPSK	36	39	21.83	21.87	21.80		
15	QPSK	75	0	21.84	21.89	21.82	23	1
15	16QAM	1	0	22.05	22.11	22.10		
15	16QAM	1	37	22.11	22.20	22.10		
15	16QAM	1	74	22.01	22.02	21.99	22	2
15	16QAM	36	0	20.95	20.95	20.93		
15	16QAM	36	20	20.95	20.98	20.92		
15	16QAM	36	39	20.91	20.91	20.85	22	2
15	16QAM	75	0	20.92	20.93	20.88		
15	64QAM	1	0	20.99	21.12	21.11		
15	64QAM	1	37	21.13	21.21	21.04	22	2
15	64QAM	1	74	21.04	20.97	20.97		
15	64QAM	36	0	20.04	20.01	19.96		
15	64QAM	36	20	20.02	20.03	19.99	21	3
15	64QAM	36	39	19.96	19.97	19.92		
15	64QAM	75	0	20.01	19.99	19.95		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.90	23.00	22.97	24	0
10	QPSK	1	25	22.85	23.00	22.80		
10	QPSK	1	49	22.86	22.89	22.84		
10	QPSK	25	0	21.90	21.97	21.85	23	1
10	QPSK	25	12	21.93	21.96	21.84		
10	QPSK	25	25	21.85	21.89	21.80		
10	QPSK	50	0	21.87	21.92	21.84	23	1
10	16QAM	1	0	22.13	22.20	22.19		
10	16QAM	1	25	22.14	22.19	22.05		
10	16QAM	1	49	22.14	22.08	22.06	22	2
10	16QAM	25	0	20.99	20.99	20.90		
10	16QAM	25	12	20.98	20.98	20.90		
10	16QAM	25	25	20.93	20.95	20.86	22	2
10	16QAM	50	0	20.95	20.96	20.89		
10	64QAM	1	0	21.09	21.22	21.20		
10	64QAM	1	25	21.16	21.19	21.02	22	2
10	64QAM	1	49	21.11	21.14	21.05		
10	64QAM	25	0	20.07	20.06	19.98		
10	64QAM	25	12	20.05	20.06	19.99	21	3
10	64QAM	25	25	19.99	20.00	19.92		
10	64QAM	50	0	20.02	20.03	19.95		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.86	22.91	22.78	24	0
5	QPSK	1	12	22.88	22.91	22.92		
5	QPSK	1	24	22.88	22.83	22.85		
5	QPSK	12	0	21.91	21.93	21.80	23	1
5	QPSK	12	7	21.91	22.06	21.94		
5	QPSK	12	13	21.93	21.88	21.89		
5	QPSK	25	0	21.98	21.94	21.80	23	1
5	16QAM	1	0	22.10	22.06	22.00		
5	16QAM	1	12	22.16	22.24	22.09		
5	16QAM	1	24	22.16	22.04	22.03	22	2
5	16QAM	12	0	20.94	20.95	20.84		
5	16QAM	12	7	20.96	21.05	20.97		
5	16QAM	12	13	21.02	20.93	20.90	22	2
5	16QAM	25	0	21.01	20.93	20.86		
5	64QAM	1	0	21.11	21.08	21.00		
5	64QAM	1	12	21.16	21.22	21.07	22	2
5	64QAM	1	24	21.14	21.03	21.05		
5	64QAM	12	0	20.00	20.02	19.91		
5	64QAM	12	7	19.98	20.10	20.05	21	3
5	64QAM	12	13	20.06	20.00	19.97		
5	64QAM	25	0	20.10	20.03	19.93		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.79	22.97	22.82	24	0
3	QPSK	1	8	22.79	22.94	22.84		
3	QPSK	1	14	22.73	22.81	22.82		
3	QPSK	8	0	21.81	21.93	21.84	23	1
3	QPSK	8	4	21.86	21.97	21.86		
3	QPSK	8	7	21.80	21.83	21.84		
3	QPSK	15	0	21.82	21.84	21.86	23	1
3	16QAM	1	0	21.99	22.12	22.01		
3	16QAM	1	8	22.04	22.14	21.99		
3	16QAM	1	14	22.04	22.00	21.98	22	2
3	16QAM	8	0	20.90	20.99	20.90		
3	16QAM	8	4	20.91	21.05	20.94		
3	16QAM	8	7	20.87	20.88	20.88	22	2
3	16QAM	15	0	20.88	20.90	20.90		
3	64QAM	1	0	21.04	21.12	21.01		
3	64QAM	1	8	21.08	21.15	21.02	22	2
3	64QAM	1	14	21.01	21.01	21.00		
3	64QAM	8	0	19.94	20.03	19.95		
3	64QAM	8	4	19.98	20.09	19.96	21	3
3	64QAM	8	7	19.94	19.92	19.92		
3	64QAM	15	0	19.95	19.96	19.99		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.75	22.90	22.78	24	0
1.4	QPSK	1	3	22.81	22.96	22.87		
1.4	QPSK	1	5	22.75	22.87	22.76		
1.4	QPSK	3	0	22.77	22.92	22.82		
1.4	QPSK	3	1	22.82	22.96	22.88		
1.4	QPSK	3	3	22.78	22.92	22.82		
1.4	QPSK	6	0	21.77	21.89	21.80	23	1
1.4	16QAM	1	0	22.00	22.10	21.93	23	1
1.4	16QAM	1	3	22.07	22.18	22.03		
1.4	16QAM	1	5	21.99	22.07	21.92		
1.4	16QAM	3	0	21.81	21.93	21.76		
1.4	16QAM	3	1	21.87	21.98	21.84		
1.4	16QAM	3	3	21.81	21.91	21.78		
1.4	16QAM	6	0	20.90	20.99	20.90	22	2
1.4	64QAM	1	0	21.00	21.11	20.99	22	2
1.4	64QAM	1	3	21.03	21.16	21.04		
1.4	64QAM	1	5	20.96	21.10	20.97		
1.4	64QAM	3	0	20.94	21.06	20.92		
1.4	64QAM	3	1	20.99	21.09	20.98		
1.4	64QAM	3	3	20.93	21.03	20.90		
1.4	64QAM	6	0	19.92	20.03	19.92	21	3

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.74	22.82	22.88	24	0
20	QPSK	1	49	22.78	22.80	22.83		
20	QPSK	1	99	22.71	22.73	22.61		
20	QPSK	50	0	21.74	21.84	21.95	23	1
20	QPSK	50	24	21.77	21.83	21.81		
20	QPSK	50	50	21.70	21.76	21.74		
20	QPSK	100	0	21.69	21.79	21.78	23	1
20	16QAM	1	0	21.91	22.13	22.26		
20	16QAM	1	49	21.98	22.14	22.15		
20	16QAM	1	99	21.98	22.05	21.96	22	2
20	16QAM	50	0	20.83	20.95	21.04		
20	16QAM	50	24	20.86	20.93	20.90		
20	16QAM	50	50	20.81	20.86	20.87	22	2
20	16QAM	100	0	20.80	20.89	20.89		
20	64QAM	1	0	20.87	21.12	21.21		
20	64QAM	1	49	21.02	21.12	21.10	22	2
20	64QAM	1	99	20.94	21.05	20.94		
20	64QAM	50	0	19.91	20.00	20.08		
20	64QAM	50	24	19.93	20.00	19.98	21	3
20	64QAM	50	50	19.86	19.95	19.93		
20	64QAM	100	0	19.87	20.00	19.98		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.59	22.79	22.69	24	0
15	QPSK	1	37	22.68	22.73	22.74		
15	QPSK	1	74	22.57	22.75	22.63		
15	QPSK	36	0	21.74	21.84	21.89	23	1
15	QPSK	36	20	21.75	21.87	21.82		
15	QPSK	36	39	21.69	21.79	21.73		
15	QPSK	75	0	21.73	21.81	21.75	23	1
15	16QAM	1	0	21.91	22.18	22.20		
15	16QAM	1	37	21.95	22.09	22.04		
15	16QAM	1	74	21.95	22.07	21.98	22	2
15	16QAM	36	0	20.81	20.94	21.01		
15	16QAM	36	20	20.82	20.97	20.86		
15	16QAM	36	39	20.81	20.88	20.85	22	2
15	16QAM	75	0	20.78	20.92	20.87		
15	64QAM	1	0	20.89	21.15	21.16		
15	64QAM	1	37	20.92	21.09	20.99	22	2
15	64QAM	1	74	20.90	21.06	20.92		
15	64QAM	36	0	19.90	20.03	20.03		
15	64QAM	36	20	19.88	20.05	19.95	21	3
15	64QAM	36	39	19.88	19.93	19.93		
15	64QAM	75	0	19.86	20.01	19.94		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.62	22.80	22.61	24	0
10	QPSK	1	25	22.69	22.80	22.74		
10	QPSK	1	49	22.62	22.79	22.66		
10	QPSK	25	0	21.75	21.82	21.79	23	1
10	QPSK	25	12	21.77	21.84	21.79		
10	QPSK	25	25	21.68	21.77	21.73		
10	QPSK	50	0	21.72	21.81	21.81	23	1
10	16QAM	1	0	21.93	22.19	22.15		
10	16QAM	1	25	21.98	22.17	22.02		
10	16QAM	1	49	21.90	22.11	21.95	22	2
10	16QAM	25	0	20.83	20.94	20.91		
10	16QAM	25	12	20.82	20.96	20.89		
10	16QAM	25	25	20.79	20.89	20.86	22	2
10	16QAM	50	0	20.78	20.91	20.87		
10	64QAM	1	0	20.89	21.11	21.15		
10	64QAM	1	25	20.96	21.13	21.03	22	2
10	64QAM	1	49	20.90	21.10	20.97		
10	64QAM	25	0	19.91	20.01	19.97		
10	64QAM	25	12	19.91	20.02	19.98	21	3
10	64QAM	25	25	19.86	19.96	19.92		
10	64QAM	50	0	19.86	19.99	19.95		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.56	22.77	22.76	24	0
5	QPSK	1	12	22.67	22.75	22.82		
5	QPSK	1	24	22.61	22.71	22.67		
5	QPSK	12	0	21.71	21.82	21.76	23	1
5	QPSK	12	7	21.78	21.88	21.81		
5	QPSK	12	13	21.73	21.80	21.76		
5	QPSK	25	0	21.69	21.81	21.78	23	1
5	16QAM	1	0	21.85	22.09	22.00		
5	16QAM	1	12	21.95	22.12	22.15		
5	16QAM	1	24	21.90	22.02	22.01	22	2
5	16QAM	12	0	20.80	20.93	20.88		
5	16QAM	12	7	20.81	20.99	20.94		
5	16QAM	12	13	20.77	20.91	20.85	22	2
5	16QAM	25	0	20.81	20.93	20.86		
5	64QAM	1	0	20.86	21.12	21.00		
5	64QAM	1	12	20.90	21.07	21.08	22	2
5	64QAM	1	24	20.90	21.03	20.97		
5	64QAM	12	0	19.85	19.98	19.96		
5	64QAM	12	7	19.88	20.06	19.99	21	3
5	64QAM	12	13	19.84	19.95	19.92		
5	64QAM	25	0	19.87	20.00	19.91		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.60	22.73	22.77	24	0
3	QPSK	1	8	22.72	22.73	22.69		
3	QPSK	1	14	22.69	22.69	22.66		
3	QPSK	8	0	21.77	21.78	21.71	23	1
3	QPSK	8	4	21.80	21.79	21.74		
3	QPSK	8	7	21.75	21.74	21.73		
3	QPSK	15	0	21.78	21.76	21.74	23	1
3	16QAM	1	0	21.93	22.03	22.10		
3	16QAM	1	8	22.04	22.08	22.05		
3	16QAM	1	14	21.93	22.02	21.96	22	2
3	16QAM	8	0	20.93	20.93	20.90		
3	16QAM	8	4	20.92	20.98	20.89		
3	16QAM	8	7	20.89	20.92	20.86	22	2
3	16QAM	15	0	20.87	20.86	20.85		
3	64QAM	1	0	20.89	21.07	21.07		
3	64QAM	1	8	21.04	21.09	20.96	22	2
3	64QAM	1	14	20.94	21.06	20.94		
3	64QAM	8	0	19.91	20.00	19.94		
3	64QAM	8	4	19.94	20.01	19.94	21	3
3	64QAM	8	7	19.94	19.95	19.90		
3	64QAM	15	0	19.93	19.96	19.91		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.53	22.66	22.60	24	0
1.4	QPSK	1	3	22.60	22.70	22.68		
1.4	QPSK	1	5	22.52	22.62	22.59		
1.4	QPSK	3	0	22.58	22.69	22.66		
1.4	QPSK	3	1	22.62	22.72	22.71		
1.4	QPSK	3	3	22.56	22.71	22.66		
1.4	QPSK	6	0	21.58	21.72	21.68	23	1
1.4	16QAM	1	0	21.84	21.98	21.94	23	1
1.4	16QAM	1	3	21.90	22.06	21.97		
1.4	16QAM	1	5	21.83	21.98	21.90		
1.4	16QAM	3	0	21.64	21.81	21.71		
1.4	16QAM	3	1	21.69	21.81	21.79		
1.4	16QAM	3	3	21.63	21.77	21.70		
1.4	16QAM	6	0	20.74	20.88	20.84	22	2
1.4	64QAM	1	0	20.82	21.00	20.90	22	2
1.4	64QAM	1	3	20.87	21.04	20.94		
1.4	64QAM	1	5	20.84	20.95	20.90		
1.4	64QAM	3	0	20.77	20.89	20.85		
1.4	64QAM	3	1	20.83	20.96	20.94		
1.4	64QAM	3	3	20.73	20.86	20.83		
1.4	64QAM	6	0	19.77	19.86	19.83	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.90	23.08	22.97	24	0
10	QPSK	1	25	23.07	22.99	22.96		
10	QPSK	1	49	22.88	22.97	22.99		
10	QPSK	25	0	22.02	22.07	21.98	23	1
10	QPSK	25	12	22.13	22.05	22.06		
10	QPSK	25	25	22.05	21.96	21.99		
10	QPSK	50	0	22.07	22.03	22.04	23	1
10	16QAM	1	0	22.32	22.40	22.33		
10	16QAM	1	25	22.45	22.37	22.36		
10	16QAM	1	49	22.22	22.31	22.35	22	2
10	16QAM	25	0	21.13	21.15	21.08		
10	16QAM	25	12	21.23	21.15	21.16		
10	16QAM	25	25	21.15	21.05	21.08	22	2
10	16QAM	50	0	21.22	21.13	21.13		
10	64QAM	1	0	21.27	21.39	21.26		
10	64QAM	1	25	21.45	21.31	21.33	22	2
10	64QAM	1	49	21.20	21.31	21.32		
10	64QAM	25	0	20.23	20.22	20.14		
10	64QAM	25	12	20.33	20.22	20.24	21	3
10	64QAM	25	25	20.25	20.16	20.16		
10	64QAM	50	0	20.27	20.19	20.22		



FCC SAR Test Report

Report No. : FA982703

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.88	22.89	22.94	24	0
5	QPSK	1	12	22.90	22.96	23.02		
5	QPSK	1	24	23.01	22.92	22.99		
5	QPSK	12	0	22.04	22.03	21.97	23	1
5	QPSK	12	7	22.04	22.04	22.12		
5	QPSK	12	13	22.02	22.00	22.04		
5	QPSK	25	0	22.02	22.00	21.98	23	1
5	16QAM	1	0	22.32	22.26	22.29		
5	16QAM	1	12	22.30	22.35	22.37		
5	16QAM	1	24	22.44	22.24	22.32	22	2
5	16QAM	12	0	21.15	21.11	21.09		
5	16QAM	12	7	21.21	21.14	21.20		
5	16QAM	12	13	21.15	21.10	21.17	22	2
5	16QAM	25	0	21.12	21.12	21.08		
5	64QAM	1	0	21.32	21.25	21.25		
5	64QAM	1	12	21.24	21.30	21.33	22	2
5	64QAM	1	24	21.39	21.26	21.34		
5	64QAM	12	0	20.24	20.20	20.17		
5	64QAM	12	7	20.24	20.20	20.27	21	3
5	64QAM	12	13	20.22	20.14	20.23		
5	64QAM	25	0	20.23	20.19	20.15		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.90	22.96	23.02	24	0
3	QPSK	1	8	22.97	22.96	23.00		
3	QPSK	1	14	22.84	22.90	22.98		
3	QPSK	8	0	21.99	21.98	22.05	23	1
3	QPSK	8	4	22.04	22.00	22.09		
3	QPSK	8	7	22.00	21.96	22.03		
3	QPSK	15	0	22.01	21.97	22.04	23	1
3	16QAM	1	0	22.29	22.34	22.35		
3	16QAM	1	8	22.38	22.31	22.39		
3	16QAM	1	14	22.25	22.30	22.33	22	2
3	16QAM	8	0	21.21	21.13	21.21		
3	16QAM	8	4	21.20	21.15	21.22		
3	16QAM	8	7	21.21	21.09	21.21	22	2
3	16QAM	15	0	21.10	21.08	21.16		
3	64QAM	1	0	21.21	21.28	21.37		
3	64QAM	1	8	21.31	21.31	21.36	22	2
3	64QAM	1	14	21.20	21.28	21.33		
3	64QAM	8	0	20.20	20.15	20.22		
3	64QAM	8	4	20.28	20.22	20.31	21	3
3	64QAM	8	7	20.22	20.16	20.23		
3	64QAM	15	0	20.19	20.13	20.24		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.81	22.88	22.92	24	0
1.4	QPSK	1	3	22.89	22.91	22.99		
1.4	QPSK	1	5	22.89	22.86	22.92		
1.4	QPSK	3	0	22.84	22.93	22.99		
1.4	QPSK	3	1	22.90	22.95	23.01		
1.4	QPSK	3	3	22.95	22.90	22.97		
1.4	QPSK	6	0	21.94	21.92	21.98	23	1
1.4	16QAM	1	0	22.24	22.23	22.30	23	1
1.4	16QAM	1	3	22.29	22.30	22.31		
1.4	16QAM	1	5	22.31	22.25	22.28		
1.4	16QAM	3	0	22.00	22.02	22.08		
1.4	16QAM	3	1	22.02	22.06	22.10		
1.4	16QAM	3	3	22.05	21.99	22.06		
1.4	16QAM	6	0	21.14	21.10	21.15	22	2
1.4	64QAM	1	0	21.20	21.17	21.34	22	2
1.4	64QAM	1	3	21.29	21.25	21.36		
1.4	64QAM	1	5	21.24	21.16	21.24		
1.4	64QAM	3	0	21.10	21.10	21.23		
1.4	64QAM	3	1	21.14	21.18	21.24		
1.4	64QAM	3	3	21.19	21.15	21.18		
1.4	64QAM	6	0	20.12	20.10	20.14	21	3

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.99	23.09	22.99	24	0
20	QPSK	1	49	23.08	23.15	23.02		
20	QPSK	1	99	23.20	23.11	22.90		
20	QPSK	50	0	22.18	22.16	22.08	23	1
20	QPSK	50	24	22.21	22.22	22.06		
20	QPSK	50	50	22.28	22.20	22.00		
20	QPSK	100	0	22.20	22.21	21.98	23	1
20	16QAM	1	0	22.24	22.48	22.18		
20	16QAM	1	49	22.43	22.50	22.16		
20	16QAM	1	99	22.52	22.43	22.03	22	2
20	16QAM	50	0	21.27	21.31	21.04		
20	16QAM	50	24	21.30	21.30	21.08		
20	16QAM	50	50	21.38	21.31	21.09	22	2
20	16QAM	100	0	21.28	21.34	21.06		
20	64QAM	1	0	21.21	21.41	21.22		
20	64QAM	1	49	21.42	21.43	21.18	22	2
20	64QAM	1	99	21.52	21.43	21.04		
20	64QAM	50	0	20.34	20.38	20.12		
20	64QAM	50	24	20.39	20.29	20.16	21	3
20	64QAM	50	50	20.46	20.28	20.14		
20	64QAM	100	0	20.37	20.29	20.13		



FCC SAR Test Report

Report No. : FA982703

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.02	23.11	22.91	24	0
15	QPSK	1	37	23.14	23.10	22.87		
15	QPSK	1	74	23.16	22.98	22.83		
15	QPSK	36	0	22.20	22.17	21.96	23	1
15	QPSK	36	20	22.20	22.22	21.99		
15	QPSK	36	39	22.17	22.19	21.96		
15	QPSK	75	0	22.20	22.20	21.98	23	1
15	16QAM	1	0	22.23	22.39	22.19		
15	16QAM	1	37	22.40	22.40	22.12		
15	16QAM	1	74	22.48	22.62	22.13	22	2
15	16QAM	36	0	21.25	21.23	21.06		
15	16QAM	36	20	21.31	21.22	21.10		
15	16QAM	36	39	21.31	21.22	21.04	22	2
15	16QAM	75	0	21.30	21.22	21.03		
15	64QAM	1	0	21.24	21.36	21.19		
15	64QAM	1	37	21.44	21.40	21.13	22	2
15	64QAM	1	74	21.46	21.57	21.15		
15	64QAM	36	0	20.35	20.28	20.13		
15	64QAM	36	20	20.38	20.32	20.16	21	3
15	64QAM	36	39	20.36	20.30	20.11		
15	64QAM	75	0	20.37	20.30	20.12		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.01	23.08	22.96	24	0
10	QPSK	1	25	23.02	23.09	22.88		
10	QPSK	1	49	23.14	22.93	22.92		
10	QPSK	25	0	22.09	22.18	21.92	23	1
10	QPSK	25	12	22.19	22.18	21.95		
10	QPSK	25	25	22.21	22.16	21.86		
10	QPSK	50	0	22.20	22.18	21.92	23	1
10	16QAM	1	0	22.24	22.43	22.08		
10	16QAM	1	25	22.32	22.43	22.00		
10	16QAM	1	49	22.44	22.44	22.06	22	2
10	16QAM	25	0	21.17	21.16	21.02		
10	16QAM	25	12	21.26	21.24	21.00		
10	16QAM	25	25	21.27	21.29	20.92	22	2
10	16QAM	50	0	21.28	21.19	21.01		
10	64QAM	1	0	21.26	21.34	21.12		
10	64QAM	1	25	21.28	21.36	20.99	22	2
10	64QAM	1	49	21.41	21.43	20.95		
10	64QAM	25	0	20.26	20.23	20.08		
10	64QAM	25	12	20.36	20.26	20.07	21	3
10	64QAM	25	25	20.34	20.27	19.99		
10	64QAM	50	0	20.37	20.24	20.08		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.02	23.08	22.73	24	0
5	QPSK	1	12	23.02	23.10	22.75		
5	QPSK	1	24	23.02	23.11	22.78		
5	QPSK	12	0	22.08	22.13	21.76	23	1
5	QPSK	12	7	22.11	22.19	21.84		
5	QPSK	12	13	22.11	22.17	21.78		
5	QPSK	25	0	22.10	22.07	21.83	23	1
5	16QAM	1	0	22.25	22.39	21.98		
5	16QAM	1	12	22.26	22.34	21.94		
5	16QAM	1	24	22.26	22.36	21.92	22	2
5	16QAM	12	0	21.16	21.19	20.85		
5	16QAM	12	7	21.21	21.22	20.86		
5	16QAM	12	13	21.17	21.18	20.90	22	2
5	16QAM	25	0	21.15	21.16	20.85		
5	64QAM	1	0	21.24	21.33	20.97		
5	64QAM	1	12	21.27	21.30	20.93	22	2
5	64QAM	1	24	21.29	21.36	20.93		
5	64QAM	12	0	20.20	20.24	19.92		
5	64QAM	12	7	20.25	20.28	19.94	21	3
5	64QAM	12	13	20.27	20.24	19.96		
5	64QAM	25	0	20.16	20.23	19.96		

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.93	23.07	23.04	24	0
15	QPSK	1	37	22.97	23.06	23.00		
15	QPSK	1	74	22.95	23.02	23.02		
15	QPSK	36	0	22.05	22.15	22.01	23	1
15	QPSK	36	20	22.14	22.13	22.12		
15	QPSK	36	39	22.02	22.05	22.00		
15	QPSK	75	0	22.11	22.09	22.07	23	1
15	16QAM	1	0	22.33	22.41	22.36		
15	16QAM	1	37	22.38	22.42	22.38		
15	16QAM	1	74	22.40	22.36	22.38	22	2
15	16QAM	36	0	21.16	21.25	21.10		
15	16QAM	36	20	21.25	21.23	21.21		
15	16QAM	36	39	21.15	21.14	21.10	22	2
15	16QAM	75	0	21.20	21.23	21.16		
15	64QAM	1	0	21.30	21.40	21.37		
15	64QAM	1	37	21.33	21.37	21.37	21	3
15	64QAM	1	74	21.30	21.38	21.32		
15	64QAM	36	0	20.24	20.32	20.17		
15	64QAM	36	20	20.34	20.33	20.28	21	3
15	64QAM	36	39	20.23	20.19	20.15		
15	64QAM	75	0	20.28	20.27	20.25		



Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.88	22.96	23.02	24	0
10	QPSK	1	25	22.95	23.01	23.05		
10	QPSK	1	49	22.94	23.02	22.96		
10	QPSK	25	0	22.00	22.08	22.02	23	1
10	QPSK	25	12	21.98	22.08	22.01		
10	QPSK	25	25	22.02	22.01	22.06		
10	QPSK	50	0	21.97	22.03	22.01	23	1
10	16QAM	1	0	22.31	22.39	22.36		
10	16QAM	1	25	22.36	22.36	22.38		
10	16QAM	1	49	22.39	22.39	22.31	22	2
10	16QAM	25	0	21.11	21.21	21.11		
10	16QAM	25	12	21.13	21.18	21.11		
10	16QAM	25	25	21.16	21.11	21.14	22	2
10	16QAM	50	0	21.09	21.15	21.12		
10	64QAM	1	0	21.24	21.31	21.32		
10	64QAM	1	25	21.30	21.37	21.35	22	2
10	64QAM	1	49	21.32	21.33	21.31		
10	64QAM	25	0	20.20	20.26	20.19		
10	64QAM	25	12	20.18	20.26	20.18	21	3
10	64QAM	25	25	20.26	20.17	20.22		
10	64QAM	50	0	20.18	20.23	20.17		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.89	23.03	23.04	24	0
5	QPSK	1	12	22.87	22.99	22.99		
5	QPSK	1	24	22.91	22.99	22.99		
5	QPSK	12	0	21.90	22.04	22.06	23	1
5	QPSK	12	7	22.05	22.06	22.05		
5	QPSK	12	13	22.01	22.05	22.04		
5	QPSK	25	0	22.00	22.02	22.06	23	1
5	16QAM	1	0	22.28	22.43	22.37		
5	16QAM	1	12	22.25	22.37	22.36		
5	16QAM	1	24	22.30	22.30	22.28	22	2
5	16QAM	12	0	21.04	21.19	21.17		
5	16QAM	12	7	21.17	21.19	21.20		
5	16QAM	12	13	21.14	21.14	21.14	22	2
5	16QAM	25	0	21.10	21.15	21.17		
5	64QAM	1	0	21.27	21.40	21.34		
5	64QAM	1	12	21.22	21.35	21.36	22	2
5	64QAM	1	24	21.31	21.31	21.30		
5	64QAM	12	0	20.12	20.24	20.24		
5	64QAM	12	7	20.20	20.24	20.26	21	3
5	64QAM	12	13	20.18	20.21	20.20		
5	64QAM	25	0	20.20	20.21	20.25		



FCC SAR Test Report

Report No. : FA982703

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.87	23.01	23.02	24	0
3	QPSK	1	8	22.88	22.97	22.99		
3	QPSK	1	14	22.85	22.97	22.99		
3	QPSK	8	0	21.89	22.01	22.05	23	1
3	QPSK	8	4	21.94	22.03	22.07		
3	QPSK	8	7	21.88	22.02	22.02		
3	QPSK	15	0	21.89	22.01	22.06	23	1
3	16QAM	1	0	22.25	22.43	22.36		
3	16QAM	1	8	22.23	22.34	22.33		
3	16QAM	1	14	22.25	22.33	22.30	22	2
3	16QAM	8	0	21.08	21.21	21.17		
3	16QAM	8	4	21.12	21.23	21.26		
3	16QAM	8	7	21.06	21.19	21.20	22	2
3	16QAM	15	0	21.03	21.16	21.17		
3	64QAM	1	0	21.22	21.38	21.33		
3	64QAM	1	8	21.24	21.34	21.32	22	2
3	64QAM	1	14	21.20	21.31	21.32		
3	64QAM	8	0	20.10	20.23	20.22		
3	64QAM	8	4	20.13	20.25	20.28	21	3
3	64QAM	8	7	20.13	20.25	20.24		
3	64QAM	15	0	20.07	20.23	20.21		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.84	22.94	22.95	24	0
1.4	QPSK	1	3	22.89	23.00	23.01		
1.4	QPSK	1	5	22.82	22.93	22.93		
1.4	QPSK	3	0	22.88	23.01	22.99		
1.4	QPSK	3	1	22.93	23.01	22.99		
1.4	QPSK	3	3	22.89	22.99	22.96		
1.4	QPSK	6	0	21.87	21.96	21.98	23	1
1.4	16QAM	1	0	22.22	22.29	22.28	23	1
1.4	16QAM	1	3	22.28	22.35	22.37		
1.4	16QAM	1	5	22.21	22.30	22.28		
1.4	16QAM	3	0	22.04	22.08	22.09		
1.4	16QAM	3	1	22.07	22.11	22.14		
1.4	16QAM	3	3	22.00	22.07	22.06		
1.4	16QAM	6	0	21.03	21.17	21.17	22	2
1.4	64QAM	1	0	21.19	21.25	21.29	22	2
1.4	64QAM	1	3	21.32	21.32	21.35		
1.4	64QAM	1	5	21.20	21.23	21.25		
1.4	64QAM	3	0	21.15	21.23	21.22		
1.4	64QAM	3	1	21.14	21.23	21.22		
1.4	64QAM	3	3	21.14	21.19	21.21		
1.4	64QAM	6	0	20.06	20.15	20.15	21	3



<WWAN Top Antenna--Reduced Power Level 1 for Head>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.65	21.70	21.42	22.1	0
20	QPSK	1	49	21.63	21.65	21.45		
20	QPSK	1	99	21.65	21.56	21.45		
20	QPSK	50	0	21.48	21.42	21.34	22.1	0
20	QPSK	50	24	21.48	21.49	21.33		
20	QPSK	50	50	21.39	21.37	21.37		
20	QPSK	100	0	21.33	21.38	21.31	22.1	0
20	16QAM	1	0	21.50	21.68	21.64		
20	16QAM	1	49	21.60	21.59	21.64		
20	16QAM	1	99	21.55	21.63	21.49	21.1	1
20	16QAM	50	0	20.57	20.49	20.40		
20	16QAM	50	24	20.54	20.51	20.40		
20	16QAM	50	50	20.48	20.42	20.46	21.1	1
20	16QAM	100	0	20.52	20.42	20.38		
20	64QAM	1	0	20.88	20.83	20.77		
20	64QAM	1	49	20.80	20.70	20.71	21.1	1
20	64QAM	1	99	20.67	20.75	20.62		
20	64QAM	50	0	19.76	19.68	19.57		
20	64QAM	50	24	19.74	19.69	19.60	20.1	2
20	64QAM	50	50	19.66	19.62	19.65		
20	64QAM	100	0	19.72	19.64	19.55		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.31	21.47	21.28	22.1	0
15	QPSK	1	37	21.29	21.36	21.35		
15	QPSK	1	74	21.29	21.26	21.26		
15	QPSK	36	0	21.38	21.40	21.32	22.1	0
15	QPSK	36	20	21.38	21.41	21.42		
15	QPSK	36	39	21.32	21.34	21.34		
15	QPSK	75	0	21.32	21.39	21.28	22.1	0
15	16QAM	1	0	21.59	21.56	21.53		
15	16QAM	1	37	21.59	21.62	21.62		
15	16QAM	1	74	21.60	21.50	21.51	21.1	1
15	16QAM	36	0	20.41	20.46	20.34		
15	16QAM	36	20	20.44	20.49	20.45		
15	16QAM	36	39	20.38	20.39	20.40	21.1	1
15	16QAM	75	0	20.39	20.45	20.38		
15	64QAM	1	0	20.72	20.89	20.64		
15	64QAM	1	37	20.67	20.71	20.73	21.1	1
15	64QAM	1	74	20.67	20.62	20.61		
15	64QAM	36	0	19.61	19.67	19.54		
15	64QAM	36	20	19.63	19.69	19.65	20.1	2
15	64QAM	36	39	19.53	19.60	19.59		
15	64QAM	75	0	19.59	19.64	19.57		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.46	21.58	21.40	22.1	0
10	QPSK	1	25	21.31	21.36	21.35		
10	QPSK	1	49	21.30	21.37	21.30		
10	QPSK	25	0	21.41	21.45	21.42	22.1	0
10	QPSK	25	12	21.39	21.44	21.41		
10	QPSK	25	25	21.35	21.38	21.38		
10	QPSK	50	0	21.37	21.42	21.39	22.1	0
10	16QAM	1	0	21.69	21.45	21.65		
10	16QAM	1	25	21.60	21.60	21.62		
10	16QAM	1	49	21.63	21.60	21.54	21.1	1
10	16QAM	25	0	20.44	20.47	20.49		
10	16QAM	25	12	20.46	20.48	20.50		
10	16QAM	25	25	20.39	20.43	20.43	21.1	1
10	16QAM	50	0	20.42	20.48	20.45		
10	64QAM	1	0	20.81	20.70	20.78		
10	64QAM	1	25	20.69	20.72	20.77	21.1	1
10	64QAM	1	49	20.72	20.71	20.65		
10	64QAM	25	0	19.67	19.70	19.68		
10	64QAM	25	12	19.65	19.69	19.69	20.1	2
10	64QAM	25	25	19.60	19.64	19.64		
10	64QAM	50	0	19.61	19.65	19.64		



FCC SAR Test Report

Report No. : FA982703

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.46	21.47	21.33	22.1	0
5	QPSK	1	12	21.45	21.38	21.36		
5	QPSK	1	24	21.38	21.32	21.29		
5	QPSK	12	0	21.48	21.41	21.36	22.1	0
5	QPSK	12	7	21.49	21.41	21.43		
5	QPSK	12	13	21.47	21.36	21.37		
5	QPSK	25	0	21.49	21.39	21.36	22.1	0
5	16QAM	1	0	21.65	21.56	21.61		
5	16QAM	1	12	21.67	21.63	21.64		
5	16QAM	1	24	21.64	21.55	21.52	21.1	1
5	16QAM	12	0	20.54	20.48	20.45		
5	16QAM	12	7	20.52	20.48	20.48		
5	16QAM	12	13	20.51	20.44	20.42	21.1	1
5	16QAM	25	0	20.52	20.43	20.45		
5	64QAM	1	0	20.82	20.85	20.72		
5	64QAM	1	12	20.80	20.74	20.74	21.1	1
5	64QAM	1	24	20.76	20.69	20.61		
5	64QAM	12	0	19.70	19.66	19.65		
5	64QAM	12	7	19.72	19.68	19.67	20.1	2
5	64QAM	12	13	19.66	19.63	19.61		
5	64QAM	25	0	19.73	19.65	19.62		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.44	21.35	21.33	22.1	0
3	QPSK	1	8	21.42	21.36	21.31		
3	QPSK	1	14	21.37	21.34	21.31		
3	QPSK	8	0	21.46	21.41	21.39	22.1	0
3	QPSK	8	4	21.50	21.40	21.39		
3	QPSK	8	7	21.44	21.38	21.37		
3	QPSK	15	0	21.46	21.38	21.37	22.1	0
3	16QAM	1	0	21.66	21.59	21.56		
3	16QAM	1	8	21.69	21.60	21.59		
3	16QAM	1	14	21.63	21.58	21.51	21.1	1
3	16QAM	8	0	20.53	20.49	20.45		
3	16QAM	8	4	20.54	20.48	20.47		
3	16QAM	8	7	20.52	20.47	20.45	21.1	1
3	16QAM	15	0	20.56	20.46	20.49		
3	64QAM	1	0	20.81	20.72	20.70		
3	64QAM	1	8	20.79	20.75	20.71	21.1	1
3	64QAM	1	14	20.78	20.70	20.67		
3	64QAM	8	0	19.67	19.63	19.61		
3	64QAM	8	4	19.74	19.65	19.63	20.1	2
3	64QAM	8	7	19.69	19.63	19.62		
3	64QAM	15	0	19.72	19.64	19.65		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.37	21.33	21.31	22.1	0
1.4	QPSK	1	3	21.40	21.44	21.55		
1.4	QPSK	1	5	21.35	21.37	21.45		
1.4	QPSK	3	0	21.44	21.41	21.37		
1.4	QPSK	3	1	21.52	21.53	21.60		
1.4	QPSK	3	3	21.50	21.49	21.47		
1.4	QPSK	6	0	21.45	21.44	21.40	22.1	0
1.4	16QAM	1	0	21.40	21.60	21.49	22.1	0
1.4	16QAM	1	3	21.55	21.40	21.44		
1.4	16QAM	1	5	21.53	21.57	21.59		
1.4	16QAM	3	0	21.50	21.44	21.47		
1.4	16QAM	3	1	21.49	21.43	21.45		
1.4	16QAM	3	3	21.55	21.50	21.53		
1.4	16QAM	6	0	20.57	20.50	20.53	21.1	1
1.4	64QAM	1	0	20.78	20.89	20.75	21.1	1
1.4	64QAM	1	3	20.75	20.83	20.73		
1.4	64QAM	1	5	20.76	20.82	20.75		
1.4	64QAM	3	0	20.64	20.62	20.63		
1.4	64QAM	3	1	20.77	20.79	20.71		
1.4	64QAM	3	3	20.63	20.64	20.60		
1.4	64QAM	6	0	19.75	19.76	19.65	20.1	2

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.76	21.79	21.83	22.9	0
10	QPSK	1	25	21.84	21.85	21.95		
10	QPSK	1	49	21.85	21.75	21.76		
10	QPSK	25	0	21.40	21.41	21.34	22.4	0.5
10	QPSK	25	12	21.38	21.41	21.30		
10	QPSK	25	25	21.43	21.35	21.37		
10	QPSK	50	0	21.47	21.39	21.31	22.4	0.5
10	16QAM	1	0	21.72	21.72	21.68		
10	16QAM	1	25	21.77	21.74	21.72		
10	16QAM	1	49	21.70	21.63	21.65	21.4	1.5
10	16QAM	25	0	20.53	20.54	20.46		
10	16QAM	25	12	20.49	20.52	20.41		
10	16QAM	25	25	20.55	20.45	20.43	21.4	1.5
10	16QAM	50	0	20.59	20.51	20.40		
10	64QAM	1	0	20.02	20.03	19.99		
10	64QAM	1	25	20.03	20.06	20.05	20.4	2.5
10	64QAM	1	49	20.03	19.95	19.94		
10	64QAM	25	0	18.95	18.95	18.86		
10	64QAM	25	12	18.92	18.91	18.83	20.4	2.5
10	64QAM	25	25	18.95	18.85	18.86		
10	64QAM	50	0	19.00	18.89	18.80		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.75	21.84	21.81	22.9	0
5	QPSK	1	12	21.85	21.82	21.92		
5	QPSK	1	24	21.79	21.80	21.76		
5	QPSK	12	0	21.42	21.38	21.35	22.4	0.5
5	QPSK	12	7	21.43	21.41	21.37		
5	QPSK	12	13	21.38	21.37	21.35		
5	QPSK	25	0	21.39	21.36	21.37	22.4	0.5
5	16QAM	1	0	21.73	21.70	21.67		
5	16QAM	1	12	21.78	21.72	21.79		
5	16QAM	1	24	21.72	21.67	21.61	21.4	1.5
5	16QAM	12	0	20.56	20.52	20.50		
5	16QAM	12	7	20.59	20.53	20.51		
5	16QAM	12	13	20.54	20.50	20.46	21.4	1.5
5	16QAM	25	0	20.52	20.48	20.45		
5	64QAM	1	0	20.01	20.06	19.98		
5	64QAM	1	12	20.08	20.04	20.11	21.4	1.5
5	64QAM	1	24	20.05	19.94	19.95		
5	64QAM	12	0	18.94	18.92	18.89		
5	64QAM	12	7	18.99	18.94	18.90	20.4	2.5
5	64QAM	12	13	18.95	18.88	18.89		
5	64QAM	25	0	18.93	18.91	18.84		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.76	21.84	21.91	22.9	0
3	QPSK	1	8	21.85	21.84	21.79		
3	QPSK	1	14	21.84	21.80	21.74		
3	QPSK	8	0	21.40	21.36	21.34	22.4	0.5
3	QPSK	8	4	21.40	21.38	21.35		
3	QPSK	8	7	21.40	21.34	21.31		
3	QPSK	15	0	21.37	21.37	21.35	22.4	0.5
3	16QAM	1	0	21.66	21.72	21.75		
3	16QAM	1	8	21.74	21.69	21.64		
3	16QAM	1	14	21.75	21.67	21.64	21.4	1.5
3	16QAM	8	0	20.61	20.55	20.50		
3	16QAM	8	4	20.59	20.55	20.51		
3	16QAM	8	7	20.60	20.52	20.48	21.4	1.5
3	16QAM	15	0	20.51	20.49	20.49		
3	64QAM	1	0	19.99	20.04	20.06		
3	64QAM	1	8	20.09	20.02	19.95	21.4	1.5
3	64QAM	1	14	20.04	19.98	19.98		
3	64QAM	8	0	18.96	18.90	18.87		
3	64QAM	8	4	18.97	18.94	18.90	20.4	2.5
3	64QAM	8	7	18.96	18.91	18.86		
3	64QAM	15	0	18.91	18.85	18.87		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.66	21.75	21.71	22.9	0
1.4	QPSK	1	3	21.75	21.81	21.78		
1.4	QPSK	1	5	21.77	21.73	21.69		
1.4	QPSK	3	0	21.72	21.81	21.76		
1.4	QPSK	3	1	21.75	21.83	21.78		
1.4	QPSK	3	3	21.83	21.77	21.74		
1.4	QPSK	6	0	21.32	21.30	21.26	22.4	0.5
1.4	16QAM	1	0	21.56	21.63	21.62	22.4	0.5
1.4	16QAM	1	3	21.69	21.72	21.70		
1.4	16QAM	1	5	21.75	21.62	21.57		
1.4	16QAM	3	0	21.39	21.41	21.36		
1.4	16QAM	3	1	21.43	21.46	21.40		
1.4	16QAM	3	3	21.48	21.40	21.35		
1.4	16QAM	6	0	20.50	20.48	20.46	21.4	1.5
1.4	64QAM	1	0	19.95	19.95	19.88	21.4	1.5
1.4	64QAM	1	3	20.03	19.98	19.98		
1.4	64QAM	1	5	19.98	19.91	19.88		
1.4	64QAM	3	0	19.85	19.88	19.80		
1.4	64QAM	3	1	19.83	19.90	19.82		
1.4	64QAM	3	3	19.90	19.82	19.77		
1.4	64QAM	6	0	18.86	18.83	18.77	20.4	2.5

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	16.94	17.11	17.08	17.5	0
20	QPSK	1	49	17.00	17.19	17.16		
20	QPSK	1	99	17.30	17.12	17.22		
20	QPSK	50	0	16.60	16.73	16.71	17.5	0
20	QPSK	50	24	16.62	16.79	16.78		
20	QPSK	50	50	16.80	16.78	16.78		
20	QPSK	100	0	16.81	16.80	16.79	17.5	0
20	16QAM	1	0	16.95	17.14	17.03		
20	16QAM	1	49	17.18	17.00	17.10		
20	16QAM	1	99	17.19	17.20	17.17	17.5	0
20	16QAM	50	0	16.69	17.10	16.93		
20	16QAM	50	24	16.83	16.94	17.01		
20	16QAM	50	50	16.81	16.90	16.90	17.5	0
20	16QAM	100	0	16.72	16.92	16.99		
20	64QAM	1	0	16.84	17.10	16.94		
20	64QAM	1	49	17.22	17.02	16.94	17.5	0
20	64QAM	1	99	16.85	17.09	16.94		
20	64QAM	50	0	16.65	16.84	16.91		
20	64QAM	50	24	16.80	16.86	16.84	17.5	0
20	64QAM	50	50	16.71	16.95	16.93		
20	64QAM	100	0	16.73	17.03	17.05		



FCC SAR Test Report

Report No. : FA982703

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.00	17.19	17.22	17.5	0
15	QPSK	1	37	16.91	17.14	17.02		
15	QPSK	1	74	17.05	17.16	17.14		
15	QPSK	36	0	16.58	16.81	16.85	17.5	0
15	QPSK	36	20	16.67	16.85	16.80		
15	QPSK	36	39	16.67	16.74	16.82		
15	QPSK	75	0	16.64	16.82	16.82	17.5	0
15	16QAM	1	0	17.06	16.90	17.10		
15	16QAM	1	37	17.19	17.02	17.06		
15	16QAM	1	74	17.03	16.87	16.99	17.5	0
15	16QAM	36	0	16.67	16.99	16.95		
15	16QAM	36	20	16.78	16.92	17.01		
15	16QAM	36	39	16.67	16.91	16.94	17.5	0
15	16QAM	75	0	16.79	16.89	16.90		
15	64QAM	1	0	16.93	17.15	17.13		
15	64QAM	1	37	17.24	16.96	17.15	17.5	0
15	64QAM	1	74	16.92	17.17	17.00		
15	64QAM	36	0	16.78	17.01	16.92		
15	64QAM	36	20	16.77	16.90	16.97	17.5	0
15	64QAM	36	39	16.82	16.90	16.95		
15	64QAM	75	0	16.76	16.96	16.93		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.00	17.08	17.26	17.5	0
10	QPSK	1	25	17.10	17.10	17.21		
10	QPSK	1	49	17.15	17.07	17.12		
10	QPSK	25	0	16.70	16.70	16.79	17.5	0
10	QPSK	25	12	16.78	16.74	16.88		
10	QPSK	25	25	16.78	16.75	16.82		
10	QPSK	50	0	16.76	16.78	16.89	17.5	0
10	16QAM	1	0	16.85	17.12	16.99		
10	16QAM	1	25	17.01	17.06	17.19		
10	16QAM	1	49	16.77	16.84	17.13	17.5	0
10	16QAM	25	0	16.79	16.91	17.02		
10	16QAM	25	12	16.79	16.93	16.96		
10	16QAM	25	25	16.79	16.98	17.00	17.5	0
10	16QAM	50	0	16.87	16.83	16.96		
10	64QAM	1	0	16.86	17.08	16.86		
10	64QAM	1	25	16.74	16.96	17.05	17.5	0
10	64QAM	1	49	17.09	16.84	17.04		
10	64QAM	25	0	16.82	16.89	16.97		
10	64QAM	25	12	16.77	16.89	17.03	17.5	0
10	64QAM	25	25	16.77	16.89	17.02		
10	64QAM	50	0	16.84	16.80	16.95		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.12	17.23	17.14	17.5	0
5	QPSK	1	12	17.26	17.23	17.04		
5	QPSK	1	24	17.22	17.19	17.20		
5	QPSK	12	0	16.84	16.86	16.81	17.5	0
5	QPSK	12	7	16.82	16.92	16.88		
5	QPSK	12	13	16.82	16.84	16.87		
5	QPSK	25	0	16.75	16.84	16.83	17.5	0
5	16QAM	1	0	16.84	17.25	16.88		
5	16QAM	1	12	17.15	17.00	17.24		
5	16QAM	1	24	17.16	17.04	16.89	17.5	0
5	16QAM	12	0	16.95	16.95	16.97		
5	16QAM	12	7	16.91	16.99	16.94		
5	16QAM	12	13	16.84	16.96	17.01	17.5	0
5	16QAM	25	0	17.01	16.89	16.97		
5	64QAM	1	0	16.93	17.05	16.98		
5	64QAM	1	12	17.09	16.94	17.14	17.5	0
5	64QAM	1	24	16.88	17.07	17.02		
5	64QAM	12	0	17.05	16.96	16.97		
5	64QAM	12	7	17.00	17.05	16.97	17.5	0
5	64QAM	12	13	16.88	17.09	16.95		
5	64QAM	25	0	16.91	16.95	16.92		

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.40	22.48	22.45		
15	QPSK	1	37	22.32	22.40	22.39	22.9	0
15	QPSK	1	74	22.32	22.37	22.47	22.4	0.5
15	QPSK	36	0	21.97	21.83	21.75		
15	QPSK	36	20	21.96	21.85	21.86		
15	QPSK	36	39	21.97	21.72	21.72		
15	QPSK	75	0	22.01	21.70	21.77	22.4	0.5
15	16QAM	1	0	22.10	22.10	22.13		
15	16QAM	1	37	22.12	22.04	22.10		
15	16QAM	1	74	22.02	22.01	22.00	21.4	1.5
15	16QAM	36	0	21.04	20.93	20.83		
15	16QAM	36	20	21.15	20.95	20.97		
15	16QAM	36	39	20.93	20.83	20.86		
15	16QAM	75	0	20.98	20.91	20.92	21.4	1.5
15	64QAM	1	0	21.14	20.87	20.98		
15	64QAM	1	37	21.10	20.89	20.83		
15	64QAM	1	74	21.12	21.04	20.89	20.4	2.5
15	64QAM	36	0	20.06	20.06	19.89		
15	64QAM	36	20	20.14	19.88	19.97		
15	64QAM	36	39	20.03	19.80	19.89		
15	64QAM	75	0	20.03	19.81	19.91		



FCC SAR Test Report

Report No. : FA982703

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.08	22.16	22.19	22.9	0
10	QPSK	1	25	22.15	22.19	22.31		
10	QPSK	1	49	22.22	22.24	22.16		
10	QPSK	25	0	21.80	21.78	21.79	22.4	0.5
10	QPSK	25	12	21.74	21.77	21.72		
10	QPSK	25	25	21.78	21.73	21.75		
10	QPSK	50	0	21.77	21.74	21.75	22.4	0.5
10	16QAM	1	0	22.19	22.10	21.93		
10	16QAM	1	25	22.17	22.14	22.27		
10	16QAM	1	49	22.20	22.13	21.92	21.4	1.5
10	16QAM	25	0	20.76	21.08	20.76		
10	16QAM	25	12	20.83	20.96	20.81		
10	16QAM	25	25	20.91	20.84	20.94	21.4	1.5
10	16QAM	50	0	20.88	20.81	20.92		
10	64QAM	1	0	20.93	21.00	21.11		
10	64QAM	1	25	20.93	21.33	20.83	21.4	1.5
10	64QAM	1	49	20.98	21.07	21.20		
10	64QAM	25	0	19.81	19.94	19.82		
10	64QAM	25	12	19.86	19.87	19.89	20.4	2.5
10	64QAM	25	25	19.91	19.83	19.86		
10	64QAM	50	0	19.86	19.94	19.83		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.23	22.32	22.26	22.9	0
5	QPSK	1	12	22.15	22.19	22.18		
5	QPSK	1	24	22.32	22.23	22.12		
5	QPSK	12	0	21.75	21.71	21.83	22.4	0.5
5	QPSK	12	7	21.93	21.80	21.81		
5	QPSK	12	13	21.82	21.73	21.78		
5	QPSK	25	0	21.91	21.75	21.83	22.4	0.5
5	16QAM	1	0	21.90	22.15	22.20		
5	16QAM	1	12	22.21	21.94	22.25		
5	16QAM	1	24	22.08	22.24	22.16	21.4	1.5
5	16QAM	12	0	20.83	20.92	20.86		
5	16QAM	12	7	21.04	20.84	20.86		
5	16QAM	12	13	20.96	20.78	20.74	21.4	1.5
5	16QAM	25	0	20.90	20.84	20.90		
5	64QAM	1	0	21.02	21.00	20.99		
5	64QAM	1	12	20.89	20.77	20.86	21.4	1.5
5	64QAM	1	24	21.05	20.91	20.96		
5	64QAM	12	0	19.83	19.82	19.92		
5	64QAM	12	7	19.99	19.88	19.87	20.4	2.5
5	64QAM	12	13	19.88	19.78	19.85		
5	64QAM	25	0	19.91	19.77	19.80		



Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.26	22.27	22.24	22.9	0
3	QPSK	1	8	22.22	22.14	22.12		
3	QPSK	1	14	22.15	22.19	22.22		
3	QPSK	8	0	21.77	21.80	21.74	22.4	0.5
3	QPSK	8	4	21.70	21.76	21.80		
3	QPSK	8	7	21.70	21.80	21.74		
3	QPSK	15	0	21.77	21.72	21.72	22.4	0.5
3	16QAM	1	0	21.78	22.06	22.06		
3	16QAM	1	8	22.04	21.83	22.07		
3	16QAM	1	14	22.03	21.69	21.92	21.4	1.5
3	16QAM	8	0	21.02	20.94	20.95		
3	16QAM	8	4	21.00	20.89	20.93		
3	16QAM	8	7	20.90	20.82	20.96	21.4	1.5
3	16QAM	15	0	20.86	20.88	20.86		
3	64QAM	1	0	20.88	20.94	20.73		
3	64QAM	1	8	20.80	21.01	20.93	21.4	1.5
3	64QAM	1	14	21.00	20.93	20.90		
3	64QAM	8	0	20.03	19.90	19.84		
3	64QAM	8	4	19.84	20.12	19.97	20.4	2.5
3	64QAM	8	7	19.79	19.83	19.89		
3	64QAM	15	0	19.87	19.80	19.95		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.23	22.25	22.21	22.9	0
1.4	QPSK	1	3	22.21	22.08	22.12		
1.4	QPSK	1	5	22.13	22.23	22.21		
1.4	QPSK	3	0	21.77	21.89	21.88		
1.4	QPSK	3	1	21.73	21.82	21.66		
1.4	QPSK	3	3	21.74	21.81	21.78	22.4	0.5
1.4	QPSK	6	0	21.77	21.73	21.66		
1.4	16QAM	1	0	21.79	22.02	22.03	22.4	0.5
1.4	16QAM	1	3	22.08	21.88	21.79		
1.4	16QAM	1	5	22.01	21.73	21.99		
1.4	16QAM	3	0	22.01	21.99	21.93		
1.4	16QAM	3	1	21.90	21.87	21.92		
1.4	16QAM	3	3	21.96	21.86	21.99	21.4	1.5
1.4	16QAM	6	0	20.98	20.93	20.91		
1.4	64QAM	1	0	20.86	20.83	20.77	21.4	1.5
1.4	64QAM	1	3	20.88	20.83	20.94		
1.4	64QAM	1	5	21.03	20.98	20.89		
1.4	64QAM	3	0	20.98	21.01	20.77		
1.4	64QAM	3	1	20.90	21.08	20.95		
1.4	64QAM	3	3	20.81	20.83	20.89	20.4	2.5
1.4	64QAM	6	0	19.78	19.77	19.93		



<WWAN Top Antenna--Reduced Power Level 2 for Head>

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.15	21.30	21.19	21.4	0
10	QPSK	1	25	21.10	21.20	21.13		
10	QPSK	1	49	21.05	21.19	21.08		
10	QPSK	25	0	20.84	21.08	21.21	21.4	0
10	QPSK	25	12	20.93	21.20	21.12		
10	QPSK	25	25	20.95	21.19	21.03		
10	QPSK	50	0	20.86	21.18	21.11	21.4	0
10	16QAM	1	0	20.87	20.82	20.88		
10	16QAM	1	25	20.80	20.89	20.82		
10	16QAM	1	49	20.77	20.98	20.88	21.4	0
10	16QAM	25	0	20.56	20.85	20.87		
10	16QAM	25	12	20.67	20.97	20.80		
10	16QAM	25	25	20.61	20.85	20.87	21.4	0
10	16QAM	50	0	20.61	20.81	20.77		
10	64QAM	1	0	20.62	20.81	20.95		
10	64QAM	1	25	20.69	20.97	20.90	21.4	0
10	64QAM	1	49	20.84	20.97	20.94		
10	64QAM	25	0	19.52	19.86	19.78		
10	64QAM	25	12	19.73	19.96	19.72	20.4	1
10	64QAM	25	25	19.66	19.84	19.83		
10	64QAM	50	0	19.74	19.98	19.81		



FCC SAR Test Report

Report No. : FA982703

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.84	21.00	21.09	21.4	0
5	QPSK	1	12	20.80	21.09	20.99		
5	QPSK	1	24	20.75	20.99	20.97		
5	QPSK	12	0	20.92	21.16	21.10	21.4	0
5	QPSK	12	7	20.85	21.26	21.05		
5	QPSK	12	13	20.93	21.19	21.06		
5	QPSK	25	0	20.82	21.21	20.99	21.4	0
5	16QAM	1	0	20.73	20.91	20.97		
5	16QAM	1	12	20.60	20.98	20.85		
5	16QAM	1	24	20.63	20.99	20.90	21.4	0
5	16QAM	12	0	20.59	20.95	20.78		
5	16QAM	12	7	20.67	20.93	20.82		
5	16QAM	12	13	20.58	20.88	20.77	21.4	0
5	16QAM	25	0	20.55	20.83	20.72		
5	64QAM	1	0	20.47	20.68	20.74		
5	64QAM	1	12	20.47	20.76	20.62	21.4	0
5	64QAM	1	24	20.40	20.66	20.67		
5	64QAM	12	0	19.53	19.88	19.70		
5	64QAM	12	7	19.64	19.85	19.75	20.4	1
5	64QAM	12	13	19.42	19.82	19.70		
5	64QAM	25	0	19.44	19.82	19.71		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.78	21.03	21.00	21.4	0
3	QPSK	1	8	20.72	21.14	21.06		
3	QPSK	1	14	20.74	21.11	20.98		
3	QPSK	8	0	20.86	21.19	21.06	21.4	0
3	QPSK	8	4	20.95	21.17	21.01		
3	QPSK	8	7	20.86	21.16	21.14		
3	QPSK	15	0	20.86	21.18	21.05	21.4	0
3	16QAM	1	0	21.00	21.27	21.20		
3	16QAM	1	8	21.02	21.00	21.00		
3	16QAM	1	14	21.01	21.25	21.16	21.4	0
3	16QAM	8	0	20.69	20.91	20.79		
3	16QAM	8	4	20.67	20.91	20.77		
3	16QAM	8	7	20.67	20.88	20.88	21.4	0
3	16QAM	15	0	20.67	20.94	20.80		
3	64QAM	1	0	20.65	20.78	20.80		
3	64QAM	1	8	20.68	20.92	20.96	21.4	0
3	64QAM	1	14	20.68	20.92	20.88		
3	64QAM	8	0	19.56	19.83	19.71		
3	64QAM	8	4	19.56	19.86	19.67	20.4	1
3	64QAM	8	7	19.47	19.73	19.79		
3	64QAM	15	0	19.54	19.81	19.78		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.66	21.09	20.98	21.4	0
1.4	QPSK	1	3	20.65	21.13	20.96		
1.4	QPSK	1	5	20.70	20.99	20.91		
1.4	QPSK	3	0	20.67	21.12	20.93		
1.4	QPSK	3	1	20.70	21.06	20.97		
1.4	QPSK	3	3	20.74	21.04	20.99		
1.4	QPSK	6	0	20.77	21.04	21.05	21.4	0
1.4	16QAM	1	0	20.46	20.80	20.79	21.4	0
1.4	16QAM	1	3	20.49	20.81	20.85		
1.4	16QAM	1	5	20.50	20.79	20.80		
1.4	16QAM	3	0	20.31	20.66	20.67		
1.4	16QAM	3	1	20.34	20.59	20.69		
1.4	16QAM	3	3	20.37	20.65	20.60		
1.4	16QAM	6	0	20.55	20.71	20.89	21.4	0
1.4	64QAM	1	0	20.56	20.90	20.89	21.4	0
1.4	64QAM	1	3	20.56	20.94	20.93		
1.4	64QAM	1	5	20.60	20.90	20.88		
1.4	64QAM	3	0	20.47	20.82	20.82		
1.4	64QAM	3	1	20.39	20.77	20.84		
1.4	64QAM	3	3	20.53	20.82	20.84		
1.4	64QAM	6	0	19.50	19.79	19.72	20.4	1

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	20.97	21.30	20.97	21.4	0
15	QPSK	1	37	20.99	21.04	21.00		
15	QPSK	1	74	21.06	21.02	21.00		
15	QPSK	36	0	21.15	21.21	20.97	21.4	0
15	QPSK	36	20	21.20	21.07	21.08		
15	QPSK	36	39	21.19	21.04	21.00		
15	QPSK	75	0	21.25	21.04	21.02		
15	16QAM	1	0	21.10	21.15	21.25	21.4	0
15	16QAM	1	37	21.25	21.10	20.95		
15	16QAM	1	74	21.20	21.22	21.26		
15	16QAM	36	0	20.90	20.87	20.78	21.4	0
15	16QAM	36	20	20.99	20.88	20.79		
15	16QAM	36	39	20.91	20.74	20.78		
15	16QAM	75	0	20.90	20.71	20.70		
15	64QAM	1	0	21.28	21.28	21.22	21.4	0
15	64QAM	1	37	21.27	21.27	21.24		
15	64QAM	1	74	21.28	21.15	21.20		
15	64QAM	36	0	20.04	20.04	19.95	20.4	1
15	64QAM	36	20	20.21	20.05	20.07		
15	64QAM	36	39	20.03	19.90	19.94		
15	64QAM	75	0	20.08	20.03	20.01		



FCC SAR Test Report

Report No. : FA982703

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	20.94	20.95	20.95	21.4	0
10	QPSK	1	25	20.93	20.90	20.97		
10	QPSK	1	49	20.95	21.01	20.90		
10	QPSK	25	0	20.93	21.11	21.01	21.4	0
10	QPSK	25	12	20.98	21.00	20.94		
10	QPSK	25	25	21.13	20.95	20.99		
10	QPSK	50	0	20.99	21.07	20.99	21.4	0
10	16QAM	1	0	20.88	20.91	20.98		
10	16QAM	1	25	20.85	20.93	20.90		
10	16QAM	1	49	20.92	21.00	20.89	21.4	0
10	16QAM	25	0	20.74	20.84	20.73		
10	16QAM	25	12	20.79	20.82	20.77		
10	16QAM	25	25	20.84	20.76	20.87	21.4	0
10	16QAM	50	0	20.68	20.75	20.79		
10	64QAM	1	0	20.74	20.76	20.76		
10	64QAM	1	25	20.70	20.68	20.68	21.4	0
10	64QAM	1	49	20.98	20.86	20.76		
10	64QAM	25	0	19.88	19.97	19.87		
10	64QAM	25	12	19.83	19.94	19.91	20.4	1
10	64QAM	25	25	19.98	19.99	19.90		
10	64QAM	50	0	19.91	19.98	19.80		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	20.87	20.92	21.02	21.4	0
5	QPSK	1	12	21.04	20.95	20.97		
5	QPSK	1	24	20.97	20.79	20.81		
5	QPSK	12	0	20.99	21.07	21.05	21.4	0
5	QPSK	12	7	21.12	21.11	21.11		
5	QPSK	12	13	21.12	21.01	21.01		
5	QPSK	25	0	21.03	21.06	21.08	21.4	0
5	16QAM	1	0	21.05	21.02	21.00		
5	16QAM	1	12	20.88	21.10	20.91		
5	16QAM	1	24	21.03	20.90	20.94	21.4	0
5	16QAM	12	0	20.69	20.78	20.75		
5	16QAM	12	7	20.82	20.81	20.72		
5	16QAM	12	13	20.82	20.71	20.67	21.4	0
5	16QAM	25	0	20.79	20.73	20.73		
5	64QAM	1	0	20.56	20.62	20.62		
5	64QAM	1	12	20.49	20.57	20.54	21.4	0
5	64QAM	1	24	20.66	20.54	20.58		
5	64QAM	12	0	20.04	20.13	20.11		
5	64QAM	12	7	20.18	20.08	20.08	20.4	1
5	64QAM	12	13	20.07	19.97	20.03		
5	64QAM	25	0	19.98	19.92	19.94		



FCC SAR Test Report

Report No. : FA982703

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.01	20.95	21.05	21.4	0
3	QPSK	1	8	21.05	21.02	20.85		
3	QPSK	1	14	21.01	20.95	20.90		
3	QPSK	8	0	21.11	21.08	21.11	21.4	0
3	QPSK	8	4	21.16	21.06	21.08		
3	QPSK	8	7	21.05	21.10	21.09		
3	QPSK	15	0	21.03	21.04	21.10	21.4	0
3	16QAM	1	0	20.95	21.11	21.01		
3	16QAM	1	8	21.04	21.02	20.99		
3	16QAM	1	14	20.97	21.02	21.03	21.4	0
3	16QAM	8	0	20.71	20.80	20.74		
3	16QAM	8	4	20.75	20.76	20.81		
3	16QAM	8	7	20.76	20.84	20.74	21.4	0
3	16QAM	15	0	20.84	20.85	20.74		
3	64QAM	1	0	20.73	20.66	20.66		
3	64QAM	1	8	20.66	20.74	20.61	21.4	0
3	64QAM	1	14	20.60	20.64	20.66		
3	64QAM	8	0	19.96	19.94	19.99		
3	64QAM	8	4	19.99	20.01	20.06	20.4	1
3	64QAM	8	7	20.00	19.95	19.98		
3	64QAM	15	0	20.05	20.07	20.05		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	20.94	20.90	20.88	21.4	0
1.4	QPSK	1	3	20.88	20.88	20.98		
1.4	QPSK	1	5	20.78	20.74	20.80		
1.4	QPSK	3	0	20.90	20.91	20.89		
1.4	QPSK	3	1	20.95	20.96	20.92		
1.4	QPSK	3	3	20.86	20.96	20.88		
1.4	QPSK	6	0	20.96	20.90	20.89	21.4	0
1.4	16QAM	1	0	20.56	20.62	20.52	21.4	0
1.4	16QAM	1	3	20.66	20.61	20.62		
1.4	16QAM	1	5	20.58	20.59	20.57		
1.4	16QAM	3	0	20.72	20.79	20.60		
1.4	16QAM	3	1	20.77	20.74	20.71		
1.4	16QAM	3	3	20.65	20.72	20.65		
1.4	16QAM	6	0	20.61	20.68	20.61	21.4	0
1.4	64QAM	1	0	20.77	20.87	20.86	21.4	0
1.4	64QAM	1	3	20.85	20.84	20.83		
1.4	64QAM	1	5	20.77	20.71	20.79		
1.4	64QAM	3	0	20.65	20.63	20.62		
1.4	64QAM	3	1	20.60	20.70	20.66		
1.4	64QAM	3	3	20.61	20.59	20.65		
1.4	64QAM	6	0	19.83	19.92	19.84	20.4	1



<WWAN Top Antenna --Reduced Power for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.65	21.70	21.42	22.1	0
20	QPSK	1	49	21.63	21.65	21.45		
20	QPSK	1	99	21.65	21.56	21.45		
20	QPSK	50	0	21.48	21.42	21.34	22.1	0
20	QPSK	50	24	21.48	21.49	21.33		
20	QPSK	50	50	21.39	21.37	21.37		
20	QPSK	100	0	21.33	21.38	21.31		
20	16QAM	1	0	21.50	21.68	21.64	22.1	0
20	16QAM	1	49	21.60	21.59	21.64		
20	16QAM	1	99	21.55	21.63	21.49		
20	16QAM	50	0	20.57	20.49	20.40	21.1	1
20	16QAM	50	24	20.54	20.51	20.40		
20	16QAM	50	50	20.48	20.42	20.46		
20	16QAM	100	0	20.52	20.42	20.38		
20	64QAM	1	0	20.88	20.83	20.77	21.1	1
20	64QAM	1	49	20.80	20.70	20.71		
20	64QAM	1	99	20.67	20.75	20.62		
20	64QAM	50	0	19.76	19.68	19.57	20.1	2
20	64QAM	50	24	19.74	19.69	19.60		
20	64QAM	50	50	19.66	19.62	19.65		
20	64QAM	100	0	19.72	19.64	19.55		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.31	21.47	21.28	22.1	0
15	QPSK	1	37	21.29	21.36	21.35		
15	QPSK	1	74	21.29	21.26	21.26		
15	QPSK	36	0	21.38	21.40	21.32	22.1	0
15	QPSK	36	20	21.38	21.41	21.42		
15	QPSK	36	39	21.32	21.34	21.34		
15	QPSK	75	0	21.32	21.39	21.28	22.1	0
15	16QAM	1	0	21.59	21.56	21.53		
15	16QAM	1	37	21.59	21.62	21.62		
15	16QAM	1	74	21.60	21.50	21.51	21.1	1
15	16QAM	36	0	20.41	20.46	20.34		
15	16QAM	36	20	20.44	20.49	20.45		
15	16QAM	36	39	20.38	20.39	20.40	21.1	1
15	16QAM	75	0	20.39	20.45	20.38		
15	64QAM	1	0	20.72	20.89	20.64		
15	64QAM	1	37	20.67	20.71	20.73	21.1	1
15	64QAM	1	74	20.67	20.62	20.61		
15	64QAM	36	0	19.61	19.67	19.54		
15	64QAM	36	20	19.63	19.69	19.65	20.1	2
15	64QAM	36	39	19.53	19.60	19.59		
15	64QAM	75	0	19.59	19.64	19.57		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.46	21.58	21.40	22.1	0
10	QPSK	1	25	21.31	21.36	21.35		
10	QPSK	1	49	21.30	21.37	21.30		
10	QPSK	25	0	21.41	21.45	21.42	22.1	0
10	QPSK	25	12	21.39	21.44	21.41		
10	QPSK	25	25	21.35	21.38	21.38		
10	QPSK	50	0	21.37	21.42	21.39	22.1	0
10	16QAM	1	0	21.69	21.45	21.65		
10	16QAM	1	25	21.60	21.60	21.62		
10	16QAM	1	49	21.63	21.60	21.54	21.1	1
10	16QAM	25	0	20.44	20.47	20.49		
10	16QAM	25	12	20.46	20.48	20.50		
10	16QAM	25	25	20.39	20.43	20.43	21.1	1
10	16QAM	50	0	20.42	20.48	20.45		
10	64QAM	1	0	20.81	20.70	20.78		
10	64QAM	1	25	20.69	20.72	20.77	21.1	1
10	64QAM	1	49	20.72	20.71	20.65		
10	64QAM	25	0	19.67	19.70	19.68		
10	64QAM	25	12	19.65	19.69	19.69	20.1	2
10	64QAM	25	25	19.60	19.64	19.64		
10	64QAM	50	0	19.61	19.65	19.64		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.46	21.47	21.33	22.1	0
5	QPSK	1	12	21.45	21.38	21.36		
5	QPSK	1	24	21.38	21.32	21.29		
5	QPSK	12	0	21.48	21.41	21.36	22.1	0
5	QPSK	12	7	21.49	21.41	21.43		
5	QPSK	12	13	21.47	21.36	21.37		
5	QPSK	25	0	21.49	21.39	21.36	22.1	0
5	16QAM	1	0	21.65	21.56	21.61		
5	16QAM	1	12	21.67	21.63	21.64		
5	16QAM	1	24	21.64	21.55	21.52	21.1	1
5	16QAM	12	0	20.54	20.48	20.45		
5	16QAM	12	7	20.52	20.48	20.48		
5	16QAM	12	13	20.51	20.44	20.42	21.1	1
5	16QAM	25	0	20.52	20.43	20.45		
5	64QAM	1	0	20.82	20.85	20.72		
5	64QAM	1	12	20.80	20.74	20.74	21.1	1
5	64QAM	1	24	20.76	20.69	20.61		
5	64QAM	12	0	19.70	19.66	19.65		
5	64QAM	12	7	19.72	19.68	19.67	20.1	2
5	64QAM	12	13	19.66	19.63	19.61		
5	64QAM	25	0	19.73	19.65	19.62		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.44	21.35	21.33	22.1	0
3	QPSK	1	8	21.42	21.36	21.31		
3	QPSK	1	14	21.37	21.34	21.31		
3	QPSK	8	0	21.46	21.41	21.39	22.1	0
3	QPSK	8	4	21.50	21.40	21.39		
3	QPSK	8	7	21.44	21.38	21.37		
3	QPSK	15	0	21.46	21.38	21.37	22.1	0
3	16QAM	1	0	21.66	21.59	21.56		
3	16QAM	1	8	21.69	21.60	21.59		
3	16QAM	1	14	21.63	21.58	21.51	21.1	1
3	16QAM	8	0	20.53	20.49	20.45		
3	16QAM	8	4	20.54	20.48	20.47		
3	16QAM	8	7	20.52	20.47	20.45	21.1	1
3	16QAM	15	0	20.56	20.46	20.49		
3	64QAM	1	0	20.81	20.72	20.70		
3	64QAM	1	8	20.79	20.75	20.71	21.1	1
3	64QAM	1	14	20.78	20.70	20.67		
3	64QAM	8	0	19.67	19.63	19.61		
3	64QAM	8	4	19.74	19.65	19.63	20.1	2
3	64QAM	8	7	19.69	19.63	19.62		
3	64QAM	15	0	19.72	19.64	19.65		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.37	21.33	21.31	22.1	0
1.4	QPSK	1	3	21.40	21.44	21.55		
1.4	QPSK	1	5	21.35	21.37	21.45		
1.4	QPSK	3	0	21.44	21.41	21.37		
1.4	QPSK	3	1	21.52	21.53	21.60		
1.4	QPSK	3	3	21.50	21.49	21.47		
1.4	QPSK	6	0	21.45	21.44	21.40	22.1	0
1.4	16QAM	1	0	21.40	21.60	21.49	22.1	0
1.4	16QAM	1	3	21.55	21.40	21.44		
1.4	16QAM	1	5	21.53	21.57	21.59		
1.4	16QAM	3	0	21.50	21.44	21.47		
1.4	16QAM	3	1	21.49	21.43	21.45		
1.4	16QAM	3	3	21.55	21.50	21.53		
1.4	16QAM	6	0	20.57	20.50	20.53	21.1	1
1.4	64QAM	1	0	20.78	20.89	20.75	21.1	1
1.4	64QAM	1	3	20.75	20.83	20.73		
1.4	64QAM	1	5	20.76	20.82	20.75		
1.4	64QAM	3	0	20.64	20.62	20.63		
1.4	64QAM	3	1	20.77	20.79	20.71		
1.4	64QAM	3	3	20.63	20.64	20.60		
1.4	64QAM	6	0	19.75	19.76	19.65	20.1	2

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.15	21.30	21.19	21.4	0
10	QPSK	1	25	21.10	21.20	21.13		
10	QPSK	1	49	21.05	21.19	21.08		
10	QPSK	25	0	20.84	21.08	21.21	21.4	0
10	QPSK	25	12	20.93	21.20	21.12		
10	QPSK	25	25	20.95	21.19	21.03		
10	QPSK	50	0	20.86	21.18	21.11	21.4	0
10	16QAM	1	0	20.87	20.82	20.88		
10	16QAM	1	25	20.80	20.89	20.82		
10	16QAM	1	49	20.77	20.98	20.88	21.4	0
10	16QAM	25	0	20.56	20.85	20.87		
10	16QAM	25	12	20.67	20.97	20.80		
10	16QAM	25	25	20.61	20.85	20.87	21.4	0
10	16QAM	50	0	20.61	20.81	20.77		
10	64QAM	1	0	20.62	20.81	20.95		
10	64QAM	1	25	20.69	20.97	20.90	21.4	0
10	64QAM	1	49	20.84	20.97	20.94		
10	64QAM	25	0	19.52	19.86	19.78		
10	64QAM	25	12	19.73	19.96	19.72	20.4	1
10	64QAM	25	25	19.66	19.84	19.83		
10	64QAM	50	0	19.74	19.98	19.81		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.84	21.00	21.09	21.4	0
5	QPSK	1	12	20.80	21.09	20.99		
5	QPSK	1	24	20.75	20.99	20.97		
5	QPSK	12	0	20.92	21.16	21.10	21.4	0
5	QPSK	12	7	20.85	21.26	21.05		
5	QPSK	12	13	20.93	21.19	21.06		
5	QPSK	25	0	20.82	21.21	20.99	21.4	0
5	16QAM	1	0	20.73	20.91	20.97		
5	16QAM	1	12	20.60	20.98	20.85		
5	16QAM	1	24	20.63	20.99	20.90	21.4	0
5	16QAM	12	0	20.59	20.95	20.78		
5	16QAM	12	7	20.67	20.93	20.82		
5	16QAM	12	13	20.58	20.88	20.77	21.4	0
5	16QAM	25	0	20.55	20.83	20.72		
5	64QAM	1	0	20.47	20.68	20.74		
5	64QAM	1	12	20.47	20.76	20.62	21.4	0
5	64QAM	1	24	20.40	20.66	20.67		
5	64QAM	12	0	19.53	19.88	19.70		
5	64QAM	12	7	19.64	19.85	19.75	20.4	1
5	64QAM	12	13	19.42	19.82	19.70		
5	64QAM	25	0	19.44	19.82	19.71		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.78	21.03	21.00	21.4	0
3	QPSK	1	8	20.72	21.14	21.06		
3	QPSK	1	14	20.74	21.11	20.98		
3	QPSK	8	0	20.86	21.19	21.06	21.4	0
3	QPSK	8	4	20.95	21.17	21.01		
3	QPSK	8	7	20.86	21.16	21.14		
3	QPSK	15	0	20.86	21.18	21.05	21.4	0
3	16QAM	1	0	21.00	21.27	21.20		
3	16QAM	1	8	21.02	21.00	21.00		
3	16QAM	1	14	21.01	21.25	21.16	21.4	0
3	16QAM	8	0	20.69	20.91	20.79		
3	16QAM	8	4	20.67	20.91	20.77		
3	16QAM	8	7	20.67	20.88	20.88	21.4	0
3	16QAM	15	0	20.67	20.94	20.80		
3	64QAM	1	0	20.65	20.78	20.80		
3	64QAM	1	8	20.68	20.92	20.96	21.4	0
3	64QAM	1	14	20.68	20.92	20.88		
3	64QAM	8	0	19.56	19.83	19.71		
3	64QAM	8	4	19.56	19.86	19.67	20.4	1
3	64QAM	8	7	19.47	19.73	19.79		
3	64QAM	15	0	19.54	19.81	19.78		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.66	21.09	20.98	21.4	0
1.4	QPSK	1	3	20.65	21.13	20.96		
1.4	QPSK	1	5	20.70	20.99	20.91		
1.4	QPSK	3	0	20.67	21.12	20.93		
1.4	QPSK	3	1	20.70	21.06	20.97		
1.4	QPSK	3	3	20.74	21.04	20.99		
1.4	QPSK	6	0	20.77	21.04	21.05	21.4	0
1.4	16QAM	1	0	20.46	20.80	20.79	21.4	0
1.4	16QAM	1	3	20.49	20.81	20.85		
1.4	16QAM	1	5	20.50	20.79	20.80		
1.4	16QAM	3	0	20.31	20.66	20.67		
1.4	16QAM	3	1	20.34	20.59	20.69		
1.4	16QAM	3	3	20.37	20.65	20.60		
1.4	16QAM	6	0	20.55	20.71	20.89	21.4	0
1.4	64QAM	1	0	20.56	20.90	20.89	21.4	0
1.4	64QAM	1	3	20.56	20.94	20.93		
1.4	64QAM	1	5	20.60	20.90	20.88		
1.4	64QAM	3	0	20.47	20.82	20.82		
1.4	64QAM	3	1	20.39	20.77	20.84		
1.4	64QAM	3	3	20.53	20.82	20.84		
1.4	64QAM	6	0	19.50	19.79	19.72	20.4	1

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	16.94	17.11	17.08	17.5	0
20	QPSK	1	49	17.00	17.19	17.16		
20	QPSK	1	99	17.30	17.12	17.22		
20	QPSK	50	0	16.60	16.73	16.71	17.5	0
20	QPSK	50	24	16.62	16.79	16.78		
20	QPSK	50	50	16.80	16.78	16.78		
20	QPSK	100	0	16.81	16.80	16.79	17.5	0
20	16QAM	1	0	16.95	17.14	17.03		
20	16QAM	1	49	17.18	17.00	17.10		
20	16QAM	1	99	17.19	17.20	17.17	17.5	0
20	16QAM	50	0	16.69	17.10	16.93		
20	16QAM	50	24	16.83	16.94	17.01		
20	16QAM	50	50	16.81	16.90	16.90	17.5	0
20	16QAM	100	0	16.72	16.92	16.99		
20	64QAM	1	0	16.84	17.10	16.94		
20	64QAM	1	49	17.22	17.02	16.94	17.5	0
20	64QAM	1	99	16.85	17.09	16.94		
20	64QAM	50	0	16.65	16.84	16.91		
20	64QAM	50	24	16.80	16.86	16.84	17.5	0
20	64QAM	50	50	16.71	16.95	16.93		
20	64QAM	100	0	16.73	17.03	17.05		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.00	17.19	17.22	17.5	0
15	QPSK	1	37	16.91	17.14	17.02		
15	QPSK	1	74	17.05	17.16	17.14		
15	QPSK	36	0	16.58	16.81	16.85	17.5	0
15	QPSK	36	20	16.67	16.85	16.80		
15	QPSK	36	39	16.67	16.74	16.82		
15	QPSK	75	0	16.64	16.82	16.82	17.5	0
15	16QAM	1	0	17.06	16.90	17.10		
15	16QAM	1	37	17.19	17.02	17.06		
15	16QAM	1	74	17.03	16.87	16.99	17.5	0
15	16QAM	36	0	16.67	16.99	16.95		
15	16QAM	36	20	16.78	16.92	17.01		
15	16QAM	36	39	16.67	16.91	16.94	17.5	0
15	16QAM	75	0	16.79	16.89	16.90		
15	64QAM	1	0	16.93	17.15	17.13		
15	64QAM	1	37	17.24	16.96	17.15	17.5	0
15	64QAM	1	74	16.92	17.17	17.00		
15	64QAM	36	0	16.78	17.01	16.92		
15	64QAM	36	20	16.77	16.90	16.97	17.5	0
15	64QAM	36	39	16.82	16.90	16.95		
15	64QAM	75	0	16.76	16.96	16.93		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.00	17.08	17.26	17.5	0
10	QPSK	1	25	17.10	17.10	17.21		
10	QPSK	1	49	17.15	17.07	17.12		
10	QPSK	25	0	16.70	16.70	16.79	17.5	0
10	QPSK	25	12	16.78	16.74	16.88		
10	QPSK	25	25	16.78	16.75	16.82		
10	QPSK	50	0	16.76	16.78	16.89	17.5	0
10	16QAM	1	0	16.85	17.12	16.99		
10	16QAM	1	25	17.01	17.06	17.19		
10	16QAM	1	49	16.77	16.84	17.13	17.5	0
10	16QAM	25	0	16.79	16.91	17.02		
10	16QAM	25	12	16.79	16.93	16.96		
10	16QAM	25	25	16.79	16.98	17.00	17.5	0
10	16QAM	50	0	16.87	16.83	16.96		
10	64QAM	1	0	16.86	17.08	16.86		
10	64QAM	1	25	16.74	16.96	17.05	17.5	0
10	64QAM	1	49	17.09	16.84	17.04		
10	64QAM	25	0	16.82	16.89	16.97		
10	64QAM	25	12	16.77	16.89	17.03	17.5	0
10	64QAM	25	25	16.77	16.89	17.02		
10	64QAM	50	0	16.84	16.80	16.95		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.12	17.23	17.14	17.5	0
5	QPSK	1	12	17.26	17.23	17.04		
5	QPSK	1	24	17.22	17.19	17.20		
5	QPSK	12	0	16.84	16.86	16.81	17.5	0
5	QPSK	12	7	16.82	16.92	16.88		
5	QPSK	12	13	16.82	16.84	16.87		
5	QPSK	25	0	16.75	16.84	16.83	17.5	0
5	16QAM	1	0	16.84	17.25	16.88		
5	16QAM	1	12	17.15	17.00	17.24		
5	16QAM	1	24	17.16	17.04	16.89	17.5	0
5	16QAM	12	0	16.95	16.95	16.97		
5	16QAM	12	7	16.91	16.99	16.94		
5	16QAM	12	13	16.84	16.96	17.01	17.5	0
5	16QAM	25	0	17.01	16.89	16.97		
5	64QAM	1	0	16.93	17.05	16.98		
5	64QAM	1	12	17.09	16.94	17.14	17.5	0
5	64QAM	1	24	16.88	17.07	17.02		
5	64QAM	12	0	17.05	16.96	16.97		
5	64QAM	12	7	17.00	17.05	16.97	17.5	0
5	64QAM	12	13	16.88	17.09	16.95		
5	64QAM	25	0	16.91	16.95	16.92		

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	20.97	21.30	20.97	21.4	0
15	QPSK	1	37	20.99	21.04	21.00		
15	QPSK	1	74	21.06	21.02	21.00		
15	QPSK	36	0	21.15	21.21	20.97	21.4	0
15	QPSK	36	20	21.20	21.07	21.08		
15	QPSK	36	39	21.19	21.04	21.00		
15	QPSK	75	0	21.25	21.04	21.02	21.4	0
15	16QAM	1	0	21.10	21.15	21.25		
15	16QAM	1	37	21.25	21.10	20.95		
15	16QAM	1	74	21.20	21.22	21.26	21.4	0
15	16QAM	36	0	20.90	20.87	20.78		
15	16QAM	36	20	20.99	20.88	20.79		
15	16QAM	36	39	20.91	20.74	20.78	21.4	0
15	16QAM	75	0	20.90	20.71	20.70		
15	64QAM	1	0	21.28	21.28	21.22		
15	64QAM	1	37	21.27	21.27	21.24	21.4	0
15	64QAM	1	74	21.28	21.15	21.20		
15	64QAM	36	0	20.04	20.04	19.95		
15	64QAM	36	20	20.21	20.05	20.07	20.4	1
15	64QAM	36	39	20.03	19.90	19.94		
15	64QAM	75	0	20.08	20.03	20.01		



Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	20.94	20.95	20.95	21.4	0
10	QPSK	1	25	20.93	20.90	20.97		
10	QPSK	1	49	20.95	21.01	20.90		
10	QPSK	25	0	20.93	21.11	21.01	21.4	0
10	QPSK	25	12	20.98	21.00	20.94		
10	QPSK	25	25	21.13	20.95	20.99		
10	QPSK	50	0	20.99	21.07	20.99	21.4	0
10	16QAM	1	0	20.88	20.91	20.98		
10	16QAM	1	25	20.85	20.93	20.90		
10	16QAM	1	49	20.92	21.00	20.89	21.4	0
10	16QAM	25	0	20.74	20.84	20.73		
10	16QAM	25	12	20.79	20.82	20.77		
10	16QAM	25	25	20.84	20.76	20.87	21.4	0
10	16QAM	50	0	20.68	20.75	20.79		
10	64QAM	1	0	20.74	20.76	20.76		
10	64QAM	1	25	20.70	20.68	20.68	21.4	0
10	64QAM	1	49	20.98	20.86	20.76		
10	64QAM	25	0	19.88	19.97	19.87		
10	64QAM	25	12	19.83	19.94	19.91	20.4	1
10	64QAM	25	25	19.98	19.99	19.90		
10	64QAM	50	0	19.91	19.98	19.80		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	20.87	20.92	21.02	21.4	0
5	QPSK	1	12	21.04	20.95	20.97		
5	QPSK	1	24	20.97	20.79	20.81		
5	QPSK	12	0	20.99	21.07	21.05	21.4	0
5	QPSK	12	7	21.12	21.11	21.11		
5	QPSK	12	13	21.12	21.01	21.01		
5	QPSK	25	0	21.03	21.06	21.08	21.4	0
5	16QAM	1	0	21.05	21.02	21.00		
5	16QAM	1	12	20.88	21.10	20.91		
5	16QAM	1	24	21.03	20.90	20.94	21.4	0
5	16QAM	12	0	20.69	20.78	20.75		
5	16QAM	12	7	20.82	20.81	20.72		
5	16QAM	12	13	20.82	20.71	20.67	21.4	0
5	16QAM	25	0	20.79	20.73	20.73		
5	64QAM	1	0	20.56	20.62	20.62		
5	64QAM	1	12	20.49	20.57	20.54	21.4	0
5	64QAM	1	24	20.66	20.54	20.58		
5	64QAM	12	0	20.04	20.13	20.11		
5	64QAM	12	7	20.18	20.08	20.08	20.4	1
5	64QAM	12	13	20.07	19.97	20.03		
5	64QAM	25	0	19.98	19.92	19.94		



FCC SAR Test Report

Report No. : FA982703

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.01	20.95	21.05	21.4	0
3	QPSK	1	8	21.05	21.02	20.85		
3	QPSK	1	14	21.01	20.95	20.90		
3	QPSK	8	0	21.11	21.08	21.11	21.4	0
3	QPSK	8	4	21.16	21.06	21.08		
3	QPSK	8	7	21.05	21.10	21.09		
3	QPSK	15	0	21.03	21.04	21.10	21.4	0
3	16QAM	1	0	20.95	21.11	21.01		
3	16QAM	1	8	21.04	21.02	20.99		
3	16QAM	1	14	20.97	21.02	21.03	21.4	0
3	16QAM	8	0	20.71	20.80	20.74		
3	16QAM	8	4	20.75	20.76	20.81		
3	16QAM	8	7	20.76	20.84	20.74	21.4	0
3	16QAM	15	0	20.84	20.85	20.74		
3	64QAM	1	0	20.73	20.66	20.66		
3	64QAM	1	8	20.66	20.74	20.61	21.4	0
3	64QAM	1	14	20.60	20.64	20.66		
3	64QAM	8	0	19.96	19.94	19.99		
3	64QAM	8	4	19.99	20.01	20.06	20.4	1
3	64QAM	8	7	20.00	19.95	19.98		
3	64QAM	15	0	20.05	20.07	20.05		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	20.94	20.90	20.88	21.4	0
1.4	QPSK	1	3	20.88	20.88	20.98		
1.4	QPSK	1	5	20.78	20.74	20.80		
1.4	QPSK	3	0	20.90	20.91	20.89		
1.4	QPSK	3	1	20.95	20.96	20.92		
1.4	QPSK	3	3	20.86	20.96	20.88		
1.4	QPSK	6	0	20.96	20.90	20.89	21.4	0
1.4	16QAM	1	0	20.56	20.62	20.52	21.4	0
1.4	16QAM	1	3	20.66	20.61	20.62		
1.4	16QAM	1	5	20.58	20.59	20.57		
1.4	16QAM	3	0	20.72	20.79	20.60		
1.4	16QAM	3	1	20.77	20.74	20.71		
1.4	16QAM	3	3	20.65	20.72	20.65		
1.4	16QAM	6	0	20.61	20.68	20.61	21.4	0
1.4	64QAM	1	0	20.77	20.87	20.86	21.4	0
1.4	64QAM	1	3	20.85	20.84	20.83		
1.4	64QAM	1	5	20.77	20.71	20.79		
1.4	64QAM	3	0	20.65	20.63	20.62		
1.4	64QAM	3	1	20.60	20.70	20.66		
1.4	64QAM	3	3	20.61	20.59	20.65		
1.4	64QAM	6	0	19.83	19.92	19.84	20.4	1

**<WWAN Bottom Antenna --Reduced Power for Handheld On>****<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.75	19.80	19.67	20.5	0
20	QPSK	1	49	19.67	19.64	19.63		
20	QPSK	1	99	19.59	19.65	19.51		
20	QPSK	50	0	19.72	19.70	19.64	20.5	0
20	QPSK	50	24	19.77	19.78	19.56		
20	QPSK	50	50	19.68	19.66	19.59		
20	QPSK	100	0	19.71	19.72	19.54	20.5	0
20	16QAM	1	0	19.61	19.63	19.60		
20	16QAM	1	49	19.55	19.50	19.49		
20	16QAM	1	99	19.50	19.51	19.37	20.5	0
20	16QAM	50	0	19.41	19.36	19.27		
20	16QAM	50	24	19.44	19.38	19.28		
20	16QAM	50	50	19.34	19.34	19.28	20.5	0
20	16QAM	100	0	19.37	19.37	19.24		
20	64QAM	1	0	19.51	19.52	19.50		
20	64QAM	1	49	19.51	19.42	19.39	20.5	0
20	64QAM	1	99	19.38	19.48	19.26		
20	64QAM	50	0	19.40	19.35	19.25		
20	64QAM	50	24	19.41	19.35	19.27	20.5	0
20	64QAM	50	50	19.31	19.31	19.26		
20	64QAM	100	0	19.36	19.36	19.25		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.58	19.76	19.58	20.5	0
15	QPSK	1	37	19.55	19.66	19.60		
15	QPSK	1	74	19.59	19.55	19.49		
15	QPSK	36	0	19.63	19.69	19.59	20.5	0
15	QPSK	36	20	19.60	19.70	19.69		
15	QPSK	36	39	19.53	19.69	19.58		
15	QPSK	75	0	19.56	19.69	19.56	20.5	0
15	16QAM	1	0	19.49	19.64	19.47		
15	16QAM	1	37	19.47	19.51	19.49		
15	16QAM	1	74	19.50	19.44	19.39	20.5	0
15	16QAM	36	0	19.30	19.35	19.21		
15	16QAM	36	20	19.35	19.36	19.33		
15	16QAM	36	39	19.24	19.29	19.29	20.5	0
15	16QAM	75	0	19.30	19.34	19.18		
15	64QAM	1	0	19.39	19.55	19.37		
15	64QAM	1	37	19.35	19.40	19.40	20.5	0
15	64QAM	1	74	19.43	19.35	19.32		
15	64QAM	36	0	19.31	19.35	19.20		
15	64QAM	36	20	19.31	19.36	19.32	20.5	0
15	64QAM	36	39	19.22	19.28	19.27		
15	64QAM	75	0	19.25	19.35	19.18		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.71	19.69	19.68	20.5	0
10	QPSK	1	25	19.58	19.69	19.62		
10	QPSK	1	49	19.59	19.70	19.52		
10	QPSK	25	0	19.60	19.74	19.65	20.5	0
10	QPSK	25	12	19.64	19.73	19.65		
10	QPSK	25	25	19.57	19.69	19.62		
10	QPSK	50	0	19.58	19.75	19.63	20.5	0
10	16QAM	1	0	19.60	19.76	19.53		
10	16QAM	1	25	19.50	19.53	19.50		
10	16QAM	1	49	19.52	19.56	19.42	20.5	0
10	16QAM	25	0	19.33	19.38	19.35		
10	16QAM	25	12	19.34	19.37	19.30		
10	16QAM	25	25	19.27	19.32	19.23	20.5	0
10	16QAM	50	0	19.32	19.37	19.31		
10	64QAM	1	0	19.52	19.67	19.43		
10	64QAM	1	25	19.44	19.47	19.36	20.5	0
10	64QAM	1	49	19.41	19.46	19.31		
10	64QAM	25	0	19.34	19.37	19.33		
10	64QAM	25	12	19.34	19.37	19.32	20.5	0
10	64QAM	25	25	19.26	19.33	19.25		
10	64QAM	50	0	19.31	19.35	19.31		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.73	19.77	19.61	20.5	0
5	QPSK	1	12	19.72	19.69	19.59		
5	QPSK	1	24	19.70	19.66	19.52		
5	QPSK	12	0	19.79	19.75	19.61	20.5	0
5	QPSK	12	7	19.77	19.77	19.62		
5	QPSK	12	13	19.73	19.70	19.57		
5	QPSK	25	0	19.73	19.72	19.62	20.5	0
5	16QAM	1	0	19.60	19.61	19.45		
5	16QAM	1	12	19.62	19.55	19.49		
5	16QAM	1	24	19.56	19.50	19.44	20.5	0
5	16QAM	12	0	19.42	19.37	19.27		
5	16QAM	12	7	19.43	19.35	19.31		
5	16QAM	12	13	19.37	19.34	19.24	20.5	0
5	16QAM	25	0	19.40	19.33	19.24		
5	64QAM	1	0	19.50	19.57	19.35		
5	64QAM	1	12	19.48	19.48	19.40	20.5	0
5	64QAM	1	24	19.43	19.38	19.33		
5	64QAM	12	0	19.40	19.32	19.25		
5	64QAM	12	7	19.43	19.34	19.29	20.5	0
5	64QAM	12	13	19.37	19.33	19.23		
5	64QAM	25	0	19.40	19.31	19.23		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.68	19.65	19.56	20.5	0
3	QPSK	1	8	19.71	19.66	19.55		
3	QPSK	1	14	19.66	19.64	19.53		
3	QPSK	8	0	19.71	19.72	19.58	20.5	0
3	QPSK	8	4	19.76	19.74	19.61		
3	QPSK	8	7	19.74	19.70	19.59		
3	QPSK	15	0	19.73	19.70	19.60	20.5	0
3	16QAM	1	0	19.56	19.54	19.45		
3	16QAM	1	8	19.61	19.53	19.46		
3	16QAM	1	14	19.56	19.45	19.38	20.5	0
3	16QAM	8	0	19.42	19.38	19.28		
3	16QAM	8	4	19.46	19.39	19.32		
3	16QAM	8	7	19.42	19.34	19.27	20.5	0
3	16QAM	15	0	19.41	19.36	19.25		
3	64QAM	1	0	19.45	19.42	19.31		
3	64QAM	1	8	19.48	19.45	19.34	20.5	0
3	64QAM	1	14	19.44	19.39	19.30		
3	64QAM	8	0	19.40	19.31	19.22		
3	64QAM	8	4	19.42	19.33	19.26	20.5	0
3	64QAM	8	7	19.38	19.29	19.23		
3	64QAM	15	0	19.38	19.33	19.25		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.66	19.62	19.48	20.5	0
1.4	QPSK	1	3	19.68	19.68	19.58		
1.4	QPSK	1	5	19.63	19.59	19.47		
1.4	QPSK	3	0	19.66	19.65	19.52		
1.4	QPSK	3	1	19.74	19.70	19.59		
1.4	QPSK	3	3	19.68	19.63	19.55		
1.4	QPSK	6	0	19.68	19.65	19.53	20.5	0
1.4	16QAM	1	0	19.52	19.48	19.35	20.5	0
1.4	16QAM	1	3	19.58	19.52	19.42		
1.4	16QAM	1	5	19.46	19.43	19.37		
1.4	16QAM	3	0	19.31	19.25	19.19		
1.4	16QAM	3	1	19.38	19.33	19.24		
1.4	16QAM	3	3	19.32	19.29	19.17		
1.4	16QAM	6	0	19.43	19.36	19.23	20.5	0
1.4	64QAM	1	0	19.42	19.40	19.28	20.5	0
1.4	64QAM	1	3	19.47	19.41	19.30		
1.4	64QAM	1	5	19.40	19.38	19.28		
1.4	64QAM	3	0	19.35	19.29	19.21		
1.4	64QAM	3	1	19.42	19.35	19.25		
1.4	64QAM	3	3	19.36	19.30	19.20		
1.4	64QAM	6	0	19.34	19.30	19.20	20.5	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.89	19.87	19.99	20.5	0
20	QPSK	1	49	19.68	19.89	19.76		
20	QPSK	1	99	19.78	19.71	19.73		
20	QPSK	50	0	19.35	19.50	19.52	20.5	0
20	QPSK	50	24	19.38	19.45	19.37		
20	QPSK	50	50	19.32	19.33	19.36		
20	QPSK	100	0	19.36	19.45	19.44	20.5	0
20	16QAM	1	0	19.57	19.92	19.65		
20	16QAM	1	49	19.65	19.95	19.65		
20	16QAM	1	99	19.45	19.61	19.74	20.5	0
20	16QAM	50	0	19.51	19.64	19.58		
20	16QAM	50	24	19.55	19.55	19.51		
20	16QAM	50	50	19.52	19.49	19.41	20.5	0
20	16QAM	100	0	19.40	19.51	19.56		
20	64QAM	1	0	19.63	19.79	19.61		
20	64QAM	1	49	19.44	19.88	19.54	20.5	0
20	64QAM	1	99	19.66	19.53	19.59		
20	64QAM	50	0	19.46	19.70	19.52		
20	64QAM	50	24	19.47	19.49	19.53	20.5	0
20	64QAM	50	50	19.33	19.51	19.44		
20	64QAM	100	0	19.41	19.52	19.60		



FCC SAR Test Report

Report No. : FA982703

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.88	19.97	19.80	20.5	0
15	QPSK	1	37	19.72	19.90	19.79		
15	QPSK	1	74	19.78	19.82	19.77		
15	QPSK	36	0	19.34	19.52	19.44	20.5	0
15	QPSK	36	20	19.30	19.43	19.40		
15	QPSK	36	39	19.34	19.35	19.34		
15	QPSK	75	0	19.32	19.41	19.30	20.5	0
15	16QAM	1	0	19.77	19.84	19.60		
15	16QAM	1	37	19.52	19.65	19.36		
15	16QAM	1	74	19.69	19.81	19.40	20.5	0
15	16QAM	36	0	19.39	19.66	19.52		
15	16QAM	36	20	19.43	19.57	19.54		
15	16QAM	36	39	19.37	19.50	19.43	20.5	0
15	16QAM	75	0	19.38	19.56	19.51		
15	64QAM	1	0	19.41	19.65	19.65		
15	64QAM	1	37	19.38	19.67	19.66	20.5	0
15	64QAM	1	74	19.35	19.28	19.43		
15	64QAM	36	0	19.37	19.68	19.53		
15	64QAM	36	20	19.43	19.60	19.54	20.5	0
15	64QAM	36	39	19.40	19.44	19.40		
15	64QAM	75	0	19.38	19.45	19.53		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.85	19.96	19.97	20.5	0
10	QPSK	1	25	19.75	19.85	19.93		
10	QPSK	1	49	19.69	19.72	19.89		
10	QPSK	25	0	19.37	19.58	19.39	20.5	0
10	QPSK	25	12	19.31	19.48	19.37		
10	QPSK	25	25	19.20	19.34	19.37		
10	QPSK	50	0	19.34	19.38	19.34	20.5	0
10	16QAM	1	0	19.75	19.73	19.76		
10	16QAM	1	25	19.79	19.89	19.50		
10	16QAM	1	49	19.72	19.57	19.59	20.5	0
10	16QAM	25	0	19.33	19.58	19.50		
10	16QAM	25	12	19.43	19.52	19.49		
10	16QAM	25	25	19.35	19.57	19.37	20.5	0
10	16QAM	50	0	19.48	19.57	19.42		
10	64QAM	1	0	19.63	19.89	19.64		
10	64QAM	1	25	19.60	19.57	19.40	20.5	0
10	64QAM	1	49	19.65	19.84	19.53		
10	64QAM	25	0	19.49	19.63	19.50		
10	64QAM	25	12	19.47	19.59	19.49	20.5	0
10	64QAM	25	25	19.33	19.47	19.46		
10	64QAM	50	0	19.40	19.48	19.47		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.96	19.95	19.98	20.5	0
5	QPSK	1	12	19.88	19.86	19.88		
5	QPSK	1	24	19.64	19.83	19.72		
5	QPSK	12	0	19.31	19.49	19.41	20.5	0
5	QPSK	12	7	19.37	19.42	19.48		
5	QPSK	12	13	19.26	19.48	19.33		
5	QPSK	25	0	19.28	19.49	19.41	20.5	0
5	16QAM	1	0	19.99	19.87	19.58		
5	16QAM	1	12	19.50	19.61	19.80		
5	16QAM	1	24	19.64	19.62	19.65	20.5	0
5	16QAM	12	0	19.53	19.56	19.52		
5	16QAM	12	7	19.47	19.52	19.59		
5	16QAM	12	13	19.39	19.39	19.40	20.5	0
5	16QAM	25	0	19.44	19.57	19.45		
5	64QAM	1	0	19.33	19.70	19.55		
5	64QAM	1	12	19.50	19.53	19.50	20.5	0
5	64QAM	1	24	19.74	19.62	19.59		
5	64QAM	12	0	19.46	19.60	19.50		
5	64QAM	12	7	19.56	19.41	19.45	20.5	0
5	64QAM	12	13	19.34	19.39	19.44		
5	64QAM	25	0	19.42	19.45	19.50		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.83	19.97	19.95	20.5	0
3	QPSK	1	8	19.95	19.95	19.86		
3	QPSK	1	14	19.98	19.98	19.83		
3	QPSK	8	0	19.24	19.35	19.41	20.5	0
3	QPSK	8	4	19.36	19.35	19.40		
3	QPSK	8	7	19.37	19.34	19.42		
3	QPSK	15	0	19.45	19.54	19.35	20.5	0
3	16QAM	1	0	19.65	19.70	19.91		
3	16QAM	1	8	19.86	19.61	19.93		
3	16QAM	1	14	19.45	19.68	19.60	20.5	0
3	16QAM	8	0	19.44	19.48	19.48		
3	16QAM	8	4	19.39	19.49	19.53		
3	16QAM	8	7	19.45	19.54	19.41	20.5	0
3	16QAM	15	0	19.58	19.70	19.55		
3	64QAM	1	0	19.45	19.65	19.57		
3	64QAM	1	8	19.59	19.65	19.75	20.5	0
3	64QAM	1	14	19.58	19.72	19.60		
3	64QAM	8	0	19.40	19.54	19.49		
3	64QAM	8	4	19.33	19.48	19.40	20.5	0
3	64QAM	8	7	19.50	19.60	19.49		
3	64QAM	15	0	19.40	19.56	19.59		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.73	19.89	19.72	20.5	0
1.4	QPSK	1	3	19.90	19.95	19.75		
1.4	QPSK	1	5	19.75	19.73	19.69		
1.4	QPSK	3	0	19.32	19.44	19.35		
1.4	QPSK	3	1	19.36	19.40	19.40		
1.4	QPSK	3	3	19.31	19.25	19.30		
1.4	QPSK	6	0	19.33	19.33	19.33	20.5	0
1.4	16QAM	1	0	19.66	19.72	19.77	20.5	0
1.4	16QAM	1	3	19.59	19.51	19.65		
1.4	16QAM	1	5	19.81	19.87	19.47		
1.4	16QAM	3	0	19.38	19.46	19.29		
1.4	16QAM	3	1	19.49	19.50	19.50		
1.4	16QAM	3	3	19.46	19.36	19.40		
1.4	16QAM	6	0	19.51	19.53	19.43	20.5	0
1.4	64QAM	1	0	19.65	19.88	19.48	20.5	0
1.4	64QAM	1	3	19.60	19.87	19.85		
1.4	64QAM	1	5	19.58	19.60	19.65		
1.4	64QAM	3	0	19.58	19.51	19.65		
1.4	64QAM	3	1	19.51	19.67	19.30		
1.4	64QAM	3	3	19.29	19.68	19.34		
1.4	64QAM	6	0	19.38	19.39	19.46	20.5	0

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.80	18.96	19.00	19.5	0
20	QPSK	1	49	18.75	18.92	19.00		
20	QPSK	1	99	19.13	18.89	19.10		
20	QPSK	50	0	18.92	19.03	19.06	19.5	0
20	QPSK	50	24	18.94	19.04	19.08		
20	QPSK	50	50	19.17	19.10	18.86		
20	QPSK	100	0	18.97	19.03	18.99	19.5	0
20	16QAM	1	0	19.19	19.30	19.14		
20	16QAM	1	49	19.39	19.09	19.00		
20	16QAM	1	99	19.40	19.35	19.34	19.5	0
20	16QAM	50	0	18.99	19.07	19.14		
20	16QAM	50	24	19.05	19.06	19.11		
20	16QAM	50	50	19.11	19.17	19.22	19.5	0
20	16QAM	100	0	18.92	19.14	19.25		
20	64QAM	1	0	19.23	19.28	19.29		
20	64QAM	1	49	19.40	19.35	19.18	19.5	0
20	64QAM	1	99	19.17	19.01	19.00		
20	64QAM	50	0	18.99	19.06	19.08		
20	64QAM	50	24	19.02	19.12	19.25	19.5	0
20	64QAM	50	50	18.94	19.09	19.20		
20	64QAM	100	0	18.93	19.16	19.21		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.74	19.09	19.06	19.5	0
15	QPSK	1	37	18.78	18.88	19.00		
15	QPSK	1	74	18.90	19.08	19.22		
15	QPSK	36	0	18.91	19.03	19.07	19.5	0
15	QPSK	36	20	18.91	19.14	19.16		
15	QPSK	36	39	18.88	19.07	19.12		
15	QPSK	75	0	18.85	19.12	19.11	19.5	0
15	16QAM	1	0	19.10	19.25	19.32		
15	16QAM	1	37	19.01	19.34	19.23		
15	16QAM	1	74	19.01	19.35	19.42	19.5	0
15	16QAM	36	0	19.09	19.19	19.23		
15	16QAM	36	20	19.05	19.16	19.26		
15	16QAM	36	39	19.03	19.21	19.18	19.5	0
15	16QAM	75	0	19.01	19.13	19.08		
15	64QAM	1	0	19.00	19.29	19.17		
15	64QAM	1	37	19.16	19.32	19.24	19.5	0
15	64QAM	1	74	18.93	19.30	19.19		
15	64QAM	36	0	18.95	19.16	19.19		
15	64QAM	36	20	19.00	19.31	19.21	19.5	0
15	64QAM	36	39	19.03	19.17	19.20		
15	64QAM	75	0	19.03	19.27	19.08		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.75	18.92	19.01	19.5	0
10	QPSK	1	25	19.03	19.05	19.03		
10	QPSK	1	49	19.05	18.98	19.01		
10	QPSK	25	0	19.05	18.97	19.04	19.5	0
10	QPSK	25	12	19.03	18.99	19.12		
10	QPSK	25	25	19.09	19.10	19.06		
10	QPSK	50	0	18.98	19.04	19.09	19.5	0
10	16QAM	1	0	19.36	19.41	19.40		
10	16QAM	1	25	19.31	19.20	19.35		
10	16QAM	1	49	18.99	19.34	19.32	19.5	0
10	16QAM	25	0	19.17	19.25	19.10		
10	16QAM	25	12	19.11	19.11	19.18		
10	16QAM	25	25	19.11	19.12	19.05	19.5	0
10	16QAM	50	0	19.02	19.07	19.09		
10	64QAM	1	0	19.03	19.25	19.21		
10	64QAM	1	25	19.16	19.38	19.33	19.5	0
10	64QAM	1	49	19.24	19.27	19.35		
10	64QAM	25	0	19.19	19.09	19.07		
10	64QAM	25	12	19.15	19.14	19.06	19.5	0
10	64QAM	25	25	19.18	19.10	19.15		
10	64QAM	50	0	19.12	19.21	19.10		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.88	18.89	19.12	19.5	0
5	QPSK	1	12	19.00	18.82	18.93		
5	QPSK	1	24	19.01	19.03	19.02		
5	QPSK	12	0	19.07	18.94	18.99	19.5	0
5	QPSK	12	7	19.03	18.98	19.06		
5	QPSK	12	13	19.08	19.03	19.06		
5	QPSK	25	0	18.95	19.01	19.02	19.5	0
5	16QAM	1	0	19.43	19.33	19.35		
5	16QAM	1	12	19.40	19.26	19.34		
5	16QAM	1	24	19.03	19.40	19.32	19.5	0
5	16QAM	12	0	19.11	19.05	19.18		
5	16QAM	12	7	19.16	19.22	19.07		
5	16QAM	12	13	19.17	19.29	19.17	19.5	0
5	16QAM	25	0	19.12	19.14	19.11		
5	64QAM	1	0	18.82	18.97	19.27		
5	64QAM	1	12	18.97	19.11	19.21	19.5	0
5	64QAM	1	24	19.26	19.32	19.22		
5	64QAM	12	0	19.07	19.22	19.12		
5	64QAM	12	7	19.16	19.17	19.08	19.5	0
5	64QAM	12	13	19.22	19.22	19.09		
5	64QAM	25	0	19.22	19.12	19.06		

<WWAN Bottom Antenna --Reduced Power for Hotspot On>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.02	19.05	18.87	19.5	0
20	QPSK	1	49	18.96	18.60	18.55		
20	QPSK	1	99	18.62	18.65	18.56		
20	QPSK	50	0	18.95	18.88	18.82	19.5	0
20	QPSK	50	24	18.90	18.99	18.86		
20	QPSK	50	50	18.91	18.89	18.84		
20	QPSK	100	0	18.92	18.94	18.74	19.5	0
20	16QAM	1	0	18.56	18.70	18.85		
20	16QAM	1	49	18.81	18.79	18.55		
20	16QAM	1	99	18.95	18.71	18.69	19.5	0
20	16QAM	50	0	18.64	18.49	18.49		
20	16QAM	50	24	18.65	18.57	18.46		
20	16QAM	50	50	18.49	18.50	18.47	19.5	0
20	16QAM	100	0	18.51	18.56	18.41		
20	64QAM	1	0	18.47	18.85	18.55		
20	64QAM	1	49	18.66	18.42	18.59	19.5	0
20	64QAM	1	99	18.51	18.65	18.36		
20	64QAM	50	0	18.66	18.52	18.46		
20	64QAM	50	24	18.63	18.55	18.49	19.5	0
20	64QAM	50	50	18.49	18.52	18.38		
20	64QAM	100	0	18.63	18.56	18.41		



FCC SAR Test Report

Report No. : FA982703

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.00	19.01	18.74	19.5	0
15	QPSK	1	37	18.94	18.77	18.84		
15	QPSK	1	74	18.96	18.77	18.73		
15	QPSK	36	0	19.03	18.95	18.81	19.5	0
15	QPSK	36	20	19.01	18.94	18.90		
15	QPSK	36	39	18.89	18.89	18.82		
15	QPSK	75	0	18.97	18.98	18.83	19.5	0
15	16QAM	1	0	19.02	19.03	18.87		
15	16QAM	1	37	18.96	18.60	18.55		
15	16QAM	1	74	18.62	18.65	18.56	19.5	0
15	16QAM	36	0	18.63	18.49	18.38		
15	16QAM	36	20	18.63	18.54	18.46		
15	16QAM	36	39	18.52	18.51	18.45	19.5	0
15	16QAM	75	0	18.50	18.47	18.39		
15	64QAM	1	0	18.63	18.53	18.61		
15	64QAM	1	37	19.03	18.57	18.84	19.5	0
15	64QAM	1	74	18.56	18.82	18.54		
15	64QAM	36	0	18.56	18.50	18.44		
15	64QAM	36	20	18.64	18.54	18.58	19.5	0
15	64QAM	36	39	18.52	18.49	18.46		
15	64QAM	75	0	18.60	18.51	18.36		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.00	19.00	18.95	19.5	0
10	QPSK	1	25	18.97	18.81	18.74		
10	QPSK	1	49	19.01	18.92	18.83		
10	QPSK	25	0	19.03	18.90	18.85	19.5	0
10	QPSK	25	12	18.96	18.97	18.89		
10	QPSK	25	25	19.00	18.89	18.84		
10	QPSK	50	0	18.96	18.92	18.88	19.5	0
10	16QAM	1	0	18.88	18.90	18.94		
10	16QAM	1	25	18.76	18.54	18.89		
10	16QAM	1	49	18.71	18.74	18.82	19.5	0
10	16QAM	25	0	18.61	18.53	18.58		
10	16QAM	25	12	18.62	18.52	18.50		
10	16QAM	25	25	18.54	18.50	18.39	19.5	0
10	16QAM	50	0	18.58	18.57	18.47		
10	64QAM	1	0	18.83	18.82	18.67		
10	64QAM	1	25	18.79	18.71	18.87	19.5	0
10	64QAM	1	49	18.78	18.46	18.49		
10	64QAM	25	0	18.60	18.54	18.54		
10	64QAM	25	12	18.59	18.52	18.50	19.5	0
10	64QAM	25	25	18.63	18.56	18.46		
10	64QAM	50	0	18.62	18.53	18.50		



FCC SAR Test Report

Report No. : FA982703

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.97	19.00	18.85	19.5	0
5	QPSK	1	12	19.03	18.93	18.75		
5	QPSK	1	24	18.93	18.75	18.71		
5	QPSK	12	0	19.01	18.98	18.90	19.5	0
5	QPSK	12	7	19.00	18.91	18.84		
5	QPSK	12	13	18.97	18.97	18.81		
5	QPSK	25	0	19.00	18.87	18.85	19.5	0
5	16QAM	1	0	18.87	18.58	18.90		
5	16QAM	1	12	18.89	19.01	18.80		
5	16QAM	1	24	18.97	18.88	18.82	19.5	0
5	16QAM	12	0	18.59	18.50	18.66		
5	16QAM	12	7	18.57	18.50	18.40		
5	16QAM	12	13	18.60	18.47	18.44	19.5	0
5	16QAM	25	0	18.53	18.49	18.51		
5	64QAM	1	0	18.70	18.45	18.57		
5	64QAM	1	12	18.48	18.66	18.87	19.5	0
5	64QAM	1	24	18.39	18.86	18.70		
5	64QAM	12	0	18.61	18.52	18.36		
5	64QAM	12	7	18.65	18.55	18.40	19.5	0
5	64QAM	12	13	18.53	18.51	18.41		
5	64QAM	25	0	18.63	18.48	18.35		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.95	18.79	18.81	19.5	0
3	QPSK	1	8	18.88	18.90	18.84		
3	QPSK	1	14	18.91	18.84	18.80		
3	QPSK	8	0	18.94	18.94	18.83	19.5	0
3	QPSK	8	4	19.03	18.98	18.90		
3	QPSK	8	7	18.98	18.92	18.84		
3	QPSK	15	0	19.02	18.97	18.88	19.5	0
3	16QAM	1	0	18.84	18.59	18.51		
3	16QAM	1	8	18.65	18.82	18.89		
3	16QAM	1	14	18.68	18.56	18.58	19.5	0
3	16QAM	8	0	18.69	18.54	18.51		
3	16QAM	8	4	18.65	18.63	18.62		
3	16QAM	8	7	18.57	18.56	18.40	19.5	0
3	16QAM	15	0	18.50	18.58	18.34		
3	64QAM	1	0	18.66	18.51	18.29		
3	64QAM	1	8	18.63	18.63	18.48	19.5	0
3	64QAM	1	14	18.52	18.46	18.40		
3	64QAM	8	0	18.52	18.57	18.39		
3	64QAM	8	4	18.56	18.59	18.49	19.5	0
3	64QAM	8	7	18.59	18.65	18.28		
3	64QAM	15	0	18.56	18.56	18.44		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.94	18.77	18.74	19.5	0
1.4	QPSK	1	3	18.91	19.00	18.84		
1.4	QPSK	1	5	18.95	18.73	18.65		
1.4	QPSK	3	0	18.88	18.88	18.77		
1.4	QPSK	3	1	18.98	18.90	18.84		
1.4	QPSK	3	3	18.94	18.88	18.78		
1.4	QPSK	6	0	18.93	18.82	18.78	19.5	0
1.4	16QAM	1	0	18.64	18.53	18.47	19.5	0
1.4	16QAM	1	3	18.70	18.73	18.81		
1.4	16QAM	1	5	18.71	18.94	18.61		
1.4	16QAM	3	0	18.51	18.36	18.44		
1.4	16QAM	3	1	18.56	18.53	18.49		
1.4	16QAM	3	3	18.55	18.38	18.30		
1.4	16QAM	6	0	18.64	18.54	18.34	19.5	0
1.4	64QAM	1	0	18.37	18.65	18.77	19.5	0
1.4	64QAM	1	3	18.62	18.54	18.30		
1.4	64QAM	1	5	18.37	18.54	18.50		
1.4	64QAM	3	0	18.59	18.58	18.22		
1.4	64QAM	3	1	18.69	18.72	18.39		
1.4	64QAM	3	3	18.50	18.50	18.33		
1.4	64QAM	6	0	18.48	18.41	18.40	19.5	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.89	19.87	19.99	20.5	0
20	QPSK	1	49	19.68	19.89	19.76		
20	QPSK	1	99	19.78	19.71	19.73		
20	QPSK	50	0	19.35	19.50	19.52	20.5	0
20	QPSK	50	24	19.38	19.45	19.37		
20	QPSK	50	50	19.32	19.33	19.36		
20	QPSK	100	0	19.36	19.45	19.44	20.5	0
20	16QAM	1	0	19.57	19.92	19.65		
20	16QAM	1	49	19.65	19.95	19.65		
20	16QAM	1	99	19.45	19.61	19.74	20.5	0
20	16QAM	50	0	19.51	19.64	19.58		
20	16QAM	50	24	19.55	19.55	19.51		
20	16QAM	50	50	19.52	19.49	19.41	20.5	0
20	16QAM	100	0	19.40	19.51	19.56		
20	64QAM	1	0	19.63	19.79	19.61		
20	64QAM	1	49	19.44	19.88	19.54	20.5	0
20	64QAM	1	99	19.66	19.53	19.59		
20	64QAM	50	0	19.46	19.70	19.52		
20	64QAM	50	24	19.47	19.49	19.53	20.5	0
20	64QAM	50	50	19.33	19.51	19.44		
20	64QAM	100	0	19.41	19.52	19.60		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.88	19.97	19.80	20.5	0
15	QPSK	1	37	19.72	19.90	19.79		
15	QPSK	1	74	19.78	19.82	19.77		
15	QPSK	36	0	19.34	19.52	19.44	20.5	0
15	QPSK	36	20	19.30	19.43	19.40		
15	QPSK	36	39	19.34	19.35	19.34		
15	QPSK	75	0	19.32	19.41	19.30	20.5	0
15	16QAM	1	0	19.77	19.84	19.60		
15	16QAM	1	37	19.52	19.65	19.36		
15	16QAM	1	74	19.69	19.81	19.40	20.5	0
15	16QAM	36	0	19.39	19.66	19.52		
15	16QAM	36	20	19.43	19.57	19.54		
15	16QAM	36	39	19.37	19.50	19.43	20.5	0
15	16QAM	75	0	19.38	19.56	19.51		
15	64QAM	1	0	19.41	19.65	19.65		
15	64QAM	1	37	19.38	19.67	19.66	20.5	0
15	64QAM	1	74	19.35	19.28	19.43		
15	64QAM	36	0	19.37	19.68	19.53		
15	64QAM	36	20	19.43	19.60	19.54	20.5	0
15	64QAM	36	39	19.40	19.44	19.40		
15	64QAM	75	0	19.38	19.45	19.53		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.85	19.96	19.97	20.5	0
10	QPSK	1	25	19.75	19.85	19.93		
10	QPSK	1	49	19.69	19.72	19.89		
10	QPSK	25	0	19.37	19.58	19.39	20.5	0
10	QPSK	25	12	19.31	19.48	19.37		
10	QPSK	25	25	19.20	19.34	19.37		
10	QPSK	50	0	19.34	19.38	19.34	20.5	0
10	16QAM	1	0	19.75	19.73	19.76		
10	16QAM	1	25	19.79	19.89	19.50		
10	16QAM	1	49	19.72	19.57	19.59	20.5	0
10	16QAM	25	0	19.33	19.58	19.50		
10	16QAM	25	12	19.43	19.52	19.49		
10	16QAM	25	25	19.35	19.57	19.37	20.5	0
10	16QAM	50	0	19.48	19.57	19.42		
10	64QAM	1	0	19.63	19.89	19.64		
10	64QAM	1	25	19.60	19.57	19.40	20.5	0
10	64QAM	1	49	19.65	19.84	19.53		
10	64QAM	25	0	19.49	19.63	19.50		
10	64QAM	25	12	19.47	19.59	19.49	20.5	0
10	64QAM	25	25	19.33	19.47	19.46		
10	64QAM	50	0	19.40	19.48	19.47		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.96	19.95	19.98	20.5	0
5	QPSK	1	12	19.88	19.86	19.88		
5	QPSK	1	24	19.64	19.83	19.72		
5	QPSK	12	0	19.31	19.49	19.41	20.5	0
5	QPSK	12	7	19.37	19.42	19.48		
5	QPSK	12	13	19.26	19.48	19.33		
5	QPSK	25	0	19.28	19.49	19.41	20.5	0
5	16QAM	1	0	19.99	19.87	19.58		
5	16QAM	1	12	19.50	19.61	19.80		
5	16QAM	1	24	19.64	19.62	19.65	20.5	0
5	16QAM	12	0	19.53	19.56	19.52		
5	16QAM	12	7	19.47	19.52	19.59		
5	16QAM	12	13	19.39	19.39	19.40	20.5	0
5	16QAM	25	0	19.44	19.57	19.45		
5	64QAM	1	0	19.33	19.70	19.55		
5	64QAM	1	12	19.50	19.53	19.50	20.5	0
5	64QAM	1	24	19.74	19.62	19.59		
5	64QAM	12	0	19.46	19.60	19.50		
5	64QAM	12	7	19.56	19.41	19.45	20.5	0
5	64QAM	12	13	19.34	19.39	19.44		
5	64QAM	25	0	19.42	19.45	19.50		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.83	19.97	19.95	20.5	0
3	QPSK	1	8	19.95	19.95	19.86		
3	QPSK	1	14	19.98	19.98	19.83		
3	QPSK	8	0	19.24	19.35	19.41	20.5	0
3	QPSK	8	4	19.36	19.35	19.40		
3	QPSK	8	7	19.37	19.34	19.42		
3	QPSK	15	0	19.45	19.54	19.35	20.5	0
3	16QAM	1	0	19.65	19.70	19.91		
3	16QAM	1	8	19.86	19.61	19.93		
3	16QAM	1	14	19.45	19.68	19.60	20.5	0
3	16QAM	8	0	19.44	19.48	19.48		
3	16QAM	8	4	19.39	19.49	19.53		
3	16QAM	8	7	19.45	19.54	19.41	20.5	0
3	16QAM	15	0	19.58	19.70	19.55		
3	64QAM	1	0	19.45	19.65	19.57		
3	64QAM	1	8	19.59	19.65	19.75	20.5	0
3	64QAM	1	14	19.58	19.72	19.60		
3	64QAM	8	0	19.40	19.54	19.49		
3	64QAM	8	4	19.33	19.48	19.40	20.5	0
3	64QAM	8	7	19.50	19.60	19.49		
3	64QAM	15	0	19.40	19.56	19.59		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.73	19.89	19.72	20.5	0
1.4	QPSK	1	3	19.90	19.95	19.75		
1.4	QPSK	1	5	19.75	19.73	19.69		
1.4	QPSK	3	0	19.32	19.44	19.35		
1.4	QPSK	3	1	19.36	19.40	19.40		
1.4	QPSK	3	3	19.31	19.25	19.30		
1.4	QPSK	6	0	19.33	19.33	19.33	20.5	0
1.4	16QAM	1	0	19.66	19.72	19.77	20.5	0
1.4	16QAM	1	3	19.59	19.51	19.65		
1.4	16QAM	1	5	19.81	19.87	19.47		
1.4	16QAM	3	0	19.38	19.46	19.29		
1.4	16QAM	3	1	19.49	19.50	19.50		
1.4	16QAM	3	3	19.46	19.36	19.40		
1.4	16QAM	6	0	19.51	19.53	19.43	20.5	0
1.4	64QAM	1	0	19.65	19.88	19.48	20.5	0
1.4	64QAM	1	3	19.60	19.87	19.85		
1.4	64QAM	1	5	19.58	19.60	19.65		
1.4	64QAM	3	0	19.58	19.51	19.65		
1.4	64QAM	3	1	19.51	19.67	19.30		
1.4	64QAM	3	3	19.29	19.68	19.34		
1.4	64QAM	6	0	19.38	19.39	19.46	20.5	0

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.12	18.31	18.26	18.5	0
20	QPSK	1	49	18.24	18.31	18.39		
20	QPSK	1	99	18.45	18.34	18.44		
20	QPSK	50	0	17.91	17.97	18.03	18.5	0
20	QPSK	50	24	17.90	18.11	18.08		
20	QPSK	50	50	18.15	18.05	18.14		
20	QPSK	100	0	17.92	18.04	18.09	18.5	0
20	16QAM	1	0	18.43	18.35	18.33		
20	16QAM	1	49	18.35	18.33	18.35		
20	16QAM	1	99	18.22	18.36	18.38	18.5	0
20	16QAM	50	0	17.97	18.15	18.11		
20	16QAM	50	24	18.05	18.16	18.32		
20	16QAM	50	50	18.07	18.22	18.24	18.5	0
20	16QAM	100	0	18.00	18.13	18.27		
20	64QAM	1	0	18.30	18.06	18.19		
20	64QAM	1	49	18.32	18.32	18.38	18.5	0
20	64QAM	1	99	18.36	18.03	18.42		
20	64QAM	50	0	18.05	18.24	18.13		
20	64QAM	50	24	17.94	18.25	18.25	18.5	0
20	64QAM	50	50	18.04	18.15	18.26		
20	64QAM	100	0	17.99	18.26	18.28		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.14	18.30	18.34	18.5	0
15	QPSK	1	37	18.32	18.37	18.35		
15	QPSK	1	74	18.32	18.37	18.35		
15	QPSK	36	0	17.95	18.08	18.09	18.5	0
15	QPSK	36	20	17.95	18.08	18.10		
15	QPSK	36	39	17.92	18.02	18.11		
15	QPSK	75	0	17.90	18.06	18.05	18.5	0
15	16QAM	1	0	18.08	18.40	18.30		
15	16QAM	1	37	18.04	18.36	18.35		
15	16QAM	1	74	18.27	18.35	18.40	18.5	0
15	16QAM	36	0	17.99	18.27	18.24		
15	16QAM	36	20	18.07	18.23	18.16		
15	16QAM	36	39	17.98	18.19	18.24	18.5	0
15	16QAM	75	0	17.97	18.20	18.24		
15	64QAM	1	0	18.35	18.26	18.01		
15	64QAM	1	37	18.40	18.35	18.30	18.5	0
15	64QAM	1	74	18.35	18.33	18.36		
15	64QAM	36	0	18.03	18.11	18.21		
15	64QAM	36	20	18.03	18.16	18.17	18.5	0
15	64QAM	36	39	18.01	18.26	18.24		
15	64QAM	75	0	18.06	18.11	18.22		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.30	18.38	18.34	18.5	0
10	QPSK	1	25	18.40	18.41	18.35		
10	QPSK	1	49	18.31	18.37	18.38		
10	QPSK	25	0	18.01	18.00	18.07	18.5	0
10	QPSK	25	12	18.07	18.06	18.05		
10	QPSK	25	25	18.04	17.96	18.05		
10	QPSK	50	0	18.02	17.99	17.98	18.5	0
10	16QAM	1	0	18.30	18.00	18.06		
10	16QAM	1	25	18.20	18.35	18.36		
10	16QAM	1	49	18.04	18.31	18.31	18.5	0
10	16QAM	25	0	18.23	18.13	18.16		
10	16QAM	25	12	18.18	18.16	18.16		
10	16QAM	25	25	18.09	18.12	18.12	18.5	0
10	16QAM	50	0	18.21	18.14	18.06		
10	64QAM	1	0	18.34	18.35	18.28		
10	64QAM	1	25	18.22	18.32	18.04	18.5	0
10	64QAM	1	49	18.19	18.20	18.30		
10	64QAM	25	0	18.16	18.05	18.14		
10	64QAM	25	12	18.19	18.09	18.13	18.5	0
10	64QAM	25	25	18.17	18.05	18.11		
10	64QAM	50	0	18.09	18.13	18.05		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.22	18.38	18.32	18.5	0
5	QPSK	1	12	18.43	18.27	18.34		
5	QPSK	1	24	18.36	18.37	18.31		
5	QPSK	12	0	17.98	17.95	18.01	18.5	0
5	QPSK	12	7	18.08	18.00	18.07		
5	QPSK	12	13	17.99	17.95	17.99		
5	QPSK	25	0	17.99	17.97	17.95	18.5	0
5	16QAM	1	0	17.87	18.35	18.36		
5	16QAM	1	12	18.32	18.25	18.25		
5	16QAM	1	24	18.31	18.27	18.32	18.5	0
5	16QAM	12	0	18.12	18.13	18.27		
5	16QAM	12	7	18.19	18.18	18.15		
5	16QAM	12	13	18.22	18.17	18.24	18.5	0
5	16QAM	25	0	18.07	18.08	18.10		
5	64QAM	1	0	18.37	18.35	18.25		
5	64QAM	1	12	18.16	18.35	18.44	18.5	0
5	64QAM	1	24	17.94	18.29	18.05		
5	64QAM	12	0	18.14	18.12	18.20		
5	64QAM	12	7	18.21	18.14	18.17	18.5	0
5	64QAM	12	13	18.17	18.07	18.15		
5	64QAM	25	0	18.22	18.07	18.11		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

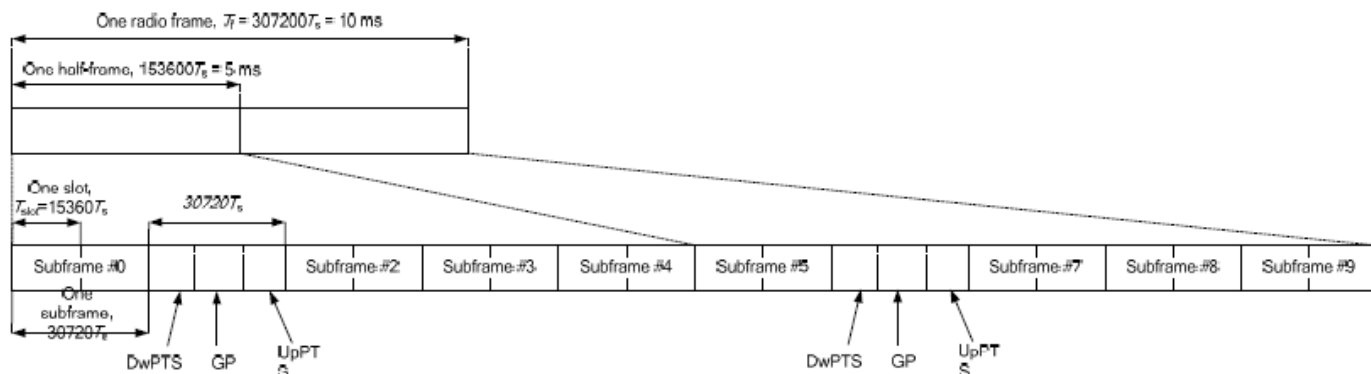


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<WWAN Top Antenna-- Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.02	22.18	22.01	22.8	0
20	QPSK	1	49	21.92	21.91	22.09		
20	QPSK	1	99	21.97	22.09	22.14		
20	QPSK	50	0	21.04	21.06	20.94	21.8	1
20	QPSK	50	24	21.06	21.04	20.98		
20	QPSK	50	50	21.04	21.03	21.01		
20	QPSK	100	0	21.00	21.05	21.00	21.8	1
20	16QAM	1	0	21.09	21.06	21.03		
20	16QAM	1	49	21.00	21.08	21.01		
20	16QAM	1	99	21.06	21.17	21.24	20.8	2
20	16QAM	50	0	20.12	20.12	20.07		
20	16QAM	50	24	20.12	20.15	20.06		
20	16QAM	50	50	20.13	20.16	20.08	20.8	2
20	16QAM	100	0	20.11	20.12	20.04		
20	64QAM	1	0	19.96	19.95	19.87		
20	64QAM	1	49	19.91	19.91	19.88	20.8	2
20	64QAM	1	99	19.94	20.06	20.09		
20	64QAM	50	0	19.12	19.15	19.15		
20	64QAM	50	24	19.15	19.22	19.12	19.8	3
20	64QAM	50	50	19.14	19.17	19.14		
20	64QAM	100	0	19.27	19.29	19.21		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.05	22.00	22.04	22.8	0
15	QPSK	1	37	22.01	21.94	22.01		
15	QPSK	1	74	22.10	22.11	22.10		
15	QPSK	36	0	21.10	21.00	20.97	21.8	1
15	QPSK	36	20	21.17	21.05	21.01		
15	QPSK	36	39	21.11	21.00	21.08		
15	QPSK	75	0	21.18	21.03	20.94	21.8	1
15	16QAM	1	0	21.16	21.07	21.13		
15	16QAM	1	37	21.05	21.04	21.11		
15	16QAM	1	74	21.22	21.23	21.26	20.8	2
15	16QAM	36	0	20.14	20.02	19.98		
15	16QAM	36	20	20.14	20.05	20.04		
15	16QAM	36	39	20.19	20.01	20.08	20.8	2
15	16QAM	75	0	20.20	20.11	20.04		
15	64QAM	1	0	20.06	19.95	19.99		
15	64QAM	1	37	19.98	19.94	19.97	20.8	2
15	64QAM	1	74	20.05	20.09	20.14		
15	64QAM	36	0	19.31	19.20	19.13		
15	64QAM	36	20	19.30	19.18	19.14	19.8	3
15	64QAM	36	39	19.32	19.18	19.28		
15	64QAM	75	0	19.31	19.21	19.17		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.09	22.00	21.93	22.8	0
10	QPSK	1	25	21.98	21.94	22.02		
10	QPSK	1	49	22.05	21.99	22.17		
10	QPSK	25	0	21.08	20.98	20.97	21.8	1
10	QPSK	25	12	21.00	21.05	21.09		
10	QPSK	25	25	21.12	21.01	21.07		
10	QPSK	50	0	21.10	21.01	21.11	21.8	1
10	16QAM	1	0	21.21	21.07	21.02		
10	16QAM	1	25	21.03	21.04	21.11		
10	16QAM	1	49	21.23	21.05	21.22	20.8	2
10	16QAM	25	0	20.24	20.03	20.03		
10	16QAM	25	12	20.14	20.15	20.15		
10	16QAM	25	25	20.18	20.09	20.15	20.8	2
10	16QAM	50	0	20.21	20.08	20.15		
10	64QAM	1	0	20.09	19.96	19.90		
10	64QAM	1	25	19.94	19.89	19.97	19.8	3
10	64QAM	1	49	20.11	19.95	20.15		
10	64QAM	25	0	19.30	19.16	19.10		
10	64QAM	25	12	19.20	19.19	19.21	19.8	3
10	64QAM	25	25	19.28	19.19	19.18		
10	64QAM	50	0	19.22	19.18	19.21		

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.03	21.82	21.98	22.8	0
5	QPSK	1	12	21.98	21.98	21.98		
5	QPSK	1	24	21.93	21.87	22.09		
5	QPSK	12	0	21.11	20.97	21.05	21.8	1
5	QPSK	12	7	21.12	21.00	21.05		
5	QPSK	12	13	21.02	21.03	21.04		
5	QPSK	25	0	21.09	20.97	21.03	21.8	1
5	16QAM	1	0	21.18	20.92	21.10		
5	16QAM	1	12	21.08	21.06	21.05		
5	16QAM	1	24	21.12	21.05	21.21	20.8	2
5	16QAM	12	0	20.13	20.03	20.02		
5	16QAM	12	7	20.15	20.10	20.10		
5	16QAM	12	13	20.07	20.04	20.07	20.8	2
5	16QAM	25	0	20.20	20.10	20.10		
5	64QAM	1	0	20.07	19.85	19.97		
5	64QAM	1	12	19.96	19.94	19.94	20.8	2
5	64QAM	1	24	19.95	19.92	20.10		
5	64QAM	12	0	19.17	19.12	19.15		
5	64QAM	12	7	19.31	19.16	19.16	19.8	3
5	64QAM	12	13	19.14	19.13	19.19		
5	64QAM	25	0	19.22	19.15	19.12		

<WWAN Bottom Antenna--Full Power Mode>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.18	23.19	22.89	24	0
20	QPSK	1	49	23.08	23.02	22.98		
20	QPSK	1	99	22.98	23.08	23.07		
20	QPSK	50	0	22.00	22.15	21.96	23	1
20	QPSK	50	24	22.04	22.13	22.12		
20	QPSK	50	50	22.01	21.98	22.15		
20	QPSK	100	0	22.20	22.16	21.93	23	1
20	16QAM	1	0	22.00	21.99	22.13		
20	16QAM	1	49	22.22	21.99	22.02		
20	16QAM	1	99	22.21	22.30	22.22	22	2
20	16QAM	50	0	21.31	21.18	20.99		
20	16QAM	50	24	21.16	21.06	21.18		
20	16QAM	50	50	21.13	21.29	21.01	22	2
20	16QAM	100	0	21.12	21.20	21.19		
20	64QAM	1	0	20.90	21.01	21.00		
20	64QAM	1	49	21.08	21.01	20.97	22	2
20	64QAM	1	99	20.87	21.13	21.36		
20	64QAM	50	0	20.04	20.09	20.04		
20	64QAM	50	24	20.18	20.17	20.21	21	3
20	64QAM	50	50	20.33	20.21	20.07		
20	64QAM	100	0	20.44	20.21	20.17		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.95	22.90	22.84	24	0
15	QPSK	1	37	22.86	22.88	22.98		
15	QPSK	1	74	23.03	23.08	23.17		
15	QPSK	36	0	21.99	21.95	21.95	23	1
15	QPSK	36	20	22.04	21.98	21.99		
15	QPSK	36	39	21.99	21.98	22.08		
15	QPSK	75	0	22.02	21.97	21.97		
15	16QAM	1	0	22.06	22.01	22.08	23	1
15	16QAM	1	37	21.98	21.97	22.10		
15	16QAM	1	74	22.13	22.15	22.24		
15	16QAM	36	0	21.05	21.01	20.98	22	2
15	16QAM	36	20	21.10	21.07	21.02		
15	16QAM	36	39	21.05	21.03	21.07		
15	16QAM	75	0	21.11	21.03	21.04		
15	64QAM	1	0	20.92	20.82	20.98	22	2
15	64QAM	1	37	20.87	20.85	20.94		
15	64QAM	1	74	21.01	20.97	21.13		
15	64QAM	36	0	20.16	20.05	20.12	21	3
15	64QAM	36	20	20.19	20.10	20.13		
15	64QAM	36	39	20.20	20.10	20.18		
15	64QAM	75	0	20.13	20.11	20.13		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.96	22.88	22.82	24	0
10	QPSK	1	25	22.93	22.89	22.96		
10	QPSK	1	49	22.94	22.95	23.12		
10	QPSK	25	0	21.89	22.01	21.87	23	1
10	QPSK	25	12	21.86	21.95	22.01		
10	QPSK	25	25	22.01	21.93	22.00		
10	QPSK	50	0	21.95	21.98	22.03		
10	16QAM	1	0	22.05	22.07	21.97	23	1
10	16QAM	1	25	21.93	21.94	22.09		
10	16QAM	1	49	22.03	21.98	22.20		
10	16QAM	25	0	21.09	20.96	21.01	22	2
10	16QAM	25	12	20.99	21.03	21.12		
10	16QAM	25	25	21.05	21.05	21.10		
10	16QAM	50	0	21.06	21.07	21.13		
10	64QAM	1	0	20.86	20.80	20.80	22	2
10	64QAM	1	25	20.78	20.82	20.89		
10	64QAM	1	49	20.90	20.88	21.05		
10	64QAM	25	0	20.09	20.08	20.02	21	3
10	64QAM	25	12	20.04	20.12	20.17		
10	64QAM	25	25	20.12	20.03	20.16		
10	64QAM	50	0	20.10	20.05	20.09		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.92	22.78	22.93	24	0
5	QPSK	1	12	22.82	22.91	22.91		
5	QPSK	1	24	22.87	22.92	23.06		
5	QPSK	12	0	22.00	21.95	21.99	23	1
5	QPSK	12	7	22.00	21.98	22.04		
5	QPSK	12	13	21.87	21.96	22.00		
5	QPSK	25	0	22.01	21.98	21.96		
5	16QAM	1	0	22.02	21.87	22.02	23	1
5	16QAM	1	12	21.99	22.01	21.98		
5	16QAM	1	24	22.00	22.04	22.16		
5	16QAM	12	0	21.04	20.97	21.00	22	2
5	16QAM	12	7	21.08	21.03	21.08		
5	16QAM	12	13	21.01	20.98	21.07		
5	16QAM	25	0	21.05	21.09	21.03		
5	64QAM	1	0	20.94	20.75	20.92	22	2
5	64QAM	1	12	20.83	20.87	20.88		
5	64QAM	1	24	20.83	20.89	21.03		
5	64QAM	12	0	20.09	20.03	20.10	21	3
5	64QAM	12	7	20.14	20.13	20.12		
5	64QAM	12	13	20.03	20.06	20.09		
5	64QAM	25	0	20.09	20.09	20.11		

<WWAN Top Antenna--Reduced Power Level 1 for Head/Hotspot On>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	18.62	18.67	18.53	18.8	0
20	QPSK	1	49	18.19	18.29	18.22		
20	QPSK	1	99	18.28	18.22	18.32		
20	QPSK	50	0	18.21	18.64	18.27	18.8	0
20	QPSK	50	24	18.50	18.60	18.53		
20	QPSK	50	50	18.60	18.40	18.54		
20	QPSK	100	0	18.62	18.61	18.57		
20	16QAM	1	0	18.04	18.26	18.18	18.8	0
20	16QAM	1	49	18.06	18.26	18.31		
20	16QAM	1	99	18.20	18.33	18.36		
20	16QAM	50	0	18.19	18.36	18.25	18.8	0
20	16QAM	50	24	18.16	18.32	18.41		
20	16QAM	50	50	18.18	18.31	18.39		
20	16QAM	100	0	18.22	18.34	18.37		
20	64QAM	1	0	18.01	18.19	18.22	18.8	0
20	64QAM	1	49	17.90	18.11	18.21		
20	64QAM	1	99	18.11	18.21	18.20		
20	64QAM	50	0	18.30	18.35	18.27	18.8	0
20	64QAM	50	24	18.30	18.38	18.40		
20	64QAM	50	50	18.25	18.39	18.42		
20	64QAM	100	0	18.36	18.50	18.52		



FCC SAR Test Report

Report No. : FA982703

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	18.20	18.39	18.30	18.8	0
15	QPSK	1	37	18.21	18.32	18.27		
15	QPSK	1	74	18.18	18.39	18.39		
15	QPSK	36	0	18.35	18.37	18.36	18.8	0
15	QPSK	36	20	18.31	18.37	18.36		
15	QPSK	36	39	18.28	18.37	18.33		
15	QPSK	75	0	18.33	18.37	18.34		
15	16QAM	1	0	18.36	18.45	18.43	18.8	0
15	16QAM	1	37	18.36	18.43	18.39		
15	16QAM	1	74	18.35	18.49	18.48		
15	16QAM	36	0	18.38	18.43	18.35	18.8	0
15	16QAM	36	20	18.42	18.50	18.39		
15	16QAM	36	39	18.38	18.43	18.37		
15	16QAM	75	0	18.41	18.46	18.42		
15	64QAM	1	0	18.19	18.21	18.22	18.8	0
15	64QAM	1	37	18.16	18.17	18.17		
15	64QAM	1	74	18.11	18.24	18.24		
15	64QAM	36	0	18.46	18.41	18.40	18.8	0
15	64QAM	36	20	18.45	18.49	18.45		
15	64QAM	36	39	18.42	18.43	18.43		
15	64QAM	75	0	18.41	18.44	18.43		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	18.49	18.59	18.52	18.8	0
10	QPSK	1	25	18.58	18.52	18.62		
10	QPSK	1	49	18.51	18.60	18.57		
10	QPSK	25	0	18.50	18.60	18.53	18.8	0
10	QPSK	25	12	18.60	18.64	18.54		
10	QPSK	25	25	18.62	18.61	18.57		
10	QPSK	50	0	18.62	18.65	18.53		
10	16QAM	1	0	18.04	18.26	18.18	18.8	0
10	16QAM	1	25	18.06	18.26	18.31		
10	16QAM	1	49	18.20	18.33	18.36		
10	16QAM	25	0	18.19	18.36	18.25	18.8	0
10	16QAM	25	12	18.16	18.32	18.41		
10	16QAM	25	25	18.18	18.31	18.39		
10	16QAM	50	0	18.22	18.34	18.37		
10	64QAM	1	0	18.01	18.19	18.22	18.8	0
10	64QAM	1	25	17.90	18.11	18.21		
10	64QAM	1	49	18.11	18.21	18.20		
10	64QAM	25	0	18.30	18.35	18.27	18.8	0
10	64QAM	25	12	18.30	18.38	18.40		
10	64QAM	25	25	18.25	18.39	18.42		
10	64QAM	50	0	18.36	18.50	18.52		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	18.44	18.55	18.61	18.8	0
5	QPSK	1	12	18.48	18.57	18.57		
5	QPSK	1	24	18.40	18.53	18.46		
5	QPSK	12	0	18.46	18.65	18.62	18.8	0
5	QPSK	12	7	18.52	18.66	18.55		
5	QPSK	12	13	18.53	18.61	18.55		
5	QPSK	25	0	18.48	18.59	18.54		
5	16QAM	1	0	18.31	18.36	18.40	18.8	0
5	16QAM	1	12	18.28	18.41	18.39		
5	16QAM	1	24	18.33	18.40	18.32		
5	16QAM	12	0	18.27	18.30	18.35	18.8	0
5	16QAM	12	7	18.31	18.36	18.26		
5	16QAM	12	13	18.26	18.36	18.25		
5	16QAM	25	0	18.30	18.38	18.30		
5	64QAM	1	0	18.04	18.16	18.13	18.8	0
5	64QAM	1	12	18.10	18.17	18.14		
5	64QAM	1	24	18.05	18.13	18.08		
5	64QAM	12	0	18.23	18.33	18.34	18.8	0
5	64QAM	12	7	18.26	18.38	18.25		
5	64QAM	12	13	18.21	18.35	18.27		
5	64QAM	25	0	18.21	18.35	18.25		



<WWAN Bottom Antenna --Reduced Power for Handheld On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.92	21.20	21.06	21.5	0
20	QPSK	1	49	20.90	20.94	21.03		
20	QPSK	1	99	21.04	20.99	21.06		
20	QPSK	50	0	21.05	21.14	20.98	21.5	0
20	QPSK	50	24	21.08	21.03	21.10		
20	QPSK	50	50	21.11	21.04	21.13		
20	QPSK	100	0	21.05	21.01	21.08	21.5	0
20	16QAM	1	0	21.08	21.13	21.19		
20	16QAM	1	49	21.08	21.08	21.16		
20	16QAM	1	99	21.18	21.12	21.14	21.5	0
20	16QAM	50	0	21.16	21.13	21.07		
20	16QAM	50	24	21.19	21.13	21.15		
20	16QAM	50	50	21.10	21.17	21.19	21.5	0
20	16QAM	100	0	21.16	21.15	21.17		
20	64QAM	1	0	20.79	20.82	20.95		
20	64QAM	1	49	20.80	20.84	20.88	21.5	0
20	64QAM	1	99	20.98	20.87	20.96		
20	64QAM	50	0	20.42	20.37	20.31	21	0.5
20	64QAM	50	24	20.46	20.42	20.44		
20	64QAM	50	50	20.44	20.41	20.45		
20	64QAM	100	0	20.50	20.48	20.51		



FCC SAR Test Report

Report No. : FA982703

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.86	21.03	21.06	21.5	0
15	QPSK	1	37	20.96	20.99	21.03		
15	QPSK	1	74	20.95	21.03	21.09		
15	QPSK	36	0	20.98	21.04	21.05	21.5	0
15	QPSK	36	20	21.02	21.04	21.11		
15	QPSK	36	39	21.02	21.04	21.06		
15	QPSK	75	0	20.98	20.99	21.08		
15	16QAM	1	0	20.97	21.11	21.15	21.5	0
15	16QAM	1	37	21.07	21.13	21.13		
15	16QAM	1	74	21.08	21.18	21.00		
15	16QAM	36	0	21.06	21.10	21.15	21.5	0
15	16QAM	36	20	21.04	21.12	21.17		
15	16QAM	36	39	21.07	21.12	21.12		
15	16QAM	75	0	21.10	21.14	21.15		
15	64QAM	1	0	20.75	20.90	20.98	21.5	0
15	64QAM	1	37	20.83	20.91	20.87		
15	64QAM	1	74	20.82	20.96	20.97		
15	64QAM	36	0	20.37	20.43	20.46	21	0.5
15	64QAM	36	20	20.40	20.42	20.47		
15	64QAM	36	39	20.37	20.41	20.45		
15	64QAM	75	0	20.38	20.40	20.49		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.85	20.91	20.89	21.5	0
10	QPSK	1	25	20.95	20.95	21.04		
10	QPSK	1	49	20.88	21.17	20.94		
10	QPSK	25	0	20.85	20.94	20.94	21.5	0
10	QPSK	25	12	20.97	21.01	20.96		
10	QPSK	25	25	20.96	20.98	20.93		
10	QPSK	50	0	20.98	21.01	20.93		
10	16QAM	1	0	20.94	21.09	21.05	21.5	0
10	16QAM	1	25	21.07	21.06	21.17		
10	16QAM	1	49	20.97	21.19	21.09		
10	16QAM	25	0	20.91	21.09	21.07	21.5	0
10	16QAM	25	12	21.08	21.08	21.06		
10	16QAM	25	25	21.08	21.11	21.04		
10	16QAM	50	0	21.04	21.08	21.04		
10	64QAM	1	0	20.69	20.84	20.81	21.5	0
10	64QAM	1	25	20.82	20.81	20.93		
10	64QAM	1	49	20.72	20.97	20.81		
10	64QAM	25	0	20.17	20.32	20.25	21	0.5
10	64QAM	25	12	20.34	20.35	20.32		
10	64QAM	25	25	20.33	20.36	20.31		
10	64QAM	50	0	20.29	20.32	20.29		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.78	20.93	20.95	21.5	0
5	QPSK	1	12	20.82	20.95	20.99		
5	QPSK	1	24	20.82	20.93	20.90		
5	QPSK	12	0	20.86	20.96	21.03	21.5	0
5	QPSK	12	7	20.92	20.98	20.97		
5	QPSK	12	13	20.90	21.02	20.99		
5	QPSK	25	0	20.87	21.01	20.93		
5	16QAM	1	0	20.92	21.04	21.11	21.5	0
5	16QAM	1	12	20.93	21.10	21.13		
5	16QAM	1	24	21.00	21.10	21.05		
5	16QAM	12	0	20.90	21.05	21.12	21.5	0
5	16QAM	12	7	20.93	21.09	21.03		
5	16QAM	12	13	20.92	21.07	21.00		
5	16QAM	25	0	20.99	21.05	21.08		
5	64QAM	1	0	20.69	20.84	20.91	21.5	0
5	64QAM	1	12	20.72	20.81	20.88		
5	64QAM	1	24	20.73	20.86	20.83		
5	64QAM	12	0	20.16	20.36	20.36	21	0.5
5	64QAM	12	7	20.25	20.39	20.32		
5	64QAM	12	13	20.24	20.33	20.28		
5	64QAM	25	0	20.23	20.35	20.33		

<WWAN Bottom Antenna --Reduced Power for Hotspot On>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.55	20.84	20.76	21	0
20	QPSK	1	49	20.56	20.64	20.71		
20	QPSK	1	99	20.46	20.68	20.80		
20	QPSK	50	0	20.61	20.73	20.57	21	0
20	QPSK	50	24	20.64	20.64	20.60		
20	QPSK	50	50	20.65	20.69	20.71		
20	QPSK	100	0	20.65	20.63	20.66		
20	16QAM	1	0	20.62	20.71	20.77	21	0
20	16QAM	1	49	20.61	20.69	20.72		
20	16QAM	1	99	20.76	20.71	20.77		
20	16QAM	50	0	20.76	20.73	20.69	21	0
20	16QAM	50	24	20.80	20.72	20.80		
20	16QAM	50	50	20.74	20.74	20.79		
20	16QAM	100	0	20.77	20.74	20.79		
20	64QAM	1	0	20.35	20.47	20.48	21	0
20	64QAM	1	49	20.36	20.47	20.50		
20	64QAM	1	99	20.53	20.50	20.52		
20	64QAM	50	0	20.67	20.62	20.59	21	0
20	64QAM	50	24	20.64	20.68	20.71		
20	64QAM	50	50	20.73	20.72	20.76		
20	64QAM	100	0	20.79	20.77	20.81		



FCC SAR Test Report

Report No. : FA982703

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.38	20.31	20.61	21	0
15	QPSK	1	37	20.53	20.51	20.58		
15	QPSK	1	74	20.43	20.65	20.69		
15	QPSK	36	0	20.47	20.57	20.66	21	0
15	QPSK	36	20	20.54	20.61	20.67		
15	QPSK	36	39	20.52	20.59	20.68		
15	QPSK	75	0	20.49	20.62	20.63		
15	16QAM	1	0	20.51	20.56	20.62	21	0
15	16QAM	1	37	20.46	20.59	20.64		
15	16QAM	1	74	20.61	20.64	20.68		
15	16QAM	36	0	20.50	20.67	20.69	21	0
15	16QAM	36	20	20.57	20.67	20.73		
15	16QAM	36	39	20.59	20.67	20.73		
15	16QAM	75	0	20.60	20.66	20.75		
15	64QAM	1	0	20.30	20.49	20.52	21	0
15	64QAM	1	37	20.34	20.38	20.48		
15	64QAM	1	74	20.30	20.48	20.57		
15	64QAM	36	0	20.57	20.68	20.73	21	0
15	64QAM	36	20	20.62	20.71	20.75		
15	64QAM	36	39	20.57	20.67	20.75		
15	64QAM	75	0	20.63	20.67	20.73		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.32	20.52	20.47	21	0
10	QPSK	1	25	20.50	20.53	20.62		
10	QPSK	1	49	20.37	20.71	20.58		
10	QPSK	25	0	20.36	20.58	20.50	21	0
10	QPSK	25	12	20.53	20.61	20.55		
10	QPSK	25	25	20.51	20.62	20.54		
10	QPSK	50	0	20.52	20.57	20.53		
10	16QAM	1	0	20.46	20.66	20.62	21	0
10	16QAM	1	25	20.61	20.68	20.76		
10	16QAM	1	49	20.49	20.82	20.67		
10	16QAM	25	0	20.46	20.61	20.65	21	0
10	16QAM	25	12	20.63	20.73	20.65		
10	16QAM	25	25	20.61	20.71	20.63		
10	16QAM	50	0	20.60	20.70	20.66		
10	64QAM	1	0	20.27	20.43	20.46	21	0
10	64QAM	1	25	20.35	20.43	20.52		
10	64QAM	1	49	20.30	20.56	20.48		
10	64QAM	25	0	20.44	20.66	20.56	21	0
10	64QAM	25	12	20.58	20.68	20.62		
10	64QAM	25	25	20.54	20.66	20.65		
10	64QAM	50	0	20.55	20.65	20.60		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.40	20.53	20.62	21	0
5	QPSK	1	12	20.37	20.54	20.62		
5	QPSK	1	24	20.37	20.57	20.51		
5	QPSK	12	0	20.39	20.62	20.68	21	0
5	QPSK	12	7	20.42	20.62	20.59		
5	QPSK	12	13	20.42	20.61	20.58		
5	QPSK	25	0	20.45	20.58	20.57		
5	16QAM	1	0	20.45	20.66	20.72	21	0
5	16QAM	1	12	20.49	20.73	20.73		
5	16QAM	1	24	20.52	20.70	20.72		
5	16QAM	12	0	20.47	20.63	20.69	21	0
5	16QAM	12	7	20.49	20.69	20.64		
5	16QAM	12	13	20.45	20.67	20.66		
5	16QAM	25	0	20.54	20.72	20.65		
5	64QAM	1	0	20.24	20.48	20.54	21	0
5	64QAM	1	12	20.25	20.51	20.51		
5	64QAM	1	24	20.33	20.47	20.48		
5	64QAM	12	0	20.45	20.66	20.70	21	0
5	64QAM	12	7	20.47	20.69	20.62		
5	64QAM	12	13	20.47	20.69	20.64		
5	64QAM	25	0	20.43	20.67	20.61		

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for CA_7C /CA_38C/CA_7A-7A and uplink for CA_7C/ CA_38C. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations.

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA_7C		No
2CC #2	CA_38C		No
2CC #3	CA_7A-7A		No

LTE Carrier Aggregation Conducted Power (Downlink)
General Note:

- i. According to KDB941225 D05A v01r02, uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<WWAN Top Antenna--Full Power Mode>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2510	20850	QPSK	1	99	Band 7	20M	2660.2	3152	22.16	22.37
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	0	Band 38	20M	2604.9	38099	22.06	22.18
	Non-Contiguous	CA_7A-7A	Band 7	20M	2510	20850	QPSK	1	99	Band 7	5M	2622.5	2775	22.31	22.37

<WWAN Bottom Antenna--Full Power Mode>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2510	20850	QPSK	1	99	Band 7	20M	2660.2	3152	23.08	23.20
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	0	Band 38	20M	2604.9	38099	23.15	23.19
	Non-Contiguous	CA_7A-7A	Band 7	20M	2510	20850	QPSK	1	99	Band 7	5M	2622.5	2775	23.18	23.20

<WWAN Top Antenna--Reduced Power Level 1 for Head/Hotspot On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2510	20850	QPSK	1	99	Band 7	20M	2660.2	3152	17.14	17.30
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	0	Band 38	20M	2604.9	38099	18.55	18.67
	Non-Contiguous	CA_7A-7A	Band 7	20M	2510	20850	QPSK	1	99	Band 7	5M	2622.5	2775	17.21	17.30

<WWAN Bottom Antenna --Reduced Power for Handheld On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2510	20850	QPSK	1	99	Band 7	20M	2660.2	3152	19.02	19.13
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	0	Band 38	20M	2604.9	38099	21.03	21.20
	Non-Contiguous	CA_7A-7A	Band 7	20M	2510	20850	QPSK	1	99	Band 7	5M	2622.5	2775	19.08	19.13


<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2510	20850	QPSK	1	99	Band 7	20M	2660.2	3152	18.42	18.45
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	0	Band 38	20M	2604.9	38099	20.77	20.84
	Non-Contiguous	CA_7A-7A	Band 7	20M	2510	20850	QPSK	1	99	Band 7	5M	2622.5	2775	18.39	18.45

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, CA_38C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to November 2017 TCB workshop, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.

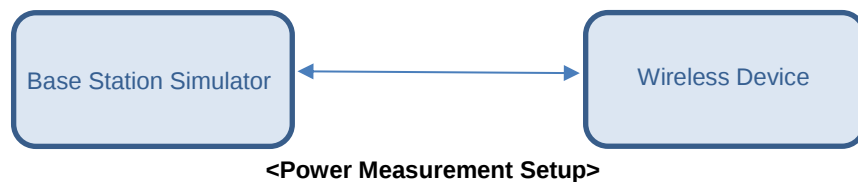

**<WWAN Top Antenna--Full Power Mode>****<LTE Band 7>**

CA_7C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	0	0	22.29	23.00
21100	20902	QPSK	1	99	0	0	22.14	23.00
21350	21152	QPSK	1	99	0	0	21.78	23.00

<LTE Band 38>

CA_38C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	0	0	0	22.07	22.80
37901	38099	QPSK	1	0	0	0	22.16	22.80
38150	37952	QPSK	1	0	0	0	22.13	22.80

<WWAN Bottom Antenna--Full Power Mode>**<LTE Band 7>**

CA_7C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	0	0	23.15	24.00
21100	20902	QPSK	1	99	0	0	23.07	24.00
21350	21152	QPSK	1	99	0	0	23.13	24.00

<LTE Band 38>

CA_38C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	0	0	0	22.98	24.00
37901	38099	QPSK	1	0	0	0	23.12	24.00
38150	37952	QPSK	1	0	0	0	22.90	24.00

**<WWAN Top Antenna--Reduced Power Level 1 for Head/Hotspot On>****<LTE Band 7>**

CA_7C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	50	50	0	0	17.14	17.50
21100	20902	QPSK	50	50	0	0	17.07	17.50
21350	21152	QPSK	50	50	0	0	16.92	17.50

<LTE Band 38>

CA_38C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	50	50	0	0	18.42	18.80
37901	38099	QPSK	50	50	0	0	18.56	18.80
38150	37952	QPSK	50	50	0	0	18.37	18.80

<WWAN Bottom Antenna --Reduced Power for Handheld On>**<LTE Band 7>**

CA_7C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	50	50	0	0	18.92	19.50
21100	20902	QPSK	50	50	0	0	18.74	19.50
21350	21152	QPSK	50	50	0	0	18.71	19.50

<LTE Band 38>

CA_38C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	50	0	0	0	20.94	21.50
37901	38099	QPSK	50	0	0	0	21.09	21.50
38150	37952	QPSK	50	0	0	0	20.92	21.50

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<LTE Band 7>

CA_7C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	50	50	0	0	17.92	18.50
21100	20902	QPSK	50	50	0	0	18.01	18.50
21350	21152	QPSK	50	50	0	0	18.12	18.50

<LTE Band 38>

CA_38C								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	100	0	0	0	20.61	21.00
37901	38099	QPSK	100	0	0	0	20.59	21.00
38150	37952	QPSK	100	0	0	0	20.66	21.00

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<Full Power>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.50	20.00	100.00
		6	2437	17.82	19.00	
		11	2462	18.58	20.00	
	802.11g 6Mbps	1	2412	19.27	20.00	98.28
		6	2437	19.30	20.00	
		11	2462	18.31	19.00	
	802.11n-HT20 MCS0	1	2412	18.22	19.00	98.15
		6	2437	18.28	19.00	
		11	2462	17.14	18.00	
	802.11n-HT40 MCS0	3	2422	16.82	18.00	94.93
		6	2437	17.14	18.00	
		9	2452	16.47	17.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.33	17.00	98.28
		40	5200	16.08	17.00	
		44	5220	16.22	17.00	
		48	5240	16.39	17.00	
	802.11n-HT20 MCS0	36	5180	15.11	16.00	98.16
		40	5200	15.00	16.00	
		44	5220	14.93	16.00	
		48	5240	15.17	16.00	
	802.11n-HT40 MCS0	38	5190	12.52	13.50	96.30
		46	5230	14.49	16.00	
	802.11ac-VHT20 MCS0	36	5180	15.09	16.00	98.16
		40	5200	14.97	16.00	
		44	5220	14.89	16.00	
		48	5240	15.10	16.00	
	802.11ac-VHT40 MCS0	38	5190	12.44	13.50	96.35
		46	5230	14.46	16.00	
	802.11ac-VHT80 MCS0	42	5210	12.86	13.50	92.51



5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	16.37	17.00	98.28
		56	5280	16.60	17.00	
		60	5300	16.72	17.00	
		64	5320	16.82	17.00	
	802.11n-HT20 MCS0	52	5260	15.30	16.00	98.16
		56	5280	15.47	16.00	
		60	5300	15.53	16.00	
		64	5320	15.93	16.00	
	802.11n-HT40 MCS0	54	5270	14.72	16.00	96.30
		62	5310	14.99	16.00	
	802.11ac-VHT20 MCS0	52	5260	15.26	16.00	98.16
		56	5280	15.34	16.00	
		60	5300	15.49	16.00	
		64	5320	15.89	16.00	
	802.11ac-VHT40 MCS0	54	5270	14.68	16.00	96.35
		62	5310	14.96	16.00	
	802.11ac-VHT80 MCS0	58	5290	13.74	15.00	92.51

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	16.58	17.00	98.28
		116	5580	16.66	17.00	
		124	5620	16.48	17.00	
		132	5660	16.46	17.00	
		140	5700	12.64	13.50	
	802.11n-HT20 MCS0	100	5500	15.56	16.00	98.16
		116	5580	15.59	16.00	
		124	5620	15.47	16.00	
		132	5660	15.49	16.00	
		140	5700	12.49	13.50	
	802.11n-HT40 MCS0	102	5510	14.94	16.00	96.30
		110	5550	15.17	16.00	
		126	5630	15.08	16.00	
		134	5670	14.90	16.00	
	802.11ac-VHT20 MCS0	100	5500	15.50	16.00	98.16
		116	5580	15.56	16.00	
		124	5620	15.43	16.00	
		132	5660	15.46	16.00	
		140	5700	12.47	13.50	
	802.11ac-VHT40 MCS0	102	5510	14.92	16.00	96.35
		110	5550	15.14	16.00	
		126	5630	15.04	16.00	
		134	5670	14.86	16.00	
	802.11ac-VHT80 MCS0	106	5530	13.89	15.00	92.51
		122	5610	13.93	15.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	16.60	17.00	98.28
		157	5785	16.73	17.00	
		161	5805	16.78	17.00	
	802.11n-HT20 MCS0	149	5745	15.54	16.00	98.16
		157	5785	15.63	16.00	
		161	5805	15.66	16.00	
	802.11n-HT40 MCS0	151	5755	15.02	16.00	96.30
		159	5795	15.25	16.00	
	802.11ac-VHT20 MCS0	149	5745	15.52	16.00	98.16
		157	5785	15.61	16.00	
		161	5805	15.63	16.00	
	802.11ac-VHT40 MCS0	151	5755	14.99	16.00	96.35
		159	5795	15.18	16.00	
	802.11ac-VHT80 MCS0	155	5775	14.02	15.00	92.51

<Reduced Power Level 1 for Head>

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	16.73	17.50	100.00
		6	2437	16.91	17.50	
		11	2462	16.85	17.50	
	802.11g 6Mbps	1	2412	16.52	17.50	98.28
		6	2437	16.62	17.50	
		11	2462	16.77	17.50	
	802.11n-HT20 MCS0	1	2412	16.33	17.50	98.15
		6	2437	16.41	17.50	
		11	2462	16.67	17.50	
	802.11n-HT40 MCS0	3	2422	16.51	17.50	94.93
		6	2437	16.86	17.50	
		9	2452	16.39	17.50	

<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	13.65	14.50	98.28
		40	5200	13.76	14.50	
		44	5220	13.94	14.50	
		48	5240	13.86	14.50	
	802.11n-HT20 MCS0	36	5180	12.94	14.50	98.16
		40	5200	13.13	14.50	
		44	5220	13.29	14.50	
		48	5240	13.25	14.50	
	802.11n-HT40 MCS0	38	5190	12.52	13.50	96.30
		46	5230	13.21	14.00	
	802.11ac-VHT20 MCS0	36	5180	12.94	14.50	98.16
		40	5200	13.14	14.50	
		44	5220	13.30	14.50	
		48	5240	13.26	14.50	
	802.11ac-VHT40 MCS0	38	5190	12.44	13.50	96.35
		46	5230	13.30	14.00	
	802.11ac-VHT80 MCS0	42	5210	12.86	13.50	92.51

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	13.46	14.50	98.28
		56	5280	13.76	14.50	
		60	5300	14.08	14.50	
		64	5320	14.12	14.50	
	802.11n-HT20 MCS0	52	5260	12.84	14.50	98.16
		56	5280	13.23	14.50	
		60	5300	13.41	14.50	
		64	5320	13.48	14.50	
	802.11n-HT40 MCS0	54	5270	12.97	14.00	96.30
		62	5310	13.42	14.00	
	802.11ac-VHT20 MCS0	52	5260	12.79	14.50	98.16
		56	5280	13.17	14.50	
		60	5300	13.43	14.50	
		64	5320	13.49	14.50	
	802.11ac-VHT40 MCS0	54	5270	12.95	14.00	96.35
		62	5310	13.49	14.00	
	802.11ac-VHT80 MCS0	58	5290	13.31	14.00	92.51



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	11.54	12.50	98.28
		116	5580	11.57	12.50	
		124	5620	11.47	12.00	
		132	5660	11.51	12.50	
		140	5700	11.81	12.50	
	802.11n-HT20 MCS0	100	5500	10.87	12.50	98.16
		116	5580	10.74	12.50	
		124	5620	11.36	12.50	
		132	5660	10.86	12.50	
		140	5700	11.12	12.50	
	802.11n-HT40 MCS0	102	5510	10.93	12.00	96.30
		110	5550	11.18	12.00	
		126	5630	11.22	12.00	
		134	5670	10.97	12.00	
	802.11ac-VHT20 MCS0	100	5500	10.84	12.50	98.16
		116	5580	10.61	12.50	
		124	5620	11.38	12.50	
		132	5660	10.95	12.50	
		140	5700	11.13	12.50	
	802.11ac-VHT40 MCS0	102	5510	10.94	12.00	96.35
		110	5550	11.19	12.00	
		126	5630	11.21	12.00	
		134	5670	11.00	12.00	
	802.11ac-VHT80 MCS0	106	5530	11.29	12.00	92.51
		122	5610	11.30	12.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	10.55	11.00	98.28
		157	5785	10.63	11.00	
		161	5805	10.69	11.00	
	802.11n-HT20 MCS0	149	5745	10.11	11.00	98.16
		157	5785	9.94	11.00	
		161	5805	9.72	11.00	
	802.11n-HT40 MCS0	151	5755	10.14	10.50	96.30
		159	5795	9.72	10.50	
	802.11ac-VHT20 MCS0	149	5745	9.95	11.00	98.16
		157	5785	9.92	11.00	
		161	5805	9.69	11.00	
	802.11ac-VHT40 MCS0	151	5755	10.08	10.50	96.35
		159	5795	9.66	10.50	
	802.11ac-VHT80 MCS0	155	5775	10.15	10.50	92.51

<Reduced Power Level 2 for Head>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	14.71	15.50	100.00
		6	2437	14.81	15.50	
		11	2462	14.77	15.50	
	802.11g 6Mbps	1	2412	14.50	15.50	98.28
		6	2437	14.53	15.50	
		11	2462	14.46	15.50	
	802.11n-HT20 MCS0	1	2412	14.57	15.50	98.15
		6	2437	14.70	15.50	
		11	2462	14.71	15.50	
	802.11n-HT40 MCS0	3	2422	14.45	15.50	94.93
		6	2437	14.64	15.50	
		9	2452	14.36	15.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	10.27	11.00	98.28
		40	5200	9.66	11.00	
		44	5220	10.33	11.00	
		48	5240	9.53	11.00	
	802.11n-HT20 MCS0	36	5180	9.66	11.00	98.16
		40	5200	9.61	11.00	
		44	5220	9.69	11.00	
		48	5240	9.54	11.00	
	802.11n-HT40 MCS0	38	5190	9.40	10.50	96.30
		46	5230	9.18	10.50	
	802.11ac-VHT20 MCS0	36	5180	9.83	11.00	98.16
		40	5200	9.75	11.00	
		44	5220	9.59	11.00	
		48	5240	9.79	11.00	
	802.11ac-VHT40 MCS0	38	5190	9.49	10.50	96.35
		46	5230	9.24	10.50	
	802.11ac-VHT80 MCS0	42	5210	9.66	10.50	92.51



5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	10.11	11.00	98.28
		56	5280	10.00	11.00	
		60	5300	10.14	11.00	
		64	5320	10.21	11.00	
	802.11n-HT20 MCS0	52	5260	9.55	11.00	98.16
		56	5280	9.59	11.00	
		60	5300	9.81	11.00	
		64	5320	9.56	11.00	
	802.11n-HT40 MCS0	54	5270	9.40	10.50	96.30
		62	5310	9.61	10.50	
	802.11ac-VHT20 MCS0	52	5260	9.61	11.00	98.16
		56	5280	9.51	11.00	
		60	5300	9.83	11.00	
		64	5320	9.55	11.00	
	802.11ac-VHT40 MCS0	54	5270	9.62	10.50	96.35
		62	5310	9.69	10.50	
	802.11ac-VHT80 MCS0	58	5290	9.85	10.50	92.51

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	8.09	9.50	98.28
		116	5580	8.25	9.50	
		124	5620	8.81	9.50	
		132	5660	8.72	9.50	
		140	5700	8.92	9.50	
	802.11n-HT20 MCS0	100	5500	8.02	9.50	98.16
		116	5580	8.20	9.50	
		124	5620	8.17	9.50	
		132	5660	8.25	9.50	
		140	5700	8.00	9.50	
	802.11n-HT40 MCS0	102	5510	7.77	9.00	96.30
		110	5550	7.92	9.00	
		126	5630	7.63	9.00	
		134	5670	7.78	9.00	
	802.11ac-VHT20 MCS0	100	5500	8.29	9.50	98.16
		116	5580	8.34	9.50	
		124	5620	8.23	9.50	
		132	5660	8.37	9.50	
		140	5700	8.13	9.50	
	802.11ac-VHT40 MCS0	102	5510	7.85	9.00	96.35
		110	5550	8.00	9.00	
		126	5630	7.65	9.00	
		134	5670	7.83	9.00	
	802.11ac-VHT80 MCS0	106	5530	7.96	9.00	92.51
		122	5610	7.90	9.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	8.06	9.00	98.28
		157	5785	8.14	9.00	
		161	5805	8.16	9.00	
	802.11n-HT20 MCS0	149	5745	7.59	9.00	98.16
		157	5785	7.83	9.00	
		161	5805	7.56	9.00	
	802.11n-HT40 MCS0	151	5755	7.02	8.50	96.30
		159	5795	7.15	8.50	
	802.11ac-VHT20 MCS0	149	5745	7.62	9.00	98.16
		157	5785	7.95	9.00	
		161	5805	7.52	9.00	
	802.11ac-VHT40 MCS0	151	5755	7.08	8.50	96.35
		159	5795	7.14	8.50	
	802.11ac-VHT80 MCS0	155	5775	7.06	8.50	92.51

<Reduced Power for Hotspot On >

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	14.71	15.50	100.00
		6	2437	14.81	15.50	
		11	2462	14.77	15.50	
	802.11g 6Mbps	1	2412	14.50	15.50	98.28
		6	2437	14.53	15.50	
		11	2462	14.46	15.50	
	802.11n-HT20 MCS0	1	2412	14.57	15.50	98.15
		6	2437	14.70	15.50	
		11	2462	14.71	15.50	
	802.11n-HT40 MCS0	3	2422	14.45	15.50	94.93
		6	2437	14.64	15.50	
		9	2452	14.36	15.50	

<5GHz WLAN>


	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	10.27	11.00	98.28
		40	5200	9.66	11.00	
		44	5220	10.33	11.00	
		48	5240	9.53	11.00	
	802.11n-HT20 MCS0	36	5180	9.66	11.00	98.16
		40	5200	9.61	11.00	
		44	5220	9.69	11.00	
		48	5240	9.54	11.00	
	802.11n-HT40 MCS0	38	5190	9.40	10.50	96.30
		46	5230	9.18	10.50	
	802.11ac-VHT20 MCS0	36	5180	9.83	11.00	98.16
		40	5200	9.75	11.00	
		44	5220	9.59	11.00	
		48	5240	9.79	11.00	
	802.11ac-VHT40 MCS0	38	5190	9.49	10.50	96.35
		46	5230	9.24	10.50	
	802.11ac-VHT80 MCS0	42	5210	9.66	10.50	92.51

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	8.06	9.00	98.28
		157	5785	8.14	9.00	
		161	5805	8.16	9.00	
	802.11n-HT20 MCS0	149	5745	7.59	9.00	98.16
		157	5785	7.83	9.00	
		161	5805	7.56	9.00	
	802.11n-HT40 MCS0	151	5755	7.02	8.50	96.30
		159	5795	7.15	8.50	
	802.11ac-VHT20 MCS0	149	5745	7.62	9.00	98.16
		157	5785	7.95	9.00	
		161	5805	7.52	9.00	
	802.11ac-VHT40 MCS0	151	5755	7.08	8.50	96.35
		159	5795	7.14	8.50	
	802.11ac-VHT80 MCS0	155	5775	7.06	8.50	92.51

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.68 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

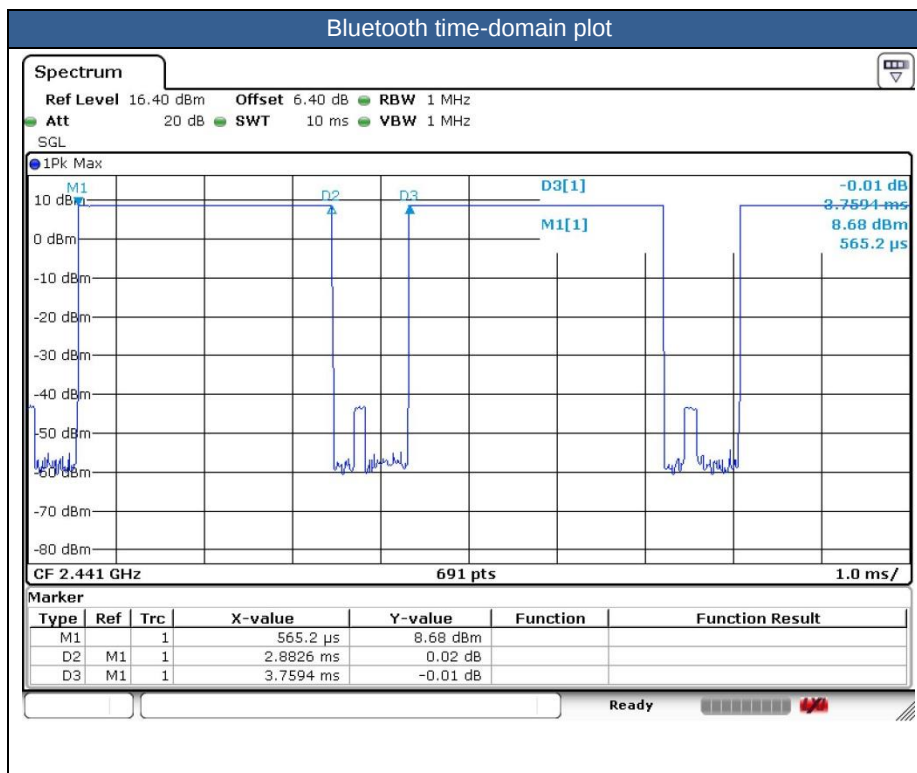


Mode	Channel	Frequency (MHz)	Data Rate
			1Mbps
BR/EDR	CH 00	2402	11.00
	CH 39	2441	10.42
	CH 78	2480	10.93
Tune-up Limit			11.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.0 LE	CH 00	2402	5.96
	CH 19	2440	5.93
	CH 39	2480	7.97
Tune-up Limit			9.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v5.0 LE	CH 00	2402	5.76
	CH 19	2440	5.81
	CH 39	2480	7.95
Tune-up Limit			9.00

14. Antenna Location

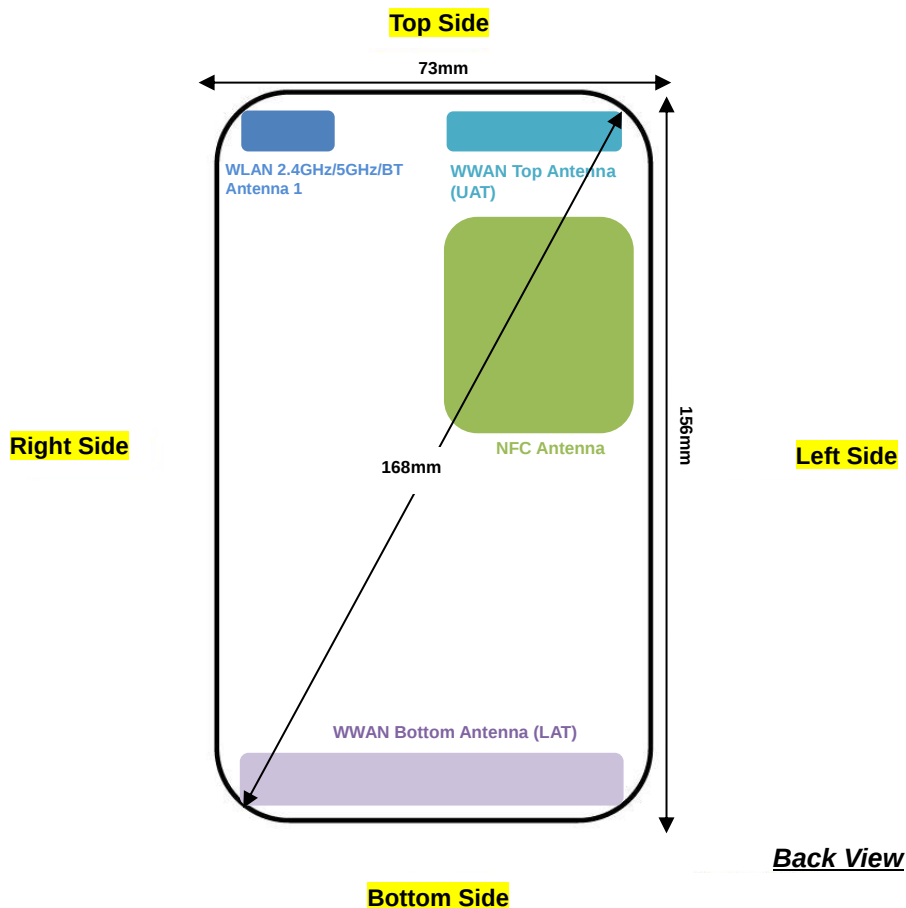

Antenna	Support Band
WWAN Top Antenna	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B26 / B38
WWAN Bottom Antenna	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B26 / B38
WLAN 2.4GHz/5GHz/BT Antenna	WLAN 2.4GHz WLAN 5GHz Bluetooth
NFC Antenna	NFC

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna(UAT)	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
WWAN Bottom Antenna(LAT)	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN 2.4GHz/5GHz/BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	Yes	Yes	Yes	No	No	Yes
WWAN Bottom Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN 2.4GHz/5GHz/BT	Yes	Yes	Yes	No	Yes	No

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
3. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15 cm or an overall diagonal dimension > 16 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2 W/kg.
5. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
6. This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously.
7. For top WWAN antenna:
Reduced power level 1:
When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850, WCDMA B2/B4/B5 and LTE B2/5/7/26/38/7C/38C.
Reduced power level 2:
For GSM850, WCDMA B5 and LTE B5/26 while the device WLAN or Bluetooth transmit simultaneously with the WWAN top antenna at head mode, power reduction enabled for this scenario.
 - a. When hotspot mode is enabled, power reduction will be activated to GSM850, WCDMA B2/B4/B5, LTE band B2/5/7/26/38/7C/38C, full power can perform pass, so no need to verify reduced power state.
8. For bottom WWAN antenna:
 - a. The device employs proximity sensors that detect the presence of the user's body at the front, back or bottom faces of the device. When front, back or bottom of handheld state is detected WCDMA B2/B4 and LTE B2/4 /7/38/7C/38C for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active for handheld state.
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA B2/B4, LTE band B2/4 /7/38/7C/38C
9. For WLAN antenna
Reduced power level 1:
When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately for WLAN 2.4GHz/ WLAN5.2/5.3/5.5/5.8GHz.
Reduced power level 2:
For WLAN 2.4GHz/ WLAN 5.2/5.3/5.5/5.8GHz, when it transmits simultaneously WWAN or Bluetooth for head mode, power reduction will be triggered for this scenario.
10. UAT means top antenna, LAT means bottom antenna.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**WCDMA Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B5 SAR test was covered by LTE B26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
5. Bluetooth and WLAN share the same antenna, with similar work frequency, so for Bluetooth SAR testing, we chose the worst position of WLAN to perform.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM 850_UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced Power Level 1	189	836.4	24.90	26.00	1.288	-0.01	0.662	0.853
	GSM 850_UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced Power Level 1	128	824.2	24.67	26.00	1.358	-0.07	0.678	0.921
	GSM 850_UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced Power Level 1	251	848.8	24.89	26.00	1.291	0.01	0.762	0.984
	GSM 850_UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced Power Level 1	189	836.4	24.90	26.00	1.288	0.06	0.671	0.864
	GSM 850_UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced Power Level 1	128	824.2	24.67	26.00	1.358	0.06	0.626	0.850
	GSM 850_UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced Power Level 1	251	848.8	24.89	26.00	1.291	0.06	0.707	0.913
	GSM 850_UAT	GPRS 4 Tx slots	Left Cheek	0	Reduced Power Level 1	189	836.4	24.90	26.00	1.288	0.01	0.689	0.888
	GSM 850_UAT	GPRS 4 Tx slots	Left Cheek	0	Reduced Power Level 1	128	824.2	24.67	26.00	1.358	0.09	0.615	0.835
	GSM 850_UAT	GPRS 4 Tx slots	Left Cheek	0	Reduced Power Level 1	251	848.8	24.89	26.00	1.291	0.04	0.709	0.915
	GSM 850_UAT	GPRS 4 Tx slots	Left Tilted	0	Reduced Power Level 1	189	836.4	24.90	26.00	1.288	0.01	0.492	0.634
	GSM 850-UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced Power Level 2	189	836.4	24.16	25.00	1.213	-0.03	0.655	0.795
	GSM 850-UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced Power Level 2	189	836.4	24.16	25.00	1.213	0.01	0.503	0.610
	GSM 850-UAT	GPRS 4 Tx slots	Left Cheek	0	Reduced Power Level 2	189	836.4	24.16	25.00	1.213	0.02	0.517	0.627
	GSM 850-UAT	GPRS 4 Tx slots	Left Tilted	0	Reduced Power Level 2	189	836.4	24.16	25.00	1.213	0.03	0.492	0.597
	GSM 850-LAT	GPRS 4 Tx slots	Right Cheek	0	Full	189	836.4	25.94	27.50	1.432	0.01	0.091	0.130
	GSM 850-LAT	GPRS 4 Tx slots	Right Tilted	0	Full	189	836.4	25.94	27.50	1.432	0.01	0.043	0.062
02	GSM 850-LAT	GPRS 4 Tx slots	Left Cheek	0	Full	189	836.4	25.94	27.50	1.432	0.01	0.122	0.175
	GSM 850-LAT	GPRS 4 Tx slots	Left Tilted	0	Full	189	836.4	25.94	27.50	1.432	0.05	0.049	0.070
	GSM 1900-UAT	GPRS 4 Tx slots	Right Cheek	0	Full	810	1909.8	22.80	23.50	1.175	0.06	0.853	1.002
	GSM 1900-UAT	GPRS 4 Tx slots	Right Cheek	0	Full	512	1850.2	22.67	23.50	1.211	0.01	0.777	0.941
	GSM 1900-UAT	GPRS 4 Tx slots	Right Cheek	0	Full	661	1880	22.78	23.50	1.180	0.03	0.833	0.983
	GSM 1900-UAT	GPRS 4 Tx slots	Right Tilted	0	Full	810	1909.8	22.80	23.50	1.175	0.04	0.438	0.515
	GSM 1900-UAT	GPRS 4 Tx slots	Left Cheek	0	Full	810	1909.8	22.80	23.50	1.175	-0.02	0.237	0.278
	GSM 1900-UAT	GPRS 4 Tx slots	Left Tilted	0	Full	810	1909.8	22.80	23.50	1.175	-0.05	0.269	0.316
	GSM 1900-LAT	GPRS 4 Tx slots	Right Cheek	0	Full	810	1909.8	22.93	24.50	1.435	0.11	0.066	0.094
	GSM 1900-LAT	GPRS 4 Tx slots	Right Tilted	0	Full	810	1909.8	22.93	24.50	1.435	0.02	0.030	0.043
	GSM 1900-LAT	GPRS 4 Tx slots	Left Cheek	0	Full	810	1909.8	22.93	24.50	1.435	0.02	0.039	0.056
	GSM 1900-LAT	GPRS 4 Tx slots	Left Tilted	0	Full	810	1909.8	22.93	24.50	1.435	-0.05	0.043	0.062



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	4233	846.6	21.68	22.50	1.208	0.01	0.861	1.040
	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	4132	826.4	21.42	22.50	1.282	-0.1	0.825	1.058
	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	4182	836.4	21.68	22.50	1.208	0.03	0.860	1.039
	WCDMA V_UAT	RMC 12.2Kbps	Right Tilted	0	Reduced Power Level 1	4233	846.6	21.68	22.50	1.208	0.01	0.706	0.853
	WCDMA V_UAT	RMC 12.2Kbps	Right Tilted	0	Reduced Power Level 1	4132	826.4	21.42	22.50	1.282	-0.07	0.637	0.817
	WCDMA V_UAT	RMC 12.2Kbps	Right Tilted	0	Reduced Power Level 1	4182	836.4	21.68	22.50	1.208	0.07	0.733	0.885
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0	Reduced Power Level 1	4233	846.6	21.68	22.50	1.208	0.01	0.824	0.995
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0	Reduced Power Level 1	4132	826.4	21.42	22.50	1.282	0.01	0.796	1.021
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0	Reduced Power Level 1	4182	836.4	21.68	22.50	1.208	0.03	0.818	0.988
	WCDMA V_UAT	RMC 12.2Kbps	Left Tilted	0	Reduced Power Level 1	4233	846.6	21.68	22.50	1.208	0.03	0.730	0.882
	WCDMA V_UAT	RMC 12.2Kbps	Left Tilted	0	Reduced Power Level 1	4132	826.4	21.42	22.50	1.282	0.06	0.639	0.819
	WCDMA V_UAT	RMC 12.2Kbps	Left Tilted	0	Reduced Power Level 1	4182	836.4	21.68	22.50	1.208	0.03	0.686	0.829
	WCDMA V-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 2	4233	846.6	20.19	21.00	1.205	-0.03	0.560	0.675
	WCDMA V-UAT	RMC 12.2Kbps	Right Tilted	0	Reduced Power Level 2	4233	846.6	20.19	21.00	1.205	0.02	0.499	0.601
	WCDMA V-UAT	RMC 12.2Kbps	Left Cheek	0	Reduced Power Level 2	4233	846.6	20.19	21.00	1.205	0.06	0.612	0.737
	WCDMA V-UAT	RMC 12.2Kbps	Left Tilted	0	Reduced Power Level 2	4233	846.6	20.19	21.00	1.205	0.06	0.515	0.621
	WCDMA V-LAT	RMC 12.2Kbps	Right Cheek	0	Full	4233	846.6	23.97	24.50	1.130	-0.02	0.149	0.168
	WCDMA V-LAT	RMC 12.2Kbps	Right Tilted	0	Full	4233	846.6	23.97	24.50	1.130	0.03	0.078	0.088
	WCDMA V-LAT	RMC 12.2Kbps	Left Cheek	0	Full	4233	846.6	23.97	24.50	1.130	0.03	0.226	0.255
	WCDMA V-LAT	RMC 12.2Kbps	Left Tilted	0	Full	4233	846.6	23.97	24.50	1.130	0.03	0.092	0.104
	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	1413	1732.6	21.06	21.70	1.159	0.03	0.789	0.914
	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	1312	1712.4	20.79	21.70	1.233	0.01	0.680	0.839
	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	1513	1752.6	20.85	21.70	1.216	-0.06	0.855	1.040
	WCDMA IV-UAT	RMC 12.2Kbps	Right Tilted	0	Reduced Power Level 1	1413	1732.6	21.06	21.70	1.159	-0.11	0.461	0.534
04	WCDMA IV-UAT	RMC 12.2Kbps	Left Cheek	0	Reduced Power Level 1	1413	1732.6	21.06	21.70	1.159	0.01	0.312	0.362
	WCDMA IV-UAT	RMC 12.2Kbps	Left Tilted	0	Reduced Power Level 1	1413	1732.6	21.06	21.70	1.159	0.01	0.300	0.348
	WCDMA IV-LAT	RMC 12.2Kbps	Right Cheek	0	Full	1413	1732.6	23.69	24.50	1.205	0.05	0.192	0.231
	WCDMA IV-LAT	RMC 12.2Kbps	Right Tilted	0	Full	1413	1732.6	23.69	24.50	1.205	0.03	0.117	0.141
	WCDMA IV-LAT	RMC 12.2Kbps	Left Cheek	0	Full	1413	1732.6	23.69	24.50	1.205	0.02	0.136	0.164
	WCDMA IV-LAT	RMC 12.2Kbps	Left Tilted	0	Full	1413	1732.6	23.69	24.50	1.205	0.05	0.104	0.125
	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	9262	1852.4	20.38	21.00	1.153	0.02	0.879	1.014
	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	9400	1880	20.19	21.00	1.205	0.01	0.972	1.171
	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced Power Level 1	9538	1907.6	20.35	21.00	1.161	0.01	1.020	1.185
	WCDMA II-UAT	RMC 12.2Kbps	Right Tilted	0	Reduced Power Level 1	9262	1852.4	20.38	21.00	1.153	0.03	0.446	0.514
	WCDMA II-UAT	RMC 12.2Kbps	Left Cheek	0	Reduced Power Level 1	9262	1852.4	20.38	21.00	1.153	0.01	0.399	0.460
	WCDMA II-UAT	RMC 12.2Kbps	Left Tilted	0	Reduced Power Level 1	9262	1852.4	20.38	21.00	1.153	0.02	0.360	0.415
05	WCDMA II-LAT	RMC 12.2Kbps	Right Cheek	0	Full	9538	1907.6	23.79	24.50	1.178	0.11	0.184	0.217
	WCDMA II-LAT	RMC 12.2Kbps	Right Tilted	0	Full	9538	1907.6	23.79	24.50	1.178	0.02	0.078	0.092
	WCDMA II-LAT	RMC 12.2Kbps	Left Cheek	0	Full	9538	1907.6	23.79	24.50	1.178	0.03	0.115	0.135
	WCDMA II-LAT	RMC 12.2Kbps	Left Tilted	0	Full	9538	1907.6	23.79	24.50	1.178	0.06	0.119	0.140



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_UAT	15M	QPSK	1	0	Right Cheek	0	Reduced Power Level 1	26865	831.5	22.48	22.90	1.102	0.01	0.865	0.953
	LTE Band 26_UAT	15M	QPSK	36	0	Right Cheek	0	Reduced Power Level 1	26865	831.5	21.83	22.40	1.140	0.02	0.791	0.902
	LTE Band 26_UAT	15M	QPSK	75	0	Right Cheek	0	Reduced Power Level 1	26865	831.5	21.70	22.40	1.175	0.01	0.785	0.922
	LTE Band 26_UAT	15M	QPSK	1	0	Right Tilted	0	Reduced Power Level 1	26865	831.5	22.48	22.90	1.102	0.02	0.821	0.904
	LTE Band 26_UAT	15M	QPSK	36	0	Right Tilted	0	Reduced Power Level 1	26865	831.5	21.83	22.40	1.140	-0.03	0.764	0.871
	LTE Band 26_UAT	15M	QPSK	75	0	Right Tilted	0	Reduced Power Level 1	26865	831.5	21.70	22.40	1.175	0.02	0.759	0.892
	LTE Band 26_UAT	15M	QPSK	1	0	Left Cheek	0	Reduced Power Level 1	26865	831.5	22.48	22.90	1.102	0.02	0.869	0.957
	LTE Band 26_UAT	15M	QPSK	36	0	Left Cheek	0	Reduced Power Level 1	26865	831.5	21.83	22.40	1.140	0.07	0.828	0.944
06	LTE Band 26_UAT	15M	QPSK	75	0	Left Cheek	0	Reduced Power Level 1	26865	831.5	21.70	22.40	1.175	-0.01	0.829	0.974
	LTE Band 26_UAT	15M	QPSK	1	0	Left Tilted	0	Reduced Power Level 1	26865	831.5	22.48	22.90	1.102	0.03	0.802	0.883
	LTE Band 26_UAT	15M	QPSK	36	0	Left Tilted	0	Reduced Power Level 1	26865	831.5	21.83	22.40	1.140	0.06	0.745	0.849
	LTE Band 26_UAT	15M	QPSK	75	0	Left Tilted	0	Reduced Power Level 1	26865	831.5	21.70	22.40	1.175	0.01	0.749	0.880
	LTE Band 26-UAT	15M	QPSK	1	0	Right Cheek	0	Reduced Power Level 2	26865	831.5	21.30	21.40	1.023	0.03	0.709	0.726
	LTE Band 26-UAT	15M	QPSK	36	0	Right Cheek	0	Reduced Power Level 2	26865	831.5	21.21	21.40	1.045	0.01	0.729	0.762
	LTE Band 26-UAT	15M	QPSK	1	0	Right Tilted	0	Reduced Power Level 2	26865	831.5	21.30	21.40	1.023	0.01	0.537	0.550
	LTE Band 26-UAT	15M	QPSK	36	0	Right Tilted	0	Reduced Power Level 2	26865	831.5	21.21	21.40	1.045	0.03	0.558	0.583
	LTE Band 26-UAT	15M	QPSK	1	0	Left Cheek	0	Reduced Power Level 2	26865	831.5	21.30	21.40	1.023	0.01	0.652	0.667
	LTE Band 26-UAT	15M	QPSK	36	0	Left Cheek	0	Reduced Power Level 2	26865	831.5	21.21	21.40	1.045	0.06	0.671	0.701
	LTE Band 26-UAT	15M	QPSK	1	0	Left Tilted	0	Reduced Power Level 2	26865	831.5	21.30	21.40	1.023	0.06	0.486	0.497
	LTE Band 26-UAT	15M	QPSK	36	0	Left Tilted	0	Reduced Power Level 2	26865	831.5	21.21	21.40	1.045	0.03	0.543	0.567
	LTE Band 26-LAT	15M	QPSK	1	0	Right Cheek	0	Full	26865	831.5	23.07	24.00	1.239	0.05	0.097	0.120
	LTE Band 26-LAT	15M	QPSK	36	0	Right Cheek	0	Full	26865	831.5	22.15	23.00	1.216	0.01	0.080	0.097
	LTE Band 26-LAT	15M	QPSK	1	0	Right Tilted	0	Full	26865	831.5	23.07	24.00	1.239	0.02	0.053	0.066
	LTE Band 26-LAT	15M	QPSK	36	0	Right Tilted	0	Full	26865	831.5	22.15	23.00	1.216	0.04	0.046	0.056
	LTE Band 26-LAT	15M	QPSK	1	0	Left Cheek	0	Full	26865	831.5	23.07	24.00	1.239	0.05	0.114	0.141
	LTE Band 26-LAT	15M	QPSK	36	0	Left Cheek	0	Full	26865	831.5	22.15	23.00	1.216	-0.01	0.098	0.120
	LTE Band 26-LAT	15M	QPSK	1	0	Left Tilted	0	Full	26865	831.5	23.07	24.00	1.239	0.03	0.052	0.064
	LTE Band 26-LAT	15M	QPSK	36	0	Left Tilted	0	Full	26865	831.5	22.15	23.00	1.216	0.08	0.043	0.052
07	LTE Band 4-UAT	20M	QPSK	1	0	Right Cheek	0	Full	20175	1732.5	22.29	23.20	1.233	-0.05	0.799	0.985
	LTE Band 4-UAT	20M	QPSK	50	0	Right Cheek	0	Full	20175	1732.5	21.29	22.20	1.233	0.08	0.744	0.917
	LTE Band 4-UAT	20M	QPSK	100	0	Right Cheek	0	Full	20175	1732.5	21.24	22.20	1.247	0.13	0.726	0.906
	LTE Band 4-UAT	20M	QPSK	1	0	Right Tilted	0	Full	20175	1732.5	22.29	23.20	1.233	0.05	0.755	0.931
	LTE Band 4-UAT	20M	QPSK	50	0	Right Tilted	0	Full	20175	1732.5	21.29	22.20	1.233	0.11	0.619	0.763
	LTE Band 4-UAT	20M	QPSK	100	0	Right Tilted	0	Full	20175	1732.5	21.24	22.20	1.247	0.04	0.624	0.778
	LTE Band 4-UAT	20M	QPSK	1	0	Left Cheek	0	Full	20175	1732.5	22.29	23.20	1.233	-0.04	0.294	0.363
	LTE Band 4-UAT	20M	QPSK	50	0	Left Cheek	0	Full	20175	1732.5	21.29	22.20	1.233	0.06	0.254	0.313
	LTE Band 4-UAT	20M	QPSK	1	0	Left Tilted	0	Full	20175	1732.5	22.29	23.20	1.233	0.03	0.407	0.502
	LTE Band 4-UAT	20M	QPSK	50	0	Left Tilted	0	Full	20175	1732.5	21.29	22.20	1.233	-0.03	0.299	0.369
	LTE Band 4-LAT	20M	QPSK	1	0	Right Cheek	0	Full	20175	1732.5	22.82	24.00	1.312	0.17	0.170	0.223
	LTE Band 4-LAT	20M	QPSK	50	0	Right Cheek	0	Full	20175	1732.5	21.84	23.00	1.306	0.06	0.168	0.219
	LTE Band 4-LAT	20M	QPSK	1	0	Right Tilted	0	Full	20175	1732.5	22.82	24.00	1.312	0.05	0.085	0.112
	LTE Band 4-LAT	20M	QPSK	50	0	Right Tilted	0	Full	20175	1732.5	21.84	23.00	1.306	0.03	0.070	0.091
	LTE Band 4-LAT	20M	QPSK	1	0	Left Cheek	0	Full	20175	1732.5	22.82	24.00	1.312	0.01	0.114	0.150
	LTE Band 4-LAT	20M	QPSK	50	0	Left Cheek	0	Full	20175	1732.5	21.84	23.00	1.306	0	0.093	0.121
	LTE Band 4-LAT	20M	QPSK	1	0	Left Tilted	0	Full	20175	1732.5	22.82	24.00	1.312	0.03	0.085	0.111
	LTE Band 4-LAT	20M	QPSK	50	0	Left Tilted	0	Full	20175	1732.5	21.84	23.00	1.306	0.01	0.070	0.092



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced Power Level 1	18900	1880	21.70	22.10	1.096	0.01	0.906	0.993
	LTE Band 2-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced Power Level 1	18700	1860	21.65	22.10	1.109	0.02	0.848	0.941
	LTE Band 2-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced Power Level 1	19100	1900	21.42	22.10	1.169	-0.03	0.985	1.152
	LTE Band 2-UAT	20M	QPSK	50	24	Right Cheek	0	Reduced Power Level 1	18900	1880	21.49	22.10	1.151	0.01	0.939	1.081
	LTE Band 2-UAT	20M	QPSK	50	24	Right Cheek	0	Reduced Power Level 1	18700	1860	21.48	22.10	1.153	0.04	0.897	1.035
08	LTE Band 2-UAT	20M	QPSK	50	24	Right Cheek	0	Reduced Power Level 1	19100	1900	21.33	22.10	1.194	0.01	0.968	1.156
	LTE Band 2-UAT	20M	QPSK	100	0	Right Cheek	0	Reduced Power Level 1	18900	1880	21.38	22.10	1.180	0.05	0.928	1.095
	LTE Band 2-UAT	20M	QPSK	1	0	Right Tilted	0	Reduced Power Level 1	18900	1880	21.70	22.10	1.096	0.01	0.702	0.770
	LTE Band 2-UAT	20M	QPSK	50	24	Right Tilted	0	Reduced Power Level 1	18900	1880	21.49	22.10	1.151	0.02	0.731	0.841
	LTE Band 2-UAT	20M	QPSK	50	24	Right Tilted	0	Reduced Power Level 1	18700	1860	21.48	22.10	1.153	0.09	0.688	0.794
	LTE Band 2-UAT	20M	QPSK	50	24	Right Tilted	0	Reduced Power Level 1	19100	1900	21.33	22.10	1.194	0.01	0.757	0.904
	LTE Band 2-UAT	20M	QPSK	100	0	Right Tilted	0	Reduced Power Level 1	18900	1880	21.38	22.10	1.180	0.02	0.726	0.857
	LTE Band 2-UAT	20M	QPSK	1	0	Left Cheek	0	Reduced Power Level 1	18900	1880	21.70	22.10	1.096	0.02	0.439	0.481
	LTE Band 2-UAT	20M	QPSK	50	24	Left Cheek	0	Reduced Power Level 1	18900	1880	21.49	22.10	1.151	0.09	0.464	0.534
	LTE Band 2-UAT	20M	QPSK	1	0	Left Tilted	0	Reduced Power Level 1	18900	1880	21.70	22.10	1.096	0.03	0.443	0.486
	LTE Band 2-UAT	20M	QPSK	50	24	Left Tilted	0	Reduced Power Level 1	18900	1880	21.49	22.10	1.151	0.06	0.462	0.532
	LTE Band 2-LAT	20M	QPSK	1	0	Right Cheek	0	Full	18900	1880	23.04	24.00	1.247	-0.07	0.147	0.183
	LTE Band 2-LAT	20M	QPSK	50	24	Right Cheek	0	Full	18900	1880	21.95	23.00	1.274	0.03	0.121	0.154
	LTE Band 2-LAT	20M	QPSK	1	0	Right Tilted	0	Full	18900	1880	23.04	24.00	1.247	-0.06	0.094	0.117
	LTE Band 2-LAT	20M	QPSK	50	24	Right Tilted	0	Full	18900	1880	21.95	23.00	1.274	0.02	0.086	0.110
	LTE Band 2-LAT	20M	QPSK	1	0	Left Cheek	0	Full	18900	1880	23.04	24.00	1.247	0.04	0.100	0.125
	LTE Band 2-LAT	20M	QPSK	50	24	Left Cheek	0	Full	18900	1880	21.95	23.00	1.274	0.03	0.075	0.096
	LTE Band 2-LAT	20M	QPSK	1	0	Left Tilted	0	Full	18900	1880	23.04	24.00	1.247	-0.05	0.106	0.132
	LTE Band 2-LAT	20M	QPSK	50	24	Left Tilted	0	Full	18900	1880	21.95	23.00	1.274	0.02	0.088	0.112
	LTE Band 7-UAT	20M	QPSK	1	99	Right Cheek	0	Reduced Power Level 1	20850	2510	17.30	17.50	1.047	0.02	0.766	0.802
	LTE Band 7-UAT	20M	QPSK	1	99	Right Cheek	0	Reduced Power Level 1	21100	2535	17.12	17.50	1.091	0.01	0.707	0.772
	LTE Band 7-UAT	20M	QPSK	1	99	Right Cheek	0	Reduced Power Level 1	21350	2560	17.22	17.50	1.067	0.03	0.725	0.773
09	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced Power Level 1	20850	2510	16.80	17.50	1.175	-0.12	0.775	0.911
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced Power Level 1	20850 + 21048	2510 + 2529.8	17.14	17.50	1.086	-0.13	0.758	0.824
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced Power Level 1	21100	2535	16.78	17.50	1.180	0.02	0.723	0.853
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced Power Level 1	21350	2560	16.78	17.50	1.180	0.01	0.738	0.871
	LTE Band 7-UAT	20M	QPSK	100	0	Right Cheek	0	Reduced Power Level 1	20850	2510	16.81	17.50	1.172	-0.03	0.661	0.775
	LTE Band 7-UAT	20M	QPSK	1	99	Right Tilted	0	Reduced Power Level 1	20850	2510	17.30	17.50	1.047	0.03	0.662	0.693
	LTE Band 7-UAT	20M	QPSK	50	50	Right Tilted	0	Reduced Power Level 1	20850	2510	16.80	17.50	1.175	0.01	0.649	0.763
	LTE Band 7-UAT	20M	QPSK	1	99	Left Cheek	0	Reduced Power Level 1	20850	2510	17.30	17.50	1.047	0.03	0.272	0.285
	LTE Band 7-UAT	20M	QPSK	50	50	Left Cheek	0	Reduced Power Level 1	20850	2510	16.80	17.50	1.175	0.01	0.277	0.325
	LTE Band 7-UAT	20M	QPSK	1	99	Left Tilted	0	Reduced Power Level 1	20850	2510	17.30	17.50	1.047	-0.09	0.310	0.325
	LTE Band 7-UAT	20M	QPSK	50	50	Left Tilted	0	Reduced Power Level 1	20850	2510	16.80	17.50	1.175	-0.07	0.317	0.372
	LTE Band 7-LAT	20M	QPSK	1	99	Right Cheek	0	Full	20850	2510	23.20	24.00	1.202	-0.05	0.095	0.114
	LTE Band 7-LAT	20M	QPSK	1	99	Right Cheek	0	Full	20850 + 21048	2510 + 2529.8	23.15	24.00	1.216	0.15	0.093	0.113
	LTE Band 7-LAT	20M	QPSK	50	50	Right Cheek	0	Full	20850	2510	22.28	23.00	1.180	0.02	0.085	0.101
	LTE Band 7-LAT	20M	QPSK	1	99	Right Tilted	0	Full	20850	2510	23.20	24.00	1.202	0.01	0.076	0.091
	LTE Band 7-LAT	20M	QPSK	50	50	Right Tilted	0	Full	20850	2510	22.28	23.00	1.180	0.02	0.053	0.063
	LTE Band 7-LAT	20M	QPSK	1	99	Left Cheek	0	Full	20850	2510	23.20	24.00	1.202	0.03	0.085	0.102
	LTE Band 7-LAT	20M	QPSK	50	50	Left Cheek	0	Full	20850	2510	22.28	23.00	1.180	-0.01	0.069	0.082
	LTE Band 7-LAT	20M	QPSK	1	99	Left Tilted	0	Full	20850	2510	23.20	24.00	1.202	0.08	0.090	0.109
	LTE Band 7-LAT	20M	QPSK	50	50	Left Tilted	0	Full	20850	2510	22.28	23.00	1.180	0.07	0.075	0.088



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced Power Level 1	38000	2595	18.67	18.80	1.030	62.9	1.006	-0.14	0.733	0.760
10	LTE Band 38-UAT	20M	QPSK	50	0	Right Cheek	0	Reduced Power Level 1	38000	2595	18.64	18.80	1.038	62.9	1.006	-0.16	0.747	0.780
	LTE Band 38-UAT	20M	QPSK	50	0	Right Cheek	0	Reduced Power Level 1	37901 + 38099	2585.1 + 2604.9	18.56	18.80	1.057	62.9	1.006	-0.06	0.723	0.769
	LTE Band 38-UAT	20M	QPSK	1	0	Right Tilted	0	Reduced Power Level 1	38000	2595	18.67	18.80	1.030	62.9	1.006	0.03	0.557	0.577
	LTE Band 38-UAT	20M	QPSK	50	0	Right Tilted	0	Reduced Power Level 1	38000	2595	18.64	18.80	1.038	62.9	1.006	0.02	0.549	0.573
	LTE Band 38-UAT	20M	QPSK	1	0	Left Cheek	0	Reduced Power Level 1	38000	2595	18.67	18.80	1.030	62.9	1.006	0.03	0.193	0.200
	LTE Band 38-UAT	20M	QPSK	50	0	Left Cheek	0	Reduced Power Level 1	38000	2595	18.64	18.80	1.038	62.9	1.006	0.03	0.193	0.201
	LTE Band 38-UAT	20M	QPSK	1	0	Left Tilted	0	Reduced Power Level 1	38000	2595	18.67	18.80	1.030	62.9	1.006	0.02	0.260	0.270
	LTE Band 38-UAT	20M	QPSK	50	0	Left Tilted	0	Reduced Power Level 1	38000	2595	18.64	18.80	1.038	62.9	1.006	0.01	0.255	0.266
	LTE Band 38-LAT	20M	QPSK	1	0	Right Cheek	0	Full	38000	2595	23.19	24.00	1.205	62.9	1.006	-0.16	0.072	0.087
	LTE Band 38-LAT	20M	QPSK	1	0	Right Cheek	0	Full	37901 + 38099	2585.1 + 2604.9	23.12	24.00	1.225	62.9	1.006	0.01	0.053	0.065
	LTE Band 38-LAT	20M	QPSK	50	0	Right Cheek	0	Full	38000	2595	22.15	23.00	1.216	62.9	1.006	0.06	0.054	0.066
	LTE Band 38-LAT	20M	QPSK	1	0	Right Tilted	0	Full	38000	2595	23.19	24.00	1.205	62.9	1.006	0.05	0.048	0.059
	LTE Band 38-LAT	20M	QPSK	50	0	Right Tilted	0	Full	38000	2595	22.15	23.00	1.216	62.9	1.006	0.05	0.038	0.046
	LTE Band 38-LAT	20M	QPSK	1	0	Left Cheek	0	Full	38000	2595	23.19	24.00	1.205	62.9	1.006	0.01	0.071	0.086
	LTE Band 38-LAT	20M	QPSK	50	0	Left Cheek	0	Full	38000	2595	22.15	23.00	1.216	62.9	1.006	0.03	0.050	0.061
	LTE Band 38-LAT	20M	QPSK	1	0	Left Tilted	0	Full	38000	2595	23.19	24.00	1.205	62.9	1.006	0.03	0.064	0.078
	LTE Band 38-LAT	20M	QPSK	50	0	Left Tilted	0	Full	38000	2595	22.15	23.00	1.216	62.9	1.006	0.06	0.053	0.064



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0	0	2402	11.00	11.50	1.122	76.68	1.086	0.03	0.083	0.101
	Bluetooth	1Mbps	Right Tilted	0	0	2402	11.00	11.50	1.122	76.68	1.086	0.02	0.101	0.123
	Bluetooth	1Mbps	Left Cheek	0	0	2402	11.00	11.50	1.122	76.68	1.086	-0.08	0.162	0.197
11	Bluetooth	1Mbps	Left Tilted	0	0	2402	11.00	11.50	1.122	76.68	1.086	-0.04	0.193	0.235

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0	Reduced Power Level 2	6	2437	14.81	15.50	1.172	100	1.000	0.02	0.231	0.271
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0	Reduced Power Level 2	6	2437	14.81	15.50	1.172	100	1.000	0.01	0.352	0.413
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0	Reduced Power Level 2	6	2437	14.81	15.50	1.172	100	1.000	0.01	0.542	0.635
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0	Reduced Power Level 2	6	2437	14.81	15.50	1.172	100	1.000	0.03	0.622	0.729
	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	0	Reduced Power Level 1	6	2437	16.91	17.50	1.146	100	1.000	0.02	0.433	0.496
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	0	Reduced Power Level 1	6	2437	16.91	17.50	1.146	100	1.000	0.01	0.594	0.680
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	0	Reduced Power Level 1	6	2437	16.91	17.50	1.146	100	1.000	0.01	0.807	0.924
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	0	Reduced Power Level 1	6	2437	16.91	17.50	1.146	100	1.000	0.03	0.894	1.024
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	0	Reduced Power Level 1	11	2462	16.85	17.50	1.161	100	1.000	-0.05	0.864	1.003
12	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	0	Reduced Power Level 1	11	2462	16.85	17.50	1.161	100	1.000	-0.04	0.956	1.110



<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0	Reduced Power Level 2	64	5320	10.21	11.00	1.199	98.28	1.018	-0.01	0.149	0.182
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0	Reduced Power Level 2	64	5320	10.21	11.00	1.199	98.28	1.018	0.08	0.125	0.153
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 2	64	5320	10.21	11.00	1.199	98.28	1.018	0.05	0.440	0.537
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 2	64	5320	10.21	11.00	1.199	98.28	1.018	0.05	0.334	0.408
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0	Reduced Power Level 1	64	5320	14.12	14.50	1.091	98.28	1.018	0.01	0.284	0.316
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0	Reduced Power Level 1	64	5320	14.12	14.50	1.091	98.28	1.018	0.03	0.260	0.289
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 1	64	5320	14.12	14.50	1.091	98.28	1.018	0.03	0.887	0.986
13	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 1	60	5300	14.08	14.50	1.102	98.28	1.018	-0.01	0.962	1.079
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 1	64	5320	14.12	14.50	1.091	98.28	1.018	0.03	0.795	0.883
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 1	60	5300	14.08	14.50	1.102	98.28	1.018	0.03	0.912	1.023
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0	Reduced Power Level 2	140	5700	8.92	9.50	1.143	98.28	1.018	0.04	0.173	0.201
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0	Reduced Power Level 2	140	5700	8.92	9.50	1.143	98.28	1.018	0.06	0.147	0.171
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 2	140	5700	8.92	9.50	1.143	98.28	1.018	0.01	0.473	0.550
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 2	140	5700	8.92	9.50	1.143	98.28	1.018	0.04	0.305	0.355
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0	Reduced Power Level 1	140	5700	11.81	12.50	1.172	98.28	1.018	0.02	0.386	0.461
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0	Reduced Power Level 1	140	5700	11.81	12.50	1.172	98.28	1.018	0.01	0.359	0.428
14	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 1	140	5700	11.81	12.50	1.172	98.28	1.018	0.02	0.983	1.173
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 1	116	5580	11.57	12.50	1.239	98.28	1.018	0.03	0.572	0.721
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 1	140	5700	11.81	12.50	1.172	98.28	1.018	0.01	0.771	0.920
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 1	116	5580	11.57	12.50	1.239	98.28	1.018	0.01	0.464	0.585
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0	Reduced Power Level 2	161	5805	8.16	9.00	1.213	98.28	1.018	0.04	0.148	0.183
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0	Reduced Power Level 2	161	5805	8.16	9.00	1.213	98.28	1.018	-0.05	0.130	0.161
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 2	161	5805	8.16	9.00	1.213	98.28	1.018	0.09	0.471	0.582
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 2	161	5805	8.16	9.00	1.213	98.28	1.018	-0.04	0.299	0.369
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0	Reduced Power Level 1	161	5805	10.69	11.00	1.074	98.28	1.018	0.01	0.362	0.396
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0	Reduced Power Level 1	161	5805	10.69	11.00	1.074	98.28	1.018	0.01	0.332	0.363
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 1	161	5805	10.69	11.00	1.074	98.28	1.018	0.03	0.986	1.078
15	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0	Reduced Power Level 1	157	5785	10.63	11.00	1.089	98.28	1.018	-0.09	1.040	1.153
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 1	161	5805	10.69	11.00	1.074	98.28	1.018	0.01	0.756	0.827
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0	Reduced Power Level 1	157	5785	10.63	11.00	1.089	98.28	1.018	0.02	0.760	0.842



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM 850-UAT	GPRS 4 Tx slots	Front	10	Full	189	836.4	26.02	27.00	1.253	0.09	0.217	0.272
	GSM 850-UAT	GPRS 4 Tx slots	Back	10	Full	189	836.4	26.02	27.00	1.253	0.02	0.191	0.239
	GSM 850-UAT	GPRS 4 Tx slots	Left Side	10	Full	189	836.4	26.02	27.00	1.253	0.01	0.233	0.292
	GSM 850-UAT	GPRS 4 Tx slots	Top Side	10	Full	189	836.4	26.02	27.00	1.253	0.01	0.183	0.229
	GSM 850-LAT	GPRS 4 Tx slots	Front	10	Full	189	836.4	25.94	27.50	1.432	0.02	0.206	0.295
16	GSM 850-LAT	GPRS 4 Tx slots	Back	10	Full	189	836.4	25.94	27.50	1.432	-0.07	0.250	0.358
	GSM 850-LAT	GPRS 4 Tx slots	Left Side	10	Full	189	836.4	25.94	27.50	1.432	0.01	0.130	0.186
	GSM 850-LAT	GPRS 4 Tx slots	Right Side	10	Full	189	836.4	25.94	27.50	1.432	0.02	0.056	0.081
	GSM 850-LAT	GPRS 4 Tx slots	Bottom Side	10	Full	189	836.4	25.94	27.50	1.432	0.03	0.142	0.203
	GSM 1900-UAT	GPRS 4 Tx slots	Front	10	Full	810	1909.8	22.80	23.50	1.175	0	0.085	0.099
	GSM 1900-UAT	GPRS 4 Tx slots	Back	10	Full	810	1909.8	22.80	23.50	1.175	0.16	0.094	0.110
	GSM 1900-UAT	GPRS 4 Tx slots	Left Side	10	Full	810	1909.8	22.80	23.50	1.175	0.03	0.133	0.156
	GSM 1900-UAT	GPRS 4 Tx slots	Top Side	10	Full	810	1909.8	22.80	23.50	1.175	-0.05	0.145	0.170
	GSM 1900-LAT	GPRS 4 Tx slots	Front	10	Reduced	810	1909.8	21.38	23.00	1.452	0.01	0.368	0.534
	GSM 1900-LAT	GPRS 4 Tx slots	Back	10	Reduced	810	1909.8	21.38	23.00	1.452	-0.13	0.304	0.441
	GSM 1900-LAT	GPRS 4 Tx slots	Left Side	10	Reduced	810	1909.8	21.38	23.00	1.452	0.03	0.077	0.112
	GSM 1900-LAT	GPRS 4 Tx slots	Right Side	10	Reduced	810	1909.8	21.38	23.00	1.452	0.03	0.069	0.100
	GSM 1900-LAT	GPRS 4 Tx slots	Bottom Side	10	Reduced	810	1909.8	21.38	23.00	1.452	0.02	0.722	1.048
	GSM 1900-LAT	GPRS 4 Tx slots	Bottom Side	10	Reduced	512	1850.2	21.36	23.00	1.459	0.01	0.809	1.180
17	GSM 1900-LAT	GPRS 4 Tx slots	Bottom Side	10	Reduced	661	1880	21.33	23.00	1.469	-0.08	0.804	1.181



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V-UAT	RMC 12.2Kbps	Front	10	Full	4233	846.6	23.47	24.50	1.268	0.03	0.418	0.530
	WCDMA V-UAT	RMC 12.2Kbps	Back	10	Full	4233	846.6	23.47	24.50	1.268	-0.08	0.369	0.468
	WCDMA V-UAT	RMC 12.2Kbps	Left Side	10	Full	4233	846.6	23.47	24.50	1.268	0.02	0.287	0.364
18	WCDMA V-UAT	RMC 12.2Kbps	Top Side	10	Full	4233	846.6	23.47	24.50	1.268	0.03	0.424	0.537
	WCDMA V-LAT	RMC 12.2Kbps	Front	10	Full	4233	846.6	23.97	24.50	1.130	0.01	0.292	0.330
	WCDMA V-LAT	RMC 12.2Kbps	Back	10	Full	4233	846.6	23.97	24.50	1.130	-0.01	0.398	0.450
	WCDMA V-LAT	RMC 12.2Kbps	Left Side	10	Full	4233	846.6	23.97	24.50	1.130	0.02	0.201	0.227
	WCDMA V-LAT	RMC 12.2Kbps	Right Side	10	Full	4233	846.6	23.97	24.50	1.130	-0.07	0.046	0.052
	WCDMA V-LAT	RMC 12.2Kbps	Bottom Side	10	Full	4233	846.6	23.97	24.50	1.130	0.02	0.286	0.323
	WCDMA IV-UAT	RMC 12.2Kbps	Front	10	Full	1413	1732.6	23.14	24.20	1.276	0.1	0.223	0.285
	WCDMA IV-UAT	RMC 12.2Kbps	Back	10	Full	1413	1732.6	23.14	24.20	1.276	0.16	0.182	0.232
	WCDMA IV-UAT	RMC 12.2Kbps	Left Side	10	Full	1413	1732.6	23.14	24.20	1.276	0.13	0.250	0.319
	WCDMA IV-UAT	RMC 12.2Kbps	Top Side	10	Full	1413	1732.6	23.14	24.20	1.276	-0.15	0.265	0.338
	WCDMA IV-LAT	RMC 12.2Kbps	Front	10	Reduced	1413	1732.6	19.07	20.00	1.239	0.01	0.466	0.577
	WCDMA IV-LAT	RMC 12.2Kbps	Back	10	Reduced	1413	1732.6	19.07	20.00	1.239	0.19	0.512	0.634
	WCDMA IV-LAT	RMC 12.2Kbps	Left Side	10	Reduced	1413	1732.6	19.07	20.00	1.239	0.03	0.093	0.116
	WCDMA IV-LAT	RMC 12.2Kbps	Right Side	10	Reduced	1413	1732.6	19.07	20.00	1.239	0.01	0.104	0.129
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	1413	1732.6	19.07	20.00	1.239	0.14	0.849	1.052
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	1312	1712.4	18.85	20.00	1.303	0.03	0.815	1.062
19	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	1513	1752.6	18.95	20.00	1.274	0.14	0.901	1.147
	WCDMA II-UAT	RMC 12.2Kbps	Front	10	Full	9538	1907.6	22.94	24.00	1.276	0.19	0.263	0.336
	WCDMA II-UAT	RMC 12.2Kbps	Back	10	Full	9538	1907.6	22.94	24.00	1.276	-0.09	0.256	0.327
	WCDMA II-UAT	RMC 12.2Kbps	Left Side	10	Full	9538	1907.6	22.94	24.00	1.276	0.05	0.390	0.498
	WCDMA II-UAT	RMC 12.2Kbps	Top Side	10	Full	9538	1907.6	22.94	24.00	1.276	-0.06	0.359	0.458
	WCDMA II-LAT	RMC 12.2Kbps	Front	10	Reduced	9538	1907.6	18.08	19.00	1.236	0.01	0.368	0.455
	WCDMA II-LAT	RMC 12.2Kbps	Back	10	Reduced	9538	1907.6	18.08	19.00	1.236	-0.03	0.430	0.531
	WCDMA II-LAT	RMC 12.2Kbps	Left Side	10	Reduced	9538	1907.6	18.08	19.00	1.236	0.03	0.087	0.108
	WCDMA II-LAT	RMC 12.2Kbps	Right Side	10	Reduced	9538	1907.6	18.08	19.00	1.236	0.02	0.061	0.075
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	9538	1907.6	18.08	19.00	1.236	0.03	0.907	1.121
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	9262	1852.4	18.08	19.00	1.236	0.02	0.893	1.104
20	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	9400	1880	18.04	19.00	1.247	0.17	0.947	1.181



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26-UAT	15M	QPSK	1	0	Front	10	Full	26865	831.5	22.63	23.40	1.194	0.01	0.290	0.346
	LTE Band 26-UAT	15M	QPSK	36	0	Front	10	Full	26865	831.5	21.69	22.40	1.178	0.07	0.299	0.352
	LTE Band 26-UAT	15M	QPSK	1	0	Back	10	Full	26865	831.5	22.63	23.40	1.194	0.01	0.262	0.313
	LTE Band 26-UAT	15M	QPSK	36	0	Back	10	Full	26865	831.5	21.69	22.40	1.178	0.04	0.255	0.300
	LTE Band 26-UAT	15M	QPSK	1	0	Left Side	10	Full	26865	831.5	22.63	23.40	1.194	0.09	0.215	0.257
	LTE Band 26-UAT	15M	QPSK	36	0	Left Side	10	Full	26865	831.5	21.69	22.40	1.178	0.07	0.172	0.203
21	LTE Band 26-UAT	15M	QPSK	1	0	Top Side	10	Full	26865	831.5	22.63	23.40	1.194	0.07	0.321	0.383
	LTE Band 26-UAT	15M	QPSK	36	0	Top Side	10	Full	26865	831.5	21.69	22.40	1.178	0.04	0.270	0.318
	LTE Band 26-LAT	15M	QPSK	1	0	Front	10	Full	26865	831.5	23.07	24.00	1.239	0.14	0.205	0.254
	LTE Band 26-LAT	15M	QPSK	36	0	Front	10	Full	26865	831.5	22.15	23.00	1.216	0.06	0.179	0.218
	LTE Band 26-LAT	15M	QPSK	1	0	Back	10	Full	26865	831.5	23.07	24.00	1.239	-0.03	0.259	0.321
	LTE Band 26-LAT	15M	QPSK	36	0	Back	10	Full	26865	831.5	22.15	23.00	1.216	0.05	0.226	0.275
	LTE Band 26-LAT	15M	QPSK	1	0	Left Side	10	Full	26865	831.5	23.07	24.00	1.239	0.06	0.177	0.219
	LTE Band 26-LAT	15M	QPSK	36	0	Left Side	10	Full	26865	831.5	22.15	23.00	1.216	0.01	0.139	0.169
	LTE Band 26-LAT	15M	QPSK	1	0	Right Side	10	Full	26865	831.5	23.07	24.00	1.239	0.06	0.069	0.086
	LTE Band 26-LAT	15M	QPSK	36	0	Right Side	10	Full	26865	831.5	22.15	23.00	1.216	0.05	0.054	0.066
	LTE Band 26-LAT	15M	QPSK	1	0	Bottom Side	10	Full	26865	831.5	23.07	24.00	1.239	0.03	0.184	0.228
	LTE Band 26-LAT	15M	QPSK	36	0	Bottom Side	10	Full	26865	831.5	22.15	23.00	1.216	0.05	0.159	0.193
	LTE Band 4-UAT	20M	QPSK	1	0	Front	10	Full	20175	1732.5	22.29	23.20	1.233	0.13	0.140	0.173
	LTE Band 4-UAT	20M	QPSK	50	0	Front	10	Full	20175	1732.5	21.29	22.20	1.233	0.03	0.104	0.128
	LTE Band 4-UAT	20M	QPSK	1	0	Back	10	Full	20175	1732.5	22.29	23.20	1.233	0.15	0.165	0.203
	LTE Band 4-UAT	20M	QPSK	50	0	Back	10	Full	20175	1732.5	21.29	22.20	1.233	0.01	0.133	0.164
	LTE Band 4-UAT	20M	QPSK	1	0	Left Side	10	Full	20175	1732.5	22.29	23.20	1.233	0.03	0.192	0.237
	LTE Band 4-UAT	20M	QPSK	50	0	Left Side	10	Full	20175	1732.5	21.29	22.20	1.233	0.05	0.157	0.194
	LTE Band 4-UAT	20M	QPSK	1	0	Top Side	10	Full	20175	1732.5	22.29	23.20	1.233	0.13	0.261	0.322
	LTE Band 4-UAT	20M	QPSK	50	0	Top Side	10	Full	20175	1732.5	21.29	22.20	1.233	0.01	0.214	0.264
	LTE Band 4-LAT	20M	QPSK	1	0	Front	10	Reduced	20175	1732.5	19.87	20.50	1.156	0.05	0.456	0.527
	LTE Band 4-LAT	20M	QPSK	50	0	Front	10	Reduced	20175	1732.5	19.50	20.50	1.259	0.03	0.461	0.580
	LTE Band 4-LAT	20M	QPSK	1	0	Back	10	Reduced	20175	1732.5	19.87	20.50	1.156	0.13	0.521	0.602
	LTE Band 4-LAT	20M	QPSK	50	0	Back	10	Reduced	20175	1732.5	19.50	20.50	1.259	0.09	0.526	0.662
	LTE Band 4-LAT	20M	QPSK	1	0	Left Side	10	Reduced	20175	1732.5	19.87	20.50	1.156	0.06	0.095	0.109
	LTE Band 4-LAT	20M	QPSK	50	0	Left Side	10	Reduced	20175	1732.5	19.50	20.50	1.259	0.03	0.093	0.117
	LTE Band 4-LAT	20M	QPSK	1	0	Right Side	10	Reduced	20175	1732.5	19.87	20.50	1.156	0.09	0.111	0.128
	LTE Band 4-LAT	20M	QPSK	50	0	Right Side	10	Reduced	20175	1732.5	19.50	20.50	1.259	0.05	0.116	0.146
	LTE Band 4-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	20175	1732.5	19.87	20.50	1.156	-0.04	0.855	0.988
	LTE Band 4-LAT	20M	QPSK	50	0	Bottom Side	10	Reduced	20175	1732.5	19.50	20.50	1.259	-0.08	0.863	1.086
22	LTE Band 4-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	20175	1732.5	19.45	20.50	1.274	-0.08	0.860	1.095



FCC SAR Test Report

Report No. : FA982703

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2-UAT	20M	QPSK	1	0	Front	10	Full	18900	1880	22.25	23.10	1.216	0.01	0.138	0.168
	LTE Band 2-UAT	20M	QPSK	50	24	Front	10	Full	18900	1880	21.09	22.10	1.262	0.04	0.159	0.201
	LTE Band 2-UAT	20M	QPSK	1	0	Back	10	Full	18900	1880	22.25	23.10	1.216	0.09	0.159	0.193
	LTE Band 2-UAT	20M	QPSK	50	24	Back	10	Full	18900	1880	21.09	22.10	1.262	-0.05	0.167	0.211
	LTE Band 2-UAT	20M	QPSK	1	0	Left Side	10	Full	18900	1880	22.25	23.10	1.216	0.05	0.221	0.269
	LTE Band 2-UAT	20M	QPSK	50	24	Left Side	10	Full	18900	1880	21.09	22.10	1.262	0.02	0.232	0.293
	LTE Band 2-UAT	20M	QPSK	1	0	Top Side	10	Full	18900	1880	22.25	23.10	1.216	0.03	0.301	0.366
	LTE Band 2-UAT	20M	QPSK	50	24	Top Side	10	Full	18900	1880	21.09	22.10	1.262	0.01	0.250	0.315
	LTE Band 2-LAT	20M	QPSK	1	0	Front	10	Reduced	18900	1880	19.05	19.50	1.109	0.01	0.412	0.457
	LTE Band 2-LAT	20M	QPSK	50	24	Front	10	Reduced	18900	1880	18.99	19.50	1.125	-0.03	0.423	0.476
	LTE Band 2-LAT	20M	QPSK	1	0	Back	10	Reduced	18900	1880	19.05	19.50	1.109	-0.04	0.434	0.481
	LTE Band 2-LAT	20M	QPSK	50	24	Back	10	Reduced	18900	1880	18.99	19.50	1.125	0	0.455	0.512
	LTE Band 2-LAT	20M	QPSK	1	0	Left Side	10	Reduced	18900	1880	19.05	19.50	1.109	0.03	0.085	0.095
	LTE Band 2-LAT	20M	QPSK	50	24	Left Side	10	Reduced	18900	1880	18.99	19.50	1.125	0.05	0.091	0.103
	LTE Band 2-LAT	20M	QPSK	1	0	Right Side	10	Reduced	18900	1880	19.05	19.50	1.109	0.06	0.084	0.093
	LTE Band 2-LAT	20M	QPSK	50	24	Right Side	10	Reduced	18900	1880	18.99	19.50	1.125	0.03	0.084	0.095
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	18900	1880	19.05	19.50	1.109	-0.1	0.937	1.039
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	18700	1860	19.02	19.50	1.117	-0.12	0.817	0.912
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	19100	1900	18.87	19.50	1.156	0.01	0.944	1.091
	LTE Band 2-LAT	20M	QPSK	50	24	Bottom Side	10	Reduced	18900	1880	18.99	19.50	1.125	-0.11	0.978	1.100
	LTE Band 2-LAT	20M	QPSK	50	24	Bottom Side	10	Reduced	18700	1860	18.90	19.50	1.148	0.08	0.921	1.057
	LTE Band 2-LAT	20M	QPSK	50	24	Bottom Side	10	Reduced	19100	1900	18.86	19.50	1.159	-0.05	0.952	1.103
23	LTE Band 2-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	18900	1880	18.94	19.50	1.138	-0.08	0.970	1.103
	LTE Band 7-UAT	20M	QPSK	1	99	Front	10	Full	20850	2510	22.37	23.00	1.156	0.01	0.383	0.443
	LTE Band 7-UAT	20M	QPSK	50	50	Front	10	Full	20850	2510	21.42	22.00	1.143	0.07	0.297	0.339
	LTE Band 7-UAT	20M	QPSK	1	99	Back	10	Full	20850	2510	22.37	23.00	1.156	0.15	0.393	0.454
	LTE Band 7-UAT	20M	QPSK	50	50	Back	10	Full	20850	2510	21.42	22.00	1.143	0.03	0.323	0.369
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	10	Full	20850	2510	22.37	23.00	1.156	0.18	0.724	0.837
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	10	Full	21100	2535	22.24	23.00	1.191	0.13	0.849	1.011
24	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	10	Full	21350	2560	21.98	23.00	1.265	0.15	0.921	1.165
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	10	Full	21350 + 21152	2560 + 2540.2	21.78	23.00	1.324	0.03	0.794	1.052
	LTE Band 7-UAT	20M	QPSK	50	50	Left Side	10	Full	20850	2510	21.42	22.00	1.143	0.01	0.557	0.637
	LTE Band 7-UAT	20M	QPSK	100	0	Left Side	10	Full	20850	2510	21.31	22.00	1.172	0.05	0.527	0.618
	LTE Band 7-UAT	20M	QPSK	1	99	Top Side	10	Full	20850	2510	22.37	23.00	1.156	0.03	0.439	0.508
	LTE Band 7-UAT	20M	QPSK	50	50	Top Side	10	Full	20850	2510	21.42	22.00	1.143	0.02	0.350	0.400
	LTE Band 7-LAT	20M	QPSK	1	99	Front	10	Reduced	20850	2510	18.45	18.50	1.012	0.04	0.325	0.329
	LTE Band 7-LAT	20M	QPSK	50	50	Front	10	Reduced	20850	2510	18.15	18.50	1.084	0.05	0.328	0.356
	LTE Band 7-LAT	20M	QPSK	1	99	Back	10	Reduced	20850	2510	18.45	18.50	1.012	0.02	0.380	0.384
	LTE Band 7-LAT	20M	QPSK	50	50	Back	10	Reduced	20850	2510	18.15	18.50	1.084	0.01	0.383	0.415
	LTE Band 7-LAT	20M	QPSK	1	99	Left Side	10	Reduced	20850	2510	18.45	18.50	1.012	0.06	0.138	0.140
	LTE Band 7-LAT	20M	QPSK	50	50	Left Side	10	Reduced	20850	2510	18.15	18.50	1.084	0.03	0.145	0.157
	LTE Band 7-LAT	20M	QPSK	1	99	Right Side	10	Reduced	20850	2510	18.45	18.50	1.012	0.03	0.054	0.055
	LTE Band 7-LAT	20M	QPSK	50	50	Right Side	10	Reduced	20850	2510	18.15	18.50	1.084	0.03	0.056	0.061
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	10	Reduced	20850	2510	18.45	18.50	1.012	0.09	0.796	0.805
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	10	Reduced	21100	2535	18.34	18.50	1.038	0.11	0.782	0.811
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	10	Reduced	21350	2560	18.44	18.50	1.014	0.15	0.815	0.826
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	20850	2510	18.15	18.50	1.084	0.13	0.771	0.836
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	21100	2535	18.05	18.50	1.109	0.18	0.791	0.877
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	21350	2560	18.14	18.50	1.086	0.14	0.854	0.928
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	21350 + 21152	2560 + 2540.2	18.12	18.50	1.091	-0.08	0.844	0.921
	LTE Band 7-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	21350	2560	18.09	18.50	1.099	0	0.795	0.874

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : 2AFZZF4G

Report Version : Rev.01

Report Template No.: 181113

Issued Date : Oct. 16, 2019



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38-UAT	20M	QPSK	1	0	Front	10	Full	38000	2595	22.18	22.80	1.153	62.9	1.006	0.01	0.218	0.253
	LTE Band 38-UAT	20M	QPSK	50	0	Front	10	Full	38000	2595	21.06	21.80	1.186	62.9	1.006	0.02	0.170	0.203
	LTE Band 38-UAT	20M	QPSK	1	0	Back	10	Full	38000	2595	22.18	22.80	1.153	62.9	1.006	0.08	0.270	0.313
	LTE Band 38-UAT	20M	QPSK	50	0	Back	10	Full	38000	2595	21.06	21.80	1.186	62.9	1.006	0.03	0.210	0.251
	LTE Band 38-UAT	20M	QPSK	1	0	Left Side	10	Full	38000	2595	22.18	22.80	1.153	62.9	1.006	0.01	0.499	0.579
	LTE Band 38-UAT	20M	QPSK	1	0	Left Side	10	Full	37901 + 38099	2585.1 + 2604.9	22.16	22.80	1.159	62.9	1.006	0.01	0.468	0.546
	LTE Band 38-UAT	20M	QPSK	50	0	Left Side	10	Full	38000	2595	21.06	21.80	1.186	62.9	1.006	0.1	0.394	0.470
	LTE Band 38-UAT	20M	QPSK	100	0	Left Side	10	Full	38000	2595	21.05	21.80	1.189	62.9	1.006	0.03	0.321	0.384
	LTE Band 38-UAT	20M	QPSK	1	0	Top Side	10	Full	38000	2595	22.18	22.80	1.153	62.9	1.006	-0.07	0.314	0.364
	LTE Band 38-UAT	20M	QPSK	50	0	Top Side	10	Full	38000	2595	21.06	21.80	1.186	62.9	1.006	-0.15	0.250	0.298
	LTE Band 38-LAT	20M	QPSK	1	0	Front	10	Reduced	38000	2595	20.84	21.00	1.038	62.9	1.006	0.01	0.392	0.409
	LTE Band 38-LAT	20M	QPSK	50	0	Front	10	Reduced	38000	2595	20.73	21.00	1.064	62.9	1.006	0.02	0.396	0.424
	LTE Band 38-LAT	20M	QPSK	1	0	Back	10	Reduced	38000	2595	20.84	21.00	1.038	62.9	1.006	0.08	0.418	0.436
	LTE Band 38-LAT	20M	QPSK	50	0	Back	10	Reduced	38000	2595	20.73	21.00	1.064	62.9	1.006	0.03	0.426	0.456
	LTE Band 38-LAT	20M	QPSK	1	0	Left Side	10	Reduced	38000	2595	20.84	21.00	1.038	62.9	1.006	0.01	0.153	0.160
	LTE Band 38-LAT	20M	QPSK	50	0	Left Side	10	Reduced	38000	2595	20.73	21.00	1.064	62.9	1.006	0.03	0.155	0.166
	LTE Band 38-LAT	20M	QPSK	1	0	Right Side	10	Reduced	38000	2595	20.84	21.00	1.038	62.9	1.006	0.06	0.078	0.081
	LTE Band 38-LAT	20M	QPSK	50	0	Right Side	10	Reduced	38000	2595	20.73	21.00	1.064	62.9	1.006	0.1	0.085	0.091
	LTE Band 38-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	38000	2595	20.84	21.00	1.038	62.9	1.006	-0.18	0.951	0.993
	LTE Band 38-LAT	20M	QPSK	50	0	Bottom Side	10	Reduced	38000	2595	20.73	21.00	1.064	62.9	1.006	-0.15	0.946	1.013
25	LTE Band 38-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	38000	2595	20.63	21.00	1.089	62.9	1.006	-0.09	0.954	1.045
	LTE Band 38-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	37901 + 38099	2585.1 + 2604.9	20.59	21.00	1.099	62.9	1.006	-0.07	0.939	1.038



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	Full	11	2462	18.58	20.00	1.387	100	1.000	0.01	0.140	0.194
	WLAN2.4GHz	802.11b 1Mbps	Back	10	Full	11	2462	18.58	20.00	1.387	100	1.000	0.03	0.137	0.190
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	Full	11	2462	18.58	20.00	1.387	100	1.000	0.03	0.029	0.040
26	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	Full	11	2462	18.58	20.00	1.387	100	1.000	0.05	0.305	0.423

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
27	Bluetooth	1Mbps	Front	10	0	2402	11.00	11.50	1.122	76.68	1.086	0.03	0.024	0.029
	Bluetooth	1Mbps	Back	10	0	2402	11.00	11.50	1.122	76.68	1.086	0.01	0.021	0.026
	Bluetooth	1Mbps	Right Side	10	0	2402	11.00	11.50	1.122	76.68	1.086	0.01	0.020	0.024
	Bluetooth	1Mbps	Top Side	10	0	2402	11.00	11.50	1.122	76.68	1.086	0.01	0.024	0.029

**<WLAN 5GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	10	Full	48	5240	16.39	17.00	1.151	98.28	1.018	0.01	0.186	0.218
28	WLAN5.2GHz	802.11a 6Mbps	Back	10	Full	48	5240	16.39	17.00	1.151	98.28	1.018	0.03	0.401	0.470
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10	Full	48	5240	16.39	17.00	1.151	98.28	1.018	0.03	0.108	0.127
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	Full	48	5240	16.39	17.00	1.151	98.28	1.018	0.014	0.368	0.431
29	WLAN5.8GHz	802.11a 6Mbps	Front	10	Full	161	5805	16.78	17.00	1.052	98.28	1.018	0.03	0.297	0.318
	WLAN5.8GHz	802.11a 6Mbps	Back	10	Full	161	5805	16.78	17.00	1.052	98.28	1.018	0.02	0.287	0.307
	WLAN5.8GHz	802.11a 6Mbps	Right Side	10	Full	161	5805	16.78	17.00	1.052	98.28	1.018	0.01	0.069	0.074
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	Full	161	5805	16.78	17.00	1.052	98.28	1.018	0.03	0.179	0.192

15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
30	GSM 850-UAT	GPRS 4 Tx slots	Front	15	Full	189	836.4	26.02	27.00	1.253	0.05	0.109	0.137
	GSM 850-UAT	GPRS 4 Tx slots	Back	15	Full	189	836.4	26.02	27.00	1.253	-0.08	0.102	0.128
	GSM 850-LAT	GPRS 4 Tx slots	Front	15	Full	189	836.4	25.94	27.50	1.432	0.03	0.117	0.168
	GSM 850-LAT	GPRS 4 Tx slots	Back	15	Full	189	836.4	25.94	27.50	1.432	-0.02	0.138	0.198
	GSM 1900-UAT	GPRS 4 Tx slots	Front	15	Full	810	1909.8	22.80	23.50	1.175	0.03	0.047	0.055
	GSM 1900-UAT	GPRS 4 Tx slots	Back	15	Full	810	1909.8	22.80	23.50	1.175	0.01	0.051	0.059
	GSM 1900-LAT	GPRS 4 Tx slots	Front	15	Full	810	1909.8	22.93	24.50	1.435	0.06	0.216	0.310
31	GSM 1900-LAT	GPRS 4 Tx slots	Back	15	Full	810	1909.8	22.93	24.50	1.435	0.13	0.246	0.353

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V-UAT	RMC 12.2Kbps	Front	15	Full	4233	846.6	23.47	24.50	1.268	0.04	0.170	0.216
	WCDMA V-UAT	RMC 12.2Kbps	Back	15	Full	4233	846.6	23.47	24.50	1.268	-0.04	0.157	0.199
	WCDMA V-LAT	RMC 12.2Kbps	Front	15	Full	4233	846.6	23.97	24.50	1.130	0.04	0.188	0.212
32	WCDMA V-LAT	RMC 12.2Kbps	Back	15	Full	4233	846.6	23.97	24.50	1.130	-0.09	0.212	0.240
	WCDMA IV-UAT	RMC 12.2Kbps	Front	15	Full	1413	1732.6	23.14	24.20	1.276	0.19	0.098	0.125
	WCDMA IV-UAT	RMC 12.2Kbps	Back	15	Full	1413	1732.6	23.14	24.20	1.276	-0.05	0.106	0.135
	WCDMA IV-LAT	RMC 12.2Kbps	Front	15	Full	1413	1732.6	23.69	24.50	1.205	0.01	0.600	0.723
33	WCDMA IV-LAT	RMC 12.2Kbps	Back	15	Full	1413	1732.6	23.69	24.50	1.205	0.12	0.743	0.895
	WCDMA IV-LAT	RMC 12.2Kbps	Back	15	Full	1312	1712.4	23.45	24.50	1.274	0.14	0.693	0.883
	WCDMA IV-LAT	RMC 12.2Kbps	Back	15	Full	1513	1752.6	23.57	24.50	1.239	0.04	0.722	0.894
	WCDMA II-UAT	RMC 12.2Kbps	Front	15	Full	9538	1907.6	22.94	24.00	1.276	0.06	0.128	0.163
	WCDMA II-UAT	RMC 12.2Kbps	Back	15	Full	9538	1907.6	22.94	24.00	1.276	-0.15	0.138	0.176
	WCDMA II-LAT	RMC 12.2Kbps	Front	15	Full	9538	1907.6	23.79	24.50	1.178	0.02	0.579	0.682
34	WCDMA II-LAT	RMC 12.2Kbps	Back	15	Full	9538	1907.6	23.79	24.50	1.178	0.15	0.667	0.785



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26-UAT	15M	QPSK	1	0	Front	15	Full	26865	831.5	22.63	23.40	1.194	0.01	0.110	0.131
	LTE Band 26-UAT	15M	QPSK	36	0	Front	15	Full	26865	831.5	21.69	22.40	1.178	0.09	0.092	0.108
	LTE Band 26-UAT	15M	QPSK	1	0	Back	15	Full	26865	831.5	22.63	23.40	1.194	-0.07	0.111	0.133
	LTE Band 26-UAT	15M	QPSK	36	0	Back	15	Full	26865	831.5	21.69	22.40	1.178	-0.14	0.093	0.109
	LTE Band 26-LAT	15M	QPSK	1	0	Front	15	Full	26865	831.5	23.07	24.00	1.239	0.02	0.117	0.145
	LTE Band 26-LAT	15M	QPSK	36	0	Front	15	Full	26865	831.5	22.15	23.00	1.216	0.06	0.097	0.118
35	LTE Band 26-LAT	15M	QPSK	1	0	Back	15	Full	26865	831.5	23.07	24.00	1.239	-0.01	0.141	0.175
	LTE Band 26-LAT	15M	QPSK	36	0	Back	15	Full	26865	831.5	22.15	23.00	1.216	0.05	0.116	0.141
	LTE Band 4-UAT	20M	QPSK	1	0	Front	15	Full	20175	1732.5	22.29	23.20	1.233	0.01	0.057	0.070
	LTE Band 4-UAT	20M	QPSK	50	0	Front	15	Full	20175	1732.5	21.29	22.20	1.233	0.09	0.049	0.061
	LTE Band 4-UAT	20M	QPSK	1	0	Back	15	Full	20175	1732.5	22.29	23.20	1.233	-0.01	0.071	0.087
	LTE Band 4-UAT	20M	QPSK	50	0	Back	15	Full	20175	1732.5	21.29	22.20	1.233	0.07	0.058	0.071
	LTE Band 4-LAT	20M	QPSK	1	0	Front	15	Full	20175	1732.5	22.82	24.00	1.312	0.05	0.447	0.587
	LTE Band 4-LAT	20M	QPSK	50	0	Front	15	Full	20175	1732.5	21.84	23.00	1.306	0.06	0.372	0.486
36	LTE Band 4-LAT	20M	QPSK	1	0	Back	15	Full	20175	1732.5	22.82	24.00	1.312	0.04	0.549	0.720
	LTE Band 4-LAT	20M	QPSK	50	0	Back	15	Full	20175	1732.5	21.84	23.00	1.306	0.05	0.432	0.564
	LTE Band 2-UAT	20M	QPSK	1	0	Front	15	Full	18900	1880	22.25	23.10	1.216	0.02	0.094	0.115
	LTE Band 2-UAT	20M	QPSK	50	24	Front	15	Full	18900	1880	21.09	22.10	1.262	0.03	0.078	0.098
	LTE Band 2-UAT	20M	QPSK	1	0	Back	15	Full	18900	1880	22.25	23.10	1.216	0	0.108	0.131
	LTE Band 2-UAT	20M	QPSK	50	24	Back	15	Full	18900	1880	21.09	22.10	1.262	0.07	0.086	0.108
	LTE Band 2-LAT	20M	QPSK	1	0	Front	15	Full	18900	1880	23.04	24.00	1.247	0.01	0.456	0.569
	LTE Band 2-LAT	20M	QPSK	50	24	Front	15	Full	18900	1880	21.95	23.00	1.274	0.07	0.368	0.469
37	LTE Band 2-LAT	20M	QPSK	1	0	Back	15	Full	18900	1880	23.04	24.00	1.247	0.09	0.525	0.655
	LTE Band 2-LAT	20M	QPSK	50	24	Back	15	Full	18900	1880	21.95	23.00	1.274	0.03	0.408	0.520
	LTE Band 7-UAT	20M	QPSK	1	99	Front	15	Full	20850	2510	22.37	23.00	1.156	0	0.189	0.219
	LTE Band 7-UAT	20M	QPSK	50	50	Front	15	Full	20850	2510	21.42	22.00	1.143	0.06	0.145	0.166
	LTE Band 7-UAT	20M	QPSK	1	99	Back	15	Full	20850	2510	22.37	23.00	1.156	-0.01	0.217	0.251
	LTE Band 7-UAT	20M	QPSK	1	99	Back	15	Full	20850 + 21048	2510 + 2529.8	22.29	23.00	1.178	0.01	0.189	0.223
	LTE Band 7-UAT	20M	QPSK	50	50	Back	15	Full	20850	2510	21.42	22.00	1.143	-0.17	0.168	0.192
	LTE Band 7-LAT	20M	QPSK	1	99	Front	15	Full	20850	2510	23.20	24.00	1.202	0.01	0.586	0.705
	LTE Band 7-LAT	20M	QPSK	50	50	Front	15	Full	20850	2510	22.28	23.00	1.180	0.03	0.466	0.550
	LTE Band 7-LAT	20M	QPSK	1	99	Back	15	Full	20850	2510	23.20	24.00	1.202	0.01	0.705	0.848
	LTE Band 7-LAT	20M	QPSK	1	99	Back	15	Full	21100	2535	23.11	24.00	1.227	0.06	0.763	0.937
38	LTE Band 7-LAT	20M	QPSK	1	99	Back	15	Full	21350	2560	22.90	24.00	1.288	0.08	0.819	1.055
	LTE Band 7-LAT	20M	QPSK	1	99	Back	15	Full	21350 + 21152	2560 + 2540.2	23.13	24.00	1.222	0.08	0.731	0.893
	LTE Band 7-LAT	20M	QPSK	50	50	Back	15	Full	20850	2510	22.28	23.00	1.180	0.01	0.565	0.667
	LTE Band 7-LAT	20M	QPSK	100	0	Back	15	Full	20850	2510	22.20	23.00	1.202	0.03	0.571	0.686



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38-UAT	20M	QPSK	1	0	Front	15	Full	38000	2595	22.18	22.80	1.153	62.9	1.006	0.02	0.112	0.130
	LTE Band 38-UAT	20M	QPSK	50	0	Front	15	Full	38000	2595	21.06	21.80	1.186	62.9	1.006	0.1	0.089	0.107
	LTE Band 38-UAT	20M	QPSK	1	0	Back	15	Full	38000	2595	22.18	22.80	1.153	62.9	1.006	0.01	0.125	0.145
	LTE Band 38-UAT	20M	QPSK	1	0	Back	15	Full	37901 + 38099	2585.1 + 2604.9	22.16	22.80	1.159	62.9	1.006	-0.03	0.116	0.135
	LTE Band 38-UAT	20M	QPSK	50	0	Back	15	Full	38000	2595	21.06	21.80	1.186	62.9	1.006	0.05	0.095	0.114
	LTE Band 38-LAT	20M	QPSK	1	0	Front	15	Full	38000	2595	23.19	24.00	1.205	62.9	1.006	-0.08	0.372	0.451
	LTE Band 38-LAT	20M	QPSK	50	0	Front	15	Full	38000	2595	22.15	23.00	1.216	62.9	1.006	0.06	0.030	0.036
39	LTE Band 38-LAT	20M	QPSK	1	0	Back	15	Full	38000	2595	23.19	24.00	1.205	62.9	1.006	0.05	0.431	0.522
	LTE Band 38-LAT	20M	QPSK	1	0	Back	15	Full	37901 + 38099	2585.1 + 2604.9	23.12	24.00	1.225	62.9	1.006	0.02	0.424	0.522
	LTE Band 38-LAT	20M	QPSK	50	0	Back	15	Full	38000	2595	22.15	23.00	1.216	62.9	1.006	0.05	0.343	0.420

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
40	Bluetooth	1Mbps	Front	15	0	2402	11.00	11.50	1.122	76.68	1.086	0.01	0.013	0.016
	Bluetooth	1Mbps	Back	15	0	2402	11.00	11.50	1.122	76.68	1.086	0.03	0.012	0.014

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
41	WLAN2.4GHz	802.11b 1Mbps	Front	15	Full	11	2462	18.58	20.00	1.387	100	1.000	0.110	-0.05	0.075	0.104
	WLAN2.4GHz	802.11b 1Mbps	Back	15	Full	11	2462	18.58	20.00	1.387	100	1.000	0.103			

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	15	Full	64	5320	16.82	17.00	1.042	98.28	1.018	0.222			
42	WLAN5.3GHz	802.11a 6Mbps	Back	15	Full	64	5320	16.82	17.00	1.042	98.28	1.018	0.532	-0.05	0.253	0.268
	WLAN5.5GHz	802.11a 6Mbps	Front	15	Full	116	5580	16.66	17.00	1.081	98.28	1.018	0.459			
43	WLAN5.5GHz	802.11a 6Mbps	Back	15	Full	116	5580	16.66	17.00	1.081	98.28	1.018	0.486	-0.02	0.221	0.243
44	WLAN5.8GHz	802.11a 6Mbps	Front	15	Full	161	5805	16.78	17.00	1.052	98.28	1.018	0.492	-0.01	0.204	0.218
	WLAN5.8GHz	802.11a 6Mbps	Back	15	Full	161	5805	16.78	17.00	1.052	98.28	1.018	0.406			

15.4 Product Specific SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM 1900-LAT	GPRS 4 Tx slots	Bottom Side	0	Full	810	1909.8	22.93	24.50	1.435	-0.06	2.170	3.115
	GSM 1900-LAT	GPRS 4 Tx slots	Bottom Side	0	Full	512	1850.2	22.91	24.50	1.442	0.03	2.140	3.086
45	GSM 1900-LAT	GPRS 4 Tx slots	Bottom Side	0	Full	661	1880	22.90	24.50	1.445	0.03	2.210	3.194

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9538	1907.6	20.86	21.50	1.159	0.05	3.080	3.569
46	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9262	1852.4	20.85	21.50	1.161	0.02	3.100	3.600
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9400	1880	20.83	21.50	1.167	0.08	3.010	3.512

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	18900	1880	19.80	20.50	1.175	0.09	2.190	2.573
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	18700	1860	19.75	20.50	1.189	-0.05	2.230	2.650
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	19100	1900	19.67	20.50	1.211	0.04	2.190	2.651
	LTE Band 2-LAT	20M	QPSK	50	24	Bottom Side	0	Reduced	18900	1880	19.78	20.50	1.180	0.04	2.310	2.727
	LTE Band 2-LAT	20M	QPSK	50	24	Bottom Side	0	Reduced	18700	1860	19.77	20.50	1.183	-0.05	2.310	2.733
47	LTE Band 2-LAT	20M	QPSK	50	24	Bottom Side	0	Reduced	19100	1900	19.56	20.50	1.242	0.01	2.280	2.831
	LTE Band 2-LAT	20M	QPSK	100	0	Bottom Side	0	Reduced	18900	1880	19.72	20.50	1.197	0.06	2.300	2.753

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
48	WLAN5.3GHz	802.11a 6Mbps	Front	0	Full	64	5320	16.82	17.00	1.042	98.28	1.018	0.01	0.811	0.861
	WLAN5.3GHz	802.11a 6Mbps	Back	0	Full	64	5320	16.82	17.00	1.042	98.28	1.018	0.03	0.687	0.729
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0	Full	64	5320	16.82	17.00	1.042	98.28	1.018	0.05	0.151	0.160
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	Full	64	5320	16.82	17.00	1.042	98.28	1.018	0.03	0.575	0.610
49	WLAN5.5GHz	802.11a 6Mbps	Front	0	Full	116	5580	16.66	17.00	1.081	98.28	1.018	0.02	1.080	1.189
	WLAN5.5GHz	802.11a 6Mbps	Back	0	Full	116	5580	16.66	17.00	1.081	98.28	1.018	0.03	0.647	0.712
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0	Full	116	5580	16.66	17.00	1.081	98.28	1.018	0.02	0.180	0.198
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0	Full	116	5580	16.66	17.00	1.081	98.28	1.018	0.01	0.687	0.756

**15.5 Repeated SAR Measurement****<1g SAR>**

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II-UAT	-	-	-	-	RMC 12.2Kbps	Right Cheek	0	Reduced	9538	1907.6	20.35	21.00	1.161		1.000	0.01	1.020	1	1.185
2nd	WCDMA II-UAT	-	-	-	-	RMC 12.2Kbps	Right Cheek	0	Reduced	9538	1907.6	20.35	21.00	1.161		1.000	0.09	0.988	1.032	1.148
1st	LTE Band 26_UAT	15M	QPSK	1	0	-	Left Cheek	0	Reduced	26865	831.5	22.48	22.90	1.102		1.000	0.02	0.869	1	0.957
2nd	LTE Band 26_UAT	15M	QPSK	1	0	-	Left Cheek	0	Reduced	26865	831.5	22.48	22.90	1.102		1.000	0.01	0.847	1.026	0.933
1st	WLAN 2.4GHz	-	-	-	-	802.11b 1Mbps	Left Tilted	0	Reduced	11	2462	16.85	17.50	1.161	100	1.000	-0.04	0.956	1	1.110
2nd	WLAN 2.4GHz	-	-	-	-	802.11b 1Mbps	Left Tilted	0	Reduced	11	2462	16.85	17.50	1.161	100	1.000	0.08	0.949	1.007	1.102
1st	WLAN 5GHz	-	-	-	-	802.11a 6Mbps	Left Cheek	0	Reduced	60	5300	14.08	14.50	1.102	98.28	1.018	-0.01	0.962	1	1.079
2nd	WLAN 5GHz	-	-	-	-	802.11a 6Mbps	Left Cheek	0	Reduced	60	5300	14.08	14.50	1.102	98.28	1.018	-0.09	0.959	1.003	1.075
1st	WLAN 5GHz	-	-	-	-	802.11a 6Mbps	Left Cheek	0	Reduced	140	5700	11.81	12.50	1.172	98.28	1.018	0.02	0.983	1	1.173
2nd	WLAN 5GHz	-	-	-	-	802.11a 6Mbps	Left Cheek	0	Reduced	140	5700	11.81	12.50	1.172	98.28	1.018	0.09	0.979	1.004	1.168
1st	WLAN 5GHz	-	-	-	-	802.11a 6Mbps	Left Cheek	0	Reduced	157	5785	10.63	11.00	1.089	98.28	1.018	-0.09	1.040	1	1.153
2nd	WLAN 5GHz	-	-	-	-	802.11a 6Mbps	Left Cheek	0	Reduced	157	5785	10.63	11.00	1.089	98.28	1.018	-0.03	1.020	1.020	1.131
1st	WCDMA IV-LAT	-	-	-	-	RMC 12.2Kbps	Bottom Side	10	Reduced	1513	1752.6	18.95	20.00	1.274		1.000	0.14	0.901	1	1.147
2nd	WCDMA IV-LAT	-	-	-	-	RMC 12.2Kbps	Bottom Side	10	Reduced	1513	1752.6	18.95	20.00	1.274		1.000	-0.02	0.890	1.012	1.133
1st	LTE Band 38-LAT	20M	QPSK	100	0	-	Bottom Side	10	Reduced	38000	2595	20.63	21.00	1.089	62.9	1.006	-0.09	0.954	1	1.045
2nd	LTE Band 38-LAT	20M	QPSK	100	0	-	Bottom Side	10	Reduced	38000	2595	20.63	21.00	1.089	62.9	1.006	0.01	0.951	1.003	1.042

<10g SAR>

No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9262	1852.4	20.85	21.50	1.161		1.000	0.02	3.100	1	3.600
2nd	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9262	1852.4	20.85	21.50	1.161		1.000	-0.02	3.090	1.003	3.589

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific
1.	GSM Voice + Bluetooth	Yes	Yes		Yes
2.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
3.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
4.	LTE + Bluetooth	Yes	Yes	Yes	Yes
5.	GSM Voice + 2.4GHz WLAN	Yes	Yes		Yes
6.	GPRS/EDGE + 2.4GHz WLAN	Yes	Yes	Yes	Yes
7.	WCDMA + 2.4GHz WLAN	Yes	Yes	Yes	Yes
8.	LTE + 2.4GHz WLAN	Yes	Yes	Yes	Yes
9.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		Yes
10.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
11.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
12.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
13.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		Yes
14.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
15.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
16.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
17.	WLAN5.3/5.5GHz + Bluetooth	Yes	Yes		Yes
18.	GSM Voice + WLAN5.3/5.5GHz + Bluetooth	Yes	Yes		Yes
19.	GPRS/EDGE + WLAN5.3/5.5GHz + Bluetooth	Yes	Yes		Yes
20.	WCDMA + WLAN5.3/5.5GHz + Bluetooth	Yes	Yes		Yes
21.	LTE + WLAN5.3/5.5GHz + Bluetooth	Yes	Yes		Yes
22.	WLAN5.2/5.8GHz + Bluetooth	Yes	Yes	Yes	Yes
23.	GSM Voice + WLAN5.2/5.8GHz + Bluetooth	Yes	Yes		Yes
24.	GPRS/EDGE + WLAN5.2/5.8GHz + Bluetooth	Yes	Yes	Yes	Yes
25.	WCDMA + WLAN5.2/5.8GHz + Bluetooth	Yes	Yes	Yes	Yes
26.	LTE + WLAN5.2/5.8GHz + Bluetooth	Yes	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), and LTE supports VoLTE function.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
4. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
5. Chose the worse zoom scan SAR of WLAN2.4GHz SAR respectively for co-located with WWAN analysis.
6. For Bluetooth SAR testing only perform the worst position of WLAN, so other position use this SAR value to do co-located with WWAN analysis.
7. All licensed modes share the same antenna part and cannot transmit simultaneously.
8. The reported SAR summation is calculated based on the same configuration and test position
9. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2) \cdot 1.5 / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.