FCC TEST REPORT

Application No:	AR/2020/A0007
Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
EUT Description:	Mobile Phone
Model No.:	M2010J19SG, M2010J19ST
Trade Mark:	Redmi
FCC ID:	2AFZZJ19CG
Standards:	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C
Test Method	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10 (2013)
Date of Receipt:	2020/9/29
Date of Test:	2020/9/29 to 2020/10/16(for original report AR/2020/9001003-01) 2020/11/3 to 2020/11/10(for new report AR/2020/A000703-01)
Date of Issue:	2021/4/22
Test Result:	**PASS ***

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Derek Yang
Wireless Laboratory Manager

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1 Version

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2020/11/13		Original
02		2021/4/22	Flora.Wang	1. Add test site Information 2.Modify data conversion error of antenna height 3.Update equipment list

Authorized for issue by:				
Prepared By		Flora Wang **(Flora Wang) /Project Engineer**		
Checked By		David Chen **(David Chen) /Reviewer**		

2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result	Test Lab*
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	Clause 4.2	PASS	B
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.3	PASS	A
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.4	PASS	A
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	Clause 4.5	PASS	A
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.6	PASS	A
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS	A
Radiated Spurious Emissions	15.205/15.209	ANSI C63.10 2013	Clause 4.8	PASS	B
Restricted bands around fundamental frequency (Radiated Emission)	15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS	B

Remark：All test were performed by Lab A and B.
Parts of test items above were subcontracted to Lab B.
Lab A SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.
Lab B SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.

Remark:

Item	M2010J19SG	M2010J19ST
LTE Band 41	Support	Not Support

Note: customer declaration, two models are the same,except for model. There are more than one model,each one should be applied throughout the compliance test respectively,
However, only the worst case(M2010J19CG) will be recorded in this report.

This report is changed to model based on the original report number AR/2020/9001003-01
The revised contents are as follow:

Model name	Camera specification	LED position	Camera position	Trade Mark	rear cover

M2010J19CG, M2010J19CT	48M+2M+2M	The LED is located to the right of the macro camera	Viewed from the back, the macro camera, main camera and depth-of-field camera appear from top to bottom	POCO	The material is the same, Camera area coverage shape adjustment, drawing is different, laser engraving is different
M2010J19SG M2010J19ST	48M+8M+2M+2M	The LED is located below the depth-of-field camera	Viewed from the back, the wide Angle camera, main camera and depth of field camera are in order from top to bottom, and add single macro camera is on the righ	Redmi	

Therefore in this report only radiated spurious emissions were performed based on the worst case(BLE_1M:Channel:39) of the original report with report number AR/2020/9001003-01 and other test data in this report are base on the previous report with report number AR/2020/9001003-01.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Contents

1 VERSION 2
2 TEST SUMMARY 3
3 GENERAL INFORMATION 6
3.1 CLIENT INFORMATION 6
3.2 TEST LOCATION 6
3.3 TEST FACILITY 6
3.4 GENERAL DESCRIPTION OF EUT 8
3.5 TEST ENVIRONMENT 9
3.6 DESCRIPTION OF SUPPORT UNITS 9
4 TEST RESULTS AND MEASUREMENT DATA 10
4.1 ANTENNA REQUIREMENT 10
4.2 AC POWER LINE CONDUCTED EMISSIONS 11
4.3 DUTY CYCLE 15
4.3.1 Test Results 15
4.3.1 Test Plots 15
4.4 CONDUCTED OUTPUT POWER 16
4.4.1 Test Results 16
4.4.2 Test plots: 17
4.5 DTS (6 DB) BANDWIDTH & 99% OCCUPIED BANDWIDTH 19
4.5.1 Test Results 19
4.5.2 Test plots 20
4.6 POWER SPECTRAL DENSITY 23
4.6.1 Test Results 23
4.6.2 Test plots 24
4.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS 26
4.7.1 Test plots 27
4.8 SPURIOUS RF CONDUCTED EMISSIONS 29
4.8.1 Test plots: 30
4.9 RADIATED SPURIOUS EMISSION 33
4.9.1 Radiated Emission below 1GHz 36
4.9.2 Transmitter Emission above 1GHz 38
4.9.3 Transmitter Emission above 1GHz 44
4.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY 46
4.11 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY 48
4.11.1 Test plots 48
5 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) 54
6 EQUIPMENT LIST 55
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS 56

3 General Information

3.1 Client Information

Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Test engineer:	Dee Zheng, Mike Hu

Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test engineer:	Ben Huang, Leah Chen

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

• A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

• FCC –Designation Number: CN1271.

3.4 General Description of EUT

EUT Description:	Mobile Phone
Model No.:	M2010J19SG, M2010J19ST
Trade Mark:	Redmi
Hardware Version:	P2
Software Version:	MIUI12
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = “Operating Frequency” in MHz, -N = “Channel Number” with the range from 0 to 39.
Bluetooth Version:	Bluetooth V5.0 LE
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	☒ Portable Device, ☐Module
Antenna Type:	PIFA Antenna
Antenna Gain:	0.8dBi
Power Supply:	☒ AC/DC Adapter; ☒ Battery;☐ PoE:; ☐ Other:

Remark:According to the client,the EUT doses’t support the rates of 2Mbps.

Operation Frequency of each channel							
Channel	**Frequency**	**Channel**	**Frequency**	**Channel**	**Frequency**	**Channel**	**Frequency**
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

3.5 Test Environment

Operating Environment	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	101.32 KPa

3.6 Description of Support Units

The EUT has been tested independent unit.

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.5dBi.	

4.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:	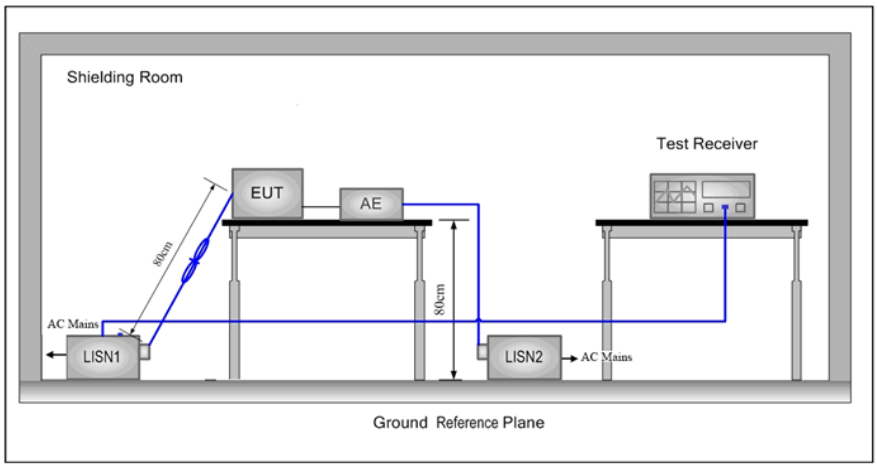		

Test Mode:	Transmitting with GFSK modulation. Charge +Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

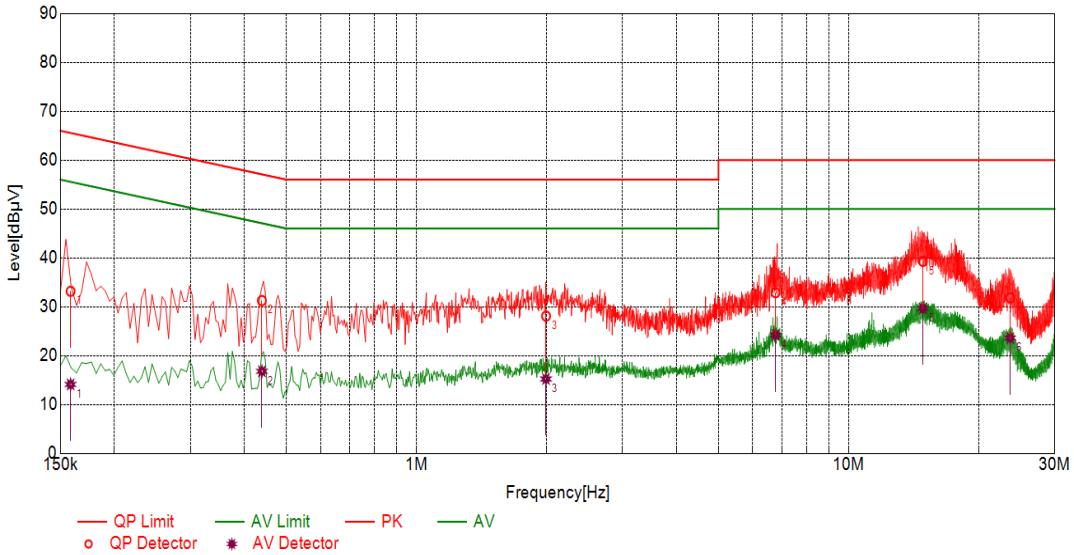

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Type
1	0.1584	10.10	33.16	65.55	32.39	14.10	55.55	41.45	L
2	0.4390	10.10	31.26	57.08	25.82	16.79	47.08	30.29	L
3	1.9947	10.10	28.09	56.00	27.91	15.21	46.00	30.79	L
4	6.7771	10.10	32.88	60.00	27.12	24.20	50.00	25.80	L
5	14.8564	10.11	39.28	60.00	20.72	29.64	50.00	20.36	L
6	23.6478	10.11	31.83	60.00	28.17	23.60	50.00	26.40	L

Neutral line:

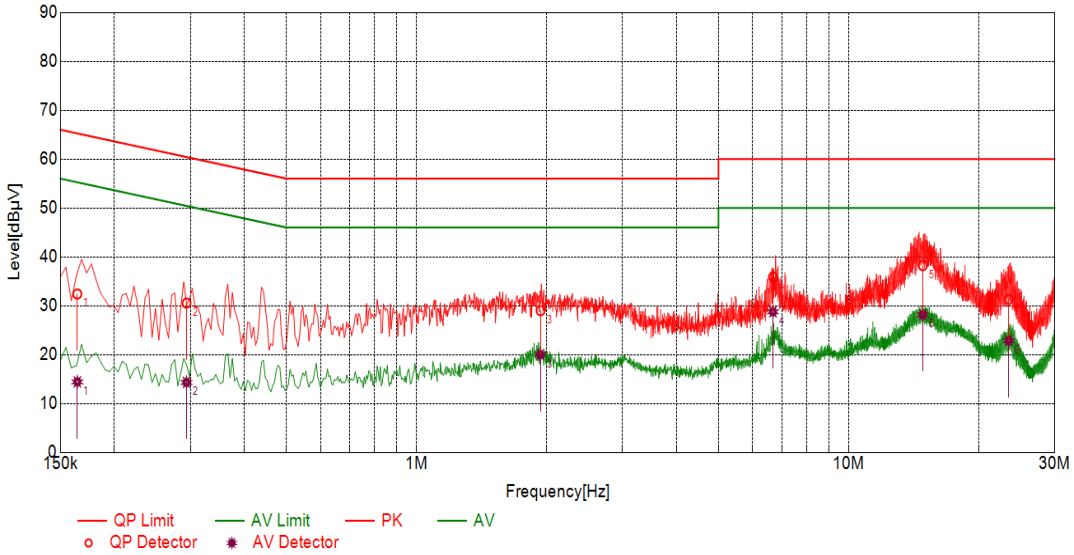

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Type
1	0.1642	10.10	32.41	65.25	32.84	14.42	55.25	40.83	N
2	0.2938	10.10	30.54	60.42	29.88	14.31	50.42	36.11	N
3	1.9373	10.10	29.00	56.00	27.00	20.00	46.00	26.00	N
4	6.6829	10.10	35.88	60.00	24.12	28.76	50.00	21.24	N
5	14.8467	10.11	38.22	60.00	21.78	28.17	50.00	21.83	N
6	23.4722	10.11	31.30	60.00	28.70	22.84	50.00	27.16	N

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

4.3 Duty Cycle

4.3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
BLE_1M	CH0, CH19, CH39	62.50

4.3.1 Test Plots

4.3.1.1 BLE_1M

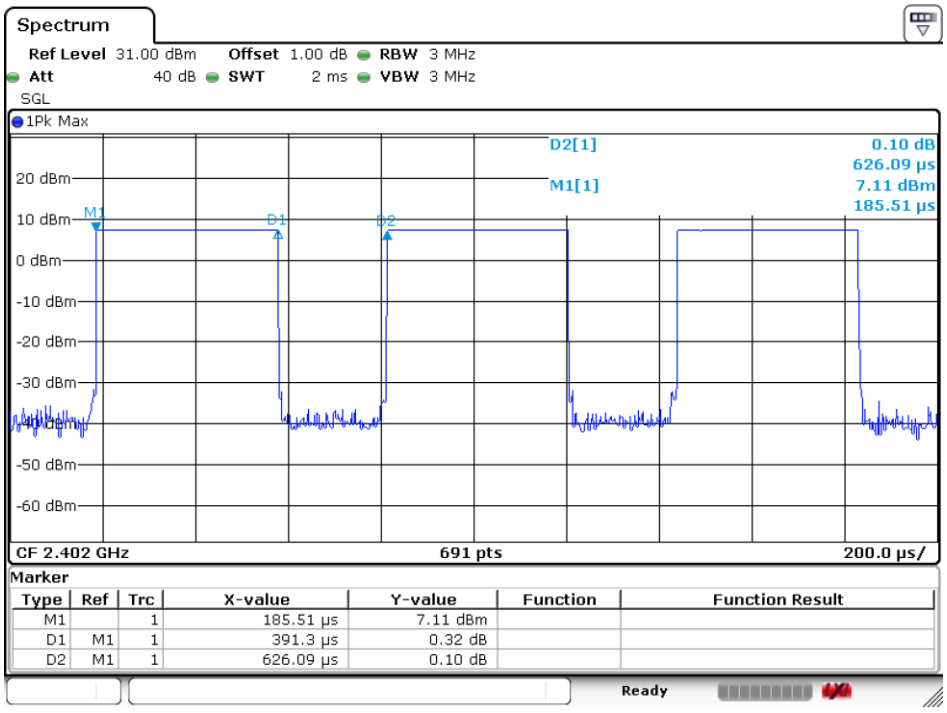

Date: 15.OCT.2020 16:17:42

4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section 11.9.1.1
Test Setup:	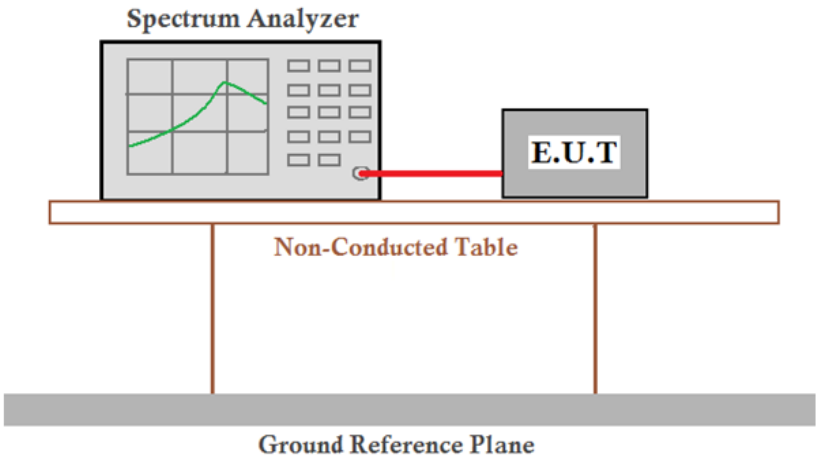
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.4.1 Test Results

Measurement Data of Peak Power:

GFSK_1M mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.54	30.00	Pass
Middle	8.42	30.00	Pass
Highest	8.45	30.00	Pass

4.4.2 Test plots:

4.4.2.1 GFSK 1M_Lowest Channel

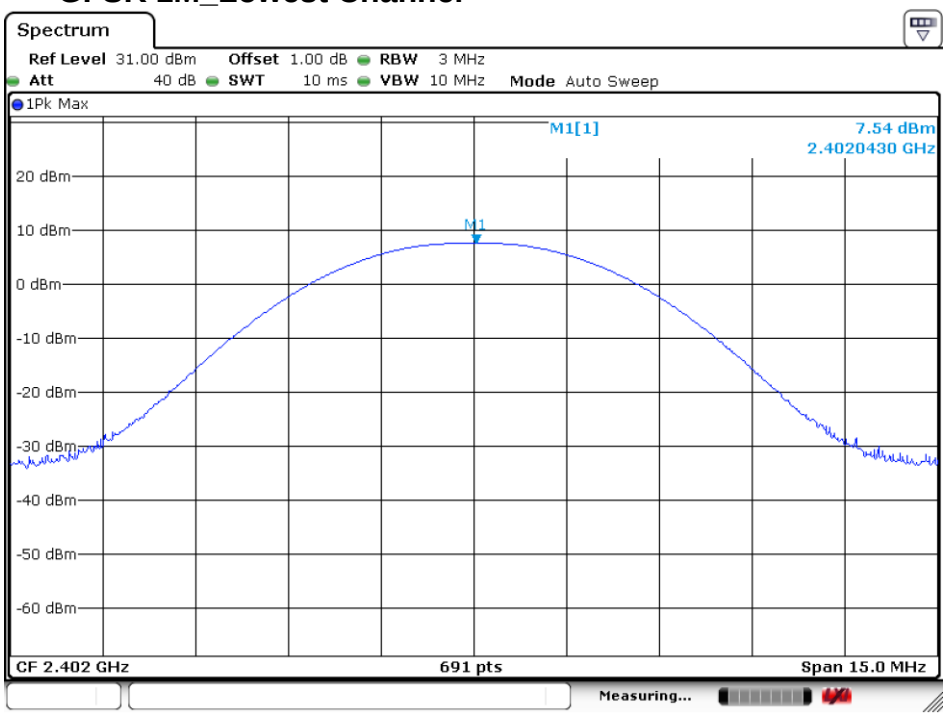

Date: 15.OCT.2020 16:02:58

4.4.2.2 GFSK 1M_Middle Channel

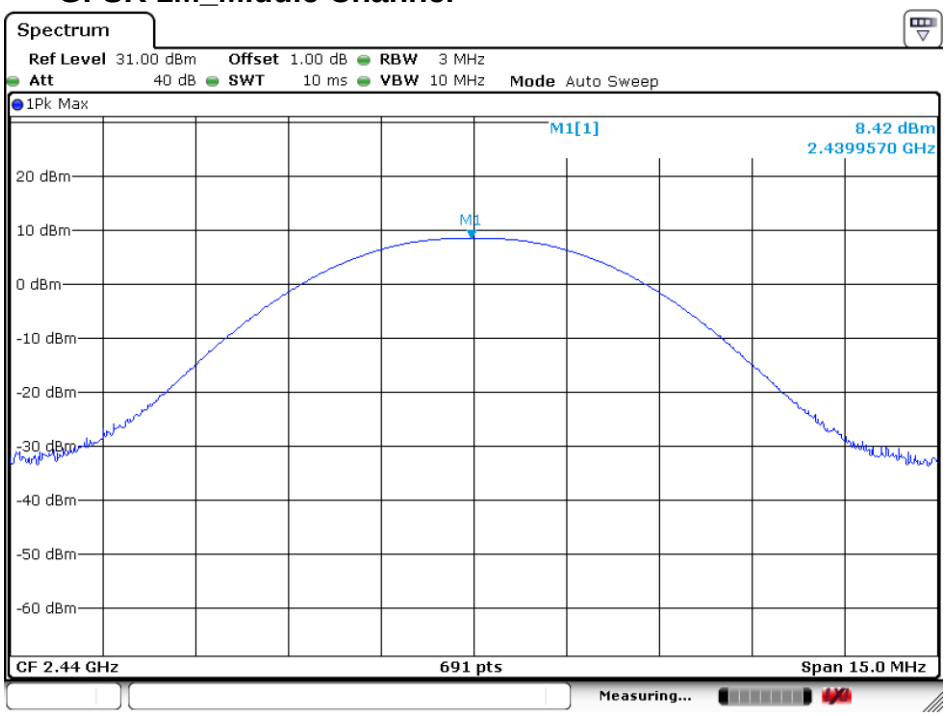

Date: 15.OCT.2020 16:03:18

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.4.2.3 GFSK 1M_Highest Channel

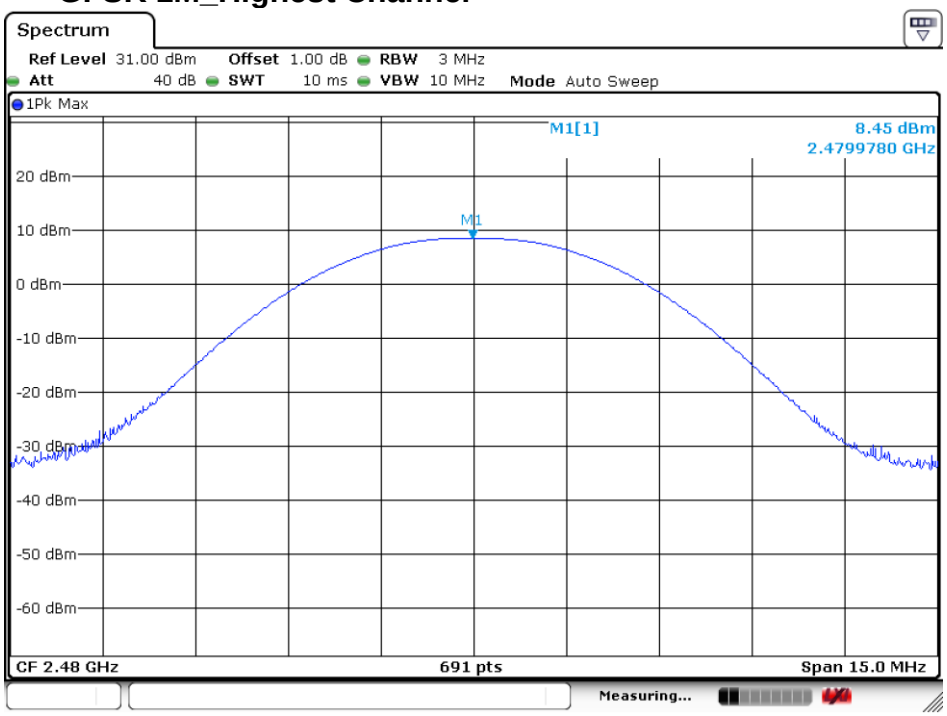

4.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8 Option 2
Test Setup:	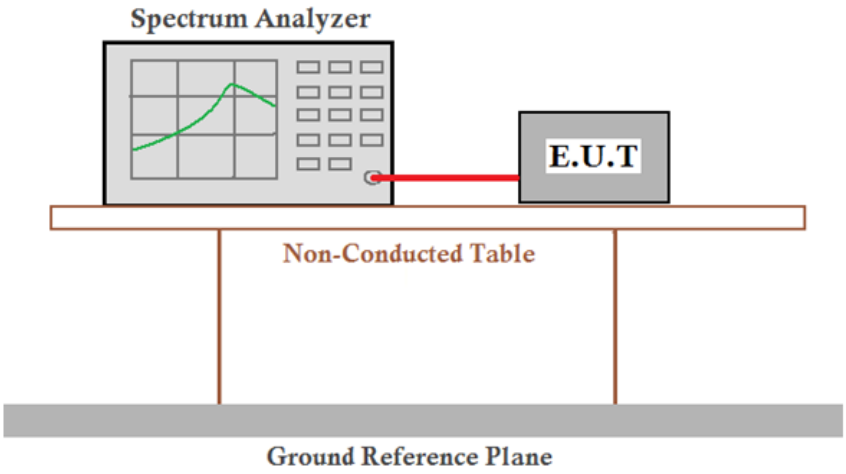
Limit:	≥ 500 kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.5.1 Test Results

Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
GFSK_1M	Lowest	1.03	0.66	≥500	Pass
	Middle	1.03	0.66	≥500	Pass
	Highest	1.03	0.66	≥500	Pass

4.5.2 Test plots

4.5.2.1 GFSK 1M_Lowest Channel

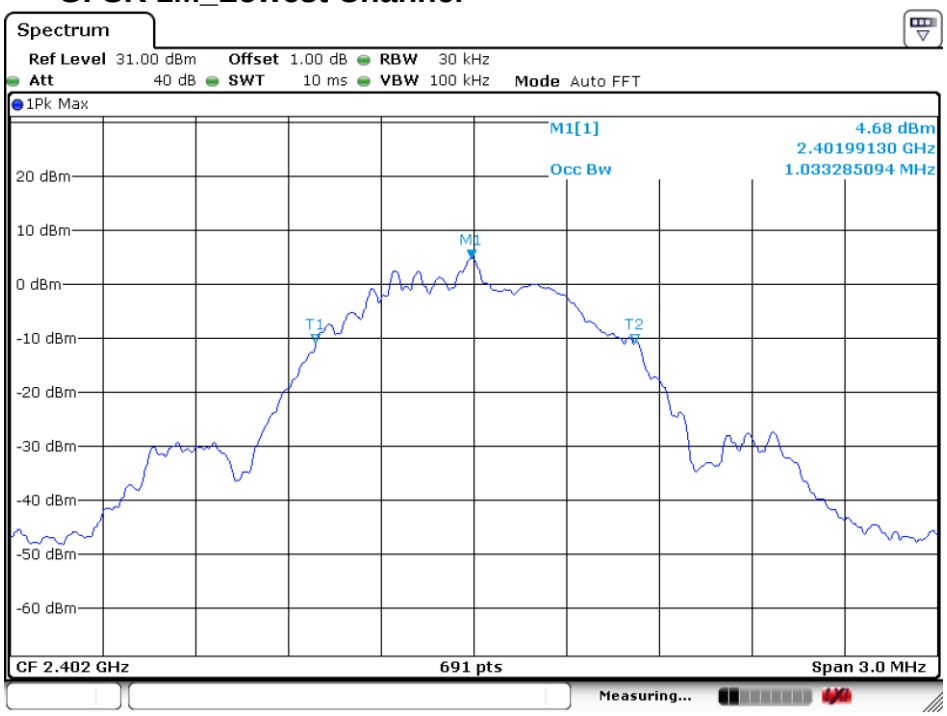

Date: 15.OCT.2020 16:09:06

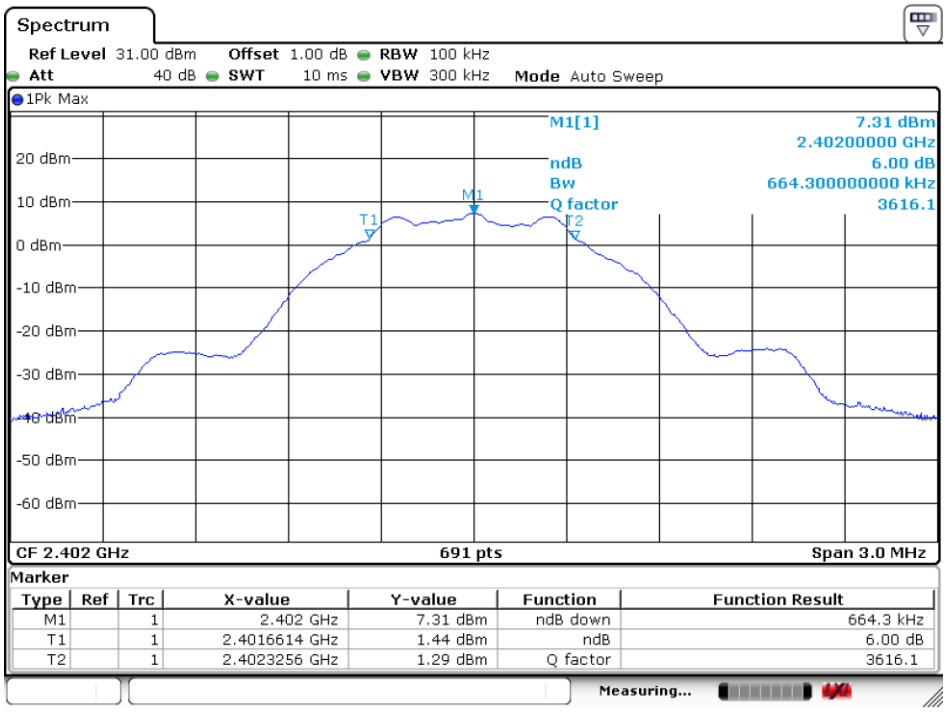

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.402 GHz	7.31 dBm	ndB down	664.3 kHz
T1		1	2.4016614 GHz	1.44 dBm	ndB	6.00 dB
T2		1	2.4023256 GHz	1.29 dBm	Q factor	3616.1

Date: 15.OCT.2020 16:06:42

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.5.2.2 GFSK 1M_Middle Channel

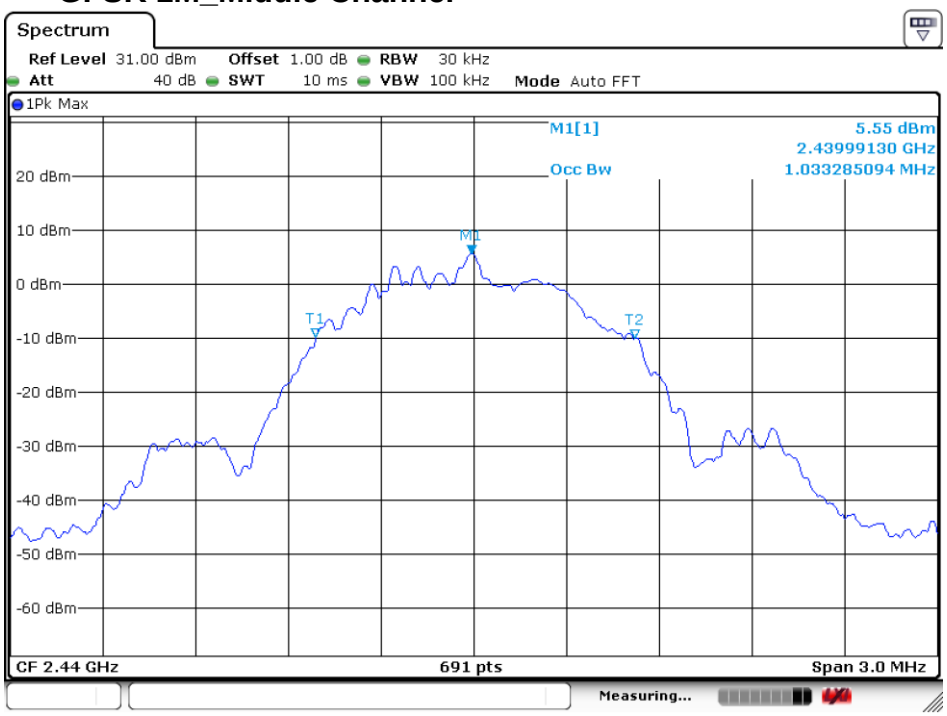

Date: 15.OCT.2020 16:08:23

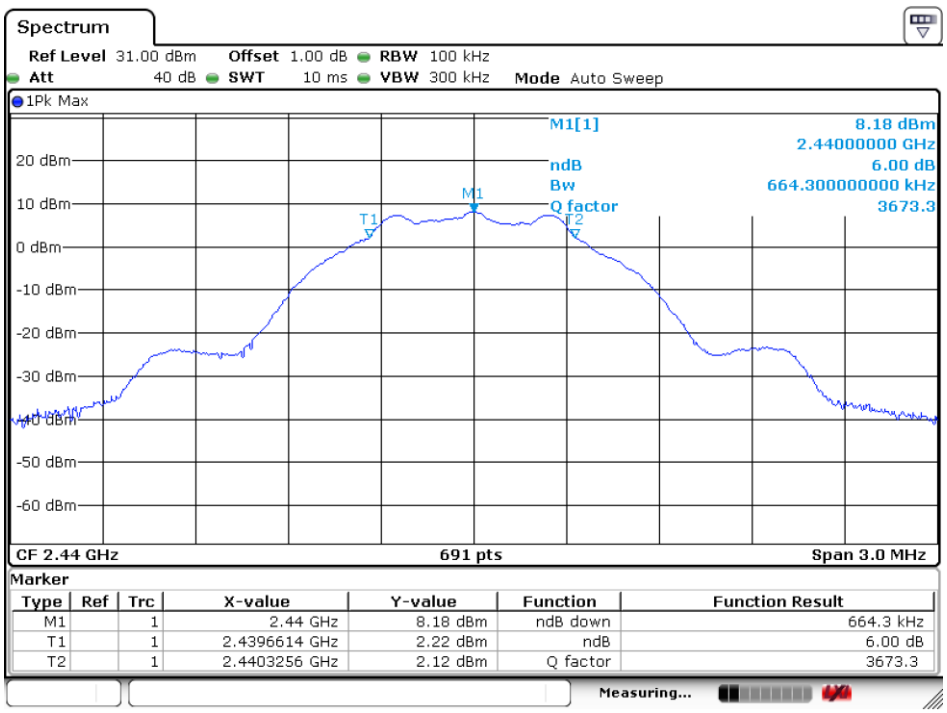

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.44 GHz	8.18 dBm	ndB down	664.3 kHz
T1		1	2.4396614 GHz	2.22 dBm	ndB	6.00 dB
T2		1	2.4403256 GHz	2.12 dBm	Q factor	3673.3

Date: 15.OCT.2020 16:07:40

4.5.2.3 GFSK 1M_Highest Channel

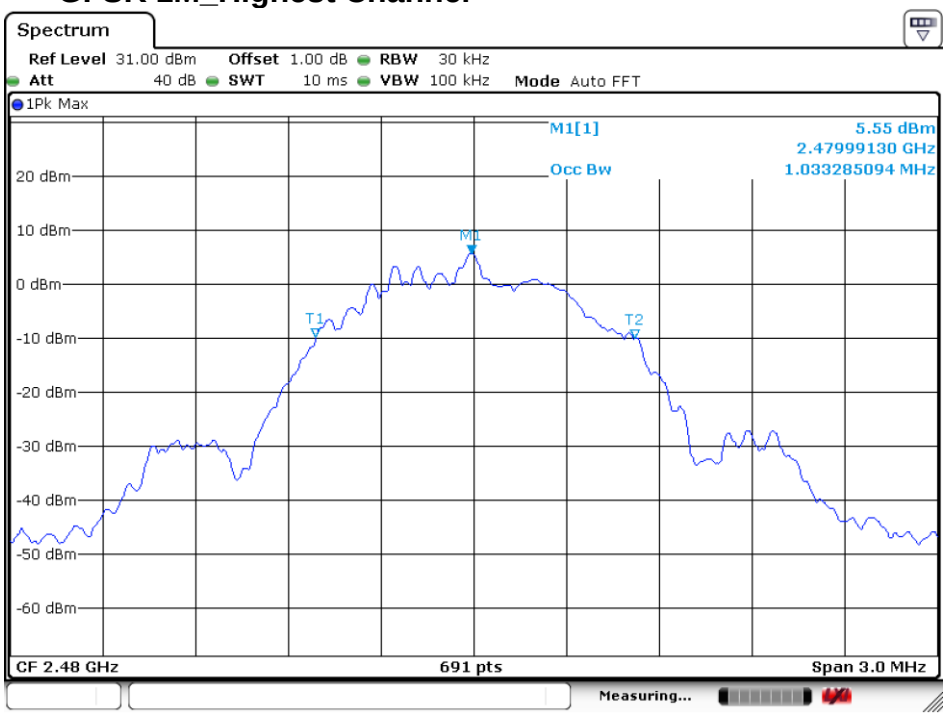

Date: 15.OCT.2020 16:08:07

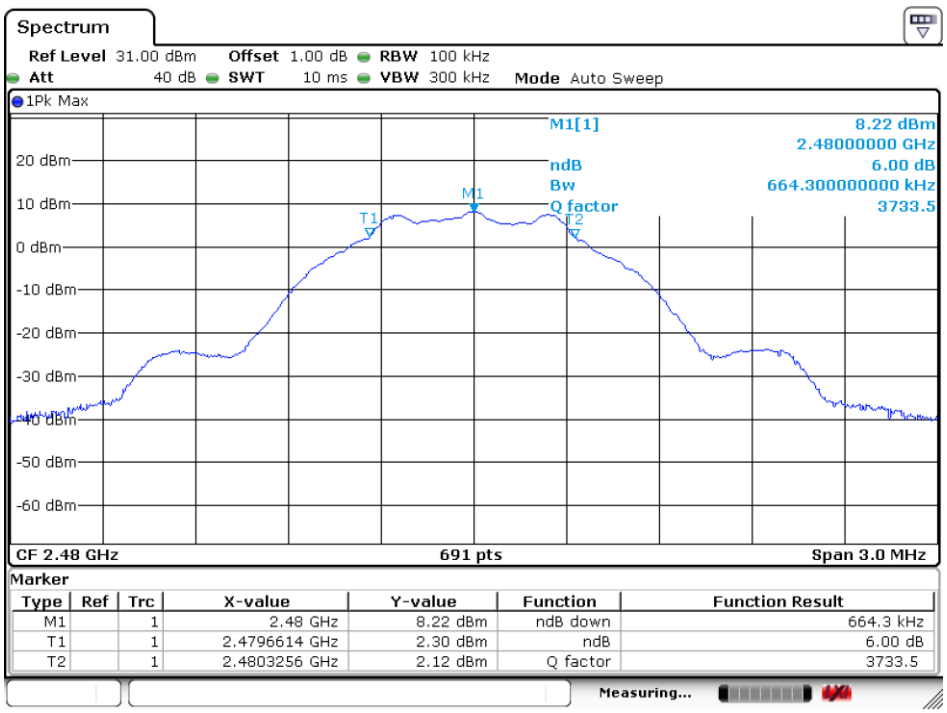

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48 GHz	8.22 dBm	ndB down	664.3 kHz
T1		1	2.4796614 GHz	2.30 dBm	ndB	6.00 dB
T2		1	2.4803256 GHz	2.12 dBm	Q factor	3733.5

Date: 15.OCT.2020 16:07:54

4.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	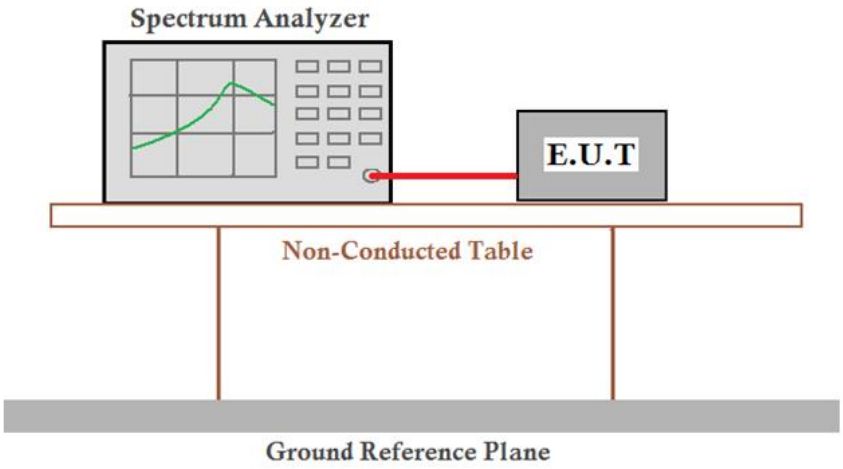
Limit:	≤8.00dBm/3kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.6.1 Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK_1M	Lowest	-7.42	≤8.00	Pass
	Middle	-6.57	≤8.00	Pass
	Highest	-6.55	≤8.00	Pass

4.6.2 Test plots

4.6.2.1 GFSK 1M_Lowest Channel

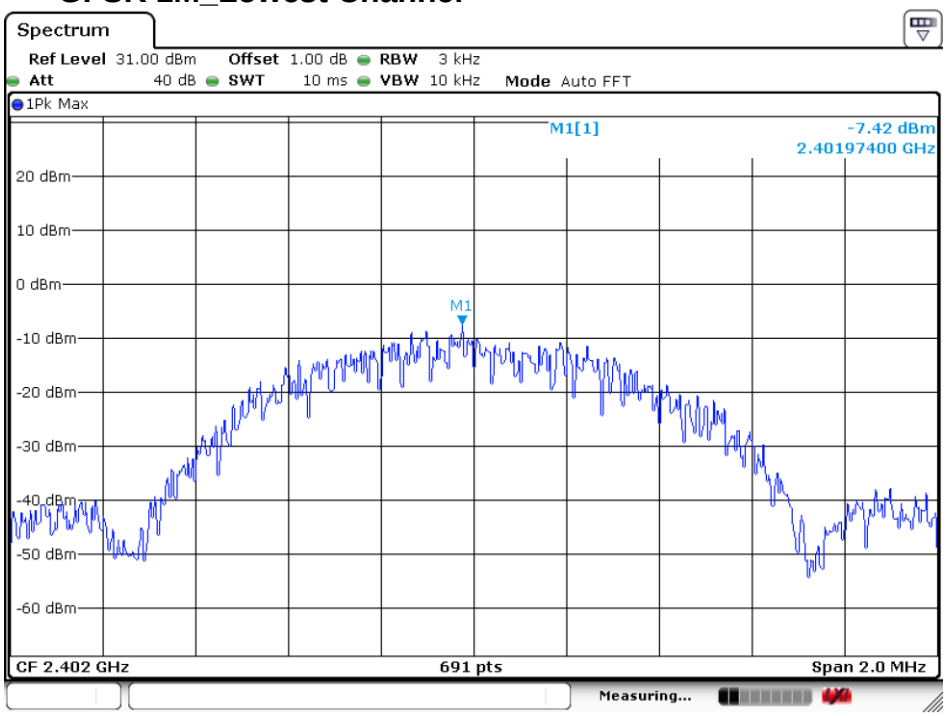

Date: 15.OCT.2020 16:06:25

4.6.2.2 GFSK 1M_Middle Channel

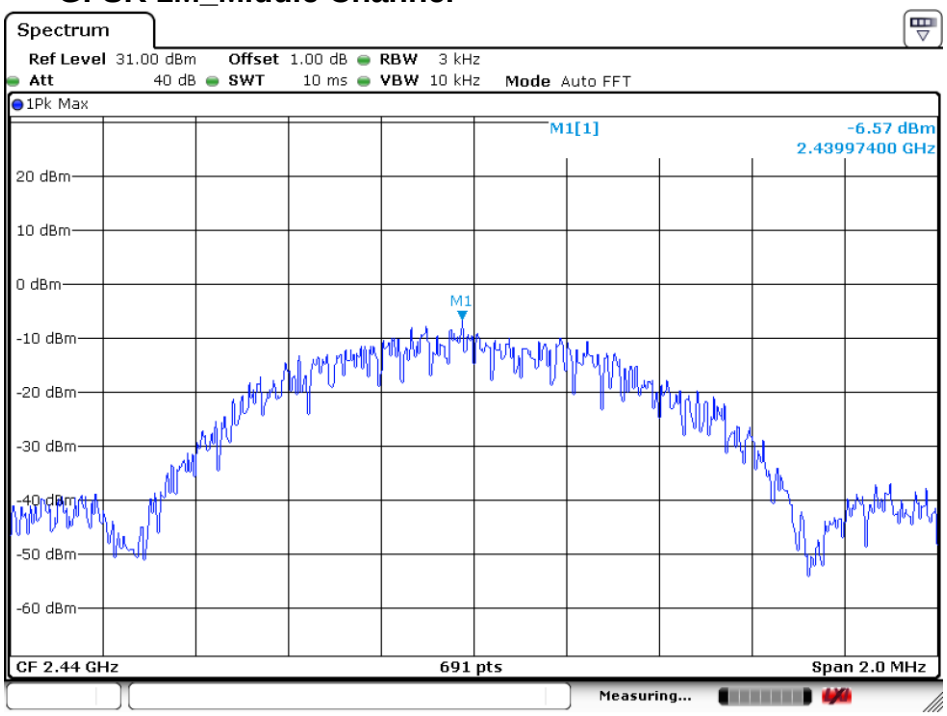

Date: 15.OCT.2020 16:06:03

4.6.2.3 GFSK 1M_Highest Channel

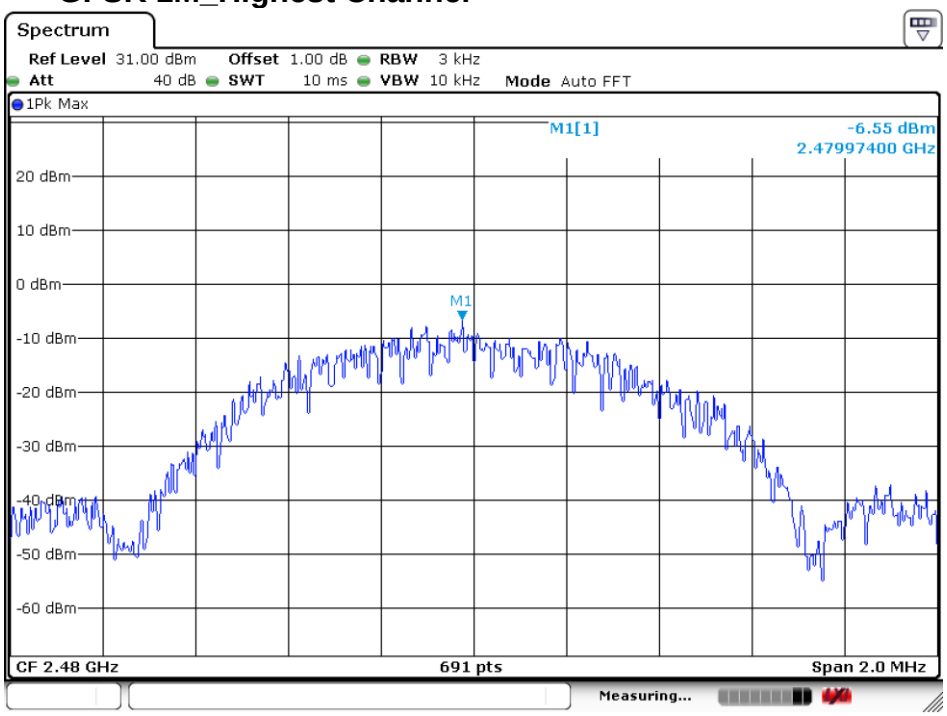

Date: 15.OCT.2020 16:04:47

4.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	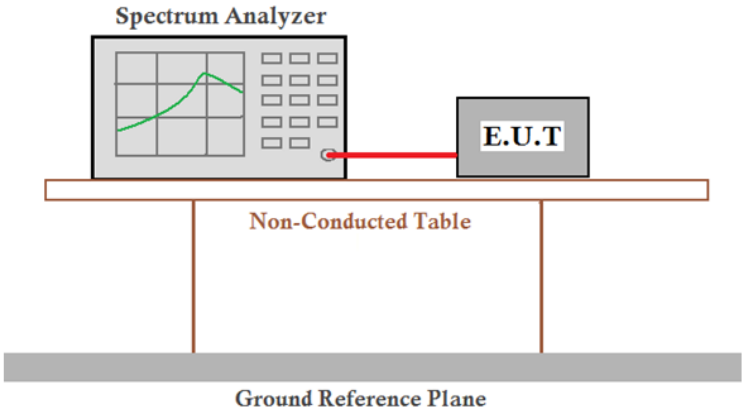
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.7.1 Test plots

4.7.1.1 GFSK 1M_Lowest Channel

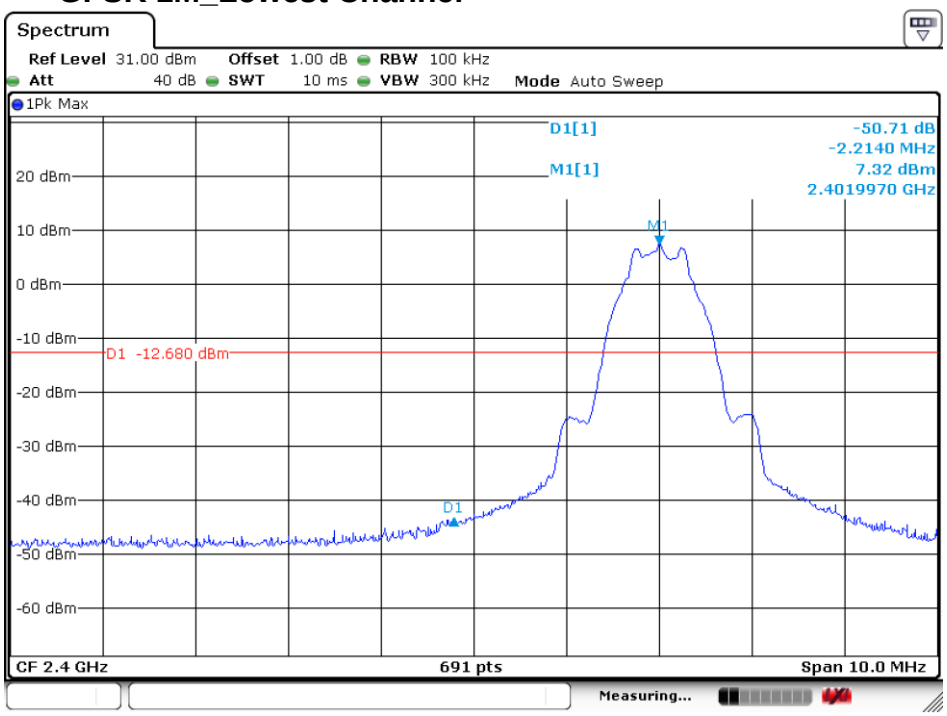

Date: 15.OCT.2020 16:10:45

4.7.1.2 GFSK 1M_Highest Channel

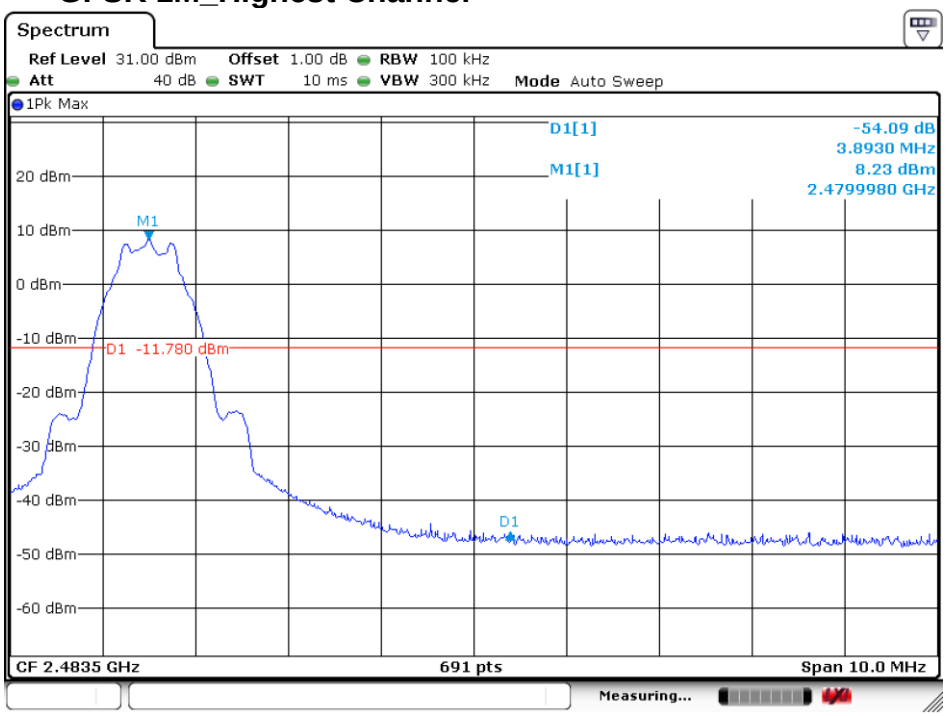

Date: 15.OCT.2020 16:12:25

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.8 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	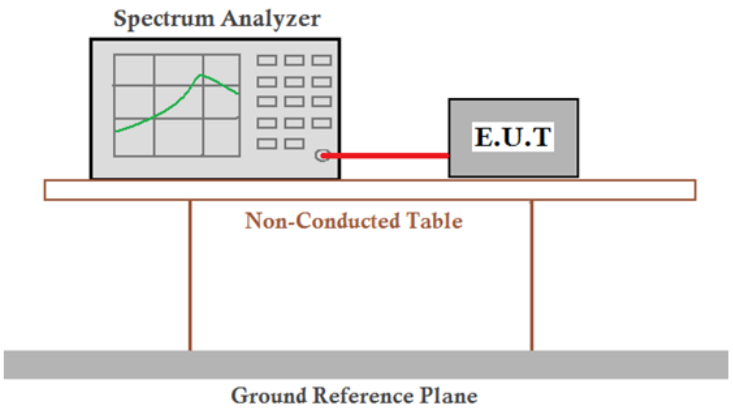
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.8.1 Test plots:

4.8.1.1 GFSK 1M_Lowest Channel

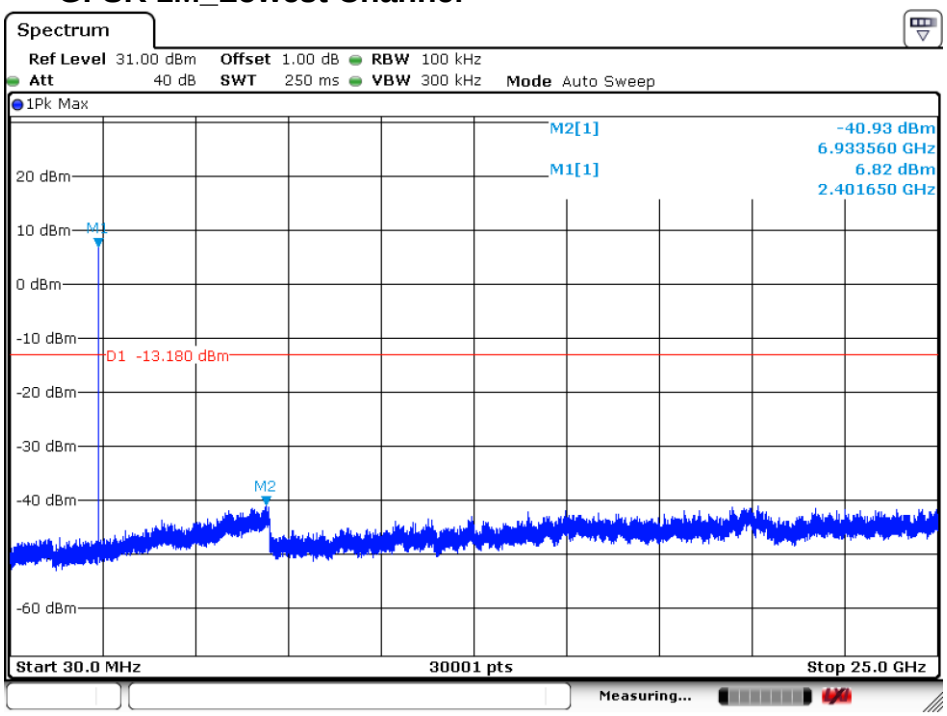

Date: 15.OCT.2020 16:14:17

4.8.1.2 GFSK 1M_Middle Channel

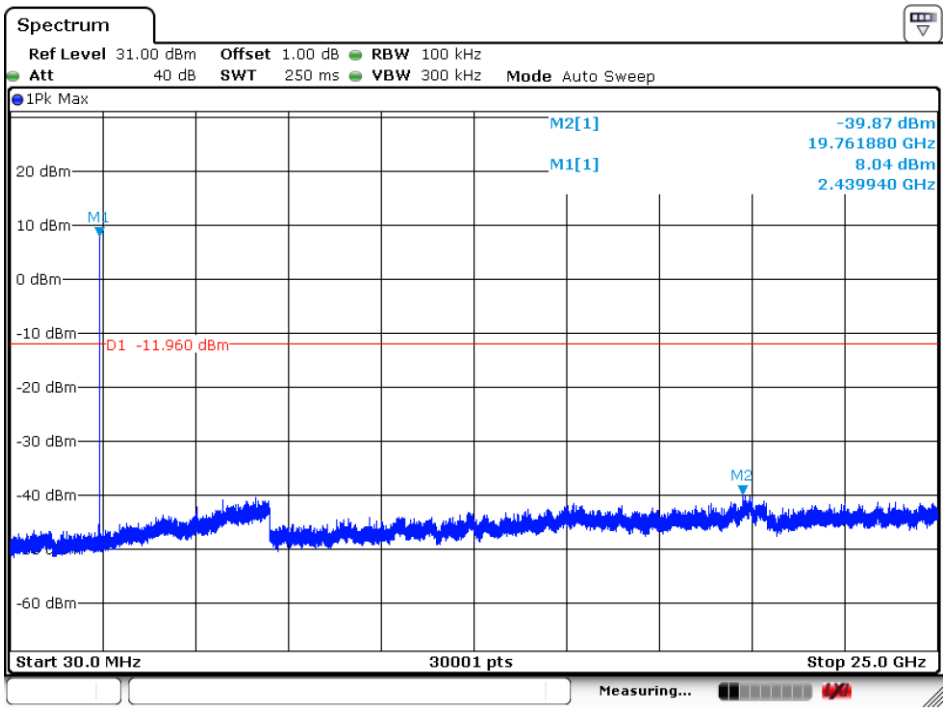

Date: 15.OCT.2020 16:16:37

4.8.1.3 GFSK 1M_Highest Channel

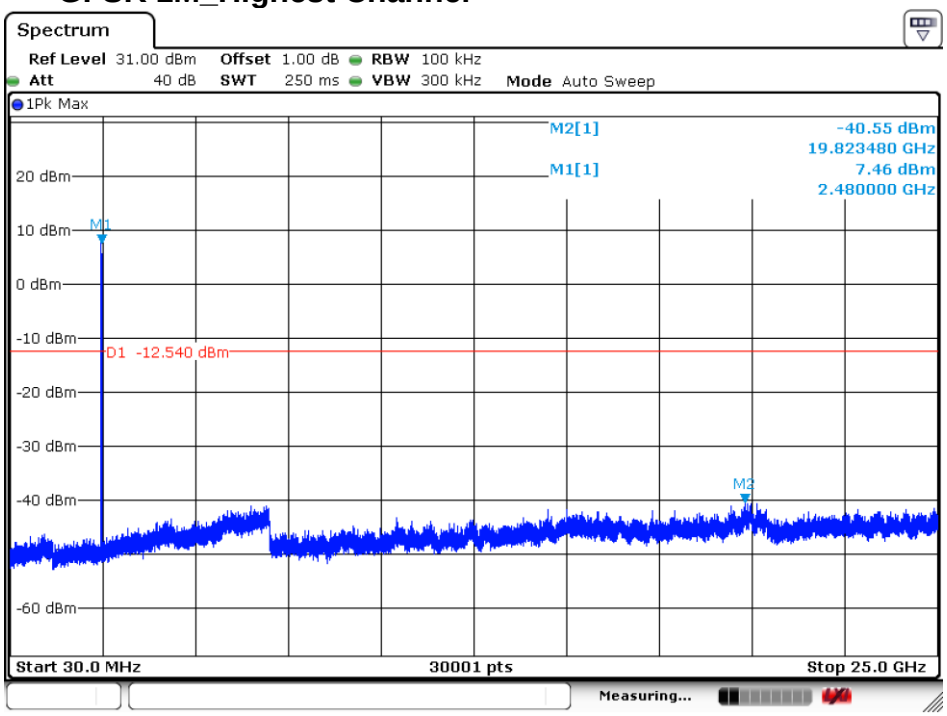

Date: 15.OCT.2020 16:13:16

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4.9 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Setup:	

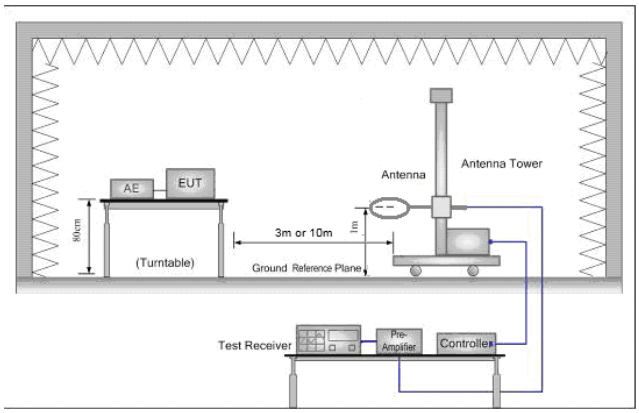

Figure 1. Below 30MHz

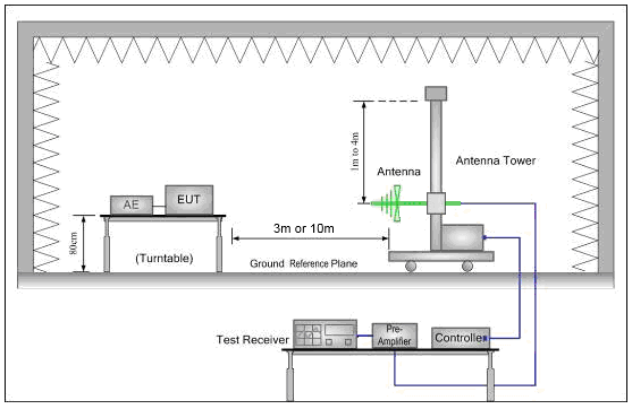

Figure 2. 30MHz to 1GHz

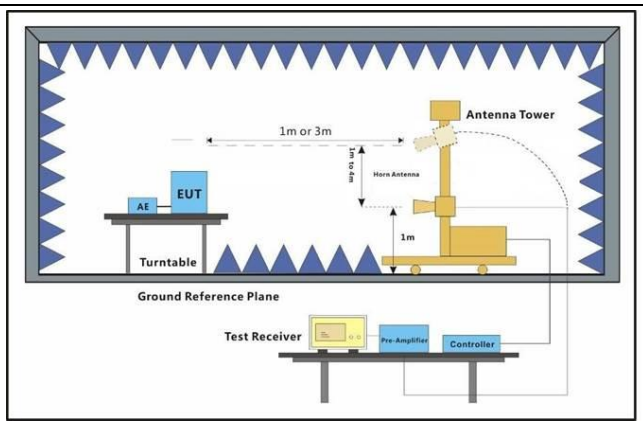

Figure 3. Above 1 GHz

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz ; VBW≥ RBW; Sweep = auto;

	Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = N 1 *L 1 +N 2 *L 2 +...+N n-1 *LN n-1 +N n *L n Where N 1 is number of type 1 pulses, L 1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle) f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. h. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. i. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) j. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. k. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.9.1 Radiated Emission below 1GHz

4.9.1.1 Charge + Transmitting

Test Graph

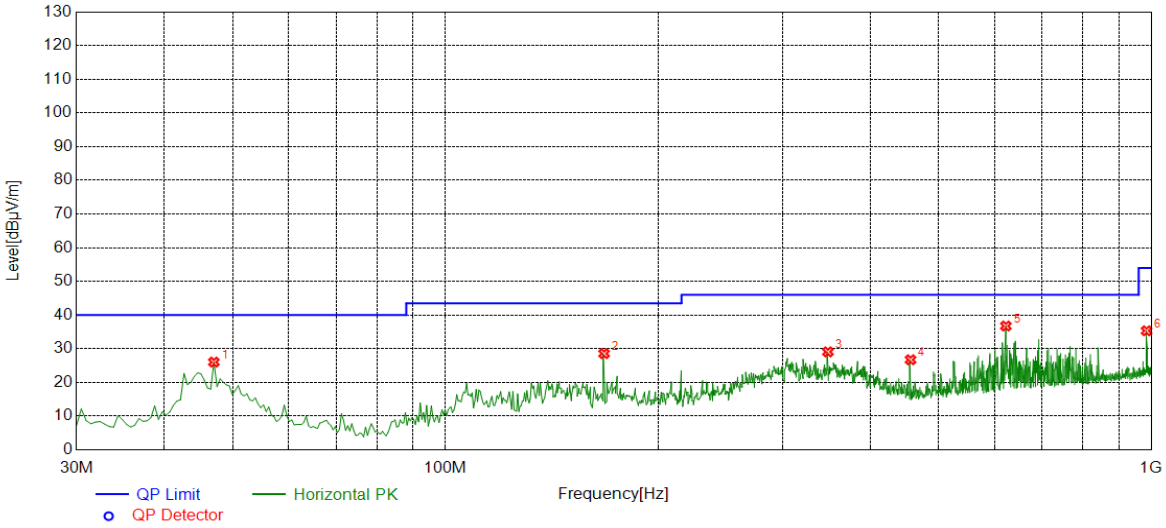

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.9835	26.05	-30.20	40.00	13.95	147	171	Horizontal
2	167.808	28.57	-33.76	43.50	14.93	109	272	Horizontal
3	348.319	29.09	-26.42	46.00	16.91	248	278	Horizontal
4	456.043	26.74	-23.71	46.00	19.26	193	278	Horizontal
5	622.481	36.76	-19.77	46.00	9.24	178	262	Horizontal
6	984.957	35.34	-14.05	54.00	18.66	119	250	Horizontal

Final Data List

Test Graph

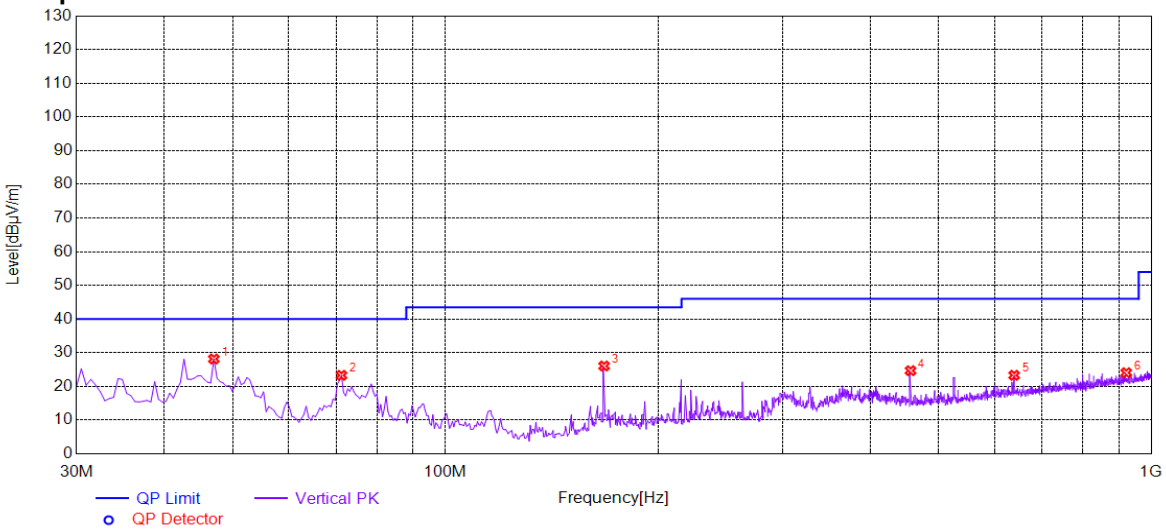

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.9835	28.16	-30.20	40.00	11.84	266	16	Vertical
2	71.2456	23.31	-34.37	40.00	16.69	150	85	Vertical
3	167.808	26.08	-33.76	43.50	17.42	199	183	Vertical
4	456.043	24.69	-23.71	46.00	21.31	274	331	Vertical
5	639.464	23.32	-19.53	46.00	22.68	194	290	Vertical
6	921.875	24.08	-14.90	46.00	21.92	237	202	Vertical

Final Data List

4.9.2 Transmitter Emission above 1GHz

4.9.2.1 BLE_1M_Channel 0

Test Graph

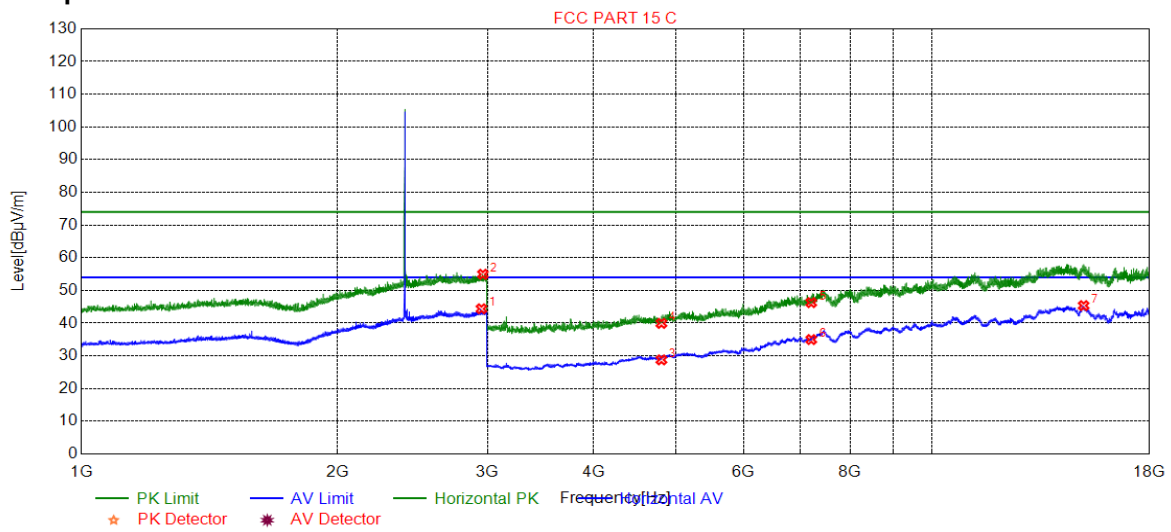

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2951.98	44.40	9.67	54.00	9.60	137	87	Horizontal
2	2963.49	54.97	9.62	74.00	19.03	112	168	Horizontal
3	4804.00	28.79	-18.30	54.00	25.21	163	100	Horizontal
4	4804.00	39.94	-18.30	74.00	34.06	164	128	Horizontal
5	7206.00	46.29	-9.82	74.00	27.71	240	360	Horizontal
6	7206.00	35.00	-9.82	54.00	19.00	163	46	Horizontal
7	15055.2	45.37	2.64	54.00	8.63	177	360	Horizontal

Final Data List

4.9.2.2 BLE_1M_Channel 0

Test Graph

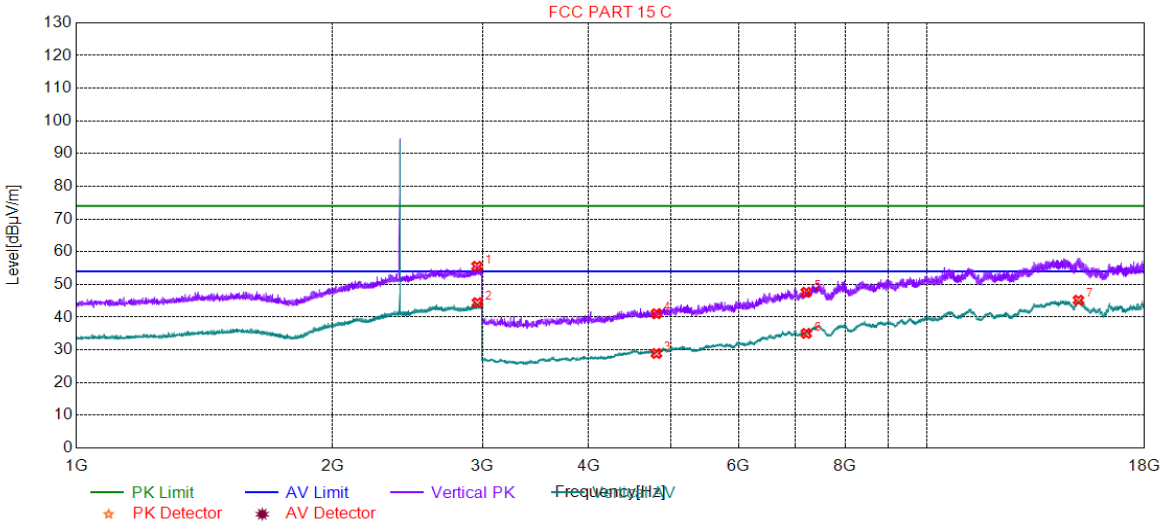

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2956.48	55.56	9.65	74.00	18.44	199	178	Vertical
2	2959.48	44.45	9.64	54.00	9.55	258	342	Vertical
3	4804.00	28.91	-18.30	54.00	25.09	260	205	Vertical
4	4804.00	41.07	-18.30	74.00	32.93	271	314	Vertical
5	7206.00	47.63	-9.82	74.00	26.37	297	41	Vertical
6	7206.00	35.05	-9.82	54.00	18.95	299	0	Vertical
7	15049.2	45.21	2.63	54.00	8.79	210	342	Vertical

Final Data List

4.9.2.3 BLE_1M_Channel 19

Test Graph

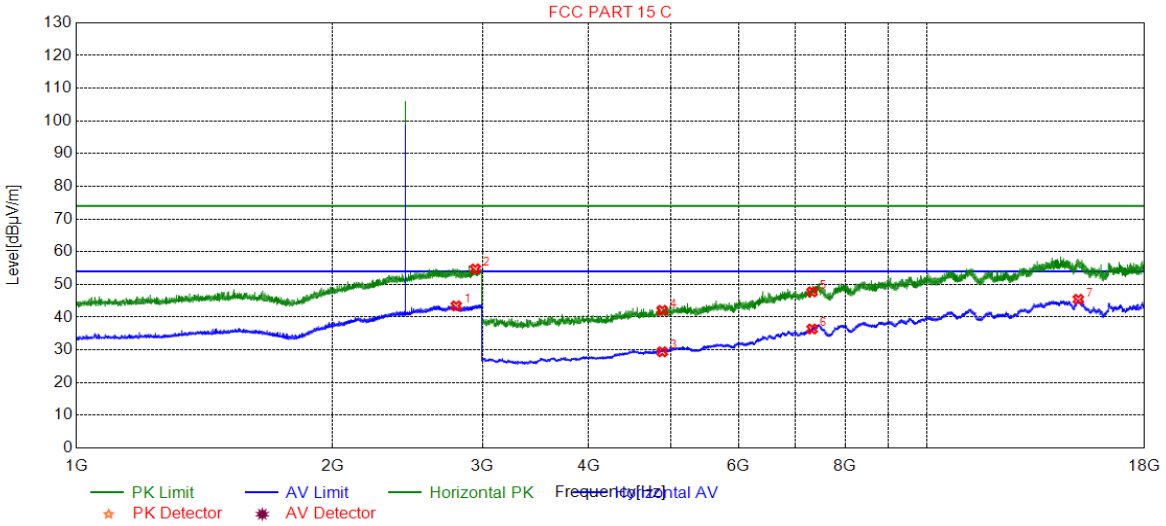

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2794.94	43.46	8.99	54.00	10.54	103	238	Horizontal
2	2943.48	54.75	9.61	74.00	19.25	116	32	Horizontal
3	4880.00	29.42	-17.96	54.00	24.58	107	18	Horizontal
4	4880.00	42.10	-17.96	74.00	31.90	234	318	Horizontal
5	7320.00	47.74	-9.54	74.00	26.26	219	264	Horizontal
6	7320.00	36.39	-9.54	54.00	17.61	207	127	Horizontal
7	15043.2	45.46	2.62	54.00	8.54	186	18	Horizontal

Final Data List

4.9.2.4 BLE_1M_Channel 19

Test Graph

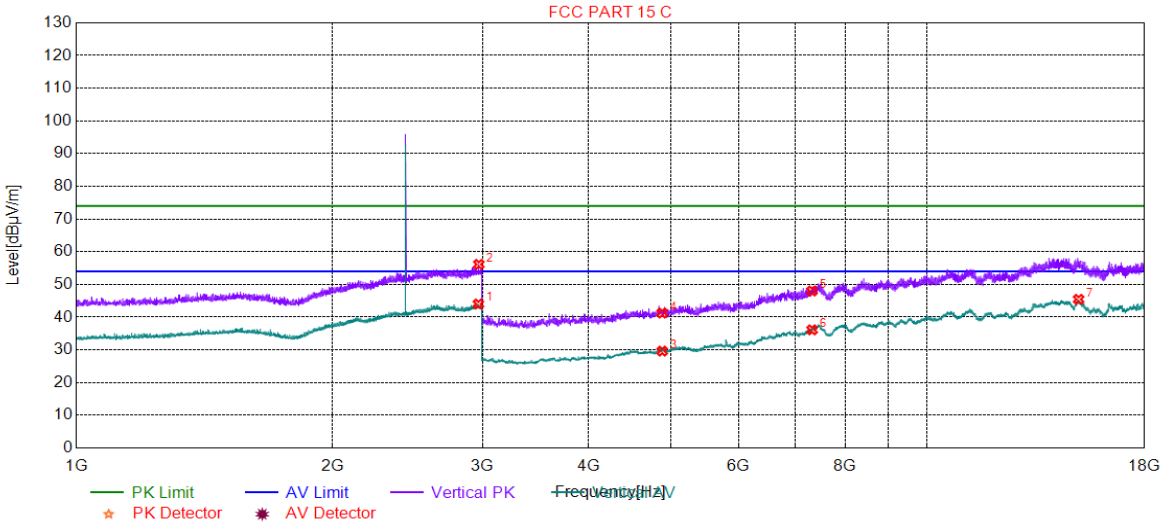

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2967.49	44.03	9.60	54.00	9.97	288	314	Vertical
2	2970.99	56.16	9.58	74.00	17.84	183	81	Vertical
3	4880.00	29.63	-17.96	54.00	24.37	153	124	Vertical
4	4880.00	41.28	-17.96	74.00	32.72	299	205	Vertical
5	7320.00	48.01	-9.54	74.00	25.99	179	42	Vertical
6	7320.00	36.14	-9.54	54.00	17.86	164	42	Vertical
7	15055.2	45.47	2.64	54.00	8.53	260	287	Vertical

Final Data List

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.9.2.5 BLE_1M_Channel 39

Test Graph

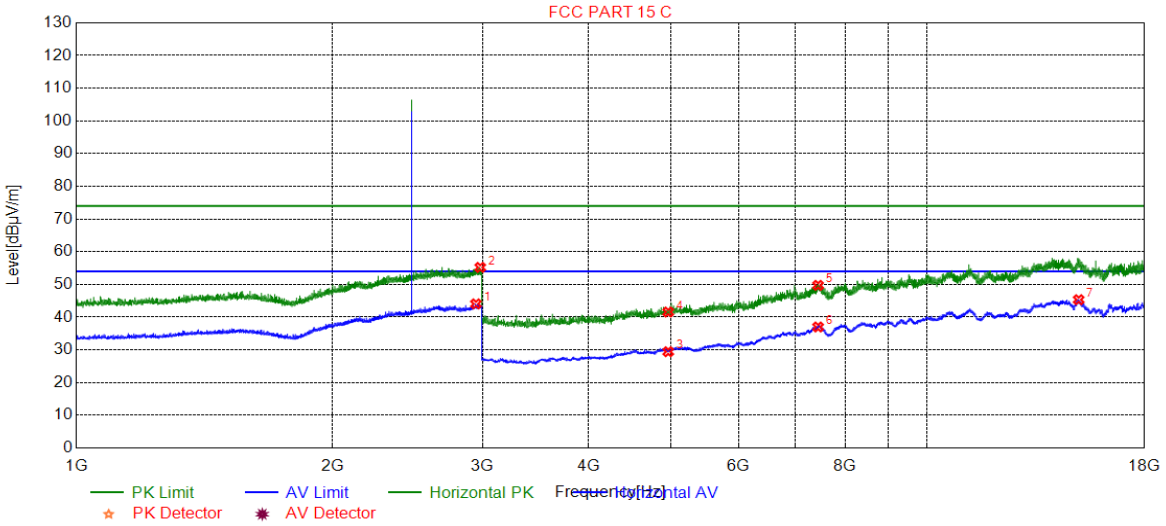

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2947.98	44.07	9.66	54.00	9.93	243	237	Horizontal
2	2982.49	55.23	9.53	74.00	18.77	131	182	Horizontal
3	4960.00	29.45	-17.47	54.00	24.55	171	360	Horizontal
4	4960.00	41.59	-17.47	74.00	32.41	143	100	Horizontal
5	7440.00	49.74	-9.02	74.00	24.26	128	100	Horizontal
6	7440.00	37.01	-9.02	54.00	16.99	141	209	Horizontal
7	15058.2	45.35	2.65	54.00	8.65	196	292	Horizontal

Final Data List

4.9.2.6 BLE_1M_Channel 39

Test Graph

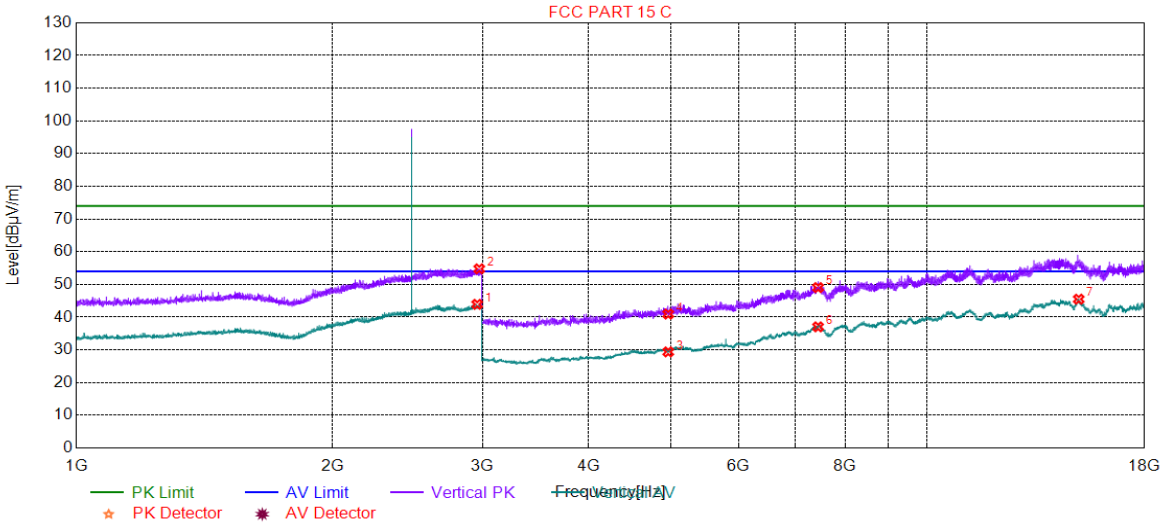

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2957.98	43.94	9.64	54.00	10.06	264	0	Vertical
2	2974.49	54.78	9.57	74.00	19.22	272	164	Vertical
3	4960.00	29.39	-17.47	54.00	24.61	279	260	Vertical
4	4960.00	40.95	-17.47	74.00	33.05	201	43	Vertical
5	7440.00	49.06	-9.02	74.00	24.94	276	205	Vertical
6	7440.00	37.05	-9.02	54.00	16.95	193	233	Vertical
7	15059.7	45.52	2.65	54.00	8.48	290	97	Vertical

Final Data List

Test on the worst case:

4.9.3 Transmitter Emission above 1GHz

4.9.3.1 BLE 1M_Channel 39

Test Graph

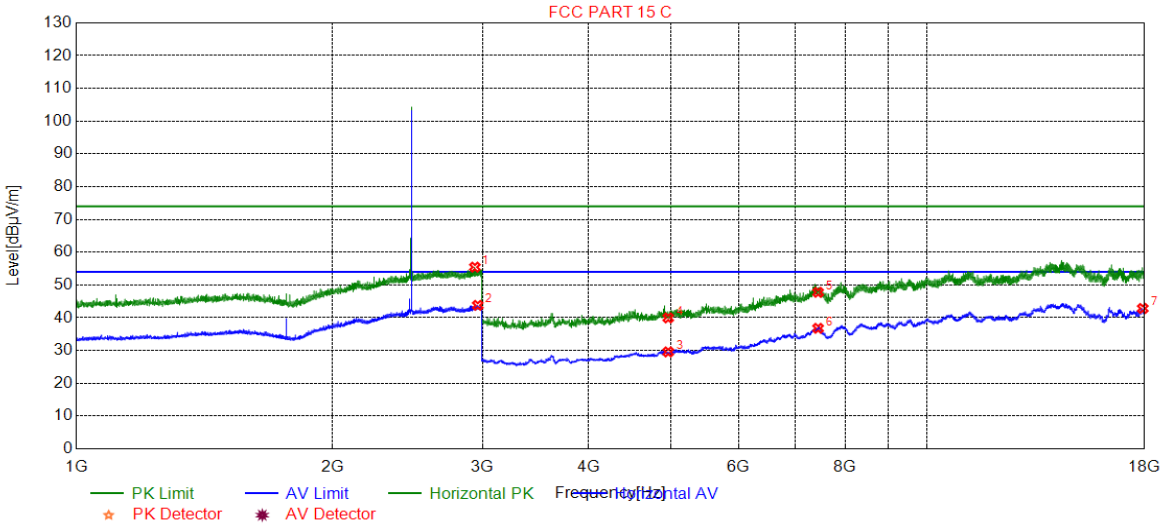

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2939.48	55.46	9.57	74.00	18.54	154	328	Horizontal
2	2962.49	43.80	9.62	54.00	10.20	186	342	Horizontal
3	4960.00	29.59	-17.47	54.00	24.41	105	261	Horizontal
4	4960.00	39.97	-17.47	74.00	34.03	212	234	Horizontal
5	7440.00	47.77	-9.02	74.00	26.23	171	70	Horizontal
6	7440.00	36.79	-9.02	54.00	17.21	158	234	Horizontal
7	17908.4	42.85	-1.31	54.00	11.15	144	288	Horizontal

Final Data List

4.9.3.2 BLE 1M_Channel 39

Test Graph

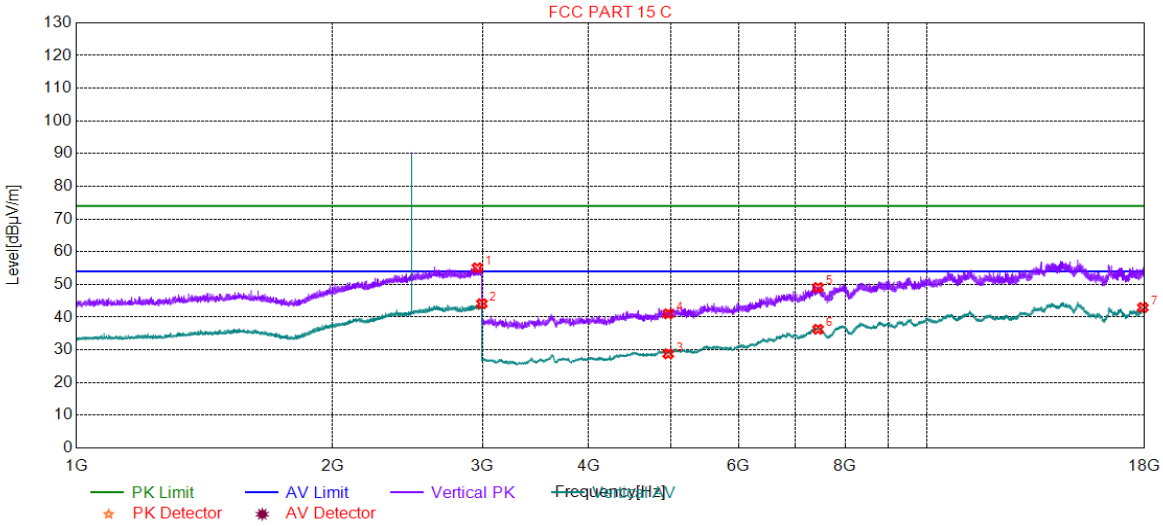

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2958.98	55.11	9.64	74.00	18.89	248	115	Vertical
2	2995.99	44.12	9.47	54.00	9.88	226	358	Vertical
3	4960.00	28.81	-17.47	54.00	25.19	177	100	Vertical
4	4960.00	41.04	-17.47	74.00	32.96	274	317	Vertical
5	7440.00	49.08	-9.02	74.00	24.92	239	100	Vertical
6	7440.00	36.31	-9.02	54.00	17.69	215	236	Vertical
7	17914.4	42.96	-1.31	54.00	11.04	278	18	Vertical

Final Data List

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
4) All Modes have been tested, but only the worst case data displayed in this report.

4.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

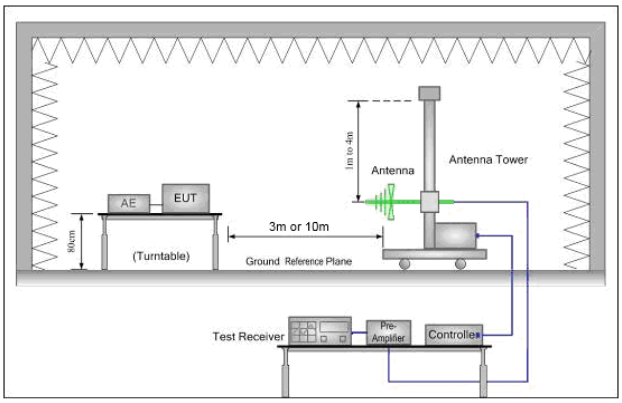

Figure 1. 30MHz to 1GHz

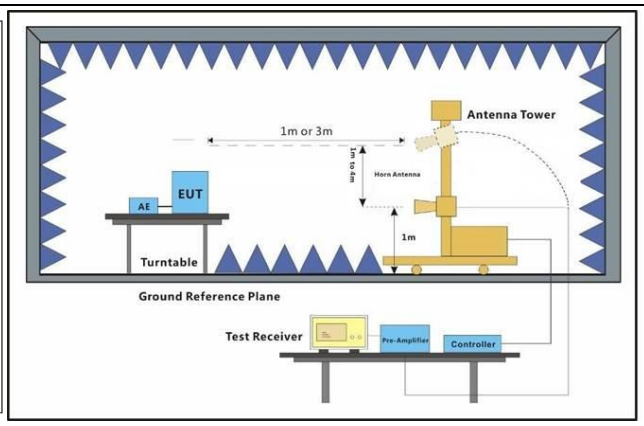

Figure 2. Above 1 GHz

Test Procedure:

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel

	h. Test the EUT in the lowest channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.11 Restricted bands around fundamental frequency

4.11.1 Test plots

4.11.1.1 BLE_1M_Channel 0

Test Graph

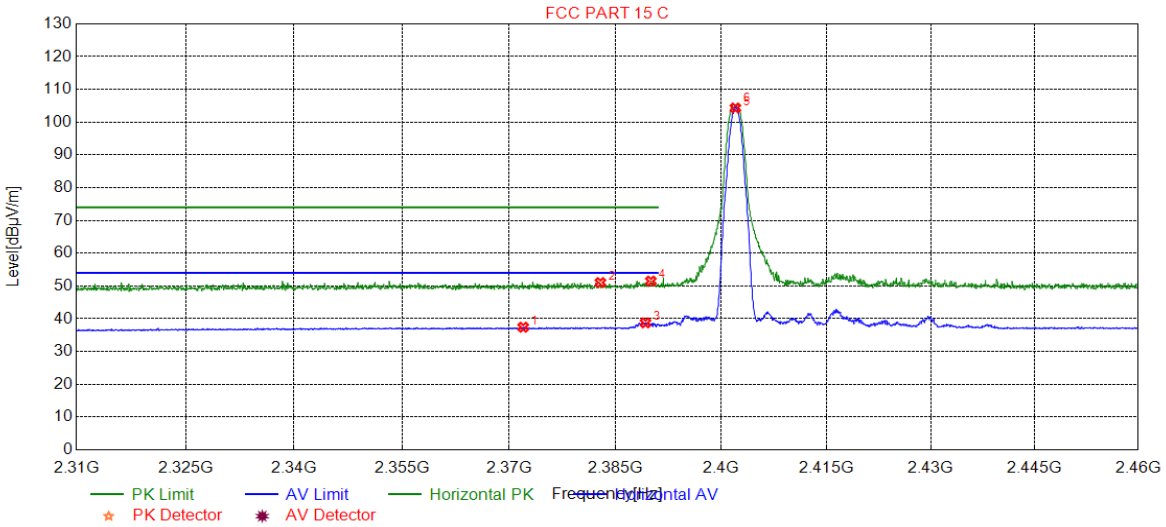

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2371.98	37.43	7.79	54.00	16.57	115	234	Horizontal
2	2382.86	51.05	7.78	74.00	22.95	147	359	Horizontal
3	2389.23	38.76	7.77	54.00	15.24	236	239	Horizontal
4	2390.00	51.51	7.77	74.00	22.49	131	267	Horizontal
5	2402.00	104.34	7.77	0.00	-104.34	209	234	Horizontal
6	2402.00	105.32	7.77	0.00	-105.32	205	239	Horizontal

Final Data List

4.11.1.2 BLE_1M_Channel 0

Test Graph

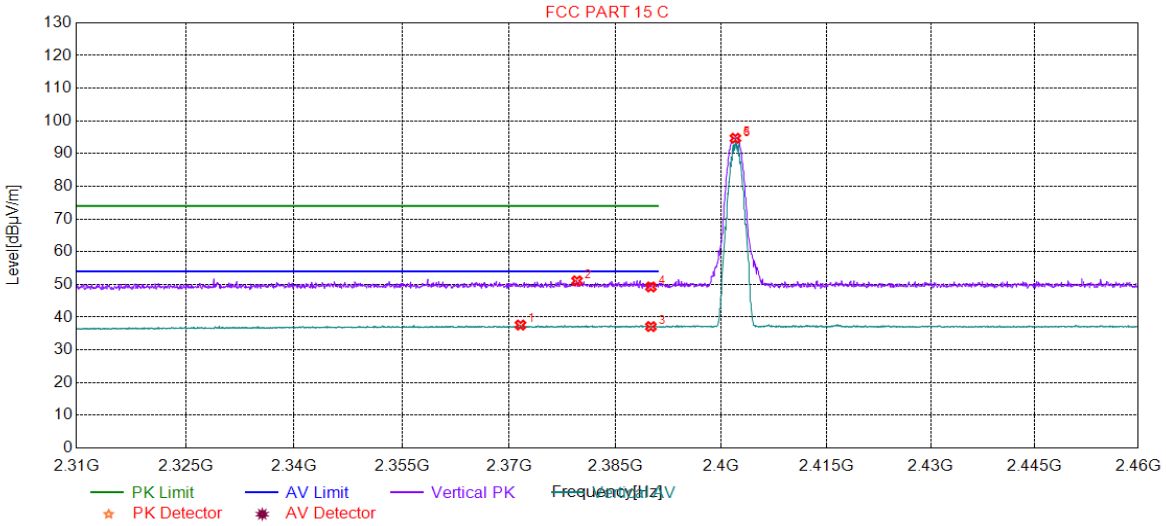

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2371.60	37.60	7.79	54.00	16.40	213	176	Vertical
2	2379.55	51.12	7.78	74.00	22.88	170	215	Vertical
3	2390.00	37.13	7.77	54.00	16.87	155	237	Vertical
4	2390.00	49.26	7.77	74.00	24.74	153	143	Vertical
5	2402.00	94.72	7.77	0.00	-94.72	209	215	Vertical
6	2402.00	94.41	7.77	0.00	-94.41	293	215	Vertical

Final Data List

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.11.1.3 BLE_1M_Channel 39

Test Graph

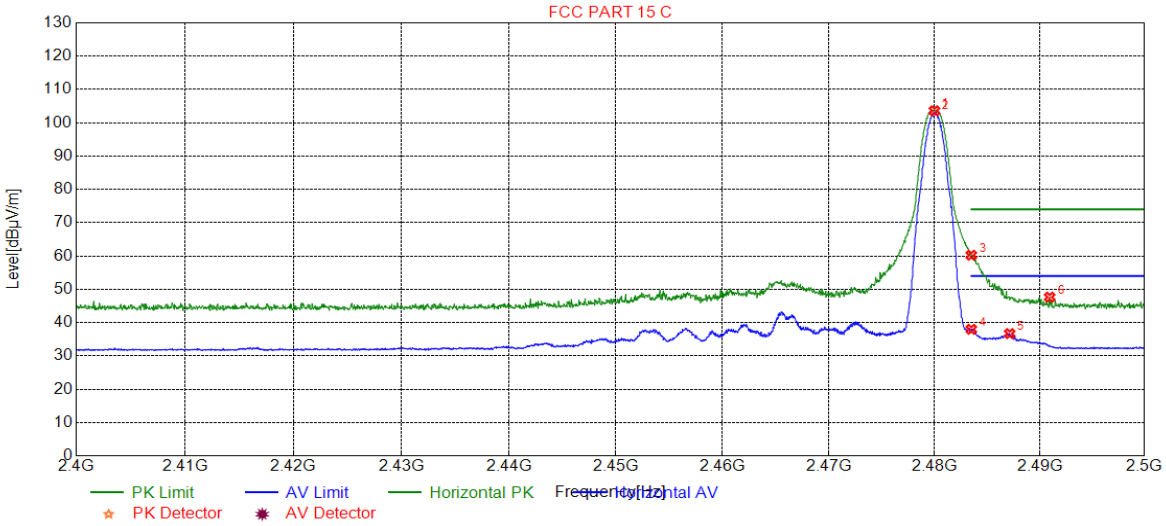

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	103.61	8.01	0.00	-103.61	120	271	Horizontal
2	2480.00	103.09	8.01	0.00	-103.09	248	271	Horizontal
3	2483.50	60.25	8.01	74.00	13.75	247	265	Horizontal
4	2483.50	38.02	8.01	54.00	15.98	160	271	Horizontal
5	2487.14	36.72	8.01	54.00	17.28	222	244	Horizontal
6	2490.94	47.67	8.02	74.00	26.33	131	255	Horizontal

Final Data List

4.11.1.4 BLE_1M_Channel 39

Test Graph

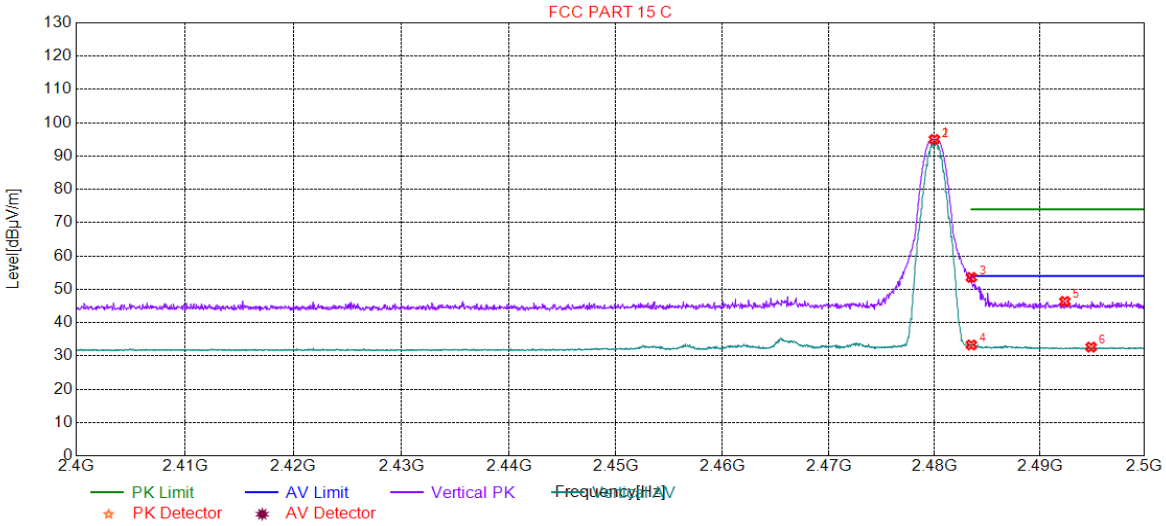

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	94.98	8.01	0.00	-94.98	232	243	Vertical
2	2480.00	94.62	8.01	0.00	-94.62	214	243	Vertical
3	2483.50	53.58	8.01	74.00	20.42	192	243	Vertical
4	2483.50	33.32	8.01	54.00	20.68	157	248	Vertical
5	2492.39	46.37	8.02	74.00	27.63	274	18	Vertical
6	2494.89	32.66	8.02	54.00	21.34	207	111	Vertical

Final Data List

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test on the worst case:

4.11.1.1 BLE 1M_Channel 39

Test Graph

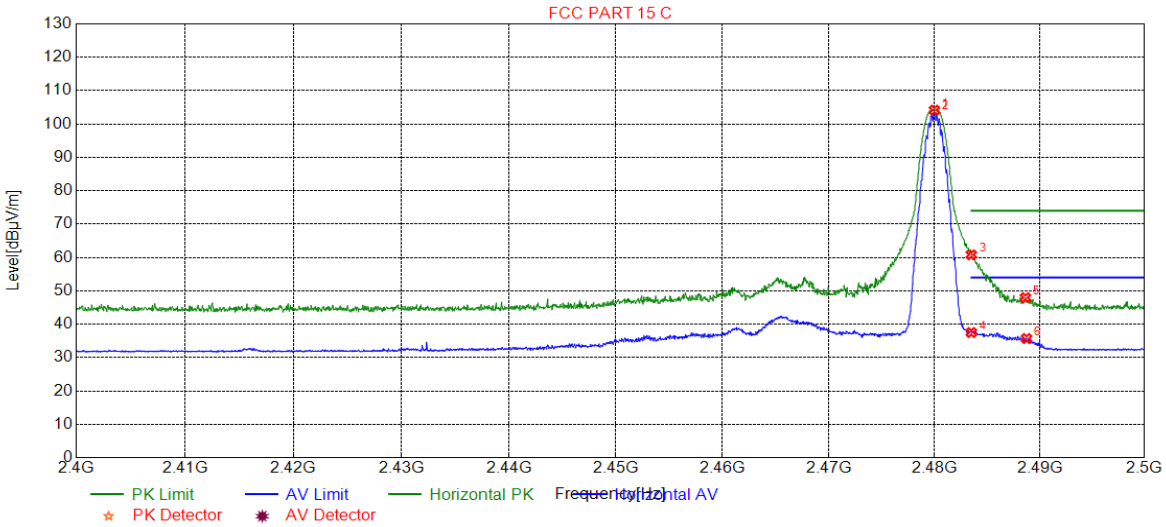

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	104.15	8.01	0.00	-104.15	156	210	Horizontal
2	2480.00	103.32	8.01	0.00	-103.32	228	216	Horizontal
3	2483.50	60.83	8.01	74.00	13.17	112	210	Horizontal
4	2483.50	37.54	8.01	54.00	16.46	137	216	Horizontal
5	2488.64	47.98	8.02	74.00	26.02	190	210	Horizontal
6	2488.74	35.73	8.02	54.00	18.27	185	210	Horizontal

Final Data List

4.11.1.2 BLE 1M_Channel 39

Test Graph

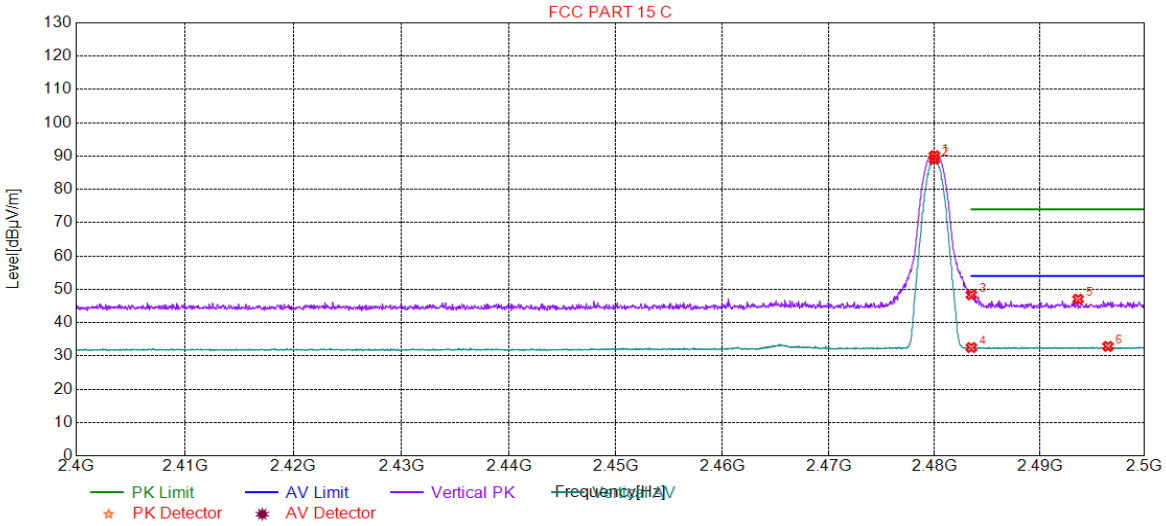

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	90.13	8.01	0.00	-90.13	171	218	Vertical
2	2480.00	89.07	8.01	0.00	-89.07	261	35	Vertical
3	2483.50	48.37	8.01	74.00	25.63	273	190	Vertical
4	2483.50	32.54	8.01	54.00	21.46	224	35	Vertical
5	2493.64	47.06	8.02	74.00	26.94	230	133	Vertical
6	2496.49	32.89	8.03	54.00	21.11	163	283	Vertical

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
All Modes have been tested, but only the worst case data displayed in this report.

5 Measurement Uncertainty (95% confidence levels, k=2)

Lab A:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Temperature test	±1°C
5	Humidity test	±3%
6	DC and low frequency voltages	±0.5%

Lab B:

No.	Item	Measurement Uncertainty
1	Conduct emission test	± 3.0dB (150kHz to 30MHz)
2	Radiated Spurious emission test	± 4.8dB (Below 1GHz)
		± 4.8dB (1GHz to 6GHz)
		± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)

6 Equipment List

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2020/7/15	2021/7/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2020/1/3	2021/1/2
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/7/14	2021/7/14
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2020/10/27	2021/10/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2020/7/14	2021/7/14

CE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10
Artificial network	ROHDE&SCHWARZ	ENV216	XAW01-04-01	2020-08-04	2021-08-03
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-11-28	2020-11-28
Measurement Software	Tonscend	TS+ CE V2.5	XAW02-05-02	NCR	NCR

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

RSE Test System					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2020-04-02	2021-04-01
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-17
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-17
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-02
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-17
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-11-18	2020-11-17
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR

7 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of Set-Up for AR/2020/A0007.

The End

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com