

Report No.: AR/2020/C000401 Page: 1 of 36

# **FCC TEST REPORT**

Application No.:	AR/2020/C0004
Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
EUT Description:	Mobile Phone
Model No.:	M2010J19SL
Trade Mark:	Redmi
FCC ID:	2AFZZJ19SL
Standards:	47 CFR Part 2
	47 CFR Part 22 subpart H
	47 CFR Part 24 subpart E
	47 CFR Part 27 subpart C
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01
	C63.26 (2015)
Date of Receipt:	2020/12/11
Date of Test:	2020/12/11 to 2020/12/31
Date of Issue:	2020/12/31
Test Result :	PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derde yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconcrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report a certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@ags.com

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755)26012053 f (86-755)26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 2 of 36

# 1 Version

Revision Record					
Version	Chapter	Date	Modifier	Remark	
01		2020-12-31		Original	

Authorized for issue by:		
Tested By	Mike Mu (Mike Hu) /Project Engineer	
Checked By	David Chen (David Chen) / Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation on ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com



Report No.: AR/2020/C000401 Page: 3 of 36

# Contents

1	Vers	sion	2
2	Test	Summary	5
	2.1	GSM850/UMTS Band 5 & LTE Band 5	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	5
	2.3	UMTS Band 4 /LTE Band 4 /66	6
	2.4	LTE Band 7/38/41/CA_7C/CA_38C	6
	2.5	LTE Band 12/17	7
3	Gen	eral Information	9
	3.1	Details of Client	9
	3.2	Test Location	9
	3.3	Test Facility	10
	3.4	General Description of EUT	11
	3.5	Test Mode	11
	3.6	Test Environment	12
	3.7	Technical Specification	12
	3.8	Test Frequencies	15
4	Des	cription of Tests	22
	4.1	Conducted Output Power	22
	4.2	Effective (Isotropic) Radiated Power of Transmitter	22
	4.3	Occupied Bandwidth	22
	4.4	Band Edge at Antenna Terminals	23
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	23
	4.6	Peak-Average Ratio	24
	4.7	Field Strength of Spurious Radiation	25
	4.8	Frequency Stability / Temperature Variation	26
	4.9	Test Setups	27
		4.9.1 Test Setup 1	27
		4.9.2 Test Setup 2	
		4.9.3 Test Setup 3	
		4.9.4 Test Setup 4	28



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excoverate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: AR/2020/C000401 Page: 4 of 36

	4.10 Test Conditions	.29
5	Main Test Instruments	.31
6	Measurement Uncertainty	.35
7	Appendixes	.36



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconcrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itest entation, forgery or falsification of the company sole stated and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 2671054 sgs.china@sgs.com



Report No.: AR/2020/C000401 5 of 36 Page:

#### 2 **Test Summary**

# 2.1 GSM850/UMTS Band 5 & LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of	Pass
			Appendix B	
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation	§2.1047	Digital modulation	Section 3 of	Pass
Characteristics	0	3	Appendix B	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of	Pass
			Appendix B	
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass
Remark: For the vero	lict, the "N/A" den	otes "not applicable", the "N/T" denotes "no	t tested".	

# 2.2 GSM 1900/UMTS Band 2 /LTE Band 2

	• • • • • • • • •			
Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's oside responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmile(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@egs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 6 of 36

Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	
Remark: For the verd	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

# 2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of	Pass
Output Data	, ,		Appendix B	
Peak-Average	§2.1046,	Limit≤13 dB	Section 2 of	Pass
Ratio	§27.50(d)		Appendix B	
Modulation	§2.1047	Digital modulation	Section 3 of	Pass
Characteristics	5		Appendix B	
Bandwidth	§2.1049	OBW: No limit.	Section 4 of	Pass
	_	EBW: No limit.	Appendix B	
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass
Remark: For the vero	lict, the "N/A" den	otes "not applicable", the "N/T" denotes "not	tested".	

# 2.4 LTE Band 7/38/41/CA\_7C/CA\_38C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit.	Section 4 of	Pass





Report No.: AR/2020/C000401 Page: 7 of 36

		EBW: No limit.		
			Appendix B	
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	P kHz 95 MHz X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	25 dBm/ 1 MHz 9 kHz 25 dBm/ 1 MHz 9 kHz 25 dBm/ 1 MHz 4 mHz 25 dBm/ 1 MHz 4 mHz 5 MHz X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

# 2.5 LTE Band 12/17

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§27.50(c)	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> No.1Workshop, M-10, Midde Secton, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sggs.com.cn end: <u>cRM</u> + <u>Atgm PGM</u> - <u>104</u> - <u>F</u>/F mig: <u>518057</u> t (86-755) 26012053 f (86-755) 26710594 sgs.com.cn



Report No.: AR/2020/C000401 Page: 8 of 36

Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	
Frequency Stability	§2.1055, §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconcrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itest entation, forgery or falsification of the company sole stated and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

www.sysgroup.com 中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 9 of 36 Page:

#### **General Information** 3

# 3.1 Details of Client

Applicant:	Xiaomi Communications Co., Ltd.		
Address of Applicant	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing,		
	China, 100085		
Manufacturer:	Xiaomi Communications Co., Ltd.		
Address of Manufacturar	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing,		
Address of Manufacturer	China, 100085		

# 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China	
Post code:	518057



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's oside responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmile(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@egs.com



Report No.: AR/2020/C000401 Page: 10 of 36

# 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions/Terms-eDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction Issues defined therein. Any holder of this document is a advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ess.com</a>



Report No.: AR/2020/C000401 Page: 11 of 36

#### EUT Description: Mobile Phone Model No.: M2010J19SL Trade Mark: Redmi P2 Hardware Version: Software Version: MIUI12 Sample Type: ⊠ Portable Device, ☐Module **PIFA** Antenna Antenna Type: GSM850: -0.48dBi(MAIN); -4.4dBi(DIV); GSM1900:0.7dBi(MAIN); -0.2dBi(DIV); WCDMA Band II:0.7dBi(MAIN); -0.2dBi(DIV); WCDMA Band VI:-0.78dBi(MAIN); -5.2dBi(DIV); WCDMA Band V:-0.48dBi(MAIN); -4.4dBi(DIV); LTE Band 2:0.1dBi(MAIN); -0.2dBi(DIV); LTE Band 4:-4.0dBi(MAIN); 0.1dBi(DIV); LTE Band 5:-0.8dBi(MAIN); -4.4dBi(DIV); Antenna Gain: LTE Band 7: -0.3dBi(MAIN); 1.3dBi(DIV); LTE Band 12:-2.9dBi(MAIN); -5.3dBi(DIV); LTE Band 17:-2.9dBi(MAIN); -5.3dBi(DIV); LTE Band 38:-0.3dBi(MAIN); 0dBi(DIV); LTE Band 41:-0.3dBi(MAIN); 1.3dBi(DIV); LTE Band 66:-0.8dBi(MAIN); -1.2dBi(DIV); LTA CA\_7C: -0.3dBi(MAIN); 1.3dBi(DIV); LTE CA\_38C:-0.3dBi(MAIN); 0dBi(DIV);

# 3.4 General Description of EUT

## 3.5 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM3	LTE system, 64QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 12 of 36

# 3.6 Test Environment

Operating Environment:				
Humidity:	50 %	% RH		
Atmospheric Pressure:	101.30 KPa			
Temperature	NT	25 °C		
	LV	3.6V		
Voltage:	NV	3.87V		
	HV	4.45∨		

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

# 3.7 Technical Specification

Characteristics	Description					
	GSM					
Radio System Type	UMTS					
	🖾 LTE					
	Band	ТХ	RX			
	GSM850	824 to 849 MHz	869 to 894 MHz			
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz			
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz			
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz			
	UMTS Band V	824 to 849 MHz	869 to 894 MHz			
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz			
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz			
Supported Frequency Range	LTE Band 5	824 to 849 MHz	869 to 894 MHz			
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz			
	LTE Band 12	699 to 716 MHz	729 to 746 MHz			
	LTE Band 17	704 to 716 MHz	734 to 746 MHz			
	LTE Band 38	2570 to 2620 MHz	2570 to 2620 MHz			
	LTE Band 41	2535 to 2655MHz	2535 to 2655MHz			
	LTE Band 66	1710 to 1780 MHz	2110 to 2200 MHz			
	LTE CA_7C	2500-2570 MHz	2620-2690 MHz			
	LTE CA_38C	2570-2620 MHz	2570-2620 MHz			
Target TX Output Power	GSM850:33.5 dBm					



	Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents, forgery or falsification of the content or appearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,
	or email: CN.Doccheck@sgs.com
Ltd.	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
	中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 13 of 36

	GSM1900: 31.0dBm UMTS Band II: 25.5dBm UMTS Band IV: 25.5dBm UMTS Band V: 25.5dBm LTE Band 2: 25.5dBm LTE Band 4: 25.5dBm LTE Band 5: 25.5dBm LTE Band 7: 25.5dBm LTE Band 12: 25.5dBm LTE Band 17: 25.5dBm LTE Band 38: 25.5dBm LTE Band 41: 25.5dBm LTE Band 41: 25.5dBm			
	GSM system:		🖾 0.2 MHz	
	UMTS system:		⊠5 MHz	
	LTE Band 2		⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠ 10 MHz; ⊠15 MHz, ⊠20 MHz	
	LTE Band 4		⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠ 10 MHz; ⊠15 MHz, ⊠20 MHz	
	LTE Band 5		⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠ 10 MHz	
	LTE Band 7		⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠ 20 MHz	
	LTE Band 12		⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠ 10 MHz	
Supported Channel Bandwidth	LTE Band 17		⊠5 MHz; ⊠10 MHz	
	LTE Band38		⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠ 20 MHz	
	LTE Band41		⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠ 20 MHz	
	LTE Band66		⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠ 10 MHz; ⊠15 MHz, ⊠20 MHz	
	LTE Band CA_7C		⊠10MHz+20MHz ⊠10MHz+15MHz ⊠15MHz+15MHz ⊠15MHz+20MHz ⊠20MHz+20MHz	
LTE Band CA_38C			⊠15MHz+15MHz ⊠20MHz+20MHz	
Characteristics	Description			
	GSM850	247KGXW;	247KG7W	
Designation of Emissions	esignation of Emissions GSM1900 247KG		243KG7W	
(Remark: the necessary	UMTS Band II 4M16F9W;			
bandwidth of which is the	UMTS Band IV 4M15F9W;			
worst value from the	UMTS Band V 4M16F9W;			
measured occupied			M09W7D; 1M10W7D	
			2M70G7D;2M69W7D; 2M69W7D	
channel bandwidth			3G7D;4M48W7D; 4M48W7D	
configuration.)			7D;8M93W7D; 8M93W7D	
		13M5G7D;1	3M5W7D; 13M5W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation or liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) test and sub aspmel(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. **Shenzhen Branch** 

> Report No.: AR/2020/C000401 14 of 36 Page:

	<u> </u>	17M9G7D;17M9W7D; 17M9W7D
		1M09G7D;1M10W7D; 1M09W7D
		2M69G7D;2M69W7D; 2M70W7D
	LTE Band 4	4M48G7D;4M48W7D; 4M48W7D
		8M95G7D;8M95W7D; 8M93W7D
		13M5G7D;13M4W7D; 13M4W7D
		17M9G7D;17M9W7D; 17M9W7D
	LTE Band 5	1M09G7D;1M09W7D; 1M10W7D
		2M70G7D;2M69W7D; 2M69W7D
		4M48G7D;4M49W7D; 4M48W7D
		8M93G7D;8M93W7D; 8M95W7D
		4M48G7D;4M50W7D; 4M48W7D
	LTE Band 7	8M95G7D;8M93W7D; 8M93W7D
		13M5G7D;13M5W7D; 13M4W7D
		17M9G7D;17M9W7D; 17M9W7D
		1M09G7D;1M09W7D; 1M10W7D
	LTE Dond 12	2M70G7D;2M69W7D; 2M69W7D
	LTE Band 12	4M48G7D;4M49W7D; 4M48W7D
		8M95G7D;8M93W7D; 8M93W7D
	LTE Dond 17	4M48G7D;4M49W7D; 4M48W7D
	LTE Band 17	8M93G7D;8M95W7D; 8M93W7D
		4M48G7D;4M50W7D; 4M49W7D
		8M91G7D;8M91W7D; 8M93W7D
	LTE Band 38	13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		4M48G7D;4M50W7D; 4M48W7D
		8M91G7D;8M91W7D; 8M93W7D
	LTE Band 41	13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		1M10G7D;1M09W7D; 1M10W7D
		2M70G7D;2M69W7D; 2M69W7D
		4M48G7D;4M49W7D; 4M48W7D
	LTE Band 66	8M95G7D;8M93W7D; 8M93W7D
		13M5G7D;13M5W7D; 13M4W7D
		17M9G7D;17M9W7D; 17M9W7D
	<u> </u>	50RB+100RB:27M6G7D;27M6W7D; 27M6W7D
		75RB+50RB:23M3G7D;23M3W7D; 23M3W7D
		75RB+75RB:28M2G7D;28M2W7D; 28M2W7D
	LTE Band CA_7C	75RB+100RB:32M5G7D;32M6W7D; 32M4W7D
		100RB+50RB:27M8G7D;27M7W7D; 27M7W7D
		100RB+75RB:32M6G7D;32M6W7D; 32M6W7D
		100RB+100RB:37M3G7D;37M3W7D;37M3W7D
	LTE Band CA_38C	75RB+75RB:28M3G7D;28M2W7D; 28M2W7D
		100RB+100RB:37M5G7D;37M3W7D;
		37M3W7D
	1	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 15 of 36

# 3.8 Test Frequencies

Test Mode	TX / RX	RF Channel			
1 est Mode			Middle (M)	High (H)	
GSM850	ТХ	Channel 128	Channel 190	Channel 251	
		824.2MHz	836.6 MHz	848.8 MHz	
	DV	Channel 128	Channel 190	Channel 251	
	RX	869.2 MHz	881.6 MHz	893.8 MHz	

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM1900	TX - RX -	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0 MHz	1909.8 MHz
		Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX	RF Channel			
		Low (L)	Middle (M)	High (H)	
WCDMA Band II	ТХ	Channel 9262	Channel 9400	Channel 9538	
		1852.4 MHz	1880.0 MHz	1907.6 MHz	
	RX	Channel 9662	Channel 9800	Channel 9938	
		1932.4 MHz	1960.0 MHz	1987.6 MHz	

Test Mode	TX / RX	RF Channel				
I EST MOUE		Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
	RX	Channel 1537	Channel 1638	Channel 1738		
	۲A	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TX / RX	RF Channel				
I est Mode		Low (L)	Middle (M)	High (H)		
WCDMA Band V	ТХ	Channel 4132	Channel 4182	Channel 4233		
		826.4MHz	836.4 MHz	846.6 MHz		
	RX	Channel 4357	Channel 4407	Channel 4458		
		871.4 MHz	881.4 MHz	891.6 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: AR/2020/C000401 Page: 16 of 36

Test Mode	Dondwidth	TX / RX	RF Channel		
	Bandwidth		Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		ТХ	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		КЛ	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		ТХ	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		КЛ	1931.5 MHz	1960 MHz	1988.5 MHz
			Channel 18625	Channel 18900	Channel 19175
	5MHz	ТХ	1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Dand O			1932.5 MHz	1960 MHz	1987.5 MHz
LTE Band 2	10MHz	ТΧ	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
		ΓΛ	1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		ТХ	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
			1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		ТХ	1860 MHz	1880 MHz	1900 MHz
	20MHz	DV	Channel 700	Channel 900	Channel 1100
		RX	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: AR/2020/C000401 Page: 17 of 36

Test Mode	Dondwidth		RF Channel		
	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		ТХ	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		ΓΛ	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		ТХ	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		КЛ	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	5MHz	ТХ	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4	10MHz	ТΧ	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
		ΓΛ	2115 MHz	2132.5MHz	2150 MHz
		ТΧ	Channel 20025	Channel 20175	Channel 20325
			1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
-			2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		ТХ	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		K۸	2120 MHz	2132.5MHz	2145 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		ΓA	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5	5MHz	тх	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
		RX	Channel 2425	Channel 2525	Channel 2625
_			871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		INA	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions/Terms-e-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test agret retained for 30 days on). Aftention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (ND, Doccheck@gs.com)



Report No.: AR/2020/C000401 18 of 36 Page:

Test Mede	Dendwidth		RF Channel		
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		КЛ	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
			2625 MHz	2655 MHz	2685 MHz
LTE Band 7		тх	Channel 20825	Channel 21100	Channel 21375
			2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	RX	Channel 2825	Channel 3100	Channel 3375
			2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	DV	Channel 2850	Channel 3100	Channel 3350
		RX	2630 MHz	2655 MHz	2680 MHz

Test Made	Dowely vielth	andwidth TV / DV	RF Channel		
Test Mode	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		ΓA	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
	3MHz	TX	700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12	5MHz	тх	Channel 23035	Channel 23095	Channel 23155
			701.5 MHz	707.5 MHz	713.5 MHz
		RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		ΓΛ	734 MHz	737.5 MHz	741 MHz

TestMede	D a w alvesi altik		RF Channel		
Test Mode	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 23755	Channel 23790	Channel 23825
LTE Band 17	5MHz	TX	706.5 MHz	710 MHz	713.5 MHz
		RX	Channel 5755	Channel 5790	Channel 5825
			736.5 MHz	740 MHz	743.5 MHz
			Channel 23780	Channel 23790	Channel 23800
	10MHz	ТХ	709 MHz	710 MHz	711 MHz
			Channel 5780	Channel 5790	Channel 5800



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057         t (86–755) 26012053         f (86–755) 26710594         www.sgsgroup.com.cn           中国・深圳・科技园中区M-10株一号厂房         邮编: 518057         t (86–755) 26012053         f (86–755) 26710594         sgs.china@sgs.com	
--	--



Report No.: AR/2020/C000401 Page: 19 of 36

	RX	739 MHz	740 MHz	741 MHz

Test Mede	Pondwidth	TX / RX	RF Channel		
Test Mode	Test Mode Bandwidth		Low (L)	Middle (M)	High (H)
			Channel 37775	Channel38000	Channel 38225
	5MHz	TX / RX	2572.5 MHz	2595 MHz	2617.5 MHz
			Channel 37825	Channel38000	Channel 38175
	10MHz TX/R	TX / RX	2577.5 MHz	2595 MHz	2612.5 MHz
LTE Band 38			Channel 37825	Channel38000	Channel 38175
	15MHz	TX / RX	2577.5 MHz	2595 MHz	2612.5 MHz
			Channel 37850	Channel38000	Channel 38150
	20MHz	TX / RX	2580 MHz	2595 MHz	2610 MHz

Test Made	Bandwidth	TX / RX	RF Channel		
Test Mode	Test Mode Bandwidth		Low (L)	Middle (M)	High (H)
			Channel 40065	Channel40640	Channel 41215
	5MHz	TX / RX	2537.5 MHz	2595 MHz	2652.5 MHz
LTE Band 41 (2535-2655)			Channel 40090	Channel40640	Channel 41190
	10MHz	TX / RX	2540 MHz	2595 MHz	2650 MHz
			Channel 40115	Channel40640	Channel 41165
	15MHz	TX / RX	2542.5 MHz	2595 MHz	2647.5 MHz
			Channel 40140	Channel40640	Channel 41140
	20MHz	TX / RX	2545 MHz	2595 MHz	2645 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test relation, forgery or faisification only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CNDoccheck@asps.com



Report No.: AR/2020/C000401 Page: 20 of 36

Test Mode	Bandwidth	TX / RX	RF Channel			
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)	
			Channel 131979	Channel 132322	Channel 132665	
		TX	1710.7 MHz	1745 MHz	1779.3 MHz	
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329	
			2110.7 MHz	2145MHz	2199.3 MHz	
			Channel 131987	Channel 132322	Channel 132657	
		ТХ	1711.5 MHz	1745 MHz	1778.5MHz	
	3MHz	RX	Channel 66451	Channel 66786	Channel 67121	
			2111.5 MHz	2145MHz	2198.5MHz	
			Channel 131997	Channel 132322	Channel 132647	
		TX	1712.5 MHz	1745 MHz	1777.5 MHz	
	5MHz	RX	Channel 66461	Channel 66786	Channel 67311	
			2112.5 MHz	2145MHz	2197.5 MHz	
LTE Band66			Channel 132022	Channel 132322	Channel 132622	
		TX	1715 MHz	1745 MHz	1775 MHz	
	10MHz	RX	Channel 66486	Channel 66786	Channel 67286	
			2115 MHz	2145MHz	2195 MHz	
			Channel 132047	Channel 132322	Channel 132597	
		ТХ	1717.5 MHz	1745 MHz	1772.5 MHz	
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261	
		101	2117.5 MHz	2145MHz	2192.5 MHz	
			Channel 132072	Channel 132322	Channel 132572	
		TX	1720 MHz	1745 MHz	1770 MHz	
	20MHz	PY	Channel 66536	Channel 66786	Channel 67236	
		RX	2120 MHz	2145MHz	2190 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: AR/2020/C000401 Page: 21 of 36

Range	CC-Combo / N <sub>RB_agg</sub> [RB]			CC1 Note1					CC2 Note1		
		BW [RB]	NuL	f∪∟ [MHz]	NDL	f <sub>DL</sub> [MHz]	BW [RB]	NUL	f∪∟ [MHz]	NDL	f⊳∟ [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680

#### Table 4.3.1.1.7A-1: Test frequencies for CA\_7C

Table 4.3.1.2.6A-1: Test frequencies for CA\_38C

Range	CC- Combo / N <sub>RB_agg</sub> [RB]		CC1 Note1			CC2 Note1	
		BW [RB]	NUL/DL	ful/dl [MHz]	BW [RB]	NUL/DL	ful/dl [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610
Note 1:	Carriers in i	Carriers in increasing frequency order.					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: Certificate, please contact us at telephone: (86-755) 8307 1443, Attention: Attenti



Report No.: AR/2020/C000401 Page: 22 of 36

# 4 Description of Tests

# 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

# 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015) Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

# 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

中国·深圳·科技园中区M-10栋一号厂房

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its Intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document counter of the document of findings may be prosecuted to the fullest extent of the law sole. The sole of the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@gs.com</u>. (N.N.Workson, M.I.O.Mide Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.on

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)

sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 23 of 36

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

## 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- 5. Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

# 4.5 Spurious And Harmonic Emissions at Antenna Terminal



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.sgp">http://www.sgs.com/en/Terms-and-Conditions.sgp</a>, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.sgp">http://www.sgs.com/en/Terms-and-Conditions.sgp</a>, and, for electronic format documents, as advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CNLDoccheck@egs.com</a>



Report No.: AR/2020/C000401 Page: 24 of 36

#### Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

# 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

中国·深圳·科技园中区M-10栋一号厂房

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its Intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the as only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@gs.com.on. (Mon. Doccheck@gs.com.on.) (Mon. Mon. Contact and Stenzer Law Stenzer L

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)

sgs.china@sgs.com

# SGS

Report No.: AR/2020/C000401 Page: 25 of 36

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

# 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

#### Above 1GHz test procedure as below:

1) Different between above is the test site, change from Semi- Anechoic

Chamber to fully Anechoic Chamber



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of tiability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document field offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@ass.com</u> or



Report No.: AR/2020/C000401 Page: 26 of 36

2) Calculate power in dBm by the following formula:

- EIRP(dBm) = Pg(dBm) cable loss (dB) + antenna gain (dBi)
- EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

# 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### Remark: Reference test setup 4



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore the apriles to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) ner retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com




# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: AR/2020/C000401 Page: 27 of 36

# 4.9 Test Setups

#### 4.9.1 Test Setup 1

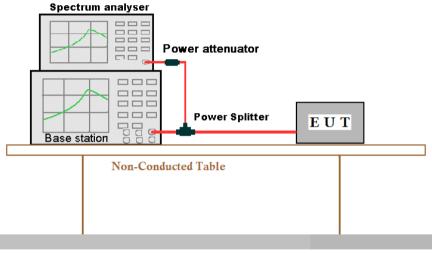

#### Ground Reference Plane

#### 4.9.2 Test Setup 2

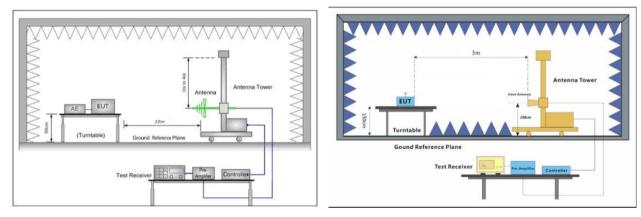


Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonert at parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, superance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@gs.com
(No.1)(whon, M-10). Mddle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sggsroup.com.on
(Pa] · 深圳 · 科技图中区M\_10栋 - 号厂房 m编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com.on



Report No.: AR/2020/C000401 28 of 36 Page:

Figure 3. above 1GHz

#### 4.9.3 **Test Setup 3**




Figure 1. Below 30MHz


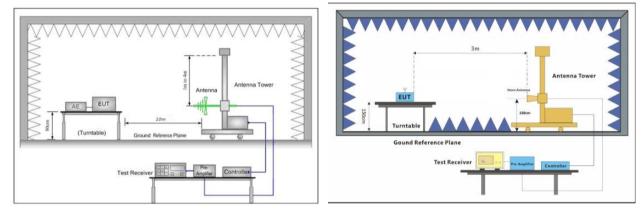


Figure 2. 30MHz to 1GHz

#### 4.9.4 **Test Setup 4**



#### Ground Reference Plane

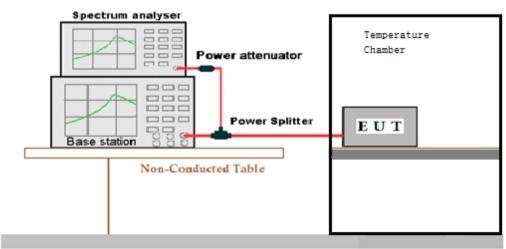

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's oside responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmile(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@egs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 29 of 36

# **4.10Test Conditions**

Test Case	•	Test Conditio	ns			
		Test Environment	Ambient Climate & Rated Voltage			
	Average	Test Setup	Test Setup 1			
Transmit	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			
Power Data	Average Power,	Test Environment	Ambient Climate & Rated Voltage			
	Spectral	Test Setup	Test Setup 1			
	Density (if required	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
	)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			
		Test Environment	Ambient Climate & Rated Voltage			
Peak-to-A	verage	Test Setup	Test Setup 1			
Ratio (if required	3)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			
		Test Environment	Ambient Climate & Rated Voltage			
Modulatior	<b>`</b>	Test Setup	Test Setup 1			
Characteri		RF Channels (TX)	M (M= middle channel )			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			
		Test Environment	Ambient Climate & Rated Voltage			
Bandwid	Occupie d	Test Setup	Test Setup 1			
th	a Bandwid th	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			



邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com Member of the SGS Group (SGS SA)



Report No.: AR/2020/C000401 Page: 30 of 36

	Emissio n	Test Environment	Ambient Climate & Rated Voltage			
	Bandwid	Test Setup	Test Setup 1			
th (if required		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
	)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			
		Test Environment	Ambient Climate & Rated Voltage			
Band Edge	26	Test Setup	Test Setup 1			
Complianc		RF Channels (TX)	L, H (L= low channel, H= high channel )			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			
		Test Environment	Ambient Climate & Rated Voltage			
Spurious E	Emission	Test Setup	Test Setup 1			
at Antenna Terminals	a	RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel )			
		Test Mode	GSM/TM1;UMTS/TM1; LTE/TM1			
		Test Environment	Ambient Climate & Rated Voltage			
		Test Setup	Test Setup 2			
	d Strength of rious Radiation Test Mode		GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2;LTE/TM3; Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.			
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
		Test	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;			
		Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.			
		Test Setup	Test Setup 4			
Frequency	' Stability	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )			
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exoncrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) is test enable(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@gs.com

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 31 of 36 Page:

#### **Main Test Instruments** 5

	RE	in Chamber			
				Cal. date	Cal.Due date
Test Equipment	Manufacturer	Model No.	Inventory No.	(yyyy-mm- dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Spectrum Analyzer (20Hz- 43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020/4/16	2021/4/15
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/12	2023/6/11
Horn Antenna (800MHz- 18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/412
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2020/10/17	2023/10/16
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2020/7/14	2021/7/14
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2020/7/14	2021/7/14
Pre-Amplifier (0.1- 26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	EMC2063	2020/9/20	2021/9/19
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2020/4/16	2021/4/15
Band filter	N/A	N/A	N/A	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/1/13	2021/1/2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 32 of 36 Page:

RF conducted test						
Toot Equipmont	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date	
Test Equipment	Manufacturer	would no.	No.	(yyyy-mm-dd)	(yyyy-mm-dd)	
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2020/10/22	2021/10/21	
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15	
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/10/22	2021/10/21	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2020/10/22	2021/10/21	
Temperature Chamber	GIANT FORCE	ICT-150-40- CP-AR	W027-03	2020/10/22	2021/10/21	
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15	
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

> Report No.: AR/2020/C000401 33 of 36 Page:

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm- dd)	Cal. Due date (yyyy-mm- dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/1/3	2021/1/2
EXA Signal Analyzer (10Hz- 26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2020/3/13	2021/3/12
Spectrum Analyzer (20Hz-43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020/4/16	2021/4/15
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26
Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2020/10/17	2023/10/16
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2020/7/25	2021/7/24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2020/7/25	2021/7/24
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP-2640- 50	SEM005-08	2020/4/16	2021/4/15
Band filter	N/A	N/A	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11
Tunable Notch Filter WRCD1700/2000-0.2/40-10EEK	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Tunable Notch Filter WRCD800/960-0.2/40-10EEK	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHK1.2/15G-10SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHKX10-2700-3000-18000-40SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHKX7.0/26.5G-6SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国 · 深圳 · 科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 34 of 36

Band Reject Filter WRCG 824/849-814/859-40/8SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Band Reject Filter WRCG 1850/1910-1835/1925- 40/8SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exoncrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itset retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@gs.com

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000401 Page: 35 of 36

# 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.37 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = ±2.0 dB
		For 3 m Chamber: U = $\pm 4.5$ dB (30 MHz to 1GHz)
Field Strength of Spurious	ERP[dBm]/EIRP [dBm]	$U = \pm 3.3 \text{ dB} (above 1 \text{ GHz})$
Radiation		For 10 m Chamber:
		$U = \pm 4.5 \text{ dB}$ (30 MHz to 1GHz)
		$U = \pm 3.2 \text{ dB}$ (above 1 GHz)
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Conditions/T



Report No.: AR/2020/C000401 Page: 36 of 36

# 7 Appendixes

Appendix A	Photographs of Set-Up for AR2020C0004.
Appendix B.1	GSM 850 & 1900
Appendix B.2	WCDMA Band II & IV & V
Appendix B.3	LTE Band 2
Appendix B.4	LTE Band 4
Appendix B.5	LTE Band 5
Appendix B.6	LTE Band 7
Appendix B.7	LTE Band 12
Appendix B.8	LTE Band 17
Appendix B.9	LTE Band 38
Appendix B.10	LTE Band 41
Appendix B.11	LTE Band 66
Appendix B.12	LTE Band 7C
Appendix B.13	LTE Band 38C

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excorate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub-ample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com