FCC SAR TEST REPORT

Report No:	AR/2020/C000407
Applicant:	Xiaomi Communications Co., Ltd.
Manufacturer:	Xiaomi Communications Co., Ltd.
Product Name:	Mobile Phone
Model No.(EUT):	M2010J19SL
Trade Mark:	Redmi
FCC ID:	2AFZZJ19SL
Standards:	FCC 47CFR §2.1093
Date of Receipt:	2020-12-19
Date of Test:	2020-12-21 to 2020-12-30
Date of Issue:	2021-01-06
Test conclusion:	**PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:



Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

REVISION HISTORY

Report Number	Revision	Description	Issue Date
AR/2020/C000407	01	Original	2021-01-06

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head	Body-worn	Hotspot	Product Specific 10-g SAR
GSM850	1.07	0.36	0.34	NA
GSM1900	0.91	0.28	1.09	NA
WCDMA Band II	1.01	0.54	0.86	NA
WCDMA Band IV	0.71	0.68	1.08	NA
WCDMA Band V	0.67	0.24	0.42	NA
LTE Band 2	1.08	0.54	1.03	NA
LTE Band 4	0.70	**0.72**	**1.10**	NA
LTE Band 5	0.72	0.26	0.35	NA
LTE Band 7	0.88	0.46	0.95	NA
LTE Band 12	0.38	0.26	0.29	NA
LTE Band 17	0.41	0.30	0.30	NA
LTE Band 38	0.45	0.27	0.53	NA
LTE Band 41	0.45	0.25	0.60	NA
LTE Band 66	**1.09**	0.72	1.08	NA
WI-FI (2.4GHz)	0.55	0.08	0.17	NA
WI-FI (5GHz)	0.87	0.30	0.46	**0.86**
BT	<0.10	<0.10	<0.10	NA
SAR Limited(W/kg)	1.6			4.0
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head	Body-worn	Hotspot	Product Specific 10-g SAR
Sum SAR	1.58	1.03	1.58	0.86
SPLSR	NA	NA	NA	NA
SPLSR Limited	0.04			0.1

Approved & Released by

Simon Ling

SAR Manager

Tested by

Jackson Li

SAR Engineer

CONTENTS

1 General Information

1.1 Details of Client

Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Test Location

Company: SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China

Post code: 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Industry Canada (IC)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006

IC#: 4620C.

1.4 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Mobile Phone		
Model No.(EUT):	M2010J19SL		
FCC ID:	2AFZZJ19SL		
Trade Mark:	Redmi		
Product Phase:	Identical Prototype		
IMEI:	869427050005862 / 869427050006886		
Hardware Version:	P2		
Software Version:	MIUI 12		
Antenna Type:	PIFA Antenna		
Device Operating Configurations :			
Modulation Mode:	**GSM:** GMSK, 8PSK; **WCDMA:** QPSK, 16QAM(HSPA+); **LTE:** QPSK,16QAM,64QAM **WIFI:** DSSS, OFDM; **BT:** GFSK, π/4DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	7
DC-HSDPA UE Category:	24		
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band II/IV/V)		
	3, tested with power control Max Power(LTE Band 2/4/5/7/12/17/38/41/66)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band IV	1710~1755	2110~2155
	WCDMA Band V	824~849	869~894
	LTE Band 2	1850 ~1910	1930 ~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869-894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 17	704~716	734~746
	LTE Band 38	2570~2620	2570~2620
	LTE Band 41	2535~2655	2535~2655
	LTE Band 66	1710~1780	2110~2200
	Bluetooth	2400~2483.5	2400~2483.5
	Wi-Fi 2.4G	2400~2483.5	2400~2483.5
	Wi-Fi 5G	5150~5250	5150~5250
		5250~5350	5250~5350
		5470~5725	5470~5725
		5725~5850	5725~5850

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Battery Information:	Model:	BN62
	Normal Voltage:	+3.87V
	Rated capacity:	5900mAh
Headset Information:	Model:	EM023
	Manufacturer:	Tiinlab Acoustic Technology (Shenzhen) Co., Ltd.

1.4.1 DUT Antenna Locations

Please see the Appendix D.

Note:
1) The test device is a smart phone. The overall diagonal dimension of this device is 174 mm. Per KDB 648474 D04, because the diagonal distance of this device is ≥160mm, so it is a phablet.

According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
Main(Ant1)	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes
DIV(Ant2)	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	Yes	No
WIFI/BT Ant	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No

Table 1： EUT Sides for SAR Testing

Note:
1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
2) WWAN antenna(Ant1/2) can't transmit simultaneously which will be chosen based on the RSSI. Only one antenna can be used transmission at a time.

1.4.2 LTE CA additional specification

The device supports downlink and intra-band contiguous uplink LTE Carrier Aggregation (CA). When carrier aggregation applies, implementation and measurement details for the following are necessary.

a) Intra-band carrier aggregation requirements for uplink.

b) Intra-band and inter-band carrier aggregation requirements for downlink.

The possible downlink and uplink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The conducted power measurement results of downlink and uplink LTE CA are provided in Section 8 of this report per 3GPP TS 36.521-1 V14.4.0. The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

SAR test procedure for intra-band contiguous UL LTE CA is as below:

1)Maximum output power is measured for each UL CA configuration for the required test channels described in KDB 941225 D05

- UL PCC configuration is determined by the required test channel

- SCC and subsequent CCs are added alternatively to either side of the PCC or within the transmission band for channels at the ends of a frequency band.

2)SAR for UL CA is required in each exposure condition and frequency band combination

3)For this device , as the maximum output for Intra-band uplink LTE CA is ≤ standalone LTE mode (without CA),

- PCC is configured according to the highest standalone SAR configuration tested.

- SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC

4)When the reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels (PCC based)

5)UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level.

Intra-band contiguous CA operating bands：

E-UTRA CA Band	E-UTRA Band	Uplink (UL) operating band BS receive / UE transmit F_{UL_low} – F_{UL_high}			Downlink (DL) operating band BS transmit / UE receive F_{DL_low} – F_{DL_high}			Duplex Mode
CA_7	7	2500 MHz	–	2570 MHz	2620 MHz	–	2690 MHz	FDD
CA_38	38	2570 MHz	–	2620 MHz	2570 MHz	–	2620 MHz	TDD

contiguous intra-band CA：

E-UTRA CA configuration	E-UTRA CA configuration / Bandwidth combination set						
	Uplink CA configurations (NOTE 3)	Component carriers in order of increasing carrier frequency				Maximum aggregated bandwidth [MHz]	Bandwidth combination set
		Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_7C	CA_7C	15	15			40	0
		20	20				
		10	20			40	1
		15	15, 20				
		20	10, 15, 20				
		15	10, 15			40	2
		20	15, 20				
CA_38C	CA_38C	15	15			40	0
		20	20				

Test frequencies for CA_7C：

Range	CC-Combo / NRB_agg [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N_{UL}	f_{UL} [MHz]	N_{DL}	f_{DL} [MHz]	BW [RB]	N_{UL}	f_{UL} [MHz]	N_{DL}	f_{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1: Carriers in increasing frequency order.											

Test frequencies for CA_38C：

Range	CC-Combo / NRB_agg [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	$N_{UL/DL}$	$f_{UL/DL}$ [MHz]	BW [RB]	$N_{UL/DL}$	$f_{UL/DL}$ [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610
Note 1: Carriers in increasing frequency order.							

1.4.3 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation.

1) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction

2) A fixed level power reduction is applied for some frequency bands when handset operate "held to the ear" condition, the power reduction triggered by audio receiver detection. The audio receiver detection is used to determine head or body scenario.

3) The proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance(Refer to section 5.4 for detailed proximity Sensor information and validation data per KDB 616217).

The following tables summarize the key power reduction information. The detailed full power which is the Max. power the state can use and reduced tune-up specifications and conducted power measurement results are provided in Section 8 of this report.

	Ant1 Power Level(dBm)								
Power Reduction Scenario	WCDMA Band II	WCDMA Band IV	LTE Band 2	LTE Band 4	LTE Band 7	LTE Band 17	LTE Band 38	LTE Band 41	LTE Band 66
Sensor off	25.5	25.5	25.5	25.5	25.0	25.5	25.5	25.5	25.5
Sensor on	22.0	20.0	20.5	20.0	21.0	25.0	22.0	23.0	20.0

	Ant1 Power Level(dBm)								
Power Reduction Scenario	WCDMA Band II	WCDMA Band IV	LTE Band 2	LTE Band 4	LTE Band 7	LTE Band 17	LTE Band 38	LTE Band 41	LTE Band 66
Receiver off	25.5	25.5	25.5	25.5	25.0	25.5	25.5	25.5	25.5
Receiver on	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5

Ant2 Power Level(dBm)													
Power Reduction	GSM	GSM	WCDMA	WCDMA	WCDMA	LTE	LTE	LTE	LTE	LTE	LTE	LTE	LTE
Scenario	850	1900	Band II	Band IV	Band V	Band 2	Band 4	Band 5	Band 7	Band 12	Band 17	Band 41	Band 66
Receiver off	34.00	31.00	22.00	21.00	25.00	22.00	25.50	25.50	20.00	25.50	25.50	23.00	25.50
Receiver on	32.50	29.00	20.50	21.50	24.00	21.00	21.00	24.00	20.50	24.50	24.50	23.50	21.00

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR for laptop and tablets v01r02

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	**1.60 mW/g**	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	**4.00 mW/g**	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2： The Ambient Conditions

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-Simulate.

The DASY5 system for performing compliance tests consists of the following items:
A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

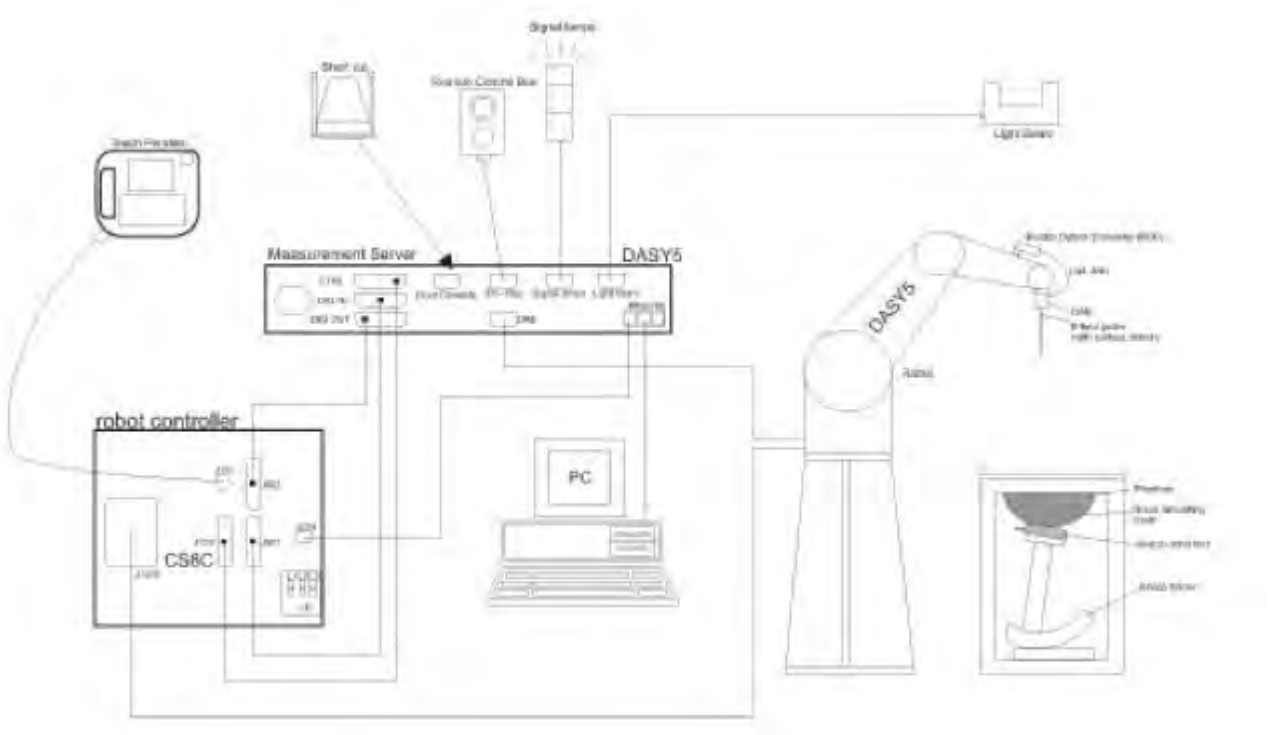

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

Model	DAE
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)
Input Offset Voltage	< 5µV (with auto zero)
Input Bias Current	< 50 f A
Dimensions	60 x 60 x 68 mm

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters
Wooden Support	SPEAG standard phantom table

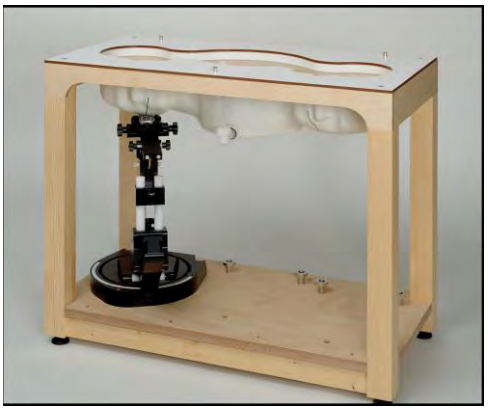

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	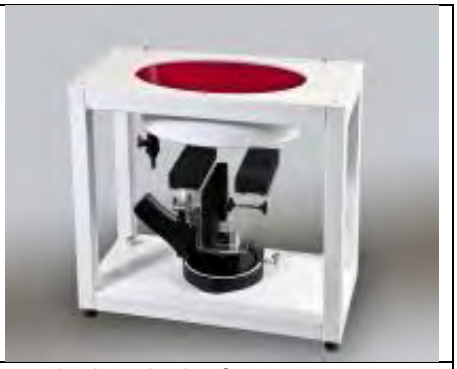
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters

F-2. **Device Holder for Transmitters**

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε=3 and loss tangent δ=0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: *Area scan*

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: *Zoom scan*

Around this point, a volume of 32mm*32mm*30mm (f≤2GHz), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points (f≤2GHz), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification).The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5·$\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2
- Conversion factor ConvFi
- Diode compression point Dcpi
Device parameters: - Frequency f
- Crest factor cf
Media parameters: - Conductivity ε
- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With Vi = compensated signal of channel i (i = x, y, z)
Ui = input signal of channel i (i = x, y, z)
cf = crest factor of exciting field (DASY parameter)
dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With Vi = compensated signal of channel i (i = x, y, z)
Normi = sensor sensitivity of channel I (i = x, y, z)
[mV/(V/m)2] for E-field Probes
ConvF = sensitivity enhancement in solution
aij = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
Ei = electric field strength of channel i in V/m
Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_Y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
Etot = total field strength in V/m
σ= conductivity in [mho/m] or [Siemens/m]
ε= equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}{}^2{}_2 / 3770 \text{ or } \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with Ppwe = equivalent power density of a plane wave in mW/cm2
Etot = total electric field strength in V/m
Htot = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ⩾ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ⩾ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ⩾1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position

5.1 Head Exposure Condition

5.1.1 SAM Phantom Shape

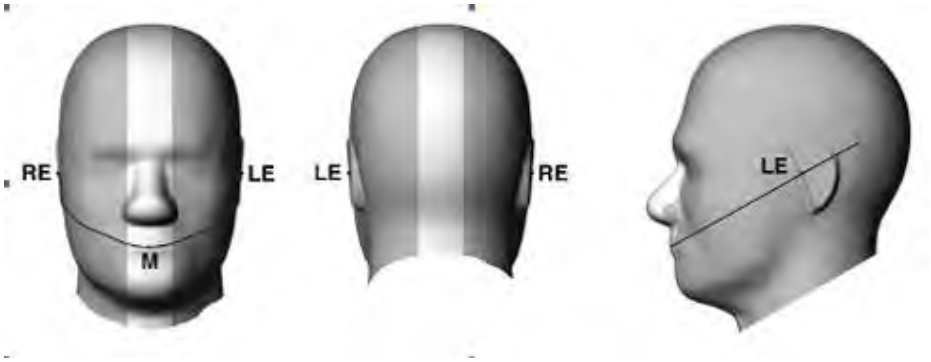

F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.

Note: The centre strip including the nose region has a different thickness tolerance.

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

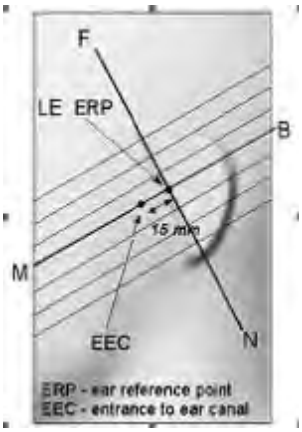

F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

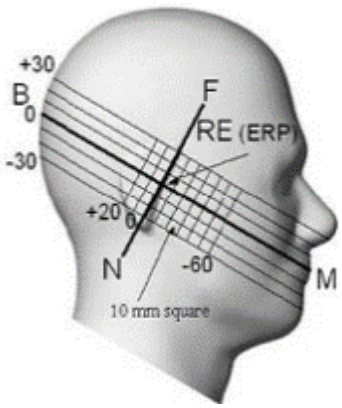

F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

5.1.2 EUT constructions

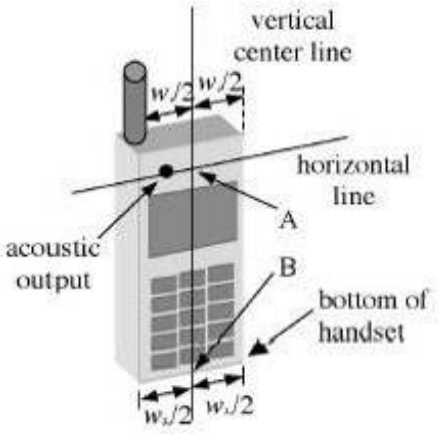

F-7. Handset vertical and horizontal reference lines-“fixed case”

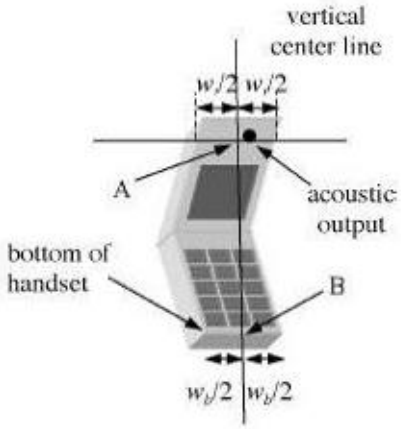

F-8. Handset vertical and horizontal reference lines-“clam-shell case”

5.1.3 Definition of the “cheek” position

a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

5.1.4 Definition of the “tilted” position

a) Position the device in the “cheek” position described above;
b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

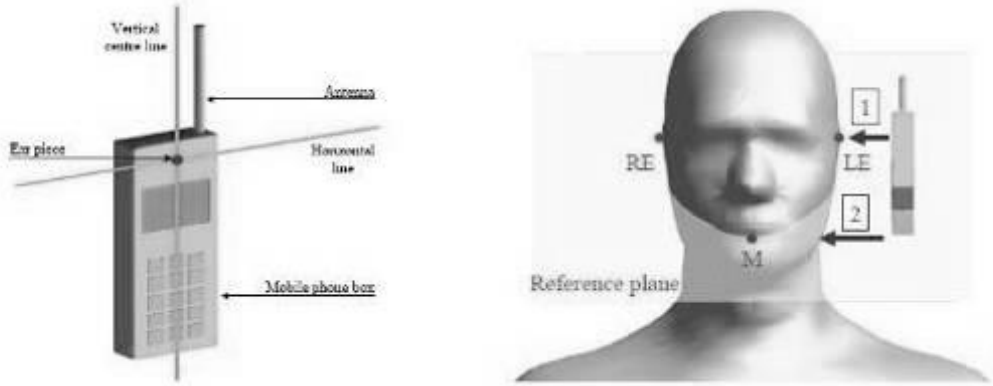

F-9. **Definition of the reference lines and points, on the phone and on the phantom and initial position**

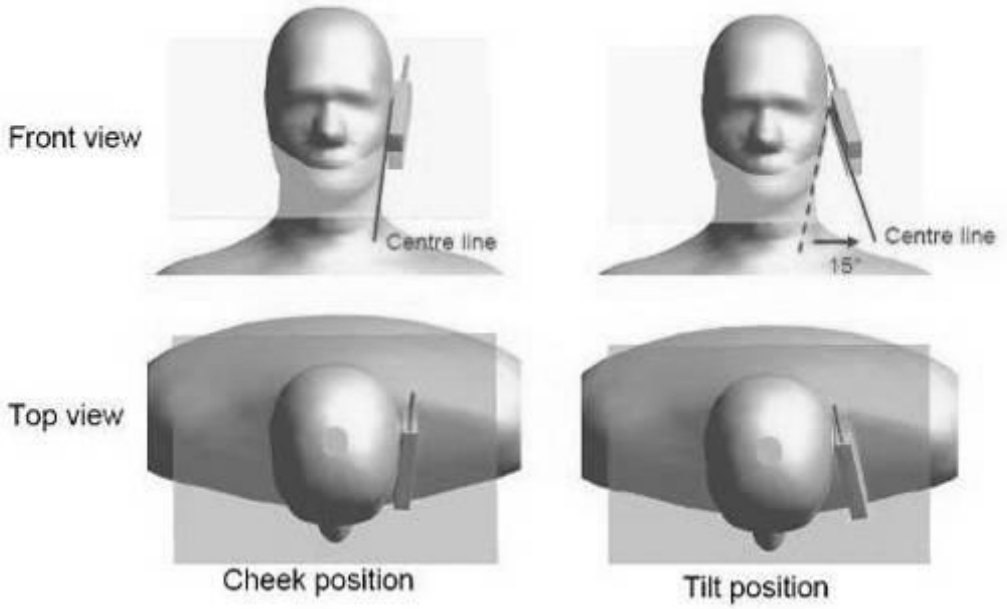

F-10. **“Cheek” and “tilt” positions of the mobile phone on the left side**

5.2 Body Exposure Condition

5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

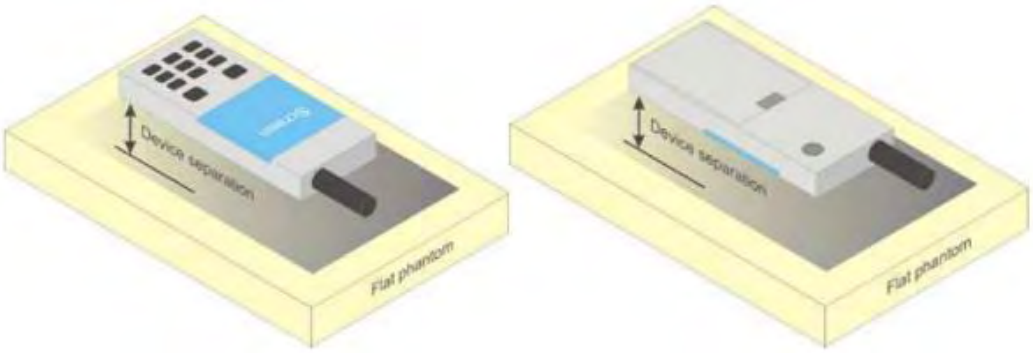

F-11. **Test positions for body-worn devices**

5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

5.3 Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as “Phablet”.
The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, no frequency bands of WWAN need to test with 0mm for the Product Specific 10-g SAR.

5.1 Proximity Sensor Triggering Test

Proximity sensor triggering distances：

The Proximity sensor triggering was applied to WCDMA Band II/IV(Ant 1) and LTE Band 2/4/7/38/41/66(Ant1). Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

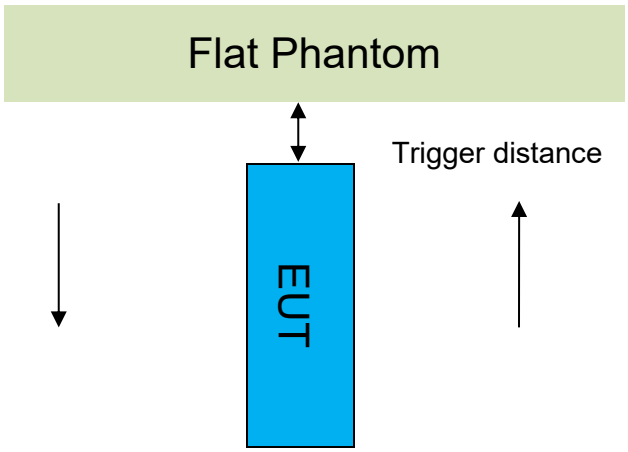

Proximity Sensor Triggering Distance(mm)			
Position	Front side	Back side	Bottom side
Minimum	8	18	16
Required SAR Test	7	17	15

Note:

SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.

- DUT Moving Toward(Trigger)the Phantom

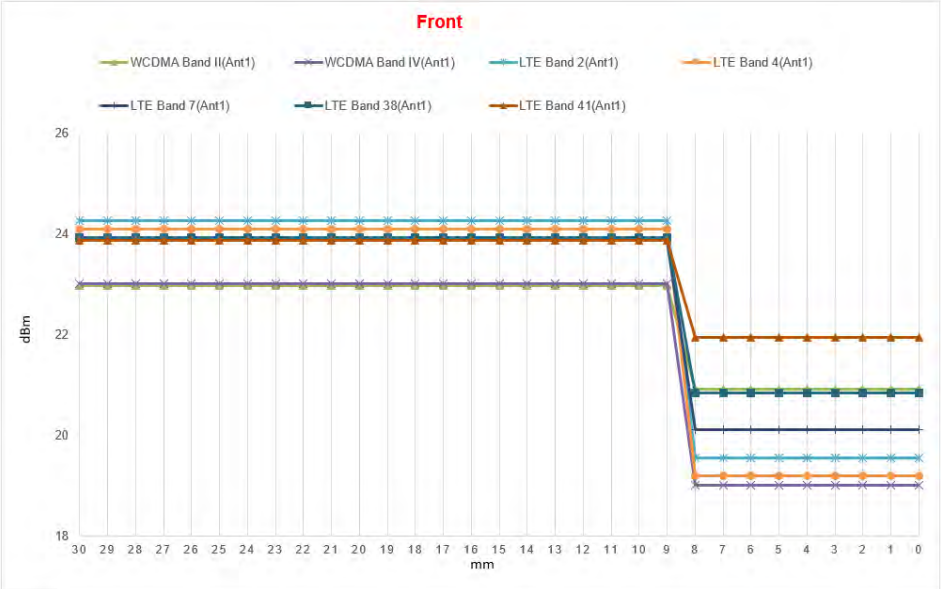

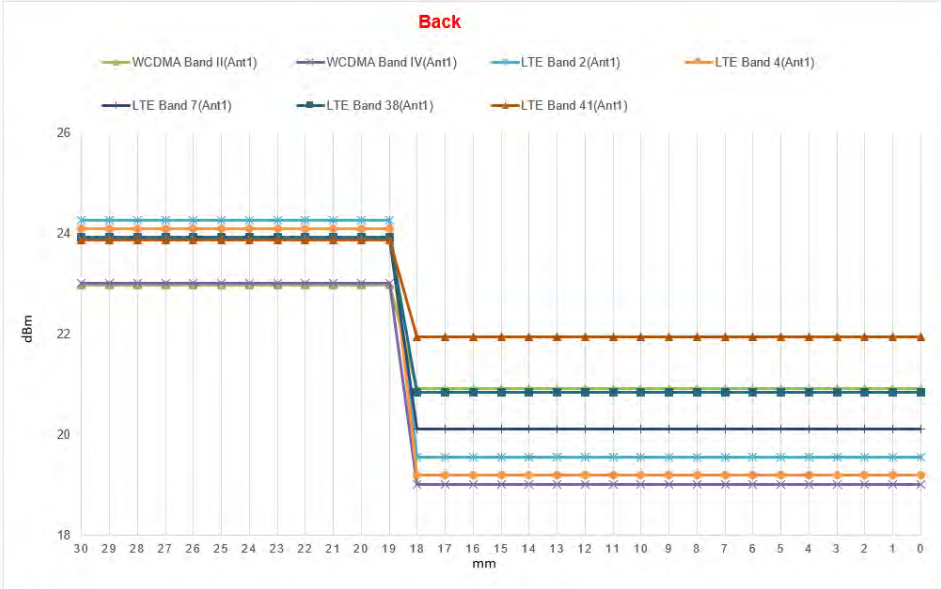

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

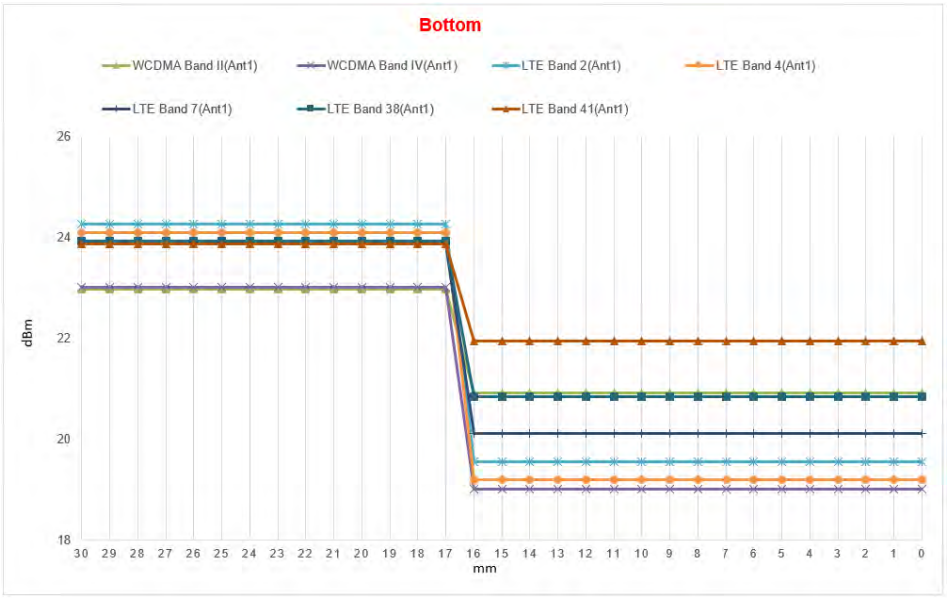

- DUT Moving Away(Release) from the Phantom

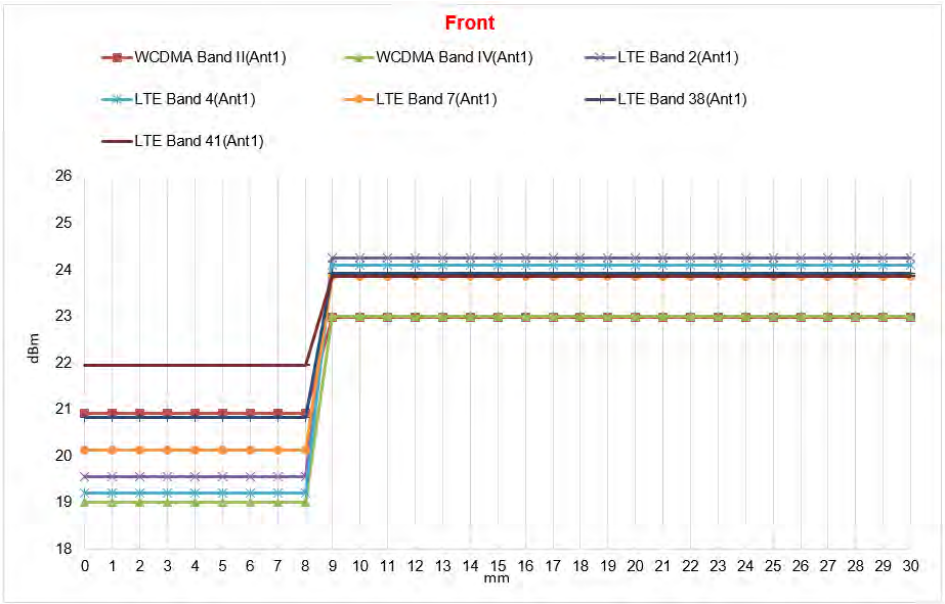

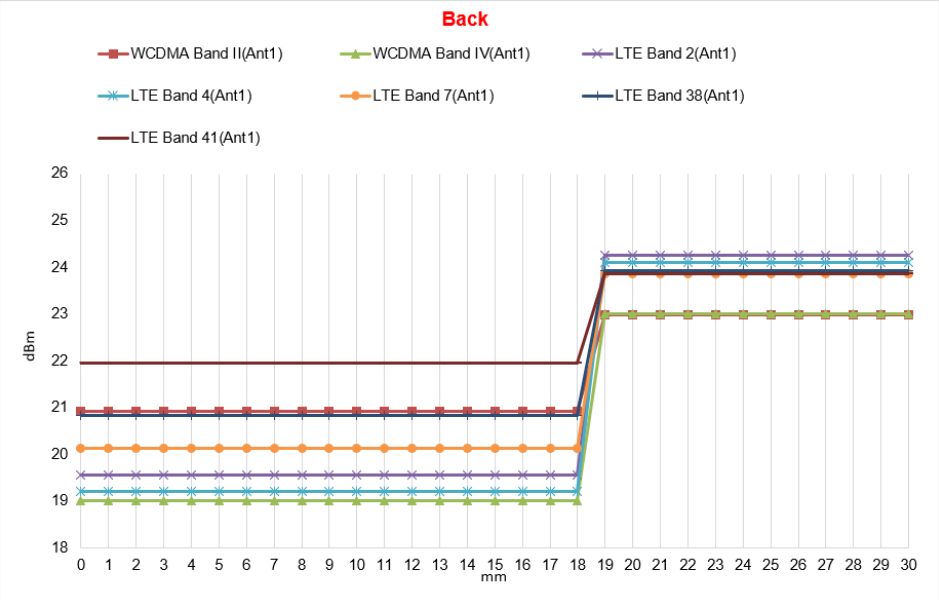

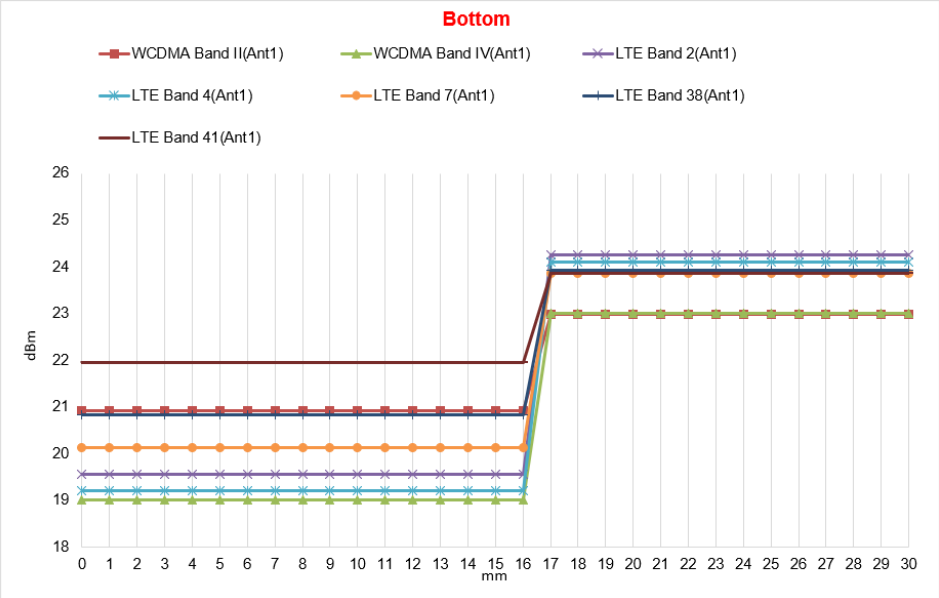

Proximity sensor coverage

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

Device tilt angle influences to proximity sensor triggering

The influence of device tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at 16mm separation.

Rotating the tablet around the edge next to the phantom in ≤ 10° increments until the tablet is ± 45° from the vertical position at 0°, and the maximum output power remains in the reduced mode.

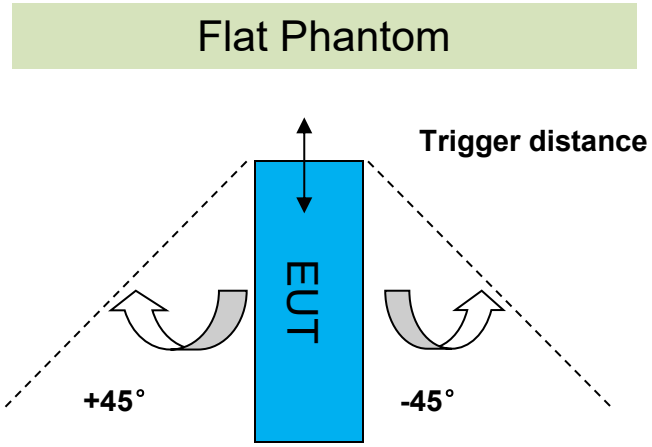

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering for Top Side												
Band (MHz)	Minimum trigger distance Per KDB616217§6.2	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status									
			-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
WCDMA Band II (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
WCDMA Band IV (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 2 (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 4 (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 7 (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 38 (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 41 (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 66 (Ant 1)	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands：

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99⁺% Pure Sodium Chloride Water: De-ionized, 16 MΩ⁺ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate			Sucrose: 98⁺% Pure Sucrose HEC: Hydroxyethyl Cellulose		
HSL5GHz is composed of the following ingredients： Water：50-65% Mineral oil：10-30% Emulsifiers：8-25% Sodium salt：0-1.5%					

Table 3： Recipe of Tissue Simulate Liquid

6.1.2 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured Frequency (MHz)	Target Tissue (±5%)		Measured Tissue		Liquid Temp.	Measured Date
		ε_r	σ(S/m)	ε_r	σ(S/m)	(℃)	
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	41.256	0.888	22.1	2020-12-27
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	41.625	0.908	22.0	2020-12-21
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.722	1.336	21.9	2020-12-22
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.870	1.331	21.9	2020-12-24
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	38.894	1.353	21.9	2020-12-30
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	38.347	1.437	22.3	2020-12-22
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	41.230	1.376	22.3	2020-12-23
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.792	1.390	22.3	2020-12-25
2450 Head	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	38.692	1.824	21.8	2020-12-26
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	37.735	1.969	21.9	2020-12-26
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	37.767	1.968	21.9	2020-12-28
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	38.589	1.977	21.9	2020-12-29
5250 Head	5250	35.9 (34.11~37.70)	4.71 (4.47~4.95)	35.677	4.620	22.3	2020-12-28
5600 Head	5600	35.5 (33.73~37.30)	5.07 (4.82~5.32)	35.005	5.087	22.3	2020-12-28
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	34.634	5.268	22.3	2020-12-29

Table 4： Measurement result of Tissue electric parameters

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15±0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

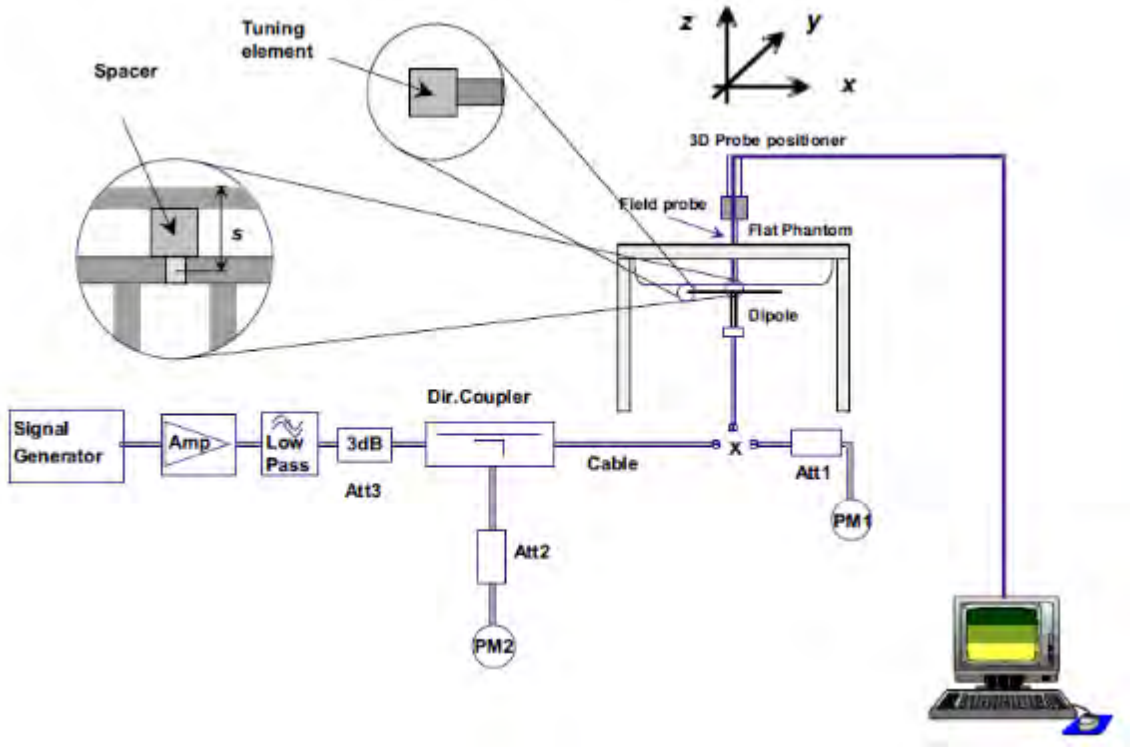

F-12. the microwave circuit arrangement used for SAR system check

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
a) There is no physical damage on the dipole;
b) System check with specific dipole is within 10% of calibrated value;
c) Return-loss is within 10% of calibrated measurement;
d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (℃)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V3	Head	2.11	1.43	8.44	5.72	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2020-12-27
D835V2	Head	2.53	1.65	10.12	6.60	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.0	2020-12-21
D1750V2	Head	9.54	5.06	38.16	20.24	36.3 (32.67~39.93)	19.2 (17.28~21.12)	21.9	2020-12-22
D1750V2	Head	9.50	5.04	38.00	20.16	36.3 (32.67~39.93)	19.2 (17.28~21.12)	21.9	2020-12-24
D1750V2	Head	9.66	5.13	38.64	20.52	36.3 (32.67~39.93)	19.2 (17.28~21.12)	21.9	2020-12-30
D1900V2	Head	10.60	5.49	42.40	21.96	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2020-12-22
D1900V2	Head	10.20	5.26	40.80	21.04	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2020-12-23
D1900V2	Head	10.30	5.32	41.20	21.28	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2020-12-25
D2450V2	Head	13.30	6.16	53.20	24.64	51.9 (46.71~57.09)	23.8 (21.42~26.18)	21.8	2020-12-26
D2600V2	Head	14.00	6.17	56.00	24.68	56.8 (51.12~62.48)	24.9 (22.41~27.39)	21.9	2020-12-26
D2600V2	Head	14.00	6.16	56.00	24.64	56.8 (51.12~62.48)	24.9 (22.41~27.39)	21.9	2020-12-28
D2600V2	Head	14.10	6.19	56.40	24.76	56.8 (51.12~62.48)	24.9 (22.41~27.39)	21.9	2020-12-29
Validation Kit		**Measured SAR 100mW**	**Measured SAR 100mW**	**Measured SAR (normalized to 1W)**	**Measured SAR (normalized to 1W)**	**Target SAR (normalized to 1W) (±10%)**	**Target SAR (normalized to 1W) (±10%)**	**Liquid Temp. (℃)**	**Measured Date**
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head(5.25GHz)	7.25	2.11	72.50	21.10	75.2 (67.68~82.72)	21.5 (19.35~23.65)	22.3	2020-12-28
	Head(5.6GHz)	7.64	2.16	76.40	21.60	80 (72~88)	22.7 (20.43~24.97)	22.3	2020-12-28
	Head(5.75GHz)	8.37	2.38	83.70	23.80	78.7 (70.83~86.57)	22.3 (20.07~24.53)	22.3	2020-12-29

Table 5： SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

7.2 Operation Configurations

7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to “5”and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode

7.2.2 WCDMA Test Configuration

1）. Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2）. Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

3）. Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreaing code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4）. HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(βc, βd), and HS-DPCCH power offset parameters (ΔACK, ΔNACK, ΔCQI) are set according to values indicated in the following table The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	βc	Bd	βd(SF)	βc/βd	βhs	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: △ACK, △NACK and △CQI= 8 Ahs = βhs/βc=30/15 βhs=30/15*βc
Note2:For the HS-DPCCH power mask requirement test in clause 5.2C,5.7A,and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A,and HSDPA EVM with phase discontinuity in clause 5.13.1AA, △ACK and △NACK= 8 (Ahs=30/15) with βhs=30/15*βc,and △CQI=
7 (Ahs=24/15) with βhs=24/15*βc.
Note3: CM=1 forβc/βd =12/15, βhs/βc=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6： settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumH S-DSCH Transport BlockBits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7： HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset" and „Release 5 HSUPA Data Device" sections of 3G device.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}(1)	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM(2) (dB)	MPR (dB)	AG(4) Index	E-TFCI
1	11/15(3)	15/15(3)	64	11/15(3)	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15(4)	15/15(4)	64	15/15(4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 8： Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Speading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 9： HSUPA UE category

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.
The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0.
A summary of these settings are illustrated below:
Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH _Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.
The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.
The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10： settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:
1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

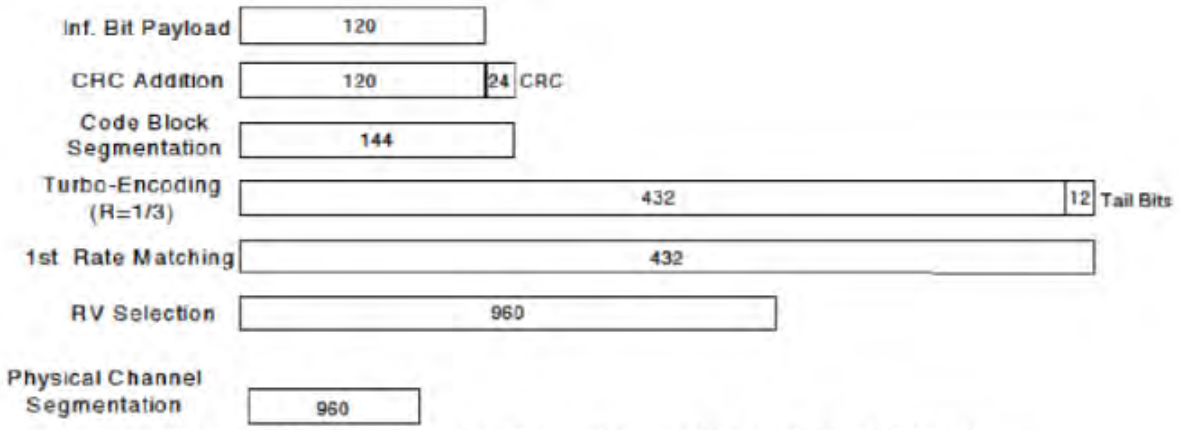

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for β_c/β_d= 12/15, β_{hs}/β_c = 24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 11/15 and β_d = 15/15

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

d) HSPA+

Per KDB941225D01, SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed}1: 30/15 β_{ed}2: 30/15	β_{ed}3: 24/15 β_{ed}4: 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and β_d = 0 by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.2.3.1 Duty cycle

1) Wi-Fi 2.4GHz 802.11b:

Duty cycle=12.3953/12.52969=98.93%

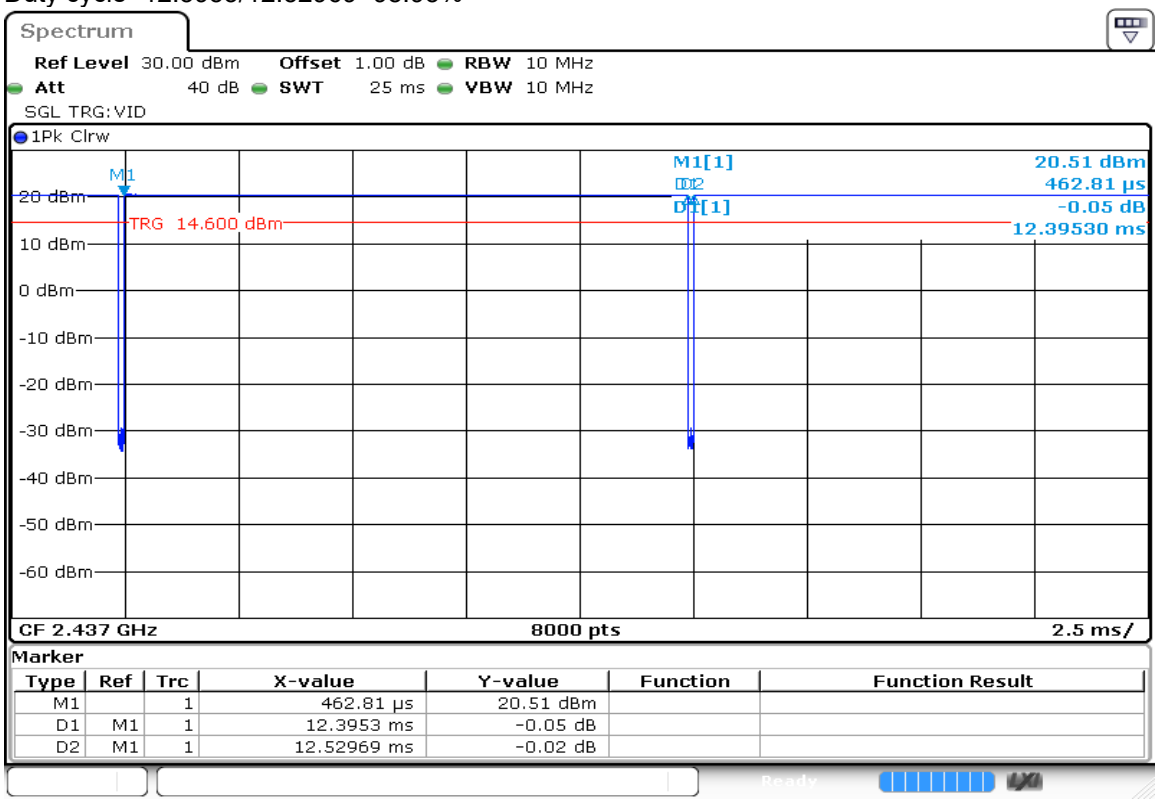

Date: 24.DEC.2020 10:24:02

2) Wi-Fi 5GHz 802.11a:
Duty cycle=2.04901/2.08776=98.14%

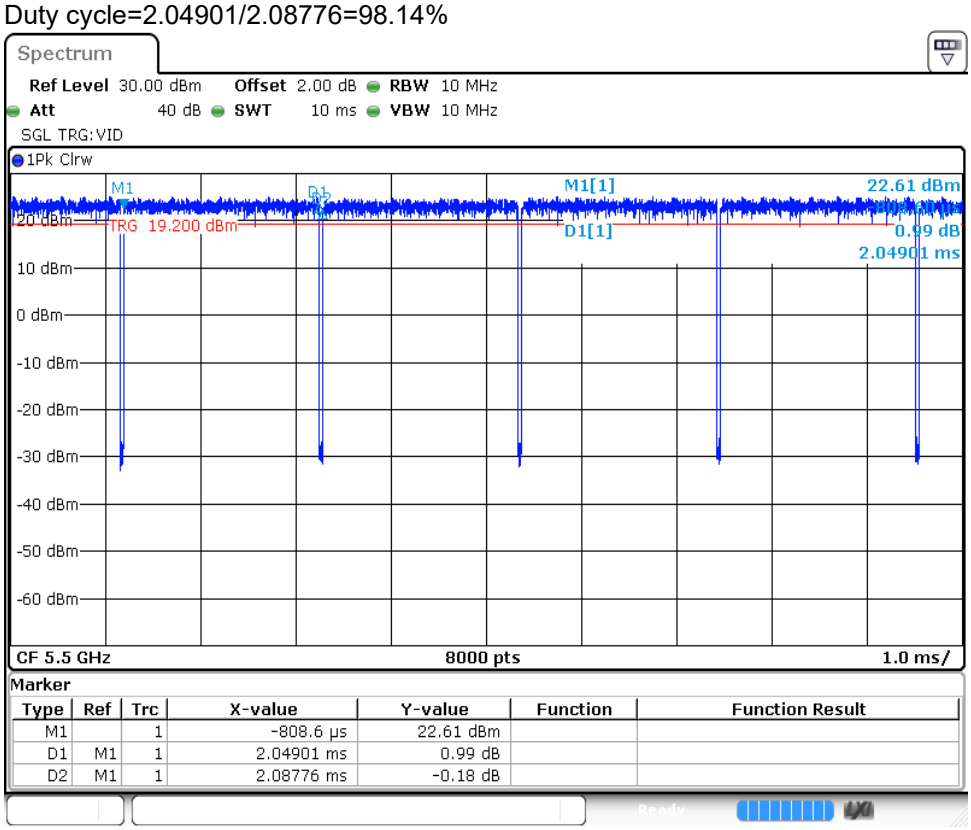

Date: 24.DEC.2020 11:07:29

3) Wi-Fi 5GHz 802.11ac 80M:
Duty cycle=458.81/496.31=92.44%

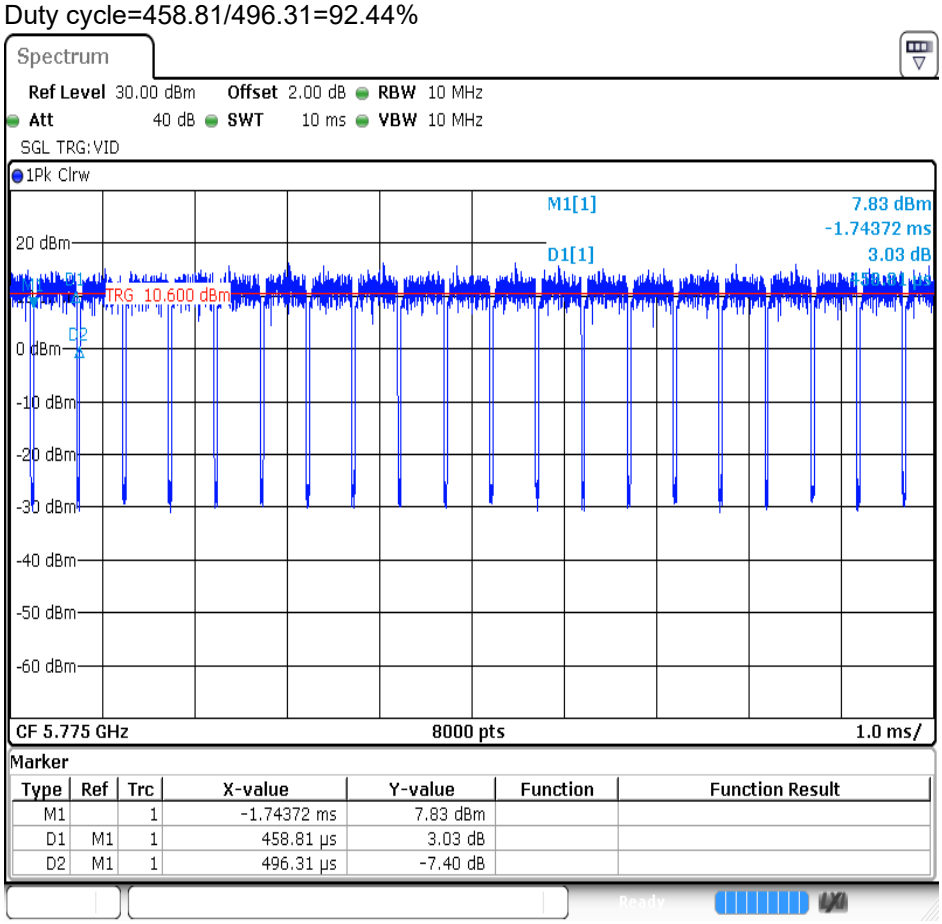

Date: 24.DEC.2020 15:06:47

7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

1）. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
2）. When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
3）. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.
For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.
When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

1）. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

2）. When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

3）. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.

a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.

b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.

4）. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:

a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)

b) replace “initial test configuration” with “all tested higher output power configurations”

7.2.3.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1）. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2）. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

1）. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2）. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.3.6 5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**
  For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following：

1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**
  The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

  When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

- **OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements**
  The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.
  1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
  2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
  3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
  4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
     a) The channel closest to mid-band frequency is selected for SAR measurement.
     b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.4 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8821C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.
SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.
LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

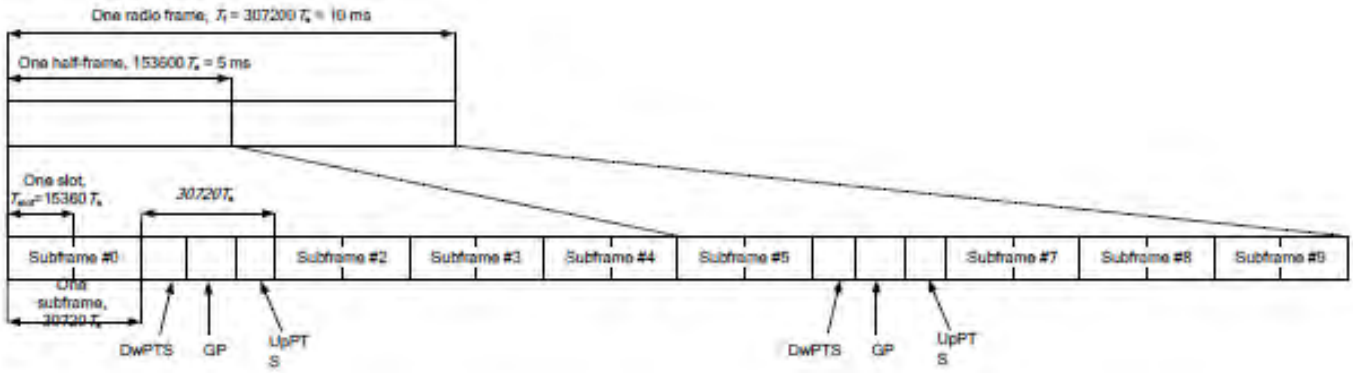

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts			7680.Ts	4384.Ts	5120.Ts
5	6592.Ts	4384.Ts	5120.Ts	20480.Ts		
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-	-	-
9	13168.Ts			-	-	-

Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power of Main Antenna(Ant1)

8.1.1.1 Conducted Power of GSM

GSM 850										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			975	38	124	
GSM(GMSK)	GSM	33.33	32.68	32.58	34.00	-9.19	24.14	23.49	23.39	24.81
GPRS/EGPRS (GMSK)	1 TX Slot	33.48	32.69	32.87	34.00	-9.19	24.29	23.50	23.68	24.81
	2 TX Slots	29.72	29.40	28.95	30.50	-6.18	23.54	23.22	22.77	24.32
	3 TX Slots	27.85	27.22	27.05	29.00	-4.42	23.43	22.80	22.63	24.58
	4 TX Slots	25.81	25.76	25.50	27.50	-3.17	22.64	22.59	22.33	24.33
EGPRS(8PSK)	1 TX Slot	26.36	25.98	25.63	27.00	-9.19	17.17	16.79	16.44	17.81
	2 TX Slots	23.43	23.65	23.28	25.00	-6.18	17.25	17.47	17.10	18.82
	3 TX Slots	22.29	21.94	21.71	23.50	-4.42	17.87	17.52	17.29	19.08
	4 TX Slots	20.96	20.59	21.15	22.50	-3.17	17.79	17.42	17.98	19.33

GSM 1900 Receiver on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	698	885	
GSM(GMSK)	GSM	30.43	30.59	30.77	31.00	-9.19	21.24	21.40	21.58	21.81
GPRS/EGPRS (GMSK)	1 TX Slot	30.52	30.68	30.67	31.00	-9.19	21.33	21.49	21.48	21.81
	2 TX Slots	27.10	26.95	26.89	27.50	-6.18	20.92	20.77	20.71	21.32
	3 TX Slots	25.12	25.50	25.46	26.00	-4.42	20.70	21.08	21.04	21.58
	4 TX Slots	23.72	23.71	23.57	24.50	-3.17	20.55	20.54	20.40	21.33
EGPRS(8PSK)	1 TX Slot	25.56	25.76	25.83	26.00	-9.19	16.37	16.57	16.64	16.81
	2 TX Slots	23.42	23.58	23.58	24.00	-6.18	17.24	17.40	17.40	17.82
	3 TX Slots	21.13	21.42	21.48	22.00	-4.42	16.71	17.00	17.06	17.58
	4 TX Slots	20.26	20.23	20.09	21.00	-3.17	17.09	17.06	16.92	17.83
GSM 1900 Receiver off										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	698	885	
GSM(GMSK)	GSM	29.87	30.03	30.25	30.50	-9.19	20.68	20.84	21.06	21.31
GPRS/EGPRS (GMSK)	1 TX Slot	29.97	30.16	30.14	30.50	-9.19	20.78	20.97	20.95	21.31
	2 TX Slots	26.55	26.44	26.31	27.50	-6.18	20.37	20.26	20.13	21.32
	3 TX Slots	24.58	24.95	24.92	26.00	-4.42	20.16	20.53	20.50	21.58
	4 TX Slots	23.15	23.15	23.01	24.50	-3.17	19.98	19.98	19.84	21.33
EGPRS(8PSK)	1 TX Slot	24.99	25.24	25.26	26.00	-9.19	15.80	16.05	16.07	16.81
	2 TX Slots	22.90	23.04	23.02	24.00	-6.18	16.72	16.86	16.84	17.82
	3 TX Slots	20.61	20.85	20.92	22.00	-4.42	16.19	16.43	16.50	17.58
	4 TX Slots	19.70	19.69	19.55	21.00	-3.17	16.53	16.52	16.38	17.83

Table 11： Conducted Power of GSM

Note:

1）. CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2）. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8

3）. When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used

8.1.1.2 Conducted Power of WCDMA

WCDMA Band II Receiver on&Receiver off+Sensor off					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	24.65	24.71	24.62	25.50
	12.2kbps AMR	24.61	24.70	24.60	25.50
HSDPA	Subtest 1	23.58	23.68	23.59	24.50
	Subtest 2	23.51	23.65	23.53	24.50
	Subtest 3	23.06	23.19	23.05	24.00
	Subtest 4	23.08	23.11	23.00	24.00
HSUPA	Subtest 1	23.58	23.65	23.53	24.50
	Subtest 2	21.57	21.64	21.52	22.50
	Subtest 3	22.59	22.61	22.55	23.50
	Subtest 4	21.59	21.60	21.56	22.50
	Subtest 5	23.60	23.66	23.58	24.50
DC-HSDPA	Subtest 1	23.53	23.65	23.53	24.50
	Subtest 2	23.57	23.61	23.54	24.50
	Subtest 3	23.13	23.16	23.10	24.00
	Subtest 4	23.06	23.17	23.08	24.00
HSPA+	16QAM	23.44	23.52	23.35	24.50
WCDMA Band II Receiver off+Sensor on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	21.35	21.46	21.61	22.00
	12.2kbps AMR	21.30	21.43	21.50	22.00
HSDPA	Subtest 1	20.25	20.36	20.56	21.00
	Subtest 2	20.22	20.39	20.40	21.00
	Subtest 3	19.81	19.88	20.03	20.50
	Subtest 4	19.71	19.84	19.91	20.50
HSUPA	Subtest 1	20.29	20.41	20.58	21.00
	Subtest 2	18.25	18.38	18.40	19.00
	Subtest 3	19.29	19.36	19.57	20.00
	Subtest 4	18.20	18.37	18.48	19.00
	Subtest 5	20.27	20.43	20.51	21.00
DC-HSDPA	Subtest 1	20.26	20.40	20.47	21.00
	Subtest 2	20.31	20.41	20.52	21.00
	Subtest 3	19.78	19.93	20.05	20.50
	Subtest 4	19.73	19.88	19.92	20.50
HSPA+	16QAM	20.22	20.44	20.41	21.00

WCDMA Band IV Receiver on&Receiver off+Sensor off					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	24.88	25.01	24.99	25.50
	12.2kbps AMR	24.79	24.92	24.88	25.50
HSDPA	Subtest 1	23.83	23.93	23.89	24.50
	Subtest 2	23.69	23.83	23.85	24.50
	Subtest 3	23.28	23.46	23.40	24.00
	Subtest 4	23.25	23.32	23.31	24.00
HSUPA	Subtest 1	23.79	23.91	23.92	24.50
	Subtest 2	21.71	21.89	21.79	22.50
	Subtest 3	22.80	22.92	22.89	23.50
	Subtest 4	21.76	21.89	21.79	22.50
	Subtest 5	23.79	23.98	23.93	24.50
DC-HSDPA	Subtest 1	23.75	23.88	23.86	24.50
	Subtest 2	23.85	23.96	23.96	24.50
	Subtest 3	23.34	23.43	23.45	24.00
	Subtest 4	23.26	23.33	23.32	24.00
HSPA+	16QAM	23.54	23.65	23.56	24.50
WCDMA Band IV Receiver off+Sensor on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	19.35	19.39	19.41	20.00
	12.2kbps AMR	19.36	19.36	19.40	20.00
HSDPA	Subtest 1	18.28	18.33	18.33	19.00
	Subtest 2	18.30	18.29	18.31	19.00
	Subtest 3	17.80	17.86	17.84	18.50
	Subtest 4	17.81	17.84	17.81	18.50
HSUPA	Subtest 1	18.26	18.32	18.33	19.00
	Subtest 2	16.32	16.26	16.34	17.00
	Subtest 3	17.27	17.36	17.38	18.00
	Subtest 4	16.34	16.33	16.35	17.00
	Subtest 5	18.32	18.33	18.34	19.00
DC-HSDPA	Subtest 1	18.27	18.30	18.32	19.00
	Subtest 2	18.33	18.37	18.38	19.00
	Subtest 3	17.77	17.87	17.85	18.50
	Subtest 4	17.80	17.80	17.83	18.50
HSPA+	16QAM	18.98	18.79	18.45	19.00

WCDMA Band V					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	24.6	24.63	24.62	25.50
	12.2kbps AMR	24.6	24.61	24.6	25.50
HSDPA	Subtest 1	23.54	23.54	23.54	24.50
	Subtest 2	23.5	23.55	23.58	24.50
	Subtest 3	23	23.05	23.1	24.00
	Subtest 4	23.03	23.04	23.04	24.00
HSUPA	Subtest 1	23.52	23.58	23.54	24.50
	Subtest 2	21.53	21.54	21.52	22.50
	Subtest 3	22.51	22.61	22.6	23.50
	Subtest 4	21.56	21.61	21.53	22.50
	Subtest 5	23.58	23.57	23.57	24.50
DC-HSDPA	Subtest 1	23.5	23.53	23.56	24.50
	Subtest 2	23.6	23.63	23.57	24.50
	Subtest 3	23.01	23.08	23.03	24.00
	Subtest 4	23.08	23.05	23.01	24.00
HSPA+	16QAM	23.56	23.63	23.44	24.5

Table 12： Conducted Power of WCDMA

8.1.1.3 Conducted Power of LTE

LTE Band 2 Receiver on&Receiver off+Sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 18607	Channel 18900	Channel 19193	Tune up
1.4MHz	QPSK	1	0	24.64	24.72	24.69	25.50
		1	2	24.76	24.85	24.64	25.50
		1	5	24.26	24.67	24.63	25.50
		3	0	24.62	24.69	24.64	25.50
		3	1	24.73	24.86	24.63	25.50
		3	3	24.31	24.66	24.64	25.50
		6	0	23.26	23.70	23.57	24.50
	16QAM	1	0	24.26	24.42	23.81	24.50
		1	2	23.84	24.28	23.60	24.50
		1	5	23.34	24.12	24.09	24.50
		3	0	23.76	23.87	23.34	24.50
		3	1	23.45	23.76	23.66	24.50
		3	3	23.49	23.68	23.65	24.50
		6	0	22.65	22.45	22.87	23.50
	64QAM	1	0	22.56	22.64	22.66	23.50
		1	2	22.68	22.81	22.55	23.50
		1	5	22.18	22.62	22.57	23.50
		3	0	22.54	22.62	22.58	23.50
		3	1	22.65	22.76	22.54	23.50
		3	3	22.28	22.57	22.60	23.50
		6	0	21.24	21.63	21.50	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up
3MHz	QPSK	1	0	24.68	24.72	24.68	25.50
		1	7	24.73	24.82	24.68	25.50
		1	14	24.35	24.63	24.64	25.50
		8	0	23.78	23.85	23.39	24.50
		8	4	23.41	23.72	23.70	24.50
		8	7	23.56	23.61	23.65	24.50
		15	0	23.31	23.70	23.54	24.50
	16QAM	1	0	24.23	24.46	23.77	24.50
		1	7	23.90	24.26	23.50	24.50
		1	14	23.30	24.15	24.15	24.50
		8	0	22.87	22.86	22.77	23.50
		8	4	22.57	22.85	22.34	23.50
		8	7	22.54	22.70	22.62	23.50
		15	0	22.52	22.65	22.55	23.50
	64QAM	1	0	22.59	22.66	22.59	23.50
		1	7	22.64	22.77	22.61	23.50
		1	14	22.33	22.53	22.58	23.50
		8	0	21.76	21.78	21.29	22.50
		8	4	21.32	21.69	21.60	22.50
		8	7	21.54	21.55	21.56	22.50
		15	0	21.24	21.66	21.51	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Bandwidth	Modulation	RB size	RB offset	Channel 18625	Channel 18900	Channel 19175	Tune up
5MHz	QPSK	1	0	24.69	24.68	24.72	25.50
		1	13	24.73	24.81	24.65	25.50
		1	24	24.36	24.60	24.54	25.50
		12	0	23.81	23.83	23.38	24.50
		12	6	23.41	23.67	23.69	24.50
		12	13	23.52	23.70	23.62	24.50
		25	0	23.28	23.71	23.56	24.50
	16QAM	1	0	24.21	24.37	23.75	24.50
		1	13	23.86	24.22	23.58	24.50
		1	24	23.30	24.16	24.11	24.50
		12	0	22.78	22.80	22.78	23.50
		12	6	22.57	22.86	22.28	23.50
		12	13	22.55	22.63	22.64	23.50
		25	0	22.63	22.81	22.26	23.50
	64QAM	1	0	22.66	22.58	22.62	23.50
		1	13	22.68	22.75	22.60	23.50
		1	24	22.33	22.56	22.44	23.50
		12	0	21.75	21.77	21.34	22.50
		12	6	21.31	21.62	21.64	22.50
		12	13	21.43	21.67	21.56	22.50
		25	0	21.21	21.68	21.52	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 18650	Channel 18900	Channel 19150	Tune up
10MHz	QPSK	1	0	24.69	24.70	24.63	25.50
		1	25	24.74	24.60	24.68	25.50
		1	49	24.26	24.61	24.61	25.50
		25	0	23.74	23.80	23.41	24.50
		25	13	23.40	23.76	23.62	24.50
		25	25	23.49	23.70	23.65	24.50
		50	0	23.28	23.65	23.60	24.50
	16QAM	1	0	24.24	24.47	23.83	24.50
		1	25	23.92	24.21	23.60	24.50
		1	49	23.35	24.19	24.13	24.50
		25	0	22.85	22.82	22.83	23.50
		25	13	22.63	22.81	22.26	23.50
		25	25	22.54	22.63	22.58	23.50
		50	0	22.57	22.85	22.34	23.50
	64QAM	1	0	22.61	22.60	22.55	23.50
		1	25	22.70	22.56	22.63	23.50
		1	49	22.20	22.56	22.59	23.50
		25	0	21.64	21.71	21.36	22.50
		25	13	21.32	21.73	21.55	22.50
		25	25	21.43	21.60	21.57	22.50
		50	0	21.25	21.61	21.51	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 18675	Channel 18900	Channel 19125	Tune up
15MHz	QPSK	1	0	24.66	24.70	24.70	25.50
		1	38	24.78	24.67	24.64	25.50
		1	74	24.36	24.57	24.63	25.50
		36	0	23.80	23.81	23.36	24.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		36	18	23.43	23.70	23.69	24.50
		36	39	23.49	23.61	23.62	24.50
		75	0	23.27	23.67	23.59	24.50
	16QAM	1	0	24.20	24.38	23.76	24.50
		1	38	23.91	24.23	23.53	24.50
		1	74	23.26	24.14	24.16	24.50
		36	0	22.81	22.83	22.82	23.50
		36	18	22.56	22.84	22.26	23.50
		36	39	22.57	22.66	22.60	23.50
		75	0	22.81	22.87	22.80	23.50
	64QAM	1	0	22.57	22.61	22.65	23.50
		1	38	22.69	22.64	22.62	23.50
		1	74	22.30	22.53	22.60	23.50
		36	0	21.76	21.76	21.30	22.50
		36	18	21.40	21.65	21.66	22.50
		36	39	21.40	21.59	21.54	22.50
		75	0	21.22	21.57	21.54	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 18700	Channel 18900	Channel 19100	Tune up
20MHz	QPSK	1	0	24.70	24.74	24.67	25.50
		1	50	24.74	24.82	24.68	25.50
		1	99	24.34	24.62	24.60	25.50
		50	0	23.79	23.83	23.34	24.50
		50	25	23.45	23.67	23.69	24.50
		50	50	23.56	23.64	23.59	24.50
		100	0	23.24	23.48	23.52	24.50
	16QAM	1	0	24.22	24.40	23.79	24.50
		1	50	23.84	24.26	23.50	24.50
		1	99	23.33	24.11	24.11	24.50
		50	0	22.81	22.87	22.80	23.50
		50	25	22.60	22.87	22.29	23.50
		50	50	22.63	22.68	22.65	23.50
		100	0	22.56	22.84	22.26	23.50
	64QAM	1	0	22.62	22.66	22.60	23.50
		1	50	22.72	22.72	22.65	23.50
		1	99	22.29	22.55	22.51	23.50
		50	0	21.76	21.77	21.31	22.50
		50	25	21.38	21.57	21.65	22.50
		50	50	21.51	21.56	21.50	22.50
		100	0	21.19	21.38	21.49	22.50

LTE Band 2 Receiver off+Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 18607	Channel 18900	Channel 19193	Tune up
1.4MHz	QPSK	1	0	20.04	19.85	19.63	20.50
		1	2	19.52	19.63	19.34	20.50
		1	5	19.83	19.69	19.83	20.50
		3	0	19.44	19.24	19.43	20.50
		3	1	19.27	19.26	19.39	20.50
		3	3	19.17	19.31	19.40	20.50
		6	0	19.24	19.30	19.43	20.50
	16QAM	1	0	19.36	19.25	19.42	20.50
		1	2	19.38	19.32	19.43	20.50
		1	5	19.34	19.29	19.42	20.50
		3	0	19.39	19.15	19.38	20.50
		3	1	19.30	19.32	19.43	20.50
		3	3	19.31	19.32	19.39	20.50
		6	0	19.36	19.32	19.35	20.50
	64QAM	1	0	20.01	19.76	19.55	20.50
		1	2	19.42	19.54	19.29	20.50
		1	5	19.81	19.65	19.73	20.50
		3	0	19.36	19.14	19.39	20.50
		3	1	19.25	19.18	19.35	20.50
		3	3	19.15	19.28	19.30	20.50
		6	0	19.18	19.25	19.41	20.50
Bandwidth	Modulation	RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up
3MHz	QPSK	1	0	19.89	19.82	20.00	20.50
		1	7	19.46	19.59	19.37	20.50
		1	14	19.82	19.59	19.84	20.50
		8	0	19.46	19.24	19.49	20.50
		8	4	19.28	19.30	19.36	20.50
		8	7	19.20	19.24	19.34	20.50
		15	0	19.18	19.27	19.37	20.50
	16QAM	1	0	19.32	19.18	19.48	20.50
		1	7	19.33	19.35	19.37	20.50
		1	14	19.43	19.27	19.50	20.50
		8	0	19.32	19.18	19.36	20.50
		8	4	19.31	19.35	19.41	20.50
		8	7	19.34	19.30	19.43	20.50
		15	0	19.32	19.18	19.36	20.50
	64QAM	1	0	19.79	19.78	19.98	20.50
		1	7	19.40	19.49	19.31	20.50
		1	14	19.73	19.57	19.79	20.50
		8	0	19.37	19.21	19.46	20.50
		8	4	19.25	19.20	19.27	20.50
		8	7	19.17	19.21	19.24	20.50
		15	0	19.08	19.25	19.31	20.50
Bandwidth	Modulation	RB size	RB offset	Channel 18625	Channel 18900	Channel 19175	Tune up
5MHz	QPSK	1	0	20.04	19.88	19.62	20.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	19.51	19.68	19.32	20.50
		1	24	19.85	19.61	19.86	20.50
		12	0	19.37	19.19	19.41	20.50
		12	6	19.36	19.20	19.34	20.50
		12	13	19.23	19.28	19.34	20.50
		25	0	19.23	19.34	19.34	20.50
	16QAM	1	0	19.37	19.18	19.38	20.50
		1	13	19.33	19.35	19.35	20.50
		1	24	19.41	19.30	19.43	20.50
		12	0	19.34	19.11	19.39	20.50
		12	6	19.33	19.36	19.39	20.50
		12	13	19.31	19.36	19.47	20.50
		25	0	19.23	19.34	19.34	20.50
	64QAM	1	0	19.98	19.85	19.53	20.50
		1	13	19.44	19.58	19.25	20.50
		1	24	19.78	19.57	19.82	20.50
		12	0	19.31	19.09	19.31	20.50
		12	6	19.31	19.14	19.24	20.50
		12	13	19.14	19.26	19.26	20.50
		25	0	19.13	19.24	19.24	20.50

Bandwidth	Modulation	RB size	RB offset	Channel 18650	Channel 18900	Channel 19150	Tune up
10MHz	QPSK	1	0	19.45	19.86	19.61	20.50
		1	25	19.56	19.66	19.42	20.50
		1	49	19.82	19.61	19.80	20.50
		25	0	19.41	19.14	19.40	20.50
		25	13	19.34	19.21	19.43	20.50
		25	25	19.20	19.30	19.37	20.50
		50	0	19.18	19.35	19.39	20.50
	16QAM	1	0	19.35	19.19	19.46	20.50
		1	25	19.39	19.29	19.39	20.50
		1	49	19.42	19.28	19.47	20.50
		25	0	19.31	19.19	19.31	20.50
		25	13	19.31	19.28	19.35	20.50
		25	25	19.27	19.27	19.40	20.50
		50	0	19.20	19.30	19.37	20.50
	64QAM	1	0	19.42	19.83	19.54	20.50
		1	25	19.50	19.57	19.40	20.50
		1	49	19.73	19.53	19.74	20.50
		25	0	19.37	19.10	19.33	20.50
		25	13	19.32	19.17	19.34	20.50
		25	25	19.16	19.25	19.28	20.50
		50	0	19.14	19.30	19.35	20.50

Bandwidth	Modulation	RB size	RB offset	Channel 18675	Channel 18900	Channel 19125	Tune up
15MHz	QPSK	1	0	19.45	19.80	19.69	20.50
		1	38	19.50	19.63	19.42	20.50
		1	74	19.82	19.60	19.79	20.50
		36	0	19.44	19.20	19.45	20.50
		36	18	19.32	19.27	19.35	20.50
		36	39	19.19	19.24	19.35	20.50
		75	0	19.20	19.27	19.34	20.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	19.33	19.18	19.41	20.50
		1	38	19.42	19.35	19.41	20.50
		1	74	19.34	19.30	19.46	20.50
		36	0	19.34	19.15	19.30	20.50
		36	18	19.35	19.37	19.33	20.50
		36	39	19.24	19.33	19.45	20.50
		75	0	19.19	19.24	19.35	20.50
	64QAM	1	0	19.35	19.76	19.67	20.50
		1	38	19.41	19.59	19.33	20.50
		1	74	19.74	19.51	19.71	20.50
		36	0	19.38	19.15	19.37	20.50
		36	18	19.28	19.22	19.30	20.50
		36	39	19.16	19.15	19.28	20.50
		75	0	19.10	19.21	19.25	20.50

Bandwidth	Modulation	RB size	RB offset	Channel 18700	Channel 18900	Channel 19100	Tune up
20MHz	QPSK	1	0	19.86	19.68	19.60	20.50
		1	50	19.53	20.10	19.42	20.50
		1	99	19.80	19.59	19.87	20.50
		50	0	19.42	19.58	19.46	20.50
		50	25	19.36	19.26	19.37	20.50
		50	50	19.22	19.24	19.35	20.50
		100	0	19.18	19.28	19.35	20.50
	16QAM	1	0	19.33	19.26	19.44	20.50
		1	50	19.36	19.28	19.35	20.50
		1	99	19.37	19.22	19.49	20.50
		50	0	19.36	19.11	19.37	20.50
		50	25	19.25	19.35	19.33	20.50
		50	50	19.28	19.28	19.38	20.50
		100	0	19.22	19.24	19.35	20.50
	64QAM	1	0	19.83	19.64	19.58	20.50
		1	50	19.43	20.06	19.39	20.50
		1	99	19.70	19.51	19.85	20.50
		50	0	19.33	19.50	19.42	20.50
		50	25	19.33	19.22	19.34	20.50
		50	50	19.19	19.20	19.31	20.50
		100	0	19.16	19.23	19.32	20.50

LTE Band 4 Receiver on&Receiver off+Sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 19957	Channel 20175	Channel 20393	Tune up
1.4MHz	QPSK	1	0	24.62	24.72	24.63	25.50
		1	2	24.75	24.83	24.59	25.50
		1	5	24.17	24.60	24.61	25.50
		3	0	24.56	24.60	24.56	25.50
		3	1	24.73	24.80	24.60	25.50
		3	3	24.26	24.57	24.56	25.50
		6	0	23.25	23.69	23.51	24.50
	16QAM	1	0	24.18	24.32	23.71	24.50
		1	2	23.76	24.20	23.60	24.50
		1	5	23.34	24.03	23.99	24.50
		3	0	23.66	23.87	23.27	24.50
		3	1	23.38	23.67	23.62	24.50
		3	3	23.39	23.58	23.55	24.50
		6	0	22.62	22.42	22.82	23.50
	64QAM	1	0	23.09	23.24	22.61	23.50
		1	2	22.68	23.18	22.53	23.50
		1	5	22.29	22.98	22.90	23.50
		3	0	22.61	22.77	22.20	23.50
		3	1	22.32	22.57	22.58	23.50
		3	3	22.35	22.52	22.53	23.50
		6	0	21.53	21.40	21.76	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	24.60	24.71	24.59	25.50
		1	7	24.63	24.72	24.68	25.50
		1	14	24.29	24.53	24.62	25.50
		8	0	23.68	23.75	23.35	24.50
		8	4	23.35	23.69	23.62	24.50
		8	7	23.55	23.54	23.57	24.50
		15	0	23.27	23.70	23.46	24.50
	16QAM	1	0	24.17	24.43	23.75	24.50
		1	7	23.85	24.18	23.45	24.50
		1	14	23.24	24.06	24.13	24.50
		8	0	22.84	22.81	22.77	23.50
		8	4	22.55	22.77	22.32	23.50
		8	7	22.52	22.65	22.55	23.50
		15	0	22.57	22.85	22.34	23.50
	64QAM	1	0	23.08	23.41	22.69	23.50
		1	7	22.78	23.12	22.39	23.50
		1	14	22.15	23.03	23.07	23.50
		8	0	21.80	21.73	21.71	22.50
		8	4	21.48	21.67	21.24	22.50
		8	7	21.43	21.60	21.45	22.50
		15	0	21.48	21.78	21.25	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	24.56	24.63	24.55	25.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.55	24.56	24.60	25.50
		1	24	24.27	24.43	24.60	25.50
		12	0	23.68	23.73	23.32	24.50
		12	6	23.31	23.68	23.55	24.50
		12	13	23.50	23.52	23.56	24.50
		25	0	23.18	23.62	23.45	24.50
	16QAM	1	0	24.08	24.40	23.68	24.50
		1	13	23.76	24.08	23.36	24.50
		1	24	23.15	24.03	24.08	24.50
		12	0	22.83	22.75	22.73	23.50
		12	6	22.45	22.67	22.26	23.50
		12	13	22.43	22.60	22.45	23.50
		25	0	22.47	22.75	22.33	23.50
	64QAM	1	0	23.02	23.35	22.62	23.50
		1	13	22.67	23.05	22.26	23.50
		1	24	22.13	22.97	23.02	23.50
		12	0	21.75	21.71	21.63	22.50
		12	6	21.35	21.59	21.20	22.50
		12	13	21.41	21.50	21.42	22.50
		25	0	21.42	21.67	21.24	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	24.60	24.61	24.56	25.50
		1	25	24.59	24.65	24.68	25.50
		1	49	24.25	24.46	24.57	25.50
		25	0	23.68	23.69	23.29	24.50
		25	13	23.29	23.64	23.58	24.50
		25	25	23.53	23.46	23.49	24.50
		50	0	23.22	23.65	23.43	24.50
	16QAM	1	0	24.13	24.43	23.68	24.50
		1	25	23.80	24.16	23.44	24.50
		1	49	23.17	24.02	24.03	24.50
		25	0	22.81	22.74	22.68	23.50
		25	13	22.52	22.68	22.28	23.50
		25	25	22.44	22.56	22.49	23.50
		50	0	22.52	22.77	22.34	23.50
	64QAM	1	0	23.08	23.38	22.61	23.50
		1	25	22.74	23.08	22.34	23.50
		1	49	22.07	22.96	22.93	23.50
		25	0	21.74	21.65	21.58	22.50
		25	13	21.45	21.64	21.24	22.50
		25	25	21.41	21.47	21.40	22.50
		50	0	21.49	21.72	21.26	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	24.54	24.70	24.53	25.50
		1	38	24.56	24.69	24.61	25.50
		1	74	24.26	24.46	24.59	25.50
		36	0	23.61	23.69	23.26	24.50
		36	18	23.28	23.69	23.58	24.50
		36	39	23.51	23.46	23.51	24.50
		75	0	23.19	23.63	23.39	24.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	24.10	24.36	23.73	24.50
		1	38	23.78	24.14	23.35	24.50
		1	74	23.15	24.03	24.13	24.50
		36	0	22.74	22.77	22.73	23.50
		36	18	22.47	22.71	22.26	23.50
		36	39	22.47	22.57	22.52	23.50
		75	0	22.55	22.77	22.29	23.50
	64QAM	1	0	23.06	23.27	22.65	23.50
		1	38	22.75	23.08	22.26	23.50
		1	74	22.09	22.94	23.06	23.50
		36	0	21.65	21.69	21.65	22.50
		36	18	21.40	21.69	21.23	22.50
		36	39	21.43	21.53	21.44	22.50
		75	0	21.47	21.72	21.27	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	24.51	24.69	24.59	25.50
		1	50	24.53	24.71	24.69	25.50
		1	99	24.20	24.46	24.59	25.50
		50	0	23.63	23.71	23.58	24.50
		50	25	23.33	23.69	23.53	24.50
		50	50	23.45	23.48	23.57	24.50
		100	0	23.20	23.38	23.67	24.50
	16QAM	1	0	24.13	24.35	23.68	24.50
		1	50	23.77	24.15	23.41	24.50
		1	99	23.17	23.96	24.11	24.50
		50	0	22.78	22.79	22.71	23.50
		50	25	22.55	22.73	22.32	23.50
		50	50	22.43	22.55	22.55	23.50
		100	0	22.57	22.85	22.29	23.50
	64QAM	1	0	23.06	23.29	22.66	23.50
		1	50	22.67	23.05	22.37	23.50
		1	99	22.09	22.93	23.03	23.50
		50	0	21.71	21.73	21.67	22.50
		50	25	21.50	21.70	21.27	22.50
		50	50	21.37	21.50	21.51	22.50
		100	0	21.53	21.81	21.22	22.50

LTE Band 4 Receiver off+Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 19957	Channel 20175	Channel 20393	Tune up
1.4MHz	QPSK	1	0	18.72	18.90	19.21	20.00
		1	2	18.55	18.80	18.98	20.00
		1	5	18.11	18.71	18.42	20.00
		3	0	18.22	18.34	18.85	20.00
		3	1	18.45	18.51	18.99	20.00
		3	3	18.17	18.59	18.62	20.00
		6	0	18.26	18.30	18.75	20.00
	16QAM	1	0	18.23	18.39	18.50	20.00
		1	2	18.38	18.35	18.51	20.00
		1	5	18.33	18.34	18.51	20.00
		3	0	18.46	18.27	18.67	20.00
		3	1	18.33	18.56	18.68	20.00
		3	3	18.25	18.42	18.63	20.00
		6	0	18.52	18.29	18.52	20.00
	64QAM	1	0	18.70	18.83	19.16	20.00
		1	2	18.52	18.75	18.89	20.00
		1	5	18.08	18.66	18.32	20.00
		3	0	18.19	18.26	18.76	20.00
		3	1	18.36	18.42	18.90	20.00
		3	3	18.15	18.57	18.55	20.00
		6	0	18.23	18.23	18.73	20.00
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	18.88	18.96	19.01	20.00
		1	7	18.75	18.95	18.88	20.00
		1	14	18.27	18.88	18.39	20.00
		8	0	18.41	18.43	18.89	20.00
		8	4	18.56	18.64	18.87	20.00
		8	7	18.33	18.77	18.68	20.00
		15	0	18.36	18.41	18.77	20.00
	16QAM	1	0	18.37	18.61	18.47	20.00
		1	7	18.56	18.40	18.47	20.00
		1	14	18.40	18.46	18.51	20.00
		8	0	18.59	18.49	18.65	20.00
		8	4	18.40	18.57	18.69	20.00
		8	7	18.31	18.54	18.53	20.00
		15	0	18.57	18.40	18.54	20.00
	64QAM	1	0	18.85	18.87	18.99	20.00
		1	7	18.67	18.93	18.84	20.00
		1	14	18.21	18.79	18.31	20.00
		8	0	18.39	18.37	18.86	20.00
		8	4	18.52	18.62	18.77	20.00
		8	7	18.27	18.68	18.62	20.00
		15	0	18.26	18.37	18.75	20.00
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	18.85	18.95	19.09	20.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	18.77	18.96	19.00	20.00
		1	24	18.30	18.87	18.45	20.00
		12	0	18.37	18.42	18.82	20.00
		12	6	18.57	18.65	18.99	20.00
		12	13	18.35	18.74	18.65	20.00
		25	0	18.36	18.37	18.71	20.00
	16QAM	1	0	18.42	18.60	18.34	20.00
		1	13	18.57	18.39	18.56	20.00
		1	24	18.39	18.47	18.54	20.00
		12	0	18.59	18.45	18.57	20.00
		12	6	18.42	18.60	18.63	20.00
		12	13	18.27	18.52	18.62	20.00
		25	0	18.57	18.44	18.63	20.00
	64QAM	1	0	18.82	18.91	19.05	20.00
		1	13	18.70	18.87	18.91	20.00
		1	24	18.20	18.83	18.43	20.00
		12	0	18.29	18.36	18.76	20.00
		12	6	18.47	18.55	18.91	20.00
		12	13	18.25	18.64	18.56	20.00
		25	0	18.26	18.33	18.63	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	18.95	19.07	19.01	20.00
		1	25	18.87	19.03	19.00	20.00
		1	49	18.39	18.96	18.37	20.00
		25	0	18.48	18.50	18.79	20.00
		25	13	18.68	18.77	18.87	20.00
		25	25	18.42	18.86	18.60	20.00
		50	0	18.48	18.50	18.70	20.00
	16QAM	1	0	18.47	18.70	18.42	20.00
		1	25	18.67	18.53	18.54	20.00
		1	49	18.48	18.57	18.49	20.00
		25	0	18.68	18.56	18.59	20.00
		25	13	18.50	18.71	18.74	20.00
		25	25	18.41	18.61	18.55	20.00
		50	0	18.67	18.54	18.55	20.00
	64QAM	1	0	18.93	19.02	18.98	20.00
		1	25	18.83	18.98	18.98	20.00
		1	49	18.36	18.94	18.29	20.00
		25	0	18.42	18.42	18.77	20.00
		25	13	18.59	18.69	18.80	20.00
		25	25	18.33	18.81	18.50	20.00
		50	0	18.38	18.45	18.66	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	18.98	19.05	19.18	20.00
		1	38	18.84	19.05	19.07	20.00
		1	74	18.37	19.00	18.30	20.00
		36	0	18.50	18.53	18.91	20.00
		36	18	18.67	18.74	18.89	20.00
		36	39	18.41	18.87	18.58	20.00
		75	0	18.45	18.51	18.66	20.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	18.51	18.67	18.44	20.00
		1	38	18.66	18.51	18.39	20.00
		1	74	18.50	18.54	18.46	20.00
		36	0	18.71	18.60	18.57	20.00
		36	18	18.50	18.68	18.61	20.00
		36	39	18.40	18.60	18.55	20.00
		75	0	18.63	18.55	18.66	20.00
	64QAM	1	0	18.92	18.99	19.08	20.00
		1	38	18.81	19.01	18.97	20.00
		1	74	18.34	18.93	18.26	20.00
		36	0	18.44	18.47	18.85	20.00
		36	18	18.65	18.67	18.80	20.00
		36	39	18.31	18.79	18.54	20.00
		75	0	18.43	18.46	18.59	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	18.99	19.02	19.03	20.00
		1	50	18.88	19.07	18.96	20.00
		1	99	18.40	19.00	18.32	20.00
		50	0	18.50	18.85	18.83	20.00
		50	25	18.69	18.74	18.56	20.00
		50	50	18.42	18.72	18.67	20.00
		100	0	18.48	18.49	18.79	20.00
	16QAM	1	0	18.48	18.69	18.44	20.00
		1	50	18.66	18.48	18.48	20.00
		1	99	18.48	18.58	18.55	20.00
		50	0	18.64	18.57	18.68	20.00
		50	25	18.50	18.62	18.66	20.00
		50	50	18.38	18.60	18.53	20.00
		100	0	18.62	18.51	18.65	20.00
	64QAM	1	0	18.96	18.93	18.94	20.00
		1	50	18.80	19.01	18.91	20.00
		1	99	18.30	18.97	18.30	20.00
		50	0	18.40	18.76	18.79	20.00
		50	25	18.60	18.65	18.54	20.00
		50	50	18.33	18.68	18.59	20.00
		100	0	18.43	18.40	18.70	20.00

LTE Band 5				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20407	Channel 20525	Channel 20643	Tune up
1.4MHz	QPSK	1	0	24.31	24.56	24.47	25.50
		1	2	24.5	24.57	24.51	25.50
		1	5	24.43	24.5	24.39	25.50
		3	0	24.56	24.58	24.55	25.50
		3	2	24.37	24.61	24.43	25.50
		3	3	24.48	24.24	24.67	25.50
		6	0	23.35	23.42	23.22	24.50
	16QAM	1	0	23.23	23.7	23.46	24.50
		1	2	23.67	23.83	23.66	24.50
		1	5	23.58	24.15	23.31	24.50
		3	0	23.6	23.73	23.64	24.50
		3	2	23.32	23.76	23.5	24.50
		3	3	23.43	23.7	23.55	24.50
		6	0	22.53	22.48	22.84	23.50
	64QAM	1	0	22.23	22.46	22.38	23.50
		1	2	22.42	22.55	22.43	23.50
		1	5	22.41	22.47	22.29	23.50
		3	0	22.50	22.50	22.48	23.50
		3	2	22.30	22.52	22.34	23.50
		3	3	22.44	22.20	22.61	23.50
		6	0	21.28	21.36	21.16	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20415	Channel 20525	Channel 20635	Tune up
3MHz	QPSK	1	0	24.41	24.56	24.42	25.50
		1	7	24.38	24.65	24.58	25.50
		1	14	24.43	24.48	24.32	25.50
		8	0	23.45	23.45	23.46	24.50
		8	4	23.49	23.54	23.4	24.50
		8	7	23.4	23.41	23.25	24.50
		15	0	23.46	23.53	23.46	24.50
	16QAM	1	0	23.84	23.81	23.68	24.50
		1	7	24.02	24.02	23.72	24.50
		1	14	23.67	24.07	23.27	24.50
		8	0	22.32	22.6	22.58	23.50
		8	4	22.57	22.47	22.45	23.50
		8	7	22.48	22.49	22.27	23.50
		15	0	22.54	22.38	22.36	23.50
	64QAM	1	0	22.32	22.53	22.37	23.50
		1	7	22.36	22.56	22.53	23.50
		1	14	22.38	22.43	22.27	23.50
		8	0	21.42	21.40	21.41	22.50
		8	4	21.45	21.44	21.38	22.50
		8	7	21.34	21.34	21.19	22.50
		15	0	21.39	21.47	21.43	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20425	Channel 20525	Channel 20625	Tune up
5MHz	QPSK	1	0	24.32	24.59	24.49	25.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.63	24.36	24.49	25.50
		1	24	24.46	24.41	24.55	25.50
		12	0	23.49	23.47	23.52	24.50
		12	6	23.47	23.5	23.6	24.50
		12	13	23.42	23.55	23.46	24.50
		25	0	23.42	23.56	23.64	24.50
	16QAM	1	0	23.33	23.88	23.62	24.50
		1	13	23.98	23.74	23.41	24.50
		1	24	23.38	23.85	23.32	24.50
		12	0	22.58	22.43	22.51	23.50
		12	6	22.53	22.6	22.57	23.50
		12	13	22.44	22.48	22.48	23.50
		25	0	22.31	22.46	22.51	23.50
	64QAM	1	0	22.22	22.52	22.43	23.50
		1	13	22.60	22.33	22.40	23.50
		1	24	22.43	22.33	22.47	23.50
		12	0	21.46	21.38	21.48	22.50
		12	6	21.42	21.46	21.55	22.50
		12	13	21.33	21.51	21.39	22.50
		25	0	21.37	21.54	21.54	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20450	Channel 20525	Channel 20600	Tune up
10MHz	QPSK	1	0	24.61	24.61	24.64	25.50
		1	25	25.02	25.08	24.66	25.50
		1	49	24.72	24.76	24.25	25.50
		25	0	23.48	23.65	23.52	24.50
		25	13	23.51	23.52	23.54	24.50
		25	25	23.5	23.58	23.41	24.50
		50	0	23.58	23.56	23.54	24.50
	16QAM	1	0	23.75	23.97	24.11	24.50
		1	25	23.96	23.7	24.08	24.50
		1	49	23.87	23.94	23.1	24.50
		25	0	22.43	22.53	22.54	23.50
		25	13	22.54	22.55	22.56	23.50
		25	25	22.39	22.52	22.64	23.50
		50	0	22.68	22.56	22.44	23.50
	64QAM	1	0	22.58	22.57	22.55	23.50
		1	25	22.95	23.03	22.58	23.50
		1	49	22.64	22.71	22.18	23.50
		25	0	21.39	21.63	21.49	22.50
		25	13	21.49	21.42	21.52	22.50
		25	25	21.48	21.56	21.33	22.50
		50	0	21.51	21.51	21.51	22.50

LTE Band 7 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20775	Channel 21100	Channel 21425	Tune up
5MHz	QPSK	1	0	24.61	24.53	24.6	25.50
		1	13	24.85	24.28	24.66	25.50
		1	24	24.58	24.46	24.44	25.50
		12	0	23.4	23.35	23.62	24.50
		12	6	23.48	23.57	23.54	24.50
		12	13	23.42	23.09	23.57	24.50
		25	0	23.3	23.3	23.58	24.50
	16QAM	1	0	23.85	23.56	23.94	24.50
		1	13	23.61	23.84	24.35	24.50
		1	24	23.94	23.52	23.86	24.50
		12	0	22.39	22.49	22.68	23.50
		12	6	22.57	22.32	22.6	23.50
		12	13	22.88	22.33	22.51	23.50
		25	0	23.01	22.7	22.77	23.50
	64QAM	1	0	22.54	22.47	22.55	23.50
		1	13	22.77	22.21	22.60	23.50
		1	24	22.54	22.37	22.35	23.50
		12	0	21.33	21.30	21.60	22.50
		12	6	21.43	21.55	21.44	22.50
		12	13	21.35	21.03	21.49	22.50
		25	0	21.25	21.22	21.53	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	24.61	24.58	24.6	25.50
		1	25	24.86	24.33	24.68	25.50
		1	49	24.59	24.5	24.48	25.50
		25	0	23.42	23.36	23.63	24.50
		25	13	23.5	23.62	23.59	24.50
		25	25	23.42	23.13	23.59	24.50
		50	0	23.34	23.34	23.62	24.50
	16QAM	1	0	23.86	23.59	23.94	24.50
		1	25	23.66	23.86	24.4	24.50
		1	49	23.97	23.55	23.86	24.50
		25	0	22.39	22.51	22.71	23.50
		25	13	22.62	22.32	22.62	23.50
		25	25	22.92	22.36	22.52	23.50
		50	0	23.06	22.73	22.82	23.50
	64QAM	1	0	22.53	22.51	22.58	23.50
		1	25	22.83	22.27	22.65	23.50
		1	49	22.53	22.41	22.45	23.50
		25	0	21.35	21.33	21.55	22.50
		25	13	21.40	21.53	21.55	22.50
		25	25	21.36	21.08	21.53	22.50
		50	0	21.25	21.27	21.59	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	24.64	24.54	24.64	25.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	24.9	24.32	24.69	25.50
		1	74	24.59	24.47	24.46	25.50
		36	0	23.43	23.36	23.65	24.50
		36	18	23.52	23.6	23.56	24.50
		36	39	23.44	23.1	23.59	24.50
		75	0	23.33	23.3	23.59	24.50
	16QAM	1	0	23.88	23.61	23.94	24.50
		1	38	23.66	23.85	24.38	24.50
		1	74	23.96	23.56	23.9	24.50
		36	0	22.44	22.54	22.72	23.50
		36	18	22.61	22.36	22.61	23.50
		36	39	22.89	22.34	22.51	23.50
		75	0	23.03	22.75	22.77	23.50
	64QAM	1	0	22.58	22.47	22.56	23.50
		1	38	22.81	22.30	22.64	23.50
		1	74	22.50	22.37	22.37	23.50
		36	0	21.35	21.27	21.60	22.50
		36	18	21.48	21.53	21.51	22.50
		36	39	21.40	21.03	21.54	22.50
		75	0	21.23	21.21	21.49	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	24.64	24.58	24.64	25.50
		1	50	24.71	24.86	24.68	25.50
		1	99	24.63	24.5	24.45	25.50
		50	0	23.42	23.66	23.4	24.50
		50	25	23.5	23.57	23.59	24.50
		50	50	23.42	23.11	23.6	24.50
		100	0	23.3	23.31	23.61	24.50
	16QAM	1	0	23.88	23.58	23.95	24.50
		1	50	23.62	23.84	24.36	24.50
		1	99	23.97	23.52	23.88	24.50
		50	0	22.41	22.53	22.73	23.50
		50	25	22.6	22.33	22.6	23.50
		50	50	22.91	22.36	22.52	23.50
		100	0	23.05	22.73	22.82	23.50
	64QAM	1	0	22.60	22.51	22.59	23.50
		1	50	22.64	22.84	22.62	23.50
		1	99	22.58	22.46	22.43	23.50
		50	0	21.38	21.62	21.33	22.50
		50	25	21.46	21.52	21.54	22.50
		50	50	21.33	21.08	21.56	22.50
		100	0	21.21	21.25	21.52	22.50

LTE Band 7 Receiver off+Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20775	Channel 21100	Channel 21425	Tune up
5MHz	QPSK	1	0	19.98	19.68	19.15	21.00
		1	13	20.02	20.1	19.73	21.00
		1	24	20.12	20.04	19.31	21.00
		12	0	19.87	19.62	19.43	21.00
		12	6	19.76	19.51	19.29	21.00
		12	13	19.79	19.52	19.26	21.00
		25	0	19.74	19.66	19.15	21.00
	16QAM	1	0	19.74	19.61	19.26	21.00
		1	13	19.74	19.37	19.12	21.00
		1	24	19.67	19.36	19.22	21.00
		12	0	19.81	19.51	19.36	21.00
		12	6	19.68	19.54	19.28	21.00
		12	13	19.62	19.43	19.27	21.00
		25	0	19.57	19.54	19.3	21.00
	64QAM	1	0	19.93	19.63	19.08	21.00
		1	13	19.99	20.03	19.66	21.00
		1	24	20.02	20.02	19.23	21.00
		12	0	19.80	19.58	19.39	21.00
		12	6	19.71	19.42	19.26	21.00
		12	13	19.71	19.46	19.23	21.00
		25	0	19.64	19.59	19.11	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	19.98	19.69	19.16	21.00
		1	25	20.05	20.15	19.73	21.00
		1	49	20.15	20.06	19.33	21.00
		25	0	19.88	19.62	19.46	21.00
		25	13	19.76	19.55	19.29	21.00
		25	25	19.79	19.52	19.28	21.00
		50	0	19.76	19.66	19.18	21.00
	16QAM	1	0	19.74	19.63	19.29	21.00
		1	25	19.79	19.41	19.13	21.00
		1	49	19.7	19.41	19.22	21.00
		25	0	19.86	19.56	19.36	21.00
		25	13	19.72	19.58	19.31	21.00
		25	25	19.66	19.44	19.31	21.00
		50	0	19.61	19.57	19.32	21.00
	64QAM	1	0	19.89	19.66	19.07	21.00
		1	25	19.95	20.13	19.71	21.00
		1	49	20.08	20.02	19.26	21.00
		25	0	19.85	19.58	19.37	21.00
		25	13	19.66	19.46	19.19	21.00
		25	25	19.73	19.49	19.26	21.00
		50	0	19.66	19.64	19.14	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	19.98	19.68	19.19	21.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	20.03	20.14	19.77	21.00
		1	74	20.12	20.08	19.32	21.00
		36	0	19.9	19.67	19.46	21.00
		36	18	19.76	19.55	19.32	21.00
		36	39	19.84	19.57	19.26	21.00
		75	0	19.74	19.66	19.17	21.00
	16QAM	1	0	19.77	19.64	19.29	21.00
		1	38	19.75	19.4	19.15	21.00
		1	74	19.71	19.41	19.24	21.00
		36	0	19.81	19.52	19.39	21.00
		36	18	19.71	19.54	19.31	21.00
		36	39	19.63	19.43	19.29	21.00
		75	0	19.57	19.55	19.32	21.00
	64QAM	1	0	19.89	19.59	19.10	21.00
		1	38	19.93	20.10	19.68	21.00
		1	74	20.05	20.05	19.25	21.00
		36	0	19.80	19.65	19.41	21.00
		36	18	19.66	19.49	19.27	21.00
		36	39	19.76	19.51	19.16	21.00
		75	0	19.72	19.57	19.13	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	20.27	20.03	19.5	21.00
		1	50	20.34	20.45	20.28	21.00
		1	99	20.18	20.4	19.65	21.00
		50	0	20.22	19.98	19.81	21.00
		50	25	20.14	19.85	19.69	21.00
		50	50	20.15	19.85	19.58	21.00
		100	0	20.11	20	19.51	21.00
	16QAM	1	0	20.14	19.98	19.62	21.00
		1	50	20.06	19.7	19.48	21.00
		1	99	20.01	19.69	19.6	21.00
		50	0	20.2	19.83	19.74	21.00
		50	25	20.04	19.89	19.61	21.00
		50	50	20	19.73	19.59	21.00
		100	0	20.49	20.48	20.26	21.00
	64QAM	1	0	20.21	19.94	19.44	21.00
		1	50	20.26	20.38	20.20	21.00
		1	99	20.10	20.30	19.59	21.00
		50	0	20.19	19.88	19.72	21.00
		50	25	20.06	19.81	19.66	21.00
		50	50	20.12	19.78	19.54	21.00
		100	0	20.06	19.98	19.46	21.00

LTE Band 7 Receiver off+Sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20775	Channel 21100	Channel 21425	Tune up
5MHz	QPSK	1	0	24.11	24.01	24.1	25.00
		1	13	24.3	23.76	24.16	25.00
		1	24	24.07	23.96	23.91	25.00
		12	0	22.9	22.82	23.1	24.50
		12	6	22.95	23.07	23.03	24.50
		12	13	22.88	22.54	23.05	24.50
		25	0	22.75	22.76	23.05	24.50
	16QAM	1	0	23.35	23.02	23.43	24.50
		1	13	23.11	23.29	23.82	24.50
		1	24	23.43	22.99	23.35	24.50
		12	0	21.88	21.94	22.14	23.50
		12	6	22.06	21.79	22.08	23.50
		12	13	22.33	21.8	21.96	23.50
		25	0	22.06	21.78	21.82	23.50
	64QAM	1	0	22.28	21.95	22.40	23.50
		1	13	22.03	22.26	22.80	23.50
		1	24	22.37	21.91	22.28	23.50
		12	0	20.84	20.88	21.06	22.50
		12	6	21.03	20.72	21.05	22.50
		12	13	21.27	20.74	20.93	22.50
		25	0	20.99	20.74	20.76	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	24.14	24	24.11	25.00
		1	25	24.35	23.83	24.19	25.00
		1	49	24.07	23.96	23.99	25.00
		25	0	22.89	22.84	23.07	24.50
		25	13	22.94	23.02	23.06	24.50
		25	25	22.92	22.6	23.12	24.50
		50	0	22.81	22.79	23.07	24.50
	16QAM	1	0	23.36	23.06	23.45	24.50
		1	25	23.15	23.36	23.86	24.50
		1	49	23.45	23.04	23.31	24.50
		25	0	21.91	21.95	22.17	23.50
		25	13	22.12	21.84	22.13	23.50
		25	25	22.35	21.85	22.01	23.50
		50	0	22.11	21.78	21.88	23.50
	64QAM	1	0	22.32	22.02	22.38	23.50
		1	25	22.11	22.30	22.80	23.50
		1	49	22.40	21.96	22.25	23.50
		25	0	20.85	20.88	21.11	22.50
		25	13	21.10	20.80	21.06	22.50
		25	25	21.30	20.78	20.98	22.50
		50	0	21.06	20.70	20.80	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	24.09	24.02	24.15	25.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	24.3	23.82	24.14	25.00
		1	74	24.09	23.96	23.98	25.00
		36	0	22.92	22.8	23.09	24.50
		36	18	22.97	23.03	23.06	24.50
		36	39	22.91	22.64	23.07	24.50
		75	0	22.78	22.77	23.09	24.50
	16QAM	1	0	23.31	23.04	23.44	24.50
		1	38	23.13	23.39	23.85	24.50
		1	74	23.45	23.02	23.33	24.50
		36	0	21.87	21.98	22.18	23.50
		36	18	22.08	21.82	22.1	23.50
		36	39	22.36	21.84	21.98	23.50
		75	0	22.09	21.8	21.87	23.50
	64QAM	1	0	22.28	21.98	22.37	23.50
		1	38	22.06	22.32	22.80	23.50
		1	74	22.40	22.00	22.30	23.50
		36	0	20.79	20.90	21.14	22.50
		36	18	21.01	20.77	21.06	22.50
		36	39	21.29	20.77	20.93	22.50
		75	0	21.06	20.78	20.79	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	24.11	24.03	24.1	25.00
		1	50	24.22	24.3	24.14	25.00
		1	99	24.12	23.95	23.95	25.00
		50	0	22.93	23.13	23.09	24.50
		50	25	22.97	23.06	23.09	24.50
		50	50	22.91	22.64	23.09	24.50
		100	0	22.78	22.79	23.12	24.50
	16QAM	1	0	23.36	23.03	23.44	24.50
		1	50	23.15	23.39	23.86	24.50
		1	99	23.44	23.01	23.32	24.50
		50	0	21.9	21.95	22.15	23.50
		50	25	22.12	21.85	22.1	23.50
		50	50	22.37	21.84	21.99	23.50
		100	0	22.12	21.78	21.86	23.50
	64QAM	1	0	22.29	21.99	22.37	23.50
		1	50	22.11	22.31	22.78	23.50
		1	99	22.38	21.93	22.24	23.50
		50	0	20.83	20.87	21.08	22.50
		50	25	21.07	20.82	21.05	22.50
		50	50	21.34	20.76	20.92	22.50
		100	0	21.07	20.73	20.78	22.50

LTE Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23017	Channel 23095	Channel 23173	Tune up
1.4MHz	QPSK	1	0	24.85	24.66	24.85	25.50
		1	2	25.09	24.55	24.69	25.50
		1	5	25.03	24.52	24.51	25.50
		3	0	24.99	24.84	24.66	25.50
		3	2	25.1	24.64	24.59	25.50
		3	3	24.95	24.57	25.06	25.50
		6	0	23.83	23.71	23.58	24.50
	16QAM	1	0	24.27	23.98	24.16	24.50
		1	2	24.32	24.4	24.37	24.50
		1	5	23.79	24.29	24.31	24.50
		3	0	23.48	23.52	24.25	24.50
		3	2	24.1	23.51	23.54	24.50
		3	3	23.61	23.6	23.62	24.50
		6	0	22.97	22.98	23.16	23.50
	64QAM	1	0	22.81	22.60	22.76	23.50
		1	2	22.99	22.48	22.66	23.50
		1	5	22.94	22.50	22.49	23.50
		3	0	22.91	22.74	22.61	23.50
		3	2	23.07	22.57	22.55	23.50
		3	3	22.91	22.48	23.02	23.50
		6	0	21.74	21.65	21.51	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23025	Channel 23095	Channel 23165	Tune up
3MHz	QPSK	1	0	24.97	25.16	25.09	25.50
		1	7	24.93	24.65	24.83	25.50
		1	14	25.03	25.08	25.01	25.50
		8	0	23.83	23.94	24.22	24.50
		8	4	23.96	23.93	24.21	24.50
		8	7	23.89	23.84	23.88	24.50
		15	0	23.94	23.8	24.13	24.50
	16QAM	1	0	24.35	24.31	24.35	24.50
		1	7	24.29	23.86	24.32	24.50
		1	14	24.14	24.4	23.74	24.50
		8	0	22.87	22.83	22.9	23.50
		8	4	22.92	23.09	22.63	23.50
		8	7	22.76	22.97	23.12	23.50
		15	0	22.8	22.9	23.33	23.50
	64QAM	1	0	22.87	23.13	23.01	23.50
		1	7	22.86	22.62	22.74	23.50
		1	14	22.99	23.03	22.98	23.50
		8	0	21.78	21.86	22.16	22.50
		8	4	21.91	21.87	22.11	22.50
		8	7	21.83	21.75	21.84	22.50
		15	0	21.90	21.74	22.03	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23035	Channel 23095	Channel 23155	Tune up
5MHz	QPSK	1	0	24.97	25.09	25.07	25.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	25.11	24.63	24.75	25.50
		1	24	24.99	24.9	25.1	25.50
		12	0	23.87	23.87	24.07	24.50
		12	6	23.98	23.95	24.05	24.50
		12	13	23.87	23.96	23.86	24.50
		25	0	23.81	23.91	24.2	24.50
	16QAM	1	0	24.36	24.26	24.3	24.50
		1	13	24.3	23.95	24.2	24.50
		1	24	24.18	24.35	23.89	24.50
		12	0	22.89	22.94	22.87	23.50
		12	6	23.03	23.01	22.73	23.50
		12	13	22.79	22.86	23.13	23.50
		25	0	22.92	22.95	23.31	23.50
	64QAM	1	0	22.92	23.06	22.97	23.50
		1	13	23.07	22.57	22.69	23.50
		1	24	22.89	22.83	23.00	23.50
		12	0	21.82	21.80	21.97	22.50
		12	6	21.95	21.91	22.02	22.50
		12	13	21.82	21.87	21.80	22.50
		25	0	21.76	21.84	22.17	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 23060	Channel 23095	Channel 23130	Tune up
10MHz	QPSK	1	0	24.92	25.3	24.9	25.50
		1	25	24.9	24.68	24.76	25.50
		1	49	24.95	25.06	25.21	25.50
		25	0	23.94	24.22	24.13	24.50
		25	13	23.92	23.91	24.09	24.50
		25	25	23.79	23.85	23.89	24.50
		50	0	23.94	23.89	24.02	24.50
	16QAM	1	0	24.38	24.33	24.26	24.50
		1	25	24.22	23.93	24.23	24.50
		1	49	24.33	24.36	23.92	24.50
		25	0	22.8	22.9	22.72	23.50
		25	13	22.99	22.92	22.79	23.50
		25	25	22.84	22.87	23.03	23.50
		50	0	22.86	22.89	23.32	23.50
	64QAM	1	0	22.83	23.23	22.86	23.50
		1	25	22.84	22.61	22.68	23.50
		1	49	22.86	23.00	23.16	23.50
		25	0	21.92	22.17	22.11	22.50
		25	13	21.84	21.82	22.01	22.50
		25	25	21.72	21.83	21.83	22.50
		50	0	21.85	21.79	21.93	22.50

LTE Band 17 Receiver on&Receiver off+Sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23755	Channel 23790	Channel 23825	Tune up
5MHz	QPSK	1	0	24.99	25.18	25.1	25.50
		1	13	25.01	24.77	24.92	25.50
		1	24	25.14	24.92	25.17	25.50
		12	0	23.92	23.86	24.12	24.50
		12	6	23.96	23.8	24.04	24.50
		12	13	23.9	23.89	23.95	24.50
		25	0	23.81	23.85	24.11	24.50
	16QAM	1	0	24.3	24.34	24.37	24.50
		1	13	24.23	23.95	24.35	24.50
		1	24	24.26	24.31	23.82	24.50
		12	0	22.81	22.82	22.73	23.50
		12	6	23	22.97	22.82	23.50
		12	13	22.95	22.98	23.07	23.50
		25	0	22.83	22.94	23.16	23.50
	64QAM	1	0	22.95	23.12	23.02	23.50
		1	13	22.96	22.69	22.85	23.50
		1	24	23.06	22.84	23.10	23.50
		12	0	21.83	21.79	22.02	22.50
		12	6	21.89	21.75	21.98	22.50
		12	13	21.84	21.79	21.87	22.50
		25	0	21.77	21.79	22.06	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23780	Channel 23790	Channel 23800	Tune up
10MHz	QPSK	1	0	24.91	25.15	24.95	25.50
		1	25	24.82	24.77	24.87	25.50
		1	49	25.04	24.98	25.02	25.50
		25	0	23.9	24.14	24.08	24.50
		25	13	23.95	23.8	24.05	24.50
		25	25	23.93	23.94	23.97	24.50
		50	0	23.86	23.89	23.84	24.50
	16QAM	1	0	24.12	24.31	24.22	24.50
		1	25	24.34	23.87	24.26	24.50
		1	49	24.18	24.28	23.91	24.50
		25	0	22.81	22.85	22.92	23.50
		25	13	22.88	22.97	22.83	23.50
		25	25	22.82	22.8	23.06	23.50
		50	0	22.81	22.93	23.33	23.50
	64QAM	1	0	22.81	23.10	22.90	23.50
		1	25	22.79	22.71	22.83	23.50
		1	49	22.99	22.93	22.96	23.50
		25	0	21.86	22.05	21.98	22.50
		25	13	21.89	21.72	22.02	22.50
		25	25	21.87	21.90	21.91	22.50
		50	0	21.83	21.84	21.76	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 17 Receiver off+Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23755	Channel 23790	Channel 23825	Tune up
5MHz	QPSK	1	0	24.44	24.58	24.57	25.00
		1	13	24.51	24.23	24.35	25.00
		1	24	24.58	24.39	24.63	25.00
		12	0	23.92	23.86	24.12	24.50
		12	6	23.96	23.8	24.04	24.50
		12	13	23.9	23.89	23.95	24.50
		25	0	23.81	23.85	24.11	24.50
	16QAM	1	0	24.3	24.34	24.37	24.50
		1	13	24.23	23.95	24.35	24.50
		1	24	24.26	24.31	23.82	24.50
		12	0	22.81	22.82	22.73	23.50
		12	6	23	22.97	22.82	23.50
		12	13	22.95	22.98	23.07	23.50
		25	0	22.83	22.94	23.16	23.50
	64QAM	1	0	23.28	23.32	23.27	23.50
		1	13	23.17	22.86	23.33	23.50
		1	24	23.18	23.29	22.80	23.50
		12	0	21.71	21.72	21.69	22.50
		12	6	21.96	21.89	21.77	22.50
		12	13	21.87	21.95	21.97	22.50
		25	0	21.81	21.86	22.09	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23780	Channel 23790	Channel 23800	Tune up
10MHz	QPSK	1	0	24.36	24.67	24.35	25.00
		1	25	24.31	24.19	24.37	25.00
		1	49	24.51	24.53	24.62	25.00
		25	0	23.9	24.14	24.08	24.50
		25	13	23.95	23.8	24.05	24.50
		25	25	23.93	23.94	23.97	24.50
		50	0	23.86	23.89	23.84	24.50
	16QAM	1	0	24.12	24.31	24.22	24.50
		1	25	24.34	23.87	24.26	24.50
		1	49	24.18	24.28	23.91	24.50
		25	0	22.81	22.85	22.92	23.50
		25	13	22.88	22.97	22.83	23.50
		25	25	22.82	22.8	23.06	23.50
		50	0	22.81	22.93	23.33	23.50
	64QAM	1	0	23.06	23.25	23.16	23.50
		1	25	23.24	22.77	23.16	23.50
		1	49	23.12	23.26	22.87	23.50
		25	0	21.76	21.76	21.88	22.50
		25	13	21.85	21.89	21.79	22.50
		25	25	21.75	21.71	22.02	22.50
		50	0	21.75	21.83	22.28	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 38 Receiver on&Receiver off+Sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 37775	Channel 38000	Channel 38225	Tune up
5MHz	QPSK	1	0	24.81	24.81	24.92	25.50
		1	13	25.04	24.94	24.98	25.50
		1	24	25.12	24.82	24.71	25.50
		12	0	23.96	23.8	24.1	24.50
		12	6	23.93	23.8	24.05	24.50
		12	13	23.87	23.9	23.95	24.50
		25	0	24.1	23.83	23.98	24.50
	16QAM	1	0	24.23	24.12	24.12	24.50
		1	13	24.31	24.22	24.2	24.50
		1	24	23.95	23.93	23.98	24.50
		12	0	23	22.83	22.7	23.50
		12	6	23.05	22.89	22.71	23.50
		12	13	23.03	22.88	22.58	23.50
		25	0	23.04	22.82	22.7	23.50
	64QAM	1	0	22.75	22.75	22.85	23.50
		1	13	22.98	22.87	22.91	23.50
		1	24	23.03	22.72	22.67	23.50
		12	0	21.87	21.71	22.03	22.50
		12	6	21.88	21.75	21.97	22.50
		12	13	21.77	21.87	21.88	22.50
		25	0	22.00	21.73	21.95	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 37800	Channel 38000	Channel 38200	Tune up
10MHz	QPSK	1	0	24.83	24.86	24.94	25.50
		1	25	25.04	24.96	24.98	25.50
		1	49	25.17	24.86	24.74	25.50
		25	0	24.01	23.81	24.14	24.50
		25	13	23.94	23.85	24.05	24.50
		25	25	23.92	23.95	23.95	24.50
		50	0	24.13	23.88	23.99	24.50
	16QAM	1	0	24.25	24.12	24.13	24.50
		1	25	24.33	24.22	24.2	24.50
		1	49	23.98	23.98	24.01	24.50
		25	0	23.05	22.88	22.7	23.50
		25	13	23.06	22.92	22.73	23.50
		25	25	23.04	22.92	22.62	23.50
		50	0	23.06	22.82	22.73	23.50
	64QAM	1	0	22.76	22.76	22.90	23.50
		1	25	23.01	22.94	22.94	23.50
		1	49	23.12	22.79	22.72	23.50
		25	0	21.92	21.71	22.11	22.50
		25	13	21.90	21.78	21.95	22.50

		25	25	21.84	21.85	21.93	22.50
		50	0	22.04	21.82	21.94	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 37825	Channel 38000	Channel 38175	Tune up
15MHz	QPSK	1	0	24.81	24.84	24.93	25.50
		1	38	25.08	24.95	24.98	25.50
		1	74	25.15	24.85	24.75	25.50
		36	0	23.99	23.82	24.11	24.50
		36	18	23.96	23.82	24.09	24.50
		36	39	23.91	23.93	23.95	24.50
		75	0	24.1	23.87	24.01	24.50
	16QAM	1	0	24.27	24.17	24.14	24.50
		1	38	24.31	24.22	24.24	24.50
		1	74	24	23.96	23.99	24.50
		36	0	23.03	22.87	22.71	23.50
		36	18	23.1	22.9	22.73	23.50
		36	39	23.03	22.89	22.63	23.50
		75	0	23.04	22.82	22.73	23.50
	64QAM	1	0	22.77	22.79	22.89	23.50
		1	38	23.05	22.88	22.95	23.50
		1	74	23.06	22.76	22.69	23.50
		36	0	21.93	21.80	22.06	22.50
		36	18	21.86	21.74	22.07	22.50
		36	39	21.84	21.90	21.85	22.50
		75	0	22.06	21.82	21.99	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 37850	Channel 38000	Channel 38150	Tune up
20MHz	QPSK	1	0	24.86	24.81	24.95	25.50
		1	50	25.08	25.13	25.01	25.50
		1	99	24.98	24.93	24.84	25.50
		50	0	23.97	23.8	23.85	24.50
		50	25	23.93	23.84	23.74	24.50
		50	50	23.91	23.9	23.96	24.50
		100	0	24.12	23.85	24.03	24.50
	16QAM	1	0	24.26	24.16	24.16	24.50
		1	50	24.35	24.25	24.21	24.50
		1	99	23.95	23.95	24.01	24.50
		50	0	23.04	22.88	22.74	23.50
		50	25	23.1	22.91	22.76	23.50
		50	50	23.06	22.9	22.63	23.50
		100	0	23.09	22.87	22.75	23.50
	64QAM	1	0	22.81	22.75	22.90	23.50
		1	50	23.06	23.09	22.99	23.50
		1	99	22.90	22.86	22.75	23.50
		50	0	21.92	21.77	21.76	22.50
		50	25	21.83	21.75	21.71	22.50
		50	50	21.84	21.81	21.87	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		100	0	22.06	21.80	21.98	22.50

LTE Band 38 Receiver off+Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 37775	Channel 38000	Channel 38225	Tune up
5MHz	QPSK	1	0	21.11	20.89	20.86	22.00
		1	13	21.21	20.88	20.83	22.00
		1	24	20.88	20.89	20.78	22.00
		12	0	21.08	20.87	20.76	22.00
		12	6	21.08	20.9	20.68	22.00
		12	13	20.96	21.02	20.95	22.00
		25	0	21.05	21	20.98	22.00
	16QAM	1	0	21.13	21.18	20.91	22.00
		1	13	21.16	20.85	21	22.00
		1	24	21.04	20.97	21.01	22.00
		12	0	21.12	20.8	20.75	22.00
		12	6	21.07	20.83	20.67	22.00
		12	13	20.93	20.83	20.95	22.00
		25	0	21.07	21.01	20.94	22.00
	64QAM	1	0	21.07	20.83	20.84	22.00
		1	13	21.15	20.81	20.73	22.00
		1	24	20.81	20.85	20.72	22.00
		12	0	20.98	20.80	20.71	22.00
		12	6	21.01	20.84	20.63	22.00
		12	13	20.86	20.99	20.86	22.00
		25	0	21.03	20.97	20.96	22.00
Bandwidth	Modulation	RB size	RB offset	Channel 37800	Channel 38000	Channel 38200	Tune up
10MHz	QPSK	1	0	21.1	20.93	20.83	22.00
		1	25	21.27	20.9	20.85	22.00
		1	49	20.93	20.88	20.83	22.00
		25	0	21.07	20.88	20.78	22.00
		25	13	21.14	20.87	20.69	22.00
		25	25	20.98	21.01	20.95	22.00
		50	0	21.04	21.03	20.97	22.00
	16QAM	1	0	21.18	21.21	20.94	22.00
		1	25	21.14	20.91	21.06	22.00
		1	49	21.04	21	21.01	22.00
		25	0	21.16	20.79	20.81	22.00
		25	13	21.09	20.89	20.74	22.00
		25	25	20.94	20.87	20.96	22.00
		50	0	21.12	21.05	20.93	22.00
	64QAM	1	0	21.01	20.88	20.73	22.00
		1	25	21.17	20.86	20.75	22.00
		1	49	20.85	20.79	20.73	22.00
		25	0	21.00	20.81	20.72	22.00
		25	13	21.07	20.84	20.60	22.00
		25	25	20.92	20.96	20.89	22.00
		50	0	20.95	20.99	20.92	22.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

				37825	38000	38175	
15MHz	QPSK	1	0	21.11	20.94	20.85	22.00
		1	38	21.28	20.89	20.84	22.00
		1	74	20.91	20.91	20.83	22.00
		36	0	21.12	20.85	20.79	22.00
		36	18	21.13	20.91	20.73	22.00
		36	39	21.01	21.04	20.99	22.00
		75	0	21.04	21.03	20.97	22.00
	16QAM	1	0	21.15	21.2	20.96	22.00
		1	38	21.11	20.9	21.06	22.00
		1	74	21.02	20.99	21	22.00
		36	0	21.16	20.83	20.84	22.00
		36	18	21.1	20.88	20.7	22.00
		36	39	20.92	20.86	20.96	22.00
		75	0	21.11	21.02	20.97	22.00
	64QAM	1	0	21.08	20.92	20.81	22.00
		1	38	21.20	20.79	20.79	22.00
		1	74	20.83	20.84	20.75	22.00
		36	0	21.08	20.75	20.76	22.00
		36	18	21.04	20.85	20.71	22.00
		36	39	20.92	20.94	20.94	22.00
		75	0	21.00	20.98	20.88	22.00
Bandwidth	Modulation	RB size	RB offset	Channel 37850	Channel 38000	Channel 38150	Tune up
20MHz	QPSK	1	0	21.08	20.93	20.81	22.00
		1	50	21.12	21.23	20.88	22.00
		1	99	20.91	20.88	20.78	22.00
		50	0	21.11	21.11	20.77	22.00
		50	25	21.09	20.89	20.71	22.00
		50	50	21.08	21	20.99	22.00
		100	0	21.05	21.02	20.94	22.00
	16QAM	1	0	21.25	21.18	20.92	22.00
		1	50	21.12	20.93	21.04	22.00
		1	99	21	20.99	21.01	22.00
		50	0	21.2	20.82	20.79	22.00
		50	25	21.12	20.87	20.72	22.00
		50	50	20.96	20.84	20.97	22.00
		100	0	21.09	21.01	20.97	22.00
	64QAM	1	0	21.02	20.89	20.79	22.00
		1	50	21.09	21.15	20.83	22.00
		1	99	20.83	20.81	20.71	22.00
		50	0	21.05	21.01	20.75	22.00
		50	25	21.04	20.83	20.65	22.00
		50	50	21.01	20.91	20.91	22.00
		100	0	20.99	20.97	20.88	22.00

LTE Band 41 Receiver on&Receiver off+Sensor off				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel 40065	Channel 40448	Channel 40832	Channel 41215	Tune up
5MHz	QPSK	1	0	24.87	24.82	25.04	25.02	25.50
		1	13	24.92	24.85	25.05	25.06	25.50
		1	24	25.12	24.79	24.65	24.78	25.50
		12	0	23.78	23.69	23.97	24.16	24.50
		12	6	23.76	23.88	24.05	24.04	24.50
		12	13	23.92	23.79	23.90	24.07	24.50
		25	0	23.96	23.85	23.92	23.99	24.50
	16QAM	1	0	24.24	24.15	24.09	24.13	24.50
		1	13	24.15	24.17	24.31	24.20	24.50
		1	24	23.84	23.92	24.00	24.03	24.50
		12	0	22.90	22.82	22.62	22.75	23.50
		12	6	23.09	22.88	22.69	22.74	23.50
		12	13	22.89	22.90	22.54	22.71	23.50
		25	0	23.06	22.71	22.62	22.89	23.50
	64QAM	1	0	22.80	22.75	22.99	22.92	23.50
		1	13	22.83	22.79	22.97	22.97	23.50
		1	24	23.06	22.71	22.58	22.68	23.50
		12	0	21.68	21.60	21.90	22.12	22.50
		12	6	21.72	21.78	21.95	21.98	22.50
		12	13	21.88	21.72	21.88	21.99	22.50
		25	0	21.89	21.75	21.88	21.95	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 40090	Channel 40457	Channel 40823	Channel 41190	Tune up
10MHz	QPSK	1	0	24.82	24.71	24.96	25.10	25.50
		1	25	24.93	24.90	24.90	25.08	25.50
		1	49	25.01	24.76	24.67	24.74	25.50
		25	0	23.90	23.78	23.99	24.29	24.50
		25	13	23.82	23.80	24.09	24.06	24.50
		25	25	23.92	23.86	23.90	24.03	24.50
		50	0	24.15	23.81	23.92	23.97	24.50
	16QAM	1	0	24.10	24.00	24.06	24.26	24.50
		1	25	24.16	24.32	24.21	24.13	24.50
		1	49	23.87	23.96	23.94	24.20	24.50
		25	0	22.94	22.85	22.76	22.83	23.50
		25	13	22.95	22.77	22.72	22.77	23.50
		25	25	23.01	22.86	22.60	22.67	23.50
		50	0	23.02	22.79	22.65	22.83	23.50
	64QAM	1	0	22.75	22.68	22.94	23.04	23.50
		1	25	22.83	22.88	22.86	23.00	23.50
		1	49	22.92	22.71	22.61	22.64	23.50
		25	0	21.85	21.72	21.89	22.26	22.50
		25	13	21.76	21.78	22.02	22.02	22.50
		25	25	21.88	21.77	21.80	21.93	22.50
		50	0	22.08	21.77	21.84	21.93	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 40115	Channel 40465	Channel 40815	Channel 41165	Tune up
15MHz	QPSK	1	0	24.78	24.86	24.85	25.03	25.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	25.06	24.96	24.98	25.07	25.50
		1	74	25.07	24.85	24.60	24.81	25.50
		36	0	23.81	23.79	24.01	24.12	24.50
		36	18	23.82	23.90	24.07	23.97	24.50
		36	39	23.93	23.86	23.96	23.96	24.50
		75	0	24.07	23.76	23.85	23.91	24.50
	16QAM	1	0	24.12	24.08	24.09	24.14	24.50
		1	38	24.35	24.22	24.18	24.29	24.50
		1	74	23.85	23.99	23.93	24.18	24.50
		36	0	22.88	22.86	22.68	22.80	23.50
		36	18	23.10	22.90	22.67	22.79	23.50
		36	39	22.98	22.82	22.69	22.72	23.50
		75	0	23.04	22.68	22.56	22.81	23.50
	64QAM	1	0	22.70	22.83	22.79	23.00	23.50
		1	38	23.01	22.89	22.94	23.03	23.50
		1	74	23.05	22.78	22.53	22.74	23.50
		36	0	21.77	21.69	21.97	22.09	22.50
		36	18	21.74	21.83	22.04	21.90	22.50
		36	39	21.90	21.77	21.90	21.86	22.50
		75	0	22.03	21.69	21.79	21.84	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 40140	Channel 40473	Channel 40807	Channel 41140	Tune up
20MHz	QPSK	1	0	24.80	25.12	24.87	25.01	25.50
		1	50	25.11	24.90	25.00	25.10	25.50
		1	99	25.06	24.76	24.62	24.74	25.50
		50	0	23.91	24.18	23.97	24.05	24.50
		50	25	23.86	23.76	24.08	24.12	24.50
		50	50	23.85	23.71	23.87	23.92	24.50
		100	0	24.13	23.83	24.01	23.98	24.50
	16QAM	1	0	24.09	24.05	24.17	24.12	24.50
		1	50	24.19	24.31	24.22	24.27	24.50
		1	99	23.93	23.85	24.05	24.15	24.50
		50	0	22.89	22.80	22.63	22.90	23.50
		50	25	22.96	22.90	22.74	22.78	23.50
		50	50	22.99	22.83	22.56	22.77	23.50
		100	0	23.01	22.75	22.69	22.92	23.50
	64QAM	1	0	22.73	23.08	22.81	22.95	23.50
		1	50	23.08	22.80	22.97	23.06	23.50
		1	99	22.96	22.70	22.55	22.71	23.50
		50	0	21.83	22.15	21.90	22.01	22.50
		50	25	21.77	21.73	21.99	22.09	22.50
		50	50	21.83	21.61	21.77	21.85	22.50
		100	0	22.08	21.81	21.91	21.94	22.50

LTE Band 41 Receiver off+Sensor on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel 40065	Channel 40448	Channel 40832	Channel 41215	Tune up
5MHz	QPSK	1	0	22.33	22.16	22.42	22.51	23.00
		1	13	22.46	22.33	22.26	22.25	23.00
		1	24	22.25	22.29	22.05	22.29	23.00
		12	0	22.30	22.20	22.12	22.08	23.00
		12	6	22.38	22.18	22.01	21.97	23.00
		12	13	22.23	22.35	22.30	22.44	23.00
		25	0	22.34	22.43	22.39	22.45	23.00
	16QAM	1	0	22.31	22.49	22.33	22.36	23.00
		1	13	22.54	22.26	22.46	22.49	23.00
		1	24	22.35	22.25	22.18	22.45	23.00
		12	0	22.39	21.98	22.23	22.14	23.00
		12	6	22.24	22.17	22.01	22.09	23.00
		12	13	22.24	22.32	22.42	22.39	23.00
		25	0	22.32	22.32	22.41	22.37	23.00
	64QAM	1	0	22.30	22.12	22.39	22.47	23.00
		1	13	22.44	22.30	22.18	22.20	23.00
		1	24	22.23	22.22	21.98	22.22	23.00
		12	0	21.72	21.60	21.60	21.51	22.50
		12	6	21.82	21.60	21.43	21.39	22.50
		12	13	21.64	21.82	21.77	21.84	22.50
		25	0	21.76	21.87	21.87	21.91	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 40090	Channel 40457	Channel 40823	Channel 41190	Tune up
10MHz	QPSK	1	0	22.32	22.14	22.30	22.40	23.00
		1	25	22.49	22.32	22.15	22.32	23.00
		1	49	22.20	22.29	22.18	22.28	23.00
		25	0	22.38	22.15	21.94	22.11	23.00
		25	13	22.30	22.10	22.08	21.93	23.00
		25	25	22.28	22.36	22.35	22.32	23.00
		50	0	22.37	22.47	22.52	22.46	23.00
	16QAM	1	0	22.37	22.50	22.36	22.44	23.00
		1	25	22.50	22.40	22.30	22.49	23.00
		1	49	22.31	22.43	22.32	22.48	23.00
		25	0	22.41	22.12	22.04	22.16	23.00
		25	13	22.37	22.32	22.11	22.22	23.00
		25	25	22.26	22.29	22.22	22.56	23.00
		50	0	22.34	22.43	22.33	22.40	23.00
	64QAM	1	0	22.27	22.06	22.23	22.32	23.00
		1	25	22.45	22.24	22.05	22.23	23.00
		1	49	22.12	22.19	22.09	22.19	23.00
		25	0	21.81	21.58	21.35	21.53	22.50
		25	13	21.71	21.54	21.53	21.39	22.50
		25	25	21.76	21.82	21.80	21.79	22.50
		50	0	21.82	21.95	21.96	21.94	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 40115	Channel 40465	Channel 40815	Channel 41165	Tune up
15MHz	QPSK	1	0	22.32	22.16	22.29	22.50	23.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	22.48	22.23	22.22	22.37	23.00
		1	74	22.28	22.19	22.05	22.10	23.00
		36	0	22.25	22.30	22.06	21.99	23.00
		36	18	22.31	22.26	21.98	21.98	23.00
		36	39	22.22	22.34	22.44	22.37	23.00
		75	0	22.30	22.49	22.39	22.36	23.00
	16QAM	1	0	22.40	22.42	22.32	22.33	23.00
		1	38	22.54	22.29	22.33	22.41	23.00
		1	74	22.45	22.25	22.28	22.54	23.00
		36	0	22.34	22.12	22.13	22.21	23.00
		36	18	22.26	22.19	21.93	22.24	23.00
		36	39	22.26	22.20	22.22	22.47	23.00
		75	0	22.35	22.26	22.38	22.38	23.00
	64QAM	1	0	22.24	22.12	22.23	22.48	23.00
		1	38	22.43	22.14	22.18	22.35	23.00
		1	74	22.24	22.17	21.97	22.05	23.00
		36	0	21.68	21.70	21.51	21.45	22.50
		36	18	21.79	21.72	21.40	21.44	22.50
		36	39	21.64	21.75	21.91	21.83	22.50
		75	0	21.76	21.94	21.86	21.76	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 40140	Channel 40473	Channel 40807	Channel 41140	Tune up
20MHz	QPSK	1	0	22.48	22.52	22.40	22.46	23.00
		1	50	22.43	22.24	22.22	22.21	23.00
		1	99	22.17	22.15	22.12	22.15	23.00
		50	0	22.38	22.63	21.95	22.13	23.00
		50	25	22.46	22.20	21.93	21.91	23.00
		50	50	22.12	22.28	22.36	22.41	23.00
		100	0	22.41	22.50	22.44	22.38	23.00
	16QAM	1	0	22.39	22.38	22.35	22.42	23.00
		1	50	22.54	22.39	22.46	22.60	23.00
		1	99	22.29	22.32	22.25	22.36	23.00
		50	0	22.47	22.11	22.19	22.27	23.00
		50	25	22.38	22.23	22.07	22.15	23.00
		50	50	22.30	22.23	22.26	22.53	23.00
		100	0	22.42	22.33	22.34	22.36	23.00
	64QAM	1	0	22.41	22.45	22.32	22.44	23.00
		1	50	22.37	22.19	22.17	22.15	23.00
		1	99	22.13	22.06	22.10	22.05	23.00
		50	0	21.80	21.55	21.38	21.54	22.50
		50	25	21.86	21.67	21.37	21.33	22.50
		50	50	21.59	21.69	21.78	21.87	22.50
		100	0	21.87	21.93	21.86	21.81	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 66 Receiver on&Receiver off+Sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 131979	Channel 132322	Channel 132665	Tune up
1.4MHz	QPSK	1	0	24.60	24.35	24.54	25.50
		1	2	24.65	24.52	24.63	25.50
		1	5	24.50	24.45	24.50	25.50
		3	0	24.53	24.54	24.19	25.50
		3	1	24.64	24.59	24.32	25.50
		3	3	24.69	24.59	24.27	25.50
		6	0	23.54	23.49	23.20	24.50
	16QAM	1	0	23.80	23.65	23.61	24.50
		1	2	23.66	23.95	23.11	24.50
		1	5	24.03	23.58	23.34	24.50
		3	0	23.70	23.37	23.29	24.50
		3	1	23.66	23.48	23.43	24.50
		3	3	23.58	23.54	23.34	24.50
		6	0	22.57	22.56	22.31	23.50
	64QAM	1	0	22.53	22.31	22.52	23.50
		1	2	22.63	22.50	22.60	23.50
		1	5	22.43	22.43	22.40	23.50
		3	0	22.46	22.50	22.12	23.50
		3	1	22.61	22.49	22.30	23.50
		3	3	22.67	22.53	22.19	23.50
		6	0	21.48	21.39	21.14	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 131987	Channel 132322	Channel 132657	Tune up
3MHz	QPSK	1	0	24.40	24.32	24.29	25.50
		1	7	24.37	24.56	24.16	25.50
		1	14	24.55	24.36	24.37	25.50
		8	0	23.60	23.43	23.10	24.50
		8	4	23.63	23.51	23.29	24.50
		8	7	23.54	23.43	23.21	24.50
		15	0	23.68	23.54	23.21	24.50
	16QAM	1	0	23.80	23.36	23.71	24.50
		1	7	24.33	23.54	23.59	24.50
		1	14	23.53	24.22	23.17	24.50
		8	0	22.66	22.52	22.18	23.50
		8	4	22.79	22.42	22.27	23.50
		8	7	22.51	22.59	22.30	23.50
		15	0	22.71	22.56	22.22	23.50
	64QAM	1	0	22.31	22.23	22.27	23.50
		1	7	22.33	22.52	22.10	23.50
		1	14	22.51	22.28	22.29	23.50
		8	0	21.54	21.41	21.01	22.50
		8	4	21.59	21.49	21.23	22.50
		8	7	21.48	21.41	21.15	22.50
		15	0	21.61	21.52	21.13	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 131997	Channel 132322	Channel 132647	Tune up
5MHz	QPSK	1	0	24.44	24.33	24.34	25.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.32	24.53	24.16	25.50
		1	24	24.59	24.40	24.39	25.50
		12	0	23.61	23.43	23.17	24.50
		12	6	23.74	23.51	23.25	24.50
		12	13	23.47	23.46	23.14	24.50
		25	0	23.64	23.45	23.25	24.50
	16QAM	1	0	23.81	23.35	23.64	24.50
		1	13	24.37	23.57	23.63	24.50
		1	24	23.54	24.12	23.13	24.50
		12	0	22.70	22.43	22.17	23.50
		12	6	22.68	22.41	22.17	23.50
		12	13	22.54	22.55	22.35	23.50
		25	0	22.76	22.53	22.26	23.50
	64QAM	1	0	22.37	22.29	22.29	23.50
		1	13	22.28	22.43	22.13	23.50
		1	24	22.53	22.33	22.30	23.50
		12	0	21.54	21.39	21.07	22.50
		12	6	21.66	21.41	21.20	22.50
		12	13	21.44	21.38	21.07	22.50
		25	0	21.57	21.39	21.15	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 132022	Channel 132322	Channel 132622	Tune up
10MHz	QPSK	1	0	24.40	24.30	24.31	25.50
		1	25	24.37	24.59	24.14	25.50
		1	49	24.56	24.38	24.32	25.50
		25	0	23.54	23.43	23.12	24.50
		25	13	23.66	23.58	23.26	24.50
		25	25	23.56	23.41	23.26	24.50
		50	0	23.67	23.54	23.23	24.50
	16QAM	1	0	23.75	23.40	23.63	24.50
		1	25	24.36	23.52	23.62	24.50
		1	49	23.48	24.16	23.24	24.50
		25	0	22.74	22.48	22.21	23.50
		25	13	22.77	22.52	22.18	23.50
		25	25	22.57	22.53	22.28	23.50
		50	0	22.74	22.53	22.25	23.50
	64QAM	1	0	22.35	22.26	22.28	23.50
		1	25	22.29	22.55	22.11	23.50
		1	49	22.54	22.33	22.29	23.50
		25	0	21.47	21.40	21.02	22.50
		25	13	21.57	21.53	21.23	22.50
		25	25	21.48	21.38	21.23	22.50
		50	0	21.62	21.45	21.14	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 132047	Channel 132322	Channel 132597	Tune up
15MHz	QPSK	1	0	24.38	24.34	24.35	25.50
		1	38	24.40	24.63	24.18	25.50
		1	74	24.54	24.40	24.34	25.50
		36	0	23.61	23.42	23.09	24.50
		36	18	23.69	23.57	23.33	24.50
		36	39	23.52	23.41	23.26	24.50
		75	0	23.71	23.51	23.21	24.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	23.74	23.43	23.70	24.50
		1	38	24.31	23.51	23.57	24.50
		1	74	23.50	24.19	23.11	24.50
		36	0	22.69	22.41	22.11	23.50
		36	18	22.77	22.48	22.25	23.50
		36	39	22.64	22.55	22.28	23.50
		75	0	22.71	22.55	22.27	23.50
	64QAM	1	0	22.33	22.31	22.27	23.50
		1	38	22.34	22.54	22.16	23.50
		1	74	22.47	22.30	22.32	23.50
		36	0	21.51	21.40	21.05	22.50
		36	18	21.63	21.53	21.27	22.50
		36	39	21.49	21.31	21.16	22.50
		75	0	21.69	21.46	21.13	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 132072	Channel 132322	Channel 132572	Tune up
20MHz	QPSK	1	0	24.40	24.38	24.31	25.50
		1	50	24.71	24.89	24.78	25.50
		1	99	24.53	24.40	24.39	25.50
		50	0	23.54	23.66	23.41	24.50
		50	25	23.46	23.51	23.32	24.50
		50	50	23.48	23.40	23.21	24.50
		100	0	23.33	23.47	23.62	24.50
	16QAM	1	0	23.80	23.36	23.72	24.50
		1	50	24.41	23.55	23.58	24.50
		1	99	23.56	24.13	23.22	24.50
		50	0	22.65	22.40	22.15	23.50
		50	25	22.72	22.53	22.15	23.50
		50	50	22.58	22.55	22.26	23.50
		100	0	22.78	22.55	22.31	23.50
	64QAM	1	0	22.36	22.35	22.29	23.50
		1	50	22.62	22.87	22.76	23.50
		1	99	22.50	22.34	22.30	23.50
		50	0	21.49	21.57	21.31	22.50
		50	25	21.38	21.45	21.26	22.50
		50	50	21.46	21.38	21.16	22.50
		100	0	21.31	21.39	21.53	22.50

LTE Band 66 Receiver off+Sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 131979	Channel 132322	Channel 132665	Tune up
1.4MHz	QPSK	1	0	18.00	18.31	18.39	20.00
		1	2	18.12	18.37	18.54	20.00
		1	5	18.05	18.42	18.50	20.00
		3	0	18.12	18.37	18.50	20.00
		3	1	18.20	18.34	18.41	20.00
		3	3	18.10	18.29	18.51	20.00
		6	0	18.15	18.30	18.54	20.00
	16QAM	1	0	18.34	18.48	18.65	20.00
		1	2	18.10	18.76	18.53	20.00
		1	5	18.43	18.58	18.71	20.00
		3	0	18.22	18.36	18.57	20.00
		3	1	18.20	18.63	18.48	20.00
		3	3	18.09	18.48	18.64	20.00
		6	0	18.11	18.46	18.42	20.00
	64QAM	1	0	18.06	18.24	18.33	20.00
		1	2	18.04	18.28	18.51	20.00
		1	5	18.07	18.34	18.45	20.00
		3	0	18.09	18.32	18.48	20.00
		3	1	18.12	18.32	18.37	20.00
		3	3	18.06	18.26	18.48	20.00
		6	0	18.12	18.21	18.44	20.00
Bandwidth	Modulation	RB size	RB offset	Channel 131987	Channel 132322	Channel 132657	Tune up
3MHz	QPSK	1	0	18.15	18.46	18.41	20.00
		1	7	18.11	18.42	18.57	20.00
		1	14	18.12	18.36	18.39	20.00
		8	0	18.23	18.35	18.48	20.00
		8	4	18.26	18.32	18.47	20.00
		8	7	18.20	18.28	18.50	20.00
		15	0	18.26	18.27	18.41	20.00
	16QAM	1	0	18.17	18.38	18.65	20.00
		1	7	18.43	18.52	18.81	20.00
		1	14	18.50	18.50	18.81	20.00
		8	0	18.38	18.38	18.63	20.00
		8	4	18.21	18.51	18.58	20.00
		8	7	18.25	18.48	18.47	20.00
		15	0	18.35	18.31	18.44	20.00
	64QAM	1	0	18.06	18.36	18.32	20.00
		1	7	18.04	18.39	18.52	20.00
		1	14	18.10	18.29	18.33	20.00
		8	0	18.13	18.31	18.44	20.00
		8	4	18.16	18.26	18.44	20.00
		8	7	18.12	18.22	18.41	20.00
		15	0	18.24	18.23	18.39	20.00
Bandwidth	Modulation	RB size	RB offset	Channel 131997	Channel 132322	Channel 132647	Tune up
5MHz	QPSK	1	0	18.40	18.63	18.28	20.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	18.13	18.22	18.42	20.00
		1	24	18.25	18.29	18.46	20.00
		12	0	18.30	18.40	18.55	20.00
		12	6	18.12	18.30	18.43	20.00
		12	13	18.26	18.30	18.43	20.00
		25	0	18.14	18.40	18.45	20.00
	16QAM	1	0	18.47	18.51	18.75	20.00
		1	13	18.23	18.69	18.68	20.00
		1	24	18.44	18.74	18.55	20.00
		12	0	18.18	18.37	18.61	20.00
		12	6	18.16	18.39	18.51	20.00
		12	13	18.17	18.54	18.49	20.00
		25	0	18.09	18.37	18.53	20.00
	64QAM	1	0	18.30	18.58	18.21	20.00
		1	13	18.03	18.20	18.38	20.00
		1	24	18.16	18.27	18.43	20.00
		12	0	18.24	18.30	18.46	20.00
		12	6	18.10	18.24	18.34	20.00
		12	13	18.23	18.25	18.34	20.00
		25	0	18.04	18.34	18.37	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 132022	Channel 132322	Channel 132622	Tune up
10MHz	QPSK	1	0	18.47	18.41	18.73	20.00
		1	25	18.34	18.32	18.33	20.00
		1	49	18.47	18.50	18.52	20.00
		25	0	18.23	18.43	18.43	20.00
		25	13	18.27	18.39	18.59	20.00
		25	25	18.29	18.28	18.36	20.00
		50	0	18.22	18.28	18.50	20.00
	16QAM	1	0	18.91	18.84	19.00	20.00
		1	25	18.80	18.83	18.71	20.00
		1	49	18.29	18.94	18.99	20.00
		25	0	18.23	18.45	18.34	20.00
		25	13	18.28	18.44	18.57	20.00
		25	25	18.10	18.34	18.35	20.00
		50	0	18.20	18.39	18.55	20.00
	64QAM	1	0	18.42	18.31	18.67	20.00
		1	25	18.25	18.24	18.27	20.00
		1	49	18.44	18.46	18.50	20.00
		25	0	18.15	18.40	18.39	20.00
		25	13	18.23	18.34	18.54	20.00
		25	25	18.26	18.21	18.29	20.00
		50	0	18.18	18.21	18.41	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 132047	Channel 132322	Channel 132597	Tune up
15MHz	QPSK	1	0	19.17	19.15	19.28	20.00
		1	38	19.05	19.11	18.98	20.00
		1	74	18.60	19.16	19.25	20.00
		36	0	18.43	18.65	18.63	20.00
		36	18	18.50	18.70	18.88	20.00
		36	39	18.39	18.60	18.60	20.00
		75	0	18.43	18.61	18.84	20.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	18.71	18.63	18.93	20.00
		1	38	18.50	18.63	18.56	20.00
		1	74	18.74	18.77	18.74	20.00
		36	0	18.40	18.65	18.70	20.00
		36	18	18.54	18.67	18.82	20.00
		36	39	18.50	18.48	18.53	20.00
		75	0	18.45	18.54	18.81	20.00
	64QAM	1	0	19.13	19.09	19.21	20.00
		1	38	19.02	19.02	18.88	20.00
		1	74	18.50	19.12	19.16	20.00
		36	0	18.39	18.57	18.56	20.00
		36	18	18.45	18.62	18.84	20.00
		36	39	18.31	18.57	18.52	20.00
		75	0	18.34	18.58	18.79	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 132072	Channel 132322	Channel 132572	Tune up
20MHz	QPSK	1	0	19.17	19.07	19.17	20.00
		1	50	19.06	19.45	18.99	20.00
		1	99	18.58	19.20	19.14	20.00
		50	0	18.47	18.98	18.63	20.00
		50	25	18.55	18.62	18.85	20.00
		50	50	18.34	18.58	18.60	20.00
		100	0	18.49	18.63	18.84	20.00
	16QAM	1	0	18.67	18.68	18.92	20.00
		1	50	18.60	18.64	18.66	20.00
		1	99	18.66	18.73	18.77	20.00
		50	0	18.45	18.67	18.76	20.00
		50	25	18.44	18.61	18.85	20.00
		50	50	18.55	18.54	18.61	20.00
		100	0	18.48	18.48	18.77	20.00
	64QAM	1	0	19.12	19.00	19.13	20.00
		1	50	19.00	19.43	18.96	20.00
		1	99	18.56	19.14	19.07	20.00
		50	0	18.43	18.92	18.60	20.00
		50	25	18.52	18.52	18.77	20.00
		50	50	18.24	18.55	18.56	20.00
		100	0	18.42	18.54	18.78	20.00

Table 13： Conducted Power of LTE

8.1.2 Conducted Power of DIV Antenna(Ant2)

8.1.2.1 Conducted Power of GSM

GSM 850 Receiver on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			975	38	124	
GSM(GMSK)	GSM	31.76	31.86	31.85	32.50	-9.19	22.57	22.67	22.66	23.31
GPRS/EGPRS (GMSK)	1 TX Slot	31.71	31.81	31.75	32.50	-9.19	22.52	22.62	22.56	23.31
	2 TX Slots	29.45	29.49	29.38	30.50	-6.18	23.27	23.31	23.20	24.32
	3 TX Slots	27.79	27.70	27.75	29.00	-4.42	23.37	23.28	23.33	24.58
	4 TX Slots	26.11	25.98	26.10	27.50	-3.17	22.94	22.81	22.93	24.33
EGPRS(8PSK)	1 TX Slot	26.69	26.89	26.85	27.00	-9.19	17.50	17.70	17.66	17.81
	2 TX Slots	24.02	24.02	24.23	25.00	-6.18	17.84	17.84	18.05	18.82
	3 TX Slots	22.45	22.43	22.51	23.50	-4.42	18.03	18.01	18.09	19.08
	4 TX Slots	21.43	21.41	21.41	22.50	-3.17	18.26	18.24	18.24	19.33
GSM 850 Receiver off										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			975	38	124	
GSM(GMSK)	GSM	33.26	33.46	33.01	34.00	-9.19	24.07	24.27	23.82	24.81
GPRS/EGPRS (GMSK)	1 TX Slot	33.27	33.41	33.04	34.00	-9.19	24.08	24.22	23.85	24.81
	2 TX Slots	29.83	29.72	29.67	30.50	-6.18	23.65	23.54	23.49	24.32
	3 TX Slots	28.12	28.04	27.99	29.00	-4.42	23.70	23.62	23.57	24.58
	4 TX Slots	26.42	26.33	26.35	27.50	-3.17	23.25	23.16	23.18	24.33
EGPRS(8PSK)	1 TX Slot	26.98	26.54	26.45	27.00	-9.19	17.79	17.35	17.26	17.81
	2 TX Slots	24.26	24.28	24.50	25.00	-6.18	18.08	18.10	18.32	18.82
	3 TX Slots	22.68	22.70	22.78	23.50	-4.42	18.26	18.28	18.36	19.08
	4 TX Slots	21.70	21.64	21.67	22.50	-3.17	18.53	18.47	18.50	19.33

GSM 1900 Receiver on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	698	885	
GSM(GMSK)	GSM	28.73	28.61	28.45	29.00	-9.19	19.54	19.42	19.26	19.81
GPRS/EGPRS (GMSK)	1 TX Slot	28.65	28.51	28.39	29.00	-9.19	19.46	19.32	19.20	19.81
	2 TX Slots	27.20	27.44	27.40	27.50	-6.18	21.02	21.26	21.22	21.32
	3 TX Slots	25.39	25.92	25.86	26.00	-4.42	20.97	21.50	21.44	21.58
	4 TX Slots	24.09	24.18	24.12	24.50	-3.17	20.92	21.01	20.95	21.33
EGPRS(8PSK)	1 TX Slot	25.64	25.75	25.65	26.00	-9.19	16.45	16.56	16.46	16.81
	2 TX Slots	23.56	23.54	23.61	24.00	-6.18	17.38	17.36	17.43	17.82
	3 TX Slots	21.33	21.18	21.38	22.00	-4.42	16.91	16.76	16.96	17.58
	4 TX Slots	20.28	20.49	20.07	21.00	-3.17	17.11	17.32	16.90	17.83
GSM 1900 Receiver off										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	698	885	
GSM(GMSK)	GSM	30.34	30.54	30.32	31.00	-9.19	21.15	21.35	21.13	21.81
GPRS/EGPRS (GMSK)	1 TX Slot	30.29	30.53	30.25	31.00	-9.19	21.10	21.34	21.06	21.81
	2 TX Slots	27.20	27.44	27.40	27.50	-6.18	21.02	21.26	21.22	21.32
	3 TX Slots	25.39	25.92	25.86	26.00	-4.42	20.97	21.50	21.44	21.58
	4 TX Slots	24.09	24.18	24.12	24.50	-3.17	20.92	21.01	20.95	21.33
EGPRS(8PSK)	1 TX Slot	25.64	25.75	25.65	26.00	-9.19	16.45	16.56	16.46	16.81
	2 TX Slots	23.56	23.54	23.61	24.00	-6.18	17.38	17.36	17.43	17.82
	3 TX Slots	21.33	21.18	21.38	22.00	-4.42	16.91	16.76	16.96	17.58
	4 TX Slots	20.28	20.49	20.07	21.00	-3.17	17.11	17.32	16.90	17.83

Table 14： Conducted Power of GSM

Note:

1) CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8

3) When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used

8.1.2.2 Conducted Power of WCDMA

WCDMA Band II Receiver on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	19.72	19.63	19.48	20.50
	12.2kbps AMR	19.30	19.26	19.05	20.50
HSDPA	Subtest 1	18.70	18.54	18.41	19.50
	Subtest 2	18.25	18.22	18.02	19.50
	Subtest 3	18.12	18.03	17.90	19.00
	Subtest 4	17.76	17.70	17.49	19.00
HSUPA	Subtest 1	18.70	18.60	18.41	19.50
	Subtest 2	16.22	16.21	15.99	17.50
	Subtest 3	17.67	17.53	17.45	18.50
	Subtest 4	16.24	16.21	15.98	17.50
	Subtest 5	18.63	18.59	18.42	19.50
DC-HSDPA	Subtest 1	18.28	18.23	18.03	19.50
	Subtest 2	18.64	18.53	18.44	19.50
	Subtest 3	18.16	18.06	17.90	19.00
	Subtest 4	17.77	17.70	17.47	19.00
HSPA+	16QAM	18.55	18.65	18.55	19.50
WCDMA Band II Receiver off					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	21.56	21.55	21.61	22.00
	12.2kbps AMR	21.51	21.45	21.60	22.00
HSDPA	Subtest 1	20.49	20.45	20.51	21.00
	Subtest 2	20.43	20.37	20.51	21.00
	Subtest 3	19.97	20.03	20.07	20.50
	Subtest 4	19.95	19.88	20.00	20.50
HSUPA	Subtest 1	20.46	20.45	20.58	21.00
	Subtest 2	18.42	18.36	18.52	19.00
	Subtest 3	19.46	19.48	19.54	20.00
	Subtest 4	18.44	18.39	18.50	19.00
	Subtest 5	20.50	20.47	20.58	21.00
DC-HSDPA	Subtest 1	20.45	20.42	20.58	21.00
	Subtest 2	20.54	20.50	20.52	21.00
	Subtest 3	19.97	20.00	20.07	20.50
	Subtest 4	19.98	19.87	20.05	20.50
HSPA+	16QAM	20.44	20.51	20.52	21.00

WCDMA Band IV Receiver on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	20.99	21.12	20.91	21.50
	12.2kbps AMR	20.95	21.10	20.90	21.50
HSDPA	Subtest 1	19.91	20.02	19.86	20.50
	Subtest 2	19.87	20.02	19.81	20.50
	Subtest 3	19.44	19.54	19.33	20.00
	Subtest 4	19.41	19.51	19.34	20.00
HSUPA	Subtest 1	19.92	20.03	19.89	20.50
	Subtest 2	17.90	18.04	17.86	18.50
	Subtest 3	18.90	19.07	18.82	19.50
	Subtest 4	17.91	18.06	17.83	18.50
	Subtest 5	19.91	20.10	19.82	20.50
DC-HSDPA	Subtest 1	19.87	20.07	19.83	20.50
	Subtest 2	19.91	20.03	19.88	20.50
	Subtest 3	19.47	19.57	19.33	20.00
	Subtest 4	19.40	19.50	19.30	20.00
HSPA+	16QAM	20.22	20.21	20.12	20.50
WCDMA Band IV Receiver off					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	20.35	20.45	20.31	21.00
	12.2kbps AMR	20.31	20.41	20.30	21.00
HSDPA	Subtest 1	19.27	19.43	19.28	20.00
	Subtest 2	19.23	19.34	19.22	20.00
	Subtest 3	18.81	18.90	18.76	19.50
	Subtest 4	18.74	18.89	18.78	19.50
HSUPA	Subtest 1	19.30	19.36	19.24	20.00
	Subtest 2	17.24	17.38	17.28	18.00
	Subtest 3	18.29	18.36	18.29	19.00
	Subtest 4	17.25	17.34	17.20	18.00
	Subtest 5	19.27	19.42	19.28	20.00
DC-HSDPA	Subtest 1	19.22	19.34	19.20	20.00
	Subtest 2	19.27	19.36	19.29	20.00
	Subtest 3	18.83	18.92	18.72	19.50
	Subtest 4	18.76	18.87	18.74	19.50
HSPA+	16QAM	19.56	19.65	19.55	20.00

WCDMA Band V Receiver on					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	23.45	23.55	23.35	24.00
	12.2kbps AMR	23.4	23.45	23.35	24.00
HSDPA	Subtest 1	22.41	22.53	22.29	23.00
	Subtest 2	22.3	22.4	22.26	23.00
	Subtest 3	21.89	21.99	21.83	22.50
	Subtest 4	21.82	21.87	21.83	22.50
HSUPA	Subtest 1	22.4	22.48	22.26	23.00
	Subtest 2	20.3	20.36	20.32	21.00
	Subtest 3	21.35	21.46	21.25	22.00
	Subtest 4	20.37	20.53	20.25	21.00
	Subtest 5	22.39	22.53	22.32	23.00
DC-HSDPA	Subtest 1	22.38	22.38	22.32	23.00
	Subtest 2	22.44	22.55	22.31	23.00
	Subtest 3	21.91	21.97	21.82	22.50
	Subtest 4	21.86	21.90	21.75	22.50
HSPA+	16QAM	22.22	22.16	22.52	23.00
WCDMA Band V Receiver off					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	24.47	24.56	24.55	25.00
	12.2kbps AMR	24.44	24.54	24.51	25.00
HSDPA	Subtest 1	23.4	23.47	23.48	24.00
	Subtest 2	23.38	23.48	23.47	24.00
	Subtest 3	22.9	23	23.03	23.50
	Subtest 4	22.86	22.99	22.96	23.50
HSUPA	Subtest 1	23.37	23.51	23.45	24.00
	Subtest 2	21.36	21.49	21.41	22.00
	Subtest 3	22.41	22.49	22.5	23.00
	Subtest 4	21.43	21.53	21.52	22.00
	Subtest 5	23.42	23.47	23.46	24.00
DC-HSDPA	Subtest 1	23.34	23.49	23.48	24.00
	Subtest 2	23.42	23.56	23.51	24.00
	Subtest 3	22.87	22.96	23.03	23.50
	Subtest 4	22.92	22.99	22.96	23.50
HSPA+	16QAM	23.11	23.51	23.23	24.00

Table 15： Conducted Power of WCDMA

8.1.2.3 Conducted Power of LTE

LTE Band 2 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 18607	Channel 18900	Channel 19193	Tune up
1.4MHz	QPSK	1	0	20.36	20.16	19.93	21.00
		1	2	19.80	20.01	19.72	21.00
		1	5	20.22	20.12	20.19	21.00
		3	0	19.74	19.63	19.69	21.00
		3	1	19.59	19.66	19.79	21.00
		3	3	19.57	19.62	19.79	21.00
		6	0	19.55	19.62	19.81	21.00
	16QAM	1	0	19.99	19.81	20.00	21.00
		1	2	19.96	19.89	20.06	21.00
		1	5	19.88	19.84	20.04	21.00
		3	0	19.92	19.75	19.96	21.00
		3	1	19.84	19.90	19.93	21.00
		3	3	19.79	19.94	19.94	21.00
		6	0	19.91	19.87	20.01	21.00
	64QAM	1	0	20.33	20.13	19.85	21.00
		1	2	19.70	19.99	19.66	21.00
		1	5	20.16	20.09	20.12	21.00
		3	0	19.64	19.54	19.67	21.00
		3	1	19.53	19.63	19.77	21.00
		3	3	19.48	19.54	19.76	21.00
		6	0	19.45	19.60	19.77	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up
3MHz	QPSK	1	0	20.49	20.13	19.91	21.00
		1	7	19.83	20.04	19.69	21.00
		1	14	20.11	20.02	20.23	21.00
		8	0	19.73	19.54	19.84	21.00
		8	4	19.56	19.67	19.75	21.00
		8	7	19.43	19.66	19.72	21.00
		15	0	19.58	19.61	19.82	21.00
	16QAM	1	0	19.94	19.77	19.88	21.00
		1	7	19.97	19.86	19.96	21.00
		1	14	19.90	19.83	19.92	21.00
		8	0	19.92	19.71	19.95	21.00
		8	4	19.83	19.92	19.96	21.00
		8	7	19.84	19.84	19.95	21.00
		15	0	19.95	19.78	19.98	21.00
	64QAM	1	0	20.41	20.09	19.85	21.00
		1	7	19.78	19.97	19.60	21.00
		1	14	20.02	19.96	20.18	21.00
		8	0	19.69	19.49	19.78	21.00
		8	4	19.52	19.64	19.70	21.00
		8	7	19.40	19.63	19.69	21.00
		15	0	19.56	19.53	19.76	21.00

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	20.32	20.44	20.01	21.00
		1	13	19.80	19.91	19.63	21.00
		1	24	20.27	20.04	20.13	21.00
		12	0	19.71	19.58	19.86	21.00
		12	6	19.60	19.52	19.75	21.00
		12	13	19.47	19.68	19.81	21.00
		25	0	19.59	19.62	19.69	21.00
	16QAM	1	0	19.91	19.76	19.95	21.00
		1	13	19.92	19.86	19.97	21.00
		1	24	19.81	19.83	19.98	21.00
		12	0	19.90	19.66	19.98	21.00
		12	6	19.86	19.82	20.05	21.00
		12	13	19.89	19.82	19.95	21.00
		25	0	19.94	19.74	19.97	21.00
	64QAM	1	0	20.24	20.35	19.98	21.00
		1	13	19.75	19.84	19.59	21.00
		1	24	20.17	19.95	20.04	21.00
		12	0	19.62	19.51	19.84	21.00
		12	6	19.58	19.47	19.73	21.00
		12	13	19.37	19.63	19.73	21.00
		25	0	19.55	19.57	19.65	21.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	20.20	20.16	20.02	21.00
		1	25	19.89	20.07	19.73	21.00
		1	49	20.12	20.07	20.19	21.00
		25	0	19.79	19.50	19.86	21.00
		25	13	19.65	19.61	19.84	21.00
		25	25	19.47	19.71	19.74	21.00
		50	0	19.63	19.62	19.82	21.00
	16QAM	1	0	19.89	19.78	19.99	21.00
		1	25	19.99	19.84	20.05	21.00
		1	49	19.89	19.76	20.06	21.00
		25	0	19.96	19.76	19.89	21.00
		25	13	19.88	19.92	20.02	21.00
		25	25	19.79	19.95	19.89	21.00
		50	0	19.96	19.79	19.90	21.00
	64QAM	1	0	20.17	20.14	19.97	21.00
		1	25	19.79	20.03	19.64	21.00
		1	49	20.08	20.00	20.13	21.00
		25	0	19.73	19.43	19.79	21.00
		25	13	19.62	19.51	19.75	21.00
		25	25	19.37	19.69	19.70	21.00
		50	0	19.58	19.55	19.75	21.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	20.13	20.15	20.01	21.00
		1	38	19.77	20.06	19.64	21.00
		1	74	20.24	20.00	20.17	21.00
		36	0	19.84	19.57	19.77	21.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		36	18	19.71	19.57	19.77	21.00
		36	39	19.44	19.76	19.71	21.00
		75	0	19.60	19.58	19.69	21.00
	16QAM	1	0	19.96	19.86	20.00	21.00
		1	38	19.89	19.78	19.98	21.00
		1	74	19.87	19.85	19.88	21.00
		36	0	19.93	19.68	20.00	21.00
		36	18	19.93	19.78	20.02	21.00
		36	39	19.76	19.80	19.99	21.00
		75	0	19.79	19.76	19.93	21.00
	64QAM	1	0	20.03	20.09	19.92	21.00
		1	38	19.69	20.04	19.56	21.00
		1	74	20.22	19.94	20.14	21.00
		36	0	19.80	19.47	19.71	21.00
		36	18	19.66	19.55	19.67	21.00
		36	39	19.34	19.68	19.62	21.00
		75	0	19.57	19.52	19.61	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 18700	Channel 18900	Channel 19100	Tune up
20MHz	QPSK	1	0	20.10	19.59	20.18	21.00
		1	50	20.31	20.40	20.22	21.00
		1	99	19.81	20.17	19.67	21.00
		50	0	20.23	20.37	20.16	21.00
		50	25	20.10	19.26	20.08	21.00
		50	50	19.98	20.24	19.76	21.00
		100	0	19.79	19.29	19.46	21.00
	16QAM	1	0	19.36	19.25	19.45	21.00
		1	50	19.31	19.32	19.34	21.00
		1	99	19.28	19.32	19.36	21.00
		50	0	19.41	19.08	19.37	21.00
		50	25	19.18	19.27	19.36	21.00
		50	50	19.27	19.22	19.31	21.00
		100	0	19.06	19.19	19.32	21.00
	64QAM	1	0	20.01	19.53	20.08	21.00
		1	50	20.21	20.31	20.20	21.00
		1	99	19.76	20.08	19.61	21.00
		50	0	20.18	20.31	20.11	21.00
		50	25	20.00	19.20	20.04	21.00
		50	50	19.95	20.16	19.69	21.00
		100	0	19.71	19.22	19.40	21.00

LTE Band 2 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 18607	Channel 18900	Channel 19193	Tune up
1.4MHz	QPSK	1	0	21.20	21.27	21.01	22.00
		1	2	20.84	21.04	20.65	22.00
		1	5	21.28	21.12	21.17	22.00
		3	0	20.79	20.68	20.73	22.00
		3	1	20.59	20.64	20.75	22.00
		3	3	20.47	20.70	20.74	22.00
		6	0	20.55	20.75	20.85	22.00
	16QAM	1	0	20.69	20.69	20.84	22.00
		1	2	20.69	20.62	20.73	22.00
		1	5	20.69	20.60	20.85	22.00
		3	0	20.80	20.55	20.68	22.00
		3	1	20.66	20.72	20.83	22.00
		3	3	20.69	20.70	20.70	22.00
		6	0	20.72	20.70	20.78	22.00
	64QAM	1	0	21.18	21.19	20.95	22.00
		1	2	20.81	21.00	20.62	22.00
		1	5	21.18	21.05	21.12	22.00
		3	0	20.70	20.64	20.71	22.00
		3	1	20.49	20.54	20.66	22.00
		3	3	20.44	20.66	20.64	22.00
		6	0	20.53	20.71	20.78	22.00
Bandwidth	Modulation	RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up
3MHz	QPSK	1	0	21.23	21.26	21.01	22.00
		1	7	20.92	20.95	20.69	22.00
		1	14	21.23	21.14	21.27	22.00
		8	0	20.87	20.57	20.73	22.00
		8	4	20.60	20.66	20.73	22.00
		8	7	20.54	20.67	20.83	22.00
		15	0	20.67	20.75	20.76	22.00
	16QAM	1	0	20.72	20.70	20.78	22.00
		1	7	20.82	20.63	20.78	22.00
		1	14	20.71	20.60	20.78	22.00
		8	0	20.72	20.52	20.75	22.00
		8	4	20.71	20.64	20.87	22.00
		8	7	20.74	20.70	20.70	22.00
		15	0	20.72	20.57	20.71	22.00
	64QAM	1	0	21.20	21.23	20.91	22.00
		1	7	20.89	20.90	20.63	22.00
		1	14	21.18	21.12	21.23	22.00
		8	0	20.77	20.54	20.69	22.00
		8	4	20.57	20.60	20.71	22.00
		8	7	20.50	20.61	20.78	22.00
		15	0	20.57	20.65	20.70	22.00
Bandwidth	Modulation	RB size	RB offset	Channel 18625	Channel 18900	Channel 19175	Tune up
5MHz	-19.01	1	0	21.20	21.22	20.95	22.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	20.92	20.94	20.71	22.00
		1	24	21.26	21.08	21.21	22.00
		12	0	20.85	20.56	20.83	22.00
		12	6	20.66	20.66	20.74	22.00
		12	13	20.60	20.72	20.77	22.00
		25	0	20.69	20.70	20.88	22.00
	16QAM	1	0	20.72	20.65	20.72	22.00
		1	13	20.69	20.71	20.84	22.00
		1	24	20.76	20.64	20.73	22.00
		12	0	20.72	20.57	20.71	22.00
		12	6	20.75	20.71	20.80	22.00
		12	13	20.64	20.64	20.73	22.00
		25	0	20.73	20.72	20.77	22.00
	64QAM	1	0	21.16	21.15	20.91	22.00
		1	13	20.89	20.90	20.62	22.00
		1	24	21.22	21.01	21.16	22.00
		12	0	20.82	20.50	20.80	22.00
		12	6	20.57	20.64	20.65	22.00
		12	13	20.52	20.69	20.67	22.00
		25	0	20.66	20.61	20.78	22.00

Bandwidth	Modulation	RB size	RB offset	Channel 18650	Channel 18900	Channel 19150	Tune up
10MHz	QPSK	1	0	21.21	21.28	21.01	22.00
		1	25	20.83	21.01	20.66	22.00
		1	49	21.17	21.11	21.27	22.00
		25	0	20.76	20.65	20.78	22.00
		25	13	20.59	20.68	20.76	22.00
		25	25	20.58	20.71	20.80	22.00
		50	0	20.54	20.60	20.77	22.00
	16QAM	1	0	20.66	20.65	20.83	22.00
		1	25	20.73	20.72	20.77	22.00
		1	49	20.70	20.63	20.83	22.00
		25	0	20.70	20.57	20.81	22.00
		25	13	20.67	20.71	20.80	22.00
		25	25	20.72	20.72	20.71	22.00
		50	0	20.65	20.77	20.88	22.00
	64QAM	1	0	21.13	21.18	20.91	22.00
		1	25	20.76	20.94	20.57	22.00
		1	49	21.12	21.02	21.18	22.00
		25	0	20.70	20.63	20.73	22.00
		25	13	20.53	20.64	20.66	22.00
		25	25	20.49	20.69	20.70	22.00
		50	0	20.44	20.52	20.68	22.00

Bandwidth	Modulation	RB size	RB offset	Channel 18675	Channel 18900	Channel 19125	Tune up
15MHz	QPSK	1	0	21.24	21.17	20.96	22.00
		1	38	20.97	21.03	20.74	22.00
		1	74	21.17	21.13	21.24	22.00
		36	0	20.87	20.61	20.74	22.00
		36	18	20.64	20.67	20.70	22.00
		36	39	20.52	20.63	20.82	22.00
		75	0	20.60	20.64	20.81	22.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	20.79	20.68	20.72	22.00
		1	38	20.75	20.66	20.82	22.00
		1	74	20.72	20.68	20.87	22.00
		36	0	20.74	20.51	20.79	22.00
		36	18	20.65	20.77	20.88	22.00
		36	39	20.64	20.70	20.81	22.00
		75	0	20.74	20.65	20.85	22.00
	64QAM	1	0	21.17	21.15	20.88	22.00
		1	38	20.95	20.96	20.65	22.00
		1	74	21.07	21.08	21.22	22.00
		36	0	20.81	20.52	20.65	22.00
		36	18	20.59	20.57	20.62	22.00
		36	39	20.49	20.57	20.72	22.00
		75	0	20.58	20.57	20.77	22.00

Bandwidth	Modulation	RB size	RB offset	Channel 18700	Channel 18900	Channel 19100	Tune up
20MHz	QPSK	1	0	21.19	20.94	20.98	22.00
		1	50	20.90	21.23	20.81	22.00
		1	99	21.03	20.85	21.08	22.00
		50	0	20.77	21.17	20.74	22.00
		50	25	20.61	20.99	20.62	22.00
		50	50	20.57	20.83	20.65	22.00
		100	0	20.65	20.76	20.72	22.00
	16QAM	1	0	20.33	20.25	20.38	22.00
		1	50	20.34	20.25	20.45	22.00
		1	99	20.25	20.28	20.41	22.00
		50	0	20.29	20.19	20.34	22.00
		50	25	20.20	20.30	20.42	22.00
		50	50	20.25	20.30	20.41	22.00
		100	0	20.20	20.24	20.41	22.00
	64QAM	1	0	21.17	20.92	20.93	22.00
		1	50	20.81	21.14	20.79	22.00
		1	99	20.93	20.78	21.06	22.00
		50	0	20.68	21.12	20.68	22.00
		50	25	20.59	20.97	20.59	22.00
		50	50	20.52	20.76	20.63	22.00
		100	0	20.58	20.71	20.67	22.00

LTE Band 4 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 19957	Channel 20175	Channel 20393	Tune up
1.4MHz	QPSK	1	0	20.08	20.01	19.87	21.00
		1	2	19.72	19.82	19.55	21.00
		1	5	20.08	19.82	20.05	21.00
		3	0	19.57	19.37	19.62	21.00
		3	1	19.42	19.44	19.52	21.00
		3	3	19.36	19.54	19.65	21.00
		6	0	19.49	19.51	19.62	21.00
	16QAM	1	0	19.51	19.40	19.58	21.00
		1	2	19.48	19.53	19.59	21.00
		1	5	19.53	19.47	19.57	21.00
		3	0	19.63	19.25	19.56	21.00
		3	1	19.49	19.50	19.60	21.00
		3	3	19.45	19.51	19.54	21.00
		6	0	19.54	19.57	19.61	21.00
	64QAM	1	0	20.00	19.94	19.78	21.00
		1	2	19.62	19.77	19.48	21.00
		1	5	19.99	19.74	20.01	21.00
		3	0	19.50	19.30	19.54	21.00
		3	1	19.33	19.35	19.43	21.00
		3	3	19.31	19.47	19.57	21.00
		6	0	19.46	19.43	19.57	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	20.03	19.98	19.78	21.00
		1	7	19.62	19.87	19.53	21.00
		1	14	19.97	19.92	19.96	21.00
		8	0	19.64	19.37	19.56	21.00
		8	4	19.50	19.48	19.63	21.00
		8	7	19.39	19.49	19.62	21.00
		15	0	19.42	19.54	19.63	21.00
	16QAM	1	0	19.61	19.39	19.60	21.00
		1	7	19.54	19.57	19.61	21.00
		1	14	19.51	19.44	19.53	21.00
		8	0	19.58	19.28	19.53	21.00
		8	4	19.50	19.55	19.57	21.00
		8	7	19.44	19.45	19.56	21.00
		15	0	19.53	19.47	19.57	21.00
	64QAM	1	0	19.95	19.94	19.70	21.00
		1	7	19.59	19.78	19.48	21.00
		1	14	19.88	19.85	19.86	21.00
		8	0	19.61	19.34	19.48	21.00
		8	4	19.47	19.43	19.53	21.00
		8	7	19.29	19.44	19.57	21.00
		15	0	19.32	19.45	19.60	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	20.01	20.02	19.79	21.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	19.68	19.76	19.46	21.00
		1	24	20.00	19.80	19.94	21.00
		12	0	19.69	19.43	19.66	21.00
		12	6	19.44	19.41	19.53	21.00
		12	13	19.28	19.51	19.57	21.00
		25	0	19.44	19.54	19.64	21.00
	16QAM	1	0	19.51	19.41	19.62	21.00
		1	13	19.63	19.47	19.53	21.00
		1	24	19.54	19.54	19.60	21.00
		12	0	19.51	19.33	19.48	21.00
		12	6	19.44	19.42	19.55	21.00
		12	13	19.43	19.47	19.52	21.00
		25	0	19.44	19.54	19.64	21.00
	64QAM	1	0	19.91	19.92	19.69	21.00
		1	13	19.59	19.66	19.36	21.00
		1	24	19.95	19.76	19.90	21.00
		12	0	19.60	19.34	19.57	21.00
		12	6	19.41	19.31	19.44	21.00
		12	13	19.24	19.43	19.54	21.00
		25	0	19.34	19.45	19.56	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	20.12	20.08	19.80	21.00
		1	25	19.72	19.77	19.44	21.00
		1	49	19.94	19.84	19.95	21.00
		25	0	19.69	19.35	19.66	21.00
		25	13	19.39	19.51	19.57	21.00
		25	25	19.36	19.54	19.61	21.00
		50	0	19.48	19.47	19.55	21.00
	16QAM	1	0	19.50	19.46	19.64	21.00
		1	25	19.58	19.56	19.63	21.00
		1	49	19.59	19.44	19.53	21.00
		25	0	19.62	19.36	19.63	21.00
		25	13	19.52	19.43	19.61	21.00
		25	25	19.54	19.50	19.50	21.00
		50	0	19.51	19.33	19.48	21.00
	64QAM	1	0	20.10	20.00	19.78	21.00
		1	25	19.68	19.68	19.37	21.00
		1	49	19.90	19.78	19.87	21.00
		25	0	19.66	19.31	19.57	21.00
		25	13	19.30	19.46	19.54	21.00
		25	25	19.26	19.51	19.58	21.00
		50	0	19.38	19.45	19.50	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	20.05	20.05	19.85	21.00
		1	38	19.64	19.76	19.46	21.00
		1	74	20.04	19.79	20.00	21.00
		36	0	19.57	19.45	19.57	21.00
		36	18	19.49	19.36	19.49	21.00
		36	39	19.37	19.43	19.59	21.00
		75	0	19.48	19.51	19.57	21.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	19.61	19.37	19.66	21.00
		1	38	19.50	19.52	19.61	21.00
		1	74	19.59	19.49	19.57	21.00
		36	0	19.54	19.33	19.49	21.00
		36	18	19.49	19.45	19.62	21.00
		36	39	19.50	19.56	19.57	21.00
		75	0	19.50	19.46	19.64	21.00
	64QAM	1	0	19.95	20.02	19.77	21.00
		1	38	19.57	19.74	19.37	21.00
		1	74	19.98	19.76	19.92	21.00
		36	0	19.55	19.40	19.52	21.00
		36	18	19.44	19.30	19.45	21.00
		36	39	19.29	19.40	19.52	21.00
		75	0	19.45	19.48	19.51	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	20.08	19.96	19.78	21.00
		1	50	20.11	20.23	19.59	21.00
		1	99	19.97	19.93	20.04	21.00
		50	0	19.68	19.78	19.64	21.00
		50	25	19.38	19.47	19.64	21.00
		50	50	19.36	19.41	19.50	21.00
		100	0	19.40	19.43	19.67	21.00
	16QAM	1	0	19.54	19.44	19.65	21.00
		1	50	19.61	19.54	19.53	21.00
		1	99	19.58	19.49	19.66	21.00
		50	0	19.58	19.35	19.61	21.00
		50	25	19.55	19.56	19.60	21.00
		50	50	19.52	19.57	19.60	21.00
		100	0	19.59	19.49	19.57	21.00
	64QAM	1	0	20.04	19.86	19.74	21.00
		1	50	20.05	20.19	19.55	21.00
		1	99	19.93	19.85	19.98	21.00
		50	0	19.65	19.72	19.61	21.00
		50	25	19.32	19.43	19.58	21.00
		50	50	19.33	19.33	19.42	21.00
		100	0	19.35	19.33	19.64	21.00

LTE Band 4 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 19957	Channel 20175	Channel 20393	Tune up
1.4MHz	QPSK	1	0	24.51	24.48	24.58	25.50
		1	2	24.62	24.72	24.50	25.50
		1	5	24.11	24.52	24.43	25.50
		3	0	24.52	24.55	24.50	25.50
		3	1	24.58	24.66	24.42	25.50
		3	3	24.09	24.53	24.41	25.50
		6	0	23.07	23.52	23.32	24.50
	16QAM	1	0	24.04	24.21	23.70	24.50
		1	2	23.73	24.07	23.37	24.50
		1	5	23.23	23.92	23.94	24.50
		3	0	23.56	23.75	23.14	24.50
		3	1	23.23	23.62	23.55	24.50
		3	3	23.39	23.46	23.48	24.50
		6	0	22.55	22.31	22.70	23.50
	64QAM	1	0	22.47	22.38	22.55	23.50
		1	2	22.52	22.66	22.45	23.50
		1	5	22.05	22.45	22.35	23.50
		3	0	22.49	22.52	22.47	23.50
		3	1	22.53	22.62	22.34	23.50
		3	3	22.02	22.46	22.35	23.50
		6	0	21.05	21.43	21.30	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	24.76	24.73	24.81	25.50
		1	7	24.65	24.74	24.83	25.50
		1	14	24.79	24.85	24.85	25.50
		8	0	23.65	23.92	23.81	24.50
		8	4	23.81	23.72	23.98	24.50
		8	7	23.79	23.90	23.67	24.50
		15	0	23.83	23.83	23.84	24.50
	16QAM	1	0	24.34	24.25	24.13	24.50
		1	7	24.00	23.75	23.95	24.50
		1	14	24.14	23.96	24.27	24.50
		8	0	22.71	22.78	22.73	23.50
		8	4	22.76	22.78	22.92	23.50
		8	7	22.79	22.72	23.11	23.50
		15	0	22.80	22.90	22.86	23.50
	64QAM	1	0	22.68	22.64	22.77	23.50
		1	7	22.56	22.69	22.76	23.50
		1	14	22.74	22.82	22.77	23.50
		8	0	21.60	21.83	21.71	22.50
		8	4	21.73	21.67	21.96	22.50
		8	7	21.75	21.81	21.57	22.50
		15	0	21.81	21.74	21.77	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	24.75	24.85	24.72	25.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.77	24.73	24.87	25.50
		1	24	24.82	24.88	24.85	25.50
		12	0	23.72	23.87	23.71	24.50
		12	6	23.79	23.69	23.98	24.50
		12	13	23.80	23.80	23.78	24.50
		25	0	23.70	23.86	23.82	24.50
	16QAM	1	0	24.21	24.28	24.10	24.50
		1	13	23.87	23.81	24.00	24.50
		1	24	24.12	23.84	24.27	24.50
		12	0	22.66	22.80	22.76	23.50
		12	6	22.77	22.66	22.90	23.50
		12	13	22.79	22.74	23.06	23.50
		25	0	22.68	22.76	22.78	23.50
	64QAM	1	0	22.68	22.82	22.67	23.50
		1	13	22.73	22.69	22.82	23.50
		1	24	22.80	22.86	22.81	23.50
		12	0	21.66	21.83	21.68	22.50
		12	6	21.77	21.64	21.92	22.50
		12	13	21.76	21.74	21.76	22.50
		25	0	21.60	21.81	21.73	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	24.71	24.77	24.83	25.50
		1	25	24.77	24.78	24.90	25.50
		1	49	24.80	24.89	24.78	25.50
		25	0	23.70	23.93	23.71	24.50
		25	13	23.82	23.66	23.84	24.50
		25	25	23.84	23.87	23.72	24.50
		50	0	23.76	23.79	23.84	24.50
	16QAM	1	0	24.27	24.39	24.03	24.50
		1	25	23.88	23.80	23.93	24.50
		1	49	24.20	23.96	24.13	24.50
		25	0	22.74	22.80	22.80	23.50
		25	13	22.70	22.66	22.92	23.50
		25	25	22.83	22.78	23.17	23.50
		50	0	22.75	22.86	22.77	23.50
	64QAM	1	0	22.63	22.67	22.79	23.50
		1	25	22.68	22.75	22.87	23.50
		1	49	22.71	22.85	22.75	23.50
		25	0	21.63	21.89	21.64	22.50
		25	13	21.77	21.56	21.76	22.50
		25	25	21.82	21.84	21.65	22.50
		50	0	21.72	21.77	21.80	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	24.77	24.81	24.70	25.50
		1	38	24.71	24.84	24.88	25.50
		1	74	24.75	24.93	24.91	25.50
		36	0	23.65	23.87	23.78	24.50
		36	18	23.74	23.72	23.98	24.50
		36	39	23.75	23.88	23.78	24.50
		75	0	23.80	23.74	23.83	24.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	24.33	24.33	24.14	24.50
		1	38	24.00	23.74	23.95	24.50
		1	74	24.23	23.88	24.18	24.50
		36	0	22.73	22.77	22.74	23.50
		36	18	22.77	22.78	22.90	23.50
		36	39	22.80	22.76	23.16	23.50
		75	0	22.67	22.84	22.79	23.50
	64QAM	1	0	22.68	22.72	22.68	23.50
		1	38	22.64	22.78	22.78	23.50
		1	74	22.69	22.85	22.83	23.50
		36	0	21.58	21.82	21.69	22.50
		36	18	21.68	21.66	21.96	22.50
		36	39	21.71	21.86	21.75	22.50
		75	0	21.76	21.72	21.81	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	24.81	24.84	24.74	25.50
		1	50	24.71	24.91	24.90	25.50
		1	99	24.79	24.81	24.90	25.50
		50	0	23.71	23.92	23.75	24.50
		50	25	23.78	23.77	23.88	24.50
		50	50	23.84	23.89	23.66	24.50
		100	0	23.80	23.78	23.84	24.50
	16QAM	1	0	24.20	24.34	24.07	24.50
		1	50	24.02	23.80	23.97	24.50
		1	99	24.21	23.88	24.15	24.50
		50	0	22.66	22.78	22.82	23.50
		50	25	22.80	22.70	23.00	23.50
		50	50	22.84	22.77	23.09	23.50
		100	0	22.79	22.79	22.84	23.50
	64QAM	1	0	22.73	22.81	22.64	23.50
		1	50	22.67	22.89	22.86	23.50
		1	99	22.69	22.71	22.88	23.50
		50	0	21.66	21.82	21.66	22.50
		50	25	21.72	21.68	21.78	22.50
		50	50	21.74	21.87	21.57	22.50
		100	0	21.75	21.75	21.79	22.50

LTE Band 5 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20407	Channel 20525	Channel 20643	Tune up
1.4MHz	QPSK	1	0	23.51	23.60	23.80	24.00
		1	2	23.46	23.54	23.41	24.00
		1	5	23.81	23.70	23.95	24.00
		3	0	23.39	23.57	23.47	24.00
		3	2	23.47	23.50	23.54	24.00
		3	3	23.47	23.53	23.65	24.00
		6	0	23.45	23.49	23.51	24.00
	16QAM	1	0	23.61	23.65	23.55	24.00
		1	2	23.41	23.66	23.54	24.00
		1	5	23.35	23.55	23.77	24.00
		3	0	22.79	23.00	22.94	24.00
		3	2	22.95	23.06	23.08	24.00
		3	3	23.01	23.04	23.05	24.00
		6	0	23.04	22.96	22.96	23.50
	64QAM	1	0	23.04	23.08	23.03	23.50
		1	2	22.81	23.08	22.96	23.50
		1	5	22.80	22.96	23.21	23.50
		3	0	22.22	22.43	22.35	23.50
		3	2	22.41	22.48	22.56	23.50
		3	3	22.45	22.52	22.51	23.50
		6	0	22.00	21.89	21.87	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20415	Channel 20525	Channel 20635	Tune up
3MHz	QPSK	1	0	23.53	23.60	23.80	24.00
		1	7	23.47	23.58	23.41	24.00
		1	14	23.86	23.74	24.00	24.00
		8	0	23.44	23.59	23.51	24.00
		8	4	23.49	23.51	23.57	24.00
		8	7	23.50	23.56	23.65	24.00
		15	0	23.47	23.53	23.54	24.00
	16QAM	1	0	23.66	23.66	23.58	24.00
		1	7	23.46	23.68	23.55	24.00
		1	14	23.37	23.56	23.77	24.00
		8	0	22.79	23.03	22.97	23.50
		8	4	22.98	23.08	23.08	23.50
		8	7	23.04	23.09	23.06	23.50
		15	0	23.07	22.98	22.96	23.50
	64QAM	1	0	23.09	23.08	23.06	23.50
		1	7	22.89	23.16	23.00	23.50
		1	14	22.84	22.98	23.18	23.50
		8	0	21.69	21.95	21.94	22.50
		8	4	21.92	22.00	22.01	22.50
		8	7	22.00	21.99	21.96	22.50
		15	0	21.97	21.92	21.91	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20425	Channel 20525	Channel 20625	Tune up
5MHz	QPSK	1	0	23.54	23.63	23.83	24.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	23.50	23.58	23.41	24.00
		1	24	23.85	23.72	23.96	24.00
		12	0	23.41	23.59	23.48	24.00
		12	6	23.49	23.53	23.59	24.00
		12	13	23.49	23.53	23.65	24.00
		25	0	23.50	23.51	23.52	24.00
	16QAM	1	0	23.61	23.70	23.57	24.00
		1	13	23.44	23.67	23.58	24.00
		1	24	23.38	23.57	23.82	24.00
		12	0	22.84	23.01	22.94	23.50
		12	6	22.99	23.06	23.08	23.50
		12	13	23.06	23.05	23.07	23.50
		25	0	23.06	22.98	22.97	23.50
	64QAM	1	0	23.03	23.14	23.05	23.50
		1	13	22.85	23.12	23.04	23.50
		1	24	22.85	22.98	23.27	23.50
		12	0	21.81	21.95	21.85	22.50
		12	6	21.97	21.98	21.98	22.50
		12	13	22.04	22.00	21.98	22.50
		25	0	22.01	21.96	21.91	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20450	Channel 20525	Channel 20600	Tune up
10MHz	QPSK	1	0	23.55	23.60	23.52	24.00
		1	25	23.84	23.98	23.76	24.00
		1	49	23.73	23.75	23.56	24.00
		25	0	23.62	23.67	23.49	24.00
		25	13	23.51	23.53	23.56	24.00
		25	25	23.50	23.55	23.61	24.00
		50	0	23.50	23.51	23.56	24.00
	16QAM	1	0	23.61	23.67	23.55	24.00
		1	25	23.43	23.71	23.54	24.00
		1	49	23.37	23.59	23.81	24.00
		25	0	22.81	23.05	22.95	23.50
		25	13	22.98	23.06	23.08	23.50
		25	25	23.02	23.09	23.10	23.50
		50	0	23.06	22.99	23.00	23.50
	64QAM	1	0	23.01	23.12	23.03	23.50
		1	25	22.88	23.17	22.94	23.50
		1	49	22.81	23.04	23.23	23.50
		25	0	21.78	22.03	21.87	22.50
		25	13	21.93	22.01	22.06	22.50
		25	25	21.96	22.01	22.01	22.50
		50	0	21.99	21.94	21.96	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 5 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20407	Channel 20525	Channel 20643	Tune up
1.4MHz	QPSK	1	0	24.93	25.17	24.93	25.50
		1	2	24.88	24.96	25.10	25.50
		1	5	25.29	25.25	25.37	25.50
		3	0	23.85	24.03	23.91	25.50
		3	2	23.93	23.87	24.09	25.50
		3	3	23.95	24.01	23.91	25.50
		6	0	23.93	23.96	23.96	24.50
	16QAM	1	0	24.45	24.50	24.24	24.50
		1	2	24.12	23.96	24.14	24.50
		1	5	24.36	24.06	24.38	24.50
		3	0	22.85	22.94	22.92	24.50
		3	2	22.94	22.89	23.11	24.50
		3	3	22.94	22.97	23.31	24.50
		6	0	22.92	23.01	22.97	23.50
	64QAM	1	0	23.35	23.45	23.14	23.50
		1	2	23.04	22.87	23.05	23.50
		1	5	23.31	22.96	23.29	23.50
		3	0	21.80	21.92	21.86	23.50
		3	2	21.86	21.82	22.08	23.50
		3	3	21.84	21.95	22.26	23.50
		6	0	21.82	21.96	21.89	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20415	Channel 20525	Channel 20635	Tune up
3MHz	QPSK	1	0	24.97	25.17	24.93	25.50
		1	7	24.91	24.96	25.15	25.50
		1	14	25.32	25.28	25.40	25.50
		8	0	23.86	24.08	23.92	24.50
		8	4	23.94	23.87	24.09	24.50
		8	7	23.99	24.02	23.92	24.50
		15	0	23.96	24.00	23.97	24.50
	16QAM	1	0	24.48	24.35	24.26	24.50
		1	7	24.13	23.98	24.14	24.50
		1	14	24.38	24.07	24.43	24.50
		8	0	22.89	22.99	22.97	23.50
		8	4	22.97	22.91	23.13	23.50
		8	7	22.94	22.98	23.32	23.50
		15	0	22.92	23.06	23.02	23.50
	64QAM	1	0	23.41	23.27	23.21	23.50
		1	7	23.11	22.88	23.09	23.50
		1	14	23.35	23.04	23.37	23.50
		8	0	21.82	21.91	21.90	22.50
		8	4	21.89	21.87	22.06	22.50
		8	7	21.86	21.92	22.26	22.50
		15	0	21.88	22.02	21.92	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 20425	Channel 20525	Channel 20625	Tune up
5MHz	QPSK	1	0	24.95	25.18	24.94	25.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.91	24.99	25.12	25.50
		1	24	25.34	25.26	25.40	25.50
		12	0	23.87	24.08	23.96	24.50
		12	6	23.96	23.88	24.12	24.50
		12	13	24.00	24.02	23.92	24.50
		25	0	23.97	24.01	23.97	24.50
	16QAM	1	0	24.47	24.25	24.26	24.50
		1	13	24.15	23.98	24.15	24.50
		1	24	24.38	24.08	24.39	24.50
		12	0	22.86	22.94	22.92	23.50
		12	6	22.94	22.89	23.15	23.50
		12	13	22.96	23.01	23.36	23.50
		25	0	22.95	23.03	22.99	23.50
	64QAM	1	0	23.40	23.18	23.23	23.50
		1	13	23.11	22.88	23.07	23.50
		1	24	23.30	22.99	23.36	23.50
		12	0	21.77	21.87	21.86	22.50
		12	6	21.92	21.82	22.11	22.50
		12	13	21.88	21.93	22.28	22.50
		25	0	21.88	21.97	21.94	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 20450	Channel 20525	Channel 20600	Tune up
10MHz	QPSK	1	0	24.93	24.98	24.95	25.50
		1	25	25.33	25.42	25.26	25.50
		1	49	25.12	25.09	25.20	25.50
		25	0	24.06	24.09	23.94	24.50
		25	13	23.97	23.91	24.01	24.50
		25	25	24.00	24.03	23.92	24.50
		50	0	23.94	24.00	23.98	24.50
	16QAM	1	0	24.48	24.35	24.26	24.50
		1	25	24.12	24.01	24.19	24.50
		1	49	24.41	24.10	24.42	24.50
		25	0	22.90	22.94	22.94	23.50
		25	13	22.96	22.92	23.11	23.50
		25	25	22.98	23.01	23.35	23.50
		50	0	22.97	23.04	23.02	23.50
	64QAM	1	0	23.45	23.32	23.24	23.50
		1	25	23.09	22.97	23.14	23.50
		1	49	23.31	23.06	23.36	23.50
		25	0	21.81	21.85	21.89	22.50
		25	13	21.88	21.84	22.09	22.50
		25	25	21.88	21.98	22.26	22.50
		50	0	21.93	21.95	21.94	22.50

LTE Band 7 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20775	Channel 21100	Channel 21425	Tune up
5MHz	QPSK	1	0	19.58	19.80	19.47	20.50
		1	13	19.22	19.39	19.27	20.50
		1	24	19.53	19.38	19.13	20.50
		12	0	18.88	19.16	18.93	20.50
		12	6	18.69	18.96	18.75	20.50
		12	13	18.78	18.99	18.74	20.50
		25	0	18.62	18.99	18.70	20.50
	16QAM	1	0	19.03	19.13	19.01	20.50
		1	13	18.64	18.95	18.65	20.50
		1	24	18.90	19.02	18.93	20.50
		12	0	18.74	19.14	18.76	20.50
		12	6	18.61	18.96	18.71	20.50
		12	13	18.75	18.82	18.72	20.50
		25	0	18.71	19.04	18.83	20.50
	64QAM	1	0	19.56	19.75	19.42	20.50
		1	13	19.19	19.34	19.22	20.50
		1	24	19.45	19.33	19.05	20.50
		12	0	18.80	19.10	18.84	20.50
		12	6	18.61	18.92	18.71	20.50
		12	13	18.73	18.89	18.72	20.50
		25	0	18.58	18.93	18.66	20.50
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	19.62	19.81	19.49	20.50
		1	25	19.24	19.39	19.27	20.50
		1	49	19.57	19.42	19.18	20.50
		25	0	18.88	19.21	18.97	20.50
		25	13	18.69	18.99	18.80	20.50
		25	25	18.81	19.01	18.78	20.50
		50	0	18.66	19.01	18.75	20.50
	16QAM	1	0	19.07	19.14	19.05	20.50
		1	25	18.69	18.96	18.68	20.50
		1	49	18.92	19.07	18.96	20.50
		25	0	18.77	19.15	18.81	20.50
		25	13	18.61	19.00	18.71	20.50
		25	25	18.76	18.84	18.72	20.50
		50	0	18.73	19.08	18.88	20.50
	64QAM	1	0	19.57	19.75	19.47	20.50
		1	25	19.20	19.29	19.23	20.50
		1	49	19.47	19.33	19.13	20.50
		25	0	18.85	19.14	18.94	20.50
		25	13	18.67	18.97	18.72	20.50
		25	25	18.72	18.96	18.75	20.50
		50	0	18.63	18.96	18.66	20.50
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	19.61	19.80	19.51	20.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	19.27	19.41	19.29	20.50
		1	74	19.53	19.41	19.14	20.50
		36	0	18.92	19.17	18.96	20.50
		36	18	18.71	18.97	18.78	20.50
		36	39	18.80	19.00	18.78	20.50
		75	0	18.66	19.04	18.72	20.50
	16QAM	1	0	19.04	19.13	19.01	20.50
		1	38	18.69	19.00	18.70	20.50
		1	74	18.93	19.05	18.97	20.50
		36	0	18.77	19.18	18.77	20.50
		36	18	18.64	19.00	18.73	20.50
		36	39	18.79	18.86	18.73	20.50
		75	0	18.76	19.08	18.84	20.50
	64QAM	1	0	19.58	19.73	19.48	20.50
		1	38	19.24	19.36	19.24	20.50
		1	74	19.45	19.37	19.07	20.50
		36	0	18.83	19.11	18.93	20.50
		36	18	18.65	18.92	18.74	20.50
		36	39	18.71	18.95	18.75	20.50
		75	0	18.63	19.02	18.62	20.50
Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	19.59	19.45	19.52	20.50
		1	50	19.60	19.85	19.67	20.50
		1	99	19.54	19.43	19.18	20.50
		50	0	19.26	19.36	19.23	20.50
		50	25	19.01	18.54	18.79	20.50
		50	50	19.08	18.62	18.75	20.50
		100	0	18.65	19.32	18.72	20.50
	16QAM	1	0	19.03	19.14	19.01	20.50
		1	50	18.66	18.98	18.66	20.50
		1	99	18.95	19.03	18.97	20.50
		50	0	18.75	19.14	18.81	20.50
		50	25	18.66	19.00	18.75	20.50
		50	50	18.77	18.87	18.73	20.50
		100	0	18.73	19.07	18.88	20.50
	64QAM	1	0	19.55	19.36	19.48	20.50
		1	50	19.57	19.79	19.61	20.50
		1	99	19.50	19.41	19.09	20.50
		50	0	19.16	19.30	19.21	20.50
		50	25	18.97	18.65	18.75	20.50
		50	50	19.02	18.60	18.71	20.50
		100	0	18.60	19.26	18.67	20.50

LTE Band 7 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20775	Channel 21100	Channel 21425	Tune up
5MHz	QPSK	1	0	19.05	19.01	19.33	20.00
		1	13	18.49	18.76	18.70	20.00
		1	24	18.59	18.80	18.84	20.00
		12	0	18.38	18.84	18.60	20.00
		12	6	18.24	18.76	18.43	20.00
		12	13	18.27	18.72	18.52	20.00
		25	0	18.14	18.63	18.45	20.00
	16QAM	1	0	18.41	18.97	18.64	20.00
		1	13	18.05	18.70	18.57	20.00
		1	24	18.26	18.76	18.48	20.00
		12	0	18.23	18.73	18.53	20.00
		12	6	18.16	18.70	18.43	20.00
		12	13	18.18	18.66	18.41	20.00
		25	0	18.15	18.71	18.51	20.00
	64QAM	1	0	19.02	18.98	19.27	20.00
		1	13	18.40	18.67	18.64	20.00
		1	24	18.51	18.77	18.80	20.00
		12	0	18.35	18.79	18.52	20.00
		12	6	18.18	18.67	18.38	20.00
		12	13	18.23	18.63	18.50	20.00
		25	0	18.05	18.61	18.35	20.00
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	19.08	19.02	19.17	20.00
		1	25	18.50	18.78	18.78	20.00
		1	49	18.60	18.85	18.86	20.00
		25	0	18.43	18.88	18.65	20.00
		25	13	18.29	18.81	18.53	20.00
		25	25	18.29	18.73	18.62	20.00
		50	0	18.19	18.67	18.49	20.00
	16QAM	1	0	18.44	19.00	18.68	20.00
		1	25	18.09	18.72	18.57	20.00
		1	49	18.31	18.85	18.54	20.00
		25	0	18.26	18.75	18.60	20.00
		25	13	18.17	18.80	18.47	20.00
		25	25	18.23	18.71	18.42	20.00
		50	0	18.15	18.77	18.51	20.00
	64QAM	1	0	19.06	18.96	19.08	20.00
		1	25	18.47	18.76	18.69	20.00
		1	49	18.57	18.81	18.78	20.00
		25	0	18.40	18.85	18.60	20.00
		25	13	18.21	18.73	18.43	20.00
		25	25	18.25	18.66	18.56	20.00
		50	0	18.16	18.60	18.42	20.00
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	19.08	19.06	19.29	20.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	18.54	18.78	18.73	20.00
		1	74	18.62	18.80	18.85	20.00
		36	0	18.43	18.87	18.69	20.00
		36	18	18.28	18.76	18.43	20.00
		36	39	18.30	18.75	18.62	20.00
		75	0	18.14	18.69	18.45	20.00
	16QAM	1	0	18.43	19.00	18.72	20.00
		1	38	18.07	18.73	18.67	20.00
		1	74	18.31	18.83	18.56	20.00
		36	0	18.28	18.81	18.54	20.00
		36	18	18.21	18.79	18.46	20.00
		36	39	18.20	18.75	18.42	20.00
		75	0	18.15	18.78	18.61	20.00
	64QAM	1	0	19.01	19.01	19.23	20.00
		1	38	18.44	18.72	18.71	20.00
		1	74	18.54	18.71	18.80	20.00
		36	0	18.40	18.83	18.67	20.00
		36	18	18.20	18.70	18.41	20.00
		36	39	18.21	18.69	18.59	20.00
		75	0	18.04	18.67	18.38	20.00

Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	18.64	19.07	18.57	20.00
		1	50	18.86	19.37	19.02	20.00
		1	99	18.64	18.86	18.89	20.00
		50	0	18.86	18.86	18.61	20.00
		50	25	18.65	18.81	18.44	20.00
		50	50	18.70	18.75	18.57	20.00
		100	0	18.15	18.66	18.54	20.00
	16QAM	1	0	18.43	19.01	18.73	20.00
		1	50	18.10	18.71	18.59	20.00
		1	99	18.28	18.76	18.48	20.00
		50	0	18.25	18.76	18.60	20.00
		50	25	18.21	18.78	18.50	20.00
		50	50	18.19	18.72	18.45	20.00
		100	0	18.20	18.78	18.52	20.00
	64QAM	1	0	18.61	19.00	18.47	20.00
		1	50	18.81	19.30	18.98	20.00
		1	99	18.58	18.79	18.80	20.00
		50	0	18.83	18.80	18.52	20.00
		50	25	18.60	18.71	18.35	20.00
		50	50	18.60	18.66	18.49	20.00
		100	0	18.06	18.62	18.48	20.00

LTE Band 12 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23017	Channel 23095	Channel 23173	Tune up
1.4MHz	QPSK	1	0	24	23.86	24.02	24.50
		1	2	24.24	23.73	23.88	24.50
		1	5	24.23	23.7	23.71	24.50
		3	0	24.15	24	23.86	24.50
		3	2	24.25	23.79	23.76	24.50
		3	3	24.13	23.74	24.21	24.50
		6	0	22.99	22.91	22.77	24.50
	16QAM	1	0	24.23	23.95	24.15	24.50
		1	2	24.28	24.35	24.32	24.50
		1	5	23.74	24.26	24.27	24.50
		3	0	23.44	23.48	24.24	24.50
		3	2	24.08	23.46	23.51	24.50
		3	3	23.61	23.59	23.61	24.50
		6	0	22.96	22.94	23.16	23.50
	64QAM	1	0	23.20	22.90	23.12	23.50
		1	2	23.26	23.30	23.24	23.50
		1	5	22.69	23.18	23.23	23.50
		3	0	22.35	22.40	23.14	23.50
		3	2	23.00	22.41	22.46	23.50
		3	3	22.54	22.57	22.54	23.50
		6	0	21.90	21.89	22.11	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23025	Channel 23095	Channel 23165	Tune up
3MHz	QPSK	1	0	24.12	24.34	24.28	24.50
		1	7	24.13	23.85	24.01	24.50
		1	14	24.18	24.28	24.2	24.50
		8	0	23.8	23.94	24.18	24.50
		8	4	23.94	23.9	24.18	24.50
		8	7	23.84	23.81	23.88	24.50
		15	0	23.93	23.79	24.08	24.50
	16QAM	1	0	24.3	24.26	24.32	24.50
		1	7	24.25	23.81	24.28	24.50
		1	14	24.09	24.39	23.71	24.50
		8	0	22.82	22.83	22.89	23.50
		8	4	22.87	23.08	22.58	23.50
		8	7	22.74	22.96	23.07	23.50
		15	0	22.79	22.89	23.31	23.50
	64QAM	1	0	23.20	23.17	23.28	23.50
		1	7	23.20	22.72	23.18	23.50
		1	14	23.02	23.30	22.69	23.50
		8	0	21.78	21.76	21.79	22.50
		8	4	21.84	21.99	21.51	22.50
		8	7	21.64	21.91	22.05	22.50
		15	0	21.73	21.87	22.27	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23035	Channel 23095	Channel 23155	Tune up
5MHz	QPSK	1	0	24.16	24.32	24.25	24.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.11	23.81	23.99	24.50
		1	24	24.19	24.26	24.2	24.50
		12	0	23.8	23.91	24.21	24.50
		12	6	23.91	23.89	24.16	24.50
		12	13	23.86	23.8	23.84	24.50
		25	0	23.92	23.76	24.09	24.50
	16QAM	1	0	24.35	24.27	24.34	24.50
		1	13	24.24	23.81	24.3	24.50
		1	24	24.12	24.4	23.73	24.50
		12	0	22.84	22.83	22.87	23.50
		12	6	22.89	23.04	22.58	23.50
		12	13	22.75	22.92	23.07	23.50
		25	0	22.76	22.89	23.28	23.50
	64QAM	1	0	23.30	23.21	23.25	23.50
		1	13	23.20	22.73	23.21	23.50
		1	24	23.02	23.38	22.70	23.50
		12	0	21.76	21.75	21.79	22.50
		12	6	21.79	21.96	21.50	22.50
		12	13	21.73	21.86	22.05	22.50
		25	0	21.71	21.79	22.22	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 23060	Channel 23095	Channel 23130	Tune up
10MHz	QPSK	1	0	24.12	24.31	24.25	24.50
		1	25	24.13	23.85	24.01	24.50
		1	49	24.19	24.23	24.19	24.50
		25	0	23.79	24.21	23.89	24.50
		25	13	23.96	23.91	24.19	24.50
		25	25	23.87	23.84	23.85	24.50
		50	0	23.9	23.78	24.12	24.50
	16QAM	1	0	24.3	24.26	24.31	24.50
		1	25	24.24	23.81	24.28	24.50
		1	49	24.12	24.38	23.7	24.50
		25	0	22.83	22.8	22.85	23.50
		25	13	22.88	23.09	22.63	23.50
		25	25	22.75	22.92	23.09	23.50
		50	0	22.79	22.88	23.31	23.50
	64QAM	1	0	23.26	23.19	23.29	23.50
		1	25	23.22	22.78	23.22	23.50
		1	49	23.06	23.35	22.62	23.50
		25	0	21.75	21.74	21.79	22.50
		25	13	21.83	22.01	21.55	22.50
		25	25	21.66	21.87	22.05	22.50
		50	0	21.73	21.81	22.25	22.50

LTE Band 12 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23017	Channel 23095	Channel 23173	Tune up
1.4MHz	QPSK	1	0	24.73	24.51	24.7	25.50
		1	2	24.95	24.45	24.57	25.50
		1	5	24.9	24.38	24.38	25.50
		3	0	24.85	24.71	24.52	25.50
		3	2	25	24.51	24.48	25.50
		3	3	24.81	24.43	24.96	25.50
		6	0	23.7	23.61	23.44	24.50
	16QAM	1	0	24.12	23.84	24.05	24.50
		1	2	24.21	24.28	24.23	24.50
		1	5	23.69	24.19	24.18	24.50
		3	0	23.37	23.38	24.12	24.50
		3	2	23.97	23.39	23.44	24.50
		3	3	23.46	23.49	23.48	24.50
		6	0	22.83	22.87	23.03	23.50
	64QAM	1	0	22.69	22.48	22.64	23.50
		1	2	22.88	22.38	22.51	23.50
		1	5	22.88	22.35	22.30	23.50
		3	0	22.77	22.69	22.47	23.50
		3	2	22.93	22.47	22.39	23.50
		3	3	22.71	22.35	22.91	23.50
		6	0	21.60	21.58	21.34	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23025	Channel 23095	Channel 23165	Tune up
3MHz	QPSK	1	0	24.87	25.04	24.95	25.50
		1	7	24.82	24.51	24.7	25.50
		1	14	24.93	24.96	24.88	25.50
		8	0	23.7	23.81	24.09	24.50
		8	4	23.86	23.78	24.06	24.50
		8	7	23.76	23.69	23.77	24.50
		15	0	23.82	23.68	24.02	24.50
	16QAM	1	0	24.23	24.17	24.24	24.50
		1	7	24.15	23.76	24.22	24.50
		1	14	24.03	24.27	23.63	24.50
		8	0	22.72	22.68	22.78	23.50
		8	4	22.8	22.99	22.5	23.50
		8	7	22.66	22.84	22.99	23.50
		15	0	22.67	22.78	23.23	23.50
	64QAM	1	0	22.82	22.96	22.88	23.50
		1	7	22.72	22.48	22.60	23.50
		1	14	22.86	22.90	22.84	23.50
		8	0	21.65	21.74	22.04	22.50
		8	4	21.83	21.68	21.99	22.50
		8	7	21.68	21.64	21.68	22.50
		15	0	21.77	21.61	21.92	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23035	Channel 23095	Channel 23155	Tune up
5MHz	QPSK	1	0	24.85	24.99	24.96	25.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.97	24.52	24.63	25.50
		1	24	24.85	24.77	24.99	25.50
		12	0	23.75	23.77	23.96	24.50
		12	6	23.86	23.83	23.9	24.50
		12	13	23.74	23.84	23.74	24.50
		25	0	23.7	23.81	24.09	24.50
	16QAM	1	0	24.24	24.15	24.2	24.50
		1	13	24.18	23.84	24.06	24.50
		1	24	24.03	24.23	23.79	24.50
		12	0	22.76	22.82	22.74	23.50
		12	6	22.88	22.87	22.62	23.50
		12	13	22.65	22.72	23.02	23.50
		25	0	22.8	22.84	23.2	23.50
	64QAM	1	0	22.78	22.91	22.88	23.50
		1	13	22.90	22.47	22.55	23.50
		1	24	22.79	22.71	22.91	23.50
		12	0	21.71	21.71	21.91	22.50
		12	6	21.82	21.78	21.84	22.50
		12	13	21.68	21.74	21.71	22.50
		25	0	21.60	21.79	22.02	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 23060	Channel 23095	Channel 23130	Tune up
10MHz	QPSK	1	0	24.79	25.19	24.78	25.50
		1	25	24.76	24.58	24.62	25.50
		1	49	24.81	24.93	25.13	25.50
		25	0	23.83	24.16	24.1	24.50
		25	13	23.8	23.76	23.71	24.50
		25	25	23.68	23.74	23.78	24.50
		50	0	23.81	23.76	23.88	24.50
	16QAM	1	0	24.28	24.21	24.14	24.50
		1	25	24.1	23.79	24.1	24.50
		1	49	24.22	24.23	23.77	24.50
		25	0	22.65	22.76	22.59	23.50
		25	13	22.89	22.77	22.67	23.50
		25	25	22.72	22.76	22.92	23.50
		50	0	22.72	22.77	23.21	23.50
	64QAM	1	0	22.70	23.12	22.72	23.50
		1	25	22.68	22.55	22.55	23.50
		1	49	22.73	22.87	23.03	23.50
		25	0	21.75	22.09	22.08	22.50
		25	13	21.78	21.71	21.63	22.50
		25	25	21.58	21.67	21.74	22.50
		50	0	21.78	21.66	21.86	22.50

LTE Band 17 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23755	Channel 23790	Channel 23825	Tune up
5MHz	QPSK	1	0	23.4	23.53	23.55	24.50
		1	13	23.49	23.22	23.31	24.50
		1	24	23.57	23.38	23.63	24.50
		12	0	23.67	23.59	23.87	24.50
		12	6	23.72	23.55	23.79	24.50
		12	13	23.69	23.63	23.72	24.50
		25	0	23.54	23.65	23.86	24.50
	16QAM	1	0	24.05	24.11	24.16	24.50
		1	13	23.98	23.72	24.1	24.50
		1	24	23.98	24.07	23.54	24.50
		12	0	22.55	22.57	22.5	23.50
		12	6	22.79	22.68	22.6	23.50
		12	13	22.72	22.77	22.83	23.50
		25	0	22.59	22.67	22.94	23.50
	64QAM	1	0	22.96	23.07	23.14	23.50
		1	13	22.93	22.64	23.04	23.50
		1	24	22.90	22.98	22.44	23.50
		12	0	21.46	21.47	21.47	22.50
		12	6	21.76	21.60	21.58	22.50
		12	13	21.64	21.74	21.78	22.50
		25	0	21.55	21.65	21.84	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23780	Channel 23790	Channel 23800	Tune up
10MHz	QPSK	1	0	23.36	24.1	23.35	24.50
		1	25	23.3	23.18	23.34	24.50
		1	49	23.51	23.49	23.62	24.50
		25	0	23.66	23.92	23.61	24.50
		25	13	23.7	23.56	23.76	24.50
		25	25	23.71	23.7	23.71	24.50
		50	0	23.63	23.67	23.83	24.50
	16QAM	1	0	24.09	24.09	23.96	24.50
		1	25	23.98	23.62	24.02	24.50
		1	49	23.97	24.05	23.63	24.50
		25	0	22.52	22.6	22.69	23.50
		25	13	22.59	22.73	22.58	23.50
		25	25	22.6	22.54	22.82	23.50
		50	0	22.6	22.66	23.05	23.50
	64QAM	1	0	22.99	23.00	22.89	23.50
		1	25	22.95	22.59	22.95	23.50
		1	49	22.92	22.96	22.54	23.50
		25	0	21.45	21.56	21.67	22.50
		25	13	21.51	21.63	21.50	22.50
		25	25	21.55	21.49	21.76	22.50
		50	0	21.52	21.56	21.96	22.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

LTE Band 17 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 23755	Channel 23790	Channel 23825	Tune up
5MHz	QPSK	1	0	24.85	25.07	24.97	25.50
		1	13	24.9	24.66	24.81	25.50
		1	24	25	24.82	25.03	25.50
		12	0	23.82	23.71	24.01	24.50
		12	6	23.82	23.65	23.92	24.50
		12	13	23.75	23.74	23.83	24.50
		25	0	23.68	23.75	24.01	24.50
	16QAM	1	0	24.2	24.2	24.27	24.50
		1	13	24.11	23.81	24.23	24.50
		1	24	24.13	24.19	23.7	24.50
		12	0	22.69	22.71	22.6	23.50
		12	6	22.87	22.82	22.7	23.50
		12	13	22.84	22.86	22.93	23.50
		25	0	22.69	22.79	23.06	23.50
	64QAM	1	0	22.79	23.00	22.93	23.50
		1	13	22.82	22.56	22.78	23.50
		1	24	22.94	22.78	22.94	23.50
		12	0	21.80	21.64	21.95	22.50
		12	6	21.78	21.58	21.82	22.50
		12	13	21.65	21.72	21.79	22.50
		25	0	21.65	21.67	21.99	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 23780	Channel 23790	Channel 23800	Tune up
10MHz	QPSK	1	0	24.8	25.1	24.84	25.50
		1	25	24.67	24.62	24.75	25.50
		1	49	24.91	24.94	25.05	25.50
		25	0	23.75	24.01	23.76	24.50
		25	13	23.8	23.65	23.95	24.50
		25	25	23.82	23.84	23.83	24.50
		50	0	23.74	23.79	23.97	24.50
	16QAM	1	0	24.22	24.19	24.09	24.50
		1	25	24.22	23.76	24.15	24.50
		1	49	24.06	24.13	23.76	24.50
		25	0	22.7	22.7	22.81	23.50
		25	13	22.74	22.82	22.71	23.50
		25	25	22.7	22.68	22.94	23.50
		50	0	22.69	22.79	23.21	23.50
	64QAM	1	0	22.71	23.05	22.81	23.50
		1	25	22.62	22.55	22.65	23.50
		1	49	22.86	22.86	23.01	23.50
		25	0	21.72	21.97	21.74	22.50
		25	13	21.73	21.61	21.92	22.50
		25	25	21.73	21.78	21.79	22.50
		50	0	21.64	21.77	21.95	22.50

LTE Band 38				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 37775	Channel 38000	Channel 38225	Tune up
5MHz	QPSK	1	0	22.27	22.00	22.22	23.00
		1	13	22.33	22.22	21.91	23.00
		1	24	22.03	22.15	21.97	23.00
		12	0	22.12	22.05	21.89	23.00
		12	6	22.18	22.04	21.83	23.00
		12	13	22.05	22.19	22.23	23.00
		25	0	22.18	22.28	22.23	23.00
	16QAM	1	0	22.26	22.32	22.05	23.00
		1	13	22.30	22.12	22.17	23.00
		1	24	22.17	22.16	22.15	23.00
		12	0	21.49	21.40	21.34	22.00
		12	6	21.43	21.38	21.28	22.00
		12	13	21.47	21.29	21.21	22.00
		25	0	21.50	21.24	21.29	22.00
	64QAM	1	0	21.17	21.30	20.95	22.00
		1	13	21.21	21.07	21.09	22.00
		1	24	21.10	21.09	21.09	22.00
		12	0	20.41	20.31	20.27	21.00
		12	6	20.35	20.35	20.26	21.00
		12	13	20.41	20.27	20.19	21.00
		25	0	20.40	20.22	20.25	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 37800	Channel 38000	Channel 38200	Tune up
10MHz	QPSK	1	0	22.31	22.04	22.23	23.00
		1	25	22.38	22.24	21.97	23.00
		1	49	22.08	22.18	21.97	23.00
		25	0	22.12	22.13	21.98	23.00
		25	13	22.19	22.10	21.86	23.00
		25	25	22.05	22.22	22.24	23.00
		50	0	22.20	22.34	22.28	23.00
	16QAM	1	0	22.29	22.33	22.12	23.00
		1	25	22.34	22.21	22.22	23.00
		1	49	22.17	22.21	22.25	23.00
		25	0	21.53	21.48	21.44	22.00
		25	13	21.44	21.47	21.37	22.00
		25	25	21.51	21.38	21.29	22.00
		50	0	21.55	21.32	21.29	22.00
	64QAM	1	0	21.25	21.27	21.09	22.00
		1	25	21.26	21.12	21.16	22.00
		1	49	21.09	21.12	21.17	22.00
		25	0	20.45	20.39	20.41	21.00
		25	13	20.36	20.44	20.35	21.00
		25	25	20.42	20.32	20.22	21.00
		50	0	20.51	20.28	20.19	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 37825	Channel 38000	Channel 38175	Tune up
15MHz	QPSK	1	0	22.31	22.00	22.30	23.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	22.33	22.28	21.94	23.00
		1	74	22.08	22.17	22.00	23.00
		36	0	22.16	22.08	21.91	23.00
		36	18	22.20	22.05	21.89	23.00
		36	39	22.10	22.28	22.29	23.00
		75	0	22.21	22.38	22.26	23.00
	16QAM	1	0	22.28	22.38	22.14	23.00
		1	38	22.34	22.12	22.23	23.00
		1	74	22.19	22.22	22.20	23.00
		36	0	21.50	21.43	21.43	22.00
		36	18	21.47	21.39	21.33	22.00
		36	39	21.48	21.35	21.23	22.00
		75	0	21.54	21.30	21.36	22.00
	64QAM	1	0	21.26	21.29	21.08	22.00
		1	38	21.28	21.06	21.15	22.00
		1	74	21.13	21.12	21.13	22.00
		36	0	20.45	20.37	20.38	21.00
		36	18	20.40	20.34	20.28	21.00
		36	39	20.40	20.25	20.13	21.00
		75	0	20.49	20.22	20.28	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 37850	Channel 38000	Channel 38150	Tune up
20MHz	QPSK	1	0	22.32	22.01	22.15	23.00
		1	50	22.37	22.52	22.22	23.00
		1	99	22.05	22.19	21.99	23.00
		50	0	22.33	22.33	21.89	23.00
		50	25	22.19	22.12	21.92	23.00
		50	50	22.05	22.27	22.24	23.00
		100	0	22.23	22.34	22.28	23.00
	16QAM	1	0	22.28	22.35	22.06	23.00
		1	50	22.31	22.20	22.18	23.00
		1	99	22.17	22.18	22.23	23.00
		50	0	21.51	21.48	21.34	22.00
		50	25	21.48	21.39	21.29	22.00
		50	50	21.50	21.34	21.26	22.00
		100	0	21.52	21.24	21.36	22.00
	64QAM	1	0	21.18	21.32	20.96	22.00
		1	50	21.26	21.18	21.14	22.00
		1	99	21.09	21.11	21.18	22.00
		50	0	20.47	20.42	20.28	21.00
		50	25	20.38	20.33	20.19	21.00
		50	50	20.43	20.26	20.21	21.00
		100	0	20.44	20.19	20.33	21.00

LTE Band 41 Receiver on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel 40065	Channel 40448	Channel 40832	Channel 41215	Tune up
5MHz	QPSK	1	0	22.73	22.44	22.61	22.63	23.50
		1	13	22.80	22.93	22.39	22.34	23.50
		1	24	22.62	22.73	22.63	22.59	23.50
		12	0	22.17	22.36	21.90	21.92	23.00
		12	6	22.15	22.10	21.99	21.88	23.00
		12	13	22.01	22.37	22.42	22.35	23.00
		25	0	22.29	22.53	22.12	22.14	23.00
	16QAM	1	0	22.11	22.45	22.04	21.92	23.00
		1	13	22.33	22.31	22.14	22.06	23.00
		1	24	22.05	22.35	22.36	22.13	23.00
		12	0	21.37	21.38	21.21	21.16	22.00
		12	6	21.35	21.57	21.29	21.30	22.00
		12	13	21.56	21.39	21.31	21.22	22.00
		25	0	21.44	21.24	21.45	21.33	22.00
	64QAM	1	0	21.03	21.42	20.99	20.85	22.00
		1	13	21.24	21.27	21.11	20.99	22.00
		1	24	20.97	21.26	21.29	21.10	22.00
		12	0	20.32	20.33	20.11	20.08	21.00
		12	6	20.29	20.50	20.25	20.25	21.00
		12	13	20.49	20.30	20.23	20.15	21.00
		25	0	20.42	20.20	20.40	20.24	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 40090	Channel 40457	Channel 40823	Channel 41190	Tune up
10MHz	QPSK	1	0	22.88	22.57	22.63	22.62	23.50
		1	25	22.91	22.65	22.55	22.44	23.50
		1	49	22.54	22.68	22.48	22.59	23.50
		25	0	22.14	22.24	21.90	21.91	23.00
		25	13	22.14	22.02	21.85	21.86	23.00
		25	25	21.96	22.32	22.38	22.26	23.00
		50	0	22.27	22.46	22.29	22.08	23.00
	16QAM	1	0	22.29	22.49	21.98	21.94	23.00
		1	25	22.37	22.27	22.26	22.11	23.00
		1	49	22.14	22.31	22.39	22.22	23.00
		25	0	21.48	21.45	21.33	21.10	22.00
		25	13	21.43	21.51	21.25	21.25	22.00
		25	25	21.38	21.27	21.19	21.23	22.00
		50	0	21.51	21.33	21.33	21.32	22.00
	64QAM	1	0	21.21	21.39	20.89	20.86	22.00
		1	25	21.33	21.25	21.24	21.07	22.00
		1	49	21.07	21.26	21.33	21.18	22.00
		25	0	20.46	20.41	20.25	20.06	21.00
		25	13	20.39	20.45	20.15	20.18	21.00
		25	25	20.35	20.18	20.10	20.21	21.00
		50	0	20.47	20.28	20.29	20.29	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 40115	Channel 40465	Channel 40815	Channel 41165	Tune up
15MHz	QPSK	1	0	22.71	22.57	22.75	22.51	23.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	22.75	22.87	22.50	22.34	23.50
		1	74	22.57	22.78	22.56	22.42	23.50
		36	0	22.06	22.25	22.02	21.80	23.00
		36	18	22.11	22.11	21.87	21.83	23.00
		36	39	21.92	22.31	22.37	22.30	23.00
		75	0	22.22	22.44	22.29	22.09	23.00
	16QAM	1	0	22.17	22.47	22.14	21.97	23.00
		1	38	22.32	22.38	22.26	22.10	23.00
		1	74	22.14	22.36	22.27	22.08	23.00
		36	0	21.40	21.57	21.18	21.10	22.00
		36	18	21.41	21.44	21.32	21.33	22.00
		36	39	21.43	21.43	21.19	21.33	22.00
		75	0	21.55	21.27	21.39	21.16	22.00
	64QAM	1	0	21.11	21.40	21.10	20.93	22.00
		1	38	21.26	21.36	21.22	21.00	22.00
		1	74	21.11	21.33	21.23	21.06	22.00
		36	0	20.31	20.49	20.13	20.02	21.00
		36	18	20.33	20.39	20.27	20.29	21.00
		36	39	20.39	20.38	20.14	20.29	21.00
		75	0	20.47	20.19	20.32	20.14	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 40140	Channel 40473	Channel 40807	Channel 41140	Tune up
20MHz	QPSK	1	0	22.68	22.59	22.60	22.57	23.50
		1	50	22.75	22.90	22.87	22.36	23.50
		1	99	22.66	22.79	22.49	22.43	23.50
		50	0	22.04	22.42	22.07	21.76	23.00
		50	25	22.27	22.14	21.93	21.86	23.00
		50	50	21.92	22.31	22.42	22.33	23.00
		100	0	22.23	22.33	22.23	22.15	23.00
	16QAM	1	0	22.30	22.35	22.15	22.01	23.00
		1	50	22.27	22.31	22.13	21.99	23.00
		1	99	22.17	22.32	22.25	22.19	23.00
		50	0	21.40	21.53	21.15	21.05	22.00
		50	25	21.44	21.46	21.40	21.30	22.00
		50	50	21.39	21.29	21.35	21.29	22.00
		100	0	21.60	21.36	21.48	21.24	22.00
	64QAM	1	0	21.24	21.28	21.09	20.99	22.00
		1	50	21.21	21.28	21.10	20.91	22.00
		1	99	21.12	21.22	21.20	21.15	22.00
		50	0	20.34	20.44	20.06	19.98	21.00
		50	25	20.35	20.39	20.35	20.27	21.00
		50	50	20.31	20.27	20.33	20.22	21.00
		100	0	20.54	20.34	20.38	20.19	21.00

LTE Band 41 Receiver off				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel 40065	Channel 40448	Channel 40832	Channel 41215	Tune up
5MHz	QPSK	1	0	22.16	21.88	22.09	21.96	23.00
		1	13	22.24	22.20	21.83	21.75	23.00
		1	24	21.90	22.12	21.91	21.73	23.00
		12	0	21.99	22.11	21.78	21.77	23.00
		12	6	22.10	22.01	21.72	21.67	23.00
		12	13	21.98	22.14	22.25	22.07	23.00
		25	0	22.07	22.20	22.15	22.10	23.00
	16QAM	1	0	22.14	22.29	21.87	21.75	23.00
		1	13	22.22	22.06	22.07	21.87	23.00
		1	24	21.97	22.09	22.17	21.98	23.00
		12	0	21.40	21.37	21.18	21.15	22.00
		12	6	21.36	21.29	21.17	21.09	22.00
		12	13	21.43	21.26	21.11	21.12	22.00
		25	0	21.36	21.06	21.29	21.14	22.00
	64QAM	1	0	21.06	21.23	20.77	20.68	22.00
		1	13	21.15	21.02	21.03	20.77	22.00
		1	24	20.87	21.03	21.10	20.94	22.00
		12	0	20.37	20.35	20.11	20.11	21.00
		12	6	20.27	20.20	20.13	20.01	21.00
		12	13	20.39	20.18	20.02	20.06	21.00
		25	0	20.26	19.96	20.19	20.04	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 40090	Channel 40457	Channel 40823	Channel 41190	Tune up
10MHz	QPSK	1	0	22.13	21.90	22.12	21.92	23.00
		1	25	22.23	22.20	21.77	21.71	23.00
		1	49	21.96	22.12	21.91	21.72	23.00
		25	0	21.98	22.07	21.85	21.79	23.00
		25	13	22.13	21.96	21.73	21.71	23.00
		25	25	21.90	22.12	22.22	22.11	23.00
		50	0	22.12	22.22	22.15	22.08	23.00
	16QAM	1	0	22.12	22.30	21.95	21.73	23.00
		1	25	22.19	22.15	22.17	21.91	23.00
		1	49	21.99	22.11	22.19	21.97	23.00
		25	0	21.36	21.37	21.22	21.15	22.00
		25	13	21.28	21.25	21.24	21.01	22.00
		25	25	21.43	21.22	21.13	21.06	22.00
		50	0	21.42	21.15	21.33	21.20	22.00
	64QAM	1	0	21.05	21.23	20.87	20.63	22.00
		1	25	21.17	21.12	21.07	20.86	22.00
		1	49	20.97	21.08	21.11	20.87	22.00
		25	0	20.31	20.35	20.18	20.06	21.00
		25	13	20.21	20.19	20.15	19.92	21.00
		25	25	20.38	20.12	20.03	19.97	21.00
		50	0	20.35	20.07	20.26	20.17	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 40115	Channel 40465	Channel 40815	Channel 41165	Tune up
15MHz	QPSK	1	0	22.18	21.94	22.10	22.01	23.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	38	22.24	22.19	21.83	21.66	23.00
		1	74	21.99	22.09	21.96	21.75	23.00
		36	0	21.97	22.10	21.86	21.80	23.00
		36	18	22.06	22.05	21.79	21.72	23.00
		36	39	21.91	22.17	22.25	22.07	23.00
		75	0	22.13	22.22	22.12	22.07	23.00
	16QAM	1	0	22.19	22.21	21.94	21.77	23.00
		1	38	22.24	22.06	22.12	21.97	23.00
		1	74	22.01	22.10	22.10	22.02	23.00
		36	0	21.36	21.29	21.22	21.17	22.00
		36	18	21.31	21.26	21.15	21.03	22.00
		36	39	21.44	21.23	21.19	21.03	22.00
		75	0	21.36	21.06	21.32	21.20	22.00
	64QAM	1	0	21.16	21.12	20.88	20.73	22.00
		1	38	21.16	21.04	21.04	20.88	22.00
		1	74	20.95	21.00	21.03	21.00	22.00
		36	0	20.30	20.20	20.14	20.08	21.00
		36	18	20.23	20.21	20.13	20.00	21.00
		36	39	20.42	20.19	20.09	19.97	21.00
		75	0	20.29	20.01	20.23	20.10	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 40140	Channel 40473	Channel 40807	Channel 41140	Tune up
20MHz	QPSK	1	0	22.20	21.89	22.14	21.98	23.00
		1	50	22.20	22.31	21.82	21.71	23.00
		1	99	21.96	22.15	21.90	21.73	23.00
		50	0	21.99	22.22	21.85	21.75	23.00
		50	25	22.10	22.00	21.77	21.65	23.00
		50	50	21.97	22.12	22.11	22.06	23.00
		100	0	22.04	22.24	22.14	22.13	23.00
	16QAM	1	0	22.14	22.30	21.95	21.77	23.00
		1	50	22.18	22.12	22.12	21.93	23.00
		1	99	22.03	22.11	22.10	22.00	23.00
		50	0	21.34	21.34	21.15	21.19	22.00
		50	25	21.28	21.24	21.19	21.06	22.00
		50	50	21.37	21.23	21.13	21.03	22.00
		100	0	21.37	21.10	21.33	21.14	22.00
	64QAM	1	0	21.11	21.23	20.92	20.69	22.00
		1	50	21.12	21.02	21.05	20.90	22.00
		1	99	20.95	21.06	21.06	20.92	22.00
		50	0	20.27	20.25	20.11	20.15	21.00
		50	25	20.24	20.16	20.10	20.03	21.00
		50	50	20.33	20.20	20.10	19.99	21.00
		100	0	20.30	20.01	20.28	20.12	21.00

LTE Band 66 Receiver on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 131979	Channel 132322	Channel 132665	Tune up
1.4MHz	QPSK	1	0	20.23	20.52	20.25	21.00
		1	2	20.29	20.66	20.03	21.00
		1	5	20.54	20.71	20.19	21.00
		3	0	20.45	20.51	20.23	21.00
		3	1	20.46	20.62	20.22	21.00
		3	3	20.42	20.62	20.01	21.00
		6	0	20.38	20.62	20.17	21.00
	16QAM	1	0	20.49	20.56	20.40	21.00
		1	2	20.16	20.57	20.27	21.00
		1	5	20.55	20.51	20.44	21.00
		3	0	20.40	20.66	20.07	21.00
		3	1	20.51	20.52	20.12	21.00
		3	3	20.10	20.57	20.03	21.00
		6	0	20.26	20.67	19.92	21.00
	64QAM	1	0	20.19	20.42	20.15	21.00
		1	2	20.20	20.56	20.00	21.00
		1	5	20.44	20.62	20.14	21.00
		3	0	20.43	20.42	20.17	21.00
		3	1	20.39	20.60	20.15	21.00
		3	3	20.38	20.58	19.99	21.00
		6	0	20.34	20.57	20.11	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 131987	Channel 132322	Channel 132657	Tune up
3MHz	QPSK	1	0	20.38	20.39	20.02	21.00
		1	7	20.48	20.74	20.13	21.00
		1	14	20.32	20.45	19.93	21.00
		8	0	20.35	20.50	20.08	21.00
		8	4	20.35	20.63	20.09	21.00
		8	7	20.28	20.55	20.11	21.00
		15	0	20.28	20.46	20.01	21.00
	16QAM	1	0	20.31	20.72	20.09	21.00
		1	7	20.50	20.68	20.43	21.00
		1	14	20.24	20.66	20.37	21.00
		8	0	20.29	20.39	20.03	21.00
		8	4	20.36	20.48	20.01	21.00
		8	7	20.18	20.53	19.89	21.00
		15	0	20.36	20.32	19.89	21.00
	64QAM	1	0	20.32	20.30	19.94	21.00
		1	7	20.46	20.66	20.08	21.00
		1	14	20.23	20.38	19.90	21.00
		8	0	20.33	20.48	20.01	21.00
		8	4	20.28	20.61	20.00	21.00
		8	7	20.18	20.47	20.08	21.00
		15	0	20.19	20.43	19.91	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 131997	Channel 132322	Channel 132647	Tune up
5MHz	QPSK	1	0	20.56	20.63	20.35	21.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	20.49	20.57	20.04	21.00
		1	24	20.23	20.55	19.98	21.00
		12	0	20.43	20.54	20.29	21.00
		12	6	20.34	20.57	20.10	21.00
		12	13	20.30	20.52	20.01	21.00
		25	0	20.37	20.58	20.00	21.00
	16QAM	1	0	20.61	20.41	20.38	21.00
		1	13	20.10	20.34	20.07	21.00
		1	24	20.57	20.40	19.80	21.00
		12	0	20.31	20.50	20.16	21.00
		12	6	20.27	20.48	20.11	21.00
		12	13	20.31	20.54	20.13	21.00
		25	0	20.32	20.33	19.93	21.00
	64QAM	1	0	20.50	20.54	20.27	21.00
		1	13	20.40	20.48	19.97	21.00
		1	24	20.16	20.48	19.93	21.00
		12	0	20.35	20.48	20.25	21.00
		12	6	20.24	20.53	20.01	21.00
		12	13	20.20	20.46	19.91	21.00
		25	0	20.29	20.50	19.94	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 132022	Channel 132322	Channel 132622	Tune up
10MHz	QPSK	1	0	20.13	20.29	20.11	21.00
		1	25	19.83	20.10	19.90	21.00
		1	49	20.11	20.30	19.44	21.00
		25	0	20.01	20.21	19.81	21.00
		25	13	19.99	20.21	19.85	21.00
		25	25	19.91	20.26	19.67	21.00
		50	0	20.06	20.16	19.82	21.00
	16QAM	1	0	20.32	20.31	19.92	21.00
		1	25	20.17	20.31	20.15	21.00
		1	49	20.21	20.22	19.75	21.00
		25	0	20.00	20.25	19.71	21.00
		25	13	19.86	20.04	19.62	21.00
		25	25	19.85	20.09	19.68	21.00
		50	0	19.95	20.12	19.68	21.00
	64QAM	1	0	20.04	20.22	20.02	21.00
		1	25	19.79	20.06	19.85	21.00
		1	49	20.02	20.20	19.42	21.00
		25	0	19.94	20.15	19.78	21.00
		25	13	19.93	20.15	19.78	21.00
		25	25	19.89	20.22	19.65	21.00
		50	0	19.96	20.12	19.80	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 132047	Channel 132322	Channel 132597	Tune up
15MHz	QPSK	1	0	20.13	20.41	20.24	21.00
		1	38	19.88	20.09	20.06	21.00
		1	74	20.07	20.05	19.97	21.00
		36	0	20.05	20.03	19.70	21.00
		36	18	19.87	20.04	20.05	21.00
		36	39	20.00	19.96	19.73	21.00
		75	0	19.84	20.07	19.80	21.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	19.92	20.24	20.12	21.00
		1	38	19.50	19.92	19.93	21.00
		1	74	19.65	19.96	19.60	21.00
		36	0	19.61	19.73	19.33	21.00
		36	18	19.50	19.58	19.55	21.00
		36	39	19.37	19.68	19.42	21.00
		75	0	19.49	19.67	19.50	21.00
	64QAM	1	0	20.07	20.32	20.19	21.00
		1	38	19.80	20.05	19.98	21.00
		1	74	20.01	19.98	19.95	21.00
		36	0	20.02	19.95	19.60	21.00
		36	18	19.80	19.98	20.03	21.00
		36	39	19.94	19.87	19.66	21.00
		75	0	19.80	20.02	19.72	21.00

Bandwidth	Modulation	RB size	RB offset	Channel 132072	Channel 132322	Channel 132572	Tune up
20MHz	QPSK	1	0	20.23	20.40	20.29	21.00
		1	50	20.33	20.56	20.55	21.00
		1	99	19.99	20.19	19.64	21.00
		50	0	20.41	20.56	20.57	21.00
		50	25	20.12	20.22	20.01	21.00
		50	50	20.06	20.05	20.06	21.00
		100	0	19.92	19.89	20.11	21.00
	16QAM	1	0	19.90	20.03	19.82	21.00
		1	50	19.69	19.63	19.78	21.00
		1	99	19.67	19.63	19.62	21.00
		50	0	19.62	19.74	19.46	21.00
		50	25	19.52	19.62	19.40	21.00
		50	50	19.56	19.68	19.56	21.00
		100	0	19.63	19.74	19.47	21.00
	64QAM	1	0	20.21	20.30	20.19	21.00
		1	50	20.23	20.52	20.49	21.00
		1	99	19.91	20.16	19.56	21.00
		50	0	20.35	20.51	20.51	21.00
		50	25	20.06	20.16	19.95	21.00
		50	50	20.04	20.00	20.04	21.00
		100	0	19.85	19.79	20.04	21.00

LTE Band 66 Receiver off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 131979	Channel 132322	Channel 132665	Tune up
1.4MHz	QPSK	1	0	24.71	24.47	24.40	25.50
		1	2	24.69	24.32	24.00	25.50
		1	5	24.16	24.22	23.94	25.50
		3	0	24.27	24.31	23.92	25.50
		3	1	24.67	24.47	24.02	25.50
		3	3	24.67	24.38	23.96	25.50
		6	0	23.25	23.23	22.92	24.50
	16QAM	1	0	23.77	23.97	23.18	24.50
		1	2	23.71	23.37	23.58	24.50
		1	5	23.37	23.73	23.36	24.50
		3	0	23.24	23.44	23.08	24.50
		3	1	23.31	23.40	23.31	24.50
		3	3	23.44	23.45	23.32	24.50
		6	0	22.48	22.44	21.97	23.50
	64QAM	1	0	22.69	22.42	22.35	23.50
		1	2	22.67	22.29	21.91	23.50
		1	5	22.07	22.12	21.88	23.50
		3	0	22.21	22.22	21.85	23.50
		3	1	22.61	22.42	21.94	23.50
		3	3	22.57	22.35	21.88	23.50
		6	0	21.20	21.14	20.85	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 131987	Channel 132322	Channel 132657	Tune up
3MHz	QPSK	1	0	24.25	24.36	24.10	25.50
		1	7	24.33	24.29	24.06	25.50
		1	14	24.39	24.37	23.98	25.50
		8	0	23.44	23.44	23.06	24.50
		8	4	23.47	23.43	23.12	24.50
		8	7	23.27	23.34	23.08	24.50
		15	0	23.39	23.34	23.07	24.50
	16QAM	1	0	23.90	23.92	23.90	24.50
		1	7	23.99	23.91	23.72	24.50
		1	14	23.33	23.81	23.27	24.50
		8	0	22.47	22.49	22.24	23.50
		8	4	22.52	22.43	22.17	23.50
		8	7	22.26	22.41	22.15	23.50
		15	0	22.48	22.39	22.14	23.50
	64QAM	1	0	22.17	22.27	22.07	23.50
		1	7	22.23	22.19	22.04	23.50
		1	14	22.29	22.27	21.92	23.50
		8	0	21.42	21.42	20.98	22.50
		8	4	21.37	21.33	21.09	22.50
		8	7	21.24	21.28	21.01	22.50
		15	0	21.36	21.24	20.99	22.50
Bandwidth	Modulation	RB size	RB offset	Channel 131997	Channel 132322	Channel 132647	Tune up
5MHz	QPSK	1	0	24.89	24.65	24.48	25.50

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		1	13	24.47	24.53	24.28	25.50
		1	24	24.60	24.43	24.21	25.50
		12	0	23.57	23.57	23.39	24.50
		12	6	23.44	23.51	23.34	24.50
		12	13	23.49	23.55	23.23	24.50
		25	0	23.58	23.57	23.20	24.50
	16QAM	1	0	23.59	24.16	23.54	24.50
		1	13	23.77	23.64	23.37	24.50
		1	24	23.90	24.17	23.26	24.50
		12	0	22.61	22.69	22.48	23.50
		12	6	22.56	22.61	22.29	23.50
		12	13	22.49	22.60	22.31	23.50
		25	0	22.50	22.63	22.32	23.50
	64QAM	1	0	22.83	22.61	22.43	23.50
		1	13	22.40	22.50	22.18	23.50
		1	24	22.51	22.35	22.17	23.50
		12	0	21.54	21.47	21.33	22.50
		12	6	21.38	21.41	21.28	22.50
		12	13	21.45	21.53	21.15	22.50
		25	0	21.49	21.54	21.10	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 132022	Channel 132322	Channel 132622	Tune up
10MHz	QPSK	1	0	24.71	24.51	24.52	25.50
		1	25	24.64	24.24	24.15	25.50
		1	49	24.89	24.54	24.26	25.50
		25	0	23.42	23.52	23.26	24.50
		25	13	23.40	23.33	23.21	24.50
		25	25	23.36	23.58	23.13	24.50
		50	0	23.45	23.33	23.16	24.50
	16QAM	1	0	24.11	24.02	23.32	24.50
		1	25	23.29	23.33	22.96	24.50
		1	49	23.65	23.94	23.08	24.50
		25	0	22.50	22.47	22.31	23.50
		25	13	22.38	22.39	22.27	23.50
		25	25	22.38	22.23	22.31	23.50
		50	0	22.40	22.37	22.23	23.50
	64QAM	1	0	22.69	22.47	22.50	23.50
		1	25	22.58	22.15	22.07	23.50
		1	49	22.84	22.52	22.21	23.50
		25	0	21.36	21.44	21.21	22.50
		25	13	21.32	21.24	21.11	22.50
		25	25	21.31	21.52	21.07	22.50
		50	0	21.35	21.25	21.13	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 132047	Channel 132322	Channel 132597	Tune up
15MHz	QPSK	1	0	24.16	24.06	24.43	25.50
		1	38	23.77	23.83	23.71	25.50
		1	74	24.10	23.96	23.84	25.50
		36	0	22.94	22.89	22.72	24.50
		36	18	22.92	22.80	22.86	24.50
		36	39	23.01	22.86	22.87	24.50
		75	0	22.90	22.81	22.69	24.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	16QAM	1	0	23.27	23.14	23.24	24.50
		1	38	23.43	22.77	23.17	24.50
		1	74	23.63	23.44	23.08	24.50
		36	0	21.96	21.96	21.85	23.50
		36	18	21.92	21.86	21.71	23.50
		36	39	22.02	21.87	21.93	23.50
		75	0	22.05	21.85	21.73	23.50
	64QAM	1	0	22.10	22.02	22.34	23.50
		1	38	21.71	21.79	21.64	23.50
		1	74	22.05	21.90	21.78	23.50
		36	0	20.84	20.85	20.69	22.50
		36	18	20.86	20.72	20.83	22.50
		36	39	20.98	20.77	20.84	22.50
		75	0	20.80	20.79	20.61	22.50

Bandwidth	Modulation	RB size	RB offset	Channel 132072	Channel 132322	Channel 132572	Tune up
20MHz	QPSK	1	0	23.72	24.20	24.21	25.50
		1	50	23.85	24.24	23.67	25.50
		1	99	23.88	23.99	23.70	25.50
		50	0	23.06	23.15	23.10	24.50
		50	25	23.00	22.89	22.87	24.50
		50	50	22.77	22.87	22.84	24.50
		100	0	23.06	23.02	22.93	24.50
	16QAM	1	0	23.59	23.91	23.75	24.50
		1	50	23.44	23.17	23.41	24.50
		1	99	23.22	23.07	22.94	24.50
		50	0	22.07	22.00	22.12	23.50
		50	25	22.05	21.85	21.93	23.50
		50	50	22.14	22.01	21.93	23.50
		100	0	22.02	22.01	21.94	23.50
	64QAM	1	0	21.62	22.18	22.14	23.50
		1	50	21.82	22.21	21.62	23.50
		1	99	21.81	21.94	21.61	23.50
		50	0	21.01	21.12	21.03	22.50
		50	25	20.95	20.81	20.82	22.50
		50	50	20.69	20.85	20.78	22.50
		100	0	21.04	20.97	20.86	22.50

Table 16： Conducted Power of LTE

8.1.3 Conducted Power of Uplink & Downlink LTE CA

The following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
Power test equipment: Anritsu Radio Communication Analyzer MT8821C were used.

8.1.3.1 Conducted Power of uplink LTE CA

Main Antenna(Ant1):

CA_7C								
Receiver on								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	0	0	0	24.55	25.50
			1	50	0	0	24.63	25.50
			1	99	0	0	24.58	25.50
			50	0	0	0	23.37	24.50
			50	25	0	0	23.43	24.50
			50	50	0	0	23.36	24.50
			100	0	0	0	23.20	24.50
21001	21199	QPSK	1	0	0	0	24.52	25.50
			1	50	0	0	24.78	25.50
			1	99	0	0	24.43	25.50
			50	0	0	0	23.60	24.50
			50	25	0	0	23.47	24.50
			50	50	0	0	23.05	24.50
			100	0	0	0	23.23	24.50
21152	21350	QPSK	1	0	0	0	24.58	25.50
			1	50	0	0	24.63	25.50
			1	99	0	0	24.35	25.50
			50	0	0	0	23.30	24.50
			50	25	0	0	23.53	24.50
			50	50	0	0	23.55	24.50
			100	0	0	0	23.51	24.50
Receiver off+Sensor on								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	0	0	0	20.18	21.00
			1	50	0	0	20.25	21.00
			1	99	0	0	20.11	21.00
			50	0	0	0	20.13	21.00
			50	25	0	0	20.06	21.00
			50	50	0	0	20.10	21.00
			100	0	0	0	20.04	21.00
21001	21199	QPSK	1	0	0	0	19.94	21.00

			1	50	0	0	20.36	21.00
			1	99	0	0	20.32	21.00
			50	0	0	0	19.89	21.00
			50	25	0	0	19.79	21.00
			50	50	0	0	19.79	21.00
			100	0	0	0	19.93	21.00
21152	21350	QPSK	1	0	0	0	19.45	21.00
			1	50	0	0	20.23	21.00
			1	99	0	0	19.58	21.00
			50	0	0	0	19.72	21.00
			50	25	0	0	19.63	21.00
			50	50	0	0	19.53	21.00
			100	0	0	0	19.45	21.00

Receiver off+Sensor off

Combination 20MHz+20MHz (100RB+100RB)

PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	0	0	0	24.03	25.00
			1	50	0	0	24.17	25.00
			1	99	0	0	24.04	25.00
			50	0	0	0	22.86	24.50
			50	25	0	0	22.91	24.50
			50	50	0	0	22.84	24.50
			100	0	0	0	22.71	24.50
21001	21199	QPSK	1	0	0	0	23.96	25.00
			1	50	0	0	24.22	25.00
			1	99	0	0	23.90	25.00
			50	0	0	0	23.05	24.50
			50	25	0	0	22.98	24.50
			50	50	0	0	22.59	24.50
			100	0	0	0	22.71	24.50
21152	21350	QPSK	1	0	0	0	24.02	25.00
			1	50	0	0	24.09	25.00
			1	99	0	0	23.90	25.00
			50	0	0	0	23.03	24.50
			50	25	0	0	23.02	24.50
			50	50	0	0	23.04	24.50
			100	0	0	0	23.04	24.50

CA_38C

Receiver on&Receiver off+Sensor off

Combination 20MHz+20MHz (100RB+100RB)

PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	0	0	0	24.81	25.50
			1	50	0	0	24.99	25.50
			1	99	0	0	24.88	25.50
			50	0	0	0	23.87	24.50
			50	25	0	0	23.86	24.50
			50	50	0	0	23.81	24.50

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

			100	0	0	0	24.06	24.50
37901	38099	QPSK	1	0	0	0	24.73	25.50
			1	50	0	0	25.07	25.50
			1	99	0	0	24.85	25.50
			50	0	0	0	23.71	24.50
			50	25	0	0	23.79	24.50
			50	50	0	0	23.84	24.50
			100	0	0	0	23.79	24.50
37952	38150	QPSK	1	0	0	0	24.88	25.50
			1	50	0	0	24.96	25.50
			1	99	0	0	24.79	25.50
			50	0	0	0	23.80	24.50
			50	25	0	0	23.67	24.50
			50	50	0	0	23.89	24.50
			100	0	0	0	23.95	24.50
Receiver off+Sensor on								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	0	0	0	21.02	22.00
			1	50	0	0	21.06	22.00
			1	99	0	0	20.85	22.00
			50	0	0	0	21.01	22.00
			50	25	0	0	21.00	22.00
			50	50	0	0	21.01	22.00
			100	0	0	0	20.97	22.00
37901	38099	QPSK	1	0	0	0	20.83	22.00
			1	50	0	0	21.13	22.00
			1	99	0	0	20.78	22.00
			50	0	0	0	21.02	22.00
			50	25	0	0	20.82	22.00
			50	50	0	0	20.94	22.00
			100	0	0	0	20.97	22.00
37952	38150	QPSK	1	0	0	0	20.76	22.00
			1	50	0	0	20.81	22.00
			1	99	0	0	20.71	22.00
			50	0	0	0	20.71	22.00
			50	25	0	0	20.66	22.00
			50	50	0	0	20.94	22.00
			100	0	0	0	20.87	22.00

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

DIV Antenna(Ant2):

CA_7C								
Receiver on								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	0	0	0	19.50	20.50
			1	50	0	0	19.51	20.50
			1	99	0	0	19.47	20.50
			50	0	0	0	19.16	20.50
			50	25	0	0	18.95	20.50
			50	50	0	0	19.00	20.50
			100	0	0	0	18.56	20.50
21001	21199	QPSK	1	0	0	0	19.36	20.50
			1	50	0	0	19.80	20.50
			1	99	0	0	19.34	20.50
			50	0	0	0	19.31	20.50
			50	25	0	0	18.46	20.50
			50	50	0	0	18.57	20.50
			100	0	0	0	19.24	20.50
21152	21350	QPSK	1	0	0	0	19.46	20.50
			1	50	0	0	19.57	20.50
			1	99	0	0	19.10	20.50
			50	0	0	0	19.13	20.50
			50	25	0	0	18.69	20.50
			50	50	0	0	18.69	20.50
			100	0	0	0	18.62	20.50
Receiver off								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	0	0	0	18.57	20.00
			1	50	0	0	18.79	20.00
			1	99	0	0	18.55	20.00
			50	0	0	0	18.80	20.00
			50	25	0	0	18.60	20.00
			50	50	0	0	18.64	20.00
			100	0	0	0	18.08	20.00
21001	21199	QPSK	1	0	0	0	18.99	20.00
			1	50	0	0	19.31	20.00
			1	99	0	0	18.77	20.00
			50	0	0	0	18.81	20.00
			50	25	0	0	18.76	20.00
			50	50	0	0	18.69	20.00
			100	0	0	0	18.58	20.00
21152	21350	QPSK	1	0	0	0	18.50	20.00
			1	50	0	0	18.95	20.00
			1	99	0	0	18.81	20.00
			50	0	0	0	18.56	20.00
			50	25	0	0	18.36	20.00

			50	50	0	0	18.48	20.00
			100	0	0	0	18.46	20.00

CA_38C								
Receiver on/Receiver off								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	0	0	0	22.25	23.00
			1	50	0	0	22.29	23.00
			1	99	0	0	22.00	23.00
			50	0	0	0	22.27	23.00
			50	25	0	0	22.10	23.00
			50	50	0	0	21.97	23.00
			100	0	0	0	22.13	23.00
37901	38099	QPSK	1	0	0	0	21.94	23.00
			1	50	0	0	22.44	23.00
			1	99	0	0	22.11	23.00
			50	0	0	0	22.24	23.00
			50	25	0	0	22.05	23.00
			50	50	0	0	22.19	23.00
			100	0	0	0	22.28	23.00
37952	38150	QPSK	1	0	0	0	22.10	23.00
			1	50	0	0	22.15	23.00
			1	99	0	0	21.92	23.00
			18	0	0	0	21.80	23.00
			50	25	0	0	21.86	23.00
			50	50	0	0	22.14	23.00
			100	0	0	0	22.21	23.00

Note:
1) This device supports uplink carrier aggregation for LTE CA_7C, CA_38C with a maximum of two 20MHz component carriers.
2) According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3) In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs.
4) Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05.

8.1.3.2 Conducted Power of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A.Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.
Power test equipment: Anritsu Radio Communication Analyzer MT8821C

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The detailed conducted power measurement results of downlink LTE CA are provided in the SAR report per 3GPP TS 36.521-1 V14.4.0. According to KDB 941225 D05A, the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.

The conducted power measurement results of downlink LTE CA Conducted Power are as below, so the downlink only carrier aggregation conditions for this device can be excluded from SAR testing

In applying the existing power measurement procedures for DL CA SAR test exclusion, the configurations that require power measurements are highlighted in the table as below:

1 Band / 2CC	2 Bands / 2CC	2 Bands / 3CC
CA_7C		
CA_38C		

Main Antenna(Ant1):

Receiver on																		
Configure		CA List	PCC								SCC					Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	DL Antenna Configuration	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	DL Antenna Configuration	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2525.1	21001	QPSK	1	50	/	Band 7	20M	2544.9	2723.1	/	24.8	24.86
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	50	/	Band 38	20M	2604.9	2783.1	/	25.1	25.13
Receiver off+Sensor on																	
Configure		CA List	PCC								SCC					Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	DL Antenna Configuration	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	DL Antenna Configuration	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2525.1	21001	QPSK	1	50	/	Band 7	20M	2544.9	2723.1	/	20.35	20.45
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	50	/	Band 38	20M	2604.9	2783.1	/	21.2	21.23
Receiver off+Sensor off																	
Configure		CA List	PCC								SCC					Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	DL Antenna Configuration	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	DL Antenna Configuration	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2525.1	21001	QPSK	1	50	/	Band 7	20M	2544.9	2723.1	/	24.12	24.3

DIV Antenna(Ant2):

Receiver on																		
Configure		CA List	PCC								SCC					Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	DL Antenna Configuration	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	DL Antenna Configuration	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2525.1	21001	QPSK	1	50	/	Band 7	20M	2544.9	2723.1	/	19.8	19.85
		CA_38C	Band 38	20M	2585.1	37901	QPSK	1	50	/	Band 38	20M	2604.9	2783.1	/	22.34	22.52
Receiver off																	
Configure		CA List	PCC								SCC					Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	DL Antenna Configuration	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	DL Antenna Configuration	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2525.1	21001	QPSK	1	50	/	Band 7	20M	2544.9	2723.1	/	19.35	19.37

Note:
The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.1.4 Conducted Power of WIFI

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	1	2412	1	16.00	15.26	NO
	6	2437		16.00	14.71	NO
	11	2462		16.00	**15.66**	YES
802.11g	1	2412	6	18.00	17.36	NO
	6	2437		18.00	17.03	NO
	11	2462		18.00	17.76	NO
802.11n HT20 SISO	1	2412	6.5	13.00	12.36	NO
	6	2437		13.00	11.93	NO
	11	2462		13.00	12.73	NO
802.11n HT40 SISO	3	2422	13.5	15.50	14.59	NO
	6	2437		15.50	14.68	NO
	9	2452		15.50	14.57	NO

Table 17： Conducted Power of 2.4G WIFI

Full power							
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	17.50	**16.52**	YES
		40	5200		17.50	16.07	NO
		44	5220		17.50	16.03	NO
		48	5240		17.50	16.11	NO
	U-NII-2A	52	5260		17.50	16.26	NO
		56	5280		17.50	16.57	NO
		60	5300		17.50	**16.98**	YES
		64	5320		17.50	**17.35**	YES
	U-NII-2C	100	5500		18.00	17.38	NO
		104	5520		18.00	17.23	NO
		108	5540		18.00	17.17	NO
		112	5560		18.00	17.04	NO
		116	5580		18.00	17.01	NO
		120	5600		18.00	16.89	NO
		124	5620		18.00	17.03	NO
		128	5640		18.00	17.22	NO
		132	5660		18.00	17.41	NO
		136	5680		18.00	**17.45**	YES
		140	5700		18.00	17.35	NO
		144	5720		18.00	17.26	NO
	U-NII-3	149	5745		14.00	13.87	NO
		153	5765		14.00	13.73	NO
		157	5785		14.00	13.14	NO
		161	5805		14.00	13.16	NO
		165	5825		14.00	12.81	NO
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT20	U-NII-1	36	5180	MCS0	17.50	16.42	NO
		40	5200		17.50	16.45	NO
		44	5220		17.50	16.37	NO

		48	5240		17.50	16.32	NO
	U-NII-2A	52	5260		17.50	16.45	NO
		56	5280		17.50	16.72	NO
		60	5300		17.50	17.01	NO
		64	5320		17.50	17.35	NO
	U-NII-2C	100	5500		18.00	17.54	NO
		104	5520		18.00	17.44	NO
		108	5540		18.00	17.38	NO
		112	5560		18.00	17.26	NO
		116	5580		18.00	17.15	NO
		120	5600		18.00	17.14	NO
		124	5620		18.00	17.25	NO
		128	5640		18.00	17.42	NO
		132	5660		18.00	17.63	NO
		136	5680		18.00	17.66	NO
		140	5700		18.00	17.54	NO
		144	5720		18.00	17.48	NO
	U-NII-3	149	5745		14.00	13.67	NO
		153	5765		14.00	13.56	NO
		157	5785		14.00	12.96	NO
		161	5805		14.00	12.97	NO
		165	5825		14.00	12.65	NO
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT40	U-NII-1	38	5190	MCS0	16.50	14.97	NO
		46	5230		16.50	14.92	NO
	U-NII-2A	54	5270		16.50	15.52	NO
		62	5310		16.50	16.03	NO
	U-NII-2C	102	5510		16.50	15.88	NO
		110	5550		16.50	15.86	NO
		118	5590		16.50	15.69	NO
		126	5630		16.50	15.62	NO
		134	5670		16.50	15.96	NO
		142	5710		16.50	16.03	NO
	U-NII-3	151	5755		14.00	13.87	NO
		159	5795		14.00	13.24	NO
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS0	17.50	16.41	NO
		40	5200		17.50	16.39	NO
		44	5220		17.50	16.36	NO
		48	5240		17.50	16.36	NO
	U-NII-2A	52	5260		17.50	16.49	NO
		56	5280		17.50	16.72	NO
		60	5300		17.50	16.97	NO
		64	5320		17.50	17.37	NO
	U-NII-2C	100	5500		18.00	17.57	NO
		104	5520		18.00	17.41	NO
		108	5540		18.00	17.32	NO
		112	5560		18.00	17.27	NO
		116	5580		18.00	17.18	NO
		120	5600		18.00	17.11	NO

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		124	5620		18.00	17.28	NO
		128	5640		18.00	17.44	NO
		132	5660		18.00	17.62	NO
		136	5680		18.00	17.67	NO
		140	5700		18.00	17.58	NO
		144	5720		18.00	17.45	NO
	U-NII-3	149	5745		14.00	13.68	NO
		153	5765		14.00	13.57	NO
		157	5785		14.00	12.98	NO
		161	5805		14.00	12.97	NO
		165	5825		14.00	12.65	NO
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	16.50	14.96	NO
		46	5230		16.50	14.92	NO
	U-NII-2A	54	5270		16.50	16.06	NO
		62	5310		16.50	16.47	NO
	U-NII-2C	102	5510		16.50	15.87	NO
		110	5550		16.50	15.87	NO
		118	5590		16.50	15.71	NO
		126	5630		16.50	15.64	NO
		134	5670		16.50	15.92	NO
		142	5710		16.50	16.09	NO
	U-NII-3	151	5755		14.00	13.86	NO
		159	5795		14.00	13.28	NO
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	15.00	13.66	NO
	U-NII-2A	58	5290		15.00	14.16	NO
	U-NII-2C	106	5530		15.00	14.12	NO
		122	5610		15.00	13.95	NO
		138	5690		15.00	14.38	NO
	U-NII-3	155	5775		14.00	**12.92**	YES

Simultaneous Transmission power						
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)
802.11a	U-NII-1	36	5180	6	16.00	14.54
		40	5200		16.00	14.5
		44	5220		16.00	14.46
		48	5240		16.00	14.53
	U-NII-2A	52	5260		16.00	14.7
		56	5280		16.00	15.02
		60	5300		16.00	15.22
		64	5320		16.00	**15.53**
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)
802.11n-HT20	U-NII-1	36	5180	MCS0	16.00	14.87
		40	5200		16.00	14.89
		44	5220		16.00	14.8

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		48	5240		16.00	14.76
	U-NII-2A	52	5260		16.00	14.85
		56	5280		16.00	15.17
		60	5300		16.00	15.46
		64	5320		16.00	15.76
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)
802.11n-HT40	U-NII-1	38	5190	MCS0	15.00	13.39
		46	5230		15.00	13.35
	U-NII-2A	54	5270		15.00	13.92
		62	5310		15.00	14.46
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)
802.11ac 20M	U-NII-1	36	5180	MCS0	16.00	14.83
		40	5200		16.00	14.79
		44	5220		16.00	14.8
		48	5240		16.00	14.76
	U-NII-2A	52	5260		16.00	14.94
		56	5280		16.00	15.12
		60	5300		16.00	15.4
		64	5320		16.00	15.79
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)
802.11ac 40M	U-NII-1	38	5190	MCS0	15.00	13.36
		46	5230		15.00	13.34
	U-NII-2A	54	5270		15.00	14.47
		62	5310		15.00	14.89
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)
802.11ac 80M	U-NII-1	42	5210	MCS0	15.00	13.66
	U-NII-2A	58	5290		15.00	14.16

Table 18： Conducted Power of 5G WIFI

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

8.1.5 Conducted Power of BT

BT			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		
GFSK	0	2402	9	8.45
	39	2441	9	8.34
	78	2480	9	8.31
π/4DQPSK	0	2402	7	6.33
	39	2441	7	6.37
	78	2480	7	6.24
8DPSK	0	2402	7	6.41
	39	2441	7	6.32
	78	2480	7	6.02

BLE			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		
GFSK	0	2402	8	6.78
	19	2440	8	7.62
	39	2480	8	7.66

Table 19： Conducted Power of BT

Note:
1)The conducted power of BT is measured with RMS detector.

8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Wi-Fi	2.45	Head	16	39.8	0	12.5	3	N
		Body-worn	16	39.8	15	4.2	3	N
		hotspot	16	39.8	10	6.2	3	N
Wi-Fi	5	Head	18	63.1	0	28.2	3	N
		Body-worn	18	63.1	15	9.4	3	N
		hotspot	17.5	56.2	10	12.6	3	N
Bluetooth	2.48	Head	9	7.9	0	2.5	3	Y
		Body-worn	9	7.9	15	0.8	3	Y
		hotspot	9	7.9	10	1.3	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where
• f(GHz) is the RF channel transmit frequency in GHz
• Power and distance are rounded to the nearest mW and mm before calculation
• The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

8.3 Measurement of SAR Data

8.3.1 SAR Result of GSM850

ANT1 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.154	0.08	32.68	34.00	1.355	**0.209**	22.1
Left tilted	GSM	190/836.6	1:8.3	0.092	0.03	32.68	34.00	1.355	0.125	22.1
Right cheek	GSM	190/836.6	1:8.3	0.146	-0.04	32.68	34.00	1.355	0.198	22.1
Right tilted	GSM	190/836.6	1:8.3	0.082	0.02	32.68	34.00	1.355	0.111	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	190/836.6	1:8.3	0.123	0.06	32.68	34.00	1.355	0.167	22.1
Back side	GSM	190/836.6	1:8.3	0.135	-0.05	32.68	34.00	1.355	**0.183**	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 1TS	190/836.6	1:8.3	0.097	0.06	32.69	34.00	1.352	0.131	22.1
Back side	GPRS 1TS	190/836.6	1:8.3	0.220	-0.08	32.69	34.00	1.352	**0.297**	22.1
Left side	GPRS 1TS	190/836.6	1:8.3	0.067	0.02	32.69	34.00	1.352	0.091	22.1
Right side	GPRS 1TS	190/836.6	1:8.3	0.093	0.08	32.69	34.00	1.352	0.126	22.1
Bottom side	GPRS 1TS	190/836.6	1:8.3	0.102	-0.04	32.69	34.00	1.352	0.138	22.1
ANT2 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.780	-0.04	31.86	32.50	1.159	0.904	22.1
Left cheek	GSM	128/824.2	1:8.3	0.662	-0.03	31.76	32.50	1.186	0.785	22.1
Left cheek	GSM	251/848.8	1:8.3	0.701	-0.03	31.85	32.50	1.161	0.814	22.1
Left tilted	GSM	190/836.6	1:8.3	0.680	-0.04	31.86	32.50	1.159	0.788	22.1
Right cheek	GSM	190/836.6	1:8.3	0.919	0.06	31.86	32.50	1.159	**1.065**	22.1
Right cheek-repeat	GSM	190/836.6	1:8.3	0.916	0.03	31.86	32.50	1.159	1.061	22.1
Right cheek	GSM	128/824.2	1:8.3	0.866	-0.02	31.76	32.50	1.186	1.027	22.1
Right cheek	GSM	251/848.8	1:8.3	0.914	-0.07	31.85	32.50	1.161	1.062	22.1
Right tilted	GSM	190/836.6	1:8.3	0.656	-0.01	31.86	32.50	1.159	0.760	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	190/836.6	1:8.3	0.183	0.02	33.46	34.00	1.132	0.207	22.1
Back side	GSM	190/836.6	1:8.3	0.318	-0.16	33.46	34.00	1.132	**0.360**	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 1TS	190/836.6	1:8.3	0.166	0.03	33.41	34.00	1.146	0.190	22.1
Back side	GPRS 1TS	190/836.6	1:8.3	0.296	-0.06	33.41	34.00	1.146	**0.339**	22.1
Left side	GPRS 1TS	190/836.6	1:8.3	0.098	0.07	33.41	34.00	1.146	0.112	22.1
Right side	GPRS 1TS	190/836.6	1:8.3	0.129	0.02	33.41	34.00	1.146	0.148	22.1
Top side	GPRS 1TS	190/836.6	1:8.3	0.154	0.010	33.41	34.00	1.146	0.176	22.1

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Right cheek	190/836.6	0.919	0.916	1.003	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 20：SAR of GSM850 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.2 SAR Result of GSM1900

ANT1 Test Record										
Test position	**Test mode**	**Test Ch./Freq.**	**Duty Cycle**	**SAR (W/kg)1-g**	**Power Drift(dB)**	**Conducted Power(dBm)**	**Tune up Limit(dBm)**	**Scaled factor**	**Scaled SAR(W/kg)**	**Liquid Temp**
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.056	-0.02	30.59	31.00	1.099	0.062	22.3
Left tilted	GSM	661/1880	1:8.3	0.053	0.07	30.59	31.00	1.099	0.058	22.3
Right cheek	GSM	661/1880	1:8.3	0.080	0.05	30.59	31.00	1.099	**0.087**	22.3
Right tilted	GSM	661/1880	1:8.3	0.043	-0.02	30.59	31.00	1.099	0.047	22.3
Body worn Test data(Separate 15mm)										
Front side	GSM	661/1880	1:8.3	0.090	0.07	30.59	31.00	1.099	0.099	22.3
Back side	GSM	661/1880	1:8.3	0.207	0.06	30.59	31.00	1.099	**0.227**	22.3
Hotspot Test data(Separate 10mm)										
Front side	GPRS 3TS	661/1880	1:2.77	0.124	0.04	24.95	26.00	1.274	0.158	22.3
Back side	GPRS 3TS	661/1880	1:2.77	0.304	0.07	24.95	26.00	1.274	0.387	22.3
Left side	GPRS 3TS	661/1880	1:2.77	0.061	-0.03	24.95	26.00	1.274	0.078	22.3
Right side	GPRS 3TS	661/1880	1:2.77	0.002	0.04	24.95	26.00	1.274	0.003	22.3
Bottom side	GPRS 3TS	661/1880	1:2.77	0.520	-0.05	24.95	26.00	1.274	**0.662**	22.3
ANT2 Test Record										
Test position	**Test mode**	**Test Ch./Freq.**	**Duty Cycle**	**SAR (W/kg)1-g**	**Power Drift(dB)**	**Conducted Power(dBm)**	**Tune up Limit(dBm)**	**Scaled factor**	**Scaled SAR(W/kg)**	**Liquid Temp**
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.685	0.03	28.61	29.00	1.094	0.749	22.3
Left tilted	GSM	661/1880	1:8.3	0.791	-0.09	28.61	29.00	1.094	0.865	22.3
Left tilted	GSM	512/1850.2	1:8.3	0.788	-0.01	28.73	29.00	1.064	0.839	22.3
Left tilted	GSM	810/1909.8	1:8.3	0.662	-0.05	28.45	29.00	1.135	0.751	22.3
Right cheek	GSM	661/1880	1:8.3	0.686	-0.04	28.61	29.00	1.094	0.750	22.3
Right tilted	GSM	661/1880	1:8.3	0.788	-0.06	28.61	29.00	1.094	0.862	22.3
Right tilted	GSM	512/1850.2	1:8.3	0.647	-0.01	28.73	29.00	1.064	0.689	22.3
Right tilted	GSM	810/1909.8	1:8.3	0.803	-0.02	28.45	29.00	1.135	**0.911**	22.3
Body worn Test data(Separate 15mm)										
Front side	GSM	661/1880	1:8.3	0.127	0.03	30.54	31.00	1.112	0.141	22.3
Back side	GSM	661/1880	1:8.3	0.254	-0.04	30.54	31.00	1.112	**0.282**	22.3
Hotspot Test data(Separate 10mm)										
Front side	GPRS 1TS	661/1880	1:8.3	0.254	0.02	30.53	31.00	1.114	0.283	22.3
Back side	GPRS 1TS	661/1880	1:8.3	0.326	0.06	30.53	31.00	1.114	0.363	22.3
Left side	GPRS 1TS	661/1880	1:8.3	0.121	-0.01	30.53	31.00	1.114	0.135	22.3
Right side	GPRS 1TS	661/1880	1:8.3	0.076	0.05	30.53	31.00	1.114	0.085	22.3
Top side	GPRS 1TS	661/1880	1:8.3	0.888	0.04	30.53	31.00	1.114	0.989	22.3
Top side	GPRS 1TS	512/1850.2	1:8.3	0.862	-0.03	30.29	31.00	1.178	1.015	22.3
Top side	GPRS 1TS	810/1909.8	1:8.3	0.915	-0.04	30.25	31.00	1.189	**1.087**	22.3
Top side-repeat	GPRS 1TS	810/1909.8	1:8.3	0.870	-0.06	30.25	31.00	1.189	1.034	22.3

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Top side	810/1909.8	0.915	0.870	1.052	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 21： SAR of GSM1900 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.3 SAR Result of WCDMA Band II

ANT1 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.131	-0.03	24.71	25.50	1.199	0.157	22.3
Left tilted	RMC	9400/1880	1:1	0.135	0.08	24.71	25.50	1.199	0.162	22.3
Right cheek	RMC	9400/1880	1:1	0.190	0.05	24.71	25.50	1.199	**0.228**	22.3
Right tilted	RMC	9400/1880	1:1	0.099	0.01	24.71	25.50	1.199	0.119	22.3
Body worn Test data Sensor on										
Back side-15mm	RMC	9400/1880	1:1	0.207	-0.03	21.46	22.00	1.132	0.234	22.3
Body worn Test data Sensor off										
Front side-15mm	RMC	9400/1880	1:1	0.208	0.05	24.71	25.50	1.199	0.249	22.3
Back side-17mm	RMC	9400/1880	1:1	0.453	-0.01	24.71	25.50	1.199	**0.543**	22.3
Hotspot Test data Sensor on										
Back side-10mm	RMC	9400/1880	1:1	0.411	0.08	21.46	22.00	1.132	0.465	22.3
Bottom side-10mm	RMC	9400/1880	1:1	0.719	-0.03	21.46	22.00	1.132	0.814	22.3
Bottom side-10mm	RMC	9262/1852.4	1:1	0.738	0.03	21.35	22.00	1.161	**0.857**	22.3
Bottom side-10mm	RMC	9538/1907.6	1:1	0.669	-0.01	21.61	22.00	1.094	0.732	22.3
Hotspot Test data Sensor off										
Front side10mm	RMC	9400/1880	1:1	0.384	0.05	24.71	25.50	1.199	0.461	22.3
Back side-17mm	RMC	9400/1880	1:1	0.328	0.07	24.71	25.50	1.199	0.393	22.3
Left side-10mm	RMC	9400/1880	1:1	0.204	0.01	24.71	25.50	1.199	0.245	22.3
Right side-10mm	RMC	9400/1880	1:1	0.108	0.06	24.71	25.50	1.199	0.130	22.3
Bottom side-15mm	RMC	9400/1880	1:1	0.577	0.02	24.71	25.50	1.199	0.692	22.3
ANT2 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.500	0.07	19.63	20.50	1.222	0.611	22.3
Left tilted	RMC	9400/1880	1:1	0.629	0.02	19.63	20.50	1.222	0.769	22.3
Right cheek	RMC	9400/1880	1:1	0.691	-0.01	19.63	20.50	1.222	0.844	22.3
Right cheek	RMC	9262/1852.4	1:1	0.677	0.05	19.72	20.50	1.197	0.810	22.3
Right cheek	RMC	9538/1907.6	1:1	0.700	0.02	19.48	20.05	1.140	0.798	22.3
Right tilted	RMC	9400/1880	1:1	0.821	-0.05	19.63	20.50	1.222	1.003	22.3
Right tilted	RMC	9262/1852.4	1:1	0.847	0.01	19.72	20.50	1.197	**1.014**	22.3
Right tilted-repeat	RMC	9262/1852.4	1:1	0.839	0.06	19.72	20.50	1.197	1.004	22.3
Right tilted	RMC	9538/1907.6	1:1	0.819	0.01	19.48	20.05	1.140	0.934	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	9400/1880	1:1	0.110	0.06	21.55	22.00	1.109	0.122	22.3
Back side	RMC	9400/1880	1:1	0.156	0.03	21.55	22.00	1.109	**0.173**	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.226	0.06	21.55	22.00	1.109	0.251	22.3
Back side	RMC	9400/1880	1:1	0.291	0.09	21.55	22.00	1.109	0.323	22.3
Left side	RMC	9400/1880	1:1	0.102	-0.04	21.55	22.00	1.109	0.113	22.3
Right side	RMC	9400/1880	1:1	0.069	0.03	21.55	22.00	1.109	0.077	22.3
Top side	RMC	9400/1880	1:1	0.664	-0.05	21.55	22.00	1.109	**0.736**	22.3

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Right tilted	9262/1852.4	0.847	0.839	1.010	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 22： SAR of WCDMA Band II for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.4 SAR Result of WCDMA Band IV

ANT1 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.088	0.06	25.01	25.50	1.119	0.099	22.2
Left tilted	RMC	1412/1732.4	1:1	0.068	-0.01	25.01	25.50	1.119	0.076	22.2
Right cheek	RMC	1412/1732.4	1:1	0.152	0.02	25.01	25.50	1.119	**0.170**	22.2
Right tilted	RMC	1412/1732.4	1:1	0.074	0.04	25.01	25.50	1.119	0.083	22.2
Body worn Test data Sensor on										
Back side-15mm	RMC	1412/1732.4	1:1	0.263	0.06	19.39	20.00	1.151	0.303	22.2
Body worn Test data Sensor off										
Front side-15mm	RMC	1412/1732.4	1:1	0.280	0.05	25.01	25.50	1.119	0.313	22.2
Back side-17mm	RMC	1412/1732.4	1:1	0.608	0.02	25.01	25.50	1.119	**0.681**	22.2
Hotspot Test data Sensor on										
Back side-10mm	RMC	1412/1732.4	1:1	0.498	0.02	19.39	20.00	1.151	0.573	22.2
Bottom side-10mm	RMC	1412/1732.4	1:1	0.550	-0.06	19.39	20.00	1.151	0.633	22.2
Hotspot Test data Sensor off										
Front side10mm	RMC	1412/1732.4	1:1	0.479	0.05	25.01	25.50	1.119	0.536	22.2
Back side-17mm	RMC	1412/1732.4	1:1	0.608	0.02	25.01	25.50	1.119	0.681	22.2
Left side-10mm	RMC	1412/1732.4	1:1	0.117	-0.08	25.01	25.50	1.119	0.131	22.2
Right side-10mm	RMC	1412/1732.4	1:1	0.110	0.06	25.01	25.50	1.119	0.123	22.2
Bottom side-15mm	RMC	1412/1732.4	1:1	0.946	0.04	25.01	25.50	1.119	1.059	22.2
Bottom side-15mm	RMC	1312/1712.4	1:1	0.925	0.05	24.88	25.50	1.153	1.067	22.2
Bottom side-15mm	RMC	1513/1752.6	1:1	**0.957**	0.04	24.99	25.50	1.125	**1.076**	22.2
Bottom side-15mm-repeat	RMC	1513/1752.6	1:1	0.942	-0.02	24.99	25.50	1.125	1.059	22.2
ANT2 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.516	0.02	21.12	21.50	1.091	0.563	22.3
Left tilted	RMC	1412/1732.4	1:1	0.581	-0.02	21.12	21.50	1.091	0.634	22.3
Right cheek	RMC	1412/1732.4	1:1	0.648	-0.03	21.12	21.50	1.091	**0.707**	22.3
Right tilted	RMC	1412/1732.4	1:1	0.578	0.01	21.12	21.50	1.091	0.631	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	1412/1732.4	1:1	0.082	0.06	20.45	21.00	1.135	0.093	22.3
Back side	RMC	1412/1732.4	1:1	0.087	0.07	20.45	21.00	1.135	**0.099**	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.121	0.06	20.45	21.00	1.135	0.137	22.3
Back side	RMC	1412/1732.4	1:1	0.144	0.09	20.45	21.00	1.135	0.163	22.3
Left side	RMC	1412/1732.4	1:1	0.079	0.02	20.45	21.00	1.135	0.090	22.3
Right side	RMC	1412/1732.4	1:1	0.043	-0.04	20.45	21.00	1.135	0.049	22.3
Top side	RMC	1412/1732.4	1:1	0.221	-0.17	20.45	21.00	1.135	**0.251**	22.3

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Bottom side-15mm	1513/1752.6	0.957	0.942	1.016	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 23： SAR of WCDMA Band IV for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.5 SAR Result of WCDMA Band V

ANT1 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.4	1:1	0.172	0.07	24.63	25.50	1.222	0.210	22.1
Left tilted	RMC	4182/836.4	1:1	0.095	0.02	24.63	25.50	1.222	0.116	22.1
Right cheek	RMC	4182/836.4	1:1	0.195	0.08	24.63	25.50	1.222	**0.238**	22.1
Right tilted	RMC	4182/836.4	1:1	0.087	-0.06	24.63	25.50	1.222	0.106	22.1
Body worn Test data(Separate 15mm)										
Front side	RMC	4182/836.4	1:1	0.132	0.03	24.63	25.50	1.222	0.161	22.1
Back side	RMC	4182/836.4	1:1	0.198	0.03	24.63	25.50	1.222	**0.242**	22.1
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.146	0.08	24.63	25.50	1.222	0.178	22.1
Back side	RMC	4182/836.4	1:1	0.320	0.05	24.63	25.50	1.222	**0.391**	22.1
Left side	RMC	4182/836.4	1:1	0.110	0.03	24.63	25.50	1.222	0.134	22.1
Right side	RMC	4182/836.4	1:1	0.143	-0.04	24.63	25.50	1.222	0.175	22.1
Bottom side	RMC	4182/836.4	1:1	0.150	0.02	24.63	25.50	1.222	0.183	22.1
ANT2 Test Record										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.4	1:1	0.564	0.01	23.55	24.00	1.109	0.626	22.1
Left tilted	RMC	4182/836.4	1:1	0.467	-0.01	23.55	24.00	1.109	0.518	22.1
Right cheek	RMC	4182/836.4	1:1	0.607	-0.03	23.55	24.00	1.109	**0.673**	22.1
Right tilted	RMC	4182/836.4	1:1	0.470	-0.02	23.55	24.00	1.109	0.521	22.1
Body worn Test data(Separate 15mm)										
Front side	RMC	4182/836.4	1:1	0.152	0.01	24.56	25.00	1.107	0.168	22.1
Back side	RMC	4182/836.4	1:1	0.214	0.04	24.56	25.00	1.107	**0.237**	22.1
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.167	0.01	24.56	25.00	1.107	0.185	22.1
Back side	RMC	4182/836.4	1:1	0.383	0.03	24.56	25.00	1.107	**0.424**	22.1
Left side	RMC	4182/836.4	1:1	0.108	-0.04	24.56	25.00	1.107	0.120	22.1
Right side	RMC	4182/836.4	1:1	0.156	0.05	24.56	25.00	1.107	0.173	22.1
Top side	RMC	4182/836.4	1:1	0.187	0.02	24.56	25.00	1.107	0.207	22.1

Table 24：SAR of WCDMA Band V for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.6 SAR Result of LTE Band 2

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	18900/1880	1:1	0.135	0.01	24.82	25.50	1.169	0.158	22.3
Left tilted	20	QPSK 1RB_50	18900/1880	1:1	0.143	0.05	24.82	25.50	1.169	0.167	22.3
Right cheek	20	QPSK 1RB_50	18900/1880	1:1	0.182	-0.03	24.82	25.50	1.169	**0.213**	22.3
Right tilted	20	QPSK 1RB_50	18900/1880	1:1	0.104	0.02	24.82	25.50	1.169	0.122	22.3
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	18900/1880	1:1	0.109	0.03	23.83	24.50	1.167	0.127	22.3
Left tilted	20	QPSK 50RB_0	18900/1880	1:1	0.112	0.04	23.83	24.50	1.167	0.131	22.3
Right cheek	20	QPSK 50RB_0	18900/1880	1:1	0.120	-0.08	23.83	24.50	1.167	0.140	22.3
Right tilted	20	QPSK 50RB_0	18900/1880	1:1	0.080	0.02	23.83	24.50	1.167	0.093	22.3
Body worn Test data 1RB Sensor on											
Back side-15mm	20	QPSK 1RB_50	18900/1880	1:1	0.125	-0.02	20.10	20.50	1.096	0.137	22.3
Body worn Test data 50%RB Sensor on											
Back side-15mm	20	QPSK 50RB_0	18900/1880	1:1	0.128	0.08	19.58	20.50	1.236	0.158	22.3
Body worn Test data 1RB Sensor off											
Front side-15mm	20	QPSK 1RB_50	18900/1880	1:1	0.203	-0.06	24.82	25.50	1.169	0.237	22.3
Back side-17mm	20	QPSK 1RB_50	18900/1880	1:1	0.462	0.03	24.82	25.50	1.169	**0.540**	22.3
Body worn Test data 50%RB Sensor off											
Front side-15mm	20	QPSK 50RB_0	18900/1880	1:1	0.165	0.04	23.83	24.50	1.167	0.193	22.3
Back side-17mm	20	QPSK 50RB_0	18900/1880	1:1	0.266	0.02	23.83	24.50	1.167	0.310	22.3
Hotspot Test data 1RB Sensor on											
Back side-10mm	20	QPSK 1RB_50	18900/1880	1:1	0.257	0.08	20.10	20.50	1.096	0.282	22.3
Bottom side-10mm	20	QPSK 1RB_50	18900/1880	1:1	0.413	0.03	20.10	20.50	1.096	0.453	22.3
Hotspot Test data 50%RB Sensor on											
Back side-10mm	20	QPSK 50RB_0	18900/1880	1:1	0.275	-0.02	19.58	20.50	1.236	0.340	22.3
Bottom side-10mm	20	QPSK 50RB_0	18900/1880	1:1	0.437	0.04	19.58	20.50	1.236	0.540	22.3
Hotspot Test data 1RB Sensor off											
Front side10mm	20	QPSK 1RB_50	18900/1880	1:1	0.396	-0.03	24.82	25.50	1.169	0.463	22.3
Back side-17mm	20	QPSK 1RB_50	18900/1880	1:1	0.336	-0.01	24.82	25.50	1.169	0.393	22.3
Left side-10mm	20	QPSK 1RB_50	18900/1880	1:1	0.211	-0.08	24.82	25.50	1.169	0.247	22.3
Right side-10mm	20	QPSK 1RB_50	18900/1880	1:1	0.130	0.02	24.82	25.50	1.169	0.152	22.3
Bottom side-15mm	20	QPSK 1RB_50	18900/1880	1:1	0.841	0.07	24.82	25.50	1.169	0.984	22.3
Bottom side-15mm	20	QPSK 1RB_50	18700/1860	1:1	0.831	0.05	24.74	25.50	1.191	0.990	22.3
Bottom side-15mm	20	QPSK 1RB_50	19100/1900	1:1	0.849	0.03	24.68	25.50	1.208	**1.025**	22.3
Hotspot Test data 50%RB Sensor off											
Front side10mm	20	QPSK 50RB_0	18900/1880	1:1	0.318	0.08	23.83	24.50	1.167	0.371	22.3
Back side-17mm	20	QPSK 50RB_0	18900/1880	1:1	0.273	0.02	23.83	24.50	1.167	0.319	22.3
Left side-10mm	20	QPSK 50RB_0	18900/1880	1:1	0.164	0.04	23.83	24.50	1.167	0.191	22.3
Right side-10mm	20	QPSK 50RB_0	18900/1880	1:1	0.102	0.02	23.83	24.50	1.167	0.119	22.3
Bottom side-15mm	20	QPSK 50RB_0	19100/1900	1:1	0.589	0.01	23.83	24.50	1.167	0.687	22.3

Hotspot Test data 100%RB Sensor off											
Bottom side-15mm	20	QPSK 100RB_0	19100/1900	1:1	0.589	0.03	23.52	24.50	1.253	0.738	22.3
ANT2 Test Record											
Test position	**BW.**	**Test mode**	**Test Ch./Freq.**	**Duty Cycle**	**SAR (W/kg)1-g**	**Power Drift(dB)**	**Conducted power(dBm)**	**Tune up Limit(dBm)**	**Scaled factor**	**Scaled SAR(W/kg)**	**Liquid Temp.**
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	18900/1880	1:1	0.508	0.27	20.40	21.00	1.148	0.583	22.1
Left tilted	20	QPSK 1RB_50	18900/1880	1:1	0.750	-0.04	20.40	21.00	1.148	0.861	22.1
Left tilted	20	QPSK 1RB_50	18700/1860	1:1	0.693	0.06	20.31	21.00	1.172	0.812	22.1
Left tilted	20	QPSK 1RB_50	19100/1900	1:1	0.706	0.07	20.22	21.00	1.197	0.845	22.1
Right cheek	20	QPSK 1RB_50	18900/1880	1:1	0.771	-0.06	20.40	21.00	1.148	0.885	22.1
Right cheek	20	QPSK 1RB_50	18700/1860	1:1	0.775	-0.09	20.31	21.00	1.172	0.908	22.1
Right cheek	20	QPSK 1RB_50	19100/1900	1:1	0.796	0.10	20.22	21.00	1.197	0.953	22.1
Right tilted	20	QPSK 1RB_50	18900/1880	1:1	0.852	-0.04	20.40	21.00	1.148	0.978	22.1
Right tilted	20	QPSK 1RB_50	18700/1860	1:1	0.863	-0.07	20.31	21.00	1.172	1.012	22.1
Right tilted	20	QPSK 1RB_50	19100/1900	1:1	0.834	-0.03	20.22	21.00	1.197	0.998	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	18900/1880	1:1	0.484	0.08	20.37	21.00	1.156	0.560	22.1
Left tilted	20	QPSK 50RB_0	18900/1880	1:1	0.640	0.03	20.37	21.00	1.156	0.740	22.1
Right cheek	20	QPSK 50RB_0	18900/1880	1:1	0.689	0.04	20.37	21.00	1.156	0.797	22.1
Right tilted	20	QPSK 50RB_0	18900/1880	1:1	0.747	0.02	20.37	21.00	1.156	0.864	22.1
Right tilted	20	QPSK 50RB_0	18700/1860	1:1	0.900	-0.07	20.23	21.00	1.194	**1.075**	22.1
Right tilted-repeat	20	QPSK 50RB_0	18700/1860	1:1	0.890	0.02	20.23	21.00	1.194	1.063	22.1
Right tilted	20	QPSK 50RB_0	19100/1900	1:1	0.753	0.08	20.16	21.00	1.213	0.914	22.1
Head Test data(100%RB)											
Left tilted	20	QPSK100RB_0	18700/1860	1:1	0.713	0.04	19.79	21.00	1.321	0.942	22.1
Right cheek	20	QPSK100RB_0	18700/1860	1:1	0.735	0.02	19.79	21.00	1.321	0.971	22.1
Right tilted	20	QPSK100RB_0	18700/1860	1:1	0.784	0.09	19.79	21.00	1.321	1.036	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	20	QPSK 1RB_50	18900/1880	1:1	0.105	0.02	21.23	22.00	1.194	0.125	22.1
Back side	20	QPSK 1RB_50	18900/1880	1:1	0.149	-0.09	21.23	22.00	1.194	**0.178**	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	20	QPSK 50RB_0	18900/1880	1:1	0.104	0.03	21.17	22.00	1.211	0.126	22.1
Back side	20	QPSK 50RB_0	18900/1880	1:1	0.135	0.06	21.17	22.00	1.211	0.163	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	18900/1880	1:1	0.209	0.06	21.23	22.00	1.194	0.250	22.1
Back side	20	QPSK 1RB_50	18900/1880	1:1	0.276	0.07	21.23	22.00	1.194	0.330	22.1
Left side	20	QPSK 1RB_50	18900/1880	1:1	0.104	-0.04	21.23	22.00	1.194	0.124	22.1
Right side	20	QPSK 1RB_50	18900/1880	1:1	0.053	0.02	21.23	22.00	1.194	0.063	22.1
Top side	20	QPSK 1RB_50	18900/1880	1:1	0.507	0.01	21.23	22.00	1.194	0.605	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	18900/1880	1:1	0.241	-0.08	21.17	22.00	1.211	0.292	22.1
Back side	20	QPSK 50RB_0	18900/1880	1:1	0.243	0.02	21.17	22.00	1.211	0.294	22.1
Left side	20	QPSK 50RB_0	18900/1880	1:1	0.095	0.04	21.17	22.00	1.211	0.115	22.1
Right side	20	QPSK 50RB_0	18900/1880	1:1	0.057	0.03	21.17	22.00	1.211	0.069	22.1
Top side	20	QPSK 50RB_0	18900/1880	1:1	0.629	-0.02	21.17	22.00	1.211	**0.761**	22.1

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Right tilted	18700/1860	0.900	0.890	1.011	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 25：SAR of LTE Band 2 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.7 SAR Result of LTE Band 4

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	20175/1732.5	1:1	0.081	-0.03	24.71	25.50	1.199	0.097	22.2
Left tilted	20	QPSK 1RB_50	20175/1732.5	1:1	0.062	0.01	24.71	25.50	1.199	0.074	22.2
Right cheek	20	QPSK 1RB_50	20175/1732.5	1:1	0.141	0.05	24.71	25.50	1.199	**0.169**	22.2
Right tilted	20	QPSK 1RB_50	20175/1732.5	1:1	0.072	0.03	24.71	25.50	1.199	0.086	22.2
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	20175/1732.5	1:1	0.067	-0.02	23.71	24.50	1.199	0.080	22.2
Left tilted	20	QPSK 50RB_0	20175/1732.5	1:1	0.051	0.08	23.71	24.50	1.199	0.061	22.2
Right cheek	20	QPSK 50RB_0	20175/1732.5	1:1	0.111	0.09	23.71	24.50	1.199	0.133	22.2
Right tilted	20	QPSK 50RB_0	20175/1732.5	1:1	0.058	-0.01	23.71	24.50	1.199	0.070	22.2
Body worn Test data 1RB Sensor on											
Back side-15mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.228	-0.05	19.07	20.00	1.239	0.282	22.2
Body worn Test data 50%RB Sensor on											
Back side-15mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.237	0.08	18.85	20.00	1.303	0.309	22.2
Body worn Test data 1RB Sensor off											
Front side-15mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.282	-0.08	24.71	25.50	1.199	0.338	22.2
Back side-17mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.601	-0.03	24.71	25.50	1.199	**0.721**	22.2
Body worn Test data 50%RB Sensor off											
Front side-15mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.228	0.06	23.71	24.50	1.199	0.273	22.2
Back side-17mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.547	-0.02	23.71	24.50	1.199	0.656	22.2
Hotspot Test data 1RB Sensor on											
Back side-10mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.446	0.03	19.07	20.00	1.239	0.553	22.2
Bottom side-10mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.499	-0.05	19.07	20.00	1.239	0.618	22.2
Hotspot Test data 50%RB Sensor on											
Back side-10mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.456	0.02	18.85	20.00	1.303	0.594	22.2
Bottom side-10mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.513	0.06	18.85	20.00	1.303	0.669	22.2
Hotspot Test data 1RB Sensor off											
Front side10mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.501	-0.08	24.71	25.50	1.199	0.601	22.2
Back side-17mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.601	0.03	24.71	25.50	1.199	0.721	22.2
Left side-10mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.111	-0.02	24.71	25.50	1.199	0.133	22.2
Right side-10mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.104	0.02	24.71	25.50	1.199	0.125	22.2
Bottom side-15mm	20	QPSK 1RB_50	20175/1732.5	1:1	0.842	-0.07	24.71	25.50	1.199	1.010	22.2
Bottom side-15mm	20	QPSK 1RB_50	20050/1720	1:1	0.866	-0.04	24.53	25.50	1.250	1.083	22.2
Bottom side-15mm	20	QPSK 1RB_50	20300/1745	1:1	0.910	0.09	24.69	25.50	1.205	**1.097**	22.2
Bottom side-15mm-repeat	20	QPSK 1RB_50	20300/1745	1:1	0.902	-0.05	24.69	25.50	1.205	1.087	22.2
Hotspot Test data 50%RB Sensor off											
Front side10mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.399	0.09	23.71	24.50	1.199	0.479	22.2
Back side-17mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.536	0.03	23.71	24.50	1.199	0.643	22.2
Left side-10mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.095	-0.01	23.71	24.50	1.199	0.114	22.2
Right side-10mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.088	0.08	23.71	24.50	1.199	0.106	22.2
Bottom side-15mm	20	QPSK 50RB_0	20175/1732.5	1:1	0.698	0.02	23.71	24.50	1.199	0.837	22.2
Bottom side-15mm	20	QPSK 50RB_0	20300/1745	1:1	0.717	0.04	23.58	24.50	1.236	0.886	22.2

Bottom side-15mm	20	QPSK 50RB_0	20050/1720	1:1	0.702	-0.06	23.63	24.50	1.222	0.858	22.2
Hotspot Test data 100%RB Sensor off											
Bottom side-15mm	20	QPSK 100RB_0	20300/1745	1:1	0.721	-0.01	23.67	24.50	1.211	0.873	22.2
ANT2 Test Record											
Test position	**BW.**	**Test mode**	**Test Ch./Freq.**	**Duty Cycle**	**SAR (W/kg)1-g**	**Power Drift(dB)**	**Conducted power(dBm)**	**Tune up Limit(dBm)**	**Scaled factor**	**Scaled SAR(W/kg)**	**Liquid Temp.**
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	20175/1732.5	1:1	0.314	0.02	20.23	21.00	1.194	0.375	22.1
Left tilted	20	QPSK 1RB_50	20175/1732.5	1:1	0.393	0.01	20.23	21.00	1.194	0.469	22.1
Right cheek	20	QPSK 1RB_50	20175/1732.5	1:1	0.529	0.05	20.23	21.00	1.194	0.632	22.1
Right tilted	20	QPSK 1RB_50	20175/1732.5	1:1	0.462	0.03	20.23	21.00	1.194	0.552	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	20175/1732.5	1:1	0.343	0.01	19.78	21.00	1.324	0.454	22.1
Left tilted	20	QPSK 50RB_0	20175/1732.5	1:1	0.384	0.01	19.78	21.00	1.324	0.509	22.1
Right cheek	20	QPSK 50RB_0	20175/1732.5	1:1	0.531	0.02	19.78	21.00	1.324	**0.703**	22.1
Right tilted	20	QPSK 50RB_0	20175/1732.5	1:1	0.440	0.03	19.78	21.00	1.324	0.583	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	20	QPSK 1RB_50	20175/1732.5	1:1	0.209	0.04	24.91	25.50	1.146	0.239	22.1
Back side	20	QPSK 1RB_50	20175/1732.5	1:1	0.232	-0.15	24.91	25.50	1.146	**0.266**	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	20	QPSK 50RB_0	20175/1732.5	1:1	0.159	-0.01	23.92	24.50	1.143	0.182	22.1
Back side	20	QPSK 50RB_0	20175/1732.5	1:1	0.161	0.03	23.92	24.50	1.143	0.184	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	20175/1732.5	1:1	0.320	0.04	24.91	25.50	1.146	0.367	22.1
Back side	20	QPSK 1RB_50	20175/1732.5	1:1	0.369	-0.02	24.91	25.50	1.146	0.423	22.1
Left side	20	QPSK 1RB_50	20175/1732.5	1:1	0.238	0.06	24.91	25.50	1.146	0.273	22.1
Right side	20	QPSK 1RB_50	20175/1732.5	1:1	0.105	0.02	24.91	25.50	1.146	0.120	22.1
Top side	20	QPSK 1RB_50	20175/1732.5	1:1	0.545	-0.04	24.91	25.50	1.146	**0.624**	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	20175/1732.5	1:1	0.273	-0.01	23.92	24.50	1.143	0.312	22.1
Back side	20	QPSK 50RB_0	20175/1732.5	1:1	0.288	0.03	23.92	24.50	1.143	0.329	22.1
Left side	20	QPSK 50RB_0	20175/1732.5	1:1	0.238	-0.07	23.92	24.50	1.143	0.272	22.1
Right side	20	QPSK 50RB_0	20175/1732.5	1:1	0.080	0.06	23.92	24.50	1.143	0.091	22.1
Top side	20	QPSK 50RB_0	20175/1732.5	1:1	0.364	0.02	23.92	24.50	1.143	0.416	22.1

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Bottom side-15mm	20300/1745	0.910	0.902	1.009	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 26：SAR of LTE Band 4 for Head and Body.

Note:

1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.8 SAR Result of LTE Band 5

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_25	20525/836.5	1:1	0.204	0.02	25.08	25.50	1.102	0.225	22.1
Left tilted	10	QPSK 1RB_25	20525/836.5	1:1	0.127	0.03	25.08	25.50	1.102	0.140	22.1
Right cheek	10	QPSK 1RB_25	20525/836.5	1:1	0.236	-0.09	25.08	25.50	1.102	**0.260**	22.1
Right tilted	10	QPSK 1RB_25	20525/836.5	1:1	0.130	-0.01	25.08	25.50	1.102	0.143	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	20525/836.5	1:1	0.164	0.02	23.65	24.50	1.216	0.199	22.1
Left tilted	10	QPSK 25RB_0	20525/836.5	1:1	0.100	0.08	23.65	24.50	1.216	0.122	22.1
Right cheek	10	QPSK 25RB_0	20525/836.5	1:1	0.157	0.03	23.65	24.50	1.216	0.191	22.1
Right tilted	10	QPSK 25RB_0	20525/836.5	1:1	0.098	0.05	23.65	24.50	1.216	0.119	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	10	QPSK 1RB_25	20525/836.5	1:1	0.212	0.02	25.08	25.50	1.102	0.234	22.1
Back side	10	QPSK 1RB_25	20525/836.5	1:1	0.239	0.17	25.08	25.50	1.102	**0.263**	22.1
Body worn Test data(Separate 15mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.157	-0.05	23.65	24.50	1.216	0.191	22.1
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.192	0.07	23.65	24.50	1.216	0.234	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	20525/836.5	1:1	0.202	0.04	25.08	25.50	1.102	0.223	22.1
Back side	10	QPSK 1RB_25	20525/836.5	1:1	0.320	0.11	25.08	25.50	1.102	**0.352**	22.1
Left side	10	QPSK 1RB_25	20525/836.5	1:1	0.154	-0.02	25.08	25.50	1.102	0.170	22.1
Right side	10	QPSK 1RB_25	20525/836.5	1:1	0.227	0.01	25.08	25.50	1.102	0.250	22.1
Bottom side	10	QPSK 1RB_25	20525/836.5	1:1	0.157	0.06	25.08	25.50	1.102	0.173	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.155	0.04	23.65	24.50	1.216	0.189	22.1
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.256	0.02	23.65	24.50	1.216	0.311	22.1
Left side	10	QPSK 25RB_0	20525/836.5	1:1	0.125	-0.01	23.65	24.50	1.216	0.152	22.1
Right side	10	QPSK 25RB_0	20525/836.5	1:1	0.178	0.03	23.65	24.50	1.216	0.216	22.1
Bottom side	10	QPSK 25RB_0	20525/836.5	1:1	0.120	-0.05	23.65	24.50	1.216	0.146	22.1
ANT2 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_25	20525/836.5	1:1	0.545	0.03	23.98	24.00	1.005	0.548	22.1
Left tilted	10	QPSK 1RB_25	20525/836.5	1:1	0.463	0.03	23.98	24.00	1.005	0.465	22.1
Right cheek	10	QPSK 1RB_25	20525/836.5	1:1	0.571	-0.02	23.98	24.00	1.005	0.574	22.1
Right tilted	10	QPSK 1RB_25	20525/836.5	1:1	0.458	-0.03	23.98	24.00	1.005	0.460	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	20525/836.5	1:1	0.550	0.02	23.67	24.00	1.079	0.593	22.1
Left tilted	10	QPSK 25RB_0	20525/836.5	1:1	0.461	0.03	23.67	24.00	1.079	0.497	22.1
Right cheek	10	QPSK 25RB_0	20525/836.5	1:1	0.667	-0.06	23.67	24.00	1.079	**0.720**	22.1
Right tilted	10	QPSK 25RB_0	20525/836.5	1:1	0.460	-0.01	23.67	24.00	1.079	0.496	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	10	QPSK 1RB_25	20525/836.5	1:1	0.145	0.01	25.42	25.50	1.019	0.148	22.1

Back side	10	QPSK 1RB_25	20525/836.5	1:1	0.226	-0.04	25.42	25.50	1.019	**0.230**	22.1
Body worn Test data(Separate 15mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.113	0.03	24.09	24.50	1.099	0.124	22.1
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.172	0.09	24.09	24.50	1.099	0.189	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	20525/836.5	1:1	0.185	0.01	25.42	25.50	1.019	0.188	22.1
Back side	10	QPSK 1RB_25	20525/836.5	1:1	0.307	0.08	25.42	25.50	1.019	**0.313**	22.1
Left side	10	QPSK 1RB_25	20525/836.5	1:1	0.109	-0.04	25.42	25.50	1.019	0.111	22.1
Right side	10	QPSK 1RB_25	20525/836.5	1:1	0.146	0.01	25.42	25.50	1.019	0.149	22.1
Top side	10	QPSK 1RB_25	20525/836.5	1:1	0.225	0.03	25.42	25.50	1.019	0.229	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.149	0.05	24.09	24.50	1.099	0.164	22.1
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.269	0.06	24.09	24.50	1.099	0.296	22.1
Left side	10	QPSK 25RB_0	20525/836.5	1:1	0.082	0.01	24.09	24.50	1.099	0.090	22.1
Right side	10	QPSK 25RB_0	20525/836.5	1:1	0.111	-0.03	24.09	24.50	1.099	0.122	22.1
Top side	10	QPSK 25RB_0	20525/836.5	1:1	0.179	0.07	24.09	24.50	1.099	0.197	22.1

Table 27： SAR of LTE Band 5 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.9 SAR Result of LTE Band 7

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	21100/2535	1:1	0.161	-0.04	24.86	25.50	1.159	**0.187**	22.1
Left cheek	20	PCC 1_50 SCC 1_99	21001+21199	1:1	0.141	0.01	24.78	25.50	1.180	0.166	22.1
Left tilted	20	QPSK 1RB_50	21100/2535	1:1	0.140	0.03	24.86	25.50	1.159	0.162	22.1
Right cheek	20	QPSK 1RB_50	21100/2535	1:1	0.160	0.01	24.86	25.50	1.159	0.185	22.1
Right tilted	20	QPSK 1RB_50	21100/2535	1:1	0.083	0.02	24.86	25.50	1.159	0.096	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	21100/2535	1:1	0.151	0.01	23.66	24.50	1.213	0.183	22.1
Left tilted	20	QPSK 50RB_0	21100/2535	1:1	0.112	0.02	23.66	24.50	1.213	0.136	22.1
Right cheek	20	QPSK 50RB_0	21100/2535	1:1	0.130	0.01	23.66	24.50	1.213	0.158	22.1
Right tilted	20	QPSK 50RB_0	21100/2535	1:1	0.062	0.03	23.66	24.50	1.213	0.075	22.1
Body worn Test data 1RB Sensor on											
Back side-15mm	20	QPSK 1RB_50	21100/2535	1:1	0.188	0.01	20.45	21.00	1.135	0.213	22.1
Body worn Test data 50%RB Sensor on											
Back side-15mm	20	QPSK 50RB_0	20850/2510	1:1	0.201	-0.07	20.22	21.00	1.197	0.241	22.1
Body worn Test data 1RB Sensor off											
Front side-15mm	20	QPSK 1RB_50	21100/2535	1:1	0.231	0.02	24.30	25.00	1.175	0.271	22.1
Back side-17mm	20	QPSK 1RB_50	21100/2535	1:1	0.389	-0.11	24.30	25.00	1.175	**0.457**	22.1
Back side-17mm	20	PCC 1_50 SCC 1_99	21001+21199	1:1	0.356	0.01	24.22	25.00	1.197	0.426	22.1
Body worn Test data 50%RB Sensor off											
Front side-15mm	20	QPSK 50RB_0	21100/2535	1:1	0.208	0.01	23.13	24.50	1.371	0.285	22.1
Back side-17mm	20	QPSK 50RB_0	21100/2535	1:1	0.324	0.02	23.13	24.50	1.371	0.444	22.1
Hotspot Test data 1RB Sensor on											
Back side-10mm	20	QPSK 1RB_50	21100/2535	1:1	0.313	0.03	20.45	21.00	1.135	0.355	22.1
Bottom side-10mm	20	QPSK 1RB_50	21100/2535	1:1	0.489	0.00	20.45	21.00	1.135	0.555	22.1
Hotspot Test data 50%RB Sensor on											
Back side-10mm	20	QPSK 50RB_0	20850/2510	1:1	0.317	0.01	20.22	21.00	1.197	0.379	22.1
Bottom side-10mm	20	QPSK 50RB_0	20850/2510	1:1	0.495	0.02	20.22	21.00	1.197	0.592	22.1
Hotspot Test data 1RB Sensor off											
Front side10mm	20	QPSK 1RB_50	21100/2535	1:1	0.448	0.01	24.30	25.00	1.175	0.526	22.1
Back side-17mm	20	QPSK 1RB_50	21100/2535	1:1	0.342	0.03	24.30	25.00	1.175	0.402	22.1
Left side-10mm	20	QPSK 1RB_50	21100/2535	1:1	0.162	0.04	24.30	25.00	1.175	0.190	22.1
Right side-10mm	20	QPSK 1RB_50	21100/2535	1:1	0.153	0.00	24.30	25.00	1.175	0.180	22.1
Bottom side-15mm	20	QPSK 1RB_50	21100/2535	1:1	0.729	0.01	24.30	25.00	1.175	0.857	22.1
Bottom side-15mm	20	QPSK 1RB_50	20850/2510	1:1	**0.775**	0.07	24.22	25.00	1.197	**0.927**	22.1
Bottom side-15mm	20	PCC 1_50 SCC 1_99	20850+21048	1:1	0.756	0.03	24.17	25.00	1.211	0.915	22.1
Bottom side-15mm	20	QPSK 1RB_50	21350/2560	1:1	0.677	0.03	24.14	25.00	1.219	0.825	22.1
Hotspot Test data 50%RB Sensor off											
Front side10mm	20	QPSK 50RB_0	21100/2535	1:1	0.408	0.01	23.13	24.50	1.371	0.559	22.1
Back side-17mm	20	QPSK 50RB_0	21100/2535	1:1	0.319	0.02	23.13	24.50	1.371	0.437	22.1
Left side-10mm	20	QPSK 50RB_0	21100/2535	1:1	0.146	0.02	23.13	24.50	1.371	0.200	22.1
Right side-10mm	20	QPSK 50RB_0	21100/2535	1:1	0.138	0.05	23.13	24.50	1.371	0.189	22.1
Bottom side-15mm	20	QPSK 50RB_0	21100/2535	1:1	0.559	0.06	23.13	24.50	1.371	0.766	22.1
ANT2 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.

Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	21100/2535.5	1:1	0.264	0.03	19.85	20.50	1.161	0.307	22.1
Left tilted	20	QPSK 1RB_50	21100/2535.5	1:1	0.417	0.01	19.85	20.50	1.161	0.484	22.1
Right cheek	20	QPSK 1RB_50	21100/2535.5	1:1	0.486	0.02	19.85	20.50	1.161	0.564	22.1
Right tilted	20	QPSK 1RB_50	21100/2535.5	1:1	0.678	0.04	19.85	20.50	1.161	0.787	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	21100/2535.5	1:1	0.322	0.01	19.36	20.50	1.300	0.419	22.1
Left tilted	20	QPSK 50RB_0	21100/2535.5	1:1	0.419	0.02	19.36	20.50	1.300	0.545	22.1
Right cheek	20	QPSK 50RB_0	21100/2535.5	1:1	0.511	0.02	19.36	20.50	1.300	0.664	22.1
Right tilted	20	QPSK 50RB_0	21100/2535.5	1:1	0.680	0.01	19.36	20.50	1.300	**0.884**	22.1
Right tilted	20	PCC 50_0 SCC 50_50	21001+21199	1:1	0.652	0.30	19.31	20.50	1.315	0.858	22.1
Right tilted	20	QPSK 50RB_0	20850/2510	1:1	0.642	-0.03	19.26	20.50	1.330	0.854	22.1
Right tilted	20	QPSK 50RB_0	21350/2560	1:1	0.628	0.08	19.23	20.50	1.340	0.841	22.1
Head Test data(100%RB)											
Right tilted	20	QPSK 100RB_0	21100/2535.5	1:1	0.663	0.02	19.32	20.50	1.312	0.870	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	20	QPSK 1RB_50	21100/2535.5	1:1	0.068	0.02	19.37	20.00	1.156	0.079	22.1
Back side	20	QPSK 1RB_50	21100/2535.5	1:1	0.279	0.01	19.37	20.00	1.156	0.323	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	20	QPSK 50RB_0	21100/2535.5	1:1	0.066	0.02	18.86	20.00	1.300	0.086	22.1
Back side	20	QPSK 50RB_0	21100/2535.5	1:1	0.313	0.12	18.86	20.00	1.300	**0.407**	22.1
Back side	20	PCC 50_0 SCC 50_50	21001+21199	1:1	0.300	0.03	18.81	20.00	1.315	0.395	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	21100/2535.5	1:1	0.123	0.01	19.37	20.00	1.156	0.142	22.1
Back side	20	QPSK 1RB_50	21100/2535.5	1:1	0.521	0.03	19.37	20.00	1.156	0.602	22.1
Left side	20	QPSK 1RB_50	21100/2535.5	1:1	0.147	0.04	19.37	20.00	1.156	0.170	22.1
Right side	20	QPSK 1RB_50	21100/2535.5	1:1	0.023	0.02	19.37	20.00	1.156	0.027	22.1
Top side	20	QPSK 1RB_50	21100/2535.5	1:1	0.482	0.06	19.37	20.00	1.156	0.557	22.1
Hotspot Test data(Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	21100/2535.5	1:1	0.131	0.07	18.86	20.00	1.300	0.170	22.1
Back side	20	QPSK 50RB_0	21100/2535.5	1:1	0.662	-0.04	18.86	20.00	1.300	0.861	22.1
Back side	20	QPSK 50RB_0	20850/2510	1:1	0.734	-0.04	18.86	20.00	1.300	**0.954**	22.1
Back side	20	PCC 50_0 SCC 50_50	20850+21048	1:1	0.719	0.01	18.80	20.00	1.318	0.948	22.1
Back side	20	QPSK 50RB_0	21350/2560	1:1	0.572	-0.05	18.61	20.00	1.377	0.788	22.1
Left side	20	QPSK 50RB_0	21100/2535.5	1:1	0.147	0.03	18.86	20.00	1.300	0.191	22.1
Right side	20	QPSK 50RB_0	21100/2535.5	1:1	0.000	0.04	18.86	20.00	1.300	0.000	22.1
Top side	20	QPSK 50RB_0	21100/2535.5	1:1	0.370	0.05	18.86	20.00	1.300	0.481	22.1
Hotspot Test data(Separate 10mm100%RB)											
Back side	20	QPSK 100RB_0	21100/2535.5	1:1	0.664	-0.02	18.66	20.00	1.361	0.904	22.1

Table 28：SAR of LTE Band 7 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.10 SAR Result of LTE Band 12

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_0	23095/707.5	1:1	0.105	0.04	25.30	25.50	1.047	0.110	22.1
Left tilted	10	QPSK 1RB_0	23095/707.5	1:1	0.056	-0.06	25.30	25.50	1.047	0.059	22.1
Right cheek	10	QPSK 1RB_0	23095/707.5	1:1	0.134	0.02	25.30	25.50	1.047	**0.140**	22.1
Right tilted	10	QPSK 1RB_0	23095/707.5	1:1	0.071	0.01	25.30	25.50	1.047	0.074	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK25RB_0	23095/707.5	1:1	0.077	-0.05	24.22	24.50	1.067	0.082	22.1
Left tilted	10	QPSK25RB_0	23095/707.5	1:1	0.045	0.02	24.22	24.50	1.067	0.048	22.1
Right cheek	10	QPSK25RB_0	23095/707.5	1:1	0.090	0.07	24.22	24.50	1.067	0.096	22.1
Right tilted	10	QPSK25RB_0	23095/707.5	1:1	0.057	-0.06	24.22	24.50	1.067	0.061	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	10	QPSK 1RB_0	23095/707.5	1:1	0.170	0.05	25.30	25.50	1.047	0.178	22.1
Back side	10	QPSK 1RB_0	23095/707.5	1:1	0.246	-0.02	25.30	25.50	1.047	**0.258**	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	10	QPSK25RB_0	23095/707.5	1:1	0.143	-0.06	24.22	24.50	1.067	0.153	22.1
Back side	10	QPSK25RB_0	23095/707.5	1:1	0.207	0.04	24.22	24.50	1.067	0.221	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	23095/707.5	1:1	0.147	-0.05	25.30	25.50	1.047	0.154	22.1
Back side	10	QPSK 1RB_0	23095/707.5	1:1	0.272	-0.03	25.30	25.50	1.047	**0.285**	22.1
Left side	10	QPSK 1RB_0	23095/707.5	1:1	0.185	0.03	25.30	25.50	1.047	0.194	22.1
Right side	10	QPSK 1RB_0	23095/707.5	1:1	0.225	-0.01	25.30	25.50	1.047	0.236	22.1
Bottom side	10	QPSK 1RB_0	23095/707.5	1:1	0.075	0.05	25.30	25.50	1.047	0.079	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK25RB_0	23095/707.5	1:1	0.128	0.04	24.22	24.50	1.067	0.137	22.1
Back side	10	QPSK25RB_0	23095/707.5	1:1	0.231	0.06	24.22	24.50	1.067	0.246	22.1
Left side	10	QPSK25RB_0	23095/707.5	1:1	0.138	-0.01	24.22	24.50	1.067	0.147	22.1
Right side	10	QPSK25RB_0	23095/707.5	1:1	0.177	0.07	24.22	24.50	1.067	0.189	22.1
Bottom side	10	QPSK25RB_0	23095/707.5	1:1	0.067	-0.03	24.22	24.50	1.067	0.071	22.1
ANT2 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_0	23095/707.5	1:1	0.294	0.02	24.31	24.50	1.045	0.307	22.1
Left tilted	10	QPSK 1RB_0	23095/707.5	1:1	0.279	0.01	24.31	24.50	1.045	0.291	22.1
Right cheek	10	QPSK 1RB_0	23095/707.5	1:1	0.361	0.02	24.31	24.50	1.045	**0.377**	22.1
Right tilted	10	QPSK 1RB_0	23095/707.5	1:1	0.296	0.03	24.31	24.50	1.045	0.309	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK25RB_0	23095/707.5	1:1	0.296	0.02	24.21	24.50	1.069	0.316	22.1
Left tilted	10	QPSK25RB_0	23095/707.5	1:1	0.272	0.02	24.21	24.50	1.069	0.291	22.1
Right cheek	10	QPSK25RB_0	23095/707.5	1:1	0.332	0.03	24.21	24.50	1.069	0.355	22.1
Right tilted	10	QPSK25RB_0	23095/707.5	1:1	0.287	0.01	24.21	24.50	1.069	0.307	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	10	QPSK 1RB_0	23095/707.5	1:1	0.138	0.07	25.19	25.50	1.074	0.148	22.1

Back side	10	QPSK 1RB_0	23095/707.5	1:1	0.246	0.03	25.19	25.50	1.074	**0.264**	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	10	QPSK25RB_0	23095/707.5	1:1	0.104	-0.60	24.16	24.50	1.081	0.112	22.1
Back side	10	QPSK25RB_0	23095/707.5	1:1	0.172	0.02	24.16	24.50	1.081	0.186	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	23095/707.5	1:1	0.122	0.03	25.19	25.50	1.074	0.131	22.1
Back side	10	QPSK 1RB_0	23095/707.5	1:1	0.223	-0.02	25.19	25.50	1.074	**0.239**	22.1
Left side	10	QPSK 1RB_0	23095/707.5	1:1	0.169	-0.04	25.19	25.50	1.074	0.182	22.1
Right side	10	QPSK 1RB_0	23095/707.5	1:1	0.158	-0.06	25.19	25.50	1.074	0.170	22.1
Top side	10	QPSK 1RB_0	23095/707.5	1:1	0.106	0.03	25.19	25.50	1.074	0.114	22.3
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK25RB_0	23095/707.5	1:1	0.096	0.02	24.16	24.50	1.081	0.104	22.1
Back side	10	QPSK25RB_0	23095/707.5	1:1	0.187	0.08	24.16	24.50	1.081	0.202	22.1
Left side	10	QPSK25RB_0	23095/707.5	1:1	0.120	-0.04	24.16	24.50	1.081	0.130	22.1
Right side	10	QPSK25RB_0	23095/707.5	1:1	0.116	0.01	24.16	24.50	1.081	0.125	22.1
Top side	10	QPSK25RB_0	23095/707.5	1:1	0.077	0.03	24.16	24.50	1.081	0.083	22.3

Table 29：SAR of LTE Band 12 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.11SAR Result of LTE Band 17

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_0	23790/710	1:1	0.107	0.08	25.15	25.50	1.084	0.116	22.1
Left tilted	10	QPSK 1RB_0	23790/710	1:1	0.062	0.01	25.15	25.50	1.084	0.067	22.1
Right cheek	10	QPSK 1RB_0	23790/710	1:1	0.145	0.06	25.15	25.50	1.084	**0.157**	22.1
Right tilted	10	QPSK 1RB_0	23790/710	1:1	0.074	0.03	25.15	25.50	1.084	0.080	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	23790/710	1:1	0.083	0.08	24.14	24.50	1.086	0.090	22.1
Left tilted	10	QPSK 25RB_0	23790/710	1:1	0.050	0.01	24.14	24.50	1.086	0.054	22.1
Right cheek	10	QPSK 25RB_0	23790/710	1:1	0.094	-0.03	24.14	24.50	1.086	0.102	22.1
Right tilted	10	QPSK 25RB_0	23790/710	1:1	0.058	0.06	24.14	24.50	1.086	0.063	22.1
Body worn Test data 1RB Sensor on											
Back side-15mm	10	QPSK 1RB_0	23790/710	1:1	0.255	0.08	24.67	25.00	1.079	**0.275**	22.1
Body worn Test data 1RB Sensor off											
Front side-15mm	10	QPSK 1RB_0	23790/710	1:1	0.179	-0.03	25.15	25.50	1.084	0.194	22.1
Back side-17mm	10	QPSK 1RB_0	23790/710	1:1	0.234	0.02	25.15	25.50	1.084	0.254	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	10	QPSK 25RB_0	23790/710	1:1	0.149	0.02	24.14	24.50	1.086	0.162	22.1
Back side	10	QPSK 25RB_0	23790/710	1:1	0.216	0.08	24.14	24.50	1.086	0.235	22.1
Hotspot Test data 1RB Sensor on											
Back side-10mm	10	QPSK 1RB_0	23790/710	1:1	0.279	0.01	24.67	25.00	1.079	**0.301**	22.1
Bottom side-10mm	10	QPSK 1RB_0	23790/710	1:1	0.079	-0.05	24.67	25.00	1.079	0.085	22.1
Hotspot Test data 1RB Sensor off											
Front side10mm	10	QPSK 1RB_0	23790/710	1:1	0.154	0.03	25.15	25.50	1.084	0.167	22.1
Back side-17mm	10	QPSK 1RB_0	23790/710	1:1	0.242	-0.04	25.15	25.50	1.084	0.262	22.1
Left side-10mm	10	QPSK 1RB_0	23790/710	1:1	0.183	-0.02	25.15	25.50	1.084	0.198	22.1
Right side-10mm	10	QPSK 1RB_0	23790/710	1:1	0.231	0.09	25.15	25.50	1.084	0.250	22.1
Bottom side-15mm	10	QPSK 1RB_0	23790/710	1:1	0.052	-0.04	25.15	25.50	1.084	0.056	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23790/710	1:1	0.135	-0.02	24.14	24.50	1.086	0.147	22.1
Back side	10	QPSK 25RB_0	23790/710	1:1	0.236	0.05	24.14	24.50	1.086	0.256	22.1
Left side	10	QPSK 25RB_0	23790/710	1:1	0.139	-0.04	24.14	24.50	1.086	0.151	22.1
Right side	10	QPSK 25RB_0	23790/710	1:1	0.178	0.02	24.14	24.50	1.086	0.193	22.1
Bottom side	10	QPSK 25RB_0	23790/710	1:1	0.070	0.01	24.14	24.50	1.086	0.076	22.1
ANT2 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_0	23790/710	1:1	0.319	0.02	24.10	24.50	1.096	0.350	22.1
Left tilted	10	QPSK 1RB_0	23790/710	1:1	0.294	0.01	24.10	24.50	1.096	0.322	22.1
Right cheek	10	QPSK 1RB_0	23790/710	1:1	0.369	0.15	24.10	24.50	1.096	**0.405**	22.1
Right tilted	10	QPSK 1RB_0	23790/710	1:1	0.307	0.03	24.10	24.50	1.096	0.337	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	23790/710	1:1	0.298	0.01	23.92	24.50	1.143	0.341	22.1

Left tilted	10	QPSK 25RB_0	23790/710	1:1	0.280	0.01	23.92	24.50	1.143	0.320	22.1
Right cheek	10	QPSK 25RB_0	23790/710	1:1	0.337	0.02	23.92	24.50	1.143	0.385	22.1
Right tilted	10	QPSK 25RB_0	23790/710	1:1	0.292	0.02	23.92	24.50	1.143	0.334	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	10	QPSK 1RB_0	23790/710	1:1	0.138	-0.03	25.10	25.50	1.096	0.151	22.1
Back side	10	QPSK 1RB_0	23790/710	1:1	0.276	-0.01	25.10	25.50	1.096	**0.303**	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	10	QPSK 25RB_0	23790/710	1:1	0.108	0.07	24.01	24.50	1.119	0.121	22.1
Back side	10	QPSK 25RB_0	23790/710	1:1	0.175	0.02	24.01	24.50	1.119	0.196	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_0	23790/710	1:1	0.128	0.01	25.10	25.50	1.096	0.140	22.1
Back side	10	QPSK 1RB_0	23790/710	1:1	0.230	0.07	25.10	25.50	1.096	**0.252**	22.1
Left side	10	QPSK 1RB_0	23790/710	1:1	0.156	-0.04	25.10	25.50	1.096	0.171	22.1
Right side	10	QPSK 1RB_0	23790/710	1:1	0.142	0.02	25.10	25.50	1.096	0.156	22.1
Top side	10	QPSK 1RB_0	23790/710	1:1	0.101	-0.06	25.10	25.50	1.096	0.111	22.3
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23790/710	1:1	0.097	0.02	24.01	24.50	1.119	0.109	22.1
Back side	10	QPSK 25RB_0	23790/710	1:1	0.192	0.05	24.01	24.50	1.119	0.215	22.1
Left side	10	QPSK 25RB_0	23790/710	1:1	0.123	0.01	24.01	24.50	1.119	0.138	22.1
Right side	10	QPSK 25RB_0	23790/710	1:1	0.113	0.06	24.01	24.50	1.119	0.126	22.1
Top side	10	QPSK 25RB_0	23790/710	1:1	0.081	-0.07	24.01	24.50	1.119	0.091	22.3

Table 30：SAR of LTE Band 17 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.12 SAR Result of LTE Band 38

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	38000/2595	1:1.58	0.110	0.08	25.13	25.50	1.089	**0.120**	22.1
Left cheek	20	PCC 1_50 SCC 1_99	37901+38099	1:1.58	0.098	0.03	25.07	25.50	1.104	0.108	22.1
Left tilted	20	QPSK 1RB_50	38000/2595	1:1.58	0.091	0.02	25.13	25.50	1.089	0.099	22.1
Right cheek	20	QPSK 1RB_50	38000/2595	1:1.58	0.092	0.03	25.13	25.50	1.089	0.100	22.1
Right tilted	20	QPSK 1RB_50	38000/2595	1:1.58	0.049	0.01	25.13	25.50	1.089	0.053	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	37850/2580	1:1.58	0.103	0.02	23.97	24.50	1.130	0.116	22.1
Left tilted	20	QPSK 50RB_0	37850/2580	1:1.58	0.075	0.01	23.97	24.50	1.130	0.085	22.1
Right cheek	20	QPSK 50RB_0	37850/2580	1:1.58	0.075	0.03	23.97	24.50	1.130	0.085	22.1
Right tilted	20	QPSK 50RB_0	37850/2580	1:1.58	0.043	0.01	23.97	24.50	1.130	0.049	22.1
Body worn Test data 1RB Sensor on											
Back side-15mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.099	-0.01	21.23	22.00	1.194	0.118	22.1
Body worn Test data 50%RB Sensor on											
Back side-15mm	20	QPSK 50RB_0	38000/2595	1:1.58	0.134	-0.03	21.11	22.00	1.227	0.164	22.1
Body worn Test data 1RB Sensor off											
Front side-15mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.163	0.01	25.13	25.50	1.089	0.177	22.1
Back side-17mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.247	0.08	25.13	25.50	1.089	**0.269**	22.1
Back side-17mm	20	PCC 1_50 SCC 1_99	37901+38099	1:1.58	0.235	0.01	25.07	25.50	1.104	0.259	22.1
Body worn Test data 50%RB Sensor off											
Front side-15mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.134	0.03	23.97	24.50	1.130	0.151	22.1
Back side-17mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.164	0.02	23.97	24.50	1.130	0.185	22.1
Hotspot Test data 1RB Sensor on											
Back side-10mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.193	0.02	21.23	22.00	1.194	0.230	22.1
Bottom side-10mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.347	-0.07	21.23	22.00	1.194	0.414	22.1
Hotspot Test data 50%RB Sensor on											
Back side-10mm	20	QPSK 50RB_0	38000/2595	1:1.58	0.203	0.09	21.11	22.00	1.227	0.249	22.1
Bottom side-10mm	20	QPSK 50RB_0	38000/2595	1:1.58	0.431	-0.06	21.11	22.00	1.227	**0.529**	22.1
Bottom side-10mm	20	PCC 50_0 SCC 50_50	37901+38099	1:1.58	0.421	0.01	21.02	22.00	1.253	0.528	22.1
Hotspot Test data 1RB Sensor off											
Front side10mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.306	0.06	25.13	25.50	1.089	0.333	22.1
Back side-17mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.191	0.01	25.13	25.50	1.089	0.208	22.1
Left side-10mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.141	-0.07	25.13	25.50	1.089	0.154	22.1
Right side-10mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.096	0.04	25.13	25.50	1.089	0.105	22.1
Bottom side-15mm	20	QPSK 1RB_50	38000/2595	1:1.58	0.356	0.02	25.13	25.50	1.089	0.388	22.1
Hotspot Test data 50%RB Sensor off											
Front side10mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.255	0.07	23.97	24.50	1.130	0.288	22.1
Back side-17mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.157	-0.12	23.97	24.50	1.130	0.177	22.1
Left side-10mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.108	0.03	23.97	24.50	1.130	0.122	22.1
Right side-10mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.086	0.p09	23.97	24.50	1.130	0.097	22.1
Bottom side-15mm	20	QPSK 50RB_0	37850/2580	1:1.58	0.298	0.06	23.97	24.50	1.130	0.337	22.1

ANT2 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	38000/2595	1:1.58	0.233	0.03	22.52	23.00	1.117	0.260	22.1
Left tilted	20	QPSK 1RB_50	38000/2595	1:1.58	0.284	0.06	22.52	23.00	1.117	0.317	22.1
Right cheek	20	QPSK 1RB_50	38000/2595	1:1.58	0.304	-0.03	22.52	23.00	1.117	0.340	22.1
Right tilted	20	QPSK 1RB_50	38000/2595	1:1.58	0.375	0.05	22.52	23.00	1.117	0.419	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	38000/2595	1:1.58	0.278	0.03	22.33	23.00	1.167	0.324	22.1
Left tilted	20	QPSK 50RB_0	38000/2595	1:1.58	0.283	-0.09	22.33	23.00	1.167	0.330	22.1
Right cheek	20	QPSK 50RB_0	38000/2595	1:1.58	0.273	0.07	22.33	23.00	1.167	0.319	22.1
Right tilted	20	QPSK 50RB_0	38000/2595	1:1.58	0.386	0.09	22.33	23.00	1.167	**0.450**	22.1
Right tilted	20	PCC 50_0 SCC 50_50	37901+38099	1:1.58	0.356	0.01	22.24	23.00	1.191	0.424	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	20	QPSK 1RB_50	38000/2595	1:1.58	0.047	0.03	22.52	23.00	1.117	0.052	22.1
Back side	20	QPSK 1RB_50	38000/2595	1:1.58	0.171	0.01	22.52	23.00	1.117	0.191	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	20	QPSK 50RB_0	38000/2595	1:1.58	0.076	0.03	22.33	23.00	1.167	0.089	22.1
Back side	20	QPSK 50RB_0	38000/2595	1:1.58	0.182	-0.01	22.33	23.00	1.167	**0.212**	22.1
Back side	20	PCC 50_0 SCC 50_50	37901+38099	1:1.58	0.156	0.01	22.24	23.00	1.191	0.186	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	38000/2595	1:1.58	0.135	0.02	22.52	23.00	1.117	0.151	22.1
Back side	20	QPSK 1RB_50	38000/2595	1:1.58	0.397	-0.08	22.52	23.00	1.117	0.443	22.1
Left side	20	QPSK 1RB_50	38000/2595	1:1.58	0.155	0.06	22.52	23.00	1.117	0.173	22.1
Right side	20	QPSK 1RB_50	38000/2595	1:1.58	0.001	-0.07	22.52	23.00	1.117	0.001	22.1
Top side	20	QPSK 1RB_50	38000/2595	1:1.58	0.256	0.02	22.52	23.00	1.117	0.286	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	38000/2595	1:1.58	0.141	0.02	22.33	23.00	1.167	0.165	22.1
Back side	20	QPSK 50RB_0	38000/2595	1:1.58	0.404	-0.01	22.33	23.00	1.167	**0.471**	22.1
Back side	20	PCC 50_0 SCC 50_50	37901+38099	1:1.58	0.358	0.01	22.24	23.00	1.191	0.426	22.1
Left side	20	QPSK 50RB_0	38000/2595	1:1.58	0.161	0.04	22.33	23.00	1.167	0.188	22.1
Right side	20	QPSK 50RB_0	38000/2595	1:1.58	0.002	0.05	22.33	23.00	1.167	0.002	22.1
Top side	20	QPSK 50RB_0	38000/2595	1:1.58	0.162	0.02	22.33	23.00	1.167	0.189	22.1

Table 31： SAR of LTE Band 38 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.13 SAR Result of LTE Band 41

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.111	0.06	25.12	25.50	1.091	**0.121**	22.1
Left tilted	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.088	0.02	25.12	25.50	1.091	0.096	22.1
Right cheek	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.086	0.02	25.12	25.50	1.091	0.094	22.1
Right tilted	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.048	0.01	25.12	25.50	1.091	0.052	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.098	0.03	24.18	24.50	1.076	0.105	22.1
Left tilted	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.075	0.02	24.18	24.50	1.076	0.081	22.1
Right cheek	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.074	0.01	24.18	24.50	1.076	0.080	22.1
Right tilted	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.002	0.02	24.18	24.50	1.076	0.002	22.1
Body worn Test data 1RB Sensor on											
Back side-15mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.153	-0.01	22.52	23.00	1.117	0.171	22.1
Body worn Test data 50%RB Sensor on											
Back side-15mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.177	-0.02	22.63	23.00	1.089	0.193	22.1
Body worn Test data 1RB Sensor off											
Front side-15mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.157	0.02	25.12	25.50	1.091	0.171	22.1
Back side-17mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.233	0.09	25.12	25.50	1.091	**0.254**	22.1
Body worn Test data 50%RB Sensor off											
Front side-15mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.130	0.02	24.18	24.50	1.076	0.140	22.1
Back side-17mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.153	0.01	24.18	24.50	1.076	0.165	22.1
Hotspot Test data 1RB Sensor on											
Back side-10mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.238	0.03	22.52	23.00	1.117	0.266	22.1
Bottom side-10mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.493	0.02	22.52	23.00	1.117	0.551	22.1
Hotspot Test data 50%RB Sensor on											
Back side-10mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.256	0.01	22.63	23.00	1.089	0.279	22.1
Bottom side-10mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.546	0.04	22.63	23.00	1.089	**0.595**	22.1
Hotspot Test data 1RB Sensor off											
Front side10mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.294	0.03	25.12	25.50	1.091	0.321	22.1
Back side-17mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.188	0.01	25.12	25.50	1.091	0.205	22.1
Left side-10mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.115	0.03	25.12	25.50	1.091	0.126	22.1
Right side-10mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.095	0.02	25.12	25.50	1.091	0.104	22.1
Bottom side-15mm	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.360	0.02	25.12	25.50	1.091	0.393	22.1
Hotspot Test data 50%RB Sensor off											
Front side10mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.243	0.03	24.18	24.50	1.076	0.262	22.1
Back side-17mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.155	0.02	24.18	24.50	1.076	0.167	22.1
Left side-10mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.099	0.01	24.18	24.50	1.076	0.107	22.1
Right side-10mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.082	0.02	24.18	24.50	1.076	0.088	22.1
Bottom side-15mm	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.310	0.01	24.18	24.50	1.076	0.334	22.1
ANT2 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.239	-0.05	22.90	23.50	1.148	0.274	22.1

Left tilted	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.332	-0.04	22.90	23.50	1.148	0.381	22.1
Right cheek	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.373	0.05	22.90	23.50	1.148	0.428	22.1
Right tilted	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.338	0.08	22.90	23.50	1.148	0.388	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.257	0.08	22.42	23.00	1.143	0.294	22.1
Left tilted	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.354	-0.04	22.42	23.00	1.143	0.405	22.1
Right cheek	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.395	-0.10	22.42	23.00	1.143	**0.451**	22.1
Right tilted	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.360	0.07	22.42	23.00	1.143	0.411	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.048	-0.02	22.31	23.00	1.172	0.056	22.1
Back side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.165	0.03	22.31	23.00	1.172	0.193	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.072	0.01	22.22	23.00	1.197	0.086	22.1
Back side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.188	-0.03	22.22	23.00	1.197	**0.225**	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.126	0.04	22.31	23.00	1.172	0.148	22.1
Back side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.409	0.01	22.31	23.00	1.172	0.479	22.1
Left side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.151	0.03	22.31	23.00	1.172	0.177	22.1
Right side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.035	0.02	22.31	23.00	1.172	0.041	22.1
Top side	20	QPSK 1RB_50	40743/2605.3	1:1.58	0.254	0.04	22.31	23.00	1.172	0.298	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.140	0.00	22.22	23.00	1.197	0.168	22.1
Back side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.420	-0.01	22.22	23.00	1.197	**0.503**	22.1
Left side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.154	0.01	22.22	23.00	1.197	0.184	22.1
Right side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.050	0.03	22.22	23.00	1.197	0.060	22.1
Top side	20	QPSK 50RB_0	40743/2605.3	1:1.58	0.256	0.01	22.22	23.00	1.197	0.306	22.1

Table 32：SAR of LTE Band 41 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.3.14 SAR Result of LTE Band 66

ANT1 Test Record											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	132322/1745	1:1.58	0.092	-0.01	24.89	25.50	1.151	0.106	22.1
Left tilted	20	QPSK 1RB_50	132322/1745	1:1.58	0.079	0.08	24.89	25.50	1.151	0.091	22.1
Right cheek	20	QPSK 1RB_50	132322/1745	1:1.58	0.143	-0.02	24.89	25.50	1.151	**0.165**	22.1
Right tilted	20	QPSK 1RB_50	132322/1745	1:1.58	0.090	0.05	24.89	25.50	1.151	0.104	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	132322/1745	1:1.58	0.074	0.06	23.66	24.50	1.213	0.090	22.1
Left tilted	20	QPSK 50RB_0	132322/1745	1:1.58	0.059	-0.01	23.66	24.50	1.213	0.072	22.1
Right cheek	20	QPSK 50RB_0	132322/1745	1:1.58	0.116	0.02	23.66	24.50	1.213	0.141	22.1
Right tilted	20	QPSK 50RB_0	132322/1745	1:1.58	0.069	0.04	23.66	24.50	1.213	0.084	22.1
Body worn Test data 1RB Sensor on											
Back side-15mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.229	0.03	19.45	20.00	1.135	0.260	22.1
Body worn Test data 50%RB Sensor on											
Back side-15mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.238	0.08	18.98	20.00	1.265	0.301	22.1
Body worn Test data 1RB Sensor off											
Front side-15mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.291	-0.02	24.89	25.50	1.151	0.335	22.1
Back side-17mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.624	-0.07	24.89	25.50	1.151	**0.718**	22.1
Body worn Test data 50%RB Sensor off											
Front side-15mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.235	0.01	23.66	24.50	1.213	0.285	22.1
Back side-17mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.563	0.08	23.66	24.50	1.213	0.683	22.1
Hotspot Test data 1RB Sensor on											
Back side-10mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.468	0.02	19.45	20.00	1.135	0.531	22.1
Bottom side-10mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.552	0.07	19.45	20.00	1.135	0.627	22.1
Hotspot Test data 50%RB Sensor on											
Back side-10mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.471	-0.03	18.98	20.00	1.265	0.596	22.1
Bottom side-10mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.539	0.02	18.98	20.00	1.265	0.682	22.1
Hotspot Test data 1RB Sensor off											
Front side10mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.545	0.08	24.89	25.50	1.151	0.627	22.1
Back side-17mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.671	-0.02	24.89	25.50	1.151	0.772	22.1
Left side-10mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.132	0.07	24.89	25.50	1.151	0.152	22.1
Right side-10mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.113	0.05	24.89	25.50	1.151	0.130	22.1
Bottom side-15mm	20	QPSK 1RB_50	132322/1745	1:1.58	0.942	0.08	24.89	25.50	1.151	**1.084**	22.1
Bottom side-15mm	20	QPSK 1RB_50	132072/1720	1:1.58	0.897	-0.05	24.71	25.50	1.199	1.076	22.1
Bottom side-15mm	20	QPSK 1RB_50	132572/1770	1:1.58	0.904	0.06	24.78	25.50	1.180	1.067	22.1
Hotspot Test data 50%RB Sensor off											
Front side10mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.419	0.02	23.66	24.50	1.213	0.508	22.1
Back side-17mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.546	-0.05	23.66	24.50	1.213	0.663	22.1
Left side-10mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.104	0.03	23.66	24.50	1.213	0.126	22.1
Right side-10mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.093	-0.02	23.66	24.50	1.213	0.113	22.1
Bottom side-15mm	20	QPSK 50RB_0	132322/1745	1:1.58	0.744	-0.04	23.66	24.50	1.213	0.903	22.1
Bottom side-15mm	20	QPSK 50RB_0	132072/1720	1:1.58	0.712	0.06	23.54	24.50	1.247	0.888	22.1
Bottom side-15mm	20	QPSK 50RB_0	132572/1770	1:1.58	0.694	0.02	23.41	24.50	1.285	0.892	22.1

Hotspot Test data 100%RB Sensor off											
Bottom side-15mm	20	QPSK 100RB_0	132572/1770	1:1.58	0.751	0.04	23.62	24.50	1.225	0.920	22.1
ANT2 Test Record											
Test position	**BW.**	**Test mode**	**Test Ch./Freq.**	**Duty Cycle**	**SAR (W/kg)1-g**	**Power Drift(dB)**	**Conducted power(dBm)**	**Tune up Limit(dBm)**	**Scaled factor**	**Scaled SAR(W/kg)**	**Liquid Temp.**
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	132322/1745	1:1.58	0.678	0.02	20.56	21.00	1.107	0.750	22.1
Left tilted	20	QPSK 1RB_50	132322/1745	1:1.58	0.815	-0.07	20.56	21.00	1.107	0.902	22.1
Right cheek	20	QPSK 1RB_50	132322/1745	1:1.58	0.920	-0.04	20.56	21.00	1.107	1.018	22.1
Right tilted	20	QPSK 1RB_50	132322/1745	1:1.58	0.710	0.10	20.56	21.00	1.107	0.786	22.1
Left tilted	20	QPSK 1RB_50	132072/1720	1:1.58	0.816	-0.02	20.33	21.00	1.167	0.952	22.1
Left tilted	20	QPSK 1RB_50	132572/1770	1:1.58	0.852	0.01	20.55	21.00	1.109	0.945	22.1
Right cheek	20	QPSK 1RB_50	132072/1720	1:1.58	0.894	0.03	20.33	21.00	1.167	1.043	22.1
Right cheek	20	QPSK 1RB_50	132572/1770	1:1.58	0.977	0.05	20.55	21.00	1.109	1.084	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	132572/1770	1:1.58	0.754	-0.03	20.57	21.00	1.104	0.832	22.1
Left tilted	20	QPSK 50RB_0	132572/1770	1:1.58	0.814	0.01	20.57	21.00	1.104	0.899	22.1
Right cheek	20	QPSK 50RB_0	132572/1770	1:1.58	0.938	0.05	20.57	21.00	1.104	1.036	22.1
Right tilted	20	QPSK 50RB_0	132572/1770	1:1.58	0.727	0.01	20.57	21.00	1.104	0.803	22.1
Left cheek	20	QPSK 50RB_0	132072/1720	1:1.58	0.774	0.03	20.41	21.00	1.146	0.887	22.1
Left cheek	20	QPSK 50RB_0	132322/1745	1:1.58	0.796	0.01	20.56	21.00	1.107	0.881	22.1
Left tilted	20	QPSK 50RB_0	132072/1720	1:1.58	0.785	-0.01	20.41	21.00	1.146	0.899	22.1
Left tilted	20	QPSK 50RB_0	132322/1745	1:1.58	0.807	0.02	20.56	21.00	1.107	0.893	22.1
Right cheek	20	QPSK 50RB_0	132072/1720	1:1.58	0.917	0.05	20.41	21.00	1.146	1.050	22.1
Right cheek	20	QPSK 50RB_0	132322/1745	1:1.58	0.985	0.05	20.56	21.00	1.107	**1.090**	22.1
Right cheek-repeat	20	QPSK 50RB_0	132322/1745	1:1.58	0.957	-0.02	20.56	21.00	1.107	1.059	22.1
Right tilted	20	QPSK 50RB_0	132072/1720	1:1.58	0.696	-0.03	20.41	21.00	1.146	0.797	22.1
Right tilted	20	QPSK 50RB_0	132322/1745	1:1.58	0.715	0.05	20.56	21.00	1.107	0.791	22.1
Head Test data(100%RB)											
Left cheek	20	QPSK 100RB_0	132572/1770	1:1.58	0.682	0.01	20.11	21.00	1.227	0.837	22.1
Left tilted	20	QPSK 100RB_0	132572/1770	1:1.58	0.771	0.02	20.11	21.00	1.227	0.946	22.1
Right cheek	20	QPSK 100RB_0	132572/1770	1:1.58	0.876	0.03	20.11	21.00	1.227	1.075	22.1
Right tilted	20	QPSK 100RB_0	132572/1770	1:1.58	0.678	-0.04	20.11	21.00	1.227	0.832	22.1
Body worn Test data(Separate 15mm 1RB)											
Front side	20	QPSK 1RB_50	132322/1745	1:1.58	0.114	0.02	24.24	25.50	1.337	0.152	22.1
Back side	20	QPSK 1RB_50	132322/1745	1:1.58	0.148	-0.07	25.24	26.50	1.337	**0.198**	22.1
Body worn Test data (Separate 15mm 50%RB)											
Front side	20	QPSK 50RB_0	132322/1745	1:1.58	0.117	0.02	23.15	24.50	1.365	0.160	22.1
Back side	20	QPSK 50RB_0	132322/1745	1:1.58	0.145	-0.04	23.15	24.50	1.365	0.198	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	132322/1745	1:1.58	0.363	-0.04	24.24	25.50	1.337	0.485	22.1
Back side	20	QPSK 1RB_50	132322/1745	1:1.58	0.379	0.02	25.24	26.50	1.337	0.507	22.1
Left side	20	QPSK 1RB_50	132322/1745	1:1.58	0.311	0.07	24.24	25.50	1.337	0.416	22.1
Right side	20	QPSK 1RB_50	132322/1745	1:1.58	0.102	-0.02	25.24	26.50	1.337	0.136	22.1
Top side	20	QPSK 1RB_50	132322/1745	1:1.58	0.392	0.03	24.24	25.50	1.337	**0.524**	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	132322/1745	1:1.58	0.311	-0.05	23.15	24.50	1.365	0.424	22.1

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Back side	20	QPSK 50RB_0	132322/1745	1:1.58	0.340	0.01	23.15	24.50	1.365	0.464	22.1
Left side	20	QPSK 50RB_0	132322/1745	1:1.58	0.207	0.06	23.15	24.50	1.365	0.282	22.1
Right side	20	QPSK 50RB_0	132322/1745	1:1.58	0.088	0.03	23.15	24.50	1.365	0.120	22.1
Top side	20	QPSK 50RB_0	132322/1745	1:1.58	0.372	-0.01	23.15	24.50	1.365	0.508	22.1

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
Right cheek	132322/1745	0.985	0.957	1.029	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Table 33：SAR of LTE Band 66 for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.15 SAR Result of WIFI 2.4G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data											
Left cheek	802.11b	11/2462	98.93%	1.01	0.503	0.08	15.66	16.00	1.081	**0.550**	22
Left tilted	802.11b	11/2462	98.93%	1.01	0.426	0.05	15.66	16.00	1.081	0.466	22
Right cheek	802.11b	11/2462	98.93%	1.01	0.207	0.06	15.66	16.00	1.081	0.226	22
Right tilted	802.11b	11/2462	98.93%	1.01	0.182	0.01	15.66	16.00	1.081	0.199	22
Body worn Test data(Separate 15mm)											
Front side	802.11b	11/2462	98.93%	1.01	0.056	-0.02	15.66	16.00	1.081	0.061	22
Back side	802.11b	11/2462	98.93%	1.01	0.070	-0.09	15.66	16.00	1.081	**0.077**	22
Hotspot Test data (Separate 10mm)											
Front side	802.11b	11/2462	98.93%	1.01	0.106	0.03	15.66	16.00	1.081	0.116	22
Back side	802.11b	11/2462	98.93%	1.01	0.158	0.02	15.66	16.00	1.081	**0.173**	22
Right side	802.11b	11/2462	98.93%	1.01	0.156	-0.04	15.66	16.00	1.081	0.171	22
Top side	802.11b	11/2462	98.93%	1.01	0.143	-0.06	15.66	16.00	1.081	0.156	22

Table 34： SAR of WIFI 2.4G for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

3)When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

Mode	Tune-up (dBm)	Tune-up (mW)	Max Reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11b	16.00	39.81	0.550	/	Yes
802.11g	18.00	63.10	/	0.872	No
802.11n-HT20	13.00	19.95	/	0.276	No
802.11n-HT40	15.50	35.48	/	0.490	No

8.3.16 SAR Result of WIFI 5G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data of U-NII-2A											
Left cheek	802.11a	64/5320	98.14%	1.02	0.781	-0.06	17.35	17.50	1.035	0.824	22.2
Left tilted	802.11a	64/5320	98.14%	1.02	0.770	0.04	17.35	17.50	1.035	0.812	22.2
Right cheek	802.11a	64/5320	98.14%	1.02	0.528	-0.03	17.35	17.50	1.035	0.557	22.2
Right tilted	802.11a	64/5320	98.14%	1.02	0.601	-0.05	17.35	17.50	1.035	0.634	22.2
Left cheek	802.11a	60/5300	98.14%	1.02	0.761	-0.08	16.98	17.50	1.127	**0.874**	22.2
Left tilted	802.11a	60/5300	98.14%	1.02	0.756	-0.02	16.98	17.50	1.127	0.868	22.2
Head Test data of U-NII-2C											
Left cheek	802.11a	136/5680	98.14%	1.02	0.346	0.09	17.45	18.00	1.135	0.400	22.2
Left tilted	802.11a	136/5680	98.14%	1.02	0.440	0.07	17.45	18.00	1.135	0.509	22.2
Right cheek	802.11a	136/5680	98.14%	1.02	0.438	0.03	17.45	18.00	1.135	0.507	22.2
Right tilted	802.11a	136/5680	98.14%	1.02	0.450	0.02	17.45	18.00	1.135	0.520	22.2
Head Test data of U-NII-3											
Left cheek	802.11ac 80	155/5775	92.44%	1.08	0.167	0.07	12.92	14.00	1.282	0.232	22.2
Left tilted	802.11ac 80	155/5775	92.44%	1.08	0.201	0.05	12.92	14.00	1.282	0.279	22.2
Right cheek	802.11ac 80	155/5775	92.44%	1.08	0.236	0.03	12.92	14.00	1.282	0.327	22.2
Right tilted	802.11ac 80	155/5775	92.44%	1.08	0.247	0.06	12.92	14.00	1.282	0.343	22.2
Head Test data of U-NII-2A(Simultaneous Transmission)											
Left cheek	802.11a	64/5320	98.14%	1.02	0.508	-0.04	15.53	16.00	1.114	0.577	22.2
Left tilted	802.11a	64/5320	98.14%	1.02	0.540	0.02	15.53	16.00	1.114	0.613	22.2
Right cheek	802.11a	64/5320	98.14%	1.02	0.375	-0.08	15.53	16.00	1.114	0.426	22.2
Right tilted	802.11a	64/5320	98.14%	1.02	0.421	0.05	15.53	16.00	1.114	0.478	22.2
Body worn Test data of U-NII-2A (Separate 15mm)											
Front side	802.11a	64/5320	98.14%	1.02	0.095	0.03	17.35	17.50	1.035	0.100	22.2
Back side	802.11a	64/5320	98.14%	1.02	0.229	0.05	17.35	17.50	1.035	0.242	22.2
Body worn Test data of U-NII-2C(Separate 15mm)											
Front side	802.11a	136/5680	98.14%	1.02	0.111	0.04	17.45	18.00	1.135	0.128	22.2
Back side	802.11a	136/5680	98.14%	1.02	0.257	0.02	17.45	18.00	1.135	**0.297**	22.2
Body worn Test data of U-NII-3(Separate 15mm)											
Front side	802.11ac 80	155/5775	92.44%	1.08	0.003	-0.06	12.92	14.00	1.282	0.004	22.2
Back side	802.11ac 80	155/5775	92.44%	1.08	0.132	0.08	12.92	14.00	1.282	0.183	22.2
Hotspot Test data of U-NII-1(Separate 10mm)											
Front side	802.11a	36/5180	98.14%	1.02	0.126	0.05	16.52	17.50	1.253	0.161	22.2
Back side	802.11a	36/5180	98.14%	1.02	0.301	0.07	16.52	17.50	1.253	0.384	22.2
Right side	802.11a	36/5180	98.14%	1.02	0.227	0.01	16.52	17.50	1.253	0.290	22.2
Top side	802.11a	36/5180	98.14%	1.02	0.363	0.04	16.52	17.50	1.253	**0.463**	22.2
Hotspot Test data of U-NII-3 (Separate 10mm)											
Front side	802.11ac 80	155/5775	92.44%	1.08	0.042	0.01	12.92	14.00	1.282	0.058	22.2
Back side	802.11ac 80	155/5775	92.44%	1.08	0.252	0.06	12.92	14.00	1.282	0.350	22.2
Right side	802.11ac 80	155/5775	92.44%	1.08	0.053	0.02	12.92	14.00	1.282	0.073	22.2
Top side	802.11ac 80	155/5775	92.44%	1.08	0.263	0.04	12.92	14.00	1.282	0.365	22.2
Test position	**Test mode**	**Test Ch./Freq.**	**Duty Cycle**	**Duty Cycle Scaled factor**	**SAR (W/kg)10-g**	**Power drift(dB)**	**Conducted power(dBm)**	**Tune up Limit(dBm)**	**Scaled factor**	**Scaled SAR(W/kg)**	**Liquid Temp.**
Product specific 10gSAR Test data of U-NII-2A(Separate 0mm)											

Front side	802.11a	64/5320	98.14%	1.02	0.412	0.02	17.35	17.50	1.035	0.435	22.2
Back side	802.11a	64/5320	98.14%	1.02	0.484	0.04	17.35	17.50	1.035	0.510	22.2
Right side	802.11a	64/5320	98.14%	1.02	0.275	0.08	17.35	17.50	1.035	0.290	22.2
Top side	802.11a	64/5320	98.14%	1.02	0.499	0.09	17.35	17.50	1.035	0.526	22.2
Product specific 10gSAR Test data of U-NII-2C(Separate 0mm)											
Front side	802.11a	136/5680	98.14%	1.02	0.508	0.06	17.45	18.00	1.135	0.587	22.2
Back side	802.11a	136/5680	98.14%	1.02	0.479	0.01	17.45	18.00	1.135	0.554	22.2
Right side	802.11a	136/5680	98.14%	1.02	0.319	-0.04	17.45	18.00	1.135	0.369	22.2
Top side	802.11a	136/5680	98.14%	1.02	0.744	0.01	17.45	18.00	1.135	**0.860**	22.2

Table 35：SAR of WIFI 5G for Head, Body and Product specific 10g SAR.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

3)Each channel was tested at the lowest data rate.

4)When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ⩽ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration.

5)For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.

6)When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ⩽ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

8.3.17 SAR Result of BT

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data											
Left cheek	DH5	39/2441	81.00%	1.23	0.040	0.02	8.34	9.00	1.164	**0.057**	22
Left tilted	DH5	39/2441	81.00%	1.23	0.012	0.12	8.34	9.00	1.164	0.017	22
Right cheek	DH5	39/2441	81.00%	1.23	0.026	-0.04	8.34	9.00	1.164	0.037	22
Right tilted	DH5	39/2441	81.00%	1.23	0.010	0.02	8.34	9.00	1.164	0.014	22
Body worn Test data(Separate 15mm)											
Front side	DH5	39/2441	81.00%	1.23	0.004	0.01	8.34	9.00	1.164	0.006	22
Back side	DH5	39/2441	81.00%	1.23	0.011	0.04	8.34	9.00	1.164	**0.016**	22
Hotspot Test data (Separate 10mm)											
Front side	DH5	39/2441	81.00%	1.23	0.007	-0.04	8.34	9.00	1.164	0.010	22
Back side	DH5	39/2441	81.00%	1.23	0.017	0.06	8.34	9.00	1.164	0.024	22
Right side	DH5	39/2441	81.00%	1.23	0.014	0.02	8.34	9.00	1.164	0.020	22
Top side	DH5	39/2441	81.00%	1.23	0.019	0.01	8.34	9.00	1.164	**0.027**	22

Table 36：SAR of BT for Head and Body.

Note:

1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.

2)Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR SAR test evaluation

- **Simultaneous Transmission Possibilities**

NO	Simultaneous TX Combination	Head	Body-worn	Hotspot	Product Specific 10-g (0mm)
1	WWAN+BT	Y	Y	Y	Y
2	WWAN+WIFI 2.4G	Y	Y	Y	Y
3	WWAN+WIFI 5G	Y	Y	Y	Y
4	WWAN+BT+WIFI 5G	Y	Y	Y	Y
5	BT+WIFI 5G	Y	Y	Y	Y

Note:
1) The device does not support DTM function.
2) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.

8.4.2 Simultaneous Transmission SAR Summation Scenario

No.		1														2	3	4	(1+2)(1+3)(1+4)	1+3+4
Test position		Main Antenna SARmax (W/kg)														WiFi Antenna SARmax (W/kg)			Summed 1g SARmax (W/kg)	Summed 1g SARmax (W/kg)
		GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 17	LTE Band 38	LTE Band 41	LTE Band 66	WLAN 2.4G	WLAN 5G	BT		
Head	Left Touch	0.209	0.062	0.157	0.099	0.210	0.158	0.097	0.225	0.166	0.110	0.116	0.108	0.121	0.106	0.550	0.874	0.057	1.099	1.156
	Left Tilt	0.125	0.058	0.162	0.076	0.116	0.167	0.074	0.140	0.162	0.059	0.067	0.099	0.096	0.091	0.466	0.868	0.017	1.035	1.052
	Right Touch	0.198	0.087	0.228	0.170	0.238	0.213	0.169	0.260	0.185	0.140	0.157	0.100	0.094	0.165	0.226	0.557	0.037	0.817	0.854
	Right Tilt	0.111	0.047	0.119	0.083	0.106	0.122	0.086	0.143	0.096	0.074	0.080	0.053	0.052	0.104	0.199	0.634	0.014	0.777	0.791
Body worn	Front	0.167	0.099	0.249	0.313	0.161	0.237	0.338	0.234	0.285	0.178	0.194	0.177	0.171	0.335	0.061	0.128	0.006	0.466	0.472
	Back	0.183	0.227	0.543	0.681	0.242	0.540	0.721	0.263	0.426	0.258	0.275	0.259	0.254	0.718	0.077	0.297	0.016	1.018	1.034
Hotspot	Front	0.131	0.158	0.461	0.536	0.178	0.463	0.601	0.223	0.559	0.154	0.167	0.333	0.321	0.627	0.116	0.161	0.010	0.788	0.798
	Back	0.297	0.387	0.465	0.681	0.391	0.393	0.721	0.352	0.437	0.285	0.301	0.249	0.279	0.772	0.173	0.384	0.024	1.156	1.180
	Left	0.091	0.078	0.245	0.131	0.134	0.247	0.133	0.170	0.200	0.194	0.198	0.154	0.126	0.152	/	/	/	0.247	0.247
	Right	0.126	0.003	0.130	0.123	0.175	0.152	0.125	0.250	0.189	0.236	0.250	0.105	0.104	0.130	0.171	0.290	0.020	0.540	0.560
	Top	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.156	0.463	0.027	0.463	0.490
	Bottom	0.138	0.662	0.857	1.076	0.183	1.025	1.097	0.173	0.915	0.079	0.085	0.528	0.595	1.084	/	/	/	1.097	1.097

Test position		Main Antenna SARmax (W/kg)														WiFi Antenna SARmax (W/kg)			Summed 10g SARmax	Summed 10g SARmax
		GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 17	LTE Band 38	LTE Band 41	LTE Band 66	WLAN 2.4G	WLAN 5G	BT		
Product Specific 10-g SAR	Front	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.587	/	0.587	0.587
	Back	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.554	/	0.554	0.554
	Left	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	0.000
	Right	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.369	/	0.369	0.369
	Top	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.860	/	0.860	0.860
	Bottom	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	0.000

Test position		DIV Antenna SARmax (W/kg)														WiFi Antenna SARmax (W/kg)			Summed 1g SARmax (W/kg)	Summed 1g SARmax (W/kg)
		GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 17	LTE Band 38	LTE Band 41	LTE Band 66	WLAN 2.4G	WLAN 5G	BT		
Head	Left Touch	0.904	0.749	0.611	0.563	0.626	0.583	0.454	0.593	0.419	0.316	0.350	0.324	0.294	0.887	0.550	0.577	0.057	1.481	1.538
	Left Tilt	0.788	0.865	0.769	0.634	0.518	0.861	0.509	0.497	0.545	0.291	0.322	0.330	0.405	0.952	0.466	0.613	0.017	1.565	1.582
	Right Touch	1.065	0.750	0.844	0.707	0.673	0.953	0.703	0.720	0.664	0.377	0.405	0.340	0.451	1.090	0.226	0.426	0.037	1.516	1.553
	Right Tilt	0.760	0.911	1.014	0.631	0.521	1.075	0.583	0.496	0.858	0.309	0.337	0.424	0.411	0.832	0.199	0.478	0.014	1.553	1.567
Body worn	Front	0.207	0.141	0.122	0.093	0.168	0.126	0.239	0.148	0.086	0.148	0.151	0.089	0.086	0.160	0.061	0.128	0.006	0.367	0.373
	Back	0.360	0.282	0.173	0.099	0.237	0.178	0.266	0.230	0.395	0.264	0.303	0.186	0.225	0.198	0.077	0.297	0.016	0.692	0.708
Hotspot	Front	0.190	0.283	0.251	0.137	0.185	0.292	0.367	0.188	0.170	0.131	0.140	0.165	0.168	0.485	0.116	0.161	0.010	0.646	0.656
	Back	0.339	0.363	0.323	0.163	0.424	0.330	0.423	0.313	0.948	0.239	0.252	0.426	0.503	0.507	0.173	0.384	0.024	1.332	1.356
	Left	0.112	0.135	0.113	0.090	0.120	0.124	0.273	0.111	0.191	0.182	0.171	0.188	0.184	0.416	/	/	/	0.416	0.416
	Right	0.148	0.085	0.077	0.049	0.173	0.069	0.120	0.149	0.027	0.170	0.156	0.002	0.060	0.136	0.171	0.290	0.020	0.463	0.483
	Top	0.176	1.087	0.736	0.251	0.207	0.761	0.624	0.229	0.557	0.114	0.111	0.286	0.306	0.524	0.156	0.463	0.027	1.550	1.577
	Bottom	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	0.000

Test position		DIV Antenna SARmax (W/kg)														WiFi Antenna SARmax (W/kg)			Summed 10g SARmax (W/kg)	Summed 10g SARmax (W/kg)
		GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 17	LTE Band 38	LTE Band 41	LTE Band 66	WLAN 2.4G	WLAN 5G	BT		
Product Specific 10-g SAR	Front	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.587	/	0.587	0.587
	Back	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.554	/	0.554	0.554
	Left	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	0.000
	Right	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.369	/	0.369	0.369
	Top	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.860	/	0.860	0.860
	Bottom	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	0.000

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

9 Equipment list

Test Platform	SPEAG DASY5 Professional
Description	SAR Test System (Frequency range 300MHz-6GHz)
Software Reference	DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Hardware Reference

	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	Twin Phantom	SPEAG	SAM 5	1481	NCR	NCR
☒	Twin Phantom	SPEAG	SAM 6	1824	NCR	NCR
☒	DAE	SPEAG	DAE4	1374	2020-11-06	2021-11-05
☒	DAE	SPEAG	DAE4	540	2020-12-11	2021-12-10
☒	E-Field Probe	SPEAG	EX3DV4	3982	2020-10-28	2021-10-27
☒	E-Field Probe	SPEAG	EX3DV4	3789	2020-06-16	2021-06-15
☒	E-Field Probe	SPEAG	EX3DV4	3923	2020-12-18	2021-12-17
☒	Validation Kits	SPEAG	D750V3	1160	2019-05-22	2022-05-21
☒	Validation Kits	SPEAG	D835V2	4d105	2019-12-17	2022-12-16
☒	Validation Kits	SPEAG	D1750V2	1149	2019-05-21	2022-05-20
☒	Validation Kits	SPEAG	D1900V2	5d028	2019-12-17	2022-12-16
☒	Validation Kits	SPEAG	D2450V2	733	2019-12-17	2022-12-16
☒	Validation Kits	SPEAG	D2600V2	1125	2019-05-20	2022-05-19
☒	Validation Kits	SPEAG	D5GHzV2	1165	2019-12-20	2022-12-19
☒	Agilent Network Analyzer	Agilent	E5071C	MY46523591	2020-04-16	2021-04-15
☒	Dielectric Probe Kit	Agilent	85070E	US01440210	NCR	NCR
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2020-04-16	2021-04-15
☒	Radio Communication Analyzer	Anritsu	MT8821C	6201502984	2020-06-11	2021-06-10
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	Agilent	N5171B	MY53050736	2020-04-15	2021-04-14
☒	Preamplifier	Mini-Circuits	ZHL-42W	15542	NCR	NCR
☒	Preamplifier	Compliance Directions Systems Inc.	AMP28-3W	073501433	NCR	NCR
☒	Power Meter	Agilent	E4416A	GB41292095	2020-04-15	2021-04-14
☒	Power Sensor	Agilent	8481H	MY41091234	2020-04-15	2021-04-14
☒	Power Sensor	R&S	NRP-Z92	100025	2020-04-16	2021-04-15
☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR

☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
☒	50 Ω coaxial load	Mini-Circuits	KARN-50+	00850	NCR	NCR
☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
☒	Speed reading thermometer	MingGao	T809	NA	2020-04-21	2021-04-20
☒	Humidity and Temperature Indicator	KIMTOKA	KIMTOKA	NA	2020-04-21	2021-04-20

Note: All the equipments are within the valid period when the tests are performed.

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com