

Report No.: AR/2020/A000301-01 Page: 1 of 35

FCC TEST REPORT

Application No:	AR/2020/A0003
Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
EUT Description:	Mobile Phone
Model No.:	M2007J22R
Trade Mark:	Redmi
FCC ID:	2AFZZJ22G
Standards:	47 CFR Part 2
	47 CFR Part 22 subpart H
	47 CFR Part 24 subpart E
	47 CFR Part 27 subpart C
	47 CFR Part 90 subpart S
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01 C63.26 (2015)
Date of Receipt:	2020/9/11
Date of Test:	2020/9/11 to 2020/9/24(for original report AR/2020/8000501-01)
	2020/10/25to 2020/11/6 (for new report AR/2020/A000301-01)
Date of Issue:	2021/5/25
Test Result:	PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derele yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document lawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at leiphone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



Report No.: AR/2020/A000301-01 Page: 2 of 35

1 Version

	Revision Record							
Version	Chapter	Date	Modifier	Remark				
01		2020/11/6		Original				
02		2021/5/25	Sherlock Fang	 Add test site Information Updated equipment list 				

Authorized for issue by:	
Prepared By	
	Sherlock Fans
	(Sherlock Fang) / Engineer
Checked By	David Chen
	(David Chen) /Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-terms-end-t



Report No.: AR/2020/A000301-01 Page: 3 of 35

Content

1	VE	RSION	
2	TE	ST SUMMARY	5
	2.1	GSM850/UMTS BAND 5 & LTE BAND 5 / 26	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	5
	2.3	UMTS BAND 4 /LTE BAND 4	6
	2.4	LTE BAND 7/38	6
	2.5	LTE BAND 12/17	7
	2.6	LTE BAND 26	8
3	GE	NERAL INFORMATION	10
	3.1	CLIENT INFORMATION	
	3.2	TEST LOCATION	
	3.3	TEST FACILITY	
	3.4	GENERAL DESCRIPTION OF EUT	
	3.5	Test Mode	
	3.6	TEST ENVIRONMENT	
	3.7	TECHNICAL SPECIFICATION	
	3.8	TEST FREQUENCIES	
4	DE	SCRIPTION OF TESTS	22
	4.1	CONDUCTED OUTPUT POWER	22
	4.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	
	4.3	OCCUPIED BANDWIDTH	
	4.4	Band Edge at Antenna Terminals	
	4.5	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	23
	4.6	PEAK-AVERAGE RATIO	24
	4.7	FIELD STRENGTH OF SPURIOUS RADIATION	24
	4.8	FREQUENCY STABILITY / TEMPERATURE VARIATION	
	4.9	Test Setups	
	4.9	.1 Test Setup 1	
	4.9	2 Test Setup 2	
	4.9	.3 Test Setup 3	
	4.9	.4 Test Setup 4	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document. does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@ags.com</u> [No.]Workbon_H0.Middle Section Xienze & technology Park, Shenzhen, Chia 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn



Report No.: AR/2020/A000301-01 Page: 4 of 35

	4.10	TEST CONDITIONS	. 29
5	MAI	N TEST INSTRUMENTS	31
6	MEA	ASUREMENT UNCERTAINTY	34
7	APP	PENDIXES	35



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 5 of 35

2 Test Summary

2.1 GSM850/UMTS Band 5 & LTE Band 5 / 26

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	A
Remark: For the verd	ict, the "N/A" denote	es "not applicable", the "N/T" denotes "not tes	sted".		

2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	A

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".



IVA denotes not applicable, the normalized of the normal state of the normal state of the normal state of the state state



Report No.: AR/2020/A000301-01 Page: 6 of 35

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	A
Remark: For the verd	lict, the "N/A" denote	es "not applicable", the "N/T" denotes "not '	tested".		

2.3 UMTS Band 4 /LTE Band 4

2.4 LTE Band 7/38

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz	Section 5 of Appendix B	Pass	A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document tips to the sample(s) tested and such sample(s) are retained for 30 days only. Attention is of check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

 No.1 Workhon, M-10, Midde Section, Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.on.on.gsg.com

 main: CN_Doccheck@ags.com
 mains: 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.on.gsg.com



Report No.: AR/2020/A000301-01 Page: 7 of 35

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
		or the actual emission bandwidth as defined in paragraph (m)(6) of this section.			
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 9 kHz 25 dBm/ 1 MHz 4 9 kHz 3 5 MHz X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass	А

2.5 LTE Band 12/17

Test Item	FCC Rule No	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§27.50(c)	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	A
Remark: For the verd	ict, the "N/A" denot	es "not applicable", the "N/T" denotes "not	tested".		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 8 of 35

2.6 LTE Band 26

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Transmitter Conducted Power Output	§2.1046, §90.635	< 100 W.	Section 1 of Appendix B	PASS	A
Peak-Average Ratio		FCC: Limit≤13 dB	Section 2 of Appendix B	N/T	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	PASS	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	PASS	A
Emission Mask	§2.1051 § 90.691	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B	PASS	A
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out- of-band emissions	Section 6 of Appendix B	PASS	A
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out- of-band emissions	Section 7 of Appendix B	PASS	A
Frequency Stability	§2.1055, §90.213	< ±2.5ppm. denotes "not applicable", the "N/T" denote	Section 8 of Appendix B	PASS	A

Remark 1: All test were performed by Lab A and B. Parts of test items above were subcontracted to Lab B. Lab A SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch Lab B SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 9 of 35

Remark2:

This test report (Report No.: AR/2020/A000301-01) is base on the original test report (Report No.: AR/2020/8000501-01).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report only radiated spurious emissions were performed based on the worst

case(GSM850:Channel:190;WCDMA IV:Channel:1513;LTE B12:Channel:23095) of the original report with report number AR/2020/8000501-01 and other test data in this report are base on the previous report with report number AR/2020/8000501-01.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, results (01 DoccheckTeres).



Report No.: AR/2020/A000301-01 Page: 10 of 35

3 General Information

3.1 Client Information

Applicant:	Xiaomi Communications Co., Ltd.		
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085		
Manufacturer:	Xiaomi Communications Co., Ltd.		
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085		

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch		
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China		
Post code:	518057		
Test engineer:	Dee Zheng,Mike Hu		

Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.		
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China		
Post code:	710086		
Test engineer:	Ben Huang, Leah Chen		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-terms-end-te



Report No.: AR/2020/A000301-01 Page: 11 of 35

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

• A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

• FCC –Designation Number: CN1271.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents, forgery or falsification of the content or appearance of this document is defined to the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing impercian report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com



Report No.: AR/2020/A000301-01 Page: 12 of 35

EUT Description:: Mobile Phone Model No.: M2007J22R Trade Mark: Redmi P2 Hardware Version: Software Version: MIUI12 Portable Device, Module Sample Type: Antenna Type: **PIFA** Antenna GSM850: -4.6dBi(Ant1); -5.5dBi(Ant2); GSM1900:-1.5dBi(Ant1);-4.0dBi(Ant2); WCDMA Band II:-1.5dBi(Ant1):-4.0dBi(Ant2); WCDMA Band VI:-0.43dBi(Ant1);-2.3dBi(Ant2); WCDMA Band V:-4.6dBi(Ant1);-5.5dBi(Ant2); LTE Band 2-1.87dBi (Ant1);-4.0dBi(Ant2); LTE Band 4:-0.43dBi (Ant1);-2.3dBi(Ant2); Antenna Gain: LTE Band 5:-4.86dBi (Ant1);-5.5dBi(Ant2); LTE Band 7: -0.75dBi(Ant1);-3.2dBi(Ant2); LTE Band 12:-5.23dBi (Ant1);-5.1dBi(Ant2); LTE Band 17:-5.23dBi (Ant1);-5.1dBi(Ant2); LTE Band 26:-5.23dBi (Ant1);-5.5dBi(Ant2); LTE Band 38:-0.75dBi (Ant1);-3.2dBi(Ant2)

3.4 General Description of EUT

3.5 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM3	LTE system, 64QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing //inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com



Report No.: AR/2020/A000301-01 Page: 13 of 35

3.6 Test Environment

Environment Parameter	Selected Values During Tests		
Relative Humidity	52%		
Atmospheric Pressure:	101.32 KPa		
Temperature	NT 25 °C		
	LV 3.6V		
Voltage:	NV	3.85V	
	HV	4.3V	

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

3.7 Technical Specification

Characteristics	Description			
	GSM			
Radio System Type	UMTS			
	LTE			
	Band	ТХ	RX	
	GSM850	824 to 849 MHz	869 to 894 MHz	
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz	
	UMTS Band V	824 to 849 MHz	869 to 894 MHz	
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz	
0	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz	
Supported Frequency Range	LTE Band 5	824 to 849 MHz	869 to 894 MHz	
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz	
	LTE Band 12	699 to 716 MHz	729 to 746 MHz	
	LTE Band 17	704 to 716 MHz	734 to 746 MHz	
	LTE Band 26	814 to 824MHz	859 to 869 MHz	
	(814 to 824 MHz)		009 10 009 MILZ	
	LTE Band 26	824 to 849 MHz		
	(824 to 849 MHz)	024 10 049 MITZ	869 to 894 MHz	
	LTE Band 38	2570 to 2620 MHz	2570 to 2620 MHz	
Target TX Output Power	GSM850:34 dBm GSM1900: 31dBm UMTS Band II: 25dBm UMTS Band IV: 25dBm UMTS Band V: 25dBm			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, jease contact us at telephone: (86-755) 83071443, or email: CN_Doccheck@sgs.com



Report No.: AR/2020/A000301-01 Page: 14 of 35

	LTE Band 2: 25dBm			
	LTE Band 4: 25dBm			
	LTE Band 5: 25dBm			
	LTE Band 7: 25dBm			
	LTE Band 12: 25dBm			
	LTE Band 17: 25dBm			
	LTE Band 26: 25dBm			
	LTE Band 38: 25dBm			
	GSM system:	0.2 MHz		
	UMTS system:	5 MHz		
		$\boxed{1.4 \text{ MHz}}$ $\boxed{3 \text{ MHz}}$ $\boxed{5 \text{ MHz}}$ $\boxed{10 \text{ MHz}}$		
	LTE Band 2	\boxtimes 15 MHz, \boxtimes 20 MHz		
		$\boxed{1.4 \text{ MHz};}$ $\boxed{3 \text{ MHz};}$ $\boxed{5 \text{ MHz};}$ $\boxed{10 \text{ MHz};}$		
	LTE Band 4	\boxtimes 15 MHz, \boxtimes 20 MHz		
	LTE Band 5	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz		
	LTE Band 7	S MHz; S10 MHz; S15 MHz, S20 MHz		
Supported Channel	LTE Band 12	X1.4 MHz; X3 MHz; X5 MHz; X10 MHz		
	LTE Band 17	\boxtimes 5 MHz; \boxtimes 10 MHz		
Bandwidth		\boxtimes 1.4 MHz; \boxtimes 3 MHz; \boxtimes 5 MHz; \boxtimes 10 MHz;		
	LTE Band 26(814-824)			
	LTE Band 26(824-849)	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz;		
	LTE Band 20(024-049)	⊠15 MHz		
	LTE Band38	⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz		
	Note1: Only 27 Resource Blog	cks for 10MHz/15MHz/20MHz when the		
	modulation is 16QAM.			
		JPA, HSDPA, DS-HSDPA, but only the worst		
	case was tested and the data			
Characteristics	Description			
	•			
	GSM850	245KGXW; 246KG7W		
	GSM1900	244KGXW; 248KG7W		
	UMTS Band II	4M23F9W; 4M22W7D;		
	UMTS Band IV	4M23F9W; 4M22W7D;		
	UMTS Band V	4M23F9W; 4M22W7D;		
		1M10G7D;1M09W7D; 1M10W7D		
		2M69G7D;2M69W7D; 2M69W7D		
Designation of	LTE Band 2	4M49G7D;4M49W7D; 4M49W7D		
Emissions		8M93G7D;8M95W7D; 8M93W7D		
		13M5G7D;13M5W7D; 13M5W7D		
(Remark: the necessary		17M9G7D;18M0W7D; 17M9W7D		
bandwidth of which is		1M10G7D;1M09W7D; 1M10W7D		
the worst value from		2M69G7D;2M69W7D; 2M69W7D		
the measured occupied	LTE Band 4	4M49G7D;4M49W7D; 4M49W7D		
bandwidths for each		8M93G7D;8M95W7D; 8M93W7D		
type of channel		13M5G7D;13M5W7D; 13M5W7D		
••		17M9G7D;18M0W7D; 17M9W7D		
bandwidth		1M10G7D;1M09W7D; 1M10W7D		
configuration.)		2M69G7D;2M69W7D; 2M69W7D		
	LTE Band 5	4M49G7D;4M49W7D; 4M48W7D		
		8M95G7D;8M93W7D; 8M95W7D		
		4M48G7D;4M48W7D; 4M48W7D		
		8M95G7D;8M93W7D; 8M95W7D		
	LTE Band 7	13M5G7D;13M5W7D; 13M5W7D		
		17M9G7D;17M9W7D; 17M9W7D		
	LTE Band 12	1M10G7D;1M09W7D;1M10W7D		
家庭を有限ない	niess otherwise agreed in writing, this document is verleaf, available on request or accessible at http://www. wheat to Terms and Conditions for Electronia	issued by the Company subject to its General Conditions of Service printed w.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, ents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. fication and jurisdiction issues defined therein. Any holder of this document is Company's findings at the time of its intervention only and within the limits of ionsibility is to its Client and this document does not exonerate parties to a ions under the transaction documents. This document cannot be reproduced ions under the transaction document, forgery or falsification of the content or mpany. Any unauthorized alteration, forgery or falsification of the content or		
A A A A A A A A A A A A A A A A A A A	ttention is drawn to the limitation of liability, indemnif dvised that information contained berson reflects the	icents at <u>nupur/www.sgs.com/en/terms-and-Conditions/ierms-e-Document.aspx.</u> fication and jurisdiction issues defined therein. Any holder of this document is Company's findings at the time of its intervention only and within the limits of		
	lient's instructions, if any. The Company's sole resp ansaction from exercising all their rights and oblight	consibility is to its Client and this document does not exonerate parties to a ions under the transaction document. This document he reproduced		
advaced in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or				



	except in full, without prior written approval of the Company. Any una appearance of this document is unlawful and offenders may be prosecul results shown in this test report refer only to the sample(s) tested and suc Attention: To check the authenticity of testing /inspection report & c	ted to the fullest extent of the law. Unless h sample(s) are retained for 30 days only.	otherwise stated the
d.	or email: CN.Doccheck@sgs.com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057	t (86-755) 26012053 f (86-755) 26710594	www.sgsgroup.com.cn
	中国·深圳・科技园中区M-10栋一号厂房 邮编: 518057	t (86-755) 26012053 f (86-755) 26710594	sgs.china@sgs.com



Report No.: AR/2020/A000301-01 Page: 15 of 35

		2M69G7D;2M69W7D; 2M69W7D
		4M49G7D;4M49W7D; 4M48W7D
		8M95G7D;8M93W7D; 8M95W7D
	LTE Dand 47	4M48G7D;4M48W7D; 4M48W7D
	LTE Band 17	8M95G7D;8M93W7D; 8M95W7D
		1M10G7D;1M09W7D; 1M10W7D
	LTE Band 26	2M69G7D;2M69W7D; 2M69W7D
	(814-824)	4M49G7D;4M49W7D; 4M49W7D
		8M93G7D;8M95W7D; 8M93W7D
	LTE Band 26 (824-849)	1M10G7D;1M09W7D; 1M10W7D
		2M69G7D;2M69W7D; 2M69W7D
		4M49G7D;4M49W7D; 4M49W7D
		8M93G7D;8M95W7D; 8M93W7D
		13M5G7D;13M5W7D; 13M5W7D
		4M48G7D;4M48W7D; 4M48W7D
	LTE Band 38	8M95G7D;8M93W7D; 8M95W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 16 of 35

3.8 Test Frequencies

Test Mode	st Mode TX / RX RF Channel			
Test Mode	ΙΛ / ΚΛ	Low (L)	Middle (M)	High (H)
GSM850	ТХ	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6 MHz	848.8 MHz
	υV	Channel 128	Channel 190	Channel 251
	RX	869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX	RF Channel		
Test Mode		Low (L)	Middle (M)	High (H)
TY	ТХ	Channel 512	Channel 661	Channel 810
GSM1900		1850.2MHz	1880.0 MHz	1909.8 MHz
GSWI1900	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX		RF Channel	
Test Mode	17/ 67	Low (L)	Middle (M)	High (H)
	WCDMA Band II RX	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz
		Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX	RF Channel			
		Low (L)	Middle (M)	High (H)	
	ТΧ	Channel 1312	Channel 1413	Channel 1513	
WCDMA Band IV		1712.4MHz	1732.6 MHz	1752.6 MHz	
	RX	Channel 1537	Channel 1638	Channel 1738	
		2112.4 MHz	2132.6 MHz	2152.6 MHz	

	TX / RX	RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)	
WCDMA Band V	ТΧ	Channel 4132	Channel 4182	Channel 4233	
		826.4MHz	836.4 MHz	846.6 MHz	
	RX	Channel 4357	Channel 4407	Channel 4458	
		871.4 MHz	881.4 MHz	891.6 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 17 of 35

TestMede	Donoduuidth			RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		тх	Channel 18607	Channel 18900	Channel 19193
			1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		КЛ	1930.7 MHz	1960 MHz	1989.3 MHz
		тх	Channel 18615	Channel 18900	Channel 19185
	3MHz		1851.5 MHz	1880 MHz	1908.5 MHz
	SIVIEZ	RX	Channel 615	Channel 900	Channel 1185
		КЛ	1931.5 MHz	1960 MHz	1988.5 MHz
		ΤХ	Channel 18625	Channel 18900	Channel 19175
	5MHz		1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
		тх	Channel 18650	Channel 18900	Channel 19150
	10MHz		1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
		тх	Channel 18675	Channel 18900	Channel 19125
	15MHz		1857.5 MHz	1880 MHz	1902.5 MHz
		RX	Channel 675	Channel 900	Channel 1125
		КЛ	1937.5 MHz	1960 MHz	1982.5 MHz
		ΤХ	Channel 18700	Channel 18900	Channel 19100
	20MHz		1860 MHz	1880 MHz	1900 MHz
	20101112	RX	Channel 700	Channel 900	Channel 1100
		INΛ	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 18 of 35

	Dondwidth			RF Channel	
Test Mode	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
		τv	Channel 19957	Channel 20175	Channel 20393
	4 4141-	ΤX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		КЛ	2112.5 MHz	2132.5MHz	2152.5 MHz
		ТХ	Channel 19965	Channel 20175	Channel 20385
	2141-		1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	DV	Channel 2000	Channel 2175	Channel 2350
		RX	2115 MHz	2132.5MHz	2150 MHz
		ТΧ	Channel 19975	Channel 20175	Channel 20375
	5MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Dallu 4		тх	Channel 20000	Channel 20175	Channel 20350
	10MHz		1715 MHz	1732.5 MHz	1750 MHz
	TOWITZ	RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
		ТΧ	Channel 20025	Channel 20175	Channel 20325
	15MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TOIVITIZ	RX	Channel 2025	Channel 2175	Channel 2325
		ΓA	2117.5 MHz	2132.5MHz	2147.5 MHz
		ТΧ	Channel 20050	Channel 20175	Channel 20300
	20MHz		1720 MHz	1732.5 MHz	1745 MHz
	2010112	RX	Channel 2050	Channel 2175	Channel 2300
		IVA	2120 MHz	2132.5MHz	2145 MHz

	Bandwidth			RF Channel		
Test Mode	Danuwiuth	TX / RX	Low (L)	Middle (M)	High (H)	
		ТХ	Channel 20407	Channel 20525	Channel 20643	
	1.4MHz		824.7 MHz	836.5 MHz	848.3 MHz	
	1.411112	RX	Channel 2407	Channel 2525	Channel 2643	
		ΓA	869.7 MHz	881.5 MHz	893.3 MHz	
		ТХ	Channel 20415	Channel 20525	Channel 20635	
	3MHz		825.5 MHz	836.5 MHz	847.5 MHz	
		RX	Channel 2415	Channel 2525	Channel 2635	
LTE Band 5			870.5 MHz	881.5 MHz	892.5 MHz	
LTE Dariu 5		тх	Channel 20425	Channel 20525	Channel 20625	
	5MHz		826.5 MHz	836.5 MHz	846.5 MHz	
	SIVILIZ	RX	Channel 2425	Channel 2525	Channel 2625	
		ΓΛ	871.5 MHz	881.5 MHz	891.5 MHz	
		ТХ	Channel 20450	Channel 20525	Channel 20600	
	10MHz		829 MHz	836.5 MHz	844 MHz	
	TOMITZ	PY	Channel 2450	Channel 2525	Channel 2600	
	RX	874 MHz	881.5 MHz	889 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 19 of 35

	Dondwidth		RF Channel		
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		ТХ	Channel 20775	Channel 21100	Channel 21425
	5MHz		2502.5 MHz	2535 MHz	2567.5 MHz
		RX	Channel 2775	Channel 3100	Channel 5825
		ΓΛ	2622.5 MHz	2655 MHz	2687.5 MHz
		ТХ	Channel 20800	Channel 21100	Channel 21400
	10MHz	IA	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
LTE Band 7			2625 MHz	2655 MHz	2685 MHz
LIE Dallu I		ТХ	Channel 20825	Channel 21100	Channel 21375
	15MHz		2507.5 MHz	2535 MHz	2562.5 MHz
	TOIVITIZ	RX	Channel 2825	Channel 3100	Channel 3375
			2627.5 MHz	2655 MHz	2682.5 MHz
		ТХ	Channel 20850	Channel 21100	Channel 21350
	201411-	IX	2510 MHz	2535 MHz	2560 MHz
		20MHz RX	Channel 2850	Channel 3100	Channel 3350
			2630 MHz	2655 MHz	2680 MHz

TestMade	Dondwidth			RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		ТΧ	Channel 23017	Channel 23095	Channel 23173
	1.4MHz		699.7 MHz	707.5 MHz	715.3 MHz
	1.411112	RX	Channel 5017	Channel 5095	Channel 5173
		ΓΛ	729.7 MHz	737.5 MHz	745.3 MHz
		ΤХ	Channel 23025	Channel 23095	Channel 23165
	3MHz		700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
LTE Band12			730.5 MHz	737.5 MHz	744.5 MHz
		тх	Channel 23035	Channel 23095	Channel 23155
	5MHz		701.5 MHz	707.5 MHz	713.5 MHz
		RX	Channel 5035	Channel 5095	Channel 5155
		ΓA	731.5 MHz	737.5 MHz	743.5 MHz
		ТХ	Channel 23060	Channel 23095	Channel 23130
	10MHz	1	704 MHz	707.5 MHz	711 MHz
	TOMITZ		Channel 5060	Channel 5095	Channel 5130
		RX	734 MHz	737.5 MHz	741 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
	Danuwium		Low (L)	Middle (M)	High (H)
		τv	Channel 23755	Channel 23790	Channel 23825
	5MHz	ΤX	706.5 MHz	710 MHz	713.5 MHz
	SIVIEZ	RX	Channel 5755	Channel 5790	Channel 5825
LTE Band 17			736.5 MHz	740 MHz	743.5 MHz
	10MHz	ТХ	Channel 23780	Channel 23790	Channel 23800
			709 MHz	710 MHz	711 MHz
		RX	Channel 5780	Channel 5790	Channel 5800
			739 MHz	740 MHz	741 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 20 of 35

Teat Meda	Donoduuidth	vidth TX / RX		RF Channel	
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
		ΤХ	Channel 26697	Channel 26740	Channel 26783
	1.4MHz		814.7 MHz	819 MHz	823.3 MHz
		RX	Channel 8697	Channel 8740	Channel 8783
			859.7 MHz	864MHz	868.3 MHz
		ΤХ	Channel 26705	Channel 26740	Channel 26775
	3MHz		815.5 MHz	819 MHz	822.5 MHz
		RX	Channel 8705	Channel 8740	Channel 8775
LTE Band26			860.5 MHz	864MHz	867.5 MHz
(814-824)		ТΧ	Channel 26715	Channel 26740	Channel 26765
	5MHz		816.5 MHz	819 MHz	821.5 MHz
	SIVILIZ	RX	Channel 8715	Channel 8740	Channel 8755
			861.5 MHz	864MHz	866.5 MHz
		ΤХ	Channel 26740	Channel 26740	Channel 26740
			819 MHz	819 MHz	819 MHz
	10MHz	RX	Channel 8740	Channel 8740	Channel 8740
		КÅ	864MHz	864MHz	864MHz

Test Mede	Danaduuidth			RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		ΤХ	Channel 26797	Channel 26915	Channel 27033
	1.4MHz		824.7 MHz	836.5 MHz	848.3 MHz
	1.411172	RX	Channel 8697	Channel 8915	Channel 9033
			859.7 MHz	881.5 MHz	893.3 MHz
		ТΧ	Channel 26805	Channel 26915	Channel 27025
	3MHz		825.5 MHz	836.5 MHz	847.5 MHz
	SIVILIZ	RX	Channel 8805	Channel 8915	Channel 9025
		ΓΛ.	860.5 MHz	881.5 MHz	892.5 MHz
	5MHz	ТХ	Channel 26815	Channel 26915	Channel 27015
LTE Band26			826.5 MHz	836.5 MHz	846.5 MHz
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015
			871.5 MHz	881.5 MHz	891.5 MHz
		ΤХ	Channel 26840	Channel 26915	Channel 26990
	10MHz		829 MHz	836.5 MHz	844 MHz
	TOWITZ	RX	Channel 8840	Channel 8915	Channel 8990
			874 MHz	881.5 MHz	889 MHz
		ΤХ	Channel 26865	Channel 26915	Channel 26965
	15MHz		831.5 MHz	836.5 MHz	841.5 MHz
	TOIVINZ	RX	Channel 8865	Channel 8915	Channel 8965
			876.5 MHz	881.5 MHz	886.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 21 of 35

Test Mode	Donoduuidth	Bandwidth TX / RX	RF Channel		
Test Mode	Danuwiutn		Low (L)	Middle (M)	High (H)
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225
			2572.5 MHz	2595 MHz	2617.5 MHz
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200
LTE Band 38			2575 MHz	2595 MHz	2615 MHz
LIE Danu 30	15MHz	TX/RX	Channel 37825	Channel38000	Channel 38175
			2577.5 MHz	2595 MHz	2612.5 MHz
		TX/RX	Channel 37850	Channel38000	Channel 38150
	20MHz		2580 MHz	2595 MHz	2610 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 22 of 35

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015) Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.frms-en-Conditions/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is attet the new by be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention, To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



Report No.: AR/2020/A000301-01 Page: 23 of 35

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within

1 - 5% of the 99% occupied bandwidth observed in Step 7

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW ≥ 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to



	Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u> . Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) is client aspecies contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ass.com
d.	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 tt (86–755) 26012053 ft (86–755) 26710594 www.sgsgroup.com.cn
	中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/A000301-01 Page: 24 of 35

force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.7 Field Strength of Spurious Radiation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio</u>



Report No.: AR/2020/A000301-01 Page: 25 of 35

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing //msection report & certificate, please contact us at telephone: (86-755) 26710594 www.sgsgroup.com.cn http://www.sgs.com/en/Ters). Not.Workshop.M-10.Midde Section, Science & Technology Park, Shenzhen, China 518057 to (86-755) 26012053 for (86-755) 26710594 sys.com/en/Ters).



Report No.: AR/2020/A000301-01 Page: 26 of 35

. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)8307 1443, results (10). Dupchedrefores not



Report No.: AR/2020/A000301-01 Page: 27 of 35

4.9 Test Setups

4.9.1 Test Setup 1

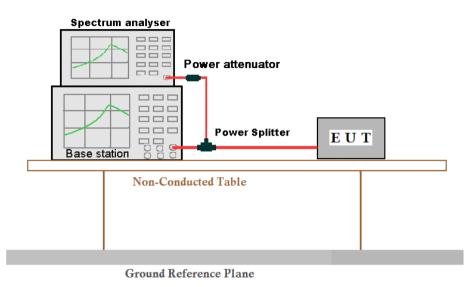

4.9.2 Test Setup 2

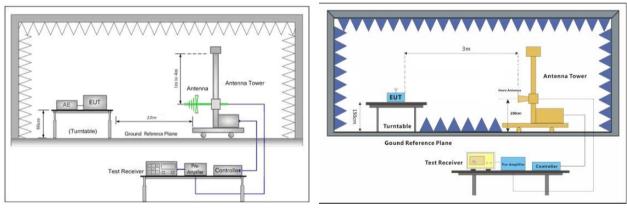


Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of lability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document to; to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 807 1443, or email: CN_Doccheck@ags.com
No.1Workshop, M-10.Mide Section, Stendogy Park, Shenzhen, China 518057 tt (86-755) 26012053 ft (86-755) 26710594 www.sgsgroup.com.on
wgs.china@gsgs.com



Report No.: AR/2020/A000301-01 Page: 28 of 35

4.9.3 Test Setup 3




Figure 1. Below 30MHz



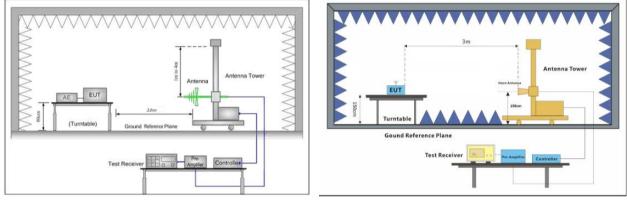


Figure 2. 30MHz to 1GHz



4.9.4 Test Setup 4

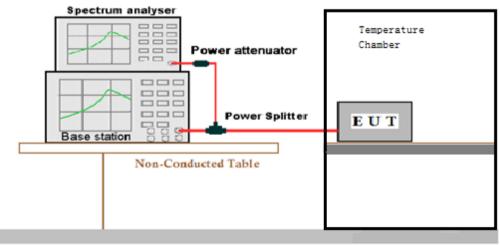

Ground Reference Plane



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and juriadiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is of the document is assetted the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

 No.1 Workhon, M-10, Midde Section, Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cn.

 main: Similar Attention is the Similar Attention is 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cn.



Report No.: AR/2020/A000301-01 Page: 29 of 35

4.10 Test Conditions

Test Case		Test Conditions			
		Test Environment	Ambient Climate & Rated Voltage		
	Average Power, Total	Test Setup	Test Setup 1		
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Transmit		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
Output			UMTS/TM2; LTE/TM1;LTE/TM2		
Power Data	Average	Test Environment	Ambient Climate & Rated Voltage		
Dala	Average Power,	Test Setup	Test Setup 1		
	Spectral Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
	required)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
			UMTS/TM2; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
Deals to Ass	Detie	Test Setup	Test Setup 1		
Peak-to-Avera (if required)	rage Ratio	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
		Test Setup	Test Setup 1		
Modulation Characteris	tics	RF Channels (TX)	M (M= middle channel)		
Characterio		Teet Mede	GSM/TM1;GSM/TM2;UMTS/TM1;		
		Test Mode	UMTS/TM2; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
		Test Setup	Test Setup 1		
	Occupied Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
Bandwidth			UMTS/TM2; LTE/TM1;LTE/TM2		
Danawiati		Test Environment	Ambient Climate & Rated Voltage		
	Emission	Test Setup	Test Setup 1		
	Bandwidth (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
	required)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
Daniel T. J.		Toot Environment	UMTS/TM2; LTE/TM1;LTE/TM2		
Band Edges	3	Test Environment	Ambient Climate & Rated Voltage		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-eDocument.aspx. Attention is drawn to the limitation of ilability. Indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereion reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document. Gocuments and within the limits of appearance of this document is adoligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is auther useful to the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at letephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

 No.1 Workhon, M-10 Midde Bection, Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cn

 main: Similar Attached Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 sys.china@sgs.com



Report No.: AR/2020/A000301-01 Page: 30 of 35

Compliance	Test Setup	Test Setup 1
	RF Channels (TX)	L, H (L= low channel, H= high channel)
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;
	Test Mode	UMTS/TM2; LTE/TM1;LTE/TM2
	Test Environment	Ambient Climate & Rated Voltage
	Test Setup	Test Setup 1
Spurious Emission at	RF Channels (TX)	L,M, H
Antenna Terminals		(L= low channel, M= middle channel, H= high channel)
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;
		UMTS/TM2; LTE/TM1;LTE/TM2
	Test Environment	Ambient Climate & Rated Voltage
	Test Setup	Test Setup 2
Field Strength of		GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2; LTE/TM1;LTE/TM2;
Spurious Radiation	Test Mode	Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;
	Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.
Frequency Stability	Test Setup	Test Setup 4
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;
		UMTS/TM2; LTE/TM1;LTE/TM2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/A000301-01 Page: 31 of 35

5 Main Test Instruments

RSE Test System							
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date		
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10		
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2020-04-02	2021-04-01		
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10		
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12		
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12		
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12		
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR		
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR		
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR		
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR		
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-17		
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-17		
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-02		
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-17		
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05		
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR		
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2020-04-02	2021-04-01		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-terms-end-t



Report No.: AR/2020/A000301-01 Page: 32 of 35

	RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-	Cal.Due date (yyyy-mm-		
Dual Output Mobile Communication DC	Agilent Technologies	66311B	W009-09	dd) 2020/10/22	dd) 2021/10/21		
Source	Inc		W005.02	2020/4/16	2021/4/15		
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15		
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11		
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A		
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/10/22	2021/10/21		
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2020/10/22	2021/10/21		
Temperature Chamber	GIANT FORCE	ICT-150- 40-CP-AR	W027-03	2020/10/22	2021/10/21		
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15		
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21		

RE in Chamber (Below 1GHz)						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020-07-19	2023-07-18	
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2019-12-16	2020-12-15	
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-02	2019-05-24	2022-05-23	
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2021-03-24	2022-03-23	
Measurement Software	AUDIX	e3 V8.2014- 6-27	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM025-01	2020-07-10	2021-07-09	
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21	

RE in Chamber (Above 1GHz)						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2021-03-26	2024-03-25	
EXA Signal Analyzer	Agilent Technologies Inc	N9010A	SEM004-12	2021-02-01	2022-01-31	
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2021-04-14	2024-04-13	
	Compliance			2020-09-23	2021-09-22	
Pre-Amplifier	Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23	
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM026-01	2020-07-10	2021-07-09	
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document to just by be prosecuted to the fullest extend of 10 and y sonly. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CN-Doccheck@esgs.com



Report No.: AR/2020/A000301-01 Page: 33 of 35

General used equipment						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2019-09-26	2020-09-25	
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2019-09-26	2020-09-25	
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-4-07	2021-04-06	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/8000501 Page: 34 of 35

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Lab A:		
Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.37 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = ±2.0 dB
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm

Radiated Spurious Emissions Below 1GHz	\pm 4.5dB
Radiated Spurious Emissions Above 1GHz	\pm 4.8dB

Lab B:

No.	Item Measurement Uncerta	
		± 4.8dB (Below 1GHz)
	Radiated Emission	± 4.8dB (1GHz to 6GHz)
1		± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T



Report No.: AR/2020/8000501 Page: 35 of 35

7 Appendixes

Appendix A	Photographs of Set-Up for AR2020A0003	
Appendix B.1	GSM 850 & 1900	
Appendix B.2	WCDMA Band II & IV & V	
Appendix B.3	LTE Band 2	
Appendix B.4	LTE Band 4	
Appendix B.5	LTE Band 5	
Appendix B.6	LTE Band 7	
Appendix B.7	LTE Band 12	
Appendix B.8	LTE Band 17	
Appendix B.9	LTE Band 26 (814-824)	
Appendix B.10	LTE Band 26 (824-849)	
Appendix B.11	LTE Band 38	

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: **CN_Doccheck@sss.com**