



FCC RADIO TEST REPORT

FCC ID : 2AFZZK11AG
Equipment : Mobile Phone
Brand Name : POCO
Model Name : M2012K11AG
Applicant : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi
Middle Road, Haidian District, Beijing,
China, 100085
Manufacturer : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi
Middle Road, Haidian District, Beijing,
China, 100085
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 05, 2021 and testing was started from Jan. 08, 2021 and completed on Jan. 26, 2021. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	42
3.6 AC Conducted Emission Measurement.....	47
3.7 Antenna Requirements	49
4 List of Measuring Equipment.....	50
5 Uncertainty of Evaluation	51
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 5.66 dB at 2389.940 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 15.79 dB at 0.503 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Vivian Hsu



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, and GNSS.

Product Specification subjective to this standard	
Sample 1	EUT with Battery 1
Sample 2	EUT with Battery 2
Antenna Type	WWAN: PIFA Antenna WLAN 5GHz: <Ant. 11>: PIFA Antenna <Ant. 6>: PIFA Antenna WLAN 2.4GHz: <Ant. 11>: PIFA Antenna <Ant. 7>: PIFA Antenna Bluetooth: <Ant. 11>: PIFA Antenna <Ant. 7>: PIFA Antenna GPS / Glonass / BDS / Galileo: <L1 Ant.>: PIFA Antenna <L5 Ant.>: PIFA Antenna NFC: Planar Antenna
Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi) Ant. 11: -3.1 Ant. 7: -3.4

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY, CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.-



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Antenna


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + USB Cable (Charging form Adapter) for Sample 1
Remark: For Radiated Test Cases, the tests were performed with Sample 1	

Ch. #	2400-2483.5 MHz			
	802.11b	802.11g	802.11ax HE20	802.11ax HE40
Low	01	01	01	03
Middle	06	06	06	06
High	11	11	11	09

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

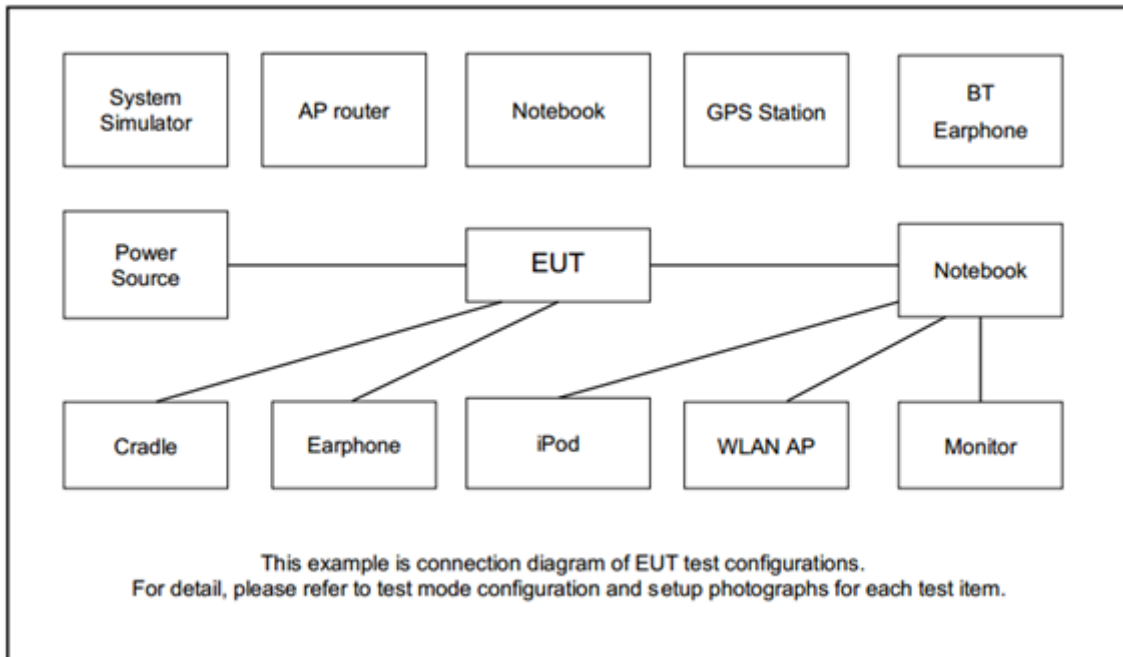

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	Latitude 3400	FCC DOC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m



2.5 EUT Operation Test Setup

The RF test items, make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.


3.1.4 Test Setup






3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

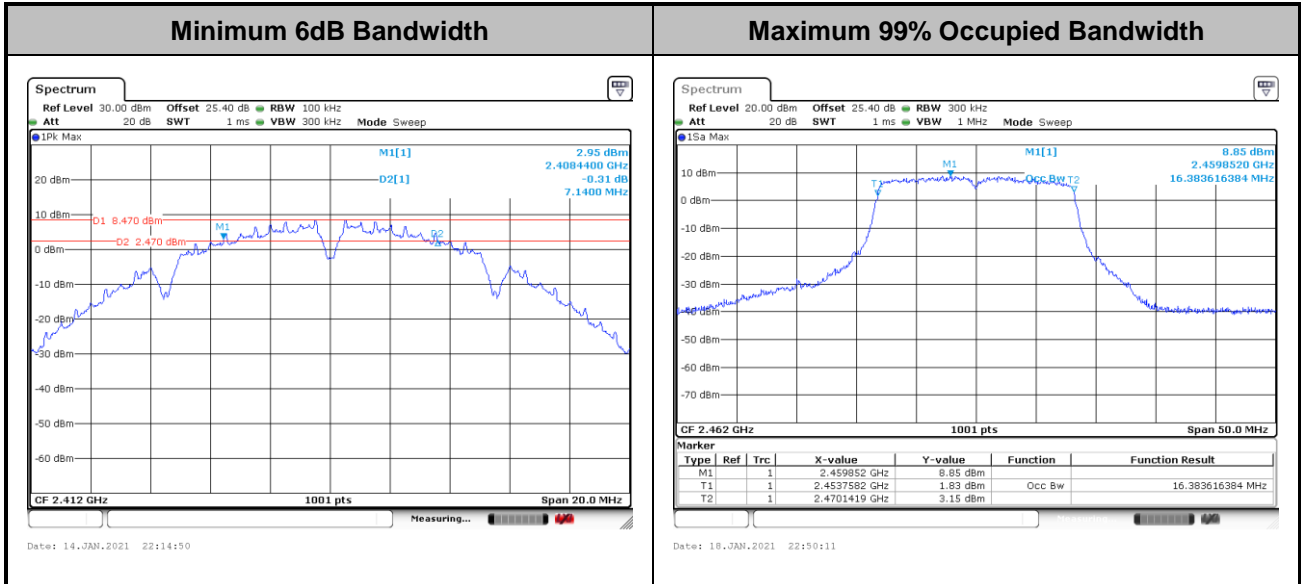

<For 802.11ax mode>

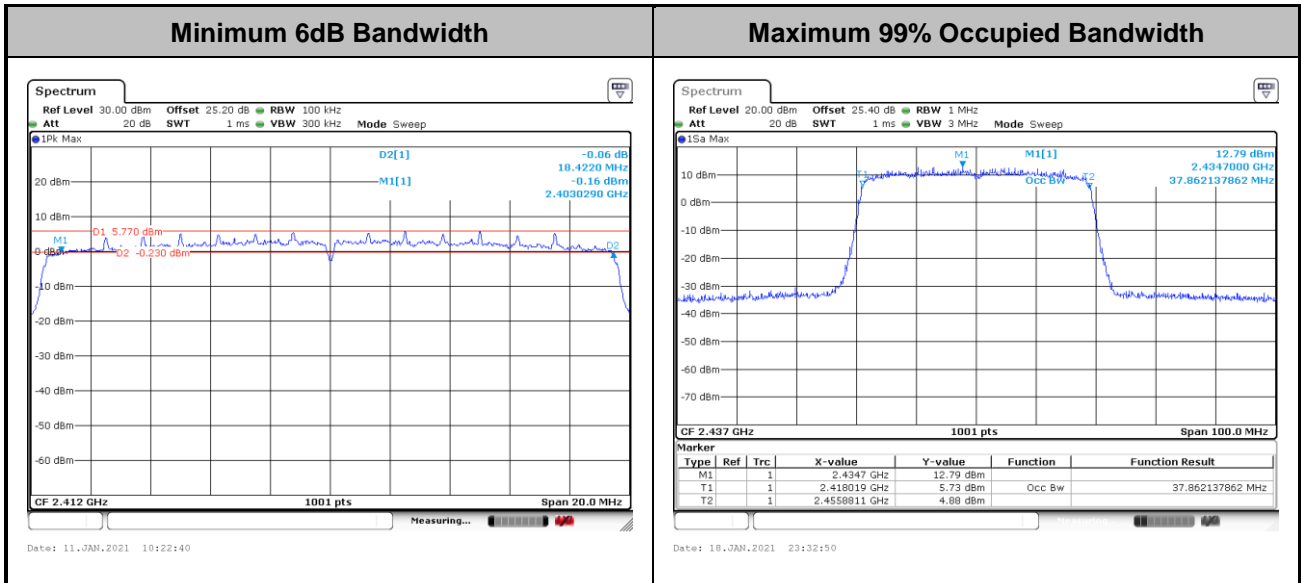

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

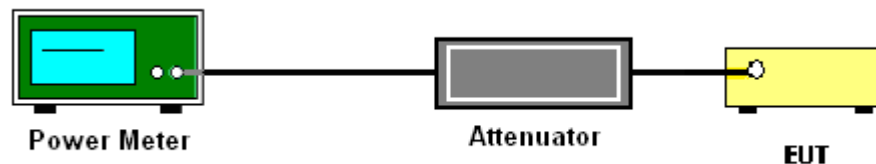

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)



3.3.4 Test Setup

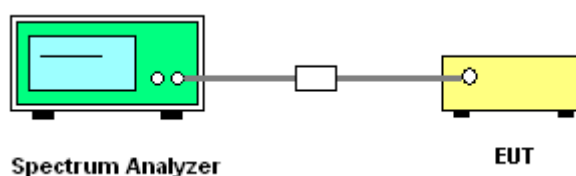





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

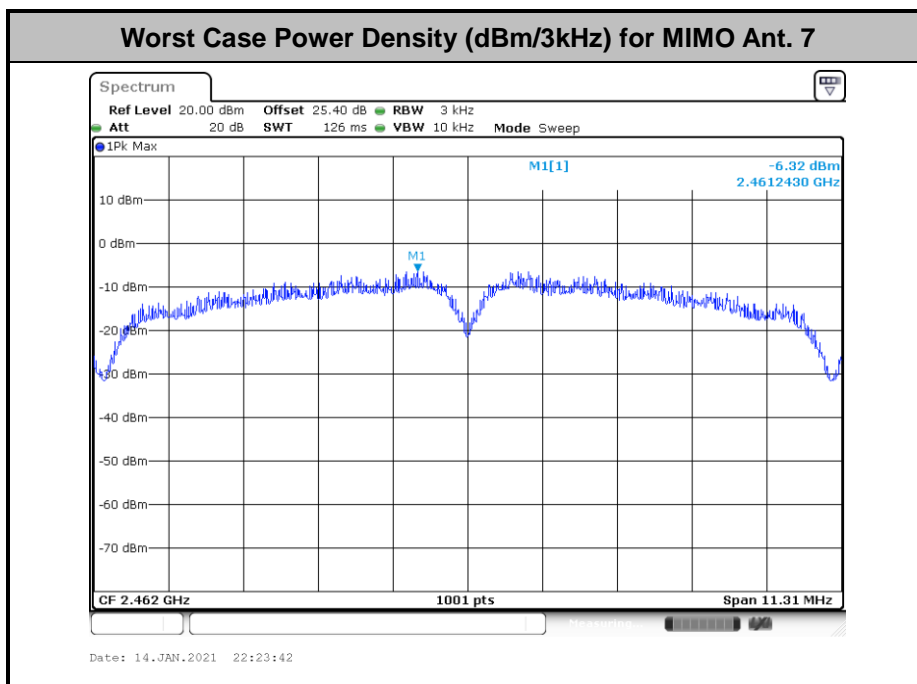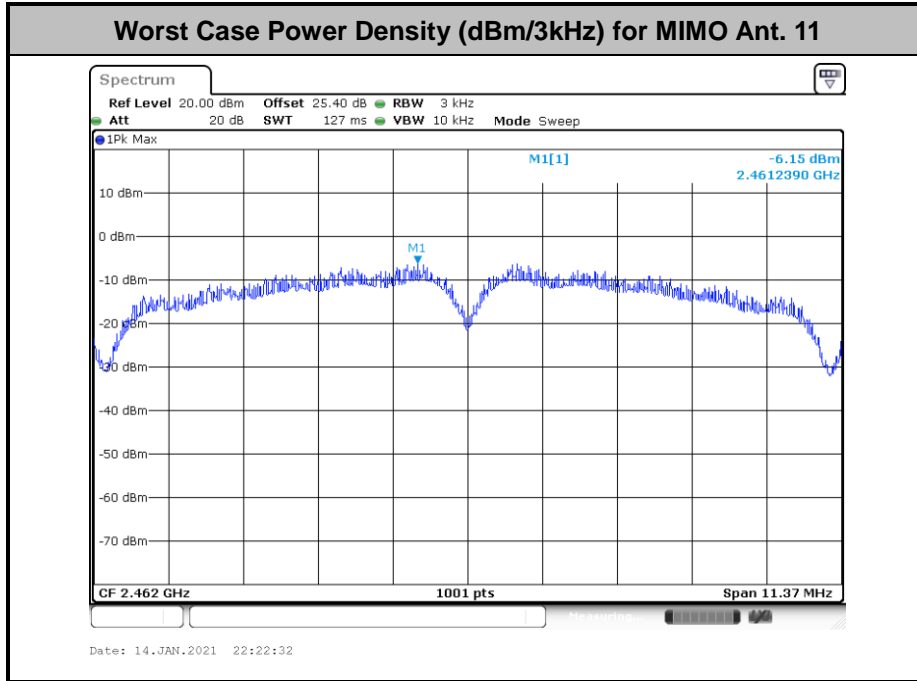



<For 802.11ax mode>

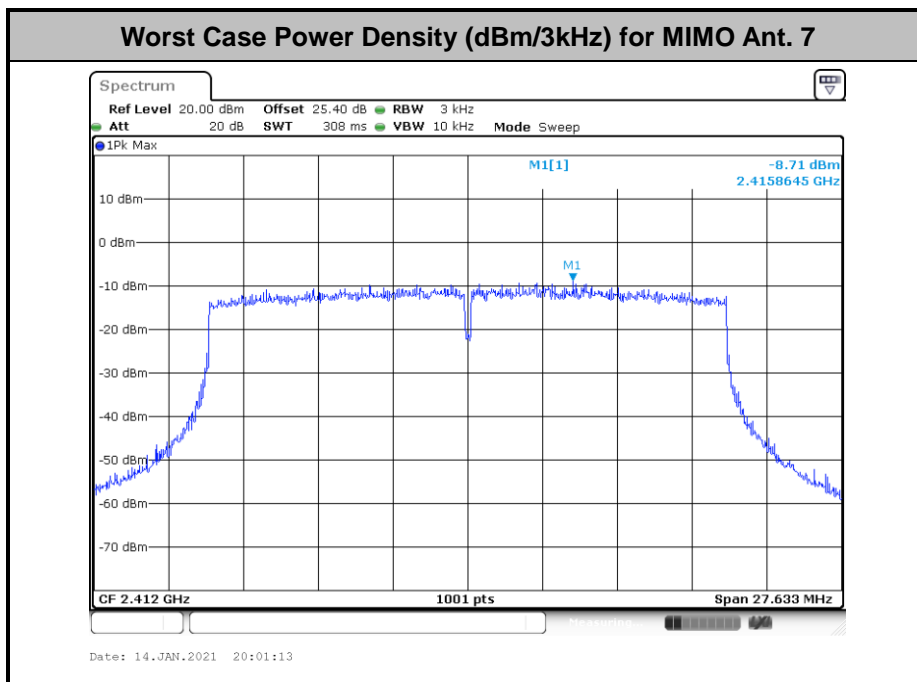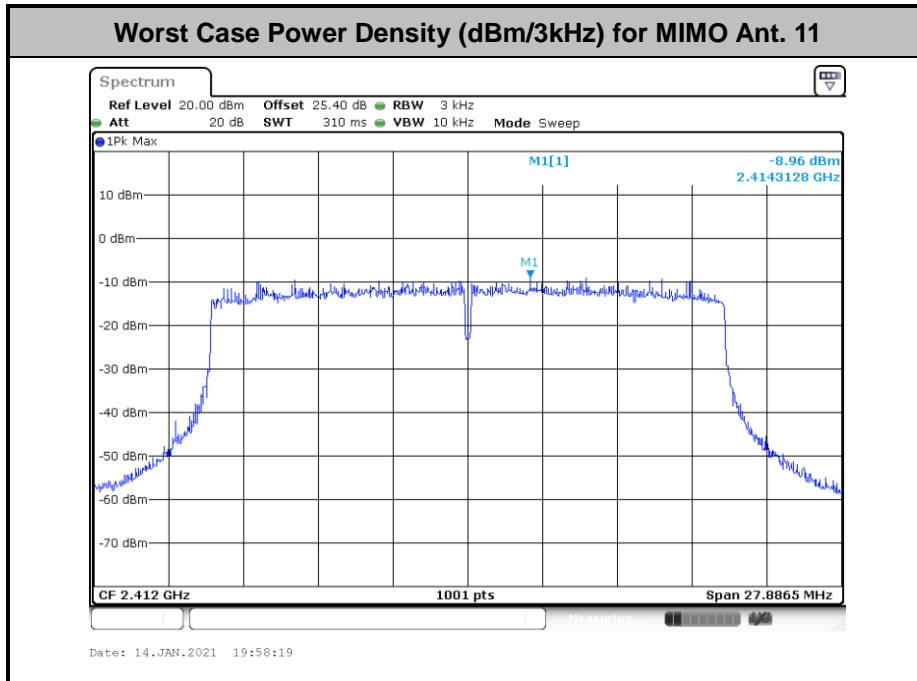

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

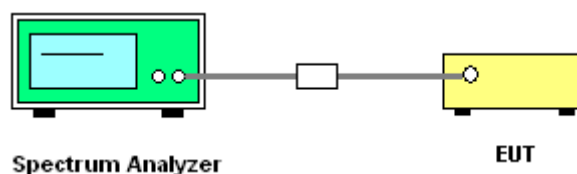




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Rebecca Li and Hank Hsu	Temperature :	21~25°C
		Relative Humidity :	51~54%



Number of TX = 2, Ant. 11 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

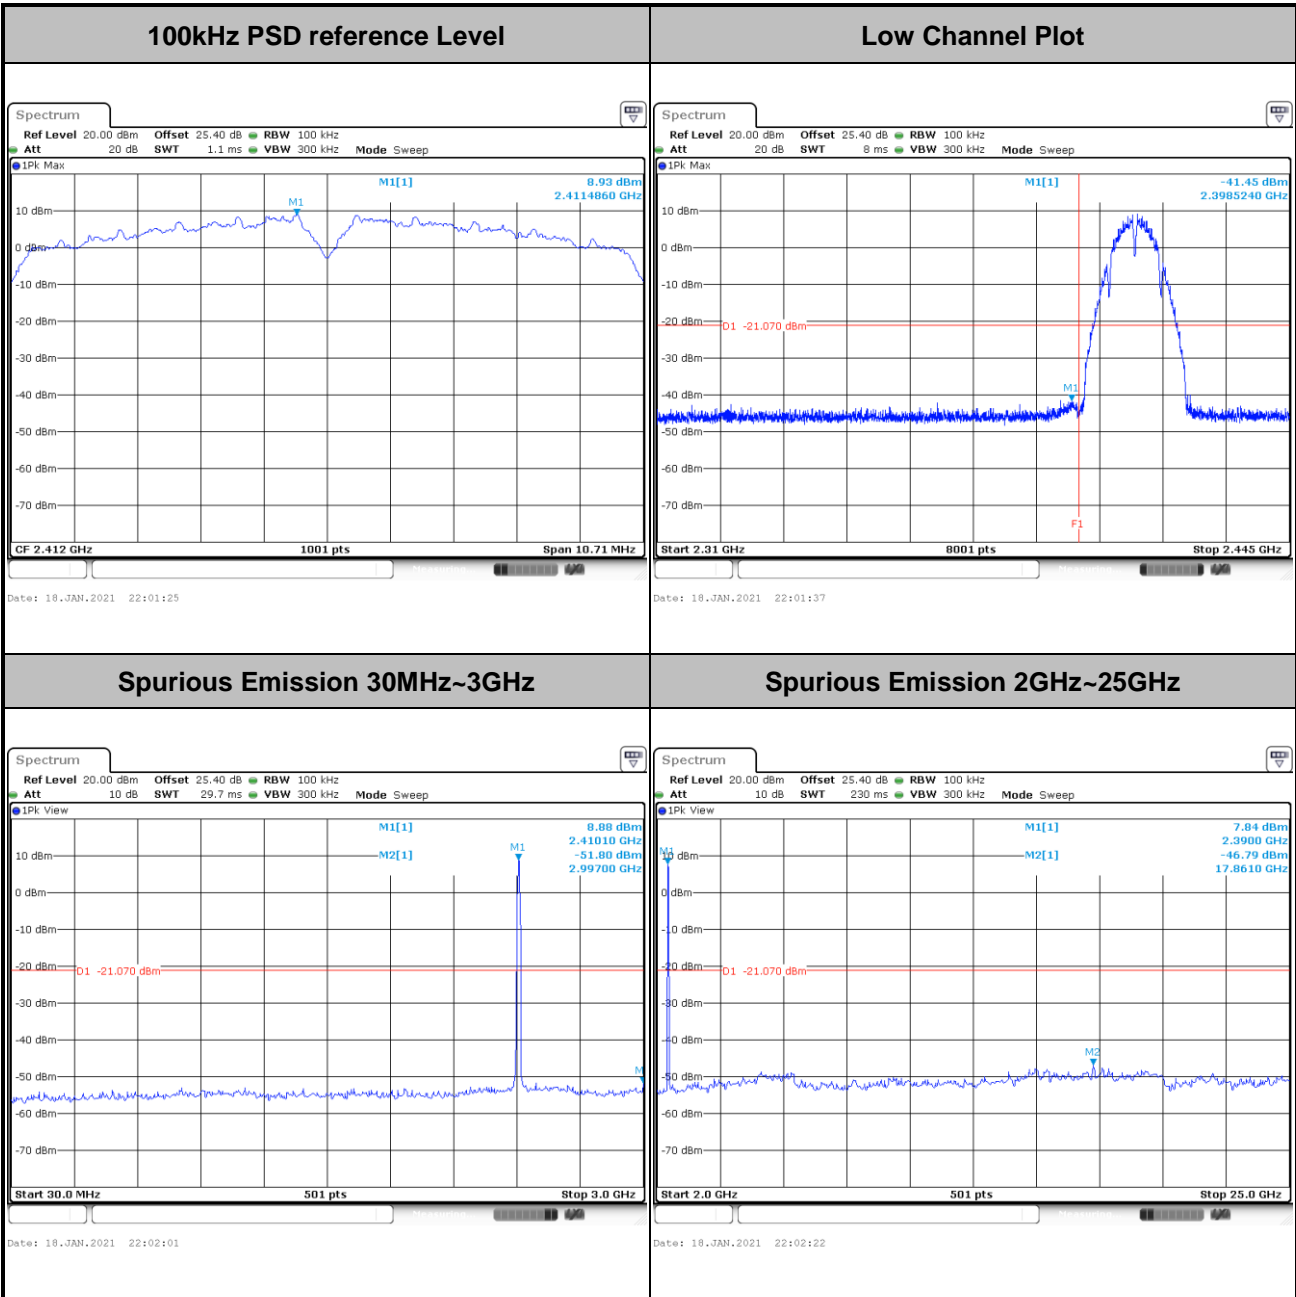




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

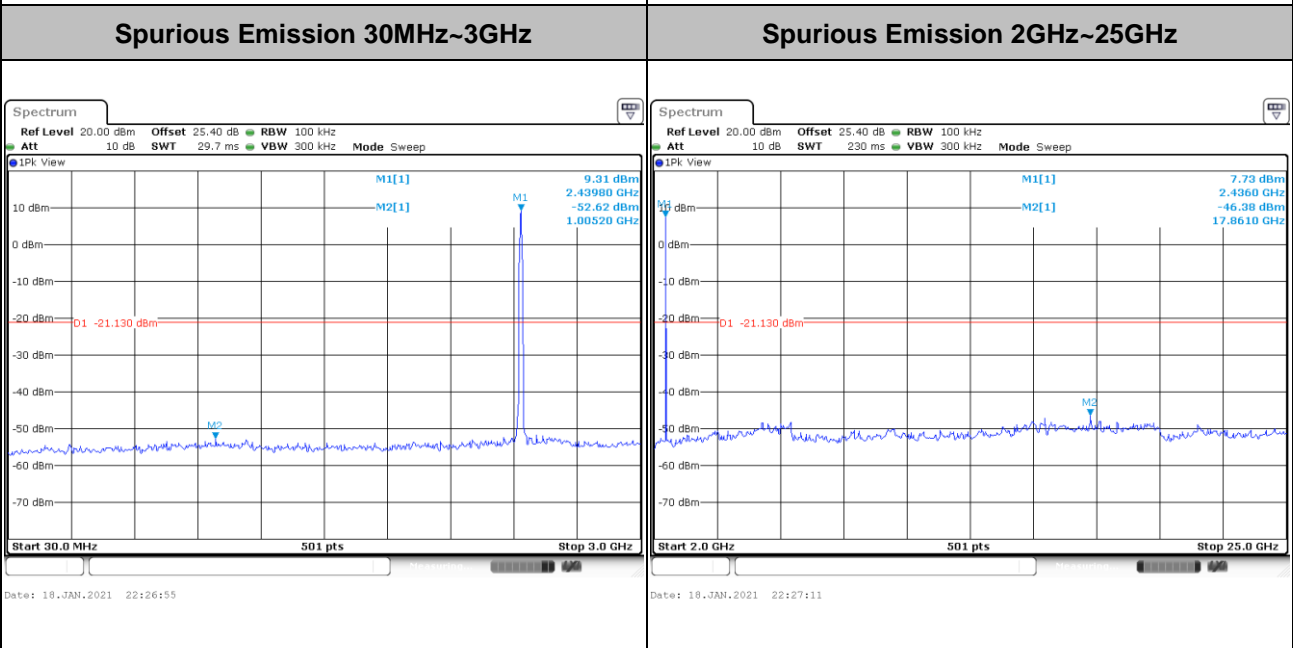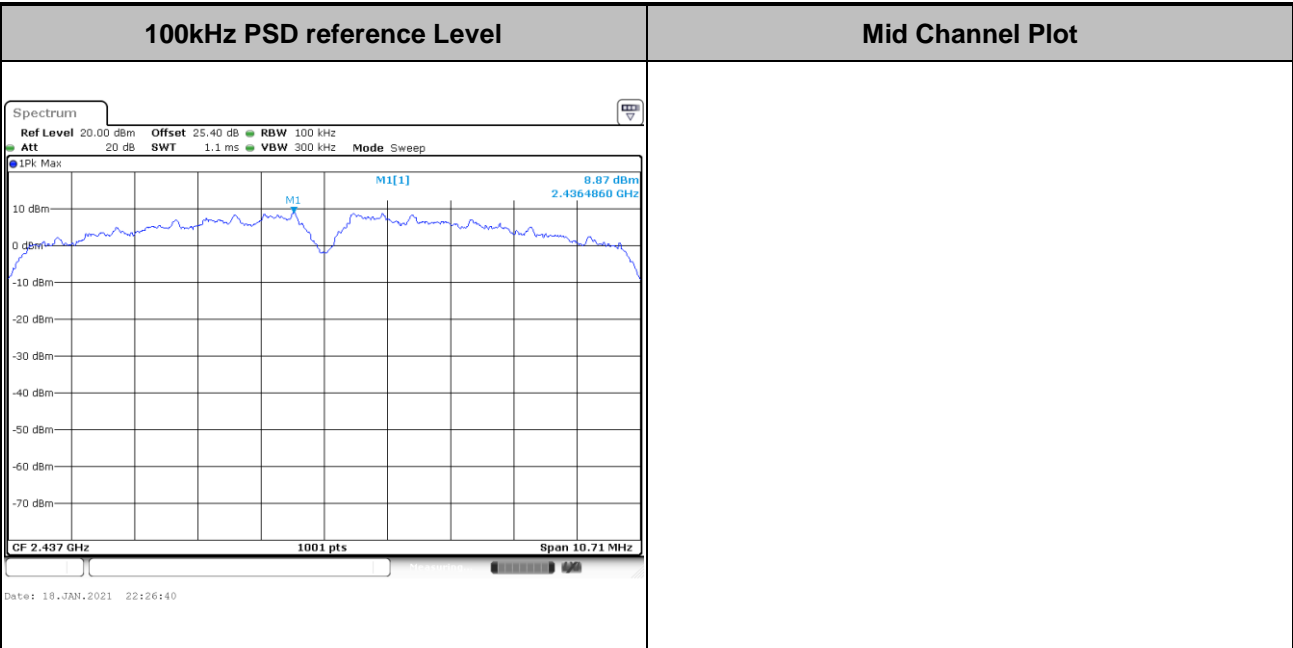




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

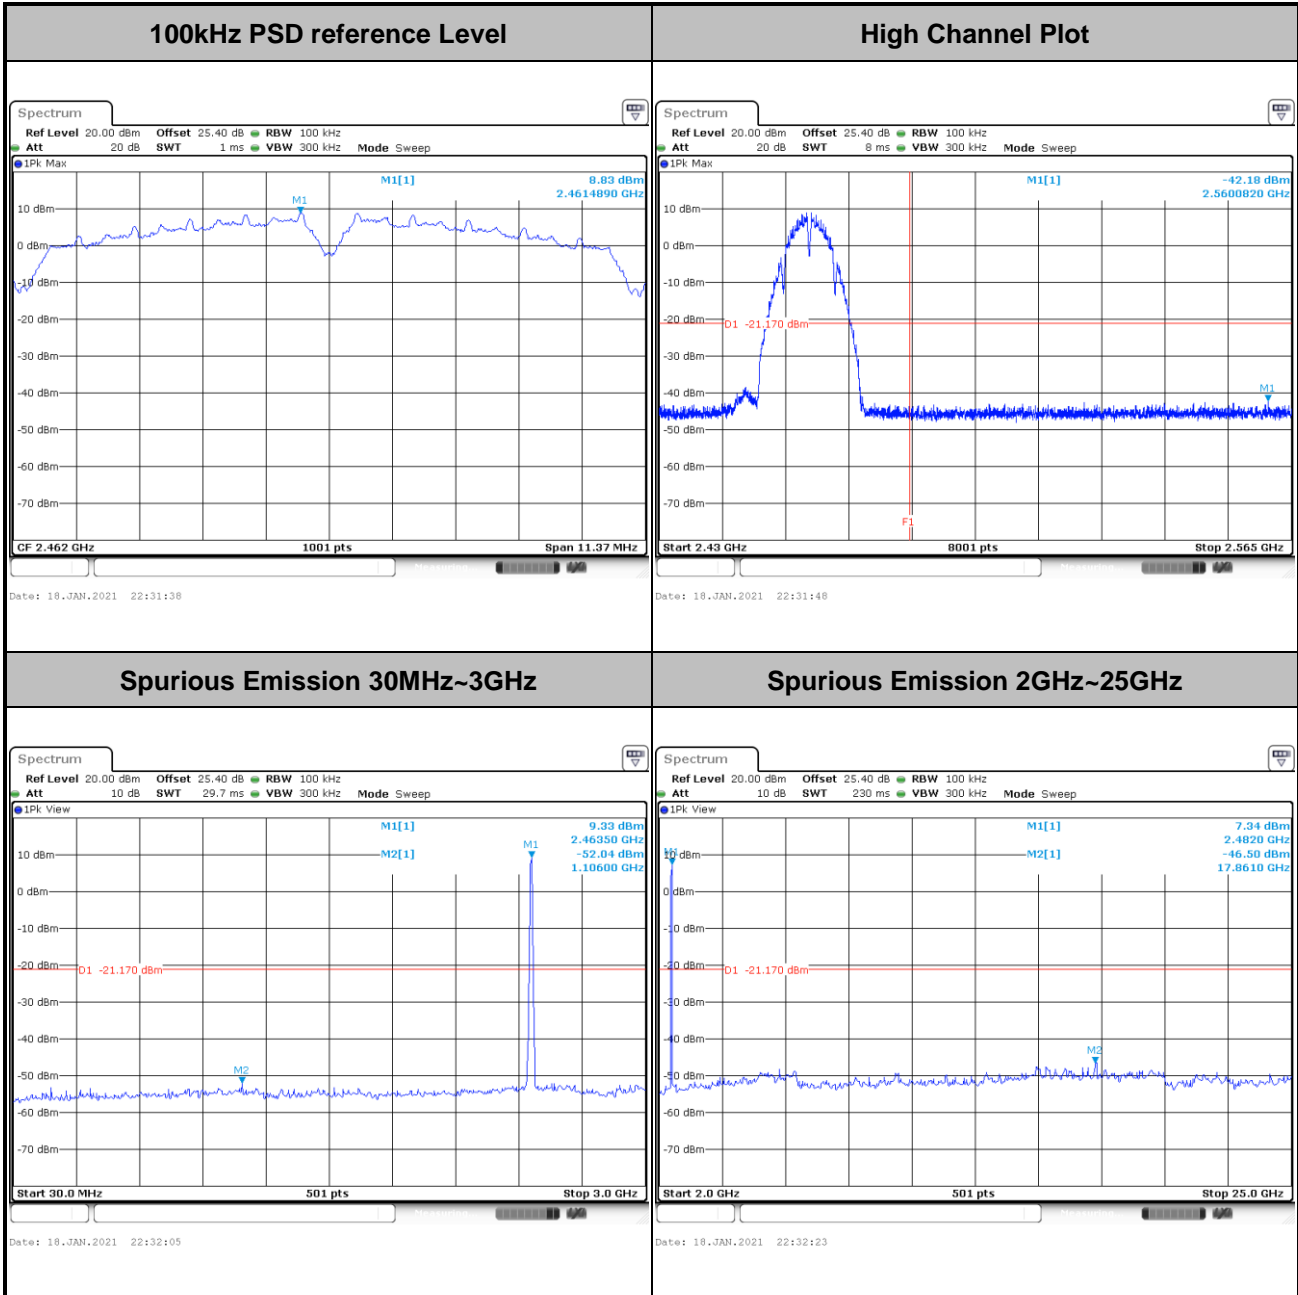





Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

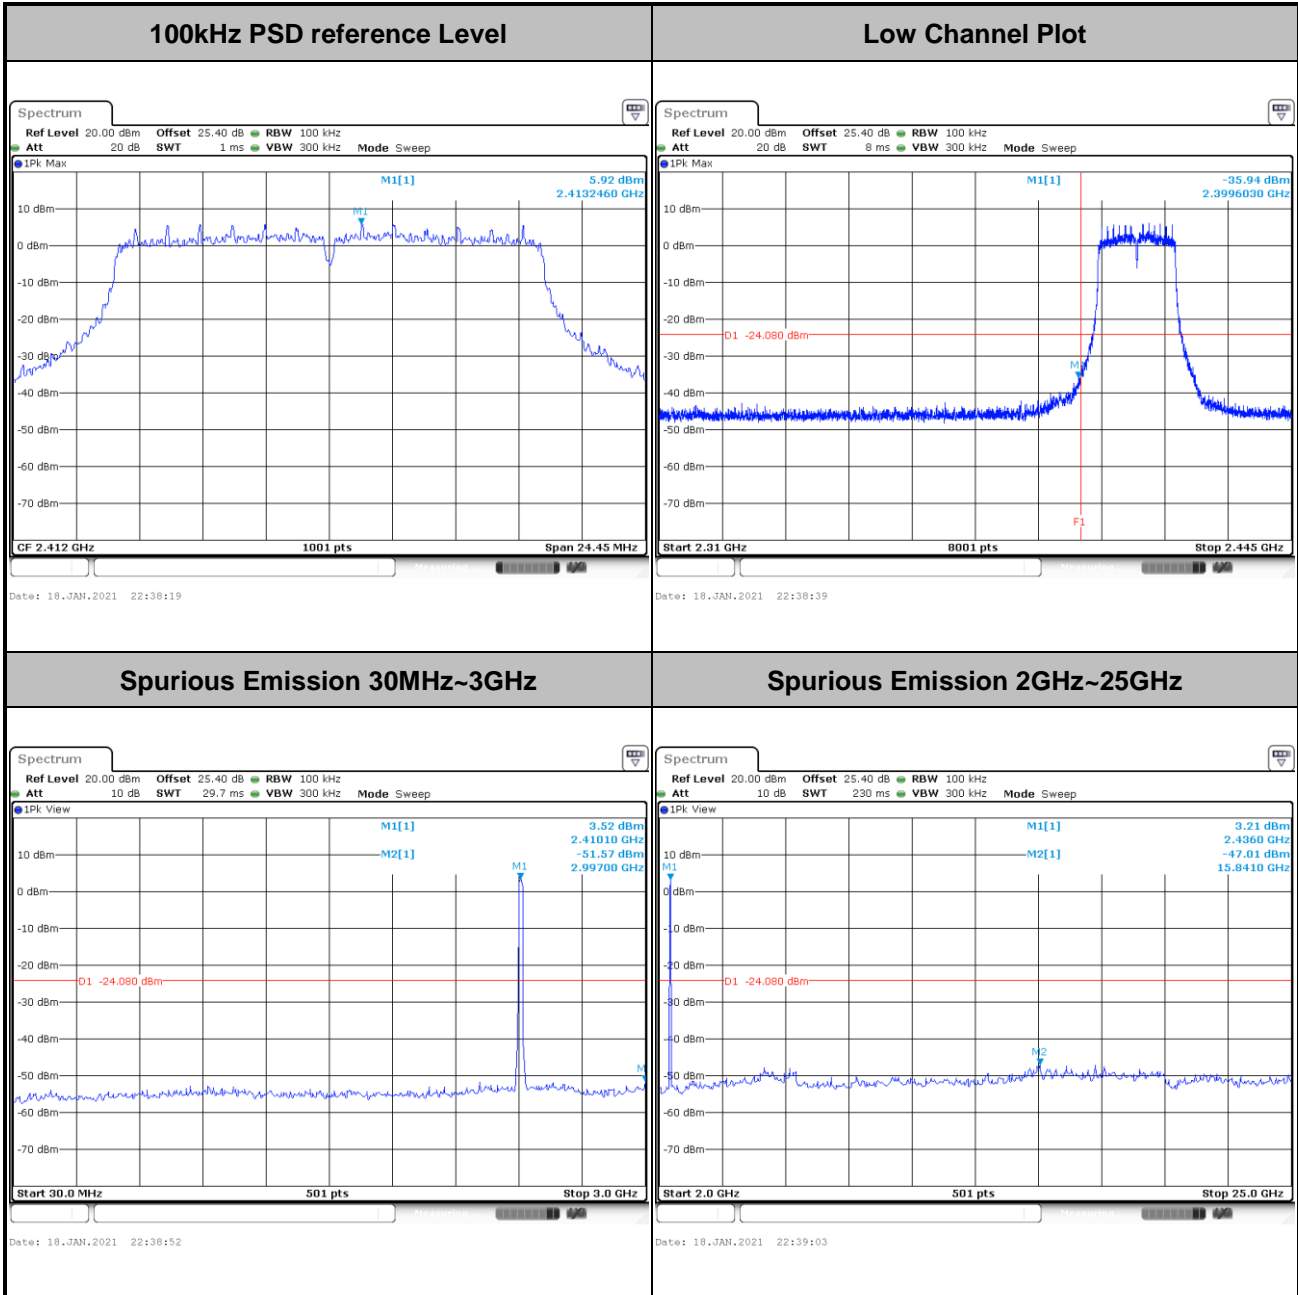




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

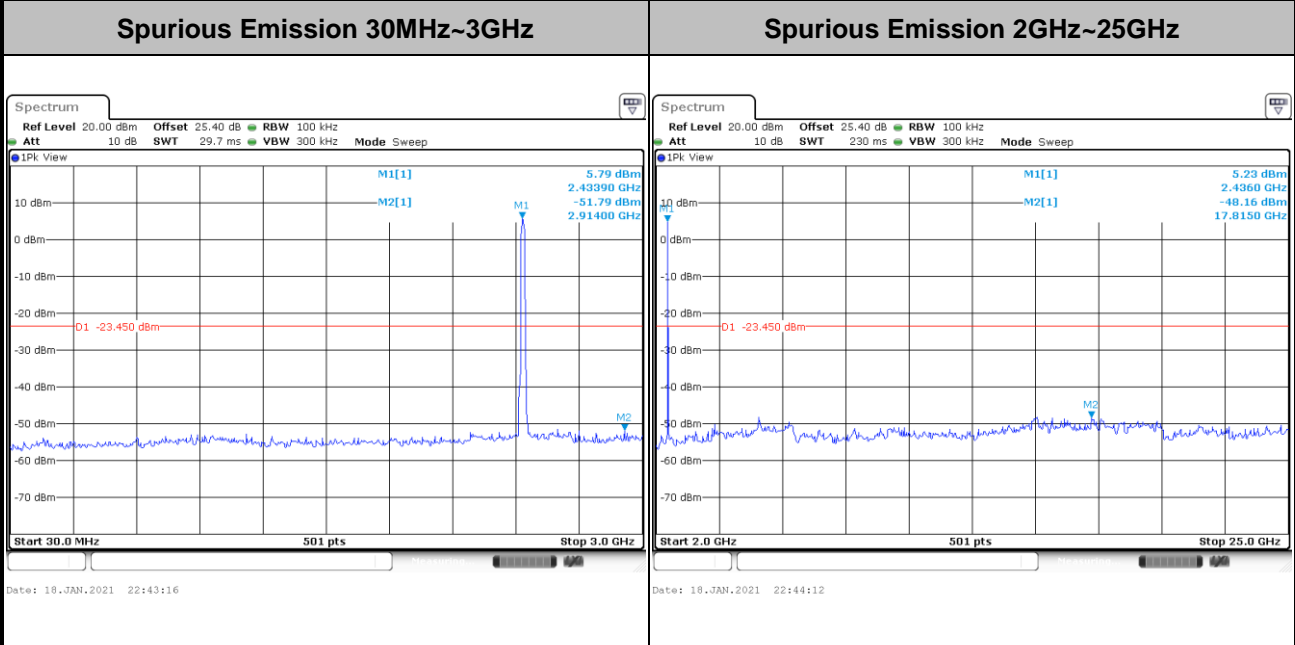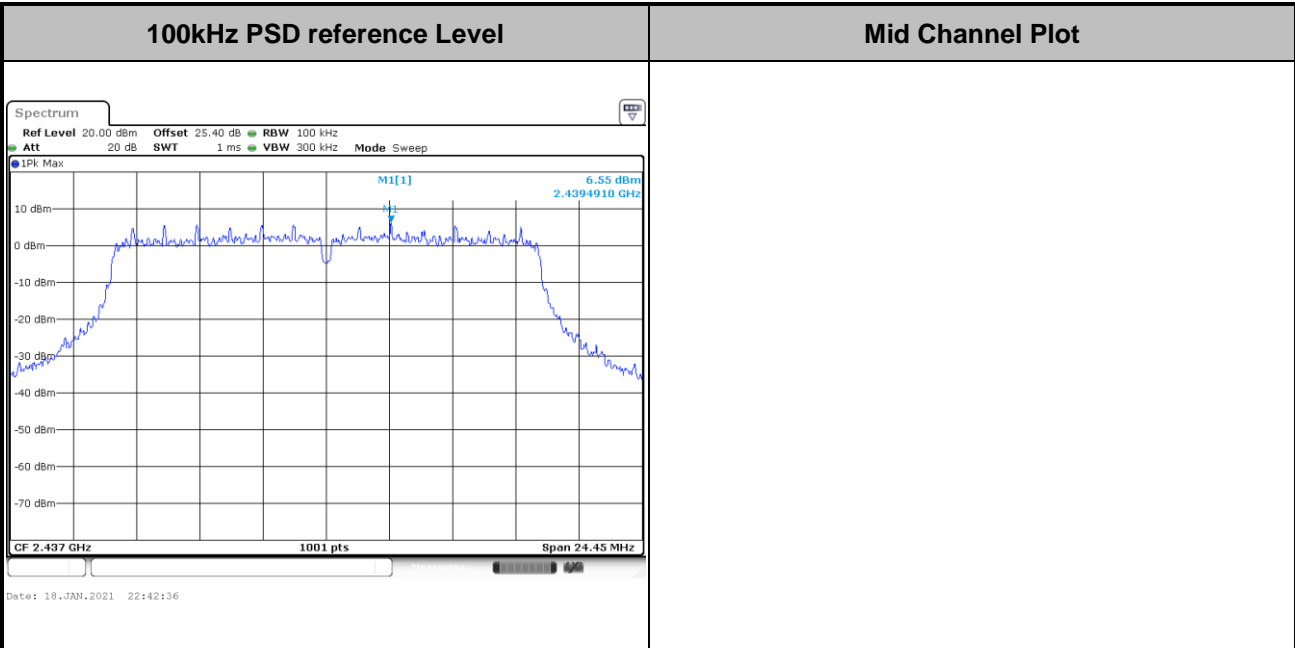





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

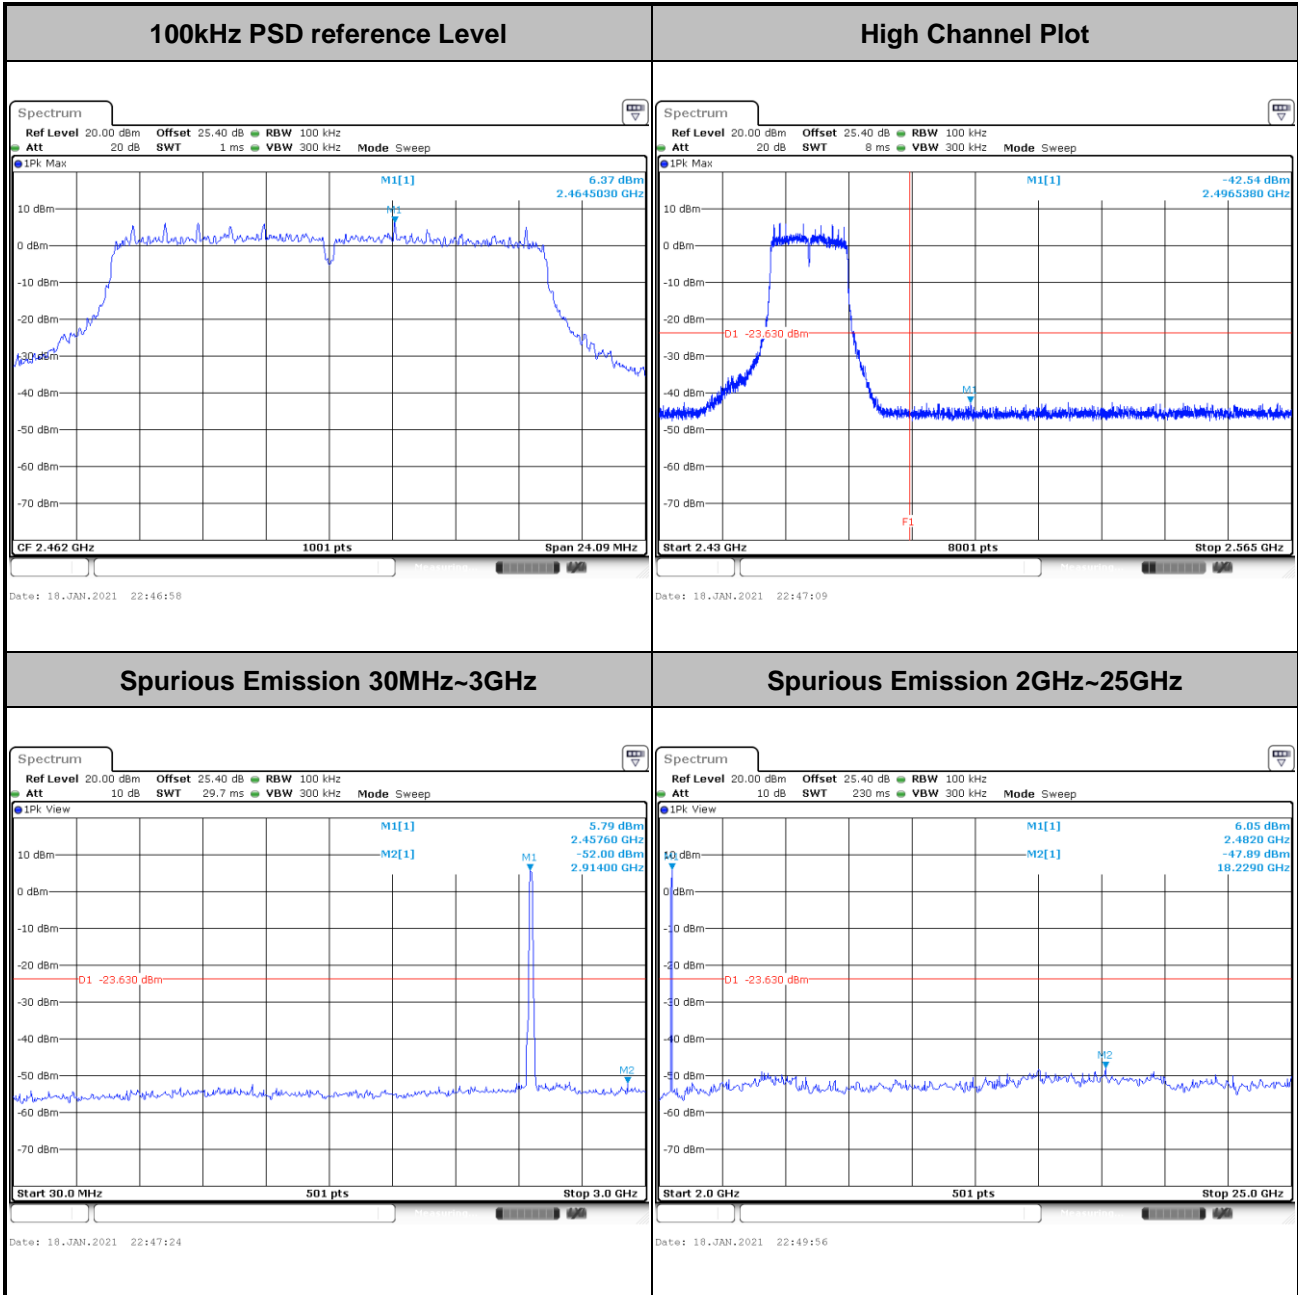





Test Mode :	802.11ax HE20	Test Channel :	01 Full RU
--------------------	---------------	-----------------------	------------

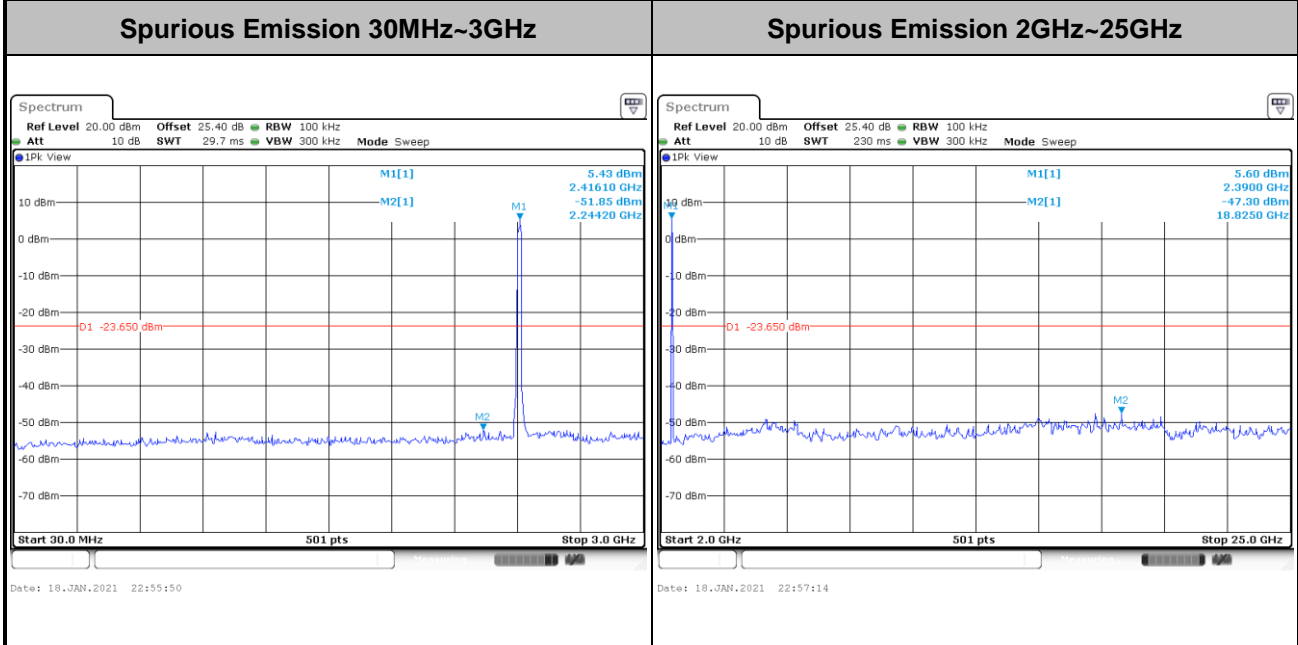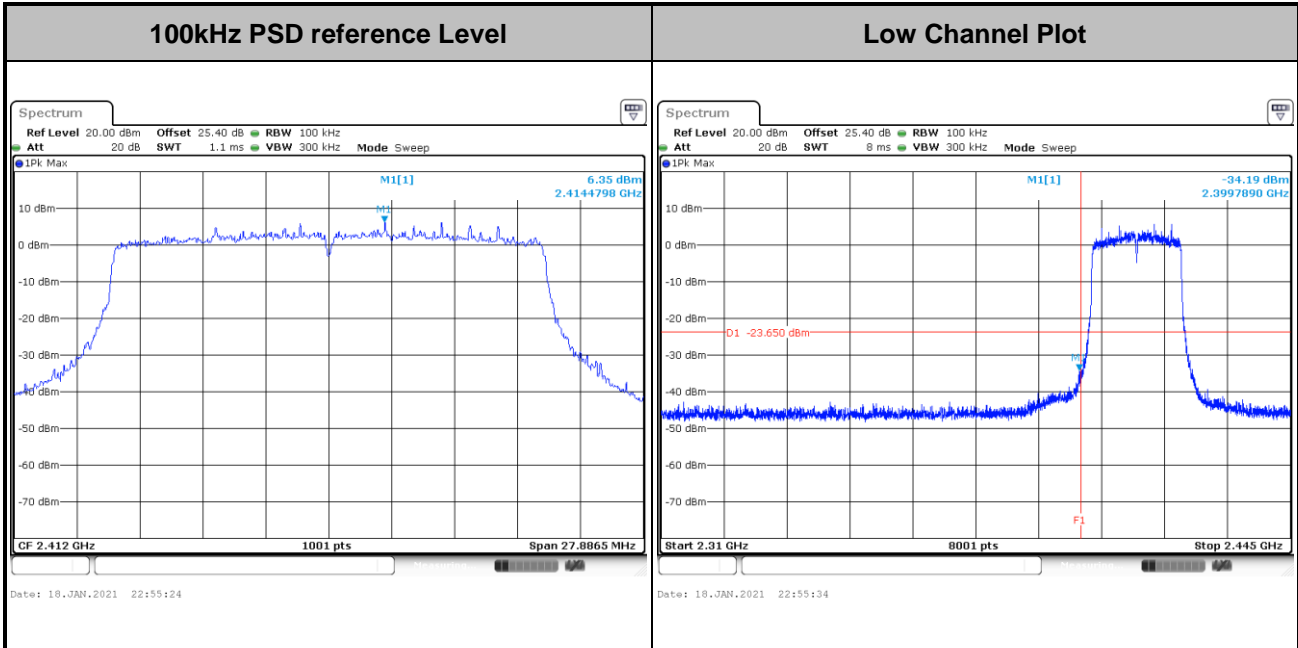




Test Mode :	802.11ax HE20	Test Channel :	06 Full RU
--------------------	---------------	-----------------------	------------

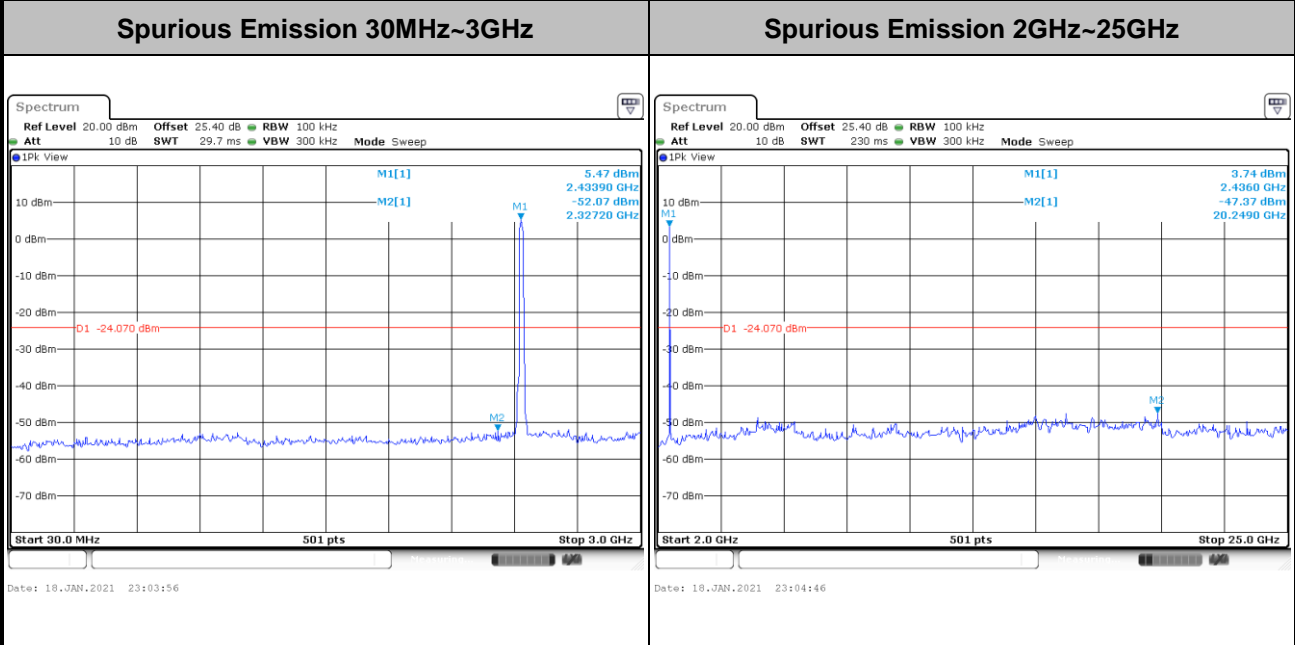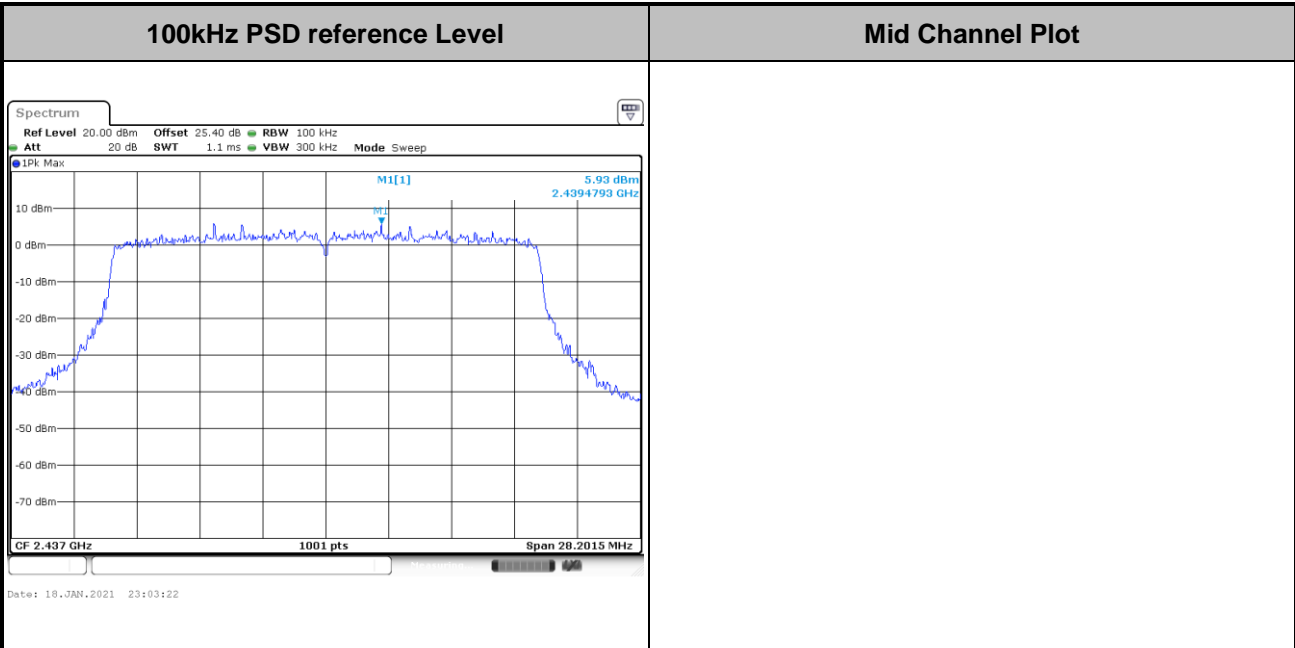




Test Mode :	802.11ax HE20	Test Channel :	11 Full RU
-------------	---------------	----------------	------------

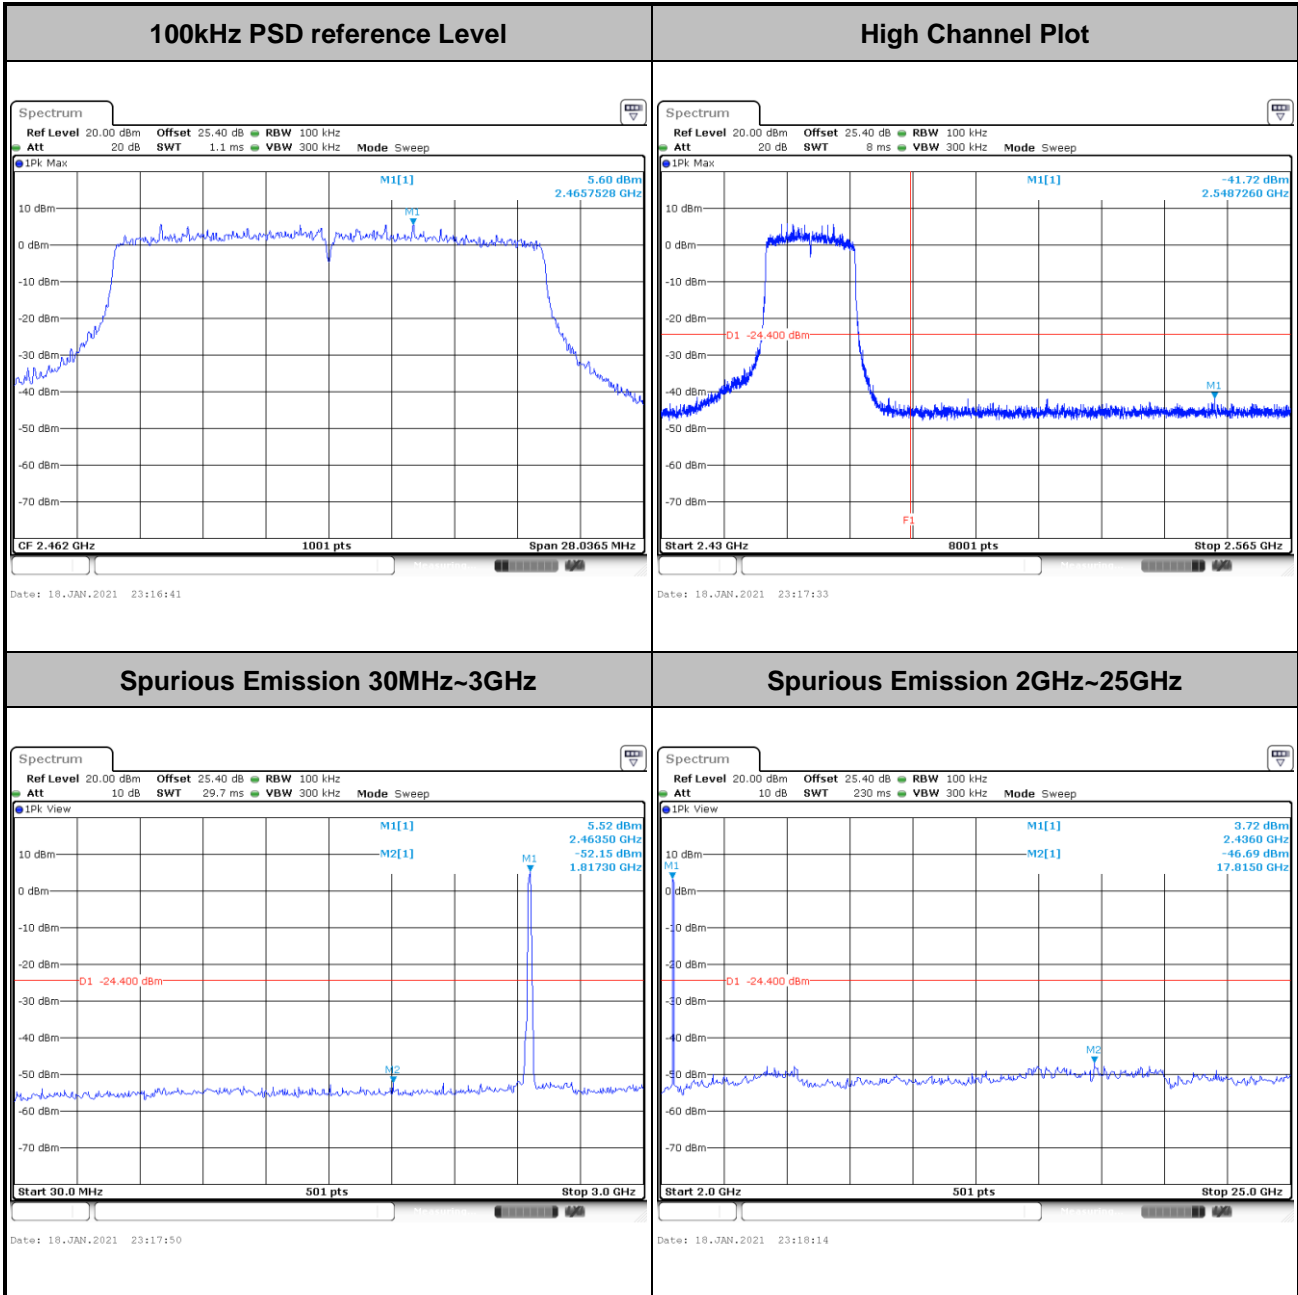





Test Mode :	802.11ax HE40	Test Channel :	03 Full RU
-------------	---------------	----------------	------------

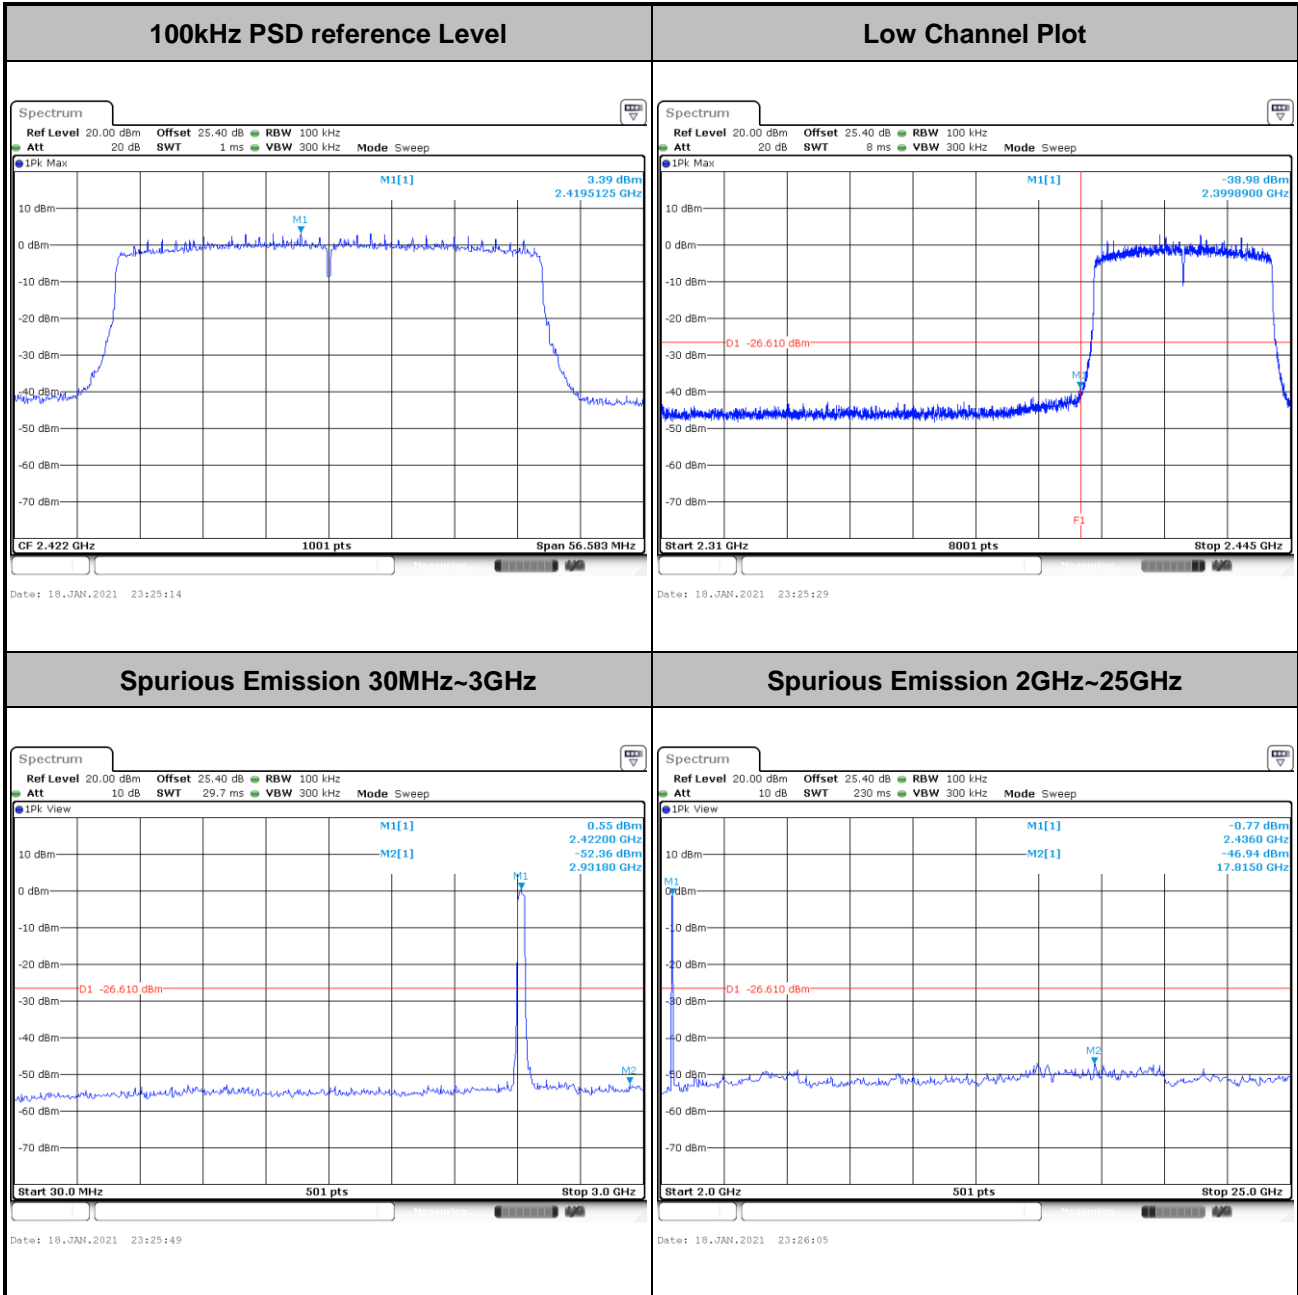




Test Mode :	802.11ax HE40	Test Channel :	06 Full RU
-------------	---------------	----------------	------------

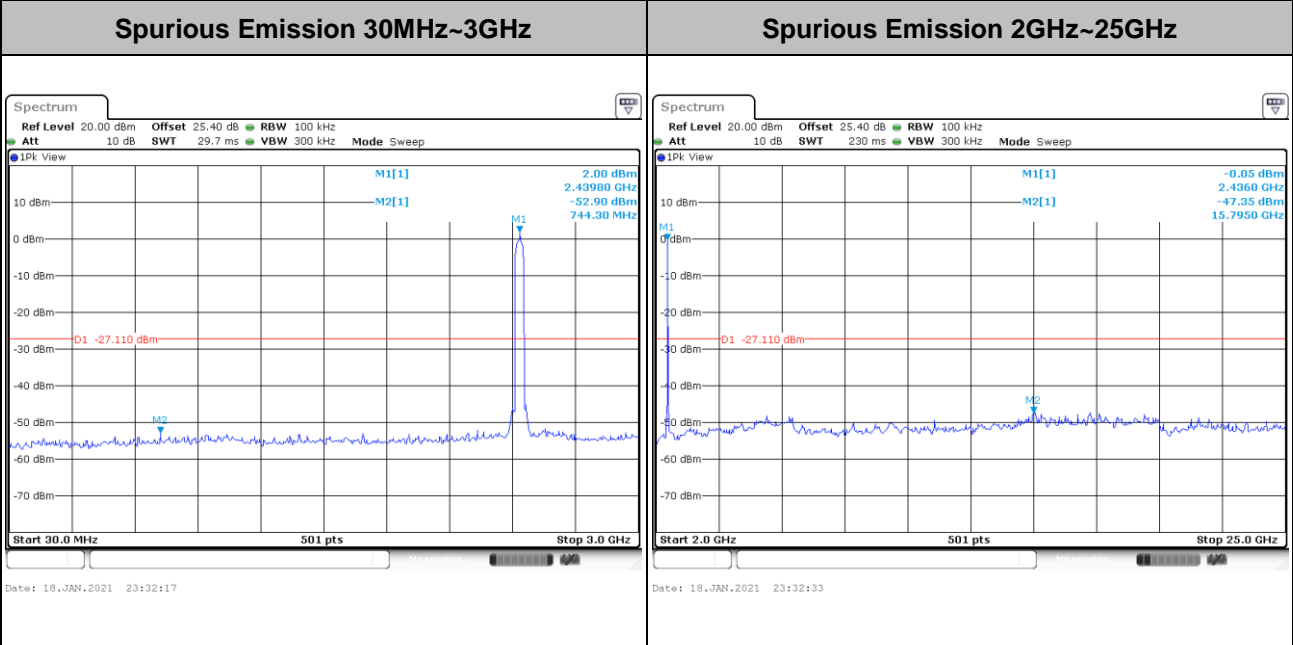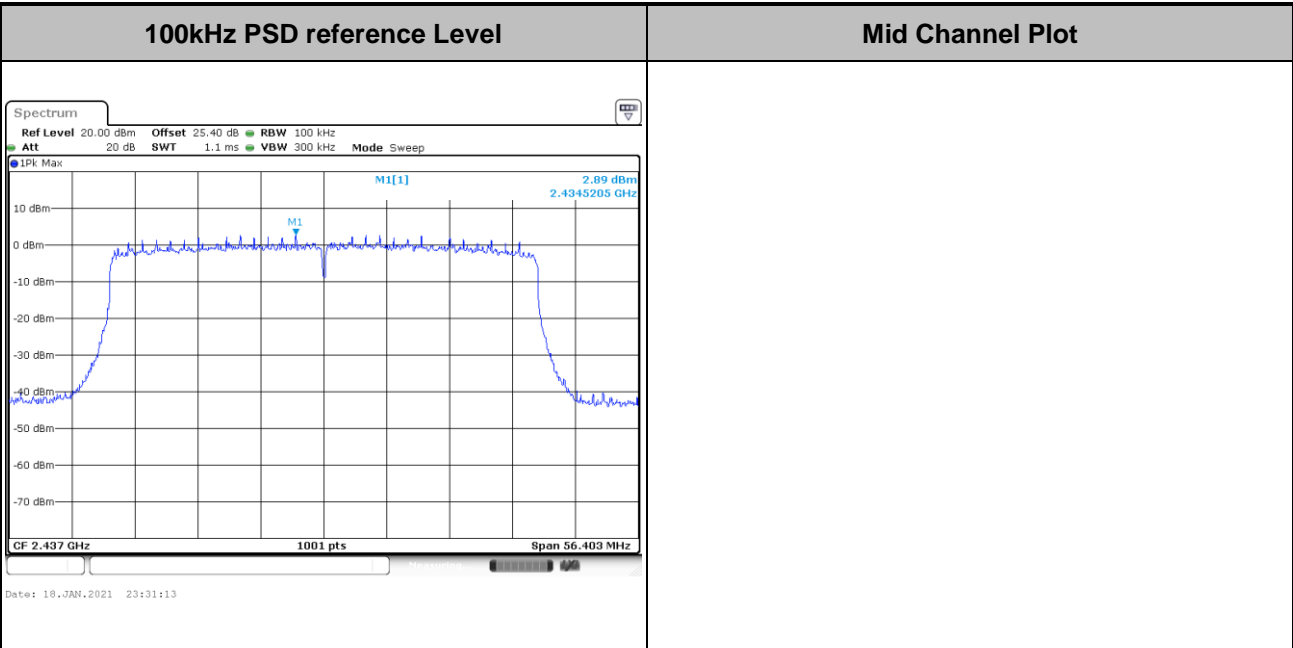





Test Mode :	802.11ax HE40	Test Channel :	09 Full RU
-------------	---------------	----------------	------------

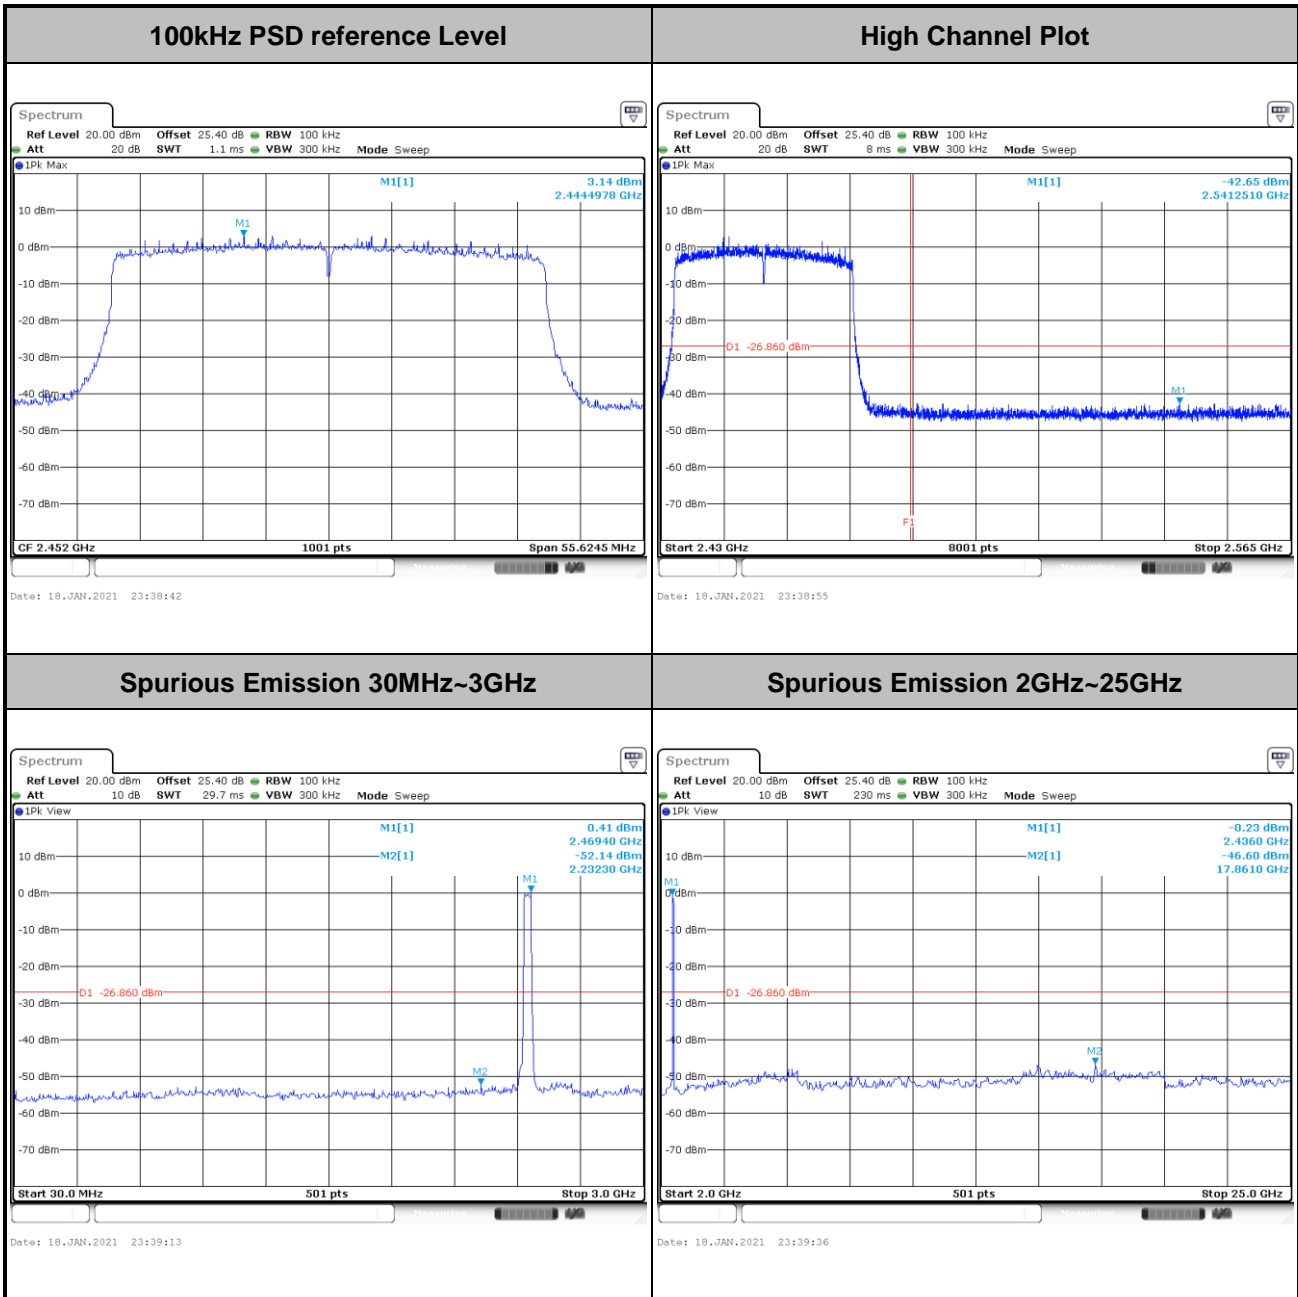





Number of TX = 2, Ant. 7 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

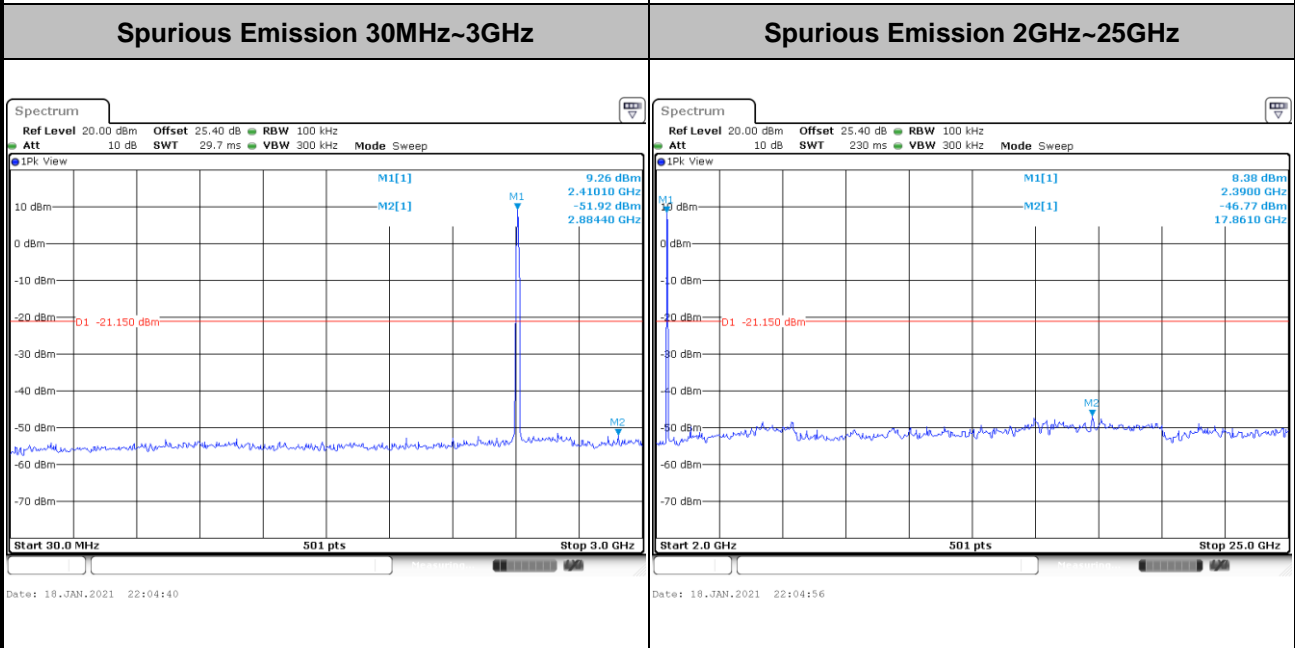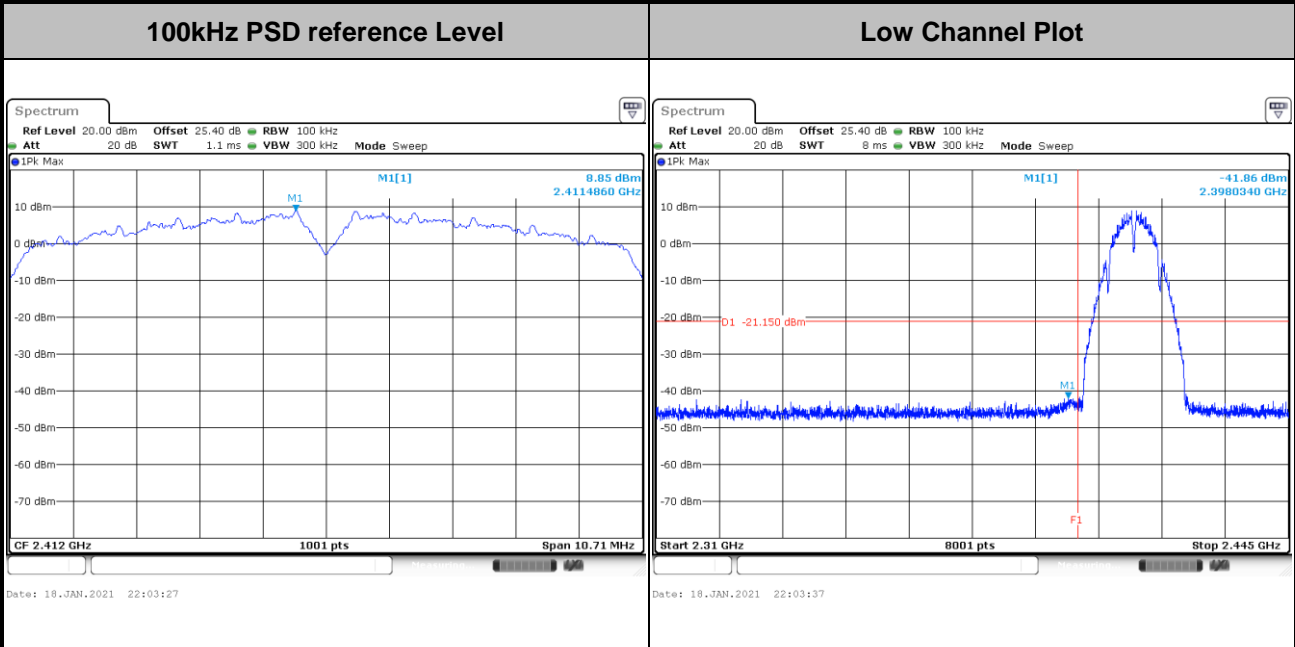




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

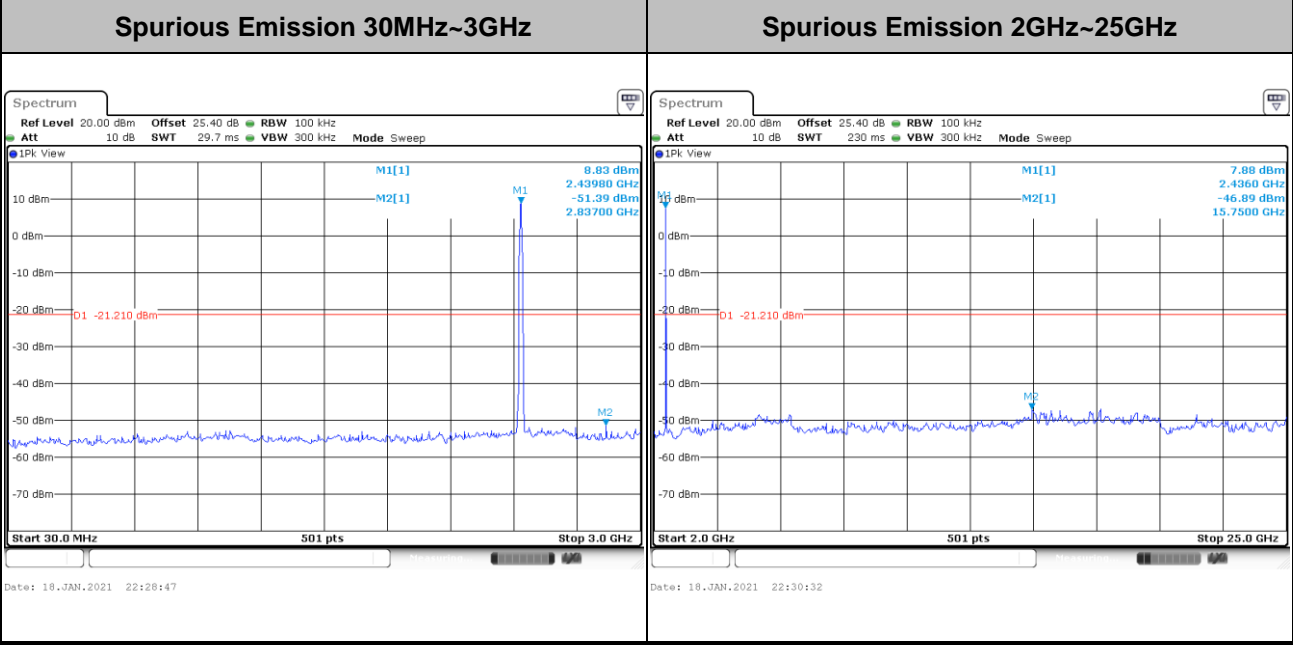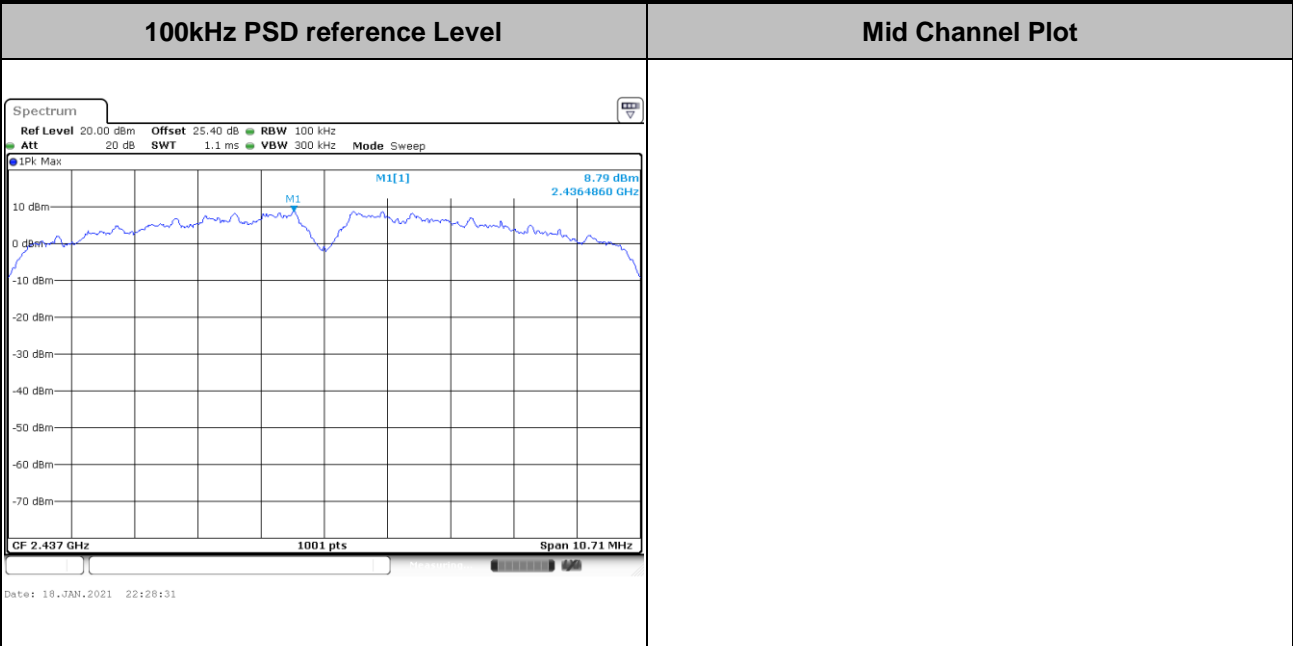




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

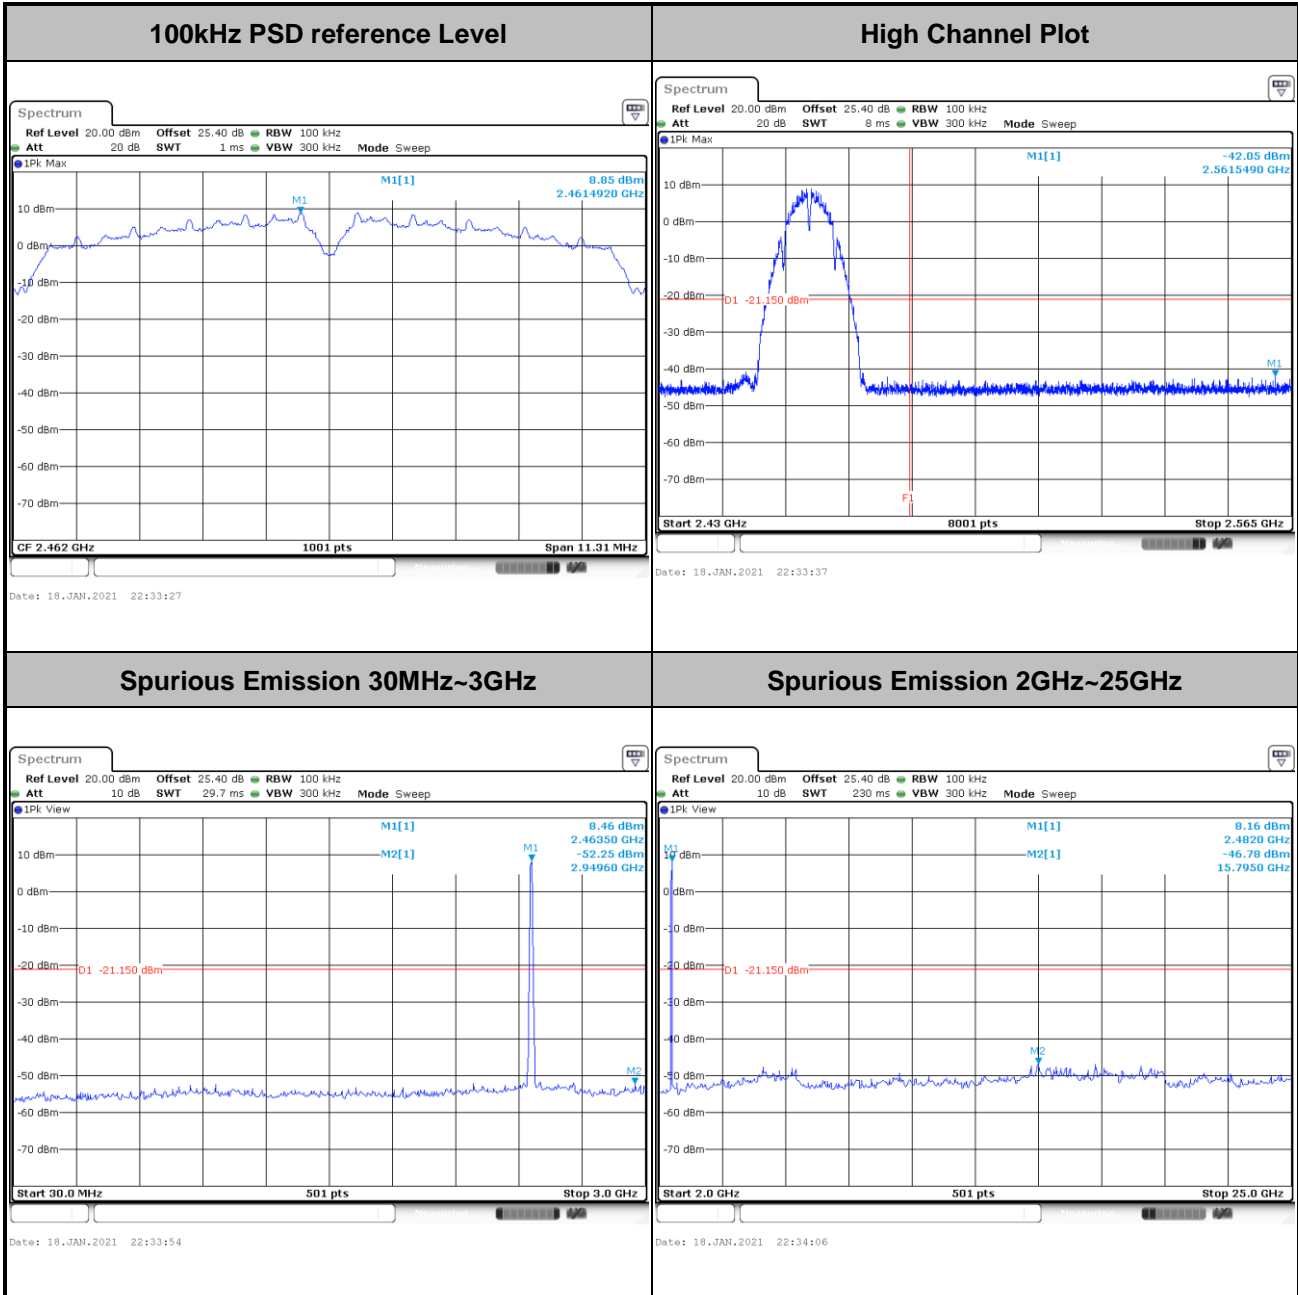





Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

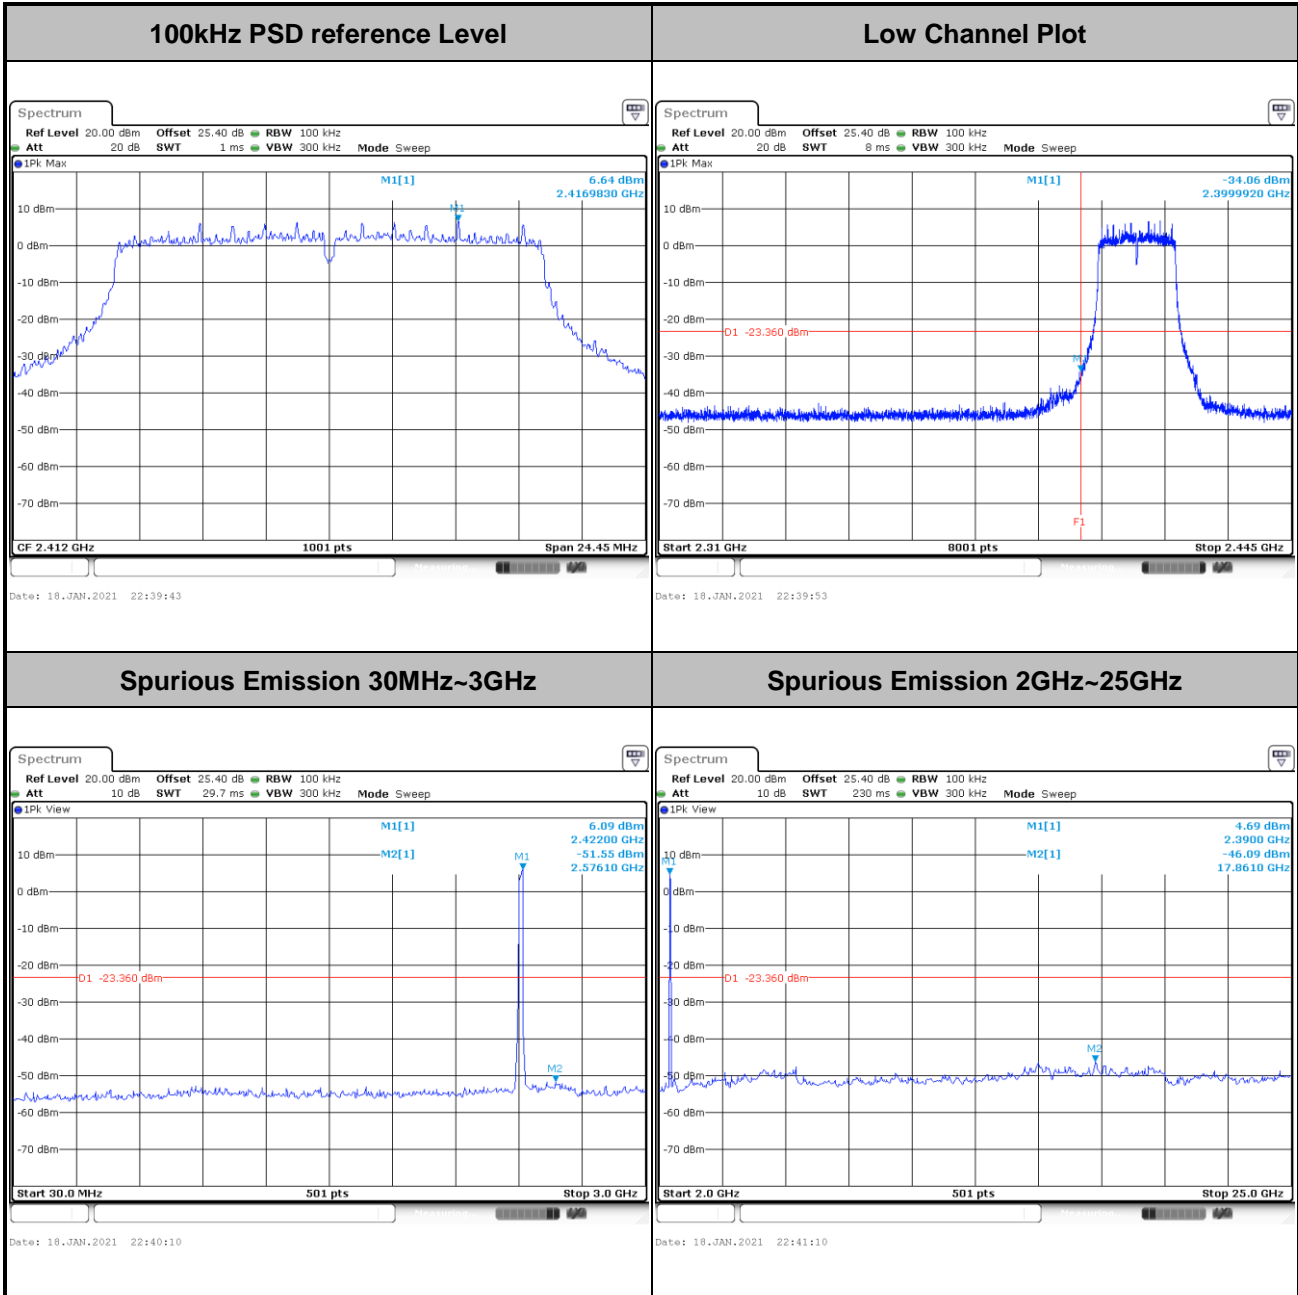




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

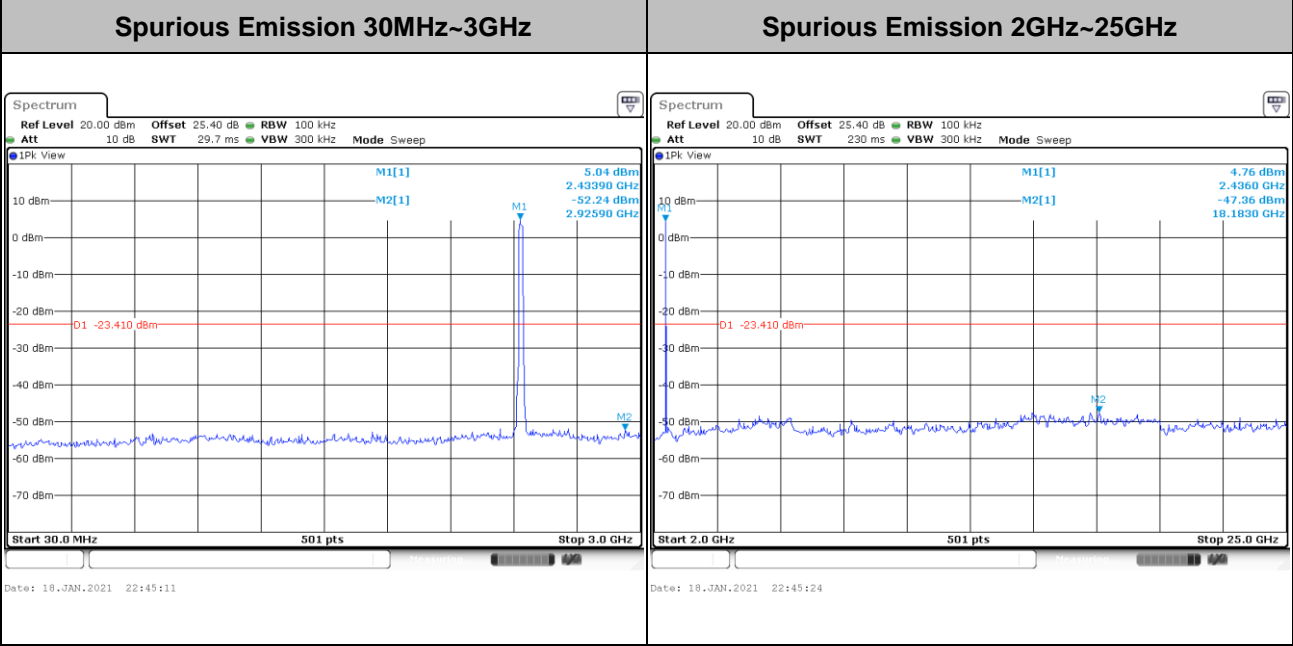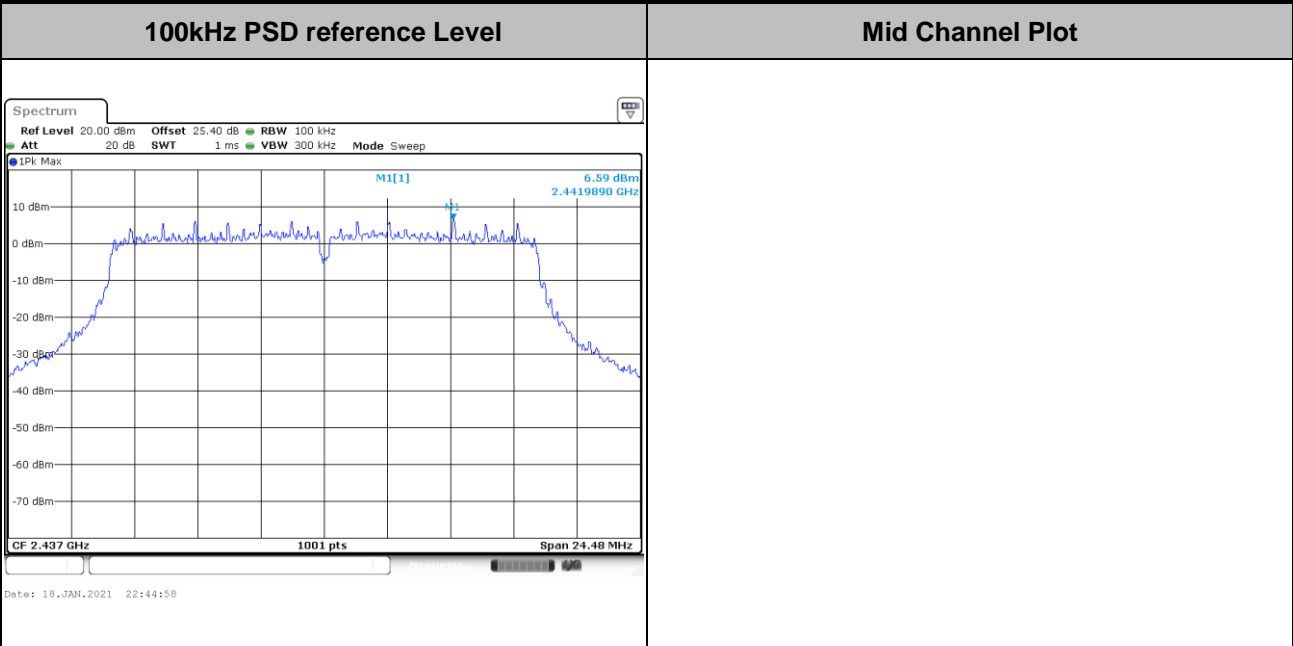




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

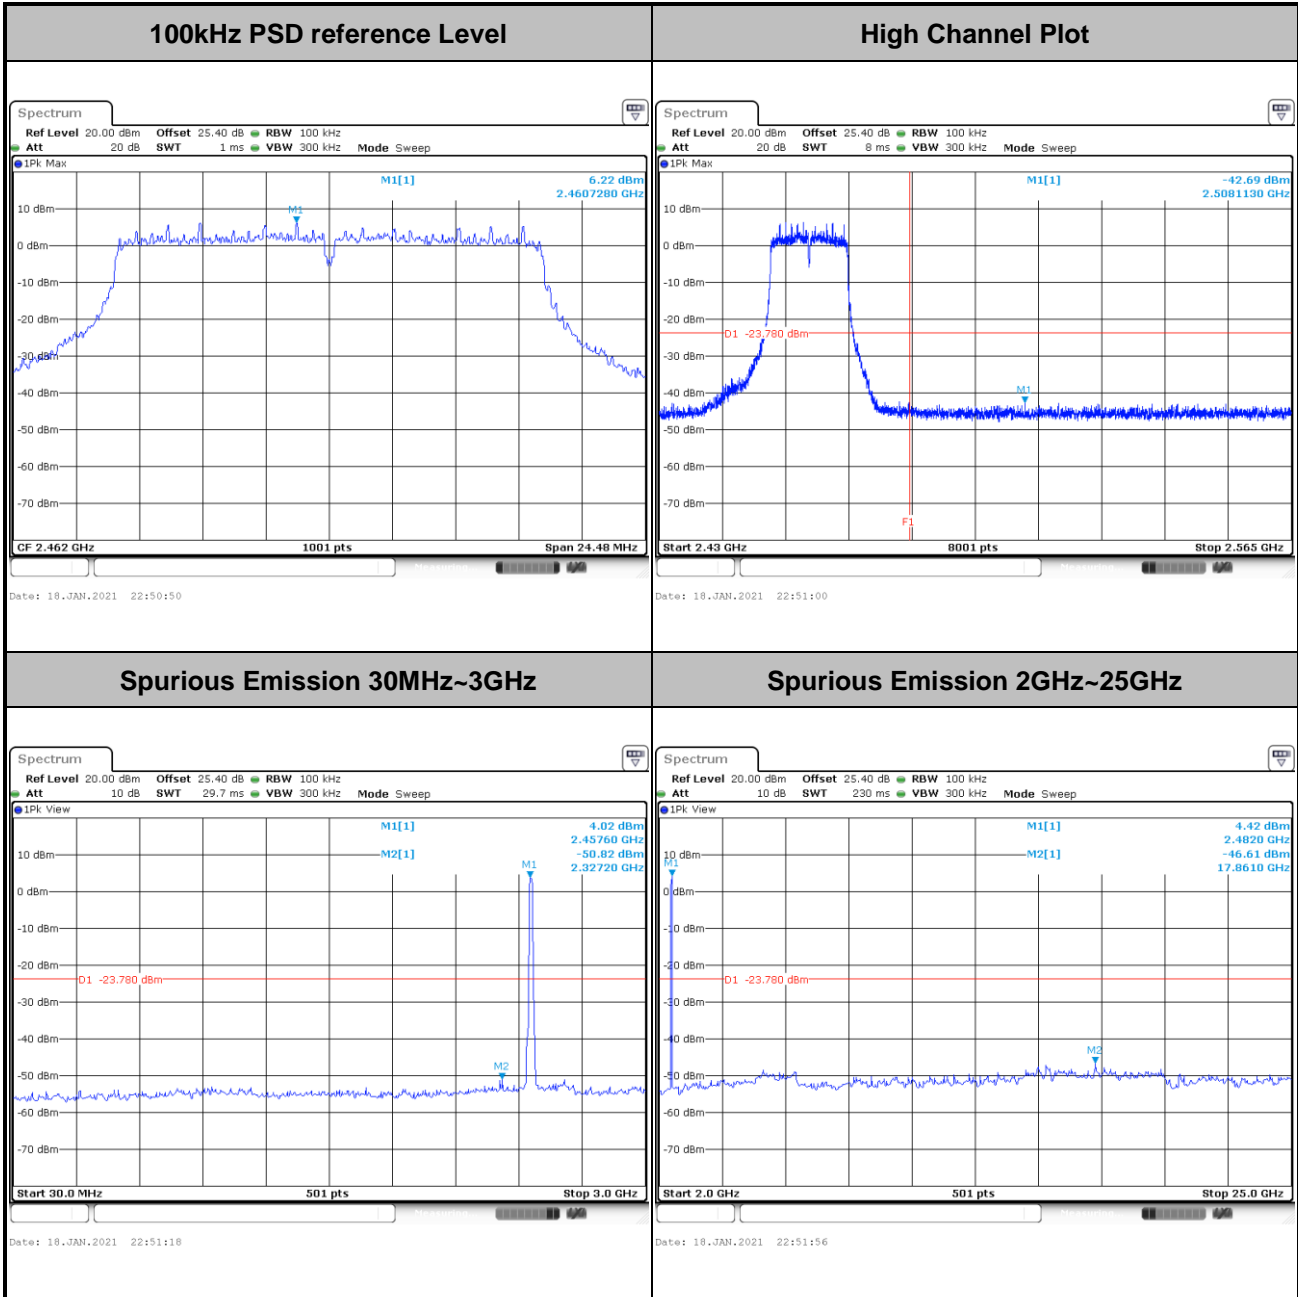





Test Mode :	802.11ax HE20	Test Channel :	01 Full RU
-------------	---------------	----------------	------------

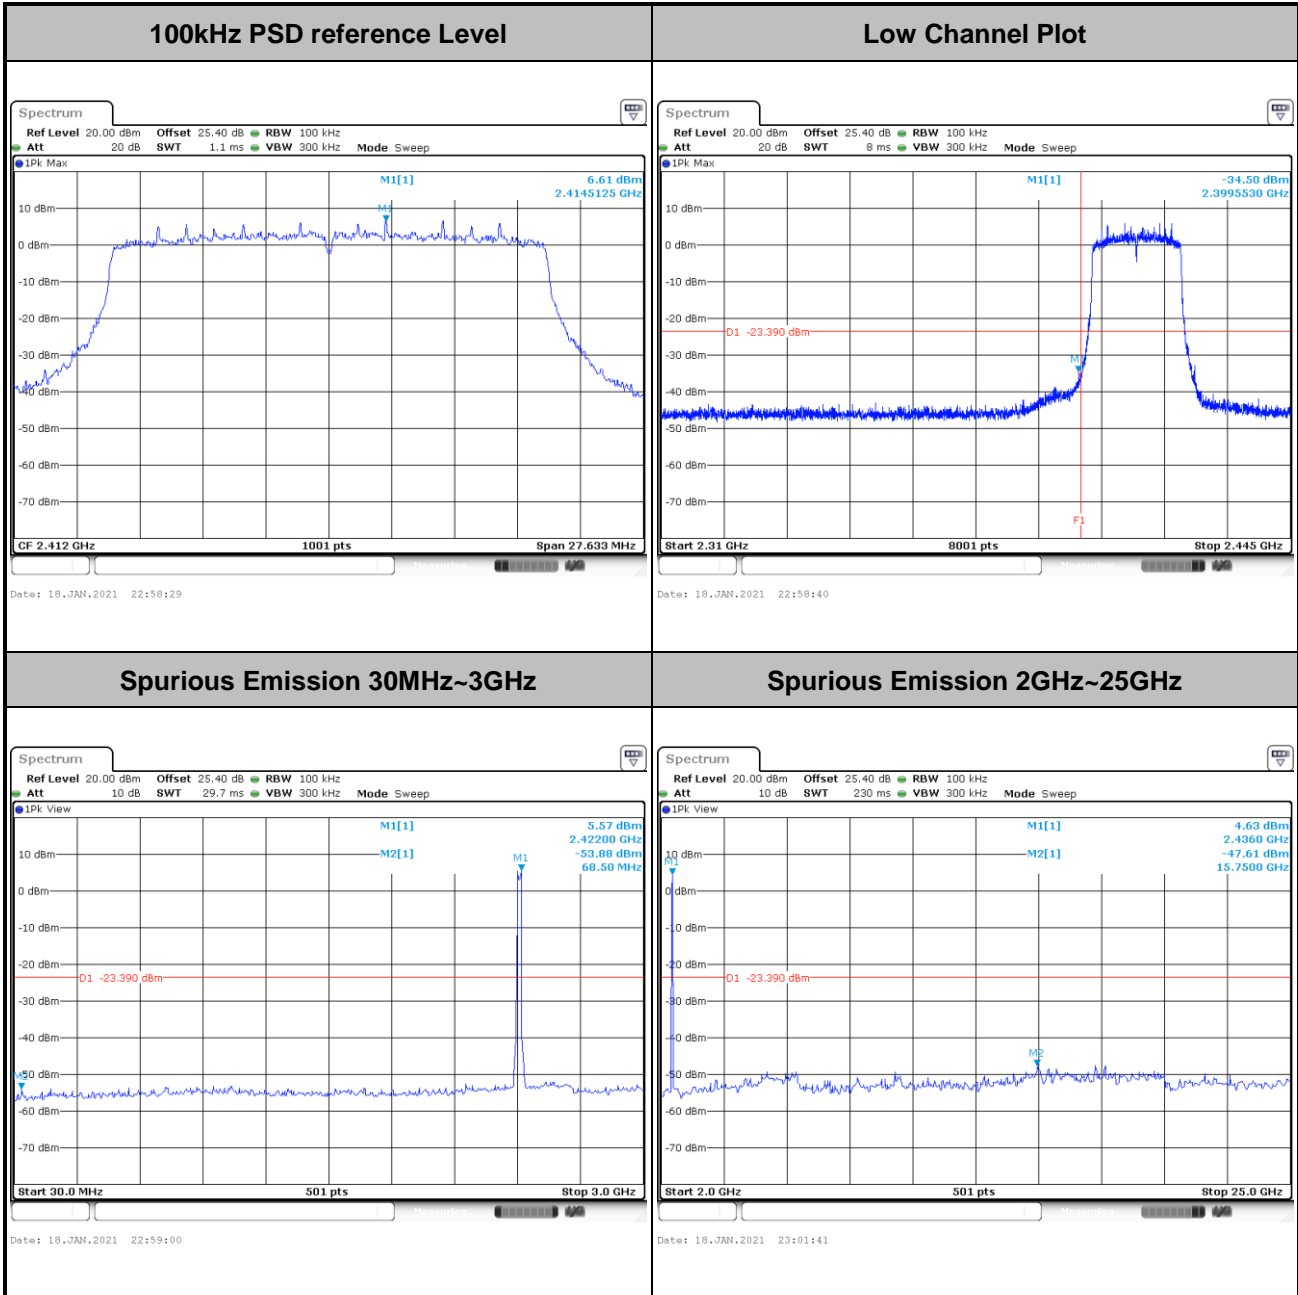




Test Mode :	802.11ax HE20	Test Channel :	06 Full RU
-------------	---------------	----------------	------------

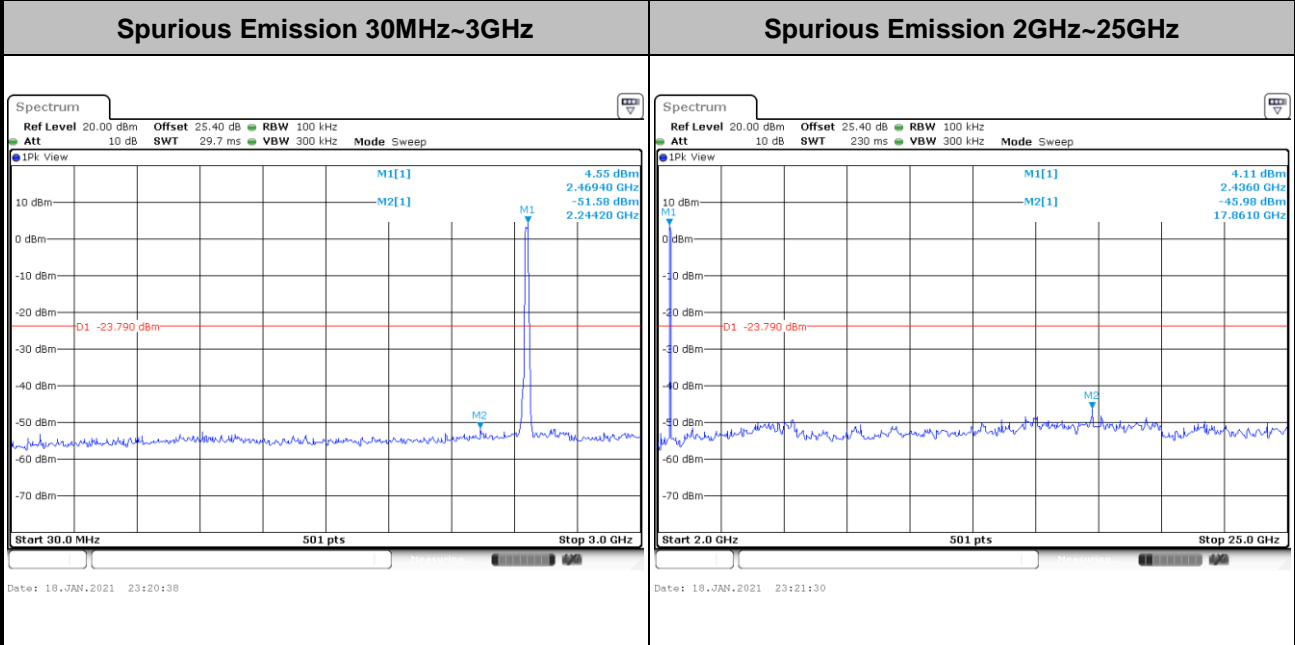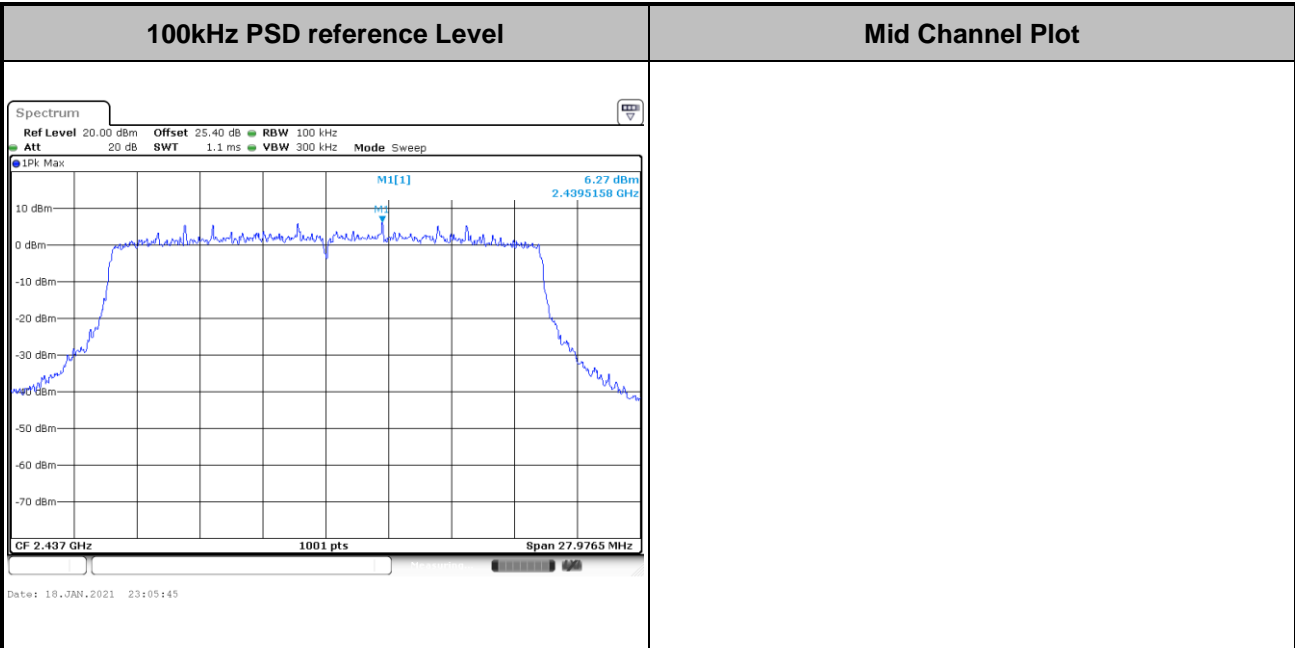




Test Mode :	802.11ax HE20	Test Channel :	11 Full RU
-------------	---------------	----------------	------------

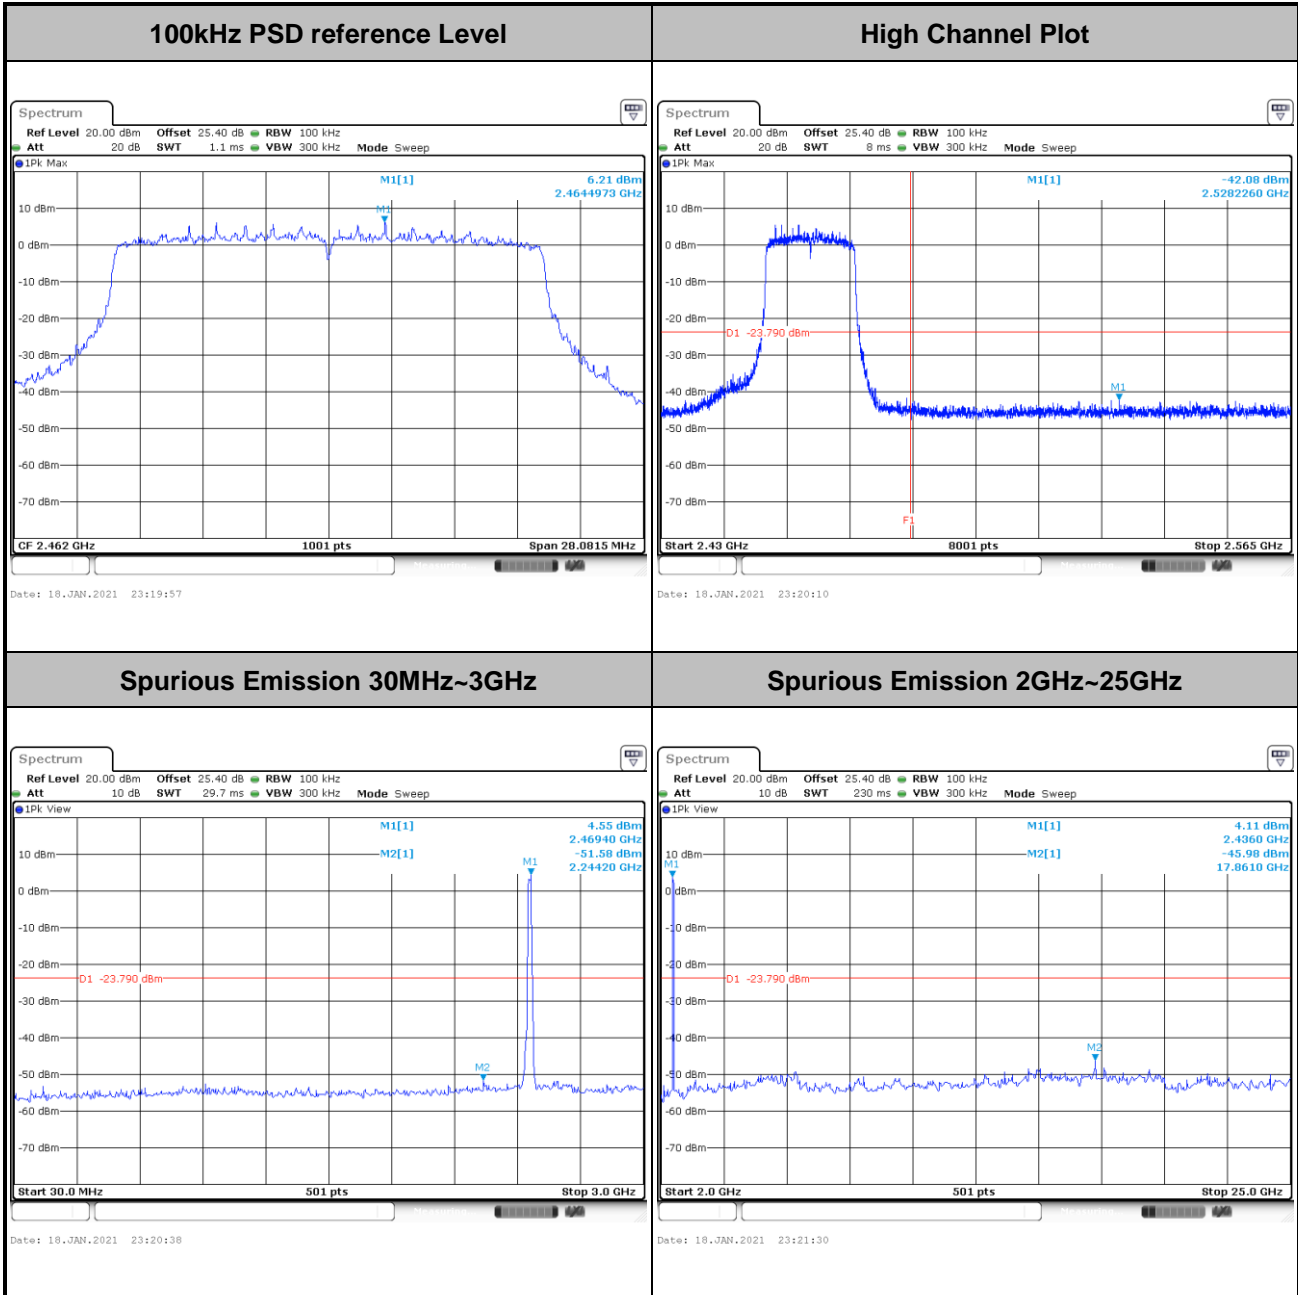





Test Mode :	802.11ax HE40	Test Channel :	03 Full RU
-------------	---------------	----------------	------------

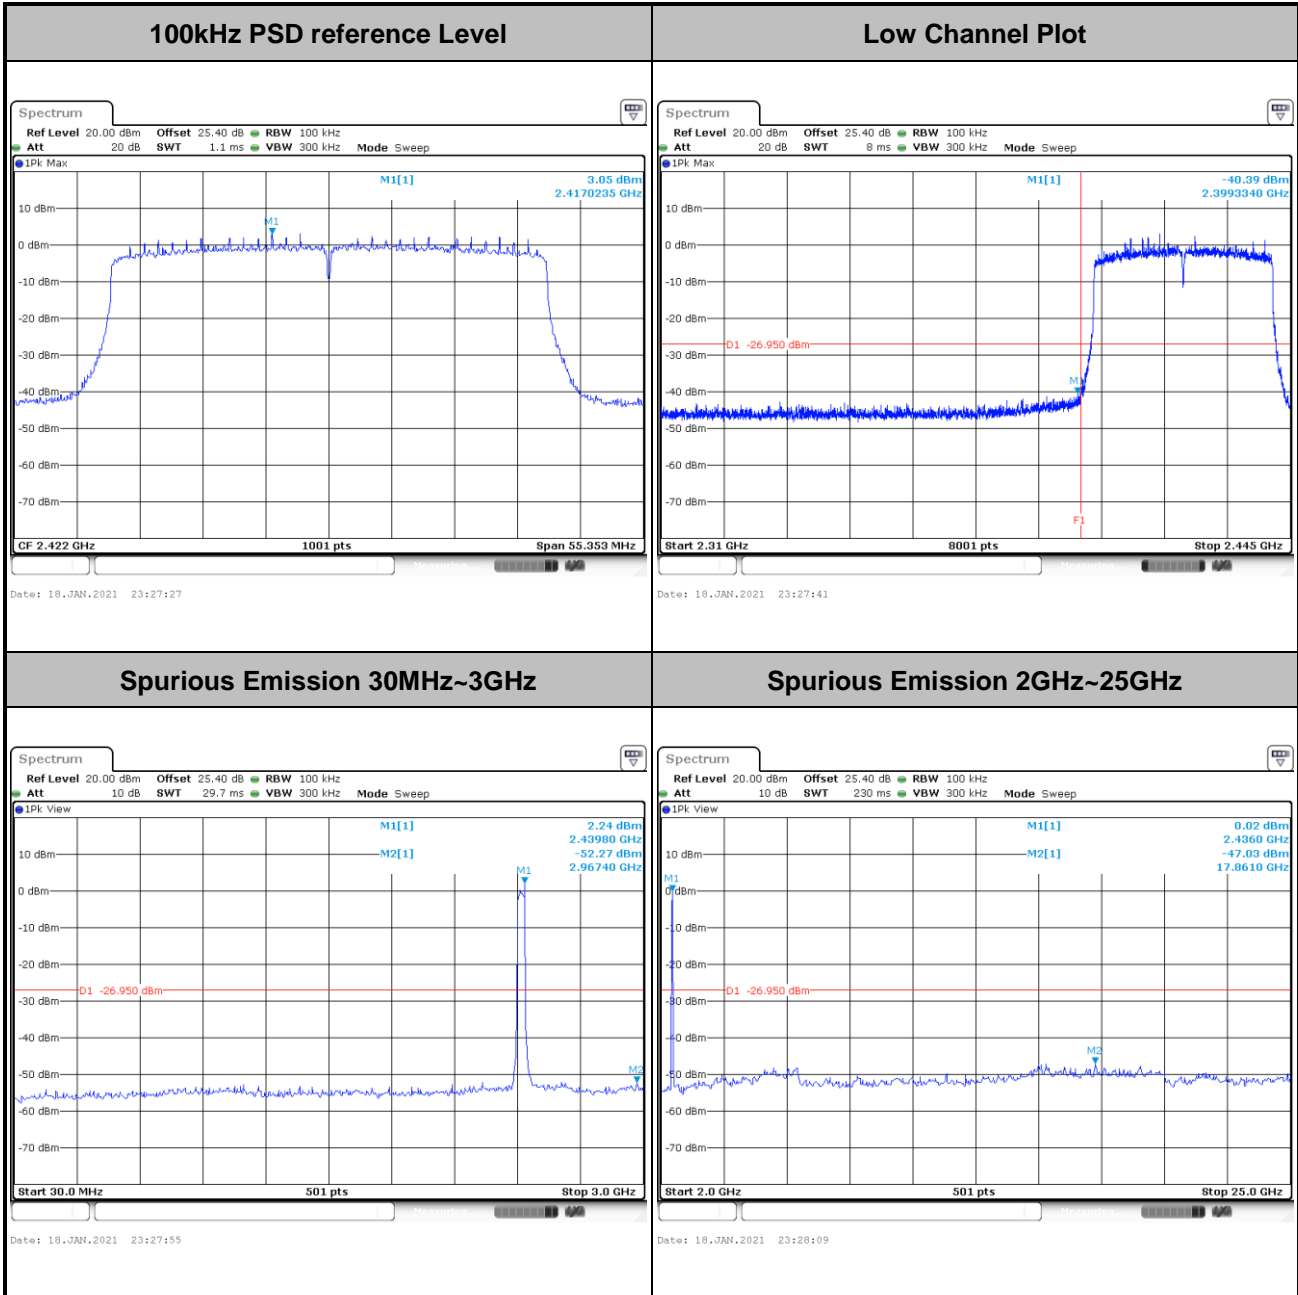





Test Mode :	802.11ax HE40	Test Channel :	06 Full RU
--------------------	---------------	-----------------------	------------

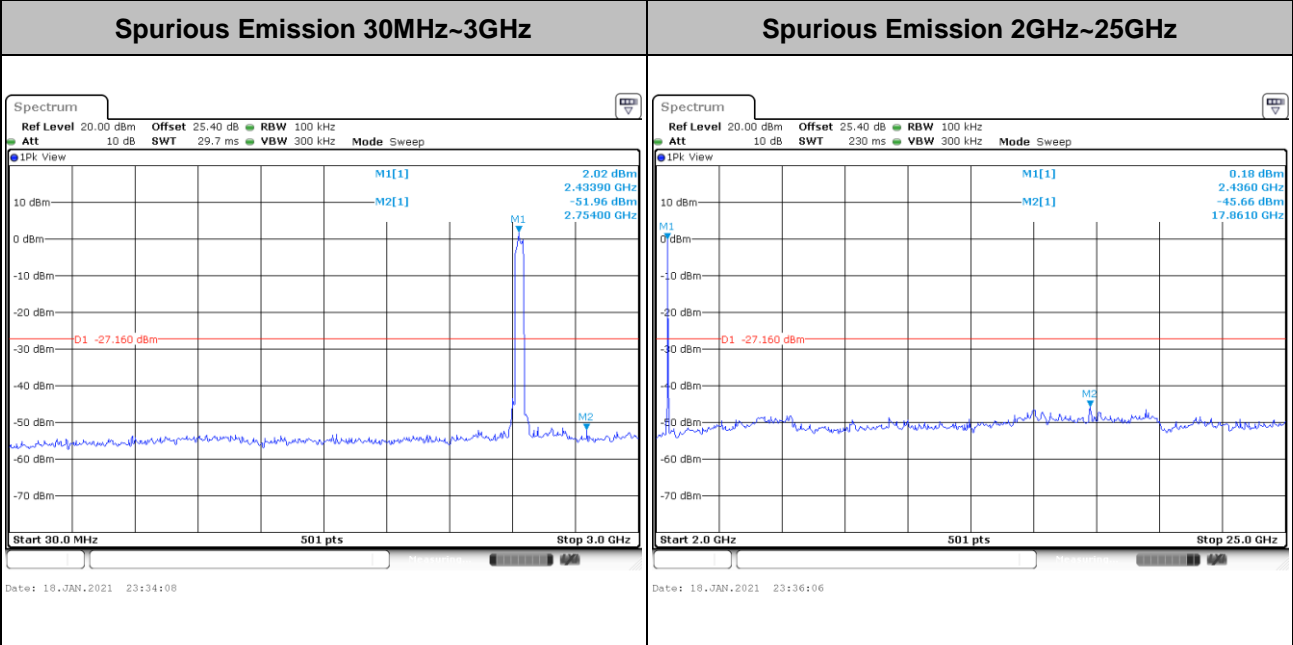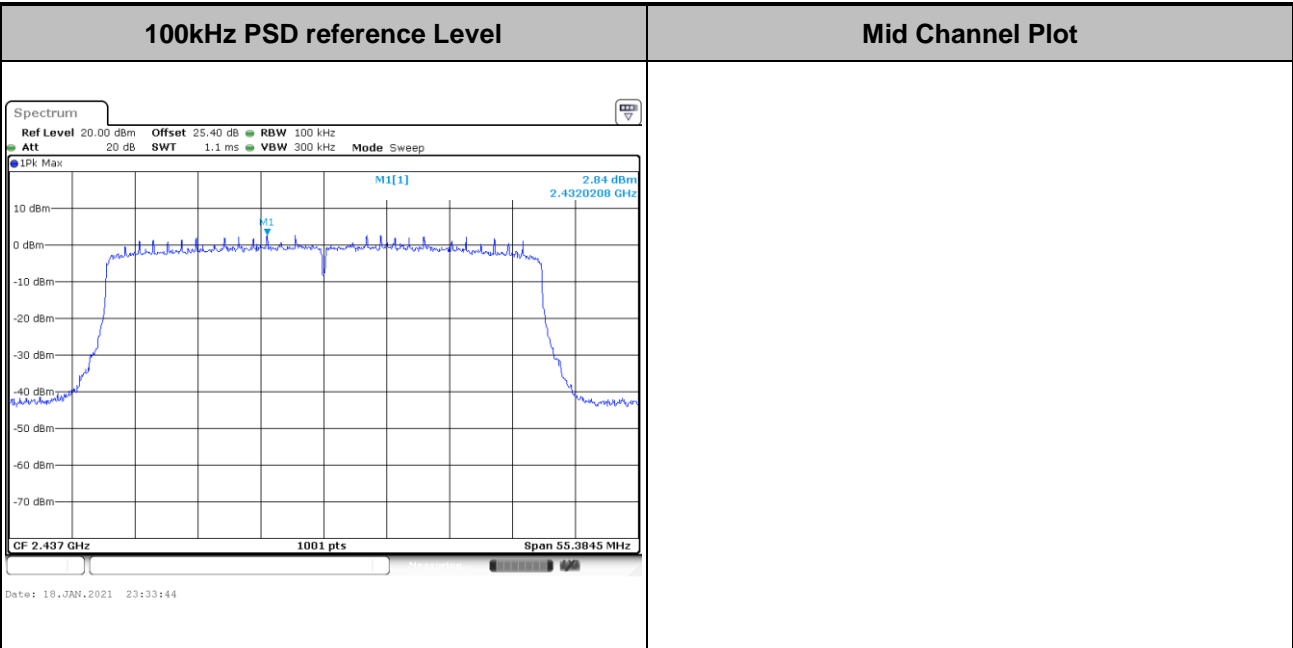



Test Mode :	802.11ax HE40	Test Channel :	09 Full RU
--------------------	---------------	-----------------------	------------

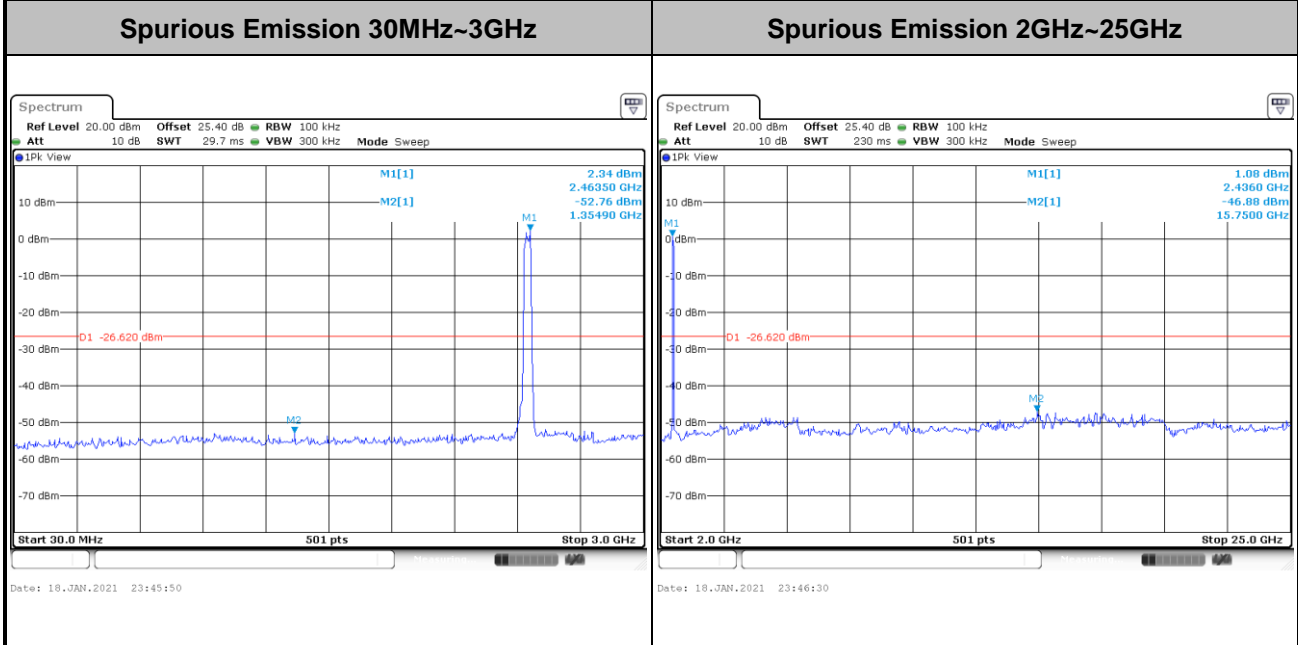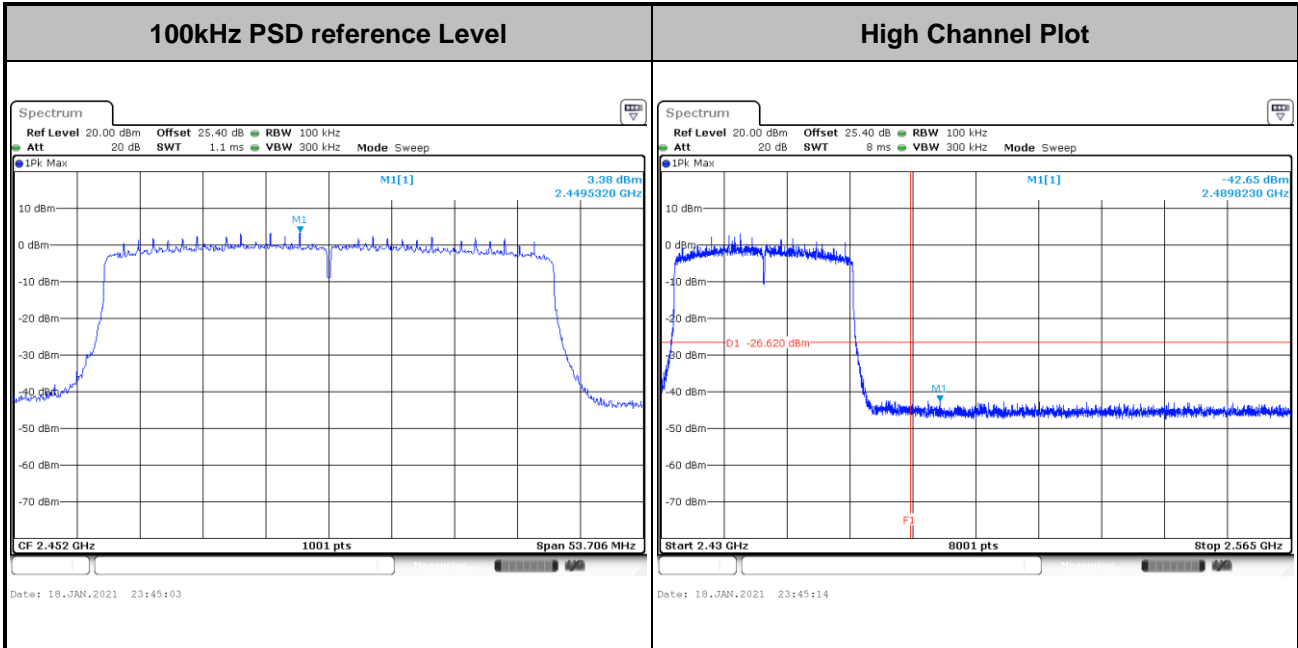



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

**3.5.3 Test Procedures**


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

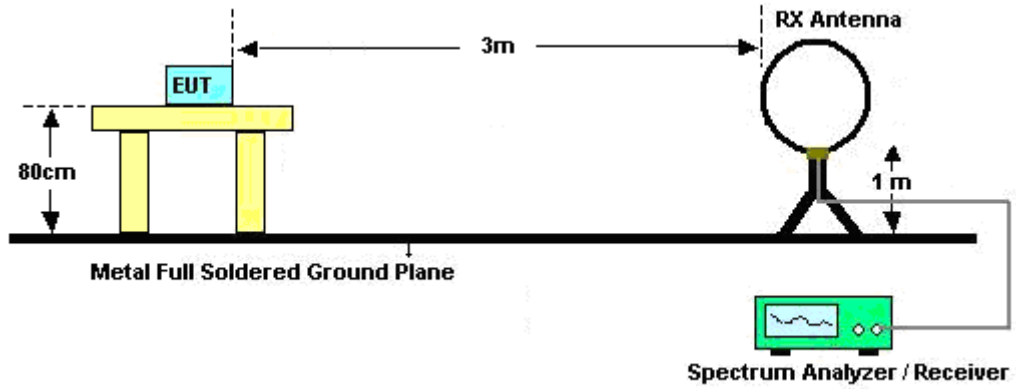


For radiated emissions from 30MHz to 1GHz

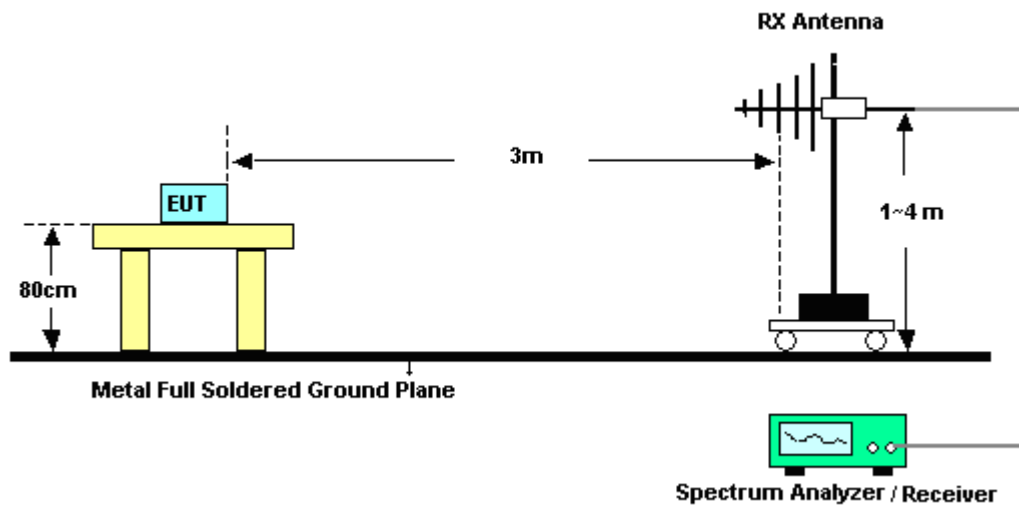

For radiated test from 1GHz to 18GHz

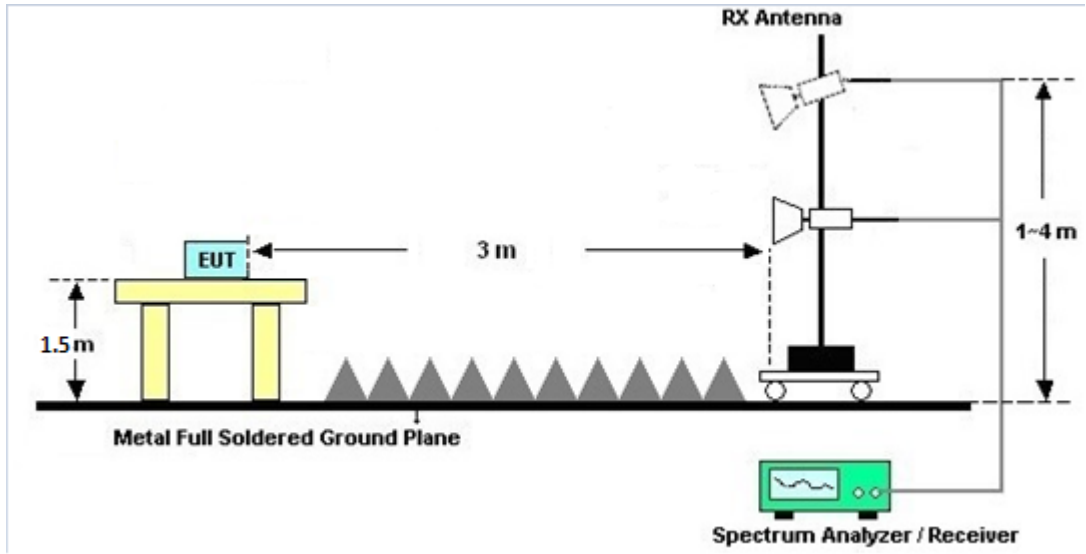

For radiated test above 18GHz

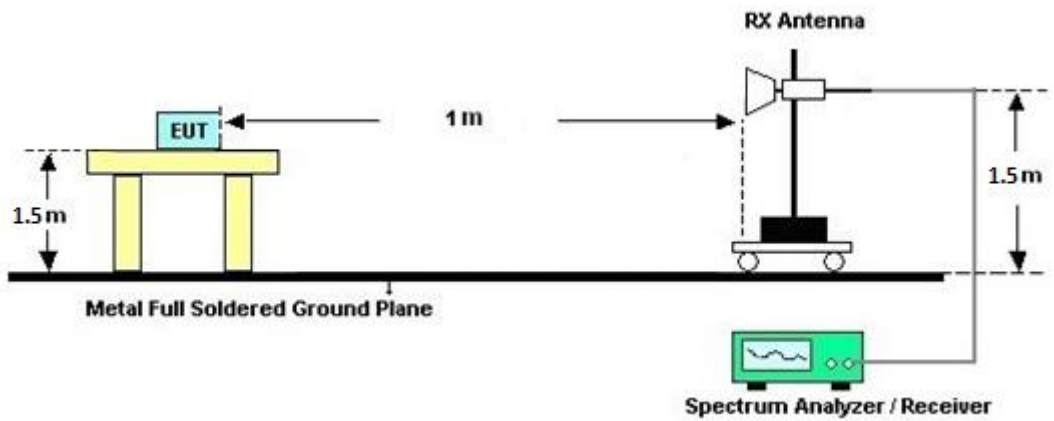



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 11 (dBi)	Ant. 7 (dBi)				
2.4 GHz	-3.10	-3.40	-3.10	-0.24	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Jan. 13, 2021~ Jan. 26, 2021	Jul. 13, 2021	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 11, 2020	Jan. 13, 2021~ Jan. 26, 2021	Oct. 10, 2021	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Sep. 30, 2020	Jan. 13, 2021~ Jan. 26, 2021	Sep. 29, 2021	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1G~18GHz	Sep. 29, 2020	Jan. 13, 2021~ Jan. 26, 2021	Sep. 28, 2021	Radiation (03CH16-HY)
Amplifier	EMCI	EMC051845S E	980729	1-18GHz	Jul. 10, 2020	Jan. 13, 2021~ Jan. 26, 2021	Jul. 09, 2021	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz ~40GHz	May 22, 2020	Jan. 13, 2021~ Jan. 26, 2021	May 21, 2021	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 10, 2020	Jan. 13, 2021~ Jan. 26, 2021	Dec. 09, 2021	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 11, 2020	Jan. 13, 2021~ Jan. 26, 2021	Dec. 10, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/4P E	NA	Aug. 29, 2020	Jan. 13, 2021~ Jan. 26, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/4P E	NA	Aug. 29, 2020	Jan. 13, 2021~ Jan. 26, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5 757	NA	Aug. 29, 2020	Jan. 13, 2021~ Jan. 26, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jan. 13, 2021~ Jan. 26, 2021	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 13, 2021~ Jan. 26, 2021	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 13, 2021~ Jan. 26, 2021	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 13, 2021~ Jan. 26, 2021	N/A	Radiation (03CH16-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 22, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Jan. 22, 2021	Sep. 10, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Jan. 22, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Jan. 22, 2021	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 22, 2021	N/A	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Jan. 22, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBE CK	ESHVTSD 9561-F N3-Z2	109561-F N003730851	9kHz-200MHz	Nov. 02, 2020	Jan. 22, 2021	Nov. 01, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Jan. 08, 2021~ Jan. 19, 2021	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SN O10	10MHz~6GHz	Dec. 09, 2020	Jan. 08, 2021~ Jan. 19, 2021	Dec. 08, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Jan. 08, 2021~ Jan. 19, 2021	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Jan. 08, 2021~ Jan. 19, 2021	Mar. 16, 2021	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Rebecca Li/Hank Hsu	Temperature:	21~25	°C
Test Date:	2021/1/8~2021/1/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 11	Ant 7	Ant 11	Ant 7		
11b	1Mbps	2	1	2412	12.94	12.94	7.14	7.14	0.50	Pass
11b	1Mbps	2	6	2437	13.09	12.99	7.14	7.14	0.50	Pass
11b	1Mbps	2	11	2462	13.09	13.04	7.58	7.54	0.50	Pass
11g	6Mbps	2	1	2412	16.33	16.33	16.30	16.30	0.50	Pass
11g	6Mbps	2	6	2437	16.33	16.38	16.30	16.32	0.50	Pass
11g	6Mbps	2	11	2462	16.38	16.38	16.06	16.32	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 11	Ant 7	SUM	Ant 11	Ant 7	Ant 11	Ant 7	Ant 11	Ant 7	Ant 11	Ant 7	
11b	1Mbps	2	1	2412	19.10	18.90	22.01	30.00		-3.10		18.91		36.00	Pass	
11b	1Mbps	2	6	2437	19.00	18.80	21.91	30.00		-3.10		18.81		36.00	Pass	
11b	1Mbps	2	11	2462	18.90	18.80	21.86	30.00		-3.10		18.76		36.00	Pass	
11g	6Mbps	2	1	2412	17.90	18.10	21.01	30.00		-3.10		17.91		36.00	Pass	
11g	6Mbps	2	6	2437	17.80	18.00	20.91	30.00		-3.10		17.81		36.00	Pass	
11g	6Mbps	2	11	2462	17.80	18.00	20.91	30.00		-3.10		17.81		36.00	Pass	
HT20	MCS0	2	1	2412	17.80	17.90	20.86	30.00		-3.10		17.76		36.00	Pass	
HT20	MCS0	2	6	2437	17.70	17.80	20.76	30.00		-3.10		17.66		36.00	Pass	
HT20	MCS0	2	11	2462	17.60	17.80	20.71	30.00		-3.10		17.61		36.00	Pass	
HT40	MCS0	2	3	2422	17.10	17.00	20.06	30.00		-3.10		16.96		36.00	Pass	
HT40	MCS0	2	6	2437	16.80	17.00	19.91	30.00		-3.10		16.81		36.00	Pass	
HT40	MCS0	2	9	2452	17.00	17.10	20.06	30.00		-3.10		16.96		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 11	Ant 7	Worse + 3.01	Ant 11	Ant 7	Ant 11	Ant 7	
11b	1Mbps	2	1	2412	-6.24	-6.35	-3.23	-0.24		8.00		Pass
11b	1Mbps	2	6	2437	-6.27	-6.45	-3.26	-0.24		8.00		Pass
11b	1Mbps	2	11	2462	-6.15	-6.32	-3.14	-0.24		8.00		Pass
11g	6Mbps	2	1	2412	-9.12	-8.69	-5.68	-0.24		8.00		Pass
11g	6Mbps	2	6	2437	-9.30	-9.49	-6.29	-0.24		8.00		Pass
11g	6Mbps	2	11	2462	-9.98	-9.66	-6.65	-0.24		8.00		Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant 11	Ant 7	Ant 11	Ant 7		
HE20	MCS0	2	1	2412	Full	18.88	18.88	18.59	18.42	0.50	Pass
HE20	MCS0	2	6	2437	Full	18.88	18.88	18.80	18.65	0.50	Pass
HE20	MCS0	2	11	2462	Full	18.83	18.88	18.69	18.72	0.50	Pass
HE40	MCS0	2	3	2422	Full	37.76	37.86	37.72	36.90	0.50	Pass
HE40	MCS0	2	6	2437	Full	37.86	37.86	37.60	36.92	0.50	Pass
HE40	MCS0	2	9	2452	Full	37.76	37.76	37.08	35.80	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant 11	Ant 7	SUM	Ant 11	Ant 7	Ant 11	Ant 7	Ant 11	Ant 7	Ant 11	Ant 7	
HE20	MCS0	2	1	2412	Full	17.90	18.00	20.96	30.00		-3.10	17.86		36.00		Pass	
HE20	MCS0	2	1	2412	26/0	9.40	9.40	12.41	30.00		-3.10	9.31		36.00		Pass	
HE20	MCS0	2	1	2412	52/37	11.10	11.20	14.16	30.00		-3.10	11.06		36.00		Pass	
HE20	MCS0	2	1	2412	106/53	14.00	14.10	17.06	30.00		-3.10	13.96		36.00		Pass	
HE20	MCS0	2	6	2437	Full	17.80	17.90	20.86	30.00		-3.10	17.76		36.00		Pass	
HE20	MCS0	2	6	2437	26/4	8.70	8.90	11.81	30.00		-3.10	8.71		36.00		Pass	
HE20	MCS0	2	6	2437	52/39	10.50	10.60	13.56	30.00		-3.10	10.46		36.00		Pass	
HE20	MCS0	2	6	2437	106/53	13.80	14.00	16.91	30.00		-3.10	13.81		36.00		Pass	
HE20	MCS0	2	11	2462	Full	17.70	17.90	20.81	30.00		-3.10	17.71		36.00		Pass	
HE20	MCS0	2	11	2462	26/8	7.50	7.90	10.71	30.00		-3.10	7.61		36.00		Pass	
HE20	MCS0	2	11	2462	52/40	10.10	10.60	13.37	30.00		-3.10	10.27		36.00		Pass	
HE20	MCS0	2	11	2462	106/54	13.90	14.20	17.06	30.00		-3.10	13.96		36.00		Pass	
HE40	MCS0	2	3	2422	Full	17.20	17.10	20.16	30.00		-3.10	17.06		36.00		Pass	
HE40	MCS0	2	3	2422	242/61	14.40	14.20	17.31	30.00		-3.10	14.21		36.00		Pass	
HE40	MCS0	2	6	2437	Full	16.90	17.10	20.01	30.00		-3.10	16.91		36.00		Pass	
HE40	MCS0	2	6	2437	242/61	14.10	14.30	17.21	30.00		-3.10	14.11		36.00		Pass	
HE40	MCS0	2	9	2452	Full	17.10	17.20	20.16	30.00		-3.10	17.06		36.00		Pass	
HE40	MCS0	2	9	2452	242/62	14.90	15.00	17.96	30.00		-3.10	14.86		36.00		Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant 11	Ant 7	Worse + 3.01	Ant 11	Ant 7	Ant 11	Ant 7	
HE20	MCS0	2	1	2412	Full	-8.96	-8.71	-5.70	-0.24		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-9.39	-9.22	-6.21	-0.24		8.00		Pass
HE20	MCS0	2	1	2412	52/37	-9.06	-9.12	-6.05	-0.24		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-9.09	-8.91	-5.90	-0.24		8.00		Pass
HE20	MCS0	2	6	2437	Full	-9.10	-9.03	-6.02	-0.24		8.00		Pass
HE20	MCS0	2	6	2437	26/4	-9.17	-9.26	-6.16	-0.24		8.00		Pass
HE20	MCS0	2	6	2437	52/39	-9.15	-9.47	-6.14	-0.24		8.00		Pass
HE20	MCS0	2	6	2437	106/53	-9.64	-9.57	-6.56	-0.24		8.00		Pass
HE20	MCS0	2	11	2462	Full	-9.43	-9.37	-6.36	-0.24		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-9.72	-9.71	-6.70	-0.24		8.00		Pass
HE20	MCS0	2	11	2462	52/40	-9.68	-9.85	-6.67	-0.24		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-9.55	-9.80	-6.54	-0.24		8.00		Pass
HE40	MCS0	2	3	2422	Full	-12.59	-12.25	-9.24	-0.24		8.00		Pass
HE40	MCS0	2	3	2422	242/61	-12.61	-12.44	-9.43	-0.24		8.00		Pass
HE40	MCS0	2	6	2437	Full	-12.52	-12.27	-9.26	-0.24		8.00		Pass
HE40	MCS0	2	6	2437	242/61	-12.81	-12.72	-9.71	-0.24		8.00		Pass
HE40	MCS0	2	9	2452	Full	-12.12	-11.85	-8.84	-0.24		8.00		Pass
HE40	MCS0	2	9	2452	242/62	-12.18	-12.05	-9.04	-0.24		8.00		Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 110409
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

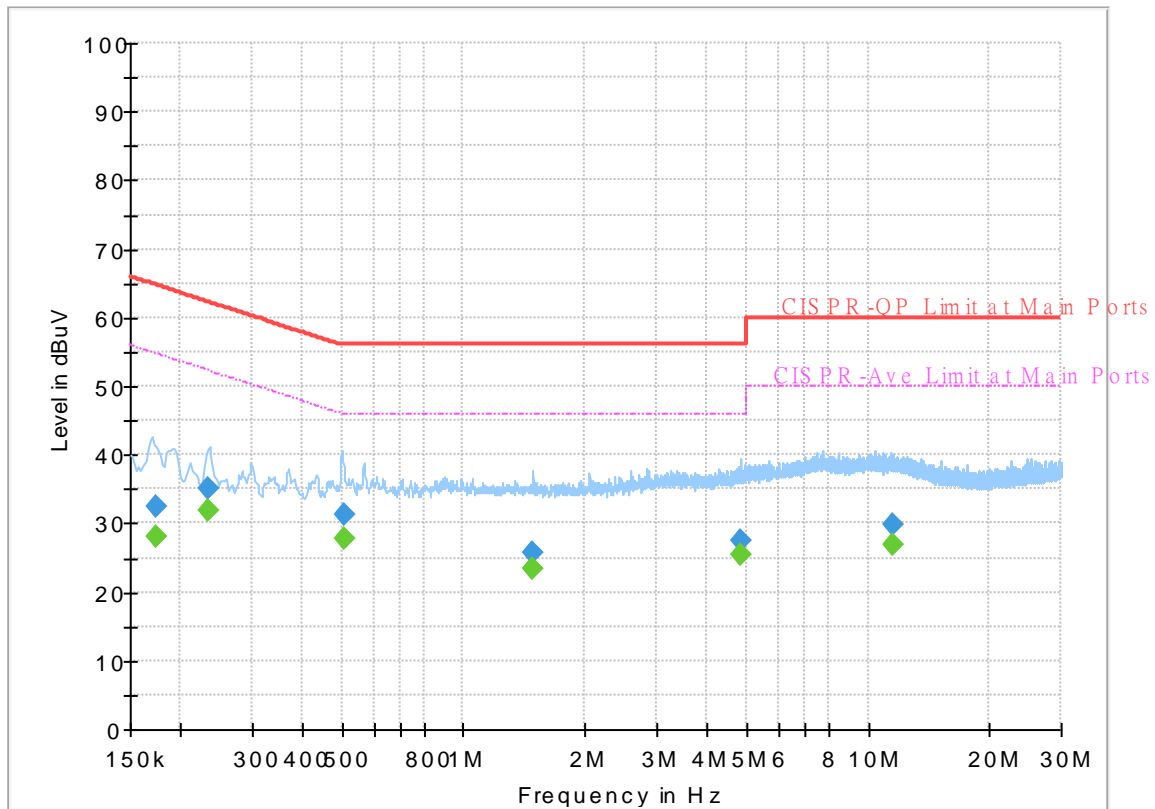


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174750	---	27.99	54.73	26.74	L1	OFF	19.7
0.174750	32.42	---	64.73	32.31	L1	OFF	19.7
0.234510	---	31.95	52.29	20.34	L1	OFF	19.7
0.234510	35.10	---	62.29	27.19	L1	OFF	19.7
0.504960	---	27.81	46.00	18.19	L1	OFF	19.9
0.504960	31.29	---	56.00	24.71	L1	OFF	19.9
1.488390	---	23.38	46.00	22.62	L1	OFF	20.2
1.488390	25.59	---	56.00	30.41	L1	OFF	20.2
4.832970	---	25.35	46.00	20.65	L1	OFF	20.1
4.832970	27.56	---	56.00	28.44	L1	OFF	20.1
11.573250	---	27.03	50.00	22.97	L1	OFF	20.2
11.573250	29.83	---	60.00	30.17	L1	OFF	20.2

EUT Information

Report NO : 110409
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

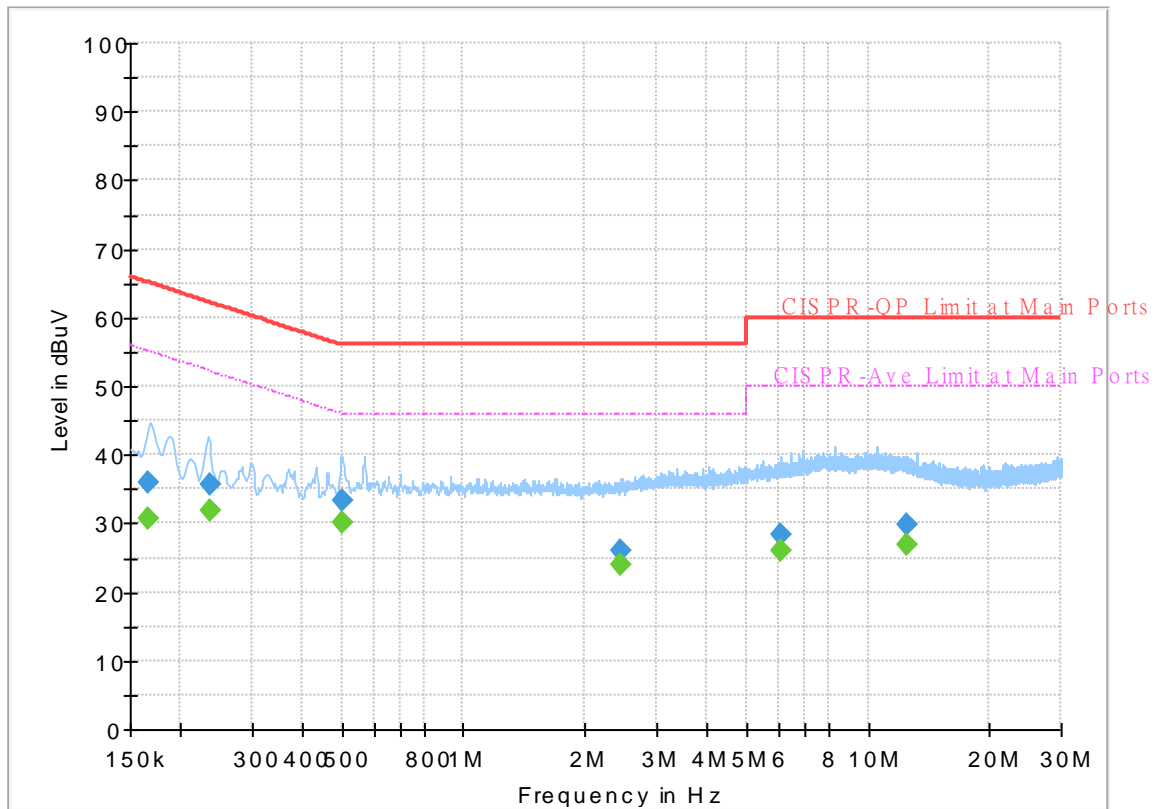

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.166200	---	30.68	55.15	24.47	N	OFF	19.7
0.166200	36.00	---	65.15	29.15	N	OFF	19.7
0.235770	---	31.96	52.24	20.28	N	OFF	19.8
0.235770	35.54	---	62.24	26.70	N	OFF	19.8
0.502980	---	30.21	46.00	15.79	N	OFF	19.9
0.502980	33.24	---	56.00	22.76	N	OFF	19.9
2.455170	---	23.87	46.00	22.13	N	OFF	20.2
2.455170	25.95	---	56.00	30.05	N	OFF	20.2
6.083250	---	26.00	50.00	24.00	N	OFF	20.1
6.083250	28.33	---	60.00	31.67	N	OFF	20.1
12.534000	---	26.80	50.00	23.20	N	OFF	20.3
12.534000	29.78	---	60.00	30.22	N	OFF	20.3



Appendix C. Radiated Spurious Emission

Test Engineer :	Karl Hou, Caster Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		2369.01	56.81	-17.19	74	40.97	27.69	18.44	30.29	106	307	P	H	
		2389.8	44.43	-9.57	54	28.67	27.56	18.48	30.28	106	307	A	H	
	*	2412	112.06	-	-	96.33	27.48	18.52	30.27	106	307	P	H	
	*	2412	109	-	-	93.27	27.48	18.52	30.27	106	307	A	H	
													H	
			2340.87	57.17	-16.83	74	41.25	27.82	18.39	30.29	371	65	P	V
			2341.185	45.14	-8.86	54	29.22	27.82	18.39	30.29	371	65	A	V
	*		2412	110.35	-	-	94.62	27.48	18.52	30.27	371	65	P	V
	*		2412	107.3	-	-	91.57	27.48	18.52	30.27	371	65	A	V
														V
802.11b CH 06 2437MHz		2311.54	56.33	-17.67	74	40.41	27.88	18.34	30.3	105	308	P	H	
		2341.22	44.34	-9.66	54	28.42	27.82	18.39	30.29	105	308	A	H	
	*	2437	112.51	-	-	96.78	27.43	18.57	30.27	105	308	P	H	
	*	2437	109.37	-	-	93.64	27.43	18.57	30.27	105	308	A	H	
			2492.3	56.12	-17.88	74	40.29	27.4	18.68	30.25	105	308	P	H
			2485.93	44.45	-9.55	54	28.63	27.4	18.67	30.25	105	308	A	H
			2374.96	56.83	-17.17	74	41.02	27.65	18.45	30.29	369	65	P	V
			2341.36	44.26	-9.74	54	28.34	27.82	18.39	30.29	369	65	A	V
	*		2437	109.41	-	-	93.68	27.43	18.57	30.27	369	65	P	V
	*		2437	106.2	-	-	90.47	27.43	18.57	30.27	369	65	A	V
			2489.64	56.49	-17.51	74	40.67	27.4	18.67	30.25	369	65	P	V
			2495.38	44.44	-9.56	54	28.6	27.4	18.69	30.25	369	65	A	V



802.11b CH 11 2462MHz	*	2462	112.06	-	-	96.3	27.4	18.62	30.26	106	310	P	H
	*	2462	108.92	-	-	93.16	27.4	18.62	30.26	106	310	A	H
		2492.84	56.3	-17.7	74	40.47	27.4	18.68	30.25	106	310	P	H
		2483.76	44.79	-9.21	54	28.98	27.4	18.66	30.25	106	310	A	H
													H
													H
	*	2462	109.75	-	-	93.99	27.4	18.62	30.26	400	61	P	V
	*	2462	106.48	-	-	90.72	27.4	18.62	30.26	400	61	A	V
		2488.68	55.94	-18.06	74	40.12	27.4	18.67	30.25	400	61	P	V
		2483.6	44.57	-9.43	54	28.76	27.4	18.66	30.25	400	61	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		4824	44.76	-29.24	74	55.61	31.15	13.36	55.36	100	0	P	H	
													H	
													H	
													H	
			4824	46.15	-27.85	74	57	31.15	13.36	55.36	100	0	P	V
														V
														V
802.11b CH 06 2437MHz		4874	41.21	-32.79	74	52.07	31.15	13.36	55.37	100	0	P	H	
		7311	44.81	-29.19	74	48.49	36.42	16.16	56.26	100	0	P	H	
													H	
													H	
			4874	41.85	-32.15	74	52.71	31.15	13.36	55.37	100	0	P	V
			7311	45.02	-28.98	74	48.7	36.42	16.16	56.26	100	0	P	V
														V
802.11b CH 11 2462MHz		4924	42.16	-31.84	74	52.98	31.2	13.36	55.38	100	0	P	H	
		7386	46.05	-27.95	74	49.54	36.43	16.36	56.28	100	0	P	H	
													H	
													H	
			4924	41.24	-32.76	74	52.06	31.2	13.36	55.38	100	0	P	V
			7386	45.6	-28.4	74	49.09	36.43	16.36	56.28	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 01 2412MHz		2344.44	56.32	-17.68	74	40.4	27.81	18.4	30.29	107	307	P	H	
		2341.08	45.08	-8.92	54	29.16	27.82	18.39	30.29	107	307	A	H	
	*	2412	111.05	-	-	95.32	27.48	18.52	30.27	107	307	P	H	
	*	2412	103.55	-	-	87.82	27.48	18.52	30.27	107	307	A	H	
													H	
														H
			2356.41	57	-17	74	41.11	27.76	18.42	30.29	368	65	P	V
			2390	45.26	-8.74	54	29.5	27.56	18.48	30.28	368	65	A	V
	*		2412	110.14	-	-	94.41	27.48	18.52	30.27	368	65	P	V
	*		2412	102.89	-	-	87.16	27.48	18.52	30.27	368	65	A	V
														V
														V
802.11g CH 06 2437MHz		2368.1	56.67	-17.33	74	40.83	27.69	18.44	30.29	102	307	P	H	
		2313.92	44.21	-9.79	54	28.3	27.87	18.34	30.3	102	307	A	H	
	*	2437	111.47	-	-	95.74	27.43	18.57	30.27	102	307	P	H	
	*	2437	103.9	-	-	88.17	27.43	18.57	30.27	102	307	A	H	
			2491.46	56.42	-17.58	74	40.59	27.4	18.68	30.25	102	307	P	H
			2490.97	44.43	-9.57	54	28.6	27.4	18.68	30.25	102	307	A	H
			2366.84	56.75	-17.25	74	40.9	27.7	18.44	30.29	364	65	P	V
			2352	44.23	-9.77	54	28.32	27.79	18.41	30.29	364	65	A	V
	*		2437	110.67	-	-	94.94	27.43	18.57	30.27	364	65	P	V
	*		2437	102.6	-	-	86.87	27.43	18.57	30.27	364	65	A	V
			2491.32	56.5	-17.5	74	40.67	27.4	18.68	30.25	364	65	P	V
			2492.93	44.44	-9.56	54	28.61	27.4	18.68	30.25	364	65	A	V



802.11g CH 11 2462MHz	*	2462	111.16	-	-	95.4	27.4	18.62	30.26	108	310	P	H
	*	2462	103.83	-	-	88.07	27.4	18.62	30.26	108	310	A	H
		2486.16	57.28	-16.72	74	41.46	27.4	18.67	30.25	108	310	P	H
		2483.52	45.25	-8.75	54	29.44	27.4	18.66	30.25	108	310	A	H
													H
													H
	*	2462	110.49	-	-	94.73	27.4	18.62	30.26	400	61	P	V
	*	2462	103.04	-	-	87.28	27.4	18.62	30.26	400	61	A	V
		2483.96	57.41	-16.59	74	41.6	27.4	18.66	30.25	400	61	P	V
		2484.68	45.2	-8.8	54	29.38	27.4	18.67	30.25	400	61	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	45.17	-28.83	74	56.02	31.15	13.36	55.36	100	0	P	H
													H
													H
													H
		4824	44.62	-29.38	74	55.47	31.15	13.36	55.36	100	0	P	V
													V
													V
802.11g CH 06 2437MHz		4874	40.77	-33.23	74	51.63	31.15	13.36	55.37	100	0	P	H
		7311	45.28	-28.72	74	48.96	36.42	16.16	56.26	100	0	P	H
													H
													H
		4874	41.65	-32.35	74	52.51	31.15	13.36	55.37	100	0	P	V
		7311	45.53	-28.47	74	49.21	36.42	16.16	56.26	100	0	P	V
													V
802.11g CH 11 2462MHz		4924	40.22	-33.78	74	51.04	31.2	13.36	55.38	100	0	P	H
		7386	45.94	-28.06	74	49.43	36.43	16.36	56.28	100	0	P	H
													H
													H
		4924	39.82	-34.18	74	50.64	31.2	13.36	55.38	100	0	P	V
		7386	46	-28	74	49.49	36.43	16.36	56.28	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 01 2412MHz		2355.675	57.58	-16.42	74	41.68	27.77	18.42	30.29	105	307	P	H	
		2390	46.65	-7.35	54	30.89	27.56	18.48	30.28	105	307	A	H	
	*	2412	111.13	-	-	95.4	27.48	18.52	30.27	105	307	P	H	
	*	2412	101	-	-	85.27	27.48	18.52	30.27	105	307	A	H	
													H	
														H
			2389.8	57.12	-16.88	74	41.36	27.56	18.48	30.28	371	66	P	V
			2390	46.84	-7.16	54	31.08	27.56	18.48	30.28	371	66	A	V
		*	2412	111.19	-	-	95.46	27.48	18.52	30.27	371	66	P	V
		*	2412	100.93	-	-	85.2	27.48	18.52	30.27	371	66	A	V
													V	
													V	
802.11ax HE20 Full CH 06 2437MHz		2388.96	56.84	-17.16	74	41.07	27.57	18.48	30.28	104	309	P	H	
		2359	44.25	-9.75	54	28.37	27.75	18.42	30.29	104	309	A	H	
	*	2437	110.9	-	-	95.17	27.43	18.57	30.27	104	309	P	H	
	*	2437	101.61	-	-	85.88	27.43	18.57	30.27	104	309	A	H	
			2486.07	56.61	-17.39	74	40.79	27.4	18.67	30.25	104	309	P	H
			2499.09	44.48	-9.52	54	28.64	27.4	18.69	30.25	104	309	A	H
			2363.62	56.34	-17.66	74	40.48	27.72	18.43	30.29	364	67	P	V
			2350.04	44.24	-9.76	54	28.32	27.8	18.41	30.29	364	67	A	V
		*	2437	109.03	-	-	93.3	27.43	18.57	30.27	364	67	P	V
		*	2437	100.32	-	-	84.59	27.43	18.57	30.27	364	67	A	V
		2488.38	56.56	-17.44	74	40.74	27.4	18.67	30.25	364	67	P	V	
		2499.37	44.47	-9.53	54	28.63	27.4	18.69	30.25	364	67	A	V	



WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
8802.11ax HE20 Full CH 11 2462MHz	*	2462	110.31	-	-	94.55	27.4	18.62	30.26	106	310	P	H
	*	2462	101.06	-	-	85.3	27.4	18.62	30.26	106	310	A	H
		2483.8	57.94	-16.06	74	42.13	27.4	18.66	30.25	106	310	P	H
		2483.52	46.86	-7.14	54	31.05	27.4	18.66	30.25	106	310	A	H
													H
													H
	*	2462	110.21	-	-	94.45	27.4	18.62	30.26	400	62	P	V
	*	2462	100.66	-	-	84.9	27.4	18.62	30.26	400	62	A	V
		2492.96	57.01	-16.99	74	41.18	27.4	18.68	30.25	400	62	P	V
		2483.52	46.34	-7.66	54	30.53	27.4	18.66	30.25	400	62	A	V
												V	
												V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 01 2412MHz		4824	43.08	-30.92	74	53.93	31.15	13.36	55.36	100	0	P	H	
													H	
													H	
													H	
			4824	43.83	-30.17	74	54.68	31.15	13.36	55.36	100	0	P	V
														V
														V
802.11ax HE20 Full CH 06 2437MHz		4874	40.57	-33.43	74	51.43	31.15	13.36	55.37	100	0	P	H	
		7311	45.28	-28.72	74	48.96	36.42	16.16	56.26	100	0	P	H	
													H	
													H	
			4874	40.29	-33.71	74	51.15	31.15	13.36	55.37	100	0	P	V
			7311	45.75	-28.25	74	49.43	36.42	16.16	56.26	100	0	P	V
														V
802.11ax HE20 Full CH 11 2462MHz		4924	39.81	-34.19	74	50.63	31.2	13.36	55.38	100	0	P	H	
		7386	45.78	-28.22	74	49.27	36.43	16.36	56.28	100	0	P	H	
													H	
													H	
			4924	39.77	-34.23	74	50.59	31.2	13.36	55.38	100	0	P	V
			7386	45.65	-28.35	74	49.14	36.43	16.36	56.28	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 106/53 CH 01 2412MHz		2388.435	63.04	-10.96	74	47.27	27.57	18.48	30.28	100	301	P	H	
		2390	45.55	-8.45	54	29.79	27.56	18.48	30.28	100	301	A	H	
	*	2412	114.81	-	-	99.08	27.48	18.52	30.27	100	301	P	H	
	*	2412	106.44	-	-	90.71	27.48	18.52	30.27	100	301	A	H	
													H	
														H
			2388.96	59.79	-14.21	74	44.02	27.57	18.48	30.28	329	66	P	V
			2390	45.09	-8.91	54	29.33	27.56	18.48	30.28	329	66	A	V
	*		2412	112.24	-	-	96.51	27.48	18.52	30.27	329	66	P	V
	*		2412	104.15	-	-	88.42	27.48	18.52	30.27	329	66	A	V
													V	
													V	
802.11ax HE20 Partial 106/54 CH 11 2462MHz	*	2462	117.56	-	-	101.8	27.4	18.62	30.26	100	304	P	H	
	*	2462	107.54	-	-	91.78	27.4	18.62	30.26	100	304	A	H	
			2484.28	64.23	-9.77	74	48.42	27.4	18.66	30.25	100	304	P	H
			2483.56	45.74	-8.26	54	29.93	27.4	18.66	30.25	100	304	A	H
														H
														H
	*		2462	114.3	-	-	98.54	27.4	18.62	30.26	400	59	P	V
	*		2462	105.85	-	-	90.09	27.4	18.62	30.26	400	59	A	V
			2485.08	62.48	-11.52	74	46.66	27.4	18.67	30.25	400	59	P	V
			2483.68	44.94	-9.06	54	29.13	27.4	18.66	30.25	400	59	A	V
													V	
													V	



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 106 (Harmonic @ 3m)

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 106/53 CH 01 2412MHz		4824	40.15	-33.85	74	51	31.15	13.36	55.36	100	0	P	H	
													H	
													H	
													H	
			4824	40.41	-33.59	74	51.26	31.15	13.36	55.36	100	0	P	V
														V
														V
802.11ax HE20 Partial 106/54 CH 11 2462MHz		4924	39.75	-34.25	74	50.57	31.2	13.36	55.38	100	0	P	H	
		7386	46.26	-27.74	74	49.75	36.43	16.36	56.28	100	0	P	H	
													H	
													H	
			4924	39.45	-34.55	74	50.27	31.2	13.36	55.38	100	0	P	V
			7386	45.34	-28.66	74	48.83	36.43	16.36	56.28	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 11+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 03 2422MHz		2389.94	59.07	-14.93	74	43.31	27.56	18.48	30.28	107	309	P	H
		2389.94	48.34	-5.66	54	32.58	27.56	18.48	30.28	107	309	A	H
	*	2422	108.13	-	-	92.4	27.46	18.54	30.27	107	309	P	H
	*	2422	98.09	-	-	82.36	27.46	18.54	30.27	107	309	A	H
		2498.88	56.68	-17.32	74	40.84	27.4	18.69	30.25	107	309	P	H
		2484.6	44.48	-9.52	54	28.67	27.4	18.66	30.25	107	309	A	H
		2388.68	58.45	-15.55	74	42.68	27.57	18.48	30.28	370	65	P	V
		2389.94	47.99	-6.01	54	32.23	27.56	18.48	30.28	370	65	A	V
	*	2422	107.4	-	-	91.67	27.46	18.54	30.27	370	65	P	V
	*	2422	97.43	-	-	81.7	27.46	18.54	30.27	370	65	A	V
		2486.7	56.62	-17.38	74	40.8	27.4	18.67	30.25	370	65	P	V
		2499.79	44.45	-9.55	54	28.61	27.4	18.69	30.25	370	65	A	V
802.11ax HE40 Full CH 06 2437MHz		2365.16	57.63	-16.37	74	41.77	27.71	18.44	30.29	103	307	P	H
		2389.94	44.68	-9.32	54	28.92	27.56	18.48	30.28	103	307	A	H
	*	2437	107.34	-	-	91.61	27.43	18.57	30.27	103	307	P	H
	*	2437	97.88	-	-	82.15	27.43	18.57	30.27	103	307	A	H
		2491.95	56.85	-17.15	74	41.02	27.4	18.68	30.25	103	307	P	H
		2483.9	44.73	-9.27	54	28.92	27.4	18.66	30.25	103	307	A	H
		2353.4	57.42	-16.58	74	41.52	27.78	18.41	30.29	363	66	P	V
		2389.94	44.49	-9.51	54	28.73	27.56	18.48	30.28	363	66	A	V
	*	2437	106.48	-	-	90.75	27.43	18.57	30.27	363	66	P	V
	*	2437	96.86	-	-	81.13	27.43	18.57	30.27	363	66	A	V
	2493.56	56.11	-17.89	74	40.28	27.4	18.68	30.25	363	66	P	V	
	2483.62	44.62	-9.38	54	28.81	27.4	18.66	30.25	363	66	A	V	