



FCC RADIO TEST REPORT

FCC ID : 2AFZZK1G
Equipment : Mobile Phone
Brand Name : Xiaomi
Model Name : M2102K1G
Applicant : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi
Middle Road, Haidian District, Beijing,
China, 100085
Manufacturer : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi
Middle Road, Haidian District, Beijing,
China, 100085
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 07, 2021 and testing was started from Jan. 10, 2021 and completed on Jan. 28, 2021. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	20
3.3 Power Spectral Density Measurement	21
3.4 Conducted Band Edges and Spurious Emission Measurement	26
3.5 Radiated Band Edges and Spurious Emission Measurement	35
3.6 AC Conducted Emission Measurement.....	39
3.7 Antenna Requirements	41
4 List of Measuring Equipment	42
5 Uncertainty of Evaluation.....	44
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 6.11 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 13.35 dB at 4.934 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Tina Chuang



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11ax, NFC, WPC/WPT, and GNSS.

Product Specification subjective to this standard		
Antenna Type	WWAN: PIFA Antenna WLAN 2.4GHz: <Ant. 5>: PIFA Antenna <Ant. 7>: PIFA Antenna WLAN 5GHz: <Ant. 11>: PIFA Antenna <Ant. 8>: PIFA Antenna WLAN 6GHz: <Ant. 11>: PIFA Antenna <Ant. 8>: PIFA Antenna Bluetooth: <Ant. 5>: PIFA Antenna <Ant. 7>: PIFA Antenna GPS / Glonass / Galileo / BDS: PIFA Antenna NFC: Planar Antenna WPC/WPT: Coil antenna	
	Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant. 5: -2.46 Ant. 7: -2.58

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY, CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and WPC Charging Mode. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + USB Cable (Charging from Adapter)

2.3 Connection Diagram of Test System

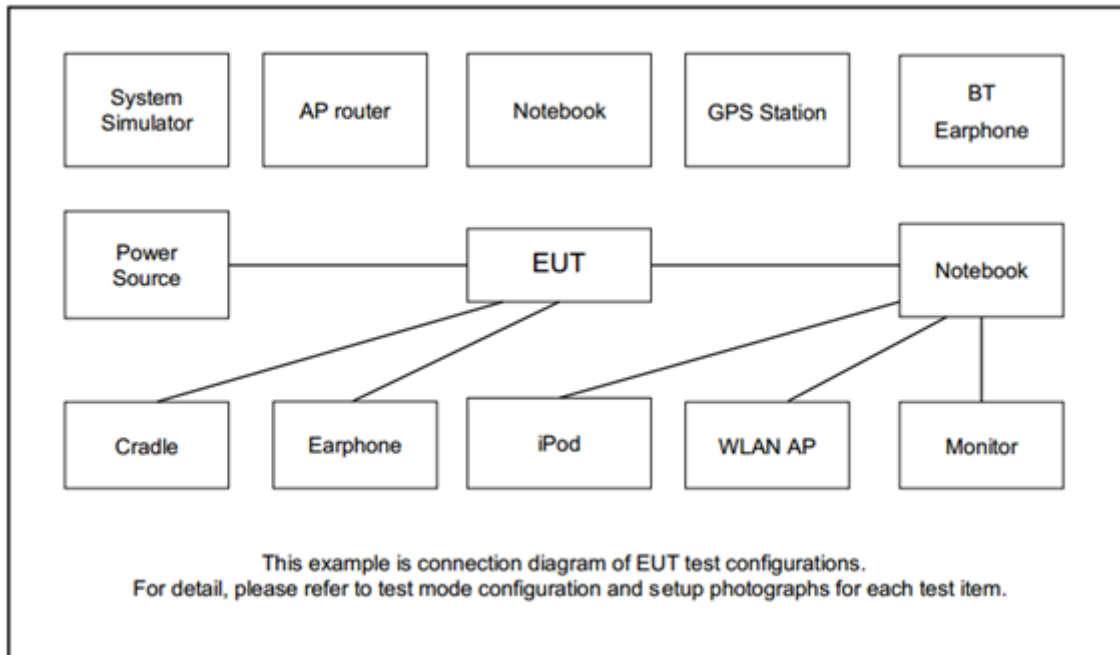

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Mobile Phone	Xiaomi	M2102K1G	2AFZZK1G	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<Ant. 5>

<1Mbps>

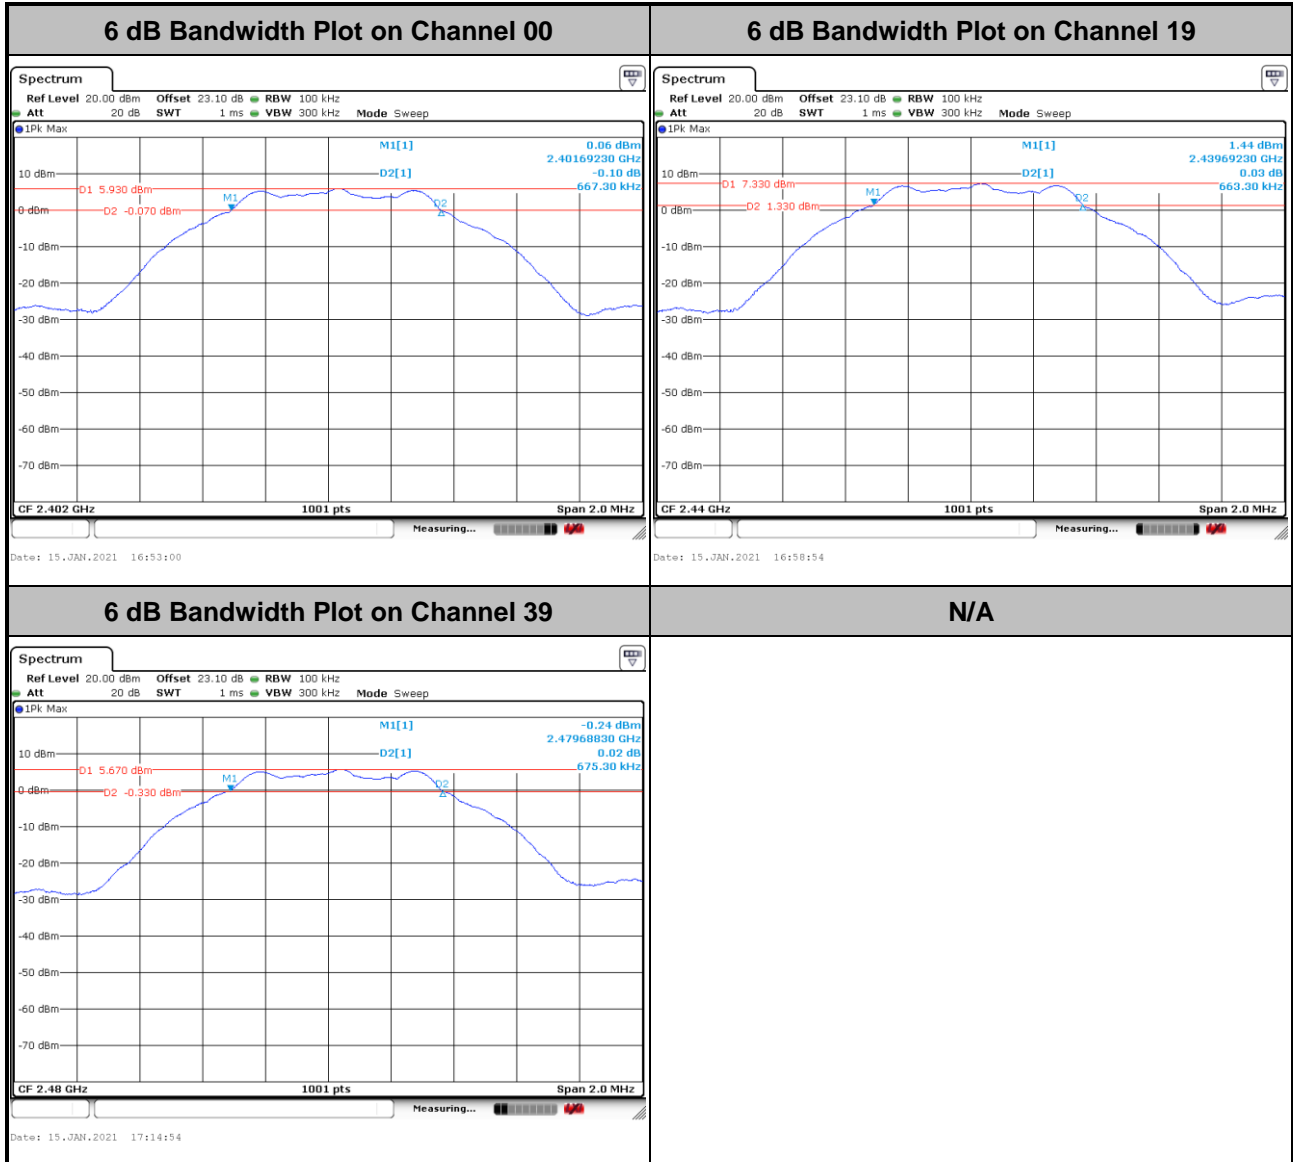




<2Mbps>

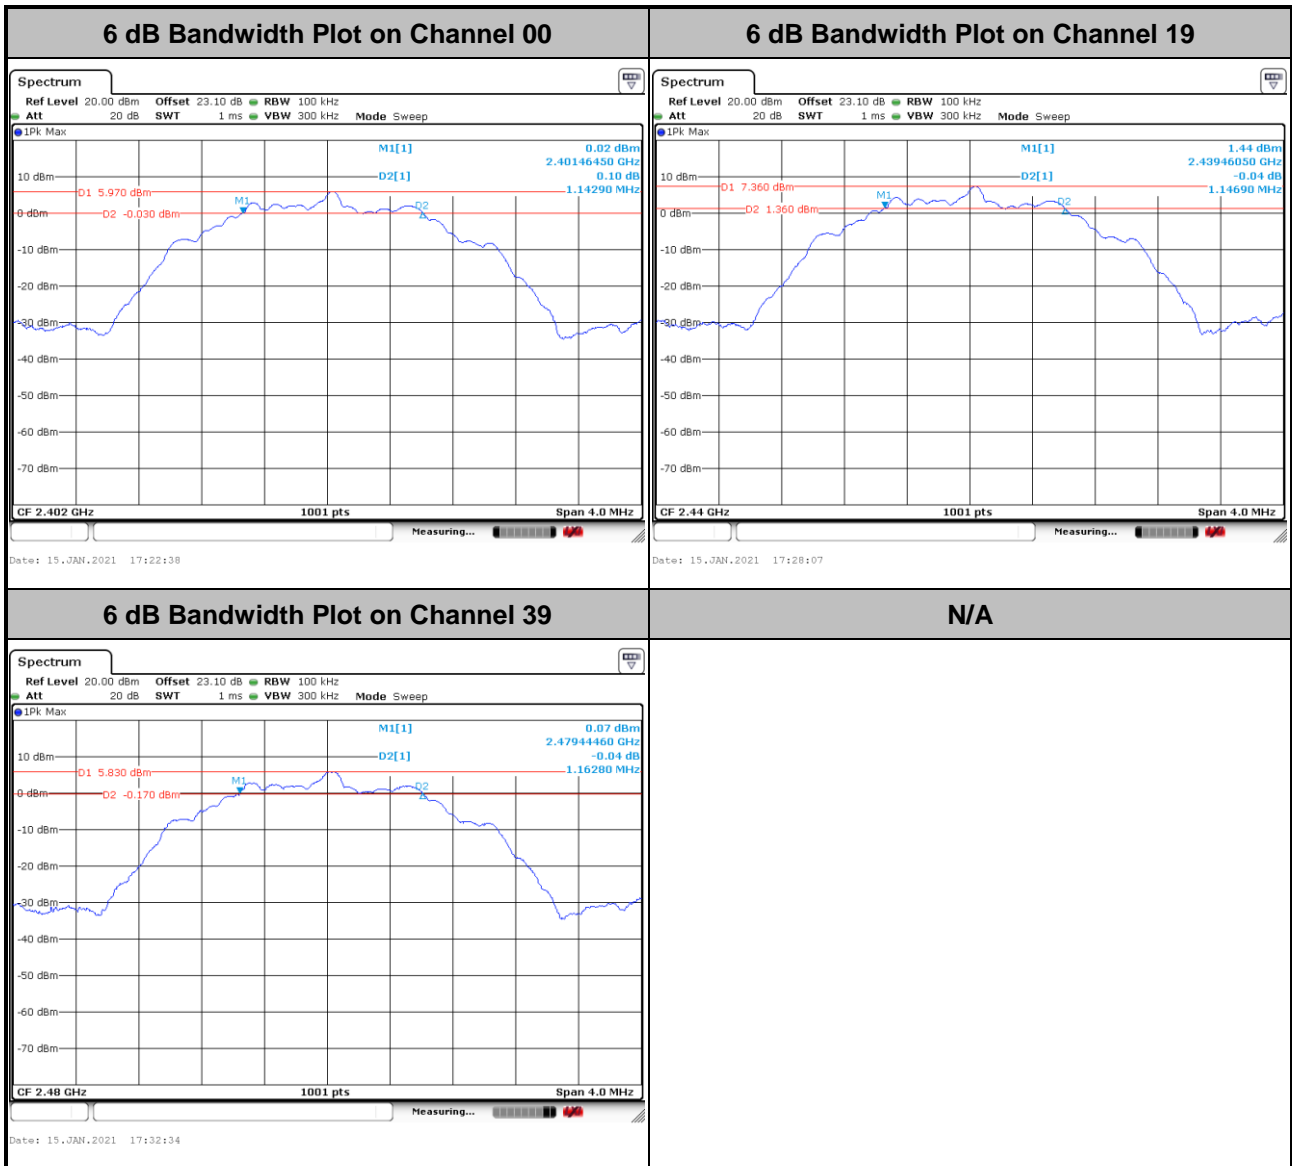




<Ant. 7>

<1Mbps>

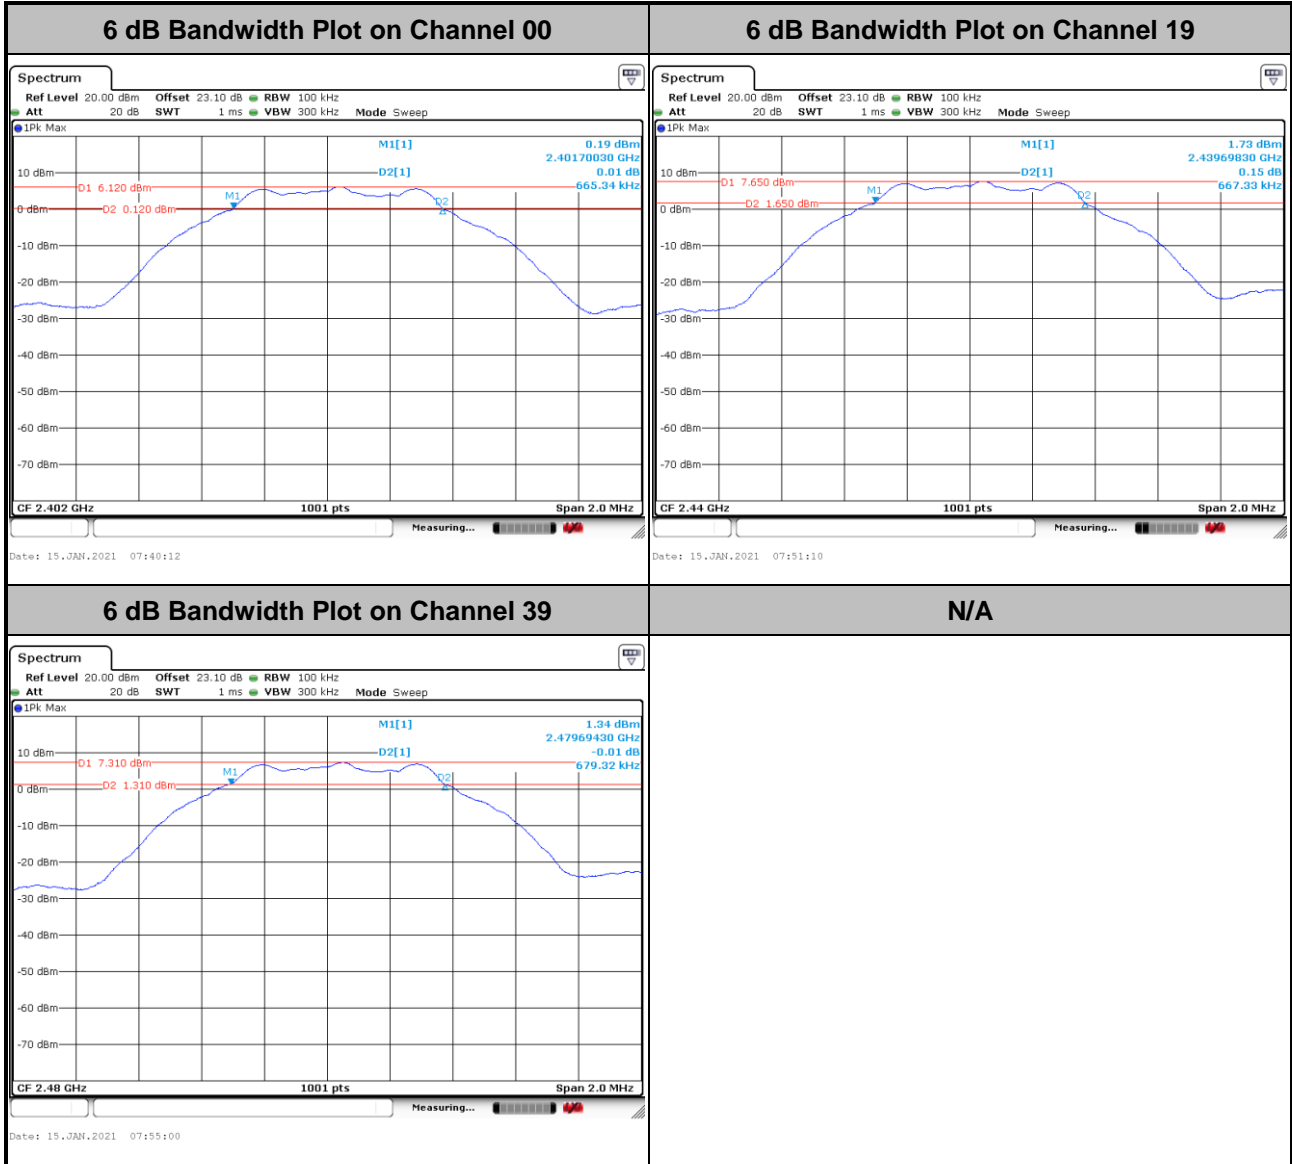



<2Mbps>

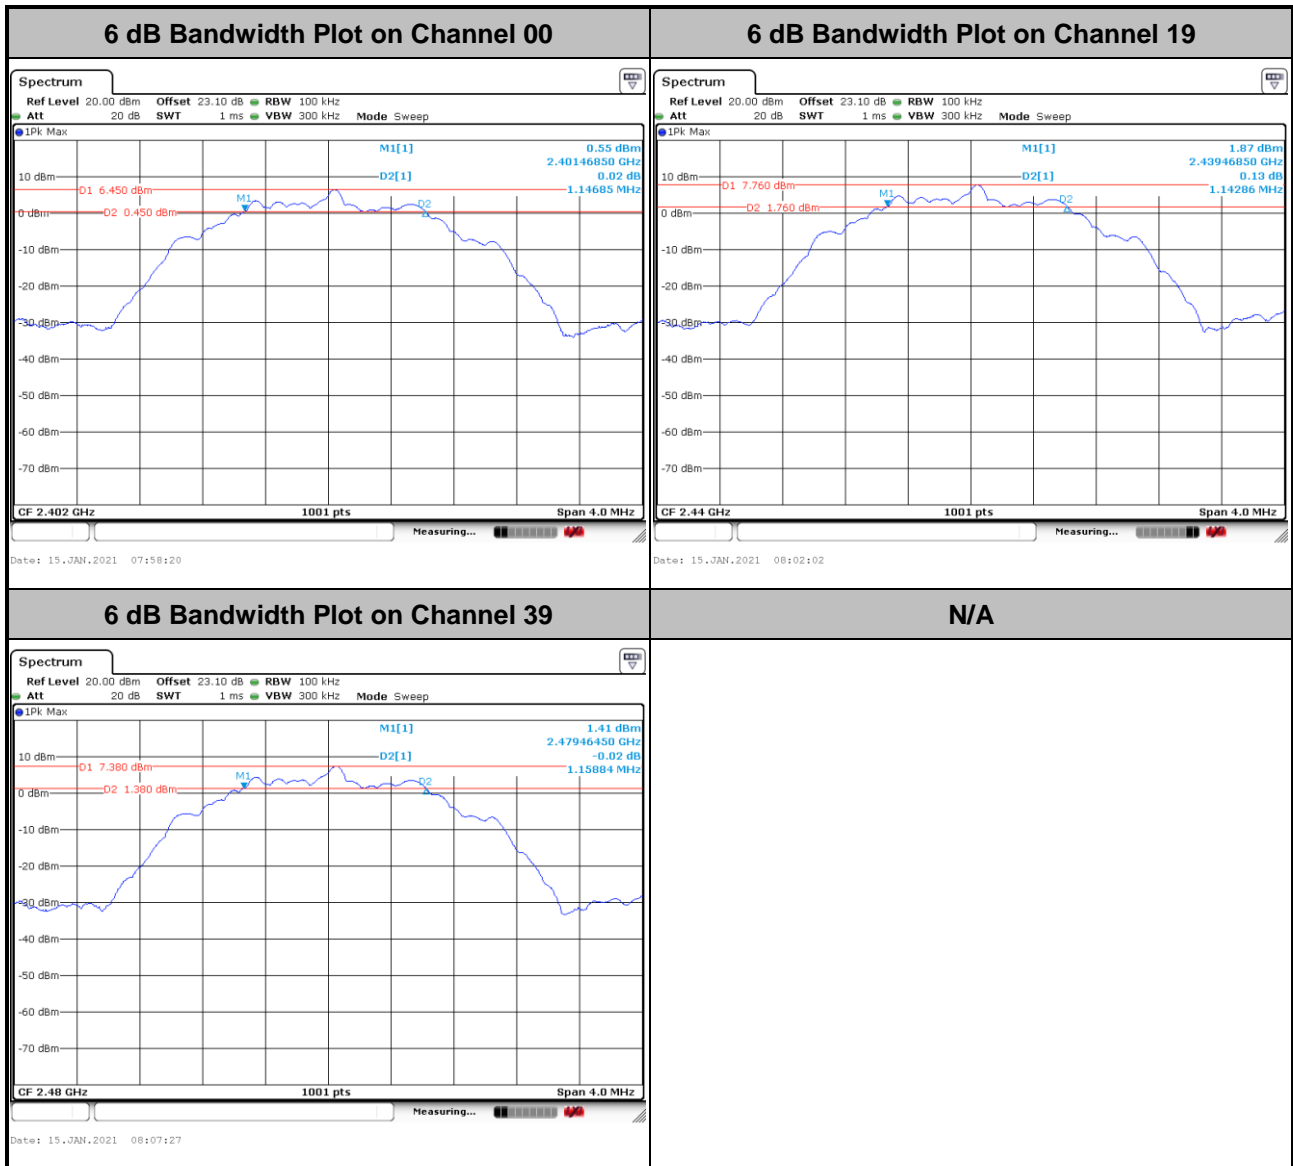




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<Ant. 5>

<1Mbps>

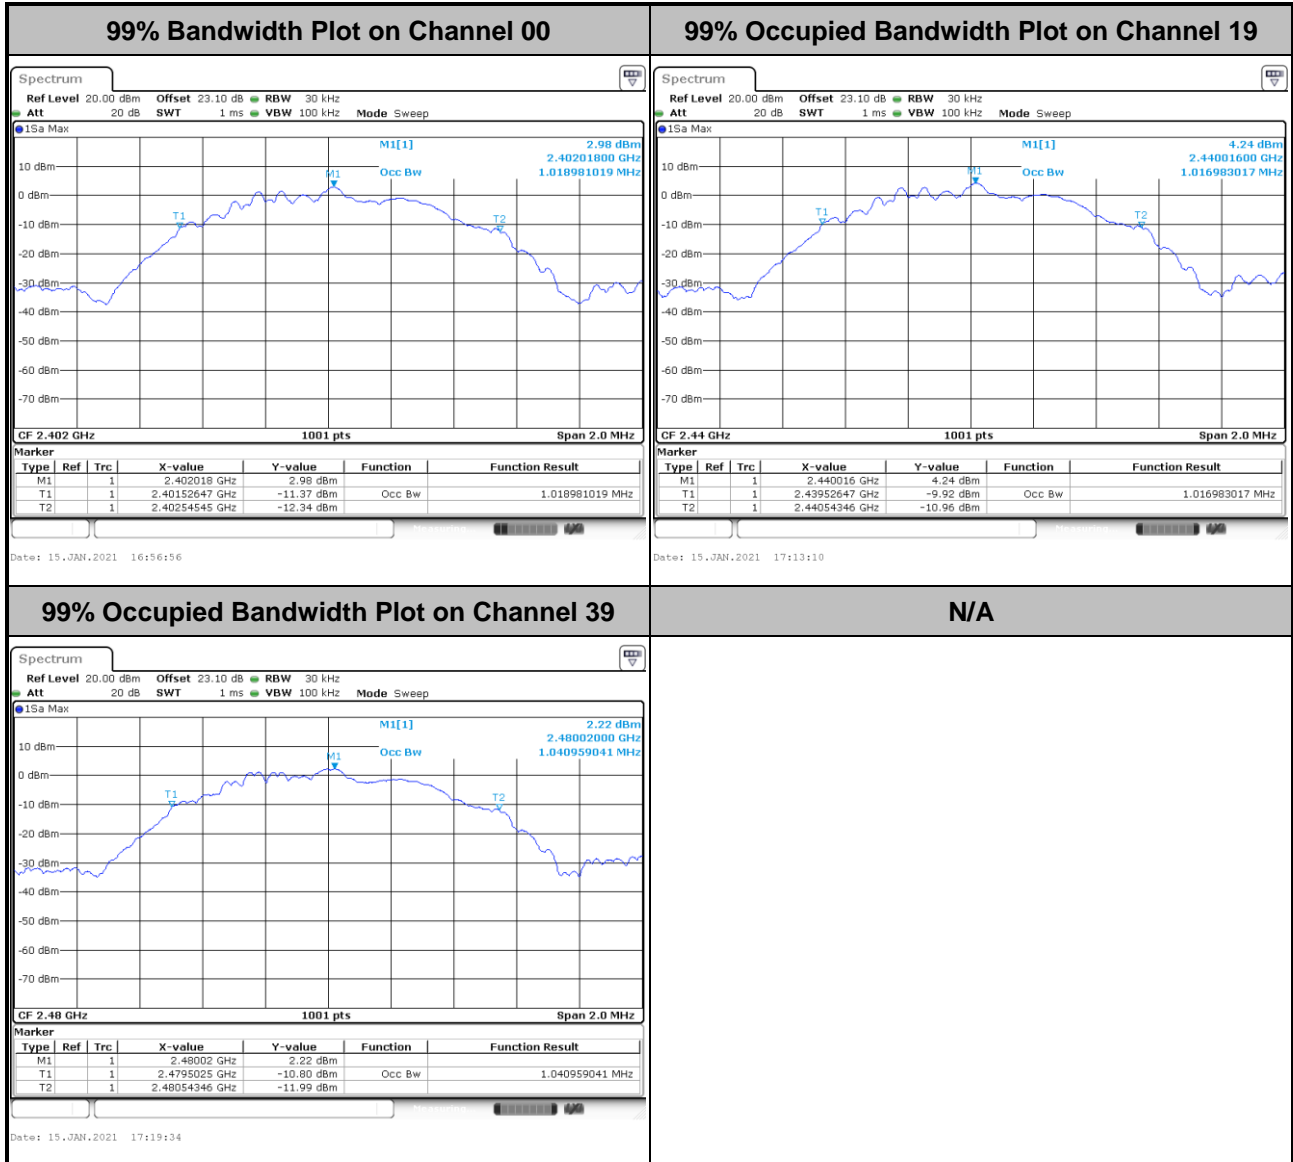




<2Mbps>

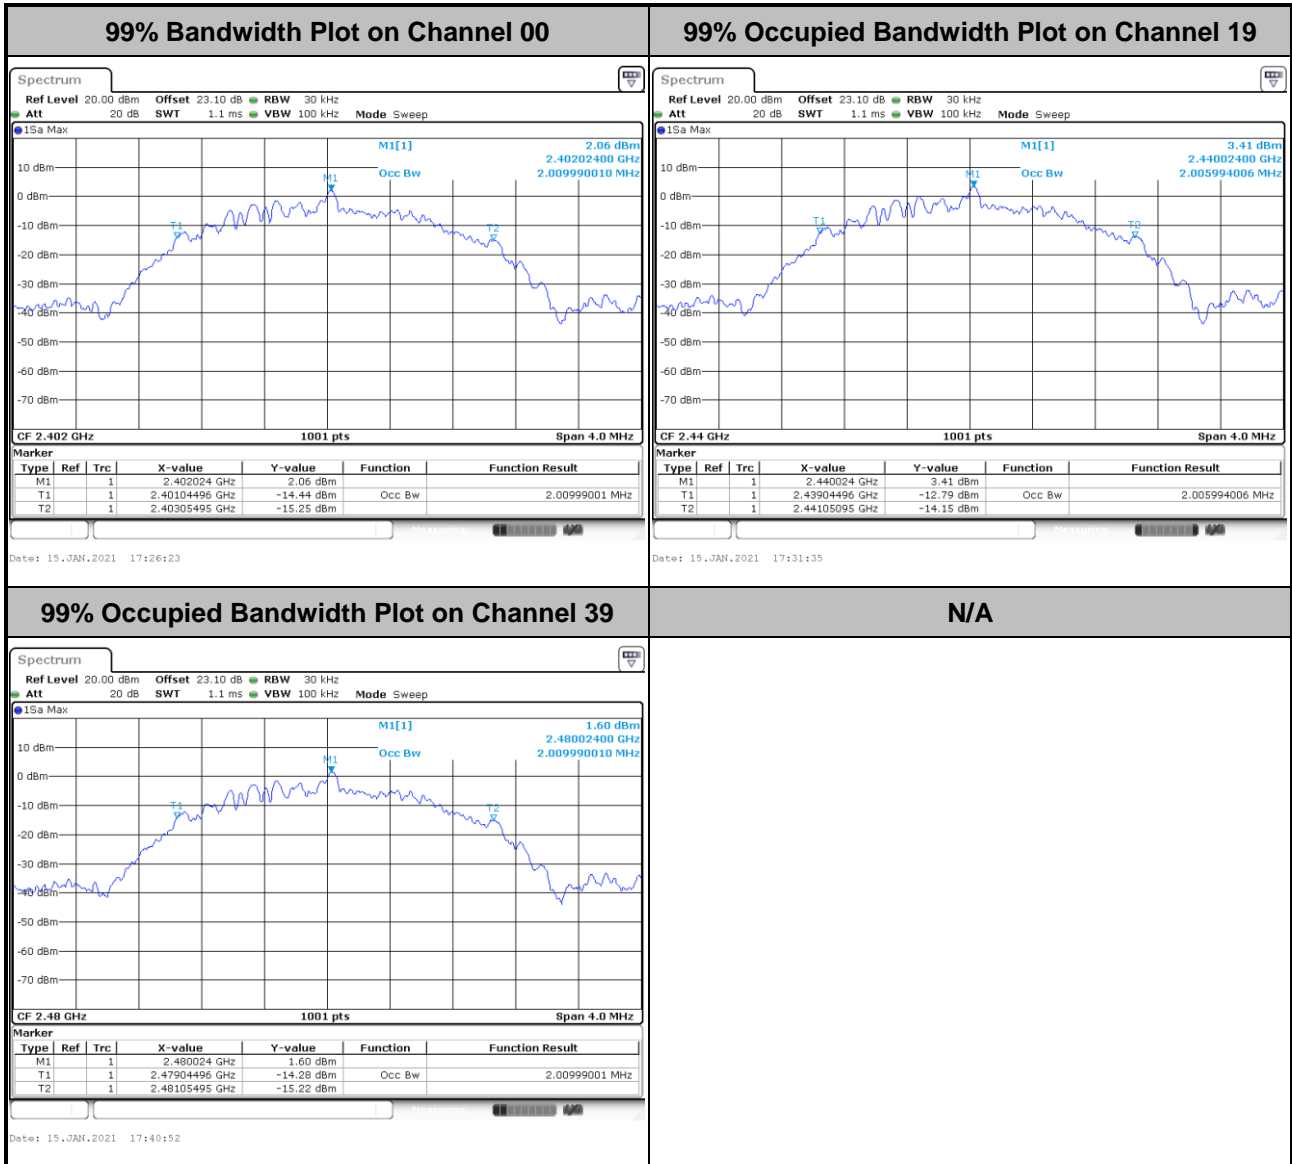




<Ant. 7>

<1Mbps>

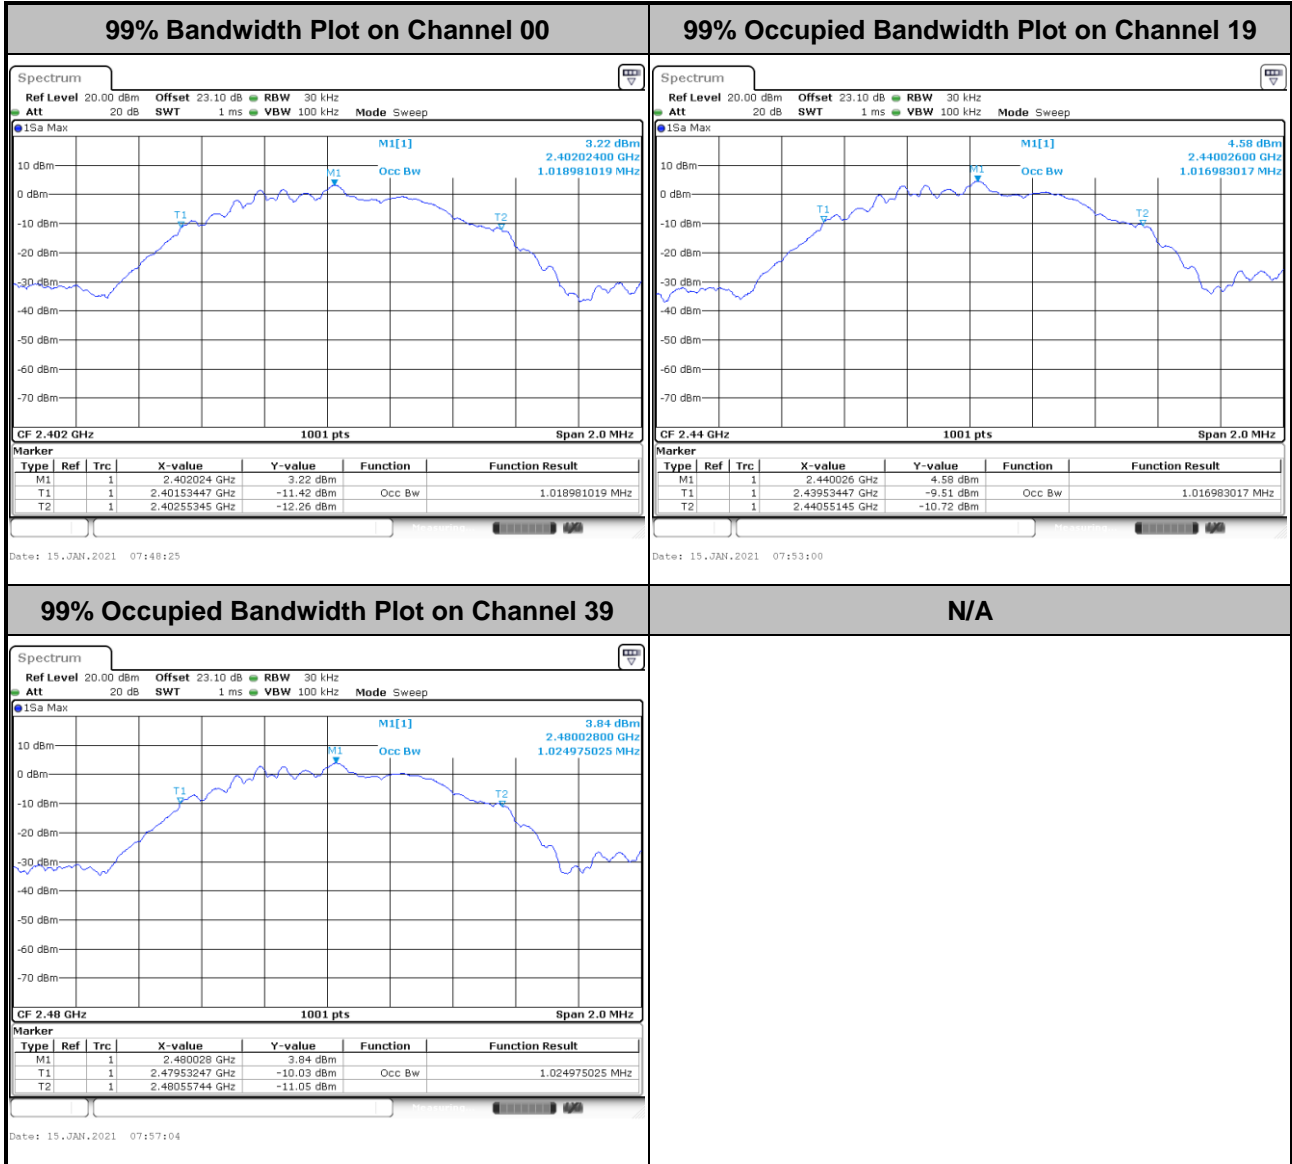



<2Mbps>

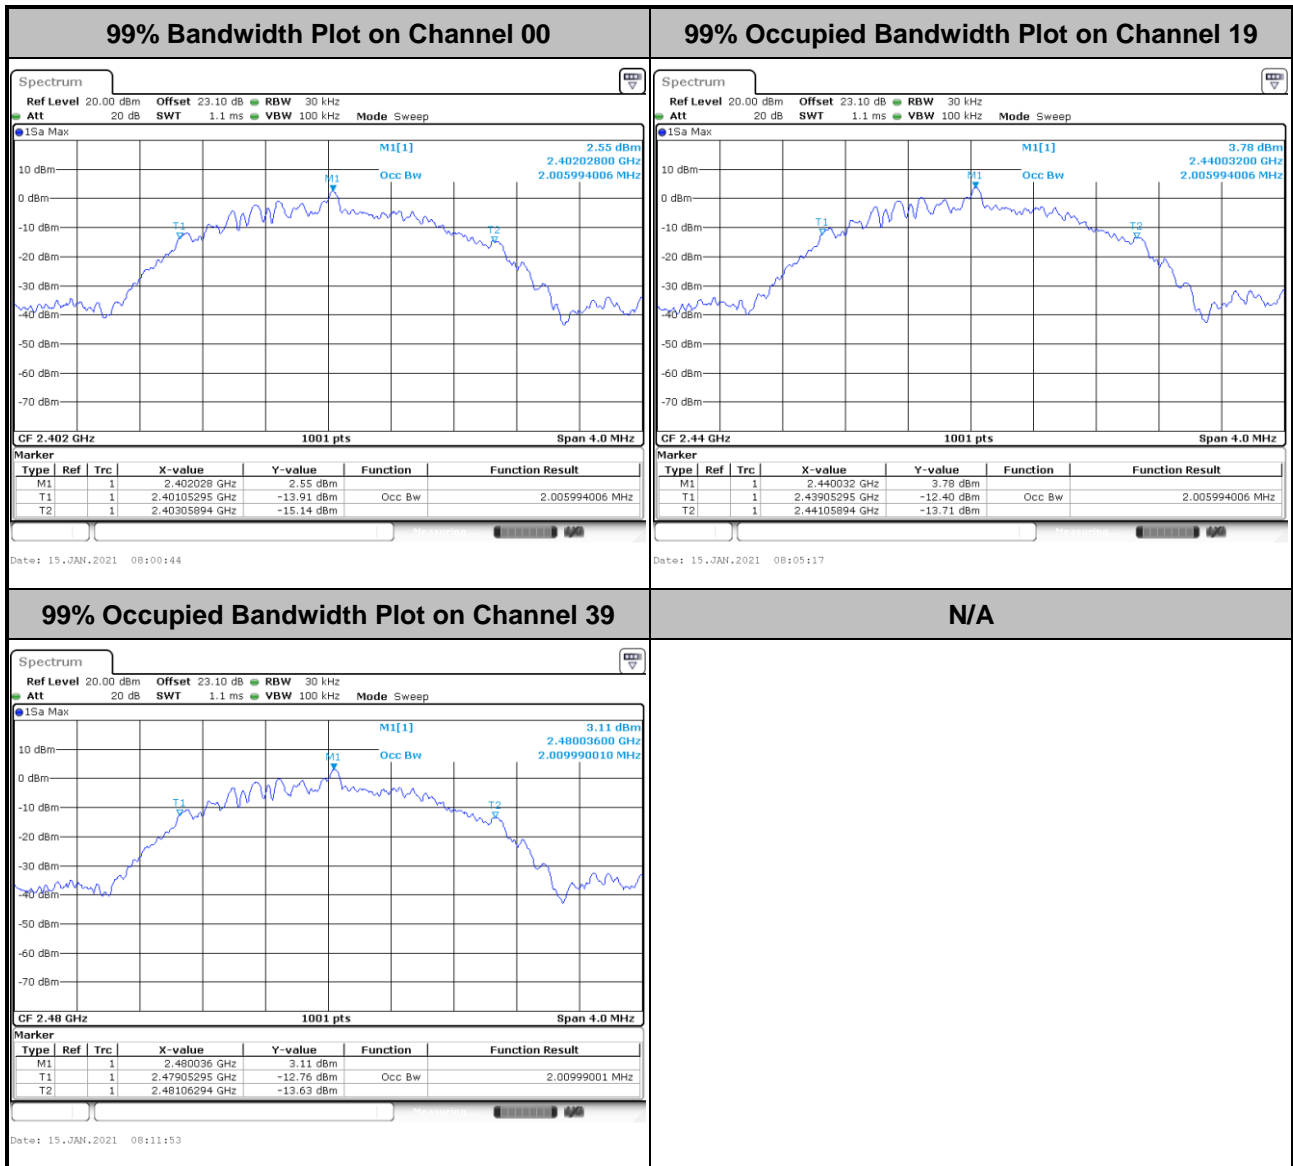

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

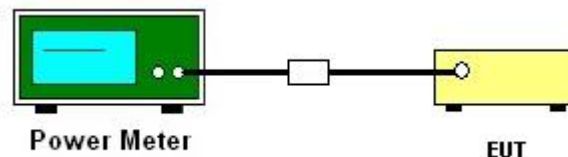

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

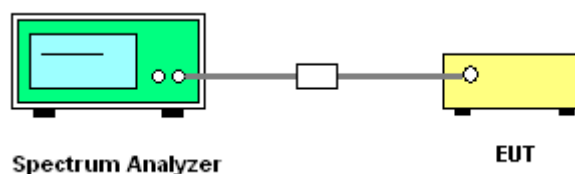

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<Ant. 5>

<1Mbps>

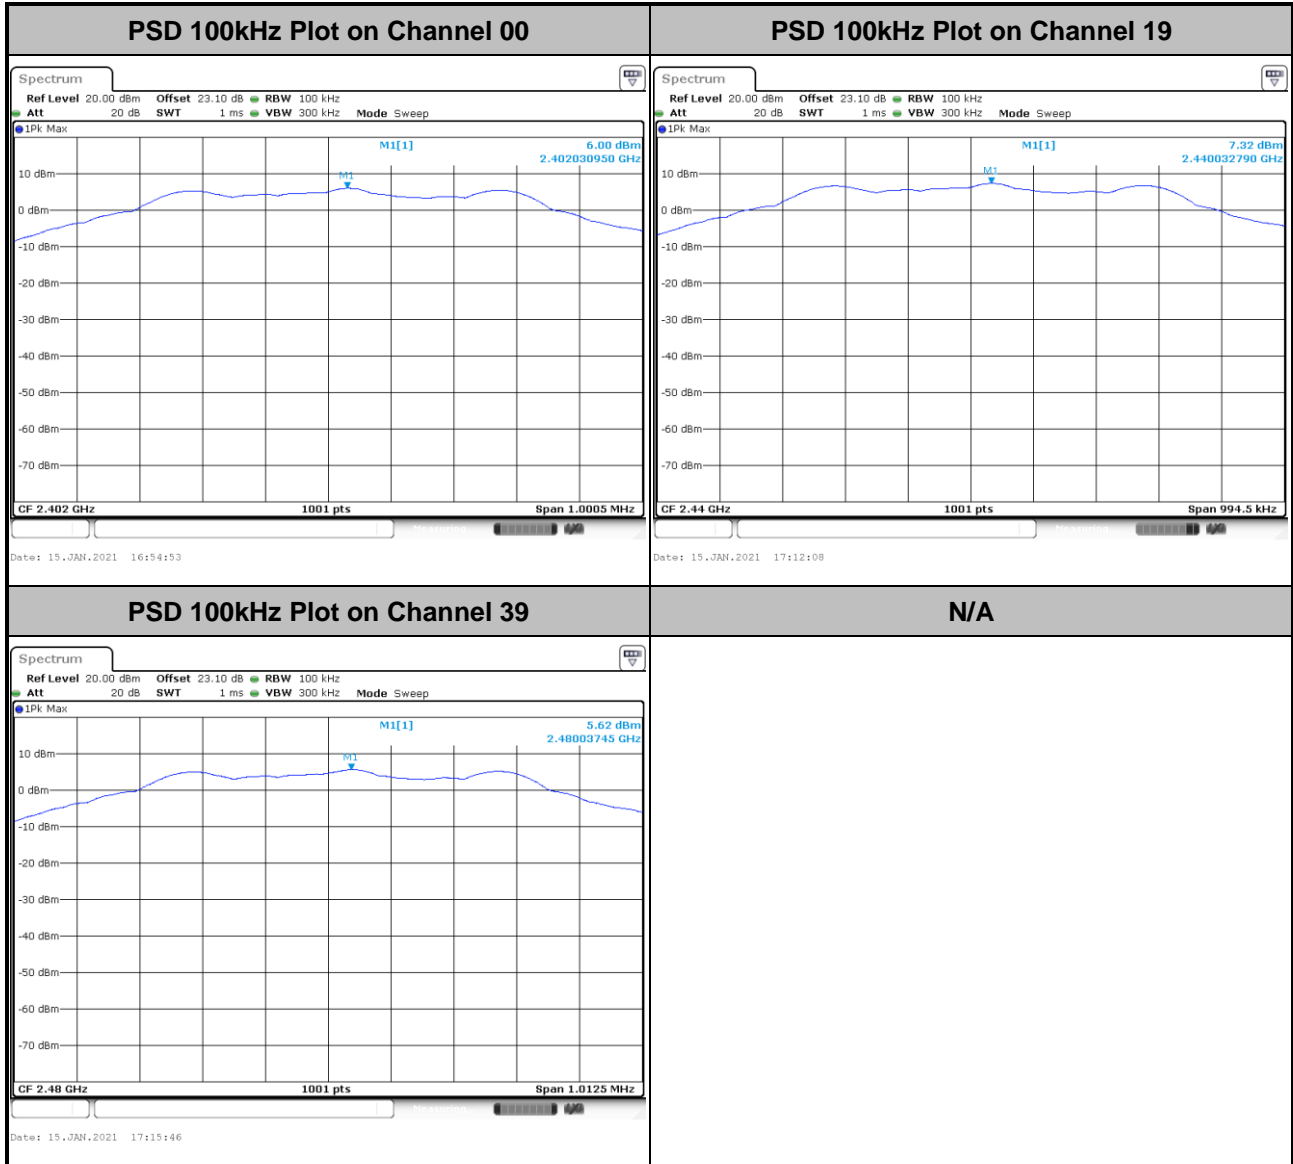




<2Mbps>

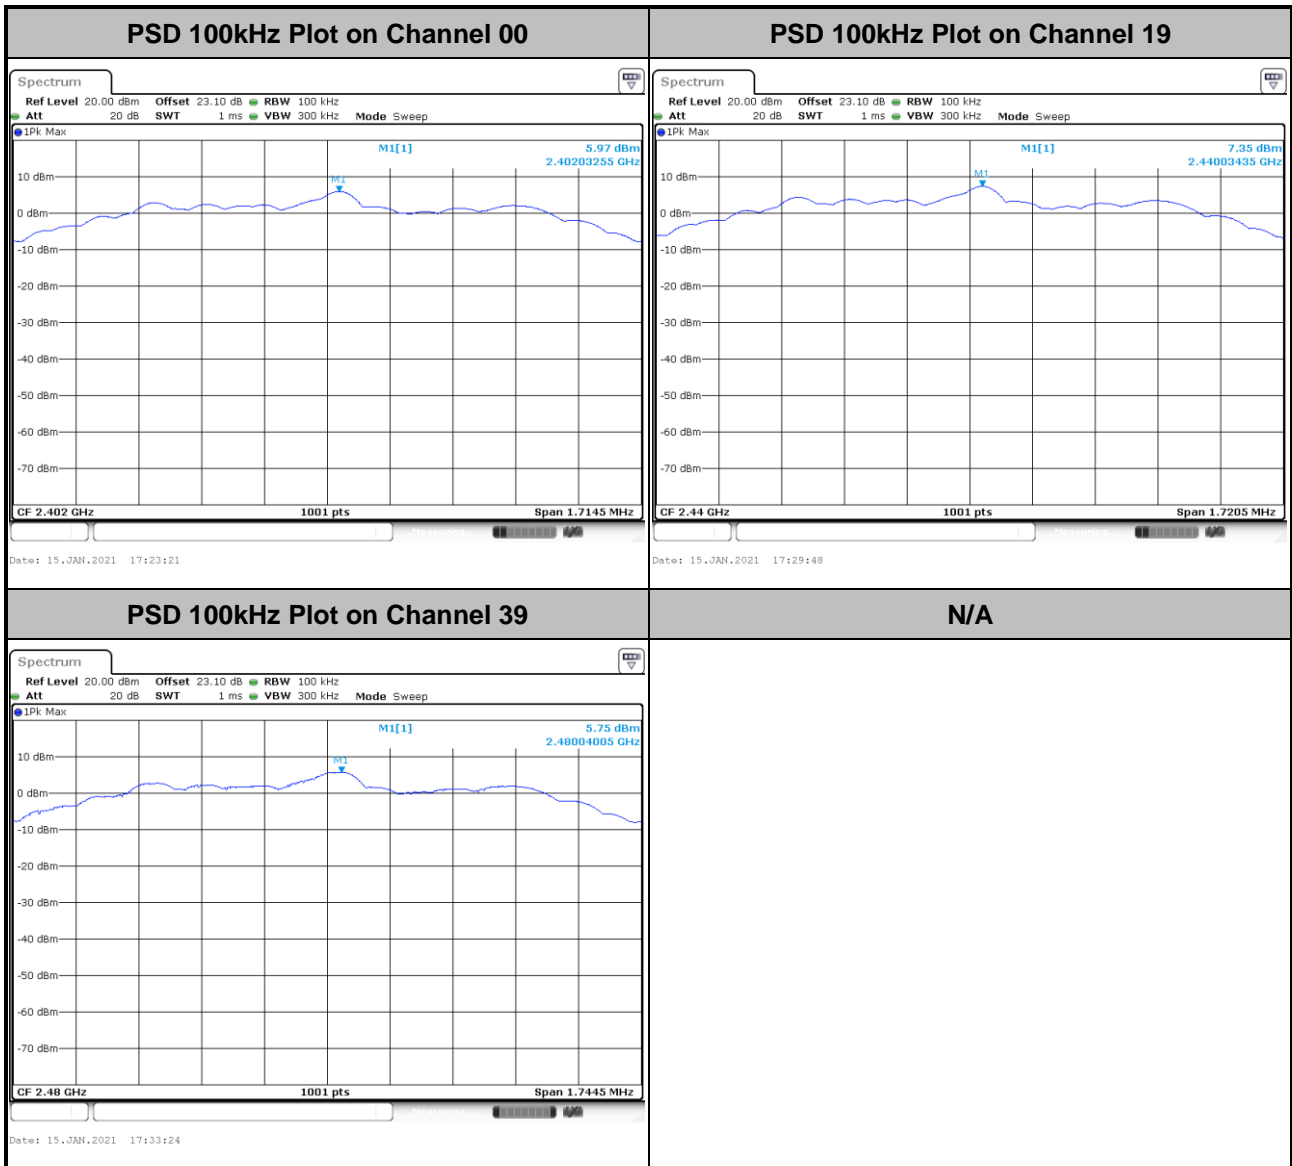




<Ant. 7>

<1Mbps>

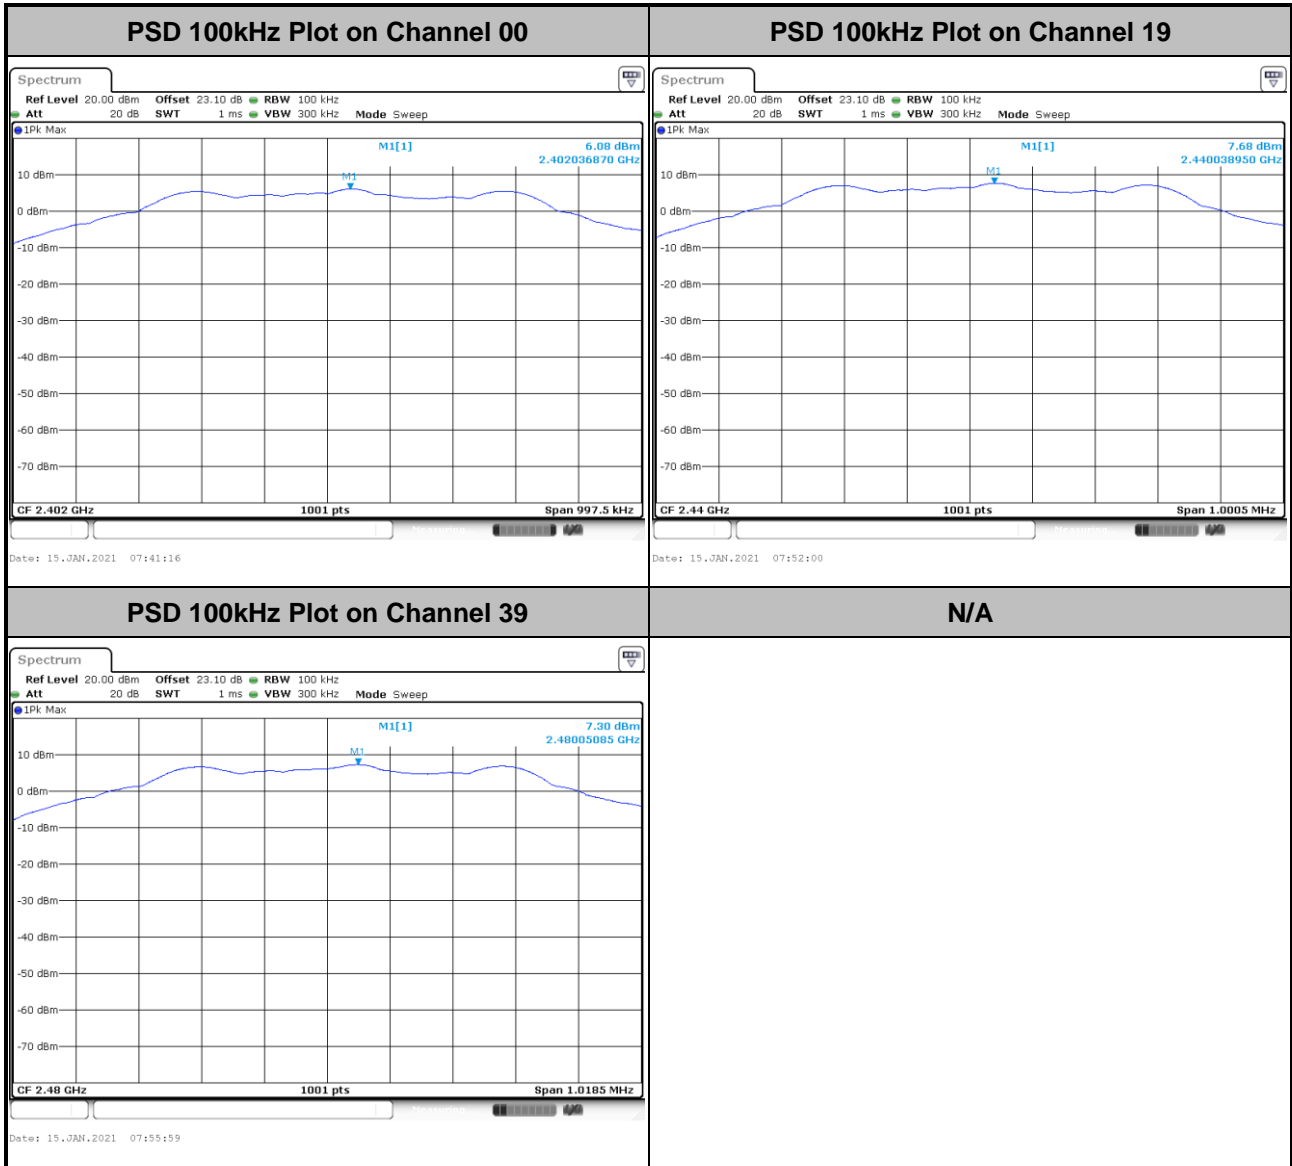



<2Mbps>

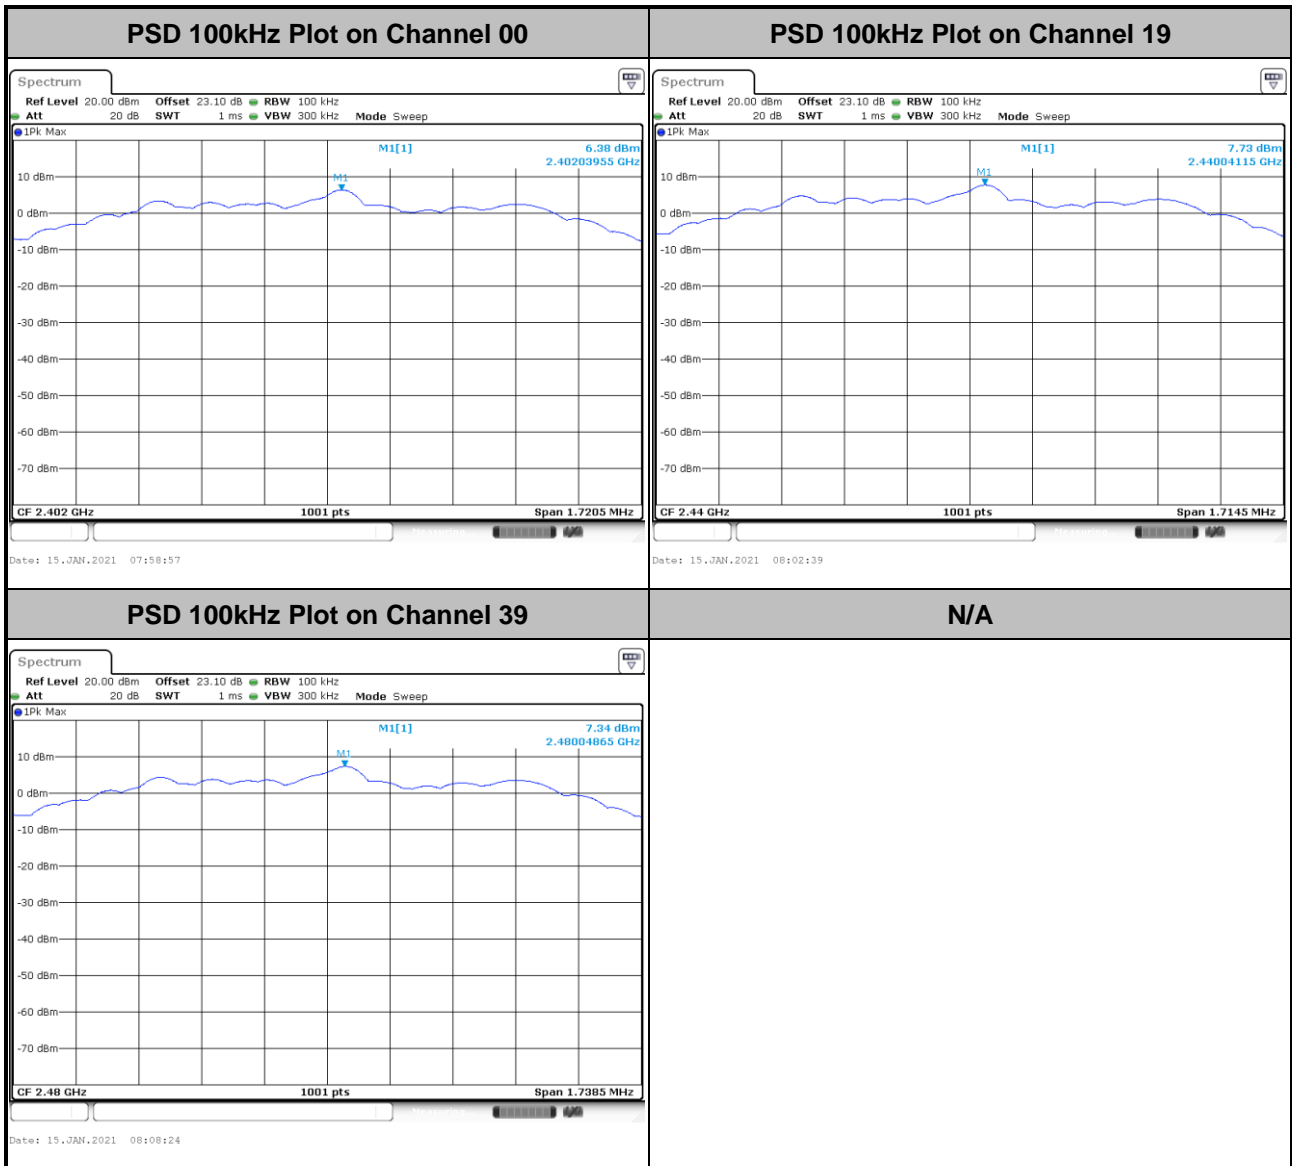

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup







3.4.5 Test Result of Conducted Band Edges Plots

<Ant. 5>

<1Mbps>

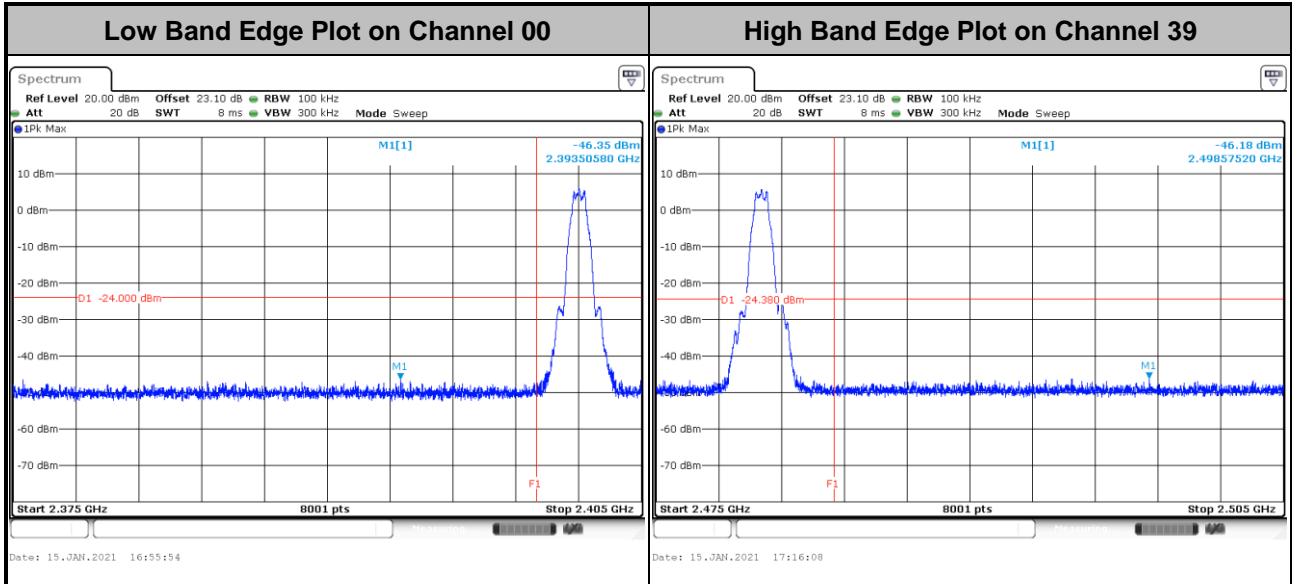


<2Mbps>

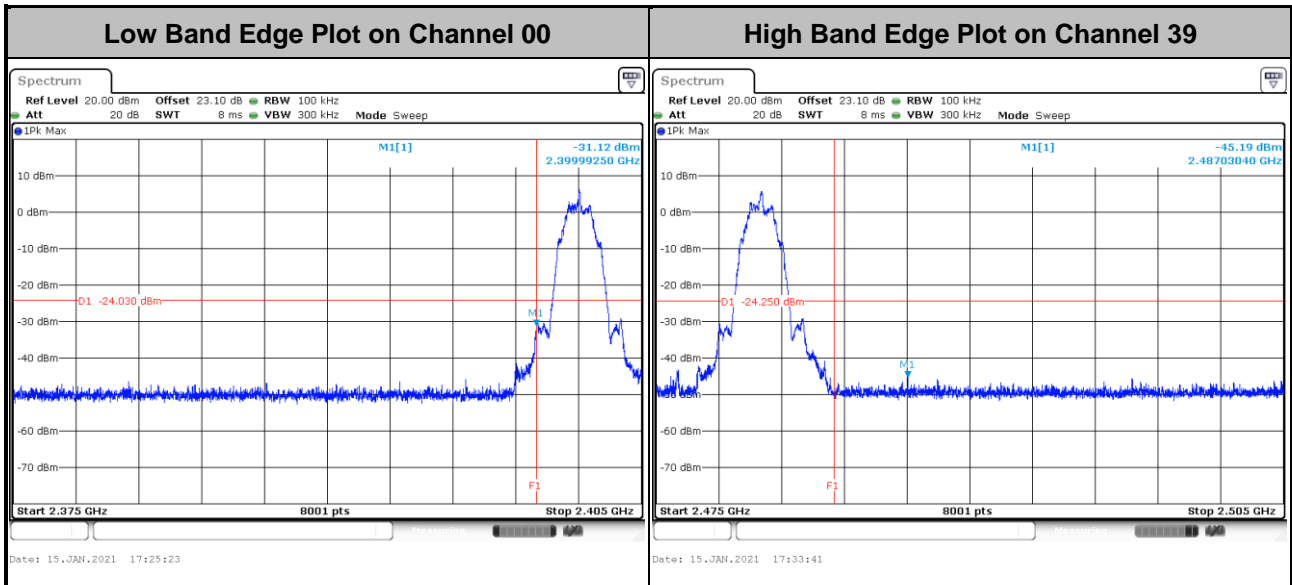




<Ant. 7>

<1Mbps>

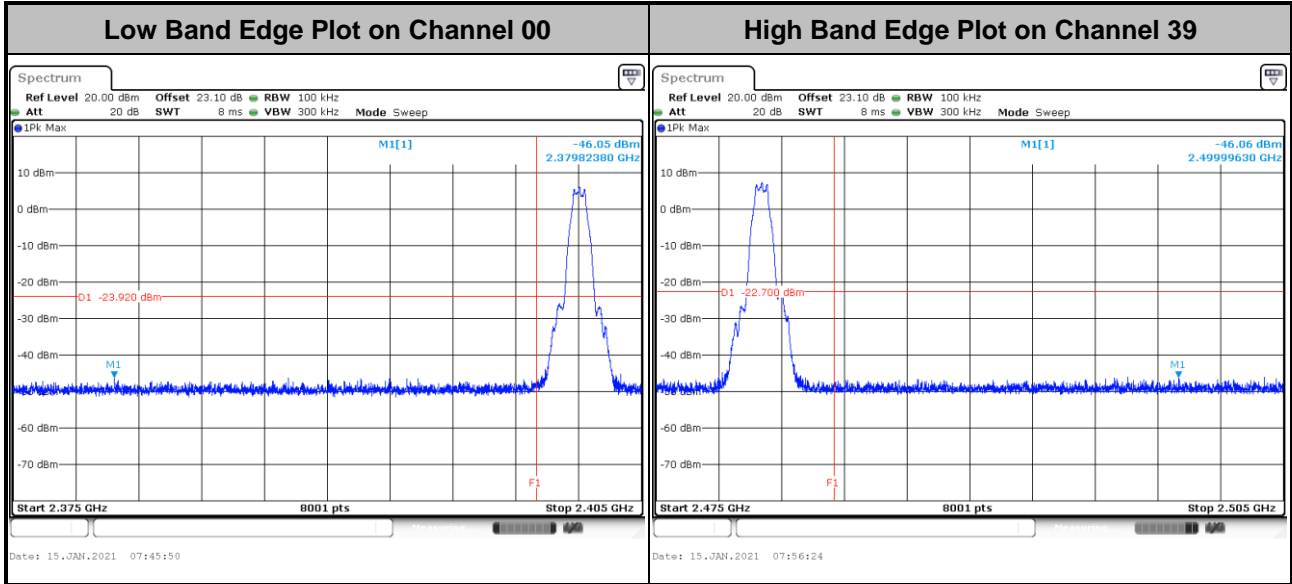

<2Mbps>

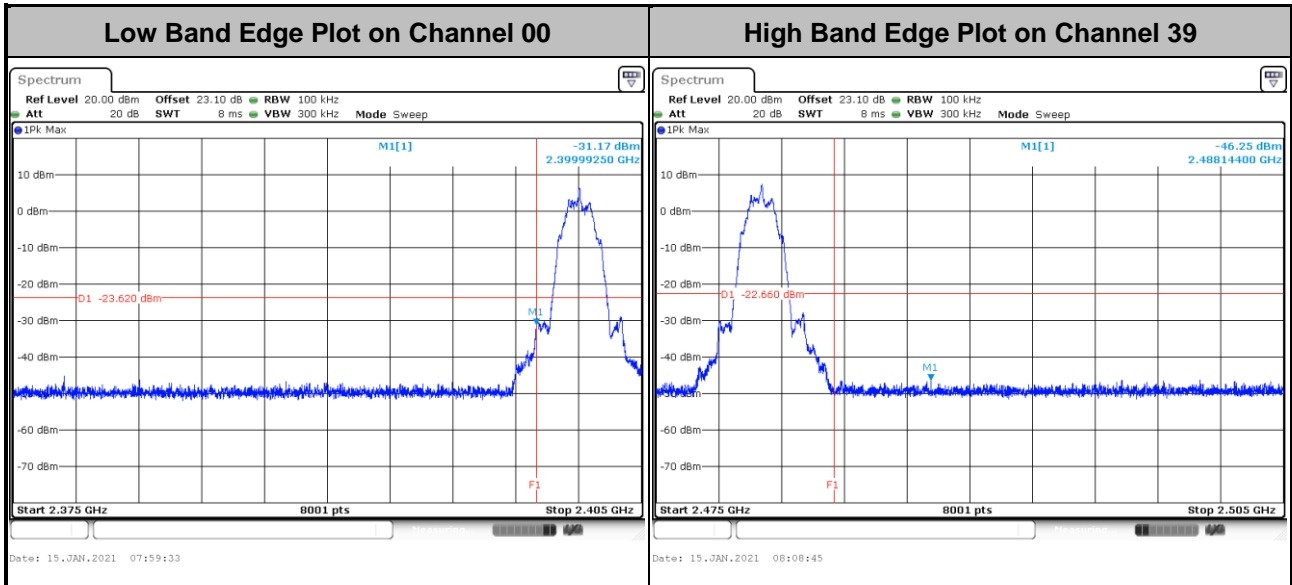





3.4.6 Test Result of Conducted Spurious Emission Plots


<Ant. 5>


<1Mbps>

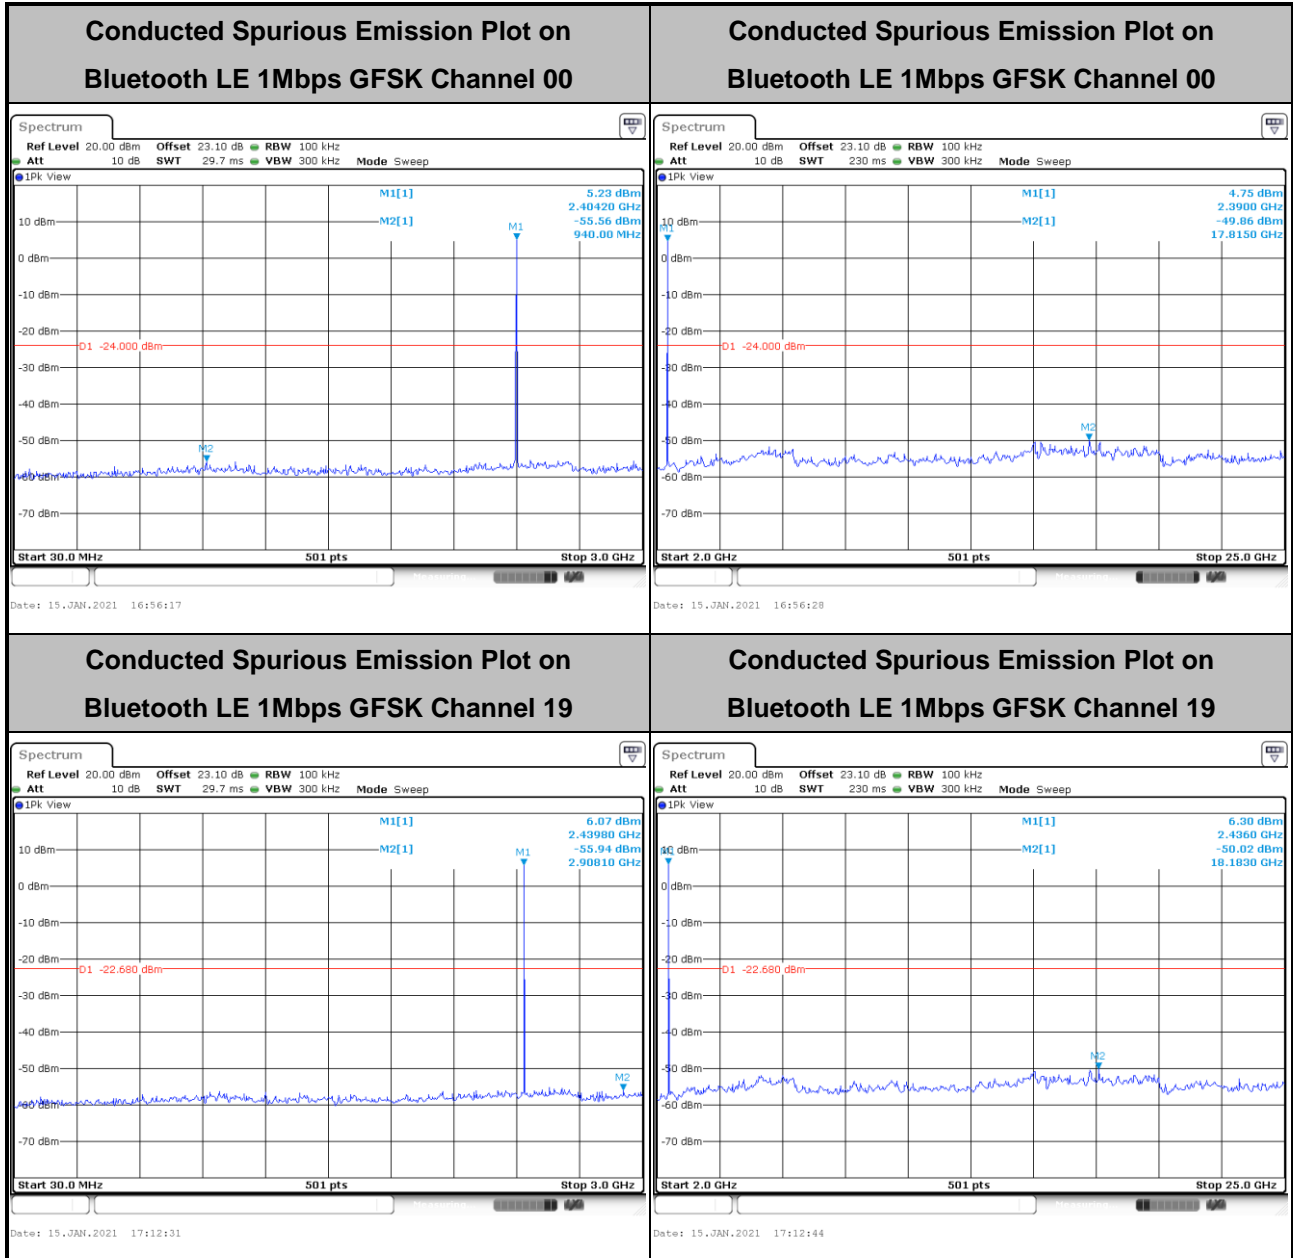

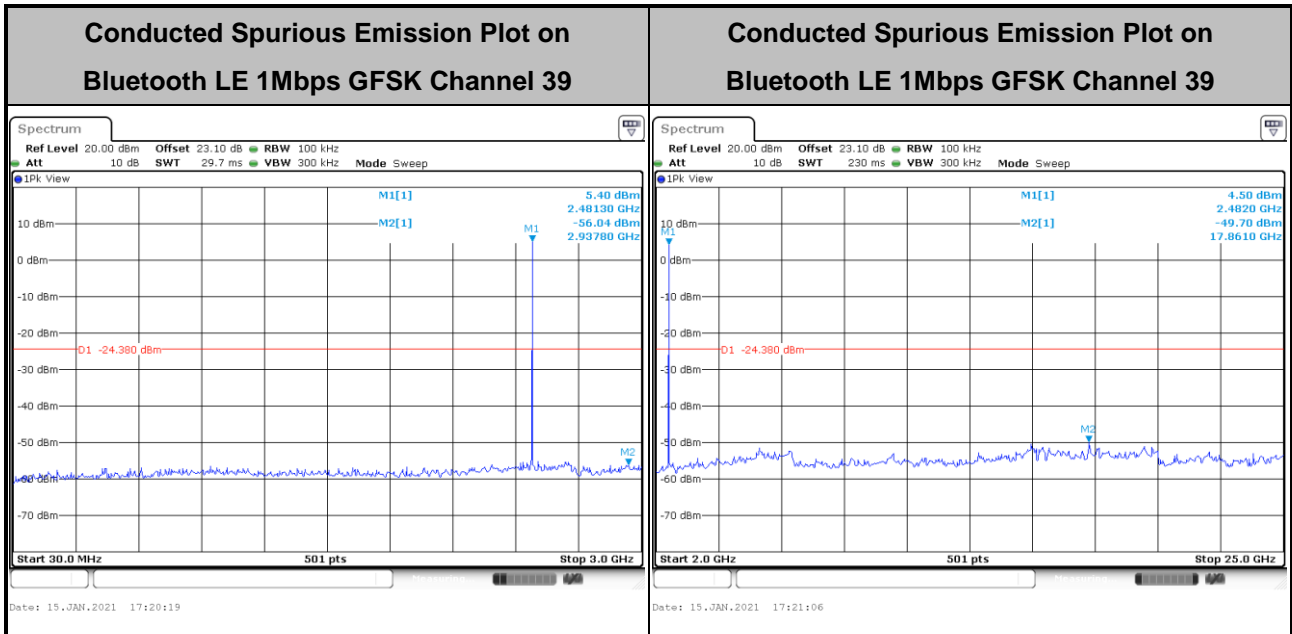

<2Mbps>

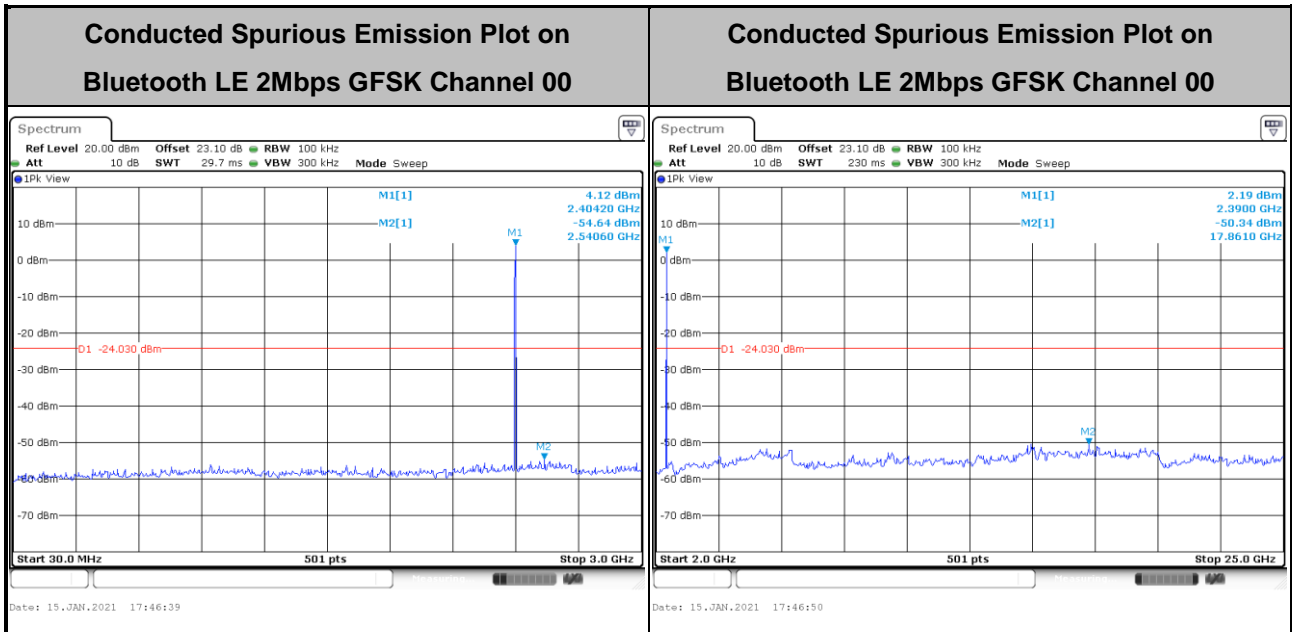


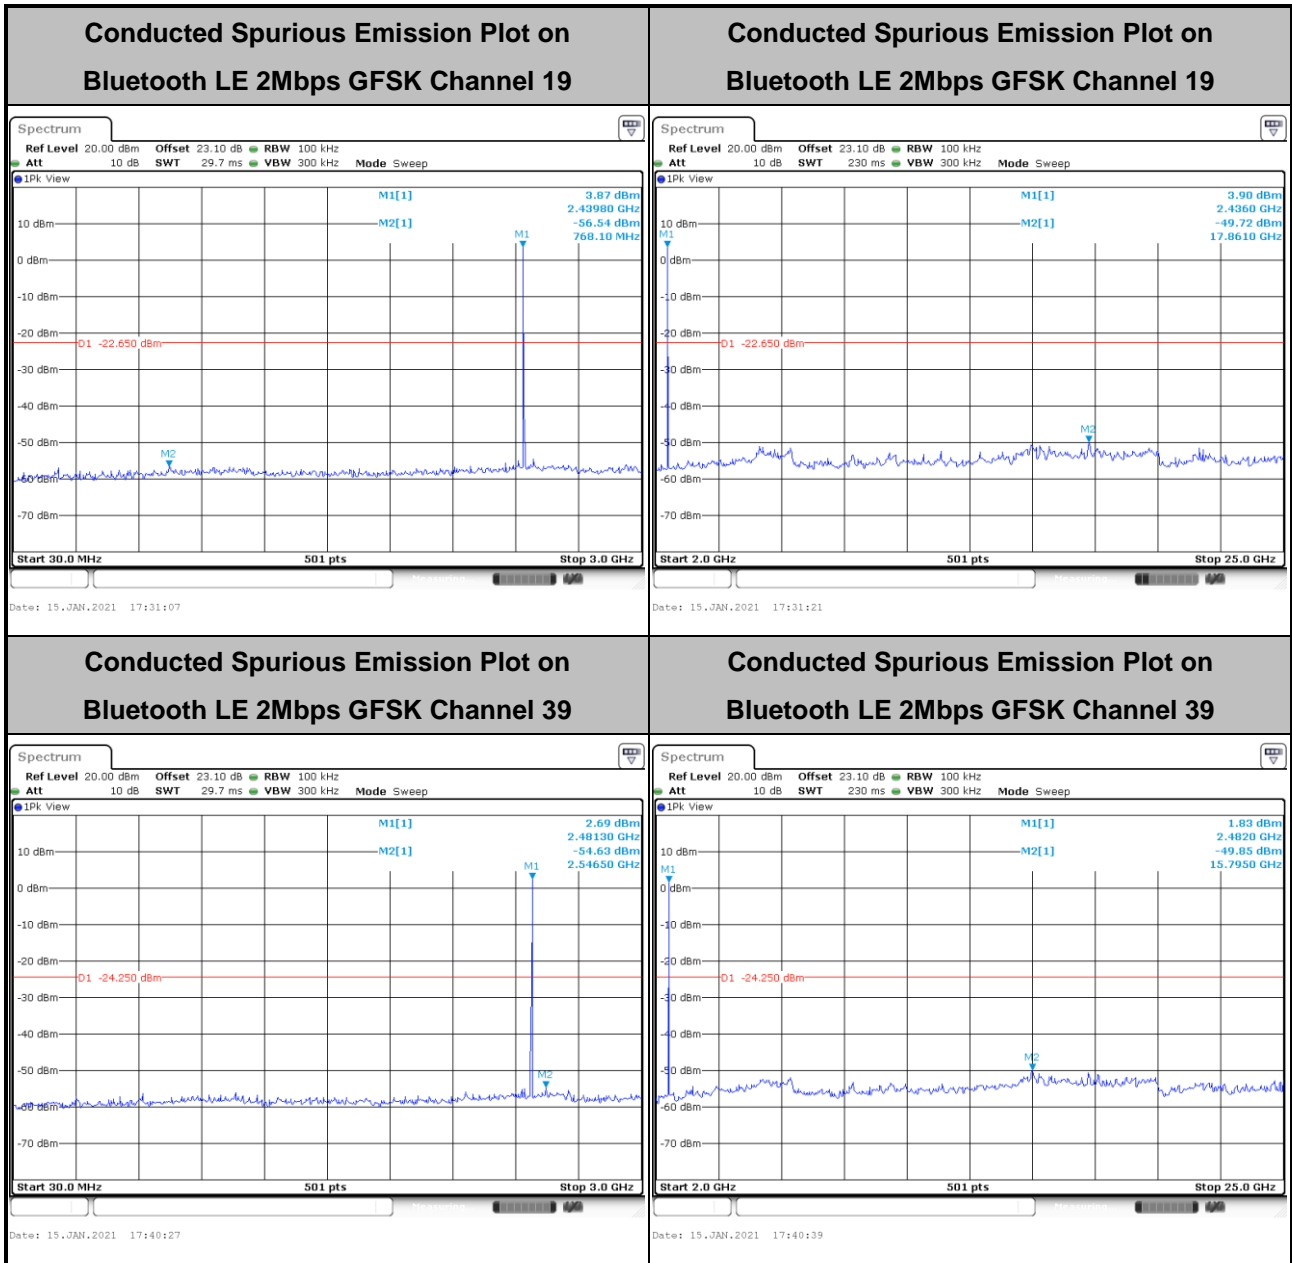





<Ant. 7>


<1Mbps>

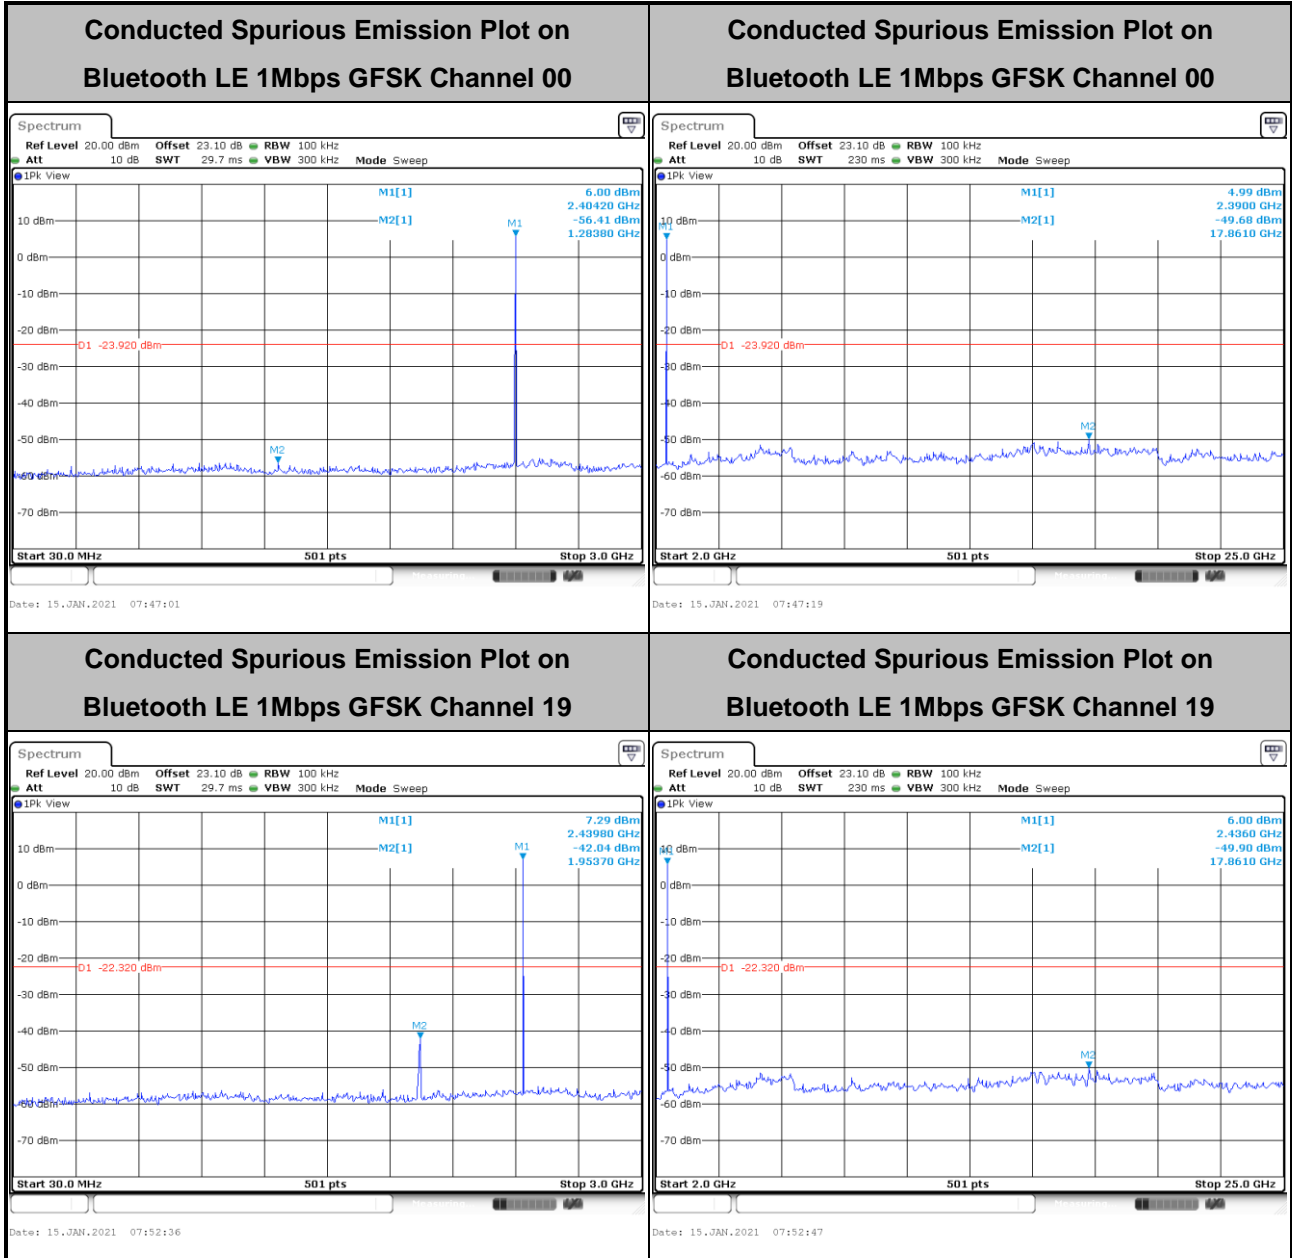

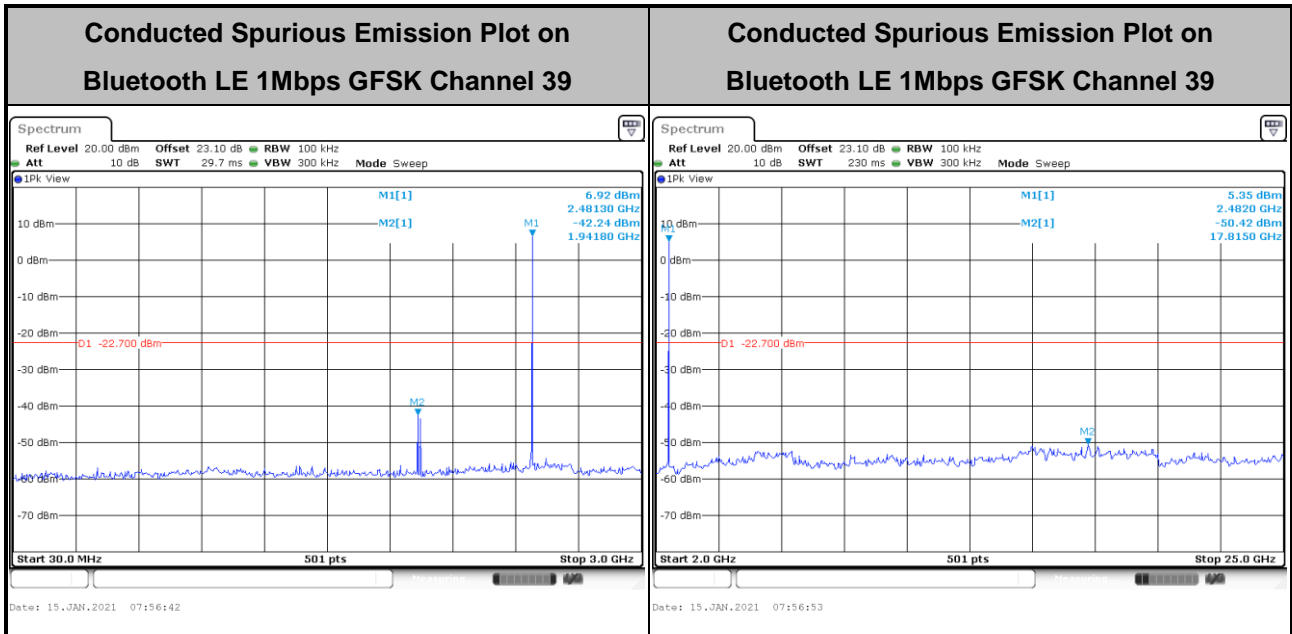

<2Mbps>

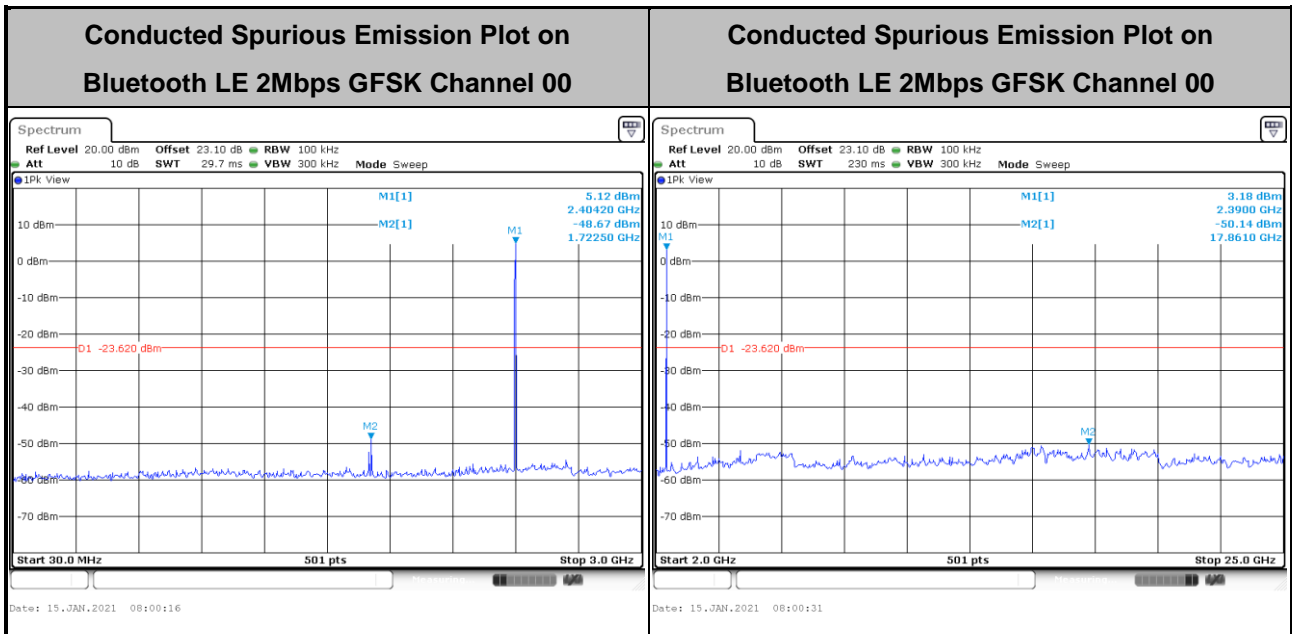

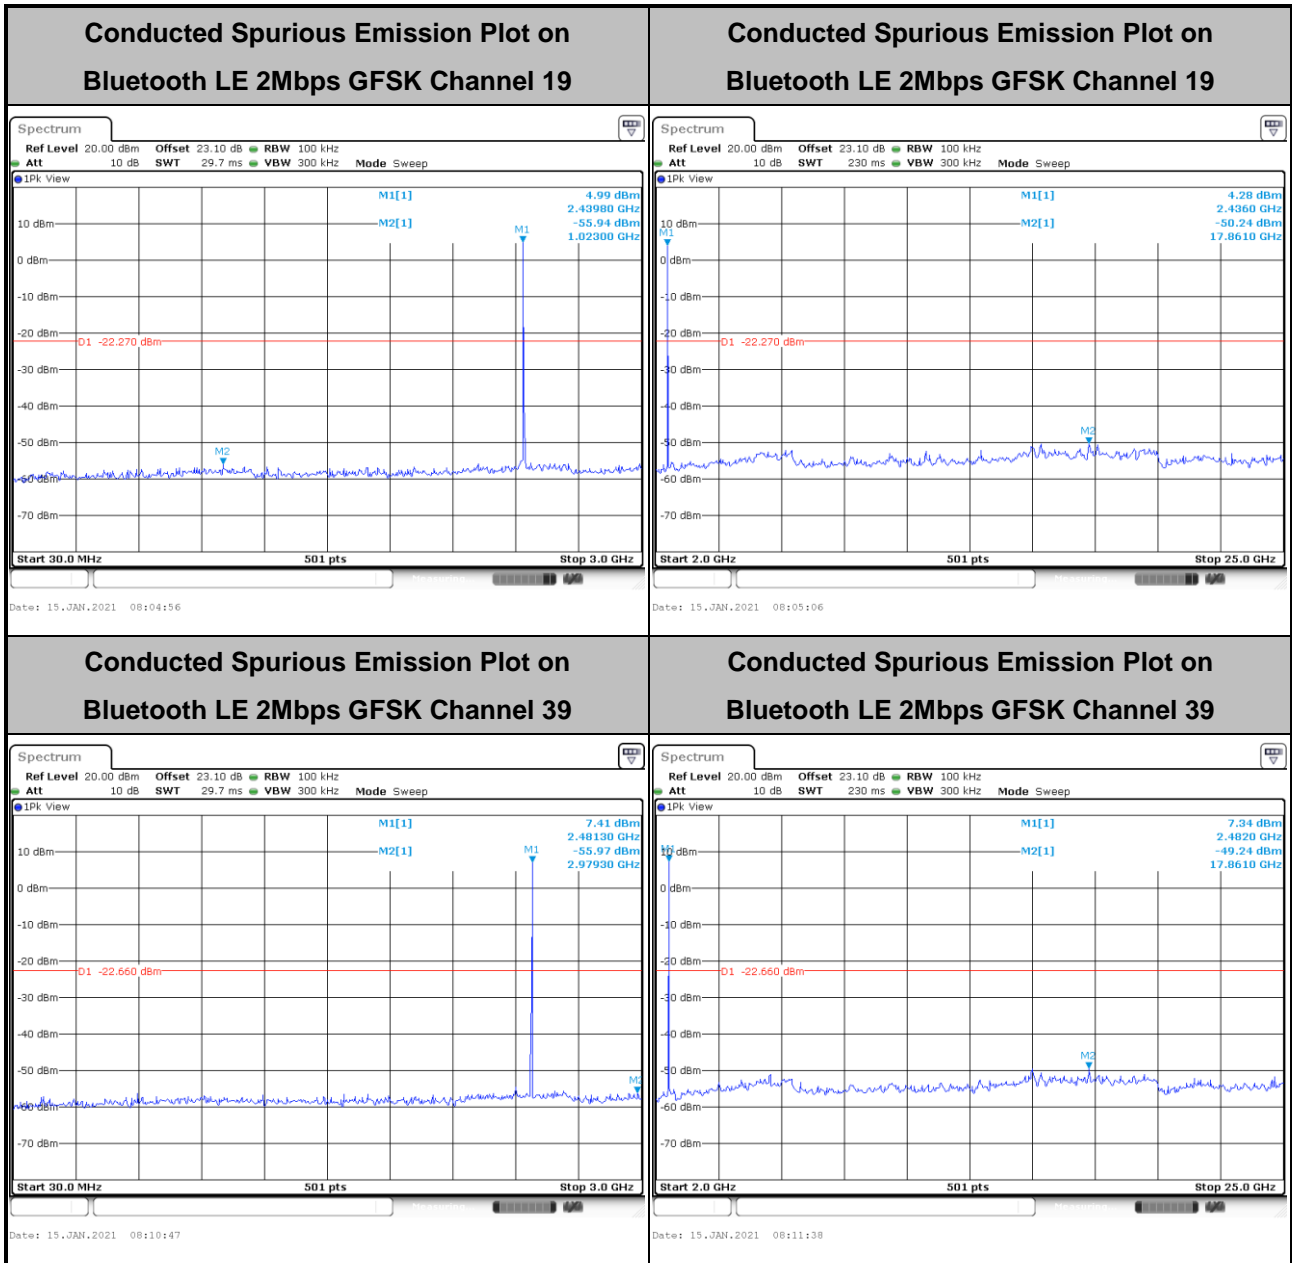



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

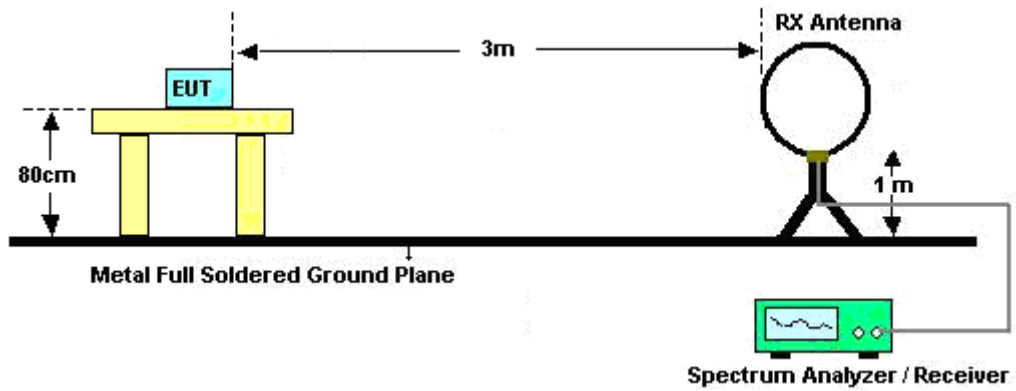

For radiated test from 30MHz to 1GHz

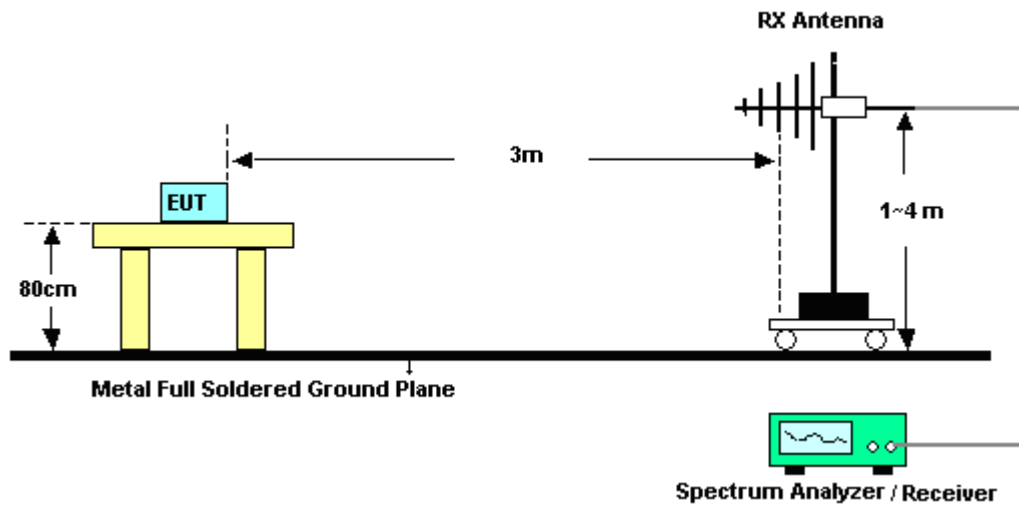

For radiated test above 1GHz

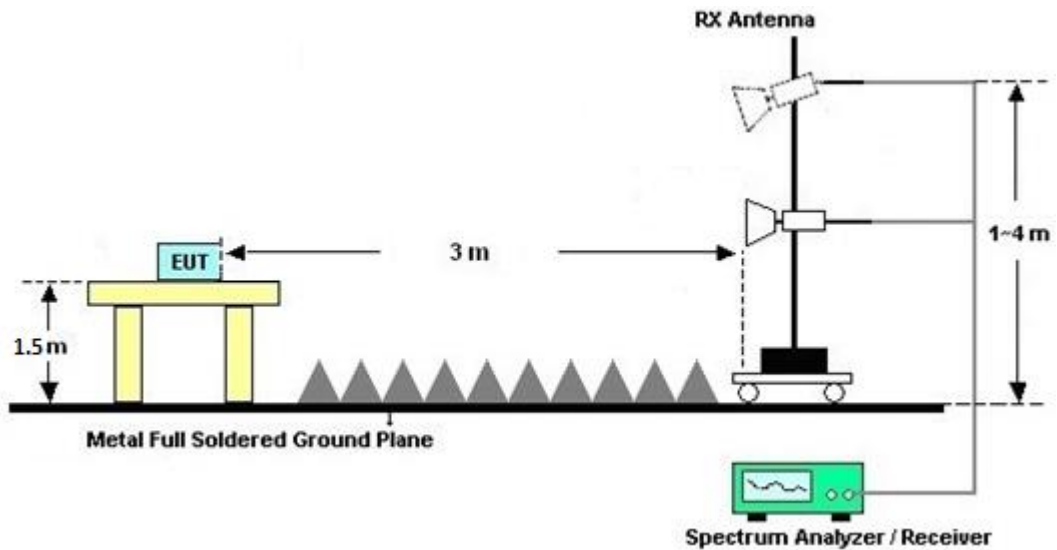

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

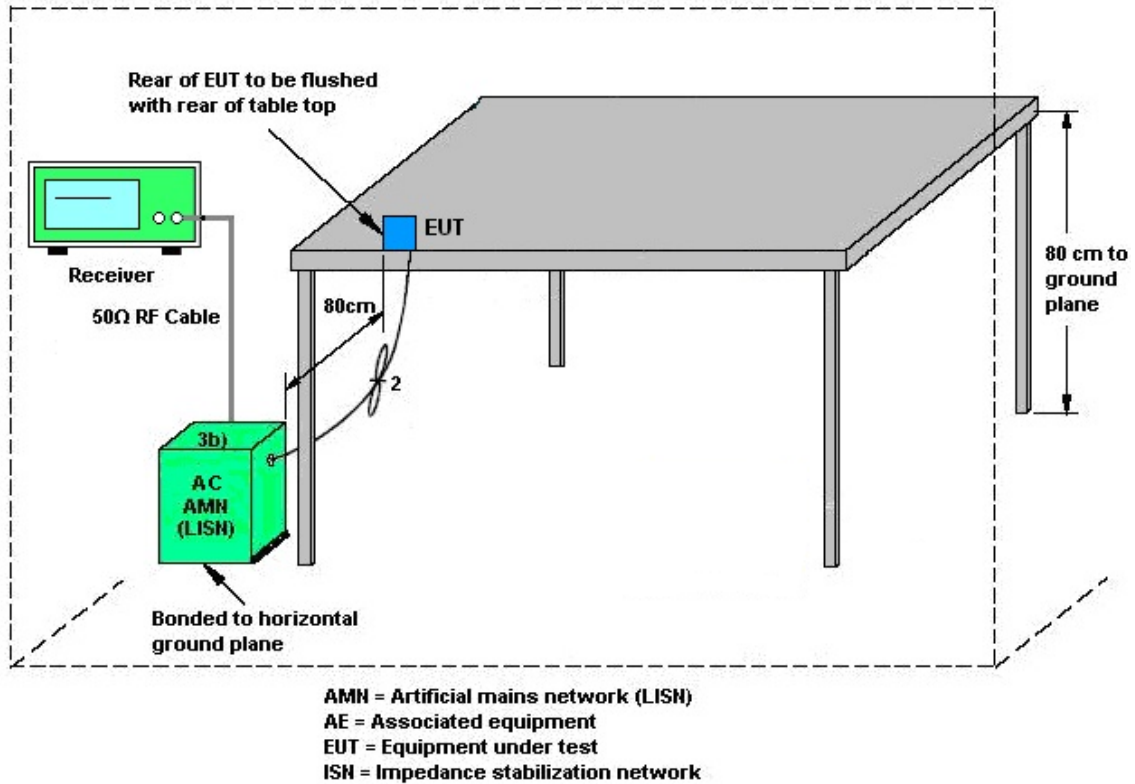

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 03, 2020	Jan. 10, 2021~ Jan. 28, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Jan. 10, 2021~ Jan. 28, 2021	Jul. 13, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00994	18GHz- 40GHz	Nov. 29, 2020	Jan. 10, 2021~ Jan. 28, 2021	Nov. 28, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Jan. 10, 2021~ Jan. 28, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Jan. 10, 2021~ Jan. 28, 2021	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Oct. 27, 2020	Jan. 10, 2021~ Jan. 28, 2021	Oct. 26, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 15, 2020	Jan. 10, 2021~ Jan. 28, 2021	Jun. 14, 2021	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	Jan. 10, 2021~ Jan. 28, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Jan. 10, 2021~ Jan. 28, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	May 21, 2020	Jan. 10, 2021~ Jan. 28, 2021	May 20, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 10, 2021~ Jan. 28, 2021	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 10, 2021~ Jan. 28, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 10, 2021~ Jan. 28, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jan. 10, 2021~ Jan. 28, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 12, 2020	Jan. 10, 2021~ Jan. 28, 2021	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 12, 2020	Jan. 10, 2021~ Jan. 28, 2021	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 12, 2020	Jan. 10, 2021~ Jan. 28, 2021	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 12, 2020	Jan. 10, 2021~ Jan. 28, 2021	Mar. 11, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53G Low Pass	Sep. 14, 2020	Jan. 10, 2021~ Jan. 28, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Jan. 10, 2021~ Jan. 28, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	QA-3-031	Oct. 22, 2020	Jan. 10, 2021~ Jan. 28, 2021	Oct. 21, 2021	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Jan. 13, 2021~ Jan. 15, 2021	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2020	Jan. 13, 2021~ Jan. 15, 2021	Dec. 22, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Jan. 13, 2021~ Jan. 15, 2021	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Jan. 13, 2021~ Jan. 15, 2021	Mar. 16, 2021	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 21, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Jan. 21, 2021	Sep. 10, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Jan. 21, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Jan. 21, 2021	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 21, 2021	N/A	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Jan. 21, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBE CK	ESHVTS D 9561-F N3-Z2	109561-F N0037308 51	9kHz-200MHz	Nov. 02, 2020	Jan. 21, 2021	Nov. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.4
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jacob Yu/Kathy Chen	Temperature:	19.6~24.3	°C
Test Date:	2021/01/13~2021/01/15	Relative Humidity:	46.7~49.4	%

<Ant 5>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.019	0.667	0.50	Pass
BLE	1Mbps	1	19	2440	1.017	0.663	0.50	Pass
BLE	1Mbps	1	39	2480	1.041	0.675	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.30	30.00	-2.46	4.84	36.00	Pass
BLE	1Mbps	1	19	2440	8.60	30.00	-2.46	6.14	36.00	Pass
BLE	1Mbps	1	39	2480	7.00	30.00	-2.46	4.54	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	6.00	-8.32	-2.46	8.00	Pass
BLE	1Mbps	1	19	2440	7.32	-7.11	-2.46	8.00	Pass
BLE	1Mbps	1	39	2480	5.62	-8.86	-2.46	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.009	1.143	0.50	Pass
BLE	2Mbps	1	19	2440	2.006	1.147	0.50	Pass
BLE	2Mbps	1	39	2480	2.010	1.163	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.40	30.00	-2.46	4.94	36.00	Pass
BLE	2Mbps	1	19	2440	8.70	30.00	-2.46	6.24	36.00	Pass
BLE	2Mbps	1	39	2480	7.10	30.00	-2.46	4.64	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.97	-11.32	-2.46	8.00	Pass
BLE	2Mbps	1	19	2440	7.35	-9.95	-2.46	8.00	Pass
BLE	2Mbps	1	39	2480	5.75	-11.80	-2.46	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant. 7>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.019	0.665	0.50	Pass
BLE	1Mbps	1	19	2440	1.017	0.667	0.50	Pass
BLE	1Mbps	1	39	2480	1.025	0.679	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.50	30.00	-2.58	4.92	36.00	Pass
BLE	1Mbps	1	19	2440	8.90	30.00	-2.58	6.32	36.00	Pass
BLE	1Mbps	1	39	2480	8.50	30.00	-2.58	5.92	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	6.08	-8.19	-2.58	8.00	Pass
BLE	1Mbps	1	19	2440	7.68	-6.67	-2.58	8.00	Pass
BLE	1Mbps	1	39	2480	7.30	-7.19	-2.58	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.006	1.147	0.50	Pass
BLE	2Mbps	1	19	2440	2.006	1.143	0.50	Pass
BLE	2Mbps	1	39	2480	2.010	1.159	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.60	30.00	-2.58	5.02	36.00	Pass
BLE	2Mbps	1	19	2440	9.00	30.00	-2.58	6.42	36.00	Pass
BLE	2Mbps	1	39	2480	8.60	30.00	-2.58	6.02	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	6.38	-10.69	-2.58	8.00	Pass
BLE	2Mbps	1	19	2440	7.73	-9.53	-2.58	8.00	Pass
BLE	2Mbps	1	39	2480	7.34	-10.09	-2.58	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 110703
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

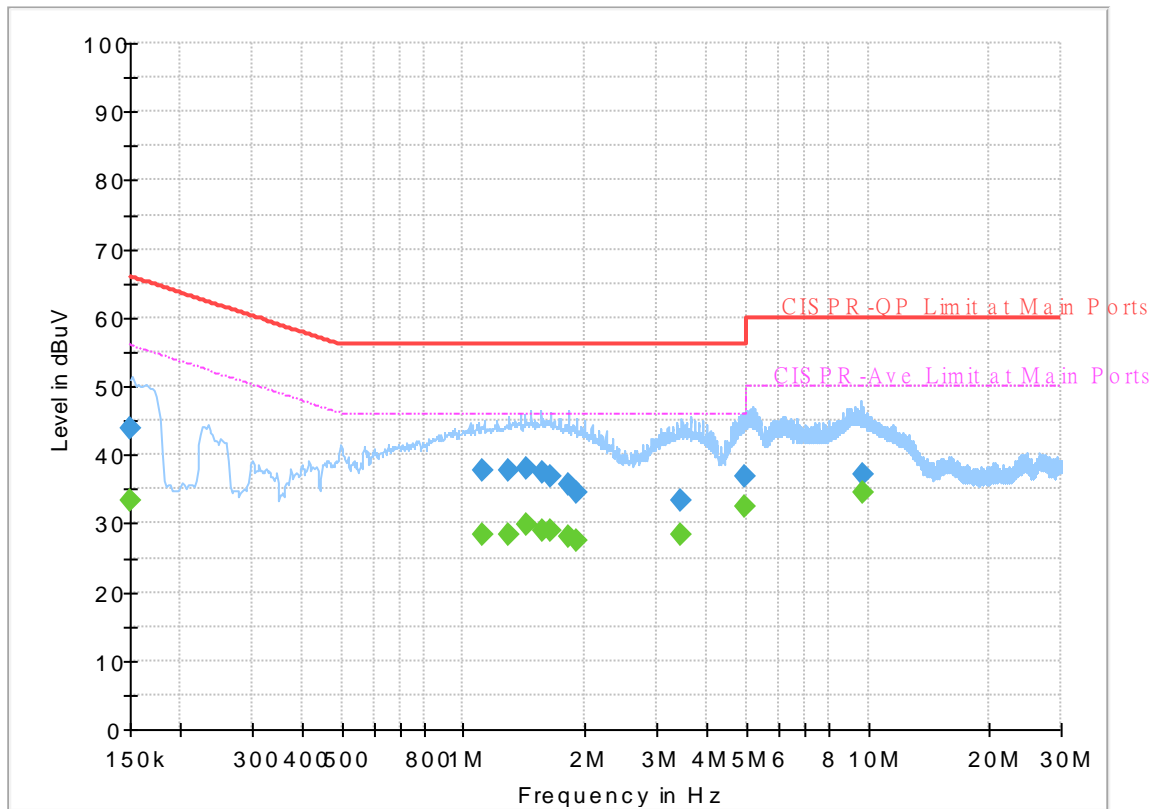

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150203	---	33.37	55.99	22.62	L1	OFF	19.7
0.150203	43.96	---	65.99	22.03	L1	OFF	19.7
1.110750	---	28.35	46.00	17.65	L1	OFF	20.3
1.110750	37.61	---	56.00	18.39	L1	OFF	20.3
1.299300	---	28.41	46.00	17.59	L1	OFF	20.2
1.299300	37.79	---	56.00	18.21	L1	OFF	20.2
1.425750	---	29.84	46.00	16.16	L1	OFF	20.2
1.425750	38.15	---	56.00	17.85	L1	OFF	20.2
1.565340	---	29.09	46.00	16.91	L1	OFF	20.2
1.565340	37.35	---	56.00	18.65	L1	OFF	20.2
1.648500	---	28.94	46.00	17.06	L1	OFF	20.2
1.648500	36.86	---	56.00	19.14	L1	OFF	20.2
1.817250	---	28.17	46.00	17.83	L1	OFF	20.2
1.817250	35.62	---	56.00	20.38	L1	OFF	20.2
1.905000	---	27.51	46.00	18.49	L1	OFF	20.2
1.905000	34.47	---	56.00	21.53	L1	OFF	20.2
3.460200	---	28.46	46.00	17.54	L1	OFF	20.1
3.460200	33.32	---	56.00	22.68	L1	OFF	20.1
4.933500	---	32.49	46.00	13.51	L1	OFF	20.1
4.933500	36.86	---	56.00	19.14	L1	OFF	20.1
9.688380	---	34.60	50.00	15.40	L1	OFF	20.2

9.688380	37.24	---	60.00	22.76	L1	OFF	20.2
----------	-------	-----	-------	-------	----	-----	------

EUT Information

Report NO : 110703
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

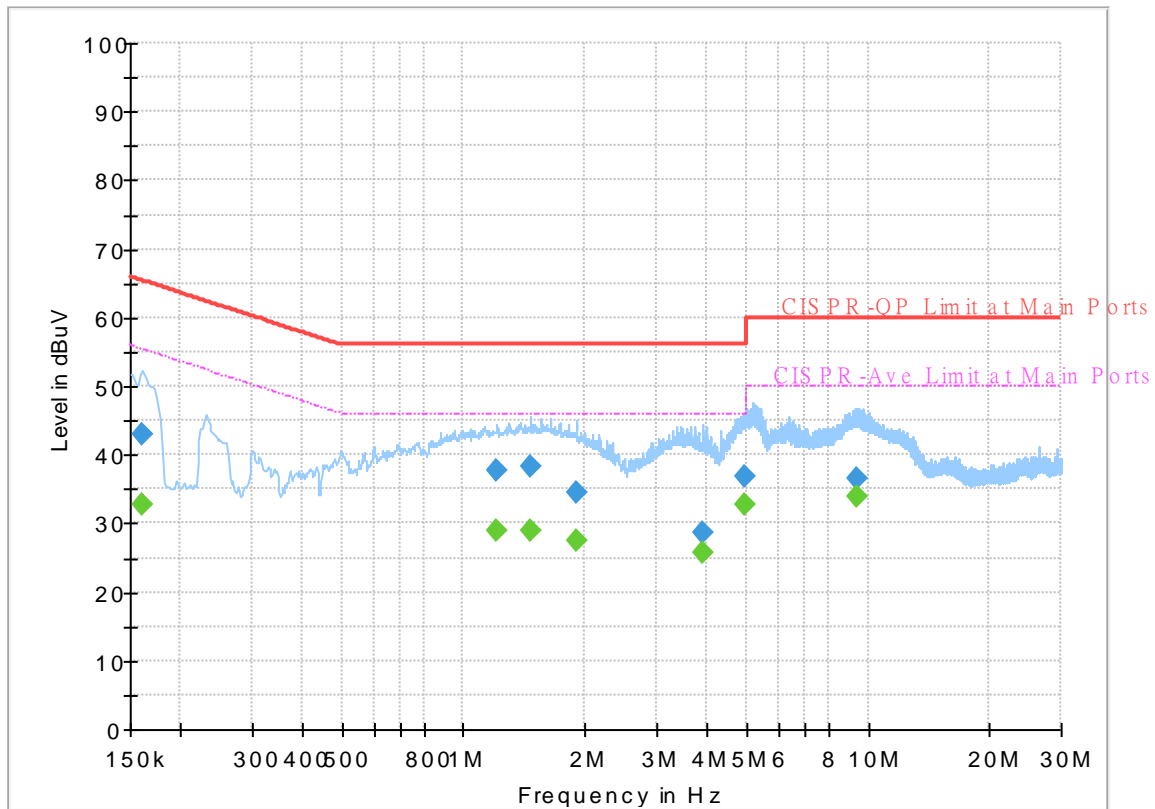

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161340	---	32.89	55.40	22.51	N	OFF	19.7
0.161340	43.11	---	65.40	22.29	N	OFF	19.7
1.208220	---	28.86	46.00	17.14	N	OFF	20.3
1.208220	37.86	---	56.00	18.14	N	OFF	20.3
1.466250	---	28.85	46.00	17.15	N	OFF	20.3
1.466250	38.26	---	56.00	17.74	N	OFF	20.3
1.911750	---	27.55	46.00	18.45	N	OFF	20.3
1.911750	34.48	---	56.00	21.52	N	OFF	20.3
3.887250	---	25.66	46.00	20.34	N	OFF	20.1
3.887250	28.65	---	56.00	27.35	N	OFF	20.1
4.933500	---	32.65	46.00	13.35	N	OFF	20.1
4.933500	36.96	---	56.00	19.04	N	OFF	20.1
9.431250	---	34.01	50.00	15.99	N	OFF	20.2
9.431250	36.60	---	60.00	23.40	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Bill Cheng, Fu Chen and Troye Hsieh	Temperature :	18.8~24.0°C
		Relative Humidity :	33.2~66.1%

<Ant. 5>

<1Mbps>

**2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2320.605	52.69	-21.31	74	41.97	27.66	16.55	33.49	334	63	P	H	
		2389.17	43.42	-10.58	54	32.74	27.52	16.62	33.46	334	63	A	H	
	*	2402	99.29	-	-	88.61	27.5	16.63	33.45	334	63	P	H	
	*	2402	99.41	-	-	88.73	27.5	16.63	33.45	334	63	A	H	
													H	
			2317.77	53.62	-20.38	74	42.9	27.66	16.55	33.49	104	69	P	V
			2377.41	43.14	-10.86	54	32.44	27.55	16.61	33.46	104	69	A	V
	*		2402	100.18	-	-	89.5	27.5	16.63	33.45	104	69	P	V
	*		2402	99.54	-	-	88.86	27.5	16.63	33.45	104	69	A	V
														V
BLE CH 19 2440MHz		2354.64	53.48	-20.52	74	42.78	27.59	16.58	33.47	366	35	P	H	
		2316.4	43.36	-10.64	54	32.63	27.67	16.55	33.49	366	35	A	H	
	*	2440	101.92	-	-	91.18	27.5	16.67	33.43	366	35	P	H	
	*	2440	101.47	-	-	90.73	27.5	16.67	33.43	366	35	A	H	
			2485.36	52.84	-21.16	74	42.1	27.43	16.72	33.41	366	35	P	H
			2498.96	43.47	-10.53	54	32.73	27.4	16.74	33.4	366	35	A	H
			2345.68	53.29	-20.71	74	42.58	27.61	16.58	33.48	100	94	P	V
			2329.68	43.22	-10.78	54	32.51	27.64	16.56	33.49	100	94	A	V
	*		2440	102.66	-	-	91.92	27.5	16.67	33.43	100	94	P	V
	*		2440	102.14	-	-	91.4	27.5	16.67	33.43	100	94	A	V
			2488.64	52.61	-21.39	74	41.87	27.42	16.73	33.41	100	94	P	V
			2485.28	43.2	-10.8	54	32.46	27.43	16.72	33.41	100	94	A	V



BLE CH 39 2480MHz	*	2480	98.8	-	-	88.05	27.44	16.72	33.41	350	53	P	H
	*	2480	98.31	-	-	87.56	27.44	16.72	33.41	350	53	A	H
		2483.52	53.03	-20.97	74	42.29	27.43	16.72	33.41	350	53	P	H
		2485.68	43.27	-10.73	54	32.53	27.43	16.72	33.41	350	53	A	H
													H
													H
	*	2480	99.98	-	-	89.23	27.44	16.72	33.41	100	93	P	V
	*	2480	99.58	-	-	88.83	27.44	16.72	33.41	100	93	A	V
		2486.2	52.76	-21.24	74	42.02	27.43	16.72	33.41	100	93	P	V
		2484.96	43.4	-10.6	54	32.66	27.43	16.72	33.41	100	93	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	38.76	-35.24	74	62.96	31	10.97	66.17	100	0	P	H
													H
													H
													H
		4804	38.48	-35.52	74	62.68	31	10.97	66.17	100	0	P	V
													V
													V
BLE CH 19 2440MHz		4880	39.57	-34.43	74	63.14	31.54	11.01	66.12	100	0	P	H
		7320	42.14	-31.86	74	58.08	36.4	13.38	65.72	100	0	P	H
													H
													H
		4880	39.46	-34.54	74	63.03	31.54	11.01	66.12	100	0	P	V
		7320	41.81	-32.19	74	57.75	36.4	13.38	65.72	100	0	P	V
													V
BLE CH 39 2480MHz		4960	39.23	-34.77	74	63.18	31.06	11.05	66.06	100	0	P	H
		7440	42.2	-31.8	74	58.17	36.56	13.26	65.79	100	0	P	H
													H
													H
		4960	38.71	-35.29	74	62.66	31.06	11.05	66.06	100	0	P	V
		7440	42	-32	74	57.97	36.56	13.26	65.79	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2350.11	53.66	-20.34	74	42.95	27.6	16.58	33.47	337	120	P	H	
		2332.155	45.18	-8.82	54	34.46	27.64	16.56	33.48	337	120	A	H	
	*	2402	98.79	-	-	88.11	27.5	16.63	33.45	337	120	P	H	
	*	2402	96.55	-	-	85.87	27.5	16.63	33.45	337	120	A	H	
													H	
													H	
			2353.575	53	-21	74	42.3	27.59	16.58	33.47	102	69	P	V
			2366.385	44.64	-9.36	54	33.94	27.57	16.6	33.47	102	69	A	V
	*		2402	101.18	-	-	90.5	27.5	16.63	33.45	102	69	P	V
	*		2402	99.39	-	-	88.71	27.5	16.63	33.45	102	69	A	V
													V	
												V		
BLE CH 19 2440MHz		2327.08	52.78	-21.22	74	42.06	27.65	16.56	33.49	322	129	P	H	
		2345.7	44.7	-9.3	54	33.99	27.61	16.58	33.48	322	129	A	H	
	*	2440	100.38	-	-	89.64	27.5	16.67	33.43	322	129	P	H	
	*	2440	99.08	-	-	88.34	27.5	16.67	33.43	322	129	A	H	
			2495.52	52.62	-21.38	74	41.87	27.41	16.74	33.4	322	129	P	H
			2499.51	45.12	-8.88	54	34.38	27.4	16.74	33.4	322	129	A	H
			2339.82	52.59	-21.41	74	41.88	27.62	16.57	33.48	100	71	P	V
			2366.98	44.82	-9.18	54	34.12	27.57	16.6	33.47	100	70	A	V
	*		2440	101.93	-	-	91.19	27.5	16.67	33.43	100	71	P	V
	*		2440	100.36	-	-	89.62	27.5	16.67	33.43	100	71	A	V
			2485.51	52.47	-21.53	74	41.73	27.43	16.72	33.41	100	71	P	V
		2495.94	44.53	-9.47	54	33.78	27.41	16.74	33.4	100	71	A	V	



BLE CH 39 2480MHz	*	2480	98.51	-	-	87.76	27.44	16.72	33.41	316	131	P	H
	*	2480	97.07	-	-	86.32	27.44	16.72	33.41	316	131	A	H
		2483.52	52.71	-21.29	74	41.97	27.43	16.72	33.41	316	131	P	H
		2483.52	45.35	-8.65	54	34.61	27.43	16.72	33.41	316	131	A	H
													H
													H
	*	2480	100.93	-	-	90.18	27.44	16.72	33.41	100	69	P	V
	*	2480	99.5	-	-	88.75	27.44	16.72	33.41	100	69	A	V
		2483.52	54.29	-19.71	74	43.55	27.43	16.72	33.41	100	69	P	V
		2483.52	46.38	-7.62	54	35.64	27.43	16.72	33.41	100	69	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.34	-34.66	74	63.54	31	10.97	66.17	100	0	P	H
													H
													H
													H
		4804	39.5	-34.5	74	63.7	31	10.97	66.17	100	0	P	V
													V
													V
BLE CH 19 2440MHz		4880	39.83	-34.17	74	63.4	31.54	11.01	66.12	100	0	P	H
		7320	42.9	-31.1	74	58.84	36.4	13.38	65.72	100	0	P	H
													H
													H
		4880	39.93	-34.07	74	63.5	31.54	11.01	66.12	100	0	P	V
		7320	42.65	-31.35	74	58.59	36.4	13.38	65.72	100	0	P	V
													V
BLE CH 39 2480MHz		4960	40.59	-33.41	74	64.54	31.06	11.05	66.06	100	0	P	H
		7440	42.62	-31.38	74	58.59	36.56	13.26	65.79	100	0	P	H
													H
													H
		4960	39.6	-34.4	74	63.55	31.06	11.05	66.06	100	0	P	V
		7440	42.52	-31.48	74	58.49	36.56	13.26	65.79	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30.97	19.24	-20.76	40	27.12	23.79	0.78	32.45	-	-	P	H	
		91.11	27.62	-15.88	43.5	44.07	14.67	1.39	32.51	-	-	P	H	
		161.92	26.15	-17.35	43.5	40.53	16.24	1.9	32.52	-	-	P	H	
		881.66	30.83	-15.17	46	28.65	29.18	4.27	31.27	-	-	P	H	
		897.18	30.89	-15.11	46	28.66	29.13	4.31	31.21	-	-	P	H	
		958.29	31.07	-14.93	46	26.37	31.06	4.46	30.82	100	0	P	H	
														H
														H
														H
														H
														H
														H
			54.25	29.78	-10.22	40	48.9	12.35	1.08	32.55	100	0	P	V
			62.01	26.69	-13.31	40	46.36	11.72	1.15	32.54	-	-	P	V
			91.11	26.71	-16.79	43.5	43.16	14.67	1.39	32.51	-	-	P	V
			857.41	30.28	-15.72	46	28.18	29.27	4.2	31.37	-	-	P	V
			939.86	30.57	-15.43	46	27.1	29.98	4.43	30.94	-	-	P	V
			959.26	31.03	-14.97	46	26.27	31.11	4.46	30.81	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<Ant. 7>
<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2383.185	52.93	-21.07	74	42.25	27.53	16.61	33.46	136	29	P	H	
		2377.2	43.27	-10.73	54	32.57	27.55	16.61	33.46	136	29	A	H	
	*	2402	99.86	-	-	89.18	27.5	16.63	33.45	136	29	P	H	
	*	2402	99.12	-	-	88.44	27.5	16.63	33.45	136	29	A	H	
													H	
													H	
			2339.295	52.53	-21.47	74	41.82	27.62	16.57	33.48	104	68	P	V
			2375.415	43.23	-10.77	54	32.53	27.55	16.61	33.46	104	68	A	V
	*		2402	101.13	-	-	90.45	27.5	16.63	33.45	104	68	P	V
	*		2402	100.59	-	-	89.91	27.5	16.63	33.45	104	68	A	V
													V	
													V	
BLE CH 19 2440MHz		2356.4	53.27	-20.73	74	42.56	27.59	16.59	33.47	153	31	P	H	
		2351.28	43.43	-10.57	54	32.72	27.6	16.58	33.47	153	31	A	H	
	*	2440	100.08	-	-	89.34	27.5	16.67	33.43	153	31	P	H	
	*	2440	99.58	-	-	88.84	27.5	16.67	33.43	153	31	A	H	
			2494.24	53.48	-20.52	74	42.74	27.41	16.73	33.4	153	31	P	H
			2491.36	43.51	-10.49	54	32.76	27.42	16.73	33.4	153	31	A	H
			2369.52	53.09	-20.91	74	42.4	27.56	16.6	33.47	100	98	P	V
			2387.44	43.38	-10.62	54	32.69	27.53	16.62	33.46	100	98	A	V
	*		2440	101.52	-	-	90.78	27.5	16.67	33.43	100	98	P	V
	*		2440	100.73	-	-	89.99	27.5	16.67	33.43	100	98	A	V
			2486.8	53	-21	74	42.25	27.43	16.73	33.41	100	98	P	V
			2490.16	43.46	-10.54	54	32.71	27.42	16.73	33.4	100	98	A	V



BLE CH 39 2480MHz	*	2480	98.95	-	-	88.2	27.44	16.72	33.41	317	127	P	H
	*	2480	98.34	-	-	87.59	27.44	16.72	33.41	317	127	A	H
		2497.36	53.28	-20.72	74	42.53	27.41	16.74	33.4	317	127	P	H
		2496.76	43.24	-10.76	54	32.49	27.41	16.74	33.4	317	127	A	H
													H
													H
	*	2480	100.33	-	-	89.58	27.44	16.72	33.41	100	74	P	V
	*	2480	99.47	-	-	88.72	27.44	16.72	33.41	100	74	A	V
		2485.64	53.02	-20.98	74	42.28	27.43	16.72	33.41	100	74	P	V
		2483.68	43.26	-10.74	54	32.52	27.43	16.72	33.41	100	74	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.03	-34.97	74	63.23	31	10.97	66.17	100	0	P	H
													H
													H
													H
		4804	38.33	-35.67	74	62.53	31	10.97	66.17	100	0	P	V
													V
													V
BLE CH 19 2440MHz		4880	39.55	-34.45	74	63.12	31.54	11.01	66.12	100	0	P	H
		7320	42.18	-31.82	74	58.12	36.4	13.38	65.72	100	0	P	H
													H
													H
		4880	39.79	-34.21	74	63.36	31.54	11.01	66.12	100	0	P	V
		7320	42.52	-31.48	74	58.46	36.4	13.38	65.72	100	0	P	V
													V
BLE CH 39 2480MHz		4960	38.48	-35.52	74	62.43	31.06	11.05	66.06	100	0	P	H
		7440	42.08	-31.92	74	58.05	36.56	13.26	65.79	100	0	P	H
													H
													H
		4960	39.1	-34.9	74	63.05	31.06	11.05	66.06	100	0	P	V
		7440	41.91	-32.09	74	57.88	36.56	13.26	65.79	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2383.605	52.41	-21.59	74	41.73	27.53	16.61	33.46	336	136	P	H	
		2313.36	44.55	-9.45	54	33.83	27.67	16.54	33.49	336	136	A	H	
	*	2402	99.76	-	-	89.08	27.5	16.63	33.45	336	136	P	H	
	*	2402	98.26	-	-	87.58	27.5	16.63	33.45	336	136	A	H	
													H	
													H	
			2333.52	52.84	-21.16	74	42.13	27.63	16.56	33.48	104	61	P	V
			2363.97	44.83	-9.17	54	34.14	27.57	16.59	33.47	104	61	A	V
	*		2402	101.27	-	-	90.59	27.5	16.63	33.45	104	61	P	V
	*		2402	100.21	-	-	89.53	27.5	16.63	33.45	104	61	A	V
													V	
												V		
BLE CH 19 2440MHz		2380.42	53.6	-20.4	74	42.91	27.54	16.61	33.46	323	131	P	H	
		2327.92	44.81	-9.19	54	34.1	27.64	16.56	33.49	323	131	A	H	
	*	2440	100.8	-	-	90.06	27.5	16.67	33.43	323	131	P	H	
	*	2440	99.5	-	-	88.76	27.5	16.67	33.43	323	131	A	H	
			2496.36	52.44	-21.56	74	41.69	27.41	16.74	33.4	323	131	P	H
			2484.88	44.73	-9.27	54	33.99	27.43	16.72	33.41	323	131	A	H
			2377.62	53.02	-20.98	74	42.33	27.54	16.61	33.46	100	100	P	V
			2323.72	44.68	-9.32	54	33.97	27.65	16.55	33.49	100	100	A	V
	*		2440	101.67	-	-	90.93	27.5	16.67	33.43	100	100	P	V
	*		2440	100.4	-	-	89.66	27.5	16.67	33.43	100	100	A	V
			2495.17	53.51	-20.49	74	42.77	27.41	16.73	33.4	100	100	P	V
		2498.6	44.58	-9.42	54	33.84	27.4	16.74	33.4	100	100	A	V	



BLE CH 39 2480MHz	*	2480	99.56	-	-	88.81	27.44	16.72	33.41	317	131	P	H
	*	2480	98.41	-	-	87.66	27.44	16.72	33.41	317	131	A	H
		2483.56	53.91	-20.09	74	43.17	27.43	16.72	33.41	317	131	P	H
		2483.52	46.26	-7.74	54	35.52	27.43	16.72	33.41	317	131	A	H
													H
													H
	*	2480	101.03	-	-	90.28	27.44	16.72	33.41	100	74	P	V
	*	2480	99.66	-	-	88.91	27.44	16.72	33.41	100	74	A	V
		2483.56	53.93	-20.07	74	43.19	27.43	16.72	33.41	100	74	P	V
		2483.52	47.89	-6.11	54	37.15	27.43	16.72	33.41	100	74	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	38.7	-35.3	74	62.9	31	10.97	66.17	100	0	P	H
													H
													H
													H
		4804	38.91	-35.09	74	63.11	31	10.97	66.17	100	0	P	V
													V
													V
BLE CH 19 2440MHz		4880	39.45	-34.55	74	63.02	31.54	11.01	66.12	100	0	P	H
		7320	43.68	-30.32	74	59.62	36.4	13.38	65.72	100	0	P	H
													H
													H
		4880	38.72	-35.28	74	62.29	31.54	11.01	66.12	100	0	P	V
		7320	42.91	-31.09	74	58.85	36.4	13.38	65.72	100	0	P	V
													V
BLE CH 39 2480MHz		4960	39.18	-34.82	74	63.13	31.06	11.05	66.06	100	0	P	H
		7440	41.89	-32.11	74	57.86	36.56	13.26	65.79	100	0	P	H
													H
													H
		4960	38.83	-35.17	74	62.78	31.06	11.05	66.06	100	0	P	V
		7440	43.22	-30.78	74	59.19	36.56	13.26	65.79	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30	20.67	-19.33	40	28.29	24.06	0.76	32.44	-	-	P	H	
		91.11	27.87	-15.63	43.5	44.32	14.67	1.39	32.51	-	-	P	H	
		161.92	25.91	-17.59	43.5	40.29	16.24	1.9	32.52	-	-	P	H	
		926.28	30.28	-15.72	46	27.38	29.54	4.39	31.03	-	-	P	H	
		942.77	30.38	-15.62	46	26.64	30.23	4.43	30.92	-	-	P	H	
		951.5	31.32	-14.68	46	26.99	30.75	4.45	30.87	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			33.88	27.19	-12.81	40	36.54	22.28	0.84	32.47	-	-	P	V
			54.25	29.93	-10.07	40	49.05	12.35	1.08	32.55	100	0	P	V
			150.28	27.54	-15.96	43.5	41.32	16.92	1.82	32.52	-	-	P	V
			857.41	31.27	-14.73	46	29.17	29.27	4.2	31.37	-	-	P	V
			872.93	30.54	-15.46	46	28.35	29.26	4.24	31.31	-	-	P	V
			956.35	31.13	-14.87	46	26.52	30.98	4.46	30.83	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<WPC Charging Mode>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz	*	2480	98.32	-	-	87.57	27.44	16.72	33.41	150	143	P	H
	*	2480	96.33	-	-	85.58	27.44	16.72	33.41	150	143	A	H
		2483.88	53.04	-20.96	74	42.3	27.43	16.72	33.41	150	143	P	H
		2483.52	45.72	-8.28	54	34.98	27.43	16.72	33.41	150	143	A	H
													H
													H
	*	2480	100.73	-	-	89.98	27.44	16.72	33.41	100	86	P	V
	*	2480	98.65	-	-	87.9	27.44	16.72	33.41	100	86	A	V
		2492.44	53.43	-20.57	74	42.68	27.42	16.73	33.4	100	86	P	V
		2498.52	45.03	-8.97	54	34.29	27.4	16.74	33.4	100	86	A	V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	38.61	-35.39	74	62.56	31.06	11.05	66.06	100	0	P	H
		7440	42.41	-31.59	74	58.38	36.56	13.26	65.79	100	0	P	H
													H
													H
		4960	38.69	-35.31	74	62.64	31.06	11.05	66.06	100	0	P	V
		7440	42.13	-31.87	74	58.1	36.56	13.26	65.79	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30	19.32	-20.68	40	26.94	24.06	0.76	32.44	-	-	P	H	
		91.11	27.55	-15.95	43.5	44	14.67	1.39	32.51	-	-	P	H	
		161.92	25.75	-17.75	43.5	40.13	16.24	1.9	32.52	-	-	P	H	
		872.93	30.19	-15.81	46	28	29.26	4.24	31.31	-	-	P	H	
		938.89	30.46	-15.54	46	27.02	29.96	4.43	30.95	-	-	P	H	
		949.56	31.32	-14.68	46	27.1	30.65	4.45	30.88	100	0	P	H	
														H
														H
														H
														H
														H
														H
			49.4	31	-9	40	48.07	14.45	1.03	32.55	100	0	P	V
			54.25	29.82	-10.18	40	48.94	12.35	1.08	32.55	-	-	P	V
			90.14	26.8	-16.7	43.5	43.34	14.59	1.38	32.51	-	-	P	V
			859.35	30.59	-15.41	46	28.44	29.3	4.21	31.36	-	-	P	V
			893.3	30.78	-15.22	46	28.57	29.13	4.31	31.23	-	-	P	V
			943.74	31.12	-14.88	46	27.28	30.32	4.44	30.92	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Bill Cheng, Fu Chen and Troye Hsieh	Temperature :	18.8~24.0°C
		Relative Humidity :	33.2~66.1%

Note symbol





-L	Low channel location
-R	High channel location



<Ant. 5>
<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

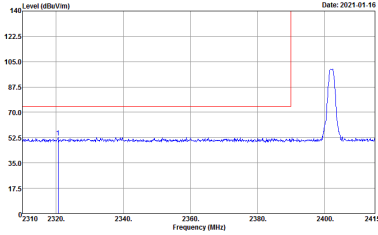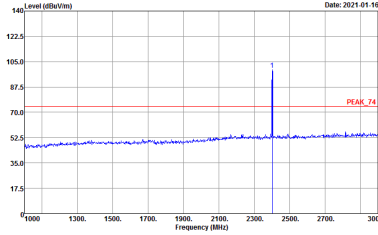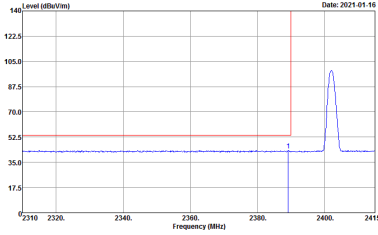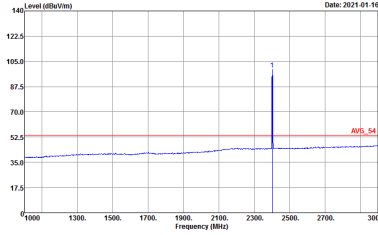BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

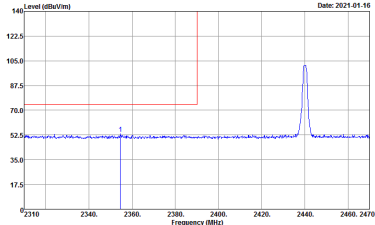
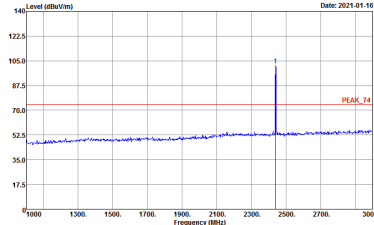
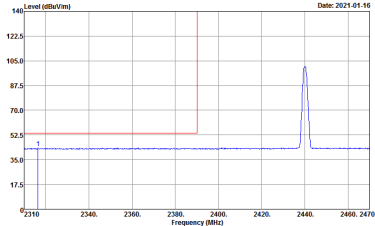
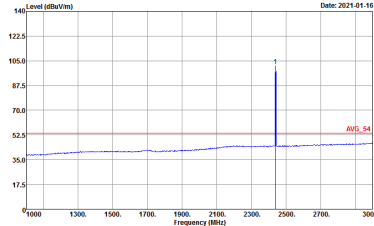


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

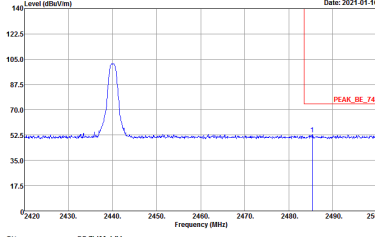
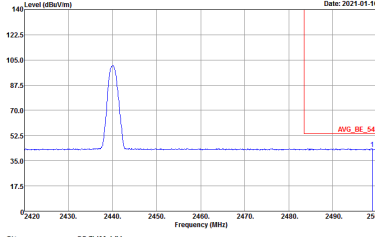


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto</p>	Left blank

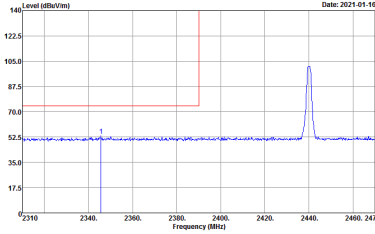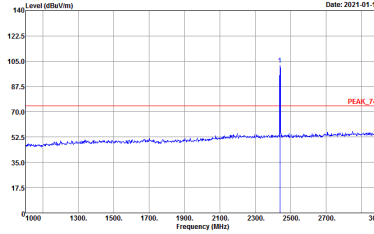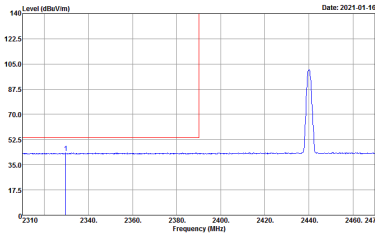

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

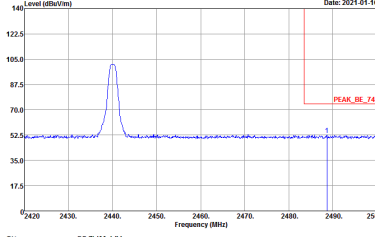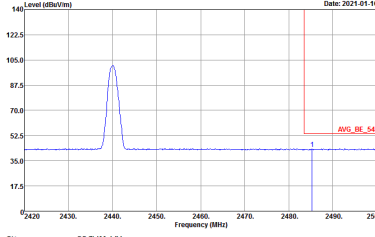

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>

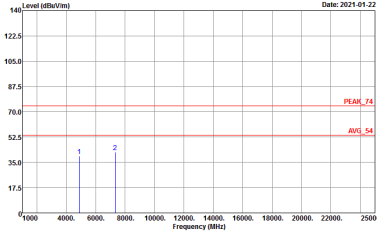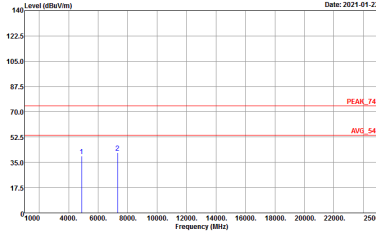

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
Peak Avg.	 <p>Date: 2021-01-22</p> <p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p>Date: 2021-01-22</p> <p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>

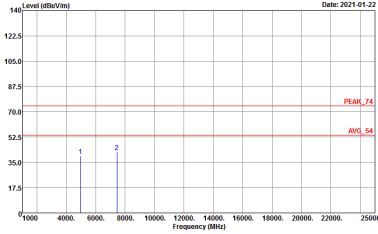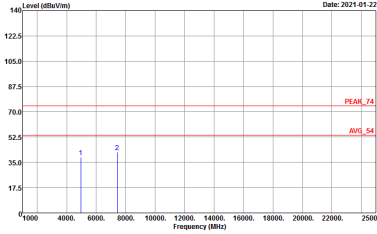

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
Peak	 <p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>







<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : : AV6_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : : AV6_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

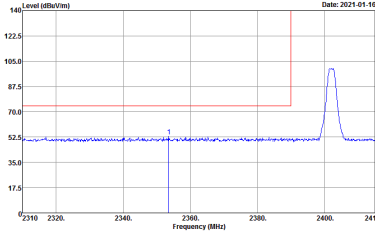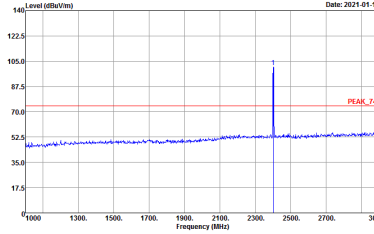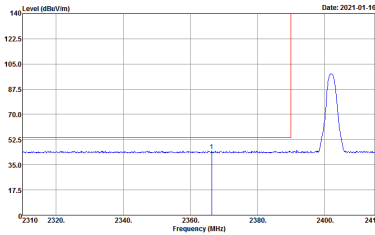

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

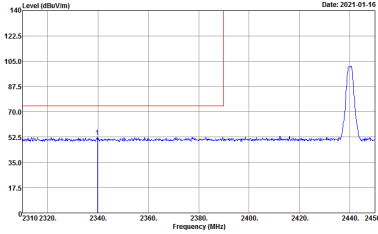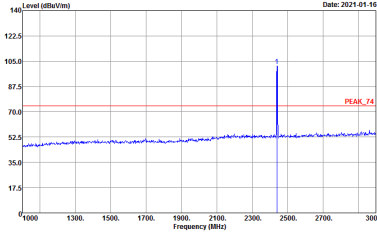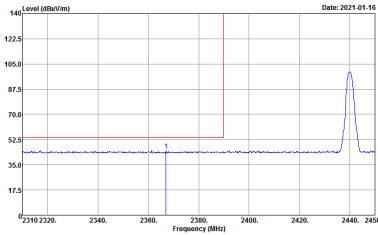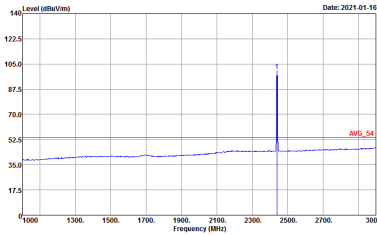

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



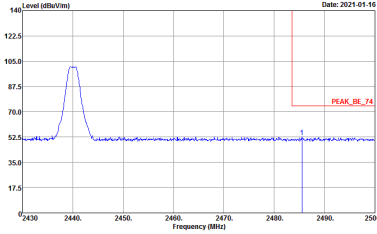
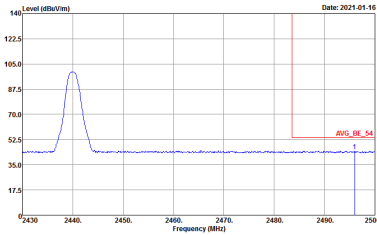


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

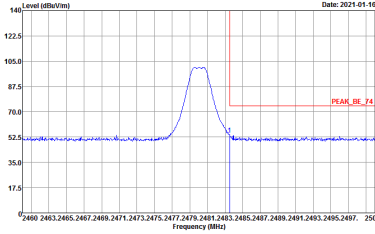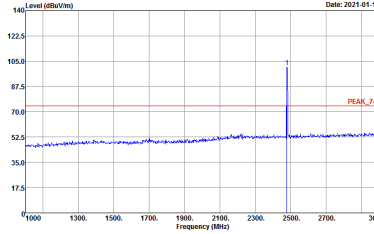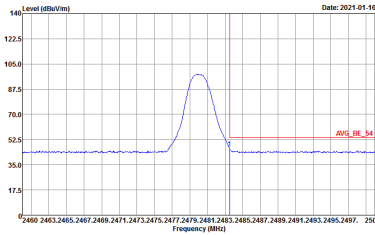



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

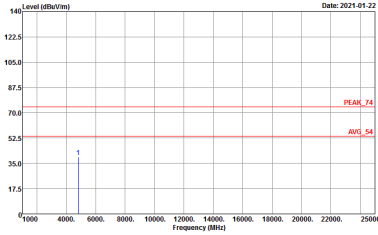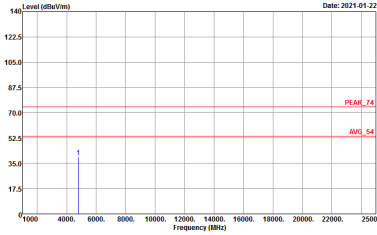BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>



Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BI-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : QP 3m BI-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>







<Ant. 7>
<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Horizontal	Fundamental
Peak	<p>Site : 03CHI1-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CHI1-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CHI1-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Site : 03CHI1-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

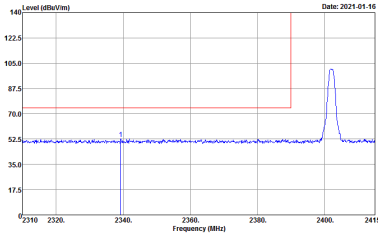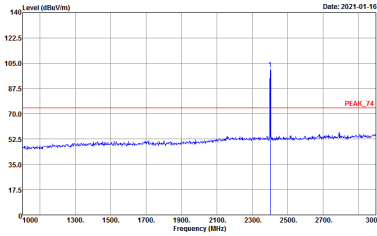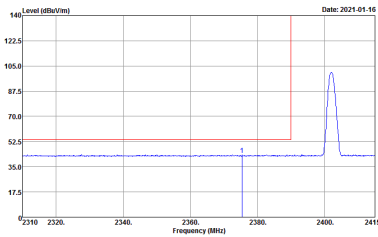
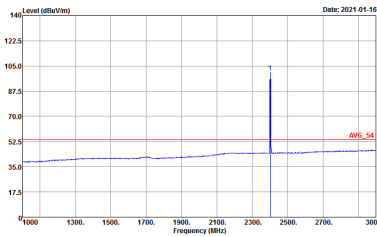


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

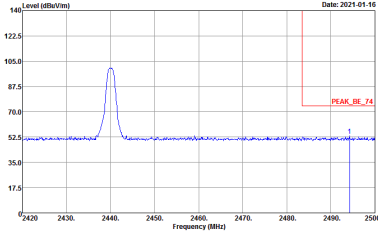
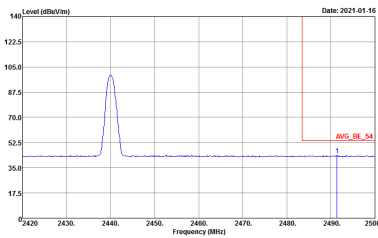


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto</p>	Left blank

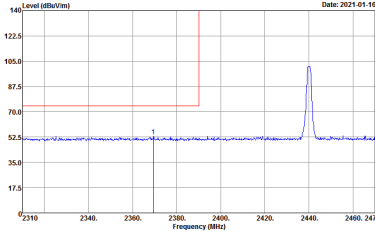
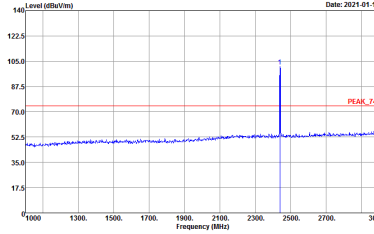
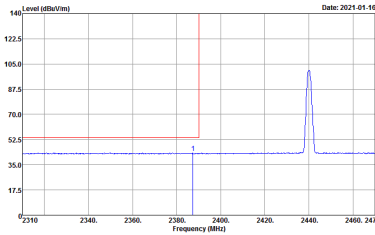



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL :RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL :RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL :RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL :RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

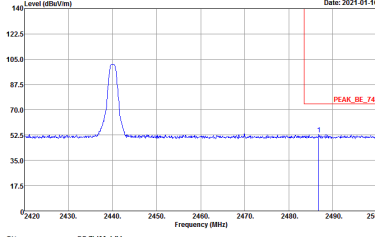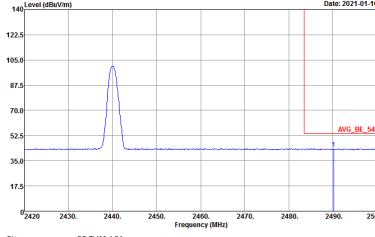

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto</p>	Left blank

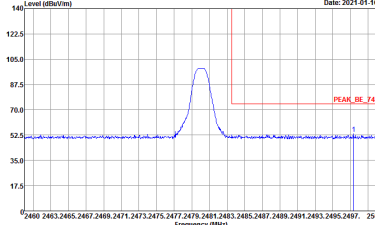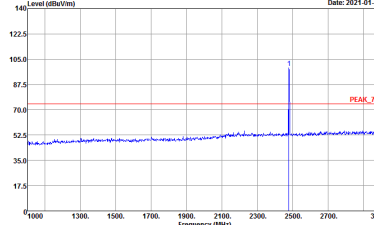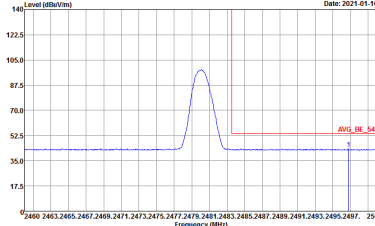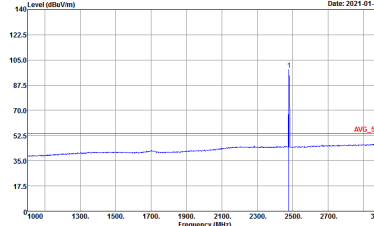

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p>Peak Avg.</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>

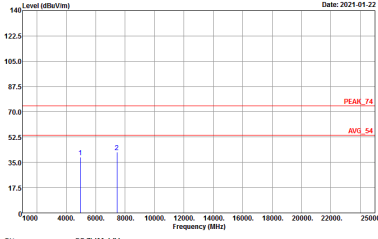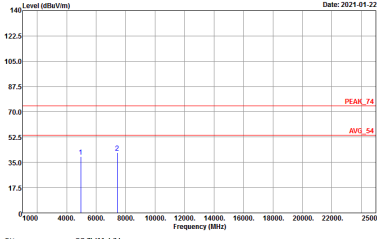

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
Peak	 <p data-bbox="432 672 710 705">Site : 03CH11-14Y Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p data-bbox="906 672 1168 705">Site : 03CH11-14Y Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>







<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CHI1-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CHI1-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CHI1-HY Condition : AV6_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Site : 03CHI1-HY Condition : AV6_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

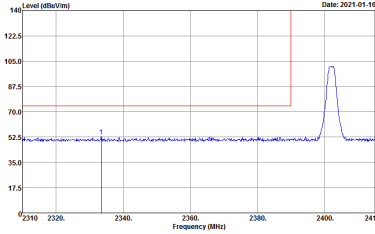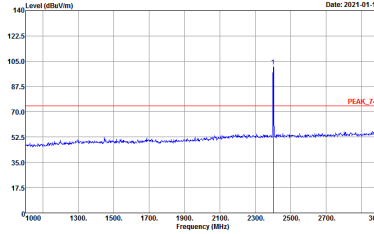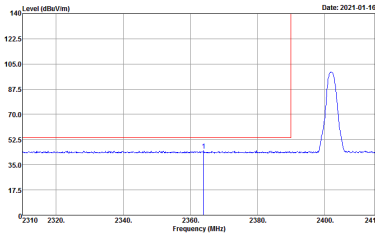

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

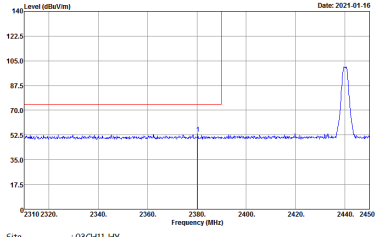
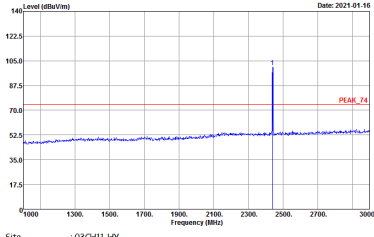
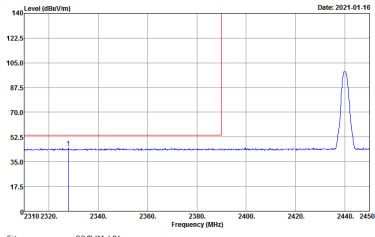
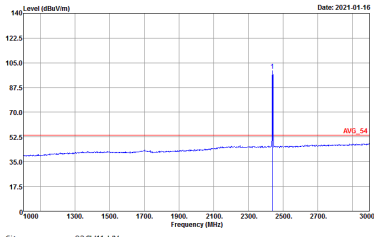


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Level (dBμV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 0 to 140 dBμV/m, and the x-axis ranges from 2310 to 2450 MHz. A red horizontal line is drawn at approximately 70 dBμV/m. The peak is labeled with a red vertical line.</p> <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBμV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 0 to 140 dBμV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 70 dBμV/m. The peak is labeled 'PEAK_74' with a red vertical line.</p> <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBμV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 0 to 140 dBμV/m, and the x-axis ranges from 2310 to 2450 MHz. A red horizontal line is drawn at approximately 70 dBμV/m. The peak is labeled with a red vertical line.</p> <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Level (dBμV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 0 to 140 dBμV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 70 dBμV/m. The peak is labeled 'AVG_54' with a red vertical line.</p> <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

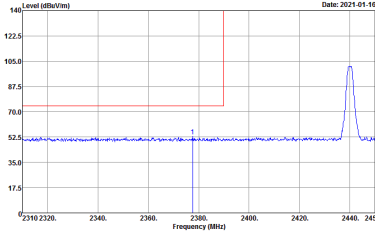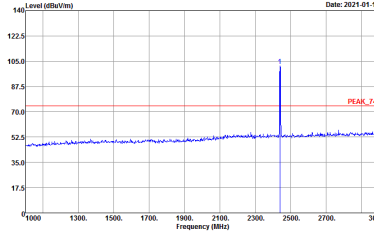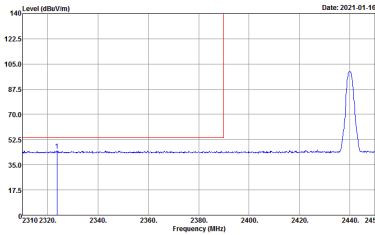

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



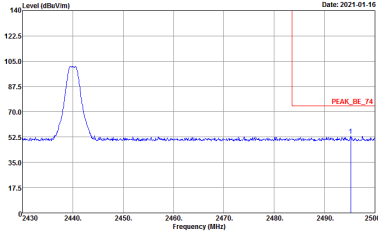
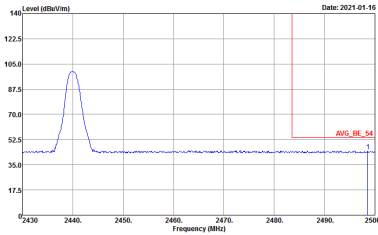


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

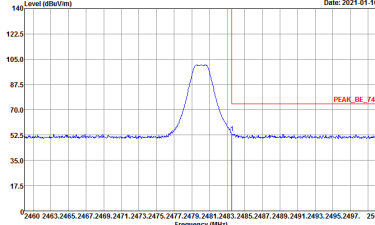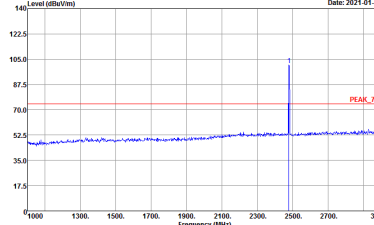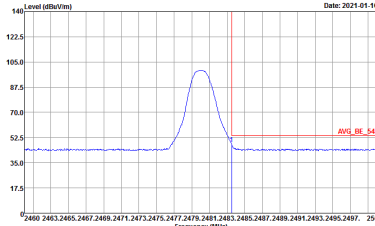
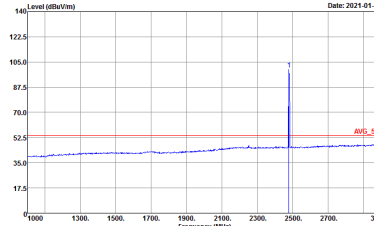


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Date: 2021-01-16</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>

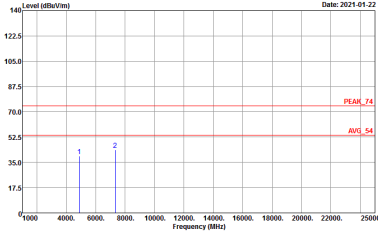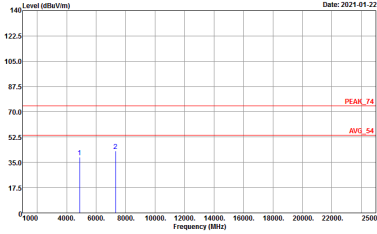

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>

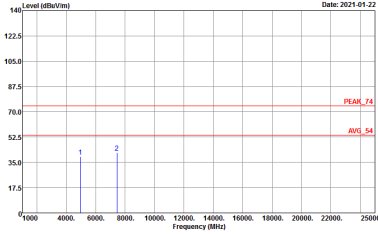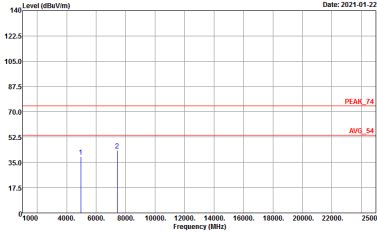

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
Peak	 <p data-bbox="432 667 715 703">Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	 <p data-bbox="906 667 1173 703">Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>



Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>







<WPC Charging Mode>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

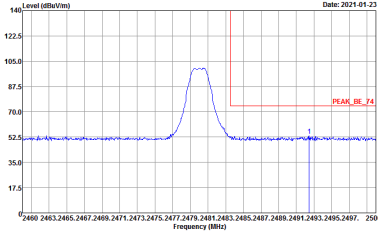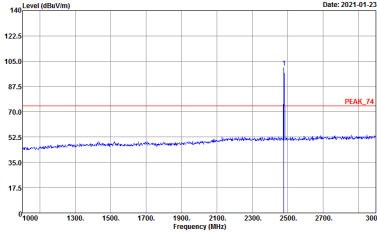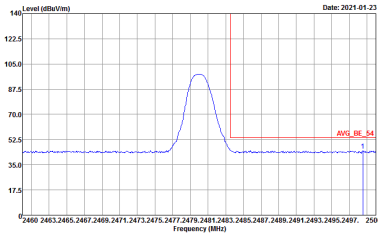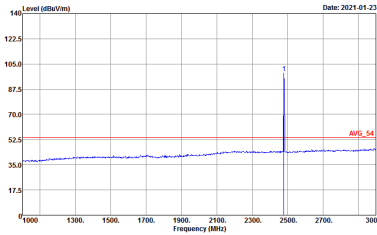

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p>



Emission below 1GHz

2.4GHz BLE (LF)

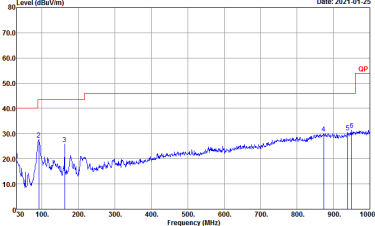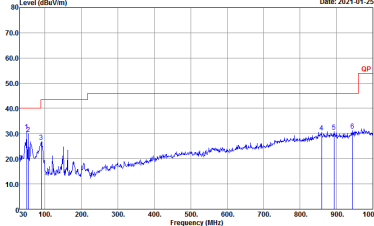
BLE	2.4GHz 2400~2483.5MHz	
BLE LF		
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m 8E-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m 8E-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>



Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)													
5	Bluetooth –LE for 1Mbps	61.98	388	2.58	3kHz	2.08													
5	Bluetooth –LE for 2Mbps	32.91	206	4.85	10kHz	7	Bluetooth –LE for 1Mbps	61.98	388	2.58	3kHz	2.08	7	Bluetooth –LE for 2Mbps	32.91	206	4.85	10kHz	4.83
7	Bluetooth –LE for 1Mbps	61.98	388	2.58	3kHz	2.08													
7	Bluetooth –LE for 2Mbps	32.91	206	4.85	10kHz	4.83													

<Ant. 5>

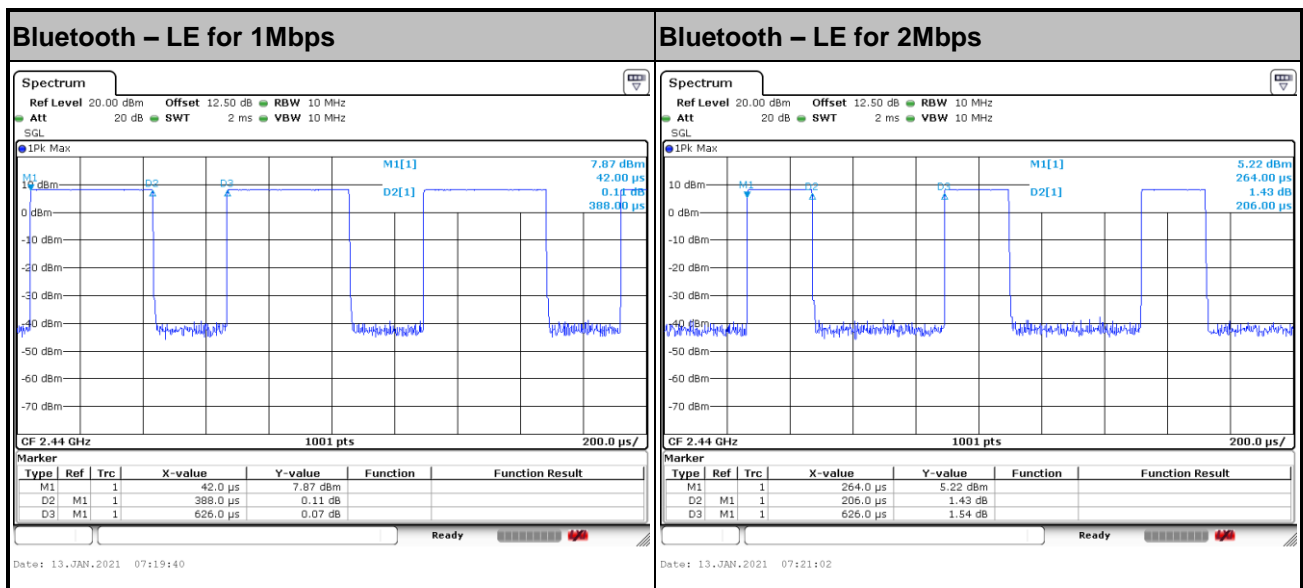

<Ant. 7>

