

Report No.: AR/2020/C000207-01 Page: 1 of 31

FCC TEST REPORT

Application No:	AR/2020/C0002
Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
EUT Description:	Mobile Phone
Model No.:	M2101K9G
Trade Mark:	XIAOMI
FCC ID:	2AFZZK9G
Standards:	47 CFR Part 2
	47 CFR Part 22 47 CFR Part 27
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01 C63.26 (2015)
Date of Receipt:	2021/1/4
Date of Test:	2021/1/4 to 2021/1/29
Date of Issue:	2021/4/30
Test Result:	PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derde yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Conditions/Te

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 · 深圳 · 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 2 of 31

1 Version

Revision Record							
Version	Chapter	Date	Modifier	Remark			
01		2021/1/29		Original			
02		2021/4/30	Kevin.Lan	1.Add test site Information 2.Update equipment list			

*This report supersedes our previous report AR/2020/C000207, issued on 2021-1-29, which is hereby deemed null and void.

Authorized for issue by:	
Prepared By	Kevin. lan (Kevin.Lan) /Engineer
Checked By	David Chen (David Chen) /Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 • 深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 3 of 31

Content

1	VER	SION	2
2	TES	SUMMARY	5
	2.1	NR BAND N5(ENDC DC_7A_N5A)	5
	2.2	NR BAND N7(ENDC DC_2A_N7A, DC_66A_N7A) /N38/N41	5
	2.3	NR BAND N66(ENDC DC_7A_N66A)	6
	2.4	NR BAND N77	7
3	GEN	ERAL INFORMATION	9
	3.1	CLIENT INFORMATION	9
	3.2	TEST LOCATION	9
	3.3	TEST FACILITY	. 10
	3.4	GENERAL DESCRIPTION OF EUT	. 11
	3.5	TEST MODE	. 11
	3.6	TEST ENVIRONMENT	. 11
	3.7	TECHNICAL SPECIFICATION	. 12
	3.8	Test Frequencies	. 14
	3.8.1	Reference test frequencies for NR operating band n5	. 14
	3.8.2	Reference test frequencies for NR operating band n7	. 15
	3.8.3	Reference test frequencies for NR operating band n38	. 15
	3.8.4	Reference test frequencies for NR operating band n41	. 16
	3.8.5	Reference test frequencies for NR operating band n66	. 17
	3.8.6	Reference test frequencies for NR operating band n77	. 18
4	DES	CRIPTION OF TESTS	.19
	4.1	CONDUCTED OUTPUT POWER	. 19
	4.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	. 19
	4.3	OCCUPIED BANDWIDTH	. 19
	4.4	BAND EDGE AT ANTENNA TERMINALS	. 20
	4.5	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	. 20
	4.6	PEAK-AVERAGE RATIO	. 21
	4.7	FIELD STRENGTH OF SPURIOUS RADIATION	. 22
	4.8	FREQUENCY STABILITY / TEMPERATURE VARIATION	. 23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unavful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

 No.1 Workhon, M-10, Midde Section, Science & TechnologyPark, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cn

 mail: CN_Doccheck@sgs.com
 mail: 518057
 t (86-755) 26012053 f (86-755) 26710594
 sys.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 4 of 31

4	4.9 T	EST SETUPS	
	4.9.1	Test Setup 1	
	4.9.2	Test Setup 2	
	4.9.3	Test Setup 3	
		Test Setup 4	
۷	4.10 T	EST CONDITIONS	
5	MAIN	TEST INSTRUMENTS	29
6	MEAS	UREMENT UNCERTAINTY	31
7	APPEN	NDIXES	31



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@csas.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 5 of 31

2 Test Summary

2.1 NR Band N5(ENDC DC_7A_N5A)

FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	A
	Limit≤13 dB	Section 2 of Appendix B	Pass	А
§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
	\$2.1046, §22.913 \$2.1047 \$2.1047 \$2.1049 \$2.1051, \$22.917 \$2.1051, \$22.917 \$2.1053, \$22.917 \$2.1053, \$22.917 \$2.1055,	§2.1046, §22.913FCC: ERP \leq 7 WLimit \leq 13 dB§2.1047Digital modulation§2.1049OBW: No limit. EBW: No limit.§2.1051, §2.917 \leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.§2.1051, §2.1051, §2.2.917FCC: \leq -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.§2.1053, §2.1055,FCC: \leq -13 dBm/100 kHz.	§2.1046, §22.913FCC: ERP \leq 7 WSection 1 of Appendix BLimit \leq 13 dBSection 2 of Appendix B \leq 2.1047Digital modulationSection 3 of Appendix B§2.1049OBW: No limit. EBW: No limit.Section 4 of Appendix B§2.1051, §2.2.917 \leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.Section 5 of Appendix B§2.1051, §2.1051, §2.2.917FCC: \leq -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.Section 7 of Appendix B§2.1053, §2.1055,FCC: \leq -13 dBm/100 kHz.Section 7 of Appendix B§2.1055, \leq +2 5mmSection 8 of	§2.1046, §22.913FCC: ERP \leq 7 WSection 1 of Appendix BPassLimit \leq 13 dBSection 2 of Appendix BPass§2.1047Digital modulationSection 3 of Appendix BPass§2.1049OBW: No limit. EBW: No limit.Section 4 of Appendix BPass§2.1051, §22.917 \leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.Section 5 of Appendix BPass§2.1051, §22.917FCC: \leq -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.Section 7 of Appendix BPass§2.1053, §2.1055,FCC: \leq -13 dBm/100 kHz.Section 7 of

2.2 NR Band N7(ENDC DC_2A_N7A, DC_66A_N7A) /N38/N41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log	Section 5 of Appendix B	Pass	A



Member of the SGS Group (SGS SA)



Report No.: AR/2020/C000207-01 Page: 6 of 31

FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
	 (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. 			
§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 9 kHz X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass	A
§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass	В
§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass	А
	§27.53(m) §2.1053, §27.53(m) §2.1055, §27.54	(P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.§2.1051, §27.53(m)-25 dBm/ 1 MHz 9 kHz 9 kHz-25 dBm/ 1 MHz 9 kHz 9 kHz 9 kHz-25 dBm/ 1 MHz 9 kHz 9 kHz 9 kHz-25 dBm/ 1 MHz 9 kHz 9 kHz 	(P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.§2.1051, §27.53(m)-25 dBm/ 1 MHz 9 kHz 9 kHz-25 dBm/ 1 MHz 10" harmonics X=Max {6MHz, EBW}Section 6 of Appendix B§2.1053, §27.53(m)-25 dBm/ 1 MHz 9 kHz-25 dBm/ 9 kHz 9 kHzSection 7 of Appendix B§2.1053, §27.53(m)-25 dBm/ 1 MHz 9 kHzSection 7 of Appendix B§2.1053, §27.53(m)9 kHz 9 kHz 9 kHzSection 7 of Appendix B§2.1055,Within authorized bands ofSection 8 of	Section 6 of Appendix BPass\$2.1053, \$27.53(m)-25 dBm/ 1 MHz 1 MHz 9 kHz 9 kHz <br< td=""></br<>

2.3 NR Band N66(ENDC DC_7A_N66A)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention is of cortent of to check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

No.1 Workbon, M-10. Midde Section, Xeinere & Echonolgy Park, Shenzhen, China 518057
t (86-755) 26012053 f (86-755) 26710594

www.sggroup.com.on
www.sggroup.com.on

main: CN_Doccheck@ags.com
main: 518057
t (86-755) 26012053 f (86-755) 26710594



Report No.: AR/2020/C000207-01 Page: 7 of 31

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*	
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	А	
Remark: For the verd	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

2.4 NR Band N77

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)	EIRP ≤ 1W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(l2)	 (2) For mobile operations in the 3700- 3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. 	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(l)	not exceed -13 dBm/MHz.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(l)	not exceed -13 dBm/MHz	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055,	Within authorized bands of	Section 8 of	Pass	А



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its Intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 8 of 31

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*		
	§27.54	operation/frequency block.	Appendix B				
Remark: For the verc	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".						

Remark:

Because the product is a multi-TX antenna, the antenna with the max conducted power is selected for conducted testing, EIRP and RSE require all antennas to be tested.

Remark: All test were performed by Lab A and B.

Parts of test items above were subcontracted to Lab B.

Lab A SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Lab B SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content to enter or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. **Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email.**

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 9 of 31

3 General Information

3.1 Client Information

Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Test Engineer	Dee Zheng,Mike Hu

Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test Engineer	Ben Huang, Leah Chen



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

No. Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 10 of 31

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

• A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American

Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01. • FCC –Designation Number: CN1271



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing imspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: OKD.Doccheck@egs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 •深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 11 of 31

EUT Description::	Mobile Phone
Model No.:	M2010K9G
Trade Mark:	XIAOMI
Hardware Version:	P2
Software Version:	MIUI 12
Sample Type:	Portable Device, Module
Antenna Type:	PIFA Antenna
Antenna Gain:	N5: -4.5dBi (Ant1); -4.3dBi (Ant4) N7: -2dBi (Ant1); -2.2dBi (Ant2); -1.5dBi (Ant3); -1.2dBi (Ant5) N38: -2dBi (Ant1); -2.2dBi (Ant2); -1.5dBi (Ant3); -1.2dBi (Ant5) N41: -2dBi (Ant1); -2.2dBi (Ant2); -1.5dBi (Ant3); -1.2dBi (Ant5) N66: -3.9dBi (Ant1); -1.7dBi (Ant2); -4.8dBi (Ant3); -1.4dBi (Ant5) N77: -1.6dBi (Ant4); -2dBi (Ant6); -0.8dBi (Ant8); -3.9dBi (Ant12)
Remark	 Frequency band for multiple antennas, the whole testing has assessed by referring to the higher conducted power. The Maximum ERP/EIRP is calculated from Max Output power and Max antenna gain, only the maximum ERP/EIRP is shown the worst two antenna data in the report

3.4 General Description of EUT

3.5 Test Mode

Test Mode	Test Modes Description
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation
NR/TM2	NR system, DFT-s-QPSK modulation
NR/TM3	NR system, DFT-s-16QAM modulation
NR/TM4	NR system, DFT-s-64QAM modulation
NR/TM5	NR system, DFT-s-256QAM modulation
NR/TM6	NR system, CP-QPSK modulation
NR/TM7	NR system, CP-16QAM modulation
NR/TM8	NR system, CP-64QAM modulation
NR/TM9	NR system, CP-256QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.

3.6 Test Environment

Environment Parameter	Selected V	/alues During Tests				
Relative Humidity	49%					
Atmospheric Pressure:	102.46 KPa					
Temperature	NT	25 °C				
	LV	3.6V				
Voltage:	NV	3.87V				
	HV	4.4V				

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

中国・深圳・科技园中区M-10栋一号厂房



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoncerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the aditenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (QN.Doccheck@ags.com) No.1 Workshop.M-10. Middle Section, Science & Rethology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)

sgs.china@sgs.com

Report No.: AR/2020/C000207-01 Page: 12 of 31

3.7 Technical Specification

S

Characteristics	Description						
Radio System Type	🖾 SA 🖾 NSA						
	Band	ТХ	RX				
	NR Band N5	824 to 849 MHz	869 to 894 MHz				
	NR Band N7	2500 to 2570 MHz	2620 to 2690 MHz				
Supported Frequency Range	NR Band N38	2570 to 2620 MHz	2570 to 2620 MHz				
	NR Band N41	2496 to 2690 MHz	2496 to 2690 MHz				
	NR Band N66	1710 to 1780 MHz	2110 to 2180 MHz				
	NR Band N77	3700 to 3980 MHz	3700 to 3980 MHz				
	NR Band N5	SCK 15k: ⊠5 MHz; ⊠10 ⊠20 MHz					
Supported Channel Bandwidth	NR Band N7	SCK 15k: ⊠5 MHz; ⊠10 ⊠20 MHz	MHz; 🛛 15 MHz;				
	NR Band N38	SCK 30k: 20 MHz					
	NR Band N41	SCK 30k: ⊠20 MHz; ⊠30 MHz; ⊠40 MHz; ⊠50 MHz; ⊠60 MHz; ⊠80 MHz; ⊠90 MHz; ⊠100 MHz					
	NR Band N66	SCK 15k: ⊠5 MHz; ⊠10 MHz; ⊠15 MHz; ⊠20 MHz; ⊠30 MHz; ⊠40 MHz					
	NR Band N77	SCK 30k: ⊠20 MHz; ⊠30 MHz; ⊠40 MHz; ⊠50 MHz; ⊠60 MHz; ⊠70 MHz ⊠80 MHz; ⊠90 MHz; ⊠100 MHz					
	NR Band N5	SCK 15k: 4M48G7D;4M47W7D; 9M26G7D;9M29W7D; 14M1G7D;14M1W7D 18M9G7D;18M9W7D					
Designation of Emissions (Remark: the necessary bandwidth of which is	NR Band N7	SCK 15k: 4M49G7D;4M49W7D; 9M30G7D;9M29W7D; 14M1G7D;14M1W7D 18M9G7D;18M9W7D					
the worst value from the measured occupied	NR Band N38	SCK 30k: 18M2G7D;18M2W7D					
bandwidths for each type of channel bandwidth configuration.)	SCK 30k: 18M2G7D;18M3W7D 27M8G7D;27M8W7D 37M8G7D;37M8W7D 37M8G7D;47M5W7D 57M8G7D;57M8W7D 77M5G7D;77M4W7D 87M3G7D;87M3W7D 97M1G7D;97M3W7D						
	NR Band N66 SCK 15k:						



	Unless otherwise agreed in writing, this document is issued by the overleaf, available on request or accessible at http://www.seg.com/en/f subject to Terms and Conditions for Electronic Documents at http://ww Attention is drawn to the limitation of liability, indemnification and jurit advised that information contained hereon reflects the Company's find Client's instructions, if any. The Company's sole responsibility is to transaction from exercising all their rights and obligations under the except in full, without prior written approval of the Company. Any un appearance of this document is unlawful and offenders may be prosec results shown in this test report refer only to the sample(s) tested and su Attention: To check the authenticity of testing /inspection report & or email: ON_Doccheck@sgs.com	Terms-and-Conditions.aspx and, for electronic format documents, www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. sdiction issues defined therein. Any holder of this document is lings at the time of its intervention only and within the limits of its Client and this document does not exonerate parties to a transaction documents. This document cannot be reproduced authorized alteration, forgery or falsification of the content or uted to the fullest extent of the law. Unless otherwise stated the ch sample(s) are retained for 30 days only.
d.	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057	t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
	中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057	t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 13 of 31

	4M48G7D;4M48W7D;
	9M27G7D;9M28W7D;
	14M1G7D;14M1W7D
	18M9G7D;18M9W7D
	28M5G7D;28M5W7D
	38M4G7D;38M4W7D
	SCK 30k:
	18M2G7D;18M3W7D;
	27M9G7D;27M9W7D
	37M8G7D;37M9W7D
	37M8G7D;37M9W7D
NR Band N77	47M5G7D;47M6W7D
	58M0G7D;58M0W7D
	67M6G7D;67M5W7D
	77M5G7D;77M7W7D
	87M6G7D;87M6W7D
	97M5G7D;97M6W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 14 of 31

3.8 Test Frequencies

3.8.1 Reference test frequencies for NR operating band n5

3.8.1.1 Test frequencies for NR operating band n5 and SCS 15 kHz

Band	carrier	Rang	je	Carrier	Carrier	point A	absoluteF	offsetTo	SS	GSCN	absoluteFre
width [MHz]	Bandwi dth			centre [MHz]	centre [ARFCN]	[MHz]	requency PointA	<i>Carrier</i> [PRBs]	block SCS		quencySSB [ARFCN]
	[PRBs]	Deurslink	Law	074 5	474000	000.05	[ARFCN]	0	[kHz]	0470	474070
5	25	Downlink	Low	871.5	174300	869.25	173850	0	15	2178	174270
			Mid	881.5	176300	860.89	172178	102		2203	176210
			High	891.5	178300	798.53	159706	504		2228	178330
		Uplink	Low	826.5	165300	824.25	164850	0	-	-	-
			Mid	836.5	167300	743.53	148706	504		-	-
			High	846.5	169300	843.17	168634	6		-	-
10	52	Downlink	Low	874	174800	869.32	173864	0	15	2179	174290
			Mid	881.5	176300	858.46	171692	102		2197	175730
			High	889	177800	793.6	158720	504		2218	177410
		Uplink	Low	829	165800	824.32	164864	0	-	-	-
			Mid	836.5	167300	741.1	148220	504		-	-
			High	844	168800	838.24	167648	6		-	-
15	79	Downlink	Low	876.5	175300	869.39	173878	0	15	2177	174250
			Mid	881.5	176300	856.03	171206	102		2191	175250
			High	886.5	177300	788.67	157734	504		2205	176430
		Uplink	Low	831.5	166300	824.39	164878	0	-	-	-
			Mid	836.5	167300	738.67	147734	504		-	-
			High	841.5	168300	833.31	166662	6		-	-
20	106	Downlink	Low	879	175800	869.46	173892	0	15	2178	174270
			Mid	881.5	176300	853.6	170720	102		2185	174770
			High	884	176800	783.74	156748	504		2192	175450
		Uplink	Low	834	166800	824.46	164892	0	-	-	-
			Mid	836.5	167300	736.24	147248	504		-	-
			High	839	167800	828.38	165676	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) test reation, forgery or faisification only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, company.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 ·深圳 · 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com

Page:

Report No.: AR/2020/C000207-01

15 of 31

3.8.2Reference test frequencies for NR operating band n7

3.8.2.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Band	carrier	Rang		Carrier	Carrier	point A	absoluteF	offsetTo	SS	GSCN	absoluteFre
width	Bandwi	Rungo		centre	centre	[MHz]	requency	Carrier	block		quencySSB
[MHz]	dth			[MHz]	[ARFCN]	[]	PointA	[PRBs]	SCS		[ARFCN]
[]	[PRBs]			[]	[[ARFCN]	[]	[kHz]		[
5	25	Downlink	Low	2622.5	524500	2620.25	524050	0	15	6554	524410
			Mid	2655	531000	2634.39	526878	102		6636	530910
			High	2687.5	537500	2594.53	518906	504		6718	537410
		Uplink	Low	2502.5	500500	2500.25	500050	0	-	-	-
			Mid	2535	507000	2442.03	488406	504		-	-
			High	2567.5	513500	2564.17	512834	6		-	-
10	52	Downlink	Low	2625	525000	2620.32	524064	0	15	6555	524430
			Mid	2655	531000	2631.96	526392	102		6630	530430
			High	2685	537000	2589.6	517920	504		6705	536430
		Uplink	Low	2505	501000	2500.32	500064	0	-	-	-
			Mid	2535	507000	2439.6	487920	504		-	-
			High	2565	513000	2559.24	511848	6		-	-
15	79	Downlink	Low	2627.5	525500	2620.39	524078	0	15	6556	524450
			Mid	2655	531000	2629.53	525906	102		6624	529950
			High	2682.5	536500	2584.67	516934	504		6692	535450
		Uplink	Low	2507.5	501500	2500.39	500078	0	-	-	-
			Mid	2535	507000	2437.17	487434	504		-	-
			High	2562.5	512500	2554.31	510862	6		-	-
20	106	Downlink	Low	2630	526000	2620.46	524092	0	15	6557	524650
			Mid	2655	531000	2627.1	525420	102		6618	529470
			High	2680	536000	2579.74	515948	504		6682	534530
		Uplink	Low	2510	502000	2500.46	500092	0	-	-	-
			Mid	2535	507000	2434.74	486948	504		-	-
			High	2560	512000	2549.38	509876	6		-	-

3.8.3 Reference test frequencies for NR operating band n38

3.8.3.1 Test frequencies for NR operating band n38 and SCS 30 kHz

Band width [MHz]	carrier Bandwi dth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absoluteF requency PointA [ARFCN]	offsetTo Carrier [PRBs]	SS block SCS [kHz]	GSCN	absoluteFre quencySSB [ARFCN]
20	51	Downlink	Low	2580	516000	2570.82	514164	0	30	6438	515070
		&	Mid	2595	519000	2549.1	509820	102		6474	517950
		Uplink	High	2610	522000	2419.38	483876	504		6513	521070



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test retainton, for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email: CN.Doccheck@ass.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 · 深圳 · 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 16 of 31

	3.8.4.1 Test frequencies for NR operating band n41 and SCS 30 kHz										
Band width [MHz]	carrier Bandwi dth [PRBs]	Rang	e	Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absoluteF requency PointA [ARFCN]	offsetTo Carrier [PRBs]	SS block SCS [kHz]	GSCN	absoluteFre quencySSB [ARFCN]
20	51	Downlink	Low	2506.02	501204	2496.84	499368	0	30	6252	500190
		&	Mid	2592.99	518598	2547.09	509418	102		6471	517710
		Uplink	High	2679.99	535998	2489.37	497874	504		6687	534990
30	78	Downlink	Low	2511	502200	2496.96	499392	0	30	6252	500190
		&	Mid	2592.99	518598	2542.23	508446	102		6456	516510
		Uplink	High	2674.98	534996	2479.5	495900	504		6663	533070
40	106	Downlink	Low	2516.01	503202	2496.93	499386	0	30	6252	500190
		&	Mid	2592.99	518598	2537.19	507438	102		6444	515550
		Uplink	High	2670	534000	2469.48	493896	504		6636	530910
50	133	Downlink	Low	2521.02	504204	2497.08	499416	0	30	6252	500190
		&	Mid	2592.99	518598	2532.33	506466	102		6432	514590
		Uplink	High	2664.99	532998	2459.61	491922	504		6612	528990
60	162	Downlink	Low	2526	505200	2496.84	499368	0	30	6252	500190
		&	Mid	2592.99	518598	2527.11	505422	102		6420	513630
		Uplink	High	2659.98	531996	2449.38	489876	504		6588	527070
80	217	Downlink	Low	2536.02	507204	2496.96	499392	0	30	6252	500190
		&	Mid	2592.99	518598	2517.21	503442	102		6396	511710
		Uplink	High	2649.99	529998	2429.49	485898	504		6537	522990
90	245	Downlink	Low	2541	508200	2496.9	499380	0	30	6252	500190
		&	Mid	2592.99	518598	2512.17	502434	102		6381	510510
		Uplink	High	2644.98	528996	2419.44	483888	504		6513	521070
100	273	Downlink	Low	2546.01	509202	2496.87	499374	0	30	6252	500190
		&	Mid	2592.99	518598	2507.13	501426	102		6369	509550
		Uplink	High	2640	528000	2409.42	481884	504		6486	518910

3.8.4 Reference test frequencies for NR operating band n41

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, terminal of the Domeshown.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 17 of 31

absoluteFre

quencySSB

[ARFCN]

422410

428910

435410

422430

428430

434430

_

422450

427950

433450

-

-

422650

427470

432530

-

422690

426510

430570

-

_

422670

425550

428670

-

_

5283

5319

5358

-

15

3.8.5 Reference test frequencies for NR operating band n66 3.8.5.1 Test frequencies for NR operating band n66 and SCS 15 kHz Carrier Carrier point A Band carrier Range absoluteF offsetTo SS GSCN requency width Bandwi centre centre [MHz] Carrier block [MHz] dth [MHz] [ARFCN] **PointA** [PRBs] SCS [PRBs] [ARFCN] [kHz] 422500 5 25 Downlink Low 2112.5 2110.25 422050 0 15 5279 2124.39 424878 102 Mid 2145 429000 5361 High 2177.5 435500 2084.53 416906 504 5443 Uplink Low 1712.5 342500 1710.25 342050 0 -Mid 1745 349000 1652.03 330406 504 1777.5 355500 1774.17 354834 6 High 10 52 Downlink 15 Low 2115 423000 2110.32 422064 0 5280 2145 2121.96 424392 102 5355 Mid 429000 2175 435000 2079.6 504 5430 High 415920 Uplink Low 1715 343000 1710.32 342064 0 _ -Mid 1745 349000 1649.6 329920 504 -1775 High 355000 1769.24 353848 6 79 15 Downlink 2117.5 423500 2110.39 422078 0 15 5281 Low Mid 2145 429000 2119.53 423906 102 5349 2172.5 504 High 434500 2074.67 414934 5417 1710.39 1717.5 342078 Uplink Low 343500 0 --Mid 1745 349000 1647.17 329434 504 -High 1772.5 354500 1764.31 352862 6 20 106 Downlink Low 2120 424000 2110.46 422092 0 15 5282 Mid 2145 429000 2117.1 423420 102 5343 High 2170 434000 2069.74 413948 504 5407 Uplink Low 1720 344000 1710.46 342092 0 -504 1745 349000 1644.74 328948 _ Mid 354000 1770 1759.38 High 351876 6 425000 2110.6 30 160 2125 422120 0 15 5284 Downlink Low Mid 2145 429000 2112.24 422448 102 5331 2165 411976 High 433000 2059.88 504 5381 Uplink 1725 342120

345000

349000

353000

426000

429000

432000

346000

349000

352000

1710.6

1639.88

1749.52

2110.56

2107.2

2049.84

1710.56

1634.84

1739.48

327976

349904

422112

421440

409968

342112

326968

347896

0

504

6

0

102

504

0

504

6



216

40

Low

Mid

High

Low

Mid High

Low

Mid

High

Downlink

Uplink

1745

1765

2130

2145

2160

1730

1745

1760

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and <u>unisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test dand such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,</u>

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sasaroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

> Report No.: AR/2020/C000207-01 Page: 18 of 31

3.8.6Reference test frequencies for NR operating band n77

3.8.6.1 Test frequencies for NR operating band n77 and SCS 30 kHz carrier Range Carrier Carrier point A absoluteF SS GSCN Band offsetTo absoluteFre requency width Bandw centre centre [MHz] Carrier block quencySSB [MHz] idth [MHz] **[ARFC PointA** [Carrier SCS [ARFCN] [PRBs] [ARFCN] PRBs] [kHz] N] 3710.01 Downlink Low Mid ጲ Uplink High 3969.99 Downlink 3715.02 Low & Mid Uplink High 3964.98 Downlink Low Mid & Uplink High Low Downlink 3725.01 & Mid Uplink High 3954.99 Downlink 3730.02 Low & Mid Uplink High 3949.98 Downlink Low & Mid Uplink High Downlink Low 3740.01 ጲ Mid Uplink High 3939.99 Downlink Low 3745.02 Mid & Uplink 3934.98 High Downlink Low Mid ጲ Uplink High



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enD-coument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test reation, forgery or faisification only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email: CN Doccheck@ass.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 •深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Report No.: AR/2020/C000207-01 Page: 19 of 31

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

4.2 Effective (Isotropic) Radiated Power of Transmitter

```
Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015)
Calculate power in dBm by the following formula:
ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)
EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)
EIRP=ERP+2.15dB
```

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1





Report No.: AR/2020/C000207-01 Page: 20 of 31

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within

1 - 5% of the 99% occupied bandwidth observed in Step 7

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW ≥ 1% of the emission bandwidth
- 4. $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

4.5 Spurious And Harmonic Emissions at Antenna Terminal


Measurement Procedure: FCC KDB 971168 D01 V03r01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

 No.1 Workhon, M-10 Middle Section, Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cm

 中国 • 梁圳 • 科技图中区M-10栋 - 号厂房
 邮编: 518057
 t (86-755) 26012053 f (86-755) 26710594
 sgs.china@sgs.com



The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@egs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

Report No.: AR/2020/C000207-01 Page: 22 of 31

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation or liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlavful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of lesting inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

No.1 Workhon, M-10, Midde Bection, Science & Technology Park, Shenzhen, China 518057
t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.on

ngli • 梁il. • 梁il. • Atbade hereol. • Clience & Technology Park, Shenzhen, China 518057
t (86-755) 26012053 f (86-755) 26710594

Report No.: AR/2020/C000207-01 Page: 23 of 31

EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi) EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete.

Remark: Reference test setup 3

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits.

However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

4) All modes have been tested, but only the worst case data displayed in this report.

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoncrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com (No.1) Widdle Section, %Intor, Middle Section, %Intor, %Intor,

> Report No.: AR/2020/C000207-01 Page: 24 of 31

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-enD-comment.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification on the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 •深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 25 of 31

4.9 Test Setups

4.9.1 Test Setup 1

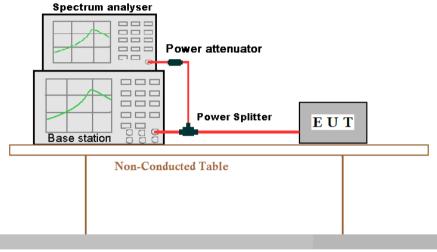

Ground Reference Plane

4.9.2 Test Setup 2


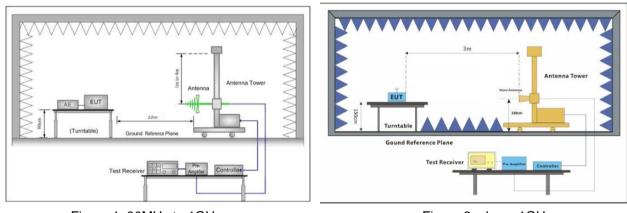


Figure 1. 30MHz to 1GHz

中国·深圳·科技园中区M-10栋一号厂房





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ggs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a papearance, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offender may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sampt (s) tested and such samptle(s) are retained for 30 days only. Attention: To check the authenticity of testing //inspection report & certificate, please contact us at telephone: (86-755)80071443, or email: Ch.Doccheck@ags.com

邮编: 518057

Member of the SGS Group (SGS SA)

sgs.china@sgs.com

t (86-755) 26012053 f (86-755) 26710594



Report No.: AR/2020/C000207-01 Page: 26 of 31

4.9.3 Test Setup 3




Figure 1. Below 30MHz


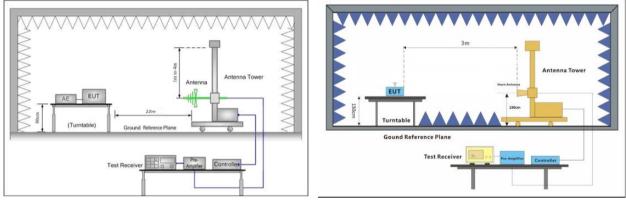


Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz

4.9.4 Test Setup 4

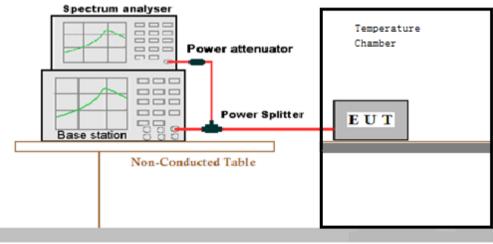

Ground Reference Plane



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

 No.1 Workhon, M-10, Midde Section, Science & Technology Park, Shenzhen, China 518057
 t (86-755) 26012053 f (86-755) 26710594
 www.sgsgroup.com.cn

 中国 -梁圳·科技图中区M-10栋一号厂房
 鄭编: 518057
 t (86-755) 26012053 f (86-755) 26710594
 sgs.china@sgs.com

SGS SG

SGS-CSTC Standards Technical Services Co., Ltd.Shenzhen Branch

> Report No.: AR/2020/C000207-01 Page: 27 of 31

4.10Test Conditions

Test Case		Test Conditions			
		Test Environment	Ambient Climate & Rated Voltage		
	Average	Test Setup	Test Setup 1		
	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Transmit Output		Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8;NR/TM9		
Power	Average	Test Environment	Ambient Climate & Rated Voltage		
Data	Average Power,	Test Setup	Test Setup 1		
	Spectral Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
	required)	Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8;NR/TM9		
		Test Environment	Ambient Climate & Rated Voltage		
Peak-to-Ave	erage Ratio	Test Setup	Test Setup 1		
(if required)		RF Channels (TX)	M (M= middle channel)		
		Test Mode	NR/TM1;NR/TM6		
		Test Environment	Ambient Climate & Rated Voltage		
Modulation		Test Setup	Test Setup 1		
Characteris	tics	RF Channels (TX)	M (M= middle channel)		
		Test Mode	NR/TM1;NR/TM6		
		Test Environment	Ambient Climate & Rated Voltage		
		Test Setup	Test Setup 1		
	Occupied Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Bandwidth		Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8;NR/TM9		
Danawidin		Test Environment	Ambient Climate & Rated Voltage		
	Emission	Test Setup	Test Setup 1		
	Bandwidth (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
	required)	Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8;NR/TM9		
Dond Edge		Test Environment	Ambient Climate & Rated Voltage		
Band Edges Compliance		Test Setup	Test Setup 1		
		RF Channels (TX)	L, H (L= low channel, H= high channel)		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. S findee at least extend to the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 28 of 31

	Test Mode	NR/TM1;NR/TM6			
	Test Environment	Ambient Climate & Rated Voltage			
	Test Setup	Test Setup 1			
Spurious Emission at Antenna Terminals	RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel)			
	Test Mode	NR/TM1			
	Test Environment	Ambient Climate & Rated Voltage			
	Test Setup	Test Setup 2			
Field Strength of Spurious Radiation	Test Mode	NR/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.			
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= hi channel)			
	Test Environment	 (1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate. 			
Frequency Stability	Test Setup	Test Setup 4			
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
	Test Mode	NR/TM1;NR/TM6			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or comail (ND pocchedicas come).

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: AR/2020/C000207-01 Page: 29 of 31

5 Main Test Instruments

RF conducted test								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm- dd)	Cal.Due date (yyyy-mm- dd)			
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2020/10/22	2021/10/21			
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15			
Signal Analyzer	KEYSIGHT	N9020A	MY48011756	2020/4/16	2021/4/15			
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A			
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2020/10/22	2021/10/21			
Temperature Chamber	GIANT FORCE	ICT-150- 40-CP-AR	W027-03	2020/10/22	2021/10/21			
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY59321333	2020/12/3	2021/12/3			

RSE Test System							
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date		
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10		
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2020-04-02	2021-04-01		
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10		
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12		
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12		
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12		
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR		
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR		
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR		
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR		
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2020-10-26	2021-10-25		
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2020-10-26	2021-10-25		
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2020-10-27	2021-10-26		
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2020-10-26	2021-10-25		
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2020-11-06	2021-11-05		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 30 of 31

Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR
5G UXM	Keysight	E7515B	XAW01-19-02	2020-09-11	2021-09-10
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2020-04-02	2021-04-01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) tested and such sample(s) ters retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, recommit of the Dependence of the sample (s) tested and such sample(s) ters for a days only.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com



Report No.: AR/2020/C000207-01 Page: 31 of 31

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Lab A:		
Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.37 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = ±2.0 dB
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm

Lab B:

No.	Item Measurement Uncertainty			
		± 4.8dB (Below 1GHz)		
1	Radiated Emission	± 4.8dB (1GHz to 6GHz)		
1		± 4.5dB (6GHz to 18GHz)		
		± 5.02dB (Above 18GHz)		

7 Appendixes

Appendix A	Photographs of Set-Up for AR/2020/C0002	
Appendix B.17	N5	
Appendix B.18	N7	
Appendix B.19	N38	
Appendix B.20	N41	
Appendix B.21	N66	
Appendix B.22	N77	

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cose not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document tips offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check disg.com (Mode Section, Section 4 Echnology Park, Shenzhen, China 518057" t (86–755) 26012053 f (86–755) 26710594" www.sgsgroup.com.cn

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com