



FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Wireless Earphones
BRAND NAME : Redmi
MODEL NAME : M2429E1
FCC ID : 2AFZZM2429E1
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Aug. 13, 2024 ~ Aug. 14, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 6

 1.6. Test Location 6

 1.7. Test Software 6

 1.8. Applicable Standards 6

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1. Test Mode 7

 2.2. Connection Diagram of Test System 8

 2.3. Supported Unit Used in Test Configuration and System 8

 2.4. EUT Operation Test Setup 9

3. TEST RESULT 10

 3.1. Test of AC Conducted Emission Measurement 10

 3.2. Test of Radiated Emission Measurement 14

4. LIST OF MEASURING EQUIPMENT 19

5. MEASUREMENT UNCERTAINTY 20

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 8.61 dB at 0.346 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 13.39 dB at 250.190 MHz

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2. Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Earphones
Brand Name	Redmi
Model Name	M2429E1
FCC ID	2AFZZM2429E1
EUT supports Radios application	Bluetooth BR/EDR/LE
SN	Sample 1: Radiation Left: LL24070600598 Right: YY24070600646 Conduction Left: LL24070600669 Right: YY24070600661 Sample 2: Radiation Left: LL24070600692 Right: YY24070600175 Conduction Left: LL24070600686 Right: YY24070600666
HW Version	V1.2
SW Version	O77_A_1.0.5.5_240713
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the sample 1 is 1st source + Battery 1 and the sample 2 is 2nd source + Battery 2. According to the difference, we choose sample 1 to full test and the sample 2 is verified for the difference.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	Bluetooth: 2400 MHz ~ 2483.5 MHz
Rx Frequency	Bluetooth: 2400 MHz ~ 2483.5 MHz
Antenna Type	Bluetooth : Monopole Antenna
Type of Modulation	Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH01-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: Headphone box 1 with earphone + USB Cable 1(Charging from Adaptor) for Sample 1 Mode 2: Headphone box 1 with earphone + USB Cable 2(Charging from Adaptor) for Sample 1 Mode 3: Headphone box 2 with earphone + USB Cable 2(Charging from Adaptor) for Sample 1 Mode 4: Headphone box 1 with earphone + USB Cable 2(Charging from Adaptor) for Sample 2
Radiated Emissions	Mode 1: Bluetooth Link With Phone + Mic + Voice call for sample 1 Mode 2: Bluetooth Link With NB + Play Music (Audio 1KHz) for sample 1 Mode 3: Headphone box 1 with earphone + USB Cable 1(Charging from Adaptor) for sample 1 Mode 4: Headphone box 1 with earphone + USB Cable 2(Charging from Adaptor) for sample 1 Mode 5: Headphone box 2 with earphone + USB Cable 1(Charging from Adaptor) for sample 1 Mode 6: Headphone box 1 with earphone + USB Cable 1(Charging from Adaptor) for sample 2
Remark: 1. The worst case of AC is mode 2; only the test data of this mode is reported. 2. The worst case of RE is mode 3; only the test data of this mode is reported.	

2.2. Connection Diagram of Test System

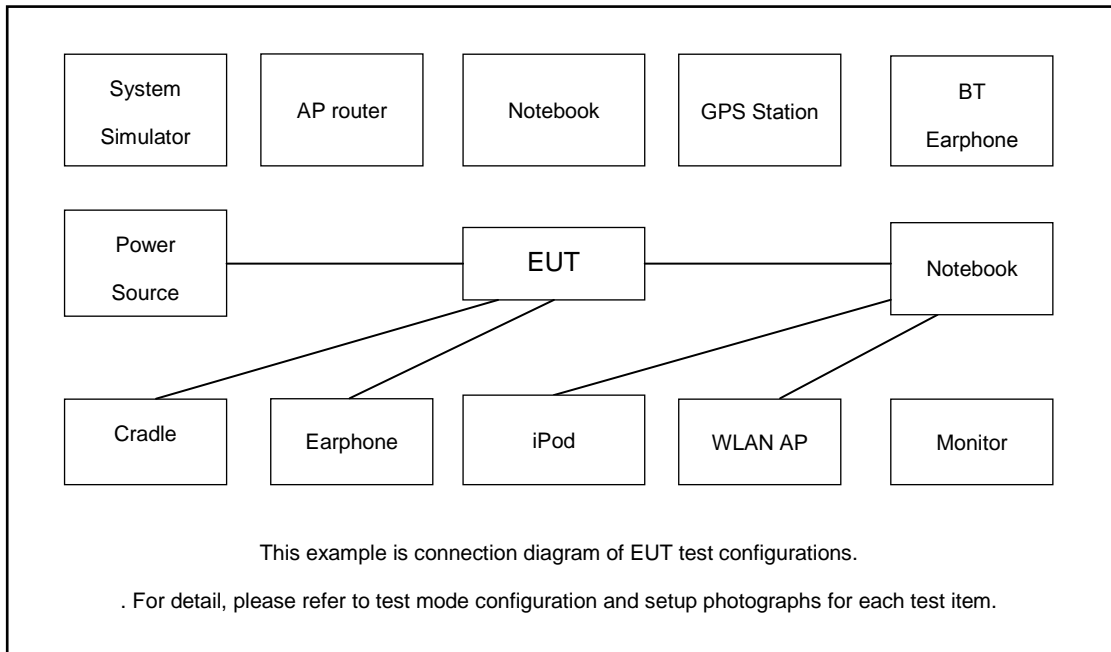

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Supported Unit Used in Test Configuration and System

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-815	KA2DIR815A1	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	(USB) Mouse	DELL	MS111-L	FCC DoC	Shielded, 1.4 m	N/A
5.	USB HD	Lenovo	F310	N/A	Unshielded, 1.0m	N/A
6.	Mobile Phone	N/A	N/A	N/A	N/A	N/A
7.	Adapter	N/A	N/A	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was attached to the Phone or Notebook for voice calling or playing music.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

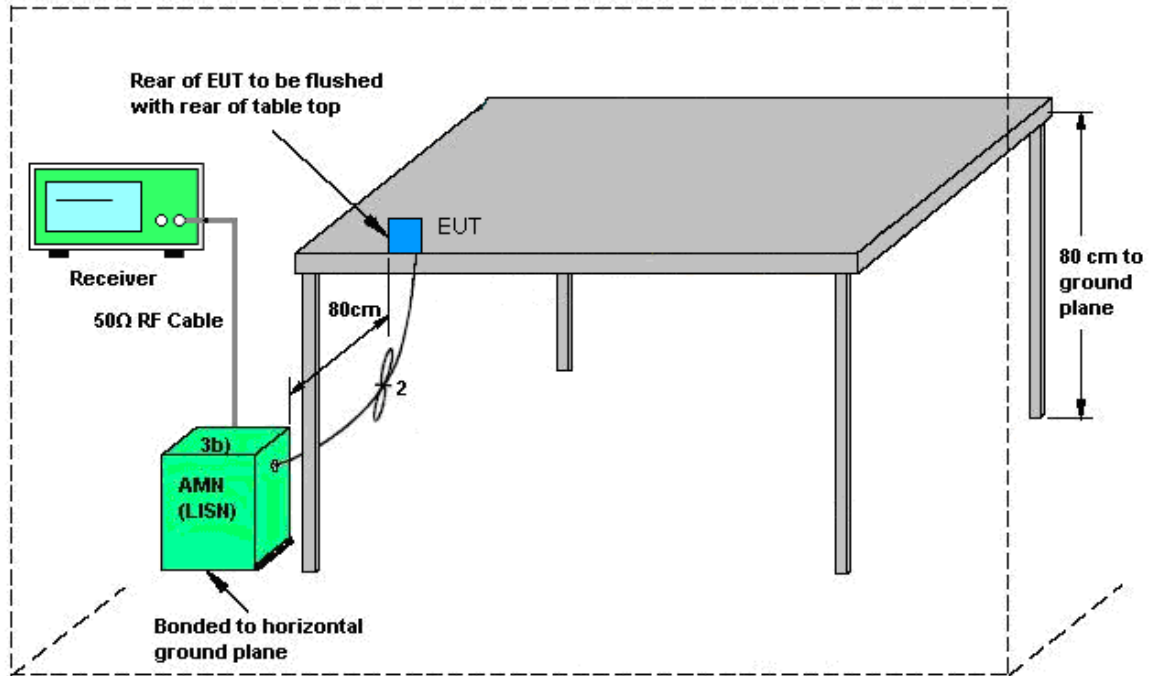


AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

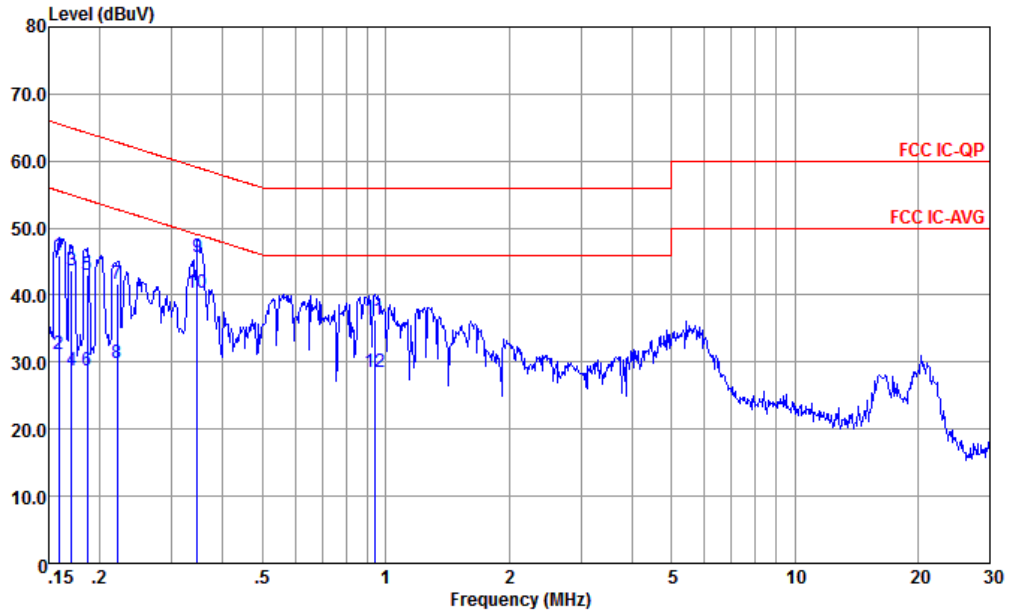


Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.159	45.93	-19.59	65.52	35.40	0.11	10.42	QP
2	0.159	31.13	-24.39	55.52	20.60	0.11	10.42	Average
3	0.170	43.72	-21.22	64.94	33.20	0.10	10.42	QP
4	0.170	28.82	-26.12	54.94	18.30	0.10	10.42	Average
5	0.186	43.00	-21.20	64.20	32.50	0.09	10.41	QP
6	0.186	28.70	-25.50	54.20	18.20	0.09	10.41	Average
7	0.221	41.59	-21.20	62.79	31.12	0.08	10.39	QP
8	0.221	29.77	-23.02	52.79	19.30	0.08	10.39	Average
9	0.346	45.74	-13.31	59.05	35.40	0.03	10.31	QP
10 *	0.346	40.44	-8.61	49.05	30.10	0.03	10.31	Average
11	0.938	36.22	-19.78	56.00	26.29	-0.17	10.10	QP
12	0.938	28.52	-17.48	46.00	18.59	-0.17	10.10	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

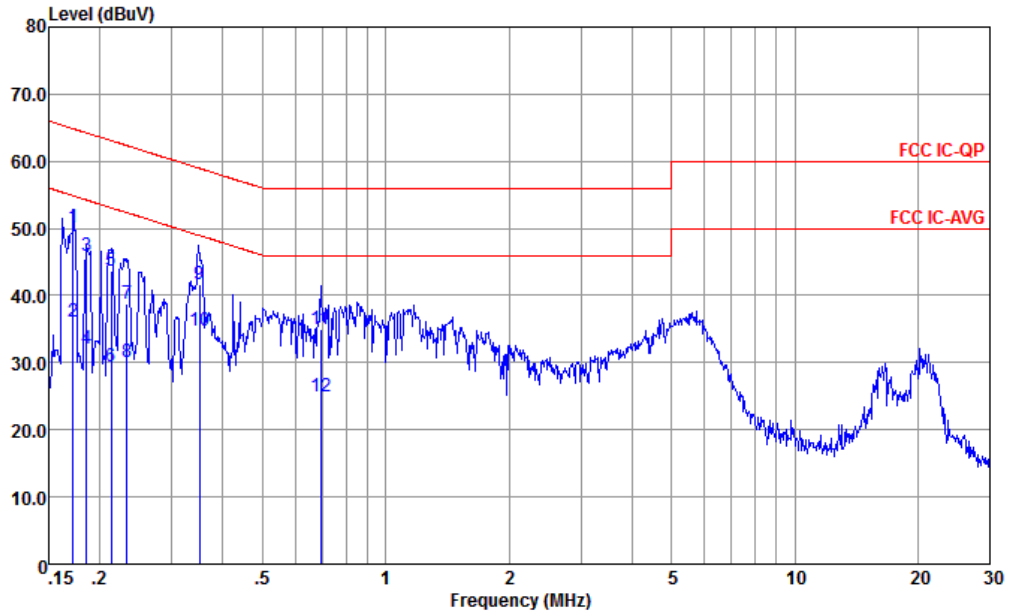

Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.172	50.14	-14.72	64.86	39.60	0.12	10.42	QP
2	0.172	36.14	-18.72	54.86	25.60	0.12	10.42	Average
3	0.185	45.84	-18.40	64.24	35.30	0.13	10.41	QP
4	0.185	32.04	-22.20	54.24	21.50	0.13	10.41	Average
5	0.213	43.79	-19.31	63.10	33.30	0.09	10.40	QP
6	0.213	29.39	-23.71	53.10	18.90	0.09	10.40	Average
7	0.233	38.72	-23.63	62.35	28.31	0.03	10.38	QP
8	0.233	30.02	-22.33	52.35	19.61	0.03	10.38	Average
9	0.350	41.68	-17.28	58.96	31.51	-0.13	10.30	QP
10 *	0.350	34.78	-14.18	48.96	24.61	-0.13	10.30	Average
11	0.694	34.88	-21.12	56.00	24.90	-0.16	10.14	QP
12	0.694	24.88	-21.12	46.00	14.90	-0.16	10.14	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

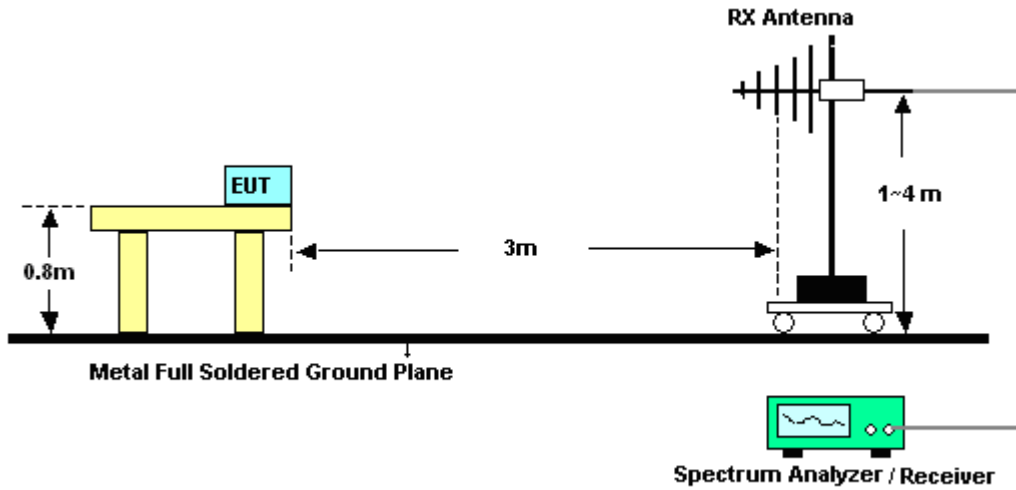


For radiated emissions above 1GHz

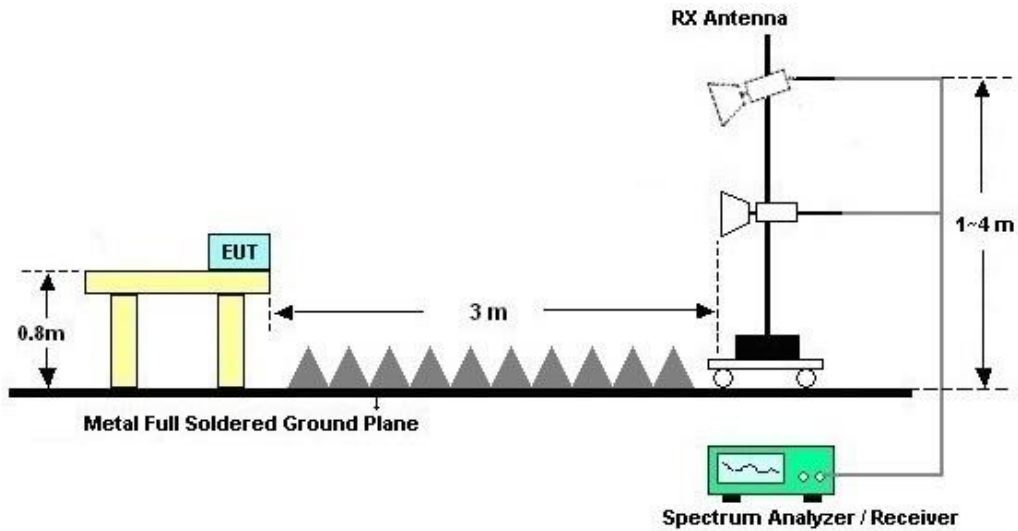



3.2.5. Test Result of Radiated Emission

Test Engineer :	Peng Fang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

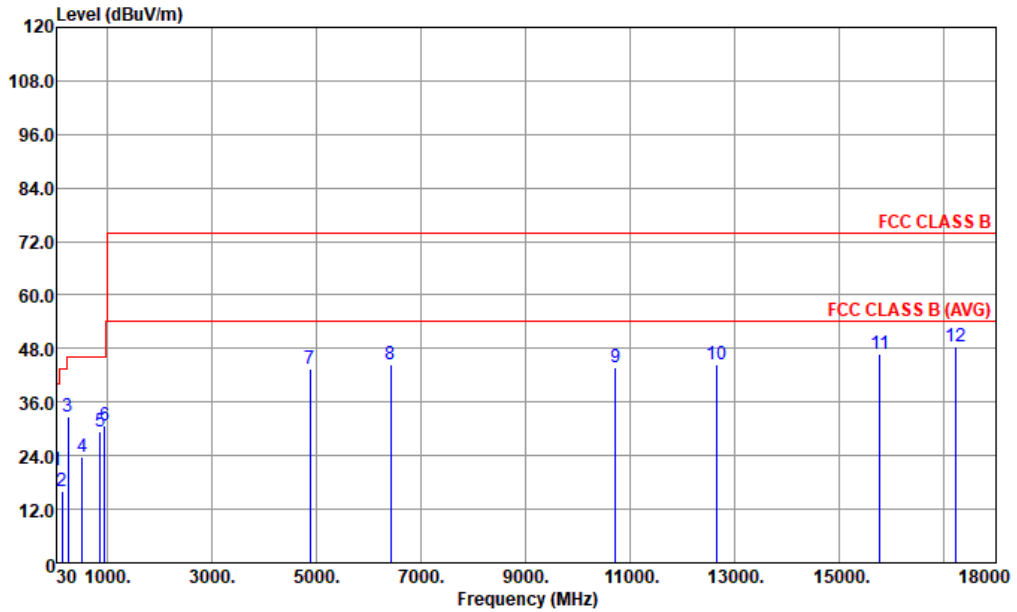


Site : 03CH02-KS
 Condition : FCC CLASS B 3m 59913 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	20.70	-19.30	40.00	28.07	24.68	0.76	32.81	---	---	Peak
2	130.88	15.98	-27.52	43.50	29.43	17.55	1.69	32.69	---	---	Peak
3	250.19	32.61	-13.39	46.00	45.09	18.31	2.10	32.89	---	---	Peak
4	523.73	23.78	-22.22	46.00	29.66	24.14	3.16	33.18	---	---	Peak
5	860.32	29.54	-16.46	46.00	28.33	29.43	4.31	32.53	---	---	Peak
6	956.35	30.71	-15.29	46.00	26.80	30.91	4.60	31.60	---	---	Peak
7	4876.00	43.38	-30.62	74.00	64.04	34.00	10.87	65.53	---	---	Peak
8	6423.00	44.51	-29.49	74.00	62.09	35.51	12.60	65.69	---	---	Peak
9	10724.00	43.74	-30.26	74.00	56.39	37.68	16.43	66.76	---	---	Peak
10	12662.00	44.34	-29.66	74.00	53.06	39.00	17.97	65.69	---	---	Peak
11	15773.00	46.88	-27.12	74.00	50.51	40.28	20.15	64.06	---	---	Peak
12	17235.00	48.51	-25.49	74.00	50.52	41.18	21.10	64.29	---	---	Peak



Test Engineer :	Peng Fang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

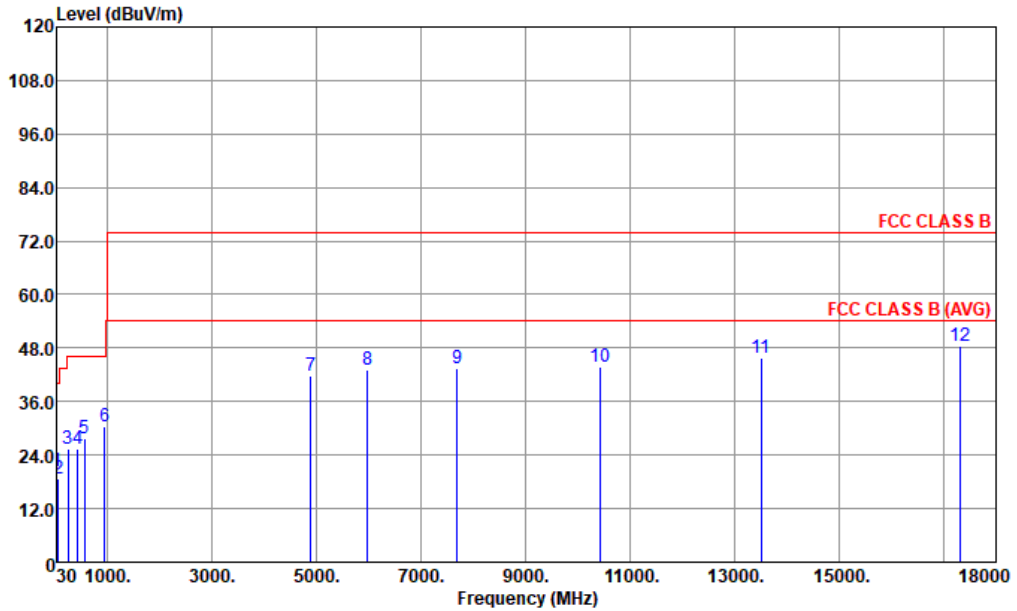

Site : O3CH02-KS
 Condition : FCC CLASS B 3m 59913 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	30.00	20.49	-19.51	40.00	27.86	24.68	0.76	32.81	---	Peak
2	68.80	18.86	-21.14	40.00	38.34	12.06	1.17	32.71	---	Peak
3	250.19	25.31	-20.69	46.00	37.79	18.31	2.10	32.89	---	Peak
4	444.19	25.47	-20.53	46.00	32.68	22.73	3.12	33.06	---	Peak
5	566.41	27.64	-18.36	46.00	31.53	26.02	3.34	33.25	---	Peak
6 p	945.68	30.55	-15.45	46.00	27.14	30.55	4.58	31.72	---	Peak
7	4893.00	41.85	-32.15	74.00	62.52	34.00	10.87	65.54	---	Peak
8	5981.00	43.13	-30.87	74.00	61.28	35.36	11.99	65.50	---	Peak
9	7698.00	43.62	-30.38	74.00	60.64	36.03	13.83	66.88	---	Peak
10	10418.00	43.72	-30.28	74.00	56.93	37.48	16.24	66.93	---	Peak
11	13512.00	45.89	-28.11	74.00	53.22	38.95	18.60	64.88	---	Peak
12	17320.00	48.48	-25.52	74.00	50.55	41.17	21.13	64.37	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2023	Aug. 13, 2024~Aug. 14, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 11, 2023	Aug. 13, 2024~Aug. 14, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 06, 2023	Aug. 13, 2024~Aug. 14, 2024	Dec. 05, 2024	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 13, 2024~Aug. 14, 2024	Oct. 22, 2024	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 13, 2024~Aug. 14, 2024	Jan. 26, 2025	Radiation (03CH02-KS)
Amplifier	EM	EM18G40GGA	060852	18~40GHz	Jan. 02, 2024	Aug. 13, 2024~Aug. 14, 2024	Jan. 01, 2025	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Aug. 13, 2024~Aug. 14, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
Amplifier	EM	EM01G18G	060806	1GHz~18GHz	Oct. 11, 2023	Aug. 13, 2024~Aug. 14, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 13, 2024~Aug. 14, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 13, 2024~Aug. 14, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 13, 2024~Aug. 14, 2024	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr 18, 2024	Aug. 14, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 14, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr 18, 2024	Aug. 14, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 14, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.12dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.30dB
---	--------

----- THE END -----