

Report No.: SZCR240100035201 01

Rev.:

Page: 1 of 39

## **TEST REPORT**

**Application No.:** 

SZCR2401000352WM

**Applicant:** 

Xiaomi Communications Co., Ltd.

**Address of Applicant:** 

#019, 9th Floor, Building 6, 33 Xi'ergi Middle Road, Haidian District, Beijing,

China

Manufacturer:

Xiaomi Communications Co., Ltd.

**Address of Manufacturer:** 

#019, 9th Floor, Building 6, 33 Xi'ergi Middle Road, Haidian District, Beijing,

China

**EUT Description:** 

Mobile Phone

Model No.:

24049RN28L

Trade Mark:

Redmi

FCC ID:

2AFZZN28L

47 CFR Part 2

47 CFR Part 22

Standards:

47 CFR Part 24 47 CFR Part 27

47 CFR Part 90

Date of Receipt:

2024/03/01

Date of Test:

2024/03/06 to 2024/03/18

Date of Issue:

2024/03/22

#### Test Result:

PASS \*

Authorized Signature:

Keny Xu Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document oso not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053 sgs.china@sgs.com

In the configuration tested, the EUT detailed in this report complied with the standards specified above.



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:

SZCR240100035201

Rev.:

01

Page:

2 of 39

### Version

	Revision Record			
Version	Version Chapter Date Modifier Remark			
01		2024/03/22		Original

Prepared By	Jall Huang  (Jack Huang) / Test Engineer
Checked By	Flora Wang  (Flora Wang) / Reviewer





Report No.:

SZCR240100035201

Rev.:

01

3 of 39 Page:

### **Contents**

1	Versi	ion	2
2	Test	Summary	5
	2.1	GSM850/UMTS Band 5/LTE Band 5/26(824~849 MHz)	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	6
	2.3	UMTS Band 4 /LTE Band 4 /66	7
	2.4	LTE Band 7/38/41	8
	2.5	LTE Band 13	9
	2.6	LTE Band 26(814~824 MHz)	10
3	Gene	eral Information	11
	3.1	Details of Client	11
	3.2	Test Location	11
	3.3	Test Facility	11
	3.4	General Description of EUT	12
	3.5	Test Mode	13
	3.6	Test Environment	13
	3.7	Description of Support Units	13
	3.8	Technical Specification	14
	3.9	Test Frequencies	17
4	Desc	ription of Tests	24
	4.1	Conducted Output Power	24
	4.2	Effective (Isotropic) Radiated Power of Transmitter	25
	4.3	Occupied Bandwidth	26
	4.4	Band Edge at Antenna Terminals	27
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	28
	4.6	Peak-Average Ratio	29
	4.7	Field Strength of Spurious Radiation	30
	4.8	Frequency Stability / Temperature Variation	31
	4.9	Test Setups	32
		4.9.1 Test Setup 1	32
		4.9.2 Test Setup 2	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 www.sgsgroup.com.cn 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

t (86-755) 26012053 sgs.china@sgs.com



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240100035201

Rev.: 01 4 of 39 Page:

	4.9.3 Test Setup 3	33
	4.10 Test Conditions	
5	Main Test Instruments	36
6	Measurement Uncertainty	38
	Appendixes	





Report No.:

SZCR240100035201

Rev.:

01

Page:

5 of 39

#### 2 **Test Summary**

## 2.1 GSM850/UMTS Band 5/LTE Band 5/26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP≤7W	Section 1 of Appendix B.1&B.5&B.8&B.12	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 4 of Appendix B.1&B.5&B.8&B.12	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.1&B.5&B.8&B.12	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.5&B.8&B.12	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.1&B.5&B.8&B.12	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 6 of Appendix B.1&B.5&B.8&B.12	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §22.355	±2.5ppm.	Section 2 of Appendix B.1&B.5&B.8&B.12	Pass







Report No.:

SZCR240100035201

Rev.:

01

Page:

6 of 39

### 2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.2&B.3&B.6	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 4 of Appendix B.2&B.3&B.6	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.2&B.3&B.6	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.2&B.3&B.6	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.2&B.3&B.6	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 6 of Appendix B.2&B.3&B.6	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §24.235	Within authorized bands of operation/frequency block.	Section 2 of Appendix B.2&B.3&B.6	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 www.sgsgroup.com.cn

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

sgs.china@sgs.com





Report No.:

SZCR240100035201

Rev.:

01

7 of 39 Page:

### 2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.4&B.7&B.15	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 4 of Appendix B.4&B.7&B.15	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.4&B.7&B.15	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.4&B.7&B.15	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.4&B.7&B.15	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 6 of Appendix B.4&B.7&B.15	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B.4&B.7&B.15	Pass







Report No.: SZCR240100035201

Rev.: 01 8 of 39 Page:

### 2.4 LTE Band 7/38/41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.9&B.13&B.14	Pass
Peak-Average Ratio		≤13 dB	Section 4 of Appendix B.9&B.13&B.14	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.9&B.13&B.14	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.9&B.13&B.14	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz  9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 5 of Appendix B.9&B.13&B.14	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz  9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.9&B.13&B.14	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B.9&B.13&B.14	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057





Report No.:

SZCR240100035201

Rev.:

01

Page:

9 of 39

### 2.5 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.10	Pass
Peak-Average Ratio		Limit≤13 dB	Section 4 of Appendix B.10	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.10	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.10	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.  On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 5 of Appendix B.10	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz.  For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 6 of Appendix B.10	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §27.54	Within authorized bands of operation/frequency block.	Section 2 of Appendix B.10	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"





Report No.:

SZCR240100035201

Rev.: Page: 01

10 of 39

## 2.6 LTE Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B.11	Pass
Peak-Average Ratio		Limit≤13 dB	Section 4 of Appendix B.11	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.11	Pass
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B.11	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 5 of Appendix B.11	Pass
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 6 of Appendix B.11	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §90.213	Within authorized bands of operation/frequency block.	Section 2 of Appendix B.11	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

Report No.:

SZCR240100035201

Rev.:

01

Page:

11 of 39

#### **General Information** 3

### 3.1 Details of Client

Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch	
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China	
Post code:	518057	
Test engineer:	Jinhua Wei, Xing Guo	

## 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

#### • FCC -Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch has been recognized as an

accredited testing laboratory. Designation Number: CN1336.

Test Firm Registration Number: 787754



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/en/Terms-and-Conditions">https://www.sqs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@as.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

sgs.china@sgs.com



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:

SZCR240100035201

Rev.:

01

Page:

12 of 39

## 3.4 General Description of EUT

3.4 General Desc	cription of EU							
EUT Description:	Mobile Phone							
Model No.:	24049RN28L							
Trade Mark:	Redmi	Redmi						
Hardware Version:	1351N19A							
Software Version:	Xiaomi HyperOS 1.	.0						
Power Supply:	DC 3.84V from inte adapter.	rnal recha	argeable bat	tery which can	n be charged by AC/DC			
	RF Conducted		86758507	0033982				
IMEI:	RSE			585070033800 585070033818				
Antenna Type:	PIFA Antenna							
	GSM850:	-6dBi(A -5.1dBi	•	GSM1900:	0.1dBi(Ant1) -0.2dBi(Ant4)			
	WCDMA Band II:	0.1dBi(. -0.2dBi	-	WCDMA Bar	nd IV: 0dBi(Ant1) -2.1dBi(Ant4)			
	WCDMA Band V:	-6dBi(Ant1) -5.1dBi(Ant4)						
	LTE Band 2:	0.1dBi( -0.2dBi	•	LTE Band 4:	OdBi(Ant1) -2.1dBi(Ant4)			
Antenna Gain:	LTE Band 5:	-5.9dBi -5.1dBi	` '	LTE Band 7:	-0.2dBi(Ant1) -3.3dBi(Ant4)			
	LTE Band 13:	-5.7dBi -6.2dBi		LTE Band 26	6: -6dBi(Ant1) -5.1dBi(Ant4)			
	LTE Band 38:	-0.7dBi -3.2dBi		LTE Band 41	1: -0.2dBi(Ant1) -3.1dBi(Ant4)			
	LTE Band 66:	0dBi(Ar	nt1); -2.1dBi(	(Ant4)				
	Note: The antenna gain are derived from the gain information report provided by t manufacturer.							
	9kHz ~ 30MH	lz	30MHz ~	1000MHz	1000MHz ~ 2000MHz			
	(0.3dB)	(0.3dB) (0.6		SdB)	(0.8dB)			
RF Cable:	2000MHz ~ 4000 (1.1dB)	MHz		~ 6000MHz 3dB)	6000MHz ~ 12750MHz (2.6dB)			
	Above 12750MHz (3.5dB)							

Note: 1. Conduction Power & EIRP of all antennas are tested, and only the worst data is presented Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document oso not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@gs.com"

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

www.sgsgroup.com.cn sgs.china@sgs.com

Report No.:

SZCR240100035201

Rev.:

01

Page:

13 of 39

### 3.5 Test Mode

Test Mode	Test Modes Description			
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
GSM/TM2	GSM system, EGPRS, 8PSK modulation			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2	LTE system, 16QAM modulation			
LTE/TM3	LTE system, 64QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

### 3.6 Test Environment

Environment Parameter		101 kPa Selected Values During Tests			
Relative Humidity		44-46 % RH Ambient			
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	3.84		
LTLV		-30	3.6		
LTHV		-30	4.3		
HTLV		50	3.6		
HTHV		50	4.3		
Remark:					
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature LT: Low		Extreme Test Temperature	HT: High Extreme Test Temperature		

## 3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/en/Terms-and-Conditions">https://www.sqs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@as.com"



Report No.:

SZCR240100035201

Rev.:

01

Page:

14 of 39

## 3.8 Technical Specification

Characteristics	Description								
Radio System Type	⊠ GSM	⊠ UMTS							
	Band		TX	TX		RX			
	GSM850		824 1	824 to 849 MHz			869 to	89	4 MHz
	GSM1900		1850	) to 19	10 MHz		1930 t	o 19	990 MHz
	UMTS Band II		1850	) to 19	10 MHz		1930 t	o 19	990 MHz
	UMTS Band I\	/	1710	) to 17	55 MHz		2110 t	o 2	155 MHz
	UMTS Band V	1	824 1	to 849	MHz		869 to	89	4 MHz
	LTE Band 2		1850	) to 19 <sup>-</sup>	10 MHz		1930 t	o 19	990 MHz
	LTE Band 4		1710	) to 17	55 MHz		2110 t	o 2	155 MHz
Supported Frequency Range	LTE Band 5		824 1	to 849	MHz		869 to	89	4 MHz
Cappeniou i requency riange	LTE Band 7		2500	) to 25	70 MHz		2620 t	o 20	690 MHz
	LTE Band 13		777 to 787 MHz			746 to	746 to 756 MHz		
	LTE Band 26 (814 to 824 MHz )		814 to 824MHz			859 to 869 MHz			
	LTE Band 26 (824 to 849 MHz )		824 to 849 MHz			869 to	894	4 MHz	
	LTE Band 38		2570 to 2620 MHz			2570 t	2570 to 2620 MHz		
	LTE Band 41		2496 to 2690MHz			2496 t	o 20	690MHz	
	LTE Band 66		1710 to 1780 MHz			2110 t	2110 to 2200 MHz		
	GSM system:		⊠0.2 MHz						
	UMTS system	:	⊠5 MHz						
	LTE Dand 0		⊠1.4	MHz	⊠3 M	Hz	⊠5 MHz		⊠10 MHz
	LTE Band 2		⊠15	MHz	⊠20 N	ЛHz			
	LTE Bond 4		⊠1.4	l MHz	⊠3 M	Hz	⊠5 MHz		⊠10 MHz
Supported Channel Bandwidth	LTE Band 4		⊠15	MHz	⊠20 N	ЛHz			
	LTE Band 5		⊠1.4	MHz	⊠3 M	Hz	⊠5 MHz		⊠10 MHz
	LTE Band 7		⊠5 N	ЛHz	⊠10 N	ЛHz	⊠15 MH	z	⊠20 MHz
	LTE Band 13		⊠5 N	ЛHz	⊠10 N	ЛHz			
	LTE Band 26(8	814-824)	⊠1.4	I MHz	⊠3 M	Hz	⊠5 MHz		⊠10 MHz
	LTE Band 26(8	824-849)	⊠1.4	l MHz	⊠3 M	Hz	⊠5 MHz		⊠10 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

www.sgsgroup.com.cn sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:

SZCR240100035201

Rev.:

01

Page:

15 of 39

			Macke				
			⊠15 MH		<u> </u>	M	<u> </u>
	LTE Band38		⊠5 MHz		⊠10 MHz		⊠20 MHz
	LTE Band66				⊠3 MHz	⊠5 MHz	⊠10 MHz
				Z	⊠20MHz		
	Note: WCDMA support worst case was tested						out only the
Characteristics	Description	anu	ine data i	uisp	nayed iii tiii	з тероп.	
	GSM:	GM	SK	8F	PSK		
	GSM850		KGXW		2KG7W		
	GSM1900		KGXW		4KG7W		
	UMTS:	QPS		24	4KG/W		
	Band II		18F9W				
	Band IV	4M19F9W					
	Band V	4M20F9W			0.111		
	E-UTRA:	QP				64QAM	256QAM
	LTE Band 2		12G7D			1M11W7D	
Designation of Emissions			73G7D			2M74W7D	
Designation of Emissions (Remark: the necessary		4M5	55G7D	4N	155W7D	4M53W7D	
bandwidth of which is the		9M0	)7G7D	91	109W7D	9M08W7D	
worst value from the measured occupied		13N	16G7D	13	M6W7D	13M6W7D	
bandwidths for each type of		181	11G7D	18	M2W7D	18M1W7D	
channel bandwidth configuration.)		1M′	12G7D	11	/11W7D	1M12W7D	
comigaration.)		2M7	74G7D	21	//72W7D	2M75W7D	
	LTE Daniel 4	4M5	56G7D	41\	155W7D	4M55W7D	
	LTE Band 4	9M0	08G7D	91	107W7D	9M08W7D	
		131	16G7D	13	M6W7D	13M6W7D	
		181	11G7D	18	M2W7D	18M1W7D	
		1M <sup>2</sup>	12G7D	11	/12W7D	1M12W7D	
		2M7	73G7D	21	//72W7D	2M73W7D	
	LTE Band 5	4M5	56G7D	41	154W7D	4M55W7D	
		9M0	)5G7D	91	105W7D	9M08W7D	
	LTE Band 7	4M5	54G7D	41\	155W7D	4M54W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

www.sgsgroup.com.cn t (86-755) 26012053 sgs.china@sgs.com





Report No.:

SZCR240100035201

Rev.:

01

Page:

16 of 39

		9M07G7D	9M09W7D	9M07W7D	
		13M6G7D	13M6W7D	13M6W7D	
		18M1G7D	18M2W7D	18M1W7D	
	LTE Band13	4M58G7D	4M60W7D	4M59W7D	
	LIL Danu13	9M06G7D	9M09W7D	9M03W7D	
		1M12G7D	1M12W7D	1M11W7D	
	LTE Band 26	2M73G7D	2M71W7D	2M72W7D	
	(814-824)	4M55G7D	4M53W7D	4M55W7D	
		9M04G7D	9M05W7D	9M09W7D	
		1M12G7D	1M11W7D	1M11W7D	
	LTE Band 26	2M73G7D	2M73W7D	2M72W7D	
	(824-849)	4M54G7D	4M53W7D	4M55W7D	
		9M08G7D	9M06W7D	9M07W7D	
	LTE Band 38	4M55G7D	4M56W7D	4M55W7D	
		9M07G7D	9M08W7D	9M08W7D	
		13M6G7D	13M6W7D	13M6W7D	
		18M1G7D	18M1W7D	18M1W7D	
		4M55G7D	4M57W7D	4M55W7D	
	LTE Band 41	9M08G7D	9M08W7D	9M07W7D	
	LIE Dallu 41	13M6G7D	13M6W7D	13M6W7D	
		18M1G7D	18M1W7D	18M1W7D	
		1M12G7D	1M12W7D	1M11W7D	
		2M73G7D	2M73W7D	2M74W7D	
	LTE Band 66	4M58G7D	4M57W7D	4M58W7D	
	LIE Daliu 00	9M10G7D	9M10W7D	9M09W7D	
		13M6G7D	13M7W7D	13M6W7D	
		18M1G7D	18M1W7D	18M1W7D	
		l	I.	I.	





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.:

SZCR240100035201

Rev.:

01

Page:

17 of 39

## 3.9 Test Frequencies

Test Mode	Test Mode TX / RX		RF Channel				
rest widde	IA/ NA	Low (L)	Middle (M)	High (H)			
GSM850	TX	Channel 128	Channel 190	Channel 251			
		824.2MHz	836.6 MHz	848.8 MHz			
	RX	Channel 128	Channel 190	Channel 251			
		869.2 MHz	881.6 MHz	893.8 MHz			

Test Mode	TX / RX	RF Channel				
rest widde	IA/NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
CCM4000		1850.2MHz	1880.0 MHz	1909.8 MHz		
GSM1900	RX	Channel 512	Channel 661	Channel 810		
		1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TX / RX	RF Channel				
rest wode	IA/IX	Low (L)	Middle (M)	High (H)		
	TX	Channel 9262	Channel 9400	Channel 9538		
MCDMA Bond II	IA	1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDMA Band II	RX	Channel 9662	Channel 9800	Channel 9938		
		1932.4 MHz	1960.0 MHz	1987.6 MHz		

Test Mode	TX / RX	RF Channel				
rest ivioue	1// 1//	Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
MCDMA Bond IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
WCDMA Band IV	RX	Channel 1537	Channel 1638	Channel 1738		
	KΛ	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TX / RX	RF Channel				
I est Mode	IA/ NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 4132	Channel 4182	Channel 4233		
MCDMA Bond V		826.4MHz	836.4 MHz	846.6 MHz		
WCDMA Band V	RX	Channel 4357	Channel 4407	Channel 4458		
		871.4 MHz	881.4 MHz	891.6 MHz		







Report No.:

SZCR240100035201

Rev.:

01

Page:

18 of 39

Tari Maria	Decade 2 date	TV / DV	RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 18607	Channel 18900	Channel 19193	
		TX	1850.7 MHz	1880 MHz	1909.3 MHz	
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193	
		KA	1930.7 MHz	1960 MHz	1989.3 MHz	
			Channel 18615	Channel 18900	Channel 19185	
		TX	1851.5 MHz	1880 MHz	1908.5 MHz	
	3MHz	RX	Channel 615	Channel 900	Channel 1185	
		NA	1931.5 MHz	1960 MHz	1988.5 MHz	
		,	Channel 18625	Channel 18900	Channel 19175	
	5MHz	TX	1852.5 MHz	1880 MHz	1907.5 MHz	
		RX	Channel 625	Channel 900	Channel1175	
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz	
LTE Banu Z		,	Channel 18650	Channel 18900	Channel 19150	
		TX	1855 MHz	1880 MHz	1905 MHz	
	10MHz	RX	Channel 650	Channel 900	Channel 1150	
		NA	1935 MHz	1960 MHz	1985 MHz	
			Channel 18675	Channel 18900	Channel 19125	
		TX	1857.5 MHz	1880 MHz	1902.5 MHz	
	15MHz	RX	Channel 675	Channel 900	Channel 1125	
		IXX	1937.5 MHz	1960 MHz	1982.5 MHz	
			Channel 18700	Channel 18900	Channel 19100	
		TX	1860 MHz	1880 MHz	1900 MHz	
	20MHz	RX	Channel 700	Channel 900	Channel 1100	
		KΛ	1940 MHz	1960 MHz	1980 MHz	







Report No.:

SZCR240100035201

Rev.:

01

Page:

19 of 39

Took Mode	Dana alived alth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	DV	Channel 1975	Channel 2175	Channel 2375
		RX	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		NΛ	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	5MHz	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Band 4	10MHz	TX	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		100	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		ľΛ	2120 MHz	2132.5MHz	2145 MHz

Toot Mode	Dondwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		KA	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
LTE Davide			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625
	ENALL-		826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
		KA	871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		IVA	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

www.sgsgroup.com.cn t (86-755) 26012053 sgs.china@sgs.com





Report No.:

SZCR240100035201

Rev.:

01

Page:

20 of 39

Took Mode	Danielo dalle	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		KA	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
1.TE D 1.7			2625 MHz	2655 MHz	2685 MHz
LTE Band 7		TX	Channel 20825	Channel 21100	Channel 21375
	45141		2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	RX	Channel 2825	Channel 3100	Channel 3375
		KX	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
		NΛ	2630 MHz	2655 MHz	2680 MHz

Test Mode	Bandwidth	TX / RX	RF Channel			
i est iviode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 23025	Channel 23230	Channel 23255	
		TX	779.5 MHz	782 MHz	784.5 MHz	
	5MHz	RX	Channel 5205	Channel 5230	Channel 5255	
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz	
LIE Dallu 13	10MHz	TX	Channel 23230	Channel 23230	Channel 23230	
			782 MHz	782 MHz	782 MHz	
		DV	Channel 5230	Channel 5230	Channel 5230	
		RX	751 MHz	751 MHz	751 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"





Report No.:

SZCR240100035201

Rev.:

01

Page:

21 of 39

Took Mode	Donalis i déla	TV / DV	TV / DV		
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26697	Channel 26740	Channel 26783
		TX	814.7 MHz	819 MHz	823.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783
		KΛ	859.7 MHz	864MHz	868.3 MHz
			Channel 26705	Channel 26740	Channel 26775
	3MHz	TX	815.5 MHz	819 MHz	822.5 MHz
		RX	Channel 8705	Channel 8740	Channel 8775
LTE Band 26			860.5 MHz	864MHz	867.5 MHz
(814-824)		TX	Channel 26715	Channel 26740	Channel 26765
(0.1.02.)	CM I		816.5 MHz	819 MHz	821.5 MHz
	5MHz	RX	Channel 8715	Channel 8740	Channel 8755
			861.5 MHz	864MHz	866.5 MHz
			Channel 26740	Channel 26740	Channel 26740
		TX	819 MHz	819 MHz	819 MHz
	10MHz	DV	Channel 8740	Channel 8740	Channel 8740
		RX	864MHz	864MHz	864MHz

Tari Marila	D d - 2.10.	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26797	Channel 26915	Channel 27033
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033
		INA	859.7 MHz	881.5 MHz	893.3 MHz
		>-	Channel 26805	Channel 26915	Channel 27025
	0.44.1	TX	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	RX	Channel 8805	Channel 8915	Channel 9025
		KΛ	860.5 MHz	881.5 MHz	892.5 MHz
	5MHz	TX	Channel 26815	Channel 26915	Channel 27015
LTE Band26			826.5 MHz	836.5 MHz	846.5 MHz
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015
(= : : : : )			871.5 MHz	881.5 MHz	891.5 MHz
		TX	Channel 26840	Channel 26915	Channel 26990
			829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 8840	Channel 8915	Channel 8990
		IXX	874 MHz	881.5 MHz	889 MHz
			Channel 26865	Channel 26915	Channel 26965
		TX	831.5 MHz	836.5 MHz	841.5 MHz
	15MHz	RX	Channel 8865	Channel 8915	Channel 8965
		INΛ	876.5 MHz	881.5 MHz	886.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

www.sgsgroup.com.cn sgs.china@sgs.com





Report No.:

SZCR240100035201

Rev.:

01

Page:

22 of 39

Test Mode	Bandwidth	TX / RX	RF Channel			
i est Mode	Dariuwiuiri	17/87	Low (L)	Middle (M)	High (H)	
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225	
	SIVITZ	17/107	2572.5 MHz	2595 MHz	2617.5 MHz	
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200	
LTE Band 38			2575 MHz	2595 MHz	2615 MHz	
LIE Danu 30	15MHz TX	TX/RX	Channel 37825	Channel38000	Channel 38175	
		IA/IXA	2577.5 MHz	2595 MHz	2612.5 MHz	
	20MH-	TX/RX	Channel 37850	Channel38000	Channel 38150	
	20MHz I X/RX	2580 MHz	2595 MHz	2610 MHz		

Toot Made	Bandwidth	TX / RX	RF Channel			
Test Mode	Danawiatri	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 39675	Channel40620	Channel 41565	
	5MHz	TX / RX	2498.5 MHz	2593 MHz	2687.5 MHz	
			Channel 39700	Channel40620	Channel 41540	
LTE Band 41	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz	
(2496-2690)			Channel 39725	Channel40620	Channel 41515	
,	15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz	
			Channel 39750	Channel40620	Channel 41490	
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz	







Report No.:

SZCR240100035201

Rev.:

01

Page:

23 of 39

Test Mode	Bandwidth	TX / RX		RF Channel	
i est iviode	Danuwidin	IA/RA	Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329
		KA	2110.7 MHz	2145MHz	2199.3 MHz
			Channel 131987	Channel 132322	Channel 132657
		TX	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	RX	Channel 66451	Channel 66786	Channel 67321
		KA	2111.5 MHz	2145MHz	2198.5MHz
			Channel 131997	Channel 132322	Channel 132647
		TX	1712.5 MHz	1745 MHz	1777.5 MHz
	5MHz	RX	Channel 66461	Channel 66786	Channel 67311
LTE Davideo			2112.5 MHz	2145MHz	2197.5 MHz
LTE Band66	10MHz	TX	Channel 132022	Channel 132322	Channel 132622
			1715 MHz	1745 MHz	1775 MHz
		RX	Channel 66486	Channel 66786	Channel 67286
			2115 MHz	2145MHz	2195 MHz
			Channel 132047	Channel 132322	Channel 132597
		TX	1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261
		1070	2117.5 MHz	2145MHz	2192.5 MHz
			Channel 132072	Channel 132322	Channel 132572
		TX	1720 MHz	1745 MHz	1770 MHz
	20MHz	DV	Channel 66536	Channel 66786	Channel 67236
		RX	2120 MHz	2145MHz	2190 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

Report No.: SZCR240100035201 01

Rev.:

Page: 24 of 39

#### 4 **Description of Tests**

## 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1





Report No.: SZCR240100035201 01

Rev.:

Page: 25 of 39

## 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's soile responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CM.Doccheck@ags.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

sgs.china@sgs.com



Report No.:

SZCR240100035201

Rev.:

01

Page:

26 of 39

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7





Report No.: SZCR240100035201 01

Rev.:

27 of 39 Page:

## 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### Remark: Reference test setup 1

#### Test Settings

- Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Report No.:

SZCR240100035201

Rev.:

01

Page:

28 of 39

## 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings





Report No.: SZCR240100035201

Rev.: 01

29 of 39 Page:

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

### Remark: Reference test setup 1

### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Report No.:

SZCR240100035201

Rev.:

01

Page:

30 of 39

## 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the Z axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi-Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the Z axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Report No.:

SZCR240100035201

Rev.:

01

Page:

31 of 39

## 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### **Time Period and Procedure:**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZCR240100035201 01

Rev.:


Page: 32 of 39


## 4.9 Test Setups

#### 4.9.1 **Test Setup 1**

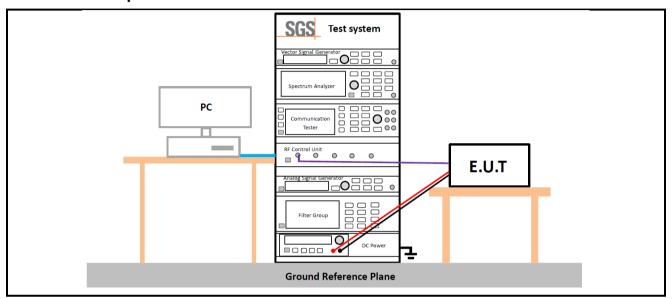

#### 4.9.2 **Test Setup 2**







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZCR240100035201

Rev.: 01

Page: 33 of 39

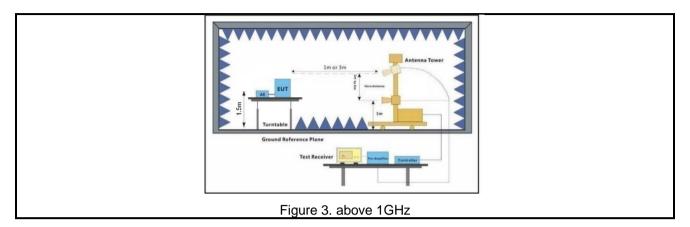

#### 4.9.3 **Test Setup 3**

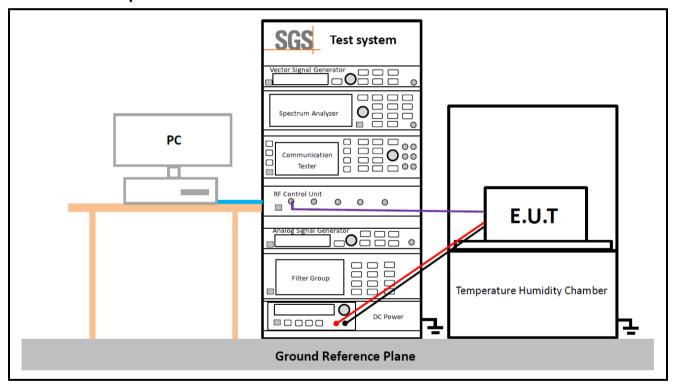





Report No.:

SZCR240100035201

Rev.:

01

Page:

34 of 39

### 4.10Test Conditions

4.101651 CON	JIIIO115
	Transmit Output Power Data - Average Power, Total
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3
	Peak-to-Average Ratio
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3
	Bandwidth - Occupied Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3
	Bandwidth - Emission Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3
	Band Edges Compliance
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, H (L= low channel, H= high channel)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

www.sgsgroup.com.cn sgs.china@sgs.com





Report No.:

SZCR240100035201

Rev.:

01

Page:

35 of 39

Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3				
Spurious Emission at Antenna Terminals					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3				
Field Strength of Spurious Radiation					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 2				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1; UMTS/TM1; LTE/TM1 Remark: All bandwidth and modulation of GSM/ UMTS/LTE have been pre tested, and only the worst results are reflected in the report.				
	Frequency Stability				
Test Case	Test Conditions				
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage				
Table Only	(2) VL, VN and VH of Rated Voltage at Ambient Climate.				
Test Setup	Test Setup 3				
RF Channels (TX)	M (M= middle channel)				
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;;LTE/TM1;LTE/TM2; LTE/TM3				
. 550 111000	The report only show the bandwidth with the worst case.				





Report No.:

SZCR240100035201

Rev.:

01

Page:

36 of 39

## **Main Test Instruments**

RF Test System							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-077	2023/05/25	2024/05/24		
Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-012	2024/01/30	2025/01/29		
DC power supply	HYELEC	HY3005B	SZ-WRG-M-044	2023/09/14	2024/09/13		
INSULATION TESTER	FLUKE	1508	SZ-WRG-M-060	2023/12/22	2024/12/21		
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	SZ-WRG-M-033	2024/01/30	2025/01/29		
Wideband Radio Communication Tester	Anritsu	MT8821C	SZ-WRG-M-042	2023/05/25	2024/05/24		
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SZ-WRG-M-017	2023/12/21	2024/12/20		







Report No.:

SZCR240100035201

Rev.:

01

Page: 37 of 39

Radiated spurious emissions						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
EMI TEST RECEIVER	Rohde & Schwarz	ESR	SZ-WRG-M-047	2024/01/30	2025/01/29	
Signal &Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2024/01/30	2025/01/29	
Low Noise Amplifier 9K-3GHz*	Tonscend	TAP9K3G32	SEM005-23	2024/03/05	2025/03/04	
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2024/01/30	2025/01/29	
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2024/01/30	2025/01/29	
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2024/01/30	2025/01/29	
Active Loop Antenna 9kHz-30MHz	SCHWARZBECK	FMZB 1519B	SZ-WRG-M-053	2023/12/25	2024/12/24	
TRILOG Breitband Antenne 30MHz-1GHz	SCHWARZBECK	VULB 9168	SZ-WRG-M-054	2023/12/25	2024/12/24	
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023/12/21	2024/12/20	
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023/12/25	2024/12/24	
RSE Test Software	Tonscend	JS32-RSE V4.0.0	SZ-WRG-S-058	NCR	NCR	
RE Test Software	Tonscend	JS36-RSE V5.0.0.1	SZ-WRG-S-059	NCR	NCR	
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2022/01/05	2025/01/04	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-078	2023/05/25	2024/05/24	
Spectrum Analyzer	Keysight	N9020A	SZ-WRG-M-002	2023/09/14	2024/09/13	
Radio Communication Tester	Anritsu	MT8821C	SZ-WRG-M-042	2023/05/25	2024/05/24	

Remark: NCR=No Calibration Requirement.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@gs.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.:

SZCR240100035201

Rev.:

01

Page:

38 of 39

## 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty	
1	Total RF power, conducted	±0.41dB	
2	RF power density, conducted	±1.96dB	
3	Spurious emissions, conducted	±0.41dB	
4	Radio Frequency	±7.10 x 10 <sup>-8</sup> GHz	
5	Duty Cycle	±0.49%	
6	Occupied Bandwidth	±0.2%	
7		±4.8dB (30MHz-1GHz)	
	Padiated Courieus amission tost/LIC)	±4.68dB (1GHz-6GHz)	
	Radiated Spurious emission test(UE)	±4.52dB (6GHz-18GHz)	
		±5.26dB (18GHz-40GHz)	

#### Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/en/Terms-and-Conditions">https://www.sqs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@as.com"



Report No.: SZCR240100035201

Rev.:

01

Page:

39 of 39

## 7 Appendixes

Appendix A.1	WWAN Setup Photos
Appendix B.1	GSM 850
Appendix B.2	GSM 1900
Appendix B.3	WCDMA Band II
Appendix B.4	WCDMA Band IV
Appendix B.5	WCDMA Band V
Appendix B.6	LTE Band 2
Appendix B.7	LTE Band 4
Appendix B.8	LTE Band 5
Appendix B.9	LTE Band 7
Appendix B.10	LTE Band 13
Appendix B.11	LTE Band 26(814-824)
Appendix B.12	LTE Band 26(824-849)
Appendix B.13	LTE Band 38
Appendix B.14	LTE Band 41
Appendix B.15	LTE Band 66

---End of Report---

