



Test Report No.: W7L-P23080006RF03



# FCC TEST REPORT

## (Part 15, Subpart E)



|            |   |
|------------|---|
| Applicant: | Xiaomi Communications Co., Ltd.   |
| Address:   | #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085 |

|                           |   |
|---------------------------|---|
| Manufacturer or Supplier: | Xiaomi Communications Co., Ltd.   |
| Address:                  | #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085 |
| Product:                  | Mobile Phone  |
| Brand Name:               | Redmi   |
| Model Name:               | 23100RN82L  |
| FCC ID:                   | 2AFZZN82L   |
| Date of tests:            | Aug. 07, 2023 ~ Sep. 12, 2023   |

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart E, Section 15.407**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

|  |  |
|--|--|
| Prepared by Simon Wang<br>Engineer / Mobile Department   | Approved by Luke Lu<br>Manager / Mobile Department   |
| <br>Date: Sep. 12, 2023 | <br>Date: Sep. 12, 2023 |

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

1 SUMMARY OF TEST RESULTS ..... 5

1.1 MEASUREMENT UNCERTAINTY ..... 6

2 GENERAL INFORMATION..... 7

2.1 GENERAL DESCRIPTION OF EUT ..... 7

2.2 DESCRIPTION OF TEST MODES ..... 9

    2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 12

2.3 DUTY CYCLE OF TEST SIGNAL ..... 17

2.4 DESCRIPTION OF SUPPORT UNITS ..... 18

    2.4.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 19

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 20

**3 TEST TYPES AND RESULTS..... 21**

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... 21

    3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 21

    3.1.2 LIMITS OF UNWANTED EMISSION..... 21

    3.1.3 TEST INSTRUMENTS..... 22

    3.1.4 TEST PROCEDURES ..... 24

    3.1.5 DEVIATION FROM TEST STANDARD ..... 24

    3.1.6 TEST SETUP ..... 25

    3.1.7 EUT OPERATING CONDITION ..... 26

    3.1.8 TEST RESULTS ..... 27

3.2 CONDUCTED EMISSION MEASUREMENT ..... 110

    3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 110

    3.2.2 TEST INSTRUMENTS..... 110

    3.2.3 TEST PROCEDURES ..... 110

    3.2.4 DEVIATION FROM TEST STANDARD ..... 111

    3.2.5 TEST SETUP ..... 111

    3.2.6 EUT OPERATING CONDITIONS ..... 111

    3.2.7 TEST RESULTS ..... 112

3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT ..... 114

    3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT ..... 114

    3.3.2 TEST SETUP ..... 115

    3.3.3 TEST INSTRUMENTS..... 115



|          |  |            |
|----------|--|------------|
| 3.3.4    | TEST PROCEDURE .....   | 116        |
| 3.3.5    | DEVIATION FROM TEST STANDARD .....   | 117        |
| 3.3.6    | EUT OPERATING CONDITIONS .....   | 117        |
| 3.3.7    | TEST RESULTS .....   | 117        |
| 3.4      | MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT .....                             | 118        |
| 3.4.1    | LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT .....                   | 118        |
| 3.4.2    | TEST SETUP .....   | 118        |
| 3.4.3    | TEST INSTRUMENTS .....   | 118        |
| 3.4.4    | TEST PROCEDURES .....  | 119        |
| 3.4.5    | DEVIATION FROM TEST STANDARD .....   | 119        |
| 3.4.6    | EUT OPERATING CONDITIONS .....   | 119        |
| 3.4.7    | TEST RESULTS .....   | 120        |
| 3.5      | AUTOMATICALLY DISCONTINUE TRANSMISSION .....                                 | 121        |
| 3.5.1    | LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION .....                        | 121        |
| 3.5.2    | TEST INSTRUMENTS .....   | 121        |
| 3.5.3    | TEST RESULT .....  | 121        |
| 3.6      | ANTENNA REQUIREMENTS .....   | 122        |
| 3.6.1    | STANDARD APPLICABLE .....  | 122        |
| 3.6.2    | ANTENNA CONNECTED CONSTRUCTION .....   | 122        |
| 3.6.3    | ANTENNA GAIN .....   | 122        |
| <b>4</b> | <b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>                           | <b>123</b> |
| <b>5</b> | <b>MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB</b> | <b>124</b> |
| <b>6</b> | <b>APPENDIX: RLAN .....</b>  | <b>125</b> |



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P23080006RF03

## RELEASE CONTROL RECORD

| ISSUE NO.         | REASON FOR CHANGE | DATE ISSUED   |
|-------------------|-------------------|---------------|
| W7L-P23080006RF03 | Original release  | Sep. 12, 2023 |



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC PART 15, SUBPART E |   |            |
|--|---|------------|
| STANDARD SECTION                         | TEST TYPE AND LIMIT                       | RESULT     |
| 15.407(b)(9)                             | AC Power Conducted Emission               | Compliance |
| 15.407(b)<br>(1/2/3/4/5)                 | Radiated Emission & Band Edge Measurement | Compliance |
| 15.407(a/1/2/3)                          | Maximum conducted output Power            | Compliance |
| 15.407(a/1/2/3)                          | Peak Power Spectral Density               | Compliance |
| 15.407(i)                                | 26 dB Bandwidth                           | Compliance |
| 15.407(e)                                | 6 dB Bandwidth                            | Compliance |
| 15.203                                   | Antenna Requirement                       | Compliance |

**NOTE:**

1. Except the data of RSE and Band Edge Measurement, other data please refer to the appendix.

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT                       | UNCERTAINTY |
|-----------------------------------|-------------|
| AC Power Conducted emissions      | ±2.70dB     |
| Radiated emissions (9KHz~30MHz)   | ±2.68dB     |
| Radiated emissions (30MHz~1GHz)   | ±4.98dB     |
| Radiated emissions (1GHz ~6GHz)   | ±4.70dB     |
| Radiated emissions (6GHz ~18GHz)  | ±4.60dB     |
| Radiated emissions (18GHz ~40GHz) | ±4.12dB     |
| Conducted emissions               | ±4.01dB     |
| Occupied Channel Bandwidth        | ±43.58KHz   |
| Conducted Output power            | ±2.06dB     |
| Power Spectral Density            | ±0.85 dB    |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                            |  |
|----------------------------|--|
| <b>PRODUCT</b>             | Mobile Phone   |
| <b>BRAND NAME</b>          | Redmi  |
| <b>MODEL NAME</b>          | 23100RN82L   |
| <b>NOMINAL VOLTAGE</b>     | 5Vdc(adapter or host equipment)<br>3.84Vdc (Li-ion, battery)   |
| <b>MODULATION</b>          | OFDM   |
| <b>TRANSFER RATE</b>       | 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps<br>802.11n: up to 150.0Mbps<br>802.11ac: up to 433.3Mbps   |
| <b>OPERATING FREQUENCY</b> | 5180 ~ 5240MHz, 5260 ~ 5320MHz,<br>5500 ~ 5720MHz, 5745 ~ 5825MHz  |
| <b>NUMBER OF CHANNEL</b>   | 5180 ~ 5240MHz: 4 for 802.11a, 802.11n, 802.11ac (20MHz)<br>2 for 802.11n, 802.11ac (40MHz)<br>1 for 802.11ac (80MHz)<br>5260 ~ 5320MHz: 4 for 802.11a, 802.11n, 802.11ac (20MHz)<br>2 for 802.11n, 802.11ac (40MHz)<br>1 for 802.11ac (80MHz)<br>5500 ~ 5700MHz: 11 for 802.11a, 802.11n, 802.11ac(20MHz)<br>5 for 802.11n, 802.11ac (40MHz)<br>2 for 802.11ac (80MHz)<br>5745 ~ 5825MHz: 5 for 802.11a, 802.11n, 802.11ac (20MHz)<br>3 for 802.11n, 802.11ac (40MHz)<br>1 for 802.11ac (80MHz) |
| <b>AVERAGE POWER</b>       | 27.8 mW for 5180 ~ 5240MHz<br>27.61 mW for 5260 ~ 5320MHz<br>39.17 mW for 5500 ~ 5720MHz<br>25.88 mW for 5745 ~ 5825MHz  |
| <b>ANTENNA TYPE</b>        | PIFA Antenna   |
| <b>ANTENNA GAIN</b>        | -0.5dBi for 5180 ~ 5240MHz<br>-0.4dBi for 5260 ~ 5320MHz<br>0.6dBi for 5500 ~ 5720MHz<br>-0.2dBi for 5745 ~ 5825MHz  |
| <b>HW VERSION</b>          | LLDM572  |
| <b>SW VERSION</b>          | MIUI 14  |
| <b>IMEI</b>                | 861440060049166<br>861440060064348<br>861440060081649  |
| <b>I/O PORTS</b>           | Refer to user's manual   |



|                       |  |
|-----------------------|--|
| <b>CABLE SUPPLIED</b> | USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter<br>USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter |
|-----------------------|--|

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

| <b>MODULATION MODE</b>          | <b>TX FUNCTION</b> |
|---------------------------------|--------------------|
| <b>802.11a</b>                  | 1TX/1RX            |
| <b>802.11n/802.11ac (20MHz)</b> | 1TX/1RX            |
| <b>802.11n/802.11ac (40MHz)</b> | 1TX/1RX            |
| <b>802.11ac (80MHz)</b>         | 1TX/1RX            |

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.





## 2.2 DESCRIPTION OF TEST MODES

### FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n, 802.11ac (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 36      | 5180 MHz  | 44      | 5220 MHz  |
| 40      | 5200 MHz  | 48      | 5240 MHz  |

2 channels are provided for 802.11n, 802.11ac (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 38      | 5190 MHz  | 46      | 5230 MHz  |

1 channel is provided for 802.11ac (80MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 42      | 5210 MHz  |         |           |

### FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n, 802.11ac (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 52      | 5260 MHz  | 60      | 5300 MHz  |
| 56      | 5280 MHz  | 64      | 5320 MHz  |

2 channels are provided for 802.11n, 802.11ac (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 54      | 5270 MHz  | 62      | 5310 MHz  |

1 channel is provided for 802.11ac (80MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 58      | 5290 MHz  |         |           |



**FOR 5500 ~ 5720MHz**

11 channels are provided for 802.11a, 802.11n, 802.11ac (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 100     | 5500 MHz  | 124     | 5620MHz   |
| 104     | 5520 MHz  | 128     | 5640MHz   |
| 108     | 5540 MHz  | 132     | 5660 MHz  |
| 112     | 5560 MHz  | 136     | 5680 MHz  |
| 116     | 5580 MHz  | 140     | 5700 MHz  |
| 120     | 5600 MHz  |         |           |

5 channels are provided for 802.11n, 802.11ac (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 102     | 5510 MHz  | 126     | 5630MHz   |
| 110     | 5550 MHz  | 134     | 5670 MHz  |
| 118     | 5590 MHz  |         |           |

2 channel is provided for 802.11ac (80MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 106     | 5530 MHz  | 122     | 5610 MHz  |



**FOR 5745 ~ 5825MHz**

5 channels are provided for 802.11a, 802.11n, 802.11ac (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 149     | 5745 MHz  | 161     | 5805 MHz  |
| 153     | 5765 MHz  | 165     | 5825 MHz  |
| 157     | 5785 MHz  |         |           |

2 channels are provided for 802.11n, 802.11ac (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 142     | 5710 MHz  | 159     | 5795 MHz  |
| 151     | 5755 MHz  |         |           |

1 channel is provided for 802.11ac (80MHz):

| CHANNEL | FREQUENCY |
|---------|-----------|
| 155     | 5775 MHz  |



## 2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO |       |     |      | DESCRIPTION                           |
|--------------------|---------------|-------|-----|------|---------------------------------------|
|                    | RE≥1G         | RE<1G | PLC | APCM |                                       |
| A                  | √             | √     | √   | -    | Powered by Adapter with wifi(5G) link |
| B                  | -             | -     | -   | √    | Powered by Battery with wifi(5G) link |
| C                  | -             | -     | -   | -    | Powered by USB with wifi(5G) link     |

Where

**RE≥1G:** Radiated Emission above 1GHz

**RE<1G:** Radiated Emission below 1GHz

**PLC:** Power Line Conducted Emission

**APCM:** Antenna Port Conducted Measurement

**NOTE:**

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

**NOTE:** “-” means no effect

### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE             | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) |
|--------------------|------------------|------------------|-------------------|----------------|------------|------------------|
| A                  | 802.11ac (80MHz) | 5180-5240        | 42                | 42             | OFDM       | MCS0             |



**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE                | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) |
|--------------------|---------------------|------------------|-------------------|----------------|------------|------------------|
| A                  | 802.11a             | 5180-5240        | 36 to 48          | 36, 48         | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz) |                  | 36 to 48          | 36, 48         | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz) |                  | 38 to 46          | 38, 46         | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)    |                  | 42                | 42             | OFDM       | MCS0             |
| A                  | 802.11a             | 5260-5320        | 52 to 64          | 52, 60, 64     | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz) |                  | 52 to 64          | 52, 60, 64     | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz) |                  | 54 to 62          | 54, 62         | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)    |                  | 58                | 58             | OFDM       | MCS0             |
| A                  | 802.11a             | 5500-5700        | 100 to 140        | 100, 116, 140  | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz) |                  | 100 to 140        | 100, 116, 140  | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz) |                  | 102 to 134        | 102, 110, 134  | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)    |                  | 106 to 122        | 106, 122       | OFDM       | MCS0             |
| A                  | 802.11a             | 5745-5825        | 149 to 165        | 149, 157,165   | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz) |                  | 149 to 165        | 149, 157,165   | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz) |                  | 151 to 159        | 151, 159       | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)    |                  | 155               | 155            | OFDM       | MCS0             |



**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE             | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) |
|--------------------|------------------|------------------|-------------------|----------------|------------|------------------|
| A                  | 802.11ac (80MHz) | 5180-5240        | 42                | 42             | OFDM       | MCS0             |

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE                 | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) |
|--------------------|----------------------|------------------|-------------------|----------------|------------|------------------|
| A                  | 802.11a              | 5180-5240        | 36 to 48          | 36, 48         | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz)  |                  | 36 to 48          | 36, 48         | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz)  |                  | 38 to 46          | 38, 46         | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)     |                  | 42                | 42             | OFDM       | MCS0             |
| A                  | 802.11a              | 5260-5320        | 52 to 64          | 52, 60, 64     | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz)  |                  | 52 to 64          | 52, 60, 64     | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz)  |                  | 54 to 62          | 54, 62         | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)     |                  | 58                | 58             | OFDM       | MCS0             |
| A                  | 802.11a              | 5500-5700        | 100 to 140        | 100, 116, 140  | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz)  |                  | 100 to 140        | 100, 116, 140  | OFDM       | MCS0             |
| A                  | 802.11an/ac/ (40MHz) |                  | 102 to 134        | 102, 110, 134  | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)     |                  | 106 to 122        | 106, 122       | OFDM       | MCS0             |
| A                  | 802.11a              | 5745-5825        | 149 to 165        | 149, 157,165   | OFDM       | 6.0              |
| A                  | 802.11an/ac (20MHz)  |                  | 149 to 165        | 149, 157,165   | OFDM       | MCS0             |
| A                  | 802.11an/ac (40MHz)  |                  | 151 to 159        | 151, 159       | OFDM       | MCS0             |
| A                  | 802.11ac (80MHz)     |                  | 155               | 155            | OFDM       | MCS0             |



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE                | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) |
|--------------------|---------------------|------------------|-------------------|----------------|------------|------------------|
| B                  | 802.11a             | 5180-5240        | 36 to 48          | 36, 48         | OFDM       | 6.0              |
| B                  | 802.11an/ac (20MHz) |                  | 36 to 48          | 36, 48         | OFDM       | MCS0             |
| B                  | 802.11an/ac (40MHz) |                  | 38 to 46          | 38, 46         | OFDM       | MCS0             |
| B                  | 802.11ac (80MHz)    |                  | 42                | 42             | OFDM       | MCS0             |
| B                  | 802.11a             | 5260-5320        | 52 to 64          | 52, 60, 64     | OFDM       | 6.0              |
| B                  | 802.11an/ac (20MHz) |                  | 52 to 64          | 52, 60, 64     | OFDM       | MCS0             |
| B                  | 802.11an/ac (40MHz) |                  | 54 to 62          | 54, 62         | OFDM       | MCS0             |
| B                  | 802.11ac (80MHz)    |                  | 58                | 58             | OFDM       | MCS0             |
| B                  | 802.11a             | 5500-5700        | 100 to 140        | 100, 116, 140  | OFDM       | 6.0              |
| B                  | 802.11an/ac (20MHz) |                  | 100 to 140        | 100, 116, 140  | OFDM       | MCS0             |
| B                  | 802.11an/ac (40MHz) |                  | 102 to 134        | 102, 110, 134  | OFDM       | MCS0             |
| B                  | 802.11ac (80MHz)    |                  | 106 to 122        | 106, 122       | OFDM       | MCS0             |
| B                  | 802.11a             | 5745-5825        | 149 to 165        | 149, 157,165   | OFDM       | 6.0              |
| B                  | 802.11an/ac (20MHz) |                  | 149 to 165        | 149, 157,165   | OFDM       | MCS0             |
| B                  | 802.11an/ac (40MHz) |                  | 151 to 159        | 151, 159       | OFDM       | MCS0             |
| B                  | 802.11ac (80MHz)    |                  | 155               | 155            | OFDM       | MCS0             |



**TEST CONDITION:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER      | TESTED BY |
|---------------|--------------------------|------------------|-----------|
| RE<1G         | 23deg. C, 70%RH          | DC 5V By Adapter | Jace Hu   |
| RE≥1G         | 23deg. C, 70%RH          | DC 5V By Adapter | Jace Hu   |
| PLC           | 25deg. C, 52%RH          | DC 5V By Adapter | James Fu  |
| APCM          | 25deg. C, 60%RH          | DC 5V By Battery | James Fu  |





## 2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix A Of this test report.

### WORST-CASE DATA:

| Measured Duty Cycle |        |                |
|---------------------|--------|----------------|
| Mode                |        | Duty Cycle [%] |
|                     |        | ANT1           |
| 5GHZ                | 11a    | 97.22          |
|                     | 11n20  | 97.01          |
|                     | 11n40  | 94.20          |
|                     | 11ac20 | 97.06          |
|                     | 11ac40 | 94.29          |
|                     | 11ac80 | 89.19          |

### Note:

Duty cycle of test signal is < 98%, duty factor shall be considered.



## 2.4 DESCRIPTION OF SUPPORT UNITS



The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT   | BRAND      | MODEL NO.    | SERIAL NO. | FCC ID |
|-----|-----------|------------|--------------|------------|--------|
| 1   | Desktop   | Lenovo     | M73 SFF      | PC04GRQV   | N/A    |
| 2   | Desktop   | Lenovo     | M73 SFF      | PC06CS27   | N/A    |
| 3   | Laptop    | Lenovo     | ThinkpadL440 | R90FTFKN   | N/A    |
| 4   | DC source | Kikusui/JP | PMX18-5A     | 0000001    | N/A    |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1   | AC Line: Unshielded, Detachable 1.5m                |
| 2   | AC Line: Unshielded, Detachable 1.5m                |
| 3   | AC Line: Unshielded, Detachable 1.5m                |
| 4   | DC Line: Unshielded, Detachable 1.0m                |



## 2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

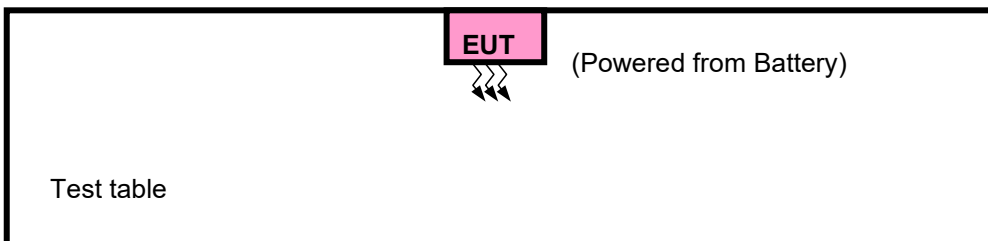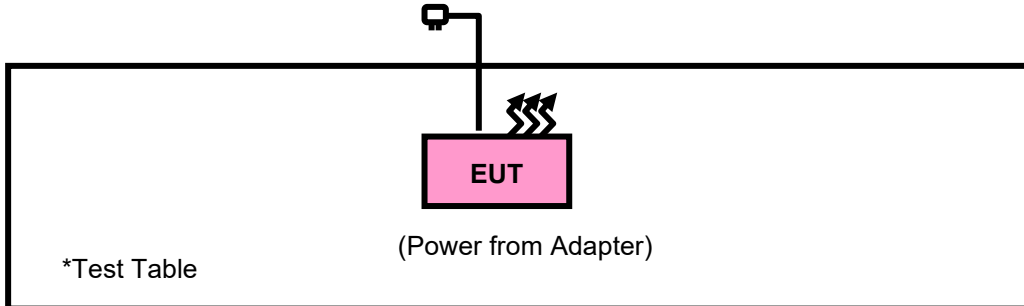



## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**KDB 789033 D02 General U-NII Test Procedures New Rules v02r01**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.



### 3 TEST TYPES AND RESULTS

#### 3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

##### 3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

##### 3.1.2 LIMITS OF UNWANTED EMISSION

| RESTRICTED BANDS            | APPLICABLE TO  | LIMIT                         |  |
|-----------------------------|--|-------------------------------|--|
|                             | 789033 D02 General<br>UNII Test Procedures<br>New Rules v02r01 | FIELD STRENGTH AT 3m (dBµV/m) |  |
|                             | PK : 74  | AV : 54                       |  |
| OUT OF THE RESTRICTED BANDS | APPLICABLE TO  | EIRP LIMIT (dBm/MHz)          | EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m) |
|                             | 15.407(b)(1)   | PK : -27                      | PK : 68.2                                |
|                             | 15.407(b)(2)   |                               |  |
|                             | 15.407(b)(3)   |                               |  |
| 15.407(b)(4)                | See note 2 (FCC 16-24)   |                               |  |



**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 3.1.3 TEST INSTRUMENTS

| Equipment                  | Manufacturer | Model No.                   | Serial No.                  | Last Cal.   | Next Cal.  |
|----------------------------|--------------|-----------------------------|-----------------------------|-------------|------------|
| 3m Semi-anechoic Chamber   | ETS-LINDGREN | 9m*6m*6m                    | Euroshieldpn-CT0001143-1216 | May. 22, 23 | May. 21,26 |
| Bilog Antenna              | ETS-LINDGREN | 3143B                       | 00161965                    | Feb. 18,23  | Feb. 17,24 |
| Horn Antenna               | ETS-LINDGREN | 3117                        | 00168692                    | Feb. 18,23  | Feb. 17,24 |
| Horn Antenna (18GHz-40GHz) | N/A          | QWH-SL-18-40-K-SG/QMS-00361 | 15433                       | Sep.04, 22  | Sep.03, 23 |
| Horn Antenna (18GHz-40GHz) | N/A          | QWH-SL-18-40-K-SG/QMS-00361 | 15433                       | Sep.03, 23  | Sep.02, 24 |
| Test Software              | E3           | V 9.160323                  | N/A                         | N/A         | N/A        |
| Test Software              | JS1120-3     | 3.2.06                      | N/A                         | N/A         | N/A        |
| 10dB Attenuator            | JFW/USA      | 50HF-010-SMA                | N/A                         | May. 06,23  | May. 05,24 |
| MXE EMI Receiver           | KEYSIGHT     | N9038A-544                  | MY54450026                  | Mar. 28,23  | Mar. 27,24 |
| Signal Pre-Amplifier       | EMSI         | EMC 9135                    | 980249                      | May. 06,23  | May. 05,24 |
| Signal Pre-Amplifier       | EMSI         | EMC 012645B                 | 980257                      | May.10,23   | May.09,24  |
| Signal Pre-Amplifier       | EMSI         | EMC 184045B                 | 980259                      | Feb. 17,23  | Feb. 16,24 |
| DC Source                  | Kikusui/JP   | PMX18-5A                    | 0000001                     | Aug. 12,22  | Aug. 11,23 |
| DC Source                  | Kikusui/JP   | PMX18-5A                    | 0000001                     | Aug. 11,23  | Aug. 10,24 |
| Power Meter                | Anritsu      | ML2495A                     | 1506002                     | Feb. 14,23  | Feb. 13,24 |
| Power Sensor               | Anritsu      | MA2411B                     | 1339352                     | Feb. 14,23  | Feb. 13,24 |
| Loop Antenna               | Schwarzbeck  | FMZB 1519B                  | 00173                       | Sep.03,22   | Sep.02,23  |
| Loop Antenna               | Schwarzbeck  | FMZB 1519B                  | 00173                       | Sep.02,23   | Sep.01,24  |



**Test Report No.: W7L-P23080006RF03**

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in the 3m Chamber.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



### 3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height varies from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated, and the worst-case emissions are reported.

### 3.1.5 DEVIATION FROM TEST STANDARD


No deviation.






### 3.1.6 TEST SETUP


#### <Frequency Range 9KHz~30MHz >

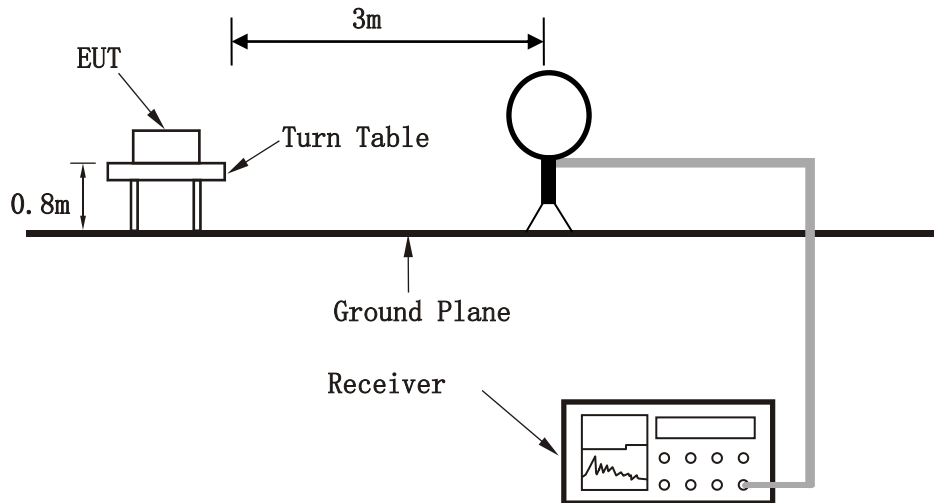

#### < Frequency Range 30MHz~1GHz >

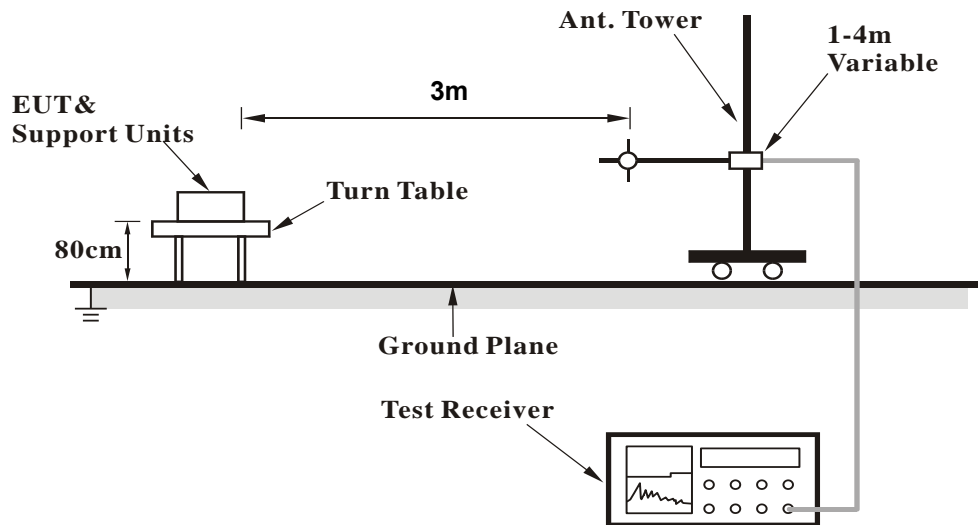

<Frequency Range above 1GHz>

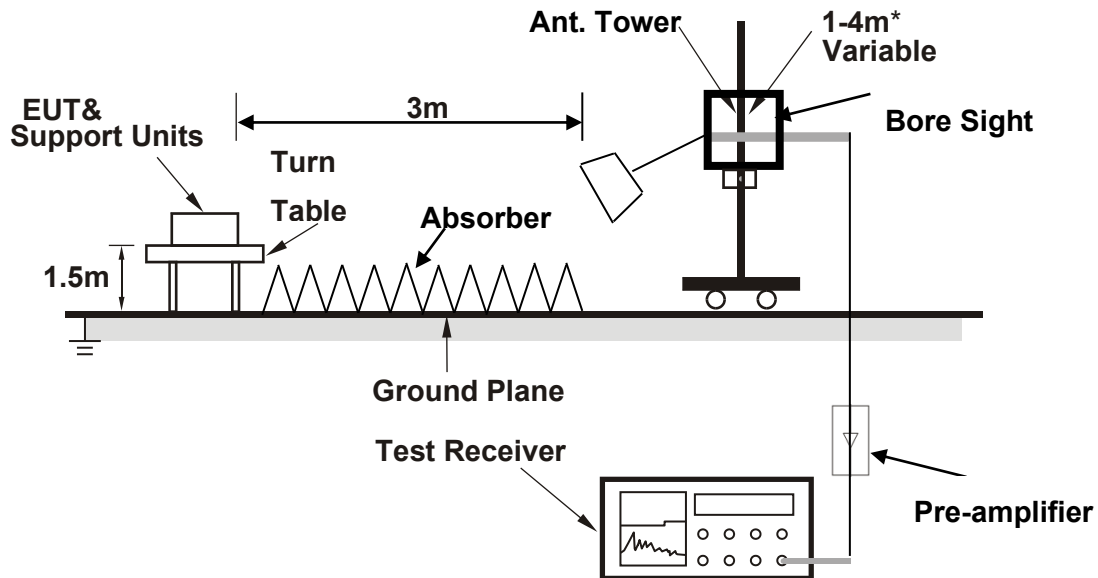

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.7 EUT OPERATING CONDITION

- a. Set the EUT under full load condition and placed it on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



**3.1.8 TEST RESULTS**

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**

**Band 1**


**802.11ac (80MHz):**

|                        |               |                          |                 |
|------------------------|---------------|--------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 42 | <b>DETECTOR FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 30MHz ~ 1GHz  |                          |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |        |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|--------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 52.31   | 23.99                   | 50.6              | 40             | -16.01      | 9.97                   | 0.41            | 36.99              | 107                 | 120                  | QP     |
| 88.2  | 15.74                   | 43.48             | 43.5           | -27.76      | 8.68                   | 0.51            | 36.93              | 107                 | 237                  | QP     |
| 193.93  | 22.58                   | 46.84             | 43.5           | -20.92      | 11.33                  | 0.73            | 36.32              | 145                 | 189                  | QP     |
| 256.98  | 30.75                   | 52.61             | 46             | -15.25      | 13.57                  | 0.84            | 36.27              | 140                 | 266                  | QP     |
| 345.25  | 22.64                   | 42.99             | 46             | -23.36      | 15                     | 0.98            | 36.33              | 124                 | 13                   | QP     |
| 422.85  | 25.43                   | 44.16             | 46             | -20.57      | 16.63                  | 1.11            | 36.47              | 156                 | 119                  | QP     |

**REMARKS:**

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

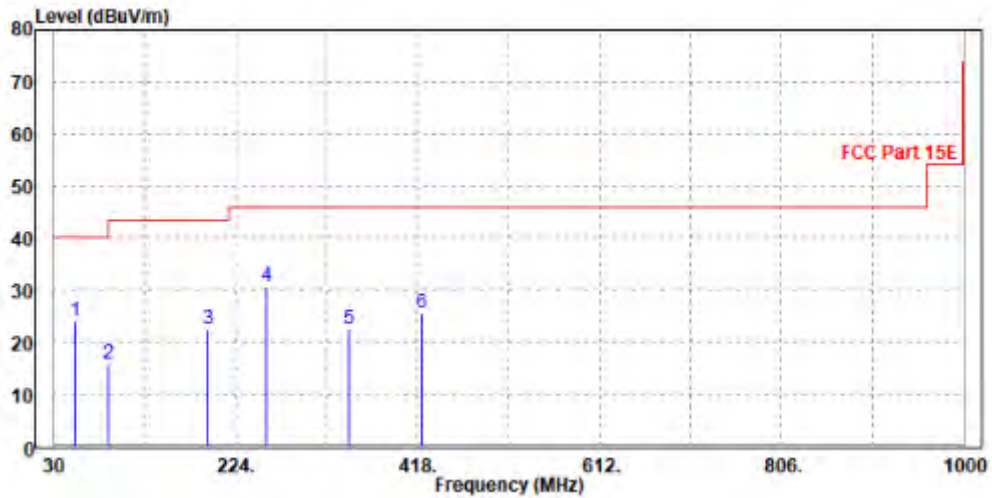



**BUREAU  
VERITAS**


**Test Report No.: W7L-P23080006RF03**

|                        |              |                          |                 |
|------------------------|--------------|--------------------------|-----------------|
| <b>CHANNEL</b>         | Channel 42   | <b>DETECTOR FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 30MHz ~ 1GHz |                          |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |        |
|---|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|--------|
| FREQ.<br>(MHz)                                    | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK |
| 34.85   | 26.9                          | 46.04                   | 40                | -13.1          | 17.88                        | 0.33                  | 37.35                    | 133                       | 313                        | QP     |
| 88.2  | 20.43                         | 48.43                   | 43.5              | -23.07         | 8.42                         | 0.51                  | 36.93                    | 186                       | 104                        | QP     |
| 205.57  | 18.16                         | 42.08                   | 43.5              | -25.34         | 11.62                        | 0.75                  | 36.29                    | 132                       | 146                        | QP     |
| 258.92  | 21.57                         | 44.14                   | 46                | -24.43         | 12.85                        | 0.85                  | 36.27                    | 185                       | 128                        | QP     |
| 486.87  | 19.91                         | 37.87                   | 46                | -26.09         | 17.43                        | 1.2                   | 36.59                    | 105                       | 114                        | QP     |
| 562.53  | 19.88                         | 36.48                   | 46                | -26.12         | 18.85                        | 1.31                  | 36.76                    | 103                       | 222                        | QP     |

**REMARKS:**

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

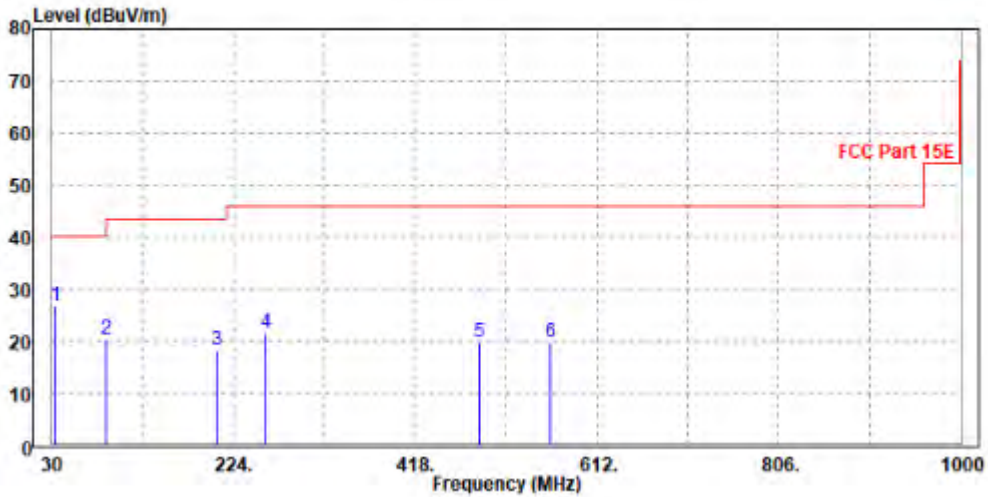



**ABOVE 1GHz WORST-CASE DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

**Band 1**

**802.11a**

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 36 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 58.04                   | 59.11             | 74             | -15.96      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150        | 50.32                   | 51.39             | 54             | -3.68       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5180        | 107.15                  | 108.21            | /              | /           | 34.54                  | 9.91            | 45.51              | 200                 | 323                  | Peak    |
| 5180        | 101.22                  | 102.28            | /              | /           | 34.54                  | 9.91            | 45.51              | 200                 | 323                  | Average |
| 5350        | 55.72                   | 56.7              | 74             | -18.28      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350        | 47.41                   | 48.39             | 54             | -6.59       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.81                   | 55.8              | 74             | -19.19      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 49.54                   | 50.53             | 54             | -4.46       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5180        | 101.49                  | 102.49            | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Peak    |
| 5180        | 95.82                   | 96.82             | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Average |
| 5350        | 54.04                   | 55.1              | 74             | -19.96      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.47                   | 48.53             | 54             | -6.53       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 40 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.44                   | 55.51             | 74             | -19.56      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150        | 49.14                   | 50.21             | 54             | -4.86       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5200        | 106.11                  | 107.16            | /              | /           | 34.56                  | 9.9             | 45.51              | 200                 | 323                  | Peak    |
| 5200        | 100.04                  | 101.09            | /              | /           | 34.56                  | 9.9             | 45.51              | 200                 | 323                  | Average |
| 5350        | 53.56                   | 54.54             | 74             | -20.44      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350        | 47.32                   | 48.3              | 54             | -6.68       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.72                   | 55.71             | 74             | -19.28      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.25                   | 49.24             | 54             | -5.75       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5200        | 100.65                  | 101.66            | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Peak    |
| 5200        | 94.4                    | 95.41             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Average |
| 5350        | 54.13                   | 55.19             | 74             | -19.87      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.54                   | 48.6              | 54             | -6.46       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5200MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 48 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.7                    | 54.77             | 74             | -20.3       | 34.52                  | 9.92            | 45.51              | 190                 | 323                  | Peak    |
| 5150        | 47.97                   | 49.04             | 54             | -6.03       | 34.52                  | 9.92            | 45.51              | 190                 | 323                  | Average |
| 5240        | 106.18                  | 107.21            | /              | /           | 34.59                  | 9.89            | 45.51              | 190                 | 323                  | Peak    |
| 5240        | 99.26                   | 100.29            | /              | /           | 34.59                  | 9.89            | 45.51              | 190                 | 323                  | Average |
| 5350        | 54.07                   | 55.05             | 74             | -19.93      | 34.68                  | 9.85            | 45.51              | 190                 | 323                  | Peak    |
| 5350        | 47.9                    | 48.88             | 54             | -6.1        | 34.68                  | 9.85            | 45.51              | 190                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.82                   | 55.81             | 74             | -19.18      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.68                   | 49.67             | 54             | -5.32       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5240        | 100.29                  | 101.31            | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Peak    |
| 5240        | 93.52                   | 94.54             | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Average |
| 5350        | 54.39                   | 55.45             | 74             | -19.61      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.42                   | 48.48             | 54             | -6.58       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5240MHz: Fundamental frequency.



**802.11n (20MHz)**

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 36 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 55.5                    | 56.57             | 74             | -18.5       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150        | 49.02                   | 50.09             | 54             | -4.98       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5180        | 105.15                  | 106.21            | /              | /           | 34.54                  | 9.91            | 45.51              | 195                 | 323                  | Peak    |
| 5180        | 99.46                   | 100.52            | /              | /           | 34.54                  | 9.91            | 45.51              | 195                 | 323                  | Average |
| 5350        | 54.06                   | 55.04             | 74             | -19.94      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350        | 47.76                   | 48.74             | 54             | -6.24       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.51                   | 54.5              | 74             | -20.49      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.6                    | 49.59             | 54             | -5.4        | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5180        | 99.78                   | 100.78            | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Peak    |
| 5180        | 93.62                   | 94.62             | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Average |
| 5350        | 53.25                   | 54.31             | 74             | -20.75      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.66                   | 48.72             | 54             | -6.34       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.





|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 40 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 55.01                   | 56.08             | 74             | -18.99      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 48.66                   | 49.73             | 54             | -5.34       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5200  | 105.49                  | 106.54            | /              | /           | 34.56                  | 9.9             | 45.51              | 195                 | 323                  | Peak    |
| 5200  | 99.36                   | 100.41            | /              | /           | 34.56                  | 9.9             | 45.51              | 195                 | 323                  | Average |
| 5350  | 55.74                   | 56.72             | 74             | -18.26      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 47.89                   | 48.87             | 54             | -6.11       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.62                   | 55.61             | 74             | -19.38      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 48.68                   | 49.67             | 54             | -5.32       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5200  | 98.76                   | 99.77             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Peak    |
| 5200  | 92.8                    | 93.81             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Average |
| 5350  | 53.74                   | 54.8              | 74             | -20.26      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 47.63                   | 48.69             | 54             | -6.37       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5200MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 48 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.71                   | 55.78             | 74             | -19.29      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 49.23                   | 50.3              | 54             | -4.77       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5240  | 105.39                  | 106.42            | /              | /           | 34.59                  | 9.89            | 45.51              | 195                 | 323                  | Peak    |
| 5240  | 98.32                   | 99.35             | /              | /           | 34.59                  | 9.89            | 45.51              | 195                 | 323                  | Average |
| 5350  | 54.13                   | 55.11             | 74             | -19.87      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 47.59                   | 48.57             | 54             | -6.41       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 53.38                   | 54.37             | 74             | -20.62      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 47.78                   | 48.77             | 54             | -6.22       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5240  | 99.17                   | 100.19            | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Peak    |
| 5240  | 92.06                   | 93.08             | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Average |
| 5350  | 53.44                   | 54.5              | 74             | -20.56      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 47.68                   | 48.74             | 54             | -6.32       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



802.11n (40MHz)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 38 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.49                   | 55.56             | 74             | -19.51      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150        | 50.53                   | 51.6              | 54             | -3.47       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5190        | 100.43                  | 101.48            | /              | /           | 34.55                  | 9.91            | 45.51              | 195                 | 323                  | Peak    |
| 5190        | 95.75                   | 96.8              | /              | /           | 34.55                  | 9.91            | 45.51              | 195                 | 323                  | Average |
| 5350        | 53.46                   | 54.44             | 74             | -20.54      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350        | 47.43                   | 48.41             | 54             | -6.57       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.41                   | 55.4              | 74             | -19.59      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.85                   | 49.84             | 54             | -5.15       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5190        | 94                      | 95                | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Peak    |
| 5190        | 89.81                   | 90.81             | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Average |
| 5350        | 53.42                   | 54.48             | 74             | -20.58      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.54                   | 48.6              | 54             | -6.46       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5190MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 46 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.14                   | 55.21             | 74             | -19.86      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150        | 49.16                   | 50.23             | 54             | -4.84       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5230        | 99.8                    | 100.84            | /              | /           | 34.58                  | 9.89            | 45.51              | 195                 | 323                  | Peak    |
| 5230        | 93.99                   | 95.03             | /              | /           | 34.58                  | 9.89            | 45.51              | 195                 | 323                  | Average |
| 5350        | 53.52                   | 54.5              | 74             | -20.48      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350        | 47.7                    | 48.68             | 54             | -6.3        | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.9                    | 54.89             | 74             | -20.1       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.39                   | 49.38             | 54             | -5.61       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5230        | 93.35                   | 94.37             | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Peak    |
| 5230        | 87.98                   | 89                | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Average |
| 5350        | 52.95                   | 54.01             | 74             | -21.05      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.54                   | 48.6              | 54             | -6.46       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5230MHz: Fundamental frequency.



802.11ac (20MHz)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 36 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.98                   | 56.05             | 74             | -19.02      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 49.81                   | 50.88             | 54             | -4.19       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5180  | 104.99                  | 106.05            | /              | /           | 34.54                  | 9.91            | 45.51              | 195                 | 323                  | Peak    |
| 5180  | 99.15                   | 100.21            | /              | /           | 34.54                  | 9.91            | 45.51              | 195                 | 323                  | Average |
| 5350  | 53.49                   | 54.47             | 74             | -20.51      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 47.95                   | 48.93             | 54             | -6.05       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.7                    | 55.69             | 74             | -19.3       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 48.89                   | 49.88             | 54             | -5.11       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5180  | 99.43                   | 100.43            | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Peak    |
| 5180  | 93.77                   | 94.77             | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Average |
| 5350  | 54.45                   | 55.51             | 74             | -19.55      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 48.15                   | 49.21             | 54             | -5.85       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 40 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.07                   | 55.14             | 74             | -19.93      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150        | 49.25                   | 50.32             | 54             | -4.75       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5200        | 105.31                  | 106.36            | /              | /           | 34.56                  | 9.9             | 45.51              | 195                 | 323                  | Peak    |
| 5200        | 99.1                    | 100.15            | /              | /           | 34.56                  | 9.9             | 45.51              | 195                 | 323                  | Average |
| 5350        | 54.02                   | 55                | 74             | -19.98      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350        | 47.33                   | 48.31             | 54             | -6.67       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.37                   | 54.36             | 74             | -20.63      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.01                   | 49                | 54             | -5.99       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5200        | 98.48                   | 99.49             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Peak    |
| 5200        | 93.06                   | 94.07             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Average |
| 5350        | 53.85                   | 54.91             | 74             | -20.15      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.21                   | 48.27             | 54             | -6.79       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5200MHz: Fundamental frequency.



BUREAU  
VERITAS

Test Report No.: W7L-P23080006RF03

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 48 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 56.29                   | 57.36             | 74             | -17.71      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 48.36                   | 49.43             | 54             | -5.64       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5240  | 105.82                  | 106.85            | /              | /           | 34.59                  | 9.89            | 45.51              | 195                 | 323                  | Peak    |
| 5240  | 98.67                   | 99.7              | /              | /           | 34.59                  | 9.89            | 45.51              | 195                 | 323                  | Average |
| 5350  | 53.64                   | 54.62             | 74             | -20.36      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 47.67                   | 48.65             | 54             | -6.33       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                         |                   |                |             |                        |                 |                    |                     |                      |         |
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.21                   | 55.2              | 74             | -19.79      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 47.86                   | 48.85             | 54             | -6.14       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5240  | 99.09                   | 100.11            | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Peak    |
| 5240  | 92.33                   | 93.35             | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Average |
| 5350  | 53.74                   | 54.8              | 74             | -20.26      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 48.23                   | 49.29             | 54             | -5.77       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5240MHz: Fundamental frequency.



802.11ac (40MHz)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 38 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 57.38                   | 58.45             | 74             | -16.62      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 50.78                   | 51.85             | 54             | -3.22       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5190  | 100.24                  | 101.29            | /              | /           | 34.55                  | 9.91            | 45.51              | 195                 | 323                  | Peak    |
| 5190  | 96.32                   | 97.37             | /              | /           | 34.55                  | 9.91            | 45.51              | 195                 | 323                  | Average |
| 5350  | 53.14                   | 54.12             | 74             | -20.86      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 48.32                   | 49.3              | 54             | -5.68       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 53.02                   | 54.01             | 74             | -20.98      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 48.59                   | 49.58             | 54             | -5.41       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5190  | 95.05                   | 96.05             | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Peak    |
| 5190  | 90.2                    | 91.2              | /              | /           | 34.6                   | 9.91            | 45.51              | 100                 | 292                  | Average |
| 5350  | 53.01                   | 54.07             | 74             | -20.99      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 47.44                   | 48.5              | 54             | -6.56       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5190MHz: Fundamental frequency.





|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 46 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.32                   | 54.39             | 74             | -20.68      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150        | 48.74                   | 49.81             | 54             | -5.26       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5230        | 99.92                   | 100.96            | /              | /           | 34.58                  | 9.89            | 45.51              | 195                 | 323                  | Peak    |
| 5230        | 94.72                   | 95.76             | /              | /           | 34.58                  | 9.89            | 45.51              | 195                 | 323                  | Average |
| 5350        | 53.77                   | 54.75             | 74             | -20.23      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350        | 47.76                   | 48.74             | 54             | -6.24       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.2                    | 54.19             | 74             | -20.8       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 48.52                   | 49.51             | 54             | -5.48       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5230        | 93.93                   | 94.95             | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Peak    |
| 5230        | 88.76                   | 89.78             | /              | /           | 34.6                   | 9.89            | 45.51              | 100                 | 292                  | Average |
| 5350        | 53.9                    | 54.96             | 74             | -20.1       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 48.4                    | 49.46             | 54             | -5.6        | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5230MHz: Fundamental frequency.



802.11ac (80MHz)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 42 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.39                   | 55.46             | 74             | -19.61      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 50.91                   | 51.98             | 54             | -3.09       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5210  | 95.22                   | 96.26             | /              | /           | 34.57                  | 9.9             | 45.51              | 195                 | 323                  | Peak    |
| 5210  | 90.8                    | 91.84             | /              | /           | 34.57                  | 9.9             | 45.51              | 195                 | 323                  | Average |
| 5350  | 53.61                   | 54.59             | 74             | -20.39      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 48.24                   | 49.22             | 54             | -5.76       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 53.46                   | 54.45             | 74             | -20.54      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 49.82                   | 50.81             | 54             | -4.18       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5210  | 88.83                   | 89.84             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Peak    |
| 5210  | 83.87                   | 84.88             | /              | /           | 34.6                   | 9.9             | 45.51              | 100                 | 292                  | Average |
| 5350  | 53.33                   | 54.39             | 74             | -20.67      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 47.83                   | 48.89             | 54             | -6.17       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5210MHz: Fundamental frequency.




802.11ac (80MHz)

Worst case harmonic:

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 42 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


|   | Freq        | Level  | Read Level | Limit Line | Over Limit | Factor | Remark  | Pol/Phase  |
|---|-------------|--------|------------|------------|------------|--------|---------|------------|
|   | MHz         | dBuV/m | dBuV       | dBuV/m     | dB         | dB/m   |         |            |
| 1 | 10418.000   | 51.30  | 44.40      | 74.00      | -22.70     | 6.90   | Peak    | Horizontal |
| 2 | 10418.000   | 41.75  | 34.85      | 54.00      | -12.25     | 6.90   | Average | Horizontal |
| 3 | PK15630.000 | 55.71  | 42.61      | 74.00      | -18.29     | 13.10  | Peak    | Horizontal |
| 4 | PP15630.000 | 46.82  | 33.72      | 54.00      | -7.18      | 13.10  | Average | Horizontal |

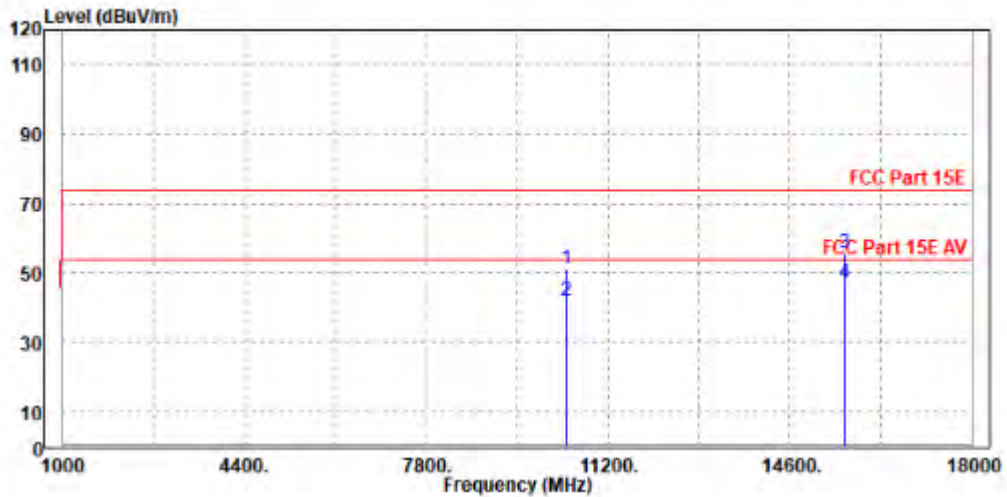



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

|   | Freq        | Level  | Read Level | Limit Line | Over Limit | Factor | Remark  | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|---------|-----------|
|   | MHz         | dBuV/m | dBuV       | dBuV/m     | dB         | dB/m   |         |           |
| 1 | 10420.000   | 54.22  | 46.10      | 74.00      | -19.78     | 8.12   | Peak    | Vertical  |
| 2 | 10420.000   | 44.69  | 36.57      | 54.00      | -9.31      | 8.12   | Average | Vertical  |
| 3 | PK15637.000 | 55.46  | 43.42      | 74.00      | -18.54     | 12.04  | Peak    | Vertical  |
| 4 | PP15637.000 | 46.19  | 34.15      | 54.00      | -7.81      | 12.04  | Average | Vertical  |

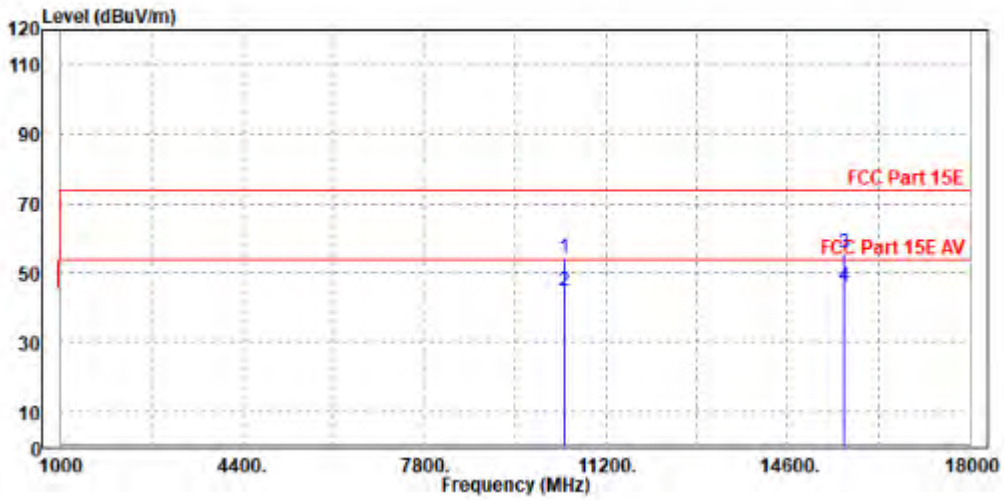

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5210MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



Band 2  
802.11a

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 52 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 55.47                   | 56.54             | 74             | -18.53      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150        | 48.07                   | 49.14             | 54             | -5.93       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5260        | 106.37                  | 107.39            | /              | /           | 34.61                  | 9.88            | 45.51              | 200                 | 323                  | Peak    |
| 5260        | 98.28                   | 99.3              | /              | /           | 34.61                  | 9.88            | 45.51              | 200                 | 323                  | Average |
| 5350        | 53.47                   | 54.45             | 74             | -20.53      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350        | 48.76                   | 49.74             | 54             | -5.24       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 52.97                   | 53.96             | 74             | -21.03      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 47.45                   | 48.44             | 54             | -6.55       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5260        | 101.17                  | 102.2             | /              | /           | 34.6                   | 9.88            | 45.51              | 100                 | 292                  | Peak    |
| 5260        | 94.12                   | 95.15             | /              | /           | 34.6                   | 9.88            | 45.51              | 100                 | 292                  | Average |
| 5350        | 53.43                   | 54.49             | 74             | -20.57      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.38                   | 48.44             | 54             | -6.62       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 60 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 54.62                   | 55.69             | 74             | -19.38      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150        | 48.41                   | 49.48             | 54             | -5.59       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5300        | 106.39                  | 107.39            | /              | /           | 34.64                  | 9.87            | 45.51              | 200                 | 323                  | Peak    |
| 5300        | 99.75                   | 100.75            | /              | /           | 34.64                  | 9.87            | 45.51              | 200                 | 323                  | Average |
| 5350        | 54.38                   | 55.36             | 74             | -19.62      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350        | 47.9                    | 48.88             | 54             | -6.1        | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.17                   | 54.16             | 74             | -20.83      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 47.86                   | 48.85             | 54             | -6.14       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5300        | 101.24                  | 102.28            | /              | /           | 34.6                   | 9.87            | 45.51              | 100                 | 292                  | Peak    |
| 5300        | 94.67                   | 95.71             | /              | /           | 34.6                   | 9.87            | 45.51              | 100                 | 292                  | Average |
| 5350        | 52.61                   | 53.67             | 74             | -21.39      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.48                   | 48.54             | 54             | -6.52       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 64 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 55.61                   | 56.68             | 74             | -18.39      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150  | 47.57                   | 48.64             | 54             | -6.43       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5320  | 104.49                  | 105.48            | /              | /           | 34.66                  | 9.86            | 45.51              | 200                 | 323                  | Peak    |
| 5320  | 97.98                   | 98.97             | /              | /           | 34.66                  | 9.86            | 45.51              | 200                 | 323                  | Average |
| 5350  | 54.93                   | 55.91             | 74             | -19.07      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350  | 48.66                   | 49.64             | 54             | -5.34       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.04                   | 55.03             | 74             | -19.96      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 48.25                   | 49.24             | 54             | -5.75       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5320  | 99.35                   | 100.4             | /              | /           | 34.6                   | 9.86            | 45.51              | 100                 | 292                  | Peak    |
| 5320  | 91.93                   | 92.98             | /              | /           | 34.6                   | 9.86            | 45.51              | 100                 | 292                  | Average |
| 5350  | 53.59                   | 54.65             | 74             | -20.41      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 47.7                    | 48.76             | 54             | -6.3        | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (20MHz)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 52 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 53.25                   | 54.32             | 74             | -20.75      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150        | 48.26                   | 49.33             | 54             | -5.74       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5260        | 105.26                  | 106.28            | /              | /           | 34.61                  | 9.88            | 45.51              | 200                 | 323                  | Peak    |
| 5260        | 98.54                   | 99.56             | /              | /           | 34.61                  | 9.88            | 45.51              | 200                 | 323                  | Average |
| 5350        | 53.17                   | 54.15             | 74             | -20.83      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350        | 48.08                   | 49.06             | 54             | -5.92       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 55.08                   | 56.07             | 74             | -18.92      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 47.94                   | 48.93             | 54             | -6.06       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5260        | 99.95                   | 100.98            | /              | /           | 34.6                   | 9.88            | 45.51              | 100                 | 292                  | Peak    |
| 5260        | 93.37                   | 94.4              | /              | /           | 34.6                   | 9.88            | 45.51              | 100                 | 292                  | Average |
| 5350        | 53.07                   | 54.13             | 74             | -20.93      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 48.05                   | 49.11             | 54             | -5.95       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.





|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 60 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 53.58                   | 54.65             | 74             | -20.42      | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150  | 48.21                   | 49.28             | 54             | -5.79       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5300  | 104.39                  | 105.39            | /              | /           | 34.64                  | 9.87            | 45.51              | 200                 | 323                  | Peak    |
| 5300  | 97.46                   | 98.46             | /              | /           | 34.64                  | 9.87            | 45.51              | 200                 | 323                  | Average |
| 5350  | 52.71                   | 53.69             | 74             | -21.29      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350  | 47.93                   | 48.91             | 54             | -6.07       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54.76                   | 55.75             | 74             | -19.24      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 47.75                   | 48.74             | 54             | -6.25       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5300  | 99.08                   | 100.12            | /              | /           | 34.6                   | 9.87            | 45.51              | 100                 | 292                  | Peak    |
| 5300  | 93.8                    | 94.84             | /              | /           | 34.6                   | 9.87            | 45.51              | 100                 | 292                  | Average |
| 5350  | 54.14                   | 55.2              | 74             | -19.86      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 47.49                   | 48.55             | 54             | -6.51       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5300MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 64 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 54                      | 55.07             | 74             | -20         | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Peak    |
| 5150  | 48.59                   | 49.66             | 54             | -5.41       | 34.52                  | 9.92            | 45.51              | 200                 | 323                  | Average |
| 5320  | 105.46                  | 106.45            | /              | /           | 34.66                  | 9.86            | 45.51              | 200                 | 323                  | Peak    |
| 5320  | 97.62                   | 98.61             | /              | /           | 34.66                  | 9.86            | 45.51              | 200                 | 323                  | Average |
| 5350  | 56.48                   | 57.46             | 74             | -17.52      | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Peak    |
| 5350  | 48.93                   | 49.91             | 54             | -5.07       | 34.68                  | 9.85            | 45.51              | 200                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 53.45                   | 54.44             | 74             | -20.55      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 48.3                    | 49.29             | 54             | -5.7        | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5320  | 98.02                   | 99.07             | /              | /           | 34.6                   | 9.86            | 45.51              | 100                 | 292                  | Peak    |
| 5320  | 92.16                   | 93.21             | /              | /           | 34.6                   | 9.86            | 45.51              | 100                 | 292                  | Average |
| 5350  | 54.62                   | 55.68             | 74             | -19.38      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 48.13                   | 49.19             | 54             | -5.87       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (40MHz)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| CHANNEL         | TX Channel 54 | DETECTOR FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 40GHz  |                   | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 51.98                   | 53.05             | 74             | -22.02      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150        | 48.66                   | 49.73             | 54             | -5.34       | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5270        | 100.36                  | 101.37            | /              | /           | 34.62                  | 9.88            | 45.51              | 195                 | 323                  | Peak    |
| 5270        | 95.29                   | 96.3              | /              | /           | 34.62                  | 9.88            | 45.51              | 195                 | 323                  | Average |
| 5350        | 53.77                   | 54.75             | 74             | -20.23      | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350        | 48.02                   | 49                | 54             | -5.98       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 5150        | 51.27                   | 52.26             | 74             | -22.73      | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150        | 47.57                   | 48.56             | 54             | -6.43       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5270        | 95.37                   | 96.4              | /              | /           | 34.6                   | 9.88            | 45.51              | 100                 | 292                  | Peak    |
| 5270        | 89.63                   | 90.66             | /              | /           | 34.6                   | 9.88            | 45.51              | 100                 | 292                  | Average |
| 5350        | 50.84                   | 51.9              | 74             | -23.16      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350        | 47.61                   | 48.67             | 54             | -6.39       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5270MHz: Fundamental frequency.



|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 62 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)   | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 52.97                   | 54.04             | 74             | -21.03      | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Peak    |
| 5150  | 48                      | 49.07             | 54             | -6          | 34.52                  | 9.92            | 45.51              | 195                 | 323                  | Average |
| 5310  | 98.56                   | 99.56             | /              | /           | 34.65                  | 9.86            | 45.51              | 195                 | 323                  | Peak    |
| 5310  | 94.58                   | 95.58             | /              | /           | 34.65                  | 9.86            | 45.51              | 195                 | 323                  | Average |
| 5350  | 53.8                    | 54.78             | 74             | -20.2       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Peak    |
| 5350  | 50.02                   | 51                | 54             | -3.98       | 34.68                  | 9.85            | 45.51              | 195                 | 323                  | Average |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                         |                   |                |             |                        |                 |                    |                     |                      |         |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz)                                       | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK  |
| 5150  | 51.8                    | 52.79             | 74             | -22.2       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Peak    |
| 5150  | 49.43                   | 50.42             | 54             | -4.57       | 34.6                   | 9.92            | 45.51              | 100                 | 292                  | Average |
| 5310  | 94.28                   | 95.33             | /              | /           | 34.6                   | 9.86            | 45.51              | 100                 | 292                  | Peak    |
| 5310  | 89.02                   | 90.07             | /              | /           | 34.6                   | 9.86            | 45.51              | 100                 | 292                  | Average |
| 5350  | 55.26                   | 56.32             | 74             | -18.74      | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Peak    |
| 5350  | 49.01                   | 50.07             | 54             | -4.99       | 34.6                   | 9.85            | 45.51              | 100                 | 292                  | Average |

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 5310MHz: Fundamental frequency.