



BUREAU VERITAS

Test Report No.: W7L-240618W002RF02



FCC TEST REPORT (Part 15, Subpart C)



Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer or Supplier:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Product:	Mobile Phone
Brand Name:	POCO
Model Name:	2409FPCC4G
FCC ID:	2AFZZPCC4G
Date of tests:	Jul. 12, 2024 ~ Aug. 05, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247
- ANSI C63.10-2020

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Aug. 05, 2024	 Date: Aug. 05, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	10
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
2.3 DUTY CYCLE OF TEST SIGNAL	14
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
2.5 DESCRIPTION OF SUPPORT UNITS	15
3 TEST TYPES AND RESULTS	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
3.1.2 TEST INSTRUMENTS.....	16
3.1.3 TEST PROCEDURES	17
3.1.4 DEVIATION FROM TEST STANDARD	17
3.1.5 TEST SETUP	18
3.1.6 EUT OPERATING CONDITIONS	18
3.1.7 TEST RESULTS	19
3.2 RADIATED EMISSION MEASUREMENT	21
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	21
3.2.2 TEST INSTRUMENTS.....	22
3.2.3 TEST PROCEDURES	23
3.2.4 DEVIATION FROM TEST STANDARD	23
3.2.5 TEST SETUP	24
3.2.6 EUT OPERATING CONDITIONS	25
3.2.7 TEST RESULTS	26
3.3 6 dB BANDWIDTH MEASUREMENT	61
3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	61
3.3.2 TEST INSTRUMENTS.....	61
3.3.3 TEST PROCEDURE.....	61
3.3.4 DEVIATION FROM TEST STANDARD	62
3.3.5 TEST SETUP	62



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

3.3.6	EUT OPERATING CONDITIONS	62
3.3.7	TEST RESULTS	63
3.4	CONDUCTED OUTPUT POWER.....	64
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	64
3.4.2	TEST SETUP	64
3.4.3	TEST INSTRUMENTS.....	64
3.4.4	TEST PROCEDURES	64
3.4.5	DEVIATION FROM TEST STANDARD	65
3.4.6	EUT OPERATING CONDITIONS	65
3.4.7	TEST RESULTS	66
3.5	POWER SPECTRAL DENSITY MEASUREMENT	67
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	67
3.5.2	TEST SETUP	67
3.5.3	TEST INSTRUMENTS.....	67
3.5.4	TEST PROCEDURE.....	67
3.5.5	DEVIATION FROM TEST STANDARD	67
3.5.6	EUT OPERATING CONDITION	67
3.5.7	TEST RESULTS	68
3.6	OUT OF BAND EMISSION MEASUREMENT	69
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	69
3.6.2	TEST SETUP	69
3.6.3	TEST INSTRUMENTS.....	69
3.6.4	TEST PROCEDURE.....	69
3.6.5	DEVIATION FROM TEST STANDARD	70
3.6.6	EUT OPERATING CONDITION	70
3.6.7	TEST RESULTS	70
3.7	ANTENNA REQUIREMENTS.....	71
3.7.1	STANDARD APPLICABLE	71
3.7.2	ANTENNA CONNECTED CONSTRUCTION.....	71
3.7.3	ANTENNA GAIN	71
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	71
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	72
6	APPENDIX.....	73



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-240618W002RF02	Original release	Aug. 05, 2024



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.205 15.209	Radiated Emissions	Compliance
15.247(d)	Out of band Emission Measurement	Compliance
15.247(a)(2)	6dB bandwidth	Compliance
15.247(b)	Conducted Output power	Compliance
15.247(e)	Power Spectral Density	Compliance
15.203	Antenna Requirement	Compliance

NOTE:

1. Except RSE, other data please refer to Appendix.
2. This report refers to the data of W7L-240618W001RF02(FCC ID: 2AFZZRAD4G), the difference of 24094RAD4G and 2409FPCC4G is model, FCC ID, brand name and 2409FPCC4G remove one camera. This report verify power and RSE worse case, retest AC Power Conducted Emission(CE). The verified power is similar as the original report. So this report only update the RSE worse case(11n20 CH11&BT S8 GFSK CH 39) and retesting CE, other data of spot-Check Please Refer to folder the naming (xiaomi O17p Spot-check).
3. List of the verified results (worse case) in the test item as follows:

Test Item / Report No.	W7L-240618W001RF02	W7L-240618W002RF02
Radiated Emission and Band edge Measurement	11n20 CH11 Margin:-8.85Db	11n20 CH11 Margin:-9.43Db
	BT S8 GFSK CH 39 Margin:-9.08Db	BT S8 GFSK CH 39 Margin:-10.18Db
Remark: All validation data are within 3dB variation or better, the new result is better than the original data.		



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Phone
BRAND NAME	POCO
MODEL NAME	2409FPCC4G
NOMINAL VOLTAGE	5/5~11Vdc(adapter or host equipment) 3.91Vdc (Li-ion, battery)
MODULATION	DSSS, OFDM, GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n(HT20): up to 72.2 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 229.67mW (Maximum) BT-LE: 2.05mW (Maximum)
ANTENNA TYPE	PIFA Antenna with -2.3dBi gain for WIFI/ BT_LE
HW VERSION	13510017P
SW VERSION	Xiaomi HyperOS 1.0
IMEI	861781070039865
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n(HT20)	1TX /1RX
BT_LE(1MHz)	1TX /1RX
BT_LE(2MHz)	1TX /1RX
BT_LE(S2)	1TX /1RX
BT_LE(S8)	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	MCS0
BT-LE	0 to 39	39	GFSK	0.125



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

POWER LINE CONDUCTED EMISSION TEST

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	MCS0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5/5~11V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC 5/5~11V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC 5/5~11V By Adapter	Carl Xie
APCM	25deg. C, 60%RH	DC 3.91V By DC Supply	James Fu



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix Of this test report.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	ThinkPad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1.The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 14,24	Feb. 13,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 10,24	Mar. 09,25

- NOTE:**
 1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated, and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

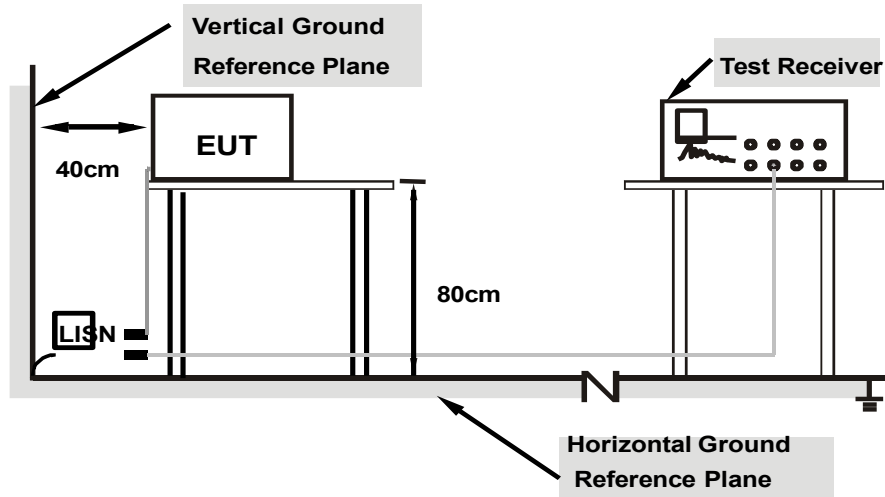

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBUV)	CAverage (dBUV)	Limit (dBUV)	Margin (dB)	Line	Filter	Corr. (dB)
0.448000	33.27	---	56.91	23.64	L1	ON	9.8
0.448000	---	24.84	46.91	22.07	L1	ON	9.8
0.452000	34.80	---	56.84	22.04	L1	ON	9.8
0.452000	---	26.94	46.84	19.90	L1	ON	9.8
3.456000	---	22.34	46.00	23.66	L1	ON	9.8
3.456000	29.47	---	56.00	26.53	L1	ON	9.8
4.900000	---	23.64	46.00	22.36	L1	ON	9.7
4.900000	31.52	---	56.00	24.48	L1	ON	9.7
17.104000	---	22.98	50.00	27.02	L1	ON	11.0
17.104000	31.79	---	60.00	28.21	L1	ON	11.0
17.696000	---	22.67	50.00	27.33	L1	ON	11.1
17.696000	31.20	---	60.00	28.80	L1	ON	11.1

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

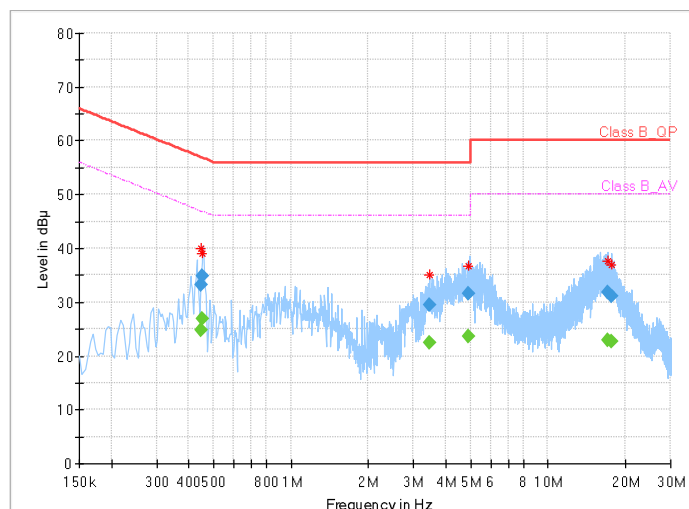




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBUV)	CAverage (dBUV)	Limit (dBUV)	Margin (dB)	Line	Filter	Corr. (dB)
0.436000	---	23.62	47.14	23.52	N	ON	9.6
0.436000	32.70	---	57.14	24.44	N	ON	9.6
3.458000	---	20.51	46.00	25.49	N	ON	9.7
3.458000	27.40	---	56.00	28.60	N	ON	9.7
4.828000	---	21.54	46.00	24.46	N	ON	9.7
4.828000	29.75	---	56.00	26.25	N	ON	9.7
17.216000	---	25.00	50.00	25.00	N	ON	11.1
17.216000	33.05	---	60.00	26.95	N	ON	11.1
18.006000	---	24.23	50.00	25.77	N	ON	11.2
18.006000	31.96	---	60.00	28.04	N	ON	11.2
0.436000	---	23.62	47.14	23.52	N	ON	9.6
0.436000	32.70	---	57.14	24.44	N	ON	9.6

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

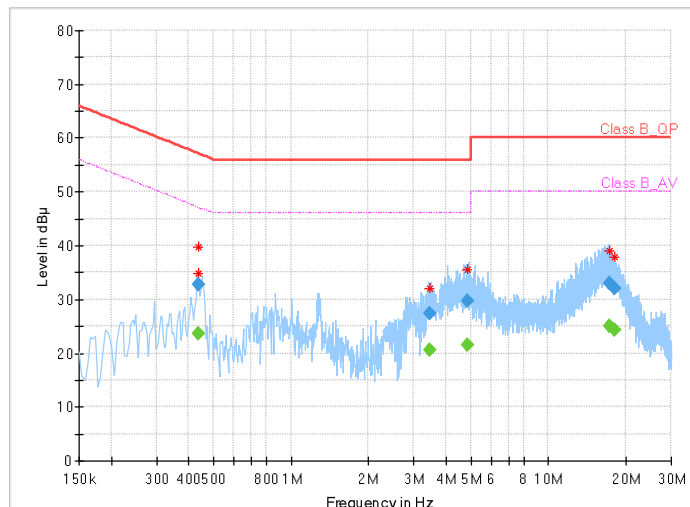



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 18,24	Feb. 17,25
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 18,24	Feb. 17,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.04, 23	Sep.03, 24
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120-3	3.2.06	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 06,24	May. 05,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,24	Mar. 27,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,24	May. 05,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,24	May.09,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,24	Feb. 16,25
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 12,23	Aug. 11,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,24	Feb. 13,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,24	Feb. 13,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,23	Sep.02,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz, and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated, and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

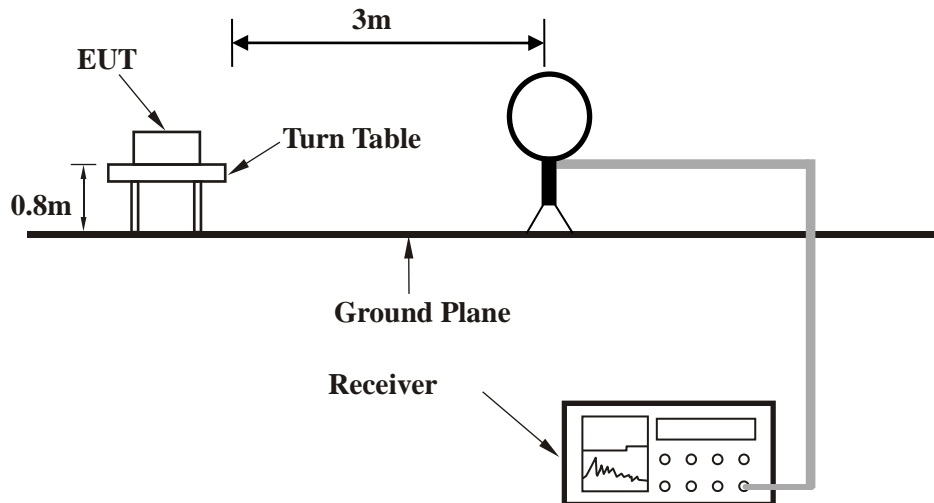


< Frequency Range 30MHz~1GHz >

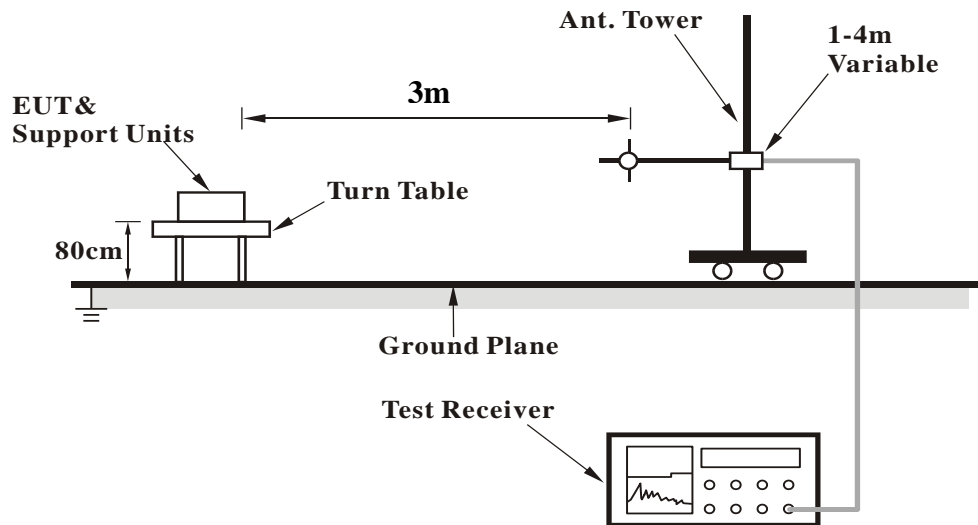



<Frequency Range above 1GHz>

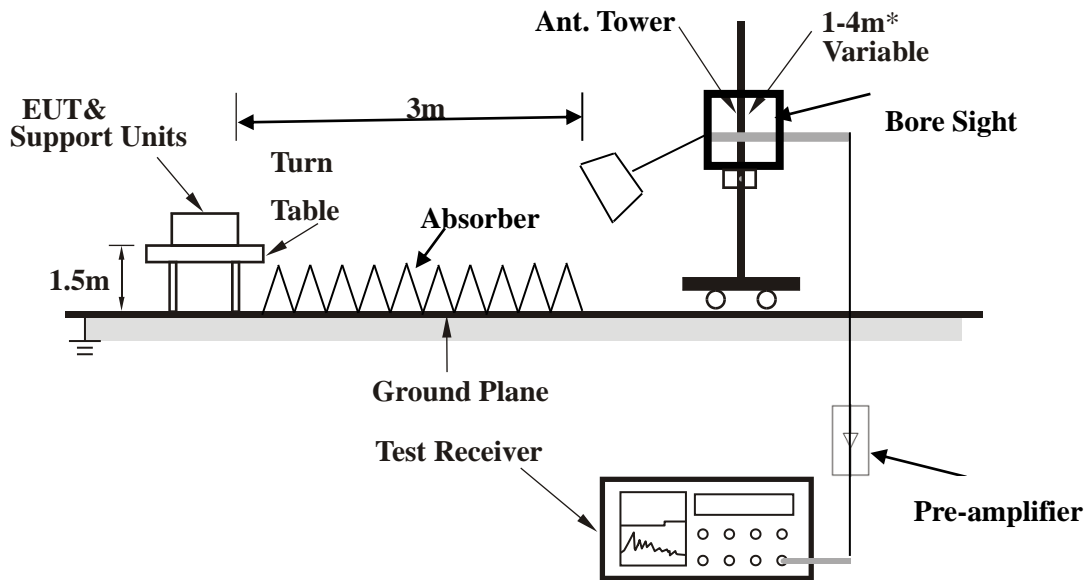

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


802.11n (20MHz)

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.94	22.08	34.75	40	-17.92	24.62	0.14	37.43	100	0	Peak
55.12	19.69	43.28	40	-20.31	13.48	0.3	37.37	100	0	Peak
138.56	16.29	38.29	43.5	-27.21	14.06	0.7	36.76	100	0	Peak
192.46	19.86	39.51	43.5	-23.64	15.99	0.94	36.58	100	0	Peak
324.33	21.58	37.44	46	-24.42	19.37	1.38	36.61	100	0	Peak
816.07	28.58	34.37	46	-17.42	29.12	2.63	37.54	100	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

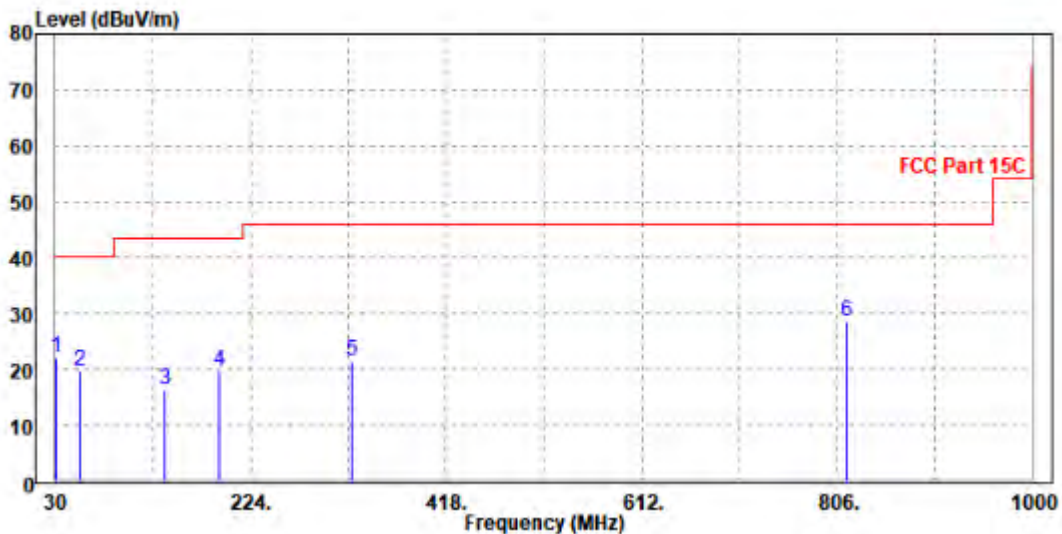




CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30	29.15	41.46	40	-10.85	25	0.13	37.44	100	360	Peak
46.22	23.97	44.74	40	-16.03	16.31	0.28	37.36	100	360	Peak
67.19	23.69	47.18	40	-16.31	13.48	0.36	37.33	100	360	Peak
97.24	24.25	46.79	43.5	-19.25	13.87	0.53	36.94	100	360	Peak
203.45	23.05	42.16	43.5	-20.45	16.44	1.01	36.56	100	360	Peak
863	28.63	34.33	46	-17.37	29.2	2.71	37.61	100	360	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

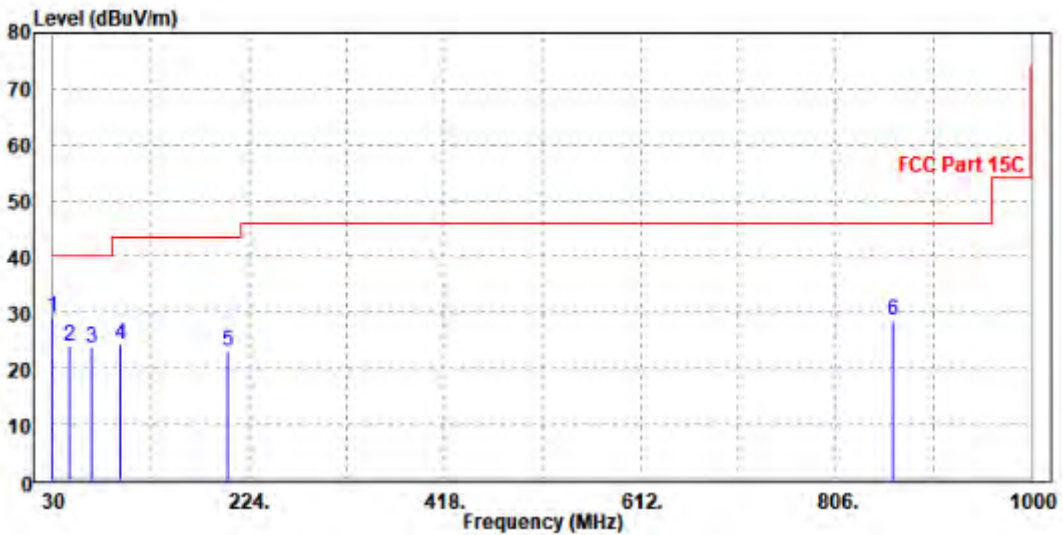

**ABOVE 1GHz WORST-CASE DATA:**

Note: 1. For radiated emissions testing, the full testing range of different modes have been scanned, only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.76	56.33	74.00	-25.24	30.80	7.74	46.11	100	25	Peak
2390.000	39.02	46.59	54.00	-14.98	30.80	7.74	46.11	100	25	Average
2412.000	100.17	107.13	/	/	31.38	7.77	46.11	100	25	Peak
2412.000	98.16	105.12	/	/	31.38	7.77	46.11	100	25	Average
2483.500	51.38	57.12	74.00	-22.62	32.47	7.88	46.09	100	25	Peak
2483.500	40.94	46.68	54.00	-13.06	32.47	7.88	46.09	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.25	56.26	74.00	-23.75	32.36	7.74	46.11	100	145	Peak
2390.000	40.48	46.49	54.00	-13.52	32.36	7.74	46.11	100	145	Average
2412.000	94.15	100.58	/	/	31.91	7.77	46.11	100	145	Peak
2412.000	92.04	98.47	/	/	31.91	7.77	46.11	100	145	Average
2483.500	50.14	57.02	74.00	-23.86	31.33	7.88	46.09	100	145	Peak
2483.500	39.86	46.74	54.00	-14.14	31.33	7.88	46.09	100	145	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.55	56.12	74.00	-25.45	30.80	7.74	46.11	100	40	Peak
2390.000	39.10	46.67	54.00	-14.90	30.80	7.74	46.11	100	40	Average
2437.000	101.48	107.59	/	/	32.18	7.81	46.10	100	40	Peak
2437.000	99.39	105.50	/	/	32.18	7.81	46.10	100	40	Average
2483.500	51.16	56.90	74.00	-22.84	32.47	7.88	46.09	100	40	Peak
2483.500	41.09	46.83	54.00	-12.91	32.47	7.88	46.09	100	40	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.34	56.35	74.00	-23.66	32.36	7.74	46.11	100	170	Peak
2390.000	40.41	46.42	54.00	-13.59	32.36	7.74	46.11	100	170	Average
2437.000	93.18	100.16	/	/	31.31	7.81	46.10	100	170	Peak
2437.000	91.13	98.11	/	/	31.31	7.81	46.10	100	170	Average
2483.500	49.56	56.44	74.00	-24.44	31.33	7.88	46.09	100	170	Peak
2483.500	39.85	46.73	54.00	-14.15	31.33	7.88	46.09	100	170	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	47.90	55.47	74.00	-26.10	30.80	7.74	46.11	100	120	Peak
2390.000	38.86	46.43	54.00	-15.14	30.80	7.74	46.11	100	120	Average
2462.000	100.89	106.60	/	/	32.55	7.84	46.10	100	120	Peak
2462.000	98.06	103.77	/	/	32.55	7.84	46.10	100	120	Average
2483.500	51.23	56.97	74.00	-22.77	32.47	7.88	46.09	100	120	Peak
2483.500	41.17	46.91	54.00	-12.83	32.47	7.88	46.09	100	120	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.50	56.51	74.00	-23.50	32.36	7.74	46.11	200	155	Peak
2390.000	40.34	46.35	54.00	-13.66	32.36	7.74	46.11	200	155	Average
2462.000	92.37	99.51	/	/	31.12	7.84	46.10	200	155	Peak
2462.000	90.25	97.39	/	/	31.12	7.84	46.10	200	155	Average
2483.500	49.68	56.56	74.00	-24.32	31.33	7.88	46.09	200	155	Peak
2483.500	39.79	46.67	54.00	-14.21	31.33	7.88	46.09	200	155	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.27	58.84	74.00	-22.73	30.80	7.74	46.11	100	120	Peak
2390.000	40.69	48.26	54.00	-13.31	30.80	7.74	46.11	100	120	Average
2412.000	101.25	108.21	/	/	31.38	7.77	46.11	100	120	Peak
2412.000	92.98	99.94	/	/	31.38	7.77	46.11	100	120	Average
2483.500	50.77	56.51	74.00	-23.23	32.47	7.88	46.09	100	120	Peak
2483.500	41.56	47.30	54.00	-12.44	32.47	7.88	46.09	100	120	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.31	57.32	74.00	-22.69	32.36	7.74	46.11	100	160	Peak
2390.000	41.30	47.31	54.00	-12.70	32.36	7.74	46.11	100	160	Average
2412.000	93.17	99.60	/	/	31.91	7.77	46.11	100	160	Peak
2412.000	84.76	91.19	/	/	31.91	7.77	46.11	100	160	Average
2483.500	49.36	56.24	74.00	-24.64	31.33	7.88	46.09	100	160	Peak
2483.500	40.44	47.32	54.00	-13.56	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.14	56.71	74.00	-24.86	30.80	7.74	46.11	100	40	Peak
2390.000	39.58	47.15	54.00	-14.42	30.80	7.74	46.11	100	40	Average
2437.000	103.03	109.14	/	/	32.18	7.81	46.10	100	40	Peak
2437.000	94.73	100.84	/	/	32.18	7.81	46.10	100	40	Average
2483.500	53.09	58.83	74.00	-20.91	32.47	7.88	46.09	100	40	Peak
2483.500	41.71	47.45	54.00	-12.29	32.47	7.88	46.09	100	40	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.60	56.61	74.00	-23.40	32.36	7.74	46.11	100	175	Peak
2390.000	40.74	46.75	54.00	-13.26	32.36	7.74	46.11	100	175	Average
2437.000	93.86	100.84	/	/	31.31	7.81	46.10	100	175	Peak
2437.000	85.52	92.50	/	/	31.31	7.81	46.10	100	175	Average
2483.500	50.82	57.70	74.00	-23.18	31.33	7.88	46.09	100	175	Peak
2483.500	40.35	47.23	54.00	-13.65	31.33	7.88	46.09	100	175	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.87	57.44	74.00	-24.13	30.80	7.74	46.11	100	140	Peak
2390.000	39.34	46.91	54.00	-14.66	30.80	7.74	46.11	100	140	Average
2462.000	102.93	108.64	/	/	32.55	7.84	46.10	100	140	Peak
2462.000	94.99	100.70	/	/	32.55	7.84	46.10	100	140	Average
2483.500	56.48	62.22	74.00	-17.52	32.47	7.88	46.09	100	140	Peak
2483.500	43.54	49.28	54.00	-10.46	32.47	7.88	46.09	100	140	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.71	55.72	74.00	-24.29	32.36	7.74	46.11	100	155	Peak
2390.000	40.89	46.90	54.00	-13.11	32.36	7.74	46.11	100	155	Average
2462.000	93.77	100.91	/	/	31.12	7.84	46.10	100	155	Peak
2462.000	85.08	92.22	/	/	31.12	7.84	46.10	100	155	Average
2483.500	51.77	58.65	74.00	-22.23	31.33	7.88	46.09	100	155	Peak
2483.500	40.69	47.57	54.00	-13.31	31.33	7.88	46.09	100	155	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.39	57.96	74.00	-23.61	30.80	7.74	46.11	100	140	Peak
2390.000	41.10	48.67	54.00	-12.90	30.80	7.74	46.11	100	140	Average
2412.000	99.24	106.20	/	/	31.38	7.77	46.11	100	140	Peak
2412.000	91.01	97.97	/	/	31.38	7.77	46.11	100	140	Average
2483.500	52.23	57.97	74.00	-21.77	32.47	7.88	46.09	100	140	Peak
2483.500	41.49	47.23	54.00	-12.51	32.47	7.88	46.09	100	140	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.18	57.19	74.00	-22.82	32.36	7.74	46.11	100	160	Peak
2390.000	41.08	47.09	54.00	-12.92	32.36	7.74	46.11	100	160	Average
2412.000	92.18	98.61	/	/	31.91	7.77	46.11	100	160	Peak
2412.000	83.54	89.97	/	/	31.91	7.77	46.11	100	160	Average
2483.500	49.83	56.71	74.00	-24.17	31.33	7.88	46.09	100	160	Peak
2483.500	40.41	47.29	54.00	-13.59	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.06	57.63	74.00	-23.94	30.80	7.74	46.11	100	40	Peak
2390.000	39.52	47.09	54.00	-14.48	30.80	7.74	46.11	100	40	Average
2437.000	102.19	108.30	/	/	32.18	7.81	46.10	100	40	Peak
2437.000	93.84	99.95	/	/	32.18	7.81	46.10	100	40	Average
2483.500	51.02	56.76	74.00	-22.98	32.47	7.88	46.09	100	40	Peak
2483.500	41.88	47.62	54.00	-12.12	32.47	7.88	46.09	100	40	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.15	56.16	74.00	-23.85	32.36	7.74	46.11	100	170	Peak
2390.000	41.13	47.14	54.00	-12.87	32.36	7.74	46.11	100	170	Average
2437.000	92.15	99.13	/	/	31.31	7.81	46.10	100	170	Peak
2437.000	83.96	90.94	/	/	31.31	7.81	46.10	100	170	Average
2483.500	50.91	57.79	74.00	-23.09	31.33	7.88	46.09	100	170	Peak
2483.500	40.64	47.52	54.00	-13.36	31.33	7.88	46.09	100	170	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.27	56.84	74	-24.73	30.8	7.74	46.11	100	115	Peak
2390.000	40.79	48.36	54	-13.21	30.8	7.74	46.11	100	115	Average
2462.000	100.55	106.26	/	/	32.55	7.84	46.1	100	115	Peak
2462.000	95.17	100.88	/	/	32.55	7.84	46.1	100	115	Average
2483.500	56.99	62.73	74	-17.01	32.47	7.88	46.09	100	115	Peak
2483.500	44.57	50.31	54	-9.43	32.47	7.88	46.09	100	115	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.5	55.51	74	-24.5	32.36	7.74	46.11	100	70	Peak
2390.000	40.16	46.17	54	-13.84	32.36	7.74	46.11	100	70	Average
2462.000	93.43	100.57	/	/	31.12	7.84	46.1	100	70	Peak
2462.000	88.04	95.18	/	/	31.12	7.84	46.1	100	70	Average
2483.500	50.97	57.85	74	-23.03	31.33	7.88	46.09	100	70	Peak
2483.500	42.28	49.16	54	-11.72	31.33	7.88	46.09	100	70	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.




**Worst case harmonic:
802.11n (20MHz)**

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4924.000	45.45	47.27	74.00	-28.55	-1.82	Peak	Horizontal
2 PP	7392.000	48.18	45.86	74.00	-25.82	2.32	Peak	Horizontal

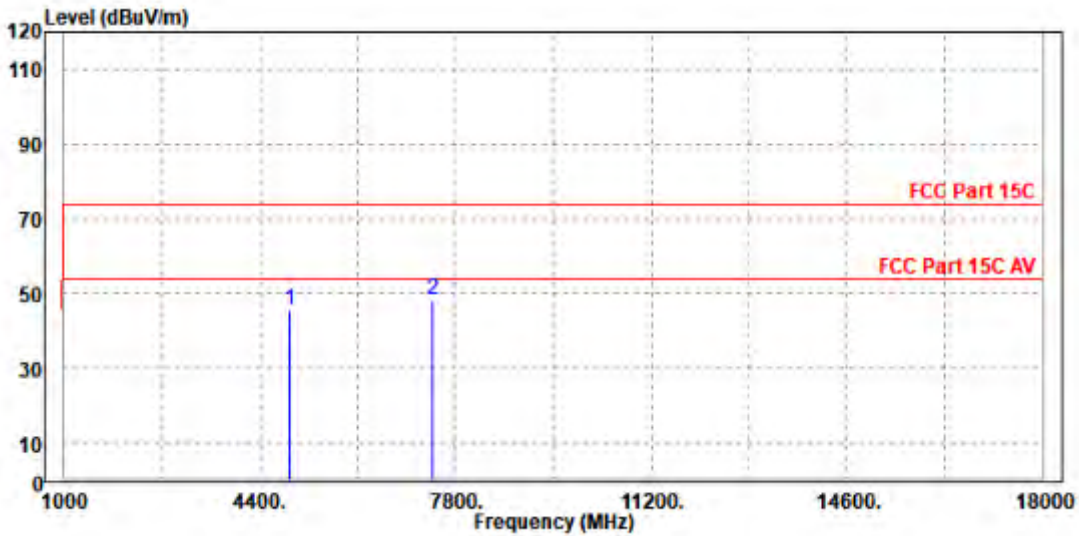



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4927.000	45.93	47.80	74.00	-28.07	-1.87	Peak	Vertical
2	PP 7386.000	47.33	44.79	74.00	-26.67	2.54	Peak	Vertical

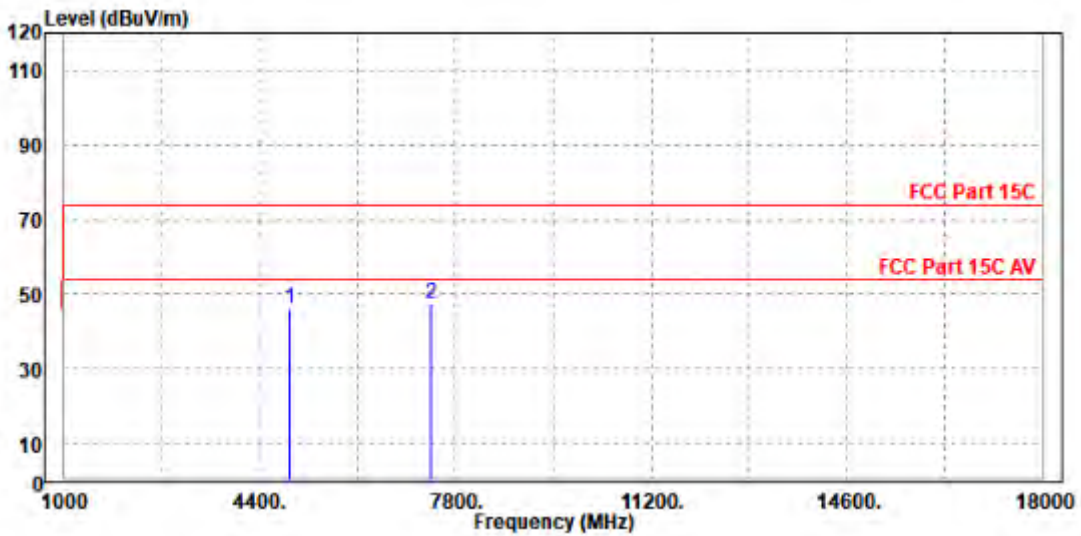

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


BT-LE_S8

CHANNEL	TX Channel 39	ODETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30	22.91	35.22	40	-17.09	25	0.13	37.44	100	360	Peak
73.15	16.79	40.68	40	-23.21	13	0.4	37.29	100	360	Peak
135.14	20.73	42.8	43.5	-22.77	14	0.7	36.77	100	360	Peak
195.26	18.07	37.34	43.5	-25.43	16.35	0.96	36.58	100	360	Peak
398	21.33	33.27	46	-24.67	23.16	1.56	36.66	100	360	Peak
802.18	27.99	33.71	46	-18.01	29.2	2.6	37.52	100	360	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

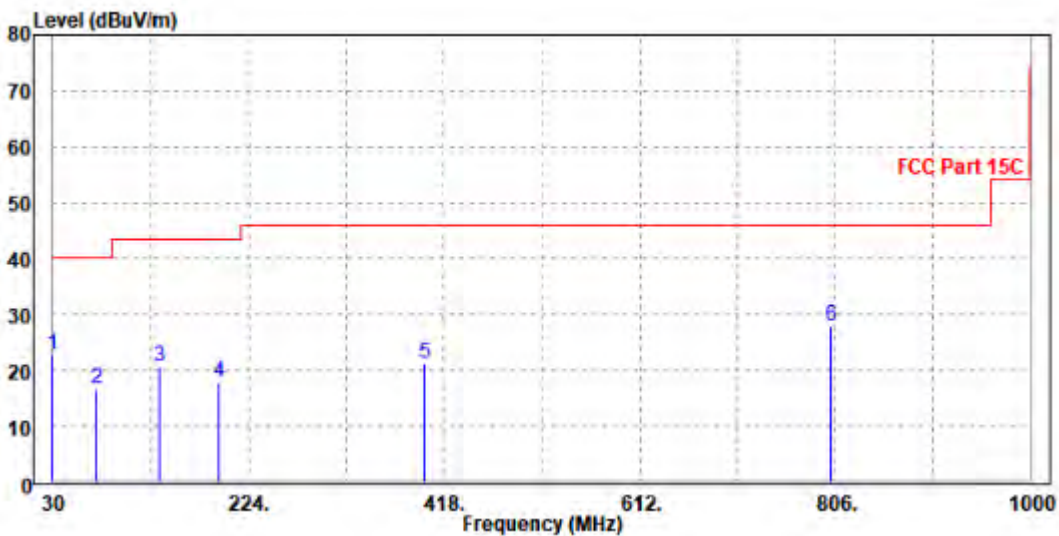




CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.97	27.24	39.92	40	-12.76	24.61	0.14	37.43	100	0	Peak
68.56	25.25	48.87	40	-14.75	13.34	0.37	37.33	100	0	Peak
171.95	21.45	41.68	43.5	-22.05	15.6	0.82	36.65	100	0	Peak
401.22	21.7	33.54	46	-24.3	23.27	1.56	36.67	100	0	Peak
488.17	24.72	35.76	46	-21.28	24.13	1.9	37.07	100	0	Peak
806	28.98	34.68	46	-17.02	29.22	2.61	37.53	100	0	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

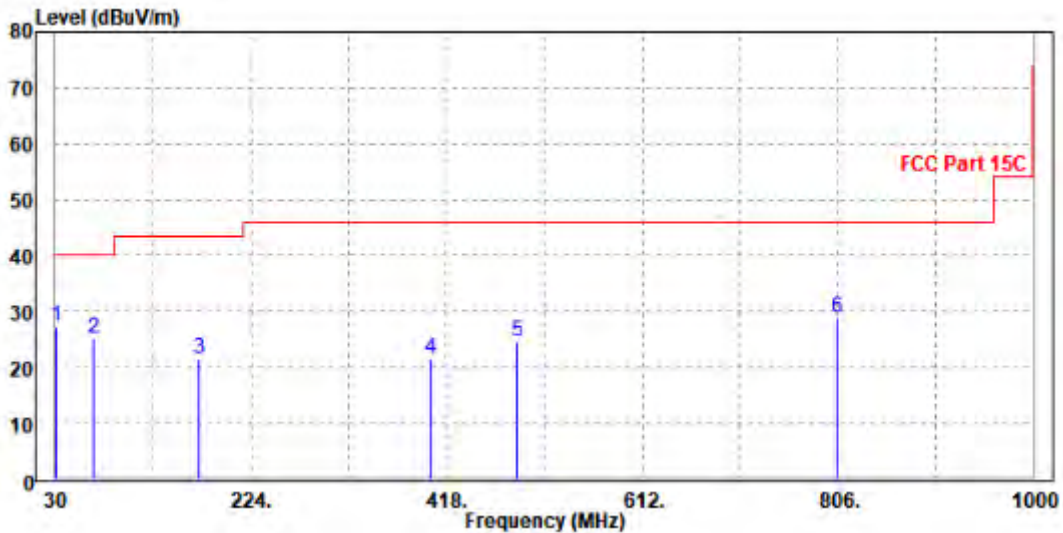



ABOVE 1GHz TEST DATA

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.18	55.75	74.00	-25.82	30.80	7.74	46.11	120	70	Peak
2390.000	40.65	48.22	54.00	-13.35	30.80	7.74	46.11	120	70	Average
2402.000	93.89	101.19	/	/	31.06	7.75	46.11	120	70	Peak
2402.000	93.42	100.72	/	/	31.06	7.75	46.11	120	70	Average
2483.500	50.38	56.12	74.00	-23.62	32.47	7.88	46.09	120	70	Peak
2483.500	42.11	47.85	54.00	-11.89	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.01	56.02	74.00	-23.99	32.36	7.74	46.11	100	160	Peak
2390.000	42.22	48.23	54.00	-11.78	32.36	7.74	46.11	100	160	Average
2402.000	84.61	90.82	/	/	32.15	7.75	46.11	100	160	Peak
2402.000	83.06	89.27	/	/	32.15	7.75	46.11	100	160	Average
2483.500	49.96	56.84	74.00	-24.04	31.33	7.88	46.09	100	160	Peak
2483.500	40.64	47.52	54.00	-13.36	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.61	57.18	74.00	-24.39	30.80	7.74	46.11	120	70	Peak
2390.000	40.83	48.40	54.00	-13.17	30.80	7.74	46.11	120	70	Average
2440.000	94.78	100.79	/	/	32.28	7.81	46.10	120	70	Peak
2440.000	93.28	99.29	/	/	32.28	7.81	46.10	120	70	Average
2483.500	51.44	57.18	74.00	-22.56	32.47	7.88	46.09	120	70	Peak
2483.500	42.51	48.25	54.00	-11.49	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.84	55.85	74.00	-24.16	32.36	7.74	46.11	100	160	Peak
2390.000	41.57	47.58	54.00	-12.43	32.36	7.74	46.11	100	160	Average
2440.000	84.24	91.29	/	/	31.24	7.81	46.10	100	160	Peak
2440.000	82.98	90.03	/	/	31.24	7.81	46.10	100	160	Average
2483.500	48.58	55.46	74.00	-25.42	31.33	7.88	46.09	100	160	Peak
2483.500	40.75	47.63	54.00	-13.25	31.33	7.88	46.09	100	160	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.09	55.66	74.00	-25.91	30.80	7.74	46.11	120	70	Peak
2390.000	40.27	47.84	54.00	-13.73	30.80	7.74	46.11	120	70	Average
2480.000	96.11	101.85	/	/	32.48	7.87	46.09	120	70	Peak
2480.000	94.44	100.18	/	/	32.48	7.87	46.09	120	70	Average
2483.500	52.87	58.61	74.00	-21.13	32.47	7.88	46.09	120	70	Peak
2483.500	43.33	49.07	54.00	-10.67	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.47	55.48	74.00	-24.53	32.36	7.74	46.11	100	160	Peak
2390.000	41.39	47.40	54.00	-12.61	32.36	7.74	46.11	100	160	Average
2480.000	84.25	91.17	/	/	31.30	7.87	46.09	100	160	Peak
2480.000	83.12	90.04	/	/	31.30	7.87	46.09	100	160	Average
2483.500	49.71	56.59	74.00	-24.29	31.33	7.88	46.09	100	160	Peak
2483.500	41.41	48.29	54.00	-12.59	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: W7L-240618W002RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	44.48	46.21	74.00	-29.52	-1.73	Peak	Horizontal
2 PP	7443.000	46.64	44.21	74.00	-27.36	2.43	Peak	Horizontal

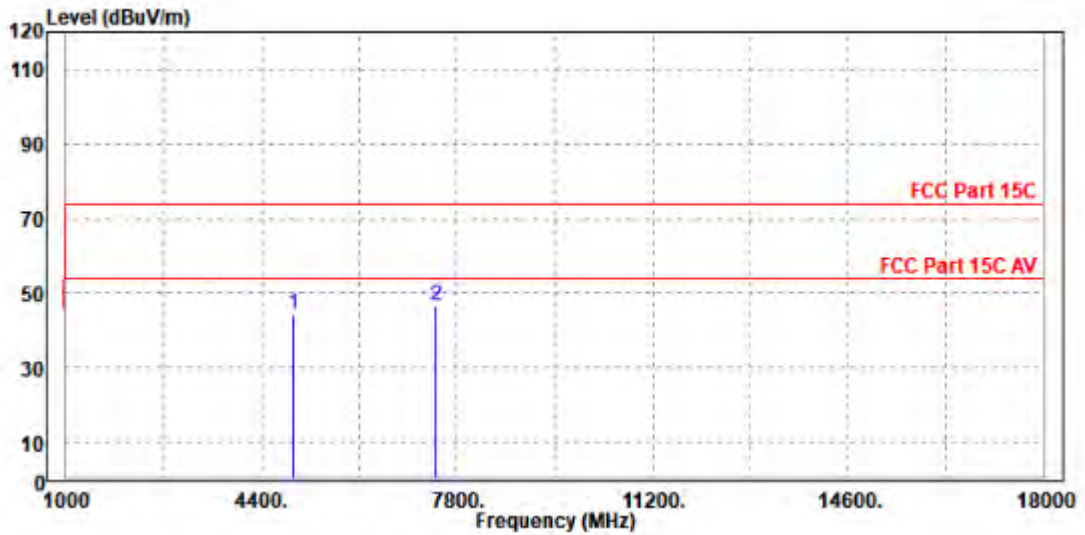



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	45.24	47.21	74.00	-28.76	-1.97	Peak	Vertical
2	PP 7440.000	46.45	44.07	74.00	-27.55	2.38	Peak	Vertical

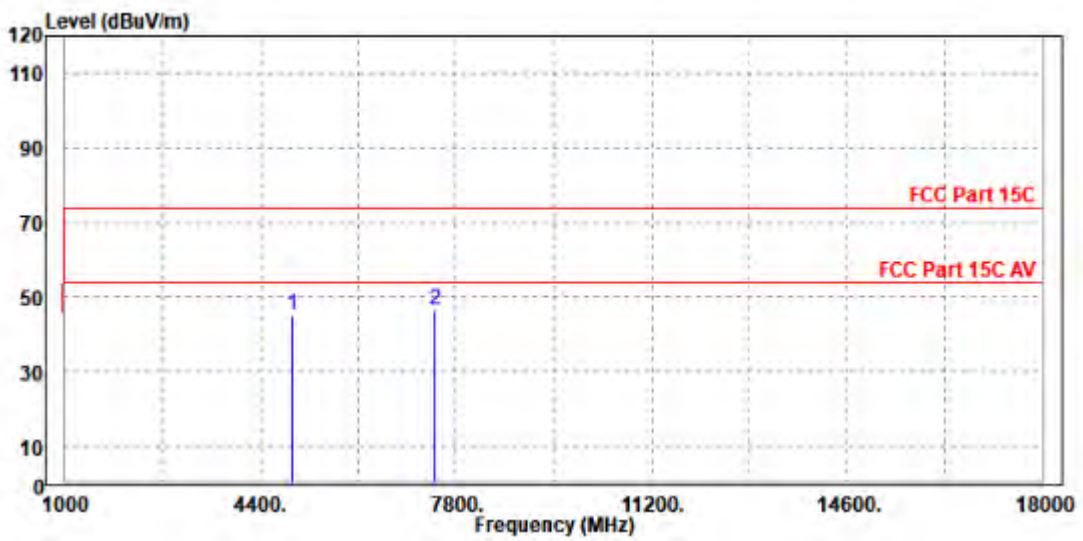

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

BT-LE_2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.38	56.95	74.00	-24.62	30.80	7.74	46.11	120	70	Peak
2390.000	41.91	49.48	54.00	-12.09	30.80	7.74	46.11	120	70	Average
2404.000	94.33	101.55	/	/	31.13	7.76	46.11	120	70	Peak
2404.000	92.39	99.61	/	/	31.13	7.76	46.11	120	70	Average
2483.500	48.84	54.58	74.00	-25.16	32.47	7.88	46.09	120	70	Peak
2483.500	42.53	48.27	54.00	-11.47	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.20	56.21	74.00	-23.80	32.36	7.74	46.11	100	160	Peak
2390.000	42.70	48.71	54.00	-11.30	32.36	7.74	46.11	100	160	Average
2404.000	83.63	89.88	/	/	32.10	7.76	46.11	100	160	Peak
2404.000	81.68	87.93	/	/	32.10	7.76	46.11	100	160	Average
2483.500	50.90	57.78	74.00	-23.10	31.33	7.88	46.09	100	160	Peak
2483.500	41.31	48.19	54.00	-12.69	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2404MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.99	56.56	74.00	-25.01	30.80	7.74	46.11	120	70	Peak
2390.000	40.94	48.51	54.00	-13.06	30.80	7.74	46.11	120	70	Average
2440.000	96.35	102.36	/	/	32.28	7.81	46.10	120	70	Peak
2440.000	94.81	100.82	/	/	32.28	7.81	46.10	120	70	Average
2483.500	51.71	57.45	74.00	-22.29	32.47	7.88	46.09	120	70	Peak
2483.500	42.72	48.46	54.00	-11.28	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.41	56.42	74.00	-23.59	32.36	7.74	46.11	100	160	Peak
2390.000	40.13	46.14	54.00	-13.87	32.36	7.74	46.11	100	160	Average
2440.000	84.44	91.49	/	/	31.24	7.81	46.10	100	160	Peak
2440.000	83.81	90.86	/	/	31.24	7.81	46.10	100	160	Average
2483.500	50.97	57.85	74.00	-23.03	31.33	7.88	46.09	100	160	Peak
2483.500	40.79	47.67	54.00	-13.21	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.60	56.17	74.00	-25.40	30.80	7.74	46.11	120	70	Peak
2390.000	40.54	48.11	54.00	-13.46	30.80	7.74	46.11	120	70	Average
2478.000	96.89	102.62	/	/	32.49	7.87	46.09	120	70	Peak
2478.000	94.79	100.52	/	/	32.49	7.87	46.09	120	70	Average
2483.500	52.50	58.24	74.00	-21.50	32.47	7.88	46.09	120	70	Peak
2483.500	43.92	49.66	54.00	-10.08	32.47	7.88	46.09	120	70	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.21	56.22	74.00	-23.79	32.36	7.74	46.11	100	160	Peak
2390.000	40.55	46.56	54.00	-13.45	32.36	7.74	46.11	100	160	Average
2478.000	84.26	91.20	/	/	31.28	7.87	46.09	100	160	Peak
2478.000	83.21	90.15	/	/	31.28	7.87	46.09	100	160	Average
2483.500	50.53	57.41	74.00	-23.47	31.33	7.88	46.09	100	160	Peak
2483.500	42.65	49.53	54.00	-11.35	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2478MHz: Fundamental frequency.




Worst case harmonic:

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	44.52	46.25	74.00	-29.48	-1.73	Peak	Horizontal
2 PP	7434.000	46.37	43.96	74.00	-27.63	2.41	Peak	Horizontal

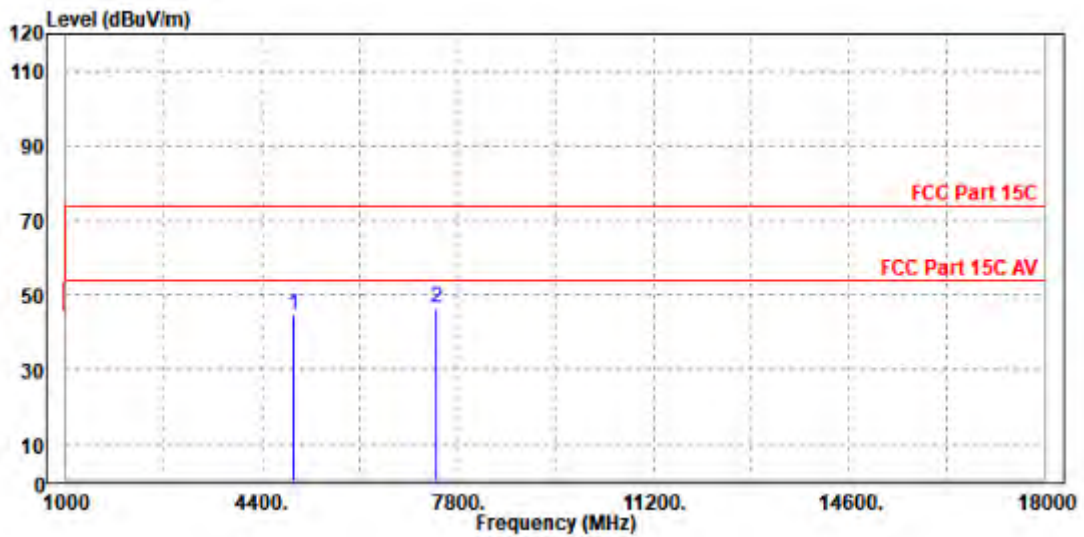



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4956.000	44.75	46.71	74.00	-29.25	-1.96	Peak	Vertical
2 PP	7426.000	46.29	43.86	74.00	-27.71	2.43	Peak	Vertical

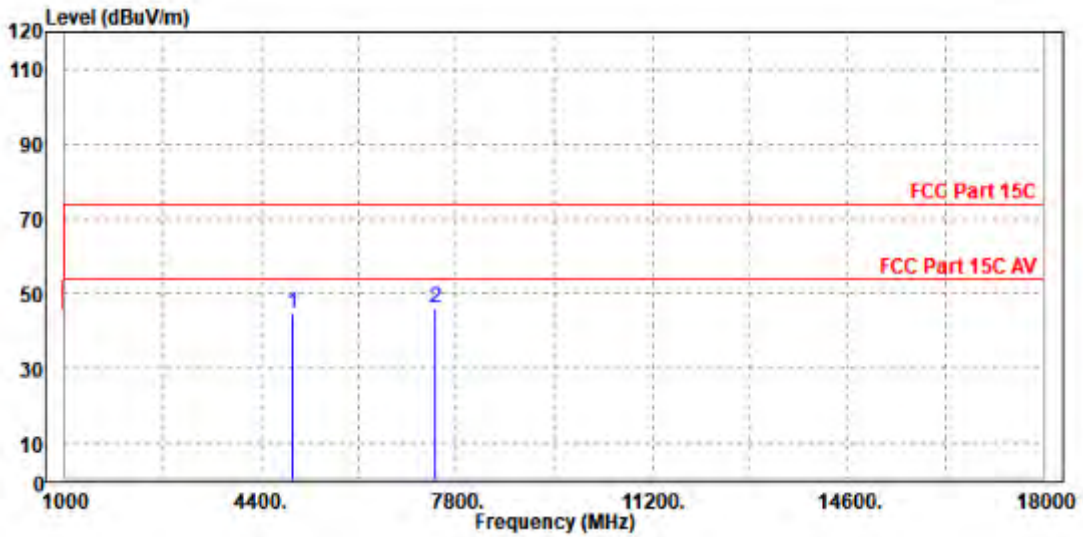

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2478MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

BT-LE_S2

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.84	56.41	74.00	-25.16	30.80	7.74	46.11	120	70	Peak
2390.000	40.55	48.12	54.00	-13.45	30.80	7.74	46.11	120	70	Average
2402.000	93.27	100.57	/	/	31.06	7.75	46.11	120	70	Peak
2402.000	91.95	99.25	/	/	31.06	7.75	46.11	120	70	Average
2483.500	50.40	56.14	74.00	-23.60	32.47	7.88	46.09	120	70	Peak
2483.500	42.06	47.80	54.00	-11.94	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.27	56.28	74.00	-23.73	32.36	7.74	46.11	100	160	Peak
2390.000	42.76	48.77	54.00	-11.24	32.36	7.74	46.11	100	160	Average
2402.000	84.67	90.88	/	/	32.15	7.75	46.11	100	160	Peak
2402.000	83.41	89.62	/	/	32.15	7.75	46.11	100	160	Average
2483.500	49.96	56.84	74.00	-24.04	31.33	7.88	46.09	100	160	Peak
2483.500	40.69	47.57	54.00	-13.31	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.36	56.93	74.00	-24.64	30.80	7.74	46.11	120	70	Peak
2390.000	42.09	49.66	54.00	-11.91	30.80	7.74	46.11	120	70	Average
2440.000	95.18	101.19	/	/	32.28	7.81	46.10	120	70	Peak
2440.000	94.17	100.18	/	/	32.28	7.81	46.10	120	70	Average
2483.500	51.23	56.97	74.00	-22.77	32.47	7.88	46.09	120	70	Peak
2483.500	43.77	49.51	54.00	-10.23	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.76	56.77	74.00	-23.24	32.36	7.74	46.11	100	160	Peak
2390.000	42.46	48.47	54.00	-11.54	32.36	7.74	46.11	100	160	Average
2440.000	83.84	90.89	/	/	31.24	7.81	46.10	100	160	Peak
2440.000	82.46	89.51	/	/	31.24	7.81	46.10	100	160	Average
2483.500	50.43	57.31	74.00	-23.57	31.33	7.88	46.09	100	160	Peak
2483.500	41.85	48.73	54.00	-12.15	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.69	57.26	74.00	-24.31	30.80	7.74	46.11	120	70	Peak
2390.000	40.03	47.60	54.00	-13.97	30.80	7.74	46.11	120	70	Average
2480.000	92.93	98.67	/	/	32.48	7.87	46.09	120	70	Peak
2480.000	91.11	96.85	/	/	32.48	7.87	46.09	120	70	Average
2483.500	51.86	57.60	74.00	-22.14	32.47	7.88	46.09	120	70	Peak
2483.500	44.14	49.88	54.00	-9.86	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.49	56.50	74.00	-23.51	32.36	7.74	46.11	100	160	Peak
2390.000	42.66	48.67	54.00	-11.34	32.36	7.74	46.11	100	160	Average
2480.000	84.80	91.72	/	/	31.30	7.87	46.09	100	160	Peak
2480.000	82.67	89.59	/	/	31.30	7.87	46.09	100	160	Average
2483.500	50.46	57.34	74.00	-23.54	31.33	7.88	46.09	100	160	Peak
2483.500	42.23	49.11	54.00	-11.77	31.33	7.88	46.09	100	160	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.




BUREAU VERITAS Test Report No.: W7L-240618W002RF02

Worst case harmonic:

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	44.66	46.39	74.00	-29.34	-1.73	Peak	Horizontal
2 PP	7443.000	46.77	44.34	74.00	-27.23	2.43	Peak	Horizontal

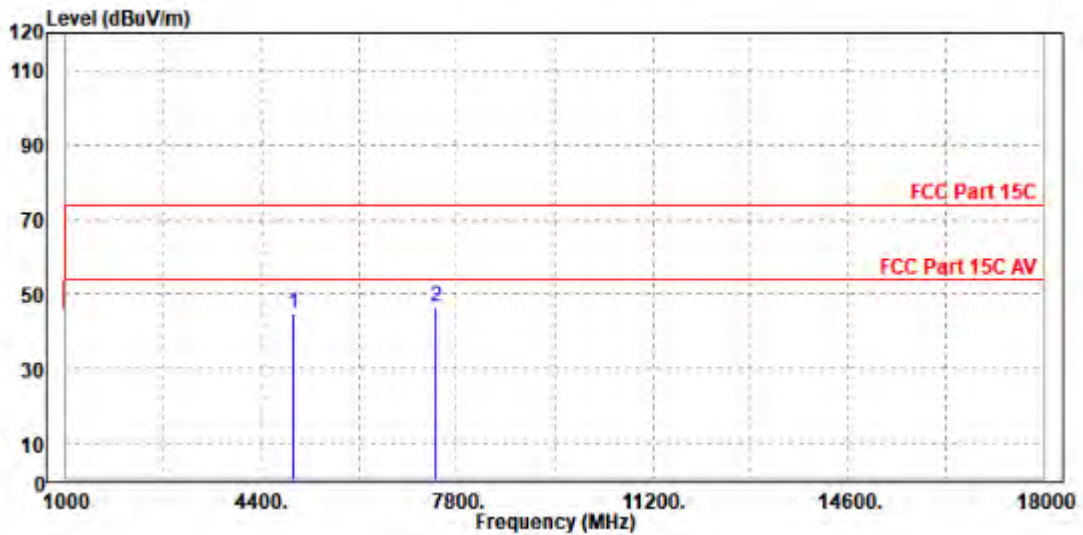



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	45.67	47.64	74.00	-28.33	-1.97	Peak	Vertical
2 PP	7440.000	47.00	44.62	74.00	-27.00	2.38	Peak	Vertical

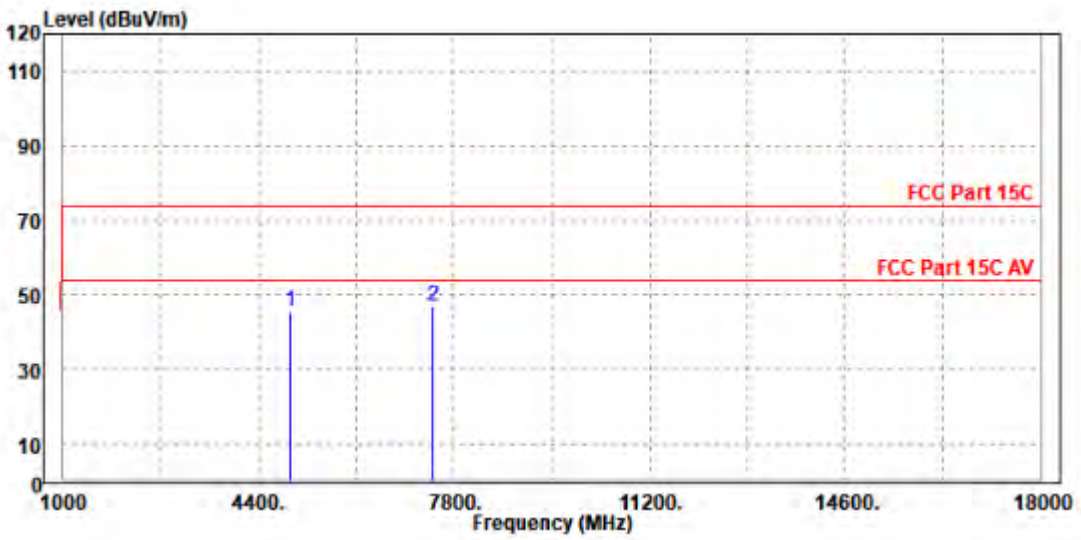

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

BT-LE_S8

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	48.64	56.21	74.00	-25.36	30.80	7.74	46.11	120	70	Peak
2390.000	42.18	49.75	54.00	-11.82	30.80	7.74	46.11	120	70	Average
2402.000	92.60	99.90	/	/	31.06	7.75	46.11	120	70	Peak
2402.000	91.73	99.03	/	/	31.06	7.75	46.11	120	70	Average
2483.500	51.67	57.41	74.00	-22.33	32.47	7.88	46.09	120	70	Peak
2483.500	43.05	48.79	54.00	-10.95	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.58	57.59	74.00	-22.42	32.36	7.74	46.11	100	160	Peak
2390.000	42.90	48.91	54.00	-11.10	32.36	7.74	46.11	100	160	Average
2402.000	84.46	90.67	/	/	32.15	7.75	46.11	100	160	Peak
2402.000	83.45	89.66	/	/	32.15	7.75	46.11	100	160	Average
2483.500	50.79	57.67	74.00	-23.21	31.33	7.88	46.09	100	160	Peak
2483.500	40.97	47.85	54.00	-13.03	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.60	57.17	74.00	-24.40	30.80	7.74	46.11	120	70	Peak
2390.000	41.21	48.78	54.00	-12.79	30.80	7.74	46.11	120	70	Average
2440.000	96.35	102.36	/	/	32.28	7.81	46.10	120	70	Peak
2440.000	94.40	100.41	/	/	32.28	7.81	46.10	120	70	Average
2483.500	52.88	58.62	74.00	-21.12	32.47	7.88	46.09	120	70	Peak
2483.500	42.89	48.63	54.00	-11.11	32.47	7.88	46.09	120	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.27	56.28	74.00	-23.73	32.36	7.74	46.11	100	160	Peak
2390.000	43.11	49.12	54.00	-10.89	32.36	7.74	46.11	100	160	Average
2440.000	84.49	91.54	/	/	31.24	7.81	46.10	100	160	Peak
2440.000	83.22	90.27	/	/	31.24	7.81	46.10	100	160	Average
2483.500	50.27	57.15	74.00	-23.73	31.33	7.88	46.09	100	160	Peak
2483.500	42.08	48.96	54.00	-11.92	31.33	7.88	46.09	100	160	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.01	56.58	74	-24.99	30.8	7.74	46.11	100	125	Peak
2390.000	40.48	48.05	54	-13.52	30.8	7.74	46.11	100	125	Average
2480.000	91.88	97.62	/	/	32.48	7.87	46.09	100	125	Peak
2480.000	89.62	95.36	/	/	32.48	7.87	46.09	100	125	Average
2483.500	51.32	57.06	74	-22.68	32.47	7.88	46.09	100	125	Peak
2483.500	43.82	49.56	54	-10.18	32.47	7.88	46.09	100	125	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.4	56.41	74	-23.6	32.36	7.74	46.11	110	180	Peak
2390.000	41.5	47.51	54	-12.5	32.36	7.74	46.11	110	180	Average
2480.000	82.13	89.05	/	/	31.3	7.87	46.09	110	180	Peak
2480.000	81.09	88.01	/	/	31.3	7.87	46.09	110	180	Average
2483.500	49.8	56.68	74	-24.2	31.33	7.88	46.09	110	180	Peak
2483.500	42.44	49.32	54	-11.56	31.33	7.88	46.09	110	180	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: W7L-240618W002RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	44.87	46.60	74.00	-29.13	-1.73	Peak	Horizontal
2 PP	7440.000	46.13	43.71	74.00	-27.87	2.42	Peak	Horizontal

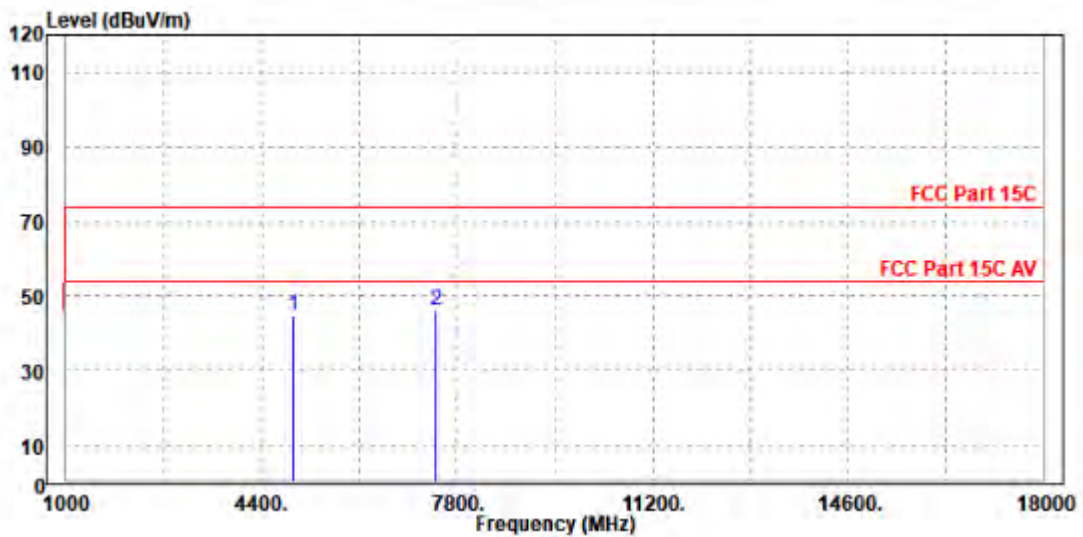



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	45.03	47.00	74.00	-28.97	-1.97	Peak	Vertical
2	PP 7443.000	46.87	44.50	74.00	-27.13	2.37	Peak	Vertical

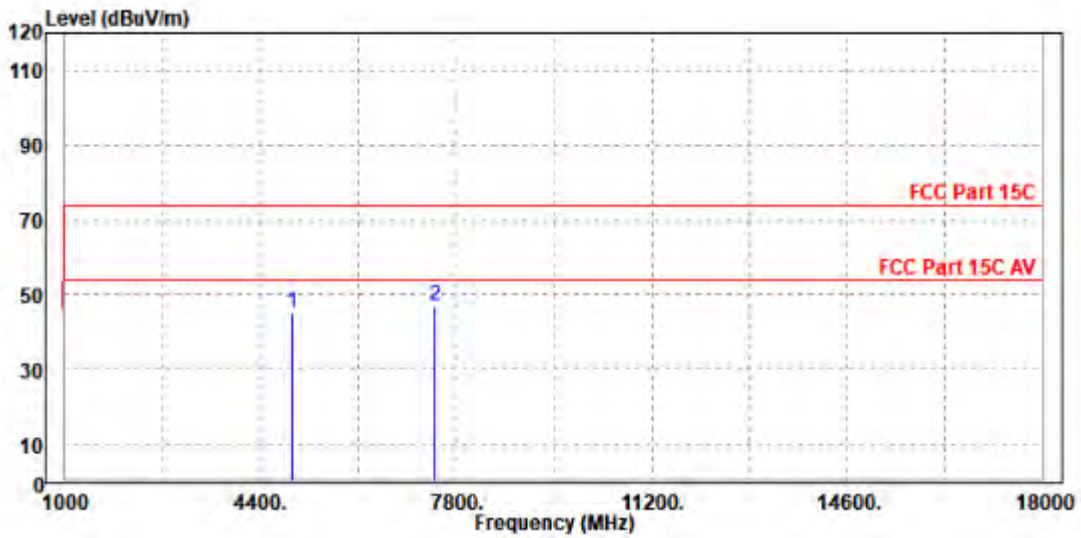

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,24	May.09,25
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 14,24	Feb. 13,25

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

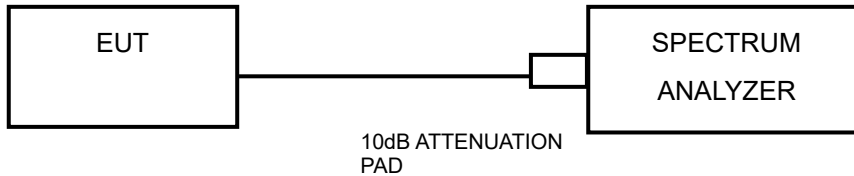

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU Test Report No.: W7L-240618W002RF02
VERITAS

3.3.7 TEST RESULTS

Please Refer to Appendix Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

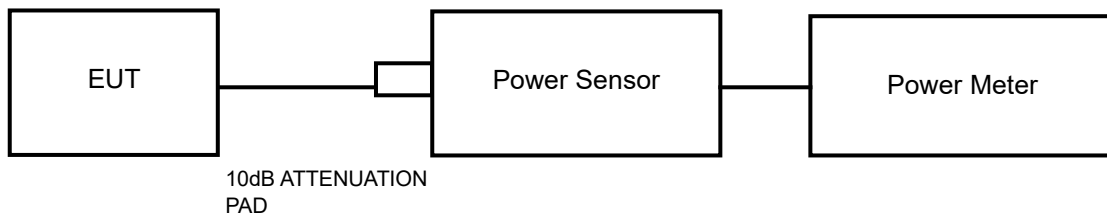

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

For 2.4G WIFI:

- a) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- b) Set span to >1.5 times the OBW.
- c) Set RBW = 1% to 5% of the OBW, but do not exceed 1 MHz.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = Power averaging (rms), if available. Otherwise, use the sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”



i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 until trace is stabilized so that the average accurately represents the true average over the ON and OFF periods of the transmitter.

j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band-power measurement function with band limits set equal to the OBW band-edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

For BLE:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = No faster than coupled (auto) time.
- e) Detector = peak.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

3.4.7 TEST RESULTS

Please Refer to Appendix Of this test report.




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW \geq 3 x RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

3.5.7 TEST RESULTS

Please Refer to Appendix Of this test report.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth). (Based on peak power limits, If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required for test shall be 30 dB instead of 20 dB.)

3.6.2 TEST SETUP

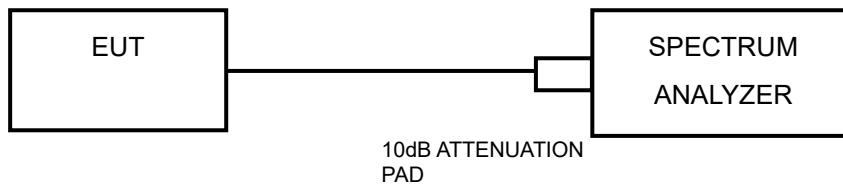

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB/30db offset below D1. It shows compliance to the requirement.

Please Refer to Appendix Of this test report.



3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit.

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 APPENDIX

WLAN


DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	8.210	2407.870	2416.080	0.5	PASS
	Ant0	2437	8.160	2432.870	2441.030	0.5	PASS
	Ant0	2462	8.160	2457.870	2466.030	0.5	PASS
11G	Ant0	2412	15.569	2404.366	2419.935	0.5	PASS
	Ant0	2437	15.419	2429.366	2444.785	0.5	PASS
	Ant0	2462	15.469	2454.115	2469.585	0.5	PASS
11N20	Ant0	2412	15.219	2404.366	2419.585	0.5	PASS
	Ant0	2437	15.569	2429.366	2444.935	0.5	PASS
	Ant0	2462	15.219	2454.366	2469.585	0.5	PASS




TEST GRAPHS

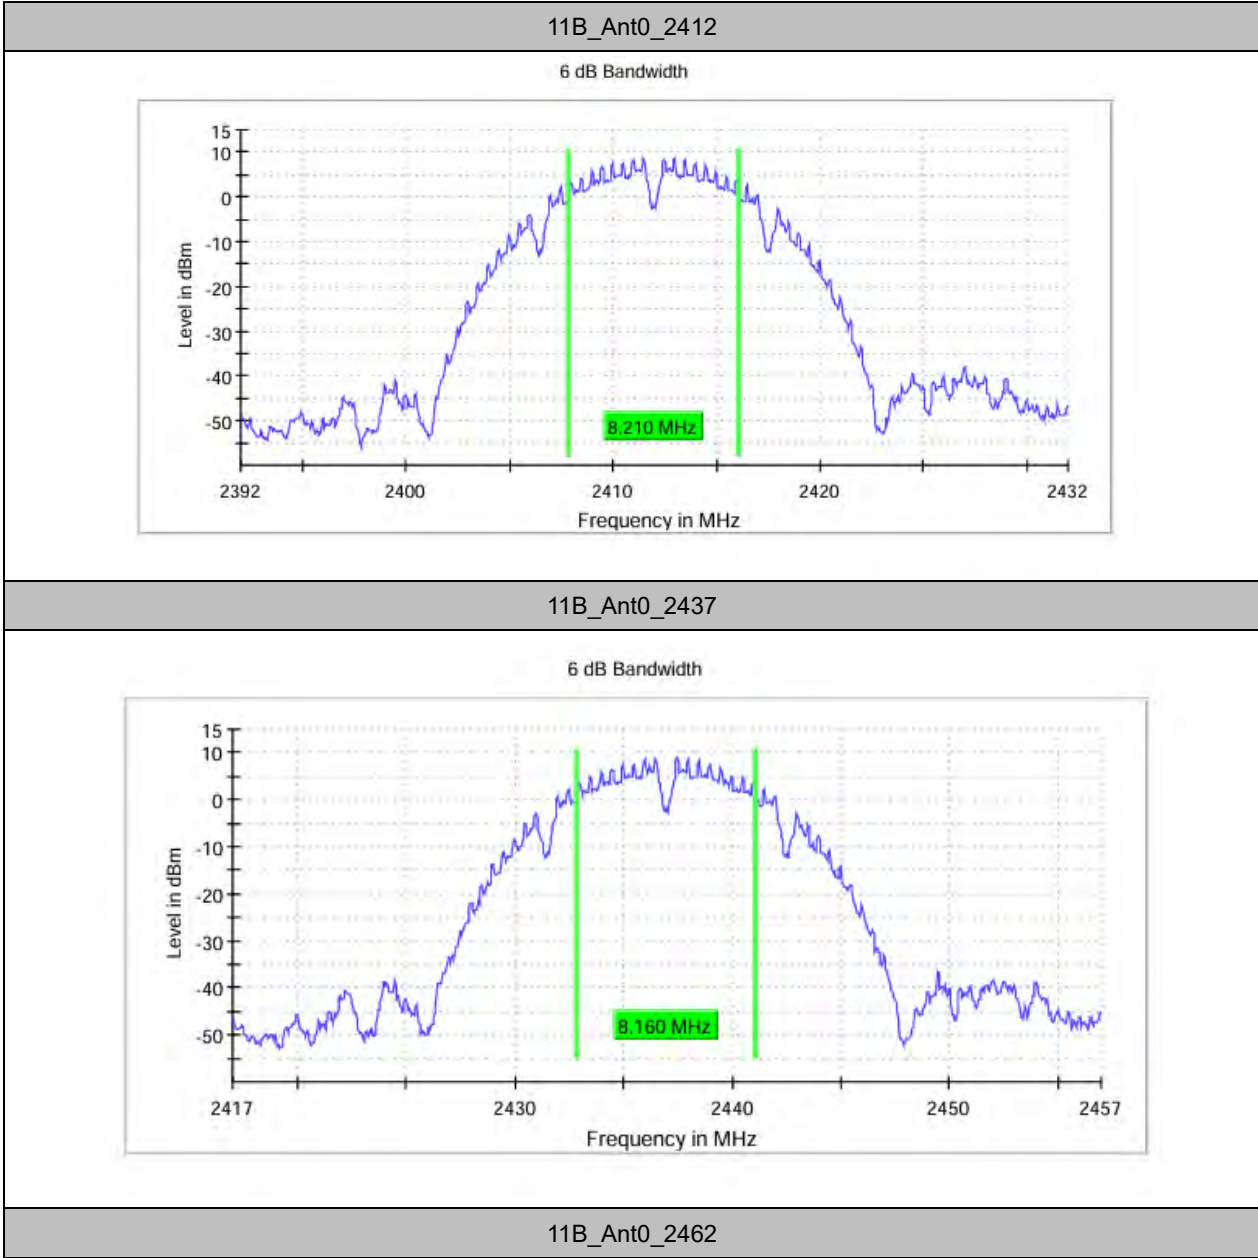




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

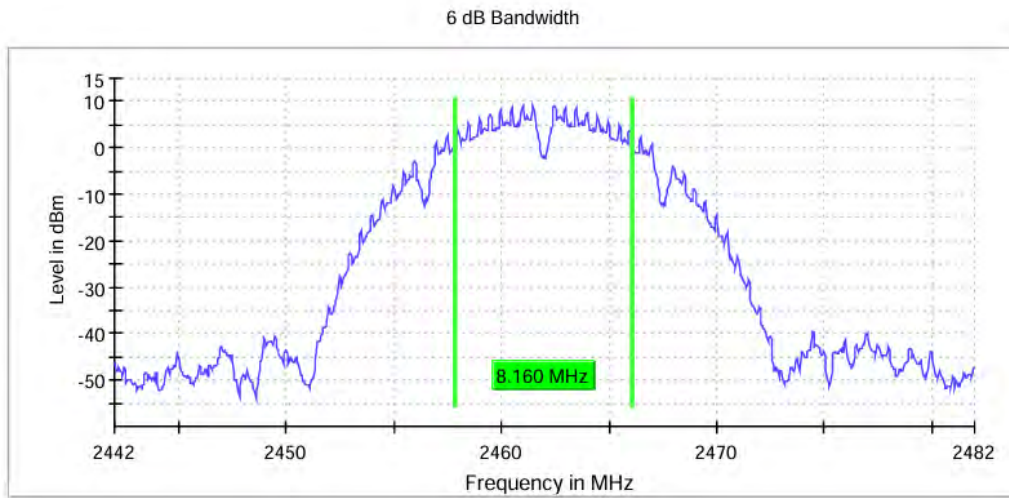

11G_Ant0_2412

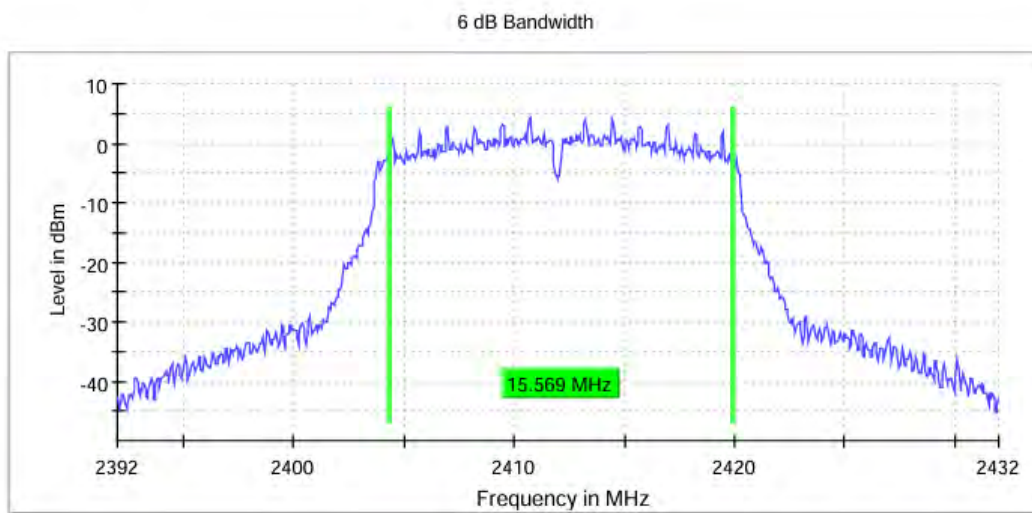


11G_Ant0_2437




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

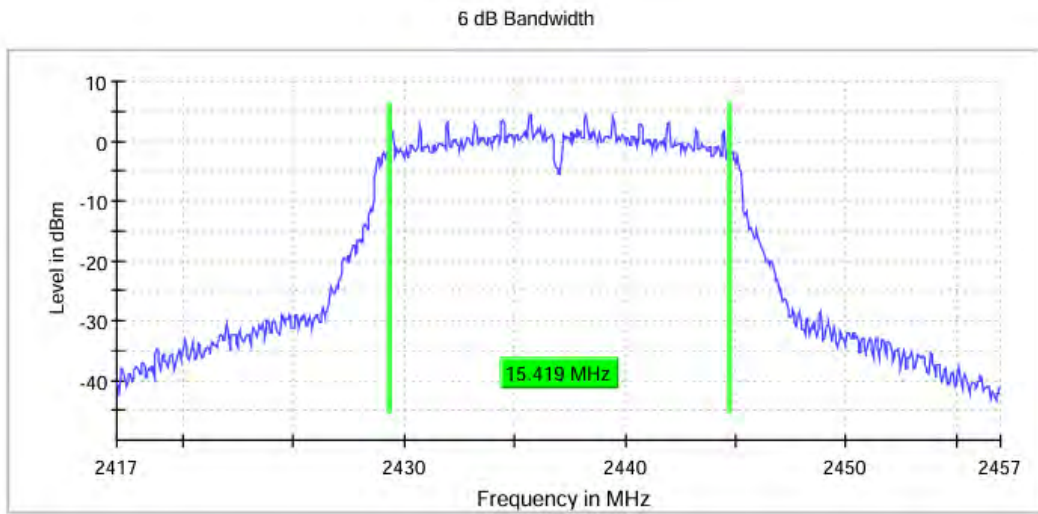

11G_Ant0_2462

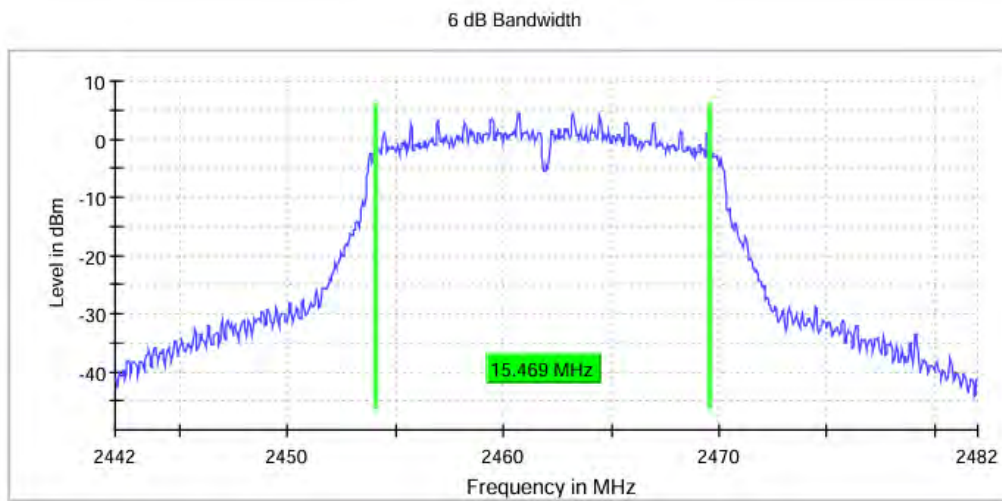


11N20_Ant0_2412




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

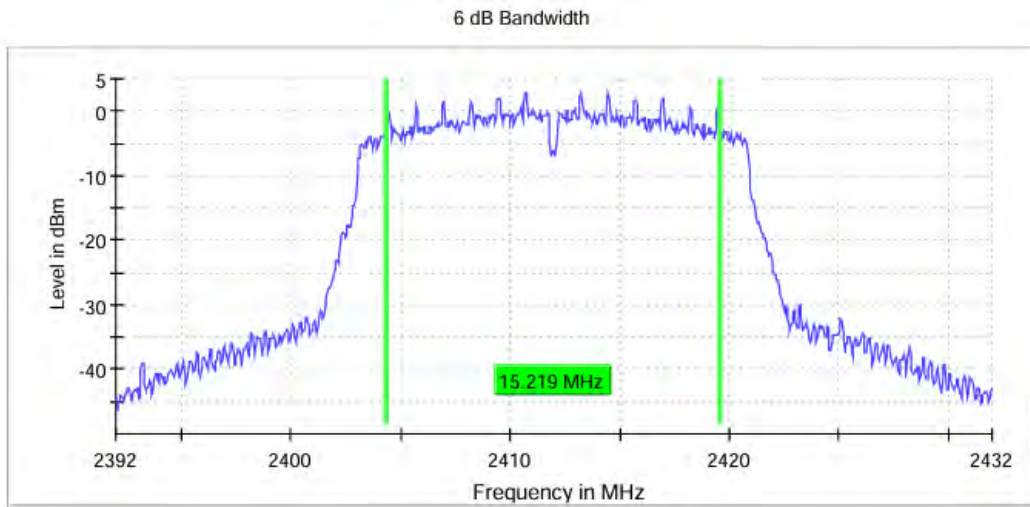

11N20_Ant0_2437

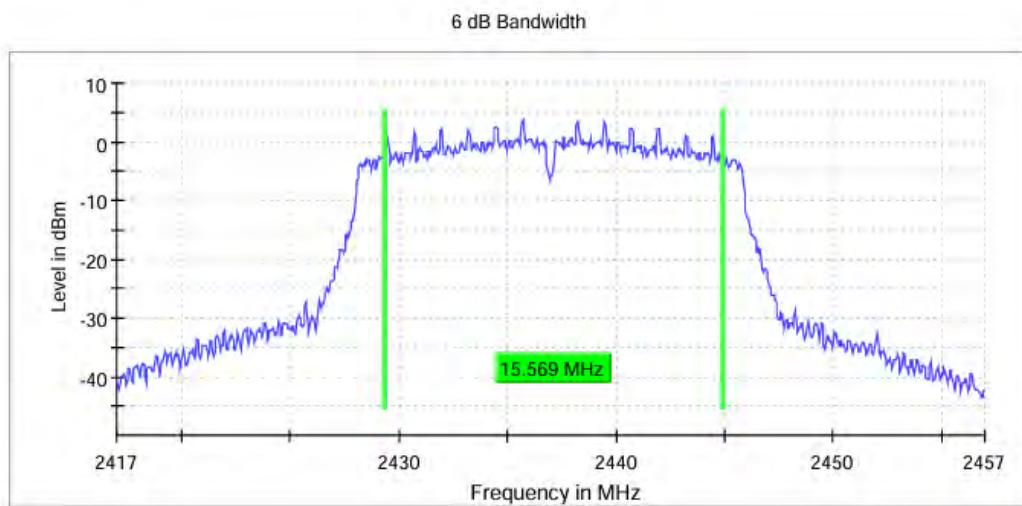


11N20_Ant0_2462



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

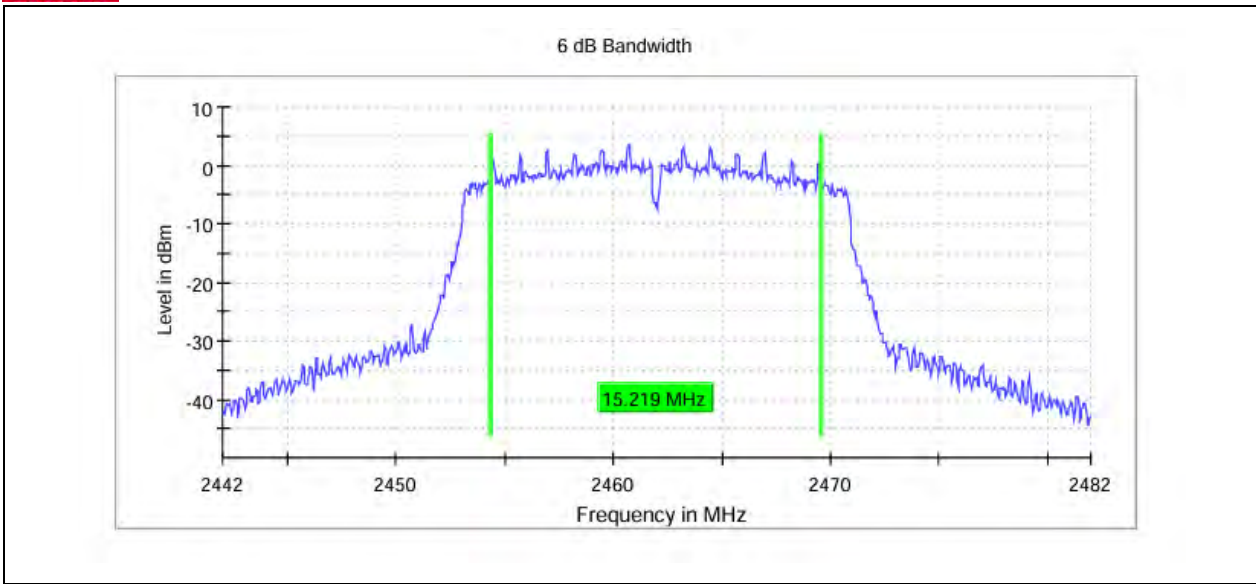

20M

RBW 100.000 kHz

VBW 300.000 kHz

40M

RBW 100.000 kHz

VBW 300.000 kHz




OBW BANDWIDTH TEST RESULT

TestMode	Antenna	Frequency[MHz]	OBW BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	12.932	2405.634	2418.566	---	PASS
	Ant0	2437	13.033	2430.534	2443.566	---	PASS
	Ant0	2462	12.832	2455.534	2468.366	---	PASS
11G	Ant0	2412	16.541	2403.729	2420.271	---	PASS
	Ant0	2437	16.541	2428.729	2445.271	---	PASS
	Ant0	2462	16.541	2453.729	2470.271	---	PASS
11N20	Ant0	2412	17.644	2403.228	2420.872	---	PASS
	Ant0	2437	17.744	2428.128	2445.872	---	PASS
	Ant0	2462	17.644	2453.128	2470.772	---	PASS




TEST GRAPHS

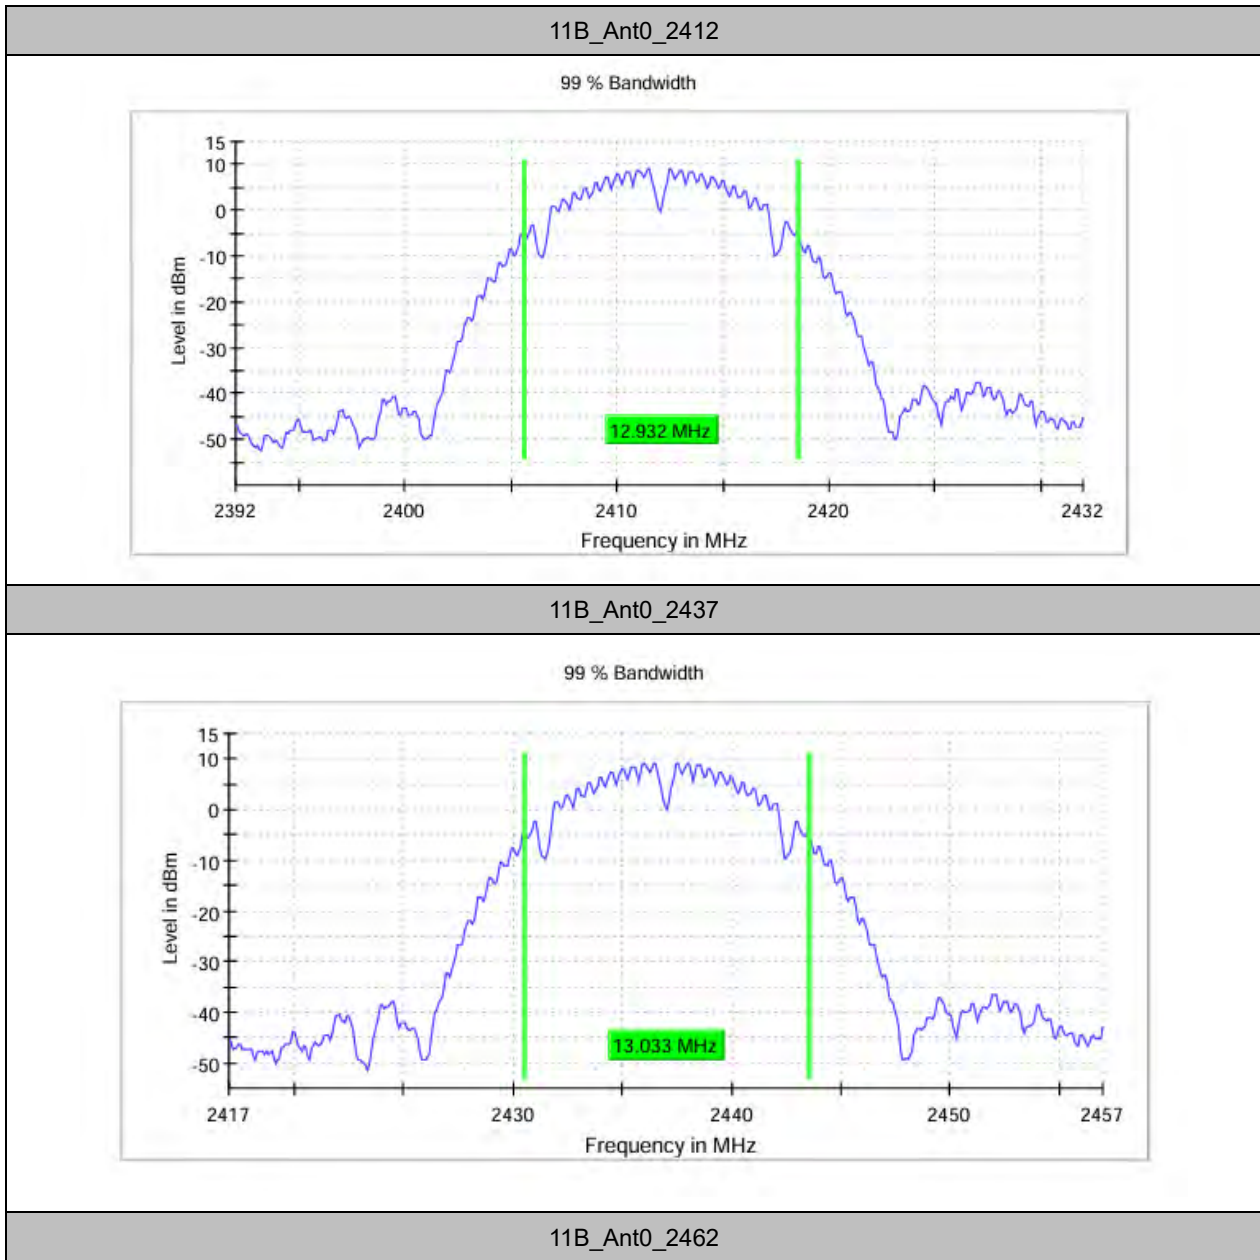




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

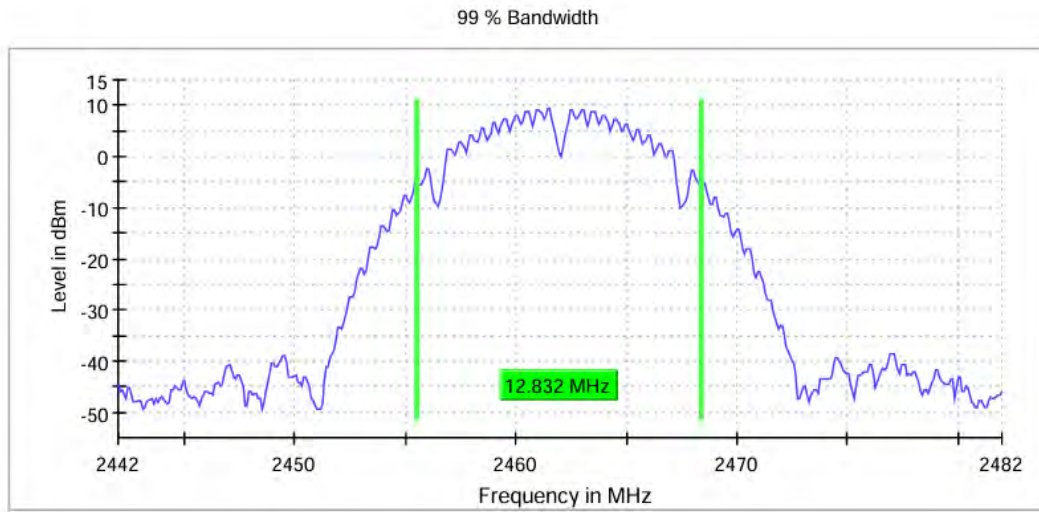

11G_Ant0_2412

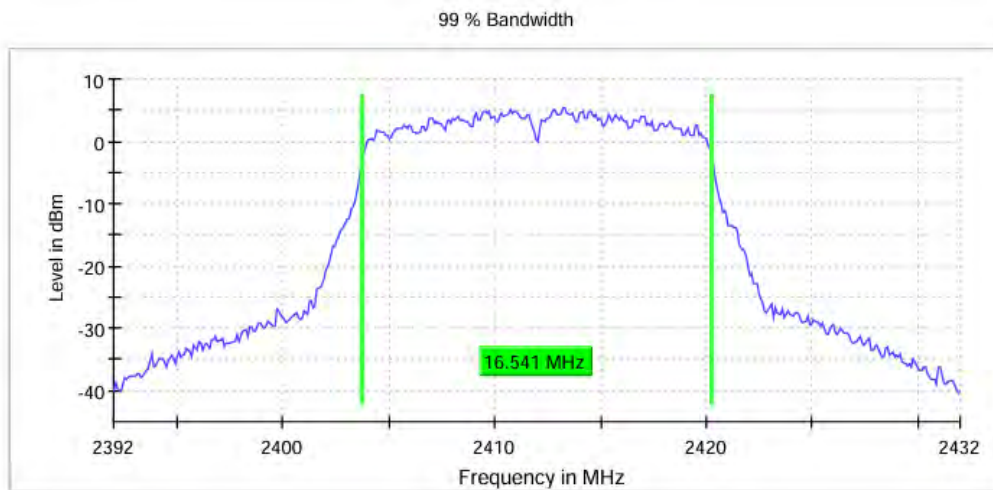


11G_Ant0_2437




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

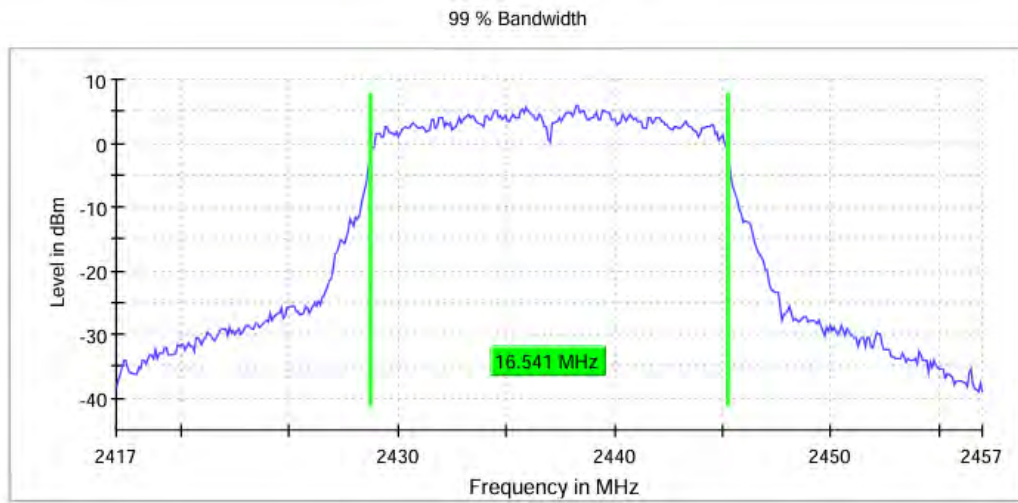

11G_Ant0_2462

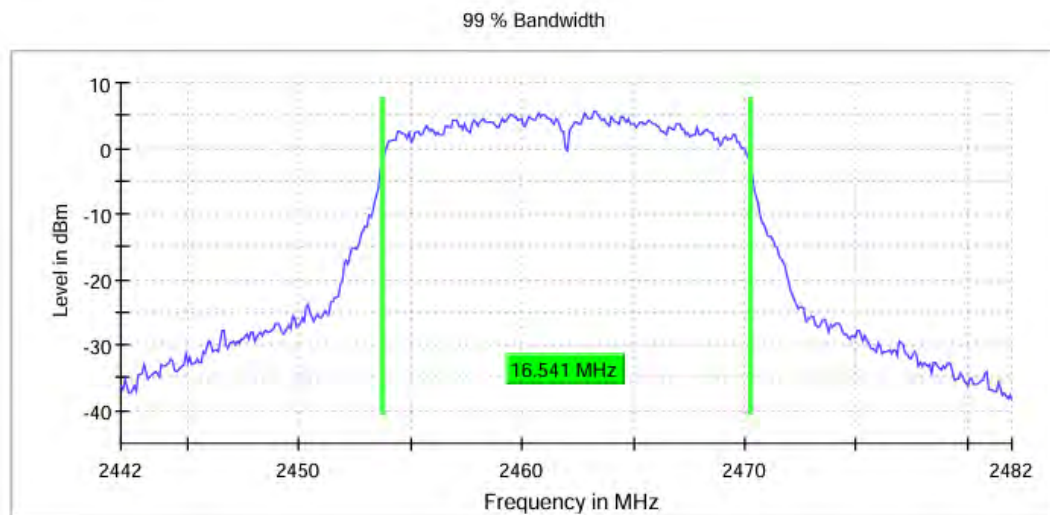


11N20_Ant0_2412




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

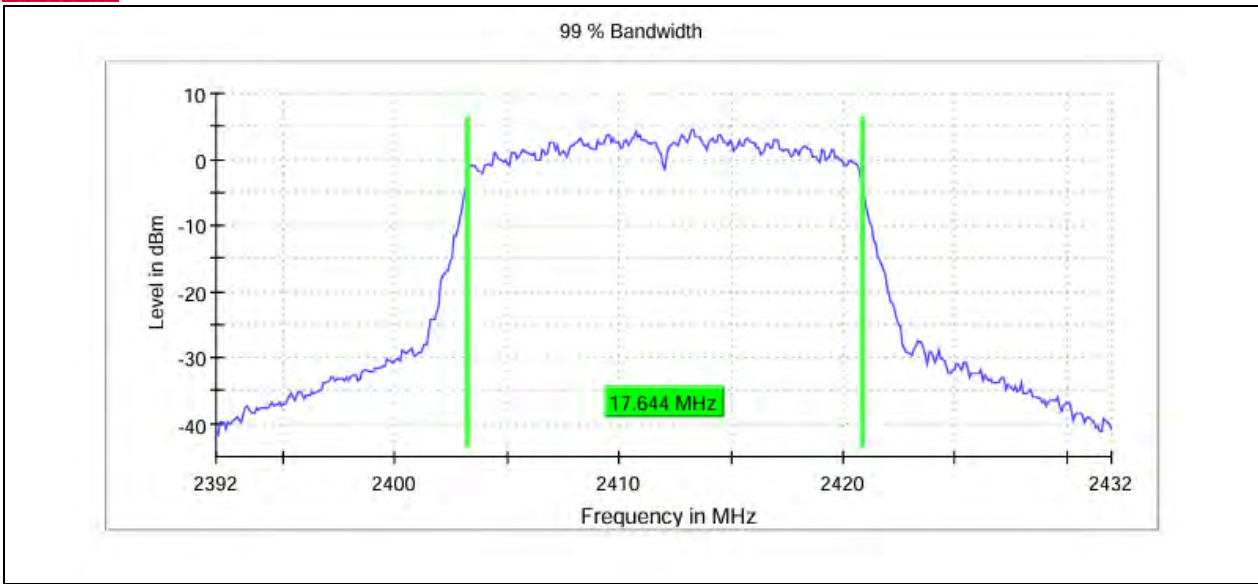

11N20_Ant0_2437

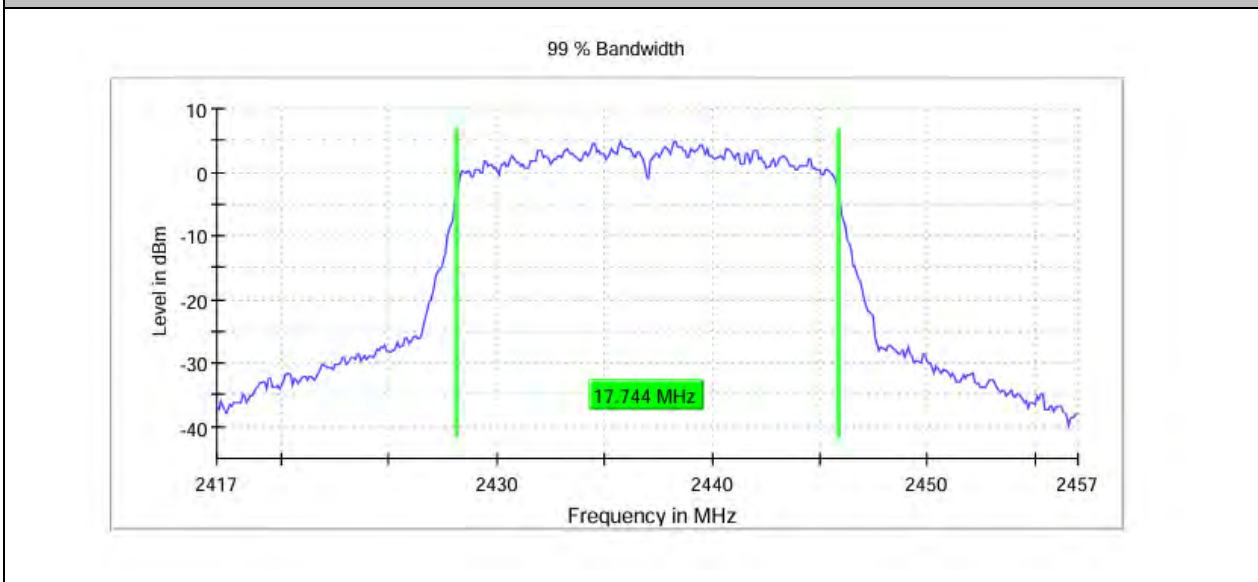


11N20_Ant0_2462



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

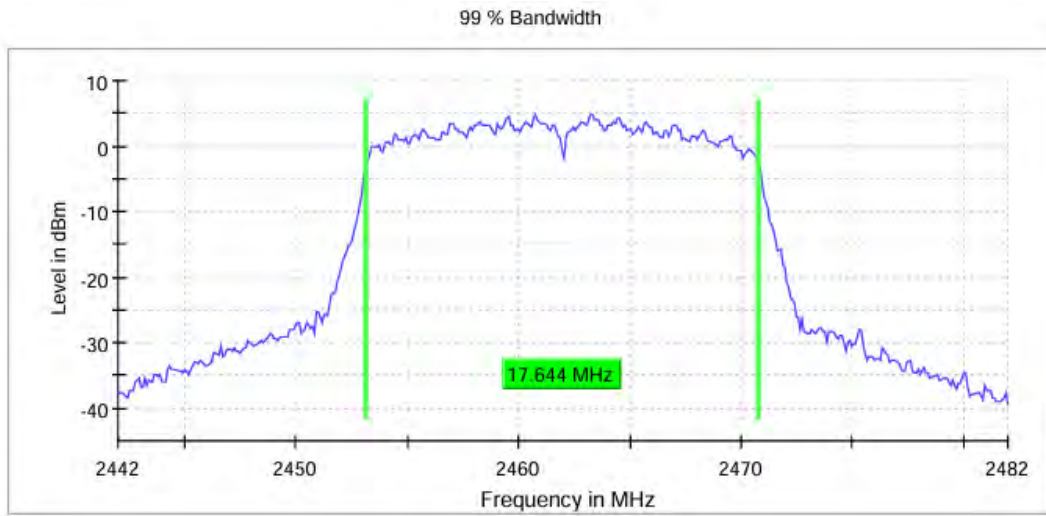

20M

RBW 200.000 kHz

VBW 1.000 MHz

40M

RBW 500.000 kHz

VBW 2.000 MHz





MAXIMUM CONDUCTED OUTPUT POWER TEST RESULT

Test Mode	TX Mod.	Freq. [MHz]	Ant.	Average power [dBm]	Peak power [dBm]	Peak power [mw]	Conducted Power Limit [dBm]	Verdict	Power Setting
11B	SISO	2412	Ant0	16.49	18.92	77.98	≤30.00	PASS	17
		2437	Ant0	16.81	19.23	83.83	≤30.00	PASS	17
		2462	Ant0	16.80	19.13	81.92	≤30.00	PASS	17
11G	SISO	2412	Ant0	14.64	23.16	207.01	≤30.00	PASS	15
		2437	Ant0	14.92	23.61	229.67	≤30.00	PASS	15
		2462	Ant0	14.83	23.34	215.68	≤30.00	PASS	15
11N20	SISO	2412	Ant0	13.50	22.45	175.83	≤30.00	PASS	14
		2437	Ant0	13.84	23.08	203.00	≤30.00	PASS	14
		2462	Ant0	13.74	22.25	167.69	≤30.00	PASS	14


Note: The Average power with duty cycle factor.

TEST GRAPHS

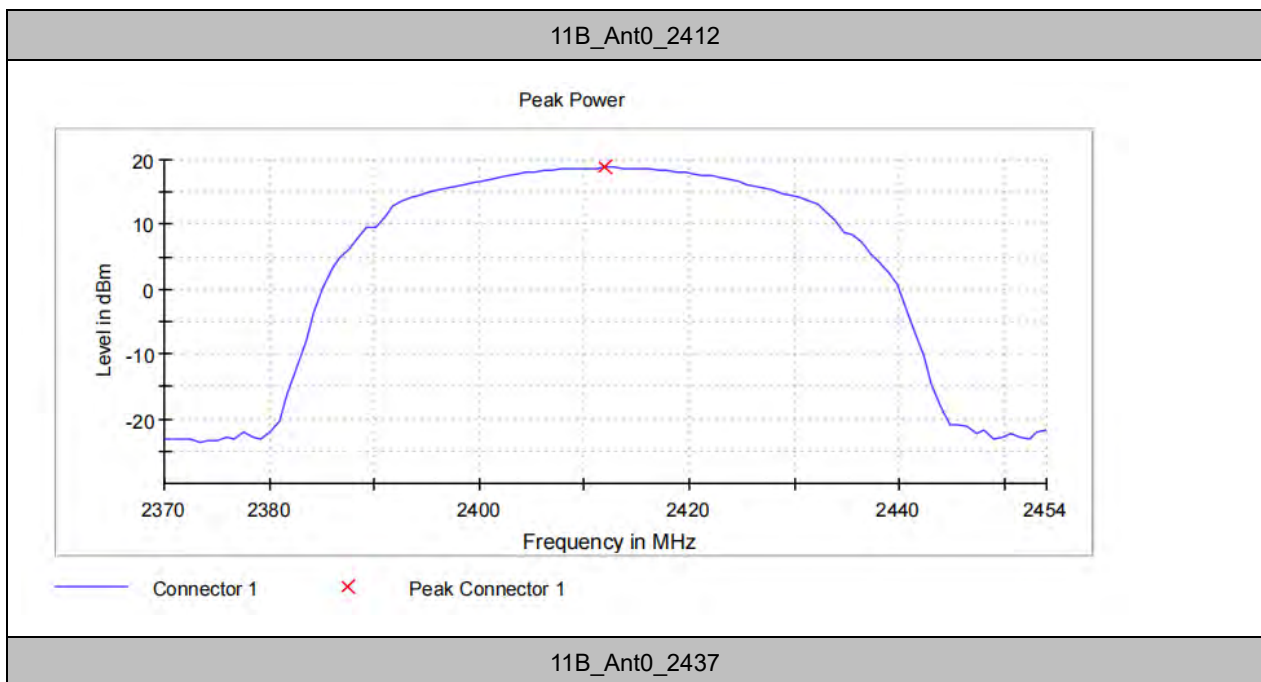


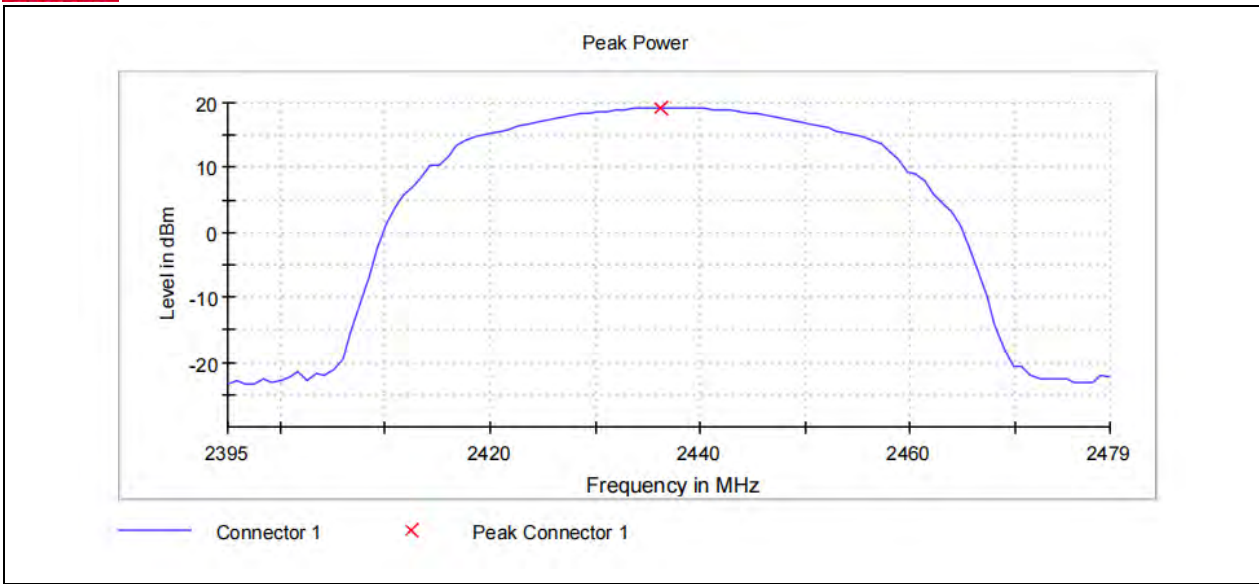


11B_Ant0_2462

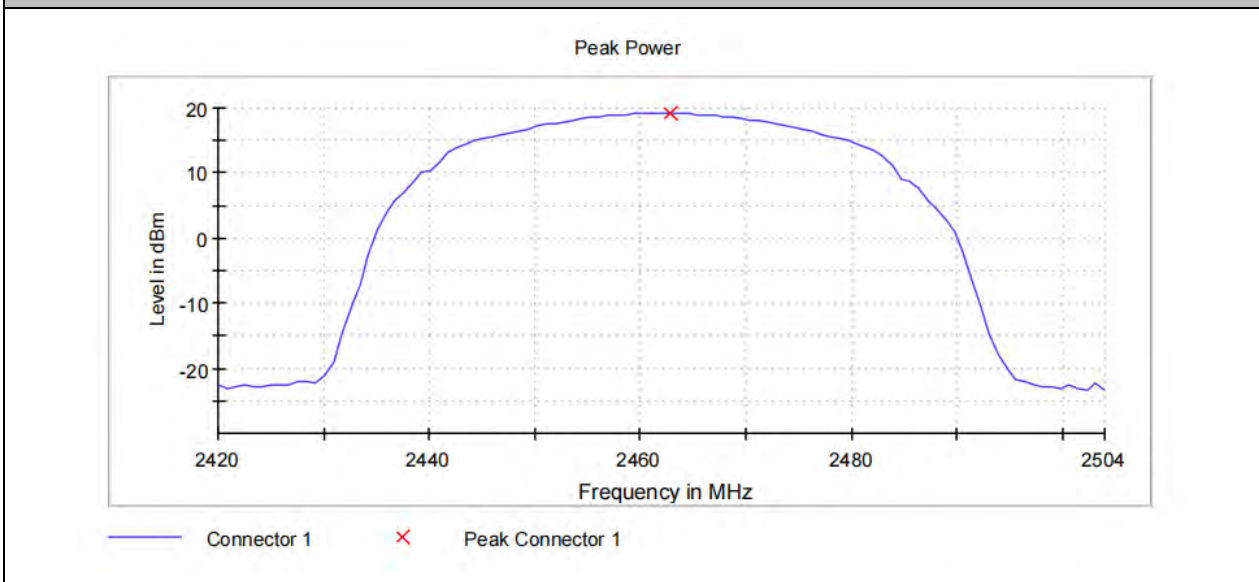

11G_Ant0_2412

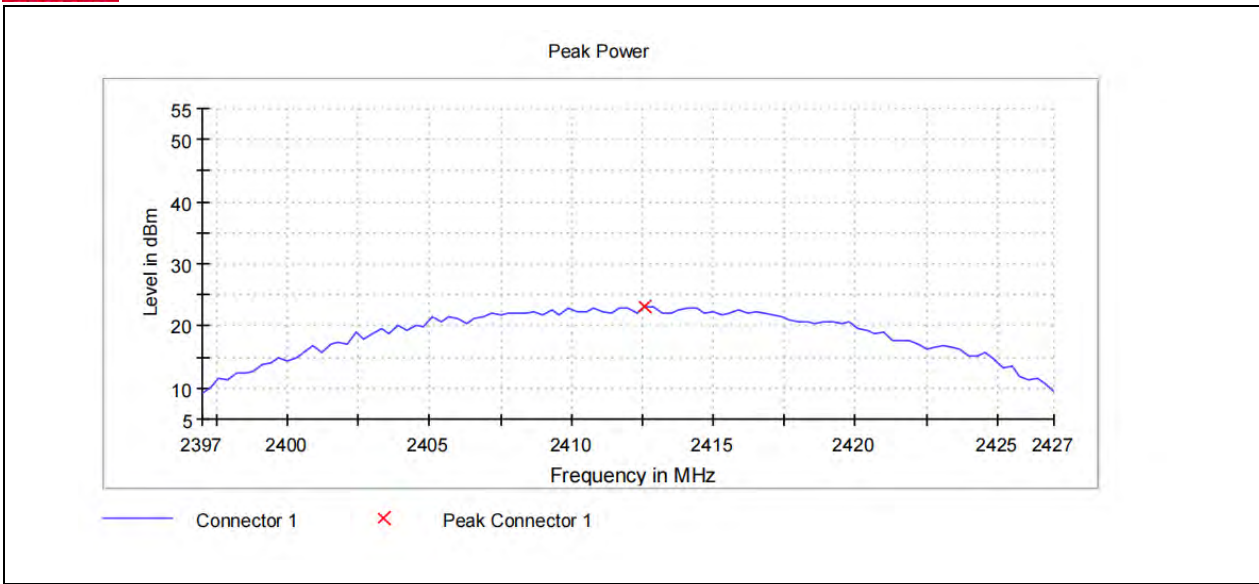

11G_Ant0_2437

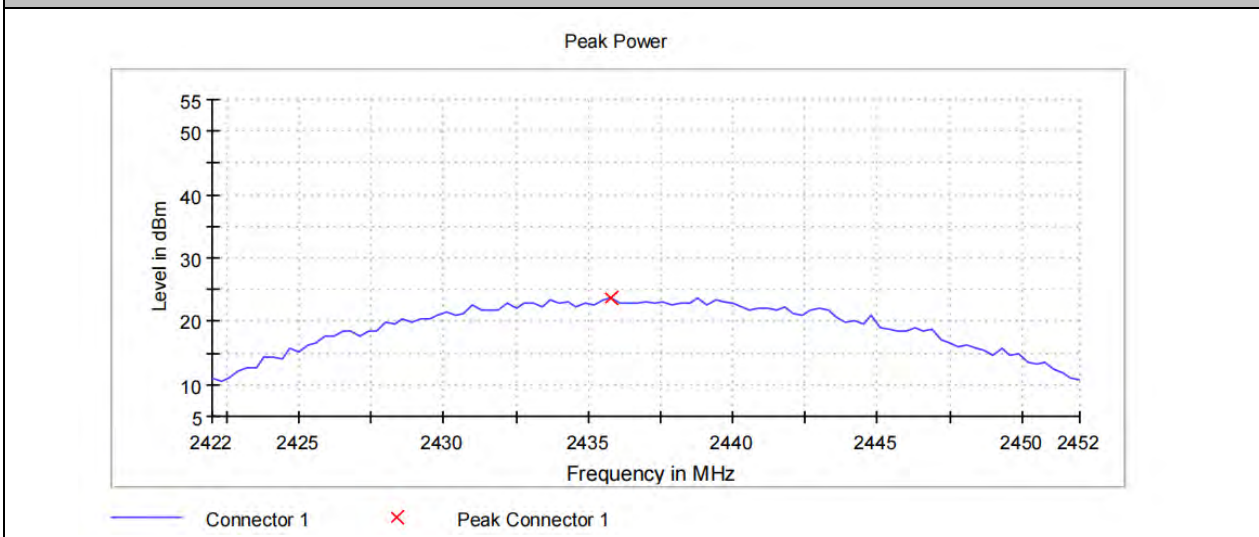


11G_Ant0_2462




BUREAU
VERITAS

Test Report No.: W7L-240618W002RF02

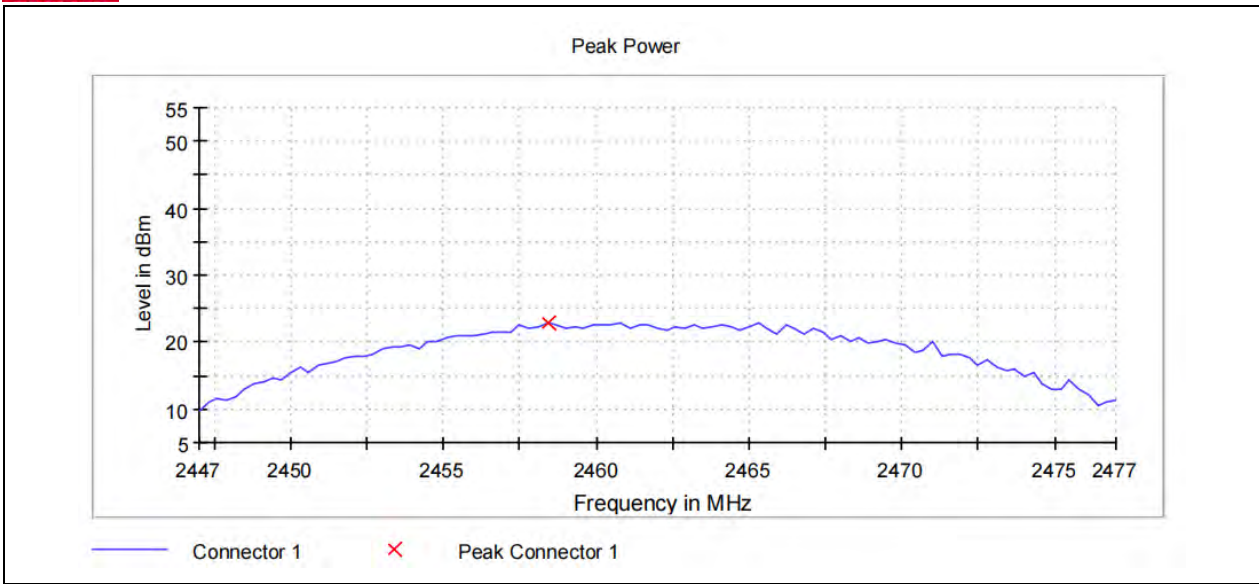

11N20_Ant0_2412

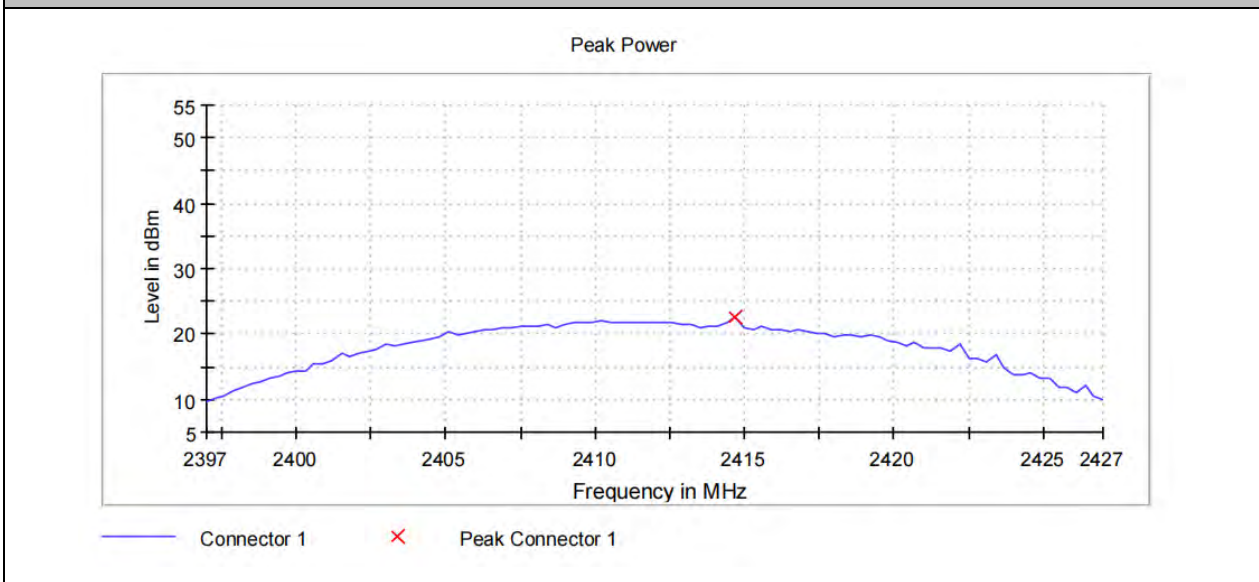


11N20_Ant0_2437




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

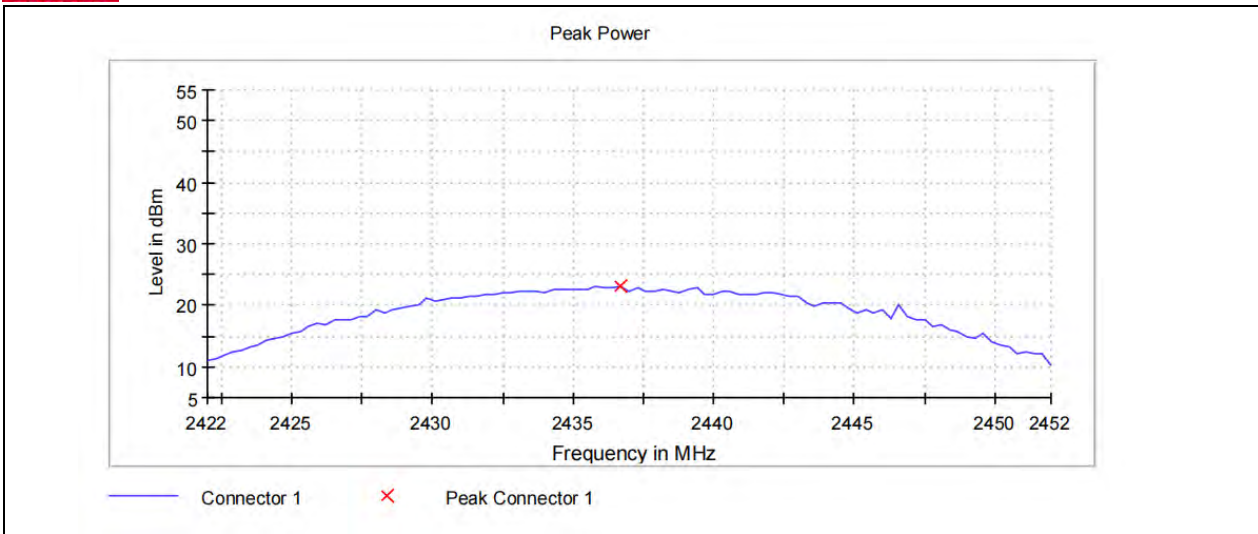

11N20_Ant0_2462

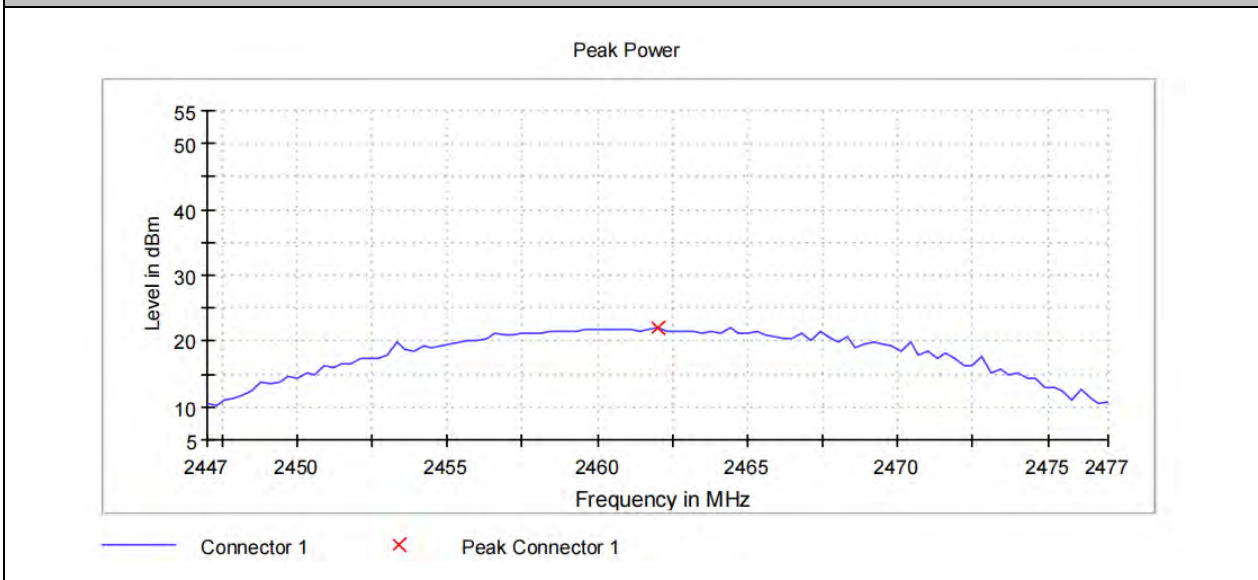

20M

RBW 28.000 MHz


VBW 40.000 MHz



MAXIMUM POWER SPECTRAL DENSITY TEST RESULT

TestMode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant0	2412	-6.42	≤8.00	PASS
	Ant0	2437	-5.99	≤8.00	PASS
	Ant0	2462	-4.80	≤8.00	PASS
11G	Ant0	2412	-9.86	≤8.00	PASS
	Ant0	2437	-9.03	≤8.00	PASS
	Ant0	2462	-9.88	≤8.00	PASS
11N20	Ant0	2412	-10.83	≤8.00	PASS
	Ant0	2437	-11.39	≤8.00	PASS
	Ant0	2462	-10.98	≤8.00	PASS


TEST GRAPHS

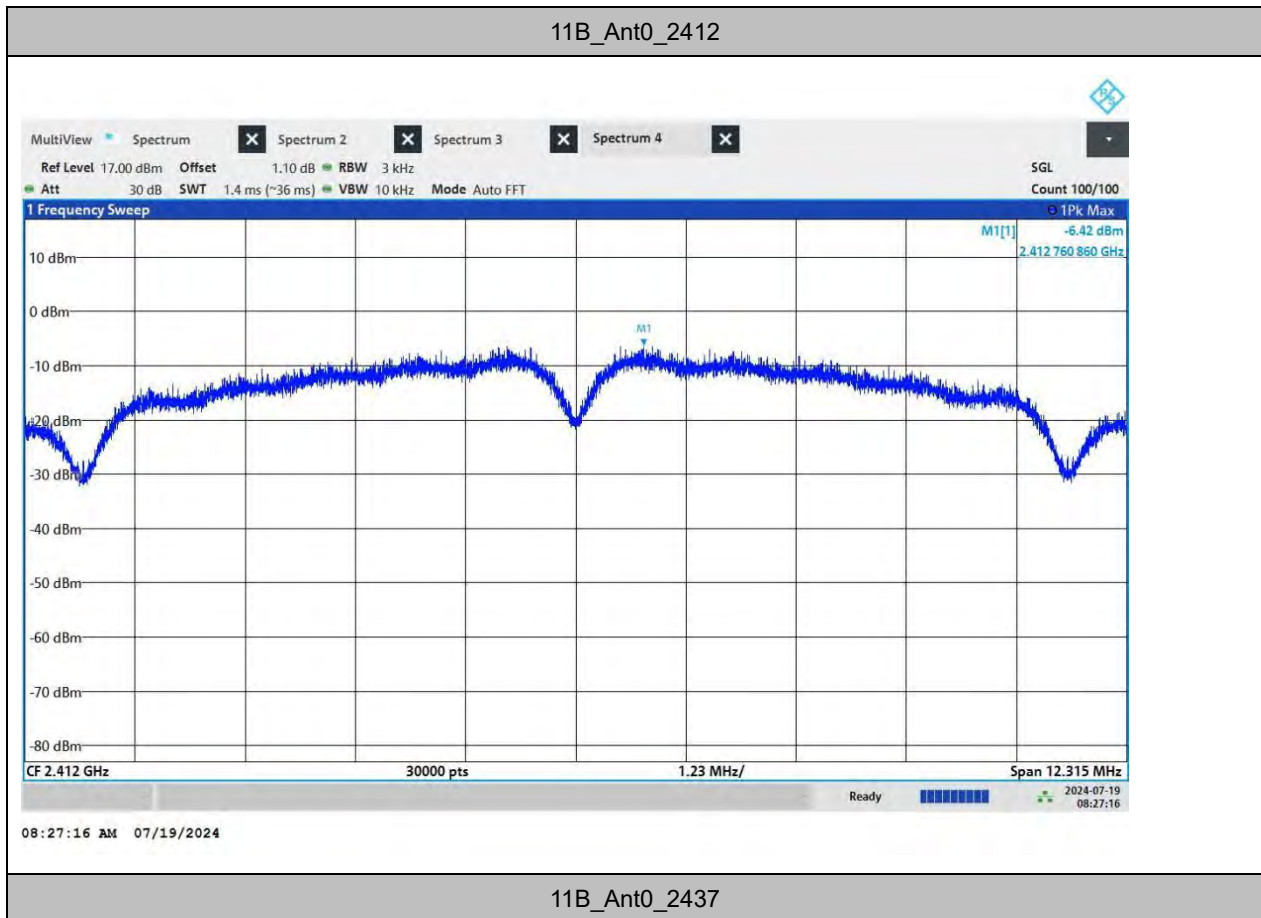




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

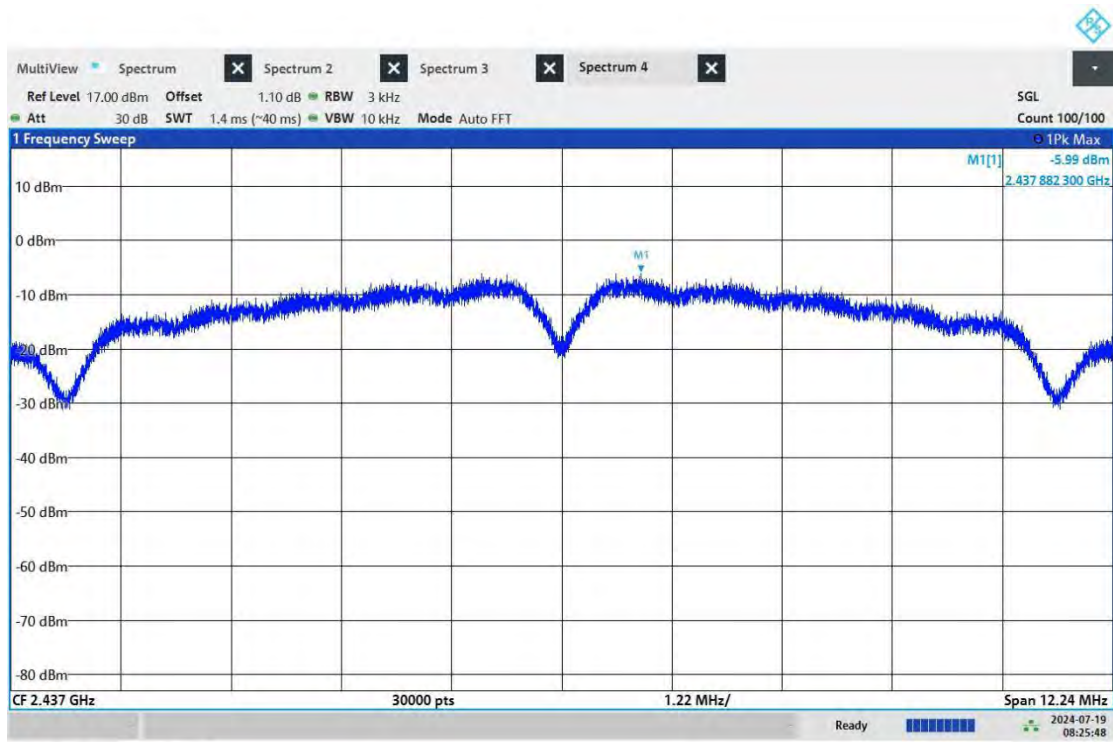

08:25:49 AM 07/19/2024

11B_Ant0_2462

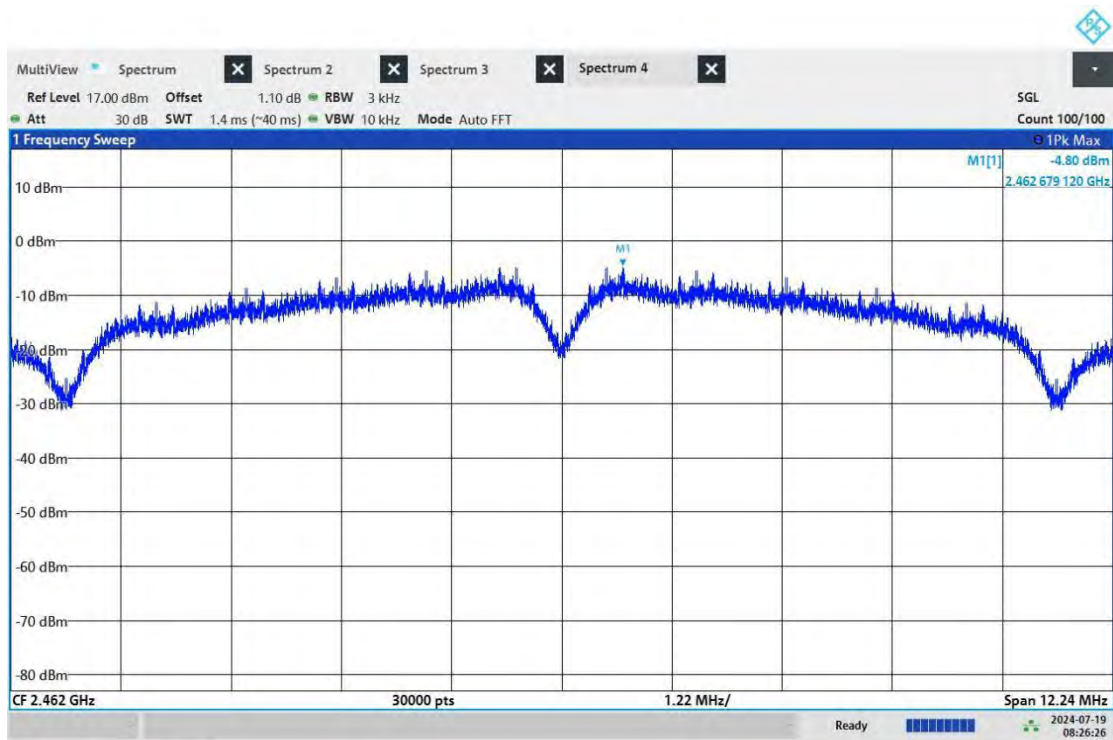

08:26:27 AM 07/19/2024

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS


Test Report No.: W7L-240618W002RF02

11G_Ant0_2412

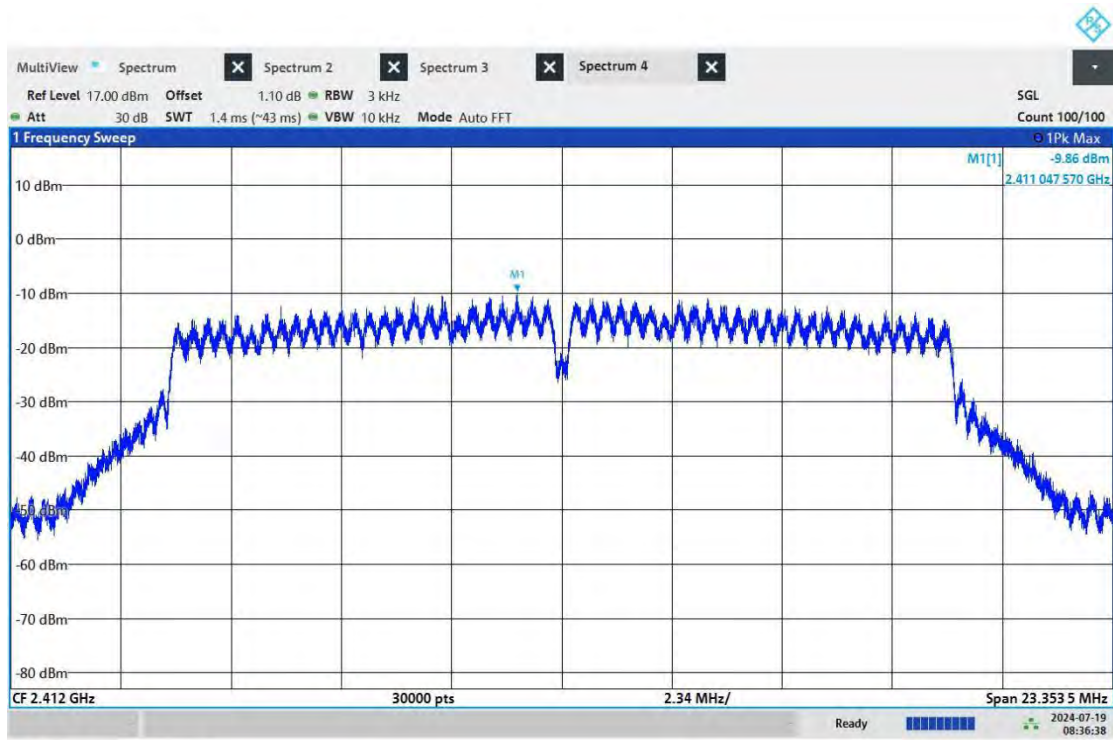


08:36:39 AM 07/19/2024

11G_Ant0_2437

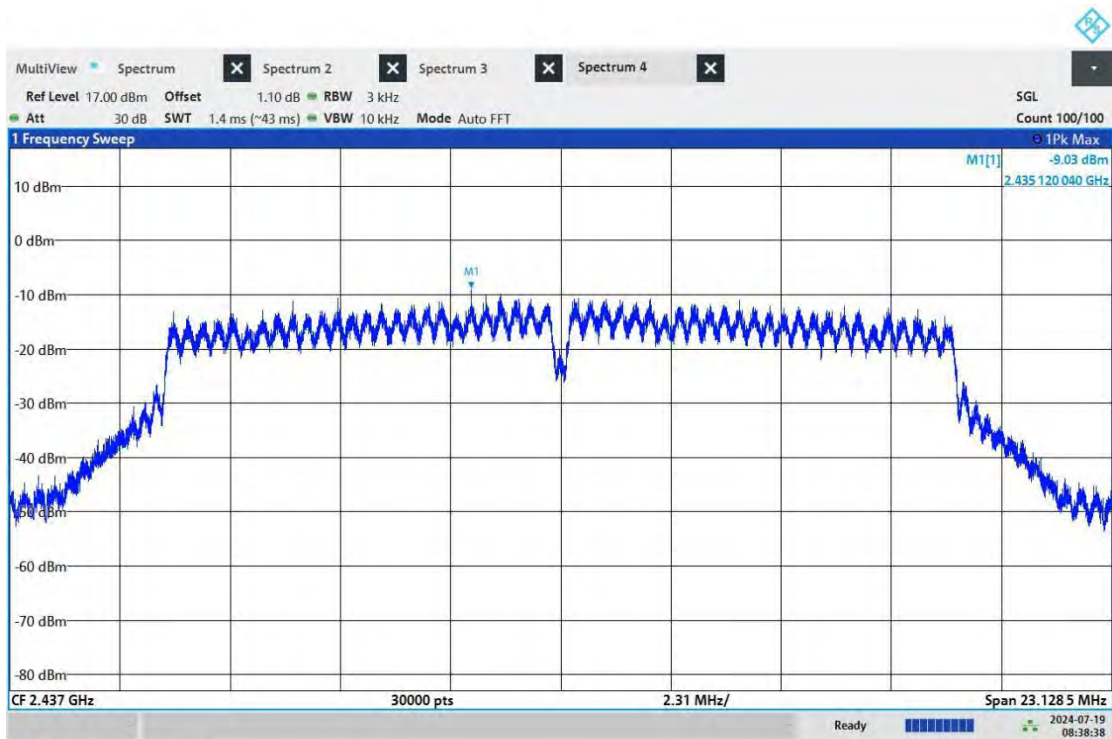

08:38:38 AM 07/19/2024

11G_Ant0_2462

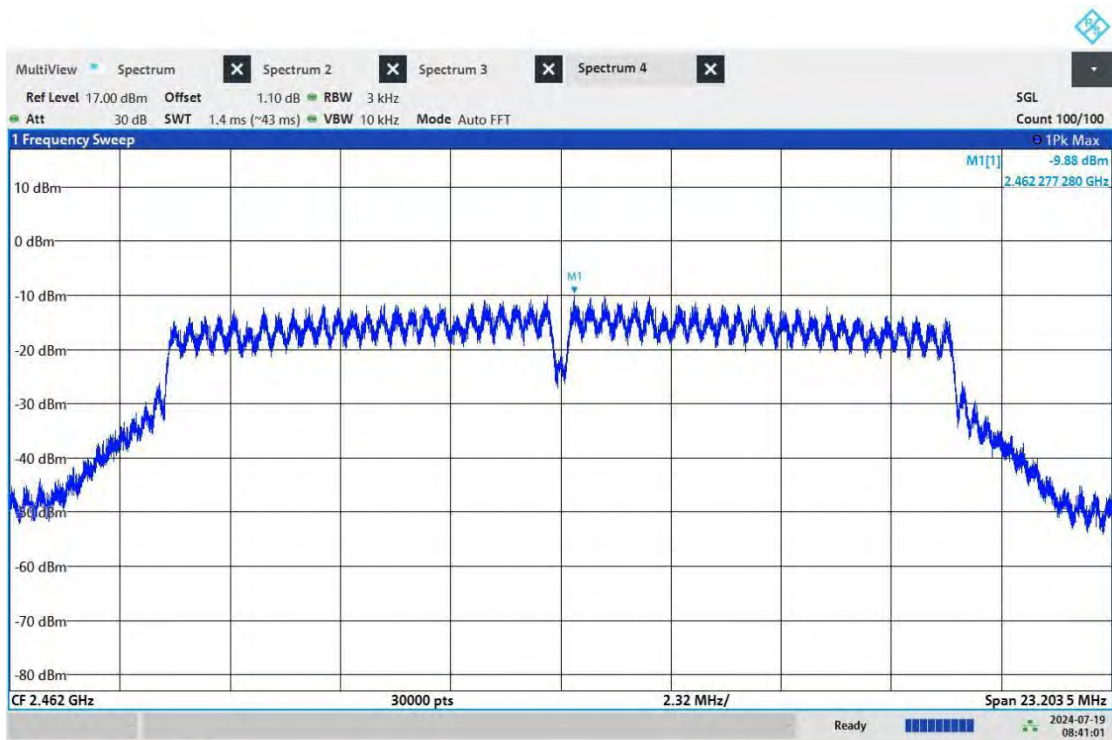


08:41:01 AM 07/19/2024



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

11N20_Ant0_2412

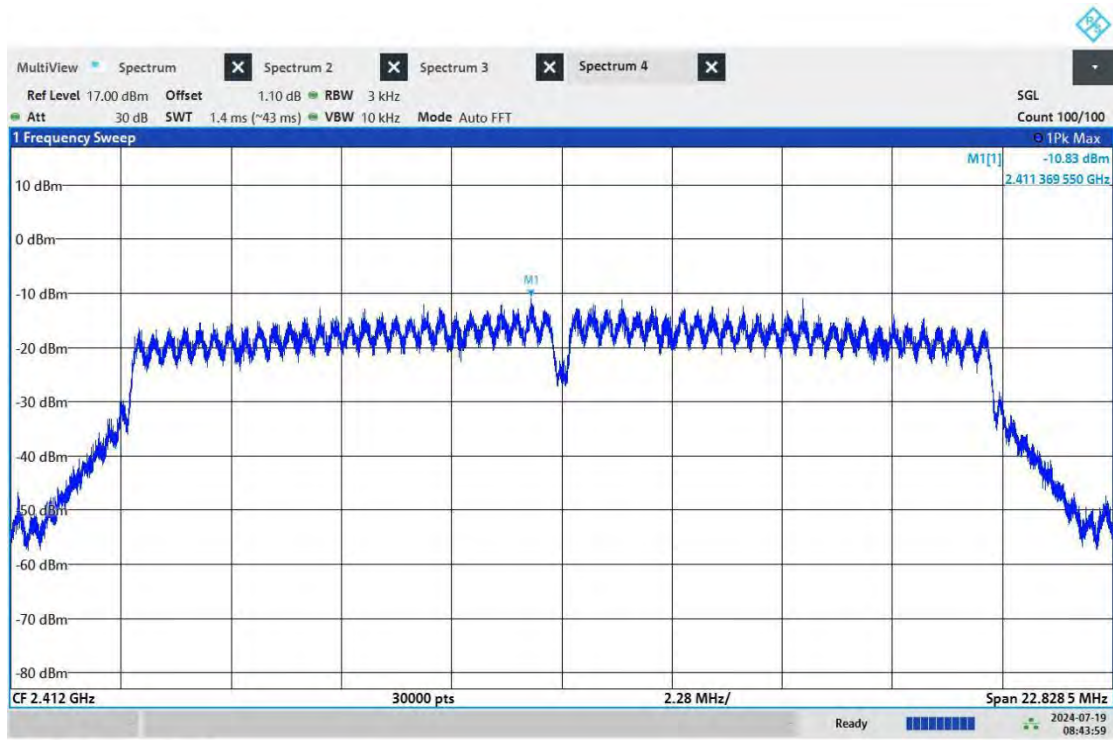


08:43:59 AM 07/19/2024

11N20_Ant0_2437




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

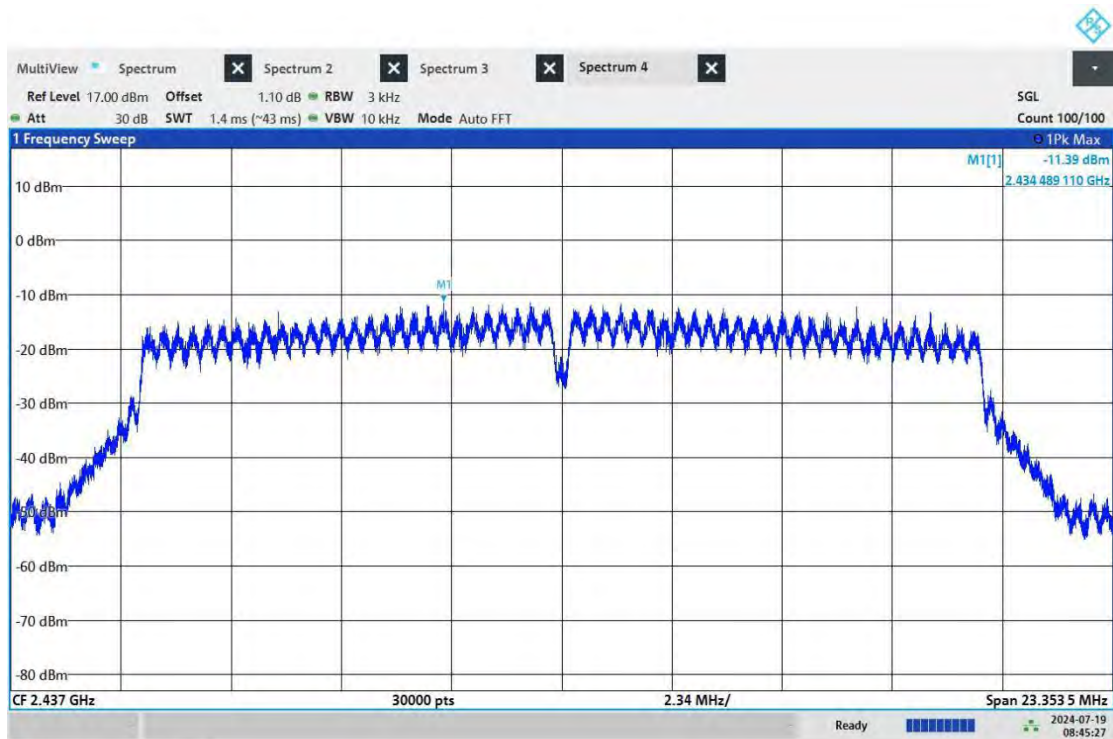

08:45:27 AM 07/19/2024

11N20_Ant0_2462

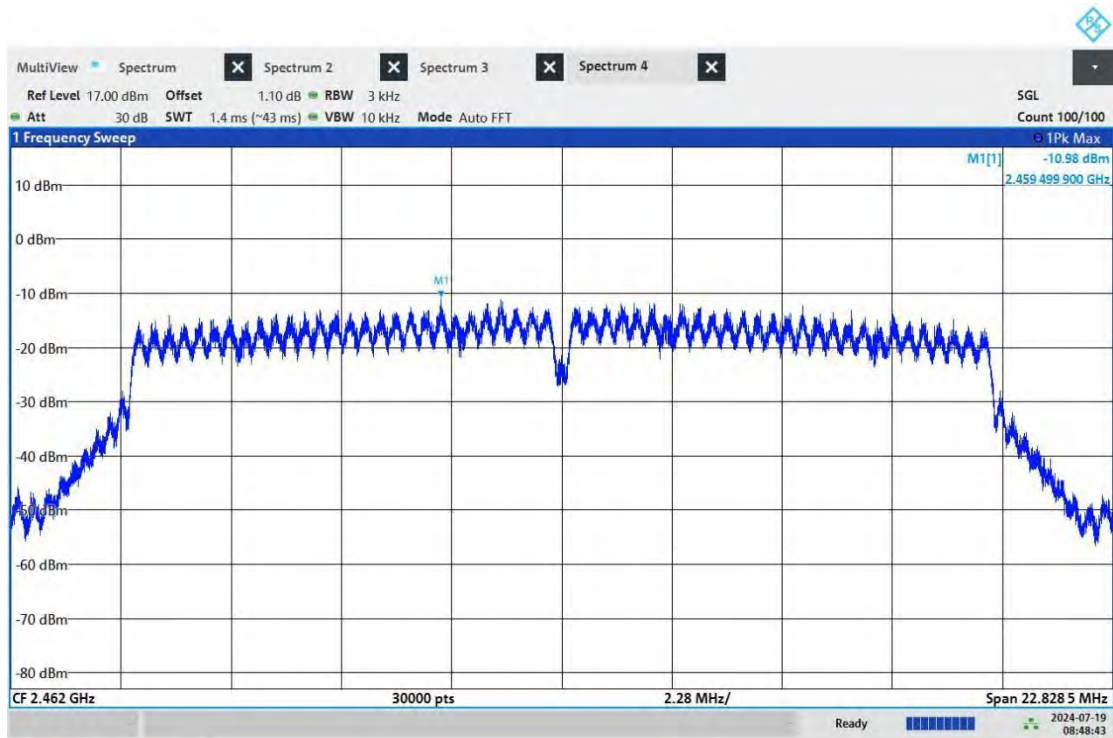

08:48:43 AM 07/19/2024

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BAND EDGE MEASUREMENTS


TEST RESULT

TestMode	Antenna	ChName	Frequency [MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant0	Low	2412	See test graph	See test graph	PASS
	Ant0	High	2462	See test graph	See test graph	PASS
11G	Ant0	Low	2412	See test graph	See test graph	PASS
	Ant0	High	2462	See test graph	See test graph	PASS
11N20	Ant0	Low	2412	See test graph	See test graph	PASS
	Ant0	High	2462	See test graph	See test graph	PASS




Test Graphs

11B-CDD_Ant0_Low_2412

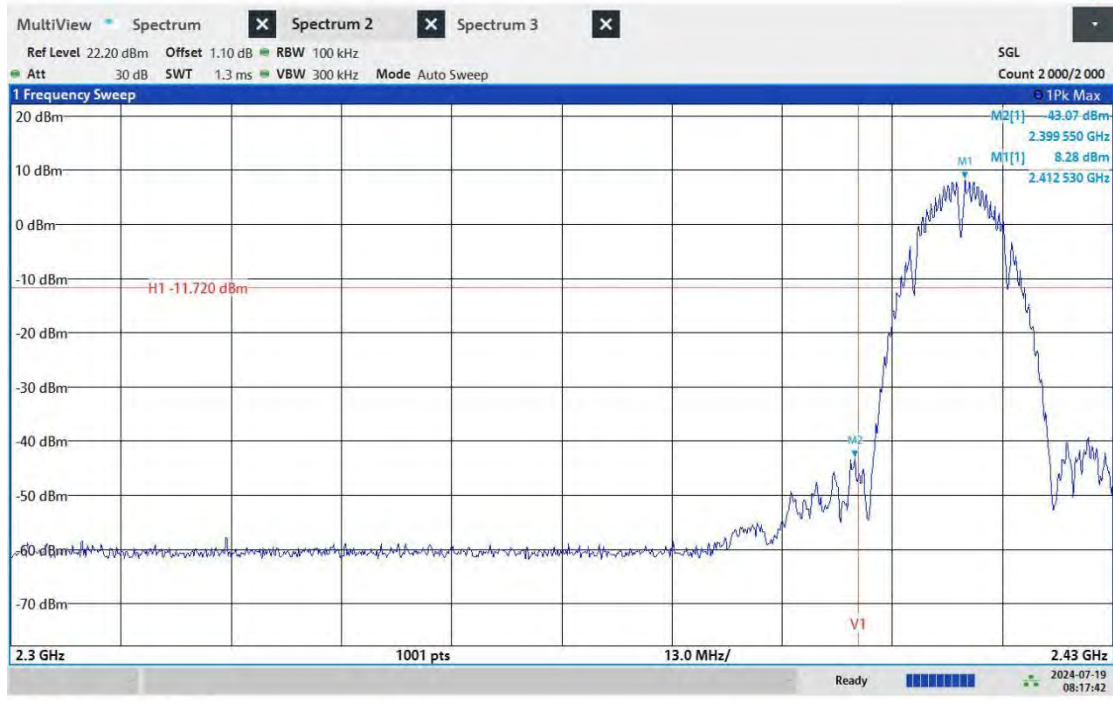


08:17:42 AM 07/19/2024

11B-CDD_Ant0_High_2462

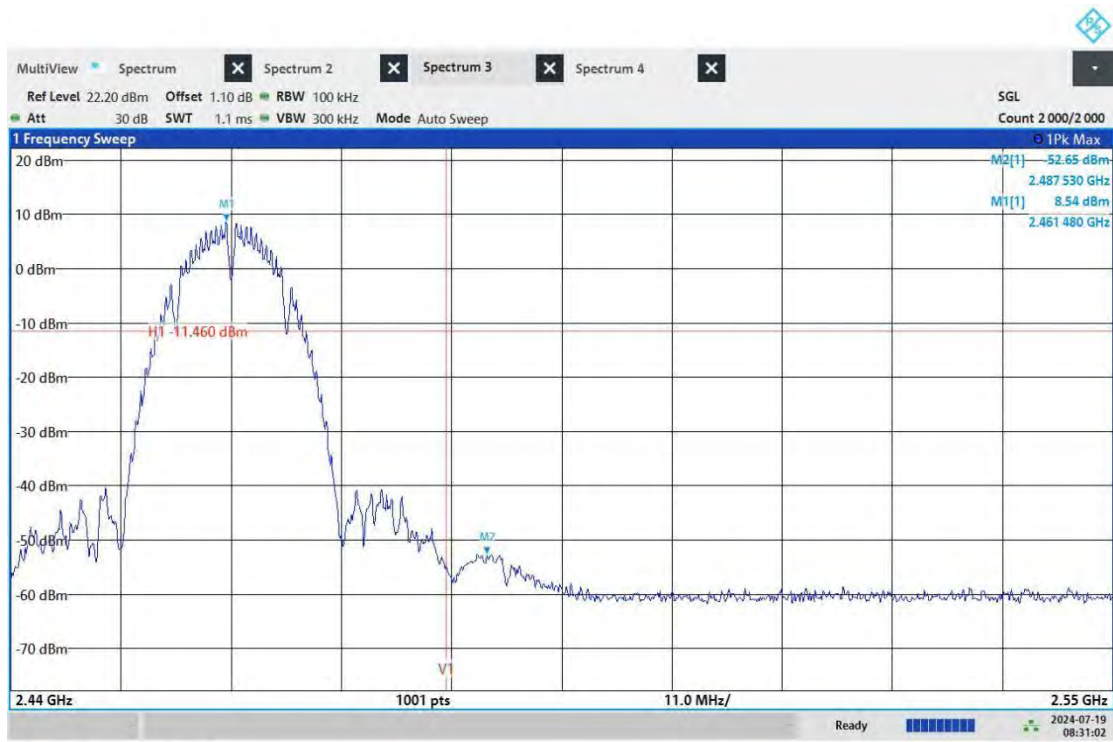

08:31:03 AM 07/19/2024

11G-CDD_Ant0_Low_2412

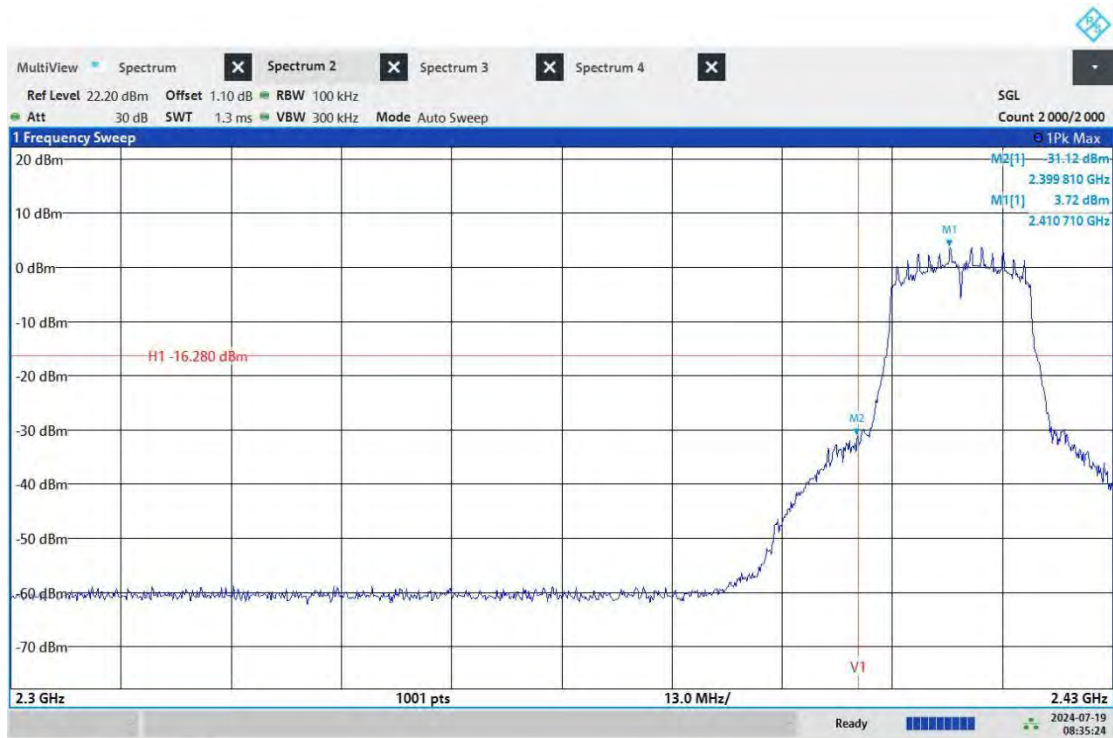


08:35:25 AM 07/19/2024



BUREAU VERITAS


Test Report No.: W7L-240618W002RF02

11G-CDD_Ant0_High_2462

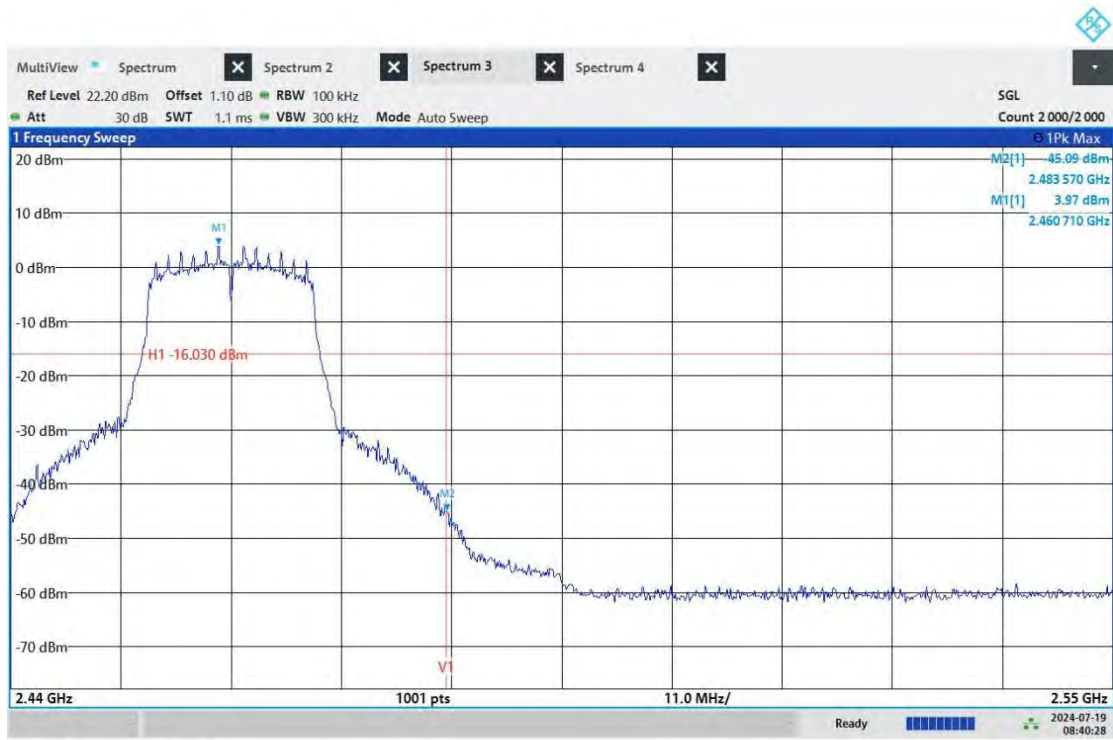


08:40:28 AM 07/19/2024

11N20SISO_Ant0_Low_2412

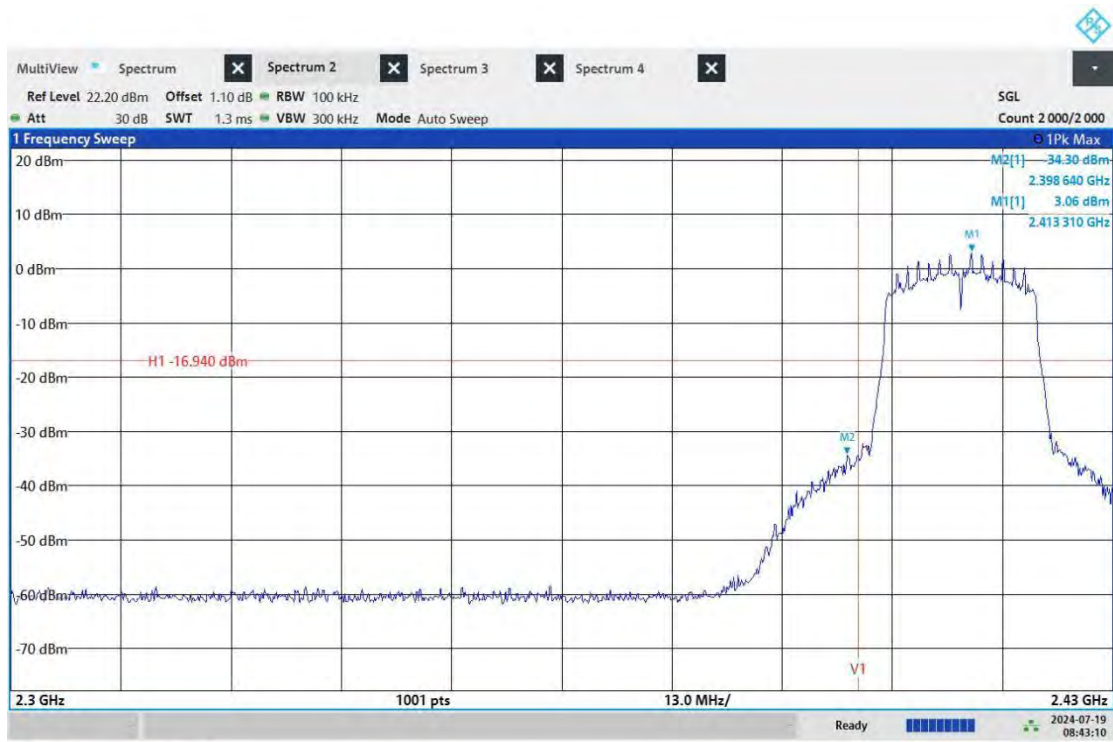

08:43:11 AM 07/19/2024

11N20SISO_Ant0_High_2462

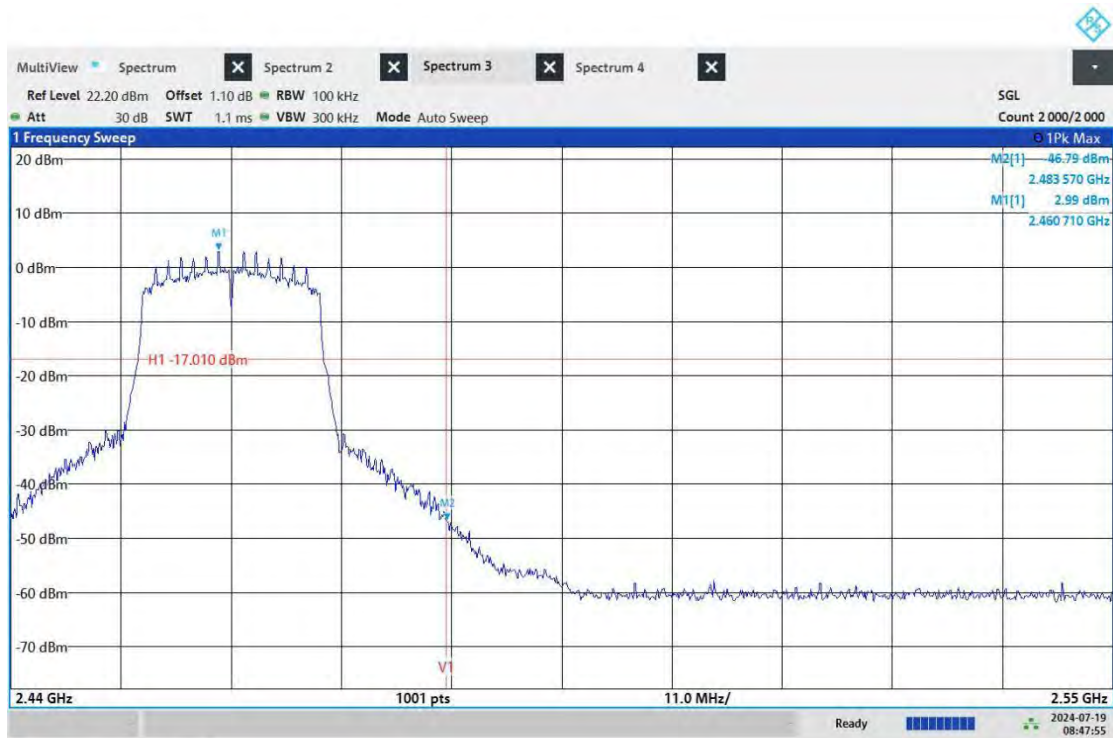

08:47:55 AM 07/19/2024



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

20M

RBW 100.000 kHz

VBW 300.000 kHz

40M

RBW 100.000 kHz

VBW 300.000 kHz



CONDUCTED SPURIOUS EMISSION

TEST RESULT


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant0	2412	30~260000	See test graph	See test graph	PASS
	Ant0	2437	30~260000	See test graph	See test graph	PASS
	Ant0	2462	30~260000	See test graph	See test graph	PASS
11G	Ant0	2412	30~260000	See test graph	See test graph	PASS
	Ant0	2437	30~260000	See test graph	See test graph	PASS
	Ant0	2462	30~260000	See test graph	See test graph	PASS
11N20	Ant0	2412	30~260000	See test graph	See test graph	PASS
	Ant0	2437	30~260000	See test graph	See test graph	PASS
	Ant0	2462	30~260000	See test graph	See test graph	PASS




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02


TEST GRAPHS

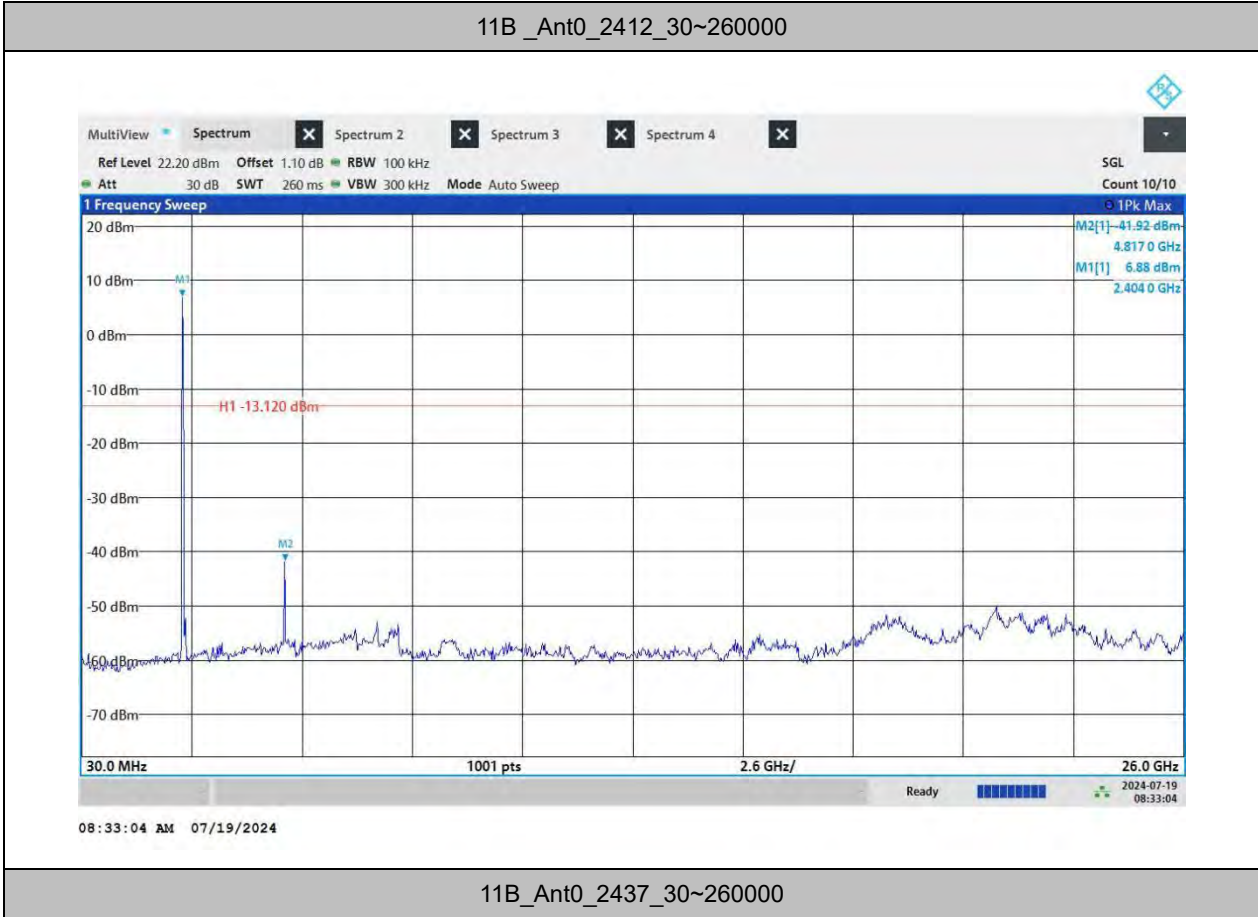

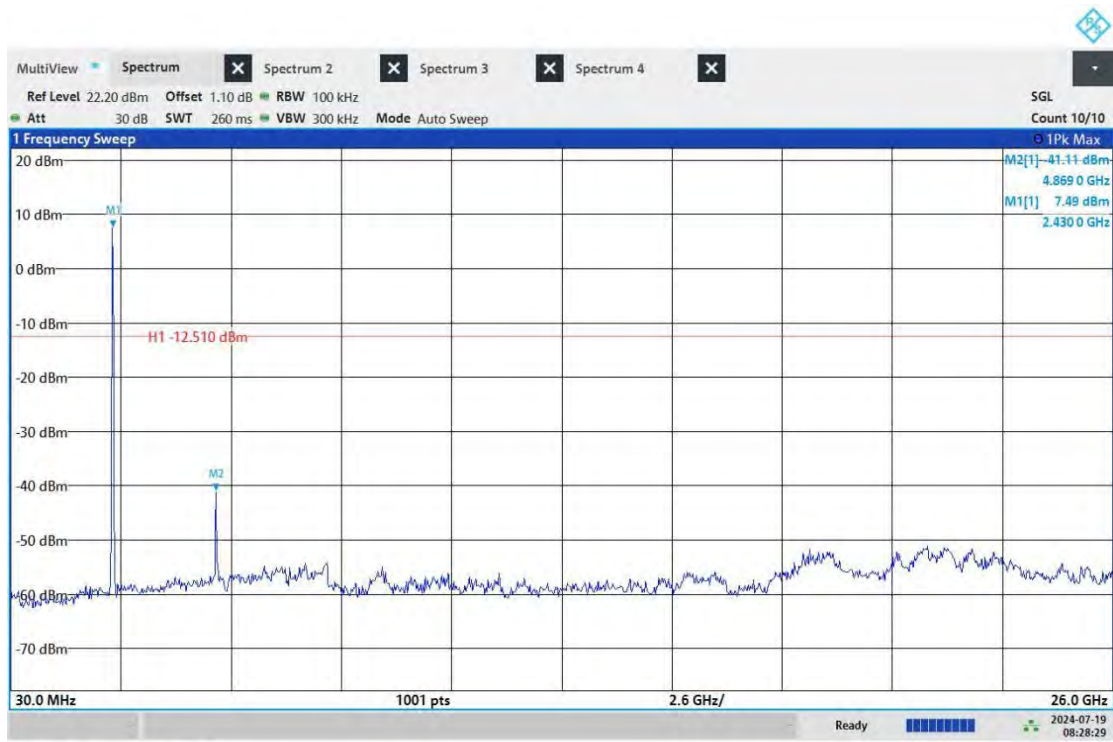

08:28:29 AM 07/19/2024

11B_Ant0_2462_30~260000

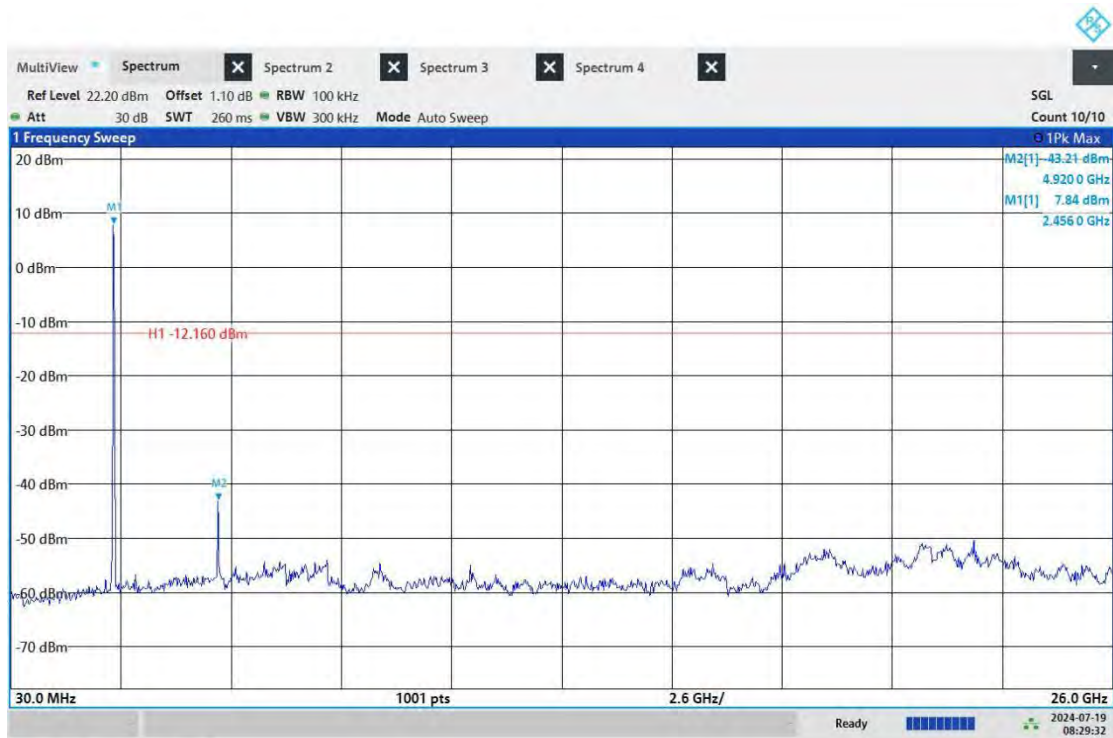


08:29:33 AM 07/19/2024



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

11G_Ant0_2412_30~260000

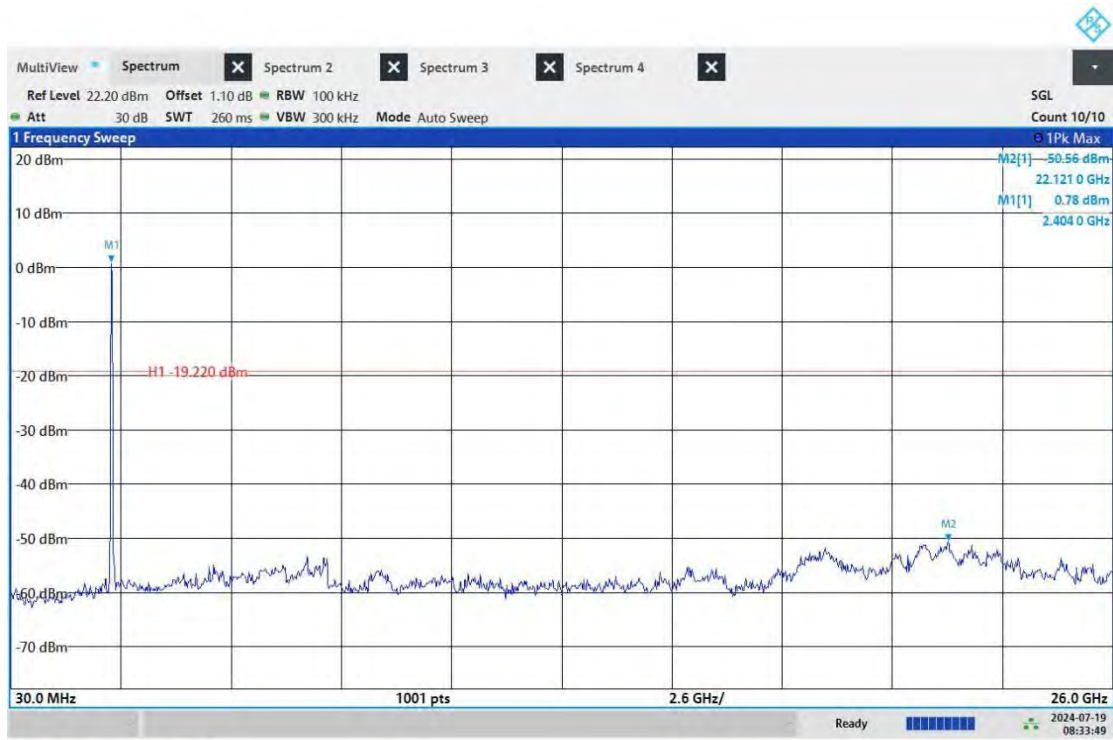


08:33:50 AM 07/19/2024

11G_Ant0_2437_30~260000




BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

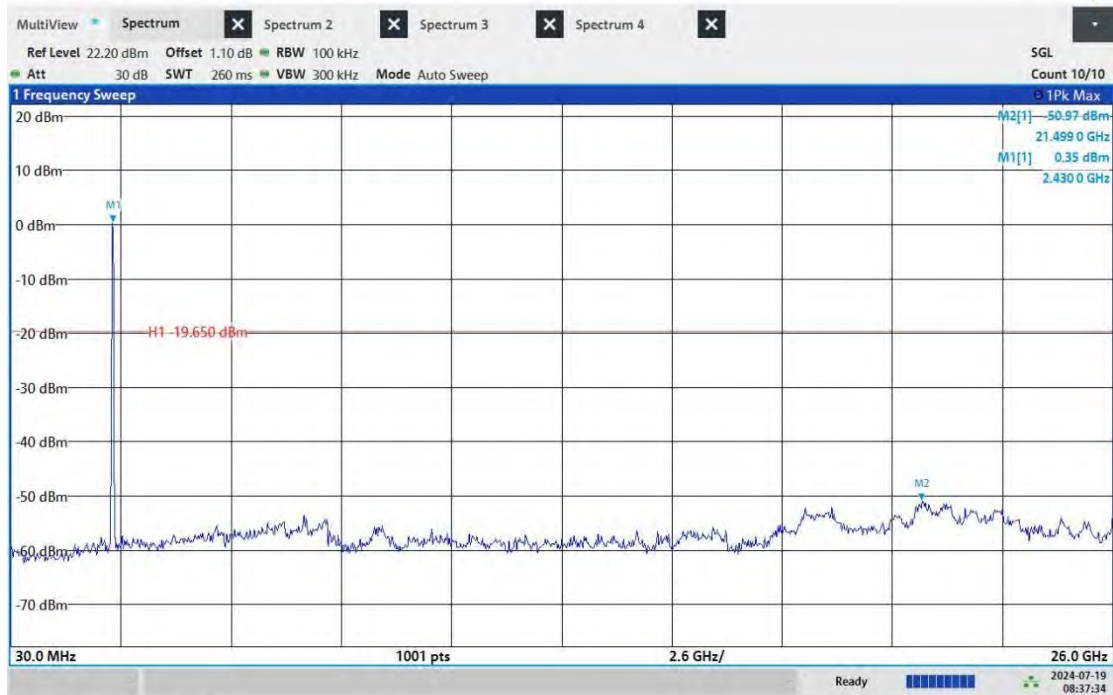

08:37:35 AM 07/19/2024

11G_Ant0_2462_30~260000

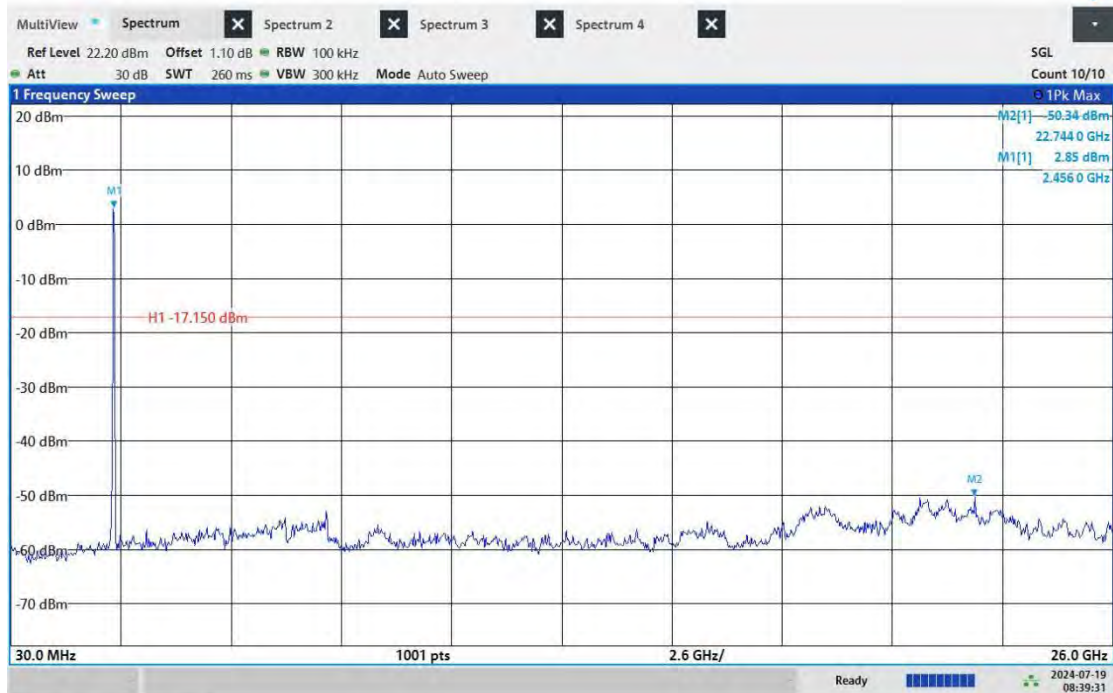

08:39:32 AM 07/19/2024

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS


Test Report No.: W7L-240618W002RF02

11N20_Ant0_2412_30~260000

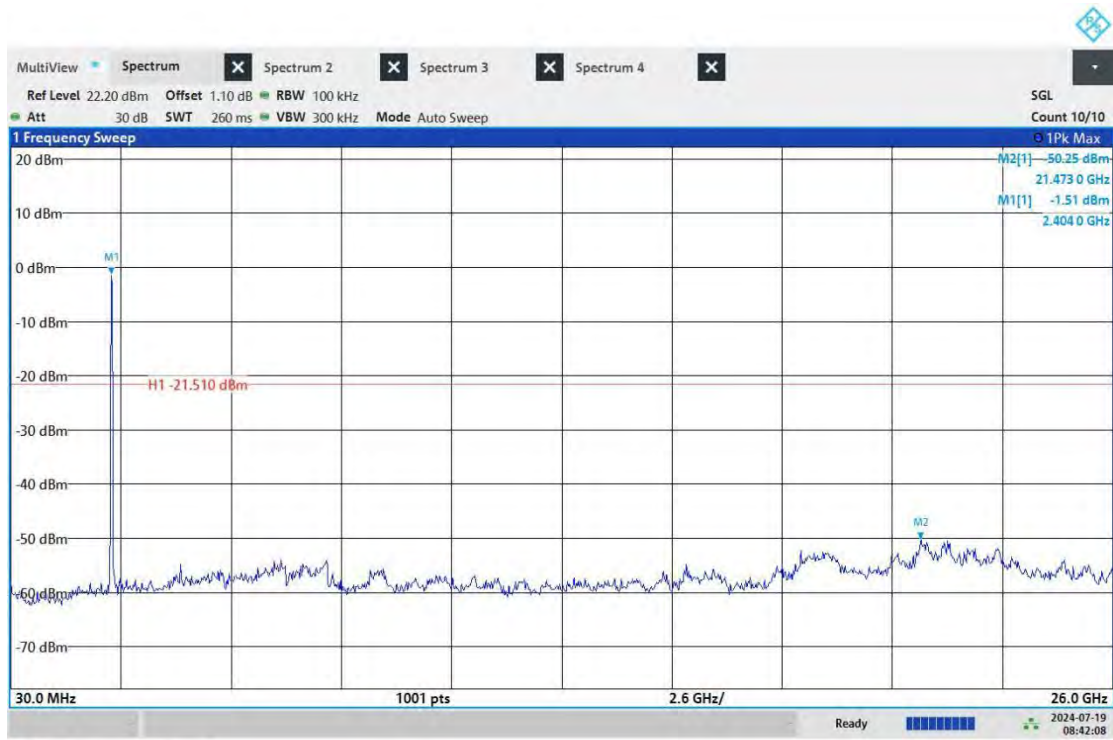


08:42:08 AM 07/19/2024

11N20_Ant0_2437_30~260000

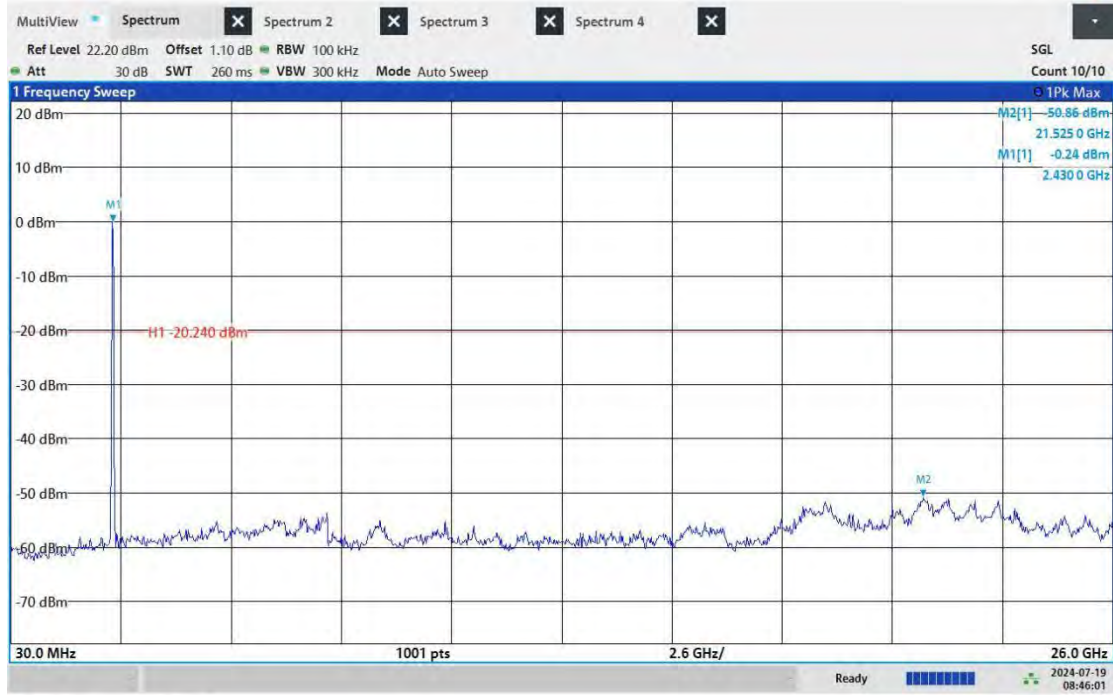

08:46:02 AM 07/19/2024

11N20_Ant0_2462_30~260000

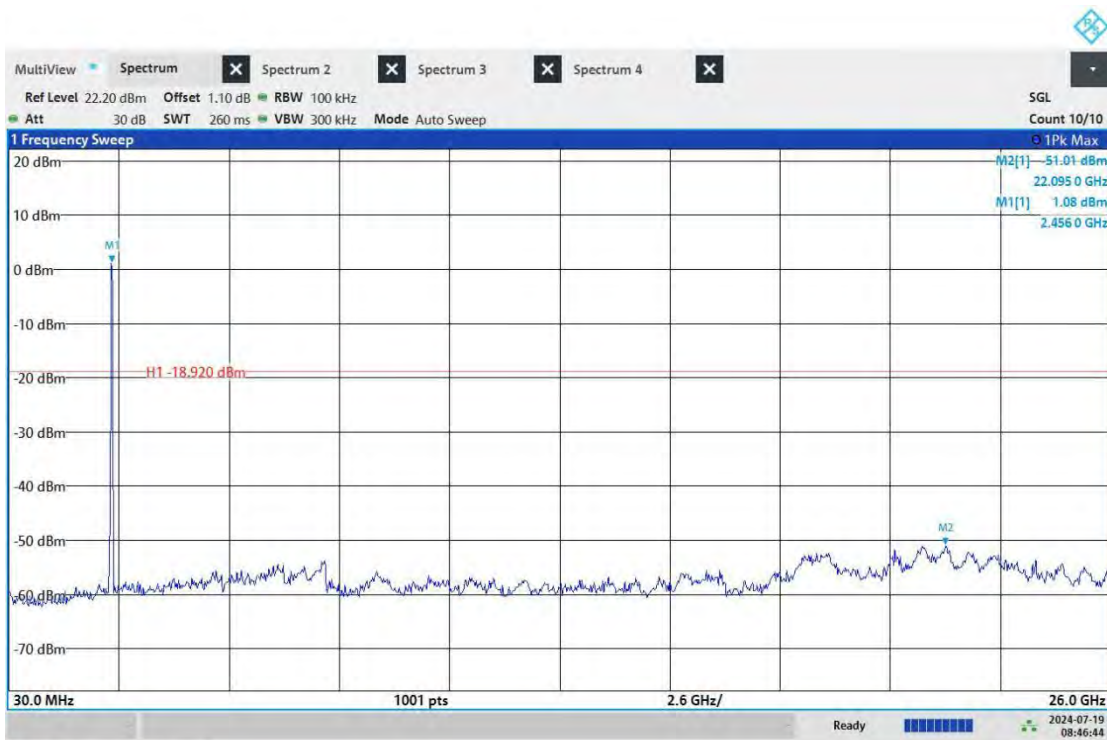

08:46:44 AM 07/19/2024




DUTY CYCLE

TEST RESULT

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	dutycycle factor
11B	Ant0	2412	100.0000	100.0000	100.00%	0
11G	Ant0	2412	1.3935	1.4300	97.45%	0.11
11N20	Ant0	2412	1.2985	1.3350	97.27%	0.12



TEST GRAPHS

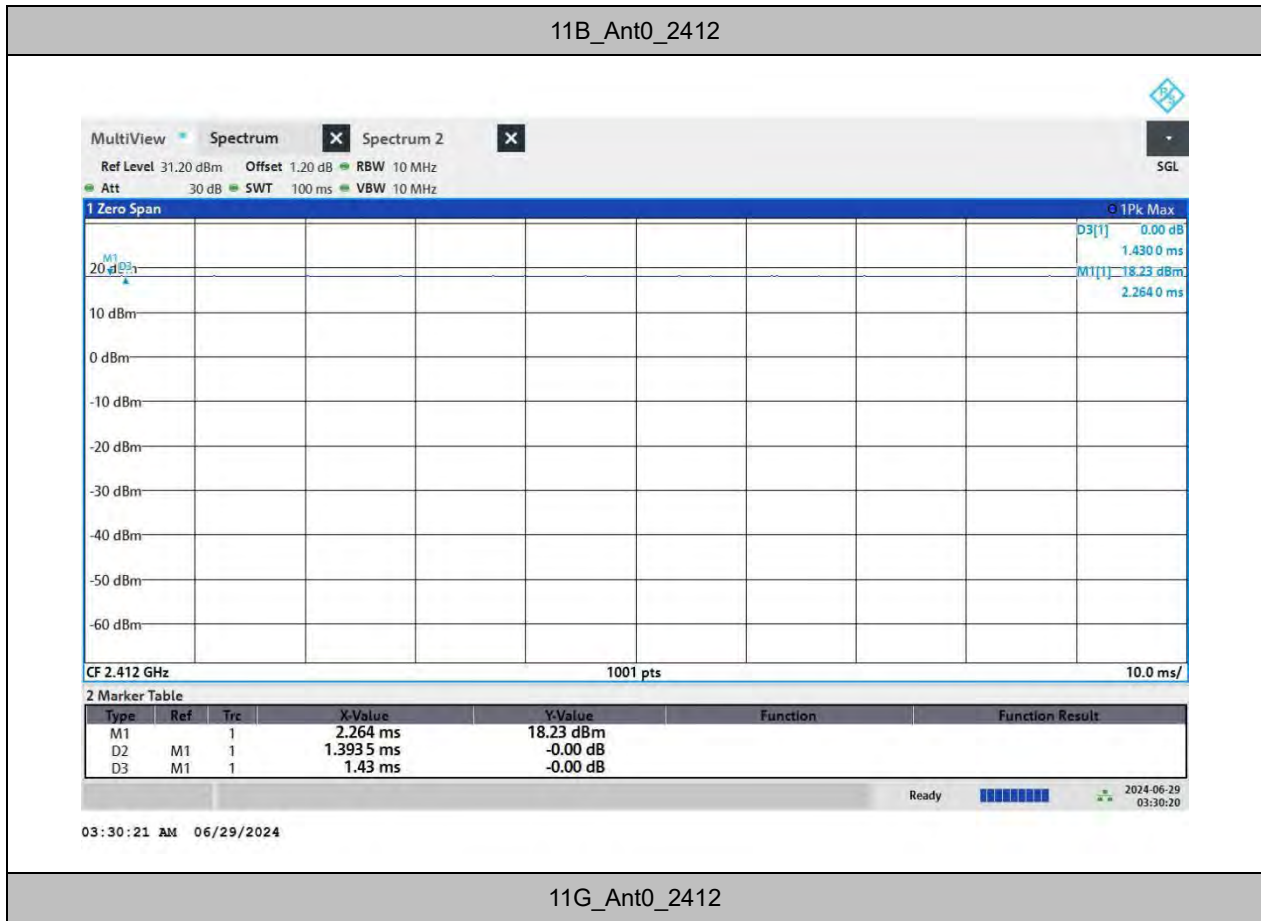



03:29:29 AM 06/29/2024

11N20_Ant0_2412



03:31:15 AM 06/29/2024



BLE


DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant0	2402	0.720	2401.640	2402.360	0.5	PASS
		2440	0.720	2439.640	2440.360	0.5	PASS
		2480	0.720	2479.640	2480.360	0.5	PASS
BLE_2M	Ant0	2404	1.280	2403.360	2404.640	0.5	PASS
		2440	1.280	2439.360	2440.640	0.5	PASS
		2478	1.280	2477.360	2478.640	0.5	PASS
BLE-S2	Ant0	2402	0.700	2401.660	2402.360	0.5	PASS
		2440	0.700	2439.660	2440.360	0.5	PASS
		2480	0.700	2479.660	2480.360	0.5	PASS
BLE_S8	Ant0	2402	0.740	2401.640	2402.380	0.5	PASS
		2440	0.760	2439.620	2440.380	0.5	PASS
		2480	0.760	2479.620	2480.380	0.5	PASS




TEST GRAPHS

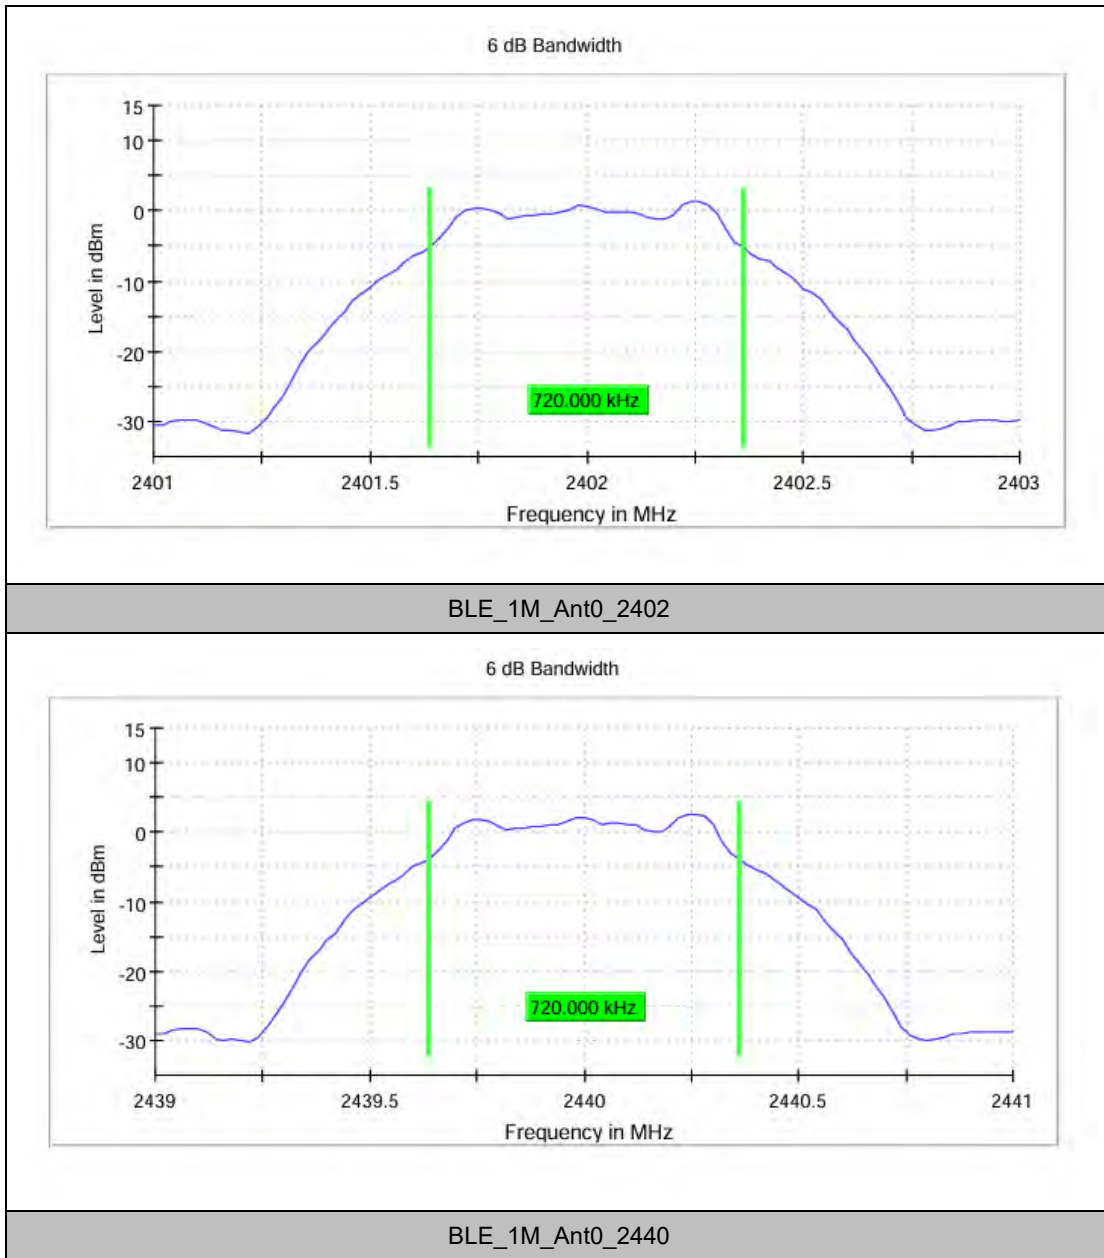




BUREAU
VERITAS

Test Report No.: W7L-240618W002RF02

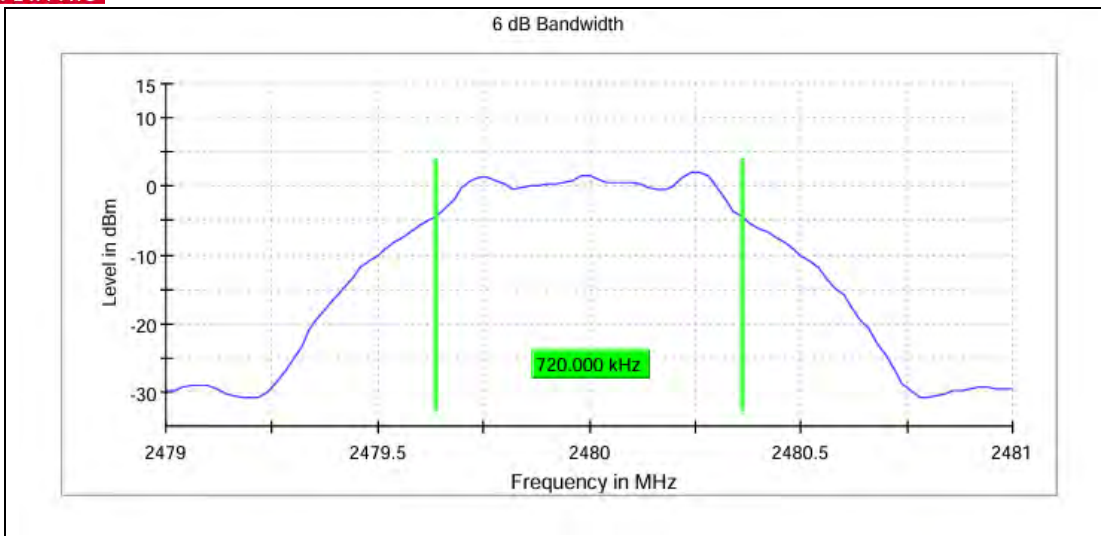

BLE_1M_Ant0_2480

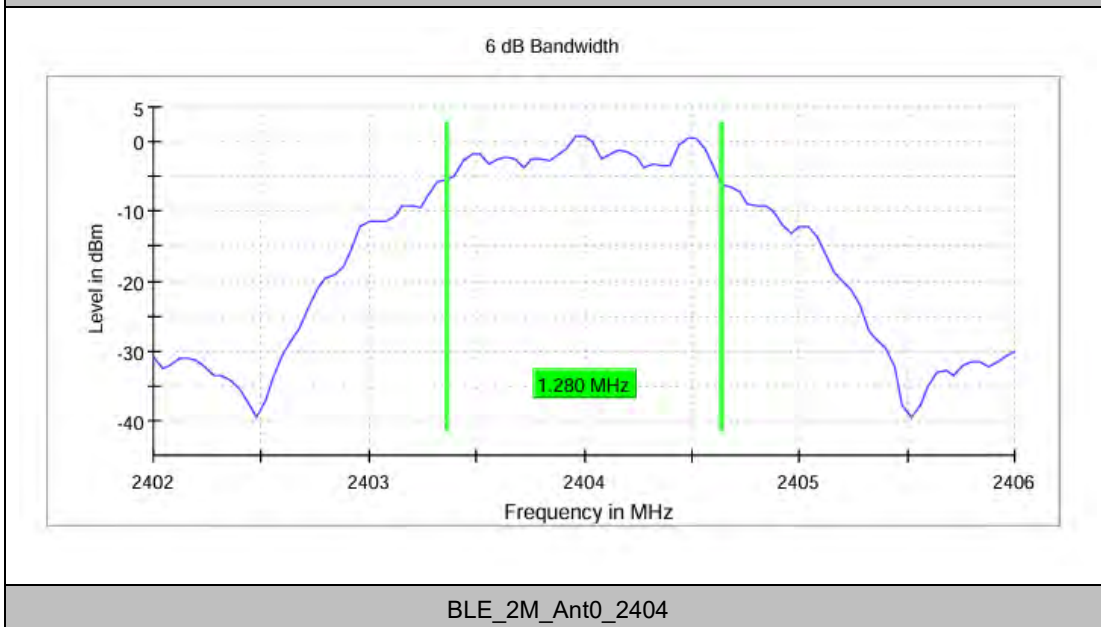


BLE_2M_Ant0_2404




BUREAU
VERITAS


Test Report No.: W7L-240618W002RF02

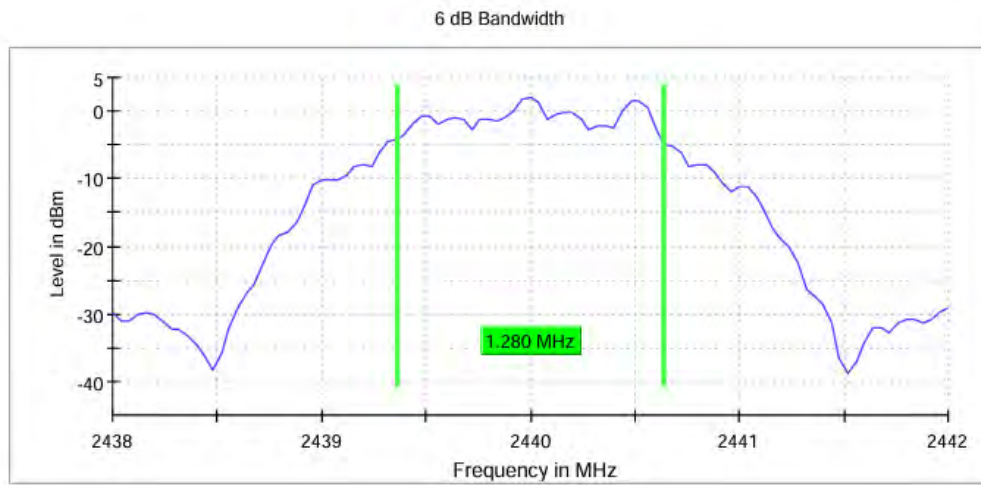


BLE_2M_Ant0_2440

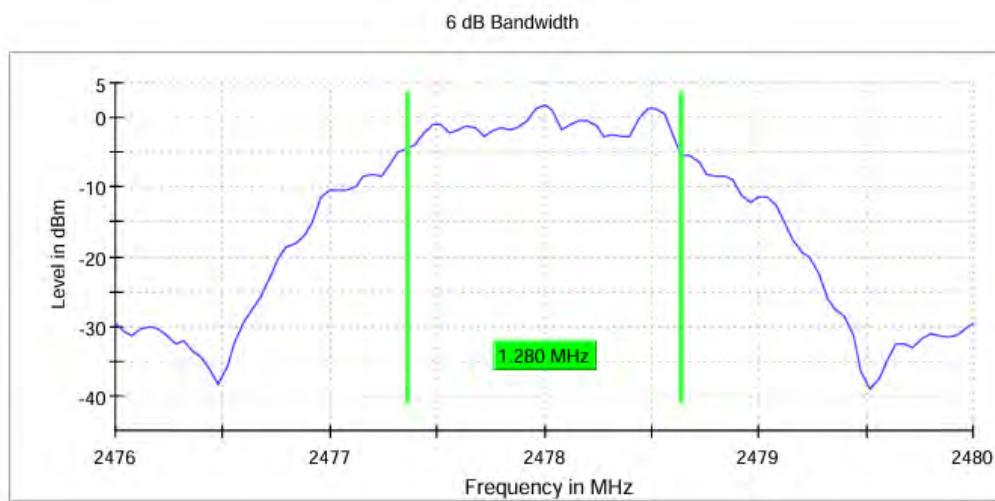


BLE_2M_Ant0_2478

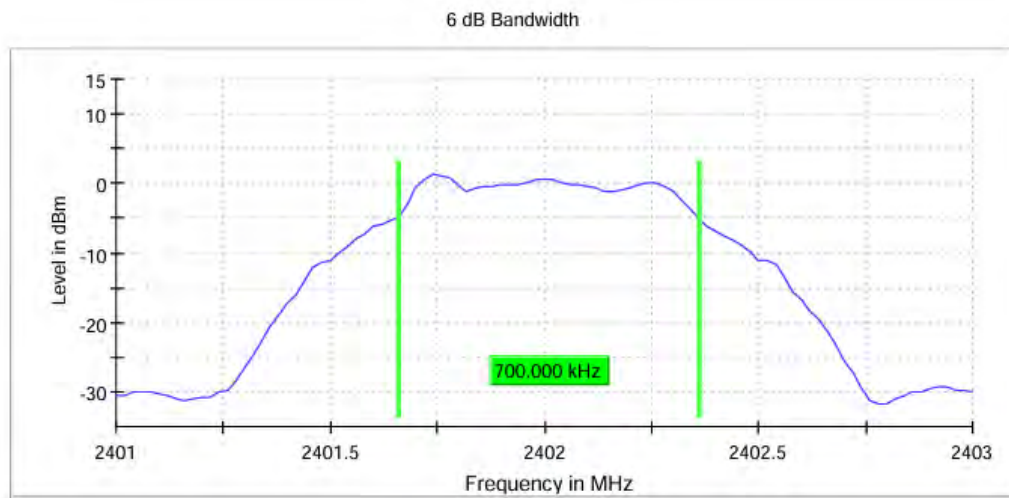


BLE_S2_Ant0_2402

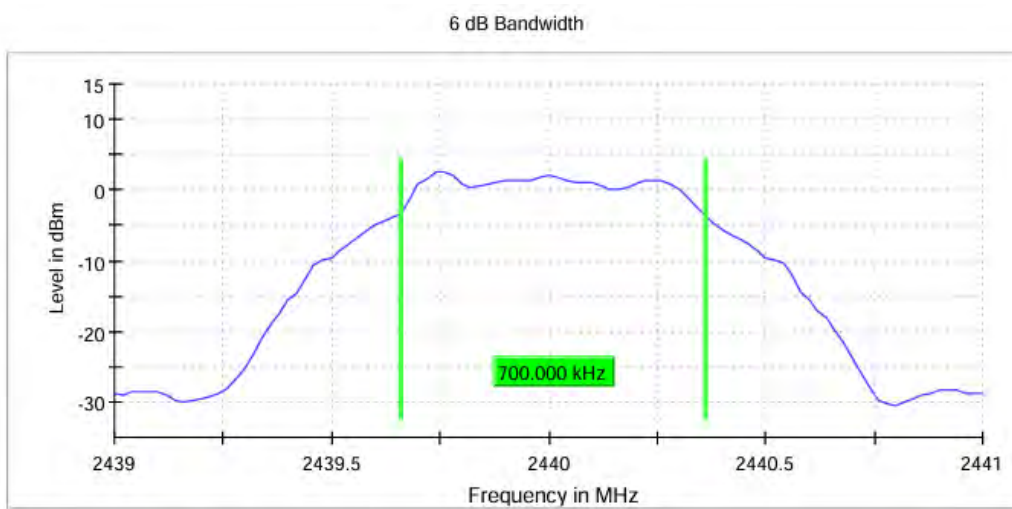

BLE_S2_Ant0_2440

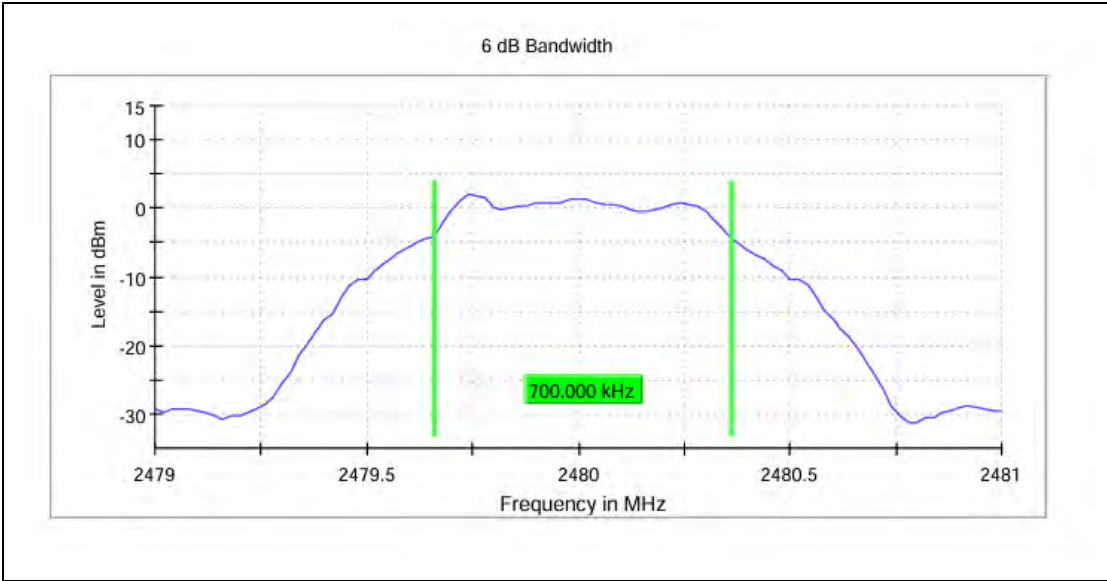

BLE_S2_Ant0_2480

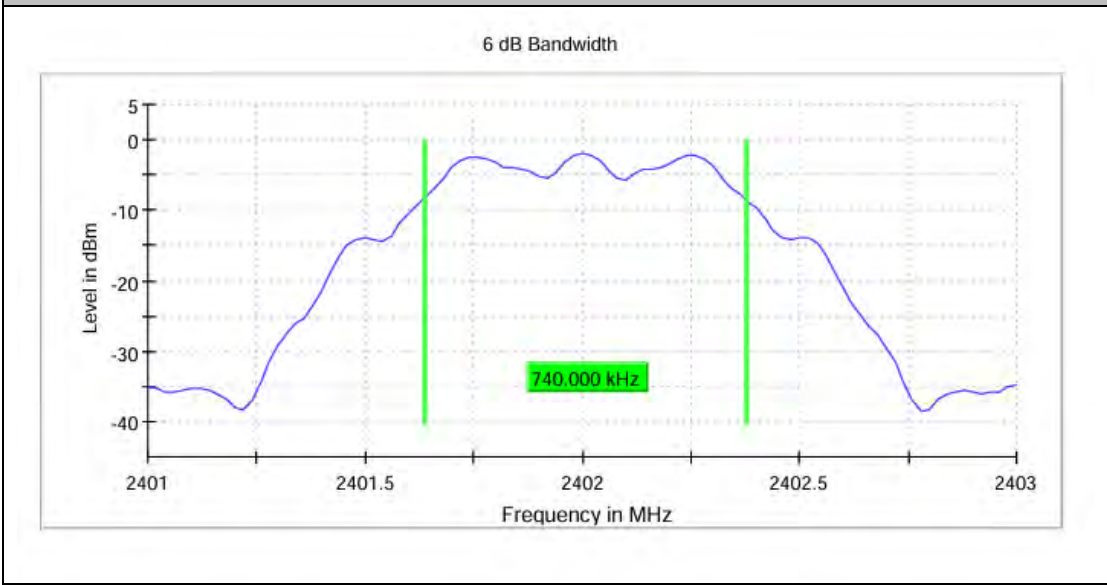


BLE_S8_Ant0_2402




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

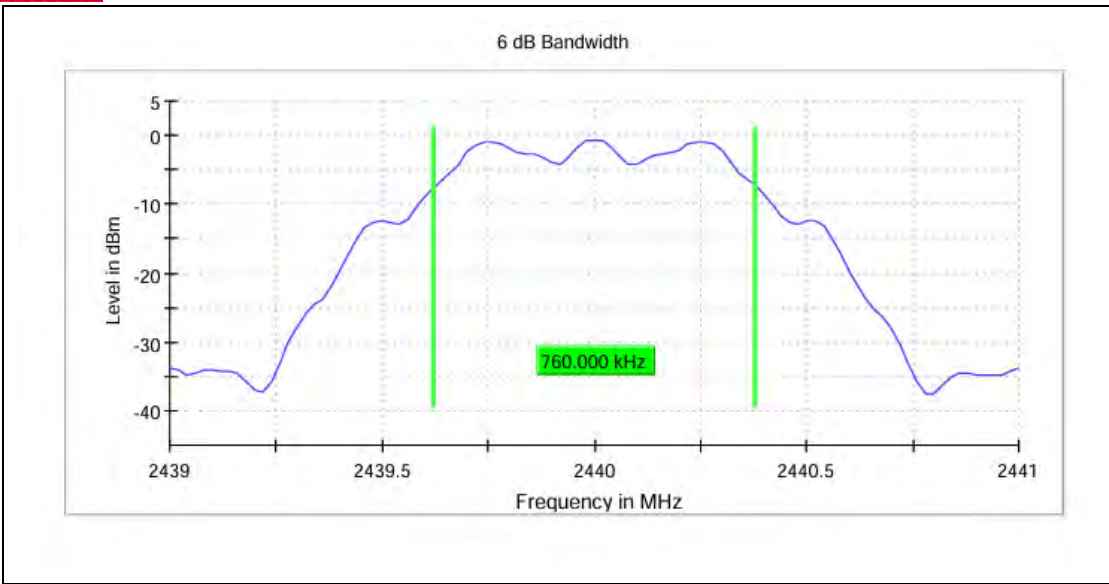

BLE_S8_Ant0_2440

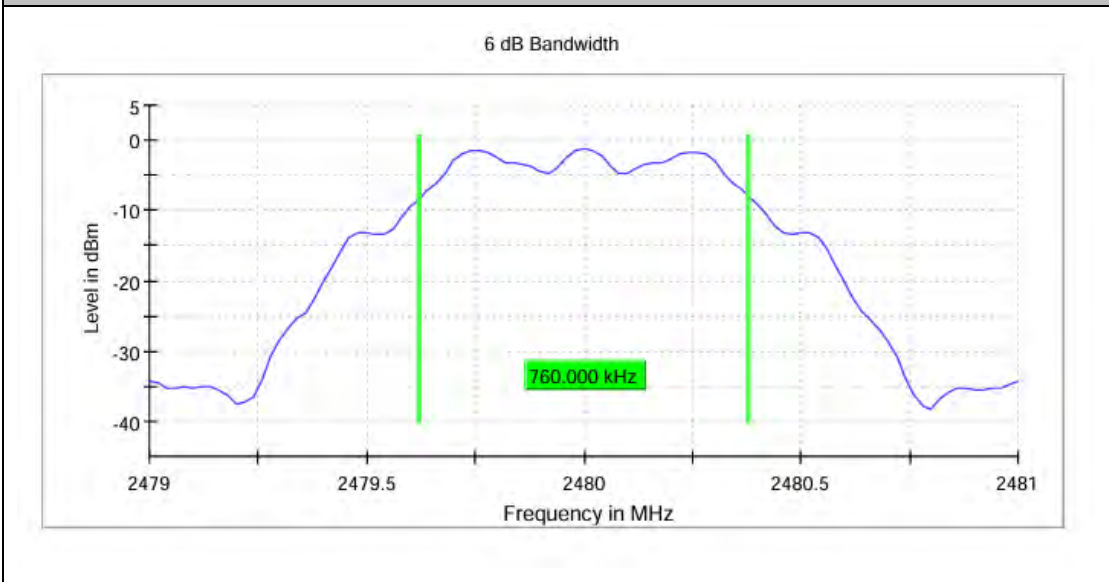

BLE_S8_Ant0_2480

RBW 100.000 kHz

VBW 300.000 kHz





OCCUPIED CHANNEL BANDWIDTH TEST RESULT

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant0	2402	1.038	2401.486	2402.524	2400-2483 5	PAS S
		2440	1.038	2439.486	2440.524	2400-2483 5	PAS S
		2480	1.038	2479.486	2480.524	2400-2483 5	PAS S
BLE_2M	Ant0	2404	2.065	2402.982	2405.048	2400-2483 5	PAS S
		2440	2.075	2438.972	2441.048	2400-2483 5	PAS S
		2478	2.075	2476.972	2479.048	2400-2483 5	PAS S
BLE-S2	Ant0	2402	1.028	2401.491	2402.519	2400-2483 5	PAS S
		2440	1.028	2439.491	2440.519	2400-2483 5	PAS S
		2480	1.033	2479.486	2480.519	2400-2483 5	PAS S
BLE_S8	Ant0	2402	1.058	2401.471	2402.529	2400-2483 5	PAS S
		2440	1.058	2439.471	2440.529	2400-2483 5	PAS S
		2480	1.058	2479.471	2480.529	2400-2483 5	PAS S




TEST GRAPHS

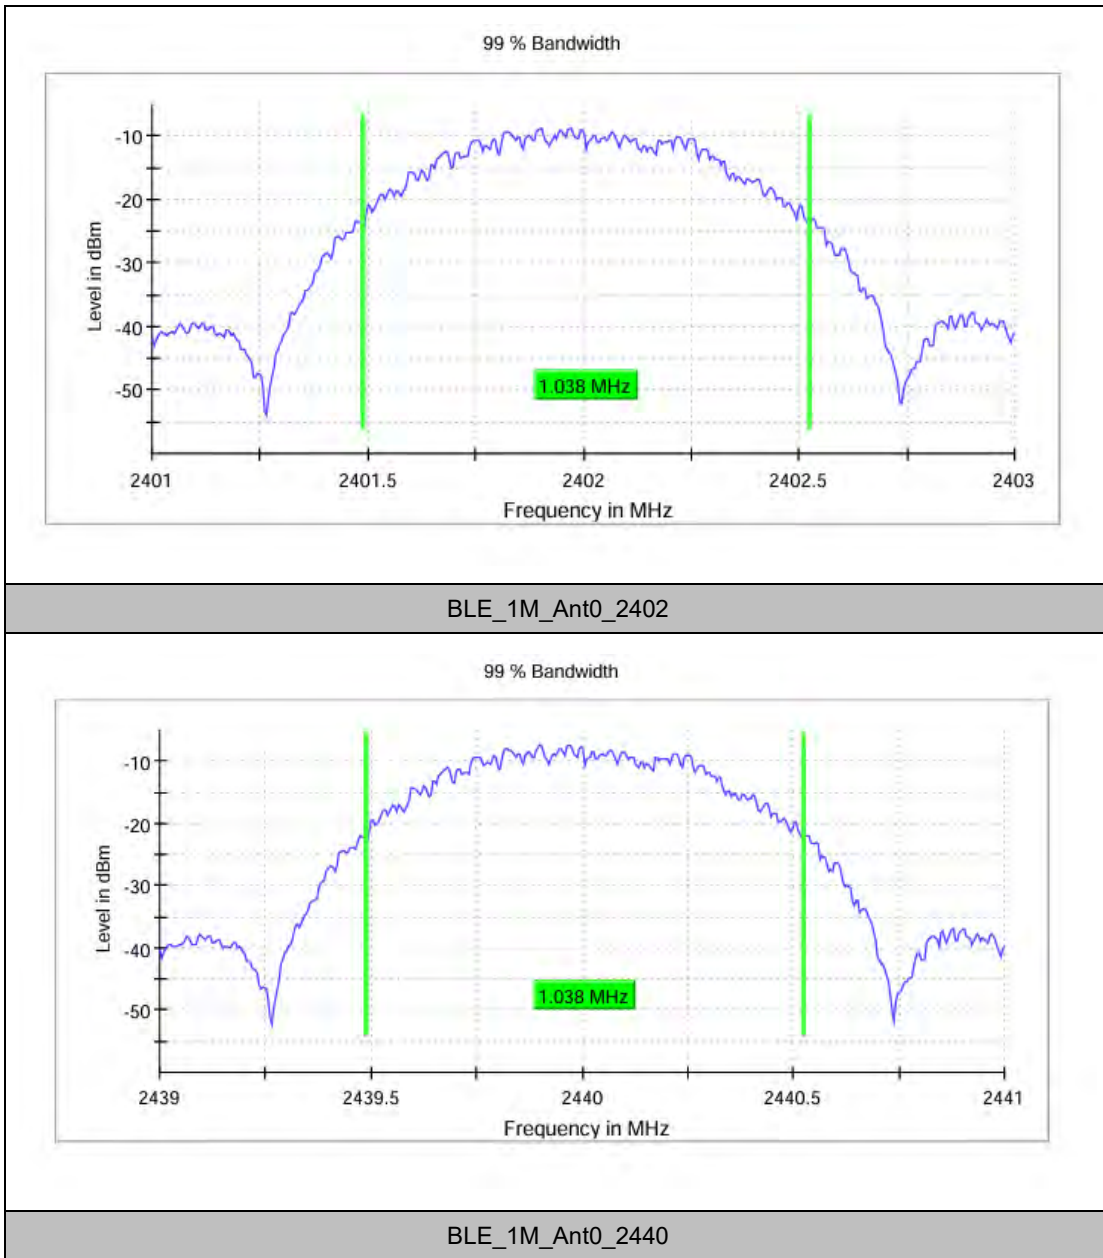

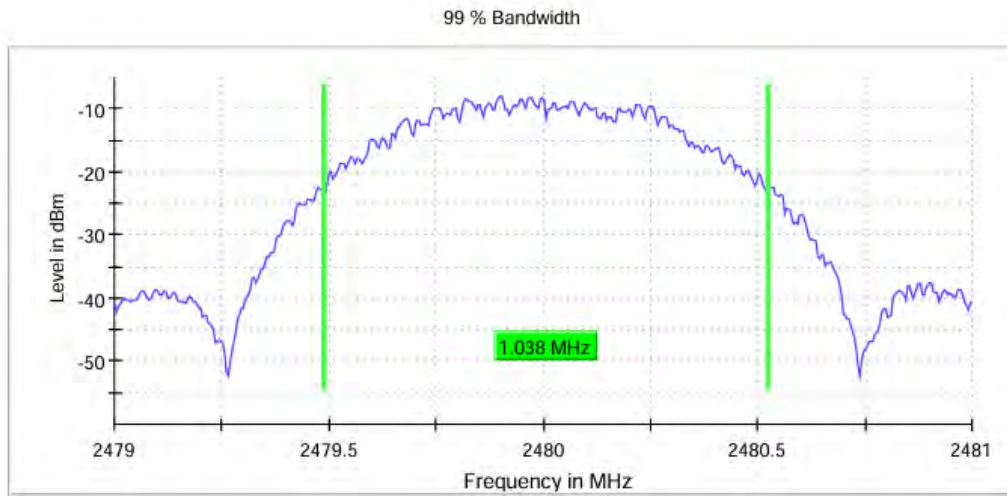

BLE_1M_Ant0_2480

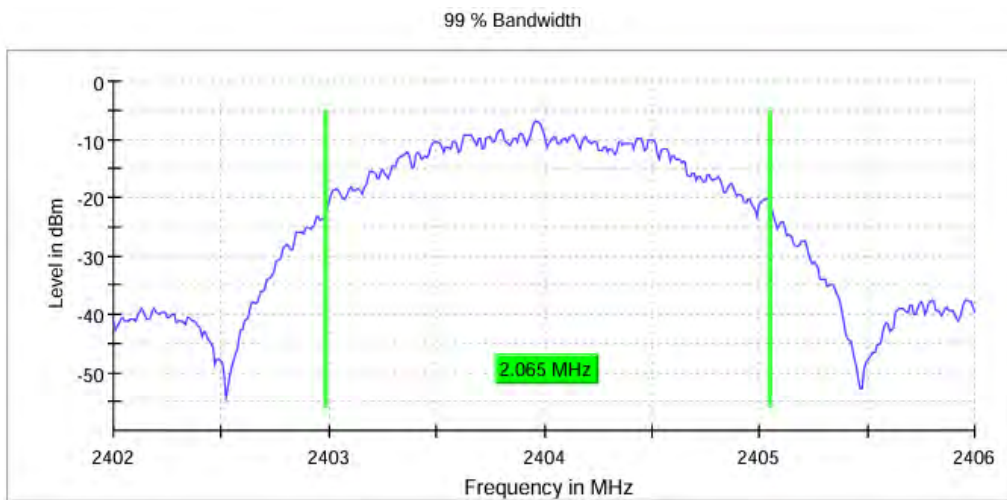


BLE_2M_Ant0_2404




**BUREAU
VERITAS**


Test Report No.: W7L-240618W002RF02

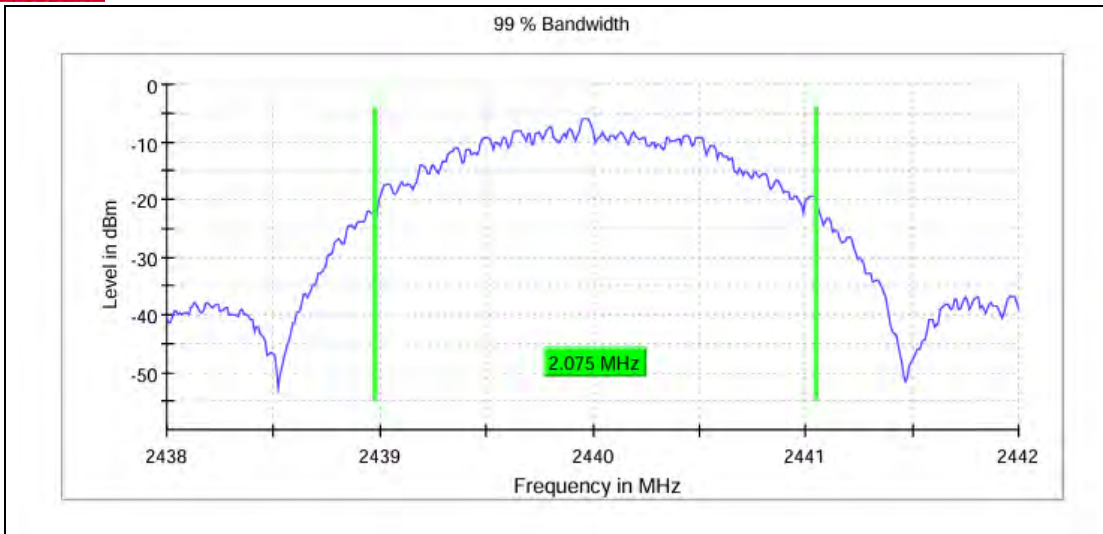


BLE_2M_Ant0_2440

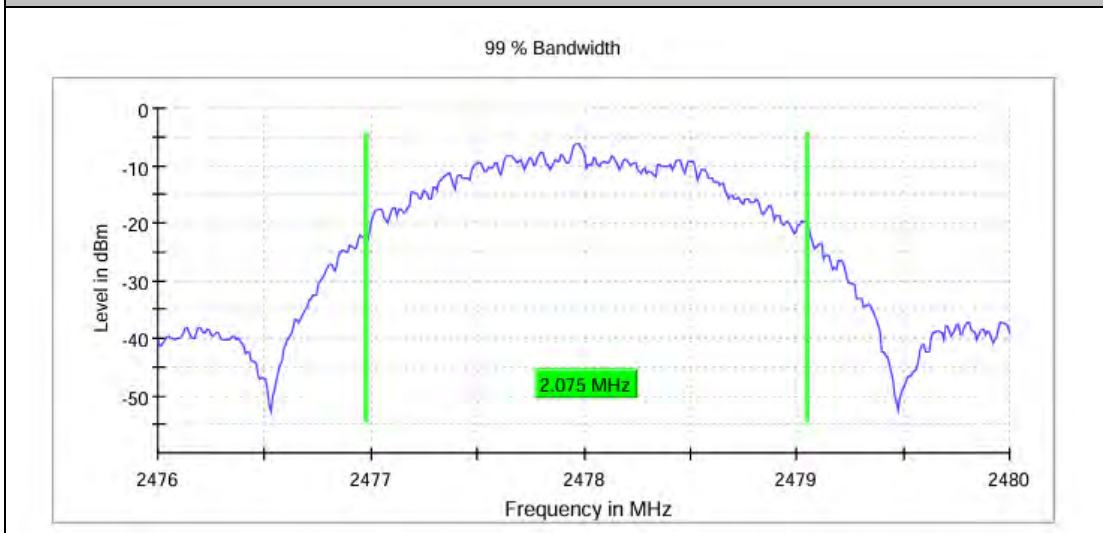


BLE_2M_Ant0_2478

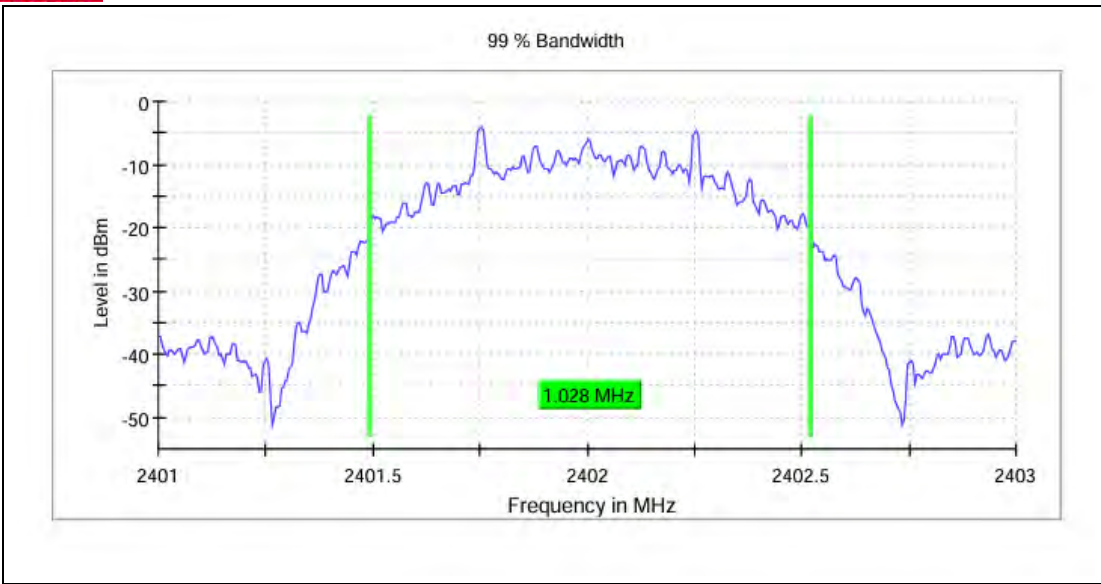


BLE_S2_Ant0_2402

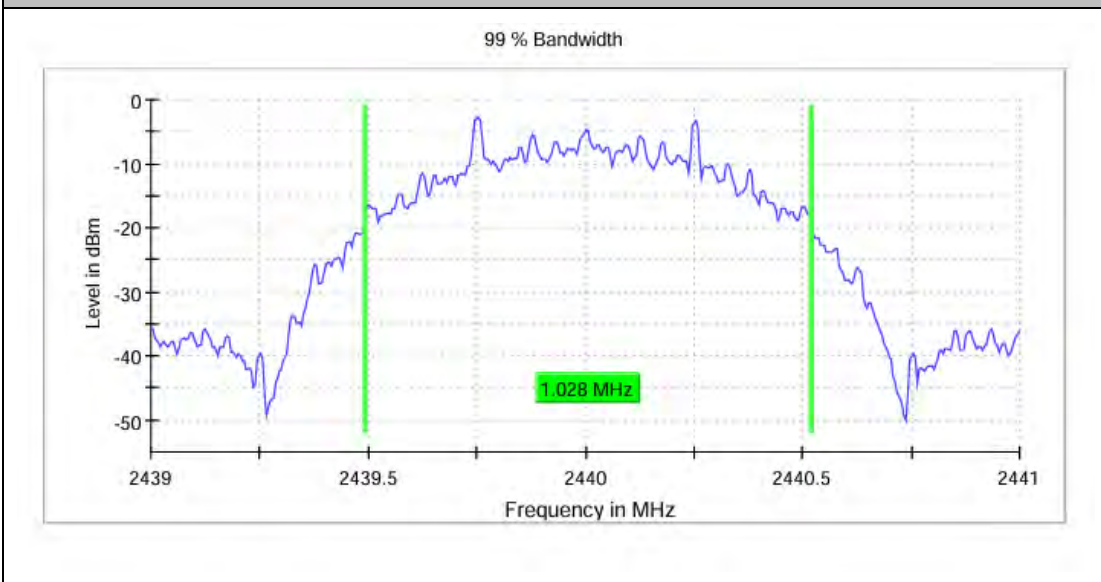

BLE_S2_Ant0_2440

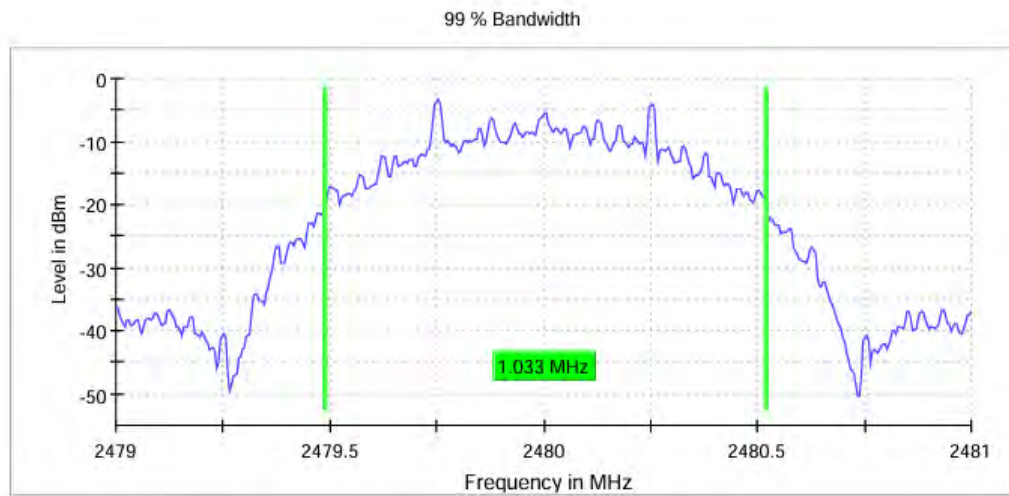

BLE_S2_Ant0_2480

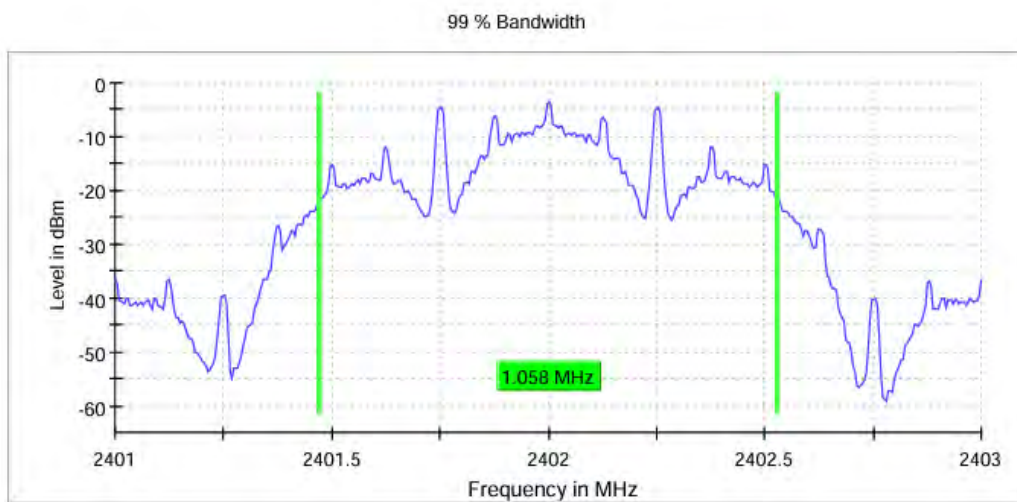


BLE_S8_Ant0_2402




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

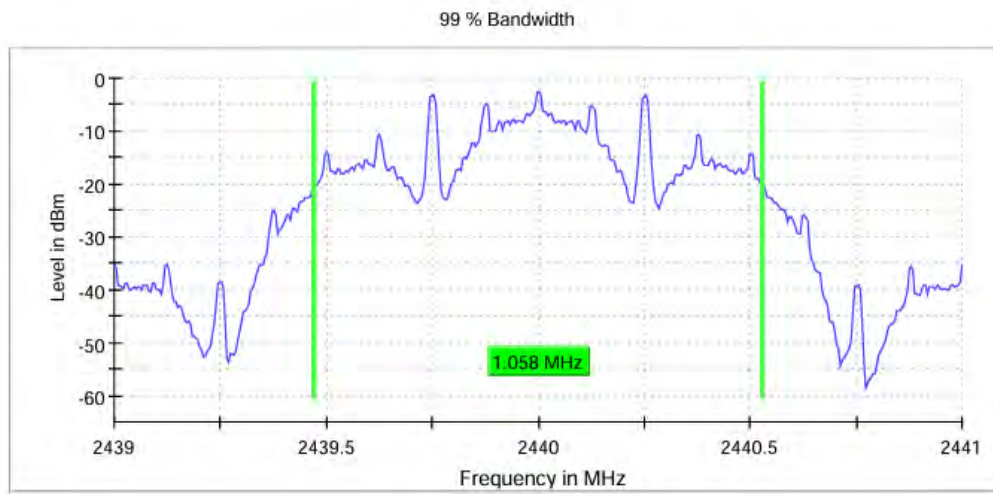

BLE_S8_Ant0_2440

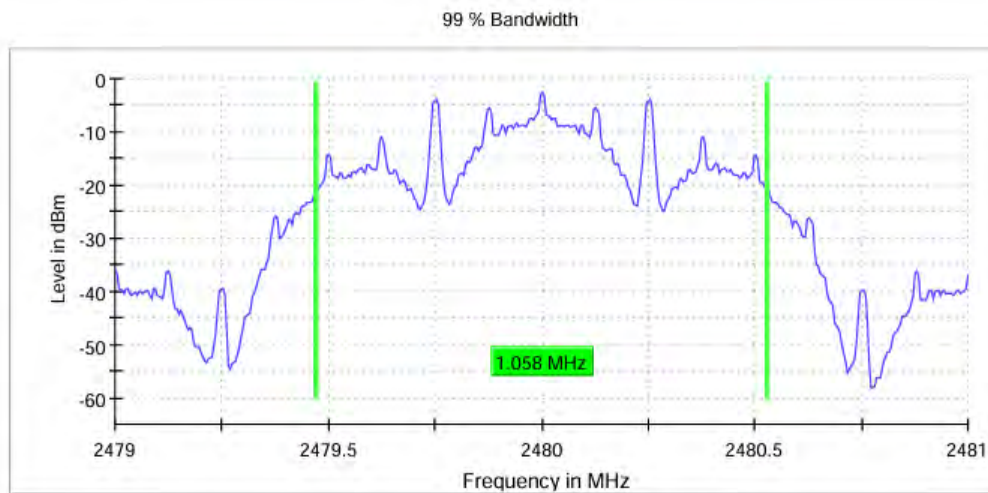

BLE_S8_Ant0_2480

1M

RBW 10.000 kHz

VBW 30.000 kHz

2M

RBW 20.000 kHz

VBW 100.000 kHz





MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT

TestMode	Antenna	Channel	Average power [dBm]	Peak power [dBm]	Peak power [mw]	Limit [dBm]	Verdict	Power Setting
BLE_1M	Ant0	2402	1.16	1.75	1.50	≤30	PASS	Default
		2440	2.46	3.08	2.03	≤30	PASS	Default
		2480	1.93	2.44	1.75	≤30	PASS	Default
BLE_2M	Ant0	2402	1.34	2.01	1.59	≤30	PASS	Default
		2440	2.45	3.12	2.05	≤30	PASS	Default
		2480	2.01	2.58	1.81	≤30	PASS	Default
BLE_125k	Ant0	2402	1.04	1.71	1.48	≤30	PASS	Default
		2440	2.32	3.03	2.01	≤30	PASS	Default
		2480	1.81	2.42	1.74	≤30	PASS	Default
BLE_500K	Ant0	2402	1.06	1.73	1.49	≤30	PASS	Default
		2440	2.36	3.06	2.02	≤30	PASS	Default
		2480	1.83	2.43	1.75	≤30	PASS	Default


TEST GRAPHS

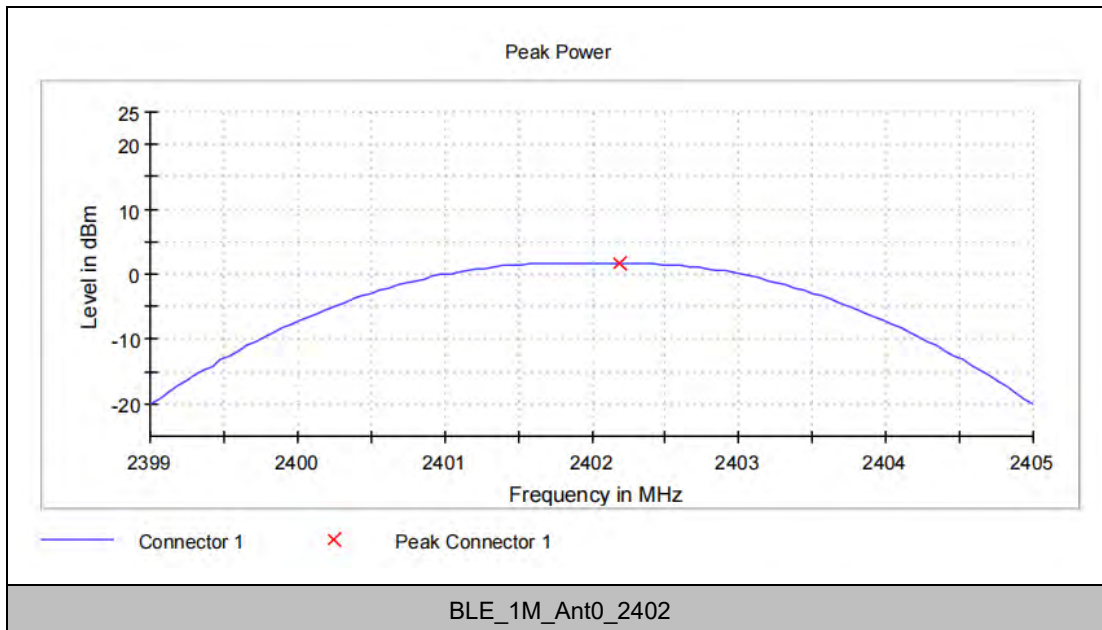

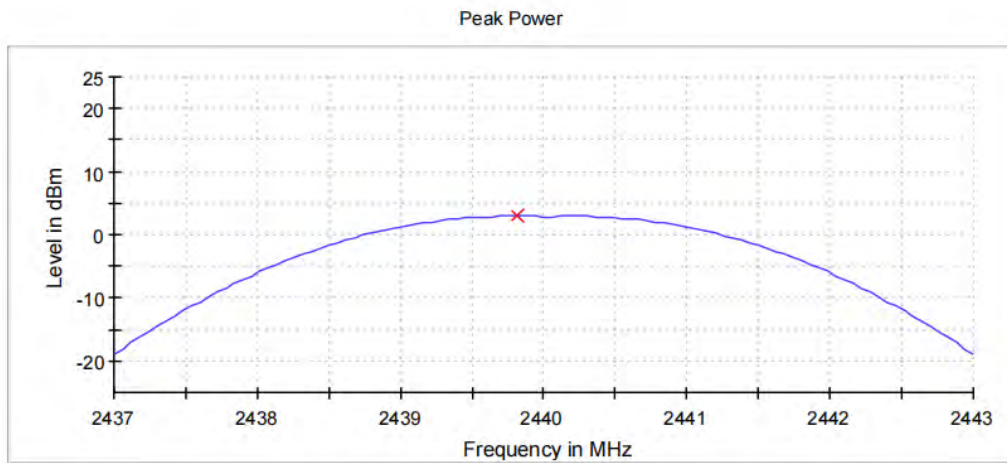


Connector 1 × Peak Connector 1

BLE_1M_Ant0_2440

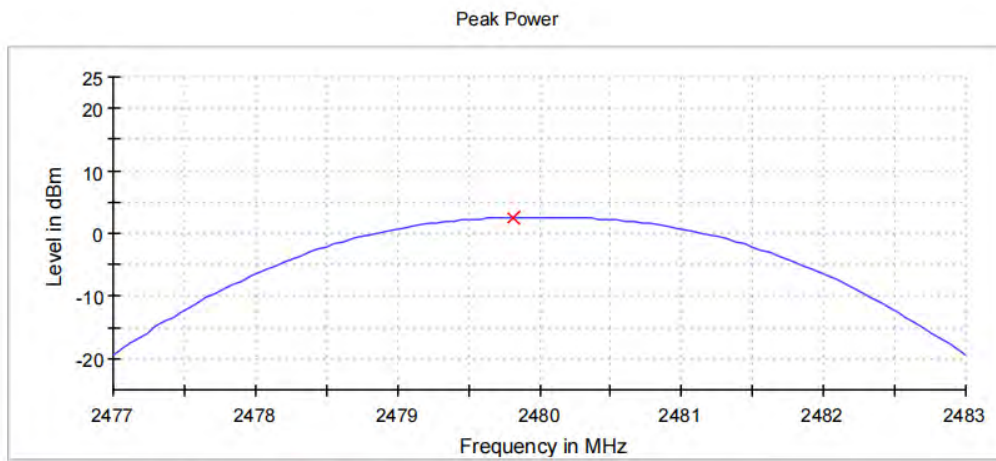


Connector 1 × Peak Connector 1


BLE_1M_Ant0_2480

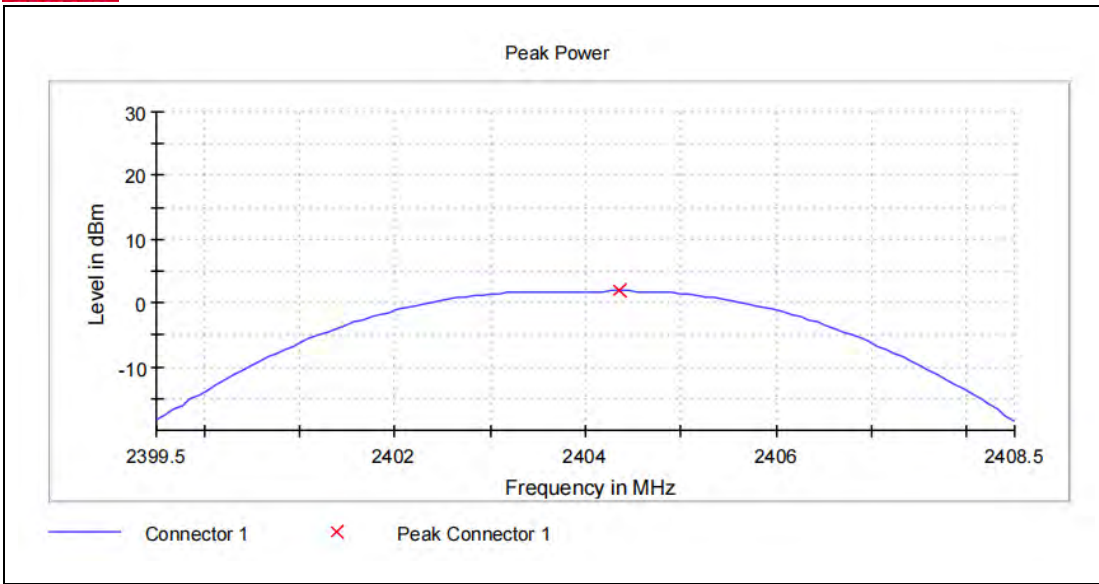


BLE_2M_Ant0_2404

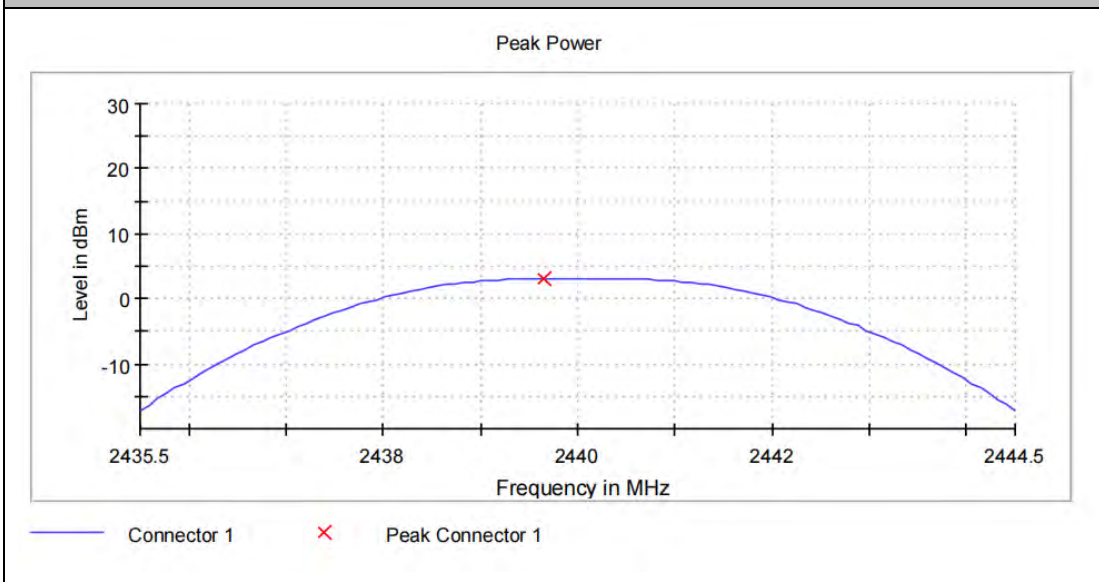


BLE_2M_Ant0_2440

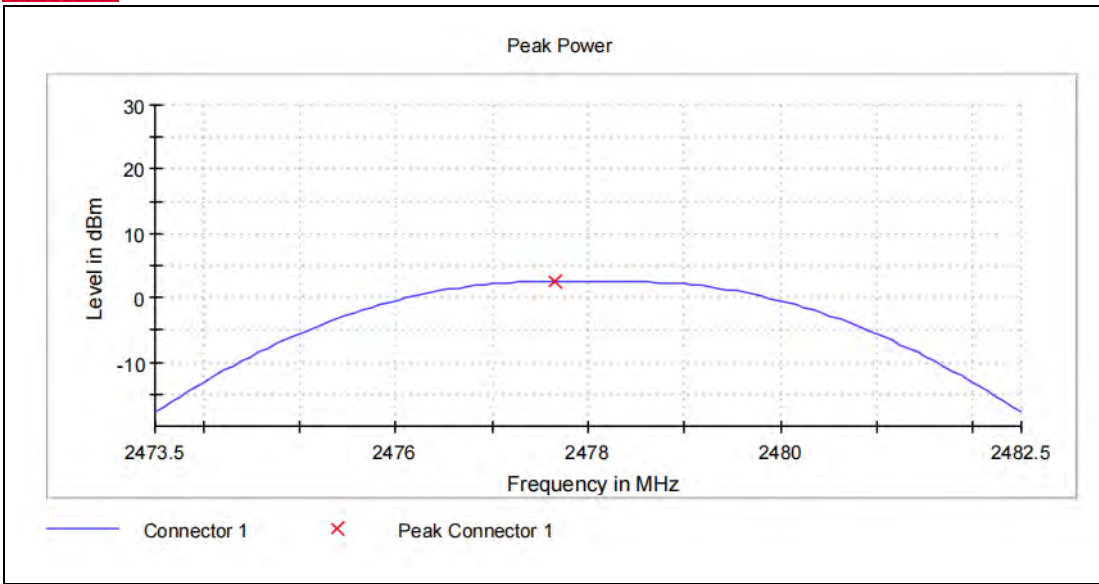


BLE_2M_Ant0_2478

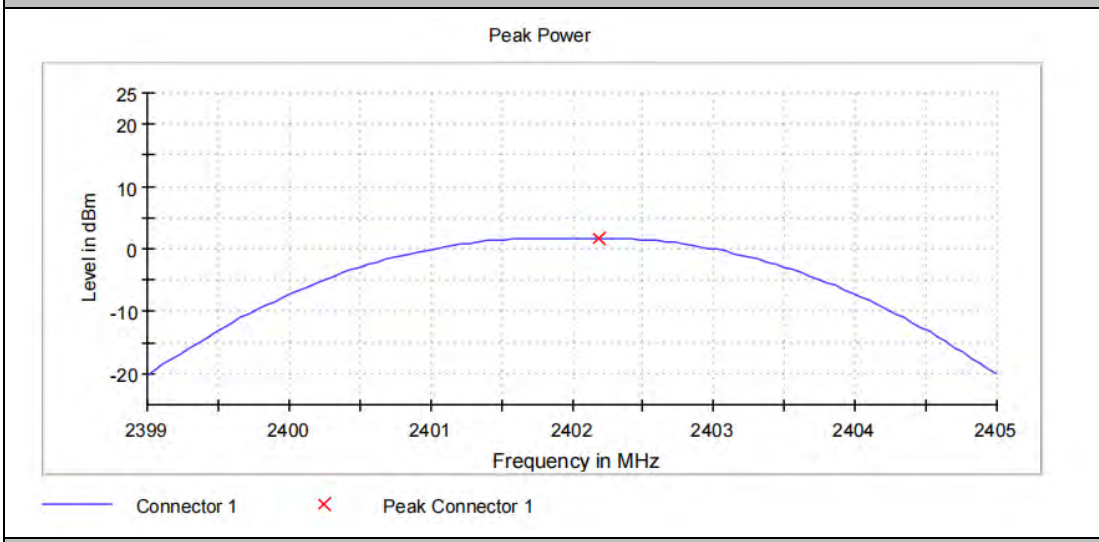


BLE_S2_Ant0_2402

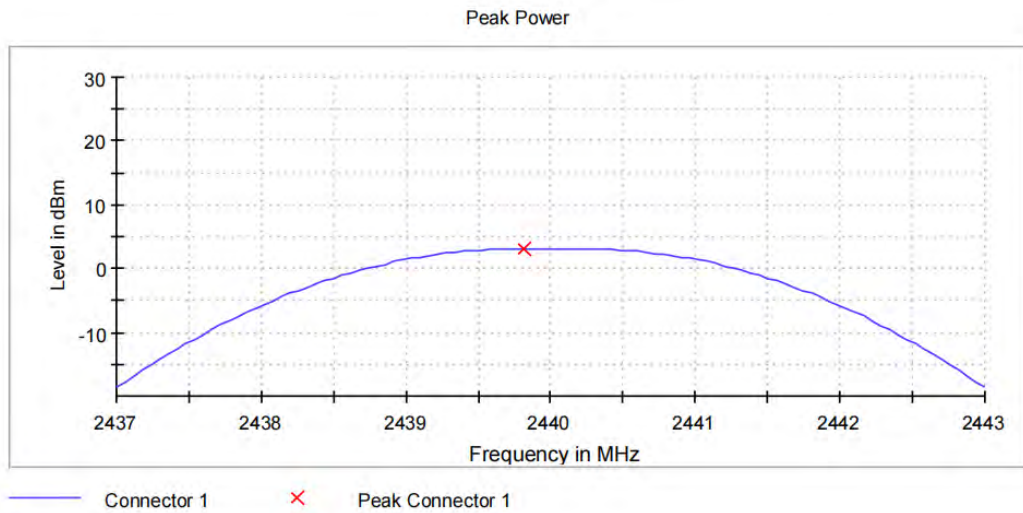


BLE_S2_Ant0_2440

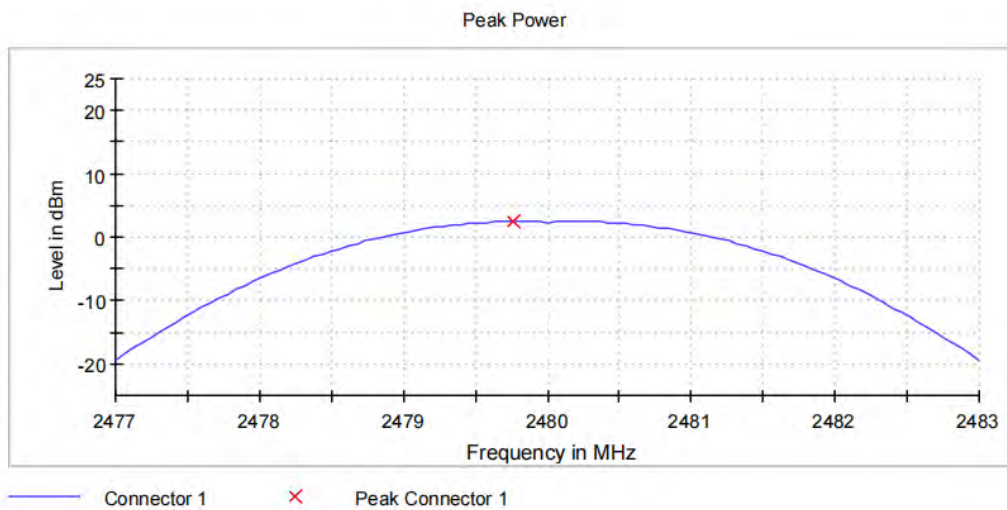

BLE_S2_Ant0_2480

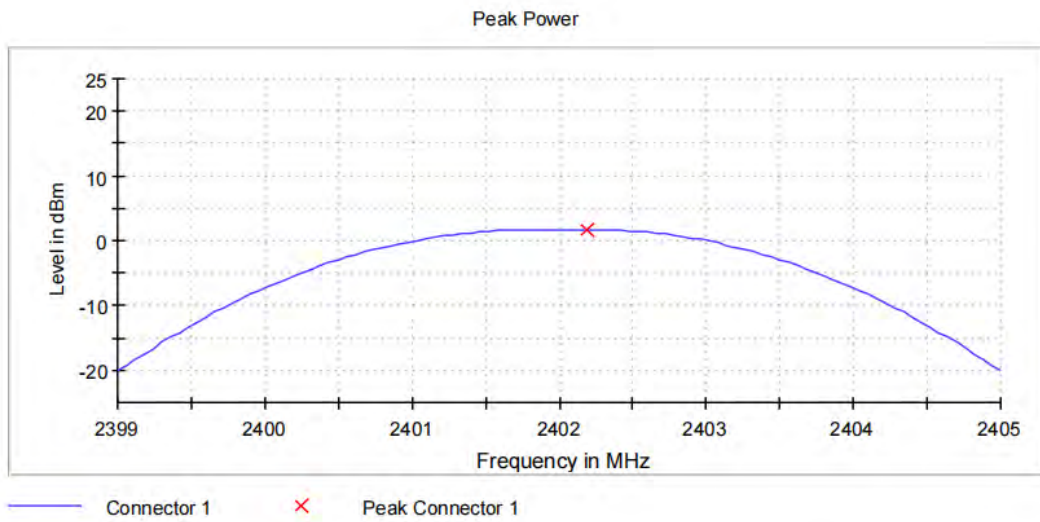

BLE_S8_Ant0_2402

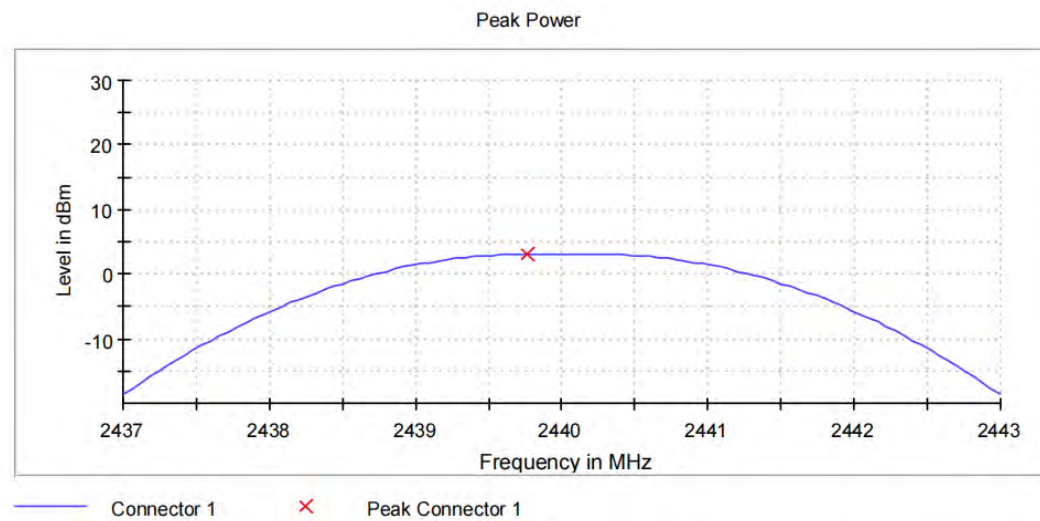


BLE_S8_Ant0_2440



**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

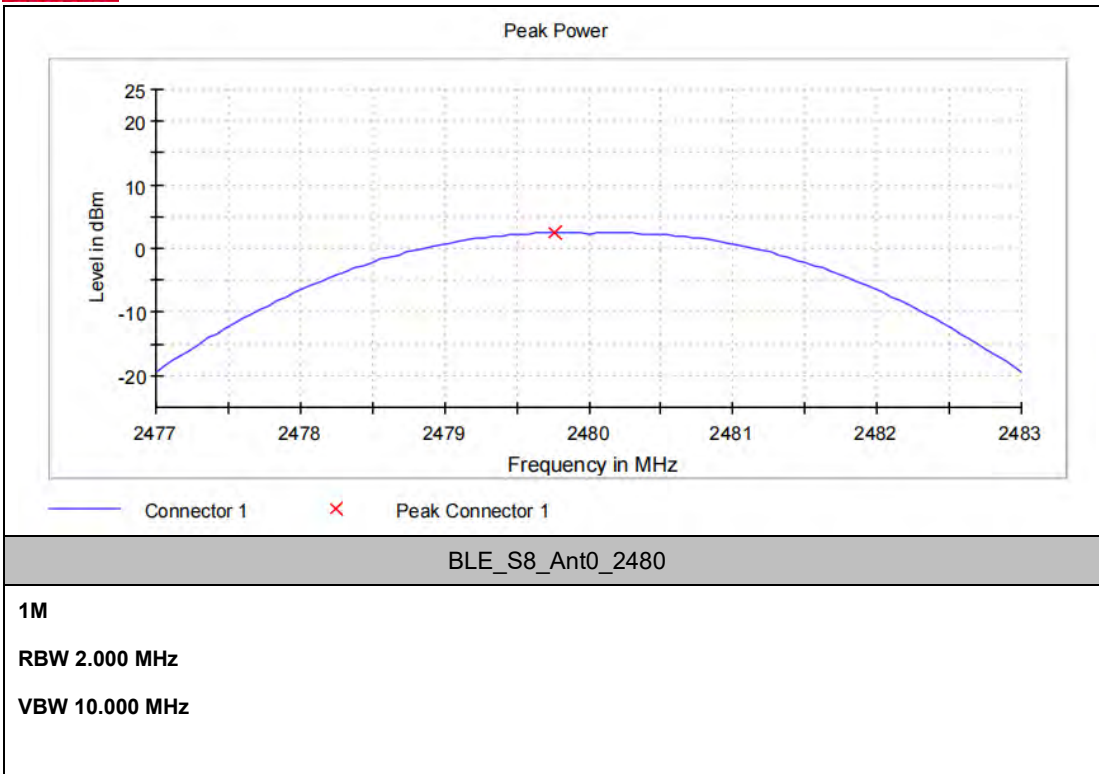



MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT


TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant0	2402	-15.71	≤8	PASS
		2440	-14.39	≤8	PASS
		2480	-14.85	≤8	PASS
BLE_2M	Ant0	2402	-17.53	≤8	PASS
		2440	-16.35	≤8	PASS
		2480	-16.73	≤8	PASS
BLE_S2	Ant0	2402	-9.54	≤8	PASS
		2440	-4.26	≤8	PASS
		2480	-7.38	≤8	PASS
BLE_S8	Ant0	2402	-5.15	≤8	PASS
		2440	-3.80	≤8	PASS
		2480	-4.27	≤8	PASS




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

TEST GRAPHS

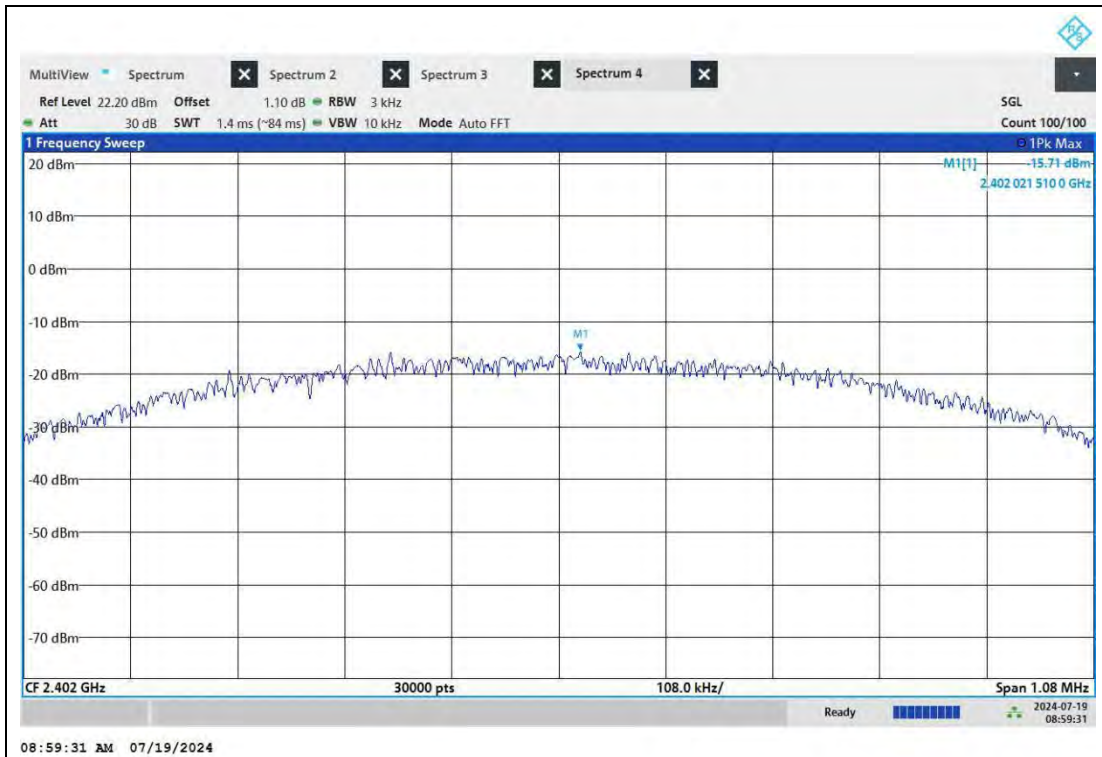

BLE_1M_Ant0_2402

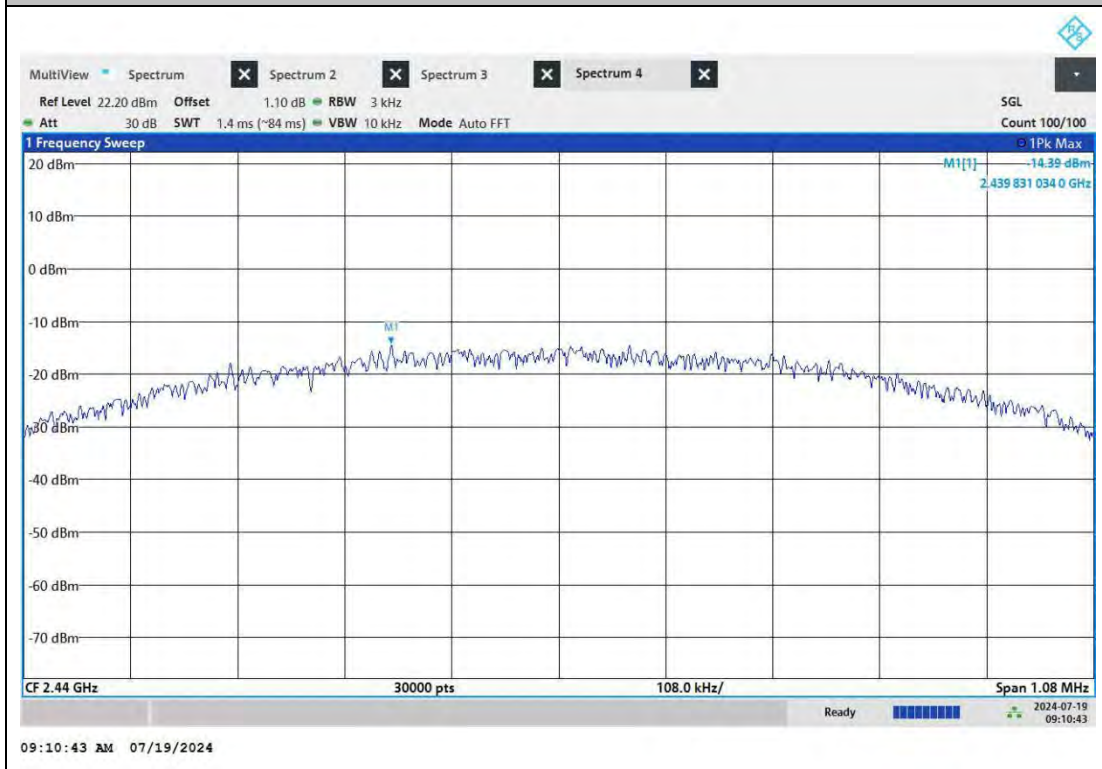

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

BLE_1M_Ant0_2440

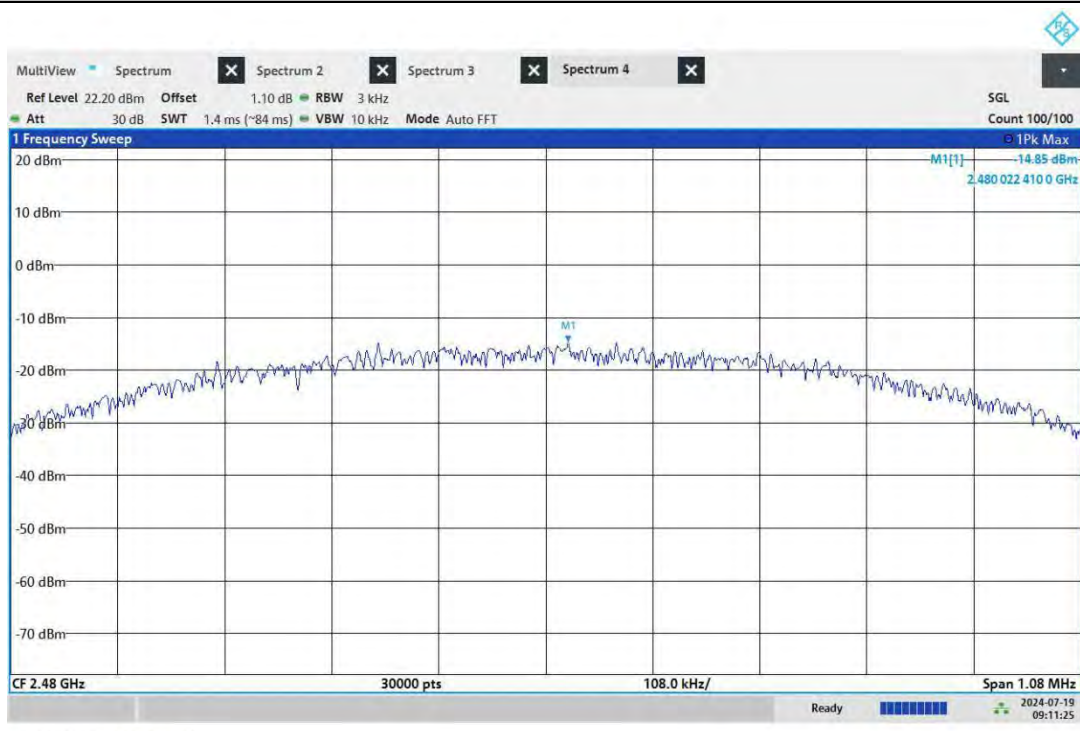

BLE_1M_Ant0_2480

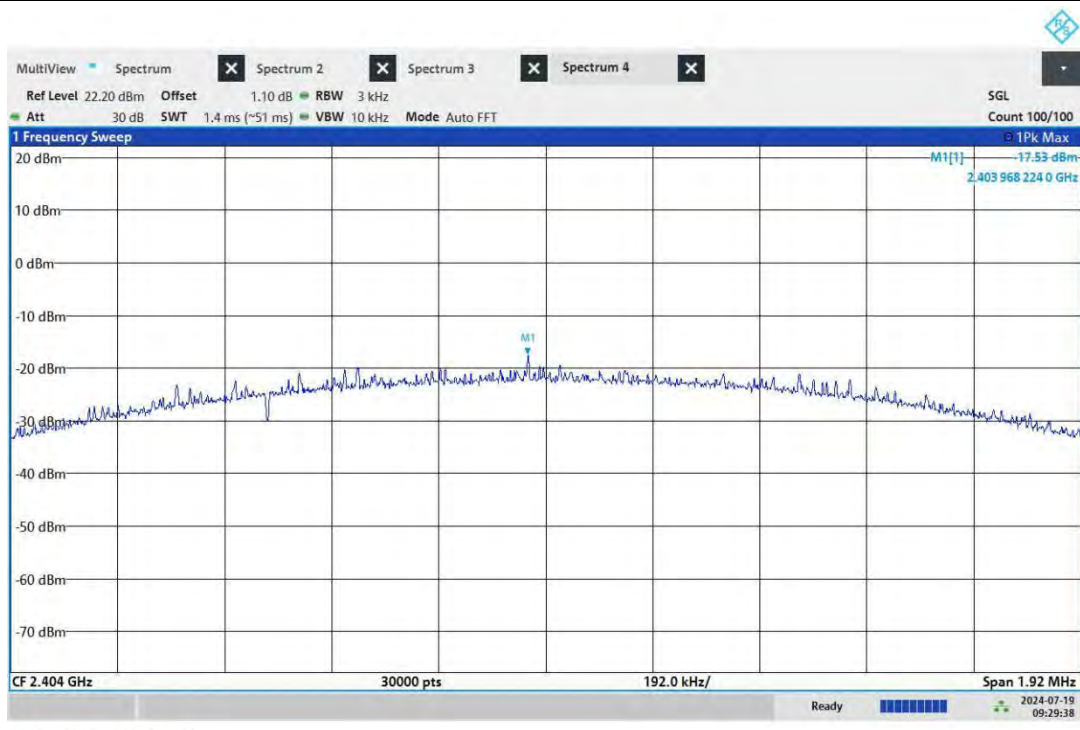


BLE_2M_Ant0_2404


BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com

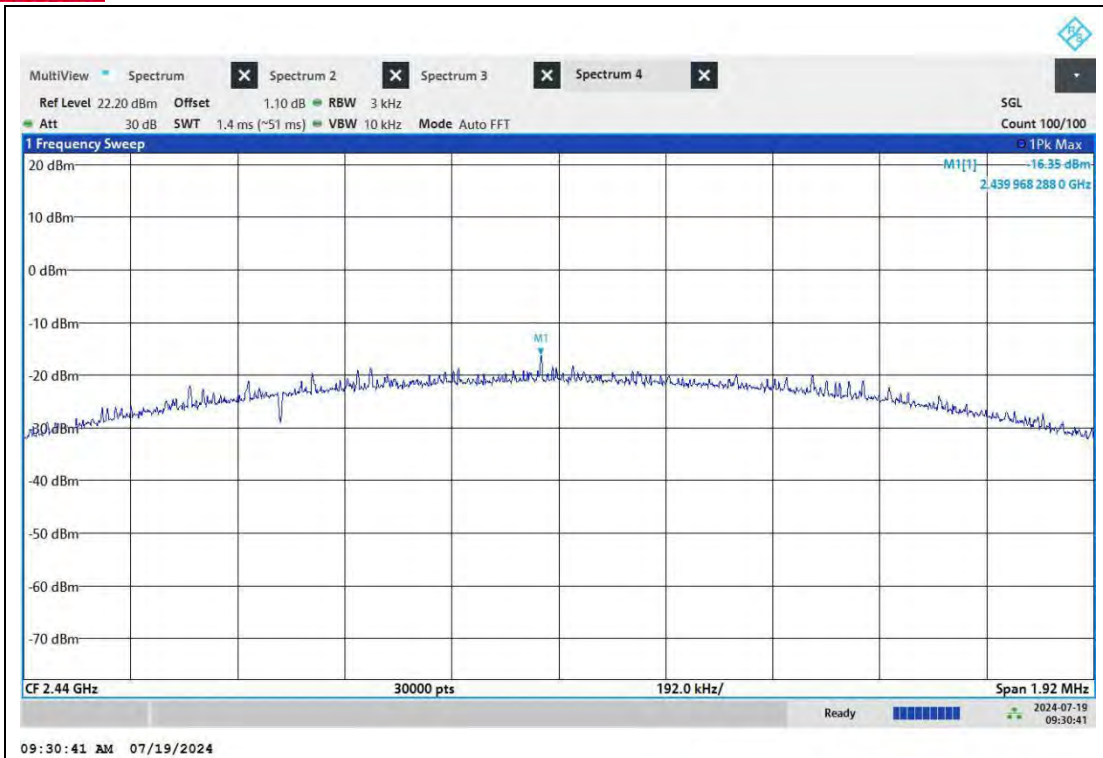

BLE_2M_Ant0_2440

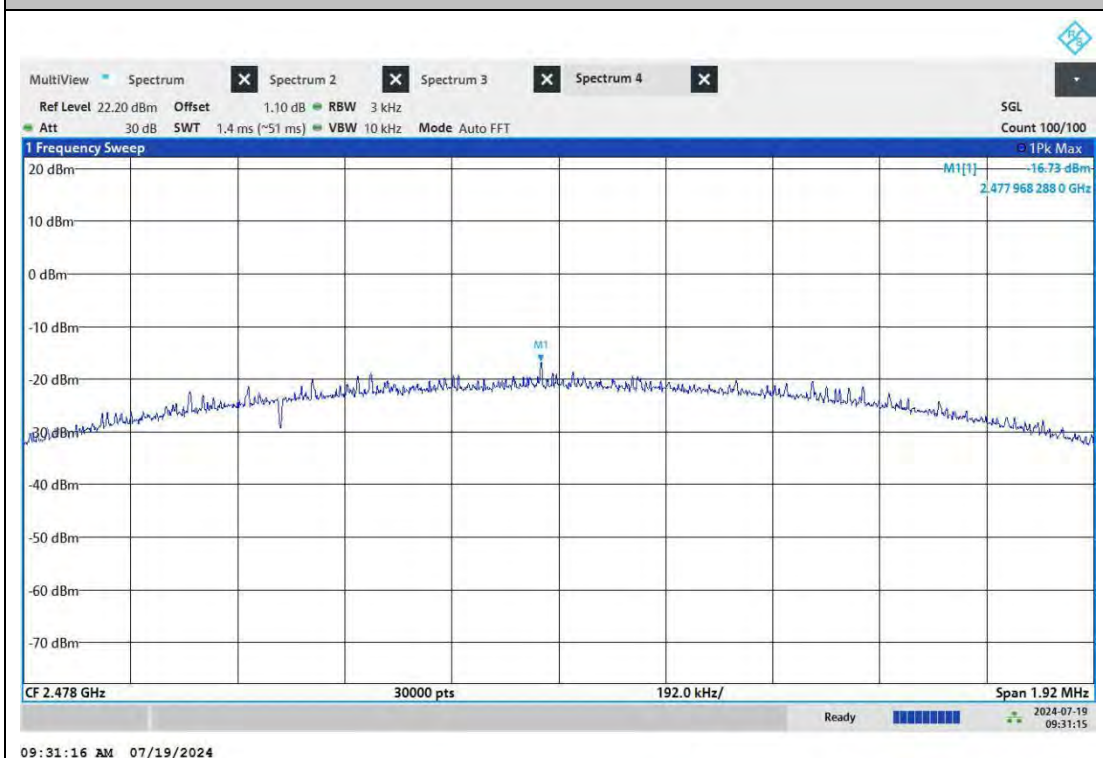


BLE_2M_Ant0_2478




**BUREAU
VERITAS**


Test Report No.: W7L-240618W002RF02

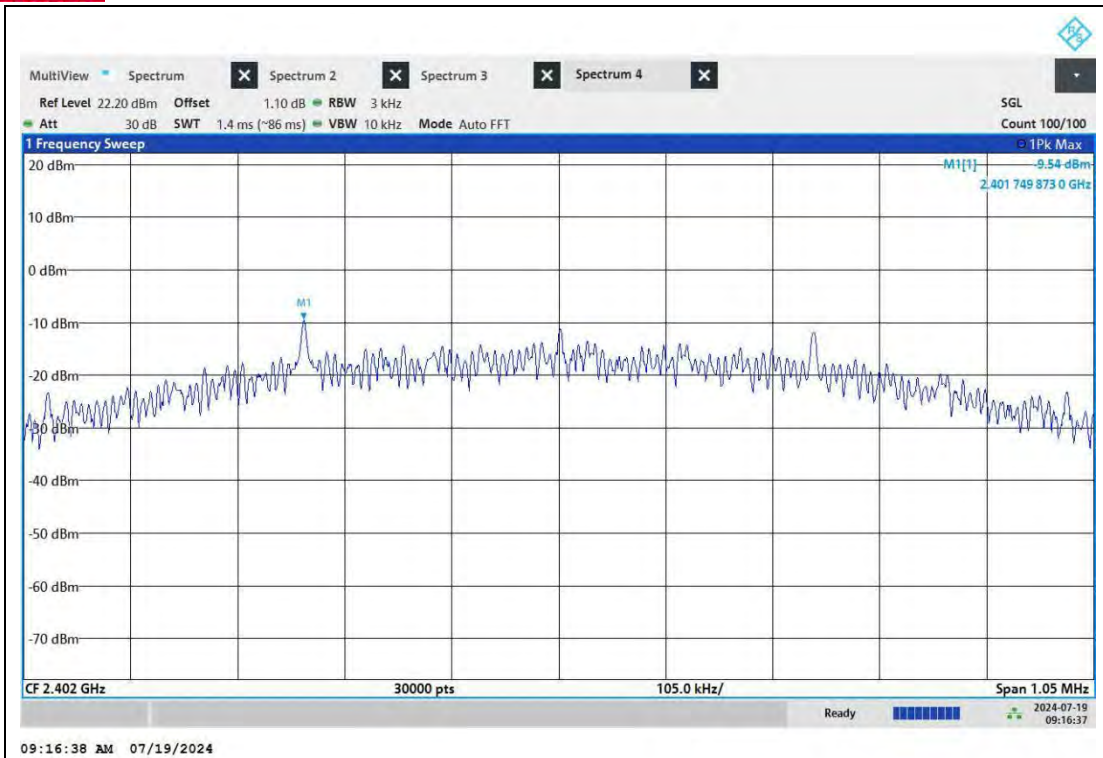


BLE_S2_Ant0_2402

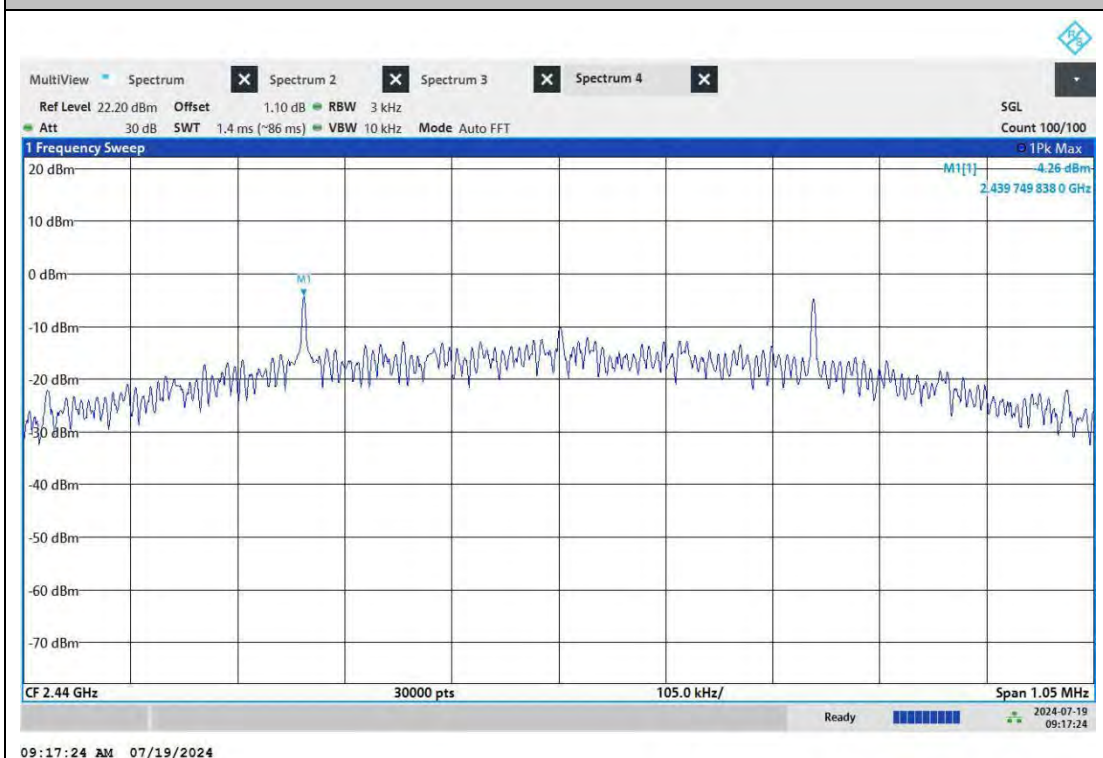


BLE_S2_Ant0_2440

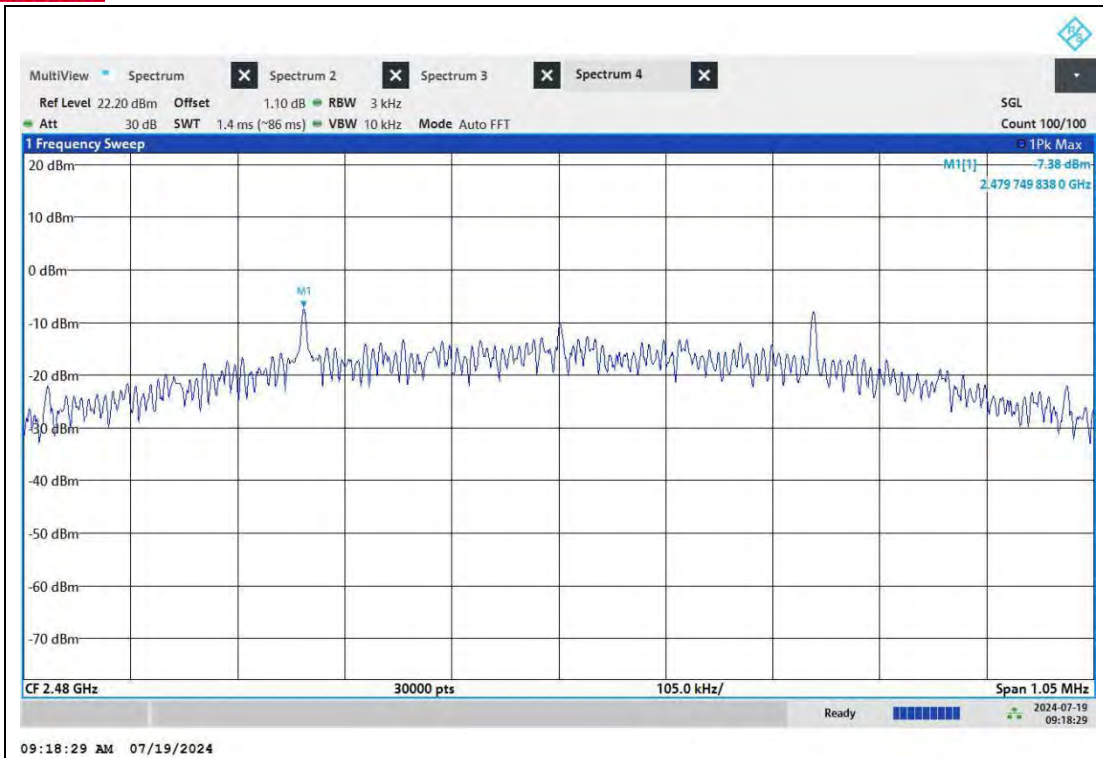


BLE_S2_Ant0_2480

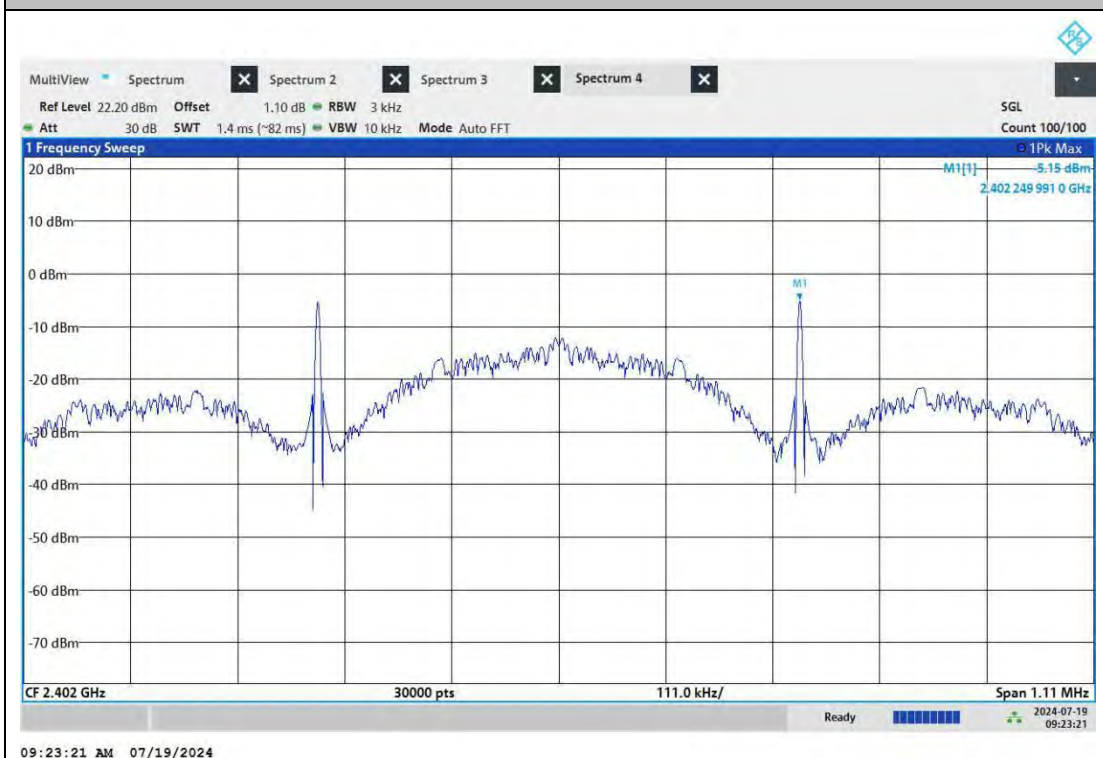

BLE_S8_Ant0_2402

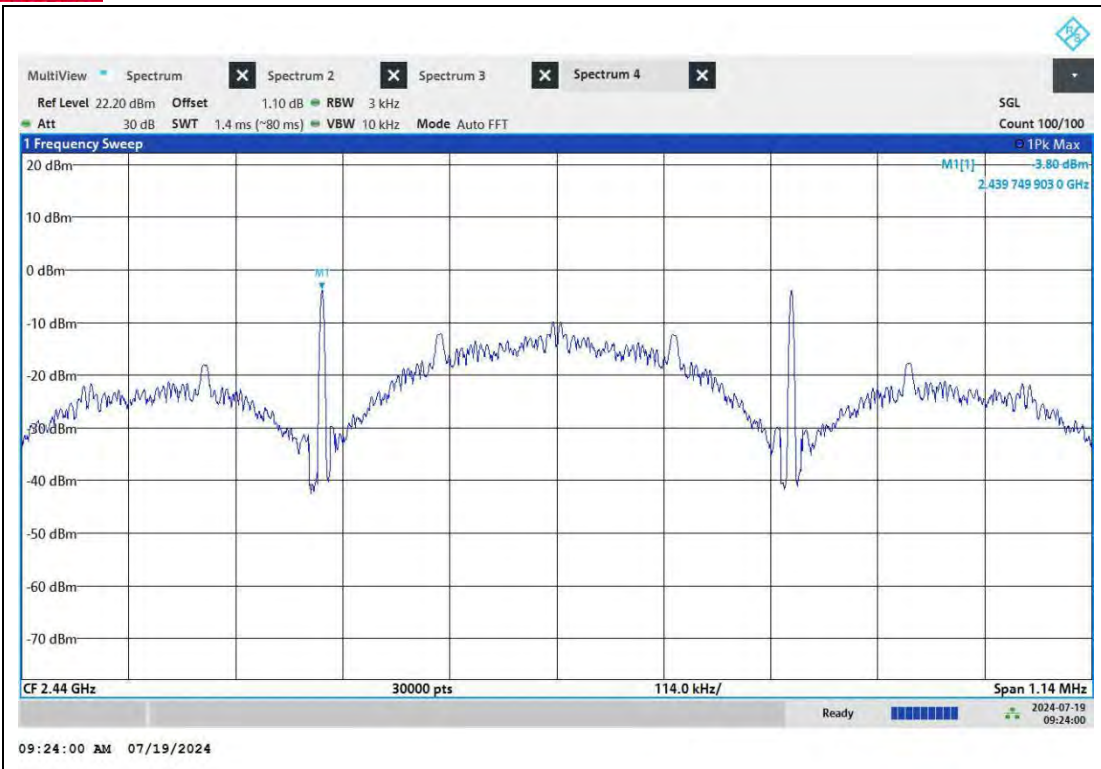

BLE_S8_Ant0_2440

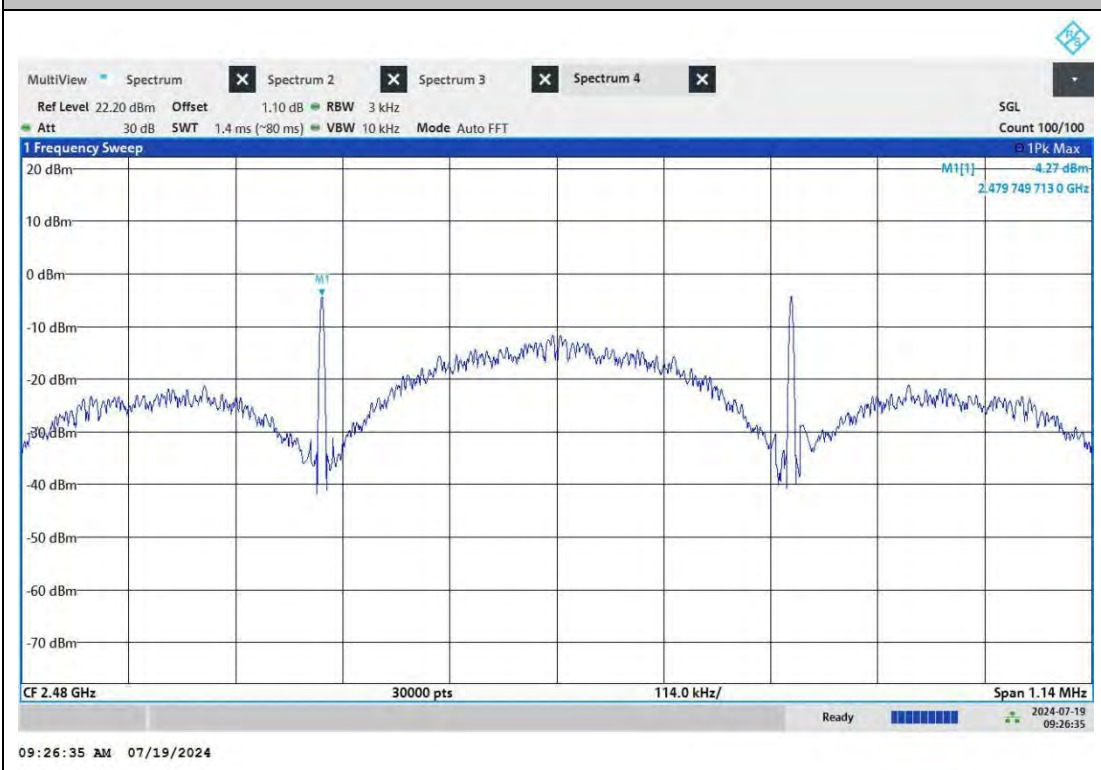

BLE_S8_Ant0_2480



BAND EDGE MEASUREMENTS

TEST RESULT


TestMode	Antenna	ChName	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant0	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS
BLE_2M	Ant0	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS
BLE_S2	Ant0	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS
BLE_S8	Ant0	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS




BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

TEST GRAPHS

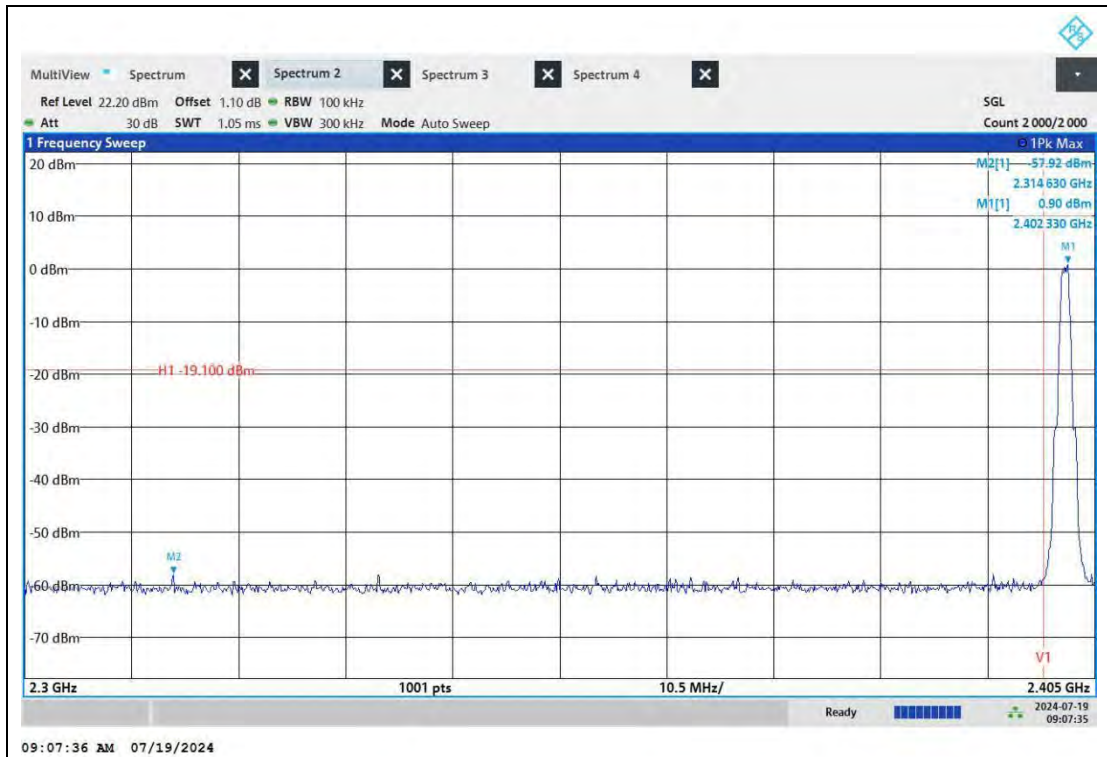

BLE_1M_Ant0_Low_2402

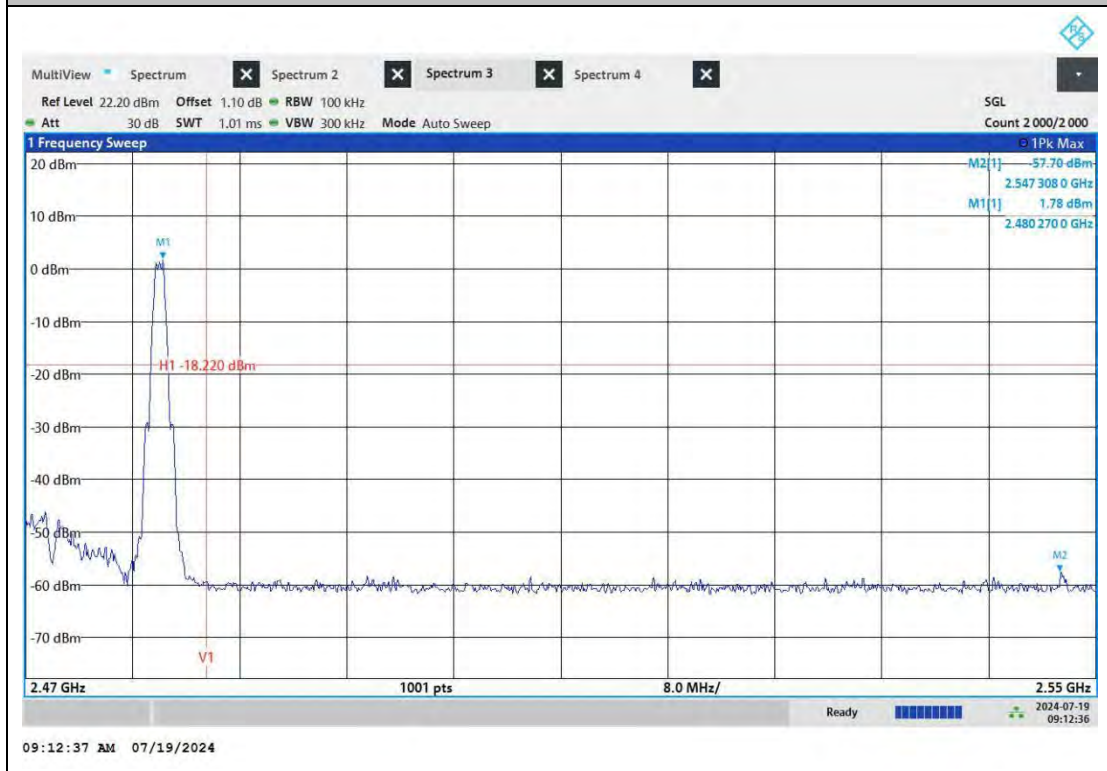

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS


Test Report No.: W7L-240618W002RF02

BLE_1M_Ant0_High_2480

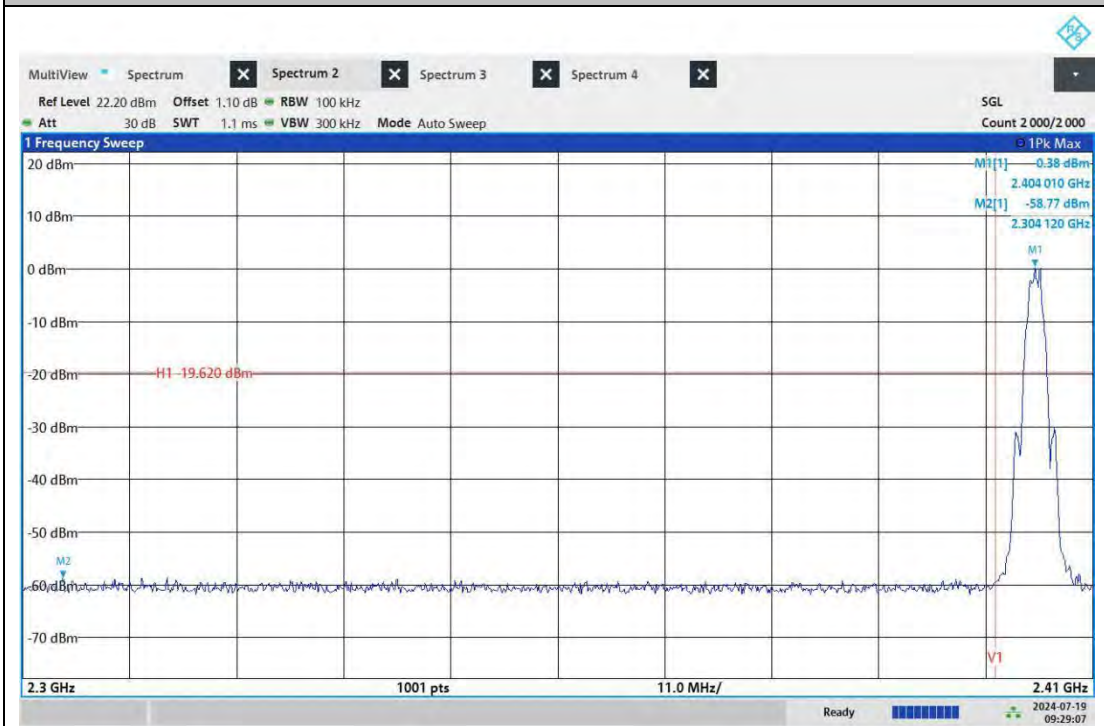

09:29:07 AM 07/19/2024

BLE_2M_Ant0_Low_2404

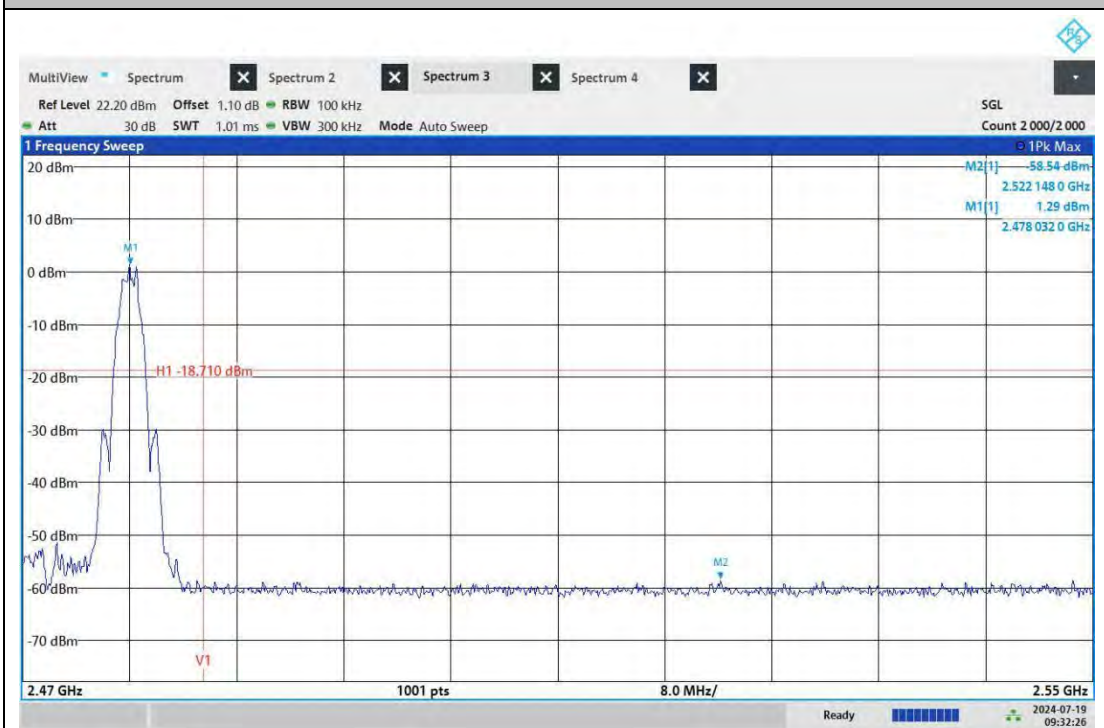

09:32:27 AM 07/19/2024

BLE_2M_Ant0_High_2478

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

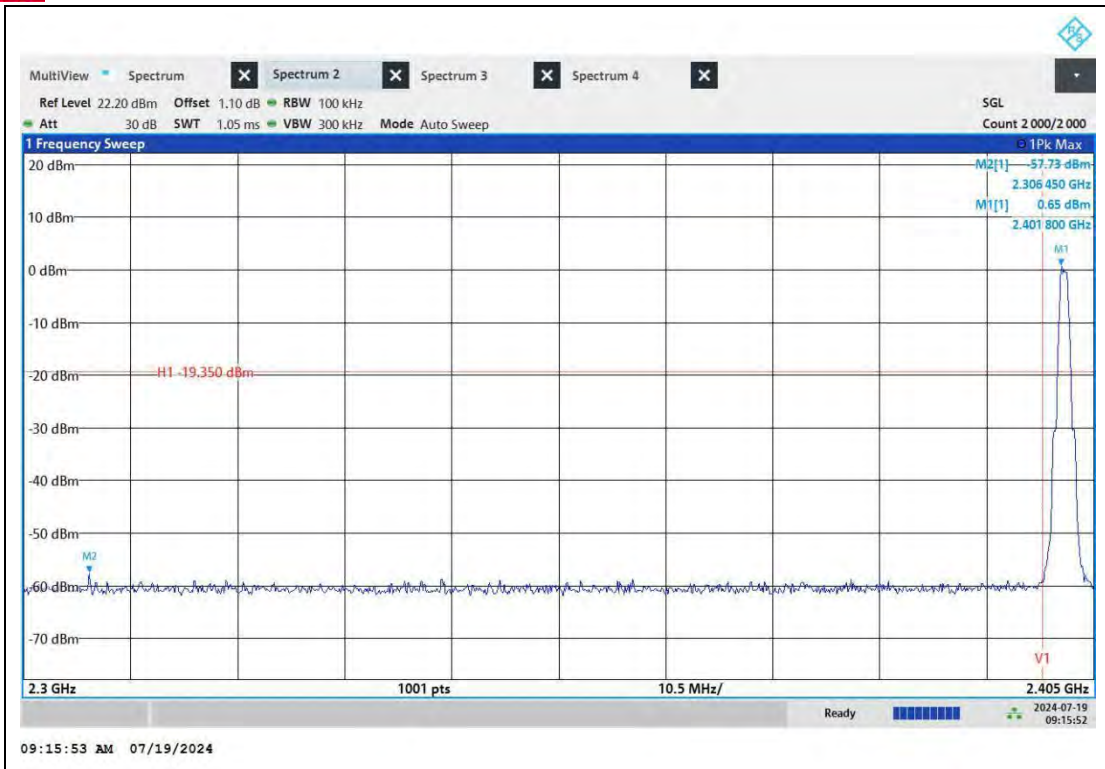

BLE_S2_Ant0_Low_2402

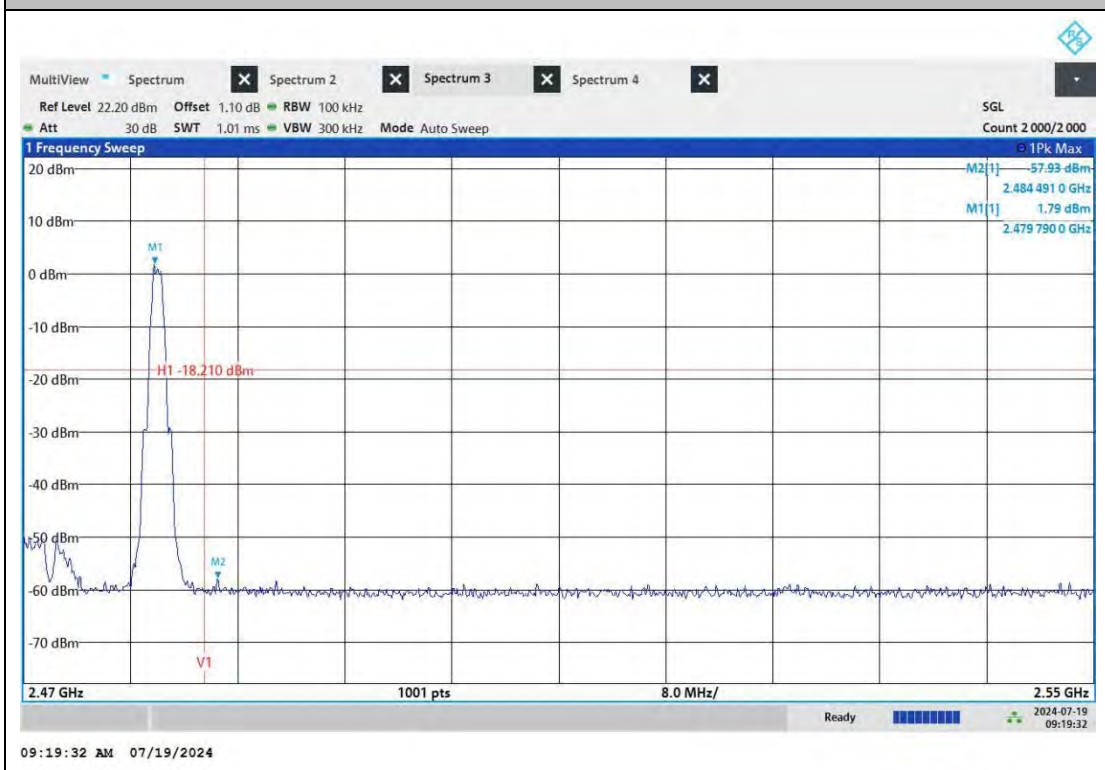

BLE_S2_Ant0_High_2480

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

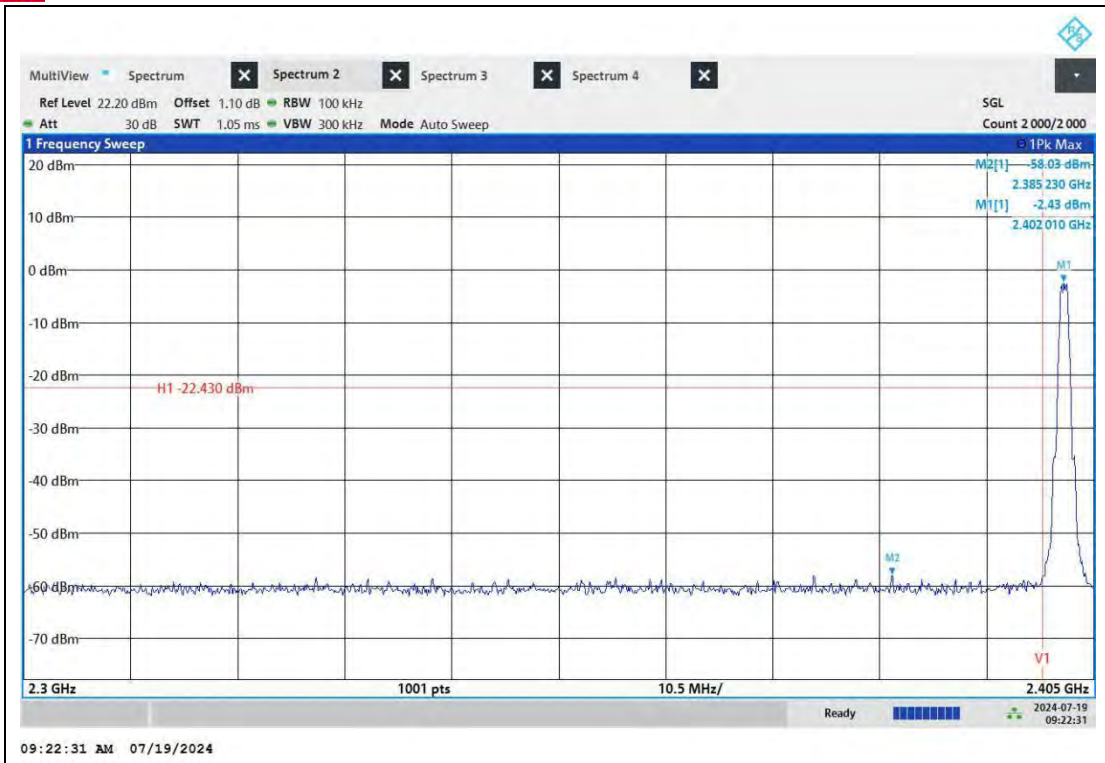

BLE_S8_Ant0_Low_2402

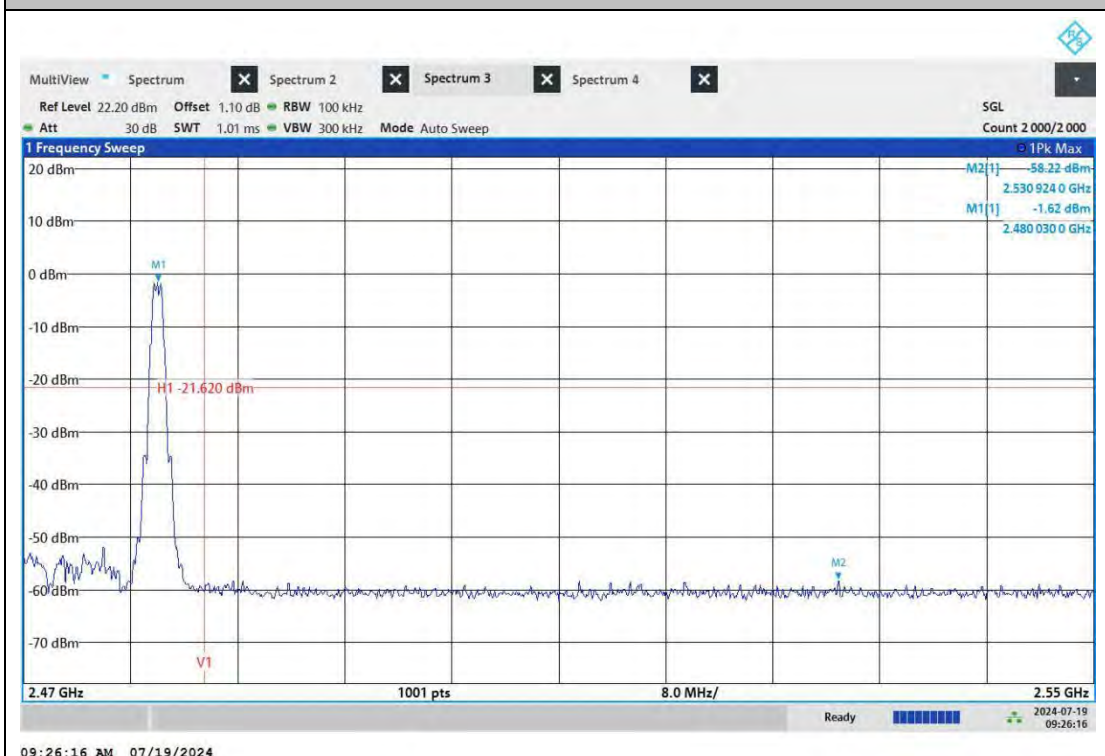

BLE_S8_Ant0_High_2480




CONDUCTED SPURIOUS EMISSION TEST RESULT

TestMode	Antenna	Channel	FreqRange [MHz]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant0	2402	30~26000	See test graph	See test graph	PASS
		2440	30~26000	See test graph	See test graph	PASS
		2480	30~26000	See test graph	See test graph	PASS
BLE_2M	Ant0	2402	30~26000	See test graph	See test graph	PASS
		2440	30~26000	See test graph	See test graph	PASS
		2480	30~26000	See test graph	See test graph	PASS
BLE_S2	Ant0	2402	30~26000	See test graph	See test graph	PASS
		2440	30~26000	See test graph	See test graph	PASS
		2480	30~26000	See test graph	See test graph	PASS
BLE_S8	Ant0	2402	30~26000	See test graph	See test graph	PASS
		2440	30~26000	See test graph	See test graph	PASS
		2480	30~26000	See test graph	See test graph	PASS




TEST GRAPHS

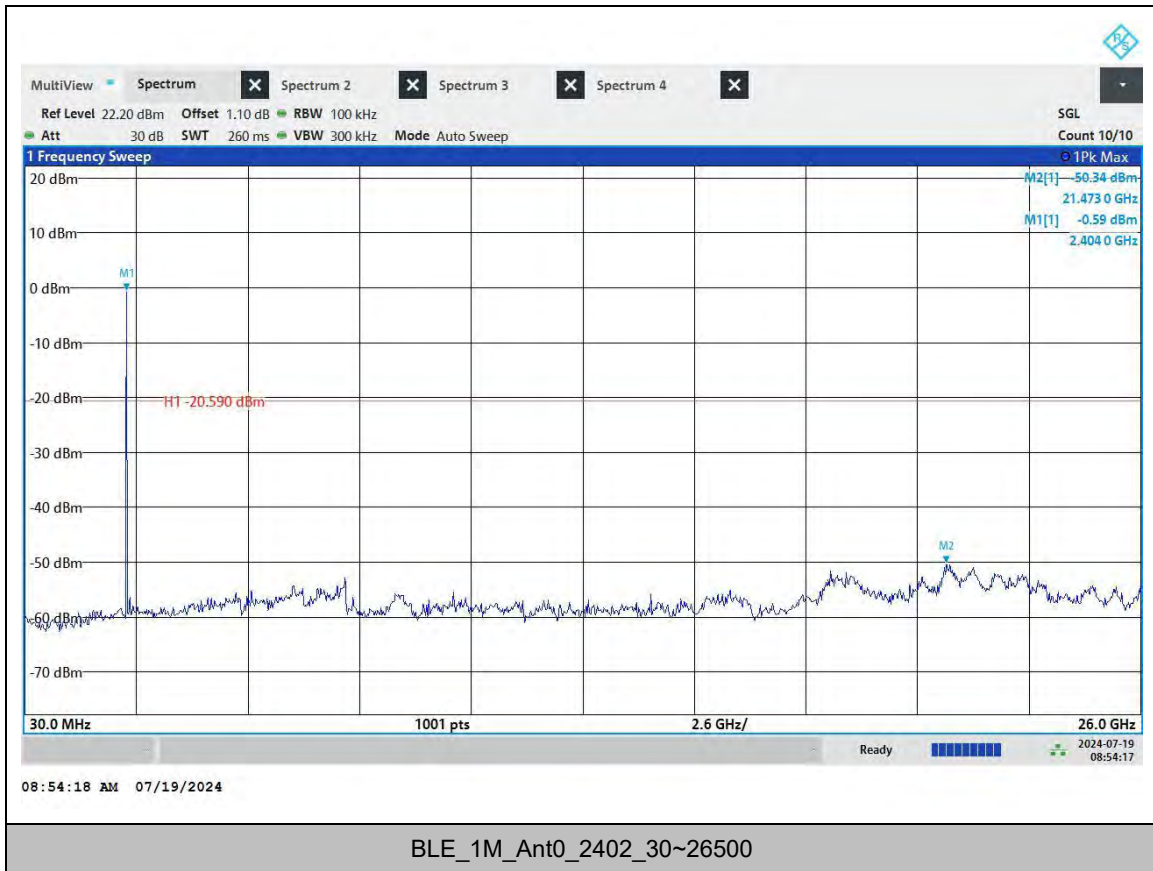




BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

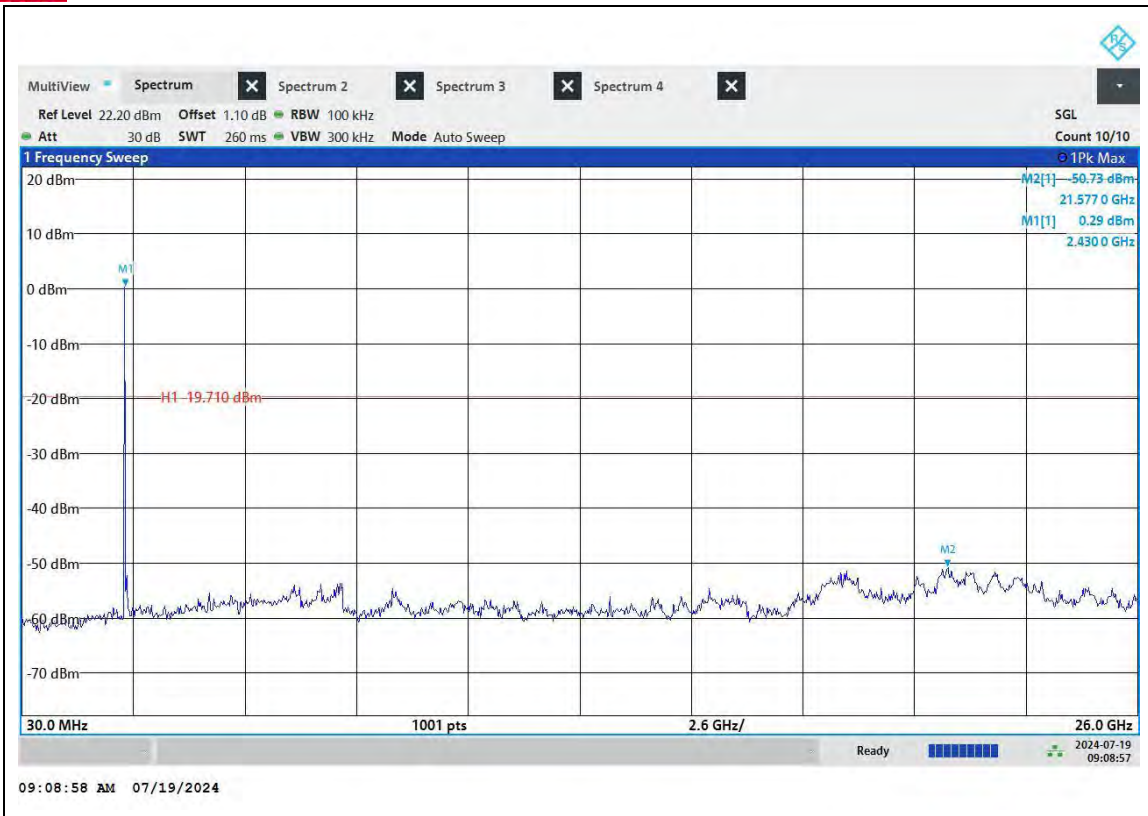

BLE_1M_Ant0_2440_30~26500

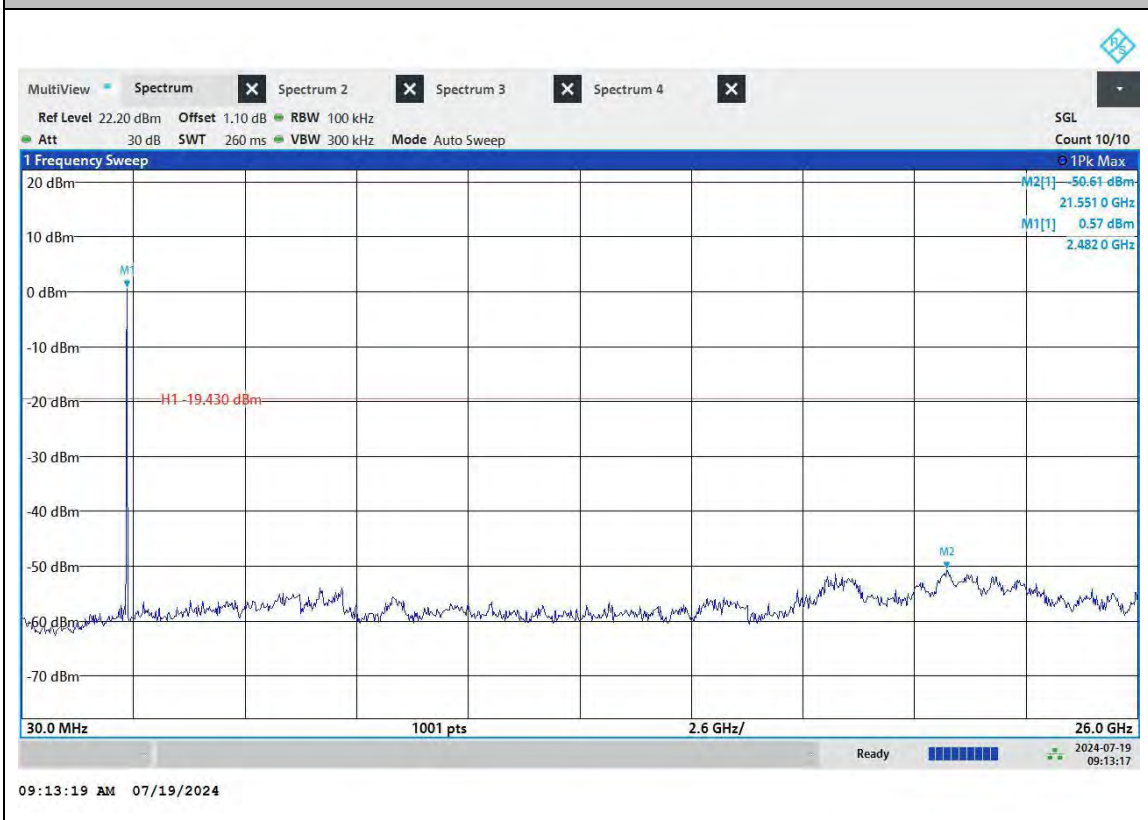

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS


Test Report No.: W7L-240618W002RF02

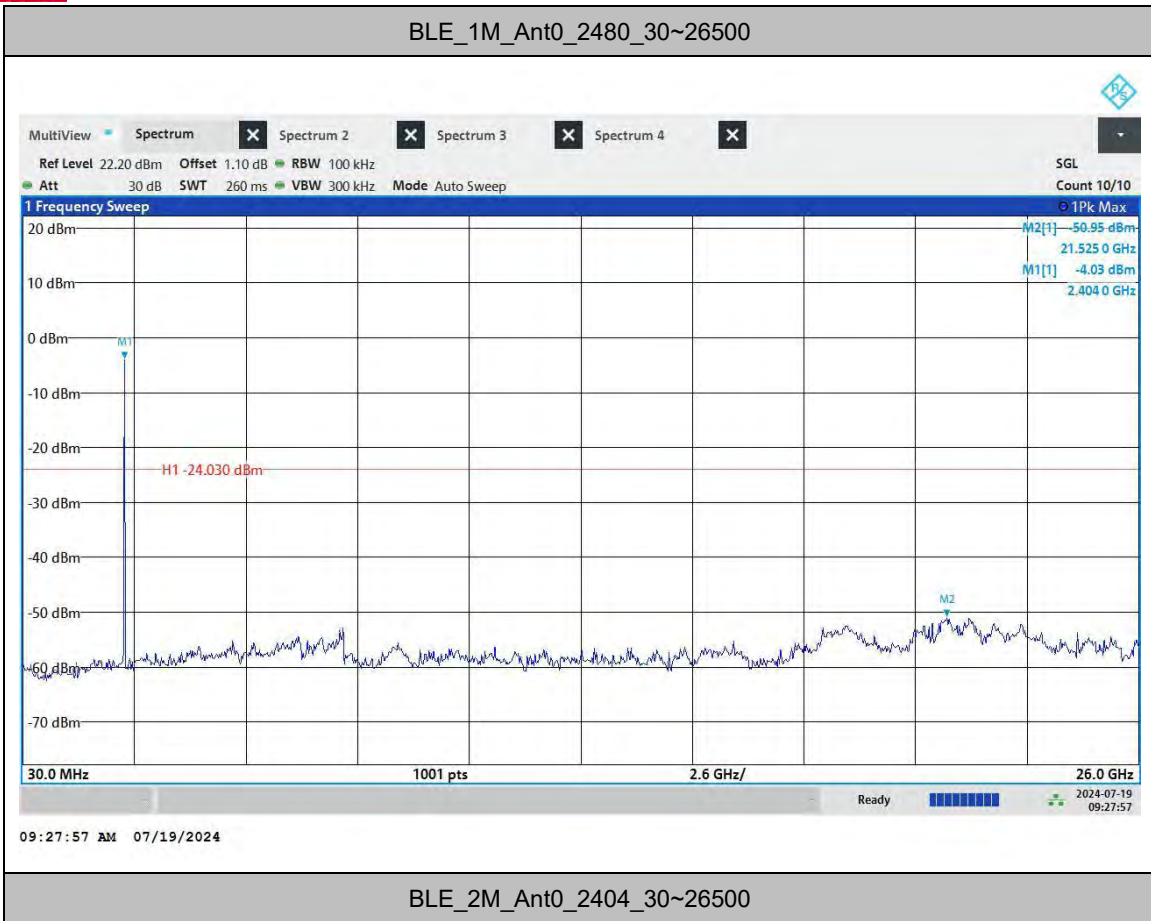




**BUREAU
VERITAS**

Test Report No.: W7L-240618W002RF02

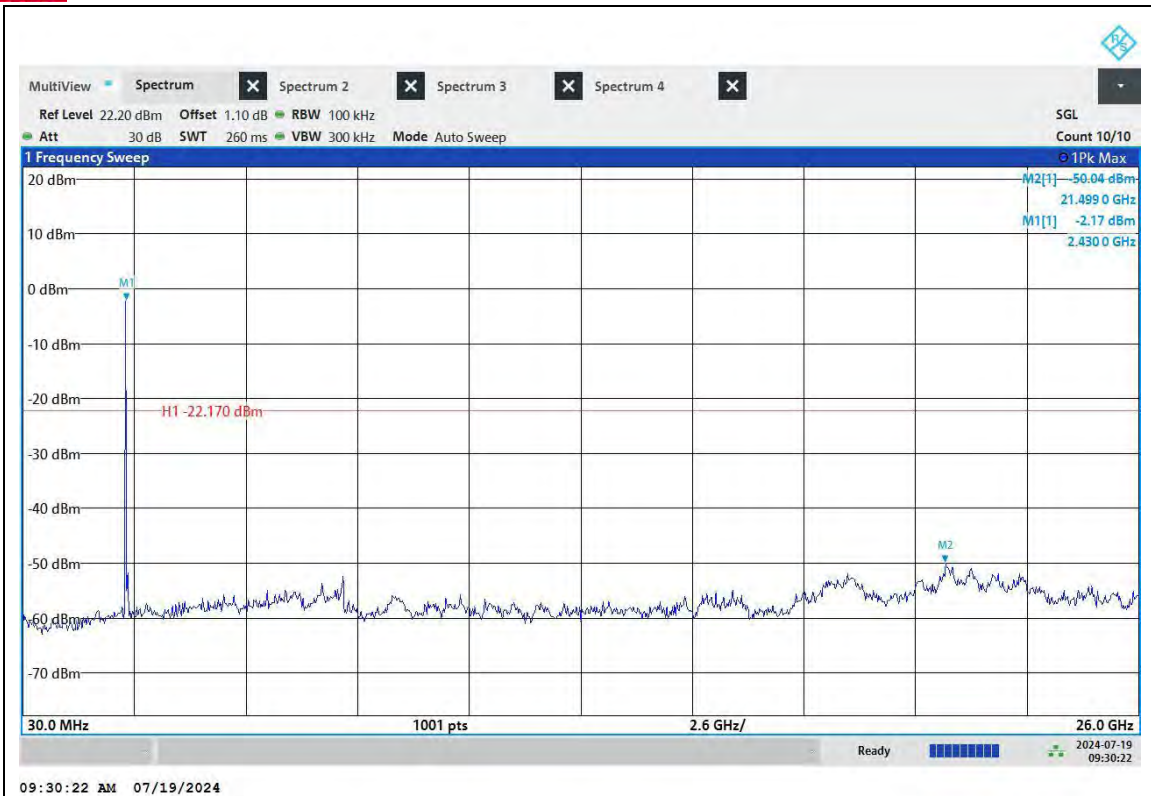

BLE_2M_Ant0_2440_30~26500

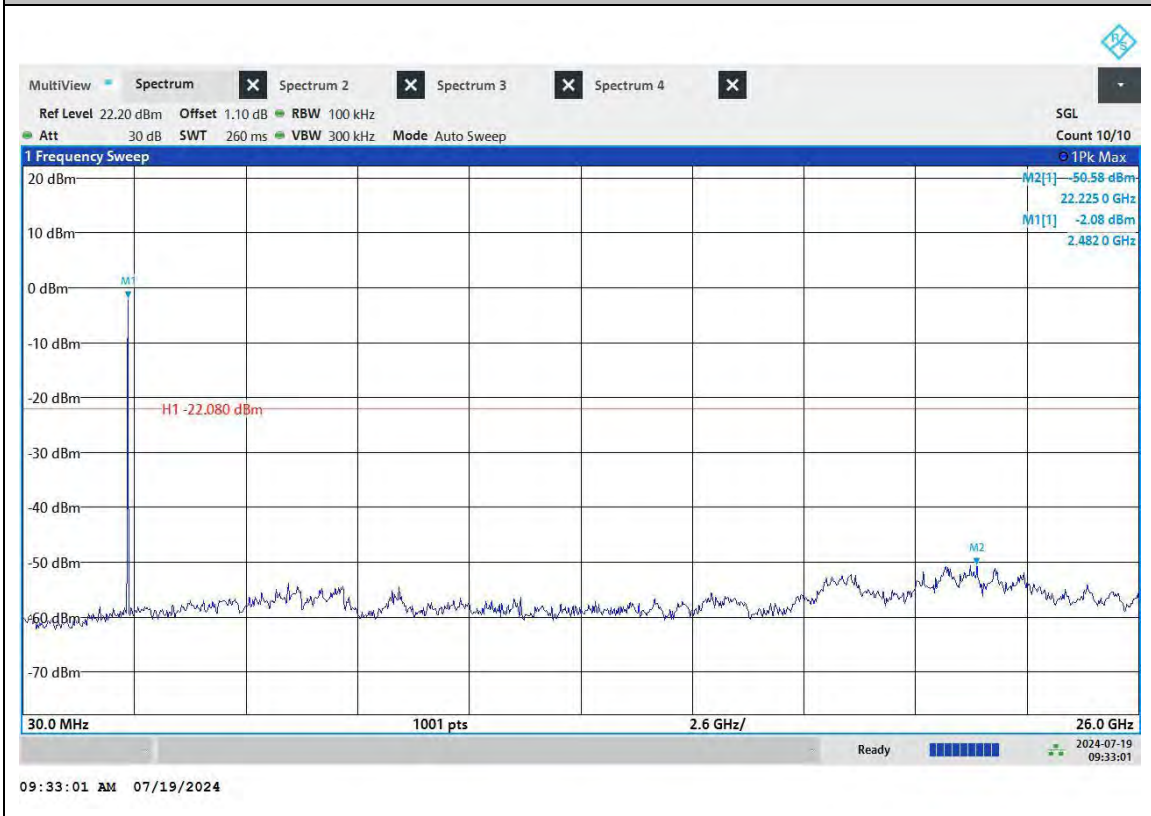

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd



Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

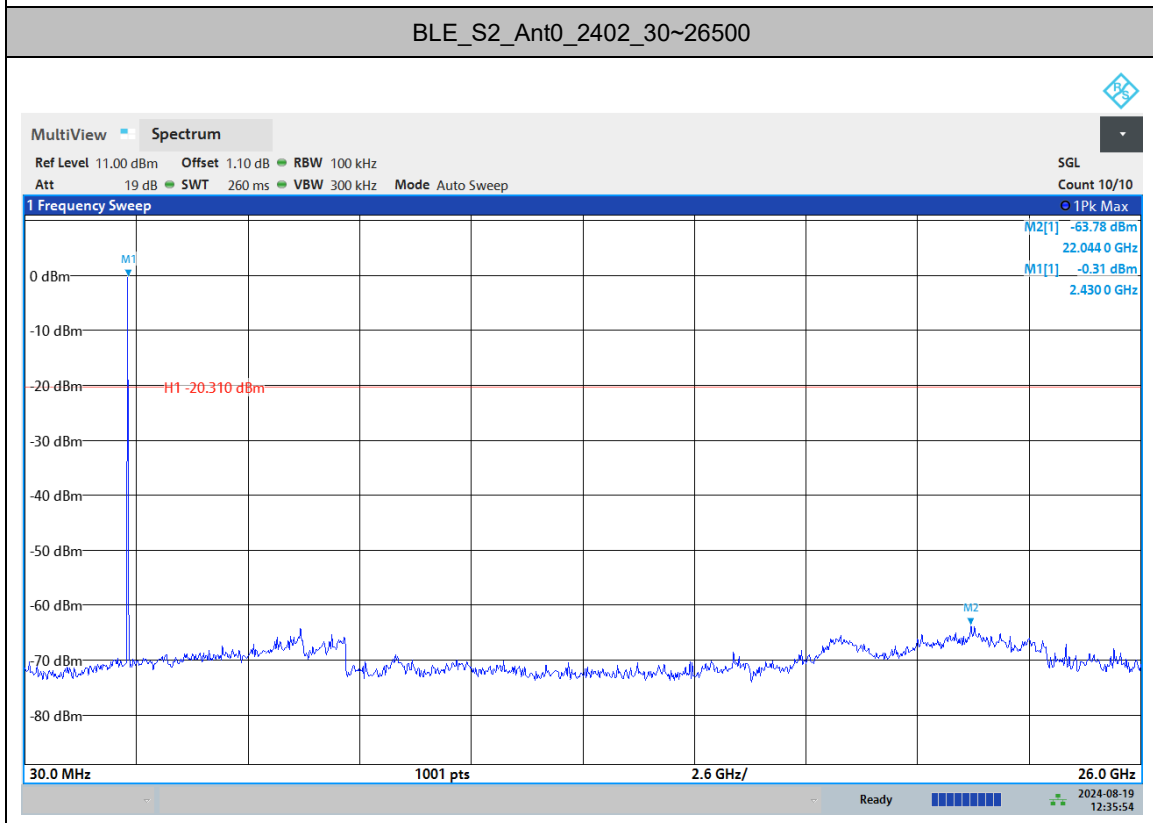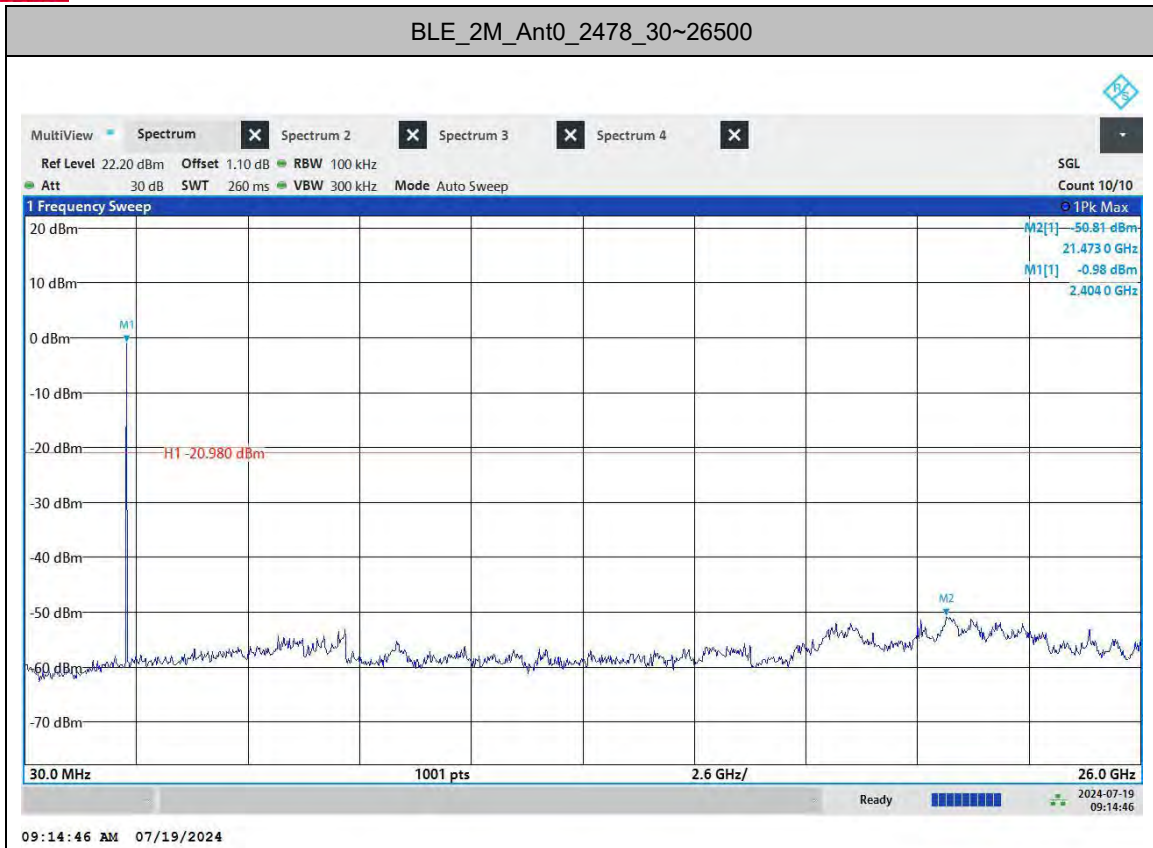

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS


Test Report No.: W7L-240618W002RF02

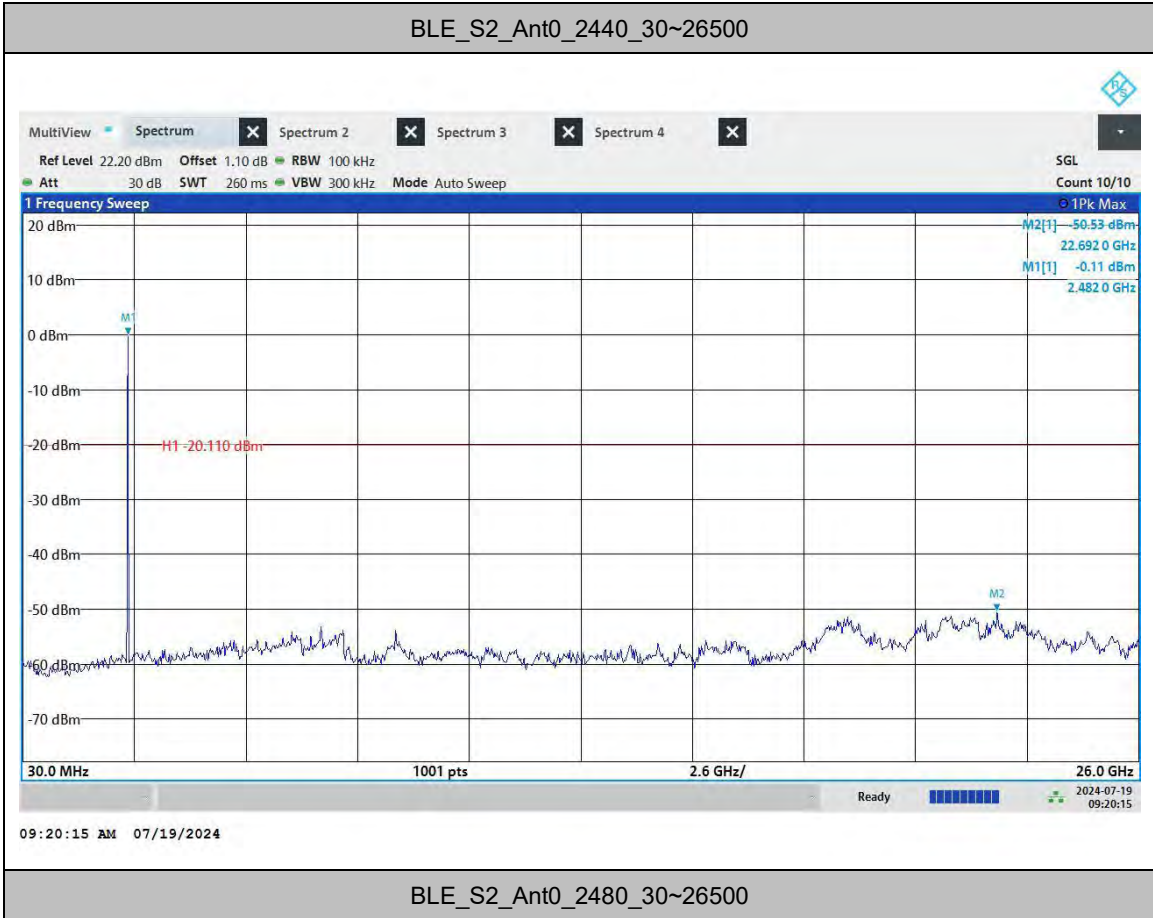




BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

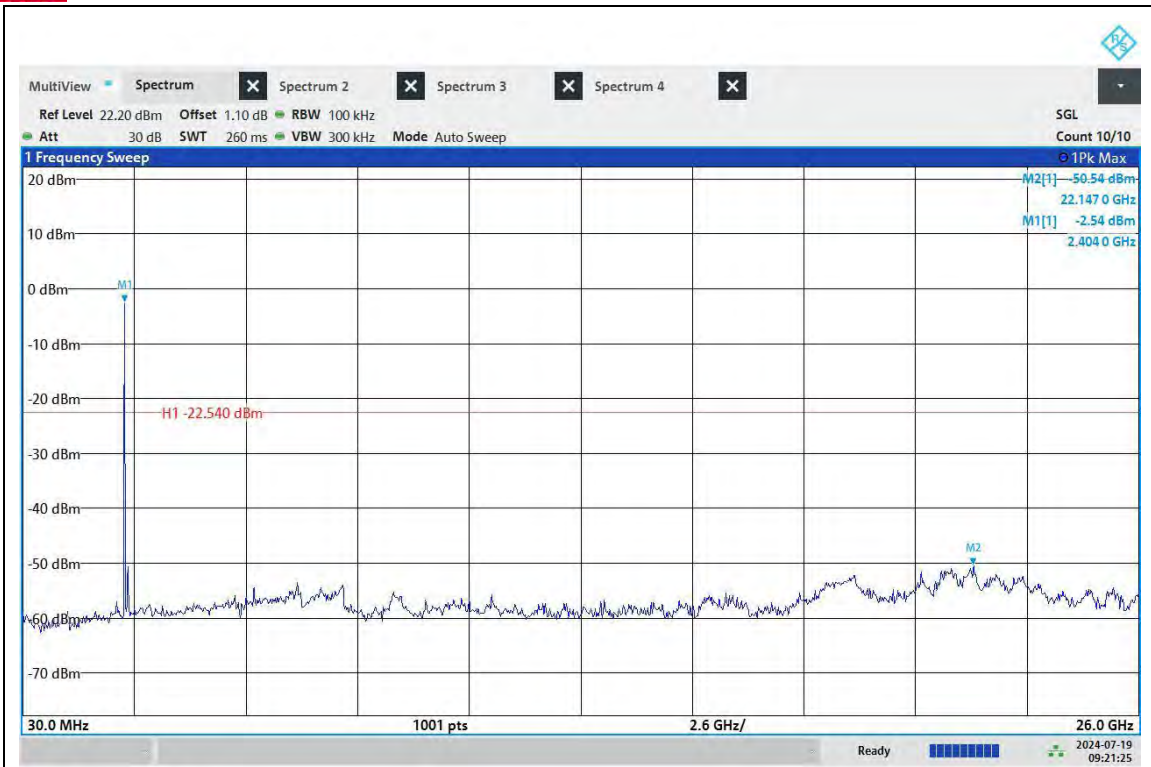

09:21:25 AM 07/19/2024

BLE_S8_Ant0_2402_30~26500

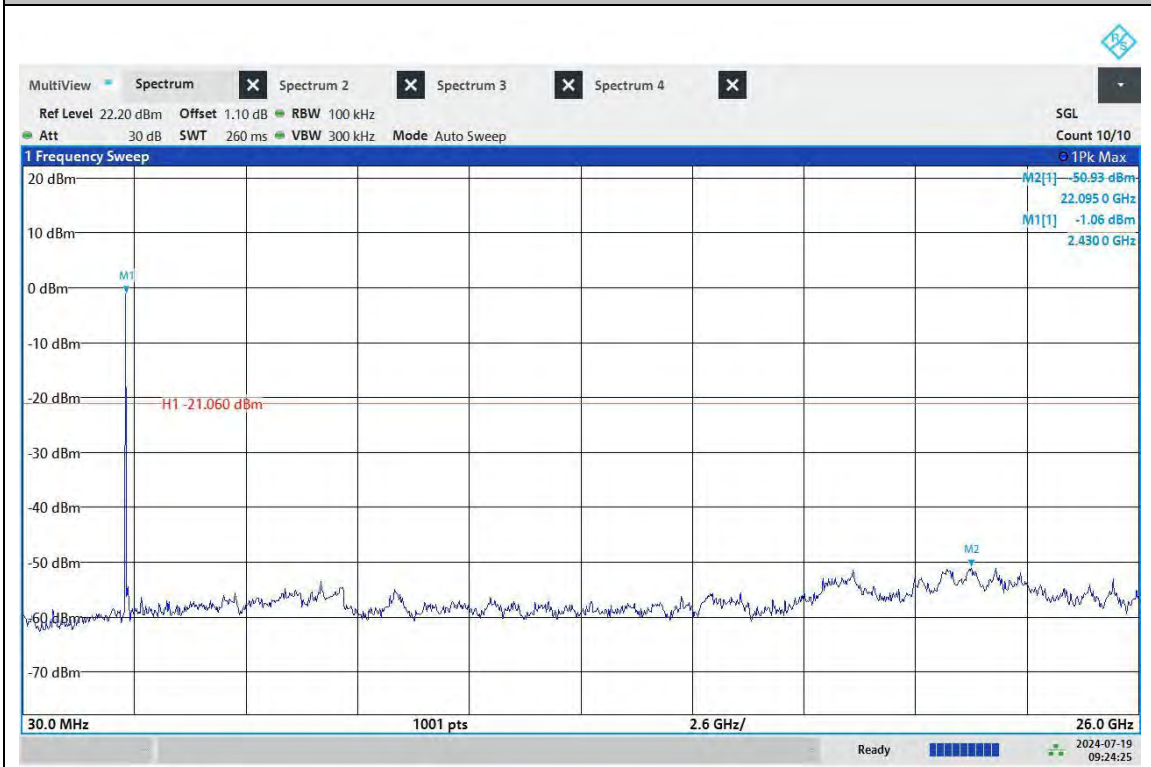

09:24:25 AM 07/19/2024

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

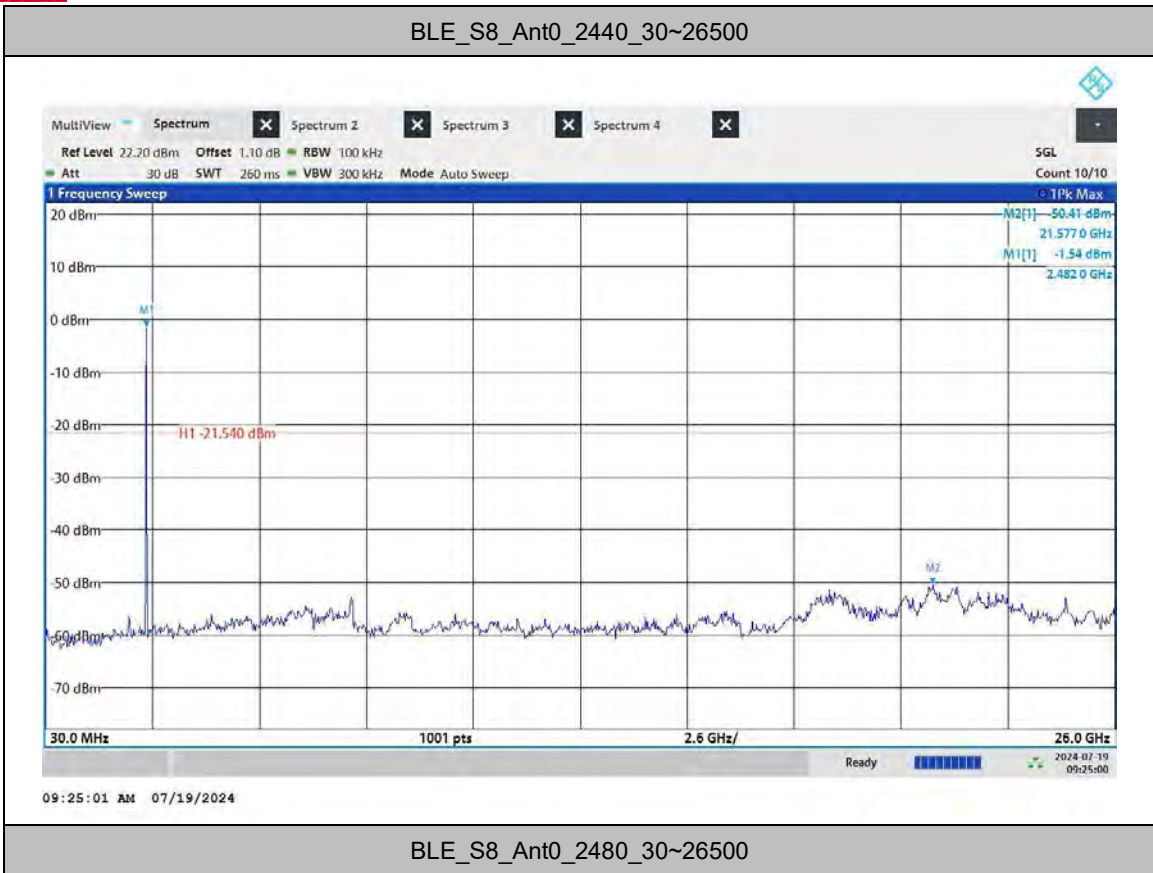



DUTY CYCLE


TEST RESULT

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	DC [%]	xFactor	Verdict
BLE_1M	Ant0	2402	2.120	2.500	84.80 %	0.72	PASS
BLE_2M	Ant0	2404	1.070	1.878	56.98 %	2.44	PASS
BLE-S2	Ant0	2402	4.557	4.998	91.18 %	0.4	PASS
BLE_S8	Ant0	2402	17.070	17.515	97.46 %	0.11	PASS




TEST GRAPHS



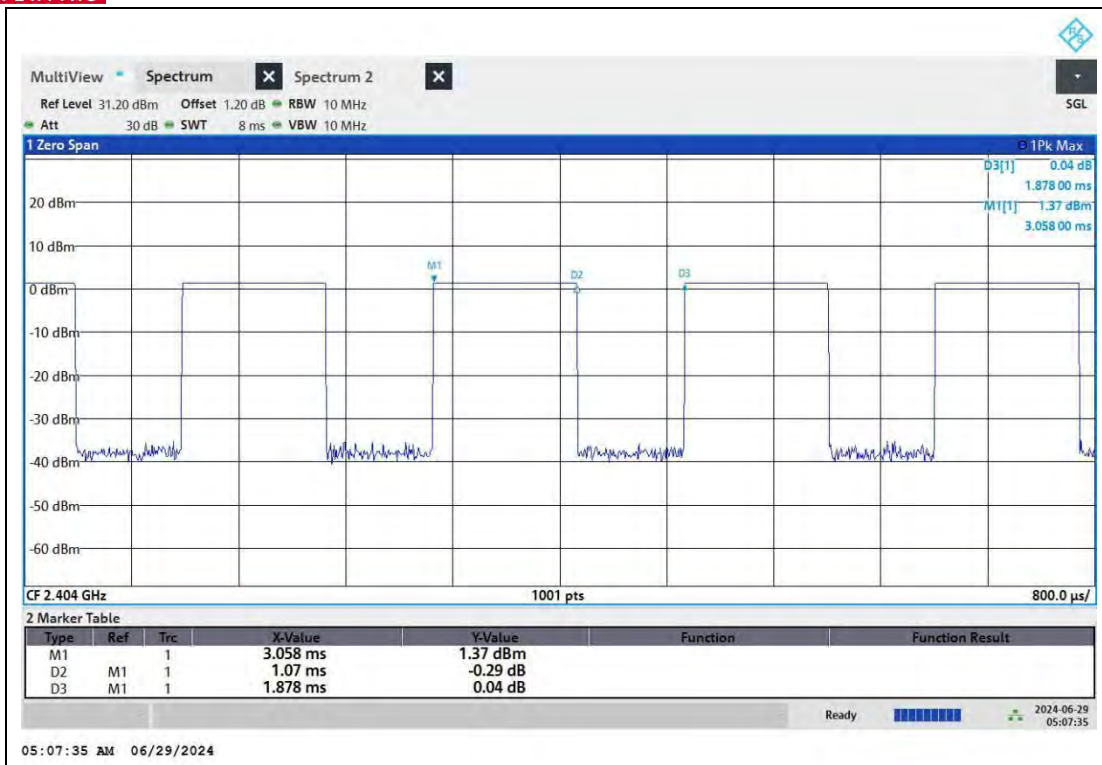

BLE_2M_Ant0_2404

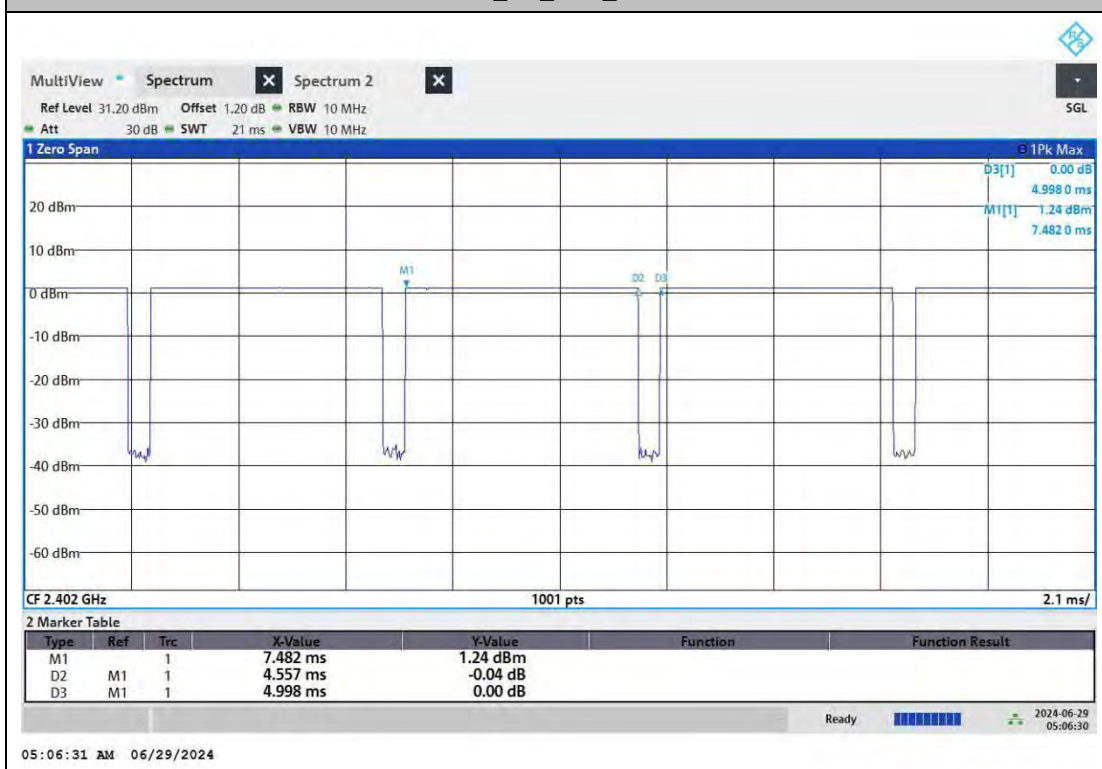


BLE_S2_Ant0_2402



BUREAU VERITAS

Test Report No.: W7L-240618W002RF02

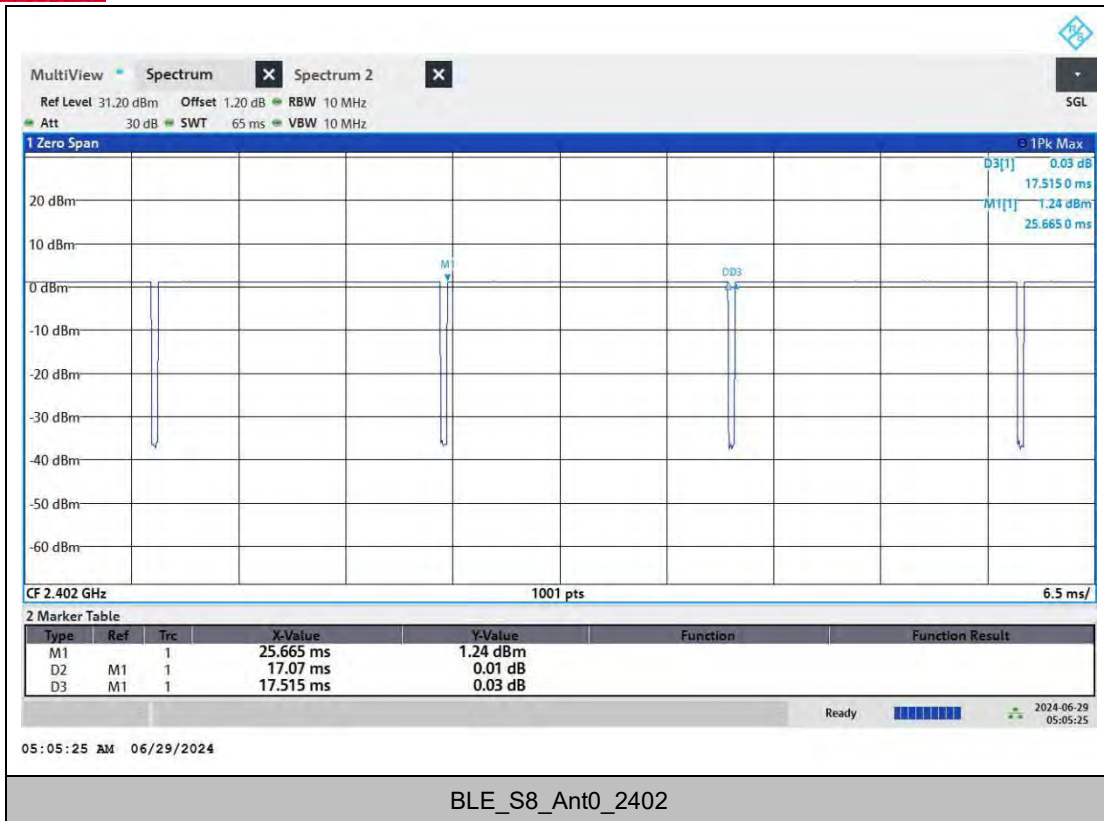

---END---