

LTE B42 5M QPSK Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	20.97	-0.1	20.87	122.18	1
42590	3500	20.67	-0.1	20.57	114.02	1
43065	3457.5	20.95	-0.1	20.85	121.62	1

LTE B42 5M 16QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	20.05	-0.1	19.95	98.86	1
42590	3500	19.94	-0.1	19.84	96.38	1
43065	3457.5	20.09	-0.1	19.99	99.77	1

LTE B42 5M 64QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	18.86	-0.1	18.76	75.16	1
42590	3500	18.92	-0.1	18.82	76.21	1
43065	3457.5	18.94	-0.1	18.84	76.56	1

LTE B42 10M QPSK Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	20.89	-0.1	20.79	119.95	1
42590	3500	20.69	-0.1	20.59	114.55	1
43040	3545	20.83	-0.1	20.73	118.3	1

LTE B42 10M 16QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	20.11	-0.1	20.01	100.23	1
42590	3500	19.83	-0.1	19.73	93.97	1
43040	3545	20.02	-0.1	19.92	98.17	1

LTE B42 10M 64QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	18.86	-0.1	18.76	75.16	1
42590	3500	18.86	-0.1	18.76	75.16	1
43040	3545	18.91	-0.1	18.81	76.03	1

LTE B42 15M QPSK Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	20.9	-0.1	20.8	120.23	1
42590	3500	20.66	-0.1	20.56	113.76	1
43015	3542.5	20.92	-0.1	20.82	120.78	1

LTE B42 15M 16QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	20	-0.1	19.9	97.72	1
42590	3500	19.86	-0.1	19.76	94.62	1
43015	3542.5	20.06	-0.1	19.96	99.08	1

LTE B42 15M 64QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	18.79	-0.1	18.69	73.96	1
42590	3500	18.86	-0.1	18.76	75.16	1
43015	3542.5	18.92	-0.1	18.82	76.21	1

LTE B42 20M QPSK Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	21.01	-0.1	20.91	123.31	1
42590	3500	20.76	-0.1	20.66	116.41	1
42990	3540	20.96	-0.1	20.86	121.9	1



Test Report No.: W7L-240618W001RF08

LTE B42 20M 16QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	20.15	-0.1	20.05	101.16	1
42590	3500	19.97	-0.1	19.87	97.05	1
42990	3540	20.12	-0.1	20.02	100.46	1

LTE B42 20M 64QAM Part27Q						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	18.89	-0.1	18.79	75.68	1
42590	3500	18.95	-0.1	18.85	76.74	1
42990	3540	18.95	-0.1	18.85	76.74	1

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

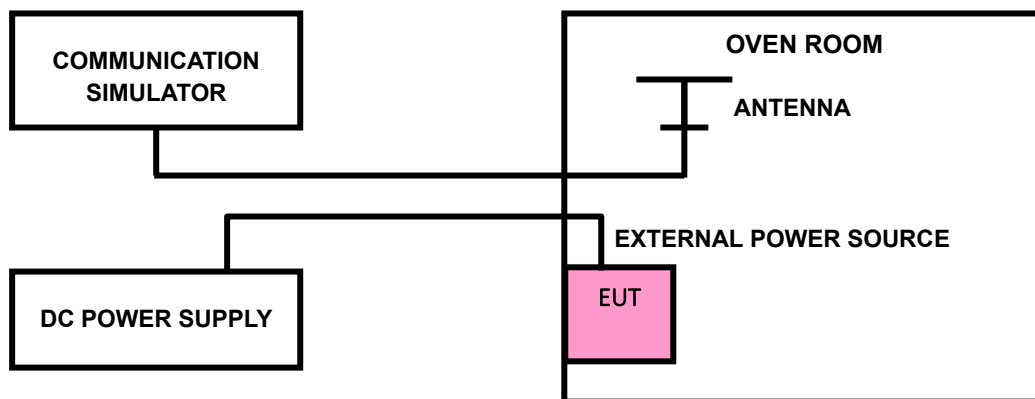



Test Report No.: W7L-240618W001RF08

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.


Note: VL = Low voltage(3.7V); VN/NV = Normal voltage(3.91V); VH = High voltage(4.3V);
NT = Normal temperature (25°C)

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

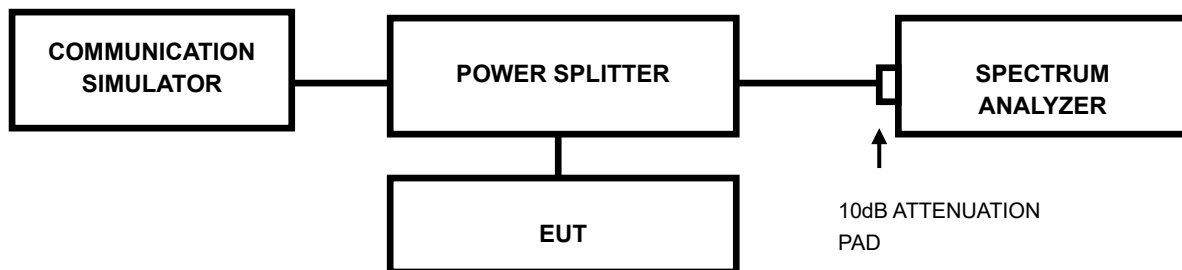

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-240618W001RF08

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.



3.4 BAND EDGE MEASUREMENT


3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC Part 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC Part 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

According to FCC Part 27.53 (n)(2)For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.4.2 TEST SETUP

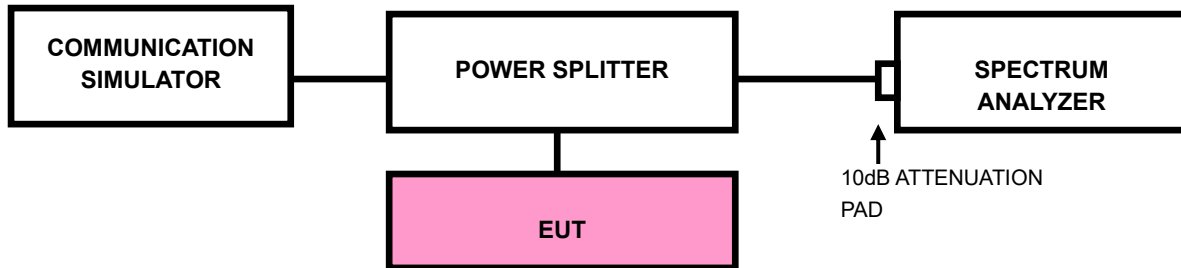



Test Report No.: W7L-240618W001RF08

3.4.3 TEST PROCEDURES

- a) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- b) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
- c) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- e) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- f) Select the average power (RMS) display detector.
- g) Set the number of measurement points to ≥ 1001 .
- h) Use auto-coupled sweep time.
- i) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- j) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- k) Record the max trace plot into the test report.



Test Report No.: W7L-240618W001RF08

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


For: Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

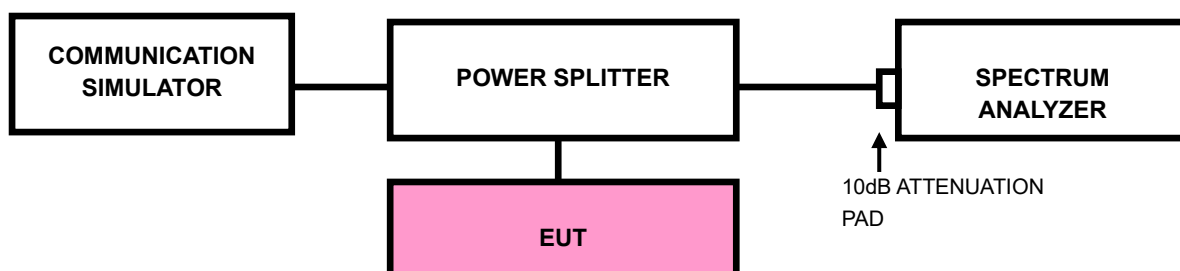



**BUREAU
VERITAS**

Test Report No.: W7L-240618W001RF08

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



Test Report No.: W7L-240618W001RF08

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

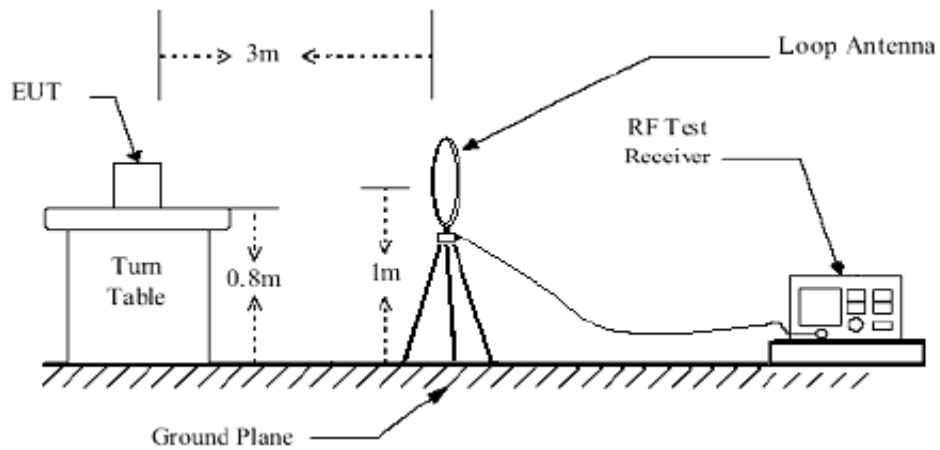

< Frequency Range 30MHz~1GHz >

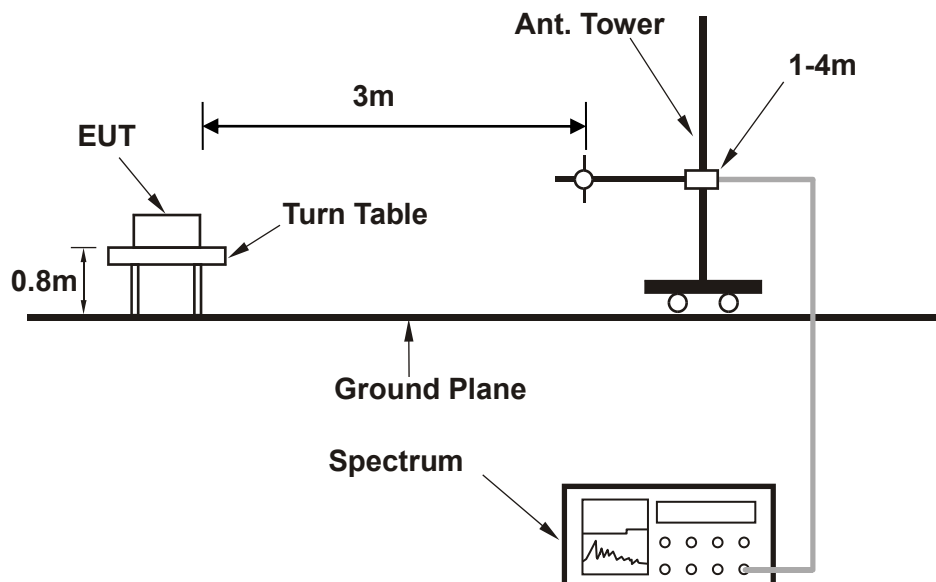

<Frequency Range above 1GHz>

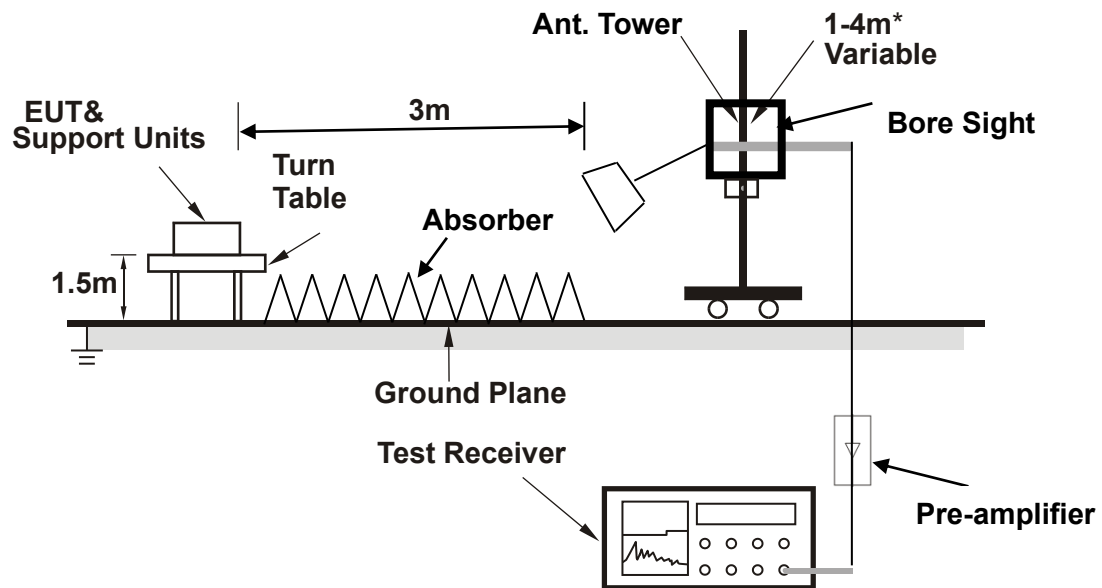

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-240618W001RF08

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 41(Ant1) (DOWN):

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.000	-61.43	-59.45	-13.00	-48.43	-1.98	Peak	Horizontal
2	63.950	-72.11	-59.75	-13.00	-59.11	-12.36	Peak	Horizontal
3	91.110	-70.76	-58.00	-13.00	-57.76	-12.76	Peak	Horizontal
4	149.310	-69.06	-54.70	-13.00	-56.06	-14.36	Peak	Horizontal
5	180.350	-72.79	-56.45	-13.00	-59.79	-16.34	Peak	Horizontal
6 PP	806.000	-58.62	-63.57	-13.00	-45.62	4.95	Peak	Horizontal

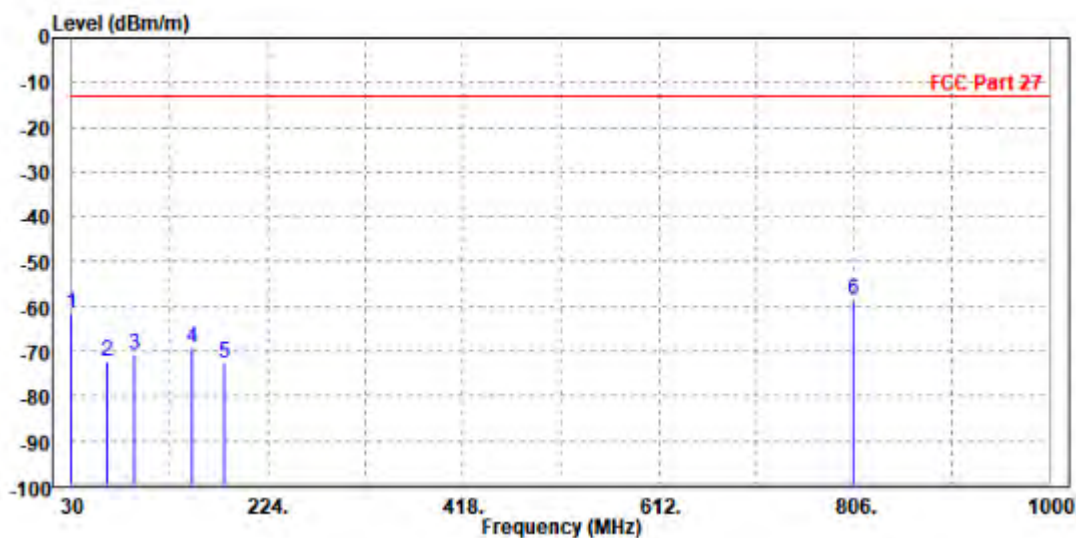




Test Report No.: W7L-240618W001RF08

MODE	TX channel 40620	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	66.860	-66.03	-46.19	-13.00	-53.03	-19.84	Peak	Vertical
2	87.230	-64.32	-46.50	-13.00	-51.32	-17.82	Peak	Vertical
3	157.070	-64.47	-53.23	-13.00	-51.47	-11.24	Peak	Vertical
4	204.600	-67.25	-58.58	-13.00	-54.25	-8.67	Peak	Vertical
5	309.360	-64.70	-61.22	-13.00	-51.70	-3.48	Peak	Vertical
6 PP	839.950	-56.86	-64.71	-13.00	-43.86	7.85	Peak	Vertical

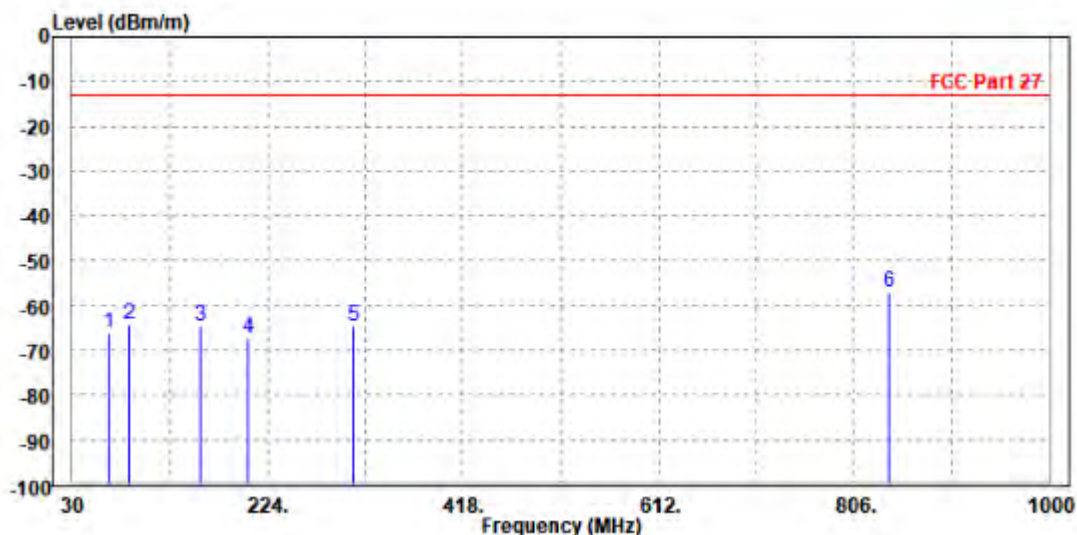



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF08

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE BAND 41(Ant1) (DOWN):

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.78	-59.12	-25.00	-22.78	11.34	Peak	Horizontal
2	7779.000	-49.73	-64.55	-25.00	-24.73	14.82	Peak	Horizontal

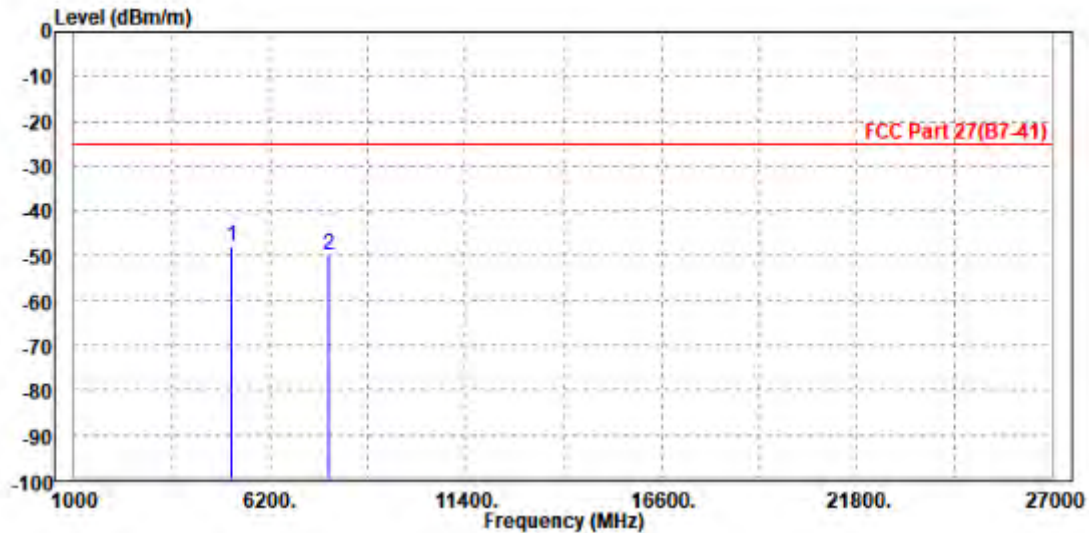




Test Report No.: W7L-240618W001RF08

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-46.04	-57.77	-25.00	-21.04	11.73	Peak	Vertical
2	7786.000	-50.05	-64.31	-25.00	-25.05	14.26	Peak	Vertical

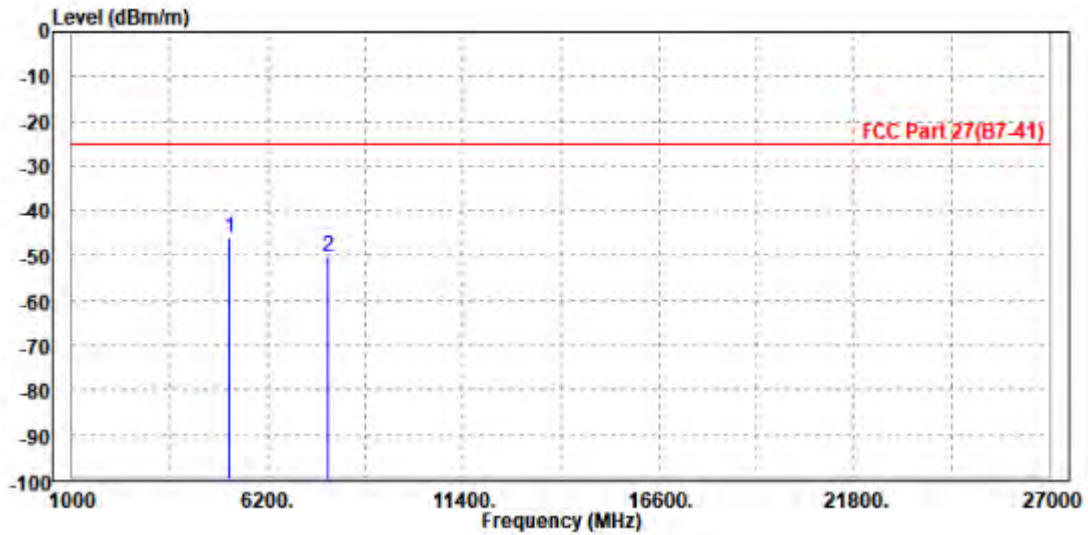




Test Report No.: W7L-240618W001RF08

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.20	-58.54	-25.00	-22.20	11.34	Peak	Horizontal
2	7786.000	-47.93	-62.76	-25.00	-22.93	14.83	Peak	Horizontal

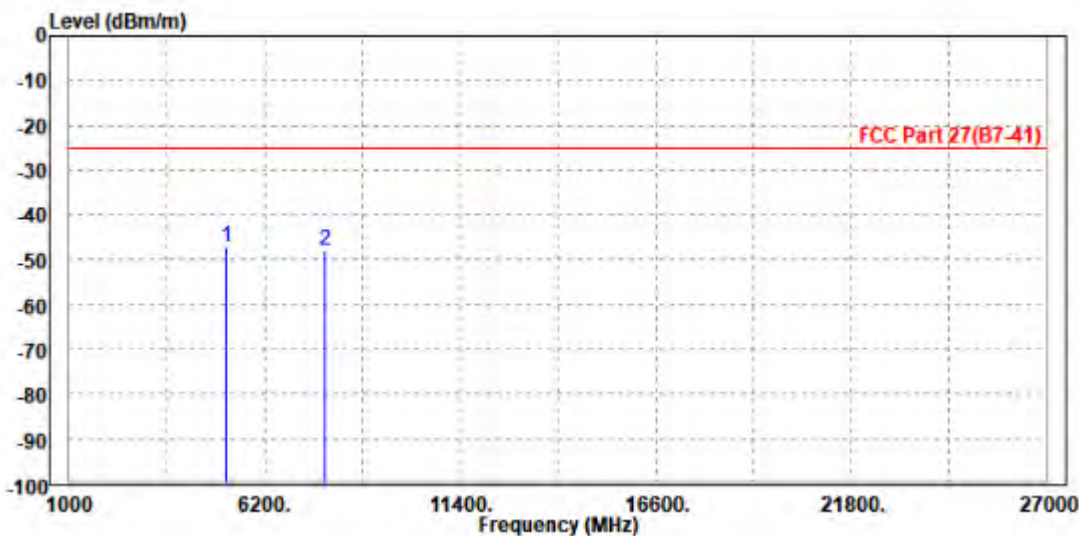




Test Report No.: W7L-240618W001RF08

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-46.79	-58.52	-25.00	-21.79	11.73	Peak	Vertical
2	7779.000	-50.88	-65.11	-25.00	-25.88	14.23	Peak	Vertical

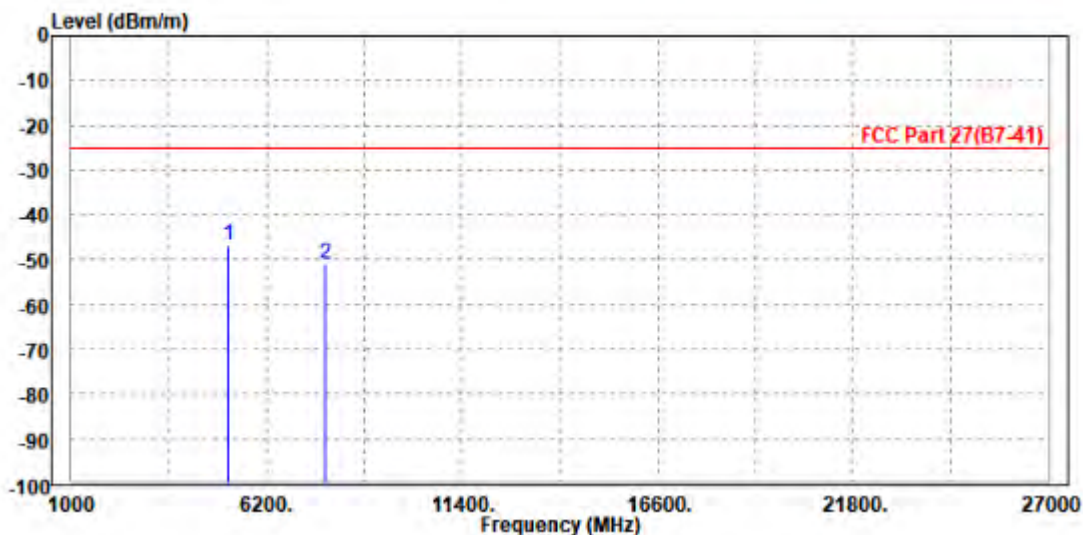




Test Report No.: W7L-240618W001RF08

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.90	-59.24	-25.00	-22.90	11.34	Peak	Horizontal
2	7779.000	-48.63	-63.45	-25.00	-23.63	14.82	Peak	Horizontal

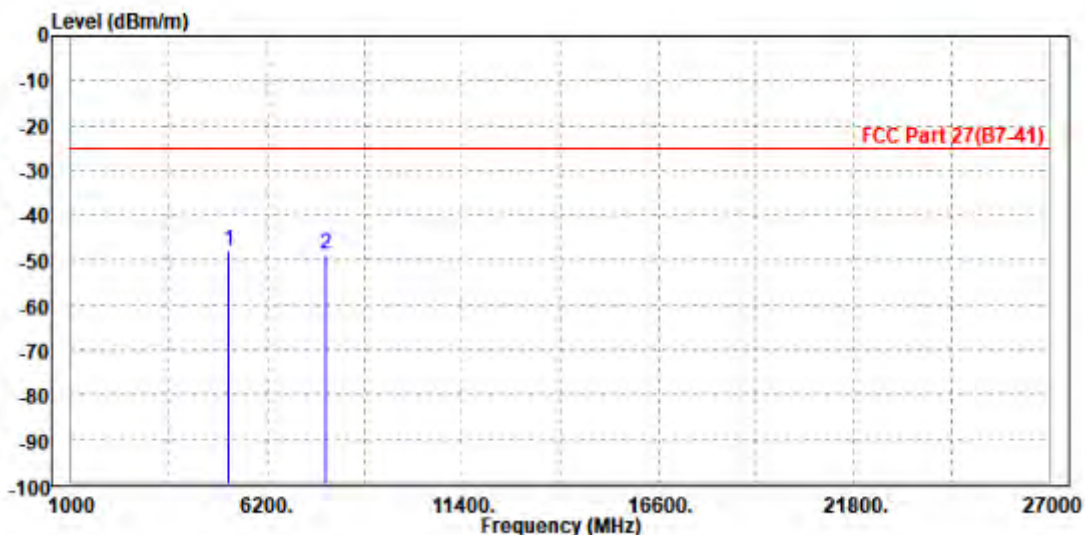




Test Report No.: W7L-240618W001RF08

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.39	-59.12	-25.00	-22.39	11.73	Peak	Vertical
2	7786.000	-49.56	-63.82	-25.00	-24.56	14.26	Peak	Vertical

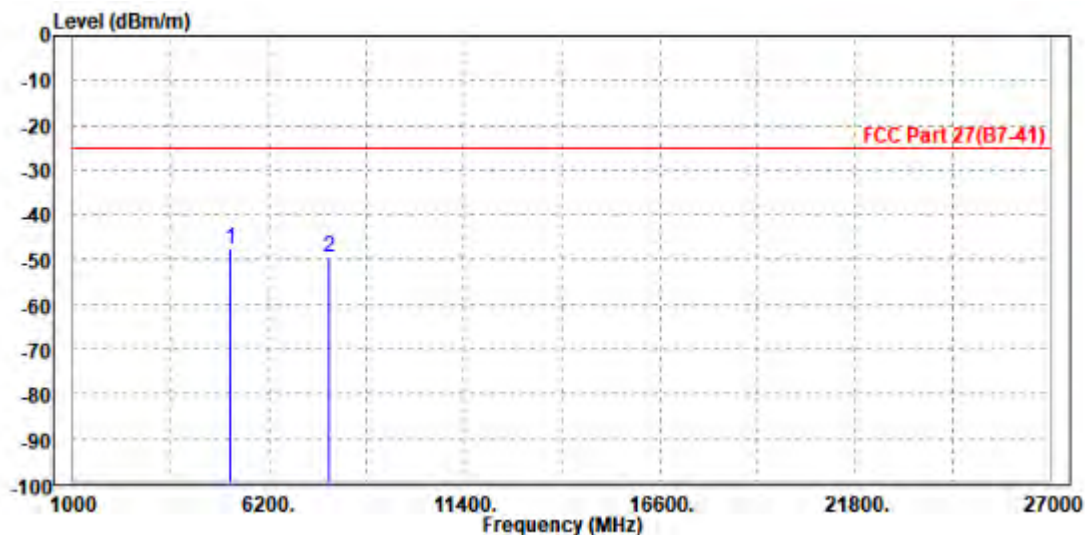




Test Report No.: W7L-240618W001RF08

CHANNEL BANDWIDTH: 20MHz / QPSK

CH39750

MODE	TX channel 39750	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5012.000	-48.34	-59.42	-25.00	-23.34	11.08	Peak	Horizontal
2 PP	7526.000	-47.90	-62.28	-25.00	-22.90	14.38	Peak	Horizontal

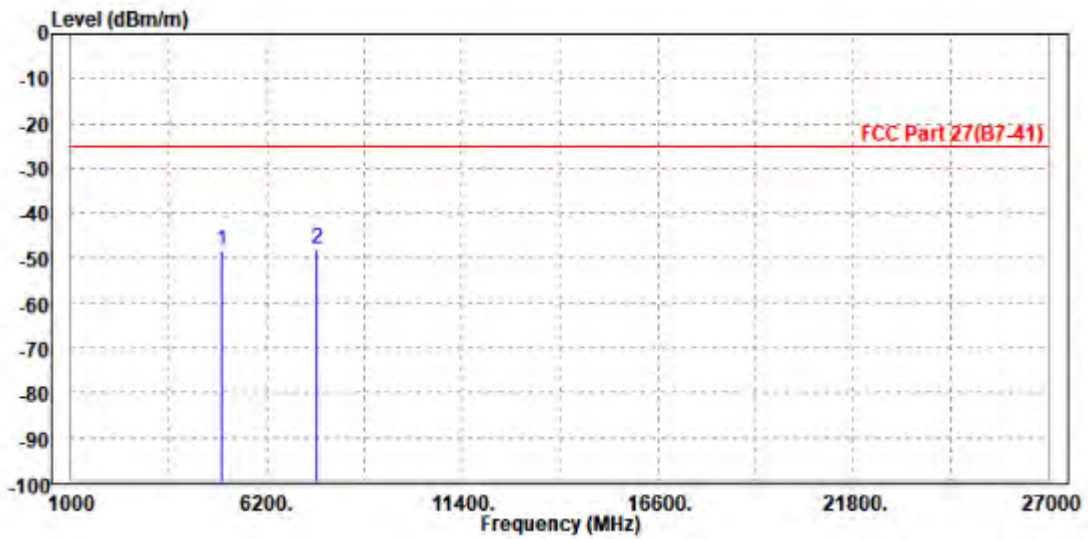




Test Report No.: W7L-240618W001RF08

MODE	TX channel 39750	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5004.000	-49.01	-60.39	-25.00	-24.01	11.38	Peak	Vertical
2	7518.000	-50.29	-63.39	-25.00	-25.29	13.10	Peak	Vertical

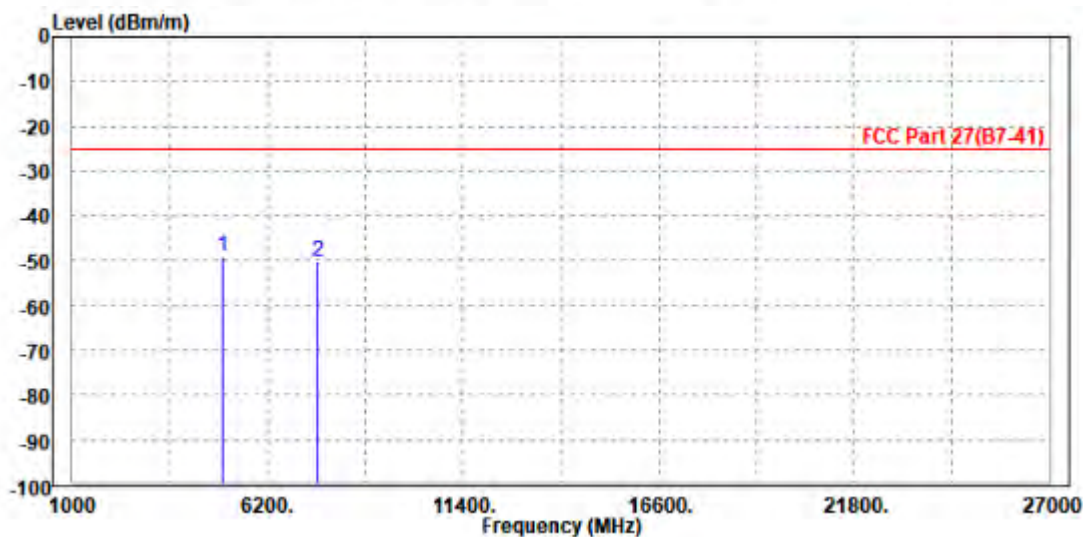




BUREAU VERITAS

Test Report No.: W7L-240618W001RF08

CH40620

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.41	-58.75	-25.00	-22.41	11.34	Peak	Horizontal
2	7786.000	-48.92	-63.75	-25.00	-23.92	14.83	Peak	Horizontal

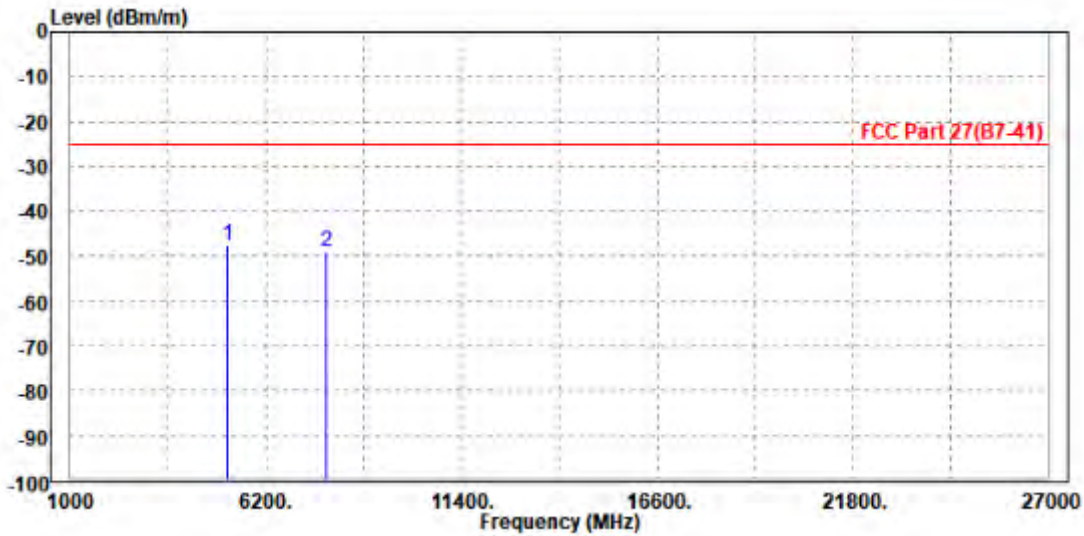




Test Report No.: W7L-240618W001RF08

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-45.96	-57.69	-25.00	-20.96	11.73	Peak	Vertical
2	7779.000	-49.69	-63.92	-25.00	-24.69	14.23	Peak	Vertical

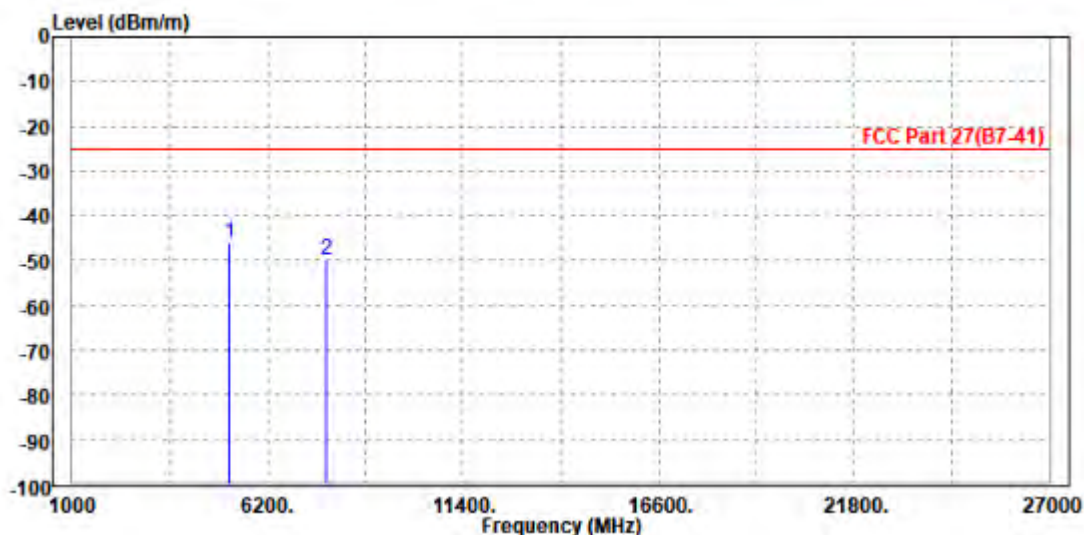




**BUREAU
VERITAS**

Test Report No.: W7L-240618W001RF08

CH41490

MODE	TX channel 41490	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5368.000	-48.44	-60.04	-25.00	-23.44	11.60	Peak	Horizontal
2	PP 8040.000	-48.11	-63.38	-25.00	-23.11	15.27	Peak	Horizontal

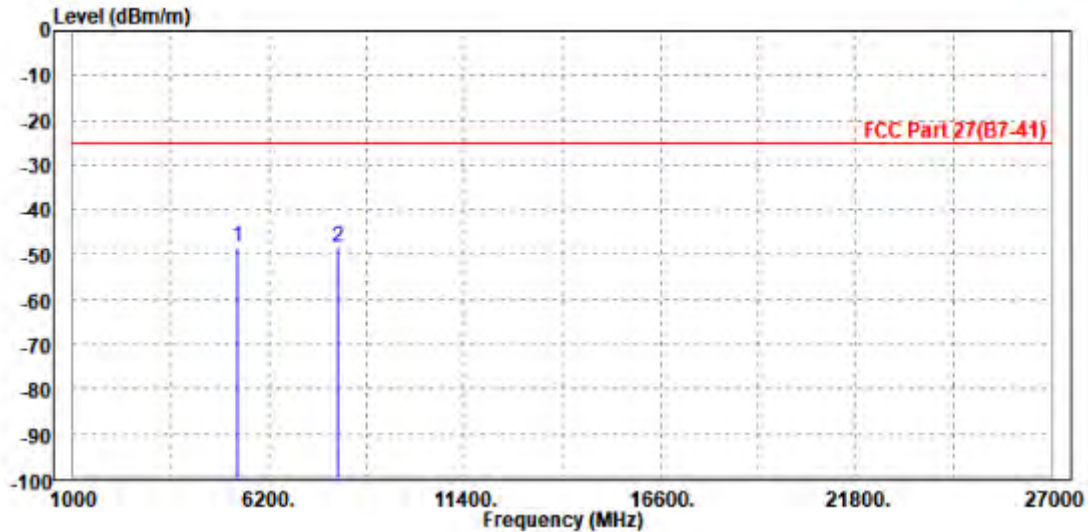




Test Report No.: W7L-240618W001RF08

MODE	TX channel 41490	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5360.000	-47.50	-59.57	-25.00	-22.50	12.07	Peak	Vertical
2	8046.000	-48.71	-64.06	-25.00	-23.71	15.35	Peak	Vertical

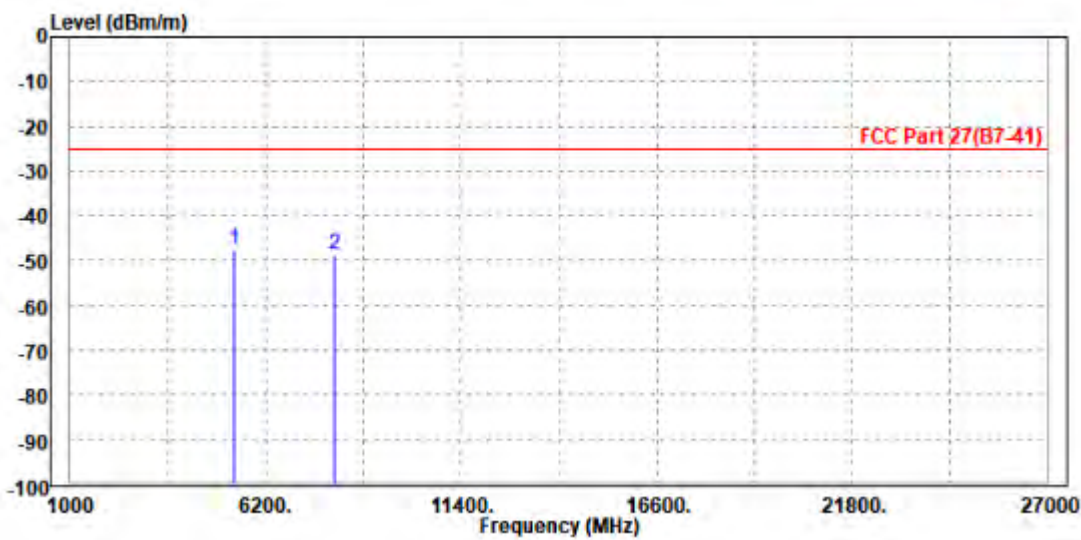



BUREAU VERITAS


Test Report No.: W7L-240618W001RF08

LTE BAND 42(Ant2) (UP):

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6985.000	-49.66	-63.40	-13.00	-36.66	13.74	Peak	Horizontal
2	PP10500.000	-42.13	-61.78	-13.00	-29.13	19.65	Peak	Horizontal

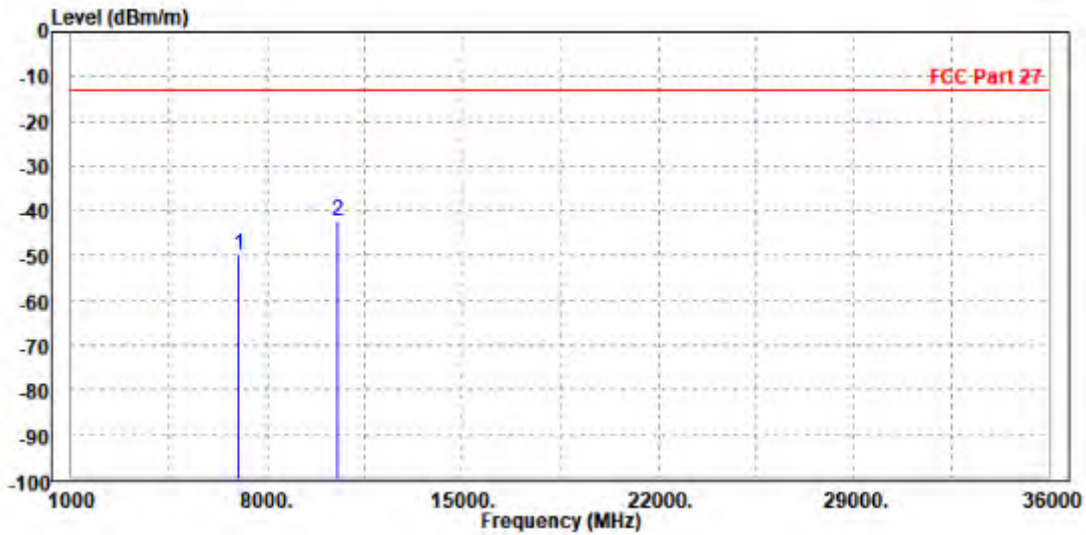




Test Report No.: W7L-240618W001RF08

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7000.000	-49.83	-64.40	-13.00	-36.83	14.57	Peak	Vertical
2	PP10500.000	-41.26	-61.83	-13.00	-28.26	20.57	Peak	Vertical

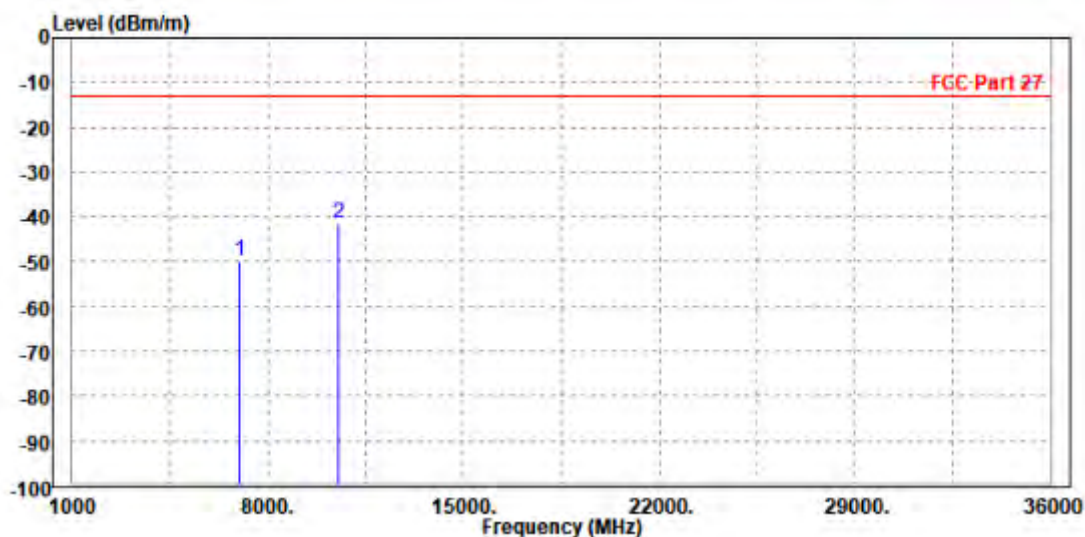




Test Report No.: W7L-240618W001RF08

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7000.000	-49.11	-62.88	-13.00	-36.11	13.77	Peak	Horizontal
2	PP10485.000	-42.01	-61.64	-13.00	-29.01	19.63	Peak	Horizontal

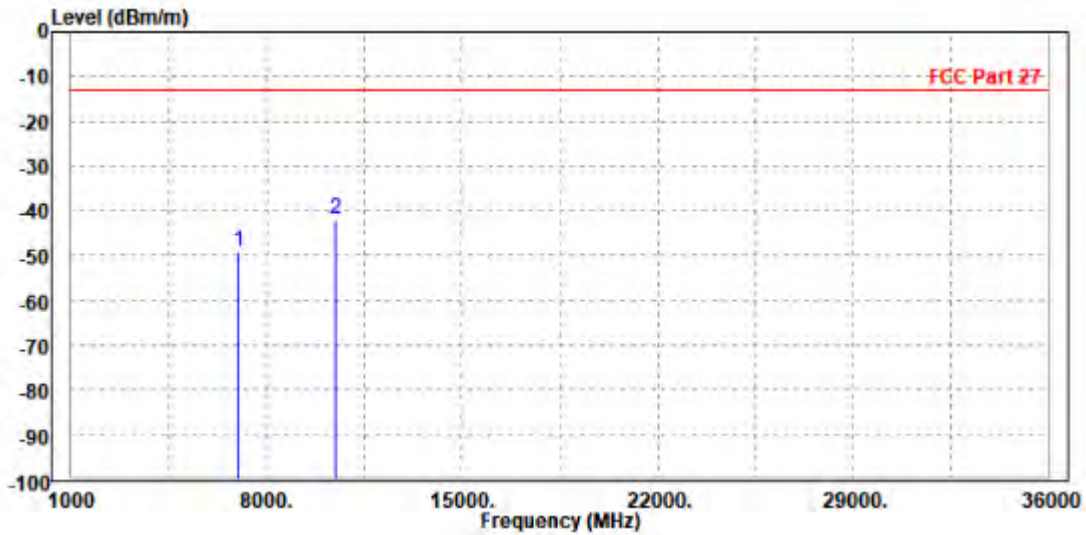




Test Report No.: W7L-240618W001RF08

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6985.000	-48.50	-63.04	-13.00	-35.50	14.54	Peak	Vertical
2	PP10500.000	-42.31	-62.88	-13.00	-29.31	20.57	Peak	Vertical

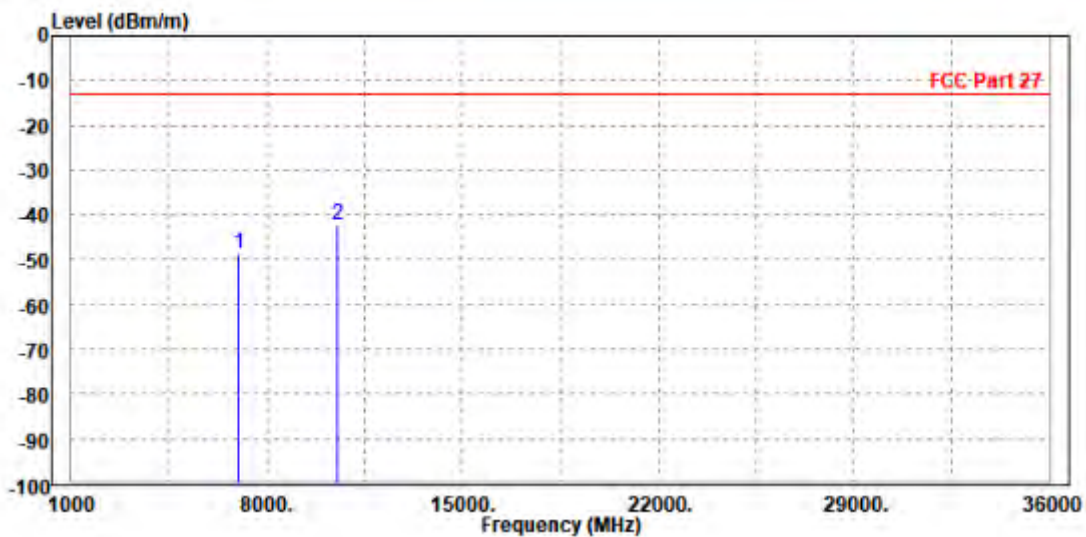




Test Report No.: W7L-240618W001RF08

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6985.000	-49.56	-63.30	-13.00	-36.56	13.74	Peak	Horizontal
2	PP10500.000	-41.99	-61.64	-13.00	-28.99	19.65	Peak	Horizontal

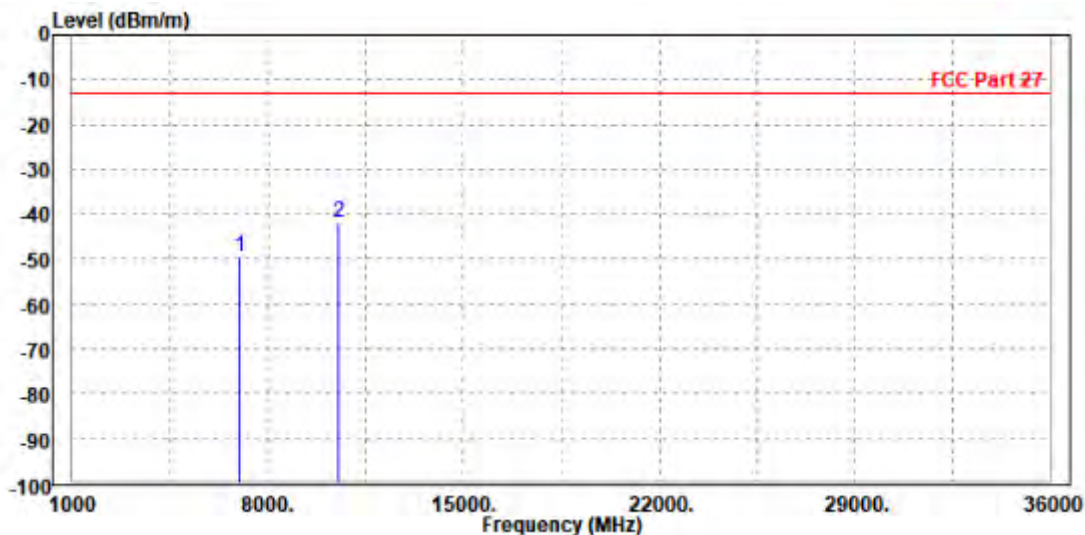




Test Report No.: W7L-240618W001RF08

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6915.000	-46.69	-61.07	-13.00	-33.69	14.38	Peak	Vertical
2	PP10485.000	-41.46	-61.96	-13.00	-28.46	20.50	Peak	Vertical

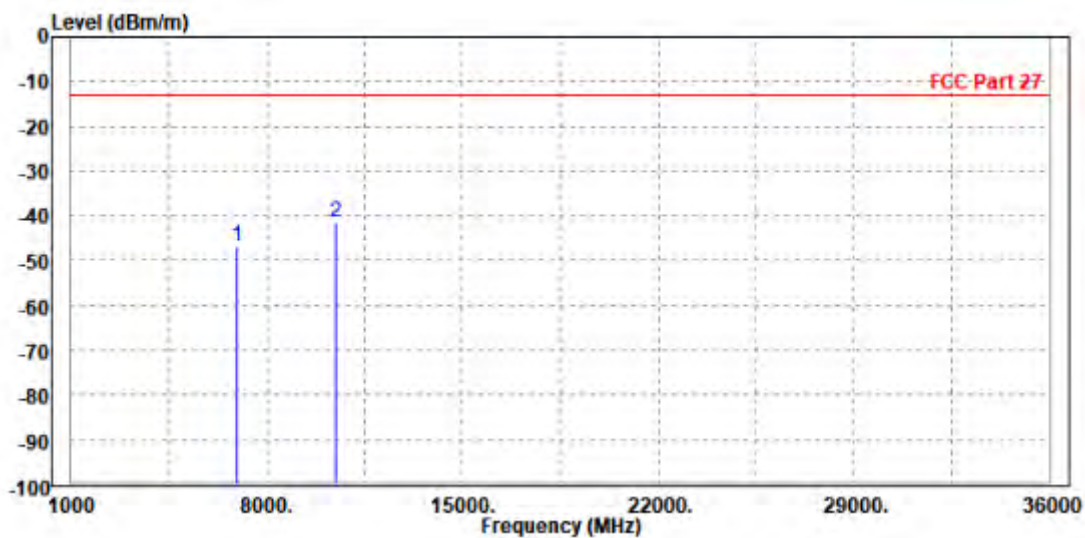




Test Report No.: W7L-240618W001RF08

CHANNEL BANDWIDTH: 20MHz / QPSK

CH42190

MODE	TX channel 42190	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6820.000	-48.99	-62.35	-13.00	-35.99	13.36	Peak	Horizontal
2	PP10240.000	-43.05	-62.33	-13.00	-30.05	19.28	Peak	Horizontal

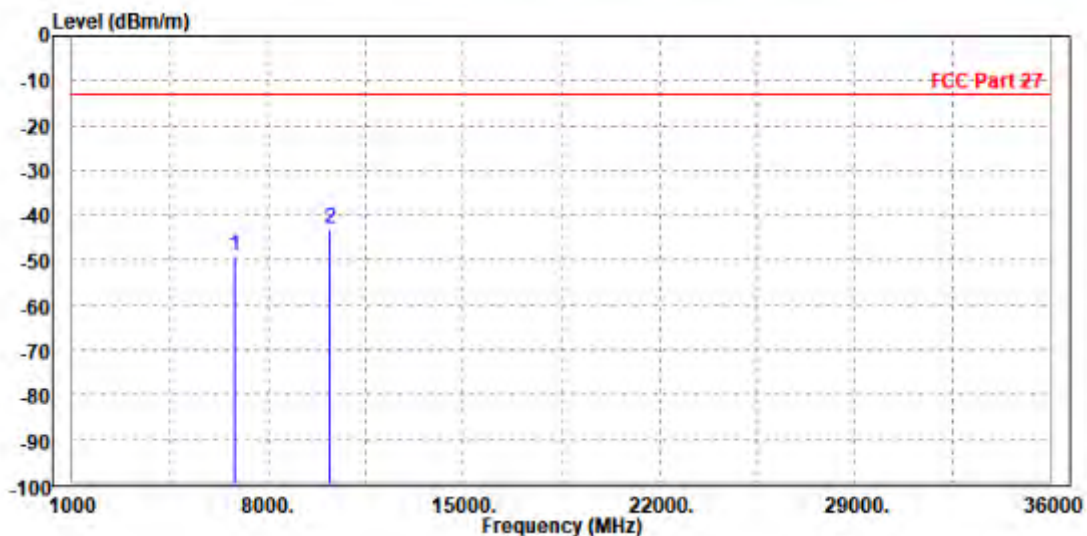




Test Report No.: W7L-240618W001RF08

MODE	TX channel 42190	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6820.000	-49.24	-63.41	-13.00	-36.24	14.17	Peak	Vertical
2	PP10230.000	-42.30	-61.56	-13.00	-29.30	19.26	Peak	Vertical

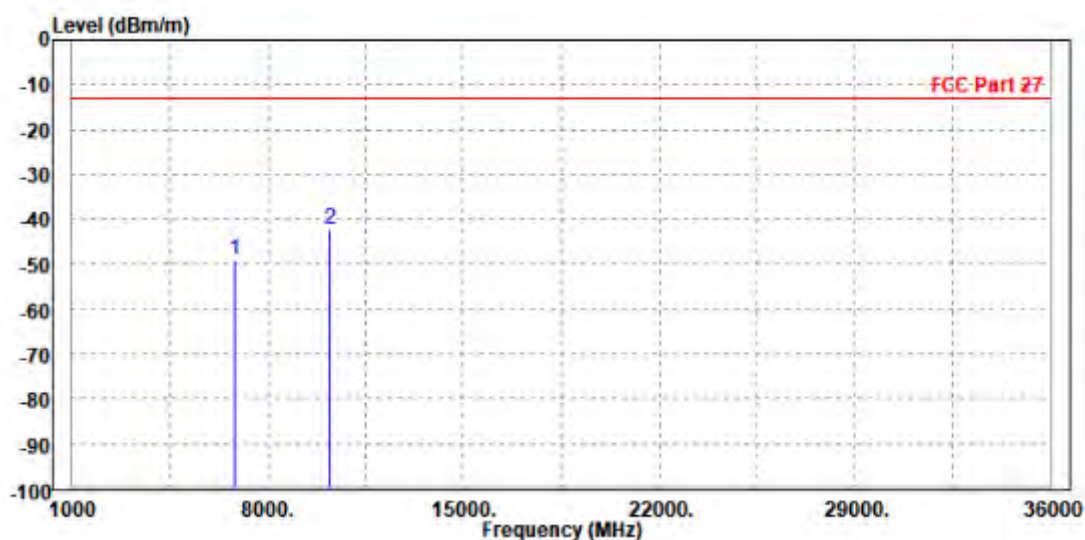




**BUREAU
VERITAS**

Test Report No.: W7L-240618W001RF08

CH42590

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7000.000	-49.44	-63.21	-13.00	-36.44	13.77	Peak	Horizontal
2	PP10500.000	-41.09	-60.74	-13.00	-28.09	19.65	Peak	Horizontal

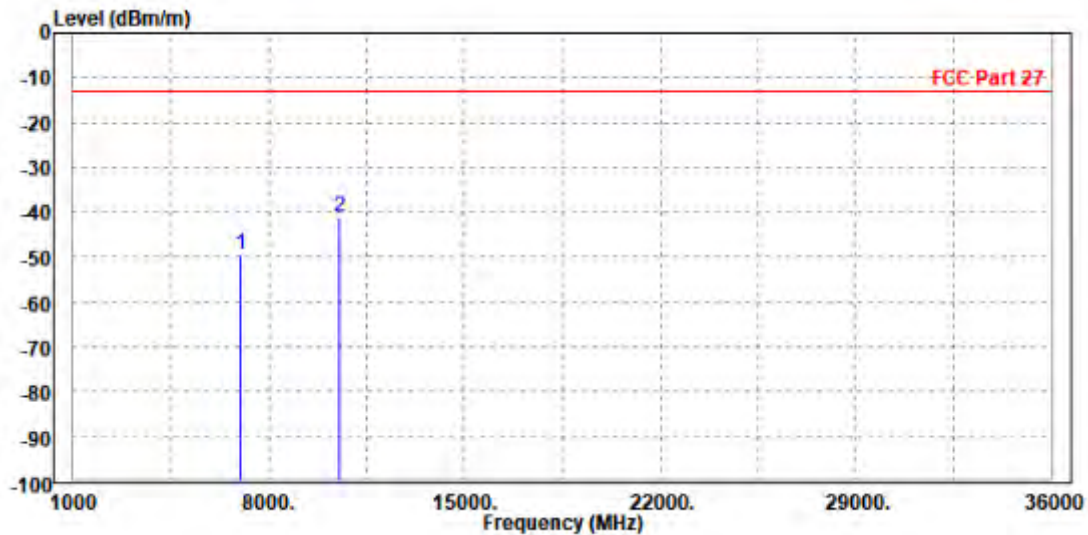




Test Report No.: W7L-240618W001RF08

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	PoI/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	6985.000	-48.85	-63.39	-13.00	-35.85	14.54	Peak	Vertical
2	PP10500.000	-41.53	-62.10	-13.00	-28.53	20.57	Peak	Vertical

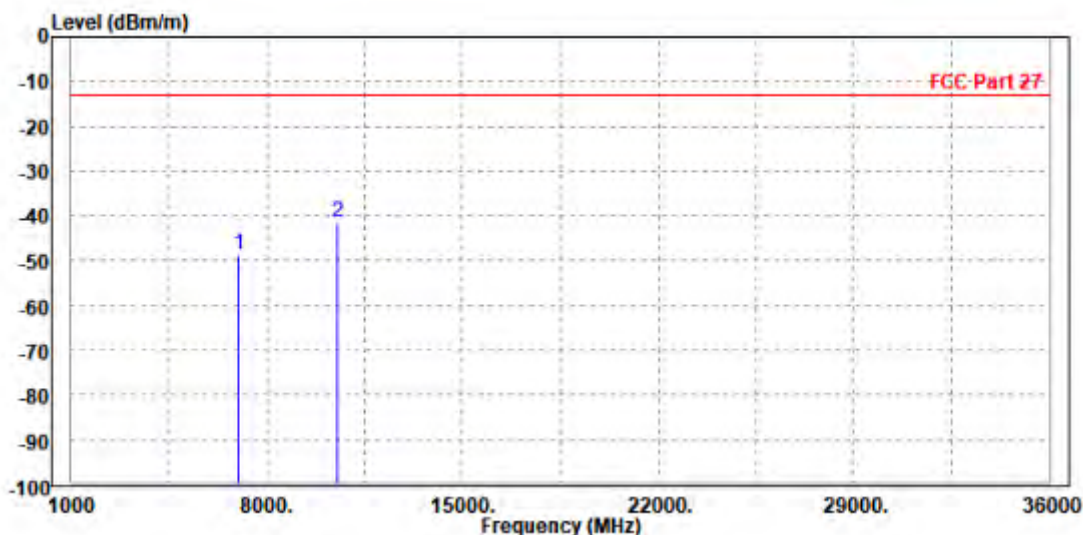




BUREAU
VERITAS

Test Report No.: W7L-240618W001RF08

CH42990

MODE	TX channel 42990	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7195.000	-50.23	-64.22	-13.00	-37.23	13.99	Peak	Horizontal
2	PP10770.000	-42.48	-62.51	-13.00	-29.48	20.03	Peak	Horizontal

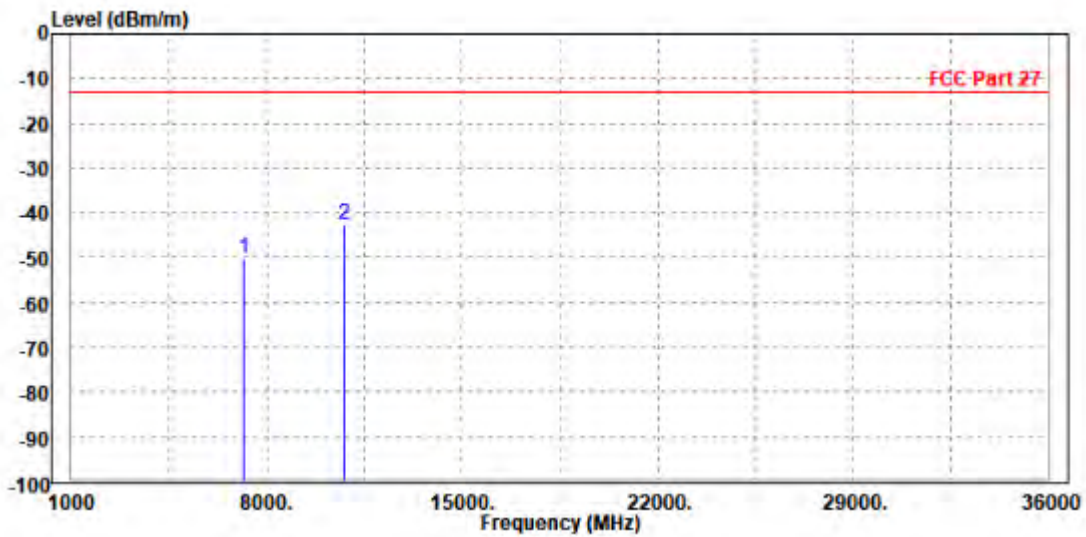




Test Report No.: W7L-240618W001RF08

MODE	TX channel 42990	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7180.000	-49.12	-63.13	-13.00	-36.12	14.01	Peak	Vertical
2	PP10765.000	-41.18	-61.71	-13.00	-28.18	20.53	Peak	Vertical

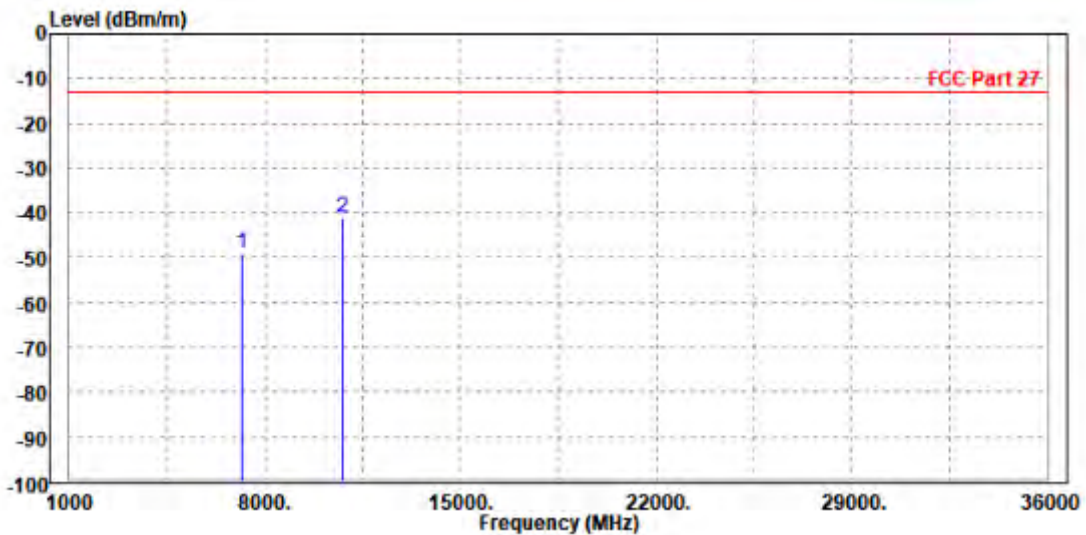




Test Report No.: W7L-240618W001RF08

LTE B66(ANT1) (DOWN):

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over-Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-51.02	-59.57	-13.00	-38.02	8.55	Peak	Horizontal
2 PP	5233.000	-48.92	-60.32	-13.00	-35.92	11.40	Peak	Horizontal

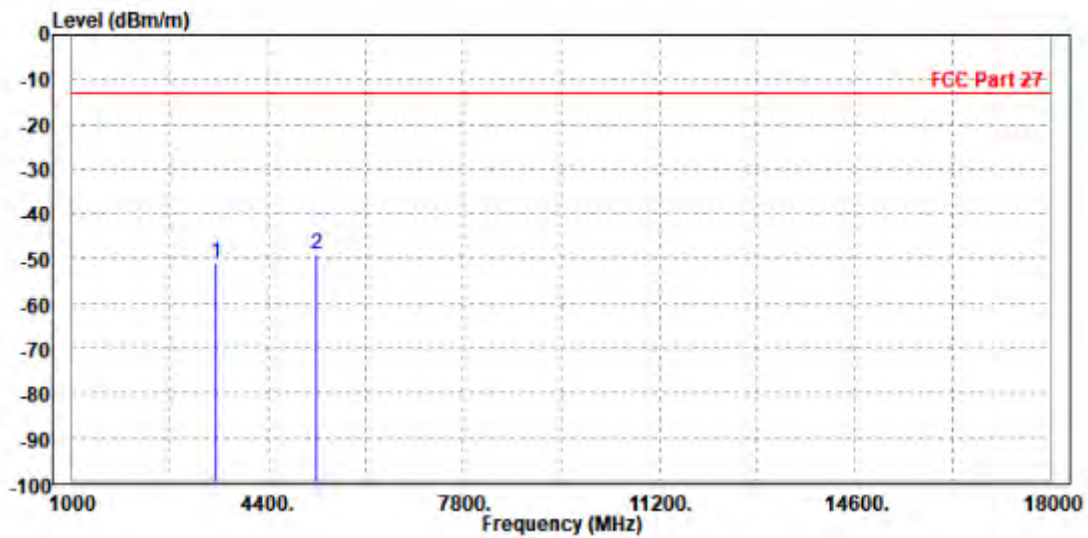



Test Report No.: W7L-240618W001RF08

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3482.000	-51.34	-59.99	-13.00	-38.34	8.65	Peak	Vertical
2 PP	5233.000	-48.28	-60.10	-13.00	-35.28	11.82	Peak	Vertical

