




Oobe Data

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5640.25	57.92	58.24	68.2	-10.28	34.54	11.61	46.47	100	0	Peak
5994.125	58.15	57.68	68.2	-10.05	35.1	11.75	46.38	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5633.6	57.65	57.81	68.2	-10.55	34.7	11.61	46.47	100	360	Peak
6019.3	58.08	57.53	68.2	-10.12	35.15	11.78	46.38	100	360	Peak

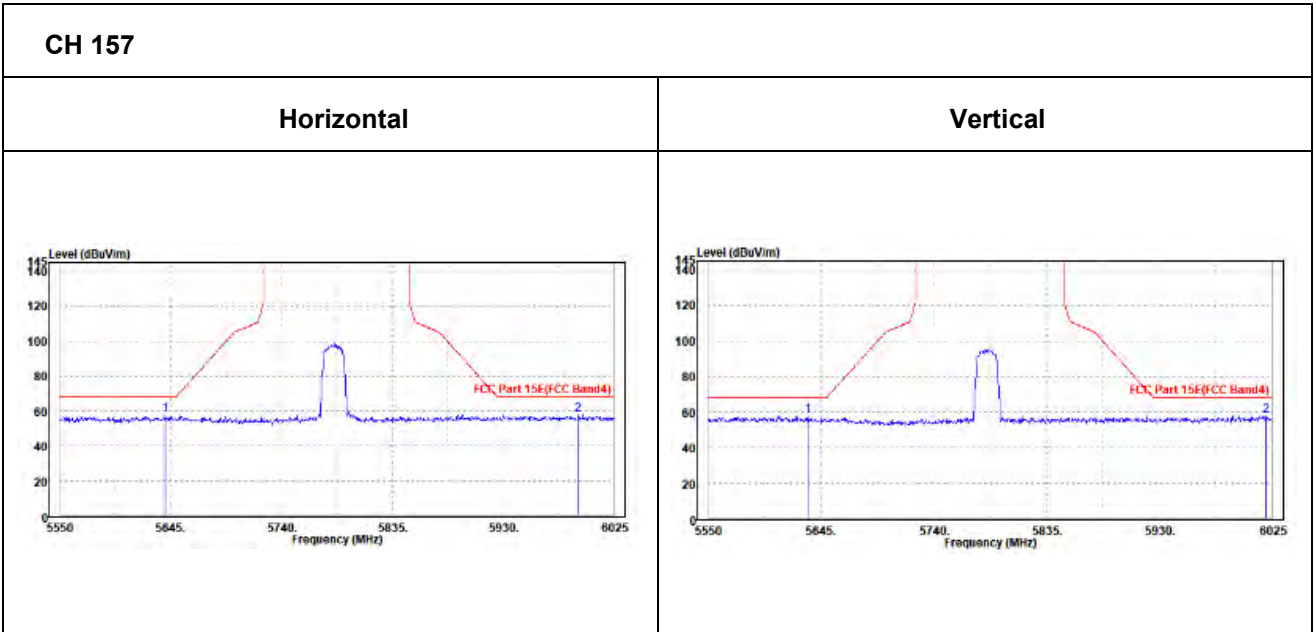



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	98.98	98.92	/	/	34.8	11.68	46.42	100	305	Peak
5825	92.93	92.87	/	/	34.8	11.68	46.42	100	305	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	95.92	95.56	/	/	35.1	11.68	46.42	100	190	Peak
5825	87.96	87.6	/	/	35.1	11.68	46.42	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.



Oobe Data

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5572.8	57.4	58	68.2	-10.8	34.3	11.59	46.49	100	0	Peak
6019.3	58.27	57.73	68.2	-9.93	35.14	11.78	46.38	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5550.475	58.12	58.33	68.2	-10.08	34.7	11.58	46.49	100	360	Peak
5980.35	58.35	58.03	68.2	-9.85	34.96	11.74	46.38	100	360	Peak

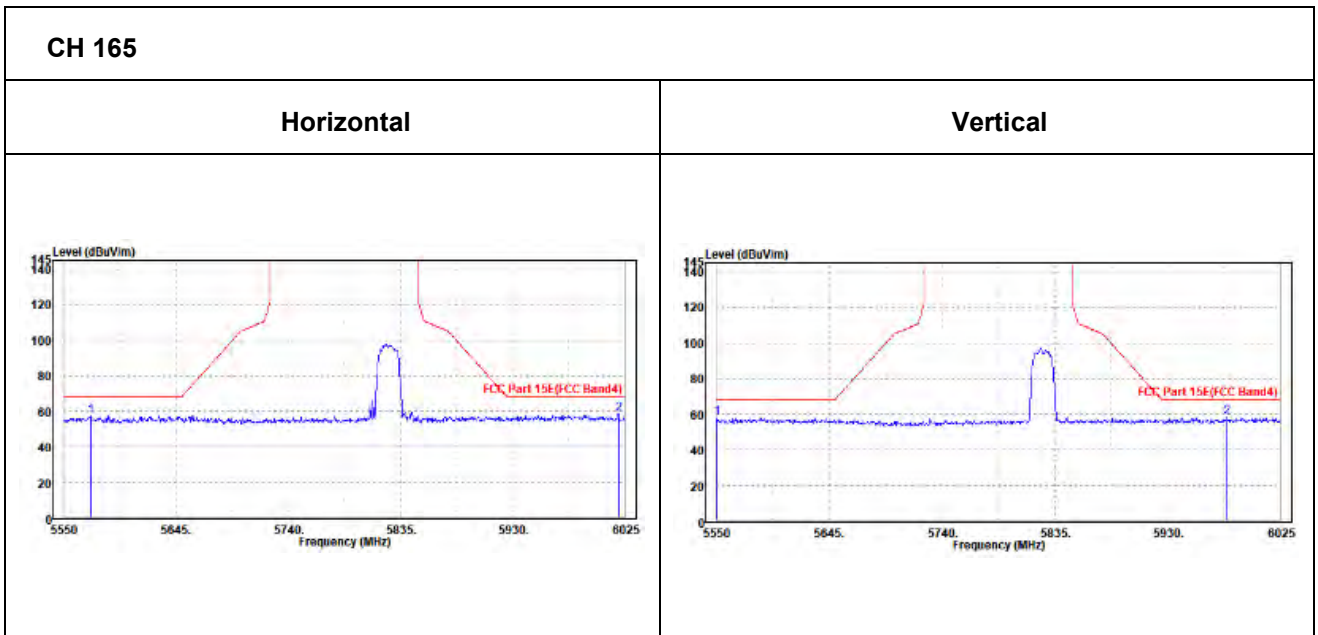



802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	99.58	99.86	/	/	34.51	11.65	46.44	100	305	Peak
5745	82.96	83.24	/	/	34.51	11.65	46.44	100	305	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	96.57	96.97	/	/	34.39	11.65	46.44	100	190	Peak
5745	86.47	86.87	/	/	34.39	11.65	46.44	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.



Oobe Data

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5593.7	57.62	58.2	68.2	-10.58	34.3	11.6	46.48	100	360	Peak
5971.325	57.9	57.45	68.2	-10.3	35.1	11.74	46.39	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5609.375	58.65	58.54	68.2	-9.55	34.99	11.6	46.48	100	0	Peak
6002.2	59.14	58.75	68.2	-9.06	35.02	11.75	46.38	100	0	Peak

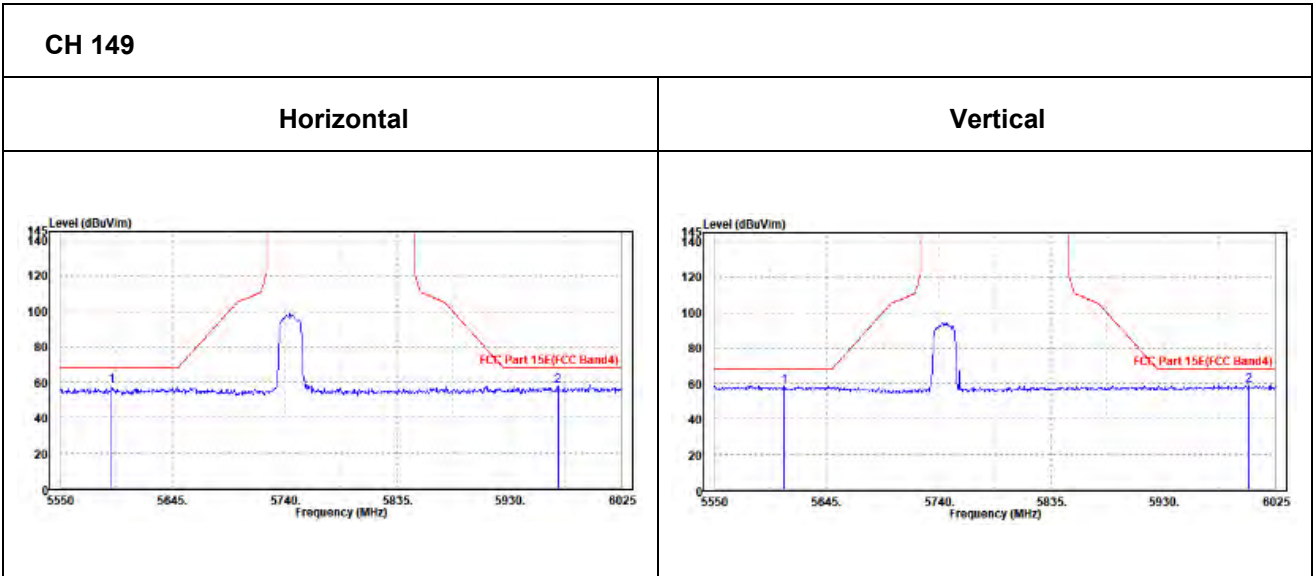



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	100.18	100.3	/	/	34.64	11.67	46.43	100	305	Peak
5785	93.02	93.14	/	/	34.64	11.67	46.43	100	305	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	95.84	95.85	/	/	34.75	11.67	46.43	100	190	Peak
5785	87.93	87.94	/	/	34.75	11.67	46.43	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.



Oobe Data

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5575.65	57.12	57.72	68.2	-11.08	34.3	11.59	46.49	100	360	Peak
5963.725	58.7	58.25	68.2	-9.5	35.1	11.74	46.39	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5583.725	57.37	57.29	68.2	-10.83	34.97	11.59	46.48	100	0	Peak
5978.925	57.9	57.59	68.2	-10.3	34.96	11.74	46.39	100	0	Peak

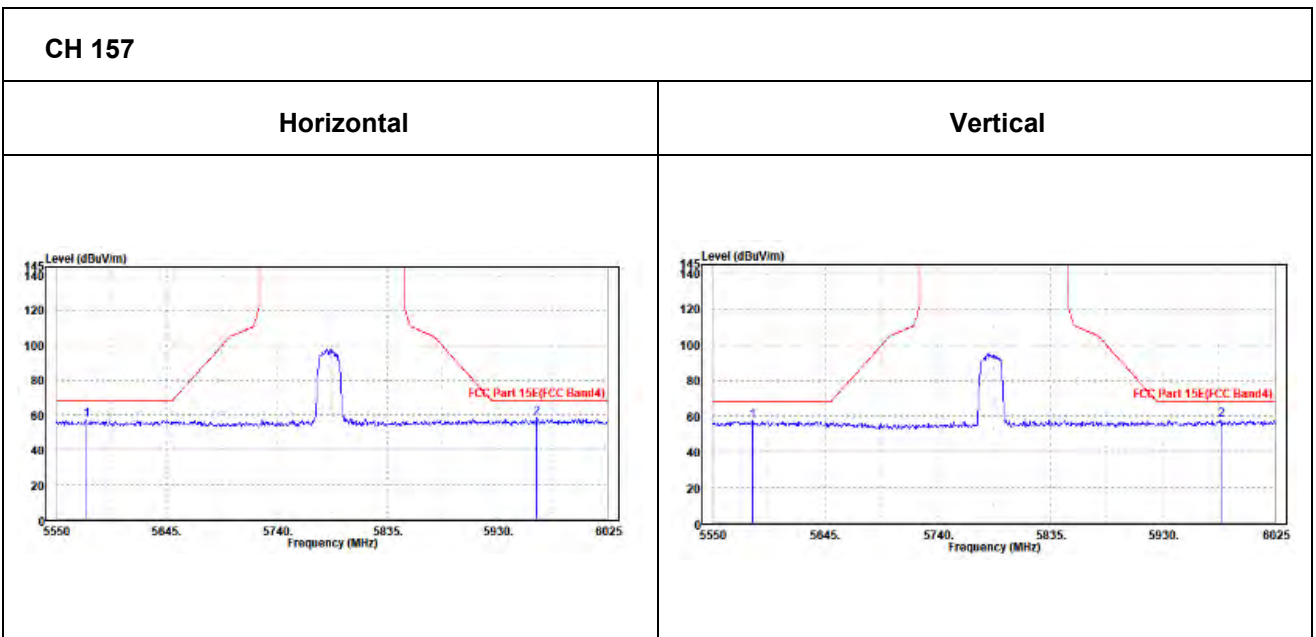



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	98.77	98.71	/	/	34.8	11.68	46.42	100	305	Peak
5825	91.9	91.84	/	/	34.8	11.68	46.42	100	305	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	96.9	96.54	/	/	35.1	11.68	46.42	100	190	Peak
5825	88.85	88.49	/	/	35.1	11.68	46.42	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.



Oobe Data

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5566.15	57.78	58.38	68.2	-10.42	34.3	11.59	46.49	100	0	Peak
6006	58.92	58.43	68.2	-9.28	35.11	11.76	46.38	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5566.625	57.6	57.67	68.2	-10.6	34.83	11.59	46.49	100	360	Peak
5972.75	57.37	57.07	68.2	-10.83	34.95	11.74	46.39	100	360	Peak

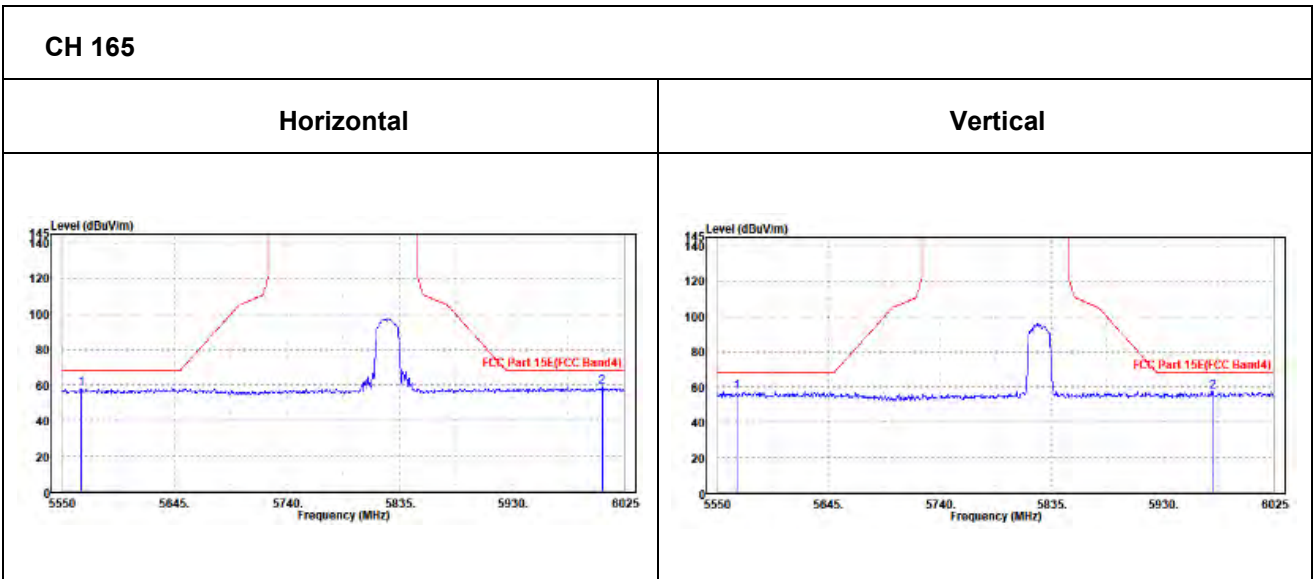



802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	95.38	95.64	/	/	34.52	11.66	46.44	100	305	Peak
5755	89.25	89.51	/	/	34.52	11.66	46.44	100	305	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	92.32	92.65	/	/	34.45	11.66	46.44	100	190	Peak
5755	85.16	85.49	/	/	34.45	11.66	46.44	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5755MHz: Fundamental frequency.



Oobe Data

802.11n (40MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5640.25	57.64	57.96	68.2	-10.56	34.54	11.61	46.47	100	360	Peak
5933.325	57.3	56.91	68.2	-10.9	35.07	11.72	46.4	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5597.975	57.79	57.59	68.2	-10.41	35.08	11.6	46.48	100	0	Peak
5973.225	57.08	56.78	68.2	-11.12	34.95	11.74	46.39	100	0	Peak

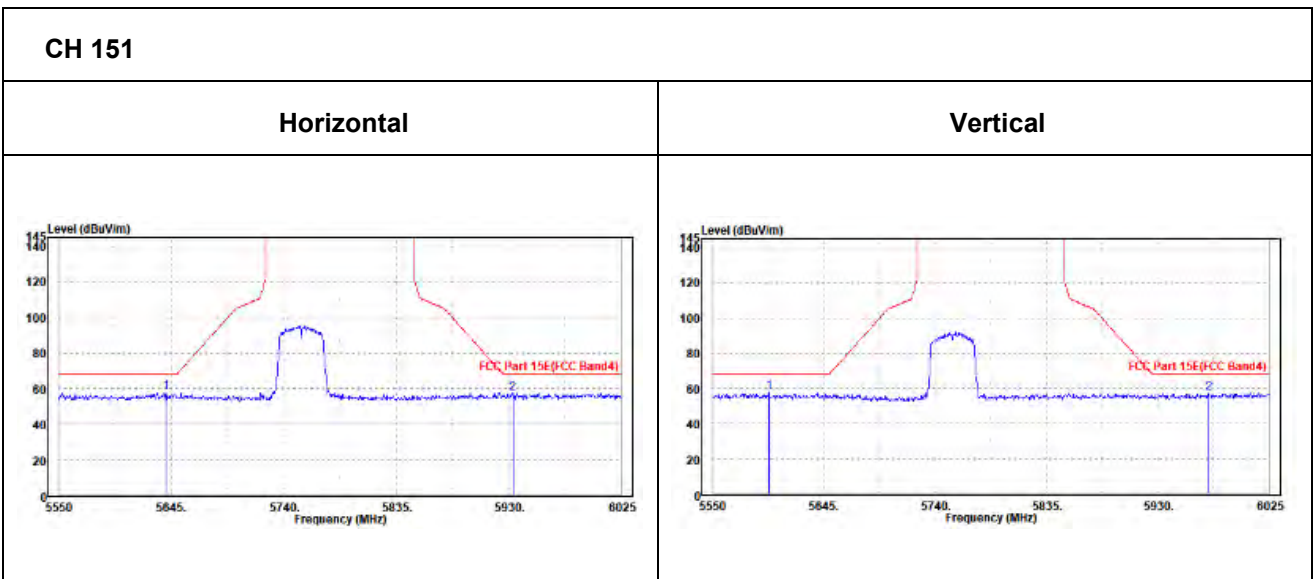



CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	95.48	95.56	/	/	34.68	11.67	46.43	100	305	Peak
5795	88.11	88.19	/	/	34.68	11.67	46.43	100	305	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	92.34	92.25	/	/	34.85	11.67	46.43	100	190	Peak
5795	86.22	86.13	/	/	34.85	11.67	46.43	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5795MHz: Fundamental frequency.



OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5640.25	57.64	57.96	68.2	-10.56	34.54	11.61	46.47	100	360	Peak
5933.325	57.3	56.91	68.2	-10.9	35.07	11.72	46.4	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5580.875	57.71	57.65	68.2	-10.49	34.95	11.59	46.48	100	360	Peak
5970.85	57.77	57.48	68.2	-10.43	34.94	11.74	46.39	100	360	Peak

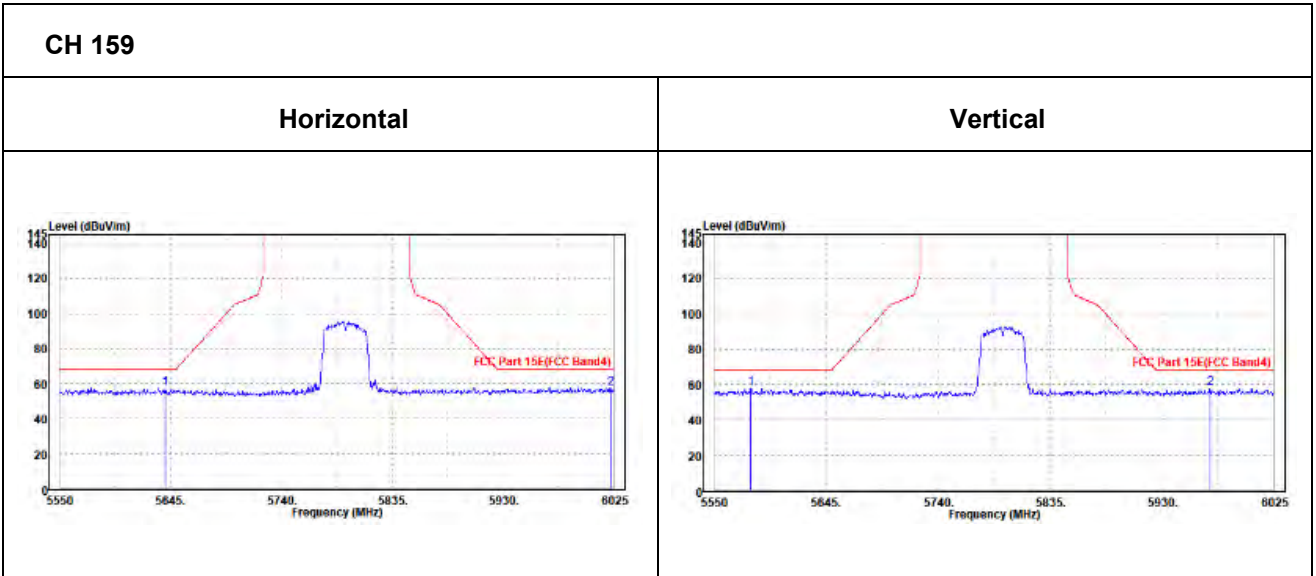



802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	92.96	93.14	/	/	34.6	11.66	46.44	100	305	Peak
5775	86.37	86.55	/	/	34.6	11.66	46.44	100	305	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	91.32	91.45	/	/	34.65	11.66	46.44	100	190	Peak
5775	84.14	84.27	/	/	34.65	11.66	46.44	100	190	Average

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5775MHz: Fundamental frequency.



Oobe Data

802.11ac (80MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5553.8	57.77	58.38	68.2	-10.43	34.3	11.58	46.49	100	360	Peak
6014.075	58.85	58.33	68.2	-9.35	35.13	11.77	46.38	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5594.65	58.01	57.83	68.2	-10.19	35.06	11.6	46.48	100	0	Peak
5991.275	57.42	57.07	68.2	-10.78	34.98	11.75	46.38	100	0	Peak

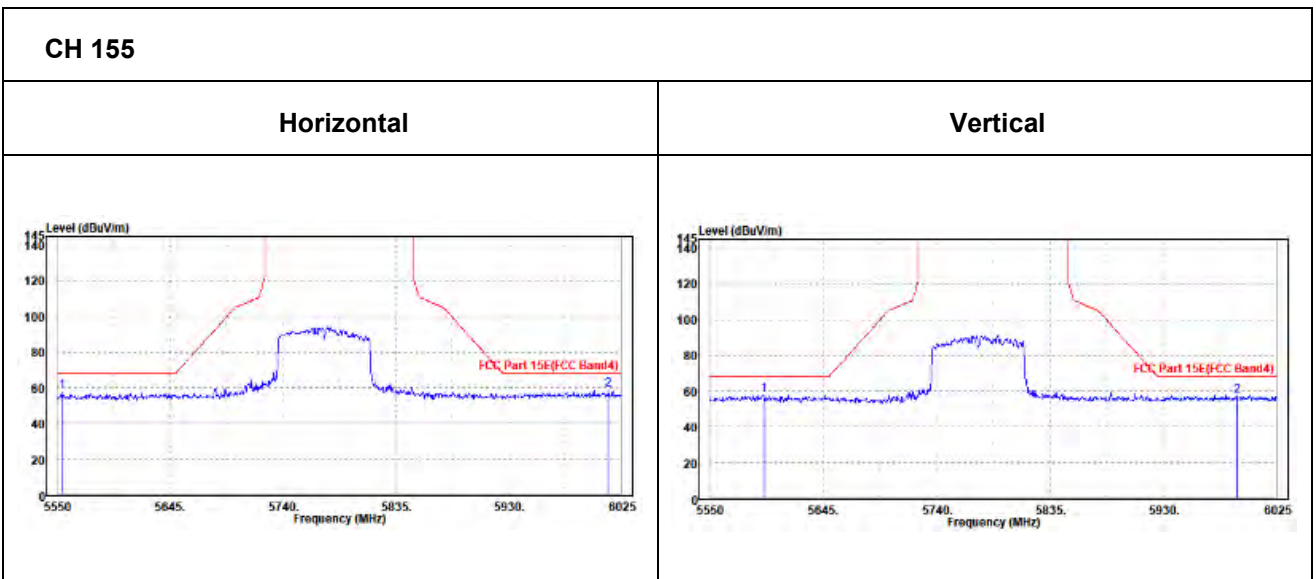




802.11ac (80MHZ)

Worst case harmonic:

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11550.000	51.62	43.62	74.00	-22.38	8.00	Peak	Horizontal
2	11550.000	42.79	34.79	54.00	-11.21	8.00	Average	Horizontal
3	PK17320.000	59.07	42.23	74.00	-14.93	16.84	Peak	Horizontal
4	PP17320.000	50.40	33.56	54.00	-3.60	16.84	Average	Horizontal

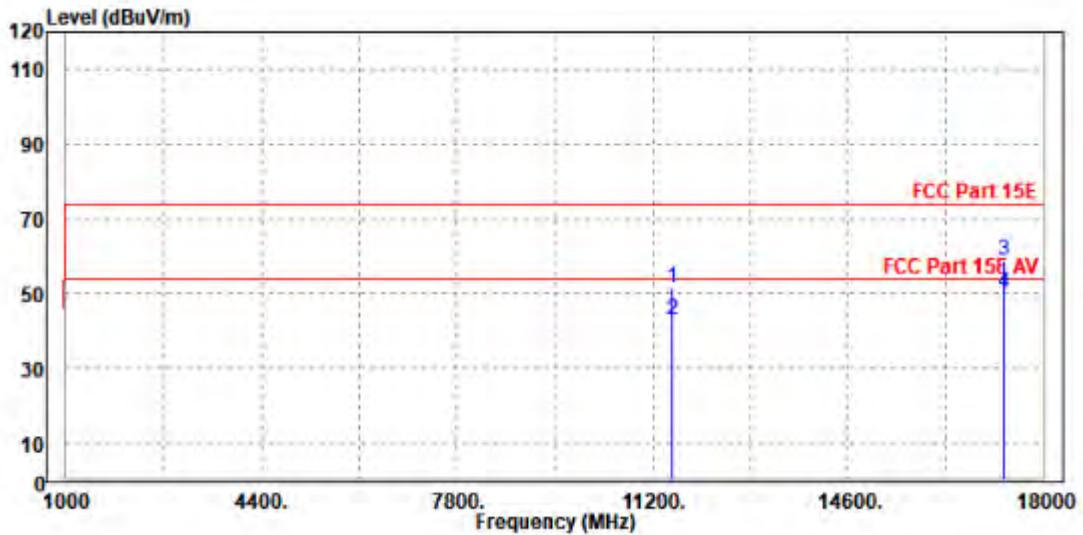



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11557.000	50.31	42.77	74.00	-23.69	7.54	Peak	Vertical
2	11557.000	41.40	33.86	54.00	-12.60	7.54	Average	Vertical
3	PK17325.000	54.79	38.85	74.00	-19.21	15.94	Peak	Vertical
4	PP17325.000	45.85	29.91	54.00	-8.15	15.94	Average	Vertical

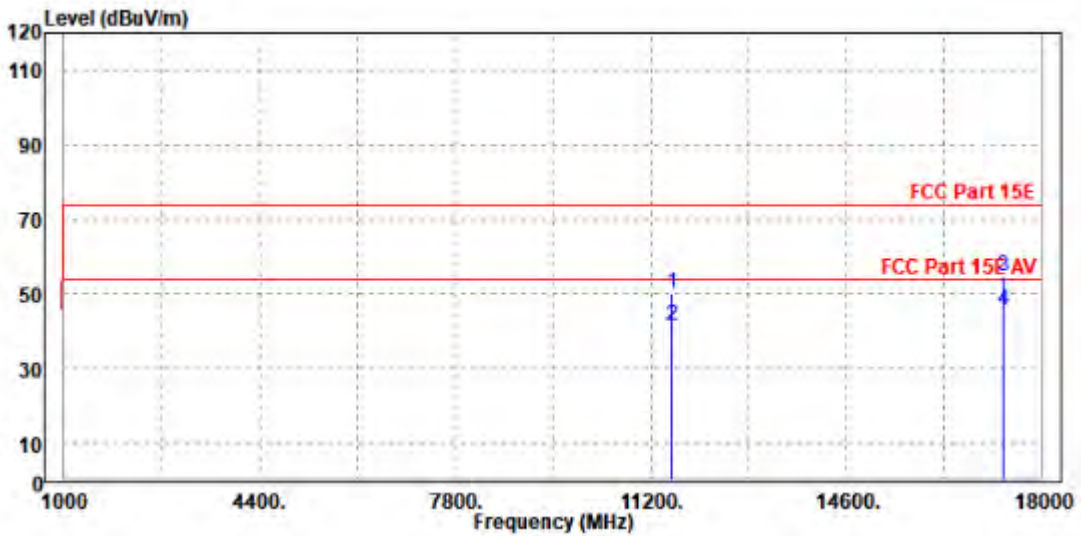

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5775MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 14,24	Feb. 13,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 10,24	Mar. 09,25

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.



3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

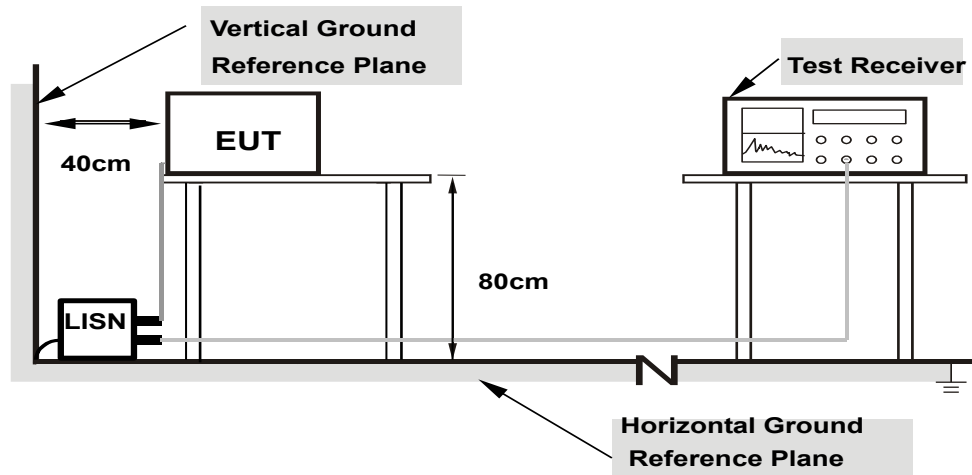

- Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.7.



3.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	23.11	56.00	32.89	L1	ON	9.8
0.150000	38.02	---	66.00	27.98	L1	ON	9.8
0.404000	---	24.71	47.77	23.06	L1	ON	9.8
0.404000	33.80	---	57.77	23.97	L1	ON	9.8
0.616000	---	10.15	46.00	35.85	L1	ON	9.8
0.616000	18.19	---	56.00	37.81	L1	ON	9.8
1.528000	---	14.64	46.00	31.36	L1	ON	9.8
1.528000	19.07	---	56.00	36.93	L1	ON	9.8
4.400000	---	17.76	46.00	28.24	L1	ON	9.8
4.400000	23.46	---	56.00	32.54	L1	ON	9.8
10.588000	---	27.17	50.00	22.83	L1	ON	10.5
10.588000	32.82	---	60.00	27.18	L1	ON	10.5

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

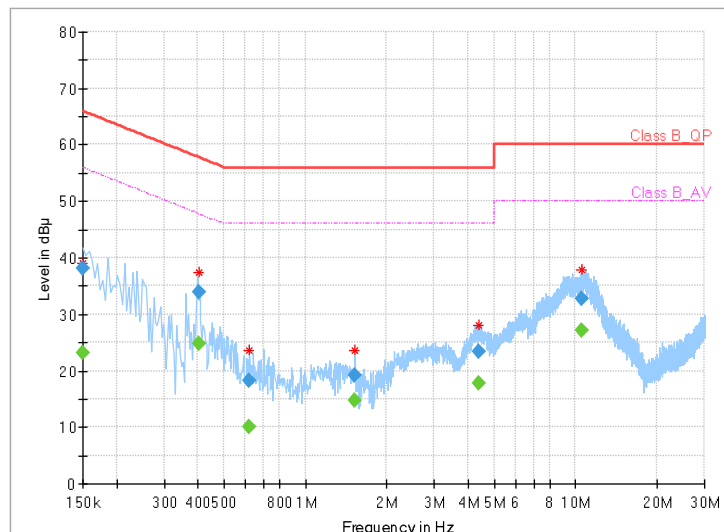




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	21.05	56.00	34.95	N	ON	9.7
0.150000	37.92	---	66.00	28.08	N	ON	9.7
0.408000	---	21.66	47.69	26.03	N	ON	9.6
0.408000	30.19	---	57.69	27.50	N	ON	9.6
0.500000	---	15.62	46.00	30.38	N	ON	9.7
0.500000	23.25	---	56.00	32.75	N	ON	9.7
0.888000	---	16.71	46.00	29.29	N	ON	9.7
0.888000	23.64	---	56.00	32.36	N	ON	9.7
4.012000	---	16.99	46.00	29.01	N	ON	9.7
4.012000	22.89	---	56.00	33.11	N	ON	9.7
9.166000	---	22.82	50.00	27.18	N	ON	10.3
9.166000	27.26	---	60.00	32.74	N	ON	10.3

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

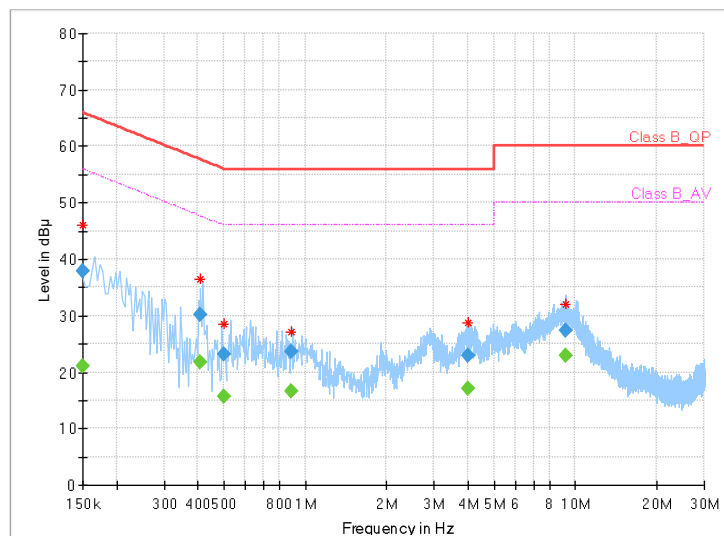



3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≤ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	B	Indoor Access Point	1 Watt (30 dBm)
	√	Client devices	250mW (24 dBm)
U-NII-2A	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)


NOTE: Where B is the 26dB emission bandwidth in MHz.




3.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

802.11a, 802.11n/ac (20MHz), 802.11 n/ac (40MHz),802.11ac (80MHz) TEST CONFIGURATION

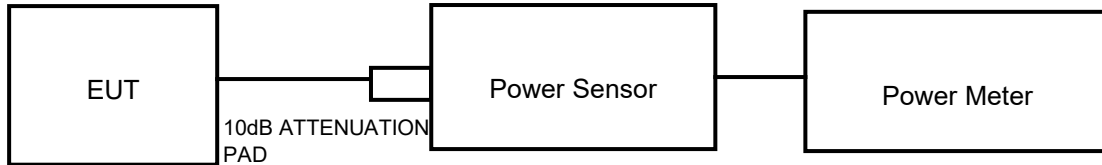

FOR 26dB BANDWIDTH



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,24	May.09,25
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 14,24	Feb. 13,25

NOTE:

1. The calibration interval of the above test instruments is 12 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in the RF Oven room.



3.3.4 TEST PROCEDURE

FOR POWER MEASUREMENT

For 802.11a, 802.11 n/ac (20MHz), 802.11 n/ac (40MHz) , 802.11 ac (80MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 99 PERCENT OCCUPIED BANDWIDTH

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Report No.: W7L-P24050016RF03

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by the client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



BUREAU Test Report No.: W7L-P24050016RF03
VERITAS

3.3.7 TEST RESULTS

Please Refer to Appendix Of this test report.




3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.



3.4.4 TEST PROCEDURES

Using method SA-2(Band1/2/3)

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 7) Record the max value

Using method SA-2 (Band4)

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 KHz, Set VBW \geq 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result. $10 \log(500\text{kHz}/300\text{KHZ}) = 2.22\text{dBm}$
- 7) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 8) Record the max value

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.1.7.



Test Report No.: W7L-P24050016RF03

3.4.7 TEST RESULTS

Please Refer to Appendix Of this test report.



3.5 AUTOMATICALLY DISCONTINUE TRANSMISSION

3.5.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information, or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.5.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.

3.5.3 TEST RESULT

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving。 The EUT can detect the controlling of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.6 ANTENNA REQUIREMENTS

3.6.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmits power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.6.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit.

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P24050016RF03

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.



6 APPENDIX

RLAN

EMISSION BANDWIDTH

TEST RESULT

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.760	5170.080	5189.840	---	---
		5200	20.040	5189.920	5209.960	---	---
		5240	19.680	5230.200	5249.880	---	---
		5260	19.560	5250.320	5269.880	---	---
		5280	20.000	5270.000	5290.000	---	---
		5300	19.840	5290.160	5310.000	---	---
		5320	20.080	5310.080	5330.160	---	---
		5500	19.760	5490.120	5509.880	---	---
		5580	20.040	5569.920	5589.960	---	---
		5700	20.120	5689.960	5710.080	---	---
		5745	19.720	5735.120	5754.840	---	---
		5785	19.800	5775.120	5794.920	---	---
		5825	19.960	5815.000	5834.960	---	---
		11N20SISO	Ant1	5180	20.160	5169.880	5190.040
5200	20.120			5189.960	5210.080	---	---
5240	20.320			5229.920	5250.240	---	---
5260	19.960			5250.000	5269.960	---	---
5300	20.400			5289.800	5310.200	---	---
5320	20.120			5309.920	5330.040	---	---
5500	20.320			5489.880	5510.200	---	---
5580	20.240			5569.880	5590.120	---	---
5700	20.200			5689.880	5710.080	---	---
5745	20.000			5734.880	5754.880	---	---
5785	20.120			5774.840	5794.960	---	---
5825	20.040			5814.840	5834.880	---	---
11N40SISO	Ant1			5190	40.800	5169.440	5210.240
		5230	40.480	5209.920	5250.400	---	---



BUREAU
VERITAS

Test Report No.: W7L-P24050016RF03

		5270	40.880	5249.760	5290.640	---	---
		5310	40.800	5289.760	5330.560	---	---
		5510	40.400	5489.600	5530.000	---	---
		5550	40.080	5529.680	5569.760	---	---
		5670	40.400	5649.680	5690.080	---	---
		5755	40.320	5734.840	5775.160	---	---
		5795	40.880	5774.440	5815.320	---	---
11AC80SISO	Ant1	5210	80.800	5169.680	5250.480	---	---
		5290	81.120	5249.520	5330.640	---	---
		5530	81.440	5489.360	5570.800	---	---
		5610	80.800	5569.520	5650.320	---	---
		5775	80.960	5734.200	5815.160	---	---



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03


TEST GRAPHS





BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

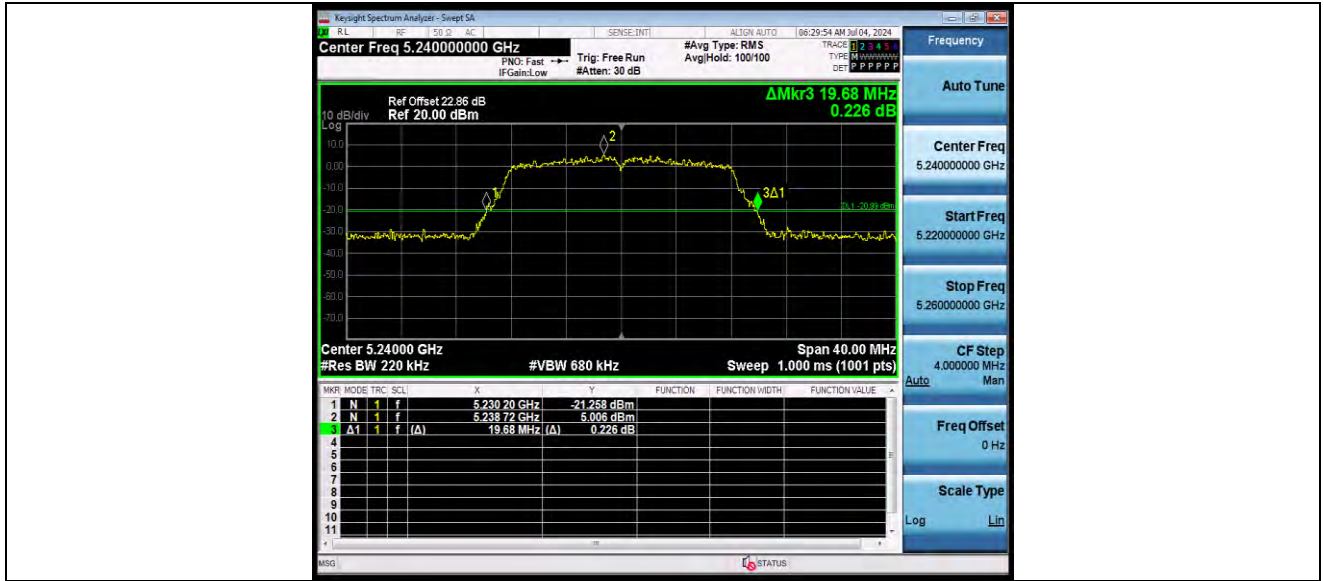

11A_Ant1_5260




11A_Ant1_5280




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

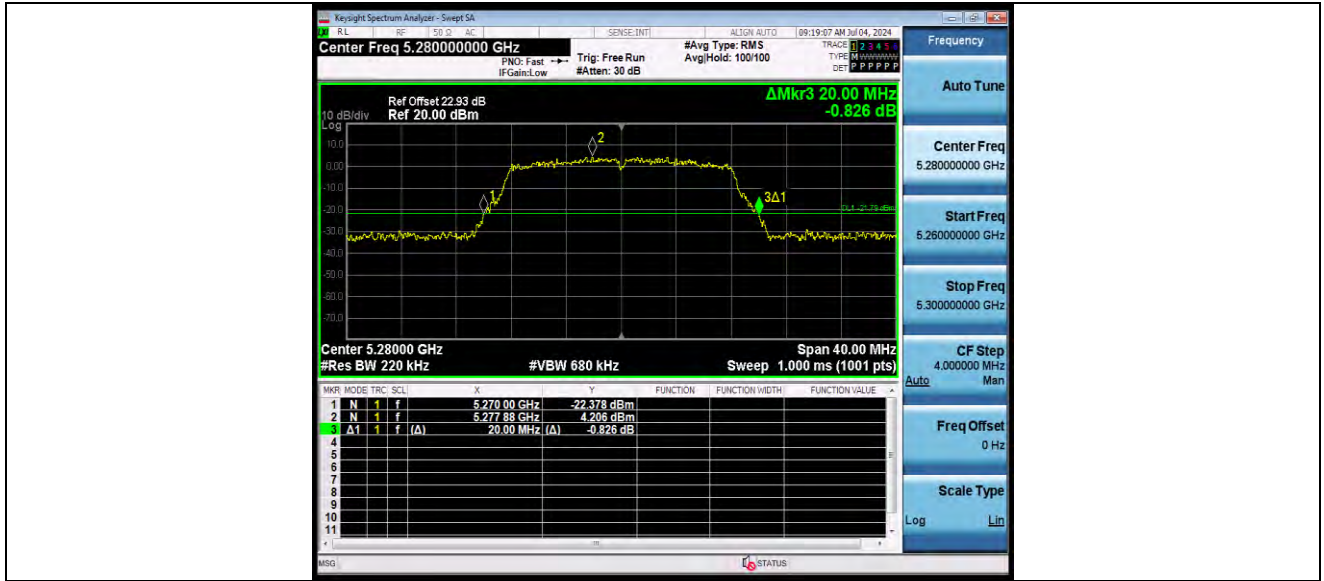

11A_Ant1_5300

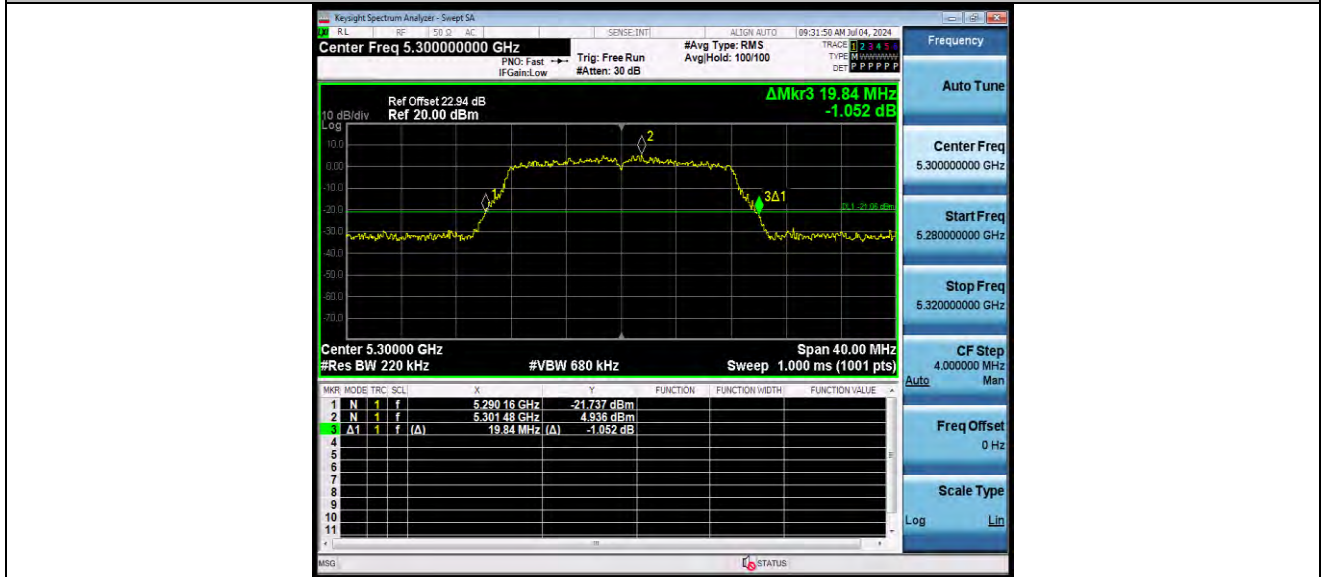


11A_Ant1_5320



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

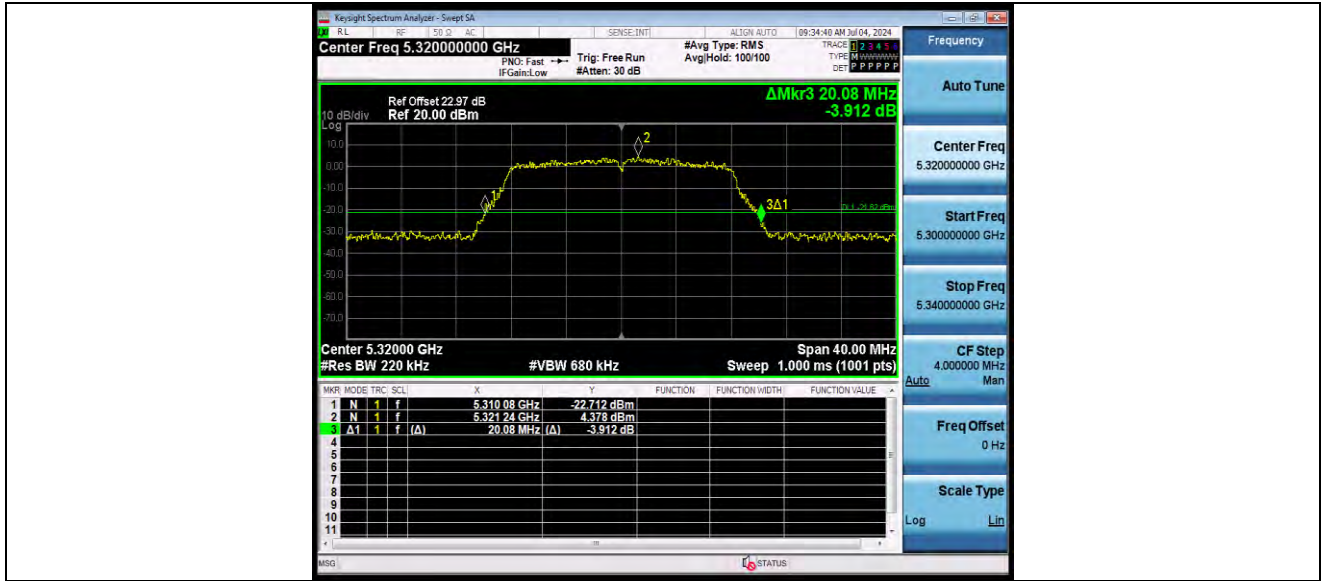

11A_Ant1_5500



11A_Ant1_5580




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03



11A_Ant1_5700

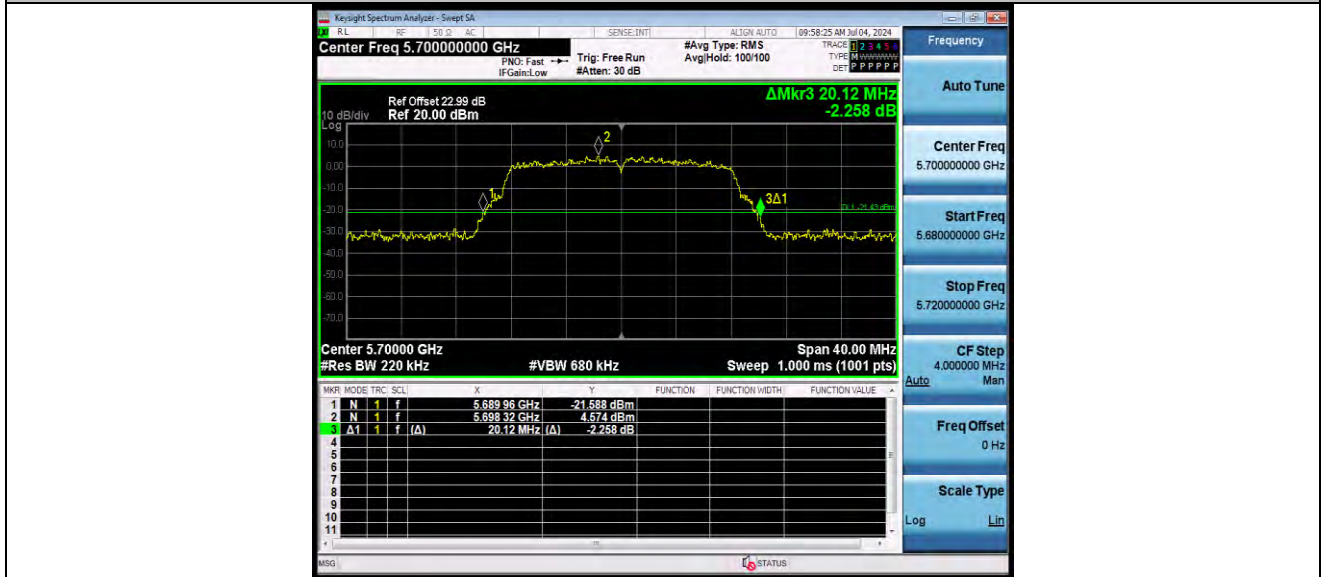


11A_Ant1_5745




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

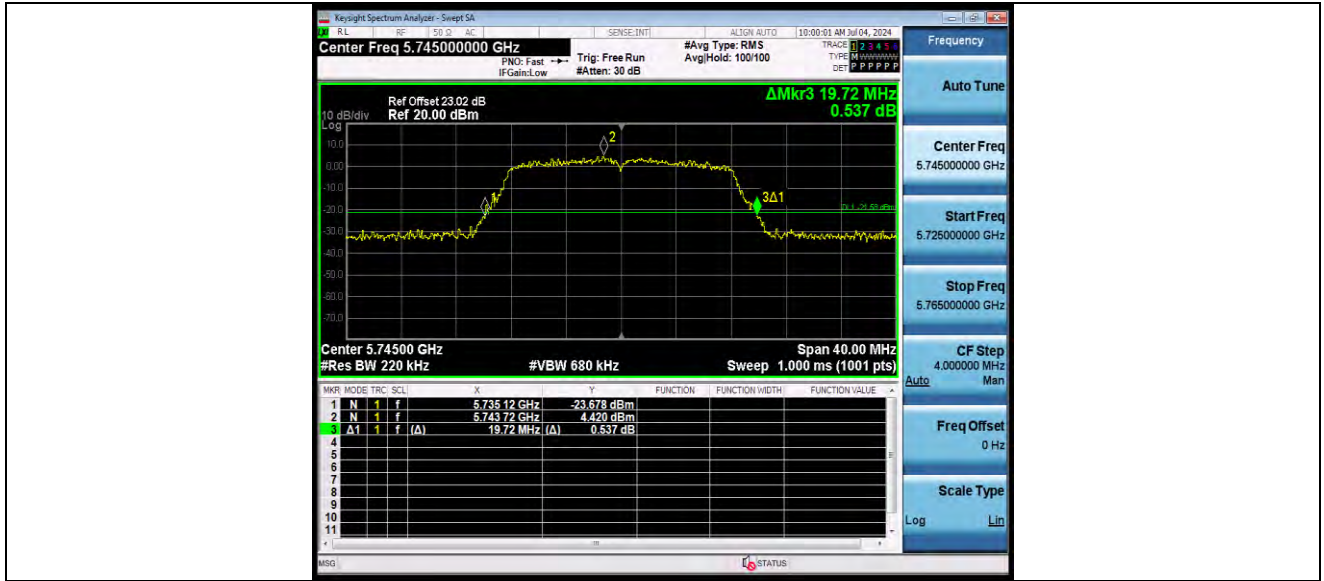

11A_Ant1_5785

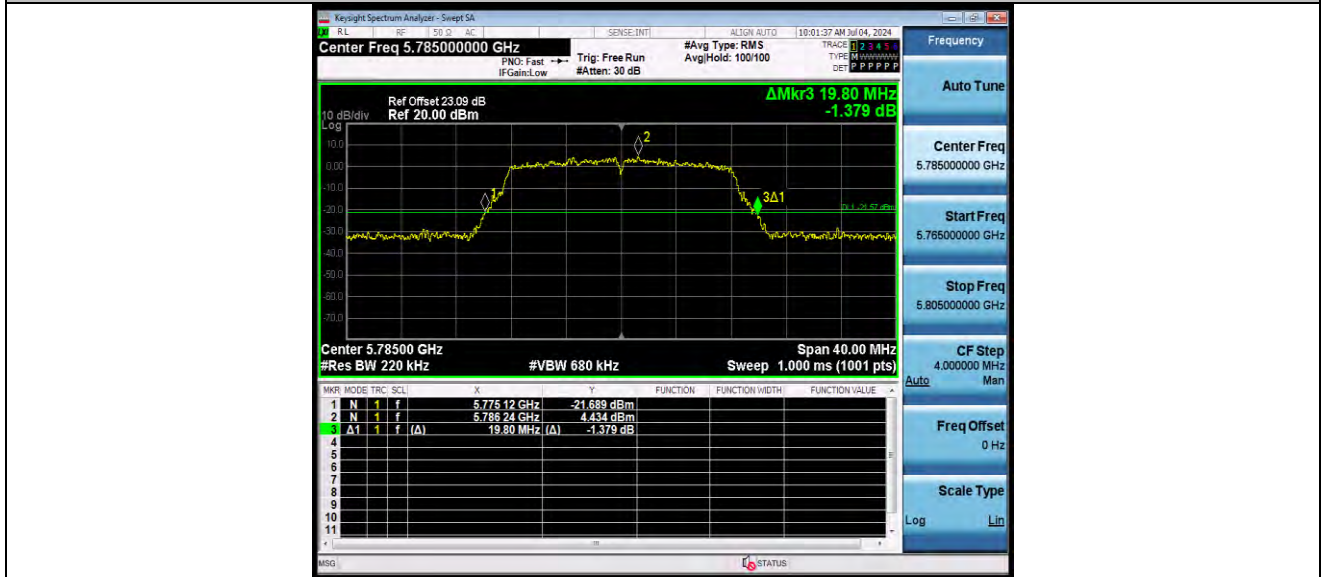

11A_Ant1_5825




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03



11N20SISO_Ant1_5180

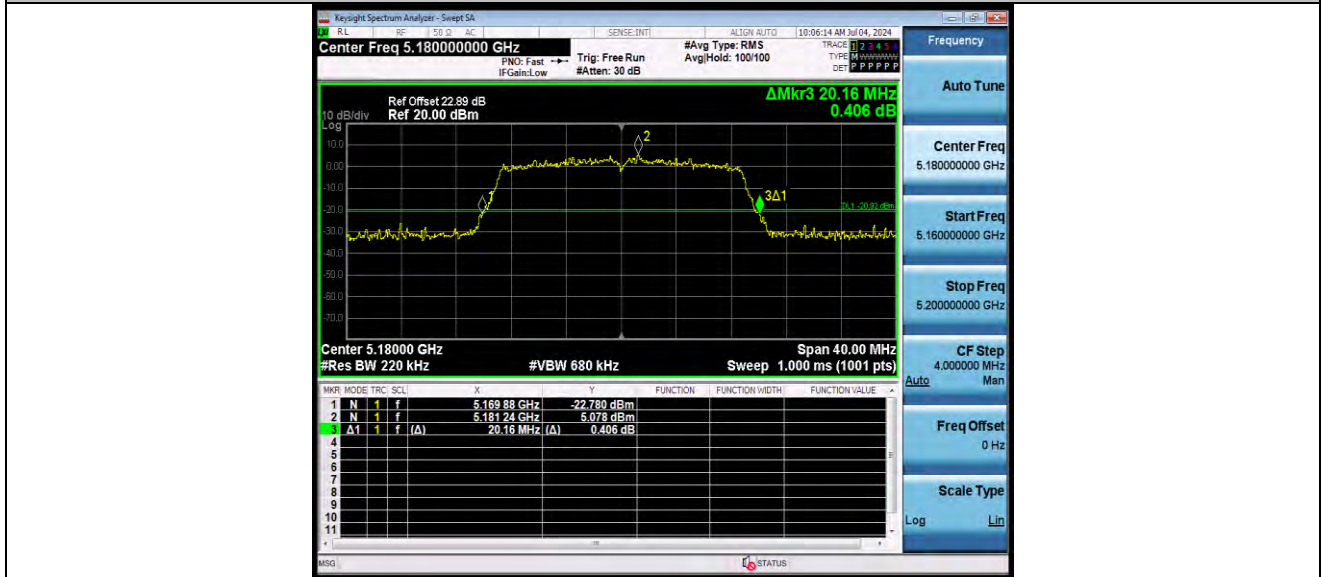


11N20SISO_Ant1_5200




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

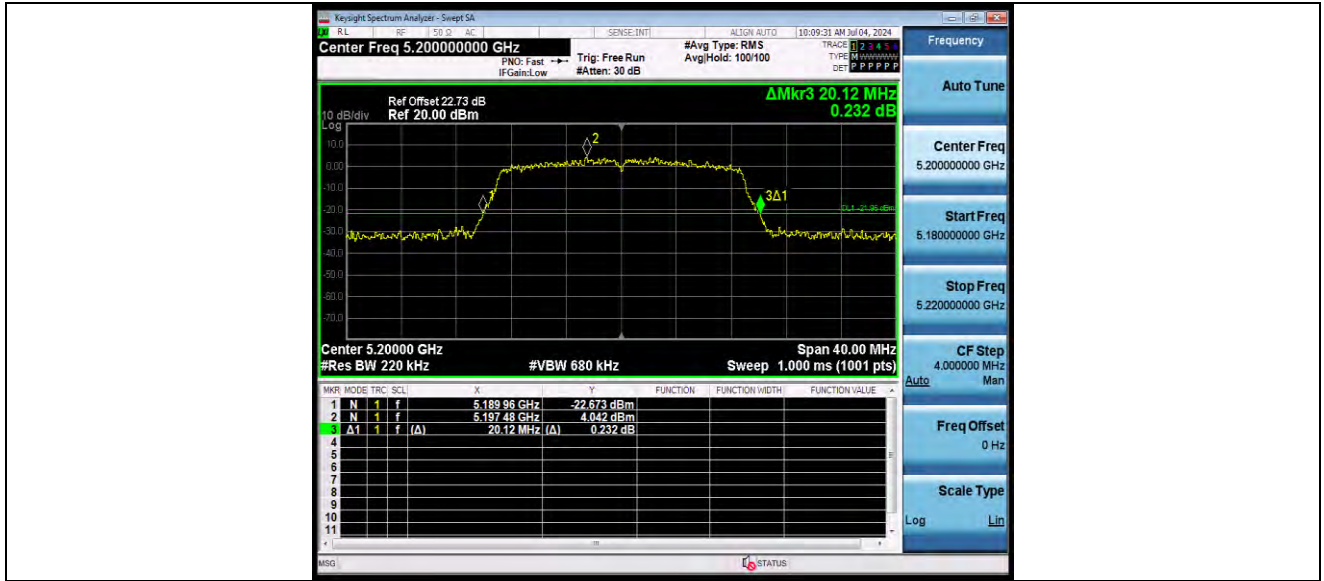

11N20SISO_Ant1_5240

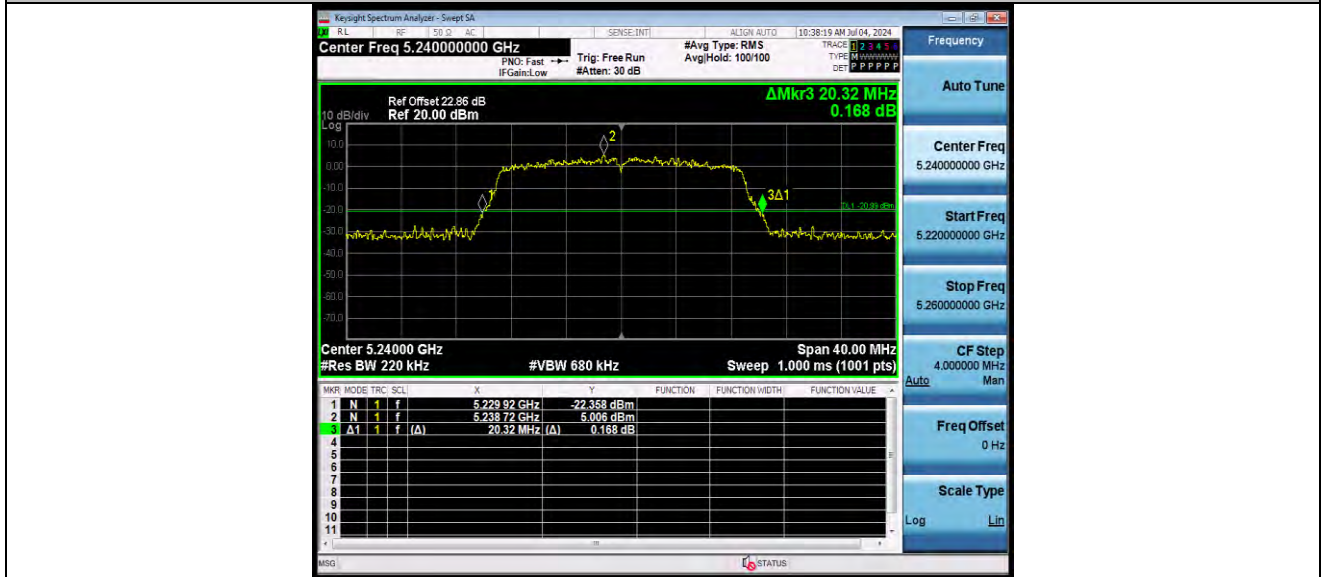


11N20SISO_Ant1_5260



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

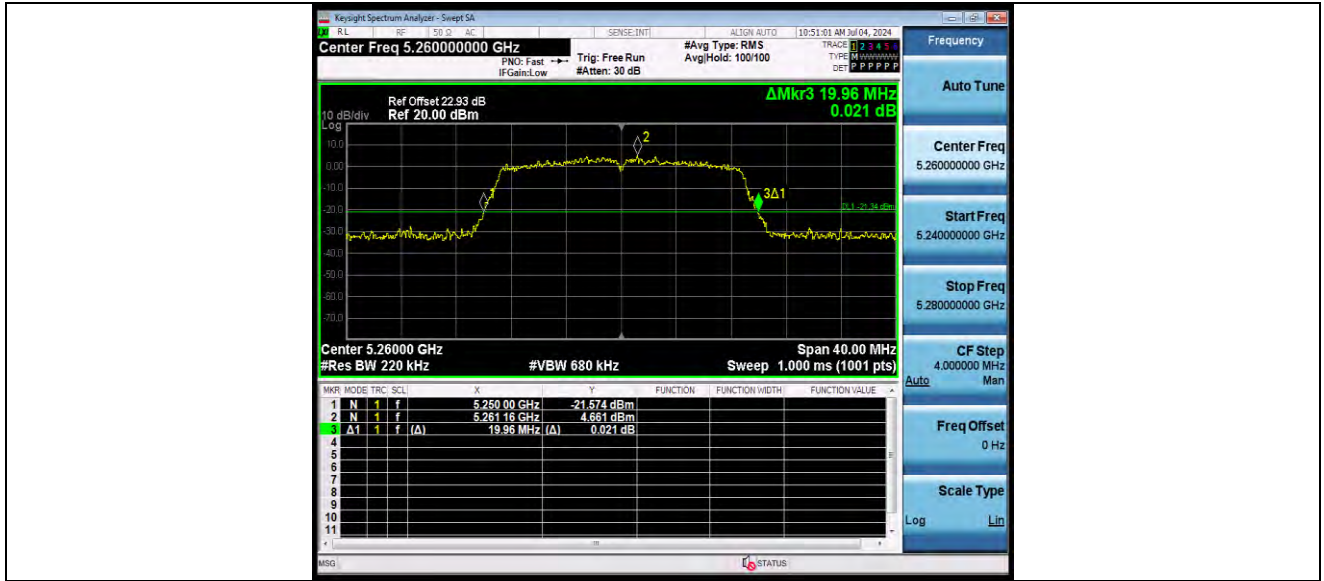

11N20SISO_Ant1_5300




11N20SISO_Ant1_5320




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

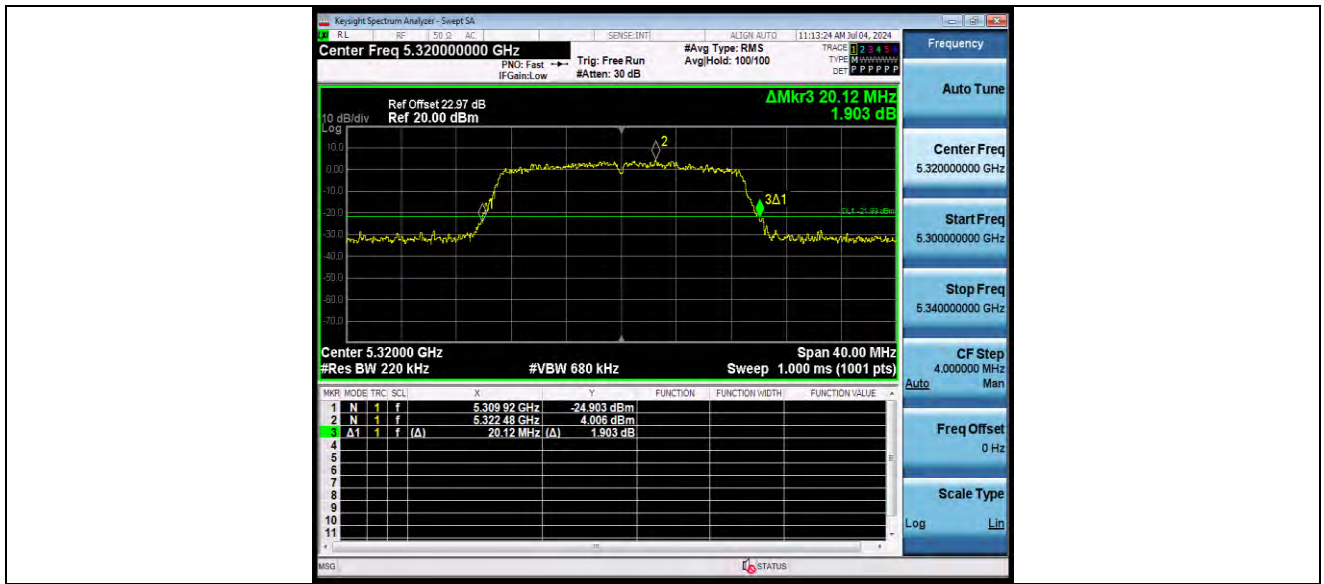

11N20SISO_Ant1_5500

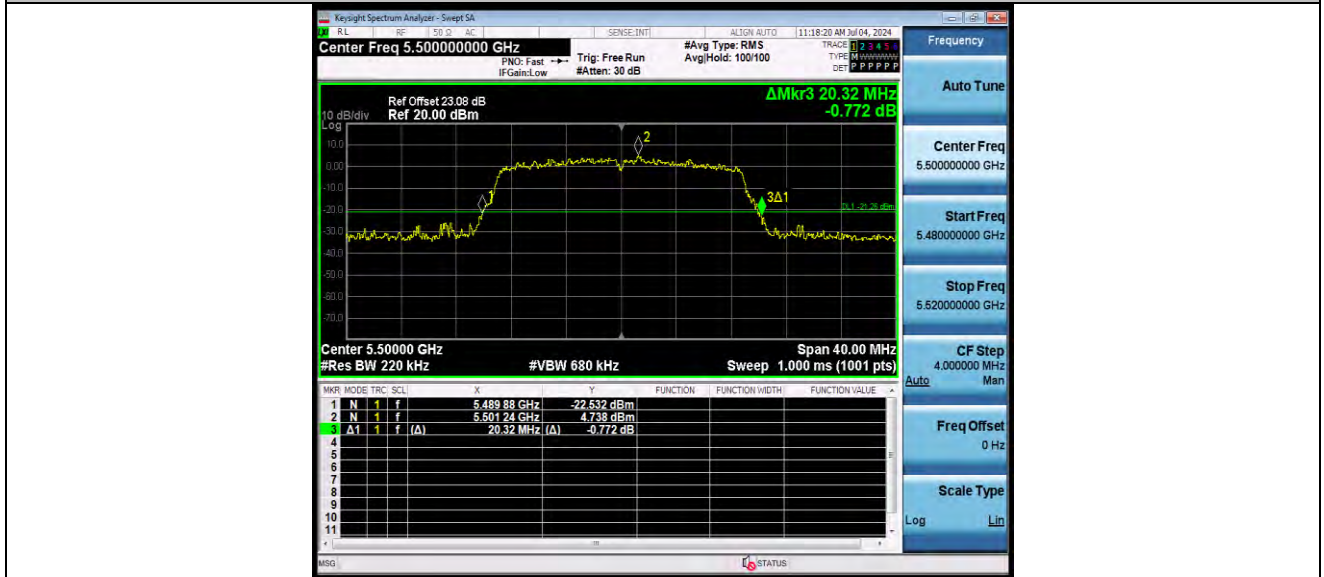


11N20SISO_Ant1_5580




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

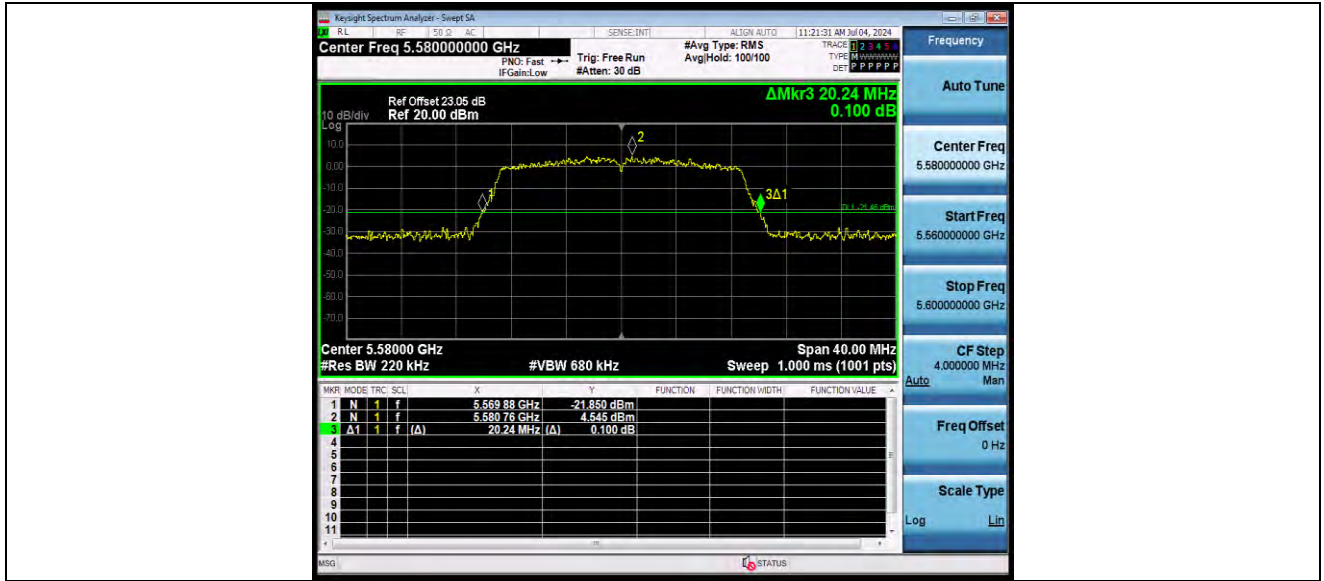

11N20SISO_Ant1_5700

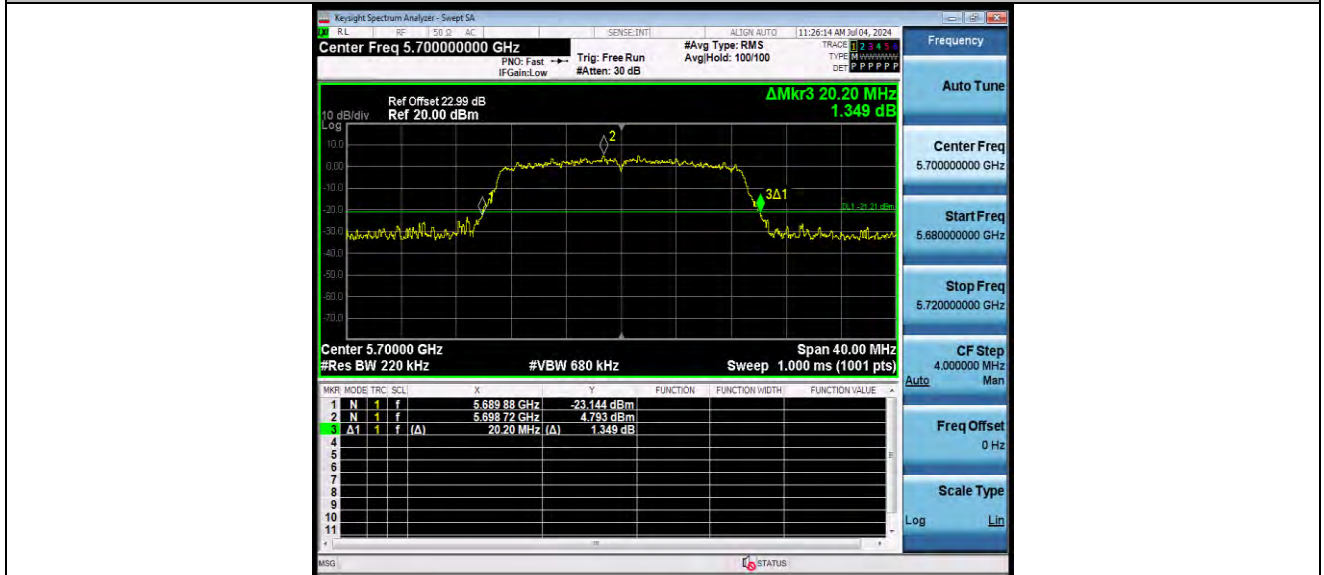


11N20SISO_Ant1_5745




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

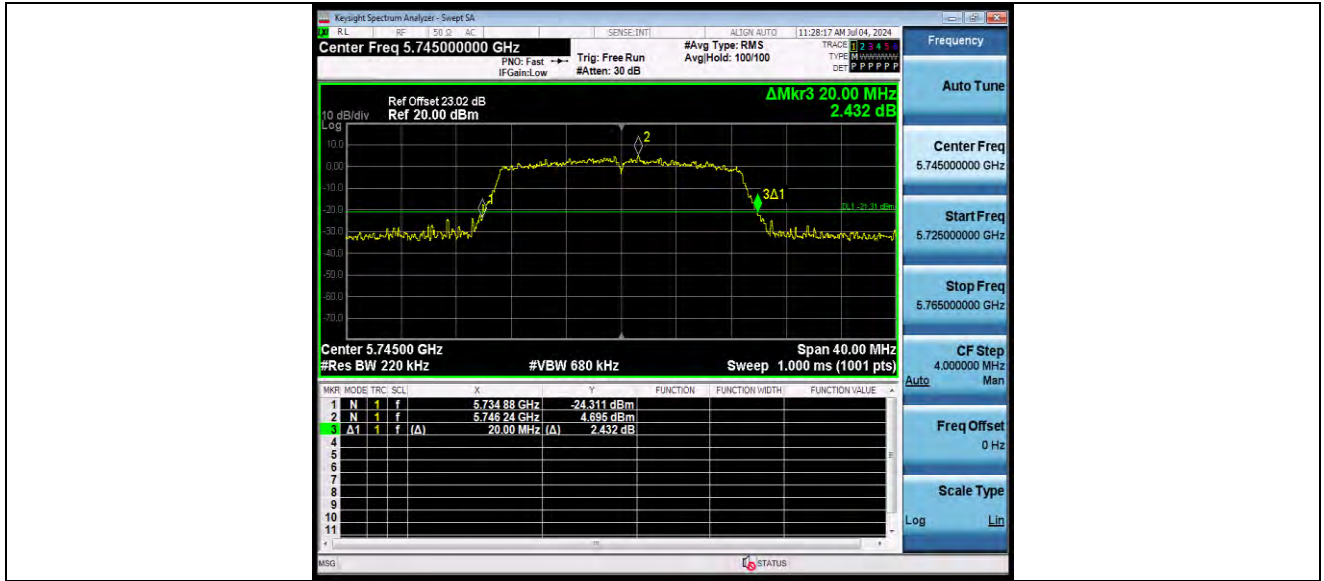

11N20SISO_Ant1_5785

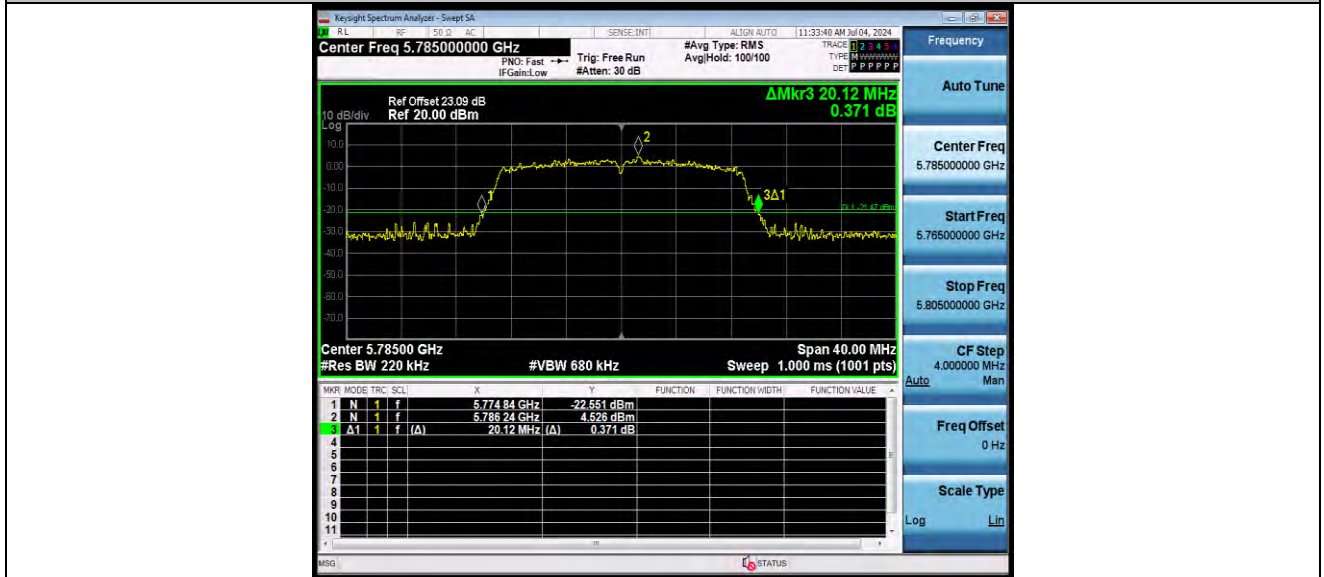


11N20SISO_Ant1_5825




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

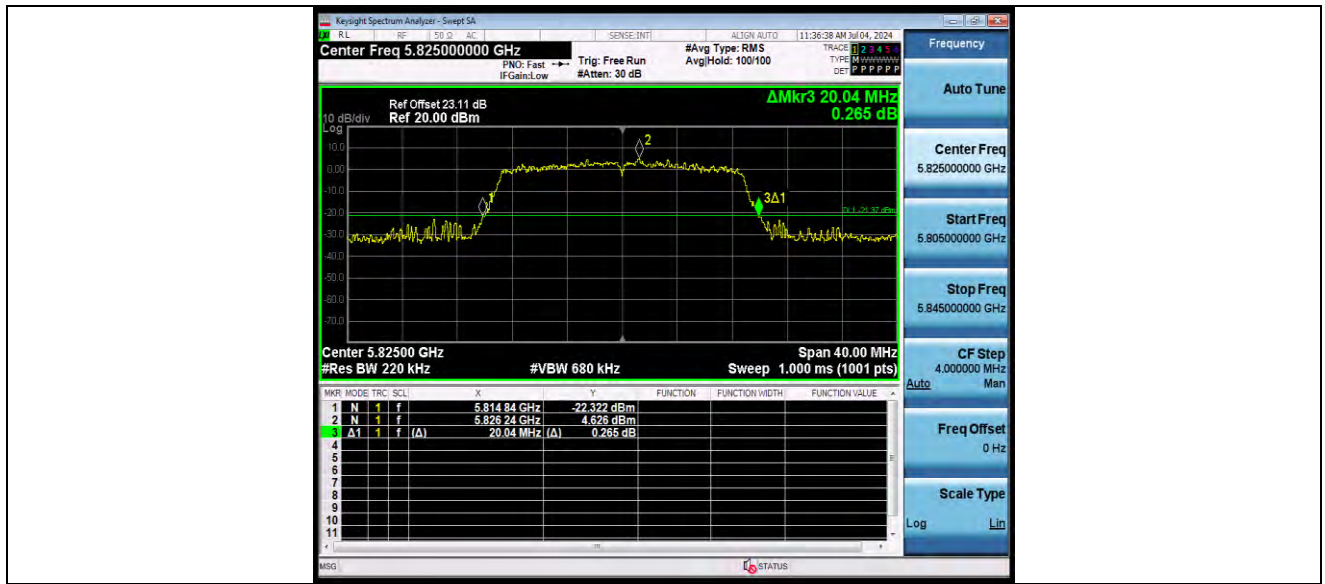

11N40SISO_Ant1_5190

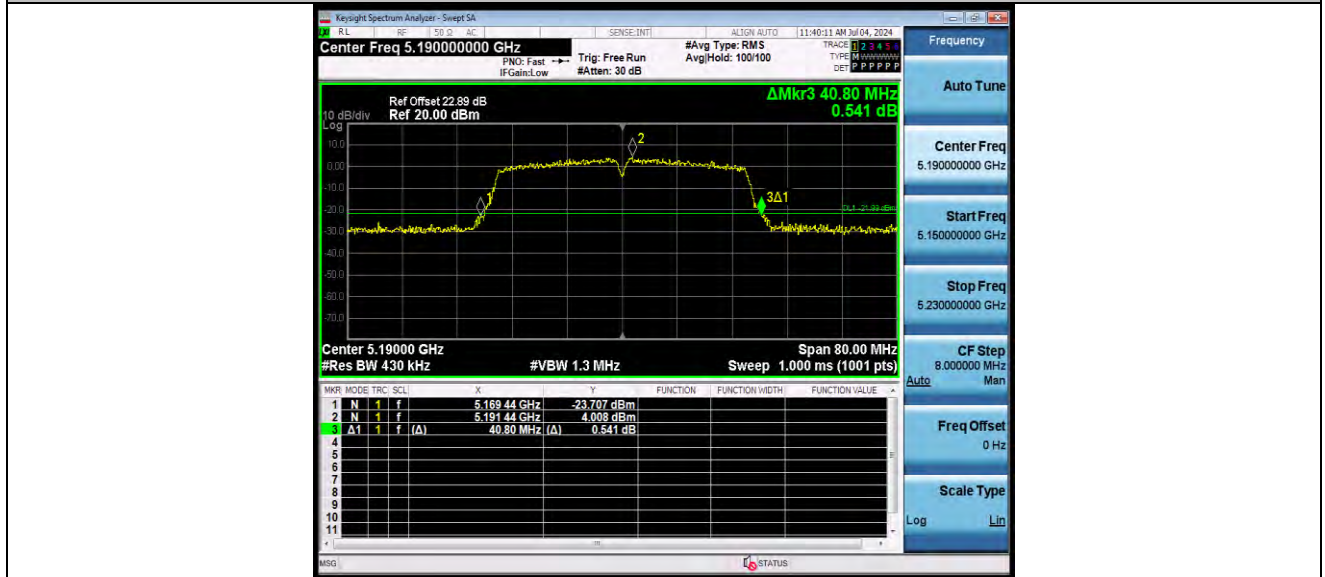


11N40SISO_Ant1_5230




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

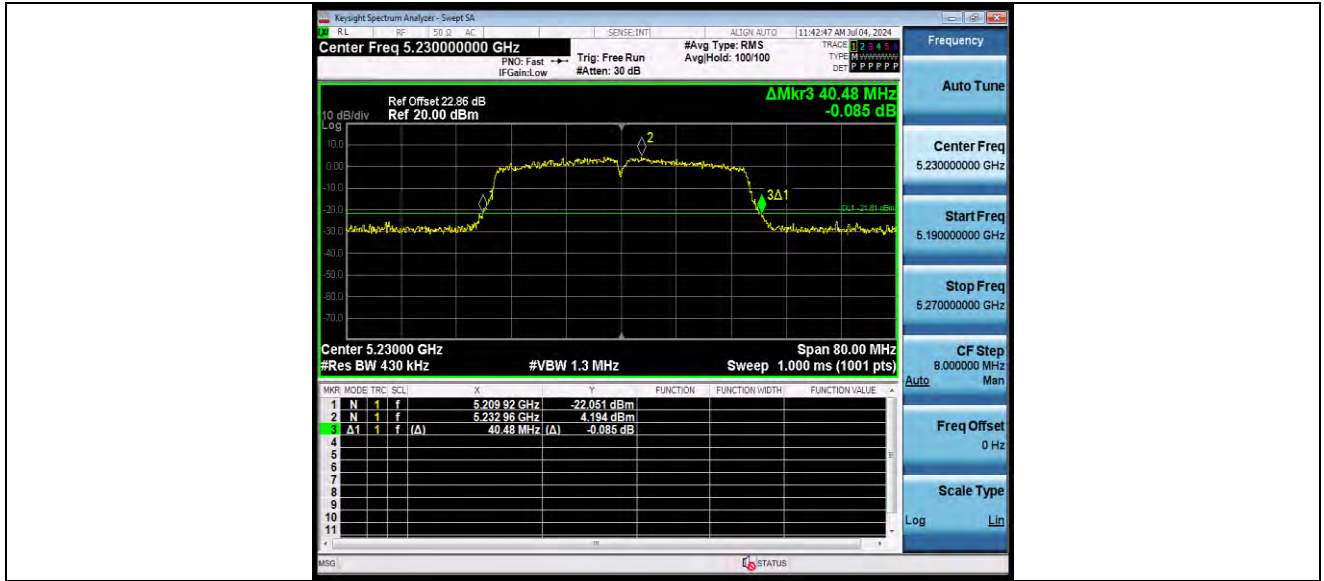

11N40SISO_Ant1_5270

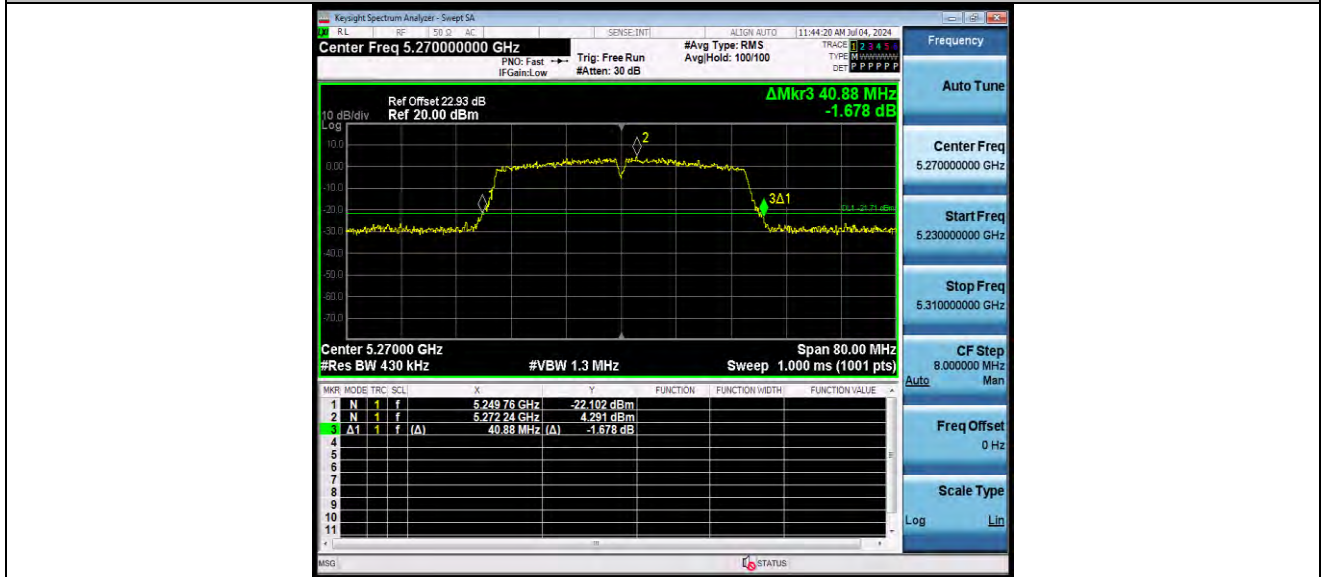


11N40SISO_Ant1_5310




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

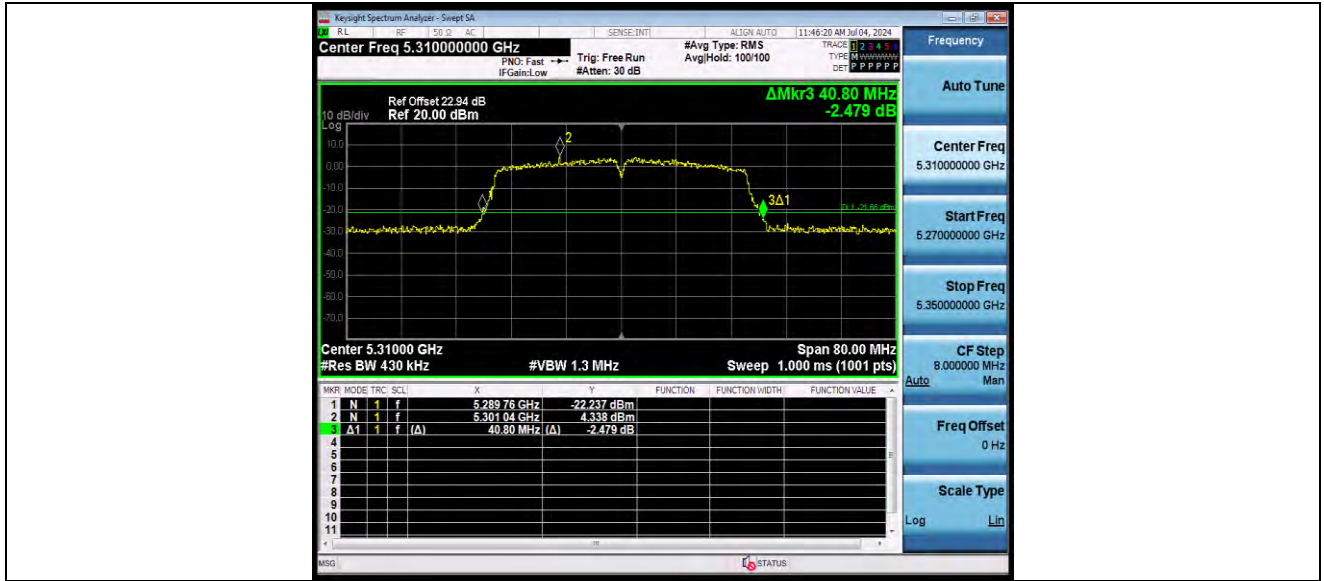

11N40SISO_Ant1_5510

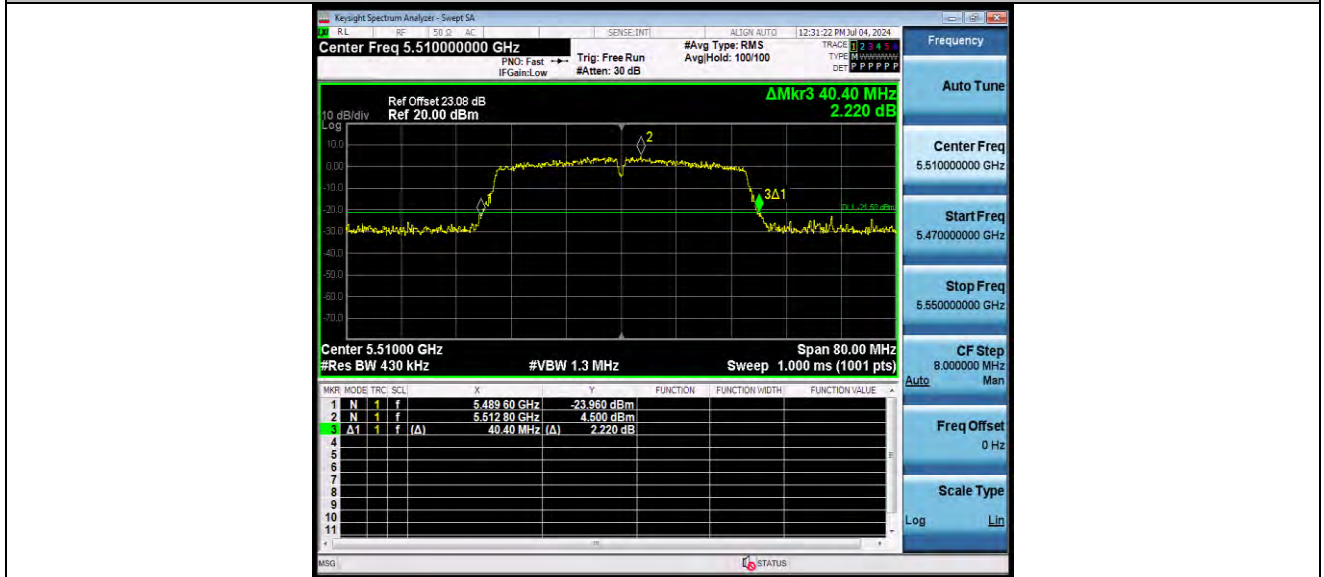


11N40SISO_Ant1_5550




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

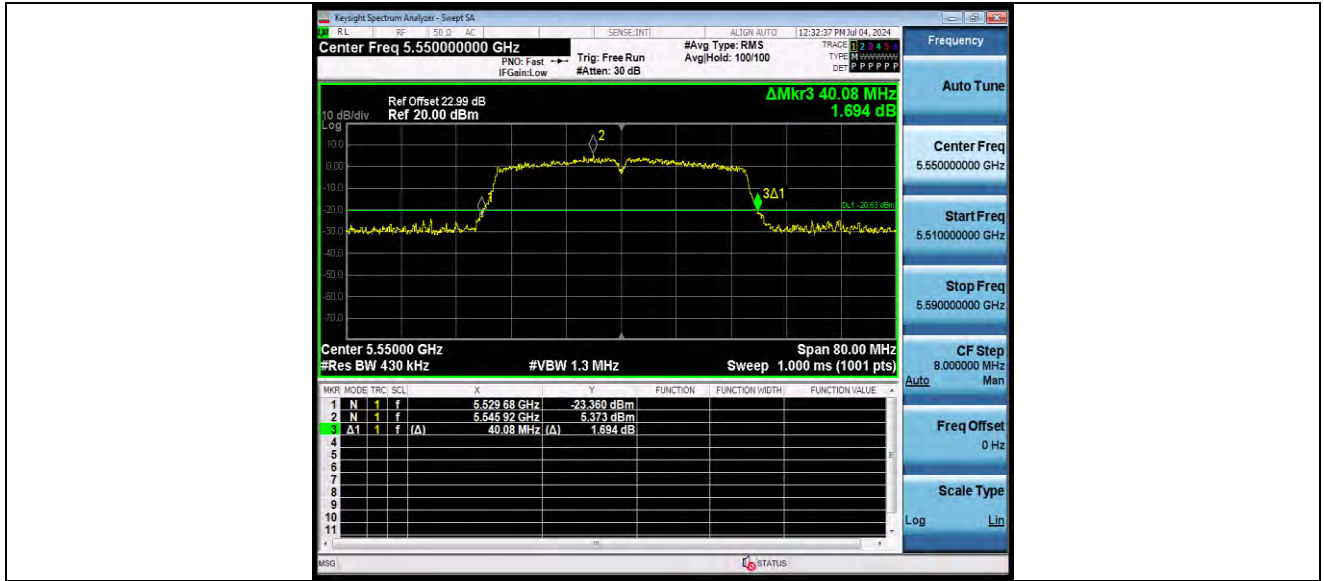

11N40SISO_Ant1_5670

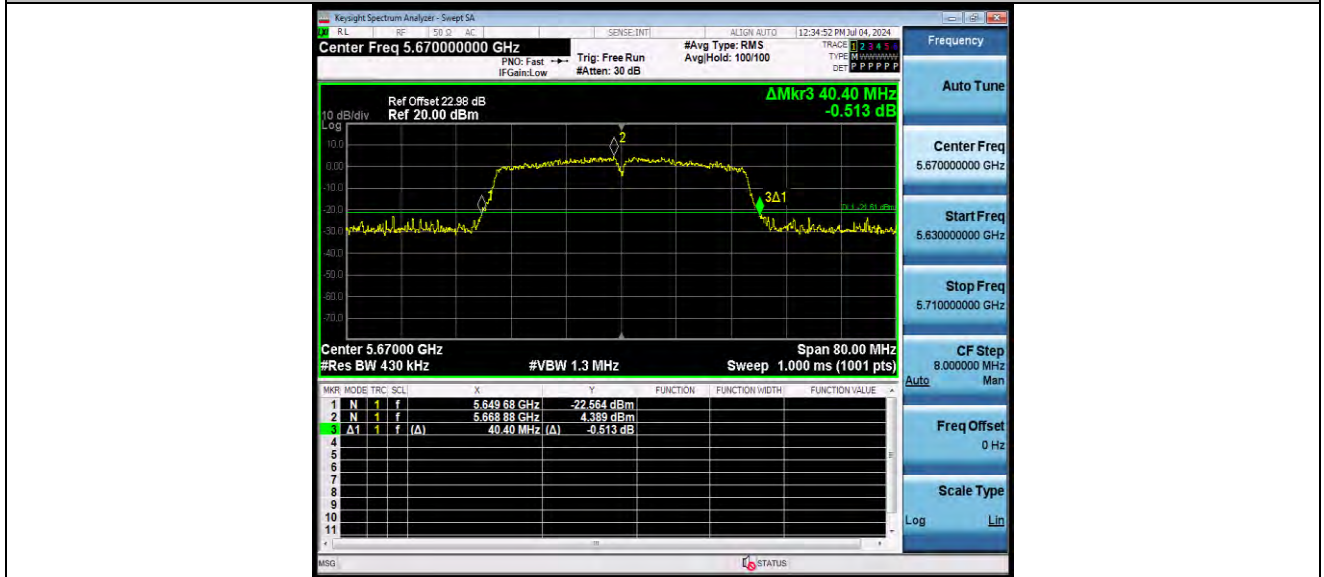


11N40SISO_Ant1_5755



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

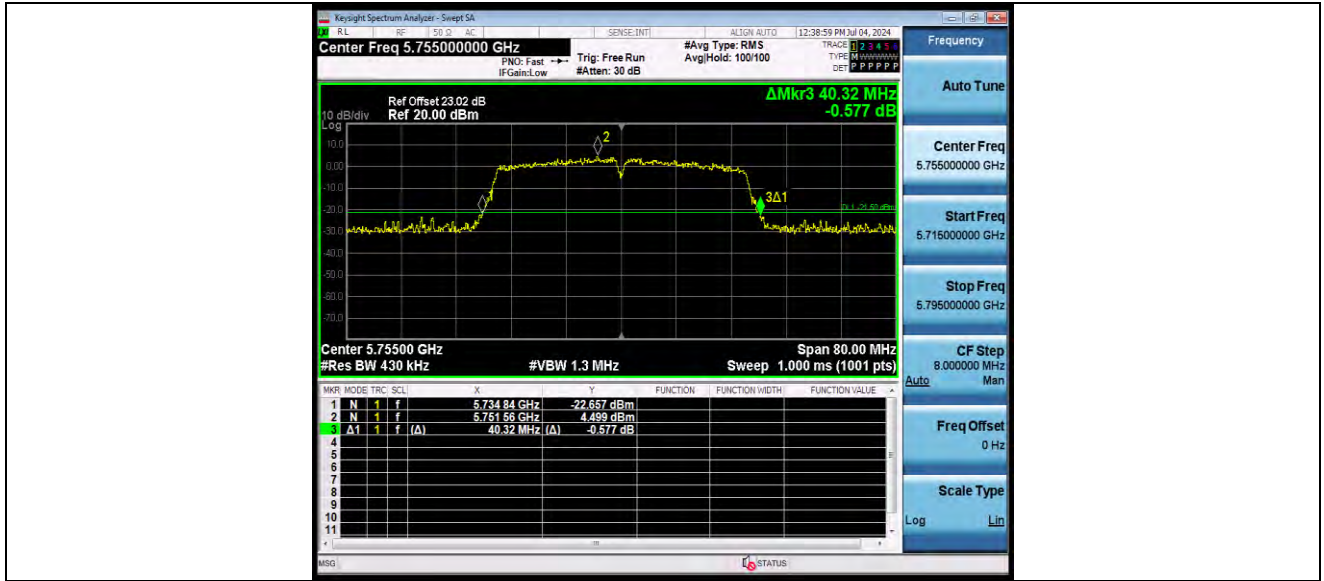

11N40SISO_Ant1_5795




11AC80SISO_Ant1_5210




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

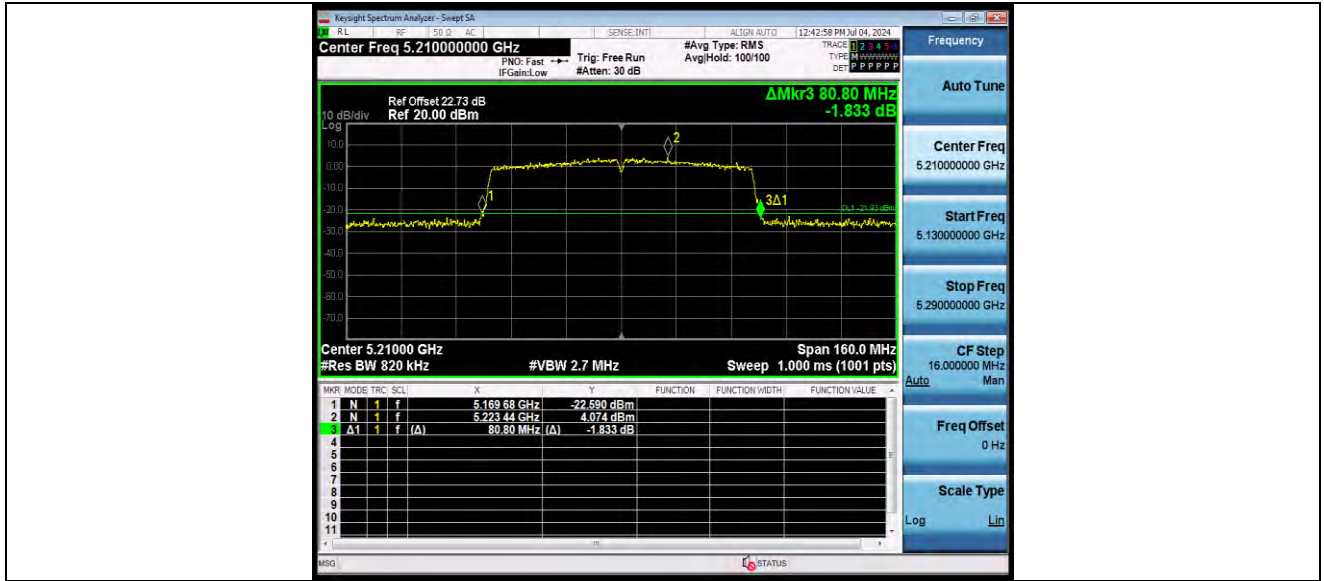

11AC80SISO_Ant1_5290

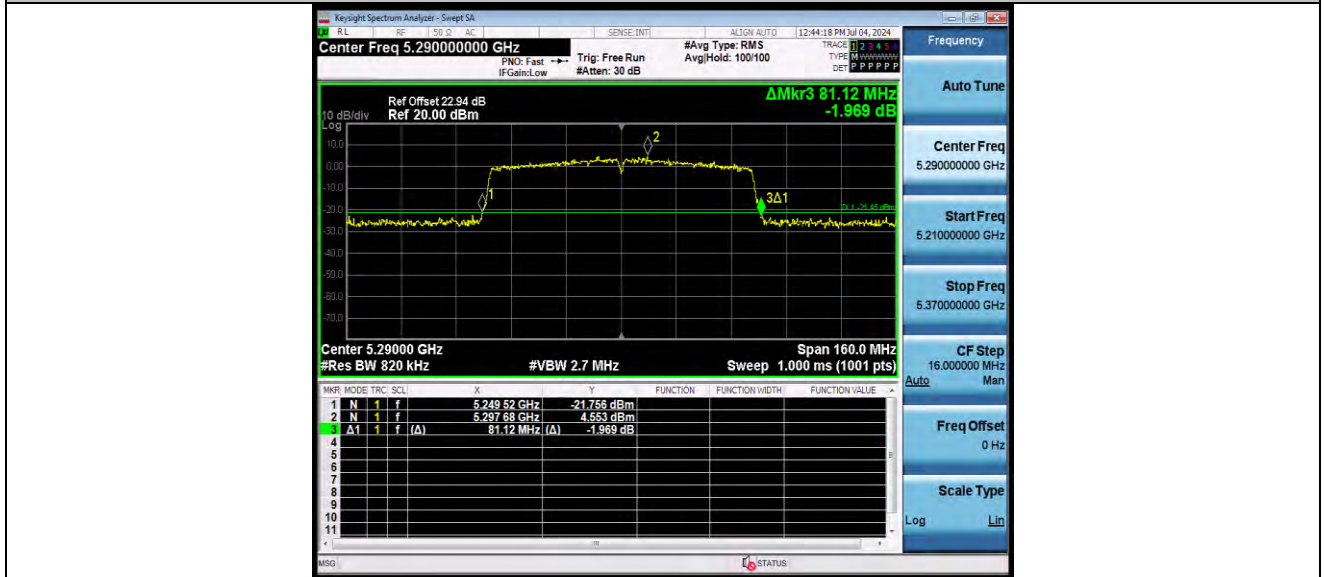


11AC80SISO_Ant1_5530




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

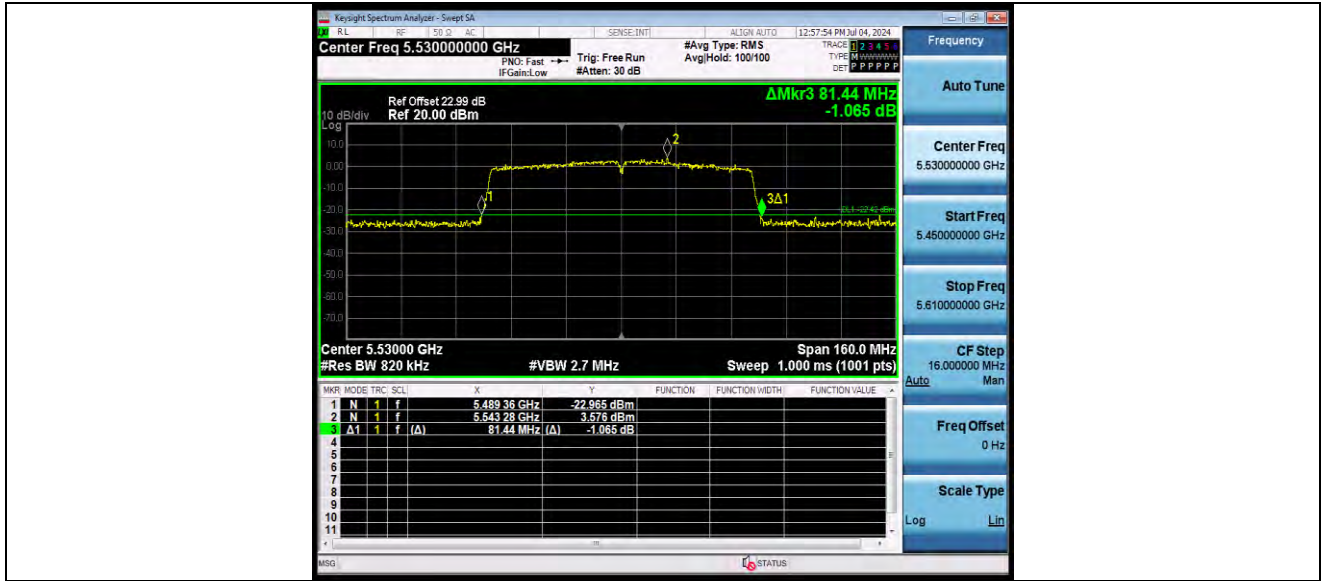

11AC80SISO_Ant1_5610

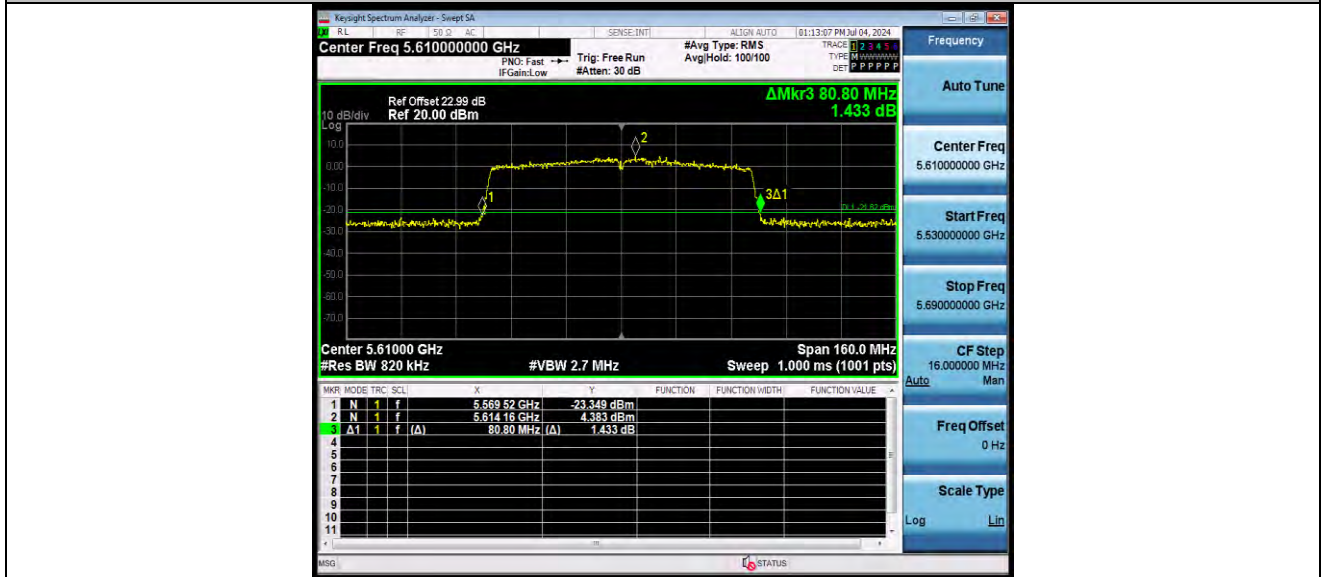


11AC80SISO_Ant1_5775



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

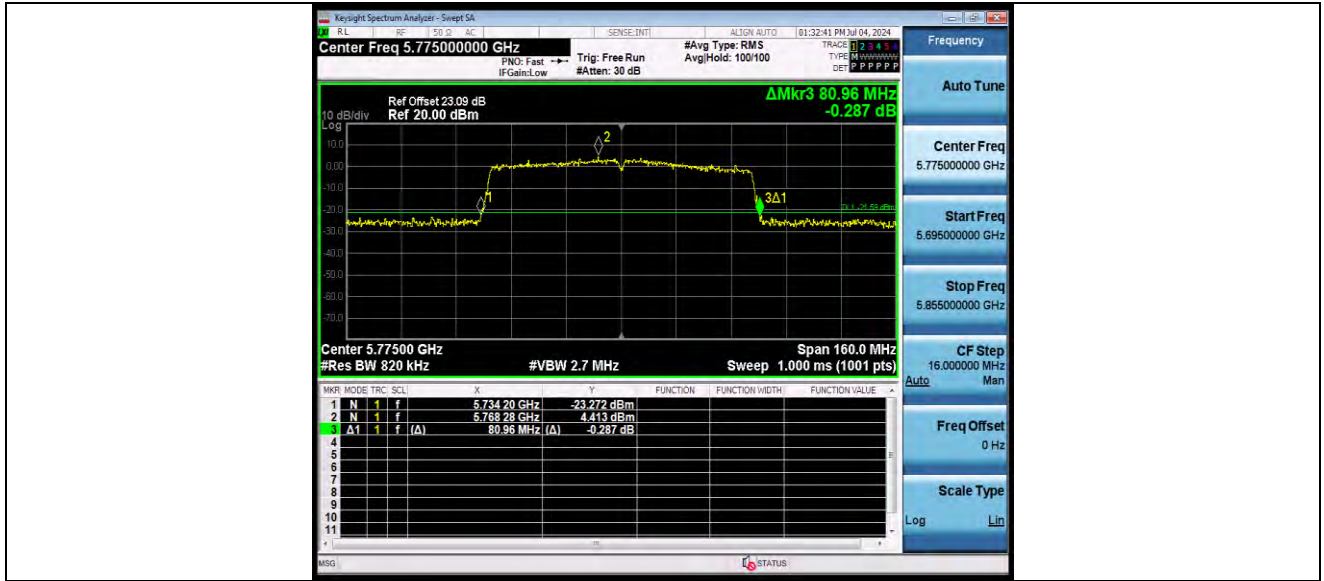

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



OCCUPIED CHANNEL BANDWIDTH TEST RESULT

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.915	5171.5223	5188.4373	---	---
		5200	16.940	5191.5039	5208.4439	---	---
		5240	16.938	5231.4825	5248.4205	---	---
		5260	16.926	5251.5302	5268.4562	---	---
		5280	16.942	5271.4938	5288.4358	---	---
		5300	16.907	5291.5299	5308.4369	---	---
		5320	16.936	5311.4963	5328.4323	---	---
		5500	16.964	5491.4825	5508.4465	---	---
		5580	16.918	5571.4909	5588.4089	---	---
		5700	16.947	5691.5087	5708.4557	---	---
		5745	16.944	5736.4698	5753.4138	---	---
		5785	16.936	5776.4921	5793.4281	---	---
		5825	16.894	5816.5177	5833.4117	---	---
		11N20SISO	Ant1	5180	17.882	5171.0366	5188.9186
5200	17.947			5191.0499	5208.9969	---	---
5240	17.915			5231.0524	5248.9674	---	---
5260	17.848			5251.0697	5268.9177	---	---
5300	17.879			5291.0492	5308.9282	---	---
5320	17.932			5311.0218	5328.9538	---	---
5500	17.891			5491.0111	5508.9021	---	---
5580	17.908			5571.0243	5588.9323	---	---
5700	17.935			5690.9956	5708.9306	---	---
5745	17.891			5736.0013	5753.8923	---	---
5785	17.944			5776.0048	5793.9488	---	---
5825	17.921			5815.9917	5833.9127	---	---
11N40SISO	Ant1	5190	36.402	5171.8266	5208.2286	---	---
		5230	36.330	5211.8560	5248.1860	---	---
		5270	36.409	5251.7792	5288.1882	---	---
		5310	36.289	5291.8571	5328.1461	---	---
		5510	36.425	5491.7790	5528.2040	---	---
		5550	36.305	5531.8178	5568.1228	---	---



BUREAU
VERITAS

Test Report No.: W7L-P24050016RF03

		5670	36.343	5651.8029	5688.1459	---	---
		5755	36.448	5736.6953	5773.1433	---	---
		5795	36.503	5776.6649	5813.1679	---	---
11AC80SISO	Ant1	5210	75.466	5172.3010	5247.7670	---	---
		5290	75.449	5252.2941	5327.7431	---	---
		5530	75.469	5492.2611	5567.7301	---	---
		5610	75.460	5572.2440	5647.7040	---	---
		5775	75.528	5737.0672	5812.5952	---	---



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03


TEST GRAPHS





BUREAU
VERITAS

Test Report No.: W7L-P24050016RF03

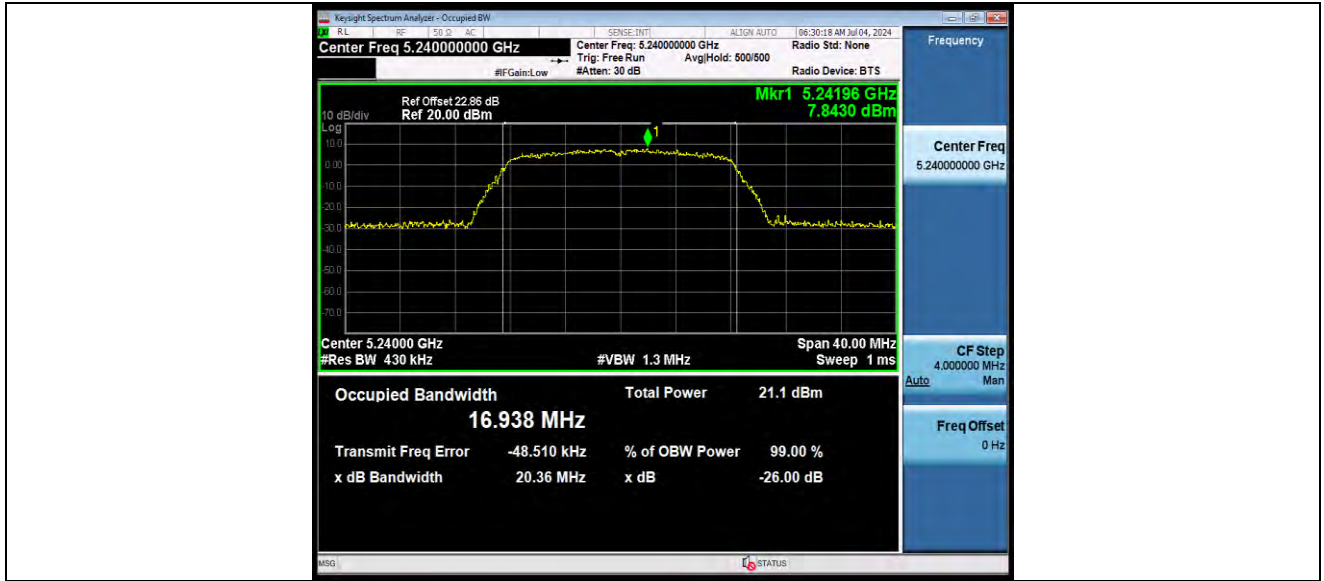

11A_Ant1_5260




11A_Ant1_5280



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

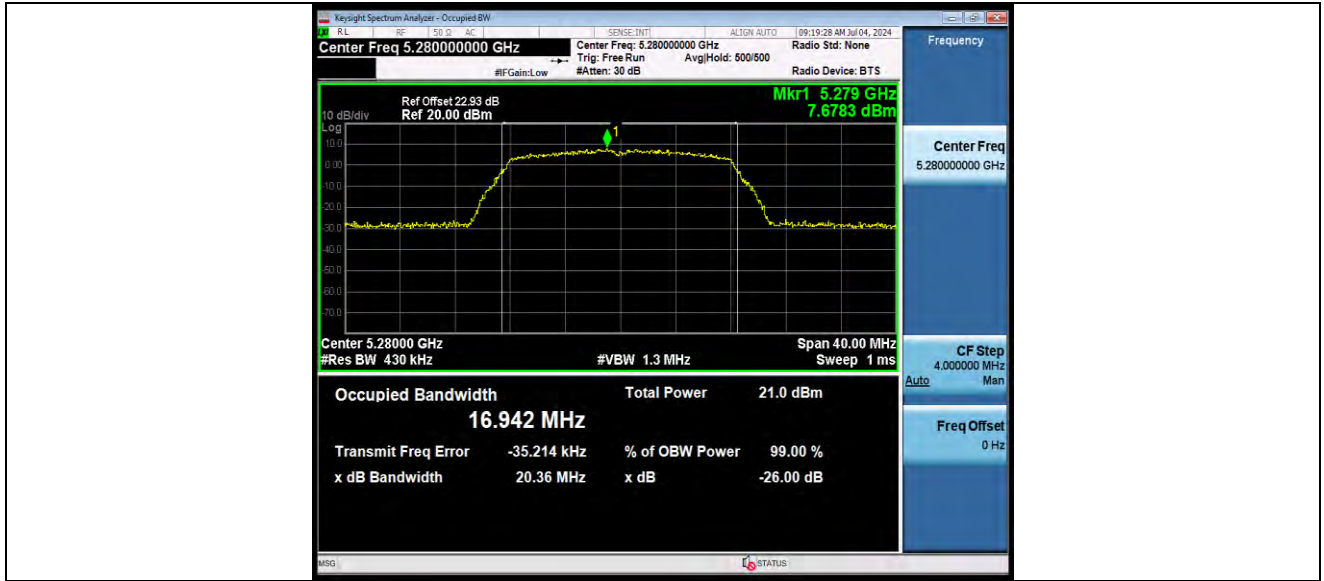

11A_Ant1_5300




11A_Ant1_5320




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

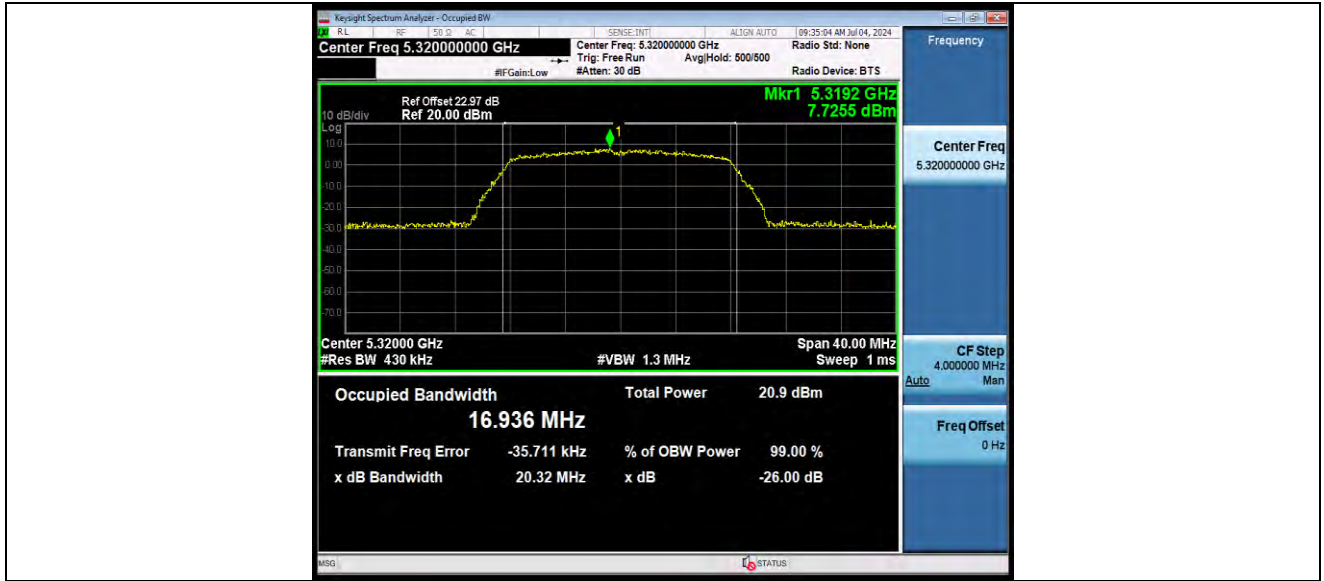

11A_Ant1_5500

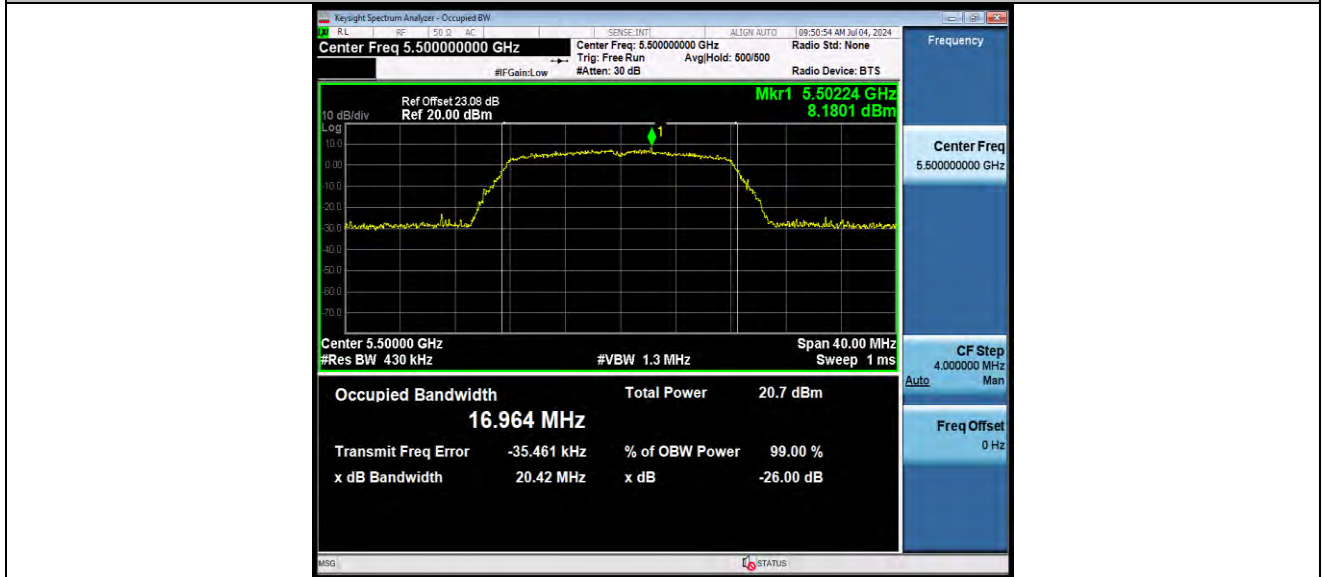


11A_Ant1_5580



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

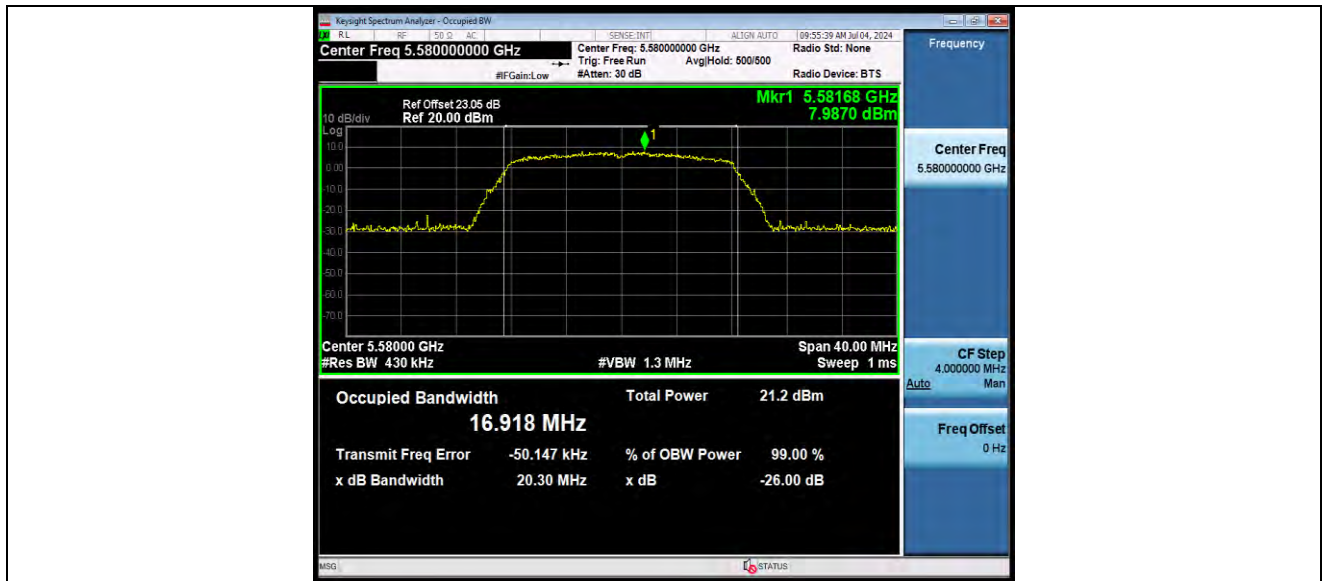

11A_Ant1_5700




11A_Ant1_5745



BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

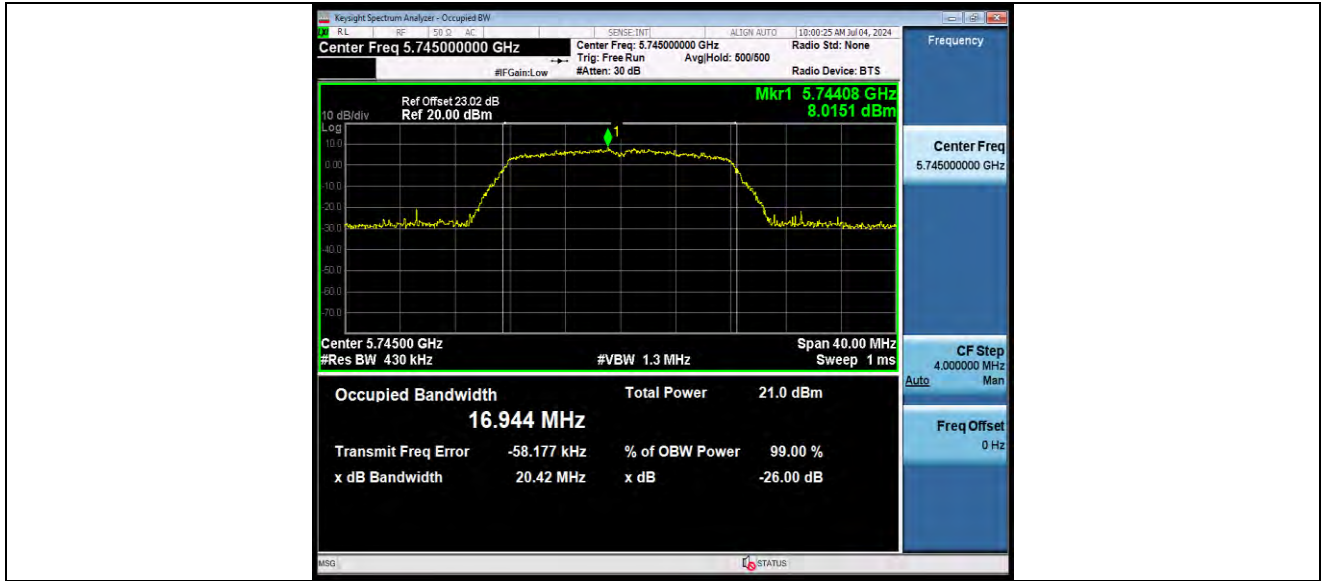

11A_Ant1_5785




11A_Ant1_5825




BUREAU VERITAS

Test Report No.: W7L-P24050016RF03

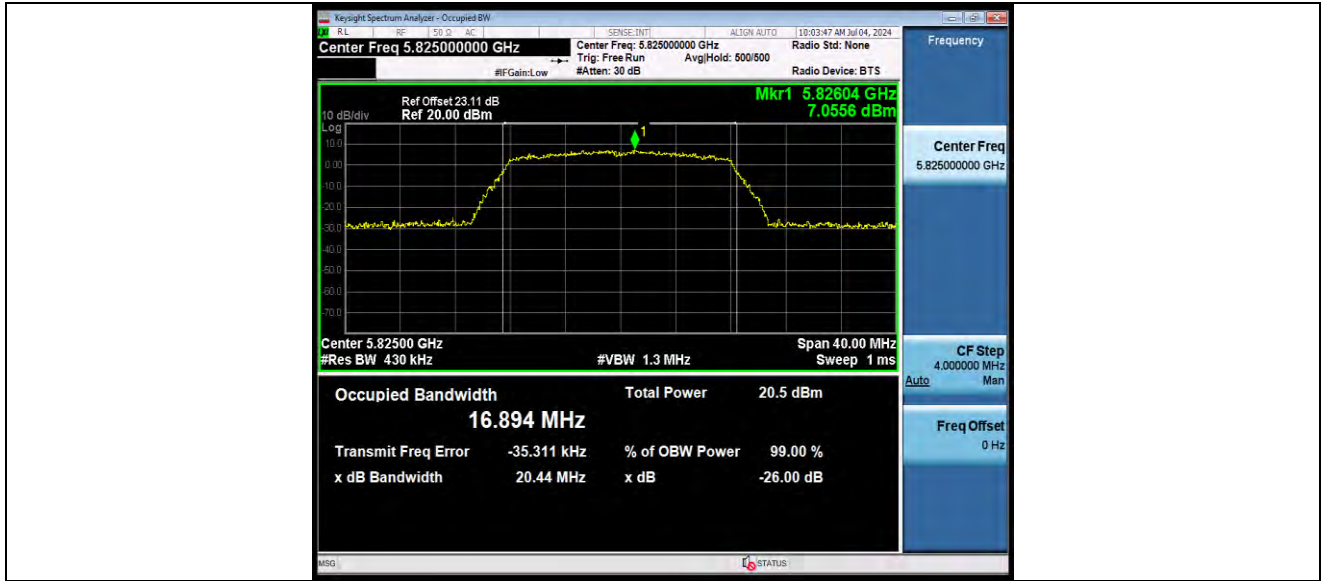

11N20SISO_Ant1_5180

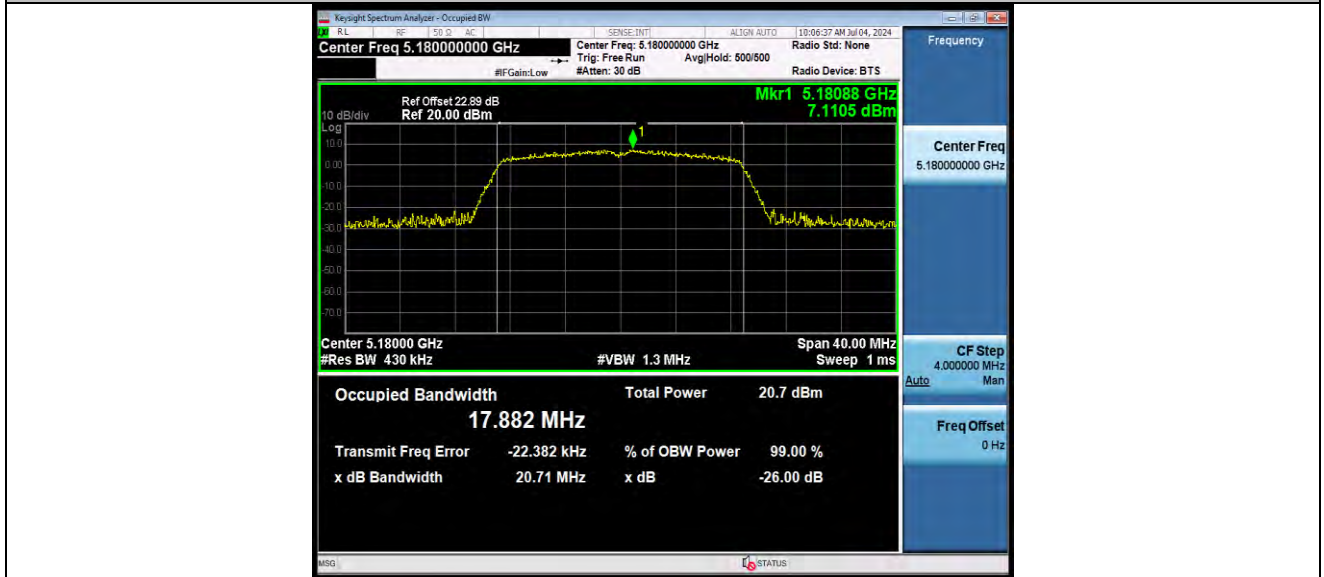

11N20SISO_Ant1_5200