



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 24129PN74G
FCC ID : 2AFZZPN74G
STANDARD : 47 CFR Part 22, 24, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Aug. 31, 2024 ~ Oct. 12, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP and Emission Designator	6
1.7 Testing Location	9
1.8 Test Software	9
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and ERP/EIRP	17
3.5 Peak-to-Average Ratio	18
3.6 Occupied Bandwidth	19
3.7 Conducted Band Edge	20
3.8 Conducted Spurious Emission	22
3.9 Frequency Stability	23
4 RADIATED TEST ITEMS	24
4.1 Measuring Instruments	24
4.2 Test Setup	24
4.3 Test Result of Radiated Test	25
4.4 Radiated Spurious Emission	26
5 LIST OF MEASURING EQUIPMENT	27
6 MEASUREMENT UNCERTAINTY	28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG482619I	Rev. 01	Initial issue of report	Oct. 14, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§24.232(c)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n2, n25) (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 38.52 dB at 2468.000 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	24129PN74G
FCC ID	2AFZZPN74G
IMEI Code	Conducted: 864868070035782/864868070035790 Radiation: 864868070038067/864868070038075
HW Version	1352000O3
SW Version	Xiaomi HyperOS 2.0
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 824 MHz ~ 849 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n26 : 869 MHz ~ 894 MHz 5G NR n66 : 2110 MHz~ 2200 MHz
Bandwidth	n2 SA: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz n5 SA/NSA: 5MHz / 10MHz / 15MHz / 20MHz (25MHz DL only) n26 SA: 5MHz / 10MHz / 15MHz / 20MHz (25/30MHz DL only) n25 SA: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz (45MHz DL only) n66 SA: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 45MHz n66 NSA: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz
SCS	15kHz

Antenna Gain	<Ant. 4> : n2/n25: -3.0 dBi <Ant. 5> : n2/n25: -3.5 dBi <Ant. 1> : n5/n26: -4.1 dBi <Ant. 0> : n5/n26: -4.5 dBi <Ant. 3> : n66: -0.7 dBi <Ant. 4> : n66: -2.2 dBi <Ant. 5> : n66: -3.5 dBi <Ant. 6> : n66: -1.2 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP are shown in the report, 5G NR n2/n25/n66 for Ant. 4 and n5/n26 for Ant. 0.
2. 5G NR n5/n66 support SA and NSA mode, n2/n25/n26 support SA mode only. According to the maximum power between SA and NSA mode, SA covers NSA mode for n66, n2/n5 covered by n25/n26, and RSE added test for n5 NSA.
3. The device supports two PAs for 5G NR n66(main PA for SA mode and other PA for NSA mode), both the PAs are full tested.
4. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.1303	4M47G7D	0.1072	4M48W7D
10	1855.0 ~ 1905.0	0.1352	9M28G7D	0.1059	9M30W7D
15	1857.5 ~ 1902.5	0.1358	14M1G7D	0.1094	14M1W7D
20	1860.0 ~ 1900.0	0.1346	18M9G7D	0.1081	18M9W7D
25	1862.5 ~ 1897.5	0.1352	23M8G7D	0.1127	23M8W7D
30	1865.0 ~ 1895.0	0.1368	28M6G7D	0.1104	28M6W7D
35	1867.5 ~ 1892.5	0.1334	33M5G7D	0.1067	33M6W7D
40	1870.0 ~ 1890.0	0.1390	38M6G7D	0.1114	38M6W7D



5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0705	4M46G7D	0.0547	4M47W7D
10	829.0 ~ 844.0	0.0711	9M27G7D	0.0551	9M28W7D
15	831.5 ~ 841.5	0.0710	14M1G7D	0.0552	14M1W7D
20	834.0 ~ 839.0	0.0703	18M9G7D	0.0551	19M0W7D

5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.1340	4M47G7D	0.1406	4M48W7D
10	1855.0 ~ 1910.0	0.1361	9M28G7D	0.1390	9M30W7D
15	1857.5 ~ 1907.5	0.1368	14M1G7D	0.1403	14M1W7D
20	1860.0 ~ 1905.0	0.1343	18M9G7D	0.1352	18M9W7D
25	1862.5 ~ 1902.5	0.1403	23M8G7D	0.1413	23M8W7D
30	1865.0 ~ 1900.0	0.1400	28M6G7D	0.1435	28M6W7D
35	1867.5 ~ 1897.5	0.1352	33M5G7D	0.1040	33M6W7D
40	1870.0 ~ 1895.0	0.1455	38M6G7D	0.1435	38M6W7D

5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0793	4M46G7D	0.0650	4M47W7D
10	829.0 ~ 844.0	0.0800	9M27G7D	0.0656	9M28W7D
15	831.5 ~ 841.5	0.0798	14M1G7D	0.0659	14M1W7D
20	834.0 ~ 839.0	0.0798	18M9G7D	0.0649	19M0W7D



5G NR n66 SA - Main PA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.1449	4M48G7D	0.1202	4M48W7D
10	1715.0 ~ 1775.0	0.1521	9M27G7D	0.1202	9M29W7D
15	1717.5 ~ 1772.5	0.1524	14M1G7D	0.1208	14M1W7D
20	1720.0 ~ 1770.0	0.1524	18M9G7D	0.1199	19M0W7D
25	1722.5 ~ 1767.5	0.1563	23M7G7D	0.1219	23M8W7D
30	1725.0 ~ 1765.0	0.1517	28M5G7D	0.1161	28M6W7D
35	1727.5 ~ 1762.5	0.1429	33M6G7D	0.1167	33M6W7D
40	1730.0 ~ 1760.0	0.1496	38M5G7D	0.1175	38M5W7D
45	1732.5 ~ 1757.5	0.1633	43M1G7D	0.1233	43M2W7D

5G NR n66 NSA - Other PA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.2143	4M49G7D	0.1687	4M49W7D
10	1715.0 ~ 1775.0	0.2223	9M27G7D	0.1754	9M29W7D
15	1717.5 ~ 1772.5	0.2275	14M1G7D	0.1778	14M1W7D
20	1720.0 ~ 1770.0	0.2249	18M9G7D	0.1714	18M9W7D
25	1722.5 ~ 1767.5	0.2307	23M7G7D	0.1795	23M8W7D
30	1725.0 ~ 1765.0	0.2472	28M5G7D	0.1726	28M5W7D
35	1727.5 ~ 1762.5	0.2183	33M5G7D	0.1778	33M6W7D
40	1730.0 ~ 1760.0	0.1959	38M5G7D	0.1514	38M5W7D

Note:

1. 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
2. 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n5 and the portion of 5G NR n26 subject to Part 22.
3. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH04-KS	AUDIX	E3	210616

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/Z plane) were recorded in this report.


The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	45	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n2	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n25	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	
	n26	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n66	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n25				v					-	v	v				v	v		v		
	n26				v	-	-	-	-	-	v	v				v	v		v		
	n66				v						v	v				v	v		v		
26dB and 99% Bandwidth	n25	v	v	v	v	v	v	v	v	-		v	v	v	v		v		v		
	n26	v	v	v	v	-	-	-	-	-		v	v	v	v		v		v		
	n66	v	v	v	v	v	v	v	v	v		v	v	v	v		v		v		
Conducted Band Edge	n25	v					v		v	-	v	v				v	v	v		v	
	n26	v	v		v	-	-	-	-	-	v	v				v	v	v		v	
	n66	v			v				v	v	v	v				v	v	v		v	
Conducted Spurious Emission	n25	v					v		v	-	v	v				v		v	v	v	
	n26	v	v	v	v	-	-	-	-	-	v	v				v		v	v	v	
	n66	v			v				v	v	v	v				v		v	v	v	

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	45	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Frequency Stability	n25				v					-		v					v		v		
	n26				v	-	-	-	-	-		v					v		v		
	n66				v							v					v		v		
E.R.P / E.I.R.P	n2	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n25	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	
	n26	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n66	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n5	Worst Case																v			
	n25	Worst Case																v			
	n26	Worst Case																v			
	n66	Worst Case																v			
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "- " means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.6V. ; High Voltage =4.3V																				

2.2 Connection Diagram of Test System

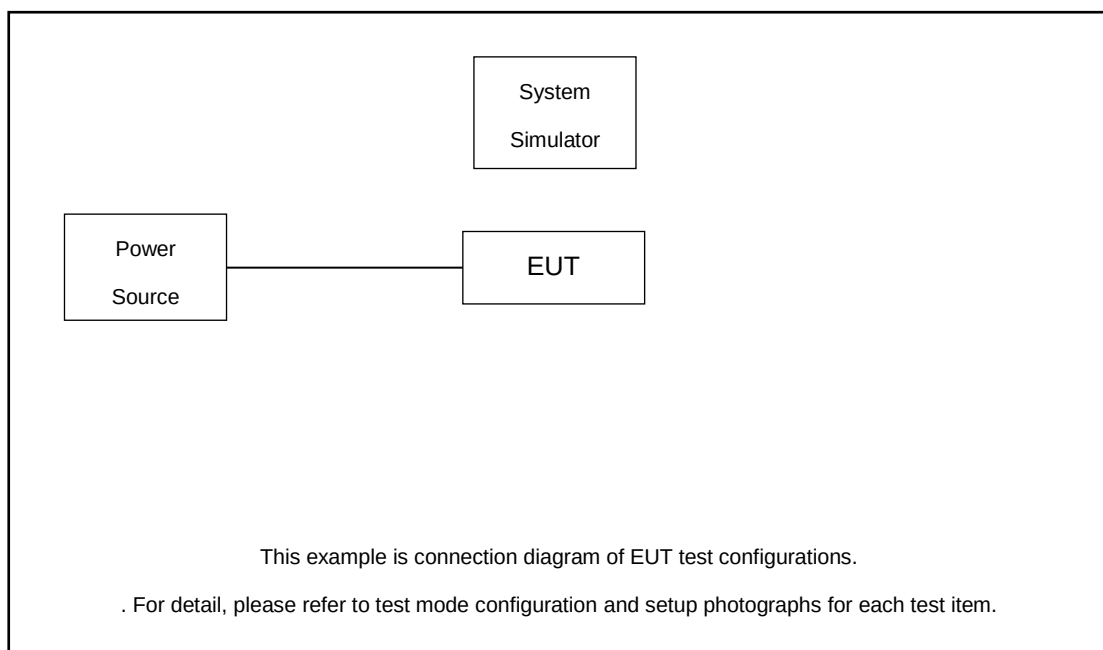

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 15.4 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 15.4 + 10 = 25.4 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376000	378000
	Frequency	1870	1880	1890
35	Channel	373500	376000	378500
	Frequency	1867.5	1880	1892.5
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
45	Channel	346500	349000	351500
	Frequency	1732.5	1745	1757.5
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
35	Channel	345500	349000	352500
	Frequency	1727.5	1745	1762.5
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

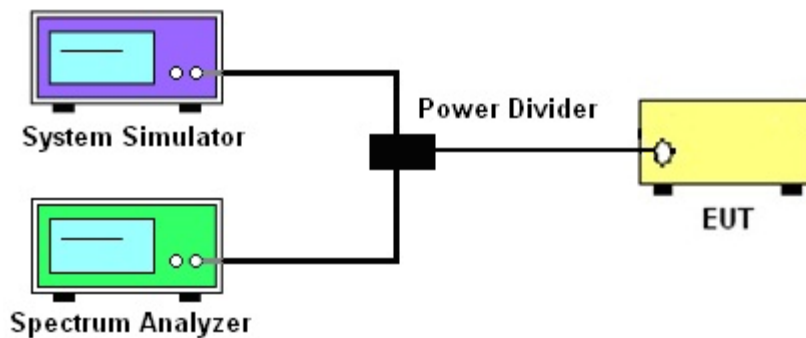

3.2.3 Frequency Stability

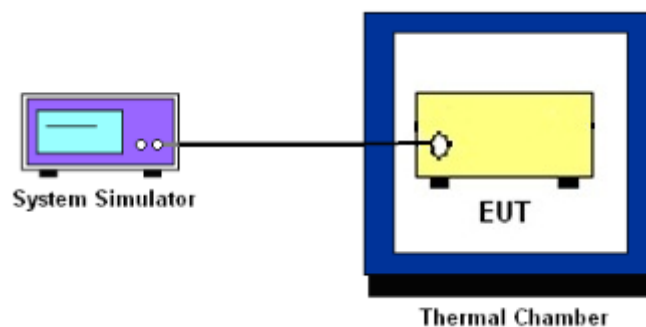

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

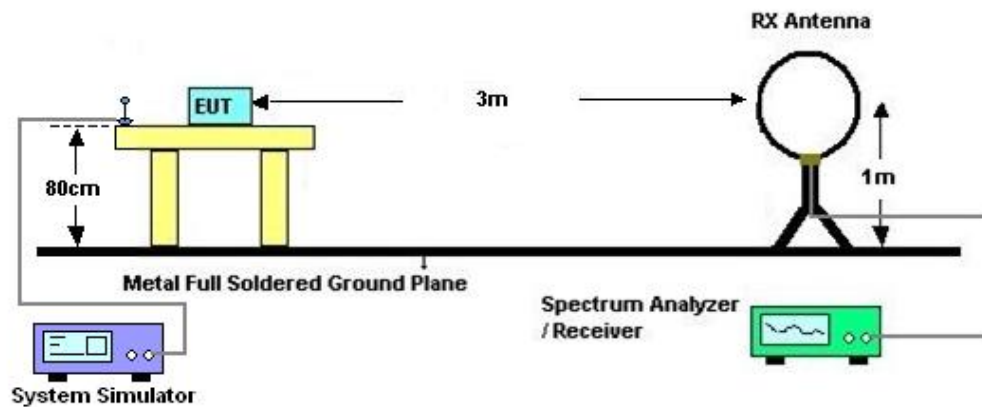

4.2.2 For radiated test from 30MHz to 1GHz

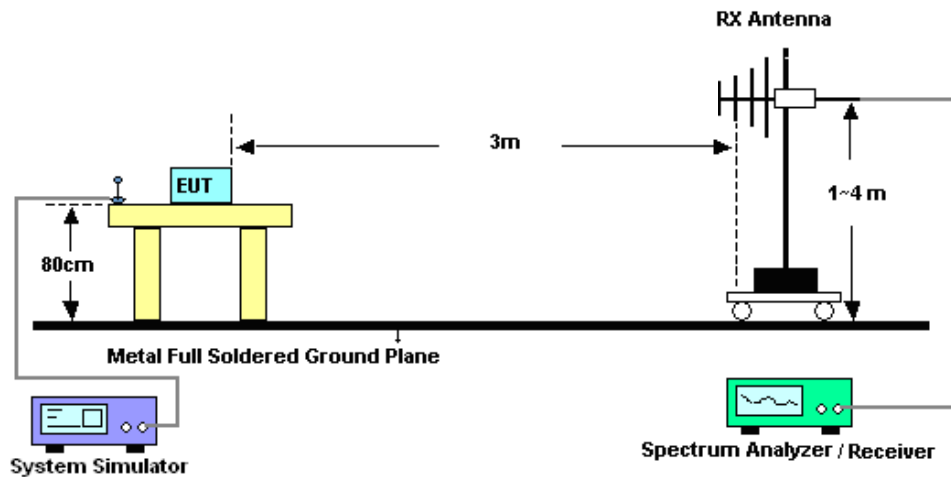

4.2.3 For radiated test above 1GHz

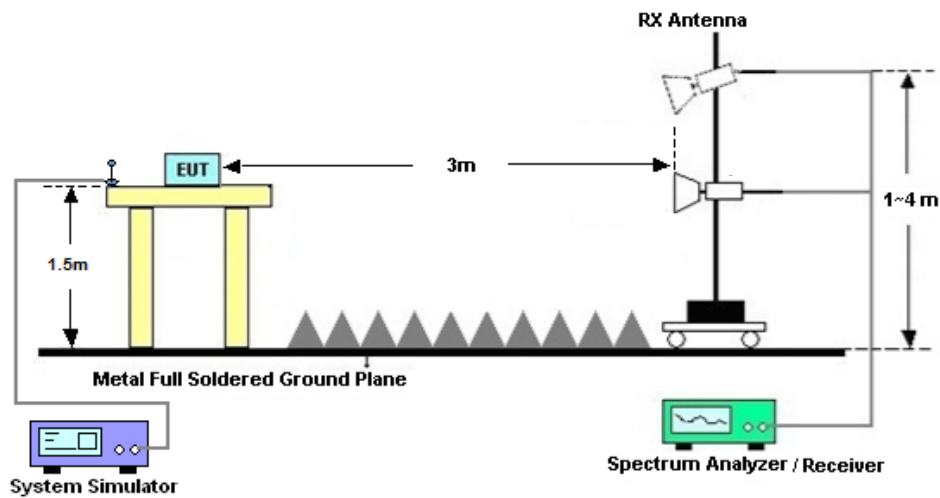

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 11, 2023	Aug. 31, 2024~ Oct. 12, 2024	Oct. 10, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 31, 2024~ Oct. 12, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 31, 2024~ Oct. 12, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Sep. 27, 2024 ~Sep. 29, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 11, 2023	Sep. 27, 2024 ~Sep. 29, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Sep. 27, 2024 ~Sep. 29, 2024	Sep. 07, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 06, 2023	Sep. 27, 2024 ~Sep. 29, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Sep. 27, 2024 ~Sep. 29, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Sep. 27, 2024 ~Sep. 29, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Sep. 27, 2024 ~Sep. 29, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Sep. 27, 2024 ~Sep. 29, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 11, 2023	Sep. 27, 2024 ~Sep. 29, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz-18Ghz	Oct. 11, 2023	Sep. 27, 2024 ~Sep. 29, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 27, 2024 ~Sep. 29, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 27, 2024 ~Sep. 29, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 27, 2024 ~Sep. 29, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.50 dB
Frequency Stability	±0.04 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring uncertainty for a level of Confidence of 95% ($u = 2uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and ERP/EIRP

5G NR n2 <Ant.4>

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	5	370500	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.04	21.04	0.1271
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.15	21.15	0.1303
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	23.30	20.30	0.1072
2	15	5	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.08	21.08	0.1282
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	24.09	21.09	0.1285
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.21	20.21	0.1050
2	15	5	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	23.91	20.91	0.1233
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.74	20.74	0.1186
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.76	19.76	0.0946
2	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	24.22	21.22	0.1324
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	24.27	21.27	0.1340
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	23.25	20.25	0.1059
2	15	10	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.15	21.15	0.1303
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	24.31	21.31	0.1352
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.25	20.25	0.1059
2	15	10	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	23.94	20.94	0.1242
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	23.89	20.89	0.1227
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.82	19.82	0.0959
2	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.21	21.21	0.1321
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.33	21.33	0.1358
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	23.29	20.29	0.1069
2	15	15	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.19	21.19	0.1315
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	24.25	21.25	0.1334
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.39	20.39	0.1094
2	15	15	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	24.03	21.03	0.1268
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.92	20.92	0.1236
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.92	19.92	0.0982
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	24.17	21.17	0.1309
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	24.29	21.29	0.1346
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	23.18	20.18	0.1042
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.07	21.07	0.1279
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	24.22	21.22	0.1324
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.34	20.34	0.1081
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	23.96	20.96	0.1247
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	23.91	20.91	0.1233
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.97	19.97	0.0993
2	15	25	372500	1862.5	DFT-s-OFDM PI/2 BPSK	1@1	24.31	21.31	0.1352



2	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	24.25	21.25	0.1334
2	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	23.33	20.33	0.1079
2	15	25	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.22	21.22	0.1324
2	15	25	376000	1880	DFT-s-OFDM QPSK	1@1	24.25	21.25	0.1334
2	15	25	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.52	20.52	0.1127
2	15	25	379500	1897.5	DFT-s-OFDM PI/2 BPSK	1@1	24.08	21.08	0.1282
2	15	25	379500	1897.5	DFT-s-OFDM QPSK	1@1	24.04	21.04	0.1271
2	15	25	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	23.11	20.11	0.1026
2	15	30	373000	1865	DFT-s-OFDM PI/2 BPSK	1@1	24.36	21.36	0.1368
2	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	24.32	21.32	0.1355
2	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	23.43	20.43	0.1104
2	15	30	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.19	21.19	0.1315
2	15	30	376000	1880	DFT-s-OFDM QPSK	1@1	24.31	21.31	0.1352
2	15	30	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.37	20.37	0.1089
2	15	30	379000	1895	DFT-s-OFDM PI/2 BPSK	1@1	24.11	21.11	0.1291
2	15	30	379000	1895	DFT-s-OFDM QPSK	1@1	24.06	21.06	0.1276
2	15	30	379000	1895	DFT-s-OFDM 16 QAM	1@1	23.23	20.23	0.1054
2	15	35	373500	1867.5	DFT-s-OFDM PI/2 BPSK	1@1	24.16	21.16	0.1306
2	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	24.25	21.25	0.1334
2	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	23.23	20.23	0.1054
2	15	35	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.04	21.04	0.1271
2	15	35	376000	1880	DFT-s-OFDM QPSK	1@1	24.09	21.09	0.1285
2	15	35	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.28	20.28	0.1067
2	15	35	378500	1892.5	DFT-s-OFDM PI/2 BPSK	1@1	23.94	20.94	0.1242
2	15	35	378500	1892.5	DFT-s-OFDM QPSK	1@1	24.18	21.18	0.1312
2	15	35	378500	1892.5	DFT-s-OFDM 16 QAM	1@1	23.15	20.15	0.1035
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	24.31	21.31	0.1352
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	24.26	21.26	0.1337
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	24.15	21.15	0.1303
2	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	24.34	21.34	0.1361
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	24.18	21.18	0.1312
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	24.33	21.33	0.1358
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	23.40	20.40	0.1096
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	23.28	20.28	0.1067
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	23.31	20.31	0.1074
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	21.89	18.89	0.0774
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	21.93	18.93	0.0782
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	22.03	19.03	0.0800
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	19.85	16.85	0.0484
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	19.28	16.28	0.0425
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	19.34	16.34	0.0431
2	15	40	374000	1870	CP-OFDM QPSK	108@54	22.97	19.97	0.0993
2	15	40	374000	1870	CP-OFDM QPSK	1@1	22.98	19.98	0.0995
2	15	40	374000	1870	CP-OFDM QPSK	1@214	23.13	20.13	0.1030
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	108@54	24.23	21.23	0.1327
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.32	21.32	0.1355
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@214	24.21	21.21	0.1321
2	15	40	376000	1880	DFT-s-OFDM QPSK	108@54	24.33	21.33	0.1358
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@1	24.39	21.39	0.1377
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@214	24.43	21.43	0.1390



2	15	40	376000	1880	DFT-s-OFDM 16 QAM	108@54	23.47	20.47	0.1114
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.35	20.35	0.1084
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@214	23.37	20.37	0.1089
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	108@54	22.01	19.01	0.0796
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@1	21.99	18.99	0.0793
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@214	22.10	19.10	0.0813
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	108@54	19.85	16.85	0.0484
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@1	19.44	16.44	0.0441
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@214	19.39	16.39	0.0436
2	15	40	376000	1880	CP-OFDM QPSK	108@54	23.04	20.04	0.1009
2	15	40	376000	1880	CP-OFDM QPSK	1@1	23.13	20.13	0.1030
2	15	40	376000	1880	CP-OFDM QPSK	1@214	23.28	20.28	0.1067
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	108@54	24.09	21.09	0.1285
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@1	24.03	21.03	0.1268
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@214	24.01	21.01	0.1262
2	15	40	378000	1890	DFT-s-OFDM QPSK	108@54	24.08	21.08	0.1282
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@1	24.12	21.12	0.1294
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@214	24.20	21.20	0.1318
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	108@54	23.26	20.26	0.1062
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@1	23.10	20.10	0.1023
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@214	23.03	20.03	0.1007
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	108@54	21.77	18.77	0.0753
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@1	21.77	18.77	0.0753
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@214	21.82	18.82	0.0762
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	108@54	19.69	16.69	0.0467
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@1	19.14	16.14	0.0411
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@214	19.20	16.20	0.0417
2	15	40	378000	1890	CP-OFDM QPSK	108@54	22.85	19.85	0.0966
2	15	40	378000	1890	CP-OFDM QPSK	1@1	22.79	19.79	0.0953
2	15	40	378000	1890	CP-OFDM QPSK	1@214	22.87	19.87	0.0971



5G NR n5 <Ant.0>

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	25.00	18.35	0.0684
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	25.06	18.41	0.0693
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	25.03	18.38	0.0689
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	25.06	18.41	0.0693
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	25.06	18.41	0.0693
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	24.94	18.29	0.0675
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	24.00	17.35	0.0543
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	23.88	17.23	0.0528
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	23.85	17.20	0.0525
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	22.57	15.92	0.0391
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	22.60	15.95	0.0394
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	22.64	15.99	0.0397
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	20.45	13.80	0.0240
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	19.87	13.22	0.0210
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	19.91	13.26	0.0212
5	15	20	166800	834	CP-OFDM QPSK	53@26	23.50	16.85	0.0484
5	15	20	166800	834	CP-OFDM QPSK	1@1	23.71	17.06	0.0508
5	15	20	166800	834	CP-OFDM QPSK	1@104	23.58	16.93	0.0493
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	24.97	18.32	0.0679
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.07	18.42	0.0695
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	25.00	18.35	0.0684
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	25.12	18.47	0.0703
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	25.12	18.47	0.0703
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	25.05	18.40	0.0692
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	24.06	17.41	0.0551
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.83	17.18	0.0522
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	23.90	17.25	0.0531
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	22.53	15.88	0.0387
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	22.72	16.07	0.0405
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	22.64	15.99	0.0397
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	20.43	13.78	0.0239
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	19.87	13.22	0.0210
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	19.91	13.26	0.0212
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	23.55	16.90	0.0490
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	23.76	17.11	0.0514
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	23.59	16.94	0.0494
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	25.04	18.39	0.0690
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	25.05	18.40	0.0692
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	25.09	18.44	0.0698
5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	25.10	18.45	0.0700
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	25.11	18.46	0.0701
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	25.01	18.36	0.0685
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	23.95	17.30	0.0537
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	23.90	17.25	0.0531
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	23.81	17.16	0.0520
5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	22.54	15.89	0.0388



5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	22.67	16.02	0.0400
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	22.56	15.91	0.0390
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	20.50	13.85	0.0243
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	19.89	13.24	0.0211
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	19.97	13.32	0.0215
5	15	20	167800	839	CP-OFDM QPSK	53@26	23.57	16.92	0.0492
5	15	20	167800	839	CP-OFDM QPSK	1@1	23.68	17.03	0.0505
5	15	20	167800	839	CP-OFDM QPSK	1@104	23.48	16.83	0.0482
5	15	5	165300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	25.09	18.44	0.0698
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	25.13	18.48	0.0705
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	24.03	17.38	0.0547
5	15	5	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.05	18.40	0.0692
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	25.12	18.47	0.0703
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.92	17.27	0.0533
5	15	5	169300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	24.94	18.29	0.0675
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	25.00	18.35	0.0684
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	23.96	17.31	0.0538
5	15	10	165800	829	DFT-s-OFDM PI/2 BPSK	1@1	25.09	18.44	0.0698
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	25.17	18.52	0.0711
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	24.06	17.41	0.0551
5	15	10	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	24.98	18.33	0.0681
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	25.04	18.39	0.0690
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.99	17.34	0.0542
5	15	10	168800	844	DFT-s-OFDM PI/2 BPSK	1@1	25.09	18.44	0.0698
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	25.11	18.46	0.0701
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	24.00	17.35	0.0543
5	15	15	166300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	25.09	18.44	0.0698
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	25.12	18.47	0.0703
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	24.02	17.37	0.0546
5	15	15	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.09	18.44	0.0698
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	25.16	18.51	0.0710
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.07	17.42	0.0552
5	15	15	168300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	25.15	18.50	0.0708
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	25.14	18.49	0.0706
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	23.94	17.29	0.0536



5G NR n25 <Ant.4>

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	24.42	21.42	0.1387
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	24.38	21.38	0.1374
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	24.13	21.13	0.1297
25	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	24.35	21.35	0.1365
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	24.49	21.49	0.1409
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	24.37	21.37	0.1371
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	24.02	21.02	0.1265
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	24.15	21.15	0.1303
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	24.32	21.32	0.1355
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	23.1	20.1	0.1023
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	23.17	20.17	0.1040
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	22.99	19.99	0.0998
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	21.06	18.06	0.0640
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	20.8	17.8	0.0603
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	20.58	17.58	0.0573
25	15	40	374000	1870	CP-OFDM QPSK	108@54	24.13	21.13	0.1297
25	15	40	374000	1870	CP-OFDM QPSK	1@1	24.32	21.32	0.1355
25	15	40	374000	1870	CP-OFDM QPSK	1@214	24.07	21.07	0.1279
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	108@54	24.23	21.23	0.1327
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.34	21.34	0.1361
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@214	24.34	21.34	0.1361
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	108@54	24.36	21.36	0.1368
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.42	21.42	0.1387
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@214	24.38	21.38	0.1374
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	108@54	24.21	21.21	0.1321
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.44	21.44	0.1393
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@214	24.4	21.4	0.1380
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	108@54	22.98	19.98	0.0995
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	23.19	20.19	0.1045
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@214	23.06	20.06	0.1014
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	108@54	20.9	17.9	0.0617
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	20.72	17.72	0.0592
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@214	20.59	17.59	0.0574
25	15	40	376500	1882.5	CP-OFDM QPSK	108@54	23.95	20.95	0.1245
25	15	40	376500	1882.5	CP-OFDM QPSK	1@1	24.29	21.29	0.1346
25	15	40	376500	1882.5	CP-OFDM QPSK	1@214	24.2	21.2	0.1318
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	108@54	24.39	21.39	0.1377
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@1	24.44	21.44	0.1393
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@214	24.41	21.41	0.1384
25	15	40	379000	1895	DFT-s-OFDM QPSK	108@54	24.38	21.38	0.1374
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@1	24.44	21.44	0.1393
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@214	24.63	21.63	0.1455
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	108@54	24.34	21.34	0.1361
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@1	24.57	21.57	0.1435
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@214	24.6	21.6	0.1445
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	108@54	23.06	20.06	0.1014



25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@1	23.26	20.26	0.1062
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@214	23.15	20.15	0.1035
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	108@54	21.01	18.01	0.0632
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@1	20.79	17.79	0.0601
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@214	20.69	17.69	0.0587
25	15	40	379000	1895	CP-OFDM QPSK	108@54	24.04	21.04	0.1271
25	15	40	379000	1895	CP-OFDM QPSK	1@1	24.23	21.23	0.1327
25	15	40	379000	1895	CP-OFDM QPSK	1@214	24.29	21.29	0.1346
25	15	5	370500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	24.17	21.17	0.1309
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.27	21.27	0.1340
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	24.48	21.48	0.1406
25	15	5	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.07	21.07	0.1279
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.21	21.21	0.1321
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.37	21.37	0.1371
25	15	5	382500	1912.5	DFT-s-OFDM PI/2 BPSK	1@1	24.02	21.02	0.1265
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	24.2	21.2	0.1318
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	24.36	21.36	0.1368
25	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	24.31	21.31	0.1352
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	24.34	21.34	0.1361
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	24.43	21.43	0.1390
25	15	10	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.09	21.09	0.1285
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.19	21.19	0.1315
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.2	21.2	0.1318
25	15	10	382000	1910	DFT-s-OFDM PI/2 BPSK	1@1	24.14	21.14	0.1300
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	24.31	21.31	0.1352
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	24.2	21.2	0.1318
25	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.33	21.33	0.1358
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.36	21.36	0.1368
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	24.47	21.47	0.1403
25	15	15	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.18	21.18	0.1312
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.31	21.31	0.1352
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.29	21.29	0.1346
25	15	15	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	24.19	21.19	0.1315
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	24.32	21.32	0.1355
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	24.28	21.28	0.1343
25	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	24.21	21.21	0.1321
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	24.28	21.28	0.1343
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	24.31	21.31	0.1352
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.17	21.17	0.1309
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.16	21.16	0.1306
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.24	21.24	0.1330
25	15	20	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	24.1	21.1	0.1288
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	24.26	21.26	0.1337
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	24.28	21.28	0.1343
25	15	25	372500	1862.5	DFT-s-OFDM PI/2 BPSK	1@1	24.4	21.4	0.1380
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	24.41	21.41	0.1384
25	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	24.5	21.5	0.1413
25	15	25	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.28	21.28	0.1343
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.47	21.47	0.1403
25	15	25	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.41	21.41	0.1384



25	15	25	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	24.17	21.17	0.1309
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@1	24.37	21.37	0.1371
25	15	25	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	24.3	21.3	0.1349
25	15	30	373000	1865	DFT-s-OFDM PI/2 BPSK	1@1	24.46	21.46	0.1400
25	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	24.46	21.46	0.1400
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	24.57	21.57	0.1435
25	15	30	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.31	21.31	0.1352
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.35	21.35	0.1365
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	24.41	21.41	0.1384
25	15	30	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	24.17	21.17	0.1309
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@1	24.36	21.36	0.1368
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@1	24.29	21.29	0.1346
25	15	35	373500	1867.5	DFT-s-OFDM PI/2 BPSK	1@1	24.22	21.22	0.1324
25	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	24.24	21.24	0.1330
25	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	23.06	20.06	0.1014
25	15	35	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.31	21.31	0.1352
25	15	35	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.21	21.21	0.1321
25	15	35	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.1	20.1	0.1023
25	15	35	379500	1897.5	DFT-s-OFDM PI/2 BPSK	1@1	24.23	21.23	0.1327
25	15	35	379500	1897.5	DFT-s-OFDM QPSK	1@1	24.24	21.24	0.1330
25	15	35	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	23.17	20.17	0.1040



5G NR n26 <Ant.0>

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
26	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	25.66	19.01	0.0796
26	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	25.59	18.94	0.0783
26	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	25.57	18.92	0.0780
26	15	20	166800	834	DFT-s-OFDM QPSK	50@25	25.66	19.01	0.0796
26	15	20	166800	834	DFT-s-OFDM QPSK	1@1	25.61	18.96	0.0787
26	15	20	166800	834	DFT-s-OFDM QPSK	1@104	25.64	18.99	0.0793
26	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	24.64	17.99	0.0630
26	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	24.69	18.04	0.0637
26	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	24.66	18.01	0.0632
26	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	23.08	16.43	0.0440
26	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	23.23	16.58	0.0455
26	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	23.12	16.47	0.0444
26	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	21.17	14.52	0.0283
26	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	20.89	14.24	0.0265
26	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	20.86	14.21	0.0264
26	15	20	166800	834	CP-OFDM QPSK	53@26	24.25	17.6	0.0575
26	15	20	166800	834	CP-OFDM QPSK	1@1	24.39	17.74	0.0594
26	15	20	166800	834	CP-OFDM QPSK	1@104	24.18	17.53	0.0566
26	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	25.62	18.97	0.0789
26	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.58	18.93	0.0782
26	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	25.52	18.87	0.0771
26	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	25.59	18.94	0.0783
26	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	25.63	18.98	0.0791
26	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	25.61	18.96	0.0787
26	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	24.56	17.91	0.0618
26	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.77	18.12	0.0649
26	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	24.68	18.03	0.0635
26	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	23.16	16.51	0.0448
26	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	23.28	16.63	0.0460
26	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	23.14	16.49	0.0446
26	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	21.11	14.46	0.0279
26	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	20.95	14.3	0.0269
26	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	20.93	14.28	0.0268
26	15	20	167300	836.5	CP-OFDM QPSK	53@26	24.27	17.62	0.0578
26	15	20	167300	836.5	CP-OFDM QPSK	1@1	24.43	17.78	0.0600
26	15	20	167300	836.5	CP-OFDM QPSK	1@104	24.32	17.67	0.0585
26	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	25.67	19.02	0.0798
26	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	25.63	18.98	0.0791
26	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	25.54	18.89	0.0774
26	15	20	167800	839	DFT-s-OFDM QPSK	50@25	25.67	19.02	0.0798
26	15	20	167800	839	DFT-s-OFDM QPSK	1@1	25.66	19.01	0.0796
26	15	20	167800	839	DFT-s-OFDM QPSK	1@104	25.63	18.98	0.0791
26	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	24.62	17.97	0.0627
26	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	24.73	18.08	0.0643
26	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	24.71	18.06	0.0640
26	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	23.2	16.55	0.0452
26	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	23.22	16.57	0.0454
26	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	23.16	16.51	0.0448
26	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	21.19	14.54	0.0284
26	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	20.9	14.25	0.0266
26	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	20.89	14.24	0.0265
26	15	20	167800	839	CP-OFDM QPSK	53@26	24.17	17.52	0.0565



26	15	20	167800	839	CP-OFDM QPSK	1@1	24.35	17.7	0.0589
26	15	20	167800	839	CP-OFDM QPSK	1@104	24.29	17.64	0.0581
26	15	5	165300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	25.56	18.91	0.0778
26	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	25.59	18.94	0.0783
26	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	24.72	18.07	0.0641
26	15	5	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.52	18.87	0.0771
26	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	25.64	18.99	0.0793
26	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.78	18.13	0.0650
26	15	5	169300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	25.49	18.84	0.0766
26	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	25.61	18.96	0.0787
26	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	24.76	18.11	0.0647
26	15	10	165800	829	DFT-s-OFDM PI/2 BPSK	1@1	25.68	19.03	0.0800
26	15	10	165800	829	DFT-s-OFDM QPSK	1@1	25.67	19.02	0.0798
26	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	24.8	18.15	0.0653
26	15	10	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.63	18.98	0.0791
26	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	25.64	18.99	0.0793
26	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.82	18.17	0.0656
26	15	10	168800	844	DFT-s-OFDM PI/2 BPSK	1@1	25.62	18.97	0.0789
26	15	10	168800	844	DFT-s-OFDM QPSK	1@1	25.61	18.96	0.0787
26	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	24.77	18.12	0.0649
26	15	15	166300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	25.64	18.99	0.0793
26	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	25.67	19.02	0.0798
26	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	24.72	18.07	0.0641
26	15	15	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	25.63	18.98	0.0791
26	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	25.63	18.98	0.0791
26	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.84	18.19	0.0659
26	15	15	168300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	25.62	18.97	0.0789
26	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	25.66	19.01	0.0796
26	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	24.76	18.11	0.0647



5G NR n66 <Ant.4>(Main PA)

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
66	15	5	342500	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.28	21.08	0.1282
66	15	5	342500	1712.5	DFT-s-OFDM QPSK	1@1	23.76	21.56	0.1432
66	15	5	342500	1712.5	DFT-s-OFDM 16 QAM	1@1	23.00	20.80	0.1202
66	15	5	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.54	21.34	0.1361
66	15	5	349000	1745	DFT-s-OFDM QPSK	1@1	23.50	21.30	0.1349
66	15	5	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.76	20.56	0.1138
66	15	5	355500	1777.5	DFT-s-OFDM PI/2 BPSK	1@1	23.81	21.61	0.1449
66	15	5	355500	1777.5	DFT-s-OFDM QPSK	1@1	23.76	21.56	0.1432
66	15	5	355500	1777.5	DFT-s-OFDM 16 QAM	1@1	23.00	20.80	0.1202
66	15	10	343000	1715	DFT-s-OFDM PI/2 BPSK	1@1	24.02	21.82	0.1521
66	15	10	343000	1715	DFT-s-OFDM QPSK	1@1	23.83	21.63	0.1455
66	15	10	343000	1715	DFT-s-OFDM 16 QAM	1@1	22.99	20.79	0.1199
66	15	10	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.61	21.41	0.1384
66	15	10	349000	1745	DFT-s-OFDM QPSK	1@1	23.64	21.44	0.1393
66	15	10	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.80	20.60	0.1148
66	15	10	355000	1775	DFT-s-OFDM PI/2 BPSK	1@1	23.91	21.71	0.1483
66	15	10	355000	1775	DFT-s-OFDM QPSK	1@1	23.89	21.69	0.1476
66	15	10	355000	1775	DFT-s-OFDM 16 QAM	1@1	23.00	20.80	0.1202
66	15	15	343500	1717.5	DFT-s-OFDM PI/2 BPSK	1@1	23.81	21.61	0.1449
66	15	15	343500	1717.5	DFT-s-OFDM QPSK	1@1	23.87	21.67	0.1469
66	15	15	343500	1717.5	DFT-s-OFDM 16 QAM	1@1	23.02	20.82	0.1208
66	15	15	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.76	21.56	0.1432
66	15	15	349000	1745	DFT-s-OFDM QPSK	1@1	23.67	21.47	0.1403
66	15	15	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.77	20.57	0.1140
66	15	15	354500	1772.5	DFT-s-OFDM PI/2 BPSK	1@1	24.03	21.83	0.1524
66	15	15	354500	1772.5	DFT-s-OFDM QPSK	1@1	23.99	21.79	0.1510
66	15	15	354500	1772.5	DFT-s-OFDM 16 QAM	1@1	22.92	20.72	0.1180
66	15	20	344000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.34	21.14	0.1300
66	15	20	344000	1720	DFT-s-OFDM QPSK	1@1	23.98	21.78	0.1507
66	15	20	344000	1720	DFT-s-OFDM 16 QAM	1@1	22.99	20.79	0.1199
66	15	20	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.91	21.71	0.1483
66	15	20	349000	1745	DFT-s-OFDM QPSK	1@1	23.69	21.49	0.1409
66	15	20	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.74	20.54	0.1132
66	15	20	354000	1770	DFT-s-OFDM PI/2 BPSK	1@1	24.03	21.83	0.1524
66	15	20	354000	1770	DFT-s-OFDM QPSK	1@1	23.84	21.64	0.1459
66	15	20	354000	1770	DFT-s-OFDM 16 QAM	1@1	22.91	20.71	0.1178
66	15	25	344500	1722.5	DFT-s-OFDM PI/2 BPSK	1@1	24.14	21.94	0.1563
66	15	25	344500	1722.5	DFT-s-OFDM QPSK	1@1	24.07	21.87	0.1538
66	15	25	344500	1722.5	DFT-s-OFDM 16 QAM	1@1	23.06	20.86	0.1219
66	15	25	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.91	21.71	0.1483
66	15	25	349000	1745	DFT-s-OFDM QPSK	1@1	23.84	21.64	0.1459
66	15	25	349000	1745	DFT-s-OFDM 16 QAM	1@1	23.00	20.80	0.1202
66	15	25	353500	1767.5	DFT-s-OFDM PI/2 BPSK	1@1	24.09	21.89	0.1545
66	15	25	353500	1767.5	DFT-s-OFDM QPSK	1@1	24.03	21.83	0.1524
66	15	25	353500	1767.5	DFT-s-OFDM 16 QAM	1@1	22.95	20.75	0.1189
66	15	30	345000	1725	DFT-s-OFDM PI/2 BPSK	1@1	24.01	21.81	0.1517



66	15	30	345000	1725	DFT-s-OFDM QPSK	1@1	23.94	21.74	0.1493
66	15	30	345000	1725	DFT-s-OFDM 16 QAM	1@1	22.85	20.65	0.1161
66	15	30	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.71	21.51	0.1416
66	15	30	349000	1745	DFT-s-OFDM QPSK	1@1	23.69	21.49	0.1409
66	15	30	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.77	20.57	0.1140
66	15	30	353000	1765	DFT-s-OFDM PI/2 BPSK	1@1	23.85	21.65	0.1462
66	15	30	353000	1765	DFT-s-OFDM QPSK	1@1	23.87	21.67	0.1469
66	15	30	353000	1765	DFT-s-OFDM 16 QAM	1@1	22.77	20.57	0.1140
66	15	35	345500	1727.5	DFT-s-OFDM PI/2 BPSK	1@1	23.75	21.55	0.1429
66	15	35	345500	1727.5	DFT-s-OFDM QPSK	1@1	23.59	21.39	0.1377
66	15	35	345500	1727.5	DFT-s-OFDM 16 QAM	1@1	22.87	20.67	0.1167
66	15	35	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.64	21.44	0.1393
66	15	35	349000	1745	DFT-s-OFDM QPSK	1@1	23.57	21.37	0.1371
66	15	35	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.65	20.45	0.1109
66	15	35	352500	1762.5	DFT-s-OFDM PI/2 BPSK	1@1	23.68	21.48	0.1406
66	15	35	352500	1762.5	DFT-s-OFDM QPSK	1@1	23.59	21.39	0.1377
66	15	35	352500	1762.5	DFT-s-OFDM 16 QAM	1@1	22.72	20.52	0.1127
66	15	40	346000	1730	DFT-s-OFDM PI/2 BPSK	1@1	23.95	21.75	0.1496
66	15	40	346000	1730	DFT-s-OFDM QPSK	1@1	23.93	21.73	0.1489
66	15	40	346000	1730	DFT-s-OFDM 16 QAM	1@1	22.90	20.70	0.1175
66	15	40	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.65	21.45	0.1396
66	15	40	349000	1745	DFT-s-OFDM QPSK	1@1	23.69	21.49	0.1409
66	15	40	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.69	20.49	0.1119
66	15	40	352000	1760	DFT-s-OFDM PI/2 BPSK	1@1	23.85	21.65	0.1462
66	15	40	352000	1760	DFT-s-OFDM QPSK	1@1	23.81	21.61	0.1449
66	15	40	352000	1760	DFT-s-OFDM 16 QAM	1@1	22.85	20.65	0.1161
66	15	45	346500	1732.5	DFT-s-OFDM PI/2 BPSK	120@60	23.74	21.54	0.1426
66	15	45	346500	1732.5	DFT-s-OFDM PI/2 BPSK	1@1	23.77	21.57	0.1435
66	15	45	346500	1732.5	DFT-s-OFDM PI/2 BPSK	1@240	23.94	21.74	0.1493
66	15	45	346500	1732.5	DFT-s-OFDM QPSK	120@60	23.53	21.33	0.1358
66	15	45	346500	1732.5	DFT-s-OFDM QPSK	1@1	23.75	21.55	0.1429
66	15	45	346500	1732.5	DFT-s-OFDM QPSK	1@240	23.86	21.66	0.1466
66	15	45	346500	1732.5	DFT-s-OFDM 16 QAM	120@60	22.82	20.62	0.1153
66	15	45	346500	1732.5	DFT-s-OFDM 16 QAM	1@1	22.86	20.66	0.1164
66	15	45	346500	1732.5	DFT-s-OFDM 16 QAM	1@240	22.90	20.70	0.1175
66	15	45	346500	1732.5	DFT-s-OFDM 64 QAM	120@60	21.28	19.08	0.0809
66	15	45	346500	1732.5	DFT-s-OFDM 64 QAM	1@1	21.50	19.30	0.0851
66	15	45	346500	1732.5	DFT-s-OFDM 64 QAM	1@240	21.60	19.40	0.0871
66	15	45	346500	1732.5	DFT-s-OFDM 256 QAM	120@60	19.27	17.07	0.0509
66	15	45	346500	1732.5	DFT-s-OFDM 256 QAM	1@1	19.13	16.93	0.0493
66	15	45	346500	1732.5	DFT-s-OFDM 256 QAM	1@240	18.10	15.90	0.0389
66	15	45	346500	1732.5	CP-OFDM QPSK	121@60	22.36	20.16	0.1038
66	15	45	346500	1732.5	CP-OFDM QPSK	1@1	22.70	20.50	0.1122
66	15	45	346500	1732.5	CP-OFDM QPSK	1@240	22.65	20.45	0.1109
66	15	45	349000	1745	DFT-s-OFDM PI/2 BPSK	120@60	23.75	21.55	0.1429
66	15	45	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.80	21.60	0.1445
66	15	45	349000	1745	DFT-s-OFDM PI/2 BPSK	1@240	23.97	21.77	0.1503
66	15	45	349000	1745	DFT-s-OFDM QPSK	120@60	23.52	21.32	0.1355
66	15	45	349000	1745	DFT-s-OFDM QPSK	1@1	23.61	21.41	0.1384
66	15	45	349000	1745	DFT-s-OFDM QPSK	1@240	23.69	21.49	0.1409



66	15	45	349000	1745	DFT-s-OFDM 16 QAM	120@60	22.77	20.57	0.1140
66	15	45	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.68	20.48	0.1117
66	15	45	349000	1745	DFT-s-OFDM 16 QAM	1@240	22.87	20.67	0.1167
66	15	45	349000	1745	DFT-s-OFDM 64 QAM	120@60	21.24	19.04	0.0802
66	15	45	349000	1745	DFT-s-OFDM 64 QAM	1@1	21.48	19.28	0.0847
66	15	45	349000	1745	DFT-s-OFDM 64 QAM	1@240	21.59	19.39	0.0869
66	15	45	349000	1745	DFT-s-OFDM 256 QAM	120@60	19.24	17.04	0.0506
66	15	45	349000	1745	DFT-s-OFDM 256 QAM	1@1	18.95	16.75	0.0473
66	15	45	349000	1745	DFT-s-OFDM 256 QAM	1@240	18.68	16.48	0.0445
66	15	45	349000	1745	CP-OFDM QPSK	121@60	22.32	20.12	0.1028
66	15	45	349000	1745	CP-OFDM QPSK	1@1	22.52	20.32	0.1076
66	15	45	349000	1745	CP-OFDM QPSK	1@240	22.72	20.52	0.1127
66	15	45	351500	1757.5	DFT-s-OFDM PI/2 BPSK	120@60	24.04	21.84	0.1528
66	15	45	351500	1757.5	DFT-s-OFDM PI/2 BPSK	1@1	23.94	21.74	0.1493
66	15	45	351500	1757.5	DFT-s-OFDM PI/2 BPSK	1@240	24.33	22.13	0.1633
66	15	45	351500	1757.5	DFT-s-OFDM QPSK	120@60	23.77	21.57	0.1435
66	15	45	351500	1757.5	DFT-s-OFDM QPSK	1@1	23.92	21.72	0.1486
66	15	45	351500	1757.5	DFT-s-OFDM QPSK	1@240	24.10	21.90	0.1549
66	15	45	351500	1757.5	DFT-s-OFDM 16 QAM	120@60	23.00	20.80	0.1202
66	15	45	351500	1757.5	DFT-s-OFDM 16 QAM	1@1	22.83	20.63	0.1156
66	15	45	351500	1757.5	DFT-s-OFDM 16 QAM	1@240	23.11	20.91	0.1233
66	15	45	351500	1757.5	DFT-s-OFDM 64 QAM	120@60	21.52	19.32	0.0855
66	15	45	351500	1757.5	DFT-s-OFDM 64 QAM	1@1	21.54	19.34	0.0859
66	15	45	351500	1757.5	DFT-s-OFDM 64 QAM	1@240	21.73	19.53	0.0897
66	15	45	351500	1757.5	DFT-s-OFDM 256 QAM	120@60	19.35	17.15	0.0519
66	15	45	351500	1757.5	DFT-s-OFDM 256 QAM	1@1	19.00	16.80	0.0479
66	15	45	351500	1757.5	DFT-s-OFDM 256 QAM	1@240	18.86	16.66	0.0463
66	15	45	351500	1757.5	CP-OFDM QPSK	121@60	22.59	20.39	0.1094
66	15	45	351500	1757.5	CP-OFDM QPSK	1@1	22.48	20.28	0.1067
66	15	45	351500	1757.5	CP-OFDM QPSK	1@240	22.75	20.55	0.1135



ENDC 5A_n66A <Ant.0+ 3> (Other PA)

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
66	15	5	342500	1712.5	DFT-s-OFDM PI/2 BPSK	1@1	24.01	23.31	0.2143
66	15	5	342500	1712.5	DFT-s-OFDM QPSK	1@1	23.84	23.14	0.2061
66	15	5	342500	1712.5	DFT-s-OFDM 16 QAM	1@1	22.97	22.27	0.1687
66	15	5	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.82	23.12	0.2051
66	15	5	349000	1745	DFT-s-OFDM QPSK	1@1	23.62	22.92	0.1959
66	15	5	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.90	22.2	0.1660
66	15	5	355500	1777.5	DFT-s-OFDM PI/2 BPSK	1@1	23.83	23.13	0.2056
66	15	5	355500	1777.5	DFT-s-OFDM QPSK	1@1	23.77	23.07	0.2028
66	15	5	355500	1777.5	DFT-s-OFDM 16 QAM	1@1	22.90	22.2	0.1660
66	15	10	343000	1715	DFT-s-OFDM PI/2 BPSK	1@1	24.17	23.47	0.2223
66	15	10	343000	1715	DFT-s-OFDM QPSK	1@1	24.09	23.39	0.2183
66	15	10	343000	1715	DFT-s-OFDM 16 QAM	1@1	23.14	22.44	0.1754
66	15	10	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.88	23.18	0.2080
66	15	10	349000	1745	DFT-s-OFDM QPSK	1@1	23.83	23.13	0.2056
66	15	10	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.92	22.22	0.1667
66	15	10	355000	1775	DFT-s-OFDM PI/2 BPSK	1@1	23.96	23.26	0.2118
66	15	10	355000	1775	DFT-s-OFDM QPSK	1@1	23.89	23.19	0.2084
66	15	10	355000	1775	DFT-s-OFDM 16 QAM	1@1	22.87	22.17	0.1648
66	15	15	343500	1717.5	DFT-s-OFDM PI/2 BPSK	1@1	24.27	23.57	0.2275
66	15	15	343500	1717.5	DFT-s-OFDM QPSK	1@1	23.99	23.29	0.2133
66	15	15	343500	1717.5	DFT-s-OFDM 16 QAM	1@1	23.12	22.42	0.1746
66	15	15	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	24.25	23.55	0.2265
66	15	15	349000	1745	DFT-s-OFDM QPSK	1@1	24.15	23.45	0.2213
66	15	15	349000	1745	DFT-s-OFDM 16 QAM	1@1	23.20	22.5	0.1778
66	15	15	354500	1772.5	DFT-s-OFDM PI/2 BPSK	1@1	24.20	23.5	0.2239
66	15	15	354500	1772.5	DFT-s-OFDM QPSK	1@1	24.08	23.38	0.2178
66	15	15	354500	1772.5	DFT-s-OFDM 16 QAM	1@1	23.10	22.4	0.1738
66	15	20	344000	1720	DFT-s-OFDM PI/2 BPSK	1@1	24.02	23.32	0.2148
66	15	20	344000	1720	DFT-s-OFDM QPSK	1@1	24.06	23.36	0.2168
66	15	20	344000	1720	DFT-s-OFDM 16 QAM	1@1	23.01	22.31	0.1702
66	15	20	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	24.22	23.52	0.2249
66	15	20	349000	1745	DFT-s-OFDM QPSK	1@1	24.12	23.42	0.2198
66	15	20	349000	1745	DFT-s-OFDM 16 QAM	1@1	23.04	22.34	0.1714
66	15	20	354000	1770	DFT-s-OFDM PI/2 BPSK	1@1	24.13	23.43	0.2203
66	15	20	354000	1770	DFT-s-OFDM QPSK	1@1	24.00	23.30	0.2138
66	15	20	354000	1770	DFT-s-OFDM 16 QAM	1@1	23.02	22.32	0.1706
66	15	25	344500	1722.5	DFT-s-OFDM PI/2 BPSK	1@1	24.33	23.63	0.2307
66	15	25	344500	1722.5	DFT-s-OFDM QPSK	1@1	24.14	23.44	0.2208
66	15	25	344500	1722.5	DFT-s-OFDM 16 QAM	1@1	23.24	22.54	0.1795
66	15	25	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	24.13	23.43	0.2203
66	15	25	349000	1745	DFT-s-OFDM QPSK	1@1	24.02	23.32	0.2148
66	15	25	349000	1745	DFT-s-OFDM 16 QAM	1@1	23.04	22.34	0.1714
66	15	25	353500	1767.5	DFT-s-OFDM PI/2 BPSK	1@1	24.03	23.33	0.2153
66	15	25	353500	1767.5	DFT-s-OFDM QPSK	1@1	23.87	23.17	0.2075
66	15	25	353500	1767.5	DFT-s-OFDM 16 QAM	1@1	22.90	22.20	0.1660
66	15	30	345000	1725	DFT-s-OFDM PI/2 BPSK	1@1	24.16	23.46	0.2218



66	15	30	345000	1725	DFT-s-OFDM QPSK	1@1	24.03	23.33	0.2153
66	15	30	345000	1725	DFT-s-OFDM 16 QAM	1@1	23.07	22.37	0.1726
66	15	30	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	24.05	23.35	0.2163
66	15	30	349000	1745	DFT-s-OFDM QPSK	1@1	23.96	23.26	0.2118
66	15	30	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.89	22.19	0.1656
66	15	30	353000	1765	DFT-s-OFDM PI/2 BPSK	1@1	23.93	23.93	0.2472
66	15	30	353000	1765	DFT-s-OFDM QPSK	1@1	23.75	23.05	0.2018
66	15	30	353000	1765	DFT-s-OFDM 16 QAM	1@1	22.83	22.13	0.1633
66	15	35	345500	1727.5	DFT-s-OFDM PI/2 BPSK	1@1	24.09	23.39	0.2183
66	15	35	345500	1727.5	DFT-s-OFDM QPSK	1@1	23.88	23.18	0.2080
66	15	35	345500	1727.5	DFT-s-OFDM 16 QAM	1@1	23.20	22.50	0.1778
66	15	35	349000	1745	DFT-s-OFDM PI/2 BPSK	1@1	23.91	23.21	0.2094
66	15	35	349000	1745	DFT-s-OFDM QPSK	1@1	23.85	23.15	0.2065
66	15	35	349000	1745	DFT-s-OFDM 16 QAM	1@1	22.85	22.15	0.1641
66	15	35	352500	1762.5	DFT-s-OFDM PI/2 BPSK	1@1	23.85	23.15	0.2065
66	15	35	352500	1762.5	DFT-s-OFDM QPSK	1@1	23.73	23.03	0.2009
66	15	35	352500	1762.5	DFT-s-OFDM 16 QAM	1@1	22.93	22.23	0.1671
66	15	40	346000	1730	DFT-s-OFDM PI/2 BPSK	108@54	23.62	22.92	0.1959
66	15	40	346000	1730	DFT-s-OFDM PI/2 BPSK	1@1	23.53	22.83	0.1919
66	15	40	346000	1730	DFT-s-OFDM PI/2 BPSK	1@214	23.49	22.79	0.1901
66	15	40	346000	1730	DFT-s-OFDM QPSK	108@54	23.46	22.76	0.1888
66	15	40	346000	1730	DFT-s-OFDM QPSK	1@1	23.37	22.67	0.1849
66	15	40	346000	1730	DFT-s-OFDM QPSK	1@214	23.28	22.58	0.1811
66	15	40	346000	1730	DFT-s-OFDM 16 QAM	108@54	22.40	21.70	0.1479
66	15	40	346000	1730	DFT-s-OFDM 16 QAM	1@1	22.50	21.80	0.1514
66	15	40	346000	1730	DFT-s-OFDM 16 QAM	1@214	22.42	21.72	0.1486
66	15	40	352000	1760	DFT-s-OFDM 64 QAM	108@54	20.76	20.06	0.1014
66	15	40	352000	1760	DFT-s-OFDM 64 QAM	1@1	20.60	19.90	0.0977
66	15	40	352000	1760	DFT-s-OFDM 64 QAM	1@214	20.93	20.23	0.1054
66	15	40	352000	1760	DFT-s-OFDM 256 QAM	108@54	18.70	18.00	0.0631
66	15	40	352000	1760	DFT-s-OFDM 256 QAM	1@1	18.67	17.97	0.0627
66	15	40	352000	1760	DFT-s-OFDM 256 QAM	1@214	18.32	17.62	0.0578
66	15	40	352000	1760	CP-OFDM QPSK	108@54	21.80	21.10	0.1288
66	15	40	352000	1760	CP-OFDM QPSK	1@1	22.03	21.33	0.1358
66	15	40	352000	1760	CP-OFDM QPSK	1@214	22.23	21.53	0.1422



Software Version: 23.06.1602

FR1 N25 SA

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0027	PASS	NV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0041	PASS	LV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0056	PASS	HV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0017	PASS	-30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0044	PASS	-20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0029	PASS	-10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0019	PASS	0°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0022	PASS	10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0026	PASS	20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0037	PASS	30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0039	PASS	40°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0011	PASS	50°C




Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	4.13	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@0	3.76	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	5.11	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	4.72	13	PASS

N25(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH



N25(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

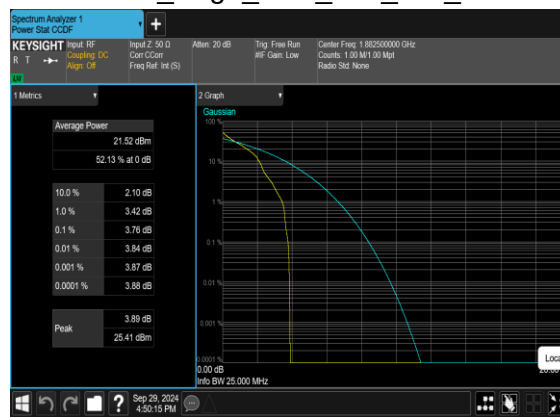

N25(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N25(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4727	5.127
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.4731	5.067
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.4796	5.167
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.4767	4.985
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.278	10.05
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.3016	10.03
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.2835	9.759
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.2865	10.01
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.107	14.79
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.112	15.04
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.114	14.94
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.114	14.82
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.933	19.97
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.924	19.94
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.914	19.84
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	18.945	19.91
25	15	25	376500	1882.5	CP-OFDM QPSK	133@0	23.803	24.86
25	15	25	376500	1882.5	CP-OFDM 16 QAM	133@0	23.795	24.88
25	15	25	376500	1882.5	CP-OFDM 64 QAM	133@0	23.779	24.77
25	15	25	376500	1882.5	CP-OFDM 256 QAM	133@0	23.757	24.8
25	15	30	376500	1882.5	CP-OFDM QPSK	160@0	28.567	29.58
25	15	30	376500	1882.5	CP-OFDM 16 QAM	160@0	28.515	29.6
25	15	30	376500	1882.5	CP-OFDM 64 QAM	160@0	28.608	29.67
25	15	30	376500	1882.5	CP-OFDM 256 QAM	160@0	28.547	29.7
25	15	35	376500	1882.5	CP-OFDM QPSK	188@0	33.539	34.85
25	15	35	376500	1882.5	CP-OFDM 16 QAM	188@0	33.486	34.77
25	15	35	376500	1882.5	CP-OFDM 64 QAM	188@0	33.593	34.85
25	15	35	376500	1882.5	CP-OFDM 256 QAM	188@0	33.564	34.89
25	15	40	376500	1882.5	CP-OFDM QPSK	216@0	38.559	39.88
25	15	40	376500	1882.5	CP-OFDM 16 QAM	216@0	38.616	39.96
25	15	40	376500	1882.5	CP-OFDM 64 QAM	216@0	38.599	39.91
25	15	40	376500	1882.5	CP-OFDM 256 QAM	216@0	38.537	40.06




N25(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

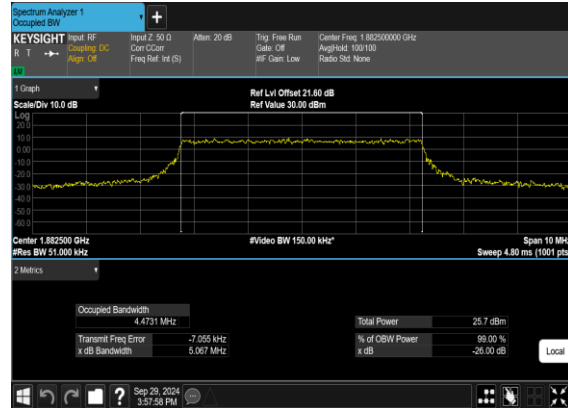

N25(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

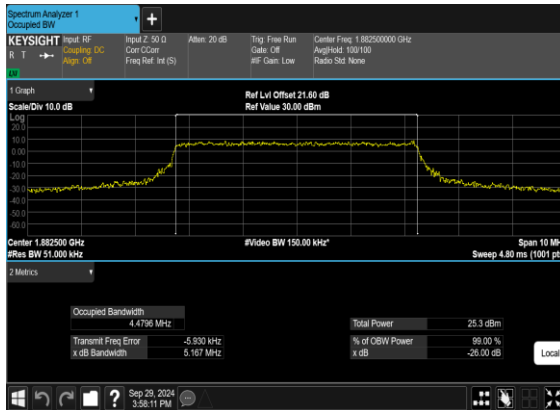


N25(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

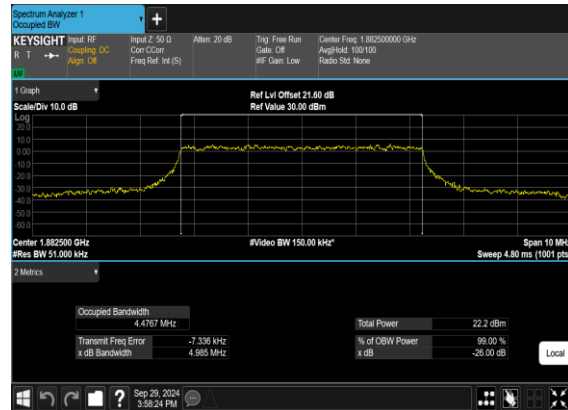





N25(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

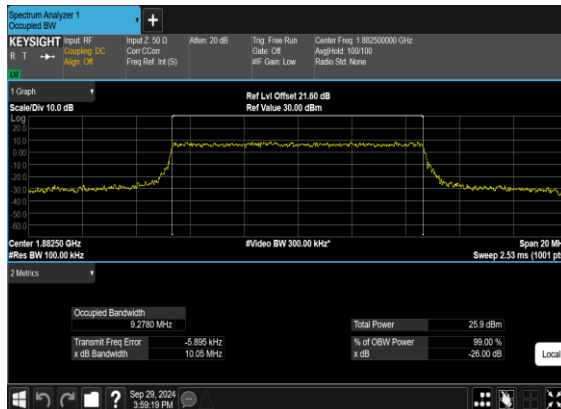


N25(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH




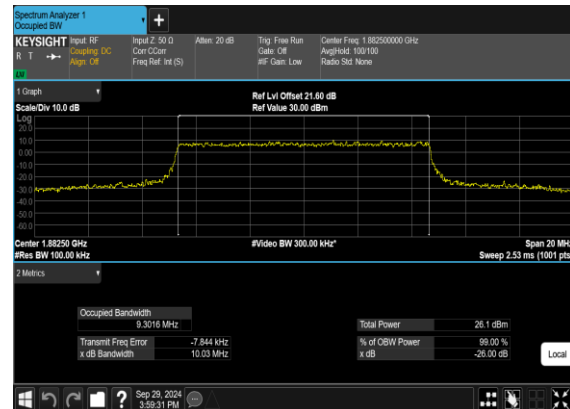


N25(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

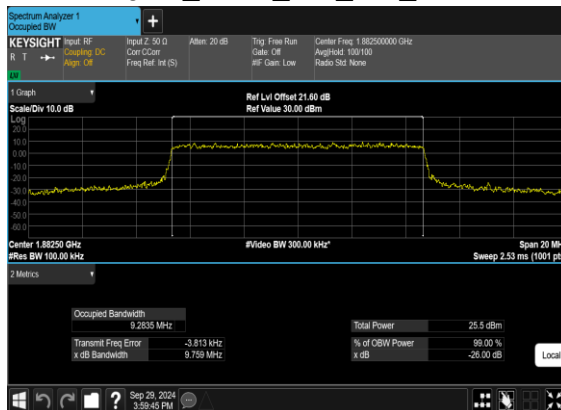


N25(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

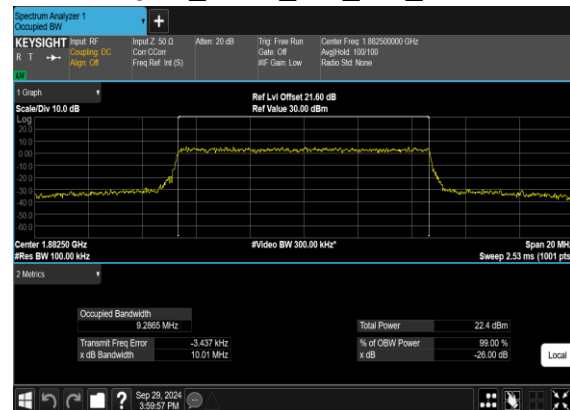







N25(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

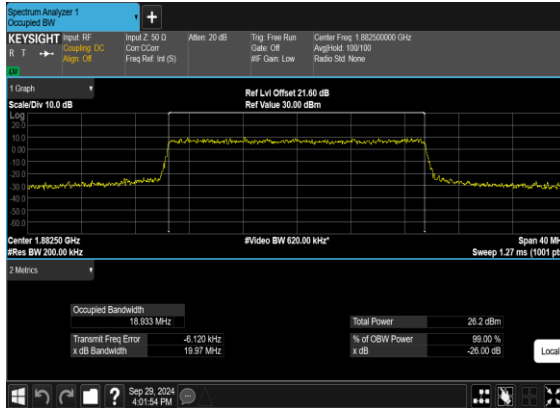


N25(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

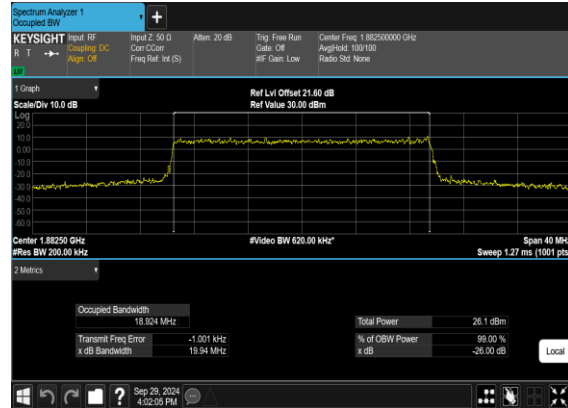

N25(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

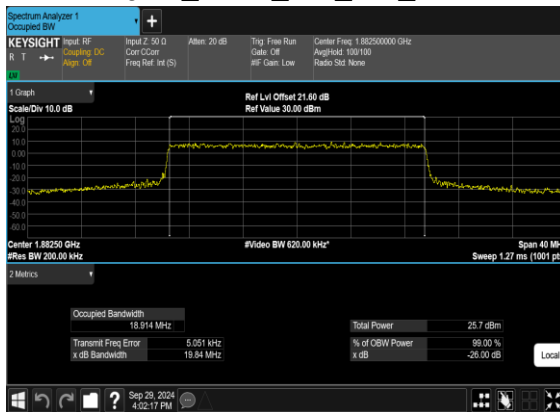


N25(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

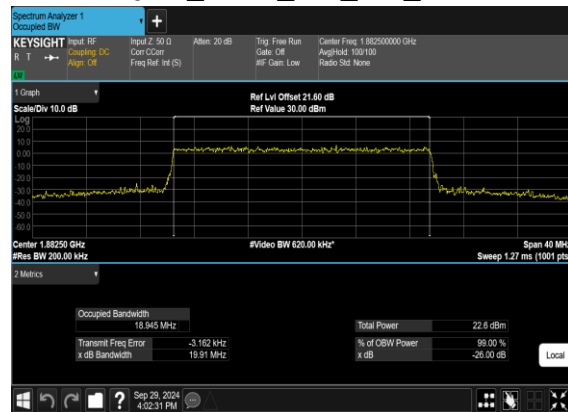





N25(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

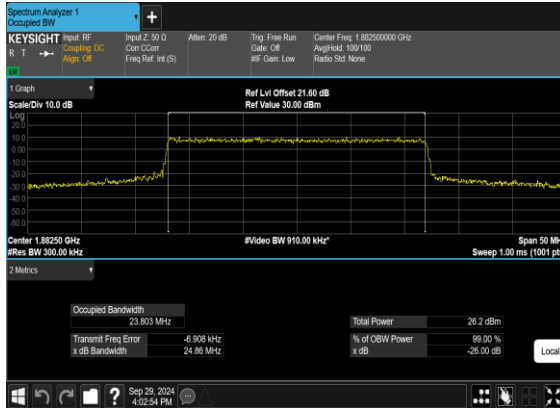


N25(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

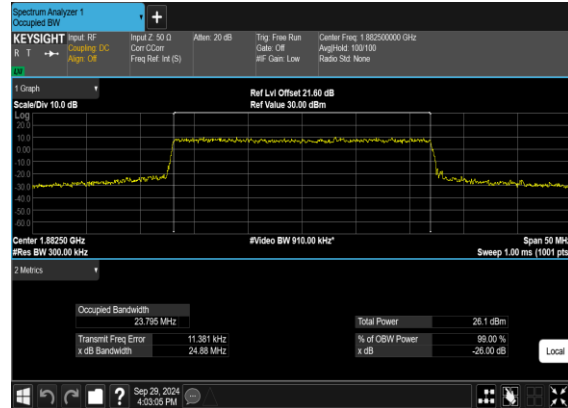

N25(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

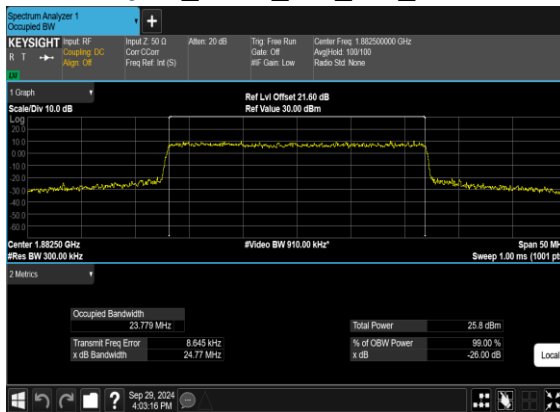

N25(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

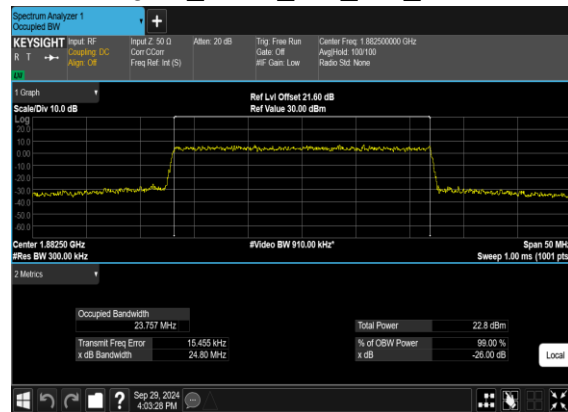




N25(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N25(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

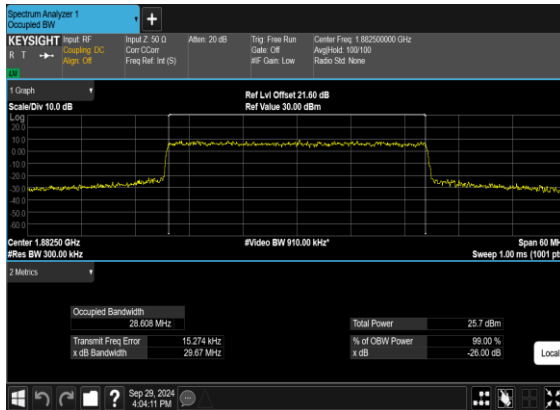


N25(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

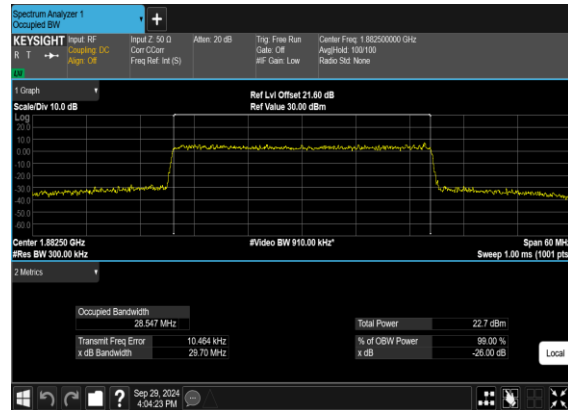





N25(35M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

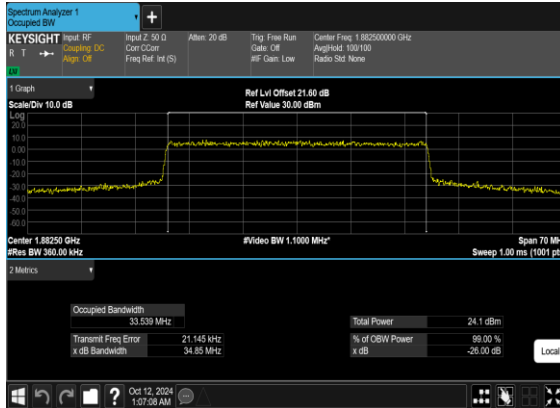


N25(35M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

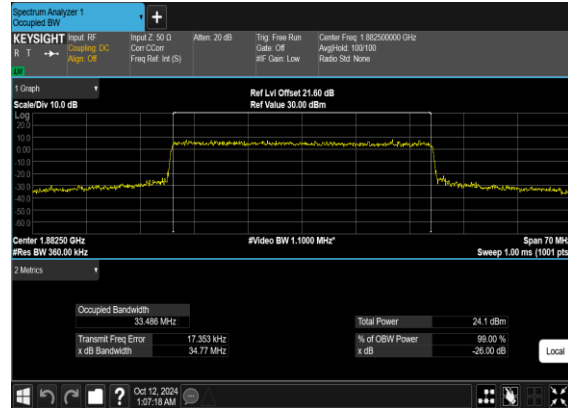

N25(35M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

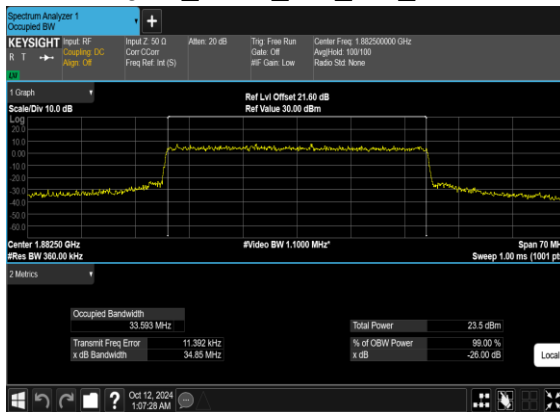

N25(35M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

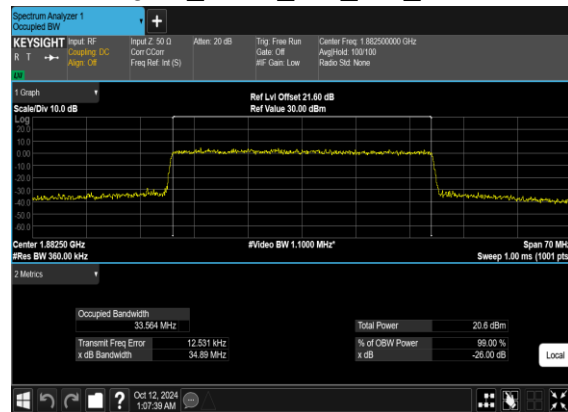





N25(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

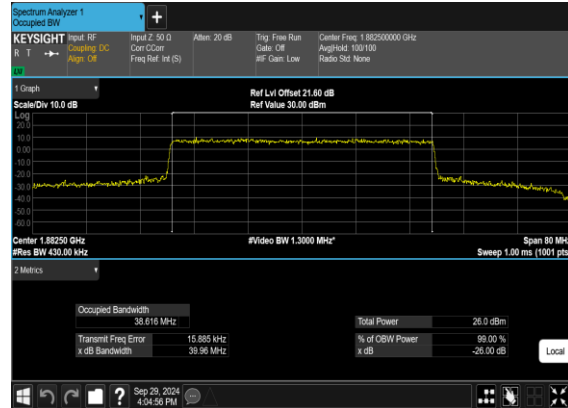

N25(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

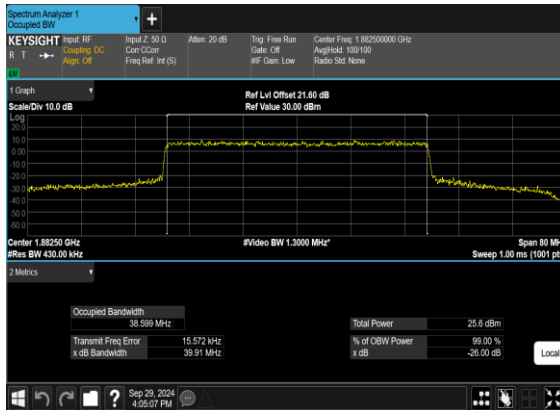

N25(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

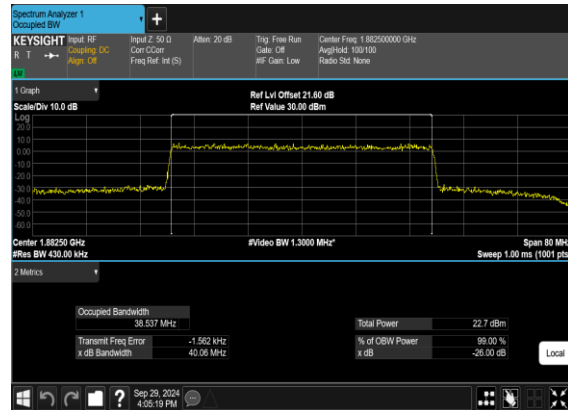


**Conducted Spurious Emissions**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	25	372500	1862.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	25	372500	1862.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	25	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	25	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	25	380500	1902.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	25	380500	1902.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	40	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

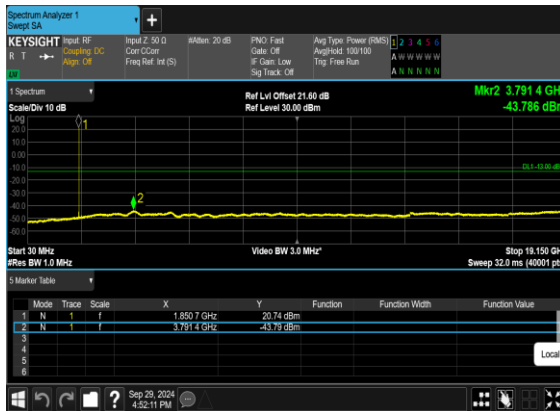


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

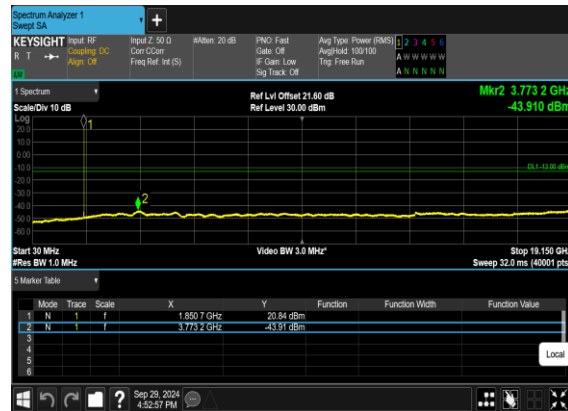


N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

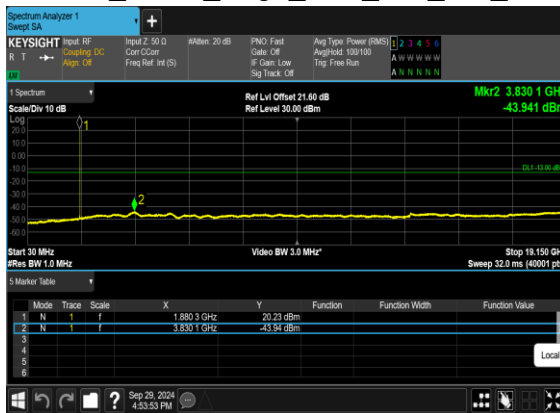


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

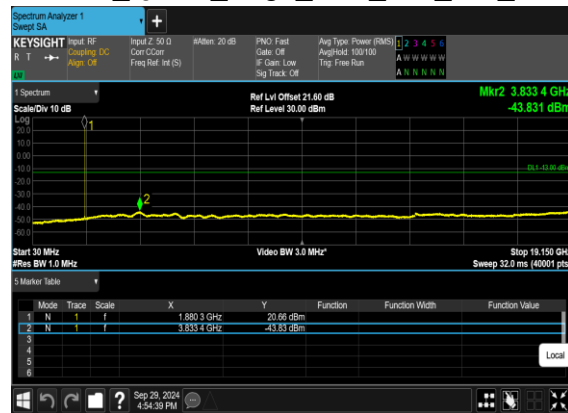

N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

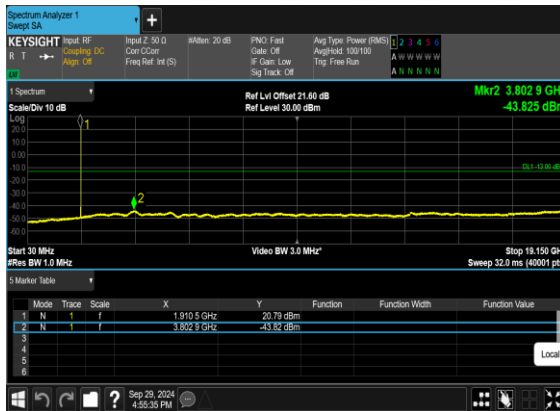


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

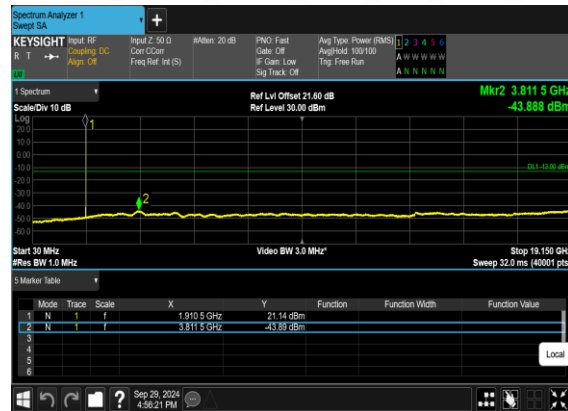





N25(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

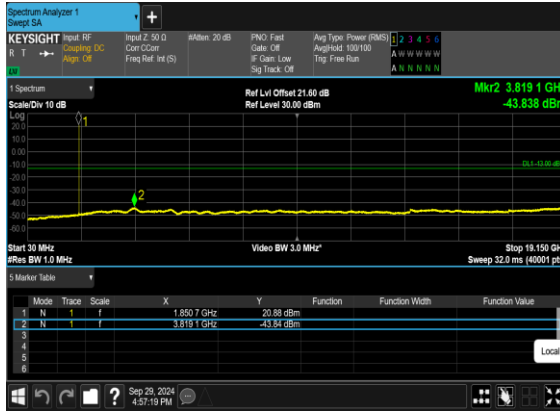


N25(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

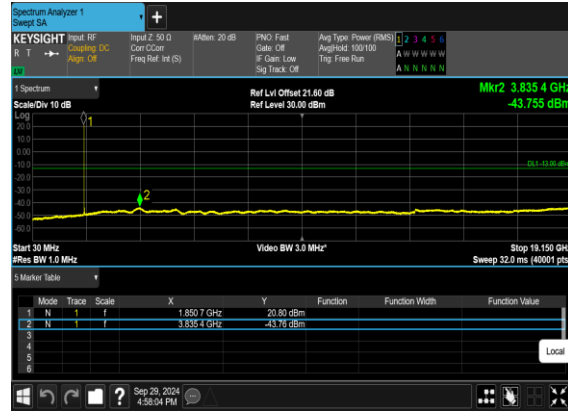


N25(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

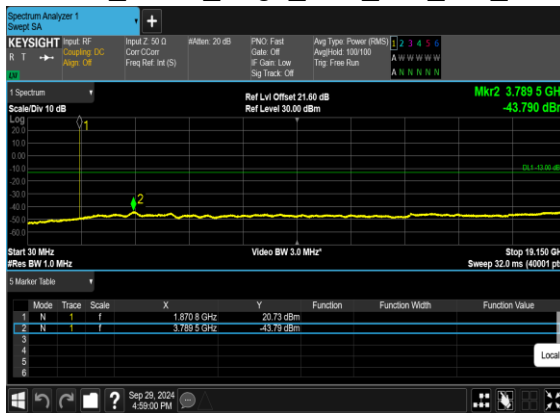


N25(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

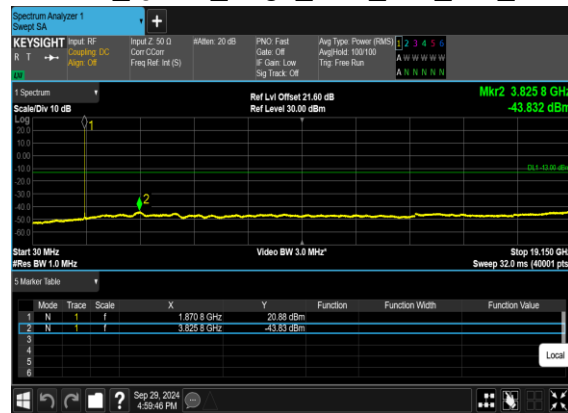

N25(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

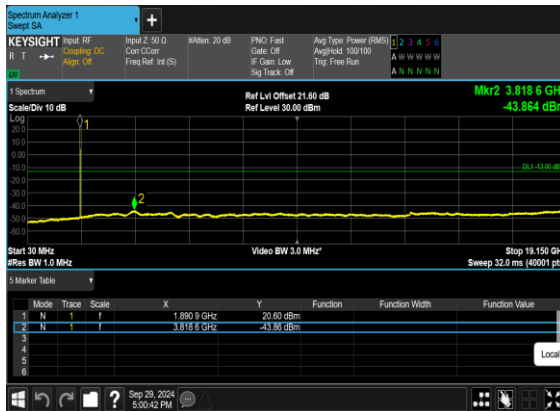


N25(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

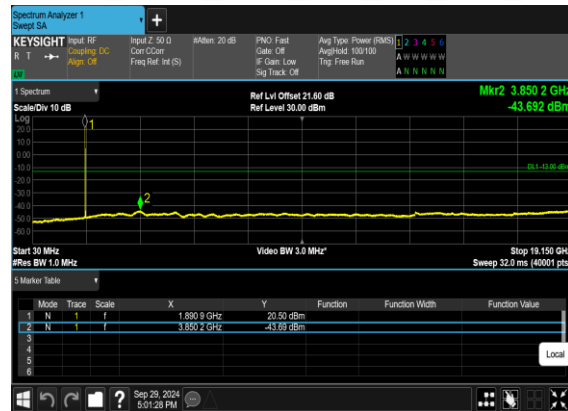





N25(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

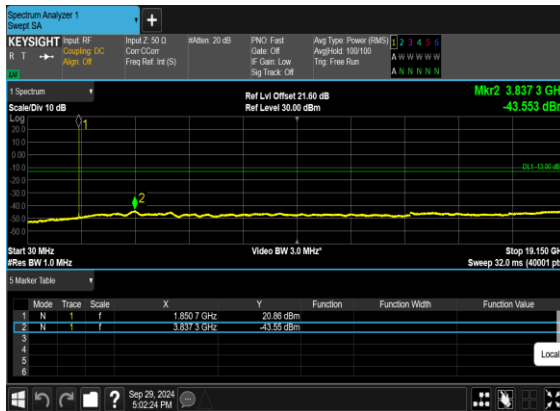


N25(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

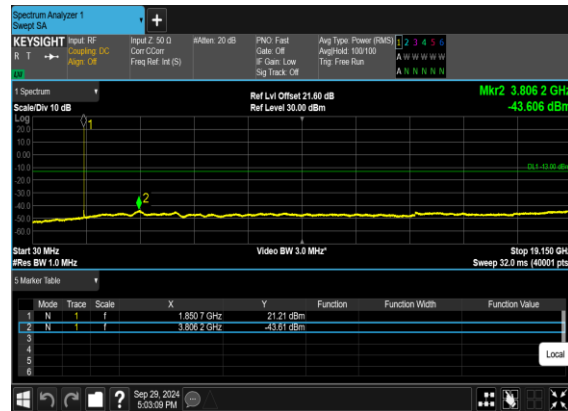


N25(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

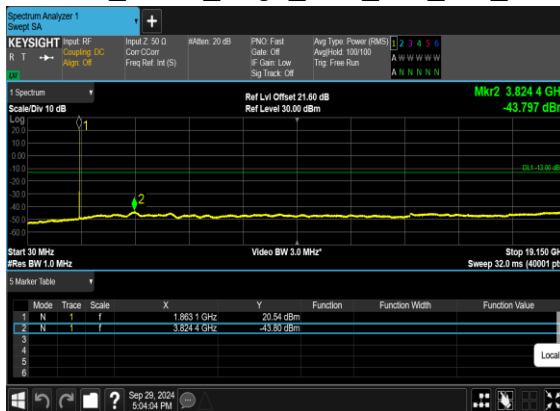


N25(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

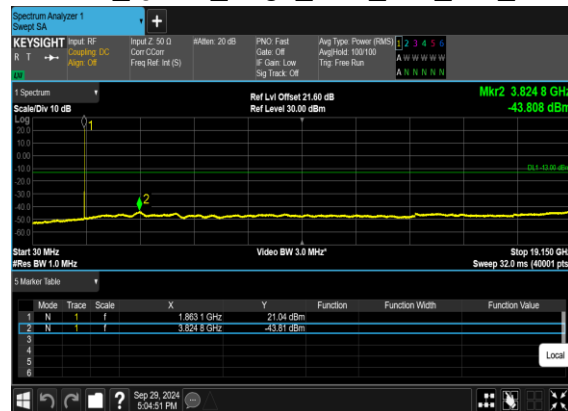

N25(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

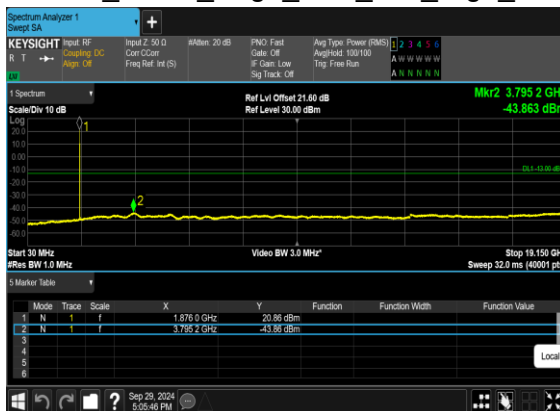

N25(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

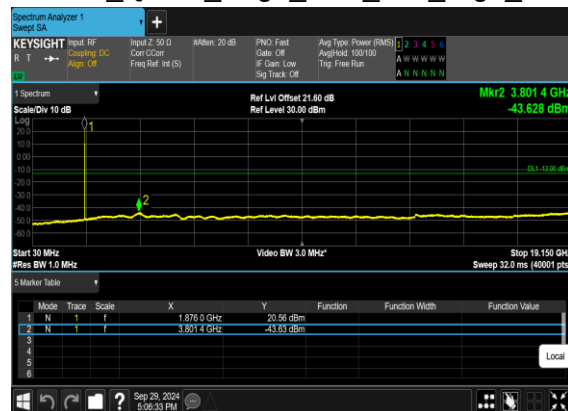




Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
25	15	25	372500	1862.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	25	372500	1862.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
25	15	25	380500	1902.5	DFT-s-OFDM BPSK	1@132	see graph	PASS
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
25	15	25	380500	1902.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	216@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	216@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	1@215	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	1@215	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	216@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	216@0	see graph	PASS




N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

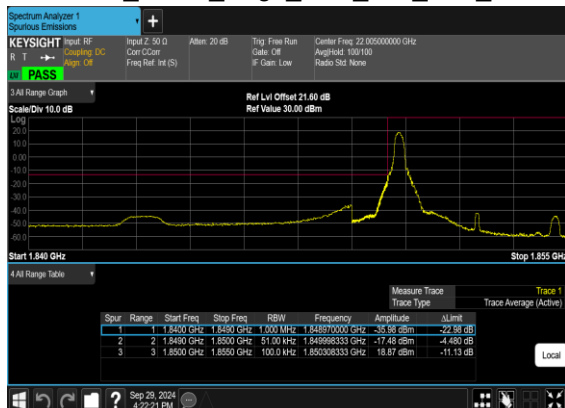


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

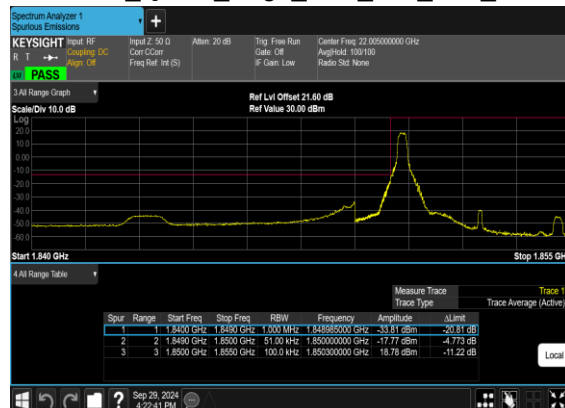

N25(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

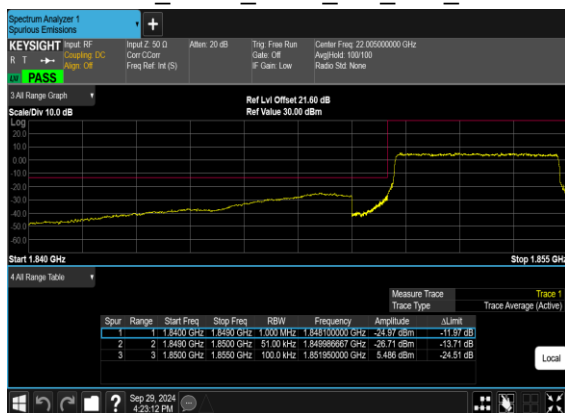


N25(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

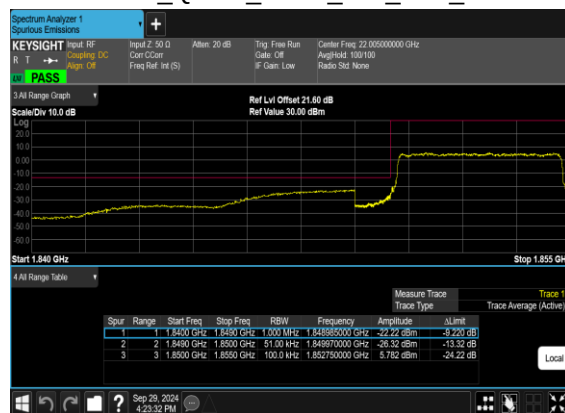





N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

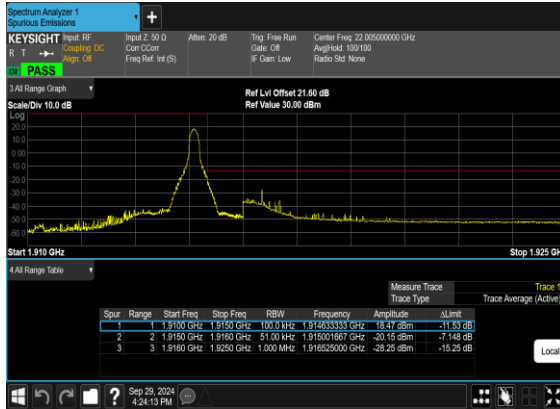


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

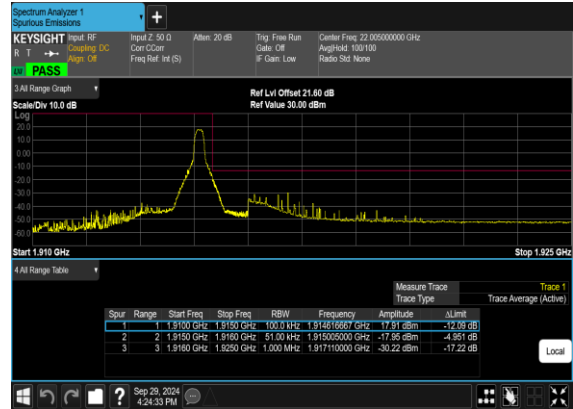

N25(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

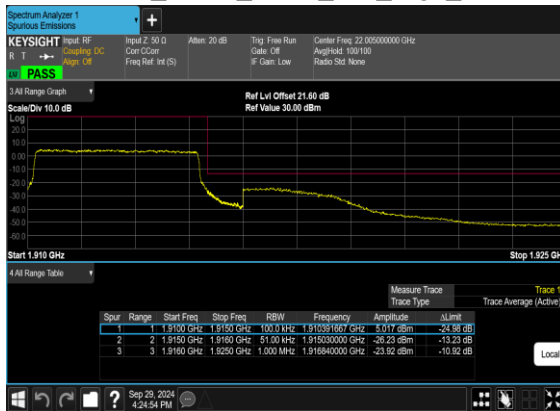


N25(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

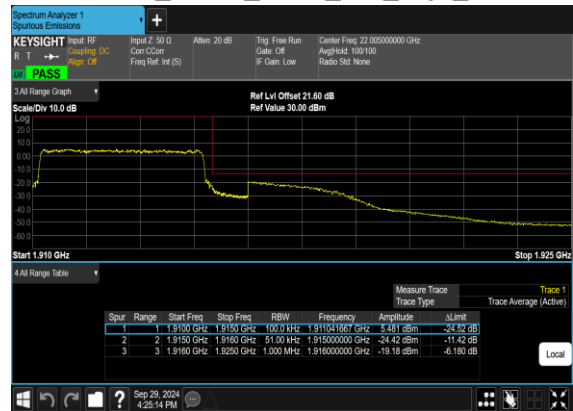





N25(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

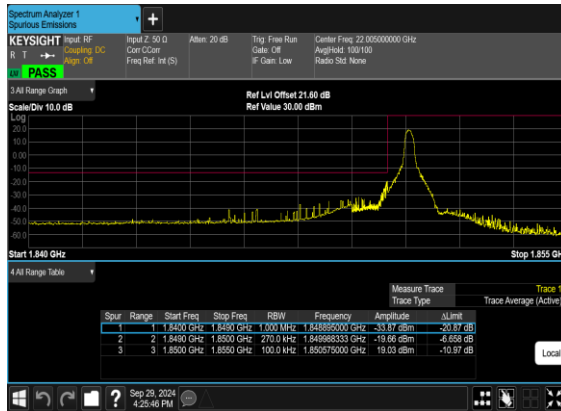


N25(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

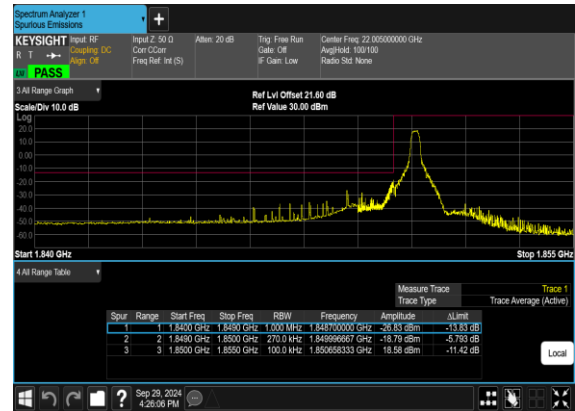

N25(25M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

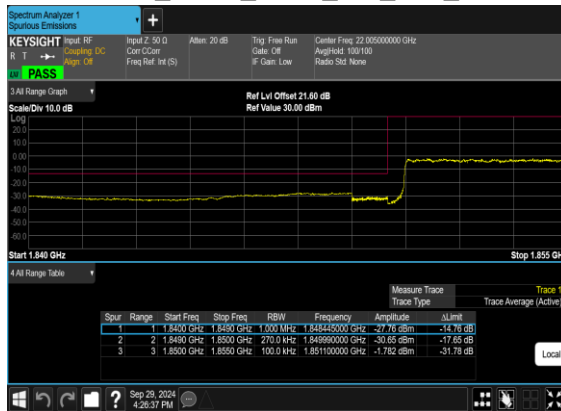


N25(25M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

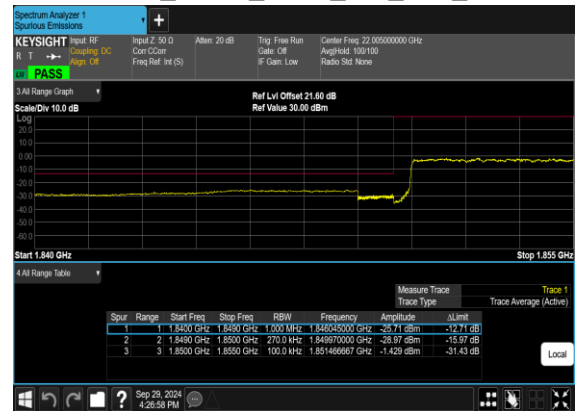





N25(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

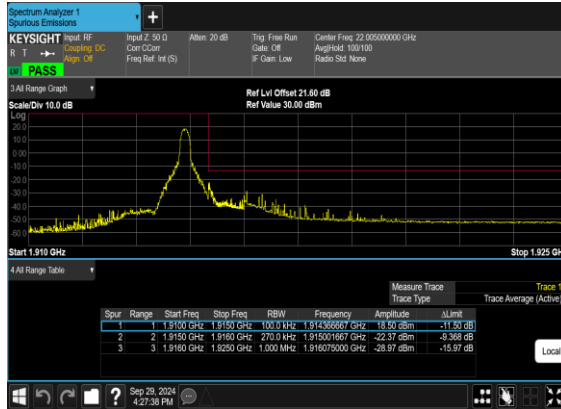

N25(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

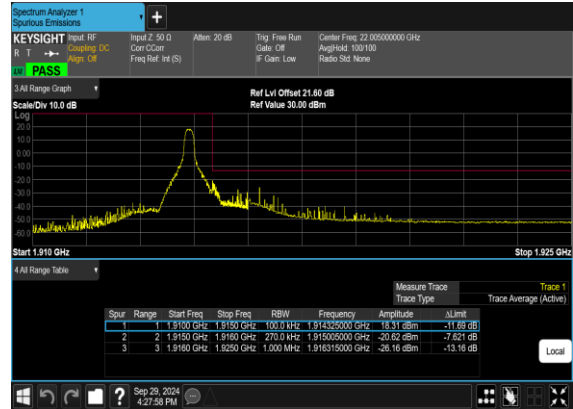

N25(25M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

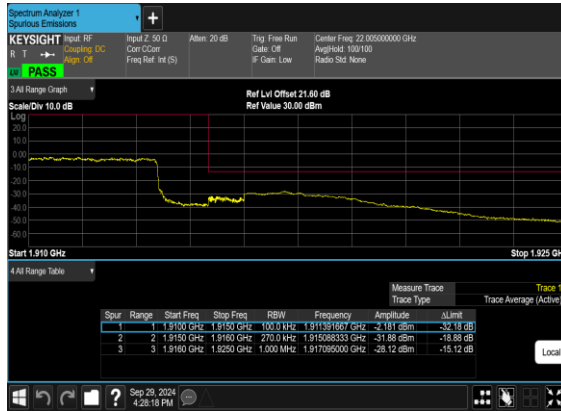


N25(25M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH







N25(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

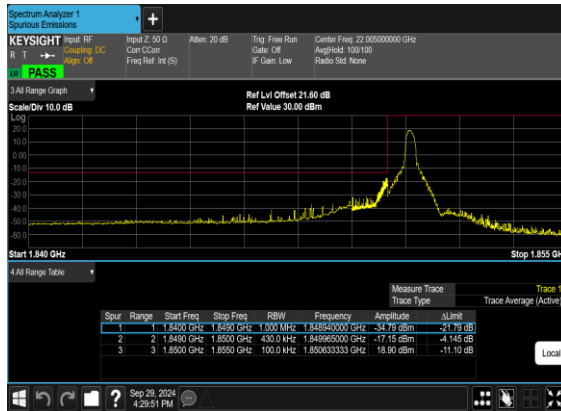


N25(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

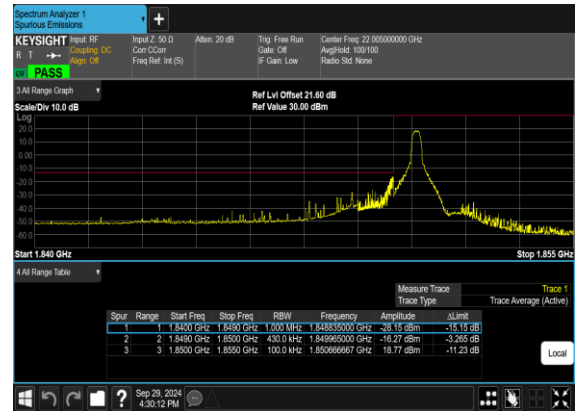

N25(40M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

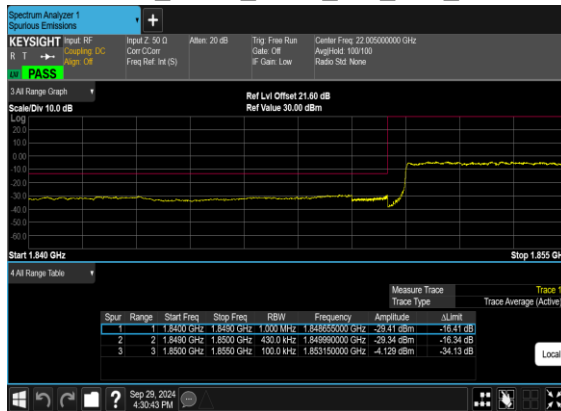


N25(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

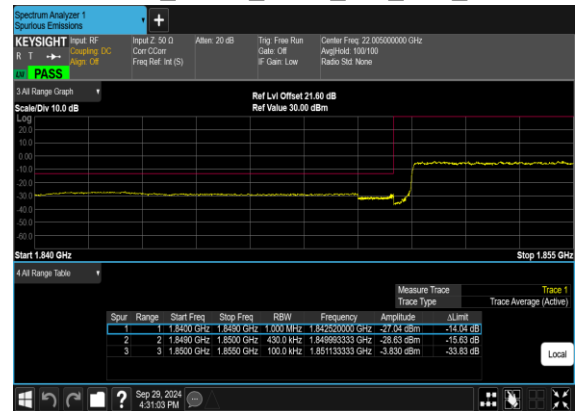





N25(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

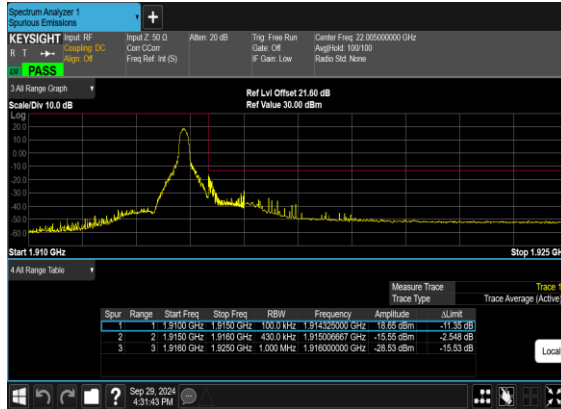


N25(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

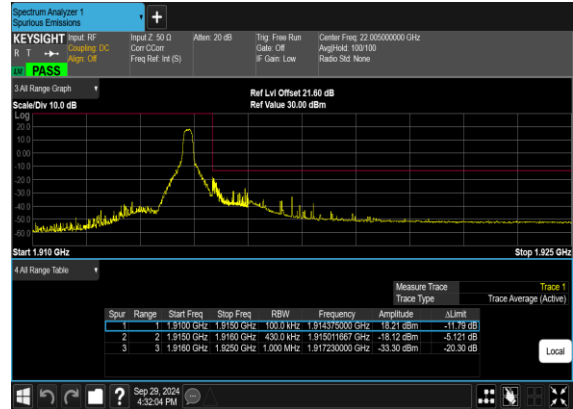

N25(40M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

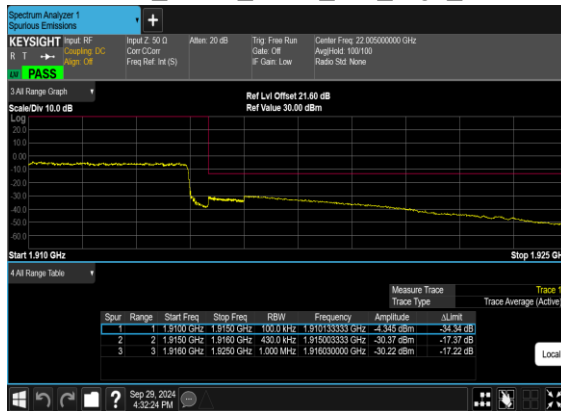

N25(40M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

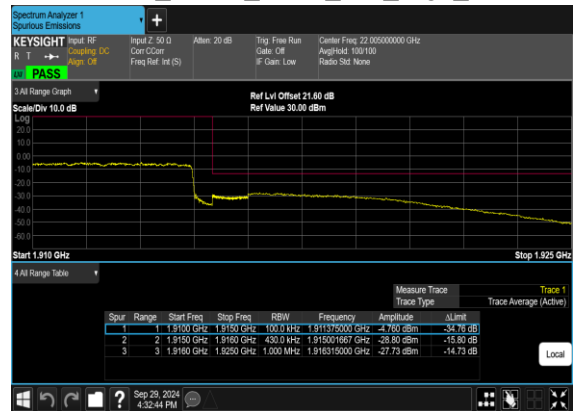



Software Version: 23.06.1602

FR1 N26 SA


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0047	PASS	NV
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0039	PASS	LV
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	-0.0038	PASS	HV
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0021	PASS	-30°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	-0.0015	PASS	-20°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0009	PASS	-10°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	-0.0022	PASS	0°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0041	PASS	10°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0039	PASS	20°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0025	PASS	30°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	-0.0018	PASS	40°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0037	PASS	50°C



Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
26	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	3.82	13	PASS
26	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@0	3.69	13	PASS
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	4.97	13	PASS
26	15	20	167300	836.5	DFT-s-OFDM QPSK	1@0	4.86	13	PASS

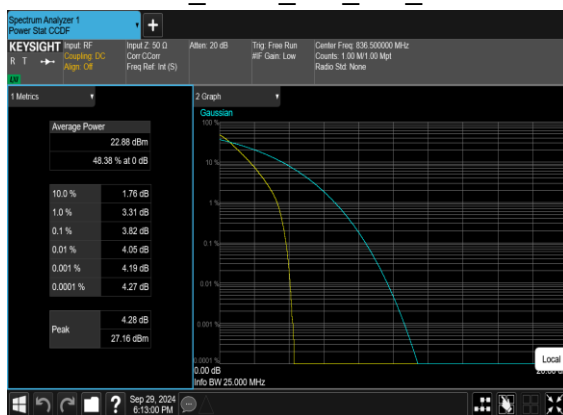N26(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CHN26(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CHN26(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CHN26(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH