

Report No.: SEWM2305000160RG01

Rev.: 01 Page: 1 of 47

TEST REPORT

SEWM2305000160RG **Application No.:**

Applicant: Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, Address of Applicant:

China, 100085

Manufacturer: Xiaomi Communications Co., Ltd.

Address of Manufacturer: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing,

China, 100085

EUT Description: Mobile Phone

Model No.: 23076RA4BR, XIG03

Trade Mark: Redmi

FCC ID: 2AFZZRA4BR Standards: 47 CFR Part 2 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

47 CFR Part 90

Date of Receipt: 2023/04/26

2023/04/28 to 2023/05/29 (for original report SEWM2304000137RG01) **Date of Test:**

2023/05/25 to 2023/06/09 (for new report SEWM2305000160RG01)

Date of Issue: 2023/06/12

PASS * Test Result:

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 2 of 47

Version

	Revision Record					
Version Chapter Date Modifier Remark				Remark		
01		2023/06/12		Original		

Prepared By	Flerili	
	(Levi Li) / Test Engineer	
Checked By	men men	
	(Well Wei) / Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 3 of 47

Contents

1	Version	on	2
2	Test S	Summary	5
	2.1	GSM850/UMTS Band 5/LTE Band 5/26(824~849 MHz)	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	6
	2.3	UMTS Band 4 /LTE Band 4	7
	2.4	LTE Band 7/38/41/CA_41C	8
	2.5	LTE Band 12/17	10
	2.6	LTE Band 13	11
	2.7	LTE Band 26(814~824 MHz)	12
	2.8	LTE Band 42/CA_42C	13
3	Gene	ral Information	15
	3.1	Details of Client	15
	3.2	Test Location	15
	3.3	Test Facility	15
	3.4	General Description of EUT	16
	3.5	Test Mode	17
	3.6	Test Environment	17
	3.7	Description of Support Units	17
	3.8	Technical Specification	18
	3.9	Test Frequencies	23
4	Descr	iption of Tests	32
	4.1	Conducted Output Power	32
	4.2	Effective (Isotropic) Radiated Power of Transmitter	33
	4.3	Occupied Bandwidth	34
	4.4	Band Edge at Antenna Terminals	35
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	36
	4.6	Peak-Average Ratio	37
	4.7	Field Strength of Spurious Radiation	38
	4.8	Frequency Stability / Temperature Variation	39
	4.9	Test Setups	40



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. Florit, No. 1, Runsherg Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.:	01
Page:	4 of 47

	4.9.1 Test Setup 1	40
	4.9.2 Test Setup 2	
	4.9.3 Test Setup 3	
	4.10 Test Conditions	
5	Main Test Instruments	44
	Measurement Uncertainty	
	Appendixes	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 5 of 47

2 Test Summary

2.1 GSM850/UMTS Band 5/LTE Band 5/26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.1&B.2&B.5&B.11	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.2&B.5&B.11	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&B.2&B.5&B.11	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&B.2&B.5&B.11	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.2&B.5&B.11	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&B.2&B.5&B.11	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.1&B.2&B.5&B.11	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.1&B.2&B.5&B.11	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/er/Terms-and-Conditions.ard, of relectronic format document subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/er/Terms-and-Conditions/Terms-e-Document.asgs.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgor or fallification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the samples) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pikot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 6 of 47

2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1&B.2&B.3	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.2&B.3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&B.2&B.3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&B.2&B.3	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.2&B.3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&B.2&B.3	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1&B.2&B.3	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.1&B.2&B.3	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 7 of 47

2.3 UMTS Band 4 /LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP≤1W	Section 1 of Appendix B.2&B.4	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.2&B.4	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.2&B.4	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.2&B.4	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.2&B.4	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.2&B.4	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.2&B.4	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.2&B.4	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 8 of 47

2.4 LTE Band 7/38/41/CA_41C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	\$2.1046, \$27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.6&B.12&B.13 &B.15	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.6&B.12&B.13 &B.15	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.6&B.12&B.13 &B.15	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.6&B.12&B.13 &B.15	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.6&B.12&B.13 &B.15	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.6&B.12&B.13 &B.15	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 9 of 47

		Channel Edge		
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	9 kHz 95 MHz XMHz 10 th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B.6&B.12&B.13 &B.15	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.6&B.12&B.13 &B.15	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 10 of 47 Page:

2.5 LTE Band 12/17

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.7&B.9	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.7&B.9	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.7&B.9	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.7&B.9	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.7&B.9	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.7&B.9	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.7&B.9	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.7&B.9	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 11 of 47

2.6 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.8	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.8	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.8	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.8	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.8	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	 ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. 	Section 6 of Appendix B.8	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.8	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.8	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 12 of 47

2.7 LTE Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B.10	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.10	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.10	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.10	Pass
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B.10	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 6 of Appendix B.10	Pass
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 7 of Appendix B.10	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §90.213	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.10	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 13 of 47

2.8 LTE Band 42/CA_42C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 1 of Appendix B.14&B.16	Pass
Peak-Average Ratio	§27.50(k)(4)	Limit≤13 dB	Section 2 of Appendix B.14&B.16	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.14&B.16	Pass
Band Edges Compliance	§2.1051, §27.53(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B.14&B.16	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 6 of Appendix B.14&B.16	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 7 of Appendix B.14&B.16	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/ frequency block.	Section 8 of Appendix B.14&B.16	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

邮编: 215000 t



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 14 of 47

Remark:

This test report (Report No.: SEWM2305000160RG01 issue on 2023/06/12) is based on the original test report (Report No.: SEWM2304000137RG01 issue on 2023/05/29).

Review this report and original report, this report just changing the parts according to the declaration letter from client

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report LTE Band 42, LTE UL CA_41C, LTE UL CA_42C and the item of Power were tested, Field Strength of Spurious Radiation were performed based on the worst case of the original report with report number SEWM2304000137RG01 issue on 2023/05/29 and other test data in this report are based on the previous report with report number SEWM2304000137RG01 issue on 2023/05/29.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, such as a fair this of the state of the state



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 15 of 47

3 General Information

3.1 Details of Client

Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-An



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 16 of 47

3.4 General Description of EUT

EUT Description:	Mobile Phone	Mobile Phone					
Model No.:	23076RA4BR, XIG	23076RA4BR, XIG03					
Trade Mark:	Redmi						
Hardware Version:	P1.1						
Software Version:	MIUI 14						
IMEI:	RF Conducted	IMEI1: 8635320 IMEI2: 8635320					
IIVIEI.	RSE & AC power line	IMEI1: 8666720 IMEI2: 8666720					
Antenna Type:	IFA Antenna						
	GSM850:	-4.8dBi(Ant0) -5.5dBi(Ant4) GSM1900: -1.7dBi(
	WCDMA Band II:	-1.7dBi(Ant0) 0.2dBi(Ant4)	WCDMA Ban	d IV: -1.0dBi(Ant0) -2.3dBi(Ant4)			
	WCDMA Band V:	-4.8dBi(Ant0) -5.5dBi(Ant4)					
	LTE Band 2:	-1.7dBi(Ant0) 0.2dBi(Ant4) LTE Band 4:		-1.0dBi(Ant0) -2.3dBi(Ant4)			
	LTE Band 5:	-4.8dBi(Ant0) -5.5dBi(Ant4)	LTE Band 7:	0.7dBi(Ant0) -0.6dBi(Ant4)			
Antenna Gain:	LTE Band 12:	-5.2dBi(Ant0) -7.5dBi(Ant4)	LTE Band 13:	-5.3dBi(Ant0) -6.3dBi(Ant4)			
	LTE Band 17:	-5.2dBi(Ant0) -7.5dBi(Ant4)	LTE Band 26	-4.8dBi(Ant0) -5.5dBi(Ant4)			
	LTE Band 38:	0.7dBi(Ant0) -0.3dBi(Ant4)	LTE Band 41:	0.7dBi(Ant0) -0.3dBi(Ant4)			
	LTE Band 42:	-5.4dBi(Ant3) -0.3dBi(Ant5)					
	LTE CA_41C:	0.7dBi(Ant0) -0.3dBi(Ant4)	LTE CA_42C	-5.4dBi(Ant3) -0.3dBi(Ant5)			
	Note: The antenna gain a manufacturer.	The antenna gain are derived from the gain information report provided by the					
RF Cable:	4.2dB(Below 1GHz	4.5dB(1.0	0~2.4GHz)	4.8dB(2.4~3.4GHz)			

Remark:

- 1. Conduction Power & EIRP of all antennas are tested, and only the worst data is presented.
- 2.As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 17 of 47

3.5 Test Mode

Test Mode	Test Modes Description		
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation		
GSM/TM2	GSM system, EGPRS, 8PSK modulation		
UMTS/TM1	UMTS system, WCDMA, QPSK modulation		
LTE/TM1	LTE system, QPSK modulation		
LTE/TM2	LTE system, 16QAM modulation		
LTE/TM3 LTE system, 64QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.		

3.6 Test Environment

NT: Normal Temperature

Environment Parameter	101.0 kPa Selected Values During Tests			
Relative Humidity	44-46 %	RH Ambient		
Value	Temperature(°C)	Voltage(V)		
NTNV	22~23	3.85		
LTLV	-30	3.60		
LTHV	-30	4.45		
HTLV	50	3.60		
HTHV	50	4.45		
Remark:				
NV: Normal Voltage LV: Low	V Extreme Test Voltage	IV: High Extreme Test Voltage		

LT: Low Extreme Test Temperature

3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://mww.sgs.com/en/Erms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://mww.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained of deys only.

HT: High Extreme Test Temperature



Report No.: SEWM2305000160RG01

Rev.: 01 18 of 47 Page:

3.8 Technical Specification

Characteristics	Description							
Radio System Type	⊠ GSM	⊠ UMTS	UMTS LTE					
, ,,	Band		TX	TX		RX	RX	
	GSM850		824	4 to 849	MHz	869 to 89	869 to 894 MHz	
	GSM1900		18	50 to 19	10 MHz	1930 to 1	1990 MHz	
	UMTS Band II		18	50 to 19	10 MHz	1930 to	1990 MHz	
	UMTS Band I\	/	17	10 to 17	55 MHz	2110 to 2	2155 MHz	
	UMTS Band V	,	824	4 to 849	MHz	869 to 89	94 MHz	
	LTE Band 2		18	50 to 19	10 MHz	1930 to 1	1990 MHz	
	LTE Band 4		17	10 to 17	55 MHz	2110 to 2	2155 MHz	
	LTE Band 5		824	4 to 849	MHz	869 to 89	94 MHz	
	LTE Band 7		250	00 to 25	70 MHz	2620 to 2	2690 MHz	
Supported Frequency Range	LTE Band 12		699	9 to 716	MHz	729 to 74	16 MHz	
	LTE Band 13		77	777 to 787 MHz		746 to 756 MHz		
	LTE Band 17		704 to 716 MHz		734 to 74	734 to 746 MHz		
	LTE Band 26 (814 to 824 MHz)		814 to 824MHz		859 to 86	859 to 869 MHz		
	LTE Band 26 (824 to 849 MHz)		824 to 849 MHz		869 to 89	94 MHz		
	LTE Band 38		25	70 to 26	20 MHz	2570 to 2	2620 MHz	
	LTE Band 41		249	2496 to 2690MHz		2496 to 2	2690MHz	
	LTE Band 42		34	3450 to 3550 MHz		3450 to 3	3450 to 3550 MHz	
	LTE CA:					•		
	LTE UL CA_4	1C; LTE UL (CA_42C;					
	GSM system:		⊠0.2 MHz					
	UMTS system	:	⊠5	MHz				
	LTE Band 2		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LIL Bana L		⊠1	5 MHz	⊠20 MHz			
Supported Channel Bandwidth	LTE Band 4		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
			1	5 MHz	⊠20 MHz			
	LTE Band 5		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LTE Band 7		⊠5	MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	LTE Band 12		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 19 of 47 Page:

LTE Band 13 □5 MHz □10 MHz				ray		01 47	
LTE Band 26(814-824)		LTE Band 13		⊠5 MHz	⊠10 MHz		
LTE Band 26(824-849)		LTE Band 17		⊠5 MHz	⊠10 MHz		
LTE Band 26(824-849)		LTE Band 26(814-824))	⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 38		TF Band 26/824-840	`	⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz
LTE Band 41		LIL Dalid 20(024-049)	<i>,</i>	⊠15 MHz			
LTE Band42 S5 MHz M10 MHz M15 MHz M20 MHz		LTE Band 38		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
LTE Band CA_41C		LTE Band 41		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
LTE Band CA_41C		LTE Band42		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
LTE Band CA_41C				⊠10MHz+	15MHz	⊠10MHz+	20MHz
March Marc				⊠15MHz+	10MHz	⊠15MHz+	15MHz
LTE Band CA_42C		LTE Band CA_41C		⊠15MHz+	20MHz	⊠20MHz+	15MHz
LTE Band CA_42C LTE Band CA_42C \[\begin{array}{cccccccccccccccccccccccccccccccccccc				⊠20MHz+	20MHz	⊠20MHz+	5MHz
LTE Band CA_42C □ 20MHz+10MHz □ 20MHz+15MHz □ 20MHz+5MHz □ 20MHz+5MHz □ 20MHz+20MHz □ 20MHz+20MHz □ 20MHz+20MHz □ 20MHz+5MHz □ 20MHz+15MHz □ 20MHz+10MHz □ 20MHz+15MHz □ 20MHz+10MHz □ 20MHz+15MHz □ 20MHz+15MHz □ 20MHz+15MHz □ 20MHz+15MHz □ 20MHz+10MHz □ 20MHz+15MHz □ 20MHz+15MHz □ 20MHz+15MHz □ 20MHz+15MHz □ 20MHz+10MHz □ 20MHz+15MHz □ 20MHz □ 20MHz+10MHz □ 20MHz □ 20MHz+10MHz □ 20MHz □ 20MHz+15MHz □ 20MHz □ 20MHz □ 20MHz+10MHz □ 20MHz □ 20MHz □ 20MHz+10MHz □ 20MHz				⊠5MHz+2	20MHz		
LTE Band CA_42C □20MHz+20MHz □35MHz+20MHz □35MHz □35MHz+20MHz □35MHz □35M				⊠10MHz+	20MHz	⊠15MHz+	20MHz
Some case was tested and the data displayed in this report.		LTE Band CA 42C		⊠20MHz+	10MHz	⊠20MHz+	15MHz
Note1: WCDMA supports HSUPA, HSDPA, DC-HSDPA, but only the worst case was tested and the data displayed in this report. Characteristics		LIE Dallu CA_42C		⊠20MHz+	20MHz	⊠20MHz+	5MHz
case was tested and the data displayed in this report. Characteristics Description GSM: GMSK 8PSK GSM850 246KGXW 248KG7W GSM1900 246KGXW 250KG7W UMTS: QPSK Band II 4M18F9W Band IV 4M15F9W Band V 4M14F9W E-UTRA: QPSK 16QAM 64QAM E-UTRA: QPSK 16QAM 64QAM LTE Band 2 1M10G7D 1M10W7D 1M11W7D 2M71G7D 2M70W7D 2M71W7D 4M48G7D 4M49W7D 4M48W7D 8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D				⊠5MHz+2	20MHz		
GSM: GMSK 8PSK							the worst
GSM850 246KGXW 248KG7W	Characteristics	Description					
Designation of Emissions (Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) LTE Band 2 ETE Band 2 ESM1900 246KGXW 250KG7W		GSM:	GM	ISK 8	BPSK		
Designation of Emissions (Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) Amount		GSM850	246	KGXW 2	248KG7W		
Designation of Emissions (Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) Band II 4M18F9W Band IV 4M15F9W Band V 4M14F9W E-UTRA: QPSK 16QAM 64QAM 1M10G7D 1M10W7D 1M11W7D 2M71G7D 2M70W7D 2M71W7D 4M48G7D 4M49W7D 4M48W7D 8M95G7D 8M96W7D 8M95W7D 13M5W7D 13M5W7D		GSM1900	246	KGXW 2	250KG7W		
(Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) Band IV 4M15F9W Band V 4M14F9W E-UTRA: QPSK 16QAM 64QAM 1M10G7D 1M10W7D 1M11W7D 2M71G7D 2M70W7D 2M71W7D 4M48G7D 4M49W7D 4M48W7D 8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D		UMTS:	QP	SK			
(Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) Band IV 4M15F9W E-UTRA: QPSK 16QAM 64QAM 1M10G7D 1M10W7D 1M11W7D 2M71G7D 2M70W7D 2M71W7D 4M48G7D 4M49W7D 4M48W7D 8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D	Designation of Emissions	Band II	4M	18F9W			
worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) E-UTRA: QPSK 16QAM 64QAM 1M10G7D 1M10W7D 1M11W7D 2M71G7D 2M70W7D 2M71W7D 4M48G7D 4M49W7D 4M48W7D 8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D	(Remark: the necessary	Band IV	4M	15F9W			
E-UTRA: QPSK 16QAM 64QAM 64Q		Band V	4M	14F9W			
channel bandwidth configuration.) LTE Band 2 M10G7D	measured occupied	E-UTRA:	QP	SK 1	6QAM	64QAM	
LTE Band 2 4M48G7D 4M49W7D 4M48W7D 8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D	channel bandwidth		1M	10G7D 1	M10W7D	1M11W7D	
LTE Band 2 8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D			2M	71G7D 2	2M70W7D	2M71W7D	
8M95G7D 8M96W7D 8M95W7D 13M5G7D 13M5W7D 13M5W7D		LTE Band 2	4M	48G7D 4	M49W7D	4M48W7D	
		LIE Band 2		95G7D 8	M96W7D	8M95W7D	
17M9G7D 17M9W7D 17M9W7D			131	/I5G7D 1	3M5W7D	13M5W7D	
			17N	//9G7D 1	7M9W7D	17M9W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 20 of 47

		1M10G7D	1M10W7D	1M11W7D
	LTE Band 4	2M70G7D	2M70W7D	2M71W7D
		4M48G7D	4M48W7D	4M48W7D
		8M96G7D	8M96W7D	8M96W7D
		13M5G7D	13M5W7D	13M5W7D
		18M0G7D	18M0W7D	18M0W7D
		1M10G7D	1M11W7D	1M11W7D
		2M70G7D	2M70W7D	2M70W7D
	LTE Band 5	4M48G7D	4M47W7D	4M48W7D
		8M97G7D	8M95W7D	8M96W7D
		4M49G7D	4M49W7D	4M49W7D
	LTE Day 17	8M96G7D	8M98W7D	8M97W7D
	LTE Band 7	13M5G7D	13M5W7D	13M5W7D
		18M0G7D	17M9W7D	17M9W7D
		1M11G7D	1M10W7D	1M10W7D
	LTE Band 12	2M70G7D	2M71W7D	2M71W7D
		4M48G7D	4M49W7D	4M48W7D
		8M96G7D	8M96W7D	8M97W7D
	LTE Band13	4M48G7D	4M48W7D	4M49W7D
		8M95G7D	8M91W7D	8M94W7D
	LTE Band 17	4M50G7D	4M50W7D	4M48W7D
	LTE Band 17	8M97G7D	8M97W7D	8M95W7D
		1M11G7D	1M11W7D	1M11W7D
	LTE Band 26	2M71G7D	2M71W7D	2M70W7D
	(814-824)	4M48G7D	4M49W7D	4M49W7D
		8M96G7D	8M94W7D	8M96W7D
		1M11G7D	1M11W7D	1M11W7D
	LTE Band 26	2M70G7D	2M71W7D	2M71W7D
	(824-849)	4M48G7D	4M48W7D	4M49W7D
	()	8M97G7D	8M95W7D	8M96W7D
		13M5G7D	13M5W7D	13M5W7D
		4M48G7D	4M49W7D	4M48W7D
	LTE Band 38	8M98G7D	8M95W7D	8M97W7D
		13M5G7D	13M5W7D	13M5W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 21 of 47

		19M0C7D 19M0W7D 19M0W7D			
		18M0G7D 18M0W7D 18M0W7D			
		4M48G7D 4M48W7D 4M48W7D			
	LTE Band 41	8M98G7D 8M96W7D 8M95W7D			
		13M5G7D 13M5W7D 13M5W7D			
		18M0G7D 18M0W7D 17M9W7D			
		4M52G7D 4M51W7D 4M50W7D			
	LTE Band 42	9M01G7D 9M01W7D 9M02W7D			
	LTE Ballu 42	13M5G7D 13M5W7D 13M5W7D			
		18M0G7D 18M1W7D 18M0W7D			
		50RB+75RB:			
		23M3G7D 23M1W7D 23M2W7D			
		50RB+100RB:			
		27M9G7D 27M9W7D 27M8W7D			
		75RB+50RB:			
		23M2G7D 23M2W7D 23M1W7D			
		75RB+75RB:			
		28M4G7D 28M4W7D 28M4W7D			
		75RB+100RB:			
	LTE Band CA_41C	32M6G7D 32M7W7D 32M7W7D			
		100RB+75RB:			
		32M6G7D 32M6W7D 32M7W7D			
		100RB+100RB:			
		37M9G7D 37M8W7D 37M9W7D			
		100RB+25RB:			
		23M0G7D 23M0W7D 23M0W7D			
		25RB+100RB:			
		22M9G7D 23M0W7D 22M9W7D			
		50RB+100RB:			
		28M1G7D 28M1W7D 28M1W7D			
		75RB+100RB:			
	LTE Band CA 42C				
	LIE DAIIU CA_42C				
		100RB+50RB:			
		28M1G7D 28M1W7D 28M1W7D			
		100RB+75RB:			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 22 of 47

	33M1G7D	33M0W7D	33M0W7D
	100RB+100	RB:	
	37M9G7D	37M8W7D	37M7W7D
	100RB+25R	RB:	
	23M0G7D	23M0W7D	23M0W7D
	25RB+100R	RB:	
	22M9G7D	22M9W7D	22M9W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 23 of 47

3.9 Test Frequencies

Test Mode	TX / RX		RF Channel	
rest wode	17/17	Low (L)	Middle (M)	High (H)
	TX	Channel 128	Channel 190	Channel 251
GSM850		824.2MHz	836.6 MHz	848.8 MHz
GSIM650	RX	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX	TY / PY RF Channel				
1 est Mode		Low (L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
GSM1900		1850.2MHz	1880.0 MHz	1909.8 MHz		
G3W1900	RX	Channel 512	Channel 661	Channel 810		
		1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TX / RX	RF Channel		
1 est Mode	17/17	Low (L)	Middle (M)	High (H)
	TX	Channel 9262	Channel 9400	Channel 9538
WCDMA Band II		1852.4 MHz	1880.0 MHz	1907.6 MHz
WCDIVIA BAIIU II	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX		RF Channel	
i est ivioue	IA/IX	Low (L)	Middle (M)	High (H)
		Channel 1312	Channel 1413	Channel 1513
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz
WCDIVIA BATILITY	DV	Channel 1537	Channel 1638	Channel 1738
	RX	2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	TY / PY RF Channel				
rest wode	IATIX	Low (L)	Middle (M)	High (H)		
	TX	Channel 4132	Channel 4182	Channel 4233		
WCDMA Band V		826.4MHz	836.4 MHz	846.6 MHz		
WCDINA Ballu V	DV	Channel 4357	Channel 4407	Channel 4458		
	RX	871.4 MHz	881.4 MHz	891.6 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No.6 Plant, No.1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pikot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 24 of 47

			i agc.	24 01 47	
Test Mode	Bandwidth	TX / RX		RF Channel	
rest Mode	de Dandwidth	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		IX	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		KA	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LTE Dallu Z	10MHz		Channel 18650	Channel 18900	Channel 19150
		TX	1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
_		KA	1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		IXX	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 25 of 47 Page:

Tank Manda	Dan alveidable	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KA.	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	5MHz	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
1.TE D 1.4			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4	10MHz		Channel 20000	Channel 20175	Channel 20350
		TX	1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		100	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		KΛ	2120 MHz	2132.5MHz	2145 MHz

Toot Mada	Pandwidth	TV / DV	RF Channel		
rest Mode	Test Mode Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		INA	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
LTC Daniel C			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625
	51411		826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
		KA.	871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		IXA	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 26 of 47

Test Mode	Bandwidth	TX / RX		RF Channel	
I est Mode	Danuwidin	IA/IM	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		KA.	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
1.TE D 1.7			2625 MHz	2655 MHz	2685 MHz
LTE Band 7		TX	Channel 20825	Channel 21100	Channel 21375
	451411		2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	DV	Channel 2825	Channel 3100	Channel 3375
		RX	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
		KA.	2630 MHz	2655 MHz	2680 MHz

Toot Made	Dandwidth	TX / RX		RF Channel	
Test Mode	Bandwidth	IX/KX	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		KA	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
	3MHz	TX	700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
1.TE D 140			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12		TX	Channel 23035	Channel 23095	Channel 23155
	5N41 I-		701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
		KΛ	731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		ΓΛΛ	734 MHz	737.5 MHz	741 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 27 of 47

Toot Mode	Dondwidth	TX / RX	RF Channel			
Test Mode	Bandwidth	IX/KX	Low (L)	Middle (M)	High (H)	
			Channel 23025	Channel 23230	Channel 23255	
		TX	779.5 MHz	782 MHz	784.5 MHz	
	5MHz	RX	Channel 5205	Channel 5230	Channel 5255	
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz	
LIE Dallu 13			Channel 23230	Channel 23230	Channel 23230	
		TX	782 MHz	782 MHz	782 MHz	
	10MHz	RX	Channel 5230	Channel 5230	Channel 5230	
		KA.	751 MHz	751 MHz	751 MHz	

Test Mode	Bandwidth TX / RX		RF Channel		
rest Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23755	Channel 23790	Channel 23825
		TX	706.5 MHz	710 MHz	713.5 MHz
	5MHz	RX	Channel 5755	Channel 5790	Channel 5825
LTE Band 17			736.5 MHz	740 MHz	743.5 MHz
LIE Dallu II			Channel 23780	Channel 23790	Channel 23800
		TX	709 MHz	710 MHz	711 MHz
	10MHz	RX	Channel 5780	Channel 5790	Channel 5800
		KA.	739 MHz	740 MHz	741 MHz

Took Mode	D an about data	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26697	Channel 26740	Channel 26783
		TX	814.7 MHz	819 MHz	823.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783
		KA	859.7 MHz	864MHz	868.3 MHz
			Channel 26705	Channel 26740	Channel 26775
	3MHz	TX	815.5 MHz	819 MHz	822.5 MHz
		RX	Channel 8705	Channel 8740	Channel 8775
LTE Band 26			860.5 MHz	864MHz	867.5 MHz
(814-824)		TX RX	Channel 26715	Channel 26740	Channel 26765
(0:: 0=:)			816.5 MHz	819 MHz	821.5 MHz
	5MHz		Channel 8715	Channel 8740	Channel 8755
		NA.	861.5 MHz	864MHz	866.5 MHz
			Channel 26740	Channel 26740	Channel 26740
		TX	819 MHz	819 MHz	819 MHz
	10MHz	RX	Channel 8740	Channel 8740	Channel 8740
		ľΛΛ	864MHz	864MHz	864MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 28 of 47 Page:

Toot Mode	Dondwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26797	Channel 26915	Channel 27033
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033
		KA.	859.7 MHz	881.5 MHz	893.3 MHz
			Channel 26805	Channel 26915	Channel 27025
		TX	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	DV	Channel 8805	Channel 8915	Channel 9025
		RX	860.5 MHz	881.5 MHz	892.5 MHz
	5MHz	TX RX	Channel 26815	Channel 26915	Channel 27015
LTE Band26			826.5 MHz	836.5 MHz	846.5 MHz
(824-849)			Channel 8815	Channel 8915	Channel 9015
(02:0:0)			871.5 MHz	881.5 MHz	891.5 MHz
		TX	Channel 26840	Channel 26915	Channel 26990
			829 MHz	836.5 MHz	844 MHz
	10MHz 15MHz	RX	Channel 8840	Channel 8915	Channel 8990
		NA.	874 MHz	881.5 MHz	889 MHz
			Channel 26865	Channel 26915	Channel 26965
		TX	831.5 MHz	836.5 MHz	841.5 MHz
		RX	Channel 8865	Channel 8915	Channel 8965
		100	876.5 MHz	881.5 MHz	886.5 MHz

Test Mode	Bandwidth	TX / RX	RF Channel				
Test Mode	Danuwiuin	17/77	Low (L)	Middle (M)	High (H)		
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225		
	SIVITZ	IAKA	2572.5 MHz	2595 MHz	2617.5 MHz		
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200		
LTE Band 38	IUIVITZ		2575 MHz	2595 MHz	2615 MHz		
LIE Daliu 30	451411-	TX/RX	Channel 37825	Channel38000	Channel 38175		
	15MHz	INIX	2577.5 MHz	2595 MHz	2612.5 MHz		
	20MHz	TX/RX	Channel 37850	Channel38000	Channel 38150		
	ΖΟΙΝΙΠΖ	INIX	2580 MHz	2595 MHz	2610 MHz		

Test Mode	Bandwidth	TX / RX	RF Channel			
i est Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 39675	Channel40620	Channel 41565	
	5MHz	TX / RX	2498.5 MHz	2593 MHz	2687.5 MHz	
			Channel 39700	Channel40620	Channel 41540	
LTE Band 41	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz	
(2496-2690)			Channel 39725	Channel40620	Channel 41515	
(15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz	
			Channel 39750	Channel40620	Channel 41490	
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 29 of 47

Toot Mode	Dandwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 42115	Channel 42590	Channel 43065
		TX	3452.5 MHz	3500 MHz	3547.5 MHz
	5MHz	RX	Channel 42115	Channel 42590	Channel 43065
		KA	3452.5 MHz	3500 MHz	3547.5 MHz
			Channel 42140	Channel 42590	Channel 43040
		TX	3455 MHz	3500 MHz	3545 MHz
	10MHz	RX	Channel 42140	Channel 42590	Channel 43040
LTE Band 42			3455 MHz	3500 MHz	3545 MHz
(3450-3550)		TX	Channel 42165	Channel 42590	Channel 43015
			3457.5 MHz	3500 MHz	3542.5 MHz
	15MHz	DV.	Channel 42165	Channel 42590	Channel 43015
		RX	3457.5 MHz	3500 MHz	3542.5 MHz
			Channel 42190	Channel 42590	Channel 42990
		TX	3460 MHz	3500 MHz	3540 MHz
	20MHz	RX	Channel 42190	Channel 42590	Channel 42990
		NA	3460 MHz	3500 MHz	3540 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 30 of 47

Table 4.3.1.2.9A-1: Test frequencies for CA_41C

Range	CC- Combo / N _{RB_agg} [RB]		CC1 Note1			CC2 Note1	
		BW [RB]	N _{UL/DL}	ful/DL [MHz]	BW [RB]	N _{UL/DL}	ful/DL [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
	75+100	75	39728	2503.8	100	39899	2520.9
		100	39750	2506	75	39921	2523.1
	100+100	100	39750	2506	100	39948	2525.8
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
		100	40546	2585.6	75	40717	2602.7
	100+100	100	40521	2583.1	100	40719	2602.9
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
		100	41341	2665.1	75	41512	2682.2
	100+100	100	41292	2660.2	100	41490	2680



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 31 of 47 Page:

LTE CA_42C(3450-3550):

Range	NRB_agg	CC1 Note1			CC2 Note1		
	[RB]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N UL/DL	f _{UL/DL} [MHz]
	05.400	25	42123	3453.3	100	42240	3465
_	25+100	100	42190	3460	25	42307	3471.7
	50.400	50	42145	3455.5	100	42289	3469.9
Low	50+100	100	42190	3460	50	42334	3474.4
	75 : 400	75	42168	3457.8	100	42339	3474.9
_	75+100	100	42190	3460	75	42361	3477.1
	100+100	100	42190	3460	100	42388	3479.8
	05 : 400	25	42498	3490.8	100	42615	3502.5
	25+100	100	42565	3497.5	25	42682	3509.2
	50:400	50	42496	3490.6	100	42640	3505
Mid	50+100	100	42541	3495.1	50	42685	3509.5
	75 : 400	75	42493	3490.3	100	42664	3507.4
	75+100	100	42516	3492.6	75	42687	3509.7
	100+100	100	42491	3490.1	100	42689	3509.9
	05 : 400	25	42873	3528.3	100	42990	3540
	25+100	100	42940	3535	25	43057	3546.7
	50.400	50	42846	3525.6	100	42990	3540
High	50+100	100	42891	3530.1	50	43035	3544.5
	75 : 400	75	42819	3522.9	100	42990	3540
	75+100	100	42841	3525.1	75	43012	3542.2
	100+100	100	42792	3520.2	100	42990	3540



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 32 of 47

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://mww.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents witherton is drawn to the limitation of liability, indemnification and jurisdiction issues defined them. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of liability. The Company's sole responsibility is to its Client and this document does not exonerate parties to ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced to the company and the produced of the company. Any unauthorized alteration, forgor of falsification of the content oppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the sults shown in this test report refer only to the sample(s) tested and such sample(s) are retained 50 days only.



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 33 of 47

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions-Terms-and-Cond

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 34 of 47

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-an

t (86-512) 62992980

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 35 of 47

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents as http://www.sps.com/en/Terms-and-Conditions/Terms-and-Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions-And-Conditions-Terms-and-Conditions-And-Condi



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 36 of 47

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prin overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.attention is a discussed at a discussion of liability, indemnification and jurisdiction issues defined therein. Any holder of this documen advised that information contained hereon reflects the Company's findings at the time of its intervion only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. The document contains the reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content appearance of this document is unjawful and offenders may be prosecuted to the fullest extent of the jaw. Unless otherwise stated to the fullest extent of the jaw. Unless otherwise stated to the fullest extent of the jaw. Unless otherwise stated to the fullest extent of the jaw. Unless otherwise stated to the fullest extent of the jaw. Unless otherwise stated to the fullest extent of the jaw.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 37 of 47

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Enditions-Terms-and-Conditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-and-Enditions-Terms-And



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 38 of 47

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of lead. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) \$3071443.



Report No.: SEWM2305000160RG01

Rev.: 01 39 of 47 Page:

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2305000160RG01


Rev.: 01 Page: 40 of 47

4.9 Test Setups

4.9.1 Test Setup 1

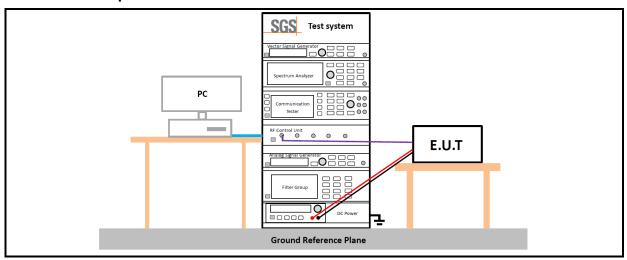

4.9.2 Test Setup 2

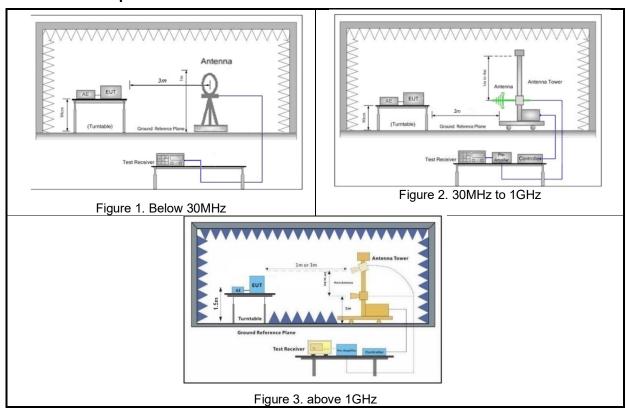



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined thera, my holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 3 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM_Doccheck@sgs.com


South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 41 of 47

4.9.3 Test Setup 3

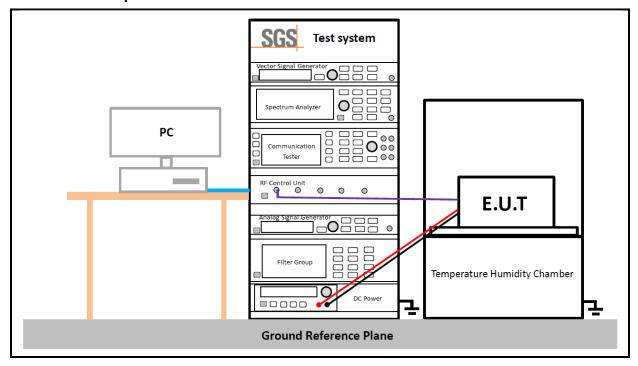



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 42 of 47 Page:

4.10 Test Conditions

	Transmit Output Power Data - Average Power, Total		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3		
	Peak-to-Average Ratio		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3		
	Modulation Characteristics		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	M (M= middle channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3		
	Bandwidth - Occupied Bandwidth		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3		
	Bandwidth - Emission Bandwidth		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3		
	Band Edges Compliance		
Test Case	Test Conditions		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG01

Rev.: 01 43 of 47 Page:

	1 agc. 40 01 47		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, H (L= low channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
	Spurious Emission at Antenna Terminals		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
	Field Strength of Spurious Radiation		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 2		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1 Remark: All bandwidth and modulation of GSM/UMTS/LTE have been pre tested, and only the worst results are reflected in the report.		
	Frequency Stability		
Test Case	Test Conditions		
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage		
rest Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
Test Setup	Test Setup 3		
RF Channels (TX)	M (M= middle channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
i est ivioue	The report only show the bandwidth with the worst case.		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 44 of 47

5 Main Test Instruments

	RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07		
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05		
Signal Analyzor	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16		
Signal Analyzer	ROHDEASCHWARZ	F3V3030	30001-01-02-02	2023/05/11	2024/05/10		
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR		
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22		
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05		
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05		
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05		
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15		
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27		
Signal Analyzer	INOTIDEASCHWARZ	F3443	30771-01-02-04	2023/05/11	2024/05/10		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. Florit, No. 1, Runsherg Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 45 of 47

		RSE Test S	ystem		
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2023/02/07	2024/02/06
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzei	NOTIBLASCITVANZ	1 37743	30771-01-02-04	2023/05/11	2024/05/10
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving	SCHWRZBECK MESS-	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
antenna	ELEKTRONIK	вына 9170	30771-01-11-03	2023/05/12	2024/05/11
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

邮编: 215000



Report No.: SEWM2305000160RG01

Rev.: 01 Page: 46 of 47

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k to 30MHz)
7	Dedicted Emission	± 4.88dB (30M to 1GHz)
7	Radiated Emission	± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{cispr/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SEWM2305000160RG01

Rev.: 01 Page: 47 of 47

7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	GSM 850&1900
Appendix B.2	WCDMA Band II & IV & V
Appendix B.3	LTE Band 2
Appendix B.4	LTE Band 4
Appendix B.5	LTE Band 5
Appendix B.6	LTE Band 7
Appendix B.7	LTE Band 12
Appendix B.8	LTE Band 13
Appendix B.9	LTE Band 17
Appendix B.10	LTE Band 26(814-824)
Appendix B.11	LTE Band 26(824-849)
Appendix B.12	LTE Band 38
Appendix B.13	LTE Band 41
Appendix B.14	LTE Band 42
Appendix B.15	LTE CA_41C
Appendix B.16	LTE CA_42C

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. Florit, No. 1, Runsherg Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

编: 215000 t (86–512) 62992980