

Report No.: SEWM2305000160RG09

Rev.: 01 Page: 1 of 134

# FCC SAR TEST REPORT

Application No.: SEWM2305000160RG

**Applicant:** Xiaomi Communications Co., Ltd. **Manufacturer:** Xiaomi Communications Co., Ltd.

Product Name: Mobile Phone

Model No.(EUT): 23076RA4BR,XIG03

Trade Mark: Redmi

FCC ID: 2AFZZRA4BR

Standards: FCC 47CFR \Science .1093

**Date of Receipt:** 2023-05-27

**Date of Test:** 2023-06-01 to 2023-06-10

Date of Issue: 2023-06-19
Test conclusion: PASS \*

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overlead, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-an-Document.aspx</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

 South of No. Filent No. 1, Runslang Road, Suthou Industrial Park, Suthou Area, Chine (Jargau) Plot Free Trade Zone
 215000
 t (86-512) 62992980
 www.sgsgroup.com.

 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州上区苏州工业园区周胜器(号约6号厂房南部
 邮编: 215000
 t (86-512) 62992980
 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 2 of 134

#### **REVISION HISTORY**

Report Number	Revision	Description	Issue Date
SEWM2305000160RG09	01	Original	2023-06-19



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgs t (86–512) 62992980 sgs.china

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: Page: 3 of 134

#### **TEST SUMMARY**

Francisco Pand		Maximum Re	ported SAR(W/kg)				
Frequency Band	Head	Body-worn	Hotspot	Product specific 10g SAR			
GSM850	0.63	0.56	0.56	/			
GSM1900	1.09	0.65	0.93	/			
WCDMA Band II	0.94	0.88	1.02	/			
WCDMA Band IV	0.74	0.79	1.00	/			
WCDMA Band V	0.93	0.52	0.52	/			
LTE Band 2	0.75	0.68	1.07	/			
LTE Band 4	0.64	0.80	0.97	/			
LTE Band 5	0.85	0.48	0.48	/			
LTE Band 7	0.68	0.71	0.72	/			
LTE Band 12	0.44	0.25	0.25	/			
LTE Band 13	0.59	0.32	0.32	/			
LTE Band 17	0.44	0.25	0.25	/			
LTE Band 26	0.85	0.48	0.48	/			
LTE Band 38	0.61	0.50	0.50	/			
LTE Band 41	0.61	0.50	0.50	/			
LTE Band 42	0.99	0.51	0.51	/			
NR Band n41	0.84	0.56	0.56	/			
NR Band n77	0.67	0.48	0.48	/			
NR Band n78	0.67	0.48	0.48	/			
WI-FI (2.4GHz)	0.42	0.40	0.40	/			
WI-FI (5GHz)	0.50	0.47	0.47	0.77			
BT	0.20	0.07	0.07	/			
NFC	/	/	/	<0.10			
SAR Limited(W/kg)		1.6		4.0			
Maximum Simultaneous Transmission SAR (W/kg)							
Scenario	Head	Body-worn	Hotspot	Product specific 10g SAR			
Sum SAR	1.59	1.48	1.55	0.78			
SPLSR	1	/	/	/			
SPLSR Limited		0.04		0.1			

1) According to TCB workshop October, 2014 RF Exposure Procedures Update (Overlapping Bands): SAR for LTE Band 5 (Frequency range:824 - 849 MHz)/ LTE Band 17 (Frequency range:704-716 MHz)/LTE Band 38 (Frequency range:2570 - 2620 MHz)/ n78 (Frequency range:3300 - 3800 MHz is respectively covered by LTE Band 26 (Frequency range:814 - 849 MHz)/ LTE Band 12 (Frequency range:699-716 MHz)/LTE Band41 (Frequency range:2496 - 2690 MHz)/ n78 (Frequency range:3300 - 3800 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth.

2) For LTE band 5/12/13/26 and n41/n77 that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3)According to the declaration letter from manufacturer, added testing for LTE Band42/n77/n78, for the other Band variant test at the worstcase SAR of original report SEWM2304000137RG09 in this report, The FCC ID of the original report SEWM2304000137RG09 is 2AFZZRN8DY.

4) Maximum Reported SAR is select the worst presentation of the original report SEWM2304000137RG09 and this report.

Reviewed by Well Wei

Nick Hu

Prepared by Nick Vhu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 4 of 134

#### **CONTENTS**

1	GENI	ERAL INFORMATION	7
	1.1	DETAILS OF CLIENT	7
	1.2	TEST LOCATION	7
		TEST FACILITY	
		GENERAL DESCRIPTION OF EUT	
	1.4.1		
	1.4.2	, ,	
	1.4.3	·	
	_	TEST SPECIFICATION	
		RF EXPOSURE LIMITS	
2	LAB	DRATORY ENVIRONMENT	17
3	SAR	MEASUREMENTS SYSTEM CONFIGURATION	18
	3.1	THE SAR MEASUREMENT SYSTEM	18
	3.2	ISOTROPIC E-FIELD PROBE EX3DV4	19
	3.3	DATA ACQUISITION ELECTRONICS (DAE)	20
	3.4	SAM TWIN PHANTOM	20
	3.5	ELI PHANTOM	21
	3.6	DEVICE HOLDER FOR TRANSMITTERS	22
	3.7	MEASUREMENT PROCEDURE	23
	3.7.1	Scanning procedure	23
	3.7.2	Data Storage	25
	3.7.3	Data Evaluation by SEMCAD	25
4	SAR	MEASUREMENT VARIABILITY AND UNCERTAINTY	27
	4.1	SAR MEASUREMENT VARIABILITY	27
	4.2	SAR MEASUREMENT UNCERTAINTY	27
5	DESC	CRIPTION OF TEST POSITION	28
	5.1	HEAD EXPOSURE CONDITION	
	5.1.1		
	5.1.2		
	5.1.3		
	5.1.4	•	
	5.2	BODY EXPOSURE CONDITION	
	5.2.1		
	5.2.2	•	
		EXTREMITY EXPOSURE CONDITIONS	
	5.4	PROXIMITY SENSOR TRIGGERING TEST	33
6	SAR	SYSTEM VERIFICATION PROCEDURE	48
	6.1	TISSUE SIMULATE LIQUID	48



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 5 of 134

	6.1.1	Recipes for Tissue Simulate Liquid	
	6.1.2	Measurement for Tissue Simulate Liquid	
6.		SAR System Check	
	6.2.1	Justification for Extended SAR Dipole Calibrations	
	6.2.2	Summary System Check Result(s)	
	6.2.3	Detailed System Check Results	52
7	TEST	CONFIGURATION	53
7.		3G SAR TEST REDUCTION PROCEDURE	
7.		OPERATION CONFIGURATIONS	
	7.2.1	GSM Test Configuration	
	7.2.2	WCDMA Test Configuration	
	7.2.3	WiFi Test Configuration	
	7.2.4	LTE Test Configuration	
	7.2.5	NR Band Test Configuration	
8		RESULT	
8.		MEASUREMENT OF RF CONDUCTED POWER	
8.		MEASUREMENT OF SAR DATA	
	8.2.1	SAR Result of GSM850	
	8.2.2	SAR Result of GSM1900	
	8.2.3	SAR Result of WCDMA Band II	
	8.2.4	SAR Result of WCDMA Band IV	
	8.2.5	SAR Result of WCDMA Band V	
	8.2.6 8.2.7	SAR Result of LTE Band 2SAR Result of LTE Band 7	
	8.2.8	SAR Result of LTE Band 12	
	8.2.9	SAR Result of LTE Band 12SAR Result of LTE Band 13	
	8.2.10		
	8.2.11		
	8.2.1	SAR Result of LTE Band 41	
	8.2.2	SAR Result of LTE BandooSAR Result of LTE Band42	
	8.2.1	SAR Result of 5G NR n41	
	8.2.2	SAR Result of 5G NR n77	
	8.2.3	SAR Result of WIFI 2.4G	
	8.2.1	SAR Result of WIFI 5G	
	8.2.2	SAR Result of BT	
	8.2.1	SAR Result of NFC	
8.3		MULTIPLE TRANSMITTER EVALUATION	
0.	8.3.1	Simultaneous SAR SAR test evaluation	
	8.3.2	Simultaneous Transmission SAR Summation Scenario	
9	EQUI	PMENT LIST	133
10	CALIE	BRATION CERTIFICATE	134
11	РНОТ	OGRAPHS	134
APP	ENDIX	A: DETAILED SYSTEM CHECK RESULTS	134
APP	ENDIX	B: DETAILED TEST RESULTS	134



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.aspx.and">http://www.sps.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.aspx.and">http://www.sps.com/en/Terms-and-Conditions.aspx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 6 of 134

APPENDIX C: CALIBRATION CERTIFICATE	134
APPENDIX D: PHOTOGRAPHS	134
APPENDIX F: CONDUCTED RE OUTPUT POWER	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 7 of 134

#### 1 General Information

#### 1.1 Details of Client

Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

#### 1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.					
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone					
Post code:	215000					
Test Engineer:	Alan-Zhang, Leon-Liu					





Report No.: SEWM2305000160RG09

Rev.: 01 Page: 8 of 134

#### 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327





Report No.: SEWM2305000160RG09

Rev.: 01 Page: 9 of 134

## 1.4 General Description of EUT

Device Type :	portable device									
Exposure Category:	uncontrolled environment / general population									
Product Name:	Mobile Phone									
Model No.(EUT):	23076RA4BR, XIG03									
FCC ID:	2AFZZRA4BR	, ,								
Trade Mark:	Redmi									
Product Phase:	Identical Prototype									
	1# 863532060006747/8635	32060006754								
IMEI:	2# 863532060006705/8635									
	3# 863532060006986/8635	32060006994								
Hardware Version:	P1.1									
Software Version:	MIUI14									
Device Operating Configuratio										
	GSM: GMSK, 8PSK; WCDN									
Modulation Mode:	LTE: QPSK,16QAM,64QAM	ı BPSK, QPSK, 16QAM, 64QAN	1 2560 AM)							
Modulation Mode.	CP-OFDM (QPSK, 16QAM,		i, 256QAM),							
		A; <b>BT:</b> GFSK, π/4DQPSK,8DP	SK							
Device Class:	В	, - , - , - , -								
GPRS Multi-slots Class:	33	EGPRS Multi-slots Class:	33							
HSDPA UE Category:	24	HSUPA UE Category	6							
DC-HSDPA UE Category:	24									
	4,tested with power level 5(GSM850)									
Power Class	1,tested with power level 0(GSM1900)									
Fower Class	3, tested with power control "all 1"(WCDMA Band)									
	3, tested with power control	Max Power(LTE Band)								
	Band	Tx (MHz)	Rx (MHz)							
	GSM850	824~849	869~894							
	GSM1900	1850~1910	1930~1990							
	WCDMA Band II	1850~1910	1930~1990							
	WCDMA Band IV	1710~1755	2110~2155							
	WCDMA Band V	824~849	869~894							
	LTE Band 2	1850 ~1910	1930 ~1990							
	LTE Band 4	1710~1755	2110~2155							
Frequency Bands:	LTE Band 5	824~849	869-894							
Frequency Bands.	LTE Band 7	2500~2570	2620~2690							
	LTE Band 12	699~716	729~746							
	LTE Band 13	777 - 787	746 - 756							
	LTE Band 17	704~716	734~746							
	LTE Band 26	814~849	859~894							
	LTE Band 38	2570~2620	2570~2620							
	LTE Band 41	2496~2690	2496~2690							
	LTE Band 42	3400~3600	3400~3600							
	NR Band n41	2496~2690	2496~2690							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions (Forms-e-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 10 of 134

	ND Dand n77	;	3450~3550	3450~3550		
	NR Band n77	;	3700~3980	3700~3980		
	ND Dond 270	;	3450~3550	3450~3550		
	NR Band n78	;	3700~3800	3700~3800		
	Bluetooth	2	400~2483.5	2400~2483.5		
	Wi-Fi 2.4G	2	2402~2462	2402~2462		
			5150~5250	5150~5250		
	Wi-Fi 5G		5250~5350	5250~5350		
	WI-FI 5G		5470~5725	5470~5725		
		Į.	5725~5850	5725~5850		
RF Cable:	□ Provided by	the aplicant	☐ Provided by the	laboratory		
NFC	Wireless Technology and Range	Frequency	requency 13.56MHz			
	mode		ASK			
	Model:	BM5R				
4# Dattan Information	Normal Voltage:	+3.87V	+3.87V			
1# Battery Information:	Typical capacity:	5000mAh	5000mAh			
	Manufacturer:	SUCD	SUCD			
	Model:	BM5R	BM5R			
2# Bottom Information:	Normal Voltage:	+3.87V				
2# Battery Information:	Typical capacity:	5000mAh	5000mAh			
	Manufacturer:	NVT				

Note: \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

#### Remark

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 11 of 134

#### 1.4.1 DUT Antenna Locations (Back View)

The DUT Antenna Locations (Back View) can refer to Appendix D.

#### Note:

1) The test device is a smart phone. The overall diagonal dimension of this device is 175 mm. Per KDB 648474 D04, because the diagonal distance of this device is ≥160mm, so it is a phablet.

2) Ant 0 is sensor pad 1 Ant 4 is sensor pad 2 Ant 2 is sensor pad 3

According to the distance between 5G NR/LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

and the contraction that									
EUT Sides for SAR Testing									
Mode Exposure Front Back Left Right Top Bott									
Ant 0	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes		
Ant 3	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	No	Yes	No		
Ant 4	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	No	Yes	No		
Ant 5	Hotspot/Product specific 10g SAR	Yes	Yes	No	No	Yes	No		

Table 1: EUT Sides for SAR Testing

Note:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

<sup>1)</sup> When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 12 of 134

#### 1.4.2 LTE CA additional specification

The device supports downlink and intra-band contiguous uplink LTE Carrier Aggregation (CA). When carrier aggregation applies, implementation and measurement details for the following are necessary.

- a) Intra-band carrier aggregation requirements for uplink.
- b) Intra-band and inter-band carrier aggregation requirements for downlink.

The possible downlink and uplink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The conducted power measurement results of downlink and uplink LTE CA are provided in Section 8 of this report per 3GPP TS 36.521-1 V14.4.0. The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

SAR test procedure for intra-band contiguous UL LTE CA is as below:

- 1)Maximum output power is measured for each UL CA configuration for the required test channels described in KDB 941225 D05
- UL PCC configuration is determined by the required test channel
- SCC and subsequent CCs are added alternatively to either side of the PCC or within the transmission band for channels at the ends of a frequency band.
- 2)SAR for UL CA is required in each exposure condition and frequency band combination
- 3)For this device , as the maximum output for Intra-band uplink LTE CA is  $\leq$  standalone LTE mode (without CA),
- PCC is configured according to the highest standalone SAR configuration tested.
- SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC
- 4) When the reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels (PCC based)
- 5)UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level.

Intra-band contiguous CA operating bands:

E-UTRA CA	E-UTRA	Uplink (UL)	ope	rating band	Downlink (DI	_) op	erating band	Dunley	
Band	_	BS receive / UE transmit  Ful_low - Ful_high		E transmit	BS transmit / UE receive			Duplex Mode	
Danu	Band			F <sub>DL_low</sub> – F <sub>DL_high</sub>			Wode		
CA_41	41	2496 MHz	_	2690 MHz	2496 MHz	ı	2690 MHz	TDD	
CA_42	42	3400 MHz	_	3600 MHz	3400 MHz	_	3600 MHz	TDD	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 13 of 134

c) The device supports Inter-band uplink LTE CA for CA\_41A-42A with two component carriers in the uplink.

1. For Inter-band uplink LTE CA SAR, as the existing SAR test system cannot test the multiple different frequency bands simultaneous Transmission SAR at the same time, we suggest that the conservative "max + max" multi-Tx and SAR scaling method can be used to evaluate the inter-band Uplink LTE CA SAR from standalone SAR test results of each LTE component band and the conservative "max + max" multi-Tx method to combine the scaled SAR value from each Inter-band uplink LTE CA component band as the inter-band Uplink LTE CA SAR. All Simultaneous Transmission Scenarios will be evaluated independently in the final SAR report. Since the maximum output power of the LTE Inter-band uplink band is ≤ the LTE Band, the SAR data of the LTE Band is used instead of the SAR data of the LTE Inter-band uplink band.

2CC Downlink Carrier Aggregation	DL 4x4 MIMO	3CC Downlink Carrier Aggregation	4CC Downlink Carrier Aggregation
CA_41C	41C	CA_41A-42C	CA_41C-42C
CA_41A-B42A	41A,42A	CA_41C-42A	-
CA_42C	42C	-	-
CA_41A-42C	-	-	-
CA_41C-42A	-	-	-
CA_41C-42C	-	-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 14 of 134

#### 1.4.3 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation

- 1) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction
- 2) A fixed level power reduction is applied for some frequency bands when handset operate "held to the ear" condition, the power reduction triggered by audio receiver detection. The audio receiver detection is used to determine head or body scenario.
- 3) The proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance (Refer to section 5.4 for detailed proximity Sensor information and validation data per KDB 616217).

The detailed power reduction information can be referred to Appendix E.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 15 of 134

## 1.5 Test Specification

Identity	Document Title			
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices			
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.			
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Avera Specific Absorption Rate (SAR) in the Human Head from Wirele Communications Devices: Measurement Techniques			
KDB 941225 D01	3G SAR Measurement Procedures v03r01			
KDB 941225 D05	SAR for LTE Devices v02r05			
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02			
KDB 941225 D06	Hotspot Mode SAR v02r01			
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02			
KDB 648474 D04	Handset SAR v01r03			
KDB 447498 D01	General RF Exposure Guidance v06			
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04			
KDB 865664 D02	RF Exposure Reporting v01r02			
KDB 690783 D01	SAR Listings on Grants v01r03			
KDB 616217 D04	SAR for laptop and tablets v01r02			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 16 of 134

#### 1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational	
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g	
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g	
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g	

#### Notes:

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



<sup>\*</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

<sup>\*\*</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>\*\*\*</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 17 of 134

# 2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C			
Relative humidity	Min. = 30%, Max. = 70%			
Ambient noise is checked and found very low and in compliance with requirement of standards.				
Reflection of surrounding objects is minimized and in compliance with requirement of standards.				

Table 2: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents, subject to Terms at Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document-ex-Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 18 of 134

# 3 SAR Measurements System Configuration

#### 3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  (|Ei|2)/  $\rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

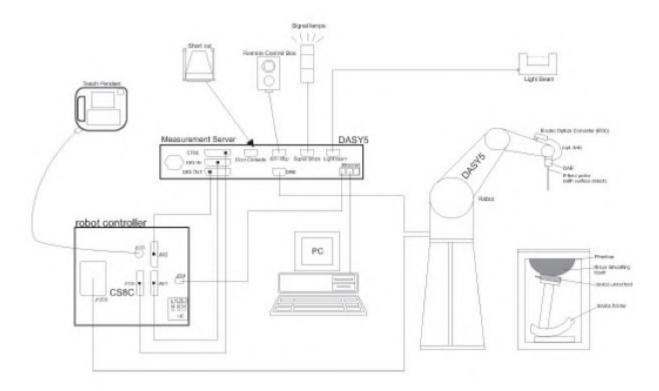

F-1. SAR Measurement System Configuration



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx.and">http://www.sgs.com/en/Terms-and-Conditions.apx.and</a>, for electronic format documents as subject to Terms and Conditions [Jerms-e-Document as the fitter. <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx.attention">http://www.sgs.com/en/Terms-e-Document.apx.attention</a> is frawn to the limitation of liability. Indemnification and jurisdicton issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent or the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 19 of 134

• The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

#### 3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

15000 t (86–512) 62

sgs.china@sgs.com




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 20 of 134

### 3.3 Data Acquisition Electronics (DAE)

Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

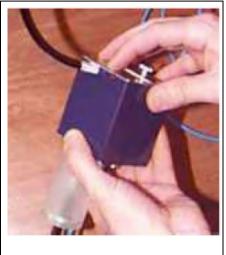

#### 3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)		
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)		
Shell Thickness	2 ±0.2 mm (6 ±0.2 mm at ear point)		
Dimensions (incl. Wooden Support)	Length: 1000 mm  Width: 500 mm  Height: adjustable feet		
Filling Volume	approx. 25 liters		
Wooden Support	SPEAG standard phantom table		



The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condit

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

15000 t (86–512) 62

sgs.china@sgs.com




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 21 of 134

#### 3.5 ELI Phantom

	-		
Material	Vinylester, glass fiber reinforced (VE-GF)		
Liquid	Compatible with all SPEAG tissue		
Compatibility	simulating liquids (incl. DGBE type)		
Shell Thickness	2.0 ±0.2 mm (bottom plate)		
Dimensions	Major axis: 600 mm		
	Minor axis: 400 mm		
Filling Volume	approx. 30 liters		
Wooden Support	SPEAG standard phantom table		



The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 4 MHz to 10 GHz. ELI is fully compatible with the IEC/IEEE 62209-1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all of SPEAG's dosimetric probes and dipoles.

ELI V5.0 and higher has the same shell geometry and is manufactured from the same material as ELI V4.0 but has a reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 22 of 134

#### 3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\varepsilon$ =3 and loss tangent  $\delta$ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alterations, forgety or fastification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

\*\*Fig. 13. \*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for 30 days only.\*\*

\*\*The Company Ample (s) are retained for



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 23 of 134

#### 3.7 Measurement procedure

#### 3.7.1 Scanning procedure

#### **Step 1: Power reference measurement**

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

#### Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

#### Step 3: Zoom scan

Around this point, a volume of 32mm\*32mm\*30mm (f≤2GHz), 30mm\*30mm\*30mm (f for 2-3GHz) and 24mm\*24mm\*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points (f≤2GHz), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 24 of 134

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area seen spatial resolution: Av. Av.			$\leq$ 2 GHz: $\leq$ 15 mm 3 - 4 GHz: $\leq$ 12 mm 2 - 3 GHz: $\leq$ 12 mm 4 - 6 GHz: $\leq$ 10 mm When the x or y dimension of the test device, in the	
Maximum area scan spatial resolution: Δx <sub>Area</sub> , Δy <sub>Area</sub>		measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>		$\leq$ 2 GHz: $\leq$ 8 mm 2 – 3 GHz: $\leq$ 5 mm <sup>*</sup>	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface grad	uniform grid: ∆z <sub>Zoom</sub> (n)		≤ 5 mm	$3 - 4 \text{ GHz} \le 4 \text{ mm}$ $4 - 5 \text{ GHz} \le 3 \text{ mm}$ $5 - 6 \text{ GHz} \le 2 \text{ mm}$
	graded	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	$3-4 \text{ GHz: } \le 3 \text{ mm}$ $4-5 \text{ GHz: } \le 2.5 \text{ mm}$ $5-6 \text{ GHz: } \le 2 \text{ mm}$
	grid  Δz <sub>Zoom</sub> (n>1): between subsequent points		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	V V 7		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

#### Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm$  5 %



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 25 of 134

#### 3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [C], [m W/g], [m W/cm], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### 3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2

Conversion factorDiode compression pointDcpi

Device parameters: - Frequency f

- Crest factor cf Media parameters: - Conductivity ε

- Density p

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With Vi = compensated signal of channel i (i = x, y, z)

Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_{i} = (V_{i} / Norm_{i} \cdot ConvF)^{1/2}$$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

or email: CN.Doccheck@sgs.com | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86–8

中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: Page: 26 of 134

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$
  
With Vi = compensated signal of channel i (i = x, y, z)  
Normi = sensor sensitivity of channel I (i = x, y, z)

[mV/(V/m)2] for E-field Probes

ConvF = sensitivity enhancement in solution

aij = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

Ei = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$$

SAR = local specific absorption rate in mW/g with Etot = total field strength in V/m

 $\sigma$ = conductivity in [mho/m] or [Siemens/m]

ε= equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 \frac{2}{3770} \,_{or} \, P_{pwe} = H_{tot}^2 \cdot 37.7$$

Ppwe = equivalent power density of a plane wave in mW/cm2

Etot = total electric field strength in V/m

Htot = total magnetic field strength in A/m



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 27 of 134

## 4 SAR measurement variability and uncertainty

#### 4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is remounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq$  0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq$  1.45 W/kg ( $\sim$  10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

### 4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.




Report No.: SEWM2305000160RG09

Rev.: Page: 28 of 134

## **Description of Test Position**


## **5.1 Head Exposure Condition**

#### 5.1.1 **SAM Phantom Shape**

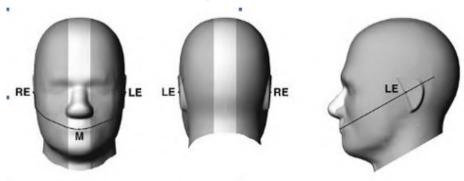


Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

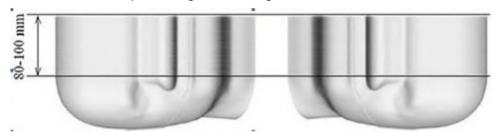

Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)



F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven crosssectional plane locations



F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

sgs.china@sgs.com




Report No.: SEWM2305000160RG09


Rev.:

Page: 29 of 134

#### **EUT constructions** 5.1.2



F-7. Handset vertical and horizontal reference lines-"fixed case"



F-8. Handset vertical and horizontal reference lines-"clam-shell case"

#### 5.1.3 Definition of the "cheek" position

- a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



unauthorized alteration, forgery or falsificat ecuted to the fullest extent of the law. Unless such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01


Page: 30 of 134

#### 5.1.4 Definition of the "tilted" position

- a) Position the device in the "cheek" position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

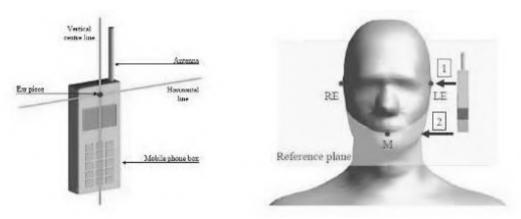

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

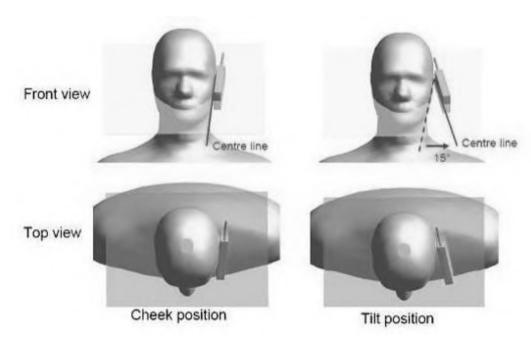

F-10. "Cheek" and "tilt" positions of the mobile phone on the left side



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 31 of 134

#### **5.2 Body Exposure Condition**


#### 5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

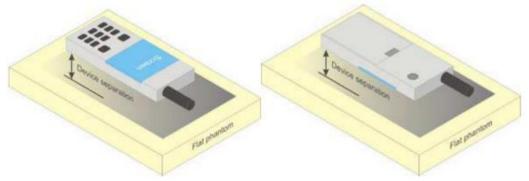

F-11. Test positions for body-worn devices



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Cocuments">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Cocuments</a>. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Cocuments at Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsherg Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 32 of 134

#### 5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets (L x W  $\geq$  9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

#### 5.3 Extremity exposure conditions

Per FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The LIMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antennal content.

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, hotspot power levels, and product specific 10g SAR power levels are the same, no frequency bands need to test with 0mm for the Product Specific 10-g SAR are not required.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09


Rev.: 01

Page: 33 of 134

### **5.4 Proximity Sensor Triggering Test**

#### Proximity sensor triggering distances:

The Proximity sensor triggering was applied to WWAN antenna. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

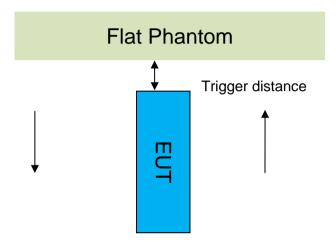

Proximity Sensor Triggering Distance(mm)					
Antenna Ant0/3/4/5 Ant0/3/4/5 Ant0 Ant3/4/5					
Position	Front	Back	Bottom Side	Top Side	
Minimum	13	18	16	20	
Required SAR Test	12	17	15	19	

#### Note:

SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat




Report No.: SEWM2305000160RG09

Rev.: 01 Page: 34 of 134

Ant 0 DUT Moving Toward(Trigger)the Phantom

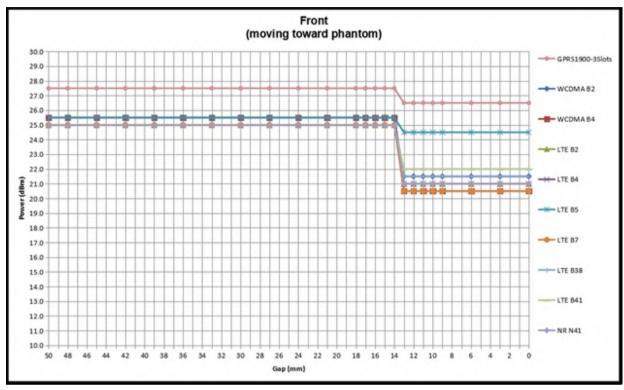

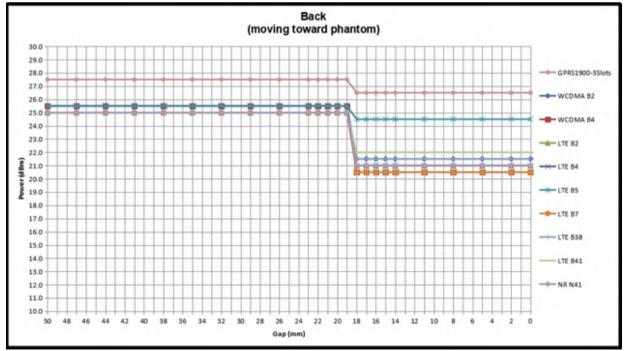



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01 Page: 35 of 134

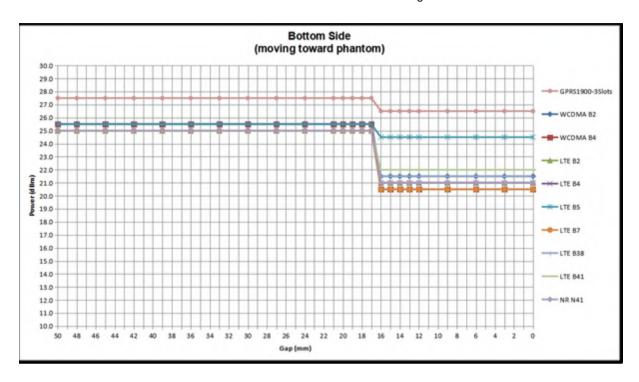

Ant 0 DUT Moving Away(Release) from the Phantom

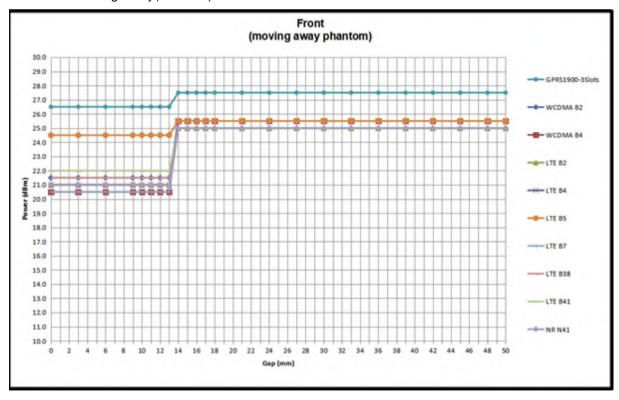



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.


South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pitol Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 36 of 134

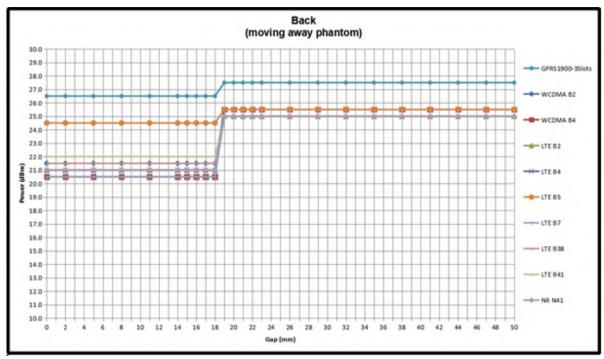

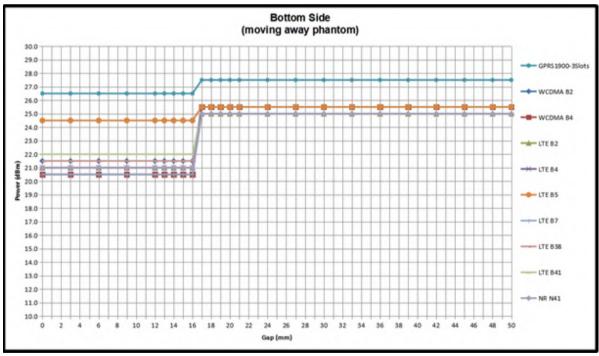



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000





Report No.: SEWM2305000160RG09

Rev.: 01

Page: 37 of 134

### Ant 4 DUT Moving Toward(Trigger)the Phantom

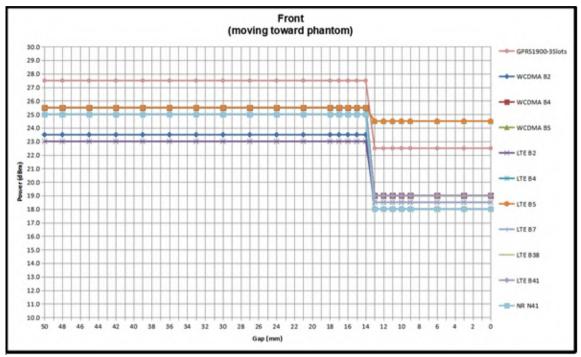

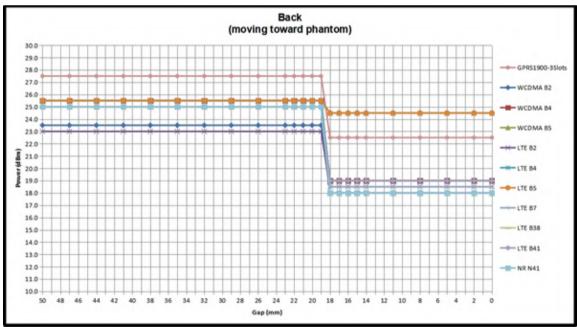



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01 Page: 38 of 134

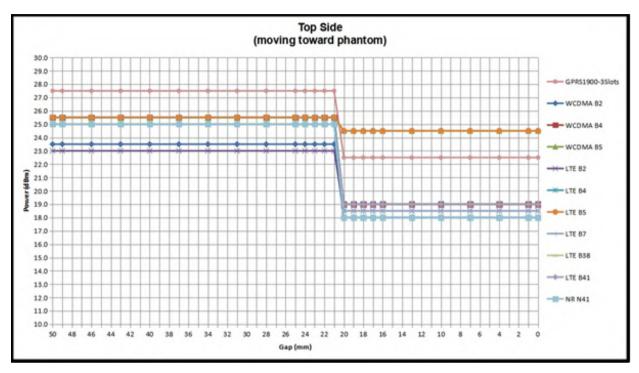

Ant 4 DUT Moving Away(Release) from the Phantom

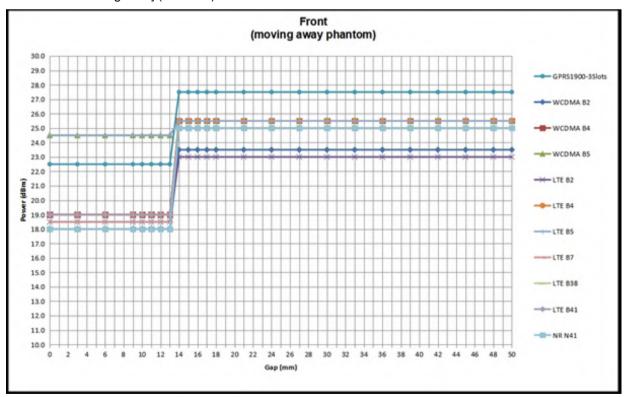



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.


South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 39 of 134

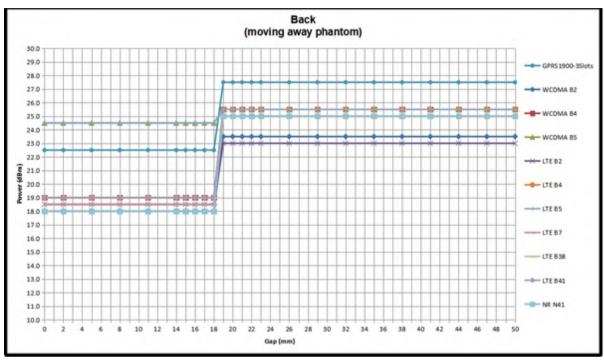

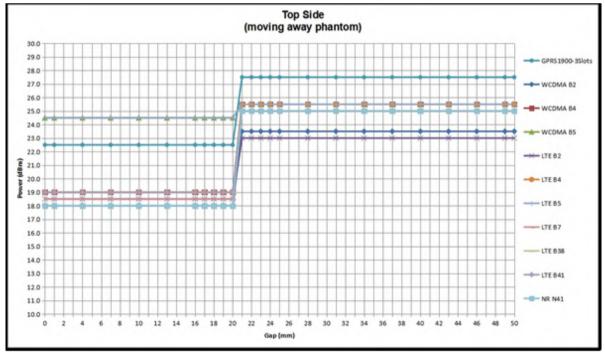



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000





Report No.: SEWM2305000160RG09

Rev.: 01

Page: 40 of 134

### Ant 3 DUT Moving Toward(Trigger)the Phantom

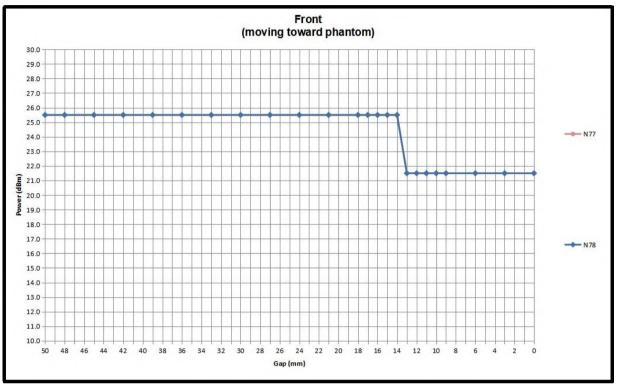

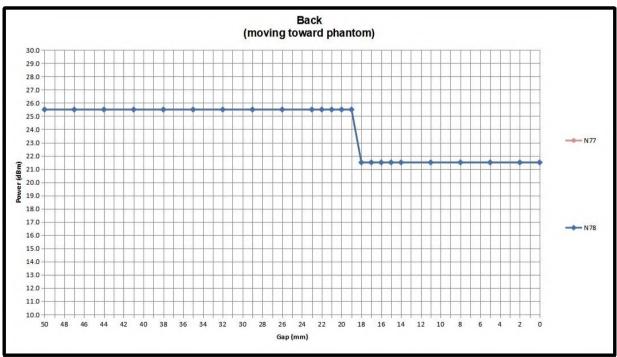



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agox and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-en-Document as part to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307.1443.


South of No. 6 Phart, No. 1, Runshang Read, Suzhou Industrial Park, Suzhou Area, China (liangsu) Plot Free Trate Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区园胜路1号约6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 41 of 134

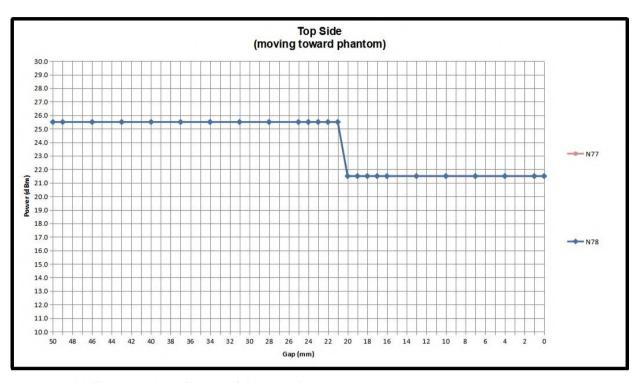

Ant 3 DUT Moving Away(Release) from the Phantom

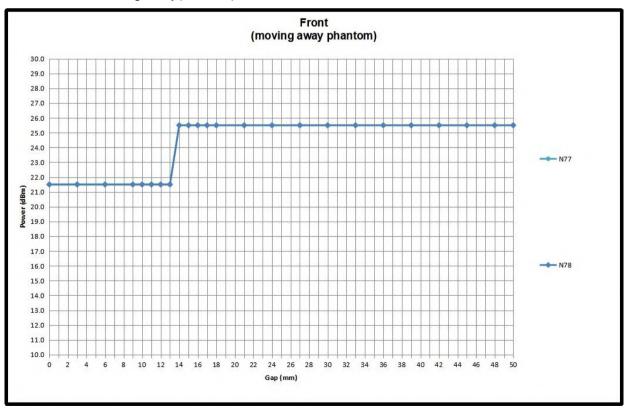



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.


South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 42 of 134

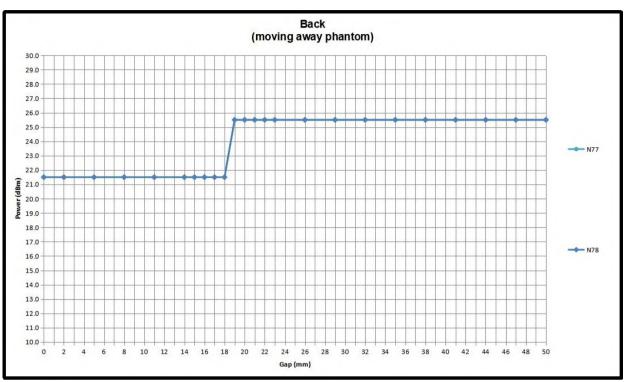

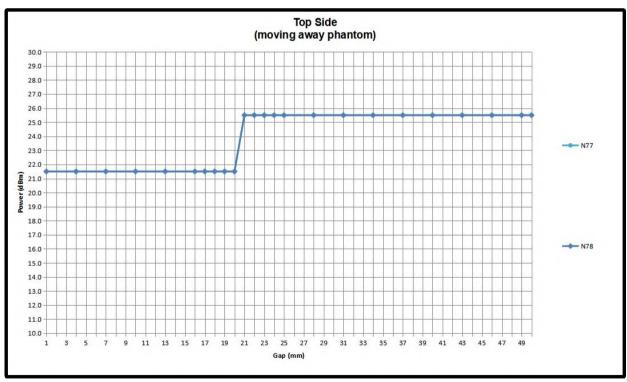



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and.for electronic format documents">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.and.for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307.1443.

or email: <u>CN. Doccheck@sgs.com</u> | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jangsu) PNot Free Trade Zone 215000 t (86–512) 62992980 www.sgsgrou

中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000





Report No.: SEWM2305000160RG09

Rev.: 01

Page: 43 of 134

### Ant 5 DUT Moving Toward(Trigger)the Phantom

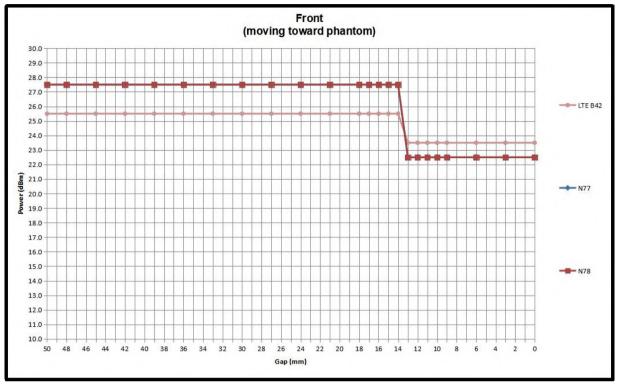

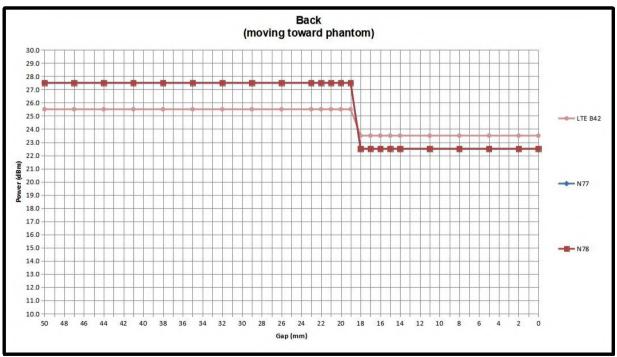



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and.for electronic format documents">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.and.for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307.1443.


South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pitol Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州 | 上级国区河胜路 | 号的6号厂房南部 鄭樂: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 44 of 134

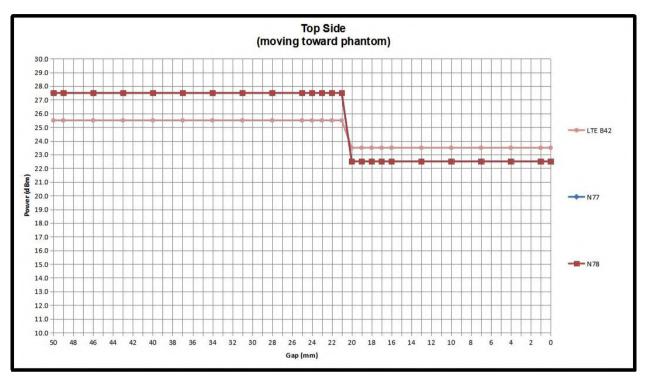

Ant 5 DUT Moving Away(Release) from the Phantom



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.


South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 45 of 134

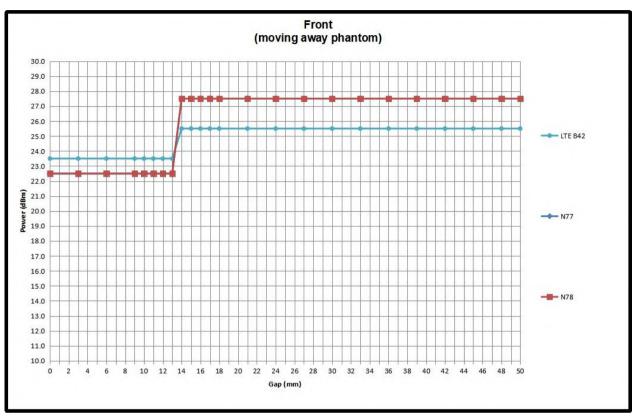

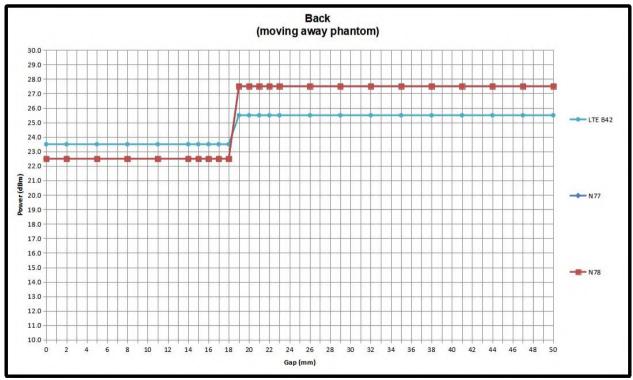



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.


South of No. 6 Plant, No. 1, Runsherg Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区洞胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 46 of 134

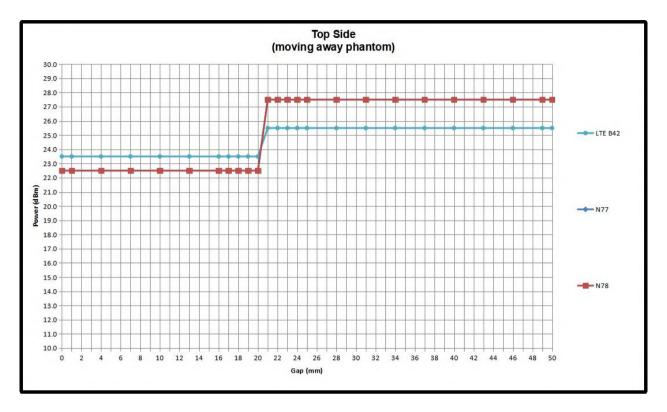



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/ferms-and-Conditions.appx">http://www.sps.com/en/ferms-and-Conditions.appx</a> and, for electronic Documents at http://www.sps.com/en/ferms-en/conditions/ferms-e-Document aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\* To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsherng Road, Suchou Industrial Park, Suzhou Area, Chira (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜最1号的6号厂房商部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 47 of 134

### Proximity sensor coverage


If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and "along the direction of maximum antenna and sensor offset".

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

### Device tilt angle influences to proximity sensor triggering

The influence of device tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom.

Rotating the tablet around the edge next to the phantom in  $\leq 10^{\circ}$  increments until the tablet is  $\pm 45^{\circ}$  from the vertical position at 0°, and the maximum output power remains in the reduced mode.

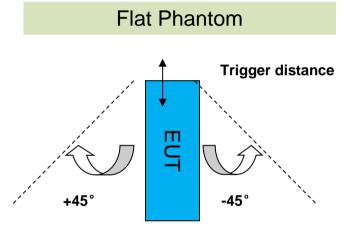

	Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering for Top Side												
Band	Band Minimum trigger		Power Reduction Status										
(MHz)	distance Per KDB616217§6.2	power reduction was maintained over ±45°	-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
Ant0	Bottom side:16mm	Bottom side:16mm	on	on	on	on	on	on	on	on	on	on	on
Ant3/4/5	Top side:20mm	Top side:20mm	on	on	on	on	on	on	on	on	on	on	on



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Sucrose: 98+% Pure Sucrose

HEC: Hydroxyethyl Cellulose

Page: 48 of 134

## 6 SAR System Verification Procedure

## 6.1 Tissue Simulate Liquid

### 6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients	Frequency (MHz)						
(% by weight)	450	700-900	1750-2000	2300-2500	2500-2700		
Water	38.56	40.30	55.24	55.00	54.92		
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23		
Sucrose	56.32	57.90	0	0	0		
HEC	0.98	0.24	0	0	0		
Bactericide	0.19	0.18	0	0	0		
Tween	0	0	44.45	44.80	44.85		

Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ+ resistivity

Tween: Polyoxyethylene (20) sorbitan monolaurate

HSL13MHz is composed of the following ingredients:

Water: 50-90%

Non-ionic detergents: 5-50%

Nacl: 0-2%

Preservative: 0.03-0.1%

HSL5GHz is composed of the following ingredients:

Water: 50-65%
Mineral oil: 10-30%
Emulsifiers: 8-25%
Sodium salt: 0-1.5%

Table 3: Recipe of Tissue Simulate Liquid



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of transaction from exercising all their rights and obligations under the transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention\*\* To check the authenticity of testing finspection report & certificite, please contact us at telephone: (86-755) \$3071443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 49 of 134

### 6.1.2 Measurement for Tissue Simulate Liquid

The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue	Measured Frequency	Target Tiss	sue (±5%)	Measure	d Tissue	Liquid Temp.	Test Date
Туре	(MHz)	ε <sub>r</sub>	σ(S/m)	ε <sub>r</sub>	σ(S/m)	(℃)	Test Date
13 Head	13	55	0.75	53.700	0.757	22.6	2023/6/8
750 Head	750	41.9	0.89	40.400	0.904	22.6	2023/5/5
835 Head	835	41.5	0.90	41.500	0.890	22.2	2023/5/7
1750 Head	1750	40.1	1.37	40.000	1.380	22.9	2023/5/10
1900 Head	1900	40.0	1.40	39.800	1.360	22.9	2023/5/12
2450 Head	2450	39.20	1.80	38.000	1.880	22.6	2023/5/16
2600 Head	2600	39.0	1.96	40.700	1.940	22.5	2023/5/18
3500 Head	3500	37.9	2.91	37.700	2.930	22.5	2023/5/26
3900 Head	3900	37.5	3.32	37.200	3.210	22.6	2023/5/28
5250 Head	5250	35.9	4.66	35.500	4.510	22.7	2023/5/24
5600 Head	5600	35.5	5.07	35.000	4.820	22.7	2023/5/24
5750 Head	5750	35.4	5.22	34.500	5.120	22.7	2023/5/24

Table 4: Measurement result of Tissue electric parameters(original report No:SEWM2304000137RG09).

Tissue	Measured Frequency	Target Tiss	sue (±5%)	Measure	d Tissue	Liquid Temp.	Toot Date
Туре	(MHz)	ε <sub>r</sub>	σ(S/m)	ε <sub>r</sub>	σ(S/m)	(℃)	Test Date
13 Head	13	55	0.75	53.700	0.757	22.6	2023/6/8
750 Head	750	41.9	0.89	43.800	0.880	22.8	2023/6/1
835 Head	835	41.5	0.90	43.400	0.945	22.6	2023/6/2
1750 Head	1750	40.1	1.37	39.600	1.330	22.4	2023/6/3
1900 Head	1900	40.0	1.40	39.100	1.470	23.1	2023/6/4
2450 Head	2450	39.20	1.80	40.200	1.800	22.7	2023/6/5
2600 Head	2600	39.0	1.96	37.100	1.890	22.6	2023/6/6
3500 Head	3500	37.9	2.91	38.600	2.990	22.9	2023/6/7
3900 Head	3900	37.5	3.32	37.400	3.450	22.9	2023/6/9
5250 Head	5250	35.9	4.66	36.200	4.780	22.8	2023/6/10
5600 Head	5600	35.5	5.07	35.300	5.170	22.8	2023/6/10
5750 Head	5750	35.4	5.22	35.100	5.360	22.8	2023/6/10

Table 5: Measurement result of Tissue electric parameters(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document say that the first of the stream of the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate\_please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com




Report No.: SEWM2305000160RG09

Rev.: 01 Page: 50 of 134

### 6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15±0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

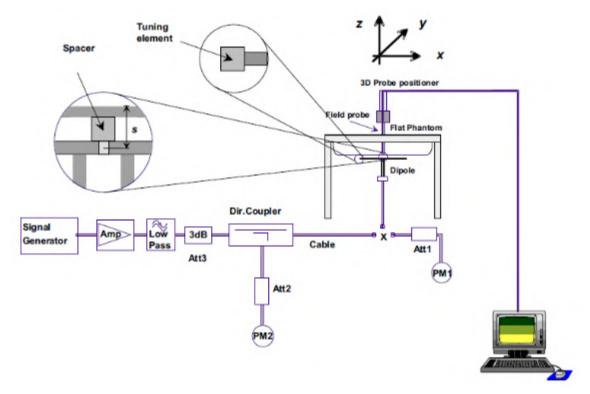

F-12. the microwave circuit arrangement used for SAR system check



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.spx.px.">http://www.sgs.com/en/Terms-and-Conditions.spx.px.</a> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defired herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the eauts shown in this test report refer only to the sample(s) tasted and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 51 of 134

### 6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within  $5\Omega$  from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 52 of 134

### 6.2.2 Summary System Check Result(s)

Val	idation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Devia (Within		Liquid Temp. (で)	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)		
CLA13	Head	0.113	0.0712	0.45	0.28	0.421	0.266	7.36%	7.07%	22.8	2023/6/8
D750V3	Head	2.19	1.44	8.76	5.76	8.39	5.63	4.41%	2.31%	22.6	2023/5/5
D835V2	Head	2.31	1.50	9.24	6.00	9.64	6.29	-4.15%	-4.61%	22.2	2023/5/7
D1750V2	Head	9.40	5.01	37.60	20.04	36.30	19.20	3.58%	4.38%	22.9	2023/5/10
D1900V2	Head	9.27	4.80	37.08	19.20	39.30	20.20	-5.65%	-4.95%	22.9	2023/5/12
D2450V2	Head	13.00	6.10	52.00	24.40	51.90	23.80	0.19%	2.52%	22.6	2023/5/16
D2600V2	Head	15.10	6.81	60.40	27.24	56.80	24.90	6.34%	9.40%	22.5	2023/5/18
Val	idation Kit	Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Devia (Within		Liquid Temp. (℃)	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)	(0)	
D3500V2	Head(3.5GHz)	6.07	2.31	60.70	23.10	66.50	25.10	-8.72%	-7.97%	22.5	2023/5/26
D3900V2	Head(3.9GHz)	6.45	2.28	64.50	22.80	71.10	24.60	-9.28%	-7.32%	22.6	2023/5/28
	Head(5.25GHz)	7.06	2.04	70.60	20.40	75.20	21.50	-6.12%	-5.12%	22.7	2023/5/24
D5GHzV2	Head(5.6GHz)	7.82	2.22	78.20	22.20	80.00	22.70	-2.25%	-2.20%	22.7	2023/5/24
	Head(5.75GHz)	7.22	2.06	72.20	20.60	78.70	22.30	-8.26%	-7.62%	22.7	2023/5/24

Table 6: SAR System Check Result (original report No:SEWM2304000137RG09).

Val	idation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Devia (Within		Liquid Temp.	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)	(℃)	
CLA13	Head	0.113	0.0712	0.45	0.28	0.421	0.266	7.36%	7.07%	22.8	2023/6/8
D750V3	Head	2.13	1.4	8.52	5.60	8.39	5.63	1.55%	-0.53%	22.8	2023/6/1
D835V2	Head	2.45	1.59	9.80	6.36	9.64	6.29	1.66%	1.11%	22.6	2023/6/2
D1750V2	Head	9.06	4.83	36.24	19.32	36.30	19.20	-0.17%	0.63%	22.4	2023/6/3
D1900V2	Head	10.10	5.21	40.40	20.84	39.30	20.20	2.80%	3.17%	23.1	2023/6/4
D2450V2	Head	12.50	5.86	50.00	23.44	51.90	23.80	-3.66%	-1.51%	22.7	2023/6/5
D2600V2	Head	14.70	6.66	58.80	26.64	56.80	24.90	3.52%	6.99%	22.6	2023/6/6
Val	idation Kit	Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Devia (Within		Liquid Temp.	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)	(℃)	
D3500V2	Head(3.5GHz)	6.14	2.36	61.40	23.60	66.50	25.10	-7.67%	-5.98%	22.9	2023/6/7
D3900V2	Head(3.9GHz)	6.88	2.45	68.80	24.50	71.10	24.60	-3.23%	-0.41%	22.9	2023/6/9
	Head(5.25GHz)	7.49	2.16	74.90	21.60	75.20	21.50	-0.40%	0.47%	22.8	2023/6/10
D5GHzV2	Head(5.6GHz)	8.39	2.38	83.90	23.80	80.00	22.70	4.88%	4.85%	22.8	2023/6/10
	Head(5.75GHz)	7.56	2.16	75.60	21.60	78.70	22.30	-3.94%	-3.14%	22.8	2023/6/10

Table 7: SAR System Check Result(Variant).

### 6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: Page: 53 of 134

#### 7 **Test Configuration**

#### 7.1 **3G SAR Test Reduction Procedure**

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test quidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

#### **Operation Configurations** 7.2

### 7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to "5" and "0" in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 33 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 33 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 54 of 134

### 7.2.2 WCDMA Test Configuration

### 1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

#### 2) . Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

### 3) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreaing code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

#### 4) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq$  1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

### a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta$ c,  $\beta$ d), and HS-DPCCH power offset parameters ( $\Delta$ ACK,  $\Delta$ NACK,  $\Delta$ CQI) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 55 of 134

Sub-test	βc	Bd	βd(SF)	βc/βd	βhs	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1:  $\triangle$ ACK,  $\triangle$ NACK and  $\triangle$ CQI= 8 Ahs =  $\beta$ hs/ $\beta$ c=30/15  $\beta$ hs=30/15\* $\beta$ c

Note2:For the HS-DPCCH power mask requirement test in clause 5.2C,5.7A,and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A,and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\triangle$ ACK and  $\triangle$ NACK= 8 ( Ahs=30/15) with  $\beta$ hs=30/15\* $\beta$ c,and  $\triangle$ CQI=

7 (Ahs=24/15) with  $\beta$ hs= $24/15*\beta$ c.

Note3: CM=1 for $\beta$ c/ $\beta$ d =12/15,  $\beta$ hs/ $\beta$ c=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8: settings of required H-Set 1 QPSK acc. to 3GPP 34.121



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsherng Road, Suchou Industrial Park, Suzhou Area, Chira (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

15000 t (86–512) 629925

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 56 of 134

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter- TTI Interval	MaximumH S-DSCH Transport BlockBits/HS- DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9: HSDPA UE category

### b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the "WCDMA Handset" and "Release 5 HSUPA Data Device" sections of 3G device.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 57 of 134 Page:

Sub -test₽	βορ	βd₽	βd (SF )θ	β₀∕β⋴ℴ	β <sub>hs</sub> (1 )↔	β <sub>ec+</sub> <sup>3</sup>	$eta_{ t ed} arphi$	β <sub>e</sub> <sub>o+</sub> (SF  )+	βed↔ (code )↔	CM <sup>(</sup> 2)↔ (dB )↔	MP R↓ (dB)↓	AG <sup>(4</sup> )↔ Inde x↔	E- TFC I <sub>e</sub>	1
1₽	11/15(3)+3	15/15(3)	64₽	11/15(3)43	22/15₽	209/22 5₊³	1039/225	4₽	1₽	1.04	0.0₽	20₽	75₽	*
2₽	6/15₽	15/15₽	64₽	6/15₽	12/15₽	12/15₽	94/75₽	4₽	1₽	3.0₽	2.0₽	<b>12</b> ₽	67₽	-
3₽	15/15	9/15₽	64₽	15/9₽	30/15₽	30/15₽	β <sub>ed1</sub> :47/1 5 <sub>4</sub> β <sub>ed2:</sub> 47/1 5 <sub>4</sub>	4₽	2₽	2.0₽	1.0₽	15.0	92₽	4
4₽	2/15₽	15/15₽	64₽	2/15₽	4/15₽	2/15₽	56/75₽	4₽	1₽	3.0₽	2.0₽	17₽	71₽	].
5₽	15/15(4)+3	15/15(4)(3	64₽	15/15(4)43	30/15₽	24/15₽	134/15₽	40	1₽	1.0₽	0.0₽	21	81₽	]

 $\triangle$  ACK,  $\triangle$  NACK and  $\triangle$  CQI = 8  $A_{hs} = \beta_{hs}/\beta_{o} = 30/15$  $\beta_{hs} = 30/15 * \beta_{e4}$ 

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference-

Note 3: For subtest 1 the β<sub>o</sub>/β<sub>d</sub> ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$   $\psi$ 

Note 4: For subtest 5 the β<sub>6</sub>/β<sub>4</sub> ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β<sub>c</sub> = 14/15 and β<sub>d</sub> = 15/15ψ

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g ₽

Note 6: βed can not be set directly; it is set by Absolute Grant Value.

Table 10: Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Speading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	4 4500
2	2	4	10	4	14484	1.4592
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
4	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6	4	8	10	2SF2&2SF	11484	5.76
(No DPDCH)	4	4	2	4	20000	2.00
7	4	8	2	2SF2&2SF	22996	?
(No DPDCH)	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11: HSUPA UE category



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 58 of 134

### c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH _Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Value
60 kbit/s
1 TTI's
6 Processes
120 Bits
1 Block
960 Bits
19200 SMLs
3200 SMLs
0.15
1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

#### Note:

- 1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2. Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 59 of 134

Inf. Bit Payload 120 **CRC Addition** 24 CRC 120 Code Block 144 Segmentation Turbo-Encoding 432 12 Tail Bits (R=1/3)1st Rate Matching 960 **RV** Selection Physical Channel Segmentation

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test₽	βe₽	$\beta_{d^{e^2}}$	β <sub>d</sub> ·(SF)₽	$\beta_c \cdot / \beta_{d^{o}}$	β <sub>hs</sub> .(1) <sub>Θ</sub>	CM(dB)(2)	MPR ·(dB)₽
1₽	2/15₽	15/15₽	64₽	2/15₽	4/15₽	0.0₽	0₽
2₽	12/15(3)	15/15(3)	64₽	12/15(3)	24/15₽	1.0₽	0₽
3₽	15/15₽	8/15₽	64₽	15/8₽	30/15₽	1.5₽	0.5₽
4₽	15/15₽	4/15₽	64₽	15/4₽	30/15₽	1.5₽	0.5₽

Note: 1:  $\triangle$  ACK,  $\triangle$  NACK and  $\triangle$  CQI=8  $A_{hs} = \beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c = 30/15$ 

Note 2: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$ .

Up commands are set continuously to set the UE to Max power. Note:

- 1. The Dual Carriers transmission only applies to HSDPA physical channels
- 2. The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4. The Dual Carriers operate in the same frequency band.
- 5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6. The device doesn't support carrier aggregation for it just can operate in Release 8.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 60 of 134

### 7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

### 7.2.3.1 Duty cycle

Wi-Fi 2.4GHz 802.11b: Duty cycle=98.57%





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号的6号厂房南部 邮编: 215000




Report No.: SEWM2305000160RG09

Rev.: 01

Page: 61 of 134

### Wi-Fi 5GHz 802.11a: Duty cycle=97.2%

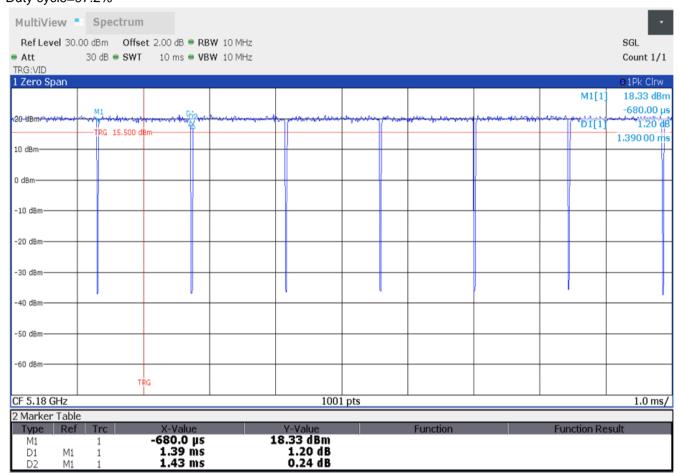



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and.">http://www.sgs.com/en/Terms-and-Conditions.aspx.and.</a> for electronic format documents, subject to Terms and Conditions for Electronic Document as this this ty//www.sgs.com/en/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend to the law Inless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificite, please contact us at telephone: (86-755) 8307 1443.\*\*

South of No. 6 Plant, No. 1, Runsherg Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区园胜路1号的6月厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: Page: 62 of 134

#### 7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-q SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

### 7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

### 7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Document.aspx.Attention">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Document.aspx.Attention</a> is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate\_please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: Page: 63 of 134

band and exposure configuration.

- 2) . When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
  - SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
  - SAR for subsequent highest measured maximum output power channels in the subsequent b) test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
  - replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
  - replace "initial test configuration" with "all tested higher output power configurations" b)



otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is that information contained hereon reflects the Company's findings at the time of its intervion only and within the limits of instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a for from exercising all their rights and obligations under the transaction documents. This document comments the reproduced in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or noce of this document is unlawful and offenders may be prosecuted to the fullest extent of the Ju-Unless otherwise stated the hown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone. (86-755) 83071443.



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 64 of 134

#### 7.2.3.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

### • 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

#### SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 65 of 134

### 7.2.4 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


#### **TDD LTE test consideration**

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

### Frame structure type 2:

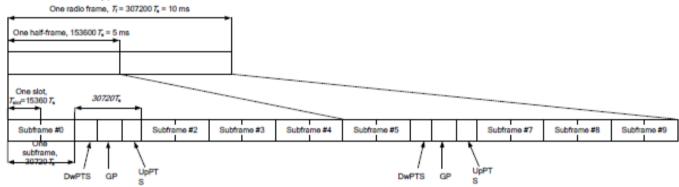



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comments. Subject to Terms and Conditions for Electronic Document as http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comments/Terms-en/Comm



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 66 of 134

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special	•	nal cyclic prefix in	downlink	Extended cyclic prefix in downlink			
subframe	DwPTS	Up	PTS	DwPTS	UpPTS		
configuration		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	6592.Ts			7680.Ts			
1	19760.Ts		20480.Ts 2192.T 2192.T	20480.Ts	2102 To	2560.Ts	
2	21952.Ts	2192.Ts		23040.Ts	2192.13	2300.13	
3	24144.Ts			25600.Ts			
4	26336.Ts			7680.Ts			
5	6592.Ts			20480.Ts	4204 To	5120 To	
6	19760.Ts			23040.Ts	4384.Ts	5120.Ts	
7	21952.Ts	4384.Ts	5120.Ts	25600.Ts			
8	24144.Ts			-	-	-	
9	13168.Ts			-	-	-	

### Uplink-downlink configurations.

Uplink-downlink	Downlink-to-				St	ubframe	e numb	er			
configuration	Uplink Switch- point periodicity	0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	J	U	D	S	U	U	D

### Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink- Downlink Configurat	Downlink-to- Uplink Switch- point Periodicity		Subframe Number						Calculated Duty Cycle (%)			
ion	LOOMILE HOOGICHY	0	1	2	3	4	5	6	7	8	9	Cycle (76)
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 6299

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 67 of 134

### A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Cha	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )								
1	1.4	3.0	5	10	15	20	1			
	MHz	MHz	MHz	MHz	MHz	MHz				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3			

### C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### D) Largest channel bandwidth standalone SAR test requirements

#### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

#### 2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq$  0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

#### 4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

#### E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is >  $\frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document.appx">http://www.sgs.com/en/Terms-en-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 68 of 134

### 7.2.5 NR Band Test Configuration

1. NR Band n41/n77/n78 support SA mode and n41/n77/n78 support NSA mode. LTE+NR Band operations are possible only with LTE under EN-DC mode and the operations are possible as following table:

Pand/	Antenna	LTE Band 41				
Danu/	Antenna	Ant0	Ant4			
n77	Ant3	√				
1177	Ant5	√				
n70	Ant3	√				
n78	Ant5	√				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 69 of 134

2. The general information supported by the NR band is as following table:

2. The general information supported by the NIX band is as following table.									
	Band		n41	n77	n78				
		PI/2 BPSK	Yes	Yes	Yes				
		QPSK	Yes	Yes	Yes				
	DFT-s-OFDM	16QAM	Yes	Yes	Yes				
		64QAM	Yes	Yes	Yes				
Modulation		256QAM	Yes	Yes	Yes				
		QPSK	Yes	Yes	Yes				
	CP-OFDM	16QAM	Yes	Yes	Yes				
	CP-OPDIVI	64QAM	Yes	Yes	Yes				
		256QAM	Yes	Yes	Yes				
Duty Cycle			100%	100%	100%				

Band	000							Bandwid	dth					
Band	SCS	5Mhz	10Mhz	15Mhz	20Mhz	25Mhz	30Mhz	40Mhz	50Mhz	60Mhz	70Mhz	80Mhz	90Mhz	100Mhz
n41	30KHZ	N/A	N/A	N/A	Yes	N/A	Yes	Yes	Yes	Yes	N/A	Yes	Yes	Yes
n77	30KHZ	N/A	N/A	N/A	Yes	N/A	Yes	Yes	Yes	Yes	N/A	Yes	Yes	Yes
n78	30KHZ	N/A	N/A	N/A	Yes	N/A	Yes	Yes	Yes	Yes	N/A	Yes	Yes	Yes



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 70 of 134

3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:

a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 3GPP 38.101 maximum power reduction for power class 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.

- b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, for PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
- c. SAR testing start with the largest SCS and largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
- e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK/16QAM/64QAM/256QAM SAR testing are not required.
- g. Smaller SCS/bandwidth output power for each RB allocation configuration for this device will not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg, smaller bandwidth SAR testing is not required for this device



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 71 of 134

#### 4. MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS 38.101-1 Section 6.2.2 under Table 6.2.2 -1.

Modul	lation		MPR (dB)						
Modul	lation	Edge RB allocations	Outer RB allocations	Inner RB allocations					
	PI/2 BPSK	≤ 3.5 <sup>1</sup>	≤ 1.2 <sup>1</sup>	≤ 0.2 <sup>1</sup>					
DFT-s-OFDM	FI/Z BF3K	≤ 0.5 <sup>2</sup>	≤ 0.5 <sup>2</sup>	0 <sup>2</sup>					
	QPSK	≤	0						
	16 QAM	≤	≤ 1						
	64 QAM		≤ 2.5						
	256 QAM		≤ 4.5						
	QPSK	≤	3	≤ 1.5					
CP-OFDM	16 QAM	≤	3	≤ 2					
CF-OFDIVI	64 QAM		≤ 3.5						
	256 QAM	≤ 6.5							

- NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability powerBoosting-pi2BPSK and if the IE powerBoostPi2BPSK is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26dBm.
- NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE powerBoostPi2BPSK is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.
- 5. For FDD NR Band operation does not have the fixed UL/DL frame structure, but during the transmitting/ receiving it can be operated in the slot structure of 100% UL duty cycle, we are proposing the conservative way to evaluate SAR at 100% duty cycle. For the purpose of test NR Band standalone SAR, and also test SAR level at 100% TX duty cycle.
- 6. For 5G NR Sub6GHz SISO Mode, SAR Test plan as below:
  - 1) For 5G NR NSA mode with the same UL EN\_DC combination but different DL EN\_DC combinations, eg: EN-DC configuration: UL DC\_7A\_n5 (UL two bands) with DL DC\_7C\_n5 (DL two bands)
- a) The UL EN-DC configuration, including the Tx antenna configuration, RF path, the channel bandwidth and other operating parameters are the same.
- b) The maximum output power, including tolerance, for the UL EN-DC configuration with DL two or more bands must be ≤ the same UL EN-DC configuration with DL two bands only to qualify for the SAR test exclusion.
- 7. For EN-DC SAR, as the existing SAR test system cannot test the multiple different frequency bands simultaneous Transmission SAR at the same time, we suggest that the conservative "max + max" multi-Tx and SAR scaling method can be used to evaluate the inter-band Uplink EN-DC SAR from standalone SAR test results of each LTE and NR EN-DC component band and the conservative "max + max" multi-Tx method to combine the scaled SAR value from each EN-DC component band as the inter-band Uplink EN-DC SAR. All Simultaneous Transmission Scenarios will be evaluated independently in the final SAR report.
- 8. When the reported SAR for and EN DC configuration is greater than 1.2 W/kg, EN DC SAR is also required for other NR based test channels.
- 9. EN DC SAR is also required for standalone NR configurations greater than 1.2 W/kg when scaled to the EN DC power level.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 72 of 134

### 8 Test Result

### 8.1 Measurement of RF conducted Power

The detailed conducted power table can refer to Appendix E.

#### Note:

1) . For GSM SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8
- 3) . When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used
- 4) . According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
- 5) In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs.
- 6) . Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05.
- 7) . Conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A.Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.
  - The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The detailed conducted power measurement results of downlink LTE CA are provided in the SAR report per 3GPP TS 36.521-1 V14.4.0. According to KDB 941225 D05A, the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.
  - The conducted power measurement results of downlink LTE CA Conducted Power are as Appendix E conducted RF output power, so the downlink only carrier aggregation conditions for this device can be excluded from SAR testing
- 8) . For conducted power of WIFI must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band. For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured. Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sag.com/en/Terms-and-Conditions.aspx.and.">http://www.sag.com/en/Terms-and-Conditions.aspx.and.</a> for electronic Documents at <a href="http://www.sag.com/en/Terms-en/Conditions/Terms-en/Co

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01 Page: 73 of 134

- 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- 9) . The conducted power of BT is measured with RMS detector. BT DH5 Duty Cycle=76.86%





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.s t (86–512) 62992980 sgs.ch



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 74 of 134

#### 8.2 Measurement of SAR Data

#### Note:

- 1) The maximum Scaled SAR value is select the worst presentation of the original report SEWM2304000137RG09 and this report. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
  - $\bullet$  ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.
- 3) Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

#### WiFi 2.4G:

 When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

#### WiFi 5G:

- When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration.
- 2) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.





Report No.: SEWM2305000160RG09

Rev.:

Page: 75 of 134

#### 8.2.1 SAR Result of GSM850

				GSM850 SAR	Test Record					
				Ant 0 Tes	st Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(°C)
				Head Te	est Data				•	•
Left cheek	GPRS 3TS	190/836.6	1:2.77	0.185	0.06	29.29	30.50	1.321	0.244	22.2
Left tilted	GPRS 3TS	190/836.6	1:2.77	0.114	0.03	29.29	30.50	1.321	0.151	22.2
Right cheek	GPRS 3TS	190/836.6	1:2.77	0.206	0.02	29.29	30.50	1.321	0.272	22.2
Right tilted	GPRS 3TS	190/836.6	1:2.77	0.127	-0.04	29.29	30.50	1.321	0.168	22.2
			Hot	spot Test data	(Separate 10n	nm)			•	
Front side	GPRS 3TS	190/836.6	1:2.77	0.214	0.13	29.29	30.50	1.321	0.283	22.2
Back side	GPRS 3TS	190/836.6	1:2.77	0.423	-0.08	29.29	30.50	1.321	0.559	22.2
Left side	GPRS 3TS	190/836.6	1:2.77	0.128	0.00	29.29	30.50	1.321	0.169	22.2
Right side	GPRS 3TS	190/836.6	1:2.77	0.270	-0.02	29.29	30.50	1.321	0.357	22.2
Bottom side	GPRS 3TS	190/836.6	1:2.77	0.311	0.10	29.29	30.50	1.321	0.411	22.2
		•	Body	-worn Test da	ta(Separate 10	Omm)	•			•
Front side	GPRS 3TS	190/836.6	1:2.77	0.214	0.13	29.29	30.50	1.321	0.283	22.2
Back side	GPRS 3TS	190/836.6	1:2.77	0.423	-0.08	29.29	30.50	1.321	0.559	22.2
		•		Ant 4 Tes	st Record		•			
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)
				Head Te	est Data					
Left cheek	GPRS 3TS	190/836.6	1:2.77	0.508	0.01	28.84	29.50	1.164	0.591	22.2
Left tilted	GPRS 3TS	190/836.6	1:2.77	0.479	0.02	28.84	29.50	1.164	0.558	22.2
Right cheek	GPRS 3TS	190/836.6	1:2.77	0.540	-0.06	28.84	29.50	1.164	0.629	22.2
Right tilted	GPRS 3TS	190/836.6	1:2.77	0.505	0.08	28.84	29.50	1.164	0.588	22.2
			Hot	spot Test data	(Separate 10n	nm)				
Front side	GPRS 3TS	190/836.6	1:2.77	0.197	0.15	29.84	30.50	1.164	0.229	22.2
Back side	GPRS 3TS	190/836.6	1:2.77	0.415	0.11	29.84	30.50	1.164	0.483	22.2
Left side	GPRS 3TS	190/836.6	1:2.77	0.101	0.11	29.84	30.50	1.164	0.118	22.2
Top side	GPRS 3TS	190/836.6	1:2.77	0.235	0.07	29.84	30.50	1.164	0.274	22.2
	•		Body	-worn Test da	ta(Separate 10	)mm)				
Front side	GPRS 3TS	190/836.6	1:2.77	0.197	0.15	29.84	30.50	1.164	0.229	22.2

SAR of GSM850 for Head and Body(original report No:SEWM2304000137RG09).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 76 of 134

				Ant 0 Tes	t Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(°C)
				Head Te	est Data					
Right cheek	GPRS 3TS	190/836.6	1:2.77	0.194	0.13	29.58	30.50	1.236	0.240	22.6
			Hot	spot Test data	(Separate 10n	nm)				
Back side	GPRS 3TS	190/836.6	1:2.77	0.402	0.02	29.58	30.50	1.236	0.497	22.6
			Body	-worn Test dat	a(Separate 10	mm)				
Back side	GPRS 3TS	190/836.6	1:2.77	0.402	0.02	29.58	30.50	1.236	0.497	22.6
				Ant 4 Tes	t Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)
				Head Te	est Data					
Right cheek	GPRS 3TS	190/836.6	1:2.77	0.518	0.03	28.13	28.50	1.089	0.564	22.6
			Hot	spot Test data	(Separate 10n	nm)				
Back side	GPRS 3TS	190/836.6	1:2.77	0.403	0.01	30.44	30.50	1.014	0.409	22.6
			Body	-worn Test dat	a(Separate 10	mm)				
Back side	GPRS 3TS	190/836.6	1:2.77	0.403	0.01	30.44	30.50	1.014	0.409	22.6

Table 14: SAR of GSM850 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 0

Page: 77 of 134

#### 8.2.2 SAR Result of GSM1900

		G	SM1900 S	AR Test Re	cord					
			Ant 0 T	est Record						
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
			Head	Test Data						
Left cheek	GPRS 3TS	661/1880	1:2.77	0.061	0.04	26.38	27.50	1.294	0.079	22.9
Left tilted	GPRS 3TS	661/1880	1:2.77	0.049	-0.05	26.38	27.50	1.294	0.063	22.9
Right cheek	GPRS 3TS	661/1880	1:2.77	0.078	0.03	26.38	27.50	1.294	0.101	22.9
Right tilted	GPRS 3TS	661/1880	1:2.77	0.047	0.01	26.38	27.50	1.294	0.061	22.9
	•	Hotspot (se	ensor on) T	est data(Se	parate 10n	nm)				
Front side	GPRS 3TS	661/1880	1:2.77	0.100	0.08	25.39	26.50	1.291	0.129	22.9
Back side	GPRS 3TS	661/1880	1:2.77	0.163	0.09	25.39	26.50	1.291	0.210	22.9
Bottom side	GPRS 3TS	661/1880	1:2.77	0.178	-0.01	25.39	26.50	1.291	0.230	22.9
		He	otspot (sen	sor off) Tes	t data	•	•			
Front side-12mm	GPRS 3TS	661/1880	1:2.77	0.102	0.02	26.38	27.50	1.294	0.132	22.9
Back side-17mm	GPRS 3TS	661/1880	1:2.77	0.121	0.09	26.38	27.50	1.294	0.157	22.9
Left side-10mm	GPRS 3TS	661/1880	1:2.77	0.039	0.01	26.38	27.50	1.294	0.050	22.9
Right side-10mm	GPRS 3TS	661/1880	1:2.77	0.043	0.09	26.38	27.50	1.294	0.056	22.9
Bottom side-15mm	GPRS 3TS	661/1880	1:2.77	0.169	0.04	26.38	27.50	1.294	0.219	22.9
	1	Body-	worn Test of	data(Separa	te 10mm)	I.	I.			
Front side	GPRS 3TS	661/1880	1:2.77	0.100	0.08	25.39	26.50	1.291	0.129	22.9
Back side	GPRS 3TS	661/1880	1:2.77	0.163	0.09	25.39	26.50	1.291	0.210	22.9
Front side-12mm	GPRS 3TS	661/1880	1:2.77	0.102	0.02	26.38	27.50	1.294	0.132	22.9
Back side-17mm	GPRS 3TS	661/1880	1:2.77	0.121	0.09	26.38	27.50	1.294	0.157	22.9
	1		Ant 4 T	est Record						
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
			Head	Test Data	•	•				
Left cheek	GPRS 3TS	661/1880	1:2.77	0.446	0.09	20.18	21.00	1.208	0.539	22.9
Left tilted	GPRS 3TS	661/1880	1:2.77	0.501	-0.01	20.18	21.00	1.208	0.605	22.9
Right cheek	GPRS 3TS	661/1880	1:2.77	0.567	0.02	20.18	21.00	1.208	0.685	22.9
Right tilted	GPRS 3TS	661/1880	1:2.77	0.736	-0.06	20.18	21.00	1.208	0.889	22.9
Right tilted	GPRS 3TS	512/1850.2	1:2.77	0.579	0.11	19.94	21.00	1.276	0.739	22.9
Right tilted	GPRS 3TS	810/1909.8	1:2.77	0.878	-0.06	20.06	21.00	1.242	1.090	22.9
Right tilted-Repeat SAR	GPRS 3TS	810/1909.8	1:2.77	0.873	0.04	20.06	21.00	1.242	1.084	22.9
	•	Hotspot (se	ensor on) T	est data(Se	parate 10n	nm)		-	•	-
Front side	GPRS 3TS	661/1880	1:2.77	0.273	-0.02	21.61	22.50	1.227	0.335	22.9
Back side	GPRS 3TS	661/1880	1:2.77	0.526	-0.01	21.61	22.50	1.227	0.646	22.9
Top side	GPRS 3TS	661/1880	1:2.77	0.654	0.01	21.61	22.50	1.227	0.803	22.9
Top side	GPRS 3TS	512/1850.2	1:2.77	0.424	0.06	21.35	22.50	1.303	0.553	22.9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 78 of 134

Top side	GPRS 3TS	810/1909.8	1:2.77	0.750	-0.10	21.57	22.50	1.239	0.929	22.9			
	Hotspot (sensor off) Test data												
Front side-12mm	Front side-12mm GPRS 3TS 661/1880 1:2.77 0.384 0.05 26.54 27.50 1.247 0.479 22.9												
Back side-17mm	GPRS 3TS	661/1880	1:2.77	0.420	-0.04	26.54	27.50	1.247	0.524	22.9			
Left side-10mm	GPRS 3TS	661/1880	1:2.77	0.096	-0.01	26.54	27.50	1.247	0.120	22.9			
Top side-19mm	GPRS 3TS	661/1880	1:2.77	0.513	0.01	26.54	27.50	1.247	0.640	22.9			
		Body-	worn Test o	lata(Separa	te 10mm)								
Front side	GPRS 3TS	661/1880	1:2.77	0.273	-0.02	21.61	22.50	1.227	0.335	22.9			
Back side	GPRS 3TS	661/1880	1:2.77	0.526	-0.01	21.61	22.50	1.227	0.646	22.9			
Front side-12mm	GPRS 3TS	661/1880	1:2.77	0.384	0.05	26.54	27.50	1.247	0.479	22.9			
Back side-17mm	GPRS 3TS	661/1880	1:2.77	0.420	-0.04	26.54	27.50	1.247	0.524	22.9			

Table 15: SAR of GSM1900 for Head and Body(original report No:SEWM2304000137RG09).

	Ant 0 Test Record												
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)			
				Head	Test Data								
Right cheek	GPRS 3TS	661/1880	1:2.77	0.067	0.05	26.50	27.50	1.259	0.084	23.1			
			Hotspot (s	sensor on) T	est data(Se	eparate 10mm)							
Bottom side	GPRS 3TS	661/1880	1:2.77	0.167	0.06	25.53	26.50	1.250	0.209	23.1			
			Body	-worn Test o	data(Separa	ate 10mm)							
Back side GPRS 3TS 661/1880 1:2.77 0.156 0.03 25.53 26.50 1.250 0.195 23.1													
				Ant 4 T	est Record	ı							
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)			
				Head	Test Data								
Right tilted	GPRS 3TS	810/1909.8	1:2.77	0.833	-0.11	20.01	21.00	1.256	1.046	23.1			
Right tilted-Repeat	GPRS 3TS	810/1909.8	1:2.77	0.821	-0.09	20.01	21.00	1.256	1.031	23.1			
			Hotspot (s	sensor on) T	est data(Se	eparate 10mm)							
Top side	GPRS 3TS	810/1909.8	1:2.77	0.733	0.02	21.49	22.50	1.262	0.925	23.1			
			Body	-worn Test of	data(Separa	ate 10mm)							
Back side	GPRS 3TS	661/1880	1:2.77	0.522	-0.06	21.79	22.50	1.178	0.615	23.1			

Table 16: SAR of GSM1900 for Head and Body(Variant).

Test Position	Channel/ Frequency	Measured	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)	SAR (1g)	SAR (1g)		SAR (1g)	SAR (1g)
Right tilted	810/1909.8	0.821	0.873	1.063	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

<sup>4)</sup> Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (liangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜嘉(号的6号厂房南部 邮编: 215000

t (86–512) 62992980

<sup>2)</sup> A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

<sup>3)</sup> A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq$  1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 79 of 134

#### 8.2.3 SAR Result of WCDMA Band II

	W B2 SAR Test Record											
	Ant 0 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)		
	•			Head	Test Data							
Left cheek	RMC	9400/1880	1:1	0.122	0.06	24.17	25.50	1.358	0.166	22.9		
Left tilted	RMC	9400/1880	1:1	0.088	0.06	24.17	25.50	1.358	0.120	22.9		
Right cheek	RMC	9400/1880	1:1	0.183	-0.01	24.17	25.50	1.358	0.249	22.9		
Right tilted	RMC	9400/1880	1:1	0.101	0.02	24.17	25.50	1.358	0.137	22.9		
		Н	otspot (se	ensor on) 7	Test data(Se	eparate 10mm)						
Front side	RMC	9400/1880	1:1	0.206	0.03	20.21	21.50	1.346	0.277	22.9		
Back side	RMC	9400/1880	1:1	0.374	0.04	20.21	21.50	1.346	0.503	22.9		
Bottom side	RMC	9400/1880	1:1	0.398	-0.04	20.21	21.50	1.346	0.536	22.9		
			H	otspot (ser	sor off) Tes	t data						
Front side-12mm	RMC	9400/1880	1:1	0.346	0.05	24.17	25.50	1.358	0.470	22.9		
Front side-17mm	RMC	9400/1880	1:1	0.312	0.03	24.17	25.50	1.358	0.424	22.9		
Left side-10mm	RMC	9400/1880	1:1	0.096	-0.03	24.17	25.50	1.358	0.130	22.9		
Right side-10mm	RMC	9400/1880	1:1	0.095	0.01	24.17	25.50	1.358	0.129	22.9		
Bottom side-15mm	RMC	9400/1880	1:1	0.402	0.04	24.17	25.50	1.358	0.546	22.9		
			Body-	worn Test	data(Separa	ate 10mm)						
Front side	RMC	9400/1880	1:1	0.206	0.03	20.21	21.50	1.346	0.277	22.9		
Back side	RMC	9400/1880	1:1	0.374	0.04	20.21	21.50	1.346	0.503	22.9		
Front side-12mm	RMC	9400/1880	1:1	0.346	0.05	24.17	25.50	1.358	0.470	22.9		
Back side-17mm	RMC	9400/1880	1:1	0.312	0.03	24.17	25.50	1.358	0.424	22.9		
				Ant 4 T	est Record	k						
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)		
				Head	Test Data							
Left cheek	RMC	9400/1880	1:1	0.336	-0.05	14.31	15.50	1.315	0.442	22.9		
Left tilted	RMC	9400/1880	1:1	0.456	-0.05	14.31	15.50	1.315	0.600	22.9		
Right cheek	RMC	9400/1880	1:1	0.523	0.09	14.31	15.50	1.315	0.688	22.9		
Right tilted	RMC	9400/1880	1:1	0.642	0.07	14.31	15.50	1.315	0.844	22.9		
Right tilted	RMC	9262/1852.4	1:1	0.542	0.02	14.19	15.50	1.352	0.733	22.9		
Right tilted	RMC	9538/1907.6	1:1	0.707	-0.04	14.25	15.50	1.334	0.943	22.9		
		Н	otspot (se	ensor on) 1	Test data(Se	eparate 10mm)						
Front side	RMC	9400/1880	1:1	0.299	-0.11	16.81	18.00	1.315	0.393	22.9		
Back side	RMC	9400/1880	1:1	0.643	-0.02	16.81	18.00	1.315	0.846	22.9		
Back side	RMC	9262/1852.4	1:1	0.535	-0.13	16.73	18.00	1.340	0.717	22.9		
Back side	RMC	9538/1907.6	1:1	0.666	-0.09	16.79	18.00	1.321	0.880	22.9		
Top side	RMC	9400/1880	1:1	0.694	-0.11	16.81	18.00	1.315	0.913	22.9		
Top side	RMC	9262/1852.4	1:1	0.517	0.01	16.73	18.00	1.340	0.693	22.9		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, Panalle (24) Panall

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 80 of 134

Top side	RMC	9538/1907.6	1:1	0.768	0.02	16.79	18.00	1.321	1.015	22.9
			Н	otspot (ser	sor off) Tes	t data				
Front side-12mm	RMC	9400/1880	1:1	0.634	0.06	22.42	23.50	1.282	0.813	22.9
Front side-12mm	RMC	9262/1852.4	1:1	0.518	-0.05	22.25	23.50	1.334	0.691	22.9
Front side-12mm	RMC	9538/1907.6	1:1	0.653	0.01	22.41	23.50	1.285	0.839	22.9
Back side-17mm	RMC	9400/1880	1:1	0.625	0.09	22.42	23.50	1.282	0.801	22.9
Back side-17mm	RMC	9262/1852.4	1:1	0.506	0.06	22.25	23.50	1.334	0.675	22.9
Back side-17mm	RMC	9538/1907.6	1:1	0.644	0.01	22.41	23.50	1.285	0.828	22.9
Left side-10mm	RMC	9400/1880	1:1	0.094	0.03	22.42	23.50	1.282	0.121	22.9
Top side-19mm	RMC	9400/1880	1:1	0.756	0.01	22.42	23.50	1.282	0.969	22.9
Top side-19mm	RMC	9262/1852.4	1:1	0.662	-0.05	22.25	23.50	1.334	0.883	22.9
Top side-19mm	RMC	9538/1907.6	1:1	0.786	0.07	22.41	23.50	1.285	1.010	22.9
			Body-	worn Test	data(Separa	ate 10mm)				
Front side	RMC	9400/1880	1:1	0.299	-0.11	16.81	18.00	1.315	0.393	22.9
Back side	RMC	9400/1880	1:1	0.643	-0.02	16.81	18.00	1.315	0.846	22.9
Back side	RMC	9262/1852.4	1:1	0.535	-0.13	16.73	18.00	1.340	0.717	22.9
Back side	RMC	9538/1907.6	1:1	0.666	-0.09	16.79	18.00	1.321	0.880	22.9
Front side-12mm	RMC	9400/1880	1:1	0.634	0.06	22.42	23.50	1.282	0.813	22.9
Front side-12mm	RMC	9262/1852.4	1:1	0.518	-0.05	22.25	23.50	1.334	0.691	22.9
Front side-12mm	RMC	9538/1907.6	1:1	0.653	0.01	22.41	23.50	1.285	0.839	22.9
Back side-17mm	RMC	9400/1880	1:1	0.625	0.09	22.42	23.50	1.282	0.801	22.9
Back side-17mm	RMC	9262/1852.4	1:1	0.506	0.06	22.25	23.50	1.334	0.675	22.9
Back side-17mm	RMC	9538/1907.6	1:1	0.644	0.01	22.41	23.50	1.285	0.828	22.9

Table 17: SAR of WCDMA Band II for Head and Body(original report No:SEWM2304000137RG09).

				Ant 0 Test I	Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)		Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
				Head Test	Data					
Right cheek	RMC	9400/1880	1:1	0.155	0.01	23.73	25.50	1.503	0.233	23.1
			Hots	pot (sensor o	off) Test data					
Bottom side-15mm	RMC	9400/1880	1:1	0.360	0.01	23.73	25.50	1.503	0.541	23.1
			Body-wor	rn Test data(	Separate 10n	nm)				
Back side	RMC	9400/1880	1:1	0.333	0.05	19.73	21.50	1.503	0.501	23.1
				Ant 4 Test I	Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)		Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				Head Test	Data					
Right tilted	RMC	9538/1907.6	1:1	0.687	0.12	14.55	15.50	1.245	0.855	23.1
		Hot	spot (sens	or on) Test	data(Separate	10mm)				
Top side	RMC	9538/1907.6	1:1	0.750	0.05	16.76	18.00	1.330	0.998	23.1
			Body-wor	rn Test data(	Separate 10n	nm)				
Back side	RMC	9538/1907.6	1:1	0.645	0.09	16.76	18.00	1.330	0.858	23.1

Table 18: SAR of WCDMA Band II for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 PPart, No. 1, Runshang Read, Suzhou Industria Park, Suzhou Area, China (Liangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区园胜路1号约6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 81 of 134

#### 8.2.4 SAR Result of WCDMA Band IV

			W	B4 SAR Tes	t Record						
Ant 0 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)			Scaled SAR 1- g (W/kg)	Liquid Temp.(°C)	
				Head Test	Data						
Left cheek	RMC	1412/1732.4	1:1	0.069	-0.03	24.19	25.50	1.352	0.093	22.9	
Left tilted	RMC	1412/1732.4	1:1	0.053	0.10	24.19	25.50	1.352	0.072	22.9	
Right cheek	RMC	1412/1732.4	1:1	0.106	0.05	24.19	25.50	1.352	0.143	22.9	
Right tilted	RMC	1412/1732.4	1:1	0.062	0.03	24.19	25.50	1.352	0.084	22.9	
		Hots	pot (sens	or on) Test d	ata(Separate	10mm)					
Front side	RMC	1412/1732.4	1:1	0.138	0.07	19.18	20.50	1.355	0.187	22.9	
Back side	RMC	1412/1732.4	1:1	0.351	0.02	19.18	20.50	1.355	0.476	22.9	
Bottom side	RMC	1412/1732.4	1:1	0.425	0.05	19.18	20.50	1.355	0.576	22.9	
			Hotsp	oot (sensor o	ff) Test data						
Front side-12mm	RMC	1412/1732.4	1:1	0.296	0.02	24.19	25.50	1.352	0.400	22.9	
Back side-17mm	RMC	1412/1732.4	1:1	0.368	-0.04	24.19	25.50	1.352	0.498	22.9	
Left side-10mm	RMC	1412/1732.4	1:1	0.044	0.07	24.19	25.50	1.352	0.059	22.9	
Right side-10mm	RMC	1412/1732.4	1:1	0.046	0.08	24.19	25.50	1.352	0.062	22.9	
Bottom side-15mm	RMC	1412/1732.4	1:1	0.477	0.08	24.19	25.50	1.352	0.645	22.9	
			Body-wor	n Test data(S	Separate 10m	ım)					
Front side	RMC	1412/1732.4	1:1	0.138	0.07	19.18	20.50	1.355	0.187	22.9	
Back side	RMC	1412/1732.4	1:1	0.351	0.02	19.18	20.50	1.355	0.476	22.9	
Front side-12mm	RMC	1412/1732.4	1:1	0.296	0.02	24.19	25.50	1.352	0.400	22.9	
Back side-17mm	RMC	1412/1732.4	1:1	0.368	-0.04	24.19	25.50	1.352	0.498	22.9	
				Ant 4 Test R	lecord						
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)		Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)	
	_			Head Test	Data			,			
Left cheek	RMC	1412/1732.4	1:1	0.256	0.02	16.22	16.50	1.067	0.273	22.9	
Left tilted	RMC	1412/1732.4	1:1	0.341	-0.03	16.22	16.50	1.067	0.364	22.9	
Right cheek	RMC	1412/1732.4	1:1	0.500	0.10	16.22	16.50	1.067	0.533	22.9	
Right tilted	RMC	1412/1732.4	1:1	0.697	-0.05	16.22	16.50	1.067	0.743	22.9	
	_	Hots	pot (sens	or on) Test d	ata(Separate	10mm)		1	,		
Front side	RMC	1412/1732.4	1:1	0.305	0.05	18.23	19.00	1.194	0.364	22.9	
Back side	RMC	1412/1732.4	1:1	0.579	-0.15	18.23	19.00	1.194	0.691	22.9	
Top side	RMC	1412/1732.4	1:1	0.688	-0.06	18.23	19.00	1.194	0.821	22.9	
Top side	RMC	1312/1712.4	1:1	0.629	0.11	18.07	19.00	1.239	0.779	22.9	
Top side	RMC	1513/1752.6	1:1	0.637	0.06	18.22	19.00	1.197	0.762	22.9	
	_		Hotsp	oot (sensor o	ff) Test data	T		ı			
Front side-12mm	RMC	1412/1732.4	1:1	0.651	0.06	24.65	25.50	1.216	0.792	22.9	
Back side-17mm	RMC	1412/1732.4	1:1	0.597	0.01	24.65	25.50	1.216	0.726	22.9	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company, Albert Section (1980-1980).

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 82 of 134

Left side-10mm	RMC	1412/1732.4	1:1	0.149	0.04	24.65	25.50	1.216	0.181	22.9
Top side-19mm	RMC	1412/1732.4	1:1	0.819	-0.05	24.65	25.50	1.216	0.996	22.9
Top side-19mm-Repeat SAR	RMC	1412/1732.4	1:1	0.815	0.11	24.65	25.50	1.216	0.991	22.9
Top side-19mm	RMC	1312/1712.4	1:1	0.736	-0.16	24.51	25.50	1.256	0.924	22.9
Top side-19mm	RMC	1513/1752.6	1:1	0.772	0.08	24.62	25.50	1.225	0.945	22.9
			Body-wor	n Test data(S	Separate 10m	ım)				
Front side	RMC	1412/1732.4	1:1	0.305	0.05	18.23	19.00	1.194	0.364	22.9
Back side	RMC	1412/1732.4	1:1	0.579	-0.15	18.23	19.00	1.194	0.691	22.9
Front side-12mm	RMC	1412/1732.4	1:1	0.651	0.06	24.65	25.50	1.216	0.792	22.9
Back side-17mm	RMC	1412/1732.4	1:1	0.597	0.01	24.65	25.50	1.216	0.726	22.9

Table 19: SAR of WCDMA Band IV for Head and Body(original report No:SEWM2304000137RG09).

	Ant 0 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)		Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(°C)		
				Head Tes	st Data							
Right cheek	RMC	1412/1732.4	1:1	0.076	0.03	23.76	25.50	1.493	0.113	22.4		
			Н	otspot (sensor	off) Test data							
Bottom side-15mm	RMC	1412/1732.4	1:1	0.427	0.06	23.76	25.50	1.493	0.637	22.4		
			Body-\	worn Test data	(Separate 10r	mm)						
Back side-17mm RMC 1412/1732.4 1:1 0.311 0.08 23.76 25.50 1.493 0.464 22.4												
				Ant 4 Test	Record							
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)		Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)		
				Head Tes	st Data							
Right tilted	RMC	1412/1732.4	1:1	0.600	0.07	15.58	16.50	1.236	0.742	22.4		
			Н	otspot (sensor	off) Test data							
Top side-19mm	RMC	1412/1732.4	1:1	0.746	-0.03	24.51	25.50	1.256	0.937	22.4		
	•		Body-\	worn Test data	(Separate 10r	mm)			•			
Front side-12mm	RMC	1412/1732.4	1:1	0.589	0.05	24.51	25.50	1.256	0.740	22.4		

Table 20: SAR of WCDMA Band IV for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

(86–512) 62992980 www.sgsgroup.com. (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 83 of 134

#### 8.2.5 SAR Result of WCDMA Band V

				W B5 SAR	Test Recor	d				
				Ant 0 Te	st Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
	•			Head T	est Data	•				•
Left cheek	RMC	4182/836.4	1:1	0.148	0.01	24.18	25.50	1.355	0.201	22.2
Left tilted	RMC	4182/836.4	1:1	0.075	0.10	24.18	25.50	1.355	0.102	22.2
Right cheek	RMC	4182/836.4	1:1	0.184	0.02	24.18	25.50	1.355	0.249	22.2
Right tilted	RMC	4182/836.4	1:1	0.115	0.02	24.18	25.50	1.355	0.156	22.2
			Hotsp	oot Test data	a(Separate	10mm)				
Front side	RMC	4182/836.4	1:1	0.202	0.06	24.18	25.50	1.355	0.274	22.2
Back side	RMC	4182/836.4	1:1	0.382	0.03	24.18	25.50	1.355	0.518	22.2
Left side	RMC	4182/836.4	1:1	0.125	0.03	24.18	25.50	1.355	0.169	22.2
Rightt side	RMC	4182/836.4	1:1	0.254	0.02	24.18	25.50	1.355	0.344	22.2
Bottom side	RMC	4182/836.4	1:1	0.349	0.04	24.18	25.50	1.355	0.473	22.2
			Body-v	vorn Test da	ta(Separate	10mm)				
Front side	RMC	4182/836.4	1:1	0.202	0.06	24.18	25.50	1.355	0.274	22.2
Back side	RMC	4182/836.4	1:1	0.382	0.03	24.18	25.50	1.355	0.518	22.2
				Ant 4 Te	st Record					
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				Head T	est Data					
Left cheek	RMC	4182/836.4	1:1	0.751	-0.18	23.56	24.50	1.242	0.932	22.2
Left cheek	RMC	4132/826.4	1:1	0.685	0.02	23.42	24.50	1.282	0.878	22.2
Left cheek	RMC	4233/846.6	1:1	0.739	0.09	23.55	24.50	1.245	0.920	22.2
Left tilted	RMC	4182/836.4	1:1	0.688	0.09	23.56	24.50	1.242	0.854	22.2
Left tilted	RMC	4132/826.4	1:1	0.604	0.08	23.42	24.50	1.282	0.775	22.2
Left tilted	RMC	4233/846.6	1:1	0.666	0.02	23.55	24.50	1.245	0.829	22.2
Right cheek	RMC	4182/836.4	1:1	0.200	0.09	23.56	24.50	1.242	0.248	22.2
Right tilted	RMC	4182/836.4	1:1	0.192	0.04	23.56	24.50	1.242	0.238	22.2
		ļ.	Hotspot (se	ensor on) Te	st data(Sep	arate 10mm)				
Front side	RMC	4182/836.4	1:1	0.171	-0.01	23.56	24.50	1.242	0.212	22.2
Back side	RMC	4182/836.4	1:1	0.375	-0.07	23.56	24.50	1.242	0.466	22.2
Top side	RMC	4182/836.4	1:1	0.269	0.04	23.56	24.50	1.242	0.334	22.2
			Ho	tspot (senso	or off) Test of	data				_
Front side-12mm	RMC	4182/836.4	1:1	0.094	0.02	24.42	25.50	1.282	0.121	22.2
Back side-17mm	RMC	4182/836.4	1:1	0.086	-0.04	24.42	25.50	1.282	0.110	22.2
Left side-10mm	RMC	4182/836.4	1:1	0.082	-0.01	24.42	25.50	1.282	0.105	22.2
Top side-19mm	RMC	4182/836.4	1:1	0.069	0.02	24.42	25.50	1.282	0.088	22.2
			Body-v	vorn Test da	ta(Separate	10mm)				
Front side	RMC	4182/836.4	1:1	0.171	-0.01	23.56	24.50	1.242	0.212	22.2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company, Albert Section (1980-1980).

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 84 of 134

Back side	RMC	4182/836.4	1:1	0.375	-0.07	23.56	24.50	1.242	0.466	22.2
Front side-12mm	RMC	4182/836.4	1:1	0.094	0.02	24.42	25.50	1.282	0.121	22.2
Back side-17mm	RMC	4182/836.4	1:1	0.086	-0.04	24.42	25.50	1.282	0.110	22.2

Table 21: SAR of WCDMA Band V for Head and Body(original report No:SEWM2304000137RG09).

	Ant 0 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)		
				Hea	ad Test Dat	а						
Right cheek	RMC	4182/836.4	1:1	0.168	0.03	24.16	25.50	1.361	0.229	22.6		
			ŀ	Hotspot Test	data(Sepa	ate 10mm)						
Back side	RMC	4182/836.4	1:1	0.363	0.07	24.16	25.50	1.361	0.494	22.6		
			Во	ody-worn Tes	st data(Sep	arate 10mm)						
Back side	RMC	4182/836.4	1:1	0.363	0.07	24.16	25.50	1.361	0.494	22.6		
				Ant 4	Test Rec	ord						
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)		
				Hea	ad Test Dat	a						
Left cheek	RMC	4182/836.4	1:1	0.736	0.04	23.15	24.00	1.216	0.895	22.6		
			Hotspo	ot (sensor on	) Test data	(Separate 10mm)	)					
Back side	RMC	4182/836.4	1:1	0.360	0.02	23.15	24.00	1.216	0.438	22.6		
			Во	ody-worn Tes	st data(Sep	arate 10mm)						
Back side	RMC	4182/836.4	1:1	0.360	0.02	23.15	24.00	1.216	0.438	22.6		

Table 22: SAR of WCDMA Band V for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 85 of 134

#### 8.2.6 SAR Result of LTE Band 2

			LTE	Band 2 S	SAR Test	Record					
				Ant 0 T	est Recoi	rd					
Test position	BW ·	Test mode	Test ch./Freq.	Duty Cycl e	SAR (W/kg ) 1-g	Powe r drift (dB)	Conducted Power(dB m)	Tune up Limit(dB m)	Scale d factor	Scale d SAR 1-g (W/kg	Liquid Temp.( °C)
				Head Te	st Data(1F	RB)					
Left cheek	20	QPSK 1_0	18900/1880	1:1	0.121	0.01	23.98	25.00	1.265	0.153	22.9
Left tilted	20	QPSK 1_0	18900/1880	1:1	0.084	0.02	23.98	25.00	1.265	0.106	22.9
Right cheek	20	QPSK 1_0	18900/1880	1:1	0.176	0.00	23.98	25.00	1.265	0.223	22.9
Right tilted	20	QPSK 1_0	18900/1880	1:1	0.091	-0.04	23.98	25.00	1.265	0.115	22.9
			Н	ead Test	Data(50%	6RB)					
Left cheek	20	QPSK 50_0	18900/1880	1:1	0.108	-0.05	23.23	24.00	1.194	0.129	22.9
Left tilted	20	QPSK 50_0	18900/1880	1:1	0.078	0.01	23.23	24.00	1.194	0.093	22.9
Right cheek	20	QPSK 50_0	18900/1880	1:1	0.135	0.03	23.23	24.00	1.194	0.161	22.9
Right tilted	20	QPSK 50_0	18900/1880	1:1	0.074	0.04	23.23	24.00	1.194	0.088	22.9
			Hotspot (senso	r on) Tes	t data(Sep	arate 10r	nm 1RB)				
Front side	20	QPSK 1_0	18900/1880	1:1	0.196	-0.01	20.05	21.00	1.245	0.244	22.9
Back side	20	QPSK 1_0	18900/1880	1:1	0.337	0.04	20.05	21.00	1.245	0.419	22.9
Bottom side	20	QPSK 1_0	18900/1880	1:1	0.355	0.09	20.05	21.00	1.245	0.442	22.9
			Hotspot (sensor	on) Test	data(Sepa	rate 10mi	m 50%RB)				
Front side	20	QPSK 50_0	18900/1880	1:1	0.211	0.05	20.03	21.00	1.250	0.264	22.9
Back side	20	QPSK 50_0	18900/1880	1:1	0.353	0.02	20.03	21.00	1.250	0.441	22.9
Bottom side	20	QPSK 50_0	18900/1880	1:1	0.357	-0.03	20.03	21.00	1.250	0.446	22.9
			Hotspo	t (sensor	off) Test	data(1RB)					
Front side-12mm	20	QPSK 1_0	18900/1880	1:1	0.261	-0.02	23.98	25.00	1.265	0.330	22.9
Back side-17mm	20	QPSK 1_0	18900/1880	1:1	0.293	0.04	23.98	25.00	1.265	0.371	22.9
Left side-10mm	20	QPSK 1_0	18900/1880	1:1	0.077	0.04	23.98	25.00	1.265	0.097	22.9
Right side-10mm	20	QPSK 1_0	18900/1880	1:1	0.086	-0.02	23.98	25.00	1.265	0.109	22.9
Bottom side-15mm	20	QPSK 1_0	18900/1880	1:1	0.316	0.06	23.98	25.00	1.265	0.400	22.9
			Hotspot	(sensor c	ff) Test da	ata(50%R	В)				
Front side-12mm	20	QPSK 50_0	18900/1880	1:1	0.211	0.02	23.23	24.00	1.194	0.252	22.9
Back side-17mm	20	QPSK 50_0	18900/1880	1:1	0.247	-0.01	23.23	24.00	1.194	0.295	22.9
Left side-10mm	20	QPSK 50_0	18900/1880	1:1	0.086	0.07	23.23	24.00	1.194	0.103	22.9
Right side-10mm	20	QPSK 50_0	18900/1880	1:1	0.089	-0.04	23.23	24.00	1.194	0.106	22.9
Bottom side-15mm	20	QPSK 50_0	18900/1880	1:1	0.263	0.02	23.23	24.00	1.194	0.314	22.9
			Body-worn	Test dat	a(Separat	e 10mm 1	RB)				
Front side	20	QPSK 1_0	18900/1880	1:1	0.196	-0.01	20.05	21.00	1.245	0.244	22.9
Back side	20	QPSK 1_0	18900/1880	1:1	0.337	0.04	20.05	21.00	1.245	0.419	22.9
Front side-12mm	20	QPSK 1_0	18900/1880	1:1	0.261	-0.02	23.98	25.00	1.265	0.330	22.9
Back side-17mm	20	QPSK 1_0	18900/1880	1:1	0.293	0.04	23.98	25.00	1.265	0.371	22.9
		,	Body-worn T	est data	Separate	10mm 50	%RB)		•		
Front side	20	QPSK 50_0	18900/1880	1:1	0.211	0.05	20.03	21.00	1.250	0.264	22.9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company, Albert Section (1980-1980).

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 86 of 134

	1	ı		ı	Т	1	ı	T	T	1	
Back side	20	QPSK 50_0	18900/1880	1:1	0.353	0.02	20.03	21.00	1.250	0.441	22.9
Front side-12mm	20	QPSK 50_0	18900/1880	1:1	0.211	0.02	23.23	24.00	1.194	0.252	22.9
Back side-17mm	20	QPSK 50_0	18900/1880	1:1	0.247	-0.01	23.23	24.00	1.194	0.295	22.9
				Ant 4 T	est Reco	rd					
Test position	BW	Test mode	Test ch./Freq.	Duty Cycl e	SAR (W/kg ) 1-g	Powe r drift (dB)	Conducted Power(dB m)	Tune up Limit(dB m)	Scale d factor	Scale d SAR 1-g (W/kg	Liquid Temp.( °C)
		·		Head Te	st Data(1F	RB)	·			,	
Left cheek	20	QPSK 1_0	18900/1880	1:1	0.322	0.04	14.81	15.50	1.172	0.377	22.9
Left tilted	20	QPSK 1_0	18900/1880	1:1	0.413	0.08	14.81	15.50	1.172	0.484	22.9
Right cheek	20	QPSK 1_0	18900/1880	1:1	0.459	0.04	14.81	15.50	1.172	0.538	22.9
Right tilted	20	QPSK 1_0	18900/1880	1:1	0.585	0.08	14.81	15.50	1.172	0.686	22.9
	ı	l	Н	lead Test	Data(50%	6RB)	l	I			
Left cheek	20	QPSK 50_0	18900/1880	1:1	0.346	0.08	14.67	15.50	1.211	0.419	22.9
Left tilted	20	QPSK 50_0	18900/1880	1:1	0.450	0.03	14.67	15.50	1.211	0.545	22.9
Right cheek	20	QPSK 50_0	18900/1880	1:1	0.484	0.02	14.67	15.50	1.211	0.586	22.9
Right tilted	20	QPSK 50_0	18900/1880	1:1	0.619	0.04	14.67	15.50	1.211	0.749	22.9
Right tilted-ENDC	20	QPSK 50_0	18900/1880	1:1	0.388	0.05	13.51	14.50	1.256	0.487	22.9
			Hotspot (senso	r on) Tes	t data(Ser	parate 10r	nm 1RB)				
Front side	20	QPSK 1_0	18900/1880	1:1	0.262	0.06	17.73	18.50	1.194	0.313	22.9
Back side	20	QPSK 1_0	18900/1880	1:1	0.442	-0.03	17.73	18.50	1.194	0.528	22.9
Top side	20	QPSK 1_0	18900/1880	1:1	0.680	-0.01	17.73	18.50	1.194	0.812	22.9
Top side	20	QPSK 1_0	18700/1860	1:1	0.573	0.01	17.59	18.50	1.233	0.707	22.9
Top side	20	QPSK 1_0	19100/1900	1:1	0.796	0.06	17.49	18.50	1.262	1.004	22.9
	L	l.	Hotspot (sensor	on) Test	data(Sepa	rate 10mi	m 50%RB)				
Front side	20	QPSK 50_0	18900/1880	1:1	0.272	0.09	17.61	18.50	1.227	0.334	22.9
Back side	20	QPSK 50_0	18900/1880	1:1	0.551	0.00	17.61	18.50	1.227	0.676	22.9
Top side	20	QPSK 50_0	18900/1880	1:1	0.701	0.03	17.61	18.50	1.227	0.860	22.9
Top side	20	QPSK 50_0	18700/1860	1:1	0.582	0.07	17.42	18.50	1.282	0.746	22.9
Top side	20	QPSK 50_0	19100/1900	1:1	0.806	-0.03	17.27	18.50	1.327	1.070	22.9
Top side-ENDC	20	QPSK 50_0	19100/1900	1:1	0.424	0.09	15.56	16.50	1.242	0.526	22.9
		ŀ	Hotspot (sensor o	n) Test o	data(Sepai	ate 10mn	n 100%RB)		•		
Top side	20	QPSK 100_0	18900/1880	1:1	0.688	-0.05	17.59	18.50	1.233	0.848	22.9
Top side	20	QPSK 100_0	18700/1860	1:1	0.579	0.07	17.47	18.50	1.268	0.734	22.9
Top side	20	QPSK 100_0	19100/1900	1:1	0.793	0.05	17.34	18.50	1.306	1.036	22.9
			Hotspo	ot (sensor	off) Test	data(1RB	)				
Front side-12mm	20	QPSK 1_0	18900/1880	1:1	0.540	-0.05	22.26	23.00	1.186	0.640	22.9
Back side-17mm	20	QPSK 1_0	18900/1880	1:1	0.529	0.04	22.26	23.00	1.186	0.627	22.9
Left side-10mm	20	QPSK 1_0	18900/1880	1:1	0.135	0.03	22.26	23.00	1.186	0.160	22.9
Top side-19mm	20	QPSK 1_0	18900/1880	1:1	0.811	0.06	22.26	23.00	1.186	0.962	22.9
Top side-19mm	20	QPSK 1_0	18700/1860	1:1	0.723	0.01	22.18	23.00	1.208	0.873	22.9
Top side-19mm	20	QPSK 1_0	19100/1900	1:1	0.882	0.09	22.25	23.00	1.189	1.048	22.9
			Hotspot	(sensor o	off) Test da	ata(50%R	В)				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one one exoretion and the expension of the expension of

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 87 of 134

Front side-12mm	20	QPSK 50_0	18900/1880	1:1	0.546	-0.16	22.24	23.00	1.191	0.650	22.9
Back side-17mm	20	QPSK 50_0	18900/1880	1:1	0.531	0.02	22.24	23.00	1.191	0.633	22.9
Left side-10mm	20	QPSK 50_0	18900/1880	1:1	0.141	0.05	22.24	23.00	1.191	0.168	22.9
Top side-19mm	20	QPSK 50_0	18900/1880	1:1	0.816	0.12	22.24	23.00	1.191	0.972	22.9
Top side-19mm	20	QPSK 50_0	18700/1860	1:1	0.735	-0.12	22.16	23.00	1.213	0.892	22.9
Top side-19mm	20	QPSK 50_0	19100/1900	1:1	0.891	0.08	22.24	23.00	1.191	1.061	22.9
Top side-19mm-Repeat SAR	20	QPSK 50_0	19100/1900	1:1	0.887	0.05	22.24	23.00	1.191	1.057	22.9
			Hotspot	(sensor c	off) Test da	ata(50%R	B)				
Top side-19mm	20	QPSK 100_0	18900/1880	1:1	0.808	0.02	22.20	23.00	1.202	0.971	22.9
Top side-19mm	20	QPSK 100_0	18700/1860	1:1	0.717	-0.16	22.12	23.00	1.225	0.878	22.9
Top side-19mm	20	QPSK 100_0	19100/1900	1:1	0.877	0.07	22.18	23.00	1.208	1.059	22.9
			Body-worn	Test dat	a(Separat	e 10mm 1	RB)				
Front side	20	QPSK 1_0	18900/1880	1:1	0.262	0.06	17.73	18.50	1.194	0.313	22.9
Back side	20	QPSK 1_0	18900/1880	1:1	0.442	-0.03	17.73	18.50	1.194	0.528	22.9
Front side-12mm	20	QPSK 1_0	18900/1880	1:1	0.540	-0.05	22.26	23.00	1.186	0.640	22.9
Back side-17mm	20	QPSK 1_0	18900/1880	1:1	0.529	0.04	22.26	23.00	1.186	0.627	22.9
			Body-worn T	est data	Separate	10mm 50	%RB)				
Front side	20	QPSK 50_0	18900/1880	1:1	0.272	0.09	17.61	18.50	1.227	0.334	22.9
Back side	20	QPSK 50_0	18900/1880	1:1	0.551	-0.14	17.61	18.50	1.227	0.676	22.9
Back side-ENDC	20	QPSK 50_0	18900/1880	1:1	0.418	0.04	15.56	16.50	1.242	0.519	22.9
Front side-12mm	20	QPSK 50_0	18900/1880	1:1	0.546	-0.16	22.24	23.00	1.191	0.650	22.9
Back side-17mm	20	QPSK 50_0	18900/1880	1:1	0.531	0.02	22.24	23.00	1.191	0.633	22.9

Table 23: SAR of LTE Band 2 for Head and Body(original report No:SEWM2304000137RG09).

Ant 0 Test Record												
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)	
					Head Tes	t Data(1RE	3)					
Right cheek	20	QPSK 1_0	18900/1880	1:1	0.158	0.03	23.85	25.00	1.303	0.206	23.1	
			Hot	spot (sens	or on) Test o	lata(Separa	ate 10mm 50%l	RB)				
Bottom side	20	QPSK 50_0	18900/1880	1:1	0.333	0.01	19.81	21.00	1.315	0.438	23.1	
Body-worn Test data(Separate 10mm 50%RB)												
Back side	20	QPSK 50_0	18900/1880	1:1	0.329	0.05	19.81	21.00	1.315	0.433	23.1	
					Ant 4 Te	est Record						
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)	
					Head Test	Data(50%F	RB)					
Right tilted	20	QPSK 50_0	18900/1880	1:1	0.604	-0.07	14.91	15.50	1.146	0.692	23.1	
			Hot	spot (sens	or on) Test o	lata(Separa	ate 10mm 50%l	RB)				
Top side	20	QPSK 50_0	19100/1900	1:1	0.764	0.07	17.46	18.50	1.271	0.971	23.1	
Body-worn Test data(Separate 10mm 50%RB)												
Back side	20	QPSK 50_0	18900/1880	1:1	0.538	0.13	17.70	18.50	1.202	0.647	23.1	

Table 24: SAR of LTE Band 2 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Pant, No. 1, Runshara Ricad, Suchou Industrial Park, Suchou Area, Chira (Jangsu) Pilot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 88 of 134

#### 8.2.7 SAR Result of LTE Band 7

	LTE Band 7 SAR Test Record  Ant 0 Test Record												
			An	t 0 Test F	Record								
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)		
			Hea	d Test Da	ita(1RB)								
Left cheek	20	QPSK 1_0	21100/2535	1:1	0.173	-0.02	23.79	25.00	1.321	0.229	22.5		
Left cheek - CA_7C	20	QPSK 1_0	21100+20902/2535+2515.2	1:1	0.155	0.05	23.61	25.00	1.377	0.213	22.5		
Left tilted	20	QPSK 1_0	21100/2535	1:1	0.101	0.09	23.79	25.00	1.321	0.133	22.5		
Right cheek	20	QPSK 1_0	21100/2535	1:1	0.107	0.03	23.79	25.00	1.321	0.141	22.5		
Right tilted	20	QPSK 1_0	21100/2535	1:1	0.065	-0.01	23.79	25.00	1.321	0.086	22.5		
			Head	Test Data	a(50%RB)								
Left cheek	20	QPSK 50_0	21100/2535	1:1	0.152	0.06	22.66	24.00	1.361	0.207	22.5		
Left tilted	20	QPSK 50_0	21100/2535	1:1	0.039	-0.01	22.66	24.00	1.361	0.053	22.5		
Right cheek	20	QPSK 50_0	21100/2535	1:1	0.076	0.08	22.66	24.00	1.361	0.103	22.5		
Right tilted	20	QPSK 50_0	21100/2535	1:1	0.055	0.00	22.66	24.00	1.361	0.075	22.5		
			Hotspot (sensor on)	Test data	a(Separate	10mm 1R	B)						
Front side	20	QPSK 1_0	21100/2535	1:1	0.311	0.02	19.43	20.50	1.279	0.398	22.5		
Back side	20	QPSK 1_0	21100/2535	1:1	0.392	0.01	19.43	20.50	1.279	0.502	22.5		
Bottom side	20	QPSK 1_0	21100/2535	1:1	0.267	0.09	19.43	20.50	1.279	0.342	22.5		
		L	Hotspot (sensor on)	Test data(	Separate 1	0mm 50%	RB)				<u> </u>		
Front side	20	QPSK 50_0	21100/2535	1:1	0.303	0.07	19.34	20.50	1.306	0.396	22.5		
Back side	20	QPSK 50_0	21100/2535	1:1	0.397	0.02	19.34	20.50	1.306	0.519	22.5		
Back side - CA_7C	20	QPSK 50_0	21100+20902/2535+2515.2	1:1	0.324	0.01	19.32	20.50	1.312	0.425	22.5		
Bottom side	20	QPSK 50_0	21100/2535	1:1	0.253	-0.03	19.34	20.50	1.306	0.330	22.5		
			Hotspot (se	ensor off)	Test data(1	RB)							
Front side-12mm	20	QPSK 1_0	21100/2535	1:1	0.539	0.07	23.79	25.00	1.321	0.712	22.5		
Back side-17mm	20	QPSK 1_0	21100/2535	1:1	0.431	-0.15	23.79	25.00	1.321	0.569	22.5		
Left side-10mm	20	QPSK 1_0	21100/2535	1:1	0.117	-0.04	23.79	25.00	1.321	0.155	22.5		
Right side-10mm	20	QPSK 1_0	21100/2535	1:1	0.062	0.04	23.79	25.00	1.321	0.082	22.5		
Bottom side-15mm	20	QPSK 1_0	21100/2535	1:1	0.202	0.06	23.79	25.00	1.321	0.267	22.5		
			Hotspot (sen	sor off) To	est data(50	%RB)	•						
Front side-12mm	20	QPSK 50_0	21100/2535	1:1	0.524	0.02	22.66	24.00	1.361	0.713	22.5		
Back side-17mm	20	QPSK 50_0	21100/2535	1:1	0.406	0.01	22.66	24.00	1.361	0.553	22.5		
Left side-10mm	20	QPSK 50_0	21100/2535	1:1	0.112	-0.03	22.66	24.00	1.361	0.152	22.5		
Right side-10mm	20	QPSK 50_0	21100/2535	1:1	0.063	-0.05	22.66	24.00	1.361	0.086	22.5		
Bottom side-15mm	20	QPSK 50_0	21100/2535	1:1	0.176	-0.08	22.66	24.00	1.361	0.240	22.5		
			Body-worn Tes	t data(Se	parate 10m	m 1RB)							
Front side	20	QPSK 1_0	21100/2535	1:1	0.311	0.02	19.43	20.50	1.279	0.398	22.5		
Back side	20	QPSK 1_0	21100/2535	1:1	0.392	0.01	19.43	20.50	1.279	0.502	22.5		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document at http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 sgs.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 89 of 134

_			T			T	1				1
Front side-12mm	20	QPSK 1_0	21100/2535	1:1	0.539	0.07	23.79	25.00	1.321	0.712	22.5
Back side-17mm	20	QPSK 1_0	21100/2535	1:1	0.431	-0.15	23.79	25.00	1.321	0.569	22.5
	_	1	Body-worn Test	data(Sepa	arate 10mn	n 50%RB)	1				
Front side	20	QPSK 50_0	21100/2535	1:1	0.303	0.07	19.34	20.50	1.306	0.396	22.5
Back side	20	QPSK 50_0	21100/2535	1:1	0.397	0.02	19.34	20.50	1.306	0.519	22.5
Front side-12mm	20	QPSK 50_0	21100/2535	1:1	0.524	0.02	22.66	24.00	1.361	0.713	22.5
Front side-12mm - CA_7C	20	QPSK 50_0	21100+20902/2535+2515.2	1:1	0.465	-0.15	22.61	24.00	1.377	0.640	22.5
Back side-17mm	20	QPSK 50_0	21100/2535	1:1	0.406	0.01	22.66	24.00	1.361	0.553	22.5
			An	t 4 Test F	Record						
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)
			Hea	d Test Da	ita(1RB)						
Left cheek	20	QPSK 1_0	21100/2535	1:1	0.307	0.06	17.93	18.50	1.140	0.350	22.5
Left tilted	20	QPSK 1_0	21100/2535	1:1	0.380	-0.04	17.93	18.50	1.140	0.433	22.5
Right cheek	20	QPSK 1_0	21100/2535	1:1	0.592	-0.09	17.93	18.50	1.140	0.675	22.5
Right cheek-ENDC A	20	QPSK 1_0	21100/2535	1:1	0.367	0.05	14.67	15.50	1.211	0.444	22.5
Right cheek - CA_7C	20	QPSK 1_0	21100+20902/2535+2515.2	1:1	0.521	-0.13	17.90	18.50	1.148	0.598	22.5
Right tilted	20	QPSK 1_0	21100/2535	1:1	0.465	0.02	17.93	18.50	1.140	0.530	22.5
		•	Head	Test Data	a(50%RB)	•					
Left cheek	20	QPSK 50_0	21100/2535	1:1	0.292	-0.01	17.78	18.50	1.180	0.345	22.5
Left tilted	20	QPSK 50_0	21100/2535	1:1	0.368	0.10	17.78	18.50	1.180	0.434	22.5
Right cheek	20	QPSK 50_0	21100/2535	1:1	0.567	-0.02	17.78	18.50	1.180	0.669	22.5
Right tilted	20	QPSK 50_0	21100/2535	1:1	0.462	0.04	17.78	18.50	1.180	0.545	22.5
			Hotspot (sensor on)	Test data	a(Separate	10mm 1R	B)				
Front side	20	QPSK 1_0	21100/2535	1:1	0.315	0.08	17.93	18.50	1.140	0.359	22.5
Back side	20	QPSK 1_0	21100/2535	1:1	0.463	0.06	17.93	18.50	1.140	0.528	22.5
Top side	20	QPSK 1_0	21100/2535	1:1	0.278	0.01	17.93	18.50	1.140	0.317	22.5
			Hotspot (sensor on)	Γest data(	Separate 1	0mm 50%	RB)				
Front side	20	QPSK 50_0	21100/2535	1:1	0.311	0.01	17.78	18.50	1.180	0.367	22.5
Back side	20	QPSK 50_0	21100/2535	1:1	0.456	0.04	17.78	18.50	1.180	0.538	22.5
Top side	20	QPSK 50_0	21100/2535	1:1	0.289	0.05	17.78	18.50	1.180	0.341	22.5
			Hotspot (se	ensor off)	Test data(1	RB)					
Front side-12mm	20	QPSK 1_0	21100/2535	1:1	0.305	0.05	24.21	25.00	1.199	0.366	22.5
Back side-17mm	20	QPSK 1_0	21100/2535	1:1	0.279	0.03	24.21	25.00	1.199	0.335	22.5
Left side-10mm	20	QPSK 1_0	21100/2535	1:1	0.600	-0.13	24.21	25.00	1.199	0.720	22.5
Left side-10mm-ENDC	20	QPSK 1_0	21100/2535	1:1	0.476	-0.04	22.01	22.50	1.119	0.533	22.5
Left side-10mm - CA_7C	20	QPSK 1_0	21100+20902/2535+2515.2	1:1	0.497	0.05	24.18	25.00	1.208	0.600	22.5
Top side-19mm	20	QPSK 1_0	21100/2535	1:1	0.398	-0.04	24.21	25.00	1.199	0.477	22.5
			Hotspot (sen	sor off) Te	est data(50	%RB)					
Front side-12mm	20	QPSK 50_0	21100/2535	1:1	0.290	-0.04	23.32	24.00	1.169	0.339	22.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company, Albert Section (1980-1980).

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 sgs



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 90 of 134

Back side-17mm	20	QPSK 50_0	21100/2535	1:1	0.262	0.02	23.32	24.00	1.169	0.306	22.5
Left side-10mm	20	QPSK 50_0	21100/2535	1:1	0.477	0.09	23.32	24.00	1.169	0.558	22.5
Top side-19mm	20	QPSK 50_0	21100/2535	1:1	0.376	0.06	23.32	24.00	1.169	0.440	22.5
			Body-worn Tes	t data(Se	parate 10m	ım 1RB)					
Front side	20	QPSK 1_0	21100/2535	1:1	0.315	0.08	17.93	18.50	1.140	0.359	22.5
Back side	20	QPSK 1_0	21100/2535	1:1	0.463	0.06	17.93	18.50	1.140	0.528	22.5
Front side-12mm	20	QPSK 1_0	21100/2535	1:1	0.305	0.05	24.21	25.00	1.199	0.366	22.5
Back side-17mm	20	QPSK 1_0	21100/2535	1:1	0.279	0.03	24.21	25.00	1.199	0.335	22.5
			Body-worn Test	data(Sepa	arate 10mn	n 50%RB)					
Front side	20	QPSK 50_0	21100/2535	1:1	0.311	0.01	17.78	18.50	1.180	0.367	22.5
Back side	20	QPSK 50_0	21100/2535	1:1	0.456	0.04	17.78	18.50	1.180	0.538	22.5
Back side - CA_7C	20	QPSK 50_0	21100+20902/2535+2515.2	1:1	0.388	0.12	17.72	18.50	1.197	0.464	22.5
Back side-ENDC	20	QPSK 50_0	21100/2535	1:1	0.411	0.08	17.24	18.00	1.191	0.490	22.5
Front side-12mm	20	QPSK 50_0	21100/2535	1:1	0.290	-0.04	23.32	24.00	1.169	0.339	22.5
Back side-17mm	20	QPSK 50_0	21100/2535	1:1	0.262	0.02	23.32	24.00	1.169	0.306	22.5

Table 25: SAR of LTE Band 7 for Head and Body(original report No:SEWM2304000137RG09).

				Α	nt 0 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				He	ad Test D	ata(1RB)					
Left cheek	20	QPSK 1_0	21100/2535	1:1	0.148	0.06	23.32	25.00	1.472	0.218	22.6
			Ho	otspot (se	nsor off) T	est data(	50%RB)				
Front side-12mm	20	QPSK 50_0	21100/2535	1:1	0.483	0.06	22.39	24.00	1.449	0.700	22.6
			Body-	worn Tes	t data(Sep	arate 10r	nm 50%RB)				
Front side-12mm	20	QPSK 50_0	21100/2535	1:1	0.483	0.06	22.39	24.00	1.449	0.700	22.6
				А	nt 4 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				He	ad Test D	ata(1RB)					
Right cheek	20	QPSK 1_0	21100/2535	1:1	0.557	0.02	18.01	18.50	1.119	0.624	22.6
			ŀ	Hotspot (s	sensor off)	Test data	a(1RB)				
Left side-10mm	20	QPSK 1_0	21100/2535	1:1	0.561	0.07	23.95	25.00	1.274	0.714	22.6
			Body-	worn Tes	t data(Sep	arate 10r	nm 50%RB)		•	•	
Back side	20	QPSK 50_0	21100/2535	1:1	0.414	0.09	17.81	18.50	1.172	0.485	22.6

Table 26: SAR of LTE Band 7 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: Page: 91 of 134

#### 8.2.8 SAR Result of LTE Band 12

				LTE B	Band 12 SA	R Test Red	cord				
					Ant 0 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				ŀ	Head Test D	Data(1RB)					
Left cheek	10	QPSK 1_0	23095/707.5	1:1	0.078	0.08	23.89	25.00	1.291	0.101	22.6
Left tilted	10	QPSK 1_0	23095/707.5	1:1	0.000	0.00	23.89	25.00	1.291	0.000	22.6
Right cheek	10	QPSK 1_0	23095/707.5	1:1	0.088	-0.03	23.89	25.00	1.291	0.114	22.6
Right tilted	10	QPSK 1_0	23095/707.5	1:1	0.043	-0.04	23.89	25.00	1.291	0.056	22.6
				He	ead Test Da	ta(50%RB)	)				
Left cheek	10	QPSK 25_0	23095/707.5	1:1	0.059	0.00	23.06	24.00	1.242	0.073	22.6
Left tilted	10	QPSK 25_0	23095/707.5	1:1	0.000	0.10	23.06	24.00	1.242	0.000	22.6
Right cheek	10	QPSK 25_0	23095/707.5	1:1	0.065	0.04	23.06	24.00	1.242	0.081	22.6
Right tilted	10	QPSK 25_0	23095/707.5	1:1	0.000	-0.02	23.06	24.00	1.242	0.000	22.6
				Hotspot T	est data(Se	parate 10m	nm 1RB)				
Front side	10	QPSK 1_0	23095/707.5	1:1	0.111	0.10	23.89	25.00	1.291	0.143	22.6
Back side	10	QPSK 1_0	23095/707.5	1:1	0.194	0.08	23.89	25.00	1.291	0.250	22.6
Left side	10	QPSK 1_0	23095/707.5	1:1	0.129	-0.04	23.89	25.00	1.291	0.167	22.6
Rightt side	10	QPSK 1_0	23095/707.5	1:1	0.193	-0.02	23.89	25.00	1.291	0.249	22.6
Bottom side	10	QPSK 1_0	23095/707.5	1:1	0.139	0.01	23.89	25.00	1.291	0.179	22.6
		•		Hotspot Tes	st data(Sepa	arate 10mn	n 50%RB)	•			
Front side	10	QPSK 25_0	23095/707.5	1:1	0.086	0.04	23.06	24.00	1.242	0.107	22.6
Back side	10	QPSK 25_0	23095/707.5	1:1	0.155	0.05	23.06	24.00	1.242	0.192	22.6
Left side	10	QPSK 25_0	23095/707.5	1:1	0.100	-0.05	23.06	24.00	1.242	0.124	22.6
Rightt side	10	QPSK 25_0	23095/707.5	1:1	0.177	0.05	23.06	24.00	1.242	0.220	22.6
Bottom side	10	QPSK 25_0	23095/707.5	1:1	0.099	0.09	23.06	24.00	1.242	0.123	22.6
				Body-worn	Test data(S	eparate 10	mm 1RB)				
Front side	10	QPSK 1_0	23095/707.5	1:1	0.111	0.10	23.89	25.00	1.291	0.143	22.6
Back side	10	QPSK 1_0	23095/707.5	1:1	0.194	-0.18	23.89	25.00	1.291	0.250	22.6
			В	ody-worn T	est data(Se	parate 10m	nm 50%RB)				
Front side	10	QPSK 25_0	23095/707.5	1:1	0.086	0.04	23.06	24.00	1.242	0.107	22.6
Back side	10	QPSK 25_0	23095/707.5	1:1	0.155	0.05	23.06	24.00	1.242	0.192	22.6
					Ant 4 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				I	Head Test D	Data(1RB)					
Left cheek	10	QPSK 1_0	23095/707.5	1:1	0.319	-0.04	23.95	25.00	1.274	0.406	22.6
Left tilted	10	QPSK 1_0	23095/707.5	1:1	0.325	0.04	23.95	25.00	1.274	0.414	22.6
Right cheek	10	QPSK 1_0	23095/707.5	1:1	0.348	-0.19	23.95	25.00	1.274	0.443	22.6
Right tilted	10	QPSK 1_0	23095/707.5	1:1	0.339	-0.03	23.95	25.00	1.274	0.432	22.6
				He	ead Test Da	ta(50%RB)	)				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, Panalle (24) Panall

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 92 of 134

Left cheek	10	QPSK 25_0	23095/707.5	1:1	0.265	0.09	23.08	24.00	1.236	0.328	22.6
Left tilted	10	QPSK 25_0	23095/707.5	1:1	0.260	0.03	23.08	24.00	1.236	0.321	22.6
Right cheek	10	QPSK 25_0	23095/707.5	1:1	0.289	0.09	23.08	24.00	1.236	0.357	22.6
Right tilted	10	QPSK 25_0	23095/707.5	1:1	0.292	-0.02	23.08	24.00	1.236	0.361	22.6
				Hotspot To	est data(Se	parate 10m	nm 1RB)				
Front side	10	QPSK 1_0	23095/707.5	1:1	0.085	-0.06	23.95	25.00	1.274	0.108	22.6
Back side	10	QPSK 1_0	23095/707.5	1:1	0.144	-0.02	23.95	25.00	1.274	0.183	22.6
Left side	10	QPSK 1_0	23095/707.5	1:1	0.093	0.06	23.95	25.00	1.274	0.118	22.6
Top side	10	QPSK 1_0	23095/707.5	1:1	0.117	0.01	23.95	25.00	1.274	0.149	22.6
				Hotspot Tes	st data(Sepa	arate 10mm	n 50%RB)				
Front side	10	QPSK 25_0	23095/707.5	1:1	0.070	0.01	23.08	24.00	1.236	0.087	22.6
Back side	10	QPSK 25_0	23095/707.5	1:1	0.128	-0.04	23.08	24.00	1.236	0.158	22.6
Left side	10	QPSK 25_0	23095/707.5	1:1	0.073	0.09	23.08	24.00	1.236	0.090	22.6
Top side	10	QPSK 25_0	23095/707.5	1:1	0.098	0.08	23.08	24.00	1.236	0.121	22.6
				Body-worn	Test data(S	eparate 10	mm 1RB)				
Front side	10	QPSK 1_0	23095/707.5	1:1	0.085	-0.06	23.95	25.00	1.274	0.108	22.6
Back side	10	QPSK 1_0	23095/707.5	1:1	0.144	-0.02	23.95	25.00	1.274	0.183	22.6
			В	ody-worn To	est data(Se	parate 10m	ım 50%RB)				
Front side	10	QPSK 25_0	23095/707.5	1:1	0.070	0.01	23.08	24.00	1.236	0.087	22.6
Back side	10	QPSK 25_0	23095/707.5	1:1	0.128	-0.04	23.08	24.00	1.236	0.158	22.6

Table 27: SAR of LTE Band 12 for Head and Body(original report No:SEWM2304000137RG09).

					A 1 O T	4 D								
		I		1	Ant 0 Tes	t Record		I						
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)			
				F	Head Test	Data(1RB	)							
Right cheek	10	QPSK 1_0	23095/707.5	1:1	0.069	0.01	23.62	25.00	1.374	0.095	22.8			
			F	Hotspot Te	est data(S	eparate 10	0mm 1RB)							
Back side	10	QPSK 1_0	23095/707.5	1:1	0.175	0.12	23.62	25.00	1.374	0.240	22.8			
			Во	dy-worn	Test data(	Separate <sup>1</sup>	10mm 1RB)							
Back side	10	QPSK 1_0	23095/707.5	1:1	0.175	0.12	23.62	25.00	1.374	0.240	22.8			
					Ant 4 Tes	t Record								
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)			
				ŀ	Head Test	Data(1RB	)							
Right cheek	10	QPSK 1_0	23095/707.5	1:1	0.337	0.02	23.88	25.00	1.294	0.436	22.8			
			F	Hotspot Te	est data(S	eparate 10	mm 1RB)	_		<b>.</b>				
Back side	10	QPSK 1_0	23095/707.5	1:1	0.132	-0.08	23.88	25.00	1.294	0.171	22.8			
			Во	dy-worn	Test data(	Separate	10mm 1RB)							
Back side	10	QPSK 1_0	23095/707.5	1:1	0.132	-0.08	23.88	25.00	1.294	0.171	22.8			

Table 28: SAR of LTE Band 12 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document at http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 93 of 134

#### 8.2.9 SAR Result of LTE Band 13

				LTE B	and 13 SAF	R Test Rec	ord				
					Ant 0 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				H	Head Test D	ata(1RB)					
Left cheek	10	QPSK 1_0	23230/782	1:1	0.119	-0.02	23.87	25.00	1.297	0.154	22.6
Left tilted	10	QPSK 1_0	23230/782	1:1	0.076	0.06	23.87	25.00	1.297	0.099	22.6
Right cheek	10	QPSK 1_0	23230/782	1:1	0.146	-0.02	23.87	25.00	1.297	0.189	22.6
Right tilted	10	QPSK 1_0	23230/782	1:1	0.086	0.05	23.87	25.00	1.297	0.112	22.6
				He	ead Test Dat	ta(50%RB)					
Left cheek	10	QPSK 25_0	23230/782	1:1	0.096	0.03	23.08	24.00	1.236	0.119	22.6
Left tilted	10	QPSK 25_0	23230/782	1:1	0.060	-0.04	23.08	24.00	1.236	0.074	22.6
Right cheek	10	QPSK 25_0	23230/782	1:1	0.117	0.05	23.08	24.00	1.236	0.145	22.6
Right tilted	10	QPSK 25_0	23230/782	1:1	0.075	0.10	23.08	24.00	1.236	0.093	22.6
				Hotspot Te	est data(Sep	arate 10mr	m 1RB)				
Front side	10	QPSK 1_0	23230/782	1:1	0.123	-0.02	23.87	25.00	1.297	0.160	22.6
Back side	10	QPSK 1_0	23230/782	1:1	0.248	0.09	23.87	25.00	1.297	0.322	22.6
Left side	10	QPSK 1_0	23230/782	1:1	0.097	0.07	23.87	25.00	1.297	0.126	22.6
Rightt side	10	QPSK 1_0	23230/782	1:1	0.202	-0.02	23.87	25.00	1.297	0.262	22.6
Bottom side	10	QPSK 1_0	23230/782	1:1	0.192	-0.01	23.87	25.00	1.297	0.249	22.6
Hotspot Test data(Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23230/782	1:1	0.096	0.05	23.08	24.00	1.236	0.119	22.6
Back side	10	QPSK 25_0	23230/782	1:1	0.174	-0.01	23.08	24.00	1.236	0.215	22.6
Left side	10	QPSK 25_0	23230/782	1:1	0.077	-0.02	23.08	24.00	1.236	0.095	22.6
Rightt side	10	QPSK 25_0	23230/782	1:1	0.158	0.06	23.08	24.00	1.236	0.195	22.6
Bottom side	10	QPSK 25_0	23230/782	1:1	0.151	-0.01	23.08	24.00	1.236	0.187	22.6
				Body-worn	Test data(Se	eparate 10r	nm 1RB)				
Front side	10	QPSK 1_0	23230/782	1:1	0.123	-0.02	23.87	25.00	1.297	0.160	22.6
Back side	10	QPSK 1_0	23230/782	1:1	0.248	0.09	23.87	25.00	1.297	0.322	22.6
			В	ody-worn Te	est data(Sep	arate 10mr	n 50%RB)				
Front side	10	QPSK 25_0	23230/782	1:1	0.096	0.05	23.08	24.00	1.236	0.119	22.6
Back side	10	QPSK 25_0	23230/782	1:1	0.174	-0.01	23.08	24.00	1.236	0.215	22.6
					Ant 4 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				H	lead Test D	ata(1RB)					
Left cheek	10	QPSK 1_0	23230/782	1:1	0.444	-0.05	23.98	25.00	1.265	0.562	22.6
Left tilted	10	QPSK 1_0	23230/782	1:1	0.420	0.03	23.98	25.00	1.265	0.531	22.6
Right cheek	10	QPSK 1_0	23230/782	1:1	0.466	-0.04	23.98	25.00	1.265	0.589	22.6
Right tilted	10	QPSK 1_0	23230/782	1:1	0.420	0.06	23.98	25.00	1.265	0.531	22.6
				He	ad Test Dat	ta(50%RB)					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company, Albert Section (1980-1980).

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.:

94 of 134 Page:

Left cheek	10	QPSK 25_0	23230/782	1:1	0.351	0.06	22.92	24.00	1.282	0.450	22.6
Left tilted	10	QPSK 25_0	23230/782	1:1	0.320	0.08	22.92	24.00	1.282	0.410	22.6
Right cheek	10	QPSK 25_0	23230/782	1:1	0.363	0.05	22.92	24.00	1.282	0.465	22.6
Right tilted	10	QPSK 25_0	23230/782	1:1	0.321	0.09	22.92	24.00	1.282	0.412	22.6
				Hotspot To	est data(Sep	parate 10mr	n 1RB)				
Front side	10	QPSK 1_0	23230/782	1:1	0.139	0.03	23.98	25.00	1.265	0.176	22.6
Back side	10	QPSK 1_0	23230/782	1:1	0.208	-0.06	23.98	25.00	1.265	0.263	22.6
Left side	10	QPSK 1_0	23230/782	1:1	0.080	0.01	23.98	25.00	1.265	0.101	22.6
Top side	10	QPSK 1_0	23230/782	1:1	0.199	0.02	23.98	25.00	1.265	0.252	22.6
				Hotspot Tes	st data(Sepa	rate 10mm	50%RB)				
Front side	10	QPSK 25_0	23230/782	1:1	0.088	0.01	22.92	24.00	1.282	0.113	22.6
Back side	10	QPSK 25_0	23230/782	1:1	0.177	0.07	22.92	24.00	1.282	0.227	22.6
Left side	10	QPSK 25_0	23230/782	1:1	0.059	0.05	22.92	24.00	1.282	0.076	22.6
Top side	10	QPSK 25_0	23230/782	1:1	0.145	0.08	22.92	24.00	1.282	0.186	22.6
				Body-worn	Test data(Se	eparate 10n	nm 1RB)				
Front side	10	QPSK 1_0	23230/782	1:1	0.139	0.03	23.98	25.00	1.265	0.176	22.6
Back side	10	QPSK 1_0	23230/782	1:1	0.208	-0.06	23.98	25.00	1.265	0.263	22.6
_			E	Body-worn Te	est data(Sep	arate 10mr	n 50%RB)				
Front side	10	QPSK 25_0	23230/782	1:1	0.088	0.01	22.92	24.00	1.282	0.113	22.6
Back side	10	QPSK 25_0	23230/782	1:1	0.177	0.07	22.92	24.00	1.282	0.227	22.6

Table 29: SAR of LTE Band 13 for Head and Body(original report No:SEWM2304000137RG09).

					Ant 0 Tes	t Dagged								
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)			
				ŀ	Head Test	Data(1RB	)							
Right cheek	10	QPSK 1_0	23230/782	1:1	0.122	0.02	23.38	25.00	1.452	0.177	22.8			
			F	lotspot Te	est data(S	eparate 10	Omm 1RB)							
Back side	10	QPSK 1_0	23230/782	1:1	0.216	0.09	23.38	25.00	1.452	0.314	22.8			
			Во	dy-worn	Test data(	Separate <sup>-</sup>	10mm 1RB)							
Back side	10	QPSK 1_0	23230/782	1:1	0.216	0.09	23.38	25.00	1.452	0.314	22.8			
					Ant 4 Tes	t Record								
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)			
				ŀ	Head Test	Data(1RB	)							
Right cheek	10	QPSK 1_0	23230/782	1:1	0.456	0.02	23.95	25.00	1.274	0.581	22.8			
			F	Hotspot To	est data(S	eparate 10	mm 1RB)							
Back side	10	QPSK 1_0	23230/782	1:1	0.201	0.02	23.95	25.00	1.274	0.256	22.8			
			Во	dy-worn	Test data(	Separate	10mm 1RB)							
Back side	10	QPSK 1_0	23230/782	1:1	0.201	0.02	23.95	25.00	1.274	0.256	22.8			

Table 30: SAR of LTE Band 13 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document at http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 95 of 134

#### 8.2.10 SAR Result of LTE Band 26

				LTE I	Band 26 SA	AR Test Re	cord				
					Ant 0 Tes	t Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
					Head Test	Data(1RB)					
Left cheek	15	QPSK 1_0	26865/831.5	1:1	0.110	0.07	23.84	25.50	1.466	0.161	22.2
Left tilted	15	QPSK 1_0	26865/831.5	1:1	0.068	0.02	23.84	25.50	1.466	0.100	22.2
Right cheek	15	QPSK 1_0	26865/831.5	1:1	0.158	0.05	23.84	25.50	1.466	0.232	22.2
Right tilted	15	QPSK 1_0	26865/831.5	1:1	0.073	0.07	23.84	25.50	1.466	0.107	22.2
				Н	ead Test Da	ata(50%RE	3)				
Left cheek	15	QPSK 36_0	26865/831.5	1:1	0.105	0.09	22.97	24.50	1.422	0.149	22.2
Left tilted	15	QPSK 36_0	26865/831.5	1:1	0.052	0.07	22.97	24.50	1.422	0.074	22.2
Right cheek	15	QPSK 36_0	26865/831.5	1:1	0.119	-0.03	22.97	24.50	1.422	0.169	22.2
Right tilted	15	QPSK 36_0	26865/831.5	1:1	0.061	0.04	22.97	24.50	1.422	0.087	22.2
				Hotspot T	est data(Se	eparate 10r	nm 1RB)				
Front side	15	QPSK 1_0	26865/831.5	1:1	0.164	0.01	23.84	25.50	1.466	0.240	22.2
Back side	15	QPSK 1_0	26865/831.5	1:1	0.279	0.06	23.84	25.50	1.466	0.409	22.2
Left side	15	QPSK 1_0	26865/831.5	1:1	0.080	0.02	23.84	25.50	1.466	0.117	22.2
Rightt side	15	QPSK 1_0	26865/831.5	1:1	0.151	-0.04	23.84	25.50	1.466	0.221	22.2
Bottom side	15	QPSK 1_0	26865/831.5	1:1	0.207	0.00	23.84	25.50	1.466	0.303	22.2
				Hotspot Te	st data(Sep	arate 10m	m 50%RB)				
Front side	15	QPSK 36_0	26865/831.5	1:1	0.141	0.01	22.97	24.50	1.422	0.201	22.2
Back side	15	QPSK 36_0	26865/831.5	1:1	0.236	-0.01	22.97	24.50	1.422	0.336	22.2
Left side	15	QPSK 36_0	26865/831.5	1:1	0.067	0.01	22.97	24.50	1.422	0.095	22.2
Rightt side	15	QPSK 36_0	26865/831.5	1:1	0.129	0.00	22.97	24.50	1.422	0.183	22.2
Bottom side	15	QPSK 36_0	26865/831.5	1:1	0.181	-0.04	22.97	24.50	1.422	0.257	22.2
				Body-worn	Test data(	Separate 10	Omm 1RB)				
Front side	15	QPSK 1_0	26865/831.5	1:1	0.164	0.01	23.84	25.50	1.466	0.240	22.2
Back side	15	QPSK 1_0	26865/831.5	1:1	0.279	0.06	23.84	25.50	1.466	0.409	22.2
			В	ody-worn T	est data(Se	eparate 10r	nm 50%RB)				
Front side	15	QPSK 36_0	26865/831.5	1:1	0.141	0.01	22.97	24.50	1.422	0.201	22.2
Back side	15	QPSK 36_0	26865/831.5	1:1	0.236	-0.01	22.97	24.50	1.422	0.336	22.2
					Ant 4 Tes	t Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
					Head Test	Data(1RB)					
Left cheek	15	QPSK 1_0	26865/831.5	1:1	0.587	-0.01	23.90	25.50	1.445	0.848	22.2
Left tilted	15	QPSK 1_0	26865/831.5	1:1	0.565	0.08	23.90	25.50	1.445	0.817	22.2
Right cheek	15	QPSK 1_0	26865/831.5	1:1	0.588	-0.07	23.90	25.50	1.445	0.850	22.2
Right tilted	15	QPSK 1_0	26865/831.5	1:1	0.548	0.10	23.90	25.50	1.445	0.792	22.2
				Н	ead Test Da	ata(50%RE	3)				
Left cheek	15	QPSK 36_0	26865/831.5	1:1	0.482	0.08	22.93	24.50	1.435	0.692	22.2
Left tilted	15	QPSK 36_0	26865/831.5	1:1	0.458	0.02	22.93	24.50	1.435	0.657	22.2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document at http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 96 of 134

	Pight chook 15 OPSK 36 0 26965/931 5 1:1 0.490 0.09 22.03 24.50 1.425 0.702 22.2													
Right cheek	15	QPSK 36_0	26865/831.5	1:1	0.489	0.08	22.93	24.50	1.435	0.702	22.2			
Right tilted	15	QPSK 36_0	26865/831.5	1:1	0.453	0.01	22.93	24.50	1.435	0.650	22.2			
				Не	ead Test Da	ıta(100%RI	3)							
Left cheek	15	QPSK 75_0	26865/831.5	1:1	0.455	0.05	22.97	24.50	1.422	0.647	22.2			
Left tilted	15	QPSK 75_0	26865/831.5	1:1	0.431	-0.16	22.97	24.50	1.422	0.613	22.2			
Right cheek	15	QPSK 75_0	26865/831.5	1:1	0.462	0.05	22.97	24.50	1.422	0.657	22.2			
				Hotspot T	est data(Se	eparate 10r	nm 1RB)							
Front side	15	QPSK 1_0	26865/831.5	1:1	0.208	-0.06	23.90	25.50	1.445	0.301	22.2			
Back side	15	QPSK 1_0	26865/831.5	1:1	0.329	-0.09	23.90	25.50	1.445	0.476	22.2			
Left side	15	QPSK 1_0	26865/831.5	1:1	0.088	0.01	23.90	25.50	1.445	0.127	22.2			
Top side	15	QPSK 1_0	26865/831.5	1:1	0.268	0.02	23.90	25.50	1.445	0.387	22.2			
				Hotspot Te	st data(Sep	arate 10mi	m 50%RB)							
Front side	15	QPSK 36_0	26865/831.5	1:1	0.154	0.06	22.93	24.50	1.435	0.221	22.2			
Back side	15	QPSK 36_0	26865/831.5	1:1	0.313	0.07	22.93	24.50	1.435	0.449	22.2			
Left side	15	QPSK 36_0	26865/831.5	1:1	0.065	0.02	22.93	24.50	1.435	0.093	22.2			
Top side	15	QPSK 36_0	26865/831.5	1:1	0.240	0.01	22.93	24.50	1.435	0.345	22.2			
				Body-worn	Test data(S	Separate 1	0mm 1RB)							
Front side	15	QPSK 1_0	26865/831.5	1:1	0.208	-0.06	23.90	25.50	1.445	0.301	22.2			
Back side	15	QPSK 1_0	26865/831.5	1:1	0.329	-0.09	23.90	25.50	1.445	0.476	22.2			
			В	Body-worn T	est data(Se	parate 10r	nm 50%RB)							
Front side	15	QPSK 36_0	26865/831.5	1:1	0.154	0.06	22.93	24.50	1.435	0.221	22.2			
Back side	15	QPSK 36_0	26865/831.5	1:1	0.313	0.07	22.93	24.50	1.435	0.449	22.2			
	_													

Table 31: SAR of LTE Band 26 for Head and Body(original report No:SEWM2304000137RG09).

					Ant 0 Tes	t Record									
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)				
				ŀ	lead Test	Data(1RB	)								
Right cheek	15	QPSK 1_0	26865/831.5	1:1	0.129	0.03	23.71	25.50	1.510	0.195	22.6				
			F	lotspot Te	est data(S	eparate 10	mm 1RB)								
Back side	15	QPSK 1_0	26865/831.5	1:1	0.241	-0.07	23.71	25.50	1.510	0.364	22.6				
			Во	dy-worn	Test data(	Separate <sup>1</sup>	10mm 1RB)								
Back side	15	QPSK 1_0	26865/831.5	1:1	0.241	-0.07	23.71	25.50	1.510	0.364	22.6				
					Ant 4 Tes	t Record									
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)				
				ŀ	lead Test	Data(1RB	)								
Right cheek	15	QPSK 1_0	26865/831.5	1:1	0.537	-0.15	24.10	24.50	1.096	0.589	22.6				
			F	lotspot Te	est data(S	eparate 10	mm 1RB)								
Back side	15	QPSK 1_0	26865/831.5	1:1	0.286	-0.14	24.10	24.50	1.096	0.314	22.6				
Body-worn Test data(Separate 10mm 1RB)															
Back side	15	QPSK 1_0	26865/831.5	1:1	0.286	-0.14	24.10	24.50	1.096	0.314	22.6				

Table 32: SAR of LTE Band 26 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and.for electronic format documents">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.and.for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307.1443.

South of No. 6 PPart, No. 1, Runsheng Road, Sudhou Industrial Park, Suzhou Area, China Liangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区洞胜路1号约6号厂房南部 邮编: 215000

(86–512) 62992980 www.sgsgroup.com. (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 97 of 134

#### 8.2.11SAR Result of LTE Band 41

			LTE Band	11 SAR Te	st Record						
			Ant (	Test Rec	ord						
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
			Head 1	Test Data(	1RB)						
Left cheek	20	QPSK 1_0	40620/2593	1:1.58	0.103	0.05	23.53	25.00	1.403	0.144	22.5
Left cheek - CA_38C	20	QPSK 1_0	37901+38099/2585.1+2 604.9	1:1.58	0.085	0.03	23.37	25.00	1.455	0.124	22.5
Left tilted	20	QPSK 1_0	40620/2593	1:1.58	0.071	0.07	23.53	25.00	1.403	0.100	22.5
Right cheek	20	QPSK 1_0	40620/2593	1:1.58	0.088	0.02	23.53	25.00	1.403	0.123	22.5
Right tilted	20	QPSK 1_0	40620/2593	1:1.58	0.059	-0.02	23.53	25.00	1.403	0.083	22.5
			Head Te	est Data(50	0%RB)		•			•	
Left cheek	20	QPSK 50_0	40620/2593	1:1.58	0.089	0.07	22.46	24.00	1.426	0.127	22.5
Left tilted	20	QPSK 50_0	40620/2593	1:1.58	0.059	0.08	22.46	24.00	1.426	0.084	22.5
Right cheek	20	QPSK 50_0	40620/2593	1:1.58	0.065	0.08	22.46	24.00	1.426	0.093	22.5
Right tilted	20	QPSK 50_0	40620/2593	1:1.58	0.051	0.05	22.46	24.00	1.426	0.073	22.5
			Hotspot (sensor on) T	est data(S	eparate 10	mm 1RB)					
Front side	20	QPSK 1_0	40620/2593	1:1.58	0.261	0.03	20.45	22.00	1.429	0.373	22.5
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.325	0.06	20.45	22.00	1.429	0.464	22.5
Bottom side	20	QPSK 1_0	40620/2593	1:1.58	0.234	0.04	20.45	22.00	1.429	0.334	22.5
			Hotspot (sensor on) Te	est data(Se	eparate 10	mm 50RB	)				
Front side	20	QPSK 50_0	40620/2593	1:1.58	0.271	0.05	20.38	22.00	1.452	0.394	22.5
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.343	0.04	20.38	22.00	1.452	0.498	22.5
Back side - CA_38C	20	QPSK 50_0	37901+38099/2585.1+2 604.9	1:1.58	0.288	0.02	20.11	21.50	1.377	0.397	22.5
Bottom side	20	QPSK 50_0	40620/2593	1:1.58	0.225	-0.04	20.38	22.00	1.452	0.327	22.5
			Hotspot (sens	sor off) Tes	st data(1RE	3)					
Front side-12mm	20	QPSK 1_0	40620/2593	1:1.58	0.330	-0.13	23.53	25.00	1.403	0.463	22.5
Back side-17mm	20	QPSK 1_0	40620/2593	1:1.58	0.301	0.05	23.53	25.00	1.403	0.422	22.5
Left side-10mm	20	QPSK 1_0	40620/2593	1:1.58	0.087	0.02	23.53	25.00	1.403	0.122	22.5
Right side-10mm	20	QPSK 1_0	40620/2593	1:1.58	0.000	0.06	23.53	25.00	1.403	0.000	22.5
Bottom side-15mm	20	QPSK 1_0	40620/2593	1:1.58	0.181	0.07	23.53	25.00	1.403	0.254	22.5
			Hotspot (sens	or off) Tes	t data(50R	В)					
Front side-12mm	20	QPSK 50_0	40620/2593	1:1.58	0.285	-0.09	22.46	24.00	1.426	0.406	22.5
Back side-17mm	20	QPSK 50_0	40620/2593	1:1.58	0.251	0.05	22.46	24.00	1.426	0.358	22.5
Left side-10mm	20	QPSK 50_0	40620/2593	1:1.58	0.091	0.09	22.46	24.00	1.426	0.130	22.5
Right side-10mm	20	QPSK 50_0	40620/2593	1:1.58	0.000	-0.05	22.46	24.00	1.426	0.000	22.5
Bottom side-15mm	20	QPSK 50_0	40620/2593	1:1.58	0.122	0.07	22.46	24.00	1.426	0.174	22.5
			Body-worn Test of	data(Separ	ate 10mm	1RB)					
Front side	20	QPSK 1_0	40620/2593	1:1.58	0.261	0.03	20.45	22.00	1.429	0.373	22.5
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.325	0.06	20.45	22.00	1.429	0.464	22.5
Front side-12mm	20	QPSK 1_0	40620/2593	1:1.58	0.330	-0.13	23.53	25.00	1.403	0.463	22.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company, Albert Section (1980-1980).

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 98 of 134

Back side-17mm   20   OPSK 1_0   4-06202593   11-58   0.201   0.05   23-53   25.00   1.403   0.402   22-5	<u>r</u>			1	1			1				,
Front side	Back side-17mm	20	QPSK 1_0	40620/2593	1:1.58	0.301	0.05	23.53	25.00	1.403	0.422	22.5
Back aide		,		Body-worn Test da	ta(Separa	te 10mm 5	0%RB)					
Bank side - CA_38C   20	Front side	20	QPSK 50_0	40620/2593	1:1.58	0.271	0.05	20.38	22.00	1.452	0.394	22.5
Front side+12mm	Back side	20	QPSK 50_0	40620/2593	1:1.58	0.343	0.04	20.38	22.00	1.452	0.498	22.5
Back side-17mm	Back side - CA_38C	20	QPSK 50_0		1:1.58	0.288	0.02	20.11	21.50	1.377	0.397	22.5
Test position	Front side-12mm	20	QPSK 50_0	40620/2593	1:1.58	0.285	-0.09	22.46	24.00	1.426	0.406	22.5
Test position	Back side-17mm	20	QPSK 50_0	40620/2593	1:1.58	0.251	0.05	22.46	24.00	1.426	0.358	22.5
Test position				Ant 4	Test Rec	ord						
Left cheek	Test position	BW.	Test mode	Test ch./Freq.		(W/kg)	drift				SAR 1-g	-
Left tilled   20				Head '	Test Data(	1RB)						
Right cheek	Left cheek	20	QPSK 1_0	40620/2593	1:1.58	0.245	0.07	18.15	19.00	1.216	0.298	22.5
Right tilted   20	Left tilted	20	QPSK 1_0	40620/2593	1:1.58	0.341	0.09	18.15	19.00	1.216	0.415	22.5
Head Test Data(50%RB)	Right cheek	20	QPSK 1_0	40620/2593	1:1.58	0.483	-0.03	18.15	19.00	1.216	0.587	22.5
Left cheek   20	Right tilted	20	QPSK 1_0	40620/2593	1:1.58	0.417	0.08	18.15	19.00	1.216	0.507	22.5
Left tilted   20				Head Te	est Data(50	0%RB)						
Right cheek   20	Left cheek	20	QPSK 50_0	40620/2593	1:1.58	0.223	-0.04	17.99	19.00	1.262	0.281	22.5
Right cheek - CA_38C	Left tilted	20	QPSK 50_0	40620/2593	1:1.58	0.315	-0.04	17.99	19.00	1.262	0.397	22.5
Right cheek 20 QPSK 50_0 40185/2549.5 1:1.58 0.426 -0.06 17.80 19.00 1.318 0.562 22.5 Right cheek 20 QPSK 50_0 40185/2549.5 1:1.58 0.439 0.01 17.78 19.00 1.324 0.581 22.5 Right cheek 20 QPSK 50_0 41055/2636.5 1:1.58 0.439 0.01 17.78 19.00 1.324 0.603 22.5 Right cheek 20 QPSK 50_0 41490/2680 1:1.58 0.455 0.08 17.75 19.00 1.334 0.603 22.5 Right cheek 20 QPSK 50_0 41490/2680 1:1.58 0.445 0.05 17.69 19.00 1.362 0.602 22.5 Right titled 20 QPSK 50_0 40620/2593 1:1.58 0.407 0.09 17.99 19.00 1.262 0.514 22.5  Head Test Data(100%RB)  Right cheek 20 QPSK 10_0 40620/2593 1:1.58 0.462 0.11 17.93 19.00 1.279 0.591 22.5 Hotspot (sensor on) Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 40620/2593 1:1.58 0.109 -0.06 18.15 19.00 1.216 0.133 22.5 Back side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.159 22.5  Top side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5  Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.209 22.5  Back side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.209 22.5  Hotspot (sensor on) Test data(1RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.207 0.05 23.81 25.00 1.315 0.351 22.5  Back side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.01 23.81 25.00 1.315 0.351 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Right cheek	20	QPSK 50_0	40620/2593	1:1.58	0.482	-0.02	17.99	19.00	1.262	0.608	22.5
Right cheek 20 QPSK 50_0 40185/2549.5 1:1.58 0.439 0.01 17.78 19.00 1.324 0.581 22.5 Right cheek 20 QPSK 50_0 41055/2636.5 1:1.58 0.452 0.08 17.75 19.00 1.334 0.603 22.5 Right cheek 20 QPSK 50_0 41490/2680 1:1.58 0.445 0.05 17.69 19.00 1.362 0.602 22.5 Right titled 20 QPSK 50_0 40620/2593 1:1.58 0.407 0.09 17.99 19.00 1.262 0.514 22.5 Head Test Data(100%RB)  Right cheek 20 QPSK 100_0 40620/2593 1:1.58 0.462 0.11 17.93 19.00 1.279 0.591 22.5 Hotspot (sensor on) Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 40620/2593 1:1.58 0.109 -0.06 18.15 19.00 1.216 0.133 22.5 Back side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5 Top side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5 Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5 Top side 20 QPSK 50_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5 Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.209 22.5 Top side 20 QPSK 50_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.209 22.5 Top side 20 QPSK 50_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.270 22.5 Top side 20 QPSK 50_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.270 22.5 Top side 20 QPSK 50_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5 Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5 Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.351 22.5 Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.350 22.5 Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 0.077 23.81 25.00 1.315 0.300 22.5	Right cheek - CA_38C	20	QPSK 50_0		1:1.58	0.417	0.13	17.98	19.00	1.265	0.527	22.5
Right cheek         20         QPSK 50_0         41055/2636.5         1:1.58         0.452         0.08         17.75         19.00         1.334         0.603         22.5           Right cheek         20         QPSK 50_0         41490/2680         1:1.58         0.445         0.05         17.69         19.00         1.352         0.602         22.5           Right cheek         20         QPSK 50_0         40620/2593         1:1.58         0.407         0.09         17.99         19.00         1.262         0.514         22.5           Right cheek         20         QPSK 100_0         40620/2593         1:1.58         0.407         0.09         17.99         19.00         1.262         0.514         22.5           Hotspot (sensor on) Test data(Separate 1000000000000000000000000000000000000	Right cheek	20	QPSK 50_0	39750/2506	1:1.58	0.426	-0.06	17.80	19.00	1.318	0.562	22.5
Right cheek 20 QPSK 50_0 41490/2680 1:1.58 0.445 0.05 17.69 19.00 1.352 0.602 22.5  Right tilted 20 QPSK 50_0 40620/2593 1:1.58 0.407 0.09 17.99 19.00 1.262 0.514 22.5  Head Test Data(100%RB)  Right cheek 20 QPSK 100_0 40620/2593 1:1.58 0.462 0.11 17.93 19.00 1.279 0.591 22.5  Hotspot (sensor on) Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 40620/2593 1:1.58 0.109 -0.06 18.15 19.00 1.216 0.133 22.5  Back side 20 QPSK 1_0 40620/2593 1:1.58 0.131 0.01 18.15 19.00 1.216 0.159 22.5  Top side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5  Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 5_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.136 22.5  Back side 20 QPSK 5_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 5_0 40620/2593 1:1.58 0.214 -0.08 17.99 19.00 1.262 0.270 22.5  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.214 -0.08 17.99 19.00 1.262 0.270 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.300 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Right cheek	20	QPSK 50_0	40185/2549.5	1:1.58	0.439	0.01	17.78	19.00	1.324	0.581	22.5
Right tilted   20	Right cheek	20	QPSK 50_0	41055/2636.5	1:1.58	0.452	0.08	17.75	19.00	1.334	0.603	22.5
Head Test Data(100%RB)   Right cheek   20	Right cheek	20	QPSK 50_0	41490/2680	1:1.58	0.445	0.05	17.69	19.00	1.352	0.602	22.5
Right cheek   20	Right tilted	20	QPSK 50_0	40620/2593	1:1.58	0.407	0.09	17.99	19.00	1.262	0.514	22.5
Hotspot (sensor on) Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 40620/2593 1:1.58 0.109 -0.06 18.15 19.00 1.216 0.133 22.5  Back side 20 QPSK 1_0 40620/2593 1:1.58 0.131 0.01 18.15 19.00 1.216 0.159 22.5  Top side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5  Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.136 22.5  Back side 20 QPSK 50_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.214 -0.08 17.99 19.00 1.262 0.270 22.5  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.235 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5				Head Te	st Data(10	0%RB)		l			l	
Front side         20         QPSK 1_0         40620/2593         1:1.58         0.109         -0.06         18.15         19.00         1.216         0.133         22.5           Back side         20         QPSK 1_0         40620/2593         1:1.58         0.131         0.01         18.15         19.00         1.216         0.159         22.5           Top side         20         QPSK 1_0         40620/2593         1:1.58         0.207         0.03         18.15         19.00         1.216         0.252         22.5           Hotspot (sensor on) Test data(Separate 10mm 50RB)           Front side         20         QPSK 50_0         40620/2593         1:1.58         0.108         0.05         17.99         19.00         1.262         0.136         22.5           Back side         20         QPSK 50_0         40620/2593         1:1.58         0.166         0.09         17.99         19.00         1.262         0.209         22.5           Top side         20         QPSK 50_0         40620/2593         1:1.58         0.214         -0.08         17.99         19.00         1.262         0.270         22.5           Hotspot (sensor off) Test data(1RB)	Right cheek	20	QPSK 100_0	40620/2593	1:1.58	0.462	0.11	17.93	19.00	1.279	0.591	22.5
Back side         20         QPSK 1_0         40620/2593         1:1.58         0.131         0.01         18.15         19.00         1.216         0.159         22.5           Top side         20         QPSK 1_0         40620/2593         1:1.58         0.207         0.03         18.15         19.00         1.216         0.252         22.5           Hotspot (sensor on) Test data(Separate 10mm 50RB)           Front side         20         QPSK 50_0         40620/2593         1:1.58         0.108         0.05         17.99         19.00         1.262         0.136         22.5           Back side         20         QPSK 50_0         40620/2593         1:1.58         0.166         0.09         17.99         19.00         1.262         0.209         22.5           Top side         20         QPSK 50_0         40620/2593         1:1.58         0.214         -0.08         17.99         19.00         1.262         0.209         22.5           Hotspot (sensor off) Test data(1RB)           Front side-12mm         20         QPSK 1_0         40620/2593         1:1.58         0.267         0.05         23.81         25.00         1.315         0.351         22.5				Hotspot (sensor on) T	est data(S	eparate 10	mm 1RB)	•			'	
Top side 20 QPSK 1_0 40620/2593 1:1.58 0.207 0.03 18.15 19.00 1.216 0.252 22.5  Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.136 22.5  Back side 20 QPSK 50_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.214 -0.08 17.99 19.00 1.262 0.270 22.5  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.235 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Front side	20	QPSK 1_0	40620/2593	1:1.58	0.109	-0.06	18.15	19.00	1.216	0.133	22.5
Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 40620/2593 1:1.58 0.108 0.05 17.99 19.00 1.262 0.136 22.5  Back side 20 QPSK 50_0 40620/2593 1:1.58 0.166 0.09 17.99 19.00 1.262 0.209 22.5  Top side 20 QPSK 50_0 40620/2593 1:1.58 0.214 -0.08 17.99 19.00 1.262 0.270 22.5  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.235 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Back side	20	QPSK 1_0	40620/2593	1:1.58	0.131	0.01	18.15	19.00	1.216	0.159	22.5
Front side         20         QPSK 50_0         40620/2593         1:1.58         0.108         0.05         17.99         19.00         1.262         0.136         22.5           Back side         20         QPSK 50_0         40620/2593         1:1.58         0.166         0.09         17.99         19.00         1.262         0.209         22.5           Top side         20         QPSK 50_0         40620/2593         1:1.58         0.214         -0.08         17.99         19.00         1.262         0.270         22.5           Hotspot (sensor off) Test data(1RB)           Front side-12mm         20         QPSK 1_0         40620/2593         1:1.58         0.267         0.05         23.81         25.00         1.315         0.351         22.5           Back side-17mm         20         QPSK 1_0         40620/2593         1:1.58         0.179         0.01         23.81         25.00         1.315         0.235         22.5           Left side-10mm         20         QPSK 1_0         40620/2593         1:1.58         0.228         -0.07         23.81         25.00         1.315         0.300         22.5	Top side	20	QPSK 1_0	40620/2593	1:1.58	0.207	0.03	18.15	19.00	1.216	0.252	22.5
Back side         20         QPSK 50_0         40620/2593         1:1.58         0.166         0.09         17.99         19.00         1.262         0.209         22.5           Top side         20         QPSK 50_0         40620/2593         1:1.58         0.214         -0.08         17.99         19.00         1.262         0.270         22.5           Hotspot (sensor off) Test data(1RB)           Front side-12mm         20         QPSK 1_0         40620/2593         1:1.58         0.267         0.05         23.81         25.00         1.315         0.351         22.5           Back side-17mm         20         QPSK 1_0         40620/2593         1:1.58         0.179         0.01         23.81         25.00         1.315         0.235         22.5           Left side-10mm         20         QPSK 1_0         40620/2593         1:1.58         0.228         -0.07         23.81         25.00         1.315         0.300         22.5		•		Hotspot (sensor on) Te	est data(Se	eparate 10	mm 50RB	)				
Top side 20 QPSK 50_0 40620/2593 1:1.58 0.214 -0.08 17.99 19.00 1.262 0.270 22.5  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.235 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Front side	20	QPSK 50_0	40620/2593	1:1.58	0.108	0.05	17.99	19.00	1.262	0.136	22.5
Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 40620/2593 1:1.58 0.267 0.05 23.81 25.00 1.315 0.351 22.5  Back side-17mm 20 QPSK 1_0 40620/2593 1:1.58 0.179 0.01 23.81 25.00 1.315 0.235 22.5  Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Back side	20	QPSK 50_0	40620/2593	1:1.58	0.166	0.09	17.99	19.00	1.262	0.209	22.5
Front side-12mm         20         QPSK 1_0         40620/2593         1:1.58         0.267         0.05         23.81         25.00         1.315         0.351         22.5           Back side-17mm         20         QPSK 1_0         40620/2593         1:1.58         0.179         0.01         23.81         25.00         1.315         0.235         22.5           Left side-10mm         20         QPSK 1_0         40620/2593         1:1.58         0.228         -0.07         23.81         25.00         1.315         0.300         22.5	Top side	20	QPSK 50_0	40620/2593	1:1.58	0.214	-0.08	17.99	19.00	1.262	0.270	22.5
Back side-17mm         20         QPSK 1_0         40620/2593         1:1.58         0.179         0.01         23.81         25.00         1.315         0.235         22.5           Left side-10mm         20         QPSK 1_0         40620/2593         1:1.58         0.228         -0.07         23.81         25.00         1.315         0.300         22.5				Hotspot (sens	sor off) Tes	st data(1RE	3)					
Left side-10mm 20 QPSK 1_0 40620/2593 1:1.58 0.228 -0.07 23.81 25.00 1.315 0.300 22.5	Front side-12mm	20	QPSK 1_0	40620/2593	1:1.58	0.267	0.05	23.81	25.00	1.315	0.351	22.5
	Back side-17mm	20	QPSK 1_0	40620/2593	1:1.58	0.179	0.01	23.81	25.00	1.315	0.235	22.5
Top side-19mm 20 QPSK 1_0 40620/2593 1:1.58 0.287 0.06 23.81 25.00 1.315 0.377 22.5	Left side-10mm	20	QPSK 1_0	40620/2593	1:1.58	0.228	-0.07	23.81	25.00	1.315	0.300	22.5
	Top side-19mm	20	QPSK 1_0	40620/2593	1:1.58	0.287	0.06	23.81	25.00	1.315	0.377	22.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faistification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 99 of 134

			_								
Top side-19mm - CA_38C	20	QPSK 1_0	37901+38099/2585.1+2 604.9	1:1.58	0.192	0.02	23.79	25.00	1.321	0.254	22.5
			Hotspot (sens	or off) Test	t data(50Rl	В)					
Front side-12mm	20	QPSK 50_0	40620/2593	1:1.58	0.219	0.09	22.81	24.00	1.315	0.288	22.5
Back side-17mm	20	QPSK 50_0	40620/2593	1:1.58	0.125	-0.12	22.81	24.00	1.315	0.164	22.5
Left side-10mm	20	QPSK 50_0	40620/2593	1:1.58	0.183	0.04	22.81	24.00	1.315	0.241	22.5
Top side-19mm	20	QPSK 50_0	40620/2593	1:1.58	0.226	0.01	22.81	24.00	1.315	0.297	22.5
			Body-worn Test of	lata(Separ	ate 10mm	1RB)					
Front side	20	QPSK 1_0	40620/2593	1:1.58	0.109	-0.06	18.15	19.00	1.216	0.133	22.5
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.131	0.01	18.15	19.00	1.216	0.159	22.5
Front side-12mm	20	QPSK 1_0	40620/2593	1:1.58	0.267	0.05	23.81	25.00	1.315	0.351	22.5
Front side-12mm - CA_38C	20	QPSK 1_0	37901+38099/2585.1+2 604.9	1:1.58	0.173	0.08	23.79	25.00	1.321	0.229	22.5
Back side-17mm	20	QPSK 1_0	40620/2593	1:1.58	0.179	0.01	23.81	25.00	1.315	0.235	22.5
			Body-worn Test da	ata(Separa	ate 10mm 5	50RB)					
Front side	20	QPSK 50_0	40620/2593	1:1.58	0.108	0.05	17.99	19.00	1.262	0.136	22.5
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.166	0.09	17.99	19.00	1.262	0.209	22.5
Front side-12mm	20	QPSK 50_0	40620/2593	1:1.58	0.219	0.09	22.81	24.00	1.315	0.288	22.5
Back side-17mm	20	QPSK 50_0	40620/2593	1:1.58	0.125	-0.12	22.81	24.00	1.315	0.164	22.5

Table 33: SAR of LTE Band 41 for Head and Body(original report No:SEWM2304000137RG09).

				Ant 0 Te	est Recor	d					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
			ŀ	Head Tes	t Data(1R	:B)					
Left cheek	20	QPSK 1_0	40620/2593	1:1.58	0.086	-0.01	23.30	25.00	1.479	0.127	22.6
Left cheek - CA_41C	20	QPSK 1_0	40620+40422/2593+2573.2	1:1.58	0.072	0.09	23.27	25.00	1.489	0.107	22.6
			Hotspot (sensor	on) Test	data(Sepa	arate 10n	nm 50RB)				
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.317	0.09	20.24	22.00	1.500	0.475	22.6
Back side - CA_41C	20	QPSK 50_0	40620+40422/2593+2573.2	1:1.58	0.299	0.04	20.16	22.00	1.528	0.457	22.6
			Body-worn To	est data(	Separate	10mm 50	)%RB)				
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.317	0.09	20.24	22.00	1.500	0.475	22.6
Back side - CA_41C	20	QPSK 50_0	40620+40422/2593+2573.2	1:1.58	0.299	0.04	20.16	22.00	1.528	0.457	22.6
				Ant 4 Te	st Recor	d					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
			He	ead Test	Data(50%	RB)					
Right cheek	20	QPSK 50_0	40620/2593	1:1.58	0.457	-0.04	18.31	19.00	1.172	0.536	22.6
Right cheek - CA_41C	20	QPSK 50_0	40620+40422/2593+2573.2	1:1.58	0.403	0.08	17.96	19.00	1.271	0.512	22.6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 wy



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 100 of 134

	Hotspot (sensor off) Test data(1RB)												
Top side-19mm	20	QPSK 1_0	40620/2593	1:1.58	0.243	0.04	23.30	25.00	1.479	0.359	22.6		
Top side-19mm - CA_41C	20	QPSK 1_0	40620+40422/2593+2573.2	1:1.58	0.223	0.07	23.25	25.00	1.496	0.334	22.6		
	Body-worn Test data(Separate 10mm 1RB)												
Front side-12mm	20	QPSK 1_0	40620/2593	1:1.58	0.225	0.08	23.30	25.00	1.479	0.333	22.6		
Front side-12mm - CA_41C	20	QPSK 1_0	40620+40422/2593+2573.2	1:1.58	0.206	0.03	23.25	25.00	1.496	0.308	22.6		

Table 34: SAR of LTE Band 41 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 101 of 134

#### 8.2.1 SAR Result of LTE Band66

				LTE Band	66 SAR Te	st Record					
				Ant	0 Test Rec	ord					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				Head	Test Data(	RB)		•			
Left cheek	20	QPSK 1_0	132322/1745	1:1	0.079	0.03	24.18	25.50	1.355	0.107	22.9
Left tilted	20	QPSK 1_0	132322/1745	1:1	0.059	0.07	24.18	25.50	1.355	0.080	22.9
Right cheek	20	QPSK 1_0	132322/1745	1:1	0.121	-0.01	24.18	25.50	1.355	0.164	22.9
Right tilted	20	QPSK 1_0	132322/1745	1:1	0.061	0.07	24.18	25.50	1.355	0.083	22.9
				Head <sup>-</sup>	Test Data(50	%RB)					
Left cheek	20	QPSK 50_0	132322/1745	1:1	0.063	0.08	23.36	24.50	1.300	0.082	22.9
Left tilted	20	QPSK 50_0	132322/1745	1:1	0.048	0.08	23.36	24.50	1.300	0.062	22.9
Right cheek	20	QPSK 50_0	132322/1745	1:1	0.094	-0.05	23.36	24.50	1.300	0.122	22.9
Right tilted	20	QPSK 50_0	132322/1745	1:1	0.051	0.03	23.36	24.50	1.300	0.066	22.9
			Hotspot	(sensor on)	Test data(S	eparate 10m	m 1RB)				
Front side	20	QPSK 1_0	132322/1745	1:1	0.179	-0.01	20.32	21.50	1.312	0.235	22.9
Back side	20	QPSK 1_0	132322/1745	1:1	0.422	0.08	20.32	21.50	1.312	0.554	22.9
Bottom side	20	QPSK 1_0	132322/1745	1:1	0.554	0.02	20.32	21.50	1.312	0.727	22.9
			Hotspot (	sensor on)	Test data(Se	parate 10mr	m 50RB)				
Front side	20	QPSK 50_0	132322/1745	1:1	0.191	-0.04	20.24	21.50	1.337	0.255	22.9
Back side	20	QPSK 50_0	132322/1745	1:1	0.432	0.05	20.24	21.50	1.337	0.577	22.9
Bottom side	20	QPSK 50_0	132322/1745	1:1	0.576	-0.01	20.24	21.50	1.337	0.770	22.9
				Hotspot (se	nsor off) Tes	t data(1RB)	•				
Front side-12mm	20	QPSK 1_0	132322/1745	1:1	0.211	0.08	24.18	25.50	1.355	0.286	22.9
Back side-17mm	20	QPSK 1_0	132322/1745	1:1	0.302	-0.13	24.18	25.50	1.355	0.409	22.9
Left side-10mm	20	QPSK 1_0	132322/1745	1:1	0.058	0.03	24.18	25.50	1.355	0.079	22.9
Right side-10mm	20	QPSK 1_0	132322/1745	1:1	0.065	-0.01	24.18	25.50	1.355	0.088	22.9
Bottom side-15mm	20	QPSK 1_0	132322/1745	1:1	0.425	0.02	24.18	25.50	1.355	0.576	22.9
			ŀ	Hotspot (sen	sor off) Test	data(50RB)	l			<u> </u>	
Front side-12mm	20	QPSK 50_0	132322/1745	1:1	0.204	0.04	23.36	24.50	1.300	0.265	22.9
Back side-17mm	20	QPSK 50_0	132322/1745	1:1	0.296	-0.10	23.36	24.50	1.300	0.385	22.9
Left side-10mm	20	QPSK 50_0	132322/1745	1:1	0.056	0.06	23.36	24.50	1.300	0.073	22.9
Right side-10mm	20	QPSK 50_0	132322/1745	1:1	0.069	0.01	23.36	24.50	1.300	0.090	22.9
Bottom side-15mm	20	QPSK 50_0	132322/1745	1:1	0.408	0.08	23.36	24.50	1.300	0.530	22.9
			Bod	y-worn Test	data(Separa	ate 10mm 1F	RB)			l .	
Front side	20	QPSK 1_0	132322/1745	1:1	0.179	-0.01	20.32	21.50	1.312	0.235	22.9
Back side	20	QPSK 1_0	132322/1745	1:1	0.422	0.08	20.32	21.50	1.312	0.554	22.9
Front side-12mm	20	QPSK 1_0	132322/1745	1:1	0.211	0.08	24.18	25.50	1.355	0.286	22.9
Back side-17mm	20	QPSK 1_0	132322/1745	1:1	0.302	-0.13	24.18	25.50	1.355	0.409	22.9
			Body-	worn Test o	lata(Separat	e 10mm 50%	6RB)				
Front side	20	QPSK 50_0	132322/1745	1:1	0.191	-0.04	20.24	21.50	1.337	0.255	22.9
Back side	20	QPSK 50_0	132322/1745	1:1	0.432	-0.16	20.24	21.50	1.337	0.577	22.9
		l	1		1	1	1	l .		ı	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2305000160RG09

Rev.:

102 of 134 Page:

F		ODOK == -	40000011717	4.	0.001	0.01	00.00	04.50	4.000	0.00=	00.0
Front side-12mm	20	QPSK 50_0	132322/1745	1:1	0.204	0.04	23.36	24.50	1.300	0.265	22.9
Back side-17mm	20	QPSK 50_0	132322/1745	1:1	0.296	-0.10	23.36	24.50	1.300	0.385	22.9
				Ant	4 Test Rec	ora					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				Head	Test Data(1	RB)					
Left cheek	20	QPSK 1_0	132322/1745	1:1	0.310	-0.03	14.29	15.50	1.321	0.410	22.9
Left tilted	20	QPSK 1_0	132322/1745	1:1	0.359	0.03	14.29	15.50	1.321	0.474	22.9
Right cheek	20	QPSK 1_0	132322/1745	1:1	0.376	0.02	14.29	15.50	1.321	0.497	22.9
Right tilted	20	QPSK 1_0	132322/1745	1:1	0.461	0.06	14.29	15.50	1.321	0.609	22.9
				Head <sup>-</sup>	Test Data(50	%RB)					
Left cheek	20	QPSK 50_0	132322/1745	1:1	0.314	0.10	14.25	15.50	1.334	0.419	22.9
Left tilted	20	QPSK 50_0	132322/1745	1:1	0.380	0.03	14.25	15.50	1.334	0.507	22.9
Right cheek	20	QPSK 50_0	132322/1745	1:1	0.400	-0.04	14.25	15.50	1.334	0.533	22.9
Right tilted	20	QPSK 50_0	132322/1745	1:1	0.478	0.08	14.25	15.50	1.334	0.637	22.9
			Hotspot	(sensor on)	Test data(Se	eparate 10m	m 1RB)				
Front side	20	QPSK 1_0	132322/1745	1:1	0.263	0.03	18.02	19.00	1.253	0.330	22.9
Back side	20	QPSK 1_0	132322/1745	1:1	0.375	-0.01	18.02	19.00	1.253	0.470	22.9
Top side	20	QPSK 1_0	132322/1745	1:1	0.579	0.07	18.02	19.00	1.253	0.726	22.9
			Hotspot (	sensor on) <sup>-</sup>	Γest data(Se	parate 10mr	m 50RB)				
Front side	20	QPSK 50_0	132322/1745	1:1	0.253	0.04	17.93	19.00	1.279	0.324	22.9
Back side	20	QPSK 50_0	132322/1745	1:1	0.432	0.10	17.93	19.00	1.279	0.553	22.9
Top side	20	QPSK 50_0	132322/1745	1:1	0.607	-0.08	17.93	19.00	1.279	0.777	22.9
				Hotspot (sei	nsor off) Tes	t data(1RB)					
Front side-12mm	20	QPSK 1_0	132322/1745	1:1	0.616	-0.02	24.38	25.50	1.294	0.797	22.9
Back side-17mm	20	QPSK 1_0	132322/1745	1:1	0.577	0.06	24.38	25.50	1.294	0.747	22.9
Left side-10mm	20	QPSK 1_0	132322/1745	1:1	0.122	0.08	24.38	25.50	1.294	0.158	22.9
Top side-19mm	20	QPSK 1_0	132322/1745	1:1	0.746	0.02	24.38	25.50	1.294	0.965	22.9
Top side-19mm	20	QPSK 1_0	132072/1720	1:1	0.601	-0.02	24.27	25.50	1.327	0.798	22.9
Top side-19mm	20	QPSK 1_0	132572/1770	1:1	0.689	0.07	24.22	25.50	1.343	0.925	22.9
			H	Hotspot (sen	sor off) Test	data(50RB)					
Front side-12mm	20	QPSK 50_0	132322/1745	1:1	0.585	-0.06	23.20	24.50	1.349	0.789	22.9
Back side-17mm	20	QPSK 50_0	132322/1745	1:1	0.552	0.02	23.20	24.50	1.349	0.745	22.9
Left side-10mm	20	QPSK 50_0	132322/1745	1:1	0.100	0.01	23.20	24.50	1.349	0.135	22.9
Top side-19mm	20	QPSK 50_0	132322/1745	1:1	0.709	0.13	23.20	24.50	1.349	0.956	22.9
Top side-19mm	20	QPSK 50_0	132072/1720	1:1	0.583	0.04	23.17	24.50	1.358	0.792	22.9
Top side-19mm	20	QPSK 50_0	132572/1770	1:1	0.671	0.07	23.29	24.50	1.321	0.887	22.9
			H	Hotspot (sen	sor off) Test	data(50RB)					
Top side-19mm	20	QPSK 100_0	132322/1745	1:1	0.711	-0.07	23.18	24.50	1.355	0.964	22.9
Top side-19mm	20	QPSK 100_0	132072/1720	1:1	0.589	0.02	23.12	24.50	1.374	0.809	22.9
Top side-19mm	20	QPSK 100_0	132572/1770	1:1	0.682	0.10	23.28	24.50	1.324	0.903	22.9
			Bod	y-worn Test	data(Separa	ate 10mm 1F	RB)				
Front side	20	QPSK 1_0	132322/1745	1:1	0.263	0.03	18.02	19.00	1.253	0.330	22.9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one on exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAI. Doccheck@sgs.com</a>

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 103 of 134

Back side	20	QPSK 1_0	132322/1745	1:1	0.375	-0.01	18.02	19.00	1.253	0.470	22.9
Front side-12mm	20	QPSK 1_0	132322/1745	1:1	0.616	-0.02	24.38	25.50	1.294	0.797	22.9
Back side-17mm	20	QPSK 1_0	132322/1745	1:1	0.577	0.06	24.38	25.50	1.294	0.747	22.9
			Body-	worn Test o	lata(Separate	e 10mm 50%	GRB)				
Front side	20	QPSK 50_0	132322/1745	1:1	0.253	0.04	17.93	19.00	1.279	0.324	22.9
Back side	20	QPSK 50_0	132322/1745	1:1	0.432	0.10	17.93	19.00	1.279	0.553	22.9
Front side-12mm	20	QPSK 50_0	132322/1745	1:1	0.585	-0.06	23.20	24.50	1.349	0.789	22.9
Back side-17mm	20	QPSK 50_0	132322/1745	1:1	0.552	0.02	23.20	24.50	1.349	0.745	22.9

Table 35: SAR of LTE Band 66 for Head and Body(original report No:SEWM2304000137RG09).

				Α	nt 0 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				He	ad Test D	ata(1RB)					
Right cheek	20	QPSK 1_0	20175/1732.5	1:1	0.099	0.07	24.14	25.50	1.368	0.135	22.4
			Hotspot (s	sensor on	) Test dat	a(Separat	e 10mm 50RB)				
Bottom side	20	QPSK 50_0	20175/1732.5	1:1	0.439	0.06	19.71	21.00	1.346	0.591	22.4
			Body-	worn Tes	t data(Sep	oarate 10r	nm 50%RB)				
Back side	20	QPSK 50_0	20175/1732.5	1:1	0.307	-0.01	19.71	21.00	1.346	0.413	22.4
				Α	nt 4 Test	Record					
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				Head	d Test Dat	ta(50%RB	5)				
Right tilted	20	QPSK 50_0	20175/1732.5	1:1	0.397	0.04	14.54	15.50	1.247	0.495	22.4
			H	Hotspot (s	ensor off)	Test data	a(1RB)				
Top side-19mm	20	QPSK 1_0	20175/1732.5	1:1	0.673	-0.08	24.12	25.50	1.374	0.925	22.4
			Body	/-worn Te	st data(Se	eparate 10	Omm 1RB)				
Front side-12mm	20	QPSK 1_0	20175/1732.5	1:1	0.553	0.01	24.12	25.50	1.374	0.760	22.4

Table 36: SAR of LTE Band 4 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com. t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 104 of 134

#### 8.2.2 SAR Result of LTE Band42

	LTE Band 42 SAR Test Record											
			Α	nt 3 Test	Record							
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg ) 1-g	Powe r drift (dB)	Conducted Power(dB m)	Tune up Limit(dB m)	Scale d factor	Scale d SAR 1-g (W/kg	Liquid Temp.( ℃)	
			He	ead Test D	ata(1RB)							
Left cheek	20	QPSK 1_0	43340/3575	1:1.5 8	0.24 8	0.05	22.83	24.00	1.309	0.325	22.9	
Left tilted	20	QPSK 1_0	43340/3575	1:1.58	0.334	-0.13	22.83	24.00	1.309	0.437	22.9	
Right cheek	20	QPSK 1_0	43340/3575	1:1.58	0.642	0.05	22.83	24.00	1.309	0.840	22.9	
Right cheek - CA_42C	20	QPSK 1_0	43340+43142/3575+355 5.2	1:1.58	0.613	0.08	22.78	24.00	1.324	0.812	22.9	
Right tilted	20	QPSK 1_0	43340/3575	1:1.58	0.440	-0.08	22.83	24.00	1.309	0.576	22.9	
Head Test Data(50%RB)												
Left cheek	20	QPSK 50_0	43340/3575	1:1.58	0.136	0.06	21.91	23.00	1.285	0.175	22.9	
Left tilted	20	QPSK 50_0	43340/3575	1:1.58	0.222	0.08	21.91	23.00	1.285	0.285	22.9	
Right cheek 20 QPSK 50_0 43340/3575 1:1.58 0.476 0.05 21.91 23.00 1.285 0.612 2												
Right tilted	20	QPSK 50_0	43340/3575	1:1.58	0.358	0.08	21.91	23.00	1.285	0.460	22.9	
			Head	d Test Data	a(100%RE	3)						
Head Test Data(100%RB)   Right cheek   20   QPSK												
	_	T	Hotspot Tes	st data(Sep	arate 10m	nm 1RB)			1			
Front side	20	QPSK 1_0	43340/3575	1:1.58	0.169	0.11	22.83	24.00	1.309	0.221	22.9	
Back side	20	QPSK 1_0	43340/3575	1:1.58	0.300	-0.05	22.83	24.00	1.309	0.393	22.9	
Back side - CA_42C	20	QPSK 1_0	43340+43142/3575+355 5.2	1:1.58	0.264	0.02	22.78	24.00	1.324	0.350	22.9	
Left side	20	QPSK 1_0	43340/3575	1:1.58	0.251	-0.06	22.83	24.00	1.309	0.329	22.9	
Top side	20	QPSK 1_0	43340/3575	1:1.58	0.202	0.02	22.83	24.00	1.309	0.264	22.9	
			Hotspot Test	data(Sepa	rate 10mn	n 50%RB)						
Front side	20	QPSK 50_0	43340/3575	1:1.58	0.112	0.12	21.91	23.00	1.285	0.144	22.9	
Back side	20	QPSK 50_0	43340/3575	1:1.58	0.223	0.01	21.91	23.00	1.285	0.287	22.9	
Left side	20	QPSK 50_0	43340/3575	1:1.58	0.168	0.04	21.91	23.00	1.285	0.216	22.9	
Top side	20	QPSK 50_0	43340/3575	1:1.58	0.143	0.14	21.91	23.00	1.285	0.184	22.9	
			Body-worn To	est data(Se	eparate 10	mm 1RB)						
Front side	20	QPSK 1_0	43340/3575	1:1.58	0.169	-0.06	22.83	24.00	1.309	0.221	22.9	
Back side	20	QPSK 1_0	43340/3575	1:1.58	0.300	-0.05	22.83	24.00	1.309	0.393	22.9	
Back side - CA_42C	20	QPSK 1_0	43340+43142/3575+355 5.2	1:1.58	0.264	0.02	22.78	24.00	1.324	0.350	22.9	
			Body-worn Tes	st data(Sep	arate 10m	m 50%RE	3)					
Front side	20	QPSK 50_0	43340/3575	1:1.58	0.112	0.05	21.91	23.00	1.285	0.144	22.9	
Back side	20	QPSK 50_0	43340/3575	1:1.58	0.223	0.07	21.91	23.00	1.285	0.287	22.9	
			A	nt 5 Test	Record							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed evertest, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to a subject to a subject to the first subject subject to the first subject subje

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www. t (86–512) 62992980 sgs.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 105 of 134

Heart Test Data(1988)   Heart Test Data(1988)   Left titled   20   OPSK 1_0   433403875   11.58   0.802   0.02   22.67   23.00   1.079   0.865   22.9	Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg ) 1-g	Powe r drift (dB)	Conducted Power(dB m)	Tune up Limit(dB m)	Scale d factor	Scale d SAR 1-g (W/kg	Liquid Temp.( ℃)
Left sited			•	He	ead Test D	ata(1RB)		•				
Left tilted	Left cheek	20	QPSK 1_0	43340/3575	1:1.58	0.802	-0.02	22.67	23.00	1.079	0.865	22.9
Left tilled - CA_42C	Left tilted	20	QPSK 1_0	43340/3575	1:1.58	0.914	0.05	22.67	23.00	1.079	0.986	22.9
Left silled - CA_4ZC   20		20	QPSK 1_0	43340/3575	1:1.58	0.911	0.01	22.67	23.00	1.079	0.983	22.9
Right titled   20		20	QPSK 1_0		1:1.58	0.873	0.09	22.51	23.00	1.119	0.977	22.9
Head Test Data(50%RB)	Right cheek	20	QPSK 1_0	43340/3575	1:1.58	0.592	0.06	22.67	23.00	1.079	0.639	22.9
Left cheek   20	Right tilted	20	QPSK 1_0	43340/3575	1:1.58	0.518	0.13	22.67	23.00	1.079	0.559	22.9
Left tilted   20			•	Hea	d Test Da	ta(50%RB)	)				•	
Right cheek   20	Left cheek	20	QPSK 50_0	43340/3575	1:1.58	0.722	0.11	22.57	23.00	1.104	0.797	22.9
Right tilted   20	Left tilted	20	QPSK 50_0	43340/3575	1:1.58	0.809	0.09	22.57	23.00	1.104	0.893	22.9
Head Test Data(100%RB)	Right cheek	20	QPSK 50_0	43340/3575	1:1.58	0.498	-0.01	22.57	23.00	1.104	0.550	22.9
Left cheek   20	Right tilted	20	QPSK 50_0	43340/3575	1:1.58	0.414	0.18	22.57	23.00	1.104	0.457	22.9
Left cheek 20 100_0 43340/3575 1:1.58 0.703 0.08 22.55 23.00 1:109 0.780 22.9  Left tilled 20 QPSK 1_00 43340/3575 1:1.58 0.786 0.01 22.55 23.00 1:109 0.872 22.9  Hotspot (sensor on) Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side - CA_42C 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.50 1.117 0.505 22.9  Top side 20 QPSK 1_0 43340/3575 1:1.58 0.308 -0.06 23.02 23.50 1.117 0.344 22.9  Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 5_0 43340/3575 1:1.58 0.234 -0.06 22.71 23.50 1.199 0.281 22.9  Back side 20 QPSK 5_0 43340/3575 1:1.58 0.431 0.18 22.71 23.50 1.199 0.517 22.9  Top side 20 QPSK 5_0 43340/3575 1:1.58 0.431 0.18 22.71 23.50 1.199 0.517 22.9  Top side 20 QPSK 5_0 43340/3575 1:1.58 0.431 0.18 22.71 23.50 1.199 0.517 22.9  Hotspot (sensor of) Test data(RB)  Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.38 22.9  Back side-17mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.184 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.184 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.184 22.9  Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.184 22.9  Back side-17mm 20 QPSK 5_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.184 22.9  Top side-19mm 20 QPSK 5_0 43340/3575 1:1.58 0.143 0.06 23.23 24.50 1.340 0.162 22.9  Back side-17mm 20 QPSK 5_0 43340/3575 1:1.58 0.143 0.06 23.23 24.50 1.340 0.162 22.9  Back side-17mm 20 QPSK 5_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Back side-17mm 20 QPSK 5_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Back side-17mm 20 QPSK 5_0 43340/3575 1:1.58 0.120 0.03 23.23 24.50 1.340 0.162 22.9  Back side-17mm 20 QPSK 5_0 43340/3575 1:1.58 0.042 0.09 23.02 23.50 1:117 0.505 22.9  Back side- CA_42C 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.00 23.50 1:117 0.505 22.9				Hea	d Test Data	a(100%RE	3)					
Left tilted   20	Left cheek	20		43340/3575	1:1.58	0.703	0.08	22.55	23.00	1.109	0.780	22.9
Hotspot (sensor on) Test data(Separate 10mm 1RB)	Left tilted	20	QPSK	43340/3575	1:1.58	0.786	0.01	22.55	23.00	1.109	0.872	22.9
Back side         20         QPSK 1_0         43340/3575         1:1.58         0.452         0.09         23.02         23.50         1.117         0.505         22.9           Back side - CA_42C         20         QPSK 1_0         43340+43142/3575+355         1:1.58         0.421         0.04         22.83         23.50         1.167         0.491         22.9           Top side         20         QPSK 1_0         43340/3575         1:1.58         0.308         -0.06         23.02         23.50         1.117         0.344         22.9           Front side         20         QPSK 50_0         43340/3575         1:1.58         0.234         -0.06         22.71         23.50         1.199         0.281         22.9           Back side         20         QPSK 50_0         43340/3575         1:1.58         0.431         0.18         22.71         23.50         1.199         0.366         22.9           Top side         20         QPSK 50_0         43340/3575         1:1.58         0.301         0.04         22.71         23.50         1.199         0.366         22.9           Front side-12mm         20         QPSK 1_0         43340/3575         1:1.58         0.			100_0	Hotspot (sensor o	n) Test da	ta(Separat	te 10mm 1	IRB)				
Back side - CA_42C	Front side	20	QPSK 1_0	43340/3575	1:1.58	0.238	0.02	23.02	23.50	1.117	0.266	22.9
Top side 20 QPSK 1_0 43340/3575 1:1.58 0.308 -0.06 23.02 23.50 1.16/ 0.491 22.9  Hotspot (sensor on) Test data(Separate 10mm 50RB)  Front side 20 QPSK 50_0 43340/3575 1:1.58 0.308 -0.06 22.71 23.50 1.199 0.281 22.9  Back side 20 QPSK 50_0 43340/3575 1:1.58 0.305 0.04 22.71 23.50 1.199 0.517 22.9  Top side 20 QPSK 50_0 43340/3575 1:1.58 0.305 0.04 22.71 23.50 1.199 0.366 22.9  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.177 0.06 24.22 25.50 1.343 0.238 22.9  Back side-17mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.192 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.137 -0.01 24.22 25.50 1.343 0.184 22.9  Hotspot (sensor off) Test data(50RB)  Front side-12mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.192 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.162 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Front side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.142 22.9  Back side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.142 22.9  Back side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.06 0.03 23.23 24.50 1.340 0.142 22.9  Back side-20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.02 23.50 1.117 0.505 22.9  Back side 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.00 1.117 0.505 22.9  Back side 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.00 1.117 0.505 22.9	Back side	20	QPSK 1_0	43340/3575	1:1.58	0.452	0.09	23.02	23.50	1.117	0.505	22.9
Hotspot (sensor on) Test data(Separate 10mm 50RB)	Back side - CA_42C	20	QPSK 1_0		1:1.58	0.421	0.04	22.83	23.50	1.167	0.491	22.9
Front side 20 QPSK 50_0 43340/3575 1:1.58 0.234 -0.06 22.71 23.50 1.199 0.281 22.9  Back side 20 QPSK 50_0 43340/3575 1:1.58 0.431 0.18 22.71 23.50 1.199 0.517 22.9  Top side 20 QPSK 50_0 43340/3575 1:1.58 0.305 0.04 22.71 23.50 1.199 0.366 22.9  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.177 0.06 24.22 25.50 1.343 0.238 22.9  Back side-17mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.192 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.137 -0.01 24.22 25.50 1.343 0.184 22.9  Hotspot (sensor off) Test data(50RB)  Front side-12mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.192 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Front side 12mm 20 QPSK 50_0 43340/3575 1:1.58 0.106 0.03 23.23 24.50 1.340 0.142 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.28 0.02 23.02 23.50 1.117 0.266 22.9  Back side 20 QPSK 1_0 43340/3575 1:1.58 0.452 0.09 23.02 23.50 1.117 0.505 22.9  Back side 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.50 1.117 0.505 22.9	Top side	20	QPSK 1_0	43340/3575	1:1.58	0.308	-0.06	23.02	23.50	1.117	0.344	22.9
Back side         20         QPSK 50_0         43340/3575         1:1.58         0.431         0.18         22.71         23.50         1.199         0.517         22.9           Top side         20         QPSK 50_0         43340/3575         1:1.58         0.305         0.04         22.71         23.50         1.199         0.366         22.9           Hotspot (sensor off) Test data(TRB)           Front side-12mm         20         QPSK 1_0         43340/3575         1:1.58         0.177         0.06         24.22         25.50         1.343         0.238         22.9           Back side-17mm         20         QPSK 1_0         43340/3575         1:1.58         0.143         0.04         24.22         25.50         1.343         0.192         22.9           Top side-19mm         20         QPSK 1_0         43340/3575         1:1.58         0.137         -0.01         24.22         25.50         1.343         0.184         22.9           Hotspot (sensor off) Test data(50RB)           Front side-12mm         20         QPSK 50_0         43340/3575         1:1.58         0.143         0.16         23.23         24.50         1.340         0.192				Hotspot (sensor or	n) Test dat	a(Separate	e 10mm 5	0RB)				
Top side 20 QPSK 50_0 43340/3575 1:1.58 0.305 0.04 22.71 23.50 1.199 0.366 22.9  Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.177 0.06 24.22 25.50 1.343 0.238 22.9  Back side-17mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.192 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.137 -0.01 24.22 25.50 1.343 0.184 22.9  Hotspot (sensor off) Test data(50RB)  Front side-12mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.192 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.106 0.03 23.23 24.50 1.340 0.142 22.9  Body-worn Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side - CA_42C 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.50 1.117 0.505 22.9	Front side	20	QPSK 50_0	43340/3575	1:1.58	0.234	-0.06	22.71	23.50	1.199	0.281	22.9
Hotspot (sensor off) Test data(1RB)  Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.177 0.06 24.22 25.50 1.343 0.238 22.9  Back side-17mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.192 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.137 -0.01 24.22 25.50 1.343 0.184 22.9  Hotspot (sensor off) Test data(50RB)  Front side-12mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.192 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.106 0.03 23.23 24.50 1.340 0.142 22.9  Body-worn Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side - CA_42C 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.00 1.117 0.505 22.9	Back side	20	QPSK 50_0	43340/3575	1:1.58	0.431	0.18	22.71	23.50	1.199	0.517	22.9
Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.177 0.06 24.22 25.50 1.343 0.238 22.9  Back side-17mm 20 QPSK 1_0 43340/3575 1:1.58 0.143 0.04 24.22 25.50 1.343 0.192 22.9  Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.137 -0.01 24.22 25.50 1.343 0.184 22.9  Hotspot (sensor off) Test data(50RB)  Front side-12mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.192 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Body-worn Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side - CA_42C 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.50 1.167 0.491 22.9	Top side	20	QPSK 50_0	43340/3575	1:1.58	0.305	0.04	22.71	23.50	1.199	0.366	22.9
Back side-17mm         20         QPSK 1_0         43340/3575         1:1.58         0.143         0.04         24.22         25.50         1.343         0.192         22.9           Top side-19mm         20         QPSK 1_0         43340/3575         1:1.58         0.137         -0.01         24.22         25.50         1.343         0.184         22.9           Hotspot (sensor off) Test data(50RB)           Front side-12mm         20         QPSK 50_0         43340/3575         1:1.58         0.143         0.16         23.23         24.50         1.340         0.192         22.9           Back side-17mm         20         QPSK 50_0         43340/3575         1:1.58         0.121         0.08         23.23         24.50         1.340         0.162         22.9           Top side-19mm         20         QPSK 50_0         43340/3575         1:1.58         0.106         0.03         23.23         24.50         1.340         0.142         22.9           Body-worn Test data(Separate 10mm 1RB)           Front side         20         QPSK 1_0         43340/3575         1:1.58         0.238         0.02         23.02         23.50         1.117         0.505         <				Hotspot (	sensor off)	Test data	(1RB)					
Top side-19mm 20 QPSK 1_0 43340/3575 1:1.58 0.137 -0.01 24.22 25.50 1.343 0.184 22.9  Hotspot (sensor off) Test data(50RB)  Front side-12mm 20 QPSK 50_0 43340/3575 1:1.58 0.143 0.16 23.23 24.50 1.340 0.192 22.9  Back side-17mm 20 QPSK 50_0 43340/3575 1:1.58 0.121 0.08 23.23 24.50 1.340 0.162 22.9  Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.106 0.03 23.23 24.50 1.340 0.142 22.9  Body-worn Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side - CA_42C 20 QPSK 1_0 43340/3575 1:1.58 0.421 0.04 22.83 23.50 1.167 0.491 22.9	Front side-12mm	20	QPSK 1_0	43340/3575	1:1.58	0.177	0.06	24.22	25.50	1.343	0.238	22.9
Hotspot (sensor off) Test data(50RB)	Back side-17mm	20	QPSK 1_0	43340/3575	1:1.58	0.143	0.04	24.22	25.50	1.343	0.192	22.9
Front side-12mm         20         QPSK 50_0         43340/3575         1:1.58         0.143         0.16         23.23         24.50         1.340         0.192         22.9           Back side-17mm         20         QPSK 50_0         43340/3575         1:1.58         0.121         0.08         23.23         24.50         1.340         0.162         22.9           Top side-19mm         20         QPSK 50_0         43340/3575         1:1.58         0.106         0.03         23.23         24.50         1.340         0.142         22.9           Body-worn Test data(Separate 10mm 1RB)           Front side         20         QPSK 1_0         43340/3575         1:1.58         0.238         0.02         23.02         23.50         1.117         0.266         22.9           Back side         20         QPSK 1_0         43340/3575         1:1.58         0.452         0.09         23.02         23.50         1.117         0.505         22.9           Back side - CA_42C         20         QPSK 1_0         43340+43142/3575+355         1:1.58         0.421         0.04         22.83         23.50         1.167         0.491         22.9	Top side-19mm	20	QPSK 1_0	43340/3575	1:1.58	0.137	-0.01	24.22	25.50	1.343	0.184	22.9
Back side-17mm         20         QPSK 50_0         43340/3575         1:1.58         0.121         0.08         23.23         24.50         1.340         0.162         22.9           Top side-19mm         20         QPSK 50_0         43340/3575         1:1.58         0.106         0.03         23.23         24.50         1.340         0.142         22.9           Body-worn Test data(Separate 10mm 1RB)           Front side         20         QPSK 1_0         43340/3575         1:1.58         0.238         0.02         23.02         23.50         1.117         0.266         22.9           Back side         20         QPSK 1_0         43340/3575         1:1.58         0.452         0.09         23.02         23.50         1.117         0.505         22.9           Back side - CA_42C         20         QPSK 1_0         43340+43142/3575+355 5.2         1:1.58         0.421         0.04         22.83         23.50         1.167         0.491         22.9				Hotspot (s	sensor off)	Test data(	(50RB)					
Top side-19mm 20 QPSK 50_0 43340/3575 1:1.58 0.106 0.03 23.23 24.50 1.340 0.142 22.9  Body-worn Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side 20 QPSK 1_0 43340/3575 1:1.58 0.452 0.09 23.02 23.50 1.117 0.505 22.9  Back side - CA_42C 20 QPSK 1_0 43340+43142/3575+355 5.2 1:1.58 0.421 0.04 22.83 23.50 1.167 0.491 22.9	Front side-12mm	20	QPSK 50_0	43340/3575	1:1.58	0.143	0.16	23.23	24.50	1.340	0.192	22.9
Body-worn Test data(Separate 10mm 1RB)  Front side 20 QPSK 1_0 43340/3575 1:1.58 0.238 0.02 23.02 23.50 1.117 0.266 22.9  Back side 20 QPSK 1_0 43340/3575 1:1.58 0.452 0.09 23.02 23.50 1.117 0.505 22.9  Back side - CA_42C 20 QPSK 1_0 43340+43142/3575+355 5.2 1:1.58 0.421 0.04 22.83 23.50 1.167 0.491 22.9	Back side-17mm	20	QPSK 50_0	43340/3575	1:1.58	0.121	0.08	23.23	24.50	1.340	0.162	22.9
Front side         20         QPSK 1_0         43340/3575         1:1.58         0.238         0.02         23.02         23.50         1.117         0.266         22.9           Back side         20         QPSK 1_0         43340/3575         1:1.58         0.452         0.09         23.02         23.50         1.117 <b>0.505</b> 22.9           Back side - CA_42C         20         QPSK 1_0         43340+43142/3575+355         1:1.58         0.421         0.04         22.83         23.50         1.167         0.491         22.9	Top side-19mm	20	QPSK 50_0	43340/3575	1:1.58	0.106	0.03	23.23	24.50	1.340	0.142	22.9
Back side         20         QPSK 1_0         43340/3575         1:1.58         0.452         0.09         23.02         23.50         1.117 <b>0.505</b> 22.9           Back side - CA_42C         20         QPSK 1_0         43340+43142/3575+355 5.2         1:1.58         0.421         0.04         22.83         23.50         1.167         0.491         22.9			1	Body-worn T	est data(S	eparate 10	mm 1RB)				ı	
Back side - CA_42C 20 QPSK 1_0 43340+43142/3575+355 5.2 1:1.58 0.421 0.04 22.83 23.50 1.167 0.491 22.9	Front side	20	QPSK 1_0	43340/3575	1:1.58	0.238	0.02	23.02	23.50	1.117	0.266	22.9
Back side - CA_42C	Back side	20	QPSK 1_0	43340/3575	1:1.58	0.452	0.09	23.02	23.50	1.117	0.505	22.9
Front side-12mm 20 QPSK 1_0 43340/3575 1:1.58 0.177 0.06 24.22 25.50 1.343 0.238 22.9	Back side - CA_42C	20	QPSK 1_0		1:1.58	0.421	0.04	22.83	23.50	1.167	0.491	22.9
	Front side-12mm	20	QPSK 1_0	43340/3575	1:1.58	0.177	0.06	24.22	25.50	1.343	0.238	22.9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one on exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAI. Doccheck@sgs.com</a>

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.

Member of the SGS Group (SGS SA)



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 106 of 134

Back side-17mm	20	QPSK 1_0	43340/3575	1:1.58	0.143	0.04	24.22	25.50	1.343	0.192	22.9
	Body-worn Test data(Separate 10mm 50%RB)										
Front side	20	QPSK 50_0	43340/3575	1:1.58	0.234	-0.06	22.71	23.50	1.199	0.281	22.9
Back side	20	QPSK 50_0	43340/3575	1:1.58	0.431	0.18	22.71	23.50	1.199	0.517	22.9
Front side-12mm	20	QPSK 50_0	43340/3575	1:1.58	0.143	0.16	23.23	24.50	1.340	0.192	22.9
Back side-17mm	20	QPSK 50_0	43340/3575	1:1.58	0.121	0.08	23.23	24.50	1.340	0.162	22.9

Table 37: SAR of LTE Band 42 for Head and Body.

Test Position	Channel/ Frequency	Measured	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)	SAR (1g)	SAR (1g)		SAR (1g)	SAR (1g)
Left tilted	43340/3575	0.914	0.911	1.003293085	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.



Report No.: SEWM2305000160RG09

Rev.:

107 of 134 Page:

#### 8.2.1 SAR Result of 5G NR n41

				SA N	41 SAR Tes	t Record					
				į.	Ant0 Test Re	ecord					
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
				Не	ead Test data	a(1RB)					
Left cheek	100	QPSK 1_1	518598/2592.99	1:1	0.158	0.04	24.03	25.00	1.250	0.198	22.5
Left tilted	100	QPSK 1_1	518598/2592.99	1:1	0.079	0.15	24.03	25.00	1.250	0.099	22.5
Right cheek	100	QPSK 1_1	518598/2592.99	1:1	0.099	0.09	24.03	25.00	1.250	0.124	22.5
Right tilted	100	QPSK 1_1	518598/2592.99	1:1	0.058	0.06	24.03	25.00	1.250	0.073	22.5
				Hea	d Test data(	50%RB)					
Left cheek	100	QPSK 135_69	518598/2592.99	1:1	0.144	-0.01	24.21	25.00	1.199	0.173	22.5
Left tilted	100	QPSK 135_69	518598/2592.99	1:1	0.060	0.02	24.21	25.00	1.199	0.072	22.5
Right cheek	100	QPSK 135_69	518598/2592.99	1:1	0.084	-0.02	24.21	25.00	1.199	0.101	22.5
Right tilted	100	QPSK 135_69	518598/2592.99	1:1	0.058	0.06	24.21	25.00	1.199	0.070	22.5
			Hotspot	(sensor o	n) Test data	(Separate 1	0mm 1RB)				
Front side	100	QPSK 1_1	518598/2592.99	1:1	0.361	0.09	20.25	21.00	1.189	0.429	22.5
Back side	100	QPSK 1_1	518598/2592.99	1:1	0.472	0.09	20.25	21.00	1.189	0.561	22.5
Bottom side	100	QPSK 1_1	518598/2592.99	1:1	0.330	-0.04	20.25	21.00	1.189	0.392	22.5
			Hotspot	(sensor or	n) Test data(	Separate 10	0mm 50RB)				
Front side	100	QPSK 135_69	518598/2592.99	1:1	0.335	-0.05	20.35	21.00	1.161	0.389	22.5
Back side	100	QPSK 135_69	518598/2592.99	1:1	0.415	-0.03	20.35	21.00	1.161	0.482	22.5
Bottom side	100	QPSK 135_69	518598/2592.99	1:1	0.304	0.07	20.35	21.00	1.161	0.353	22.5
				Hotspot (	sensor off) T	est data(1R	B)				
Front side-12mm	100	QPSK 1_1	518598/2592.99	1:1	0.286	0.02	24.03	25.00	1.250	0.358	22.5
Back side-17mm	100	QPSK 1_1	518598/2592.99	1:1	0.231	0.05	24.03	25.00	1.250	0.289	22.5
Left side-10mm	100	QPSK 1_1	518598/2592.99	1:1	0.146	0.04	24.03	25.00	1.250	0.183	22.5
Right side-10mm	100	QPSK 1_1	518598/2592.99	1:1	0.082	0.09	24.03	25.00	1.250	0.103	22.5
Bottom side-15mm	100	QPSK 1_1	518598/2592.99	1:1	0.167	-0.16	24.03	25.00	1.250	0.209	22.5
				Hotspot (s	ensor off) Te	est data(50F	RB)				
Front side-12mm	100	QPSK 135_69	518598/2592.99	1:1	0.268	0.05	24.21	25.00	1.199	0.321	22.5
Back side-17mm	100	QPSK 135_69	518598/2592.99	1:1	0.223	0.01	24.21	25.00	1.199	0.267	22.5
Left side-10mm	100	QPSK 135_69	518598/2592.99	1:1	0.136	-0.02	24.21	25.00	1.199	0.163	22.5
Right side-10mm	100	QPSK 135_69	518598/2592.99	1:1	0.064	0.09	24.21	25.00	1.199	0.077	22.5
Bottom side-15mm	100	QPSK 135_69	518598/2592.99	1:1	0.146	0.03	24.21	25.00	1.199	0.175	22.5
			Boo	dy-worn Te	est data(Sep	arate 10mm	1RB)				
Front side	100	QPSK 1_1	518598/2592.99	1:1	0.361	0.09	20.25	21.00	1.189	0.429	22.5
Back side	100	QPSK 1_1	518598/2592.99	1:1	0.472	0.09	20.25	21.00	1.189	0.561	22.5
Front side-12mm	100	QPSK 1_1	518598/2592.99	1:1	0.286	0.02	24.03	25.00	1.250	0.358	22.5
Back side-17mm	100	QPSK 1_1	518598/2592.99	1:1	0.231	0.05	24.03	25.00	1.250	0.289	22.5
			Bod	y-worn Te	st data(Sepa	arate 10mm	50RB)				
Front side	100	QPSK 135_69	518598/2592.99	1:1	0.335	-0.05	20.35	21.00	1.161	0.389	22.5
Back side	100	QPSK 135_69	518598/2592.99	1:1	0.415	-0.03	20.35	21.00	1.161	0.482	22.5
Front side-12mm	100	QPSK 135_69	518598/2592.99	1:1	0.268	0.05	24.21	25.00	1.199	0.321	22.5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 108 of 134

Back side-17mm 100 QPSK 135_69 518598/2592.99 1:1 0.223 0.01 24.21 25.00 1.199 0.267 22.5													
Back side-1/mm	100	QPSK 135_69	518598/2592.99				24.21	25.00	1.199	0.267	22.5		
		ı		Δ	nt4 Test Re		l .		I				
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)		
				He	ead Test data	a(1RB)							
Left cheek	100	QPSK 1_1	518598/2592.99	1:1	0.389	0.03	18.68	19.00	1.076	0.419	22.5		
Left tilted	100	QPSK 1_1	518598/2592.99	1:1	0.468	0.03	18.68	19.00	1.076	0.504	22.5		
Right cheek	100	QPSK 1_1	518598/2592.99	1:1	0.783	0.12	18.68	19.00	1.076	0.843	22.5		
Right tilted	100	QPSK 1_1	518598/2592.99	1:1	0.604	0.01	18.68	19.00	1.076	0.650	22.5		
				Hea	d Test data(	50%RB)	T						
Left cheek	100	QPSK 135_69	518598/2592.99	1:1	0.370	0.04	18.89	19.00	1.026	0.379	22.5		
Left tilted	100	QPSK 135_69	518598/2592.99	1:1	0.463	-0.03	18.89	19.00	1.026	0.475	22.5		
Right cheek	100	QPSK 135_69	518598/2592.99	1:1	0.689	0.08	18.89	19.00	1.026	0.707	22.5		
Right tilted	100	QPSK 135_69	518598/2592.99	1:1	0.616	0.01	18.89	19.00	1.026	0.632	22.5		
				Hea	d Test data(	50%RB)	T						
Right cheek         100         QPSK 270_0         518598/2592.99         1:1         0.692         0.05         18.71         19.00         1.069         0.740         22.5													
			Hotspot	(sensor o	n) Test data	Separate 1	0mm 1RB)						
Front side 100 QPSK 1_1 518598/2592.99 1:1 0.162 0.09 17.66 18.00 1.081 0.175 22.5													
Back side	100	QPSK 1_1	518598/2592.99	1:1	0.242	0.07	17.66	18.00	1.081	0.262	22.5		
Top side	100	QPSK 1_1	518598/2592.99	1:1	0.269	0.02	17.66	18.00	1.081	0.291	22.5		
			Hotspot	(sensor or	n) Test data(	Separate 10	0mm 50RB)						
Front side	100	QPSK 135_69	518598/2592.99	1:1	0.171	-0.01	17.97	18.00	1.007	0.172	22.5		
Back side	100	QPSK 135_69	518598/2592.99	1:1	0.230	0.03	17.97	18.00	1.007	0.232	22.5		
Top side	100	QPSK 135_69	518598/2592.99	1:1	0.264	0.13	17.97	18.00	1.007	0.266	22.5		
				Hotspot (s	sensor off) T	est data(1R	B)						
Front side-12mm	100	QPSK 1_1	518598/2592.99	1:1	0.135	0.05	24.42	25.00	1.143	0.154	22.5		
Back side-17mm	100	QPSK 1_1	518598/2592.99	1:1	0.130	0.01	24.42	25.00	1.143	0.149	22.5		
Left side-10mm	100	QPSK 1_1	518598/2592.99	1:1	0.177	-0.05	24.42	25.00	1.143	0.202	22.5		
Top side-19mm	100	QPSK 1_1	518598/2592.99	1:1	0.149	0.09	24.42	25.00	1.143	0.170	22.5		
		I		Hotspot (s	ensor off) Te	est data(50F	RB)		1				
Front side-12mm	100	QPSK 135_69	518598/2592.99	1:1	0.142	-0.04	24.66	25.00	1.081	0.154	22.5		
Back side-17mm	100	QPSK 135_69	518598/2592.99	1:1	0.136	0.05	24.66	25.00	1.081	0.147	22.5		
Left side-10mm	100	QPSK 135_69	518598/2592.99	1:1	0.157	0.07	24.66	25.00	1.081	0.170	22.5		
Top side-19mm	100	QPSK 135_69	518598/2592.99	1:1	0.156	0.01	24.66	25.00	1.081	0.169	22.5		
		I	Boo	dy-worn Te	est data(Sep	arate 10mm	1RB)		1				
Front side	100	QPSK 1_1	518598/2592.99	1:1	0.162	0.09	17.66	18.00	1.081	0.175	22.5		
Back side	100	QPSK 1_1	518598/2592.99	1:1	0.242	0.07	17.66	18.00	1.081	0.262	22.5		
Front side-12mm	100	QPSK 1_1	518598/2592.99	1:1	0.135	0.05	24.42	25.00	1.143	0.154	22.5		
Back side-17mm	100	QPSK 1_1	518598/2592.99	1:1	0.130	0.01	24.42	25.00	1.143	0.149	22.5		
		1	Bod	y-worn Te	st data(Sepa	rate 10mm	50RB)		ı				
Front side	100	QPSK 135_69	518598/2592.99	1:1	0.171	-0.01	17.97	18.00	1.007	0.172	22.5		
Back side	100	QPSK 135_69	518598/2592.99	1:1	0.230	0.03	17.97	18.00	1.007	0.232	22.5		
Front side-12mm	100	QPSK 135_69	518598/2592.99	1:1	0.142	-0.04	24.66	25.00	1.081	0.154	22.5		
Back side-17mm	100	QPSK 135_69	518598/2592.99	1:1	0.136	0.05	24.66	25.00	1.081	0.147	22.5		

Table 38: SAR of 5G NR n41 for Head and Body(original report No:SEWM2304000137RG09).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible (2002).

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 www. t (86–512) 62992980 sgs.



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 109 of 134

Ant0 Test Record													
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)		
				He	ead Test c	lata(1RB)							
Left cheek	100	QPSK 1_1	518598/2592.99	1:1	0.134	-0.16	24.15	25.00	1.216	0.163	22.6		
Hotspot (sensor on) Test data(Separate 10mm 1RB)													
Back side         100         QPSK 1_1         518598/2592.99         1:1         0.441         0.02         20.25         21.00         1.189         0.524         22.6													
Body-worn Test data(Separate 10mm 1RB)													
Back side	100	QPSK 1_1	518598/2592.99	1:1	0.441	0.02	20.25	21.00	1.189	0.524	22.6		
					Ant4 Test	Record							
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)		
				He	ead Test o	lata(1RB)							
Right cheek	100	QPSK 1_1	518598/2592.99	1:1	0.746	0.10	18.58	19.00	1.102	0.822	22.6		
Hotspot (sensor on) Test data(Separate 10mm 1RB)													
Top side	100	QPSK 1_1	518598/2592.99	1:1	0.228	-0.12	17.62	18.00	1.091	0.249	22.6		
	Body-worn Test data(Separate 10mm 1RB)												
Back side	100	QPSK 1_1	518598/2592.99	1:1	0.206	0.01	17.62	18.00	1.091	0.225	22.6		

Table 39: SAR of 5G NR n41 for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 110 of 134

### 8.2.2 SAR Result of 5G NR n77

				SA N7	7 SAR Te	st Recor	d					
				Ar	nt3 Test R	ecord						
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)	
				Hea	ad Test da	ta(1RB)						
Left cheek	100	QPSK 1_1	633334/3500	1:1	0.105	0.05	19.50	20.00	1.122	0.118	22.9	
Left tilted	100	QPSK 1_1	633334/3500	1:1	0.109	-0.03	19.50	20.00	1.122	0.122	22.9	
Right cheek	100	QPSK 1_1	633334/3500	1:1	0.258	0.08	19.50	20.00	1.122	0.289	22.9	
Right tilted	100	QPSK 1_1	633334/3500	1:1	0.176	-0.05	19.50	20.00	1.122	0.197	22.9	
Head Test data(50%RB)												
Left cheek	100	QPSK 135_69	633334/3500	1:1	0.109	0.03	19.56	20.00	1.107	0.121	22.9	
Left tilted	100	QPSK 135_69	633334/3500	1:1	0.111	0.03	19.56	20.00	1.107	0.123	22.9	
Right cheek	100	QPSK 135_69	633334/3500	1:1	0.262	-0.07	19.56	20.00	1.107	0.290	22.9	
Right tilted	100	QPSK 135_69	633334/3500	1:1	0.178	0.09	19.56	20.00	1.107	0.197	22.9	
			Hotspot (se	ensor on	) Test data	a(Separat	e 10mm 1RB)					
Front side	100	QPSK 1_1	633334/3500	1:1	0.073	0.01	19.50	20.00	1.122	0.082	22.9	
Back side	100	QPSK 1_1	633334/3500	1:1	0.086	-0.02	19.50	20.00	1.122	0.096	22.9	
Top side	100	QPSK 1_1	633334/3500	1:1	0.068	-0.01	19.50	20.00	1.122	0.076	22.9	
			Hotspot (se	ensor on)	Test data	(Separate	e 10mm 50RB)					
Front side	100	QPSK 135_69	633334/3500	1:1	0.081	0.05	19.56	20.00	1.107	0.090	22.9	
Back side	100	QPSK 135_69	633334/3500	1:1	0.099	0.07	19.56	20.00	1.107	0.110	22.9	
Top side	100	QPSK 135_69	633334/3500	1:1	0.073	0.03	19.56	20.00	1.107	0.081	22.9	
			Н	otspot (se	ensor off)	Test data	(1RB)					
Front side-12mm	100	QPSK 1_1	633334/3500	1:1	0.065	0.02	23.48	24.00	1.127	0.073	22.9	
Back side-17mm	100	QPSK 1_1	633334/3500	1:1	0.047	0.03	23.48	24.00	1.127	0.053	22.9	
Left side-10mm	100	QPSK 1_1	633334/3500	1:1	0.102	0.05	23.48	24.00	1.127	0.115	22.9	
Top side-19mm	100	QPSK 1_1	633334/3500	1:1	0.044	0.10	23.48	24.00	1.127	0.050	22.9	
			Но	tspot (se	nsor off) T	est data	50RB)					
Front side-12mm	100	QPSK 135_69	633334/3500	1:1	0.087	0.05	23.58	24.00	1.102	0.096	22.9	
Back side-17mm	100	QPSK 135_69	633334/3500	1:1	0.058	0.14	23.58	24.00	1.102	0.064	22.9	
Left side-10mm	100	QPSK 135_69	633334/3500	1:1	0.110	0.02	23.58	24.00	1.102	0.121	22.9	
Top side-19mm	100	QPSK 135_69	633334/3500	1:1	0.053	0.08	23.58	24.00	1.102	0.058	22.9	
			Body-	worn Tes	st data(Se	parate 10	mm 1RB)					
Front side	100	QPSK 1_1	633334/3500	1:1	0.073	0.01	19.50	20.00	1.122	0.082	22.9	
Back side	100	QPSK 1_1	633334/3500	1:1	0.086	-0.02	19.50	20.00	1.122	0.096	22.9	
Front side-12mm	100	QPSK 1_1	633334/3500	1:1	0.065	0.02	23.48	24.00	1.127	0.073	22.9	
Back side-17mm	100	QPSK 1_1	633334/3500	1:1	0.047	0.03	23.48	24.00	1.127	0.053	22.9	
			Body-v	vorn Tes	t data(Sep	arate 10r	nm 50RB)					
Front side	100	QPSK 135_69	633334/3500	1:1	0.081	0.05	19.56	20.00	1.107	0.090	22.9	
Back side	100	QPSK 135_69	633334/3500	1:1	0.099	0.07	19.56	20.00	1.107	0.110	22.9	
Front side-12mm	100	QPSK 135_69	633334/3500	1:1	0.087	0.05	23.58	24.00	1.102	0.096	22.9	
Back side-17mm	100	QPSK 135_69	633334/3500	1:1	0.058	0.14	23.58	24.00	1.102	0.064	22.9	
				Ar	nt5 Test R	ecord						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company Advances and the content of the c

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 111 of 134

Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
				Hea	d Test da	ta(1RB)					
Left cheek	100	QPSK 1_1	633334/3500	1:1	0.362	0.14	17.27	18.00	1.183	0.428	22.9
Left tilted	100	QPSK 1_1	633334/3500	1:1	0.373	0.07	17.27	18.00	1.183	0.441	22.9
Right cheek	100	QPSK 1_1	633334/3500	1:1	0.235	0.01	17.27	18.00	1.183	0.278	22.9
Right tilted	100	QPSK 1_1	633334/3500	1:1	0.256	0.02	17.27	18.00	1.183	0.303	22.9
				Head	Test data	(50%RB)					
Left cheek	100	QPSK 135_69	633334/3500	1:1	0.372	0.06	17.36	18.00	1.159	0.431	22.9
Left tilted	100	QPSK 135_69	633334/3500	1:1	0.399	-0.03	17.36	18.00	1.159	0.462	22.9
Right cheek	100	QPSK 135_69	633334/3500	1:1	0.253	0.15	17.36	18.00	1.159	0.293	22.9
Right tilted	100	QPSK 135_69	633334/3500	1:1	0.277	0.11	17.36	18.00	1.159	0.321	22.9
			Hotspot (se	ensor on	) Test data	a(Separat	e 10mm 1RB)				
Front side	100	QPSK 1_1	633334/3500	1:1	0.194	0.07	19.81	20.50	1.172	0.227	22.9
Back side	100	QPSK 1_1	633334/3500	1:1	0.351	-0.01	19.81	20.50	1.172	0.411	22.9
Top side	100	QPSK 1_1	633334/3500	1:1	0.249	-0.02	19.81	20.50	1.172	0.292	22.9
			Hotspot (se	ensor on)	Test data	(Separate	10mm 50RB)				
Front side	100	QPSK 135_69	633334/3500	1:1	0.205	0.11	19.92	20.50	1.143	0.234	22.9
Back side	100	QPSK 135_69	633334/3500	1:1	0.378	0.09	19.92	20.50	1.143	0.432	22.9
Top side	100	QPSK 135_69	633334/3500	1:1	0.266	-0.05	19.92	20.50	1.143	0.304	22.9
			Ho	otspot (se	ensor off)	Test data	(1RB)				
Front side-12mm	100	QPSK 1_1	633334/3500	1:1	0.121	0.12	24.91	25.50	1.146	0.139	22.9
Back side-17mm	100	QPSK 1_1	633334/3500	1:1	0.116	0.05	24.91	25.50	1.146	0.133	22.9
Top side-19mm	100	QPSK 1_1	633334/3500	1:1	0.066	0.11	24.91	25.50	1.146	0.076	22.9
			Но	tspot (se	nsor off) T	est data(	50RB)				
Front side-12mm	100	QPSK 135_69	633334/3500	1:1	0.129	-0.05	24.95	25.50	1.135	0.146	22.9
Back side-17mm	100	QPSK 135_69	633334/3500	1:1	0.123	0.04	24.95	25.50	1.135	0.140	22.9
Top side-19mm	100	QPSK 135_69	633334/3500	1:1	0.077	-0.04	24.95	25.50	1.135	0.087	22.9
			Body-	worn Tes	t data(Se	parate 10	mm 1RB)				
Front side	100	QPSK 1_1	633334/3500	1:1	0.194	0.07	19.81	20.50	1.172	0.227	22.9
Back side	100	QPSK 1_1	633334/3500	1:1	0.351	-0.01	19.81	20.50	1.172	0.411	22.9
Front side-12mm	100	QPSK 1_1	633334/3500	1:1	0.121	0.12	24.91	25.50	1.146	0.139	22.9
Back side-17mm	100	QPSK 1_1	633334/3500	1:1	0.116	0.05	24.91	25.50	1.146	0.133	22.9
			Body-v	vorn Tes	t data(Sep	arate 10n	nm 50RB)				
Front side	100	QPSK 135_69	633334/3500	1:1	0.205	0.11	19.92	20.50	1.143	0.234	22.9
Back side	100	QPSK 135_69	633334/3500	1:1	0.378	0.09	19.92	20.50	1.143	0.432	22.9
Front side-12mm	100	QPSK 135_69	633334/3500	1:1	0.129	-0.05	24.95	25.50	1.135	0.146	22.9
Back side-17mm	100	QPSK 135_69	633334/3500	1:1	0.123	0.04	24.95	25.50	1.135	0.140	22.9

Table 40: SAR of 5G NR n77(3450MHz-3550MHz) for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 112 of 134

	SA N77 SAR Test Record												
					nt3 Test R		<del>-</del>						
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)		
				Hea	ad Test da	ta(1RB)							
Left cheek	100	QPSK 1_1	656000/3840	1:1	0.140	0.01	19.50	20.00	1.122	0.157	22.9		
Left tilted	100	QPSK 1_1	656000/3840	1:1	0.183	0.06	19.50	20.00	1.122	0.205	22.9		
Right cheek	100	QPSK 1_1	656000/3840	1:1	0.311	0.04	19.50	20.00	1.122	0.349	22.9		
Right tilted	100	QPSK 1_1	656000/3840	1:1	0.282	0.03	19.50	20.00	1.122	0.316	22.9		
				Head	Test data	(50%RB)							
Left cheek	100	QPSK 135_69	656000/3840	1:1	0.143	-0.03	19.51	20.00	1.119	0.160	22.9		
Left tilted	100	QPSK 135_69	656000/3840	1:1	0.189	-0.01	19.51	20.00	1.119	0.212	22.9		
Right cheek	100	QPSK 135_69	656000/3840	1:1	0.315	0.02	19.51	20.00	1.119	0.353	22.9		
Right tilted	100	QPSK 135_69	656000/3840	1:1	0.289	0.05	19.51	20.00	1.119	0.324	22.9		
			Hotspot (se	ensor on	) Test data	a(Separat	e 10mm 1RB)						
Front side	100	QPSK 1_1	656000/3840	1:1	0.077	0.02	19.50	20.00	1.122	0.086	22.9		
Back side	100	QPSK 1_1	656000/3840	1:1	0.102	-0.05	19.50	20.00	1.122	0.114	22.9		
Top side	100	QPSK 1_1	656000/3840	1:1	0.147	0.03	19.50	20.00	1.122	0.165	22.9		
			Hotspot (se	ensor on)	Test data	(Separate	e 10mm 50RB)						
Front side	100	QPSK 135_69	656000/3840	1:1	0.085	0.07	19.51	20.00	1.119	0.095	22.9		
Back side	100	QPSK 135_69	656000/3840	1:1	0.105	0.09	19.51	20.00	1.119	0.118	22.9		
Top side	100	QPSK 135_69	656000/3840	1:1	0.151	0.03	19.51	20.00	1.119	0.169	22.9		
			Ho	otspot (se	ensor off)	Test data	(1RB)						
Front side-12mm	100	QPSK 1_1	656000/3840	1:1	0.084	0.07	23.51	24.00	1.119	0.094	22.9		
Back side-17mm	100	QPSK 1_1	656000/3840	1:1	0.042	0.07	23.51	24.00	1.119	0.047	22.9		
Left side-10mm	100	QPSK 1_1	656000/3840	1:1	0.116	0.01	23.51	24.00	1.119	0.130	22.9		
Top side-19mm	100	QPSK 1_1	656000/3840	1:1	0.076	-0.03	23.51	24.00	1.119	0.085	22.9		
			Но	tspot (se	nsor off) T	est data(	50RB)						
Front side-12mm	100	QPSK 135_69	656000/3840	1:1	0.093	0.01	23.57	24.00	1.104	0.103	22.9		
Back side-17mm	100	QPSK 135_69	656000/3840	1:1	0.050	0.06	23.57	24.00	1.104	0.055	22.9		
Left side-10mm	100	QPSK 135_69	656000/3840	1:1	0.128	0.01	23.57	24.00	1.104	0.141	22.9		
Top side-19mm	100	QPSK 135_69	656000/3840	1:1	0.085	0.03	23.57	24.00	1.104	0.094	22.9		
			Body-	worn Tes	st data(Se	parate 10	mm 1RB)						
Front side	100	QPSK 1_1	656000/3840	1:1	0.077	0.02	19.50	20.00	1.122	0.086	22.9		
Back side	100	QPSK 1_1	656000/3840	1:1	0.102	-0.05	19.50	20.00	1.122	0.114	22.9		
Front side-12mm	100	QPSK 1_1	656000/3840	1:1	0.084	0.07	23.51	24.00	1.119	0.094	22.9		
Back side-17mm	100	QPSK 1_1	656000/3840	1:1	0.042	0.07	23.51	24.00	1.119	0.047	22.9		
			Body-v	vorn Tes	t data(Sep	arate 10r	nm 50RB)						
Front side	100	QPSK 135_69	656000/3840	1:1	0.085	0.07	19.51	20.00	1.119	0.095	22.9		
Back side	100	QPSK 135_69	656000/3840	1:1	0.105	0.09	19.51	20.00	1.119	0.118	22.9		
Front side-12mm	100	QPSK 135_69	656000/3840	1:1	0.093	0.01	23.57	24.00	1.104	0.103	22.9		
Back side-17mm	100	QPSK 135_69	656000/3840	1:1	0.050	0.06	23.57	24.00	1.104	0.055	22.9		
				Ar	nt5 Test R	ecord							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one on exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAI. Doccheck@sgs.com</a>

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 113 of 134

Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
				Hea	d Test da	ta(1RB)					
Left cheek	100	QPSK 1_1	656000/3840	1:1	0.469	-0.04	17.35	18.00	1.161	0.545	22.9
Left tilted	100	QPSK 1_1	656000/3840	1:1	0.542	0.01	17.35	18.00	1.161	0.630	22.9
Right cheek	100	QPSK 1_1	656000/3840	1:1	0.304	0.09	17.35	18.00	1.161	0.353	22.9
Right tilted	100	QPSK 1_1	656000/3840	1:1	0.353	-0.03	17.35	18.00	1.161	0.410	22.9
				Head	Test data	(50%RB)					
Left cheek	100	QPSK 135_69	656000/3840	1:1	0.492	0.05	17.44	18.00	1.138	0.560	22.9
Left tilted	100	QPSK 135_69	656000/3840	1:1	0.586	0.04	17.44	18.00	1.138	0.667	22.9
Right cheek	100	QPSK 135_69	656000/3840	1:1	0.311	-0.02	17.44	18.00	1.138	0.354	22.9
Right tilted	100	QPSK 135_69	656000/3840	1:1	0.365	0.07	17.44	18.00	1.138	0.415	22.9
			Hotspot (se	ensor on)	) Test data	a(Separat	e 10mm 1RB)				
Front side	100	QPSK 1_1	656000/3840	1:1	0.223	0.08	19.91	20.50	1.146	0.255	22.9
Back side	100	QPSK 1_1	656000/3840	1:1	0.377	-0.02	19.91	20.50	1.146	0.432	22.9
Top side	100	QPSK 1_1	656000/3840	1:1	0.349	-0.04	19.91	20.50	1.146	0.400	22.9
			Hotspot (se	ensor on)	Test data	(Separate	10mm 50RB)				
Front side	100	QPSK 135_69	656000/3840	1:1	0.235	-0.03	19.93	20.50	1.140	0.268	22.9
Back side	100	QPSK 135_69	656000/3840	1:1	0.417	-0.12	19.93	20.50	1.140	0.475	22.9
Top side	100	QPSK 135_69	656000/3840	1:1	0.364	-0.02	19.93	20.50	1.140	0.415	22.9
			Ho	otspot (se	ensor off)	Test data	(1RB)				
Front side-12mm	100	QPSK 1_1	656000/3840	1:1	0.143	0.03	24.92	25.50	1.143	0.163	22.9
Back side-17mm	100	QPSK 1_1	656000/3840	1:1	0.136	0.04	24.92	25.50	1.143	0.155	22.9
Top side-19mm	100	QPSK 1_1	656000/3840	1:1	0.127	0.01	24.92	25.50	1.143	0.145	22.9
			Но	tspot (se	nsor off) T	est data(	50RB)				
Front side-12mm	100	QPSK 135_69	656000/3840	1:1	0.159	0.08	25.06	25.50	1.107	0.176	22.9
Back side-17mm	100	QPSK 135_69	656000/3840	1:1	0.147	-0.04	25.06	25.50	1.107	0.163	22.9
Top side-19mm	100	QPSK 135_69	656000/3840	1:1	0.141	-0.04	25.06	25.50	1.107	0.156	22.9
			Body-	worn Tes	t data(Se	parate 10	mm 1RB)				
Front side	100	QPSK 1_1	656000/3840	1:1	0.223	0.08	19.91	20.50	1.146	0.255	22.9
Back side	100	QPSK 1_1	656000/3840	1:1	0.377	-0.02	19.91	20.50	1.146	0.432	22.9
Front side-12mm	100	QPSK 1_1	656000/3840	1:1	0.143	0.03	24.92	25.50	1.143	0.163	22.9
Back side-17mm	100	QPSK 1_1	656000/3840	1:1	0.136	0.04	24.92	25.50	1.143	0.155	22.9
			Body-v	vorn Test	t data(Sep	arate 10n	nm 50RB)				
Front side	100	QPSK 135_69	656000/3840	1:1	0.235	-0.03	19.93	20.50	1.140	0.268	22.9
Back side	100	QPSK 135_69	656000/3840	1:1	0.417	-0.12	19.93	20.50	1.140	0.475	22.9
Front side-12mm	100	QPSK 135_69	656000/3840	1:1	0.159	0.08	25.06	25.50	1.107	0.176	22.9
Back side-17mm	100	QPSK 135_69	656000/3840	1:1	0.147	-0.04	25.06	25.50	1.107	0.163	22.9

Table 41: SAR of 5G NR n77(3700MHz -3980MHz) for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 114 of 134

### 8.2.3 SAR Result of WIFI 2.4G

	Wi-Fi 2.4G SAR Test Record													
				Ant6	Test Reco	rd chain0								
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)			
Head Test data - Receiver on														
Left cheek 802.11b 6/2437 98.57% 1.015 0.366 -0.12 15.97 16.50 1.130 <b>0.420</b> 22.6														
Left tilted	802.11b	6/2437	98.57%	1.015	0.271	0.05	15.97	16.50	1.130	0.311	22.6			
Right cheek	802.11b	6/2437	98.57%	1.015	0.129	0.04	15.97	16.50	1.130	0.148	22.6			
Right tilted	802.11b	6/2437	98.57%	1.015	0.137	-0.16	15.97	16.50	1.130	0.157	22.6			
			Hots	spot Test data	(Separate	10mm) - R	eceiver off							
Front side	802.11b	6/2437	98.57%	1.015	0.223	0.05	19.20	20.00	1.202	0.272	22.6			
Back side	802.11b	6/2437	98.57%	1.015	0.327	0.07	19.20	20.00	1.202	0.399	22.6			
Left side	802.11b	6/2437	98.57%	1.015	0.046	0.09	19.20	20.00	1.202	0.056	22.6			
Right side	802.11b	6/2437	98.57%	1.015	0.249	0.09	19.20	20.00	1.202	0.304	22.6			
Top side	802.11b	6/2437	98.57%	1.015	0.174	0.15	19.20	20.00	1.202	0.212	22.6			
Front side-12mm	802.11b	6/2437	98.57%	1.015	0.136	0.11	19.20	20.00	1.202	0.166	22.6			
Back side-17mm	802.11b	6/2437	98.57%	1.015	0.127	-0.04	19.20	20.00	1.202	0.155	22.6			
Top side-19mm	802.11b	6/2437	98.57%	1.015	0.079	0.05	19.20	20.00	1.202	0.096	22.6			

Table 42: SAR of WIFI 2.4G for Head and Body(original report No:SEWM2304000137RG09).

Note: When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq$  1.2 W/kg, SAR test for the other 802.11 modes are not required.

	Wi-Fi 2.4G SAR Test Record													
Ant6 Test Record chain0														
Test position	mode cn./Freq. Cycle Scaled 1-g (dB) Power(dBm) Limit(dBm) factor 1-g (W/kg)													
				Hea	ad Test da	ta - Receiv	er on							
Left cheek	802.11b	6/2437	98.57%	1.015	0.328	0.17	15.85	16.50	1.161	0.386	22.7			
Hotspot Test data (Separate 10mm) - Receiver off														
Back side	802.11b	6/2437	98.57%	1.015	0.289	0.04	18.87	20.00	1.297	0.380	22.7			

Table 43: SAR of WIFI 2.4G for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 115 of 134

### 8.2.1 SAR Result of WIFI 5G

				Wi-F	i 5G SAR Te	st Record					
				Ant	6 Test Reco	rd chain0					
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
				Head Test	data of U-NII	-2A - Receive	er on				
Left cheek	802.11a	60/5300	97.20%	1.029	0.394	0.05	15.77	16.50	1.183	0.480	22.7
Left tilted	802.11a	60/5300	97.20%	1.029	0.412	-0.13	15.77	16.50	1.183	0.501	22.7
Right cheek	802.11a	60/5300	97.20%	1.029	0.310	0.08	15.77	16.50	1.183	0.377	22.7
Right tilted	802.11a	60/5300	97.20%	1.029	0.343	-0.01	15.77	16.50	1.183	0.418	22.7
				Head Test	data of U-NII-	-2C - Receive	er on				
Left cheek	802.11a	116/5580	97.20%	1.029	0.288	0.08	15.84	16.50	1.164	0.345	22.7
Left tilted	802.11a	116/5580	97.20%	1.029	0.410	0.03	15.84	16.50	1.164	0.491	22.7
Right cheek	802.11a	116/5580	97.20%	1.029	0.264	0.09	15.84	16.50	1.164	0.316	22.7
Right tilted	802.11a	116/5580	97.20%	1.029	0.370	0.02	15.84	16.50	1.164	0.443	22.7
				Head Test	data of U-NI	I-3 - Receive	r on				
Left cheek	802.11a	157/5785	97.20%	1.029	0.334	0.03	15.89	16.50	1.151	0.395	22.7
Left tilted	802.11a	157/5785	97.20%	1.029	0.356	0.01	15.89	16.50	1.151	0.422	22.7
Right cheek	802.11a	157/5785	97.20%	1.029	0.298	0.11	15.89	16.50	1.151	0.353	22.7
Right tilted	802.11a	157/5785	97.20%	1.029	0.355	0.01	15.89	16.50	1.151	0.420	22.7
			Hotspo	t Test data of	U-NII-1(Sepa	arate 10mm)	- Receiver off				
Front side	802.11a	40/5200	97.20%	1.029	0.189	0.07	17.02	18.00	1.253	0.244	22.7
Back side	802.11a	40/5200	97.20%	1.029	0.364	0.08	17.02	18.00	1.253	0.469	22.7
Left side	802.11a	40/5200	97.20%	1.029	0.045	0.03	17.02	18.00	1.253	0.058	22.7
Right side	802.11a	40/5200	97.20%	1.029	0.157	0.13	17.02	18.00	1.253	0.202	22.7
Top side	802.11a	40/5200	97.20%	1.029	0.363	-0.02	17.02	18.00	1.253	0.468	22.7
Front side-12mm	802.11a	40/5200	97.20%	1.029	0.174	-0.02	17.02	18.00	1.253	0.224	22.7
Back side-17mm	802.11a	40/5200	97.20%	1.029	0.223	0.04	17.02	18.00	1.253	0.288	22.7
Top side-19mm	802.11a	40/5200	97.20%	1.029	0.210	0.09	17.02	18.00	1.253	0.271	22.7
			Hotspo	t Test data of	U-NII-3(Sepa	arate 10mm)	- Receiver off				
Front side	802.11a	157/5785	97.20%	1.029	0.085	0.06	16.81	17.50	1.172	0.103	22.7
Back side	802.11a	157/5785	97.20%	1.029	0.335	0.07	16.81	17.50	1.172	0.404	22.7
Left side	802.11a	157/5785	97.20%	1.029	0.077	-0.01	16.81	17.50	1.172	0.093	22.7
Right side	802.11a	157/5785	97.20%	1.029	0.086	-0.04	16.81	17.50	1.172	0.104	22.7
Top side	802.11a	157/5785	97.20%	1.029	0.284	-0.14	16.81	17.50	1.172	0.342	22.7
Front side-12mm	802.11a	157/5785	97.20%	1.029	0.056	-0.11	16.81	17.50	1.172	0.068	22.7
Back side-17mm	802.11a	157/5785	97.20%	1.029	0.167	0.02	16.81	17.50	1.172	0.201	22.7
Top side-19mm	802.11a	157/5785	97.20%	1.029	0.110	0.17	16.81	17.50	1.172	0.133	22.7
			Body wo	rn Test data	of U-NII-1(Se	parate 10mm	n) - Receiver off				
Front side	802.11a	40/5200	97.20%	1.029	0.189	0.07	17.02	18.00	1.253	0.244	22.7
Back side	802.11a	40/5200	97.20%	1.029	0.364	0.08	17.02	18.00	1.253	0.469	22.7
			Body wor	n Test data o	f U-NII-2A(Se	eparate 10mr	m) - Receiver off				
Front side	802.11a	60/5300	97.20%	1.029	0.153	0.04	17.31	18.00	1.172	0.185	22.7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 116 of 134

Back side	802.11a	60/5300	97.20%	1.029	0.252	-0.11	17.31	18.00	1.172	0.304	22.7			
			Body wor	n Test data o	f U-NII-2C(Se	eparate 10mr	n) - Receiver off							
Front side	802.11a	116/5580	97.20%	1.029	0.106	0.04	17.27	18.00	1.183	0.129	22.7			
Back side	802.11a	116/5580	97.20%	1.029	0.359	0.08	17.27	18.00	1.183	0.437	22.7			
			Body wo	rn Test data	of U-NII-3(Se	parate 10mm	n) - Receiver off							
Front side	802.11a	157/5785	97.20%	1.029	0.085	0.06	16.81	17.50	1.172	0.103	22.7			
Back side	802.11a	157/5785	97.20%	1.029	0.335	0.07	16.81	17.50	1.172	0.404	22.7			
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10- g (W/kg)	Liquid Temp.(℃)			
	Product specific 10gSAR Test data of U-NII-2A(Separate 0mm) - Receiver off													
Front side	802.11a	60/5300	97.20%	1.029	0.291	0.04	17.31	18.00	1.172	0.351	22.7			
Back side	802.11a	60/5300	97.20%	1.029	0.524	0.13	17.31	18.00	1.172	0.632	22.7			
Left side	802.11a	60/5300	97.20%	1.029	0.032	-0.01	17.31	18.00	1.172	0.039	22.7			
Right side	802.11a	60/5300	97.20%	1.029	0.086	0.07	17.31	18.00	1.172	0.104	22.7			
Top side	802.11a	60/5300	97.20%	1.029	0.545	-0.06	17.31	18.00	1.172	0.657	22.7			
		Prod	uct specific	10gSAR Tes	t data of U-N	II-2C(Separa	ite 0mm) - Receiv	er off						
Front side	802.11a	116/5580	97.20%	1.029	0.215	0.03	17.27	18.00	1.183	0.262	22.7			
Back side	802.11a	116/5580	97.20%	1.029	0.611	-0.04	17.27	18.00	1.183	0.744	22.7			
Left side	802.11a	116/5580	97.20%	1.029	0.075	0.01	17.27	18.00	1.183	0.091	22.7			
Right side	802.11a	116/5580	97.20%	1.029	0.068	-0.01	17.27	18.00	1.183	0.083	22.7			
Top side	802.11a	116/5580	97.20%	1.029	0.635	-0.07	17.27	18.00	1.183	0.773	22.7			
T-11- 44 OAD	. ( \ \ /   E   _	~		D I . /			EVA/8.4000.40		~~`					

Table 44: SAR of WIFI 5G for Head and Body(original report No:SEWM2304000137RG09).

1) As the 802.11a highest reported SAR is smaller than 1.2 W/kg , and the tune-up of the other 802.11 modes are not higher than 802.11a,therefore the adjusted SAR is ≤ 1.2 W/kg for other 802.11 modes, SAR test for the other 802.11 modes are not required. For Product specific 10gSAR the highest reported SAR is smaller than 3.0 W/kg, SAR test for the other 802.11 modes are also not required.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 117 of 134

				١	Ni-Fi 5G SA	AR Test R	ecord				
					Ant6 Test I	Record ch	ain0				
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1- g (W/kg)	Liquid Temp.(℃)
	•			Head T	est data of	U-NII-2A -	Receiver on				
Left tilted	802.11a	60/5300	97.20%	1.029	0.393	0.03	15.70	16.50	1.202	0.486	22.8
				Head T	est data of	U-NII-2C -	Receiver on				
Left tilted	802.11a	116/5580	97.20%	1.029	0.389	0.01	15.84	16.50	1.164	0.466	22.8
				Head <sup>7</sup>	Test data of	U-NII-3 -	Receiver on				
Left tilted	802.11a	157/5785	97.20%	1.029	0.333	-0.06	15.83	16.50	1.167	0.400	22.8
			Hotsp	ot Test dat	a of U-NII-1	(Separate	10mm) - Receiv	er off			
Back side	802.11a	40/5200	97.20%	1.029	0.341	0.07	16.91	18.00	1.285	0.451	22.8
			Hotsp	ot Test dat	a of U-NII-3	(Separate	10mm) - Receiv	er off			
Back side	802.11a	157/5785	97.20%	1.029	0.311	0.15	16.67	17.50	1.211	0.387	22.8
			Body w	orn Test da	ata of U-NII-	-1(Separat	e 10mm) - Rece	iver off			
Back side	802.11a	40/5200	97.20%	1.029	0.341	0.07	16.91	18.00	1.285	0.451	22.8
	1		Body wo	rn Test da	ta of U-NII-2	2A(Separa	te 10mm) - Rece	eiver off			
Back side	802.11a	60/5300	97.20%	1.029	0.234	0.08	17.23	18.00	1.194	0.287	22.8
	1		Body wo	rn Test da	ta of U-NII-2	2C(Separa	te 10mm) - Rece	eiver off			
Back side	802.11a	116/5580	97.20%	1.029	0.326	-0.04	17.15	18.00	1.216	0.408	22.8
	1		Body w	orn Test da	ata of U-NII-	-3(Separa	e 10mm) - Rece	iver off			
Back side	802.11a	157/5785	97.20%	1.029	0.311	0.15	16.67	17.50	1.211	0.387	22.8
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(℃)
		Pro	duct specifi	c 10gSAR	Test data o	f U-NII-2A	(Separate 0mm)	- Receiver off			
Top side	802.11a	60/5300	97.20%	1.029	0.528	0.18	17.23	18.00	1.194	0.649	22.8
		Prod	duct specifi	c 10gSAR	Test data o	f U-NII-2C	(Separate 0mm)	- Receiver off			
Top side	802.11a	116/5580	97.20%	1.029	0.616	0.13	17.15	18.00	1.216	0.771	22.8

Table 45: SAR of WIFI 5G for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 118 of 134

#### 8.2.2 SAR Result of BT

				Blu	etooth SAR	Test Record								
	Ant6 Test Record													
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)			
	Head Test data													
Left cheek	DH5	39/2441	76.86%	1.301	0.106	-0.04	11.46	13.00	1.426	0.197	22.6			
Left tilted	DH5	39/2441	76.86%	1.301	0.078	0.08	11.46	13.00	1.426	0.145	22.6			
Right cheek	DH5	39/2441	76.86%	1.301	0.037	0.08	11.46	13.00	1.426	0.069	22.6			
Right tilted	DH5	39/2441	76.86%	1.301	0.040	0.03	11.46	13.00	1.426	0.074	22.6			
				Hotspo	ot Test data (S	eparate 10mr	n)							
Front side	DH5	39/2441	76.86%	1.301	0.024	0.13	11.46	13.00	1.426	0.045	22.6			
Back side	DH5	39/2441	76.86%	1.301	0.035	0.14	11.46	13.00	1.426	0.065	22.6			
Left side	DH5	39/2441	76.86%	1.301	0.005	0.03	11.46	13.00	1.426	0.009	22.6			
Right side	DH5	39/2441	76.86%	1.301	0.027	-0.03	11.46	13.00	1.426	0.050	22.6			
Top side	DH5	39/2441	76.86%	1.301	0.019	0.12	11.46	13.00	1.426	0.035	22.6			

Table 46: SAR of BT for Head and Body(original report No:SEWM2304000137RG09).

Bluetooth SAR Test Record													
Ant6 Test Record													
Test position  Test mode  Test ch./Freq.  Test ch./Freq.  Duty Cycle Cycle Scaled factor  SAR (W/kg) 1-g  Power drift (dB)  Conducted Power(dBm)  Limit(dBm)  Scaled factor  Scaled factor  Scaled factor  Liquid Temp. (*Conducted factor)													
					Head Test	data							
Left cheek	DH5	39/2441	76.86%	1.301	0.101	0.02	11.39	13.00	1.449	0.190	22.7		
Hotspot Test data (Separate 10mm)													
Back side	DH5	39/2441	76.86%	1.301	0.031	0.08	11.39	13.00	1.449	0.058	22.7		

Table 47: SAR of BT for Head and Body(Variant).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 119 of 134

### 8.2.1 SAR Result of NFC

Test position	Test mode	Test /Freq.	SAR (W/kg) 10-g	Power drift (dB)	Scaled SAR 10-g (W/kg)	Liquid Temp.(℃)
			Body Test data (Se	eparate 0mm)		
Front side	NFC	13.56MHz	0.001	0.02	0.001	22.8
Back side	NFC	13.56MHz	0.026	0.01	0.026	22.8
Left side	NFC	13.56MHz	0.001	0.03	0.001	22.8
Right side	NFC	13.56MHz	0.001	0.05	0.001	22.8
Top side	NFC	13.56MHz	0.001	-0.09	0.001	22.8
Bottom side	NFC	13.56MHz	0.001	0.06	0.001	22.8

Table 48: SAR of NFC for Body(original report No:SEWM2304000137RG09).

NFC SAR Test Record										
Test position	Test mode	Test /Freq.	SAR (W/kg) 10-g	Power drift (dB)	Liquid Temp.(℃)					
Body Test data (Separate 0mm)										
Back side	NFC 13.56MHz 0.033 0.06 22.8									

Table 49: SAR of NFC for Body(Variant).

### Note:

- NFC mainly operate in hand-held extremity exposure conditions and NFC sensing distance with other device or reading tag is about 20cm, therefore Standalone 10-g extremity SAR testing for NFC will be performed with active mode and max power mode, with 100% duty cycle at 0mmseparation distance.
- 2) NFC SAR is measured for all edges and surfaces of the device.
- 3) NFC 13.56MHz antenna por is not available on the device to support conducted power measurement, therefore the measured results are referred to as reported SAR.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, ubject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of ransaction from exercising all their rights and obligations under the transaction from exercising all their rights and obligations under the transaction forment or This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or preparance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seuts shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Vitables of the charket the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) \$307 1443, \*\*Vitables of the charket the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) \$307 1443, \*\*Vitables of the charket the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) \$307 1443, \*\*Vitables of the contact us at telephone: (86-755) \$307 1443, \*\*Vitables of the contact us at telephone: (86-755) \$307 1443, \*\*Vitables of the contact us at telephone: (86-755) \$307 1443, \*\*Vitables of the contact us at telephone: (86-755

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 120 of 134

### 8.3 Multiple Transmitter Evaluation

### 8.3.1 Simultaneous SAR SAR test evaluation

#### Simultaneous Transmission Possibilities

NO	Simultaneous Tx Combination	Head	Body- worn	Hotspot	Product Specific 10-g (0mm)
1	WWAN + 2.4G	Υ	Υ	Υ	Y
2	WWAN + 5G	Υ	Υ	Y	Y
3	WWAN + BT	Υ	Υ	Y	Y

#### Note:

- 1) The device support DTM function.
- 2) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.
- 3) NFC is different from the working scenario of WWAN/WIFI(Head/Body-worn/Hotspot) and does not participate in the simultaneous transmission.
- 4) Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required it wireless router 1g SAR(Scaled to the maximum output power ,including tolerance) < 1.2 W/Kg. Therefore, no further analysis beyond tables included in this section was required to determine that possible Simultaneous transmission scenarios would not exceed the SAR limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as that this printed in the conditions for Terms and Conditions of Terms and Conditions for Terms-and-Conditions/Terms-e-Document as year. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.:

121 of 134 Page:

### 8.3.2 Simultaneous Transmission SAR Summation Scenario Simultaneous Transmission SAR Summation Scenario for WLAN Head:

			SARn	nax (W/kg)				
Test	position	Main Ant0	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ		Summed SAR	
		1	2	3	4	1+2	1+3	1+4
	Left cheek	0.244	0.420	0.480	0.197	0.66	0.72	0.44
GSM850	Left tilted	0.151	0.311	0.501	0.145	0.46	0.65	0.30
ANT0	Right cheek	0.272	0.148	0.377	0.069	0.42	0.65	0.34
	Right tilted	0.168	0.157	0.443	0.074	0.33	0.61	0.24
	Left cheek	0.591	0.420	0.480	0.197	1.01	1.07	0.79
GSM850	Left tilted	0.558	0.311	0.501	0.145	0.87	1.06	0.70
ANT4	Right cheek	0.629	0.148	0.377	0.069	0.78	1.01	0.70
	Right tilted	0.588	0.157	0.443	0.074	0.75	1.03	0.66
	Left cheek	0.079	0.420	0.480	0.197	0.50	0.56	0.28
GSM1900	Left tilted	0.063	0.311	0.501	0.145	0.37	0.56	0.21
ANT0	Right cheek	0.101	0.148	0.377	0.069	0.25	0.48	0.17
	Right tilted	0.061	0.157	0.443	0.074	0.22	0.50	0.14
	Left cheek	0.539	0.420	0.480	0.197	0.96	1.02	0.74
GSM1900	Left tilted	0.605	0.311	0.501	0.145	0.92	1.11	0.75
ANT4	Right cheek	0.685	0.148	0.377	0.069	0.83	1.06	0.75
	Right tilted	1.090	0.157	0.443	0.074	1.25	1.53	1.16
WCDMA II	Left cheek	0.166	0.420	0.480	0.197	0.59	0.65	0.36
WCDMA II	Left tilted	0.120	0.311	0.501	0.145	0.43	0.62	0.27
ANT0	Right cheek	0.249	0.148	0.377	0.069	0.40	0.63	0.32
	Right tilted	0.137	0.157	0.443	0.074	0.29	0.58	0.21
WCDMA II	Left cheek	0.442	0.420	0.480	0.197	0.86	0.92	0.64
	Left tilted	0.600	0.311	0.501	0.145	0.91	1.10	0.75
ANT4	Right cheek	0.688	0.148	0.377	0.069	0.84	1.07	0.76
	Right tilted	0.943	0.157	0.443	0.074	1.10	1.39	1.02
	Left cheek	0.093	0.420	0.480	0.197	0.51	0.57	0.29
WCDMA IV	Left tilted	0.072	0.311	0.501	0.145	0.38	0.57	0.22
ANT0	Right cheek	0.143	0.148	0.377	0.069	0.29	0.52	0.21
•	Right tilted	0.084	0.157	0.443	0.074	0.24	0.53	0.16
	Left cheek	0.273	0.420	0.480	0.197	0.69	0.75	0.47
WCDMA IV	Left tilted	0.364	0.311	0.501	0.145	0.68	0.87	0.51
ANT4	Right cheek	0.533	0.148	0.377	0.069	0.68	0.91	0.60
•	Right tilted	0.743	0.157	0.443	0.074	0.90	1.19	0.82
	Left cheek	0.201	0.420	0.480	0.197	0.62	0.68	0.40
WCDMA V	Left tilted	0.102	0.311	0.501	0.145	0.41	0.60	0.25
ANT0	Right cheek	0.249	0.148	0.377	0.069	0.40	0.63	0.32
•	Right tilted	0.156	0.157	0.443	0.074	0.31	0.60	0.23
	Left cheek	0.932	0.420	0.480	0.197	1.35	1.41	1.13
WCDMA V	Left tilted	0.854	0.311	0.501	0.145	1.17	1.36	1.00
ANT4	Right cheek	0.248	0.148	0.377	0.069	0.40	0.63	0.32
ļ	Right tilted	0.238	0.157	0.443	0.074	0.40	0.68	0.31
	Left cheek	0.153	0.420	0.480	0.197	0.57	0.63	0.35
LTE Band 2	Left tilted	0.106	0.311	0.501	0.145	0.42	0.61	0.25
ANT0	Right cheek	0.223	0.148	0.377	0.069	0.37	0.60	0.29



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.:

122 of 134 Page:

	Right tilted	0.115	0.157	0.443	0.074	0.27	0.56	0.19
	Left cheek	0.419	0.420	0.480	0.197	0.84	0.90	0.62
LTE Band 2	Left tilted	0.545	0.311	0.501	0.145	0.86	1.05	0.69
ANT4	Right cheek	0.586	0.148	0.377	0.069	0.73	0.96	0.66
	Right tilted	0.749	0.157	0.443	0.074	0.91	1.19	0.82
	Left cheek	0.229	0.420	0.480	0.197	0.65	0.71	0.43
LTE Band 7	Left tilted	0.133	0.311	0.501	0.145	0.44	0.63	0.28
ANT0	Right cheek	0.141	0.148	0.377	0.069	0.29	0.52	0.21
	Right tilted	0.086	0.157	0.443	0.074	0.24	0.53	0.16
	Left cheek	0.350	0.420	0.480	0.197	0.77	0.83	0.55
LTE Band 7	Left tilted	0.434	0.311	0.501	0.145	0.75	0.94	0.58
ANT4	Right cheek	0.675	0.148	0.377	0.069	0.82	1.05	0.74
	Right tilted	0.545	0.157	0.443	0.074	0.70	0.99	0.62
	Left cheek	0.107	0.420	0.480	0.197	0.53	0.59	0.30
LTE Band 4	Left tilted	0.080	0.311	0.501	0.145	0.39	0.58	0.23
ANT0	Right cheek	0.164	0.148	0.377	0.069	0.31	0.54	0.23
	Right tilted	0.083	0.157	0.443	0.074	0.24	0.53	0.16
	Left cheek	0.419	0.420	0.480	0.197	0.84	0.90	0.62
LTE Band 4	Left tilted	0.507	0.311	0.501	0.145	0.82	1.01	0.65
ANT4	Right cheek	0.533	0.148	0.377	0.069	0.68	0.91	0.60
	Right tilted	0.637	0.157	0.443	0.074	0.79	1.08	0.71
	Left cheek	0.101	0.420	0.480	0.197	0.52	0.58	0.30
LTE Band	Left tilted	0.000	0.311	0.501	0.145	0.31	0.50	0.15
12 ANTO	Right cheek	0.114	0.148	0.377	0.069	0.26	0.49	0.18
-	Right tilted	0.056	0.157	0.443	0.074	0.21	0.50	0.13
	Left cheek	0.406	0.420	0.480	0.197	0.83	0.89	0.60
LTE Band	Left tilted	0.414	0.311	0.501	0.145	0.73	0.92	0.56
12 ANT4	Right cheek	0.443	0.148	0.377	0.069	0.59	0.82	0.51
	Right tilted	0.432	0.157	0.443	0.074	0.59	0.88	0.51
	Left cheek	0.154	0.420	0.480	0.197	0.57	0.63	0.35
LTE Band	Left tilted	0.099	0.311	0.501	0.145	0.41	0.60	0.24
13 ANT0	Right cheek	0.189	0.148	0.377	0.069	0.34	0.57	0.26
	Right tilted	0.112	0.157	0.443	0.074	0.27	0.56	0.19
	Left cheek	0.562	0.420	0.480	0.197	0.98	1.04	0.76
LTE Band	Left tilted	0.531	0.311	0.501	0.145	0.84	1.03	0.68
13 ANT4	Right cheek	0.589	0.148	0.377	0.069	0.74	0.97	0.66
	Right tilted	0.531	0.157	0.443	0.074	0.69	0.97	0.61
	Left cheek	0.161	0.420	0.480	0.197	0.58	0.64	0.36
LTE Band	Left tilted	0.100	0.311	0.501	0.145	0.41	0.60	0.25
26 ANT0	Right cheek	0.232	0.148	0.377	0.069	0.38	0.61	0.30
	Right tilted	0.107	0.157	0.443	0.074	0.26	0.55	0.18
	Left cheek	0.848	0.420	0.480	0.197	1.27	1.33	1.05
LTE Band	Left tilted	0.817	0.311	0.501	0.145	1.13	1.32	0.96
26 ANT4	Right cheek	0.850	0.148	0.377	0.069	1.00	1.23	0.92
	Right tilted	0.792	0.157	0.443	0.074	0.95	1.24	0.87
	Left cheek	0.144	0.420	0.480	0.197	0.56	0.62	0.34
LTE Band	Left tilted	0.100	0.311	0.501	0.145	0.41	0.60	0.25
41 ANTO	Right cheek	0.123	0.148	0.377	0.069	0.27	0.50	0.19
	Right tilted	0.083	0.157	0.443	0.074	0.24	0.53	0.16
	Left cheek	0.298	0.420	0.480	0.197	0.72	0.78	0.50



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one on exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAI. Doccheck@sgs.com</a>

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 123 of 134

Right cheek   0.608   0.148   0.377   0.069   0.76   0.99   0.68		Left tilted	0.415	0.311	0.501	0.145	0.73	0.92	0.56
Right tilled		Right cheek	0.608	0.148	0.377	0.069	0.76	0.99	0.68
Left tilted	41 AN14	Right tilted	0.514	0.157	0.443	0.074	0.67	0.96	0.59
Right cheek		Left cheek	0.325	0.420	0.480	0.197	0.75	0.81	0.52
Right cheek	LTE Band	Left tilted	0.437	0.311	0.501	0.145	0.75	0.94	0.58
Left cheek 0.865 0.420 0.480 0.197 1.29 1.35 1.06  Left tilted 0.986 0.311 0.501 0.145 1.30 1.49 1.13  Right cheek 0.639 0.148 0.377 0.069 0.79 1.02 0.71  Right tilted 0.559 0.157 0.443 0.074 0.72 1.00 0.63  Left cheek 0.198 0.420 0.480 0.197 0.62 0.68 0.40  Left tilted 0.099 0.311 0.501 0.145 0.41 0.60 0.24  Right cheek 0.124 0.148 0.377 0.069 0.27 0.50 0.19  Right tilted 0.073 0.157 0.443 0.074 0.72 0.50 0.19  Left cheek 0.419 0.420 0.480 0.197 0.84 0.90 0.62  Left tilted 0.504 0.311 0.501 0.145 0.82 1.01 0.65  Right cheek 0.843 0.148 0.377 0.069 0.99 1.22 0.91  Right tilted 0.500 0.157 0.443 0.074 0.81 1.09 0.72  Left cheek 0.121 0.420 0.480 0.197 0.54 0.60 0.32  Left tilted 0.123 0.311 0.501 0.145 0.81 1.09 0.72  Left cheek 0.121 0.420 0.480 0.197 0.54 0.60 0.32  ANT3 Right cheek 0.290 0.148 0.377 0.069 0.44 0.67 0.36  Right tilted 0.197 0.157 0.443 0.074 0.35 0.64 0.27  Left cheek 0.290 0.148 0.377 0.069 0.44 0.67 0.36  Right tilted 0.462 0.311 0.501 0.145 0.77 0.96 0.61  ANT5 Right cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36  Right tilted 0.462 0.311 0.501 0.145 0.77 0.96 0.61  ANT3 Right cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36  Right tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  Left tilted 0.321 0.157 0.443 0.074 0.48 0.77 0.96 0.61  ANT5 Right cheek 0.353 0.148 0.377 0.069 0.44 0.67 0.36  Right tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  Left tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  Left tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  ANT3 Right cheek 0.353 0.148 0.377 0.069 0.50 0.73 0.42  Right tilted 0.324 0.167 0.443 0.074 0.48 0.77 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right tilted 0.567 0.311 0.501 0.145 0.98 1.07 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right tilted 0.567 0.311 0.501 0.145 0.98 1.04 0.76  Right cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76	42 ANT3	Right cheek	0.840	0.148	0.377	0.069	0.99	1.22	0.91
LTE Band 42 ANT5 Right cheek 0.639 0.148 0.377 0.069 0.79 1.02 0.71   Right cheek 0.639 0.148 0.377 0.069 0.79 1.02 0.71   Right litled 0.559 0.157 0.443 0.074 0.72 1.00 0.63   Left cheek 0.198 0.420 0.480 0.197 0.62 0.68 0.40   Left litled 0.099 0.311 0.501 0.145 0.41 0.60 0.24   Right cheek 0.124 0.148 0.377 0.069 0.27 0.50 0.19   Right tilted 0.073 0.157 0.443 0.074 0.23 0.52 0.15   Left cheek 0.419 0.420 0.480 0.197 0.84 0.90 0.62   Left litled 0.504 0.311 0.501 0.145 0.82 1.01 0.65   Right cheek 0.843 0.148 0.377 0.069 0.99 1.22 0.91   Right litled 0.650 0.157 0.443 0.074 0.81 1.09 0.72   Left cheek 0.121 0.420 0.480 0.197 0.54 0.60 0.32   Left cheek 0.121 0.420 0.480 0.197 0.54 0.60 0.32   Left litled 0.123 0.311 0.501 0.145 0.43 0.62 0.27   ANT3 Right cheek 0.290 0.148 0.377 0.069 0.99 1.22 0.91   Right cheek 0.290 0.148 0.377 0.069 0.94 0.44 0.67 0.36   Right litled 0.197 0.157 0.443 0.074 0.35 0.64 0.27   Left cheek 0.431 0.420 0.480 0.197 0.54 0.60 0.32   Left cheek 0.431 0.420 0.480 0.197 0.54 0.60 0.32   Left cheek 0.431 0.420 0.480 0.197 0.55 0.64 0.67 0.36   Right litled 0.197 0.157 0.443 0.074 0.35 0.64 0.27   Left cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36   Right litled 0.462 0.311 0.501 0.145 0.77 0.96 0.61   Right cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36   Right litled 0.321 0.157 0.443 0.074 0.35 0.64 0.27   Left cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36   Right litled 0.321 0.157 0.443 0.074 0.35 0.64 0.36   Right litled 0.321 0.157 0.443 0.074 0.35 0.64 0.36   Right litled 0.321 0.157 0.443 0.074 0.48 0.76 0.40   Left litled 0.324 0.157 0.443 0.074 0.48 0.77 0.99 0.61   Right cheek 0.353 0.148 0.377 0.069 0.50 0.73 0.42   Right litled 0.324 0.157 0.443 0.074 0.48 0.77 0.40   Left litled 0.324 0.157 0.443 0.074 0.48 0.77 0.40   Left litled 0.324 0.157 0.443 0.074 0.48 0.77 0.40   Left litled 0.324 0.157 0.443 0.074 0.48 0.77 0.40   Left litled 0.324 0.157 0.443 0.074 0.48 0.77 0.40   Left cheek 0.560 0.420 0.480 0.197 0.98 1.104 0.76   Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0		Right tilted	0.576	0.157	0.443	0.074	0.73	1.02	0.65
Right cheek   0.639   0.148   0.377   0.069   0.79   1.02   0.71		Left cheek	0.865	0.420	0.480	0.197	1.29	1.35	1.06
Right cheek   0.639   0.148   0.377   0.069   0.79   1.02   0.71	LTE Band	Left tilted	0.986	0.311	0.501	0.145	1.30	1.49	1.13
n41 ANTO         Left cheek         0.198         0.420         0.480         0.197         0.62         0.68         0.40           Left tilted         0.099         0.311         0.501         0.145         0.41         0.60         0.24           Right cheek         0.124         0.148         0.377         0.069         0.27         0.50         0.19           Right tilted         0.073         0.157         0.443         0.074         0.23         0.52         0.15           Left cheek         0.419         0.420         0.480         0.197         0.84         0.90         0.62           Left tilted         0.504         0.311         0.501         0.145         0.82         1.01         0.65           Right tilted         0.650         0.157         0.443         0.074         0.81         1.09         0.72           Left cheek         0.121         0.420         0.480         0.197         0.54         0.60         0.32           NT7-3500         Left tilted         0.123         0.311         0.501         0.145         0.43         0.62         0.27           NT7-3500         Left cheek         0.290         0.148         0.377		Right cheek	0.639	0.148	0.377	0.069	0.79	1.02	0.71
Left tilted   0.099   0.311   0.501   0.145   0.41   0.60   0.24     Right cheek   0.124   0.148   0.377   0.069   0.27   0.50   0.19     Right tilted   0.073   0.157   0.443   0.074   0.23   0.52   0.15     Left cheek   0.419   0.420   0.480   0.197   0.84   0.90   0.62     Left tilted   0.504   0.311   0.501   0.145   0.82   1.01   0.65     Right cheek   0.843   0.148   0.377   0.069   0.99   1.22   0.91     Right tilted   0.650   0.157   0.443   0.074   0.81   1.09   0.72     Left cheek   0.121   0.420   0.480   0.197   0.54   0.60   0.32     Left tilted   0.123   0.311   0.501   0.145   0.43   0.62   0.27     ANT3   Right cheek   0.290   0.148   0.377   0.069   0.44   0.67   0.36     Right tilted   0.197   0.157   0.443   0.074   0.35   0.64   0.27     Left cheek   0.431   0.420   0.480   0.197   0.85   0.91   0.63     ANT5   Right tilted   0.321   0.157   0.443   0.074   0.48   0.77   0.96   0.61     Right tilted   0.321   0.157   0.443   0.074   0.48   0.76   0.40     Left cheek   0.160   0.420   0.480   0.197   0.58   0.64   0.36     Right tilted   0.212   0.311   0.501   0.145   0.52   0.71   0.36     Right tilted   0.212   0.311   0.501   0.145   0.52   0.71   0.36     Right tilted   0.324   0.157   0.443   0.074   0.48   0.76   0.40     ANT3   Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.58   0.64   0.36     Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.98   1.04   0.76     Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.98   1.04   0.76     Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.98   1.04   0.76     Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.98   1.04   0.76     Right tilted   0.667   0.311   0.501   0.145   0.98   1.17   0.81		Right tilted	0.559	0.157	0.443	0.074	0.72	1.00	0.63
Right cheek   0.124   0.148   0.377   0.069   0.27   0.50   0.19		Left cheek	0.198	0.420	0.480	0.197	0.62	0.68	0.40
Right cheek   0.124   0.148   0.377   0.069   0.27   0.50   0.19	~44 ANTO	Left tilted	0.099	0.311	0.501	0.145	0.41	0.60	0.24
Left cheek   0.419   0.420   0.480   0.197   0.84   0.90   0.62	n41 ANTO	Right cheek	0.124	0.148	0.377	0.069	0.27	0.50	0.19
n41 ANT4         Left tilted         0.504         0.311         0.501         0.145         0.82         1.01         0.65           Right cheek         0.843         0.148         0.377         0.069         0.99         1.22         0.91           Right tilted         0.650         0.157         0.443         0.074         0.81         1.09         0.72           Left cheek         0.121         0.420         0.480         0.197         0.54         0.60         0.32           Left tilted         0.123         0.311         0.501         0.145         0.43         0.62         0.27           Right cheek         0.290         0.148         0.377         0.069         0.44         0.67         0.36           Right tilted         0.197         0.157         0.443         0.074         0.35         0.64         0.27           Left cheek         0.431         0.420         0.480         0.197         0.85         0.91         0.63           ANT5         Right tilted         0.462         0.311         0.501         0.145         0.77         0.96         0.61           Right tilted         0.321         0.157         0.443         0.074 <t< td=""><td></td><td>Right tilted</td><td>0.073</td><td>0.157</td><td>0.443</td><td>0.074</td><td>0.23</td><td>0.52</td><td>0.15</td></t<>		Right tilted	0.073	0.157	0.443	0.074	0.23	0.52	0.15
n41 ANT4         Right cheek         0.843         0.148         0.377         0.069         0.99         1.22         0.91           Right tilted         0.650         0.157         0.443         0.074         0.81         1.09         0.72           Left cheek         0.121         0.420         0.480         0.197         0.54         0.60         0.32           Left tilted         0.123         0.311         0.501         0.145         0.43         0.62         0.27           Right cheek         0.290         0.148         0.377         0.069         0.44         0.67         0.36           Right tilted         0.197         0.157         0.443         0.074         0.35         0.64         0.27           Left cheek         0.431         0.420         0.480         0.197         0.85         0.91         0.63           Left tilted         0.462         0.311         0.501         0.145         0.77         0.96         0.61           Right tilted         0.321         0.157         0.443         0.074         0.48         0.76         0.40           NT7-3900         Left cheek         0.160         0.420         0.480         0.197		Left cheek	0.419	0.420	0.480	0.197	0.84	0.90	0.62
Right cheek   0.843   0.148   0.377   0.069   0.99   1.22   0.91	44 ANIT 4	Left tilted	0.504	0.311	0.501	0.145	0.82	1.01	0.65
Name	n41 AN14	Right cheek	0.843	0.148	0.377	0.069	0.99	1.22	0.91
Negative color="1">   Left tilted   0.123   0.311   0.501   0.145   0.43   0.62   0.27     Right cheek   0.290   0.148   0.377   0.069   0.44   0.67   0.36     Right tilted   0.197   0.157   0.443   0.074   0.35   0.64   0.27     Left cheek   0.431   0.420   0.480   0.197   0.85   0.91   0.63     Left tilted   0.462   0.311   0.501   0.145   0.77   0.96   0.61     Right cheek   0.293   0.148   0.377   0.069   0.44   0.67   0.36     Right tilted   0.321   0.157   0.443   0.074   0.48   0.76   0.40     Left cheek   0.160   0.420   0.480   0.197   0.58   0.64   0.36     Right cheek   0.353   0.148   0.377   0.069   0.50   0.73   0.42     Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.98   1.04   0.76     Left tilted   0.667   0.311   0.501   0.145   0.98   1.17   0.81     NT7-3900   Left tilted   0.667   0.311   0.501   0.145   0.98   1.17   0.81     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     Right cheek   0.354   0.148   0.377   0.069   0.50   0.50   0.73   0.42     Rig		Right tilted	0.650	0.157	0.443	0.074	0.81	1.09	0.72
ANT3 Right cheek 0.290 0.148 0.377 0.069 0.44 0.67 0.36 Right tilted 0.197 0.157 0.443 0.074 0.35 0.64 0.27  Left cheek 0.431 0.420 0.480 0.197 0.85 0.91 0.63  ANT5 Right cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36  Right cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36  Right tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  Left cheek 0.160 0.420 0.480 0.197 0.58 0.64 0.36  ANT3 Right cheek 0.353 0.148 0.377 0.069 0.50 0.73 0.42  Right tilted 0.324 0.157 0.443 0.074 0.48 0.77 0.40  Left cheek 0.353 0.148 0.377 0.069 0.50 0.73 0.42  Right tilted 0.324 0.157 0.443 0.074 0.48 0.77 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  ANT5 Right cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right cheek 0.560 0.420 0.480 0.197 0.98 1.17 0.81  Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42		Left cheek	0.121	0.420	0.480	0.197	0.54	0.60	0.32
Right tilted   0.197   0.157   0.443   0.074   0.35   0.64   0.27	n77-3500	Left tilted	0.123	0.311	0.501	0.145	0.43	0.62	0.27
Left cheek   0.431   0.420   0.480   0.197   0.85   0.91   0.63	ANT3	Right cheek	0.290	0.148	0.377	0.069	0.44	0.67	0.36
n77-3500 ANT5         Left tilted         0.462         0.311         0.501         0.145         0.77         0.96         0.61           Right cheek         0.293         0.148         0.377         0.069         0.44         0.67         0.36           Right tilted         0.321         0.157         0.443         0.074         0.48         0.76         0.40           Left cheek         0.160         0.420         0.480         0.197         0.58         0.64         0.36           ANT3         Left tilted         0.212         0.311         0.501         0.145         0.52         0.71         0.36           Right cheek         0.353         0.148         0.377         0.069         0.50         0.73         0.42           Right tilted         0.324         0.157         0.443         0.074         0.48         0.77         0.40           Left cheek         0.560         0.420         0.480         0.197         0.98         1.04         0.76           n77-3900 ANT5         Left tilted         0.667         0.311         0.501         0.145         0.98         1.17         0.81           Right cheek         0.354         0.148         0.377		Right tilted	0.197	0.157	0.443	0.074	0.35	0.64	0.27
ANT5 Right cheek 0.293 0.148 0.377 0.069 0.44 0.67 0.36 Right tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  Left cheek 0.160 0.420 0.480 0.197 0.58 0.64 0.36  ANT3 Right cheek 0.353 0.148 0.377 0.069 0.50 0.73 0.42  Right tilted 0.324 0.157 0.443 0.074 0.48 0.77 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Left tilted 0.324 0.157 0.480 0.197 0.98 1.04 0.76  ANT5 Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42  Right cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42		Left cheek	0.431	0.420	0.480	0.197	0.85	0.91	0.63
Right tilted 0.321 0.157 0.443 0.074 0.48 0.76 0.40  Left cheek 0.160 0.420 0.480 0.197 0.58 0.64 0.36  ANT3 Right tilted 0.212 0.311 0.501 0.145 0.52 0.71 0.36  Right tilted 0.353 0.148 0.377 0.069 0.50 0.73 0.42  Right tilted 0.324 0.157 0.443 0.074 0.48 0.77 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  Left tilted 0.667 0.311 0.501 0.145 0.98 1.17 0.81  Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42	n77-3500	Left tilted	0.462	0.311	0.501	0.145	0.77	0.96	0.61
Left cheek   0.160   0.420   0.480   0.197   0.58   0.64   0.36     ANT3   Right cheek   0.353   0.148   0.377   0.069   0.50   0.73   0.42     Right tilted   0.324   0.157   0.443   0.074   0.48   0.77   0.40     Left cheek   0.560   0.420   0.480   0.197   0.98   1.04   0.76     ANT5   Right cheek   0.354   0.148   0.377   0.069   0.50   0.73   0.42     O.501   0.145   0.98   1.17   0.81     O.502   0.74   0.76   0.77   0.78     O.503   0.77   0.77   0.78     O.504   0.77   0.78   0.78     O.505   0.77   0.78   0.78     O.506   0.77   0.78   0.78     O.507   0.78   0.78   0.78     O.508   0.79   0.79   0.79     O.509   0.500   0.73   0.42     O.509   0.500   0.73   0.42     O.509   0.500   0.73   0.42     O.509   0.500   0.79   0.79     O.509   0.500   0.79   0.42     O.509   0.500   0.79   0.79     O.509   0.500   0.79   0.79     O.509   0.500   0.79   0.79     O.509   0.500   0.79   0.79     O.500   0.79	ANT5	Right cheek	0.293	0.148	0.377	0.069	0.44	0.67	0.36
n77-3900 ANT3         Left tilted         0.212         0.311         0.501         0.145         0.52         0.71         0.36           Right cheek         0.353         0.148         0.377         0.069         0.50         0.73         0.42           Right tilted         0.324         0.157         0.443         0.074         0.48         0.77         0.40           Left cheek         0.560         0.420         0.480         0.197         0.98         1.04         0.76           n77-3900 ANT5         Left tilted         0.667         0.311         0.501         0.145         0.98         1.17         0.81           Right cheek         0.354         0.148         0.377         0.069         0.50         0.73         0.42		Right tilted	0.321	0.157	0.443	0.074	0.48	0.76	0.40
ANT3 Right cheek 0.353 0.148 0.377 0.069 0.50 0.73 0.42  Right tilted 0.324 0.157 0.443 0.074 0.48 0.77 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  ANT5 Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42		Left cheek	0.160	0.420	0.480	0.197	0.58	0.64	0.36
Right tilted 0.324 0.157 0.443 0.074 0.48 0.77 0.40  Left cheek 0.560 0.420 0.480 0.197 0.98 1.04 0.76  ANT5 Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42	n77-3900	Left tilted	0.212	0.311	0.501	0.145	0.52	0.71	0.36
Left cheek         0.560         0.420         0.480         0.197         0.98         1.04         0.76           ANT5         Left tilted         0.667         0.311         0.501         0.145         0.98         1.17         0.81           ANT5         Right cheek         0.354         0.148         0.377         0.069         0.50         0.73         0.42	ANT3	Right cheek	0.353	0.148	0.377	0.069	0.50	0.73	0.42
n77-3900 ANT5         Left tilted         0.667         0.311         0.501         0.145         0.98         1.17         0.81           Right cheek         0.354         0.148         0.377         0.069         0.50         0.73         0.42		Right tilted	0.324	0.157	0.443	0.074	0.48	0.77	0.40
ANT5 Right cheek 0.354 0.148 0.377 0.069 0.50 0.73 0.42		Left cheek	0.560	0.420	0.480	0.197	0.98	1.04	0.76
Tright 61001	n77-3900	Left tilted	0.667	0.311	0.501	0.145	0.98	1.17	0.81
Right tilted 0.415 0.157 0.443 0.074 0.57 0.86 0.49		Right cheek	0.354	0.148	0.377	0.069	0.50	0.73	0.42
		Right tilted	0.415	0.157	0.443	0.074	0.57	0.86	0.49

				SARmax (W/I	kg)					
ENDC		WWAN	NR	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ	Summed SAR			
	1	2	3	4	5	1+2+3 1+2+4 1+2+5				
	Left cheek	0.144	0.160	0.420	0.303	0.197	0.72	0.61	0.50	
LTE Band 41 ANT0	Left tilted	0.100	0.212	0.310	0.316	0.145	0.62	0.63	0.46	
n77 ANT3(n78)	Right cheek	0.123	0.353	0.148	0.238	0.069	0.62	0.71	0.55	
-( -/	Right tilted	0.083	0.324	0.157	0.280	0.074	0.56	0.69	0.48	
	Left cheek	0.144	0.560	0.420	0.303	0.197	1.12	1.01	0.90	
LTE Band 41 ANT0 n77 ANT5(n78)	Left tilted	0.100	0.667	0.310	0.316	0.145	1.08	1.08	0.91	
	Right cheek	0.123	0.354	0.148	0.238	0.069	0.63	0.72	0.55	
	Right tilted	0.083	0.415	0.157	0.280	0.074	0.66	0.78	0.57	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon relects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one on exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAI. Doccheck@sgs.com</a>

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 s

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 124 of 134

				SARmax (W/	kg)					
UL_C <i>i</i>	Ą	WWAN	WWAN	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ	Summed SAR			
		1	2	3	4	5	1+2+3 1+2+4 1+2+5			
LTE Band 41	Left cheek	0.144	0.325	0.420	0.480	0.197	0.89	0.95	0.67	
ANT0	Left tilted	0.100	0.437	0.311	0.501	0.145	0.85	1.04	0.68	
LTE Band 42	Right cheek	0.123	0.840	0.148	0.377	0.069	1.11	1.34	1.03	
ANT3	Right tilted	0.083	0.576	0.157	0.443	0.074	0.82	1.10	0.73	
LTE Band 41	Left cheek	0.144	0.865	0.420	0.480	0.197	1.43	1.49	1.21	
ANT0	Left tilted	0.100	0.986	0.311	0.501	0.145	1.40	1.59	1.23	
LTE Band 42	Right cheek	0.123	0.639	0.148	0.377	0.069	0.91	1.14	0.83	
ANT5	Right tilted	0.083	0.559	0.157	0.443	0.074	0.80	1.09	0.72	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 125 of 134

### Simultaneous Transmission SAR Summation Scenario for WLAN Body:

Body-worn:												
			SARm	ax (W/kg)								
Test position	on	Main Ant0	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ		Summed SAR					
		1	2	3	4	1+2	1+3	1+4				
0014050 41170	Front side	0.283	0.272	0.244	0.045	0.56	0.53	0.33				
GSM850 ANT0	Back side	0.559	0.399	0.469	0.065	0.96	1.03	0.62				
OOMOSO ANTA	Front side	0.229	0.272	0.244	0.045	0.50	0.47	0.27				
GSM850 ANT4	Back side	0.483	0.399	0.469	0.065	0.88	0.95	0.55				
CCM4000 ANTO	Front side	0.132	0.272	0.244	0.045	0.40	0.38	0.18				
GSM1900 ANT0	Back side	0.210	0.399	0.469	0.065	0.61	0.68	0.28				
GSM1900 ANT4	Front side	0.479	0.272	0.244	0.045	0.75	0.72	0.52				
G3W1900 AN14	Back side	0.646	0.399	0.469	0.065	1.05	1.12	0.71				
WCDMA II ANTO	Front side	0.470	0.272	0.244	0.045	0.74	0.71	0.52				
WCDINA II ANTO	Back side	0.503	0.399	0.469	0.065	0.90	0.97	0.57				
WCDMA II ANT4	Front side	0.839	0.272	0.244	0.045	1.11	1.08	0.88				
WCDINA II ANT4	Back side	0.880	0.399	0.469	0.065	1.28	1.35	0.95				
WCDMA IV ANTO	Front side	0.400	0.272	0.244	0.045	0.67	0.64	0.45				
WODINA IV AIVIO	Back side	0.498	0.399	0.469	0.065	0.90	0.97	0.56				
WCDMA IV ANT4	Front side	0.792	0.272	0.244	0.045	1.06	1.04	0.84				
WODIVIA IV AINT4	Back side	0.726	0.399	0.469	0.065	1.13	1.20	0.79				
WCDMA V ANTO	Front side	0.274	0.272	0.244	0.045	0.55	0.52	0.32				
WODINA V AINTO	Back side	0.518	0.399	0.469	0.065	0.92	0.99	0.58				
WCDMA V ANT4	Front side	0.212	0.272	0.244	0.045	0.48	0.46	0.26				
WCDIMA V ANT4	Back side	0.466	0.399	0.469	0.065	0.87	0.94	0.53				
LTE Band 2 ANT0	Front side	0.330	0.272	0.244	0.045	0.60	0.57	0.38				
ETE Bana 2711110	Back side	0.441	0.399	0.469	0.065	0.84	0.91	0.51				
LTE Band 2 ANT4	Front side	0.650	0.272	0.244	0.045	0.92	0.89	0.70				
ETE Balla 2 AIVI 4	Back side	0.676	0.399	0.469	0.065	1.08	1.15	0.74				
LTE Band 7 ANT0	Front side	0.713	0.272	0.244	0.045	0.99	0.96	0.76				
ETE Balla / AIVIO	Back side	0.569	0.399	0.469	0.065	0.97	1.04	0.63				
LTE Band 7 ANT4	Front side	0.366	0.272	0.244	0.045	0.64	0.61	0.41				
ETE Balla / AIVI 4	Back side	0.411	0.399	0.469	0.065	0.81	0.88	0.48				
LTE Band 4 ANT0	Front side	0.286	0.272	0.244	0.045	0.56	0.53	0.33				
ETE Balla 1711110	Back side	0.577	0.399	0.469	0.065	0.98	1.05	0.64				
LTE Band 4 ANT4	Front side	0.797	0.272	0.244	0.045	1.07	1.04	0.84				
ETE Balla 171111	Back side	0.747	0.399	0.469	0.065	1.15	1.22	0.81				
LTE Band 12 ANT0	Front side	0.143	0.272	0.244	0.045	0.42	0.39	0.19				
	Back side	0.250	0.399	0.469	0.065	0.65	0.72	0.32				
LTE Band 12 ANT4	Front side	0.108	0.272	0.244	0.045	0.38	0.35	0.15				
	Back side	0.183	0.399	0.469	0.065	0.58	0.65	0.25				
LTE Band 13 ANT0	Front side	0.160	0.272	0.244	0.045	0.43	0.40	0.21				
	Back side	0.322	0.399	0.469	0.065	0.72	0.79	0.39				
LTE Band 13 ANT4	Front side	0.176	0.272	0.244	0.045	0.45	0.42	0.22				
	Back side	0.263	0.399	0.469	0.065	0.66	0.73	0.33				
LTE Band 26 ANT0	Front side	0.240	0.272	0.244	0.045	0.51	0.48	0.29				
	Back side	0.409	0.399	0.469	0.065	0.81	0.88	0.47				
LTE Band 26 ANT4	Front side	0.301	0.272	0.244	0.045	0.57	0.55	0.35				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company Advances and the content of the c

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 126 of 134

	Back side	0.476	0.399	0.469	0.065	0.88	0.95	0.54
		*****		*****				
LTE Band 41 ANT0	Front side	0.496	0.272	0.244	0.045	0.77	0.74	0.54
	Back side	0.498	0.399	0.469	0.065	0.90	0.97	0.56
LTE Band 41 ANT4	Front side	0.351	0.272	0.244	0.045	0.62	0.60	0.40
LTE Dalla 41 ANT4	Back side	0.235	0.399	0.469	0.065	0.63	0.70	0.30
LTE Band 42 ANT3	Front side	0.221	0.272	0.244	0.045	0.49	0.47	0.27
LIE Daliu 42 ANTS	Back side	0.393	0.399	0.469	0.065	0.79	0.86	0.46
LTE Band 42 ANT5	Front side	0.281	0.272	0.244	0.045	0.55	0.53	0.33
LIE Daliu 42 ANTO	Back side	0.517	0.399	0.469	0.065	0.92	0.99	0.58
n41 ANT0	Front side	0.429	0.272	0.244	0.045	0.70	0.67	0.47
1141 ANTO	Back side	0.561	0.399	0.469	0.065	0.96	1.03	0.63
n44 ANT4	Front side	0.175	0.272	0.244	0.045	0.45	0.42	0.22
n41 ANT4	Back side	0.262	0.399	0.469	0.065	0.66	0.73	0.33
- 77 0500 ANTO	Front side	0.096	0.272	0.244	0.045	0.37	0.34	0.14
n77-3500 ANT3	Back side	0.110	0.399	0.469	0.065	0.51	0.58	0.18
n77-3500 ANT5	Front side	0.234	0.272	0.244	0.045	0.51	0.48	0.28
1177-3500 ANTS	Back side	0.432	0.399	0.469	0.065	0.83	0.90	0.50
~77 2000 ANTO	Front side	0.103	0.272	0.244	0.045	0.38	0.35	0.15
n77-3900 ANT3	Back side	0.118	0.399	0.469	0.065	0.52	0.59	0.18
577 2000 ANTS	Front side	0.268	0.272	0.244	0.045	0.54	0.51	0.31
n77-3900 ANT5	Back side	0.475	0.399	0.469	0.065	0.87	0.94	0.54

			S	SARmax (W/kg	<b>j</b> )				
ENDC		WWAN	NR	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ	Summed SAR		
	1	2	3	4	5	1+2+3	1+2+4	1+2+5	
LTE Band 41 ANT0	Front side	0.496	0.103	0.272	0.244	0.045	0.87	0.84	0.64
n77 ANT3(n78)	Back side	0.498	0.118	0.399	0.469	0.065	1.02	1.09	0.68
LTE Band 41 ANT0	Front side	0.496	0.268	0.272	0.244	0.045	1.04	1.01	0.81
n77 ANT5(n78)	Back side	0.498	0.475	0.399	0.469	0.065	1.37	1.44	1.04

				SARmax (W/	kg)					
UL_CA		WWAN	WWAN	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ	Summed SAR			
		1	2	3	4	5	1+2+3	1+2+4	1+2+5	
LTE Band 41 ANT0 LTE Band 42 ANT3	Front side	0.496	0.221	0.272	0.244	0.045	0.99	0.96	0.76	
	Back side	0.498	0.393	0.399	0.469	0.065	1.29	1.36	0.96	
LTE Band 41 ANT0	Front side	0.496	0.281	0.272	0.244	0.045	1.05	1.02	0.82	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 127 of 134

LTE Band 42 ANT5	Back side	0.498	0.517	0.399	0.469	0.065	1.41	1.48	1.08
---------------------	-----------	-------	-------	-------	-------	-------	------	------	------

**Hotspot:** 

Hotspot:								
			SARm	ax (W/kg)				
Test	position	Main Ant0	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ		Summed SAR	
		1	2	3	4	1+2	1+3	1+4
	Front side	0.283	0.272	0.244	0.045	0.56	0.53	0.33
	Back side	0.559	0.399	0.469	0.065	0.96	1.03	0.62
GSM850	Left side	0.169	0.056	0.093	0.009	0.23	0.26	0.18
ANT0	Right side	0.357	0.304	0.202	0.050	0.66	0.56	0.41
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.411	0.000	0.000	0.000	0.41	0.41	0.41
	Front side	0.229	0.272	0.244	0.045	0.50	0.47	0.27
	Back side	0.483	0.399	0.469	0.065	0.88	0.95	0.55
GSM850	Left side	0.118	0.056	0.093	0.009	0.17	0.21	0.13
ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.274	0.212	0.468	0.035	0.49	0.74	0.31
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
	Front side	0.132	0.272	0.244	0.045	0.40	0.38	0.18
	Back side	0.210	0.399	0.469	0.065	0.61	0.68	0.28
GSM1900	Left side	0.050	0.056	0.093	0.009	0.11	0.14	0.06
ANT0	Right side	0.056	0.304	0.202	0.050	0.36	0.26	0.11
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.230	0.000	0.000	0.000	0.23	0.23	0.23
	Front side	0.479	0.272	0.244	0.045	0.75	0.72	0.52
	Back side	0.646	0.399	0.469	0.065	1.05	1.12	0.71
GSM1900	Left side	0.120	0.056	0.093	0.009	0.18	0.21	0.13
ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.929	0.212	0.468	0.035	1.14	1.40	0.96
	Bottom side	0.929	0.000	0.000	0.000	0.93	0.93	0.93
	Front side	0.470	0.272	0.244	0.045	0.74	0.71	0.52
	Back side	0.503	0.399	0.469	0.065	0.90	0.97	0.57
WCDMA II	Left side	0.130	0.056	0.093	0.009	0.19	0.22	0.14
ANT0	Right side	0.129	0.304	0.202	0.050	0.43	0.33	0.18
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.546	0.000	0.000	0.000	0.55	0.55	0.55
	Front side	0.839	0.272	0.244	0.045	1.11	1.08	0.88
	Back side	0.880	0.399	0.469	0.065	1.28	1.35	0.95
WCDMA II	Left side	0.121	0.056	0.093	0.009	0.18	0.21	0.13
ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	1.015	0.212	0.468	0.035	1.23	1.48	1.05
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
	Front side	0.400	0.272	0.244	0.045	0.67	0.64	0.45
WCDMA	Back side	0.498	0.399	0.469	0.065	0.90	0.97	0.56
IV ANTO	Left side	0.059	0.056	0.093	0.009	0.12	0.15	0.07
I	Right side	0.062	0.304	0.202	0.050	0.37	0.26	0.11



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company Advances and the content of the c

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 ww t (86–512) 62992980 sg:



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 128 of 134

	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
В	Bottom side	0.645	0.000	0.000	0.000	0.65	0.65	0.65
+	Front side	0.792	0.272	0.244	0.045	1.06	1.04	0.84
ļ	Back side	0.726	0.399	0.469	0.065	1.13	1.20	0.79
WCDMA	Left side	0.181	0.056	0.093	0.009	0.24	0.27	0.19
13 / 4 5 / /	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.996	0.212	0.468	0.035	1.21	1.46	1.03
В	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
ı	Front side	0.274	0.272	0.244	0.045	0.55	0.52	0.32
ı	Back side	0.518	0.399	0.469	0.065	0.92	0.99	0.58
WCDMA V	Left side	0.169	0.056	0.093	0.009	0.23	0.26	0.18
	Right side	0.344	0.304	0.202	0.050	0.65	0.55	0.39
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
В	Bottom side	0.473	0.000	0.000	0.000	0.47	0.47	0.47
ı	Front side	0.212	0.272	0.244	0.045	0.48	0.46	0.26
ı	Back side	0.466	0.399	0.469	0.065	0.87	0.94	0.53
WCDMA V	Left side	0.105	0.056	0.093	0.009	0.16	0.20	0.11
ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.334	0.212	0.468	0.035	0.55	0.80	0.37
В	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
ı	Front side	0.330	0.272	0.244	0.045	0.60	0.57	0.38
į	Back side	0.441	0.399	0.469	0.065	0.84	0.91	0.51
LTE Band	Left side	0.103	0.056	0.093	0.009	0.16	0.20	0.11
	Right side	0.109	0.304	0.202	0.050	0.41	0.31	0.16
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
В	Bottom side	0.446	0.000	0.000	0.000	0.45	0.45	0.45
ı	Front side	0.650	0.272	0.244	0.045	0.92	0.89	0.70
i	Back side	0.676	0.399	0.469	0.065	1.08	1.15	0.74
LTE Band	Left side	0.168	0.056	0.093	0.009	0.22	0.26	0.18
O ANIT 4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	1.070	0.212	0.468	0.035	1.28	1.54	1.11
В	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
ı	Front side	0.713	0.272	0.244	0.045	0.99	0.96	0.76
ı	Back side	0.569	0.399	0.469	0.065	0.97	1.04	0.63
LTE Band	Left side	0.155	0.056	0.093	0.009	0.21	0.25	0.16
7 ANTO	Right side	0.086	0.304	0.202	0.050	0.39	0.29	0.14
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
В	Bottom side	0.342	0.000	0.000	0.000	0.34	0.34	0.34
ı	Front side	0.366	0.272	0.244	0.045	0.64	0.61	0.41
ı	Back side	0.411	0.399	0.469	0.065	0.81	0.88	0.48
LTE Band	Left side	0.720	0.056	0.093	0.009	0.78	0.81	0.73
7 ANT 4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.477	0.212	0.468	0.035	0.69	0.95	0.51
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
l B	Front side	0.286	0.272	0.244	0.045	0.56	0.53	0.33
				0.400	0.065	0.98	1.05	0.64
F	Back side	0.577	0.399	0.469	0.000	0.50	1.00	0.04
F		0.577 0.079	0.399 0.056	0.469	0.009	0.14	0.17	0.09
LTE Band	Back side							+
LTE Band 4 ANT0	Back side Left side	0.079	0.056	0.093	0.009	0.14	0.17	0.09



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company Advances and the content of the c

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.:

129 of 134 Page:

	Front side	0.797	0.272	0.244	0.045	1.07	1.04	0.84
	Back side	0.747	0.399	0.469	0.065	1.15	1.22	0.81
LTE Band	Left side	0.158	0.056	0.093	0.009	0.21	0.25	0.17
4 ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.965	0.212	0.468	0.035	1.18	1.43	1.00
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
	Front side	0.143	0.272	0.244	0.045	0.42	0.39	0.19
	Back side	0.250	0.399	0.469	0.065	0.65	0.72	0.32
LTE Band	Left side	0.167	0.056	0.093	0.009	0.22	0.26	0.18
12 ANTO	Right side	0.249	0.304	0.202	0.050	0.55	0.45	0.30
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.179	0.000	0.000	0.000	0.18	0.18	0.18
	Front side	0.108	0.272	0.244	0.045	0.38	0.35	0.15
	Back side	0.183	0.399	0.469	0.065	0.58	0.65	0.25
LTE Band	Left side	0.118	0.056	0.093	0.009	0.17	0.21	0.13
12 ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.149	0.212	0.468	0.035	0.36	0.62	0.18
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
	Front side	0.160	0.272	0.244	0.045	0.43	0.40	0.21
	Back side	0.322	0.399	0.469	0.065	0.72	0.79	0.39
LTE Band	Left side	0.126	0.056	0.093	0.009	0.18	0.22	0.14
13 ANTO	Right side	0.262	0.304	0.202	0.050	0.57	0.46	0.31
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.249	0.000	0.000	0.000	0.25	0.25	0.25
	Front side	0.176	0.272	0.244	0.045	0.45	0.42	0.22
	Back side	0.263	0.399	0.469	0.065	0.66	0.73	0.33
LTE Band	Left side	0.101	0.056	0.093	0.009	0.16	0.19	0.11
13 ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.252	0.212	0.468	0.035	0.46	0.72	0.29
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
	Front side	0.240	0.272	0.244	0.045	0.51	0.48	0.29
	Back side	0.409	0.399	0.469	0.065	0.81	0.88	0.47
LTE Band	Left side	0.117	0.056	0.093	0.009	0.17	0.21	0.13
26 ANT0	Right side	0.221	0.304	0.202	0.050	0.53	0.42	0.27
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.303	0.000	0.000	0.000	0.30	0.30	0.30
	Front side	0.301	0.272	0.244	0.045	0.57	0.55	0.35
	Back side	0.476	0.399	0.469	0.065	0.88	0.95	0.54
LTE Band	Left side	0.127	0.056	0.093	0.009	0.18	0.22	0.14
26 ANT4	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.387	0.212	0.468	0.035	0.60	0.86	0.42
	Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
	Front side	0.496	0.272	0.244	0.045	0.77	0.74	0.54
	Back side	0.498	0.399	0.469	0.065	0.90	0.97	0.56
LTE Band	Left side	0.136	0.056	0.093	0.009	0.19	0.23	0.15
41 ANTO	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
	Top side	0.000	0.212	0.468	0.035	0.21	0.47	0.04
	Bottom side	0.334	0.000	0.000	0.000	0.33	0.33	0.33
LTE Band	Front side	0.351	0.272	0.244	0.045	0.62	0.60	0.40
41 ANT4	Back side	0.235	0.399	0.469	0.065	0.63	0.70	0.30
_								



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company Advances and the content of the c

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 130 of 134

Right side   0.000   0.394   0.202   0.050   0.300   0.20   0.055		Left side	0.300	0.056	0.093	0.009	0.36	0.39	0.31
Top side									
Bottom siide   0.000				-					
Front side		· ·		-					
Back side   0.333   0.399   0.469   0.065   0.79   0.866   0.46   0.46   0.46   0.46   0.000   0.000   0.000   0.000   0.000   0.20   0.05   0.05   0.05   0.000   0.20   0.05   0.05   0.000   0.00									
Left side									
A2 ANT3   Right side	I TE Band			-		0.009			
Top side		Right side		-	0.202	0.050	0.30	0.20	0.05
Bettom side   0.000			0.264			0.035	0.48	0.73	0.30
Back side   0.517   0.399   0.469   0.065   0.92   0.99   0.58		· ·					0.00	0.00	+
LTE Band 42 ANT5 Right side 0.000 0.056 0.093 0.009 0.056 0.009 0.056 0.000 0.001 0.000 0.001 0.000 0.001 0.000 0.001 0.000 0.001 0.		Front side	0.281	0.272	0.244	0.045	0.55	0.53	0.33
A2 ANT5   Right side		Back side	0.517	0.399	0.469	0.065	0.92	0.99	0.58
A2 ANTS   Right side   0.000   0.304   0.202   0.050   0.30   0.20   0.05     Top side   0.366   0.212   0.468   0.035   0.588   0.83   0.40     Top side   0.366   0.212   0.468   0.035   0.588   0.83   0.40     Bottom side   0.429   0.272   0.244   0.045   0.70   0.67   0.47     Back side   0.561   0.399   0.469   0.065   0.96   1.03   0.63     Left side   0.183   0.056   0.093   0.009   0.24   0.28   0.19     Right side   0.103   0.304   0.202   0.050   0.41   0.31   0.15     Top side   0.000   0.212   0.468   0.035   0.21   0.47   0.04     Bottom side   0.392   0.000   0.000   0.000   0.39   0.39   0.39   0.39     Back side   0.262   0.399   0.469   0.065   0.66   0.73   0.33     Left side   0.202   0.056   0.093   0.009   0.26   0.30   0.21     Right side   0.202   0.056   0.093   0.009   0.26   0.30   0.21     Top side   0.000   0.304   0.202   0.050   0.30   0.20   0.05     Top side   0.000   0.304   0.202   0.050   0.30   0.20   0.05     Top side   0.091   0.212   0.468   0.035   0.50   0.76   0.33     Bottom side   0.006   0.000   0.000   0.000   0.00   0.00   0.00     ANT3   Right side   0.096   0.272   0.244   0.045   0.37   0.34   0.14     Left side   0.110   0.399   0.469   0.065   0.51   0.58   0.18     Left side   0.110   0.399   0.469   0.065   0.51   0.58   0.18     Left side   0.121   0.056   0.093   0.009   0.18   0.21   0.13     Top side   0.081   0.212   0.468   0.035   0.29   0.55   0.12     Bottom side   0.000   0.000   0.000   0.000   0.00   0.00   0.00     ANT5   Right side   0.000   0.006   0.093   0.009   0.05   0.05   0.05     Top side   0.081   0.212   0.468   0.035   0.51   0.58   0.18     Left side   0.000   0.006   0.009   0.000   0.000   0.000   0.000   0.000     ANT5   Right side   0.000   0.006   0.009   0.000   0.00	LTF Band	Left side	0.000	0.056	0.093	0.009	0.06	0.09	0.01
Bottom side   0.000		Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
n41 ANTO         Front side         0.429         0.272         0.244         0.045         0.70         0.67         0.47           Back side         0.561         0.399         0.469         0.065         0.96         1.03         0.63           Left side         0.183         0.056         0.093         0.009         0.24         0.28         0.19           Right side         0.103         0.304         0.202         0.050         0.41         0.31         0.15           Top side         0.000         0.212         0.488         0.035         0.21         0.47         0.04           Bottom side         0.392         0.000         0.000         0.005         0.45         0.42         0.22           Front side         0.262         0.399         0.469         0.065         0.66         0.73         0.33           Left side         0.202         0.056         0.066         0.73         0.33         0.21           Right side         0.202         0.056         0.066         0.73         0.33         0.21           Right side         0.202         0.056         0.066         0.73         0.33         0.21           Right side		Top side	0.366	0.212	0.468	0.035	0.58	0.83	0.40
n41 ANT0         Back side         0.561         0.399         0.469         0.065         0.96         1.03         0.63           Left side         0.183         0.056         0.093         0.009         0.24         0.28         0.19           Right side         0.103         0.304         0.202         0.060         0.41         0.013         0.01           Top side         0.000         0.212         0.488         0.035         0.21         0.47         0.04           Bottom side         0.392         0.000         0.000         0.000         0.39         0.22         0.22         0.22         0.22         0.22         0.05         0.30         0.20         0.05         0.30         0.20         0.05         0.30         0.20         0.05         0.30         0.20         0.05         0.3		Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
Name		Front side	0.429	0.272	0.244	0.045	0.70	0.67	0.47
Right side   0.103		Back side	0.561	0.399	0.469	0.065	0.96	1.03	0.63
Right side   0.103   0.304   0.202   0.050   0.41   0.31   0.15		Left side	0.183	0.056	0.093	0.009	0.24	0.28	0.19
Top side	n41 ANT0	Right side	0.103	0.304	0.202	0.050	0.41	0.31	0.15
Bottom side   0.392   0.000   0.000   0.000   0.39   0.39   0.39   0.39				0.212		0.035	0.21	0.47	
Front side		•		1			0.39	0.39	0.39
NATIANTA   Back side   0.262   0.399   0.469   0.065   0.66   0.73   0.33   0.33									+
n41 ANT4         Left side         0.202         0.056         0.093         0.009         0.26         0.30         0.21           Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.291         0.212         0.468         0.035         0.50         0.76         0.33           Bottom side         0.000         0.000         0.000         0.000         0.000         0.000         0.00           Front side         0.096         0.272         0.244         0.045         0.37         0.34         0.14           Back side         0.110         0.399         0.469         0.065         0.51         0.58         0.18           Left side         0.121         0.056         0.093         0.009         0.18         0.21         0.13           Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.081         0.212         0.468         0.035         0.29         0.55         0.12           Bottom side         0.000         0.000         0.000         0.000         0.000         0.00						0.065	0.66	0.73	0.33
Right side   0.000   0.304   0.202   0.050   0.30   0.20   0.05     Top side   0.291   0.212   0.468   0.035   0.50   0.76   0.33     Bottom side   0.000   0.000   0.000   0.000   0.00   0.00   0.00     Front side   0.096   0.272   0.244   0.045   0.37   0.34   0.14     Back side   0.110   0.399   0.469   0.065   0.51   0.58   0.18     Left side   0.121   0.056   0.093   0.009   0.18   0.21   0.13     Right side   0.000   0.304   0.202   0.050   0.30   0.20   0.05     Top side   0.081   0.212   0.468   0.035   0.29   0.55   0.12     Bottom side   0.000   0.000   0.000   0.000   0.000   0.000   0.000     ANTS   Right side   0.432   0.399   0.469   0.065   0.83   0.99   0.50     Top side   0.304   0.272   0.244   0.045   0.51   0.48   0.28     Back side   0.432   0.399   0.469   0.065   0.83   0.99   0.05     Top side   0.304   0.212   0.468   0.035   0.52   0.77   0.34     Bottom side   0.000   0.000   0.000   0.000   0.000   0.000   0.000     Top side   0.304   0.212   0.468   0.035   0.52   0.77   0.34     Bottom side   0.000   0.000   0.000   0.000   0.000   0.000   0.000     ANTS   Back side   0.118   0.399   0.469   0.065   0.52   0.59   0.18     Back side   0.118   0.399   0.469   0.065   0.52   0.59   0.18     Right side   0.000   0.304   0.202   0.050   0.30   0.20   0.05     Top side   0.169   0.212   0.468   0.035   0.38   0.64   0.20     Top side   0.169   0.212   0.468   0.035   0.38   0.64   0.20     Front side   0.000   0.000   0.000   0.000   0.000   0.000     Front side   0.068   0.272   0.244   0.045   0.38   0.64   0.20     Front side   0.068   0.272   0.244   0.045   0.54   0.51   0.31     NT7-3900   ANTS   Back side   0.141   0.056   0.093   0.009   0.000   0.000   0.000   0.000     Front side   0.068   0.272   0.244   0.045   0.54   0.51   0.31     NT7-3900   Back side   0.475   0.399   0.469   0.065   0.87   0.94   0.54     ANTS   Left side   0.000   0.056   0.093   0.009   0.066   0.099   0.01      Top side   0.688   0.272   0.244   0.045   0.54   0.51   0.31     Top side   0.000   0.000		Left side	0.202	0.056	0.093	0.009	0.26	0.30	0.21
Top side   0.291   0.212   0.468   0.035   0.50   0.76   0.33	n41 ANT4	Right side		•		0.050	0.30	0.20	0.05
Pront side   0.096   0.272   0.244   0.045   0.37   0.34   0.14			0.291	0.212	0.468	0.035	0.50	0.76	0.33
Back side   0.110   0.399   0.469   0.065   0.51   0.58   0.18		Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
n77-3500 ANT3         Left side         0.121         0.056         0.093         0.009         0.18         0.21         0.13           ANT3         Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.081         0.212         0.468         0.035         0.29         0.55         0.12           Bottom side         0.000         0.000         0.000         0.000         0.000         0.00         0.00           Front side         0.234         0.272         0.244         0.045         0.51         0.48         0.28           Back side         0.432         0.399         0.469         0.065         0.83         0.90         0.50           Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01           ANT5         Bottom side         0.000         0.056         0.093         0.009         0.06         0.09         0.01           ANT5         Bottom side         0.000         0.000         0.000         0.000         0.000         0.000         0.000         0.00         0.00         0.00           ANT3		Front side	0.096	0.272	0.244	0.045	0.37	0.34	0.14
ANT3 Right side 0.000 0.304 0.202 0.050 0.30 0.20 0.05 Top side 0.081 0.212 0.468 0.035 0.29 0.55 0.12 Bottom side 0.000 0.000 0.000 0.000 0.00 0.00 0.0		Back side	0.110	0.399	0.469	0.065	0.51	0.58	0.18
ANT3 Right side 0.000 0.304 0.202 0.050 0.30 0.20 0.05 Top side 0.081 0.212 0.468 0.035 0.29 0.55 0.12 Bottom side 0.000 0.000 0.000 0.000 0.000 0.00 0.	n77-3500	Left side	0.121	0.056	0.093	0.009	0.18	0.21	0.13
Bottom side   0.000   0.500   0.500   0.500   0.500   0.500   0.000		Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
Front side   0.234   0.272   0.244   0.045   0.51   0.48   0.28		Top side	0.081	0.212	0.468	0.035	0.29	0.55	0.12
Rack side   0.432   0.399   0.469   0.065   0.83   0.90   0.50		Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
n77-3500 ANT5         Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01           ANT5         Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.304         0.212         0.468         0.035         0.52         0.77         0.34           Bottom side         0.000         0.000         0.000         0.000         0.000         0.00         0.00           Front side         0.103         0.272         0.244         0.045         0.38         0.35         0.15           Back side         0.118         0.399         0.469         0.065         0.52         0.59         0.18           Left side         0.141         0.056         0.093         0.009         0.20         0.23         0.15           Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.169         0.212         0.468         0.035         0.38         0.64         0.20           Bottom side         0.000         0.000         0.000         0.000         0.00		Front side	0.234	0.272	0.244	0.045	0.51	0.48	0.28
ANT5 Right side 0.000 0.304 0.202 0.050 0.30 0.20 0.05  Top side 0.304 0.212 0.468 0.035 0.52 0.77 0.34  Bottom side 0.000 0.000 0.000 0.000 0.000 0.00 0.		Back side	0.432	0.399	0.469	0.065	0.83	0.90	0.50
ANT5 Right side 0.000 0.304 0.202 0.050 0.30 0.20 0.05  Top side 0.304 0.212 0.468 0.035 0.52 0.77 0.34  Bottom side 0.000 0.000 0.000 0.000 0.000 0.00 0.	n77-3500	Left side	0.000	0.056	0.093	0.009	0.06	0.09	0.01
Top side		Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
Front side         0.103         0.272         0.244         0.045         0.38         0.35         0.15           Back side         0.118         0.399         0.469         0.065         0.52         0.59         0.18           ANT3         Left side         0.141         0.056         0.093         0.009         0.20         0.23         0.15           Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.169         0.212         0.468         0.035         0.38         0.64         0.20           Bottom side         0.000         0.000         0.000         0.000         0.000         0.00         0.00           Front side         0.268         0.272         0.244         0.045         0.54         0.51         0.31           n77-3900 ANT5         Back side         0.475         0.399         0.469         0.065         0.87         0.94         0.54           Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01			0.304	0.212	0.468	0.035	0.52	0.77	0.34
Back side         0.118         0.399         0.469         0.065         0.52         0.59         0.18           ANT3         Left side         0.141         0.056         0.093         0.009         0.20         0.23         0.15           Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.169         0.212         0.468         0.035         0.38         0.64         0.20           Bottom side         0.000         0.000         0.000         0.000         0.000         0.00         0.00           Front side         0.268         0.272         0.244         0.045         0.54         0.51         0.31           NT7-3900         Back side         0.475         0.399         0.469         0.065         0.87         0.94         0.54           Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01		Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
n77-3900 ANT3         Left side         0.141         0.056         0.093         0.009         0.20         0.23         0.15           Right side         0.000         0.304         0.202         0.050         0.30         0.20         0.05           Top side         0.169         0.212         0.468         0.035         0.38         0.64         0.20           Bottom side         0.000         0.000         0.000         0.000         0.000         0.00         0.00           Front side         0.268         0.272         0.244         0.045         0.54         0.51         0.31           n77-3900 ANT5         Back side         0.475         0.399         0.469         0.065         0.87         0.94         0.54           Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01		Front side	0.103	0.272	0.244	0.045	0.38	0.35	0.15
ANT3 Right side 0.000 0.304 0.202 0.050 0.30 0.20 0.05  Top side 0.169 0.212 0.468 0.035 0.38 0.64 0.20  Bottom side 0.000 0.000 0.000 0.000 0.00 0.00  Front side 0.268 0.272 0.244 0.045 0.54 0.51 0.31  ANT5 Back side 0.475 0.399 0.469 0.065 0.87 0.94 0.54  Left side 0.000 0.056 0.093 0.009 0.06 0.09 0.01		Back side	0.118	0.399	0.469	0.065	0.52	0.59	0.18
Top side 0.169 0.212 0.468 0.035 0.38 0.64 0.20  Bottom side 0.000 0.000 0.000 0.000 0.00 0.00  Front side 0.268 0.272 0.244 0.045 0.54 0.51 0.31  Back side 0.475 0.399 0.469 0.065 0.87 0.94 0.54  Left side 0.000 0.056 0.093 0.009 0.06 0.09 0.01	n77-3900	Left side	0.141	0.056	0.093	0.009	0.20	0.23	0.15
Bottom side         0.000         0.000         0.000         0.000         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.00         0.01         0.02         0.01         0.02         0.01         0.02         0.01         0.02         0.01         0.02	ANT3	Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05
Front side         0.268         0.272         0.244         0.045         0.54         0.51         0.31           ANT5         Back side         0.475         0.399         0.469         0.065         0.87         0.94         0.54           Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01		Top side	0.169	0.212	0.468	0.035	0.38	0.64	0.20
n77-3900 ANT5         Back side         0.475         0.399         0.469         0.065         0.87         0.94         0.54           Left side         0.000         0.056         0.093         0.009         0.06         0.09         0.01		Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00
ANT5 Left side 0.000 0.056 0.093 0.009 0.06 0.09 0.01		Front side	0.268	0.272	0.244	0.045	0.54	0.51	0.31
ANT5 Left side 0.000 0.056 0.093 0.009 0.06 0.09 0.01	n77-3900	Back side	0.475	0.399	0.469	0.065	0.87	0.94	0.54
Right side 0.000 0.304 0.202 0.050 0.30 0.20 0.05		Left side	0.000	0.056	0.093	0.009	0.06	0.09	0.01
		Right side	0.000	0.304	0.202	0.050	0.30	0.20	0.05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, accessible Company Advances and the content of the c

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 sg

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 131 of 134

Top side	0.415	0.212	0.468	0.035	0.63	0.88	0.45
Bottom side	0.000	0.000	0.000	0.000	0.00	0.00	0.00

				SARmax (W/k	(g)				
ENDC		WWAN	NR	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ		Summed SAR	
		1	2	3	4	5	1+2+3	1+2+4	1+2+5
	Front side	0.429	0.103	0.272	0.244	0.045	0.80	0.78	0.58
	Back side	0.561	0.118	0.399	0.469	0.065	1.08	1.15	0.74
LTE Band 41 ANT0	Left side	0.183	0.141	0.056	0.093	0.009	0.38	0.42	0.33
n77 ANT3(n78)	Right side	0.103	0.000	0.304	0.202	0.050	0.41	0.31	0.15
	Top side	0.000	0.169	0.212	0.468	0.035	0.38	0.64	0.20
	Bottom side	0.392	0.000	0.000	0.000	0.000	0.39	0.39	0.39
	Front side	0.429	0.268	0.272	0.244	0.045	0.97	0.94	0.74
	Back side	0.561	0.475	0.399	0.469	0.065	1.44	1.51	1.10
LTE Band 41 ANT0	Left side	0.183	0.000	0.056	0.093	0.009	0.24	0.28	0.19
n77 ANT5(n78)	Right side	0.103	0.000	0.304	0.202	0.050	0.41	0.31	0.15
	Top side	0.000	0.415	0.212	0.468	0.035	0.63	0.88	0.45
	Bottom side	0.392	0.000	0.000	0.000	0.000	0.39	0.39	0.39

				SARmax (W/	kg)				
UL_C/	Α	WWAN	WWAN	WiFi 2.4G Ant6	WiFi 5G Ant6	ВТ		Summed SAR	
		1	2	3	4	5	1+2+3	1+2+4	1+2+5
	Front side	0.429	0.221	0.272	0.244	0.045	0.92	0.89	0.70
LTE Band 41	Back side	0.561	0.393	0.399	0.469	0.065	1.35	1.42	1.02
ANT0	Left side	0.183	0.329	0.056	0.093	0.009	0.57	0.61	0.52
LTE Band 42	Right side	0.103	0.000	0.304	0.202	0.050	0.41	0.31	0.15
ANT3	Top side	0.000	0.264	0.212	0.468	0.035	0.48	0.73	0.30
	Bottom side	0.392	0.000	0.000	0.000	0.000	0.39	0.39	0.39
	Front side	0.429	0.281	0.272	0.244	0.045	0.98	0.95	0.76
LTE Band 41	Back side	0.561	0.517	0.399	0.469	0.065	1.48	1.55	1.14
ANT0	Left side	0.183	0.000	0.056	0.093	0.009	0.24	0.28	0.19
LTE Band 42	Right side	0.103	0.000	0.304	0.202	0.050	0.41	0.31	0.15
ANT5	Top side	0.000	0.366	0.212	0.468	0.035	0.58	0.83	0.40
	Bottom side	0.392	0.000	0.000	0.000	0.000	0.39	0.39	0.39



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 132 of 134

Simultaneous Transmission SAR Summation Scenario for Product specific 10g SAR:

	TO THE CONTRACTOR CONTRACTOR	<u> </u>	•
	SARma		
Test position	WiFi 5G Ant6	NFC Ant8	Summed SAR
	1	2	1+2
Front side	0.351	0.001	0.352
Back side	0.744	0.033	0.777
Left side	0.091	0.001	0.092
Right side	0.104	0.001	0.105
Top side	0.773	0.001	0.774
Bottom side	-	0.001	0.001



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 133 of 134

9 Equipment list

	Test Platform	SPEAG DASY8 P	rofessional			
	Description	SAR Test System	(Frequency range 10I	MHz-10GHz)		
	Software Reference	DASY8 Module SA	AR V16.2.0.1425			
			Hardware Reference	ı		
	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
$\boxtimes$	Twin Phantom	SPEAG	SAM	2103	NCR	NCR
$\boxtimes$	Twin Phantom	SPEAG	EL4	1143	NCR	NCR
$\boxtimes$	DAE	SPEAG	DAE4	1740	2022-08-03	2023-08-02
$\boxtimes$	DAE	SPEAG	DAE4	1324	2022-10-17	2023-10-16
$\boxtimes$	E-Field Probe	SPEAG	EX3DV4	3793	2022-09-30	2023-09-29
$\boxtimes$	Validation Kits	SPEAG	CLA13	1032	2023-02-09	2024-02-08
$\boxtimes$	Validation Kits	SPEAG	D750V3	1210	2021-09-08	2024-09-07
$\boxtimes$	Validation Kits	SPEAG	D835V2	4d161	2020-08-28	2023-08-27
$\boxtimes$	Validation Kits	SPEAG	D1750V2	1105	2020-08-29	2023-08-28
$\boxtimes$	Validation Kits	SPEAG	D1900V2	5d114	2020-08-27	2023-08-26
$\boxtimes$	Validation Kits	SPEAG	D2450V2	922	2020-08-27	2023-08-26
$\boxtimes$	Validation Kits	SPEAG	D2600V2	1180	2021-05-12	2024-05-11
$\boxtimes$	Validation Kits	SPEAG	D3500V2	1124	2021-05-17	2024-05-16
$\boxtimes$	Validation Kits	SPEAG	D3900V2	1071	2021-05-20	2024-05-19
$\boxtimes$	Validation Kits	SPEAG	D5GHzV2	1313	2022-01-25	2025-01-24
$\boxtimes$	Dielectric parameter probes	SPEAG	DAKS-3.5	1148	2023-03-20	2024-03-19
$\boxtimes$	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	21460031	2023-03-20	2024-03-19
$\boxtimes$	Dielectric parameter probes	SPEAG	DAKS-12	1043	2022-06-20	2023-06-19
$\boxtimes$	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R60	21423005	2022-06-17	2023-06-16
	Universal Radio Communication Tester	R&S	CMW500	111637	2022-09-26	2023-09-26
$\boxtimes$	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
$\boxtimes$	Signal Generator	R&S	SMB100A	182393	2023-02-06	2024-02-05
$\boxtimes$	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
$\boxtimes$	Power Sensor	Keysight	U2002H	MY5639004	2022-9-16	2023-09-15
$\boxtimes$	Power Sensor	Keysight	U2002H	MY48200110	2022-12-23	2023-12-22
$\boxtimes$	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
$\boxtimes$	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions.agpx.and">http://www.sps.com/en/Terms-and-Conditions.agpx.and</a>, for electronic formations of the initiation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2305000160RG09

Rev.: 01

Page: 134 of 134

$\boxtimes$	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
$\boxtimes$	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
$\boxtimes$	Speed reading thermometer	LKM	DTM3000	SUW201-30-01	2022-09-19	2023-09-18
	Humidity and Temperature Indicator	MingGao	MingGao	NA	2022-09-19	2023-09-18

Note: All the equipments are within the valid period when the tests are performed.

### 10 Calibration certificate

Please see the Appendix C

### 11 Photographs

Please see the Appendix D

**Appendix A: Detailed System Check Results** 

**Appendix B: Detailed Test Results** 

**Appendix C: Calibration certificate** 

**Appendix D: Photographs** 

**Appendix E: Conducted RF Output Power** 

---END---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgc.om/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgc.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgc.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or fasification of the contents appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

\*\*Testing of the company is a supplication of the sample(s) are retained for 30 days only.