

Report No.: SEWM2307000261RG02

Rev.: 01 Page: 1 of 41

TEST REPORT

Application No.: SEWM2307000261RG

Applicant: Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Address of Applicant:

Beijing, China, 100085

Manufacturer: Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Address of Manufacturer:

Beijing, China, 100085

EUT Description: Mobile Phone Model No.: 2312DRA50G

Trade Mark: Redmi

FCC ID: 2AFZZRA50G Standards: 47 CFR Part 2 47 CFR Part 22

47 CFR Part 27


Date of Receipt: 2023/07/31

Date of Test: 2023/08/06 to 2023/08/24

Date of Issue: 2023/08/25

Test Result: PASS *

Authorized Signature:



Well Wei Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

www.sgsgroup.com.cn t (86-512) 62992980 t (86-512) 62992980

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SEWM2307000261RG02

Rev.: Page: 2 of 41

Version

Revision Record						
Version	Version Chapter Date Modifier Remark					
01		2023/08/25		Original		

Prepared By	(Levi Li) / Test Engineer
Checked By	Stone JM (Stone Gu) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01 Page: 3 of 41

Content

1	Vers	sion	2
2	Tes	t Summary	5
	2.1	NR Band n5	5
	2.2	NR Band n7/ NR Band n38/ NR Band n41	6
	2.3	NR Band n66	7
	2.4	NR Band n77 / NR Band n78	8
3	Ger	eral Information	10
	3.1	Client Information	10
	3.2	Test Location	10
	3.3	Test Facility	10
	3.4	General Description of EUT	11
	3.5	Test Mode	12
	3.6	Test Environment	
	3.7	Description of Support Units	
	3.8	Technical Specification	
	3.9	Test Frequencies	
	3.9.		
	3.9.	2 Reference test frequencies for NR operating band n7	
	3.9.	1 5	
		4 Reference test frequencies for NR operating band n41	
		5 Reference test frequencies for NR operating band n66	
		6 Reference test frequencies for NR operating band n77	
	3.9.	7 Reference test frequencies for NR operating band n78	24
4	Des	cription of Tests	26
	4.1	Conducted Output Power	26
	4.2	Effective (Isotropic) Radiated Power of Transmitter	27
	4.3	Occupied Bandwidth	28
	4.4	Band Edge at Antenna Terminals	29
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	30
	4.6	Peak-Average Ratio	31



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2307000261RG02

Rev.: 4 of 41 Page:

	•	
4.7	Field Strength of Spurious Radiation	32
4.8	Frequency Stability / Temperature Variation	33
4.9	Test Setups	34
4.9.	1 Test Setup 1	34
4.9.2	2 Test Setup 2	34
4.9.3	3 Test Setup 3	35
4.10	Test Conditions	36
Mair	n Test Instruments	38
Mea	surement Uncertainty	40
App	endixes	41
	4.8 4.9 4.9. 4.9. 4.10 Maii	4.7 Field Strength of Spurious Radiation 4.8 Frequency Stability / Temperature Variation 4.9 Test Setups 4.9.1 Test Setup 1 4.9.2 Test Setup 2 4.9.3 Test Setup 3 4.10 Test Conditions Main Test Instruments Measurement Uncertainty Appendixes



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2307000261RG02

Rev.: Page: 5 of 41

Test Summary

2.1 NR Band n5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Section 1 of Appendix B.17	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.17	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.17	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.17	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.17	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 6 of Appendix B.17	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	≤ ±2.5ppm.	Section 7 of Appendix B.17	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01 Page: 6 of 41

2.2 NR Band n7/ NR Band n38/ NR Band n41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.18&B.19&B.20	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.18&B.19&B.20	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.18&B.19&B.20	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, wdhere X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 4 of Appendix B.18&B.19&B.20	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 5 of Appendix B.18&B.19&B.20	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 9 kHz 9 kHz 9 kHz 25 dBm/ 1 MHz	Section 6 of Appendix B.18&B.19&B.20	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.18&B.19&B.20	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2307000261RG02

Rev.: 01 Page: 7 of 41

2.3 NR Band n66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.21	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.21	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.21	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.21	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.21	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 6 of Appendix B.21	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.21	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01 Page: 8 of 41

2.4 NR Band n77 / NR Band n78

3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 1 of Appendix B.23&B.25	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.23&B.25	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.23&B.25	Pass
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed - 13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 4 of Appendix B.23&B.25	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.	Section 5 of Appendix B.23&B.25	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz	Section 6 of Appendix B.23&B.25	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.23&B.25	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2307000261RG02

Rev.: Page: 9 of 41

3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 1 of Appendix B.22&B.24	Pass
Peak-Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB	Section 2 of Appendix B.24	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.24	Pass
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 4 of Appendix B.24	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B.24	Pass
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 6 of Appendix B.22&B.24	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/ frequency block.	Section 7 of Appendix B.24	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 10 of 41

3 General Information

3.1 Client Information

Applicant:	Xiaomi Communications Co., Ltd.	
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085	
Manufacturer:	Xiaomi Communications Co., Ltd.	
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085	

3.2 Test Location

Company: SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.	
Address: South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial F Area, China (Jiangsu) Pilot Free Trade Zone	
Post code:	215000
Test engineer:	Levi Li, King-p Li

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed vorletaf, available on request or accessible at https://mew.sqs.com/en/lema-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://mww.sqs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.tetniton in the description of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this lest report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 11 of 41

3.4 General Description of EUT

EUT Description:	Mobile Phone			
Model No.:	2312DRA50G			
Trade Mark:	Redmi			
Hardware Version:	P2			
Software Version:	MIUI 14			
Power Supply:	Lithium Battery (3	.91V)		
IMEI:	RF Conducted		IMEI1: 860949060030480 IMEI2: 860949060030498	
	RSE		86094906003024100	
HPUE Power Class:	Class 2: NR Band	d n77; NI	R Band n78	
Antenna Type:	IFA Antenna			
	NR Band n5:	-5dBi (Ant0); -4.6dBi (Ant1)		
	NR Band n7: -0.3dBi (Ant2); -1.2dBi (Ant3); -1.6dBi (Ant4); -2dBi (Ant5)			
	NR Band n38:	-0.3dBi (Ant2); -1.2dBi (Ant3); -2dBi (Ant4); -3.8dBi (Ant5)		
	NR Band n41:	-0.3dBi (Ant2); -1.2dBi (Ant3); -1.6dBi (Ant4); -2dBi (Ant5)		
Antenna Gain:	NR Band n66:	-5.8dB	i (Ant2); -2.2dBi (Ant3); -1.7	dBi (Ant4); -4.5dBi (Ant5)
	NR Band n77:	-2.8dB	si (Ant1); 2.6dBi (Ant6); -0.3d	dBi (Ant7); 1.9dBi (Ant8)
	NR Band n78:	-2.8dB	si (Ant1); 2.6dBi (Ant6); -0.3d	dBi (Ant7); 1.9dBi (Ant8)
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.			
DE Cable:	0.8dB(Below 1GF	łz)	1.0dB(1.0~2.4GHz)	1.2dB(2.4~3.4GHz)
RF Cable:	1.5dB(Above 3.4GHz)			

Remark:

1. Conduction Power & EIRP of all antennas are tested, and only the worst data is presented.

2.As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 12 of 41

3.5 Test Mode

Test Mode	Test Modes Description				
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation				
NR/TM2	NR system, DFT-s-QPSK modulation				
NR/TM3	NR system, DFT-s-16QAM modulation				
NR/TM4	NR system, DFT-s-64QAM modulation				
NR/TM5	NR system, DFT-s-256QAM modulation				
NR/TM6	NR system, CP-QPSK modulation				
NR/TM7	NR system, CP-16QAM modulation				
NR/TM8	NR system, CP-64QAM modulation				
NR/TM9	NR system, CP-256QAM modulation				
Remark: The test mode(s)	are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parame	eter	101.0 kPa Selected Values During Tests		
Relative Humidity	,	44-46 % RH Ambient		
Value		Temperature(°C)	Voltage(Vdc)	
NTNV		22~23	3.91	
LTLV		-30	3.5	
LTHV		-30	4.35	
HTLV		50	3.5	
HTHV		50	4.35	
Remark:				
NV: Normal Voltage	LV: Low	/ Extreme Test Voltage	HV: High Extreme Test Voltage	
NT: Normal Temperature	LT: Low	Extreme Test Temperature	HT: High Extreme Test Temperature	

3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://mww.sgs.com/en/Erms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.tetntonic strawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the esults shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 13 of 41

3.8 Technical Specification

Characteristics	Description						
Radio System Type	⊠ SA ⊠ NSA	⊠ SA ⊠ NSA					
	Band	TX		RX			
	NR Band n5	824 to 849 M	ИНz	869 to 894 M	1Hz		
	NR Band n7	2500 to 2570) MHz	2620 to 2690) MHz		
	NR Band n38	2570 to 2620) MHz	2570 to 2620) MHz		
	NR Band n41	2496 to 2690) MHz	2496 to 2690) MHz		
	NR Band n66	1710 to 1780) MHz	2110 to 2180) MHz		
Supported Frequency Range	NR Band n77*	3700 to 3980) MHz	3700 to 3980) MHz		
	NIX Dallu III I	3450 to 3550) MHz	3450 to 3550) MHz		
	NR Band n78*	3700 to 3800) MHz	3700 to 3800) MHz		
	NIX Dallu III 0	3450 to 3550) MHz	3450 to 3550) MHz		
	ENDC: DC_7A_n5A; DC_66A_n7A; DC_66A_n38A; DC_12A_n66A; DC_2A_n66A; DC_5A_n66A; DC_7A_n66A; DC_66A_n41A; DC_26A_n41A; DC_2A_n78A; DC_38A_n78A; DC_41A_n78A; DC_5A_n78A; DC_66A_n78A; DC_7A_n78A; DC_26A_n78A; ENDC only test RSE, report only show worst mode. Note*: Both NR Band n77 and NR Band n78 have the same frequency range 3450 MHz to 3550 MHz, and NR Band n78 was fully tested, NR Band n77 only test the items of Power and RSE.						
	ND Dand of	SCS 15kHz:					
	NR Band n5	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz		
		SCS 15kHz:					
	NR Band n7	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz		
		⊠25 MHz	⊠30 MHz	⊠40 MHz			
Supported Channel		SCS 30kHz:					
Bandwidth	NR Band n38	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠30 MHz		
		⊠40 MHz					
		SCS 30kHz:					
	NR Band n41	⊠20 MHz	⊠30 MHz	⊠40 MHz	⊠50 MHz		
		⊠60 MHz	⊠70 MHz	⊠80 MHz	⊠90 MHz		
		⊠100 MHz					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

01

14 of 41 Page:

			i age.	17 01 71	
		SCS 15kHz:			
	NR Band n66	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		⊠30 MHz	⊠40 MHz		
		SCS 30kHz			
	ND David n.77	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠30 MHz
	NR Band n77	⊠40 MHz	⊠50 MHz	⊠60 MHz	⊠70 MHz
		⊠80 MHz	⊠90 MHz	⊠100 MHz	
		SCS 30kHz:			
	ND David vi70	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠30 MHz
	NR Band n78	⊠40 MHz	⊠50 MHz	⊠60 MHz	⊠70 MHz
		⊠80 MHz	⊠90 MHz	⊠100 MHz	
		DFT-s-Pi/2- BPSK	CP-16QAM		
		SCS 15kHz:			
	NR Band n5	4M47G7D	4M51W7D		
		8M89G7D	9M27W7D		
		13M4G7D	14M1W7D		
		17M9G7D	18M9W7D		
		SCS 15kHz:			
Designation of		4M47G7D	4M51W7D		
Emissions		8M93G7D	9M27W7D		
(Remark: the necessary	ND Dand n7	13M5G7D	14M2W7D		
bandwidth of which is the worst value from	NR Band n7	17M9G7D	18M9W7D		
the measured occupied		22M9G7D	23M8W7D		
bandwidths for each		28M6G7D	28M6W7D		
type of channel bandwidth		38M6G7D	38M5W7D		
configuration.)		SCS 30kHz:			
J ,		8M61G7D	8M60W7D		
	ND Dond 20	12M9G7D	13M7W7D		
	NR Band n38	17M8G7D	18M2W7D		
		26M9G7D	27M9W7D		
		35M8G7D	38M0W7D		
		SCS 30kHz:			
	NR Band n41	17M8G7D	18M3W7D		
		26M8G7D	27M9W7D		
	1	1			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

Page:

01

15 of 41

			. age.	
		35M6G7D	37M8W7D	
		45M8G7D	47M6W7D	
		57M7G7D	57M8W7D	
		64M3G7D	67M3W7D	
		77M0G7D	77M6W7D	
		85M4G7D	87M3W7D	
		96M2G7D	97M5W7D	
		SCS 15kHz:		
		4M47G7D	4M48W7D	
		8M92G7D	9M29W7D	
	NR Band n66	13M5G7D	14M1W7D	
		17M9G7D	19M0W7D	
		28M6G7D	28M6W7D	
		38M7G7D	38M7W7D	
		SCS 30kHz:		
	NR Band n77 (3700-3980)	8M60G7D	8M58W7D	
		12M9G7D	13M6W7D	
		17M7G7D	18M3W7D	
		26M8G7D	27M8W7D	
		35M8G7D	37M9W7D	
		45M7G7D	47M3W7D	
		57M8G7D	57M8W7D	
		64M5G7D	67M2W7D	
		77M2G7D	77M6W7D	
		85M7G7D	87M4W7D	
		96M4G7D	97M3W7D	
		SCS 30kHz:		
		8M58G7D	8M59W7D	
		12M9G7D	13M6W7D	
		17M8G7D	18M2W7D	
	NR Band n78 (3450-3550)	26M7G7D	27M9W7D	
	(0-00 0000)	35M8G7D	37M8W7D	
		45M7G7D	47M3W7D	
		57M9G7D	57M8W7D	
		64M3G7D	67M2W7D	
	•			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

Page: 16 of 41

			ı agc.	10 01 11	
		77M2G7D	77M6W7D		
		85M8G7D	87M5W7D		
		96M5G7D	97M3W7D		
		SCS 30kHz:			
		8M60G7D	8M55W7D		
		12M8G7D	13M6W7D		
	NR Band n78 (3700-3800)	17M8G7D	18M2W7D		
		26M7G7D	27M8W7D		
		35M7G7D	37M8W7D		
		45M7G7D	47M5W7D		
		57M8G7D	57M8W7D		
		64M2G7D	67M4W7D		
		77M0G7D	77M6W7D		
		85M8G7D	87M3W7D		
		96M4G7D	97M4W7D		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

17 of 41 Page:

3.9 Test Frequencies

Reference test frequencies for NR operating band n5

3.9.1.1 Test frequencies for NR operating band n5 and SCS 15 kHz

CBW	Range		Carrier centre	Carrier centre	SS block SCS
[MHz]	90		[MHz]	[ARFCN]	[kHz]
		Low	871.5	174300	
	Downlink	Mid	881.5	176300	15
5		High	891.5	178300	
5		Low	826.5	165300	
	Uplink	Mid	836.5	167300	-
		High	846.5	169300	
	Downlink	Low	874	174800	
		Mid	881.5	176300	15
10		High	889	177800	
10		Low	829	165800	
	Uplink	Mid	836.5	167300	-
		High	844	168800	
		Low	876.5	175300	
	Downlink	Mid	881.5	176300	15
15		High	886.5	177300	
15		Low	831.5	166300	
	Uplink	Mid	836.5	167300	-
		High	841.5	168300	
		Low	879	175800	
	Downlink	Mid	881.5	176300	15
20		High	884	176800	
20		Low	834	166800	-
	Uplink	Mid	836.5	167300	
		High	839	167800	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: Page: 18 of 41

Reference test frequencies for NR operating band n7 3.9.2.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Bandwidth	-		Carrier centre	Carrier centre	SS block
[MHz]	Range		[MHz]	[ARFCN]	SCS [kHz]
		Low	2622.5	524500	
	Downlink	Mid	2655	531000	15
5		High	2687.5	537500	
3		Low	2502.5	500500	
	Uplink	Mid	2535	507000	-
		High	2567.5	513500	
		Low	2625	525000	
	Downlink	Mid	2655	531000	15
10		High	2685	537000	
10		Low	2505	501000	
	Uplink	Mid	2535	507000	-
		High	2565	513000	
		Low	2627.5	525500	
	Downlink	Mid	2655	531000	15
15		High	2682.5	536500	
13		Low	2507.5	501500	
	Uplink	Mid	2535	507000	-
	·	High	2562.5	512500	
		Low	2630	526000	15
	Downlink	Mid	2655	531000	
00		High	2680	536000	
20		Low	2510	502000	
	Uplink	Mid	2535	507000	-
		High	2560	512000	
		Low	2632.5	526500	
	Downlink	Mid	2655	531000	15
0.5		High	2677.5	535500	
25		Low	2512.5	502500	
	Uplink	Mid	2535	507000	_
	·	High	2557.5	511500	
		Low	2635	52700	
	Downlink	Mid	2655	531000	15
20		High	2675	535000	
30		Low	2515	503000	
	Uplink	Mid	2535	507000	_
	•	High	2555	511000	
		Low	2640	528000	
	Downlink	Mid	2655	531000	15
		High	2670	534000	1
40		Low	2520	504000	
	Uplink	Mid	2535	507000	1
	Оршк				-
		High	2550	510000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: Page: 19 of 41

Reference test frequencies for NR operating band n38 3.9.3

3.9.3.1 Test frequencies for NR operating band n38 and SCS 30 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2575	515000	30
10	&	Mid	2595	519000	30
	Uplink	High	2615	523000	
	Downlink	Low	2577.5	515500	30
15	&	Mid	2595	519000	30
	Uplink	High	2612.5	522500	
	Downlink	Low	2580	516000	
20	&	Mid	2595	519000	30
	Uplink	High	2610	522000	
	Downlink	Low	2585	517000	
30	&	Mid	2595	519000	30
	Uplink	High	2605	521000	
	Downlink	Low	2590	518000	
40	&	Mid	2595	519000	30
	Uplink	High	2600	520000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: Page: 20 of 41

Reference test frequencies for NR operating band n41 3.9.4

Test frequencies for NR operating band n41 and SCS 30 kHz

Bandwidth [MHz]	Rai	nge	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2506.02	501204	
20	&	Mid	2592.99	518598	30
	Uplink	High	2679.99	535998	
	Downlink	Low	2511	502200	
30	&	Mid	2592.99	518598	30
	Uplink	High	2674.98	534996	
	Downlink	Low	2516.01	503202	
40	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2521.02	504204	
50	&	Mid	2592.99	518598	30
	Uplink	High	2664.99	532998	
	Downlink	Low	2526	505200	
60	&	Mid	2592.99	518598	30
	Uplink	High	2659.98	531996	
	Downlink	Low	2531	506200	
70	&	Mid	2592.29	518598	30
	Uplink	High	2655	531000	
	Downlink	Low	2536.02	507204	
80	&	Mid	2592.99	518598	30
	Uplink	High	2649.99	529998	
	Downlink	Low	2541	508200	
90	&	Mid	2592.99	518598	30
	Uplink	High	2644.98	528996	
	Downlink	Low	2546.01	509202	
100	100 &	Mid	2592.99	518598	30
	Uplink	High	2640	528000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: Page: 21 of 41

Reference test frequencies for NR operating band n66

3.9.5.1 Test frequencies for NR operating band n66 and SCS 15 kHz

CBW	Range	operating b	Carrier centre	Carrier centre	SS block SCS
[MHz]			[MHz]	[ARFCN]	[kHz]
		Low	2112.5	422500	
	Downlink	Mid	2145	429000	15
E		High	2177.5	435500	
5		Low	1712.5	342500	
	Uplink	Mid	1745	349000	-
		High	1777.5	355500	
		Low	2115	423000	
	Downlink	Mid	2145	429000	15
40		High	2175	435000	1
10		Low	1715	343000	
	Uplink	Mid	1745	349000	-
	·	High	1775	355000	
		Low	2117.5	423500	
	Downlink	Mid	2145	429000	15
4.5		High	2172.5	434500	1
15		Low	1717.5	343500	
	Uplink	Mid	1745	349000	1 -
	•	High	1772.5	354500	1
		Low	2120	424000	
	Downlink	Mid	2145	429000	15
00		High	2170	434000	
20		Low	1720	344000	
	Uplink	Mid	1745	349000	1 -
	•	High	1770	354000	
		Low	2125	425000	
	Downlink	Mid	2145	429000	15
20		High	2165	433000	
30		Low	1725	345000	
	Uplink	Mid	1745	349000] -
	·	High	1765	353000	1
		Low	2130	426000	
	Downlink	Mid	2145	429000	15
		High	2160	432000	1
40		Low	1730	346000	
	Uplink Mid		1745	349000	1 -
		High	1760	352000	1 -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: Page: 22 of 41

Reference test frequencies for NR operating band n77 3.9.6.1 Test frequencies for NR operating band n77 and SCS 30 kHz

3700-3980:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
	Downlink	Low	3705	647000		
10	&	Mid	3840	656000	30	
	Uplink	High	3975	665000		
	Downlink	Low	3707.52	647168		
15	&	Mid	3840	656000	30	
	Uplink	High	3972.48	664832	1	
	Downlink	Low	3710.01	647334		
20	&	Mid	3840	656000	30	
	Uplink	High	3969.99	664666	1	
	Downlink	Low	3714.99	647666		
30	&	Mid	3840	656000	30	
	Uplink	High	3965.01	664334	1	
	Downlink	Low	3720	648000		
40	&	Mid	3840	656000	30	
	Uplink	High	3960	664000		
	Downlink	Low	3725.01	648334		
50	&	Mid	3840	656000	30	
	Uplink	High	3954.99	663666	1	
	Downlink	Low	3730.02	648668		
60	&	Mid	3840	656000	30	
	Uplink	High	3949.98	663332	1	
	Downlink	Low	3735	649000		
70	&	Mid	3840	656000	30	
	Uplink	High	3945	663000	1	
	Downlink	Low	3740.01	649334		
80	&	Mid	3840	656000	30	
	Uplink	High	3939.99	662666	1	
	Downlink	Low	3745.02	649668		
90	&	Mid	3840	656000	30	
	Uplink	High	3934.98	662332		
	Downlink	Low	3750	650000		
100	&	Mid	3840 656000	30		
	Uplink	High	3930	662000	1	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

Page: 23 of 41

3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3465	631000	
30	&	Mid	3500.01	633334	30
	Uplink	High	3534.99	635666	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	
50	&	Mid	3500.01	633334	30
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3485.01	632334	
70	&	Mid	3500.01	633334	30
	Uplink	High	3515.01	634334	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	
	Downlink	Low	3495	633000	
90	&	Mid	3500.01	633334	30
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01 Page: 24 of 41

3.9.7 Reference test frequencies for NR operating band n78

3.9.7.1 Test frequencies for NR operating band n78 and SCS 30 kHz

3700-3800:

CBW [MHz]	Range)	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3750	650000	30
	Uplink	High	3795	653000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3750	650000	30
	Uplink	High	3792.48	652832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3750	650000	30
	Uplink	High	3789.99	652666	
	Downlink	Low	3715.02	647668	
30	&	Mid	3750	650000	30
	Uplink	High	3785.01	652334	
	Downlink	Low	3720	648000	
40	&	Mid	3750	650000	30
	Uplink	High	3780	652000	
	Downlink	Low	3725.01	648334	
50	&	Mid	3750	650000	30
	Uplink	High	3774.99	651666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3750	650000	30
	Uplink	High	3769.98	651332	
	Downlink	Low	3735	649000	
70	&	Mid	3750	650000	30
	Uplink	High	3765	651000	1
	Downlink	Low	3740.01	649334	
80	&	Mid	3750	650000	30
	Uplink	High	3759.99	650666	
90	Downlink	Low	3745.02	649668	
	&	Mid	3750	650000	30
	Uplink	High	3754.98	650332	
	Downlink	Low	1	/	
100	&	Mid	3750	650000	30
100	Uplink	High	1	1	1 "



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pitot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

15000 t (86–512) 62992980 15000 t (86–512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

Page: 25 of 41

3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3465	631000	
30	&	Mid	3500.01	633334	30
	Uplink	High	3534.99	635666	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	
50	&	Mid	3500.01	633334	30
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3485.01	632334	
70	&	Mid	3500.01	633334	30
	Uplink	High	3515.01	634334	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	
	Downlink	Low	3495	633000	
90	&	Mid	3500.01	633334	30
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 26 of 41

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://mww.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents withtenton is drawn to the limitation of liability, indemnification and jurisdiction issues defined them. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of lient's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced to the company and the produced and the document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this test report refer only to the sample(s) tested and such sample(s) are retained 70 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

Page: 27 of 41

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2307000261RG02

01 Rev.:

Page: 28 of 41

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-an

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

29 of 41 Page:

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold

Remark: Reference test setup 1

Test Settings

- Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize





Report No.: SEWM2307000261RG02

Rev.:

Page: 30 of 41

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents us http://www.sgs.com/en/Terms-and-Conditions/Terms-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. Mis document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullulest extent of the jaw. Unless otherwise stated the



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 31 of 41

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 32 of 41

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (μ V/m) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Gocument cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of lea. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-75) 83071443,

South of No. 6 Plant, No. 1, Runsheng Road, Southou Industrial Park, Southou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业国区河胜路1号的6号厂房南部 単編: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 33 of 41

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2307000261RG02

Rev.: 01


Page: 34 of 41

4.9 Test Setups

4.9.1 Test Setup 1

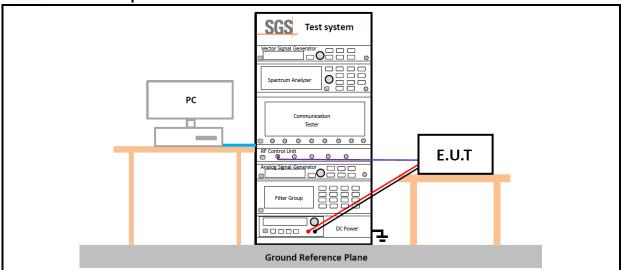

4.9.2 Test Setup 2

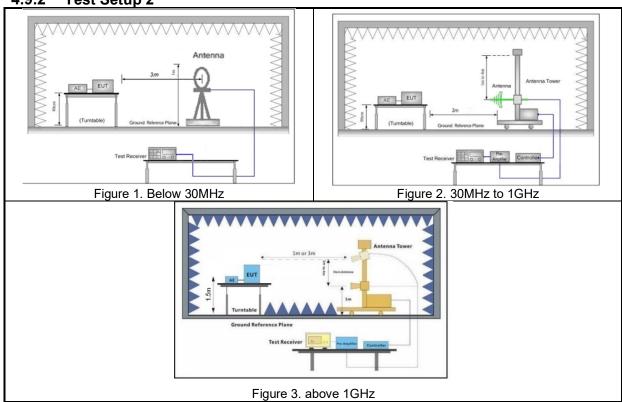



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Ferms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is client of the standard of the stan

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com




Report No.: SEWM2307000261RG02

Rev.: 0

Page: 35 of 41

4.9.3 Test Setup 3

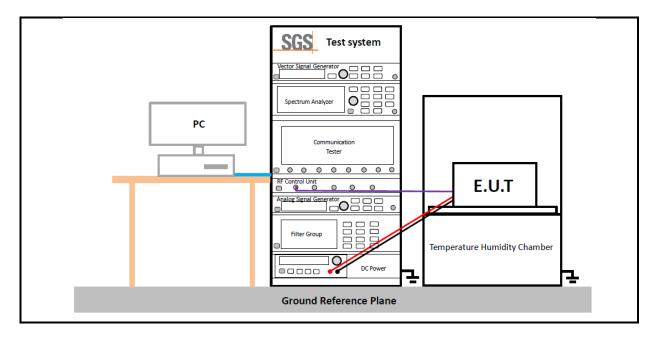



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 0

Page: 36 of 41

4.10 Test Conditions

	Transmit Output Power Data - Average Power, Total			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6			
	Peak-to-Average Ratio			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM5; NR/TM9			
	Bandwidth - Occupied Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	M (M= middle channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9			
	Bandwidth - Emission Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	M (M= middle channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9			
Band Edges Compliance				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, H (L= low channel, H= high channel)			
Test Mode	NR/TM1; NR/TM6			
	Spurious Emission at Antenna Terminals			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company. Any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.:

Page: 37 of 41

	: a.g.: 3: 3: 1:
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1
	Field Strength of Spurious Radiation
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 2
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.
	Frequency Stability
Test Case	Test Conditions
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage
Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.
Test Setup	Test Setup 3
RF Channels (TX)	M (M= middle channel)
Test Mode	NR/TM1; NR/TM6
restiviode	The report only show the bandwidth with the worst case.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 38 of 41

5 Main Test Instruments

	RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05	
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2023/05/11	2024/05/10	
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR	
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22	
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05	
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05	
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05	
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 39 of 41

	RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)	
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2023/02/07	2024/02/06	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10	
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2022/11/23	2023/11/22	
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07	
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9163	SUWI-01-11-01	2023/05/13	2024/05/12	
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2023/05/13	2024/05/12	
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2024/05/11	
Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2024/05/12	
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2023/02/06	2024/02/05	
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2023/02/06	2024/02/05	
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2023/02/08	2024/02/07	
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-01	2022/09/16	2023/09/15	
Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-04	NCR	NCR	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

邮编: 215000 t (86-512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2307000261RG02

Rev.: 01

Page: 40 of 41

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k to 30MHz)
7	Radiated Emission	± 4.8dB (30M to 1GHz)
,	Radiated Emission	± 4.8dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than U_{clspt/ETSI} (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SEWM2307000261RG02

Rev.: 01

Page: 41 of 41

7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.17	NR Band n5
Appendix B.18	NR Band n7
Appendix B.19	NR Band n38
Appendix B.20	NR Band n41
Appendix B.21	NR Band n66
Appendix B.22	NR Band n77(3450-3550)
Appendix B.23	NR Band n77(3700-3980)
Appendix B.24	NR Band n78(3450-3550)
Appendix B.25	NR Band n78(3700-3800)

---End of Report---

