

P27 WLAN5G_802.11n-HT20_Left Tilted_Ch140


Communication System: 802.11n-HT20; Frequency: 5700 MHz; Duty Cycle: 1:1.028
Medium: HSL5G_0814 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 34.203$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.2, 5.2, 5.2) @ 5700 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.492 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.455 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.078 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.7%
Maximum value of SAR (measured) = 0.539 W/kg

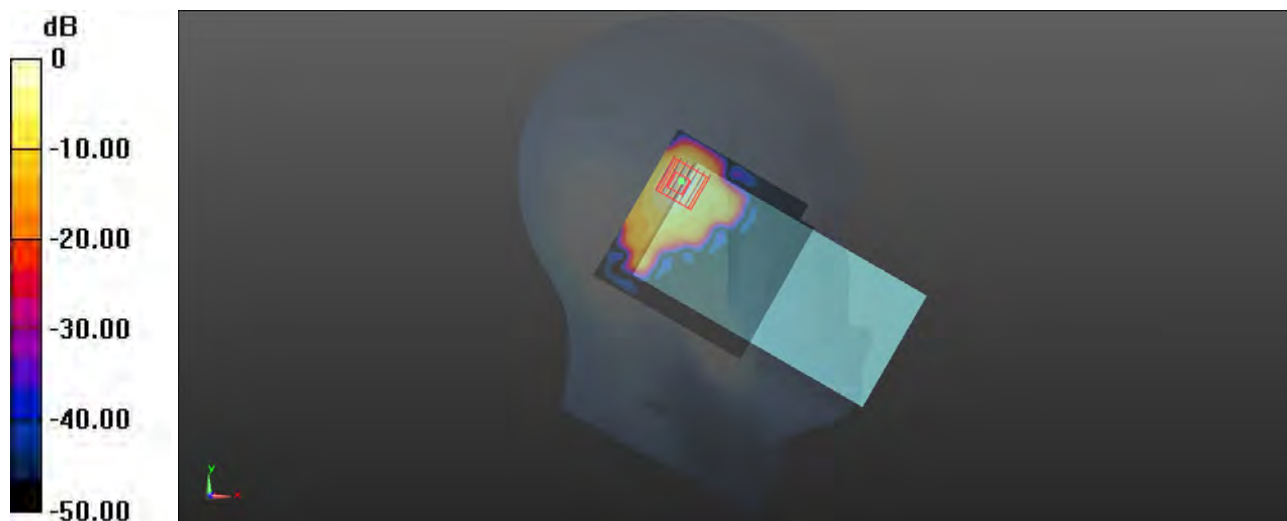

0 dB = 0.539 W/kg

P28 WLAN5G_802.11n-HT20_Left Cheek_Ch149


Communication System: 802.11n-HT20; Frequency: 5745 MHz; Duty Cycle: 1:1.028
Medium: HSL5G_0814 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 34.161$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.2, 5.2, 5.2) @ 5745 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.416 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.334 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.062 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 49.8%
Maximum value of SAR (measured) = 0.396 W/kg

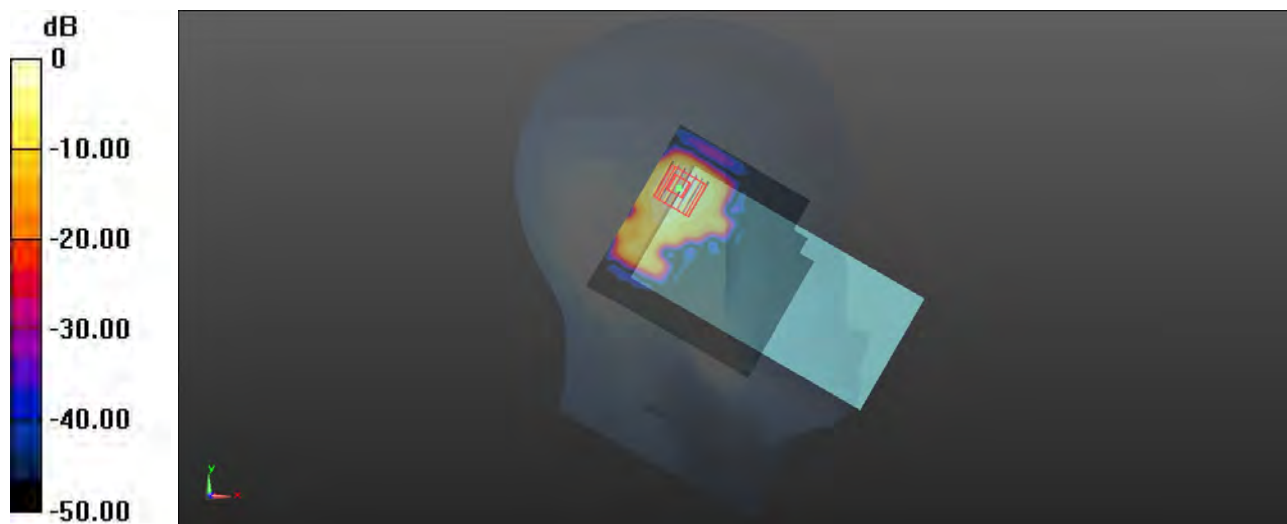

0 dB = 0.396 W/kg

P29 BT_GFSK_Left Cheek_Ch39

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.304

Medium: HSL2450_0801 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.856$ S/m; $\epsilon_r = 38.975$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.2, 8.2, 8.2) @ 2441 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.166 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.682 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.148 W/kg

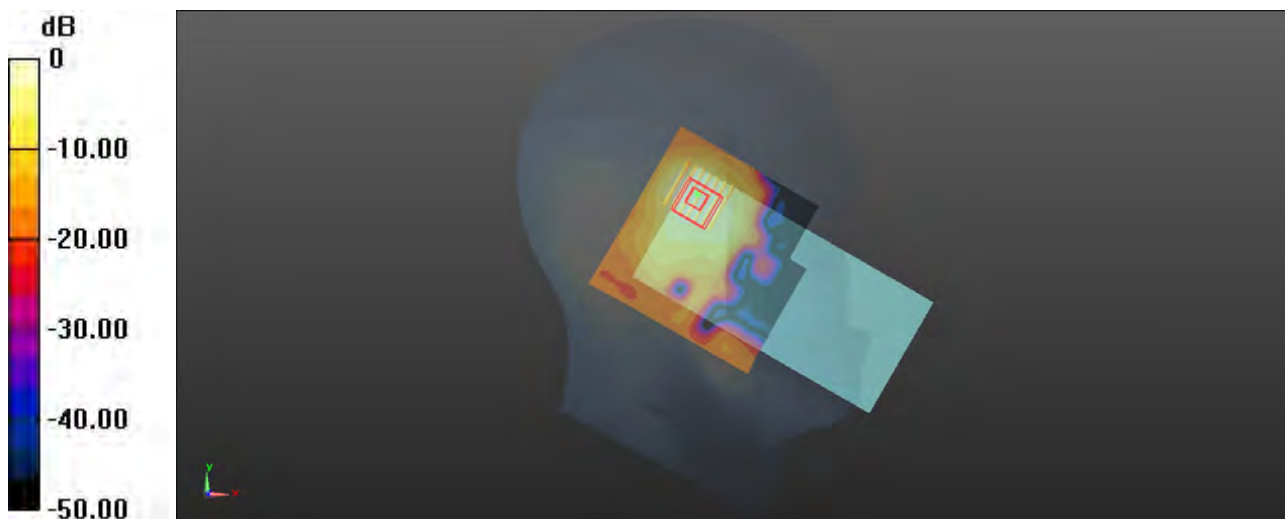

0 dB = 0.148 W/kg

P30 GSM850_GPRS 2Tx Slot_Rear Face_1cm_Ch189_Ant1


Communication System: GPRS 2Tx Slot; Frequency: 836.4 MHz; Duty Cycle: 1:4.15
Medium: HSL835_0728 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.96, 10.96, 10.96) @ 836.4 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.302 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.73 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.467 W/kg
SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.165 W/kg
Smallest distance from peaks to all points 3 dB below = 15.1 mm
Ratio of SAR at M2 to SAR at M1 = 59.9%
Maximum value of SAR (measured) = 0.336 W/kg

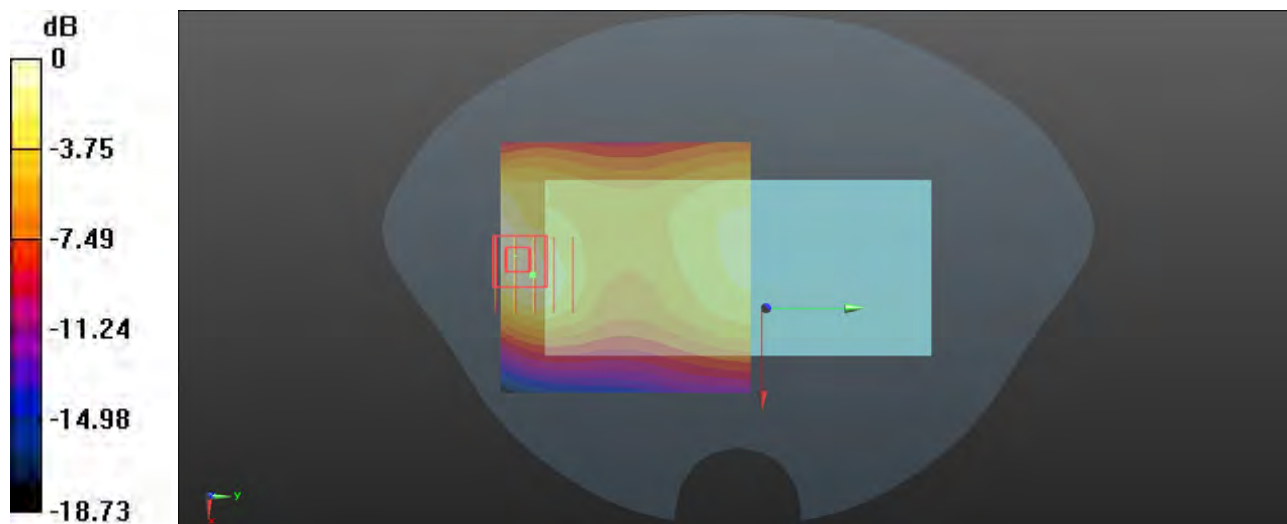

0 dB = 0.336 W/kg

P31 GSM1900_GPRS 3Tx Slot_Rear Face_1cm_Ch810_Ant1


Communication System: UID 0, GPRS11 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.66993
Medium: HSL1950_0724 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.339$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.83, 8.83, 8.83) @ 1909.8 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.459 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.556 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.630 W/kg
SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.191 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 59.3%
Maximum value of SAR (measured) = 0.457 W/kg

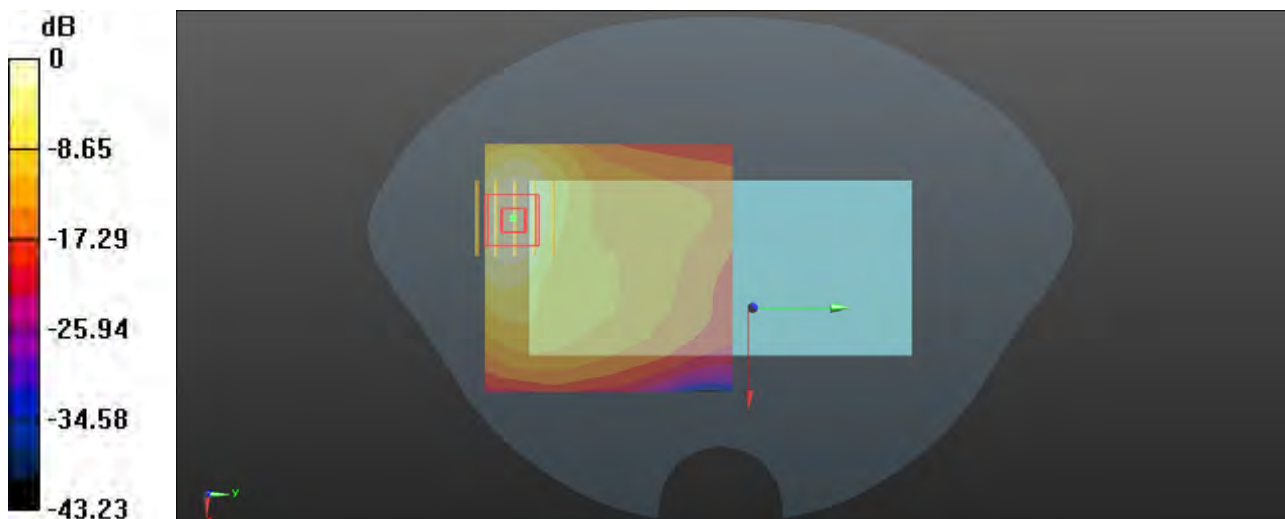

0 dB = 0.457 W/kg

P32 WCDMA II_RMC 12.2K_Rear Face_1cm_Ch9400_Ant4


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL1950_0730 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 40.077$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.83, 8.83, 8.83) @ 1880 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.750 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm=
Reference Value = 4.343 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.10 W/kg
SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.326 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 57.4%
Maximum value of SAR (measured) = 0.776 W/kg

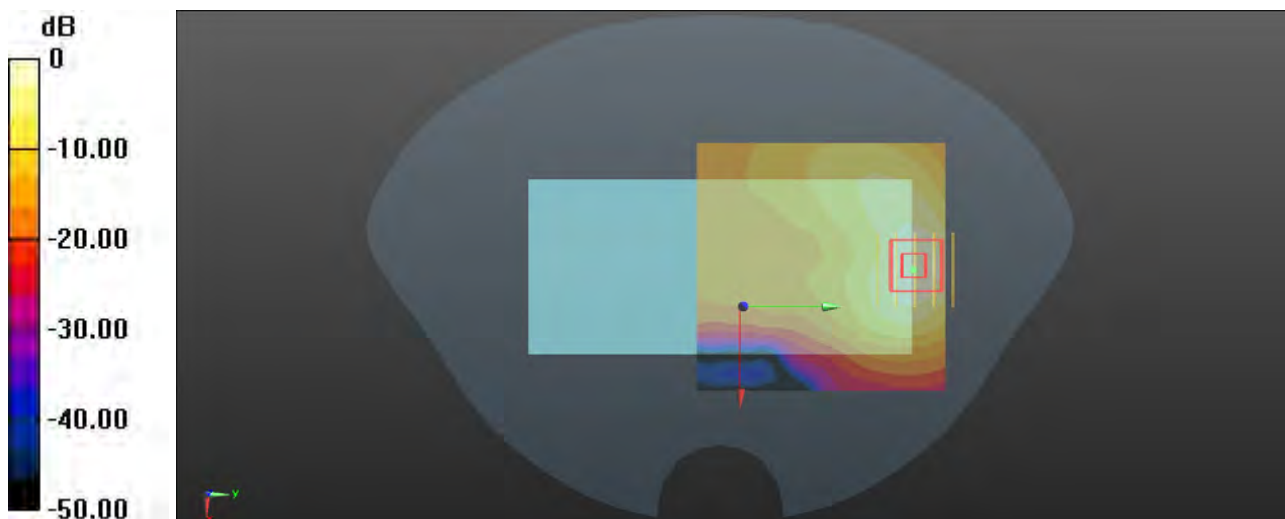

0 dB = 0.776 W/kg

P33 WCDMA IV_RMC 12.2K_Rear Face_1cm_Ch1413_Ant4


Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL1750_0731 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.355$ S/m; $\epsilon_r = 40.108$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.2, 9.2, 9.2) @ 1732.6 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.889 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.641 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.952 W/kg
SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.297 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 61.9%
Maximum value of SAR (measured) = 0.880 W/kg

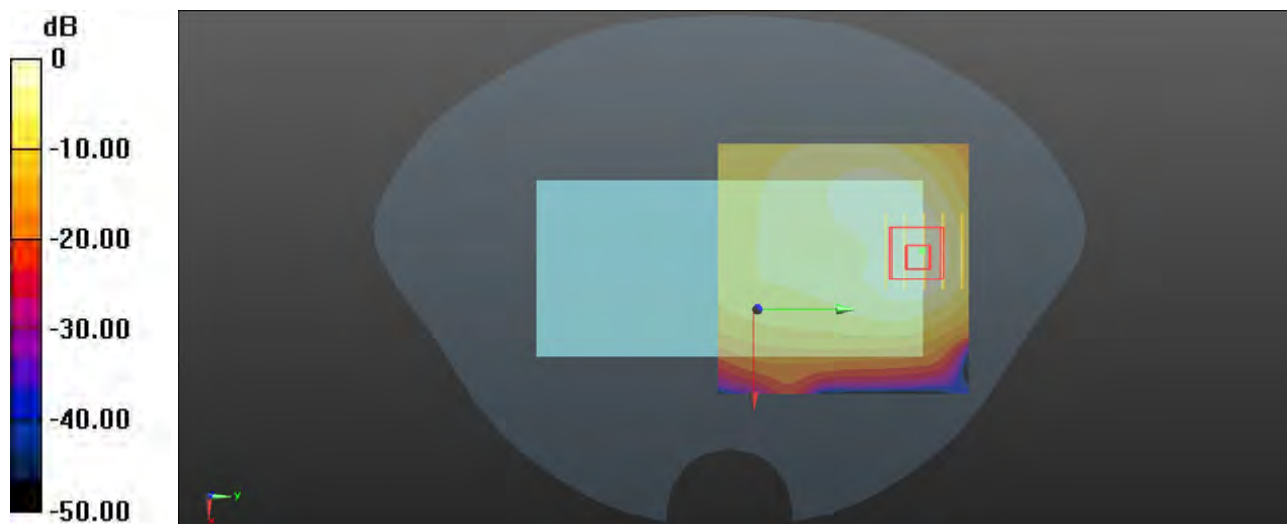

0 dB = 0.880 W/kg

P34 WCDMA V_RMC 12.2K_Rear Face_1cm_Ch4233_Ant1


Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL835_0728 Medium parameters used: $f = 847$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 40.277$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.96, 10.96, 10.96) @ 846.6 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.307 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.59 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.456 W/kg
SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.163 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 60.7%
Maximum value of SAR (measured) = 0.330 W/kg

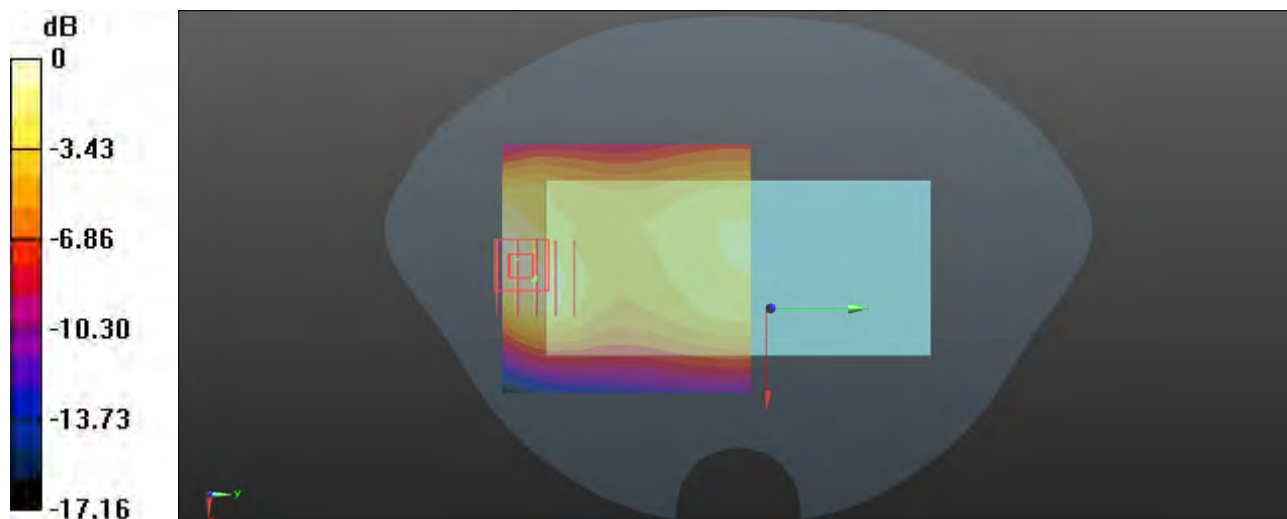

0 dB = 0.330 W/kg

P35 LTE 2_QPSK20M_Rear Face_1cm_Ch18900_50RB_OS0_Ant4

Communication System: LTE_FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950_0824 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 38.872$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3985; ConvF(8.16, 8.16, 8.16) @ 1880 MHz; Calibrated: 2024/07/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn755; Calibrated: 2024/07/5
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.508 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.114 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.782 W/kg
SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.226 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 58.3%
Maximum value of SAR (measured) = 0.557 W/kg

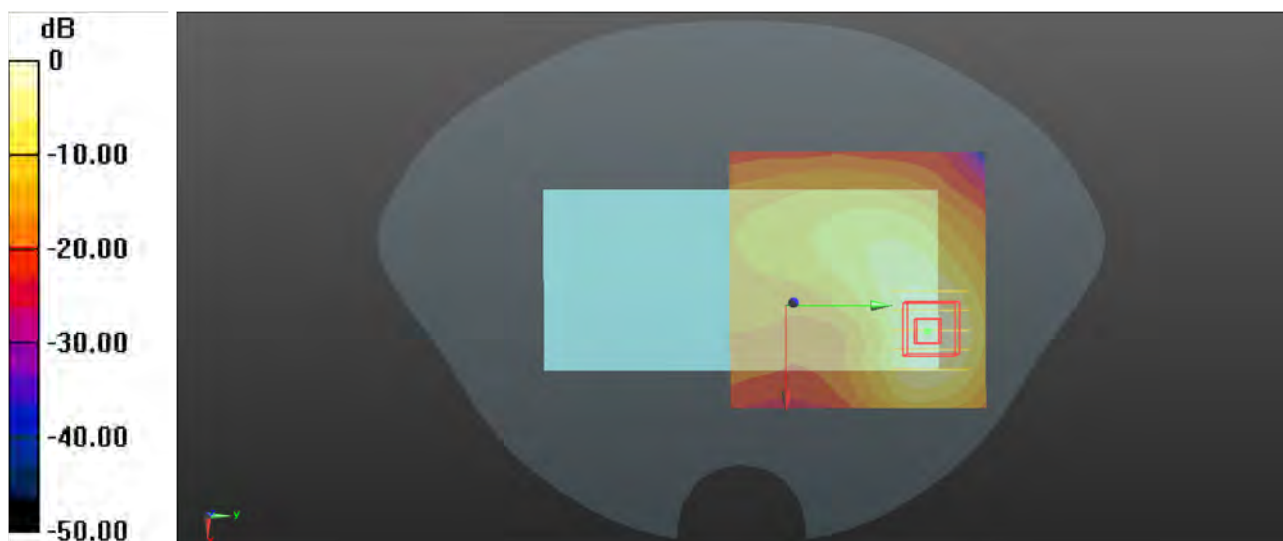

0 dB = 0.557 W/kg

P36 LTE 7_QPSK20M_Front Face_1cm_Ch21100_50RB_OS25_Ant1


Communication System: LTE_FDD; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2550_0802 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.01, 8.01, 8.01) @ 2535 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.816 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.505 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.237 W/kg
Smallest distance from peaks to all points 3 dB below = 10.6 mm
Ratio of SAR at M2 to SAR at M1 = 51.8%
Maximum value of SAR (measured) = 0.822 W/kg

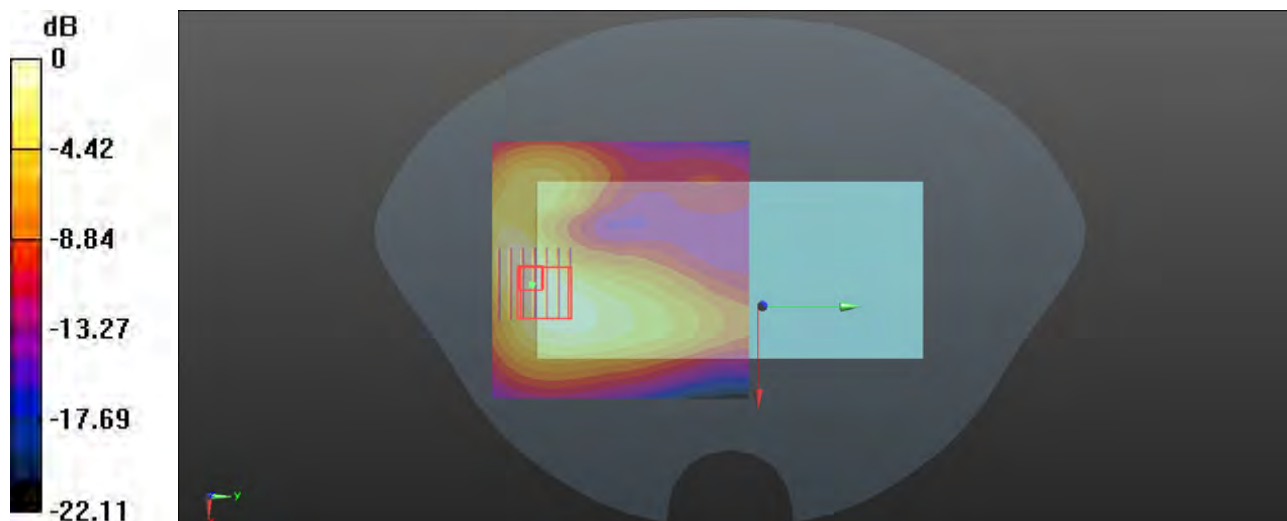

0 dB = 0.822 W/kg

P37 LTE 12_QPSK10M_Rear Face_1cm_Ch23060_1RB_OS0_Ant1


Communication System: LTE_FDD; Frequency: 704 MHz; Duty Cycle: 1:1
Medium: HSL750_0724 Medium parameters used: $f = 704$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 43.056$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.4, 11.4, 11.4) @ 704 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.262 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.84 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.298 W/kg
SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.182 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)
Ratio of SAR at M2 to SAR at M1 = 78.6%
Maximum value of SAR (measured) = 0.260 W/kg

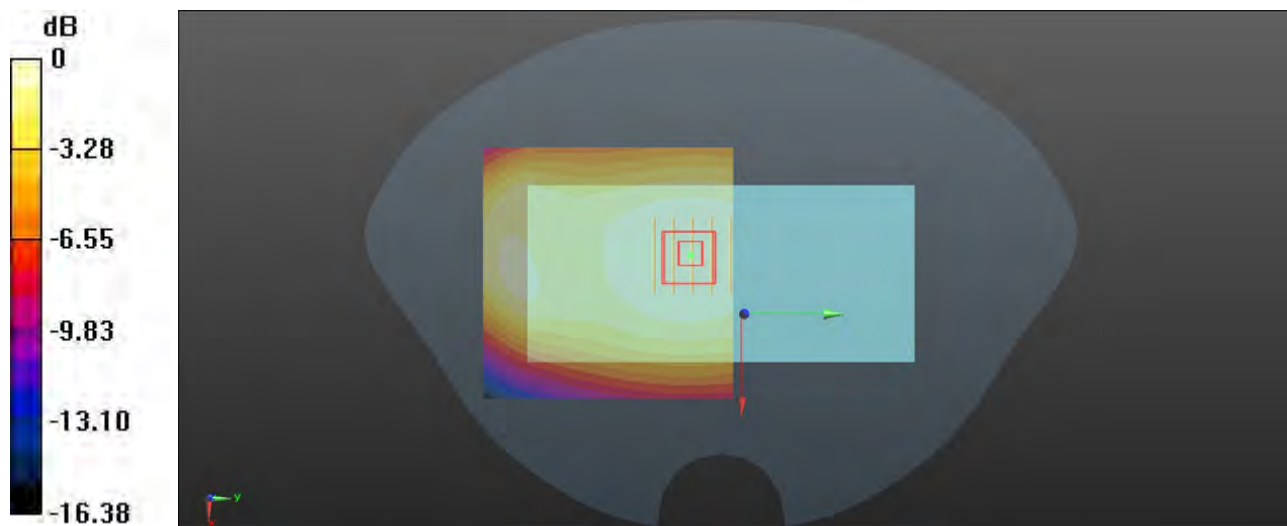

0 dB = 0.260 W/kg

P38 LTE 13_QPSK10M_Rear Face_1cm_Ch23230_1RB_OS49_Ant1


Communication System: LTE_FDD; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL750_0724 Medium parameters used: $f = 782$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.824$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.4, 11.4, 11.4) @ 782 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.315 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm=
Reference Value = 14.01 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.368 W/kg
SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.117 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 55.8%
Maximum value of SAR (measured) = 0.303 W/kg

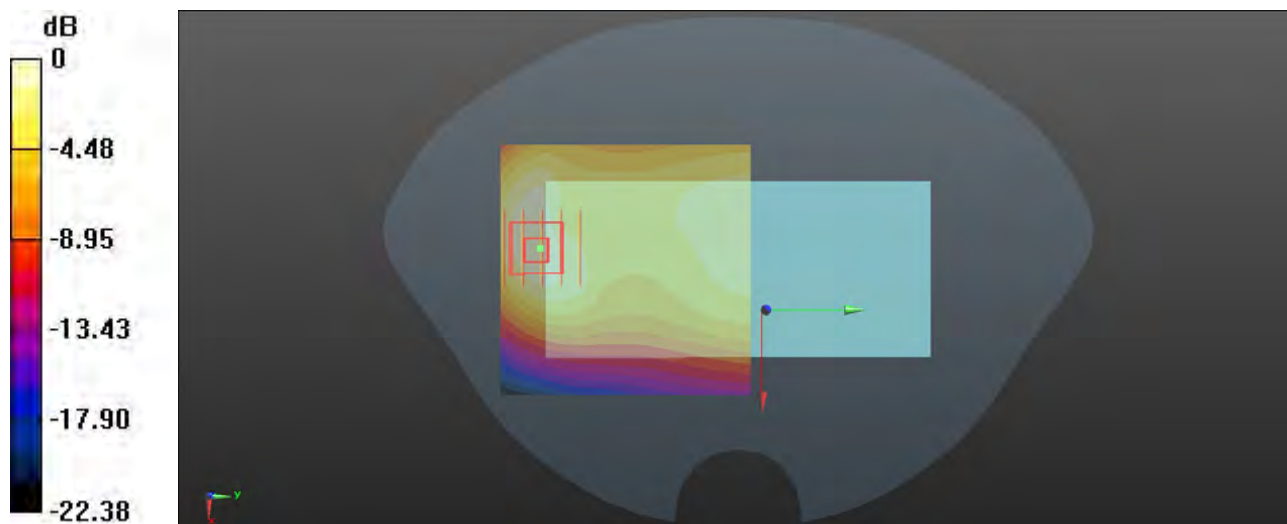

0 dB = 0.303 W/kg

P39 LTE 26_QPSK15M_Rear Face_1cm_Ch26865_1RB_OS37_Ant1


Communication System: LTE_FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835_0729 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 43.298$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.96, 10.96, 10.96) @ 831.5 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.361 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.54 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.549 W/kg
SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.200 W/kg
Smallest distance from peaks to all points 3 dB below = 15.8 mm
Ratio of SAR at M2 to SAR at M1 = 58.5%
Maximum value of SAR (measured) = 0.389 W/kg

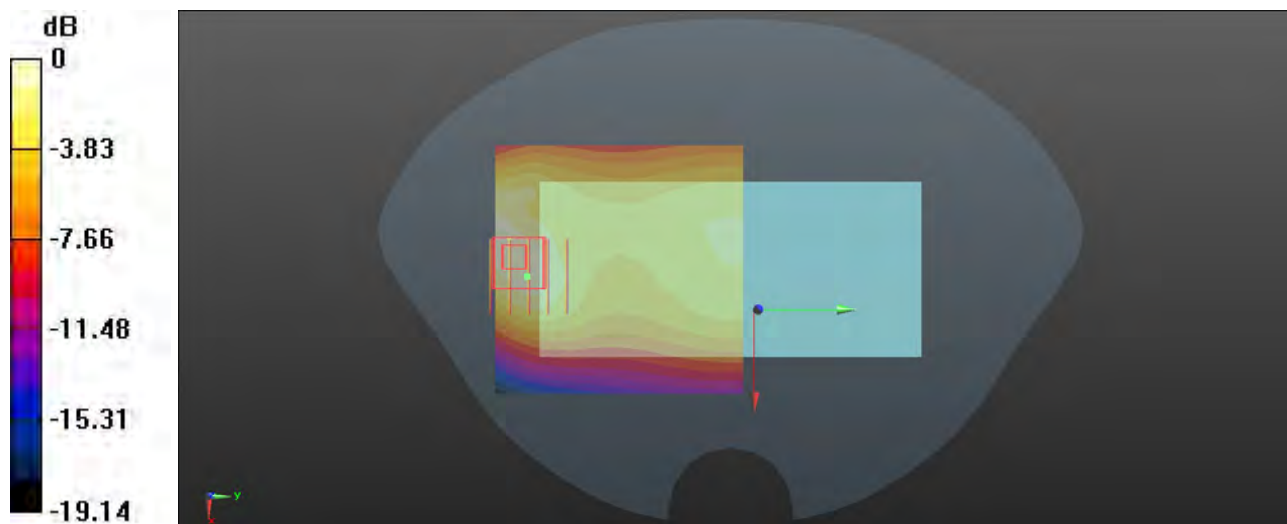

0 dB = 0.389 W/kg

P40 LTE 38_QPSK20M_Rear Face_1cm_Ch38000_50RB_OS0_Ant4


Communication System: LTE_TDD; Frequency: 2595 MHz; Duty Cycle: 1:1.59
Medium: HSL2550_0804 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.470$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.01, 8.01, 8.01) @ 2595 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.506 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.435 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.804 W/kg
SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.199 W/kg
Smallest distance from peaks to all points 3 dB below = 10.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.9%
Maximum value of SAR (measured) = 0.520 W/kg

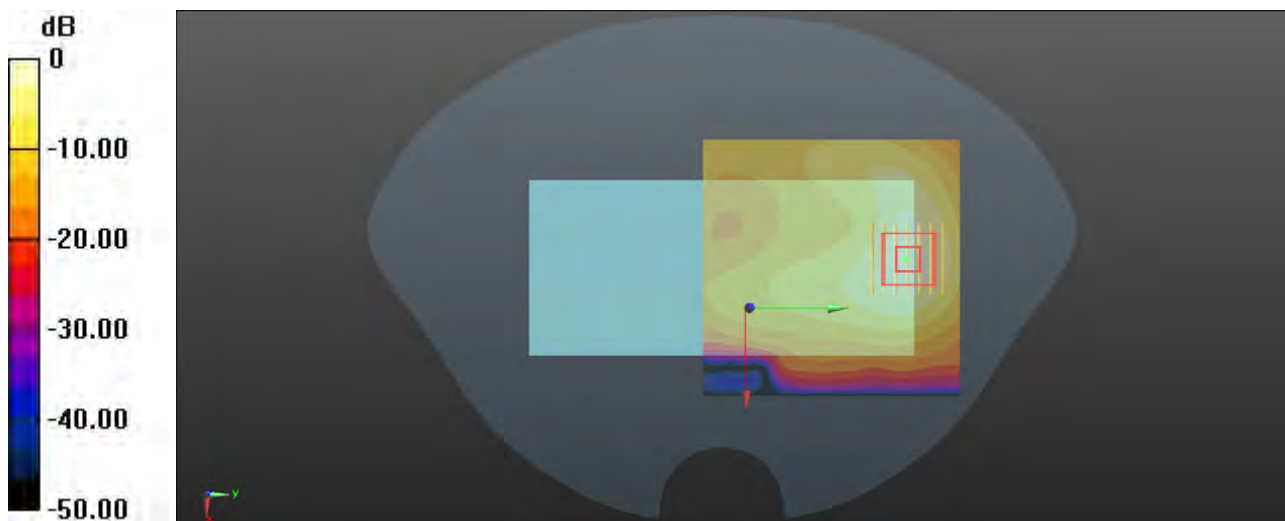

0 dB = 0.520 W/kg

P41 LTE 41_QPSK20M_Rear Face_1cm_Ch39750_50RB_OS0_Ant4

Communication System: LTE_TDD; Frequency: 2506 MHz; Duty Cycle: 1:1.59

Medium: HSL2550_0804 Medium parameters used: $f = 2506$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 39.663$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.01, 8.01, 8.01) @ 2506 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.437 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.652 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.454 W/kg

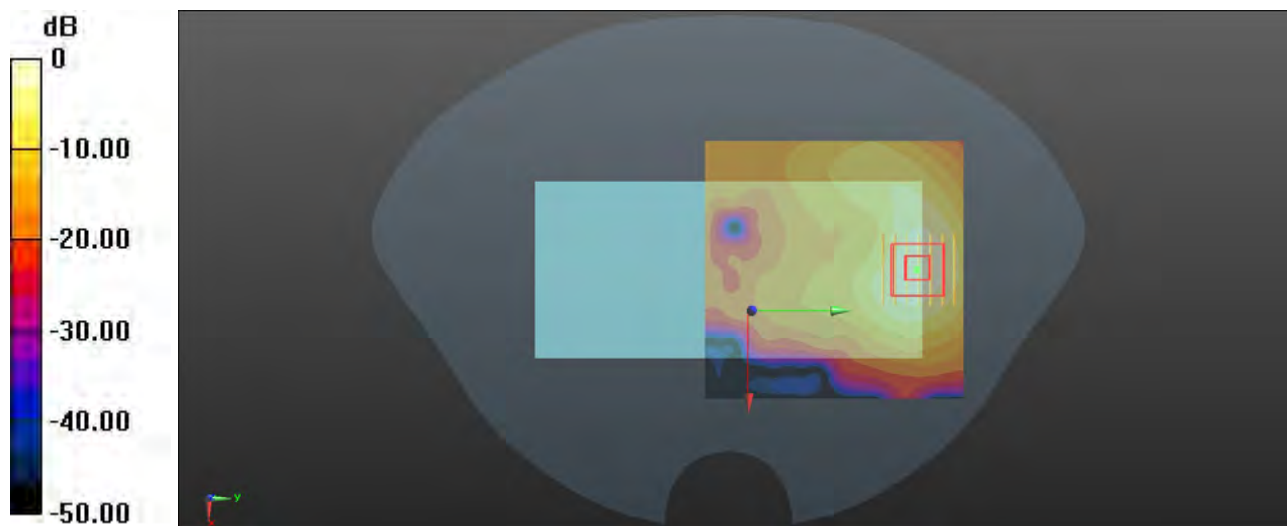

0 dB = 0.454 W/kg

P42 LTE 42_QPSK20M_Rear Face_1cm_Ch42990_50RB_OS0_Ant5


Communication System: LTE_TDD; Frequency: 3540 MHz; Duty Cycle: 1:1.59
Medium: HSL3500_0805 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.859$ S/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.45, 7.45, 7.45) @ 3540 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.667 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.202 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.199 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 68.5%
Maximum value of SAR (measured) = 0.705 W/kg

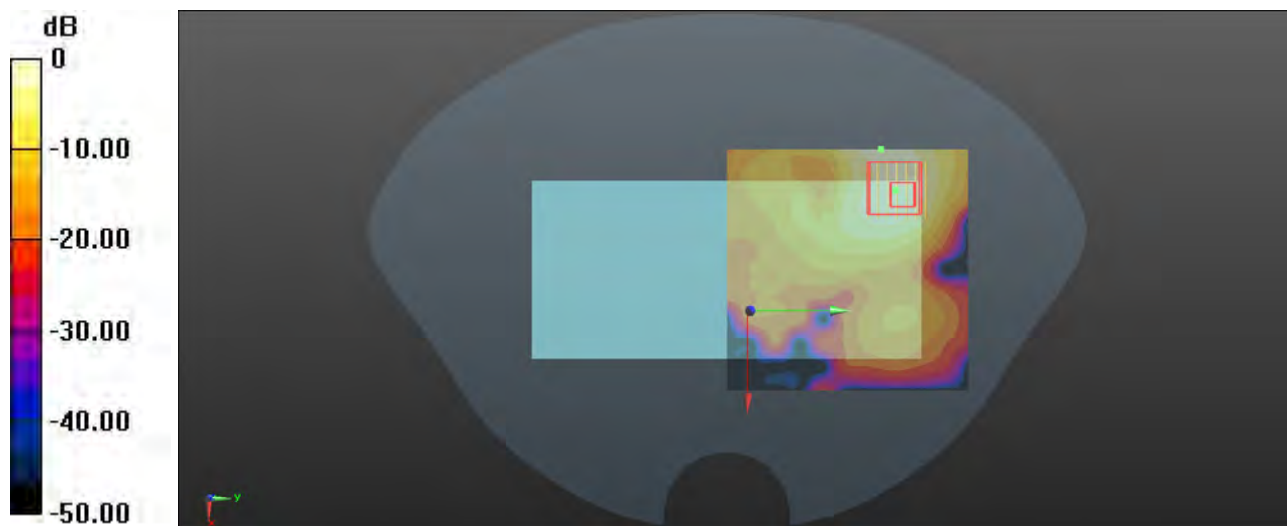

0 dB = 0.705 W/kg

P43 LTE 48_QPSK20M_Rear Face_1cm_Ch55340_50RB_OS25_Ant7


Communication System: LTE_TDD; Frequency: 3560 MHz; Duty Cycle: 1:1.59
Medium: HSL3500_0806 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 39.592$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.45, 7.45, 7.45) @ 3560 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.666 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.229 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 68.4%
Maximum value of SAR (measured) = 0.698 W/kg

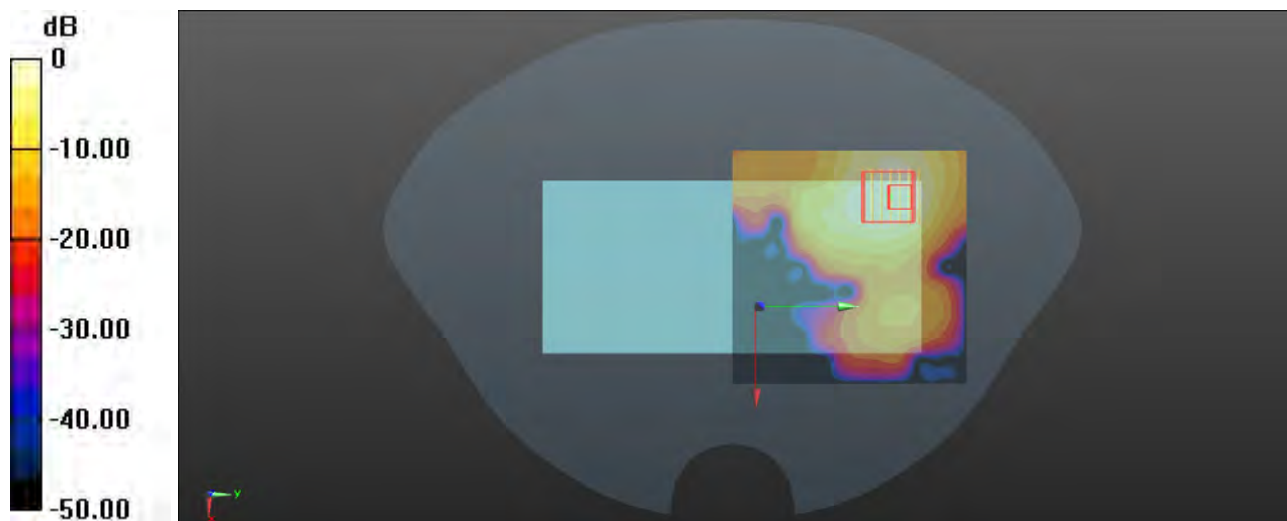

0 dB = 0.698 W/kg

P44 LTE 66_QPSK20M_Rear Face_1cm_Ch132072_1RB_OS50_Ant4


Communication System: LTE_FDD; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL1750_0731 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.121$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.2, 9.2, 9.2) @ 1720 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.503 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.298 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.707 W/kg
SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.246 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 61.2%
Maximum value of SAR (measured) = 0.523 W/kg

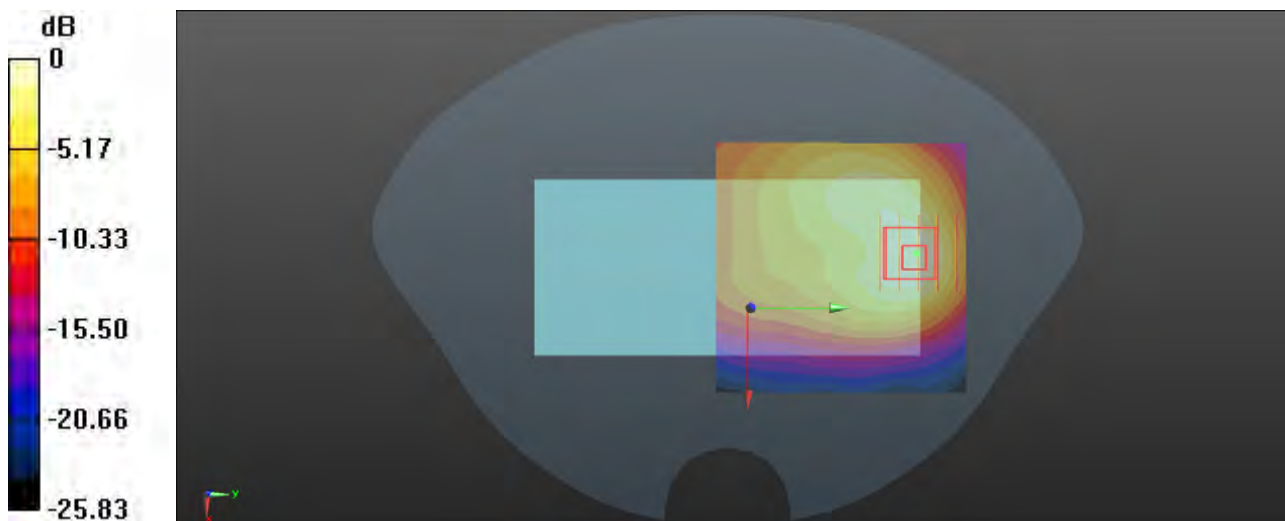

0 dB = 0.523 W/kg

P45 N2_DFT-QPSK20M_Rear Face_1cm_Ch376000_1RB_OS53_Ant4

Communication System: NR; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950_0724 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.368$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.83, 8.83, 8.83) @ 1880 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.824 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.518 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.852 W/kg

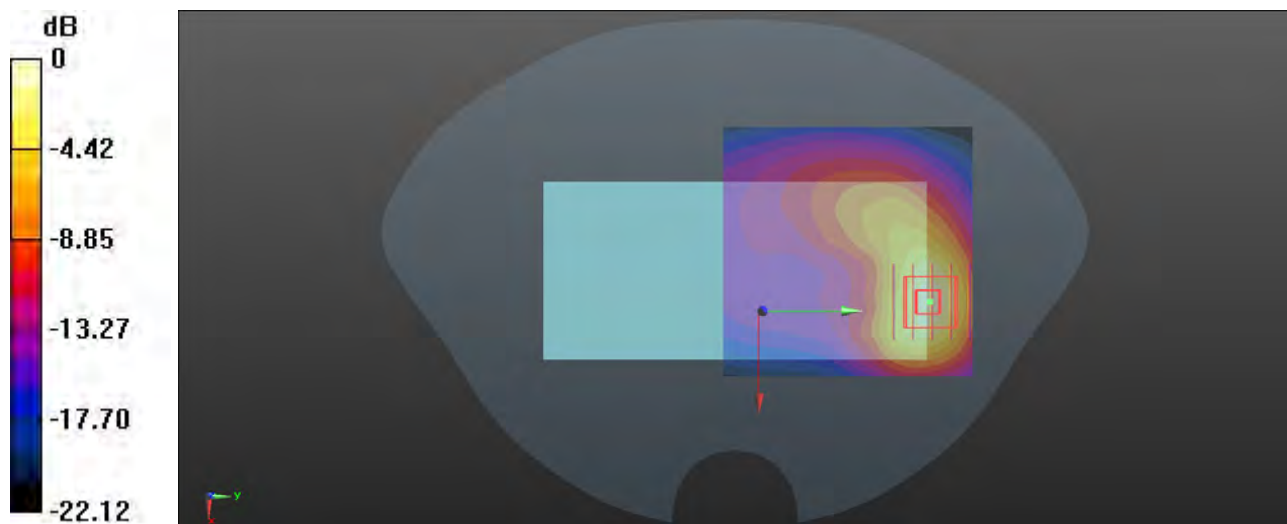

0 dB = 0.852 W/kg

P46 N7_DFT-QPSK50M_Rear Face_1cm_Ch505000_1RB_OS135_Ant4

Communication System: NR; Frequency: 2525 MHz; Duty Cycle: 1:1

Medium: HSL2550_0802 Medium parameters used: $f = 2525$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.251$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.2, 8.2, 8.2) @ 2525 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.744 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.360 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.755 W/kg

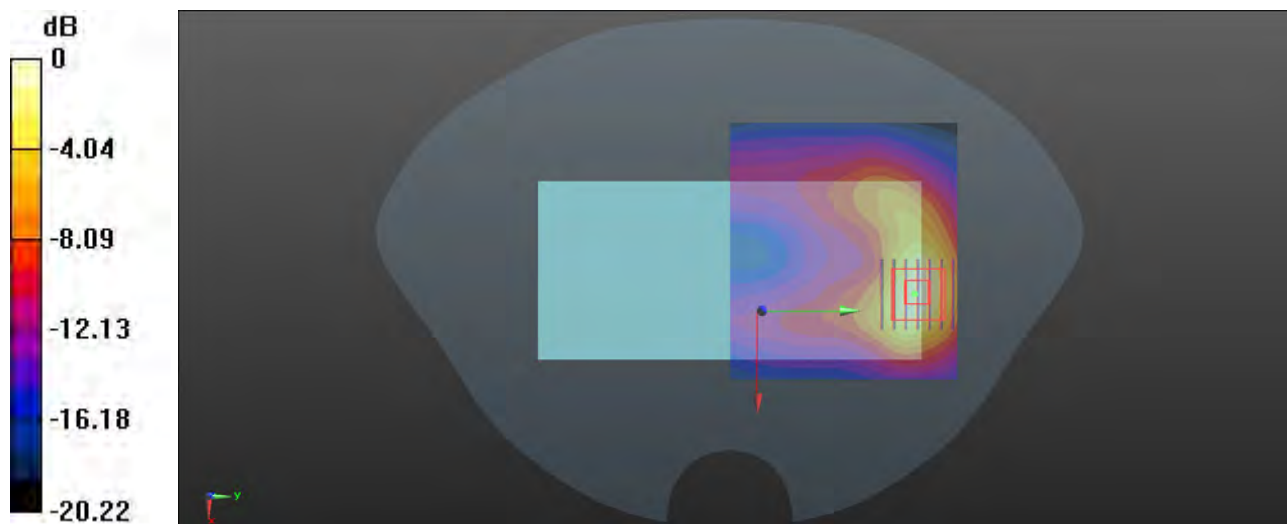

0 dB = 0.755 W/kg

P47 N12_DFT-QPSK15M_Rear Face_1cm_Ch141500_36RB_OS22_Ant1


Communication System: NR; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL750_0724 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.037$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.4, 11.4, 11.4) @ 707.5 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.265 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.30 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.339 W/kg
SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.117 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 57.1%
Maximum value of SAR (measured) = 0.266 W/kg

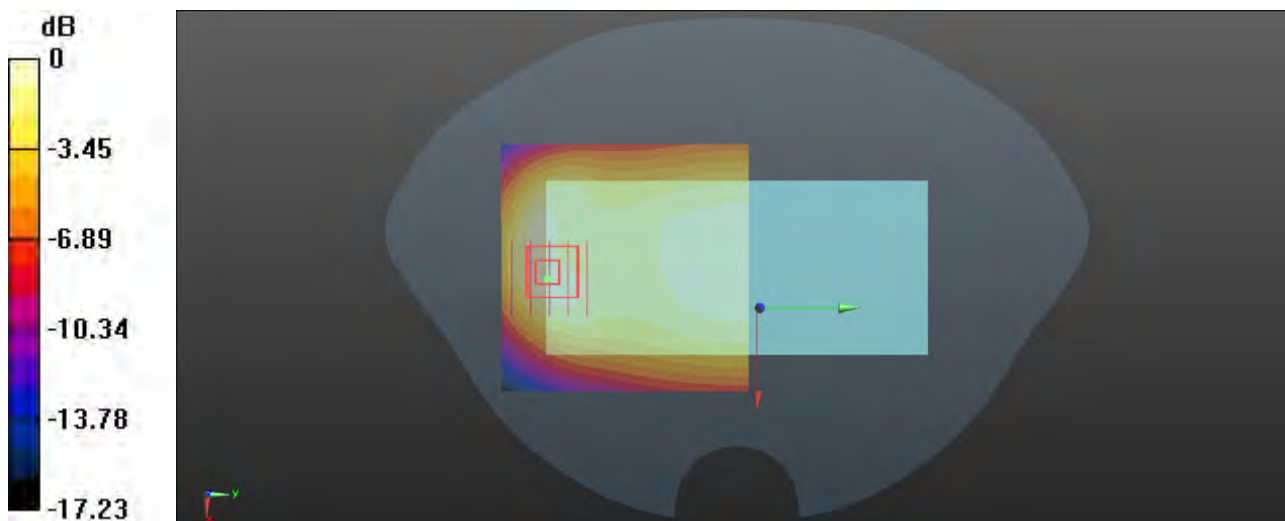

0 dB = 0.266 W/kg

P48 N26_DFT-QPSK20M_Rear Face_1cm_Ch166300_1RB_OS53_Ant1


Communication System: NR; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835_0729 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 43.298$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.96, 10.96, 10.96) @ 831.5 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.443 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.63 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.633 W/kg
SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.222 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 58.9%
Maximum value of SAR (measured) = 0.444 W/kg

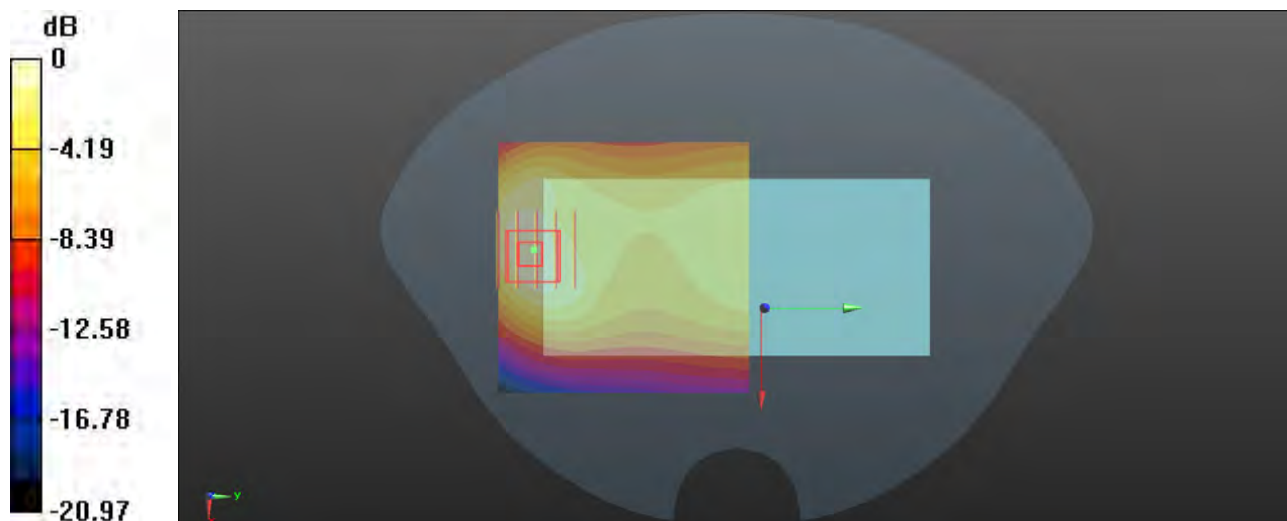

0 dB = 0.444 W/kg

P49 N38_DFT-QPSK40M_Rear Face_1cm_Ch520000_1RB_OS53_Ant4

Communication System: NR; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL2550_0803 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.465$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.01, 8.01, 8.01) @ 2600 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.716 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.624 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 0.723 W/kg

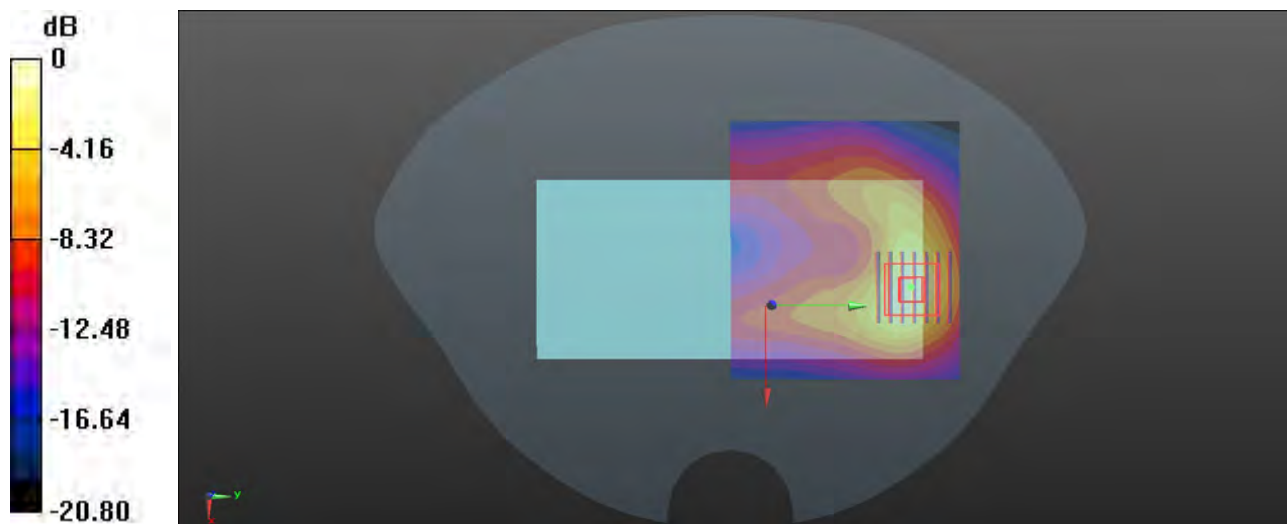

0 dB = 0.723 W/kg

P50 N41_DFT-QPSK100M_Rear Face_1cm_Ch518598_135RB_OS69_Ant4

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2550_0804 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 39.483$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.01, 8.01, 8.01) @ 2592.99 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.774 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.960 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.263 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.800 W/kg

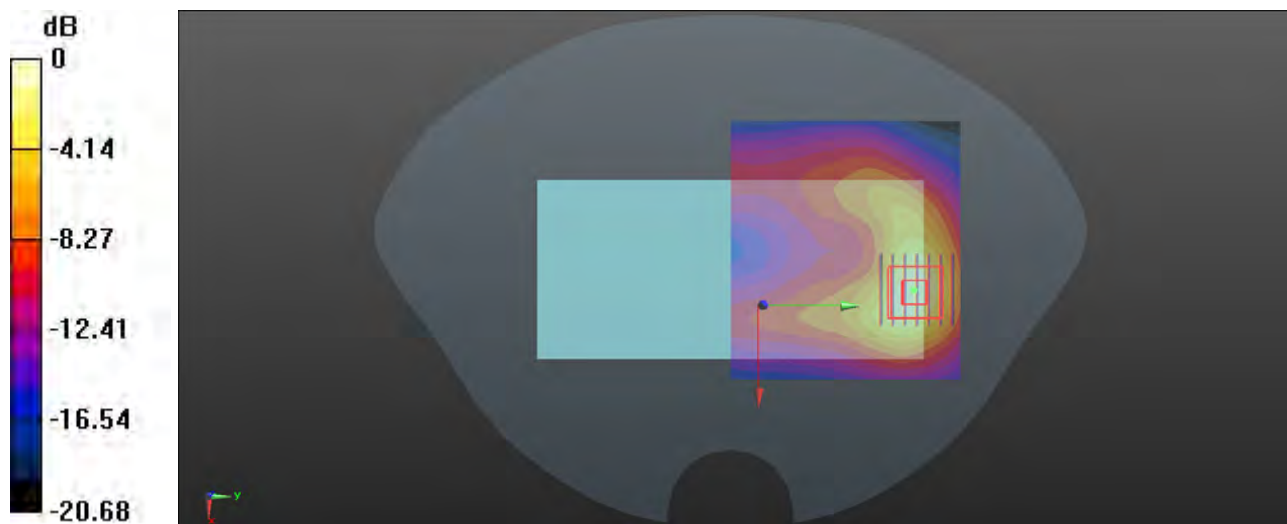

0 dB = 0.800 W/kg

P51 N48_DFT-QPSK100M_Rear Face_1cm_Ch643332_1RB_OS137_Ant7

Communication System: NR; Frequency: 3649.98 MHz; Duty Cycle: 1:1

Medium: HSL3700_0807 Medium parameters used: $f = 3650$ MHz; $\sigma = 2.936$ S/m; $\epsilon_r = 38.886$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.18, 7.18, 7.18) @ 3649.98 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.201 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.6%

Maximum value of SAR (measured) = 1.38 W/kg

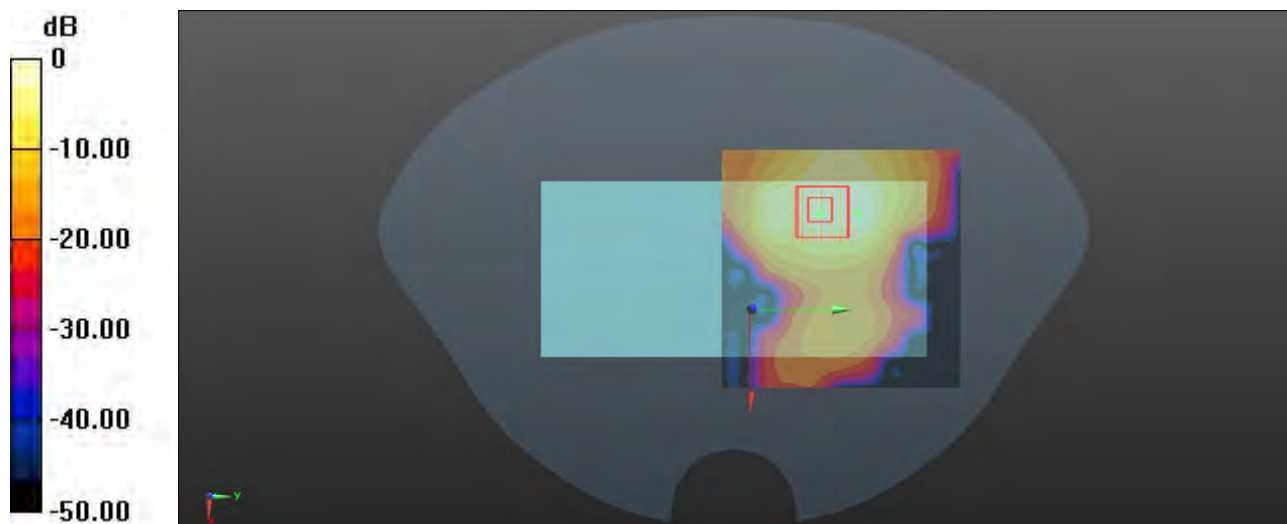

0 dB = 1.38 W/kg

P52 N66_DFT-QPSK40M_Rear Face_1cm_Ch349000_1RB_OS107_Ant4

Communication System: NR; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750_0730 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.2, 9.2, 9.2) @ 1745 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.893 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.374 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.881 W/kg

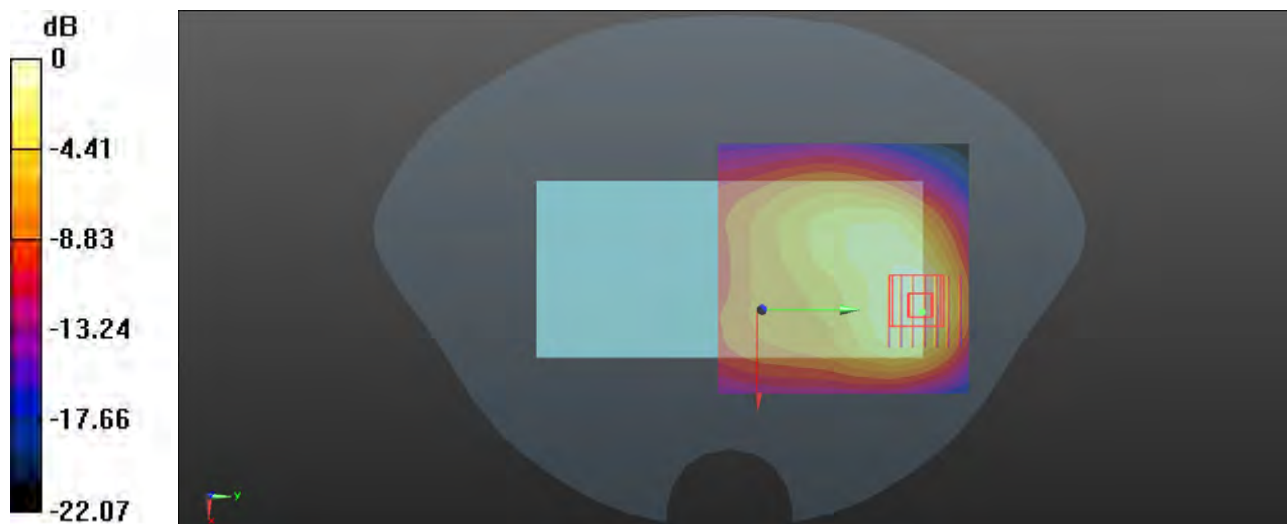

0 dB = 0.881 W/kg

P53 N77_QPSK100M_Rear Face_1cm_Ch662000_135RB_OS69_Ant7

Communication System: NR; Frequency: 3930 MHz; Duty Cycle: 1:1

Medium: HSL3900_0811 Medium parameters used: $f = 3930$ MHz; $\sigma = 3.212$ S/m; $\epsilon_r = 38.468$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(6.9, 6.9, 6.9) @ 3930 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2024/3/6
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.66 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.044 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.1%

Maximum value of SAR (measured) = 1.40 W/kg

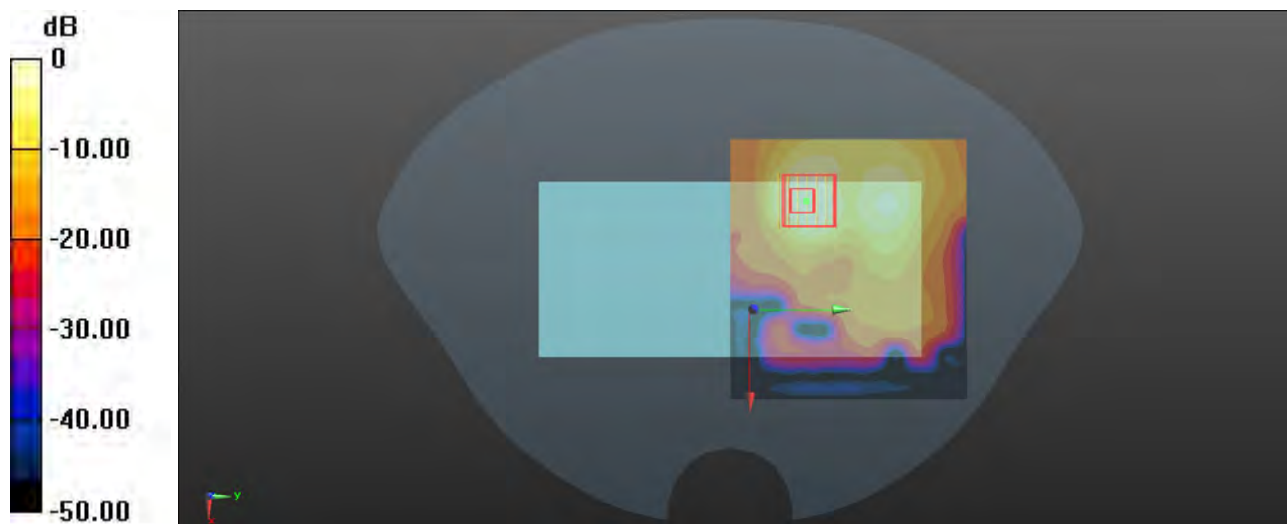

0 dB = 1.40 W/kg