




Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----



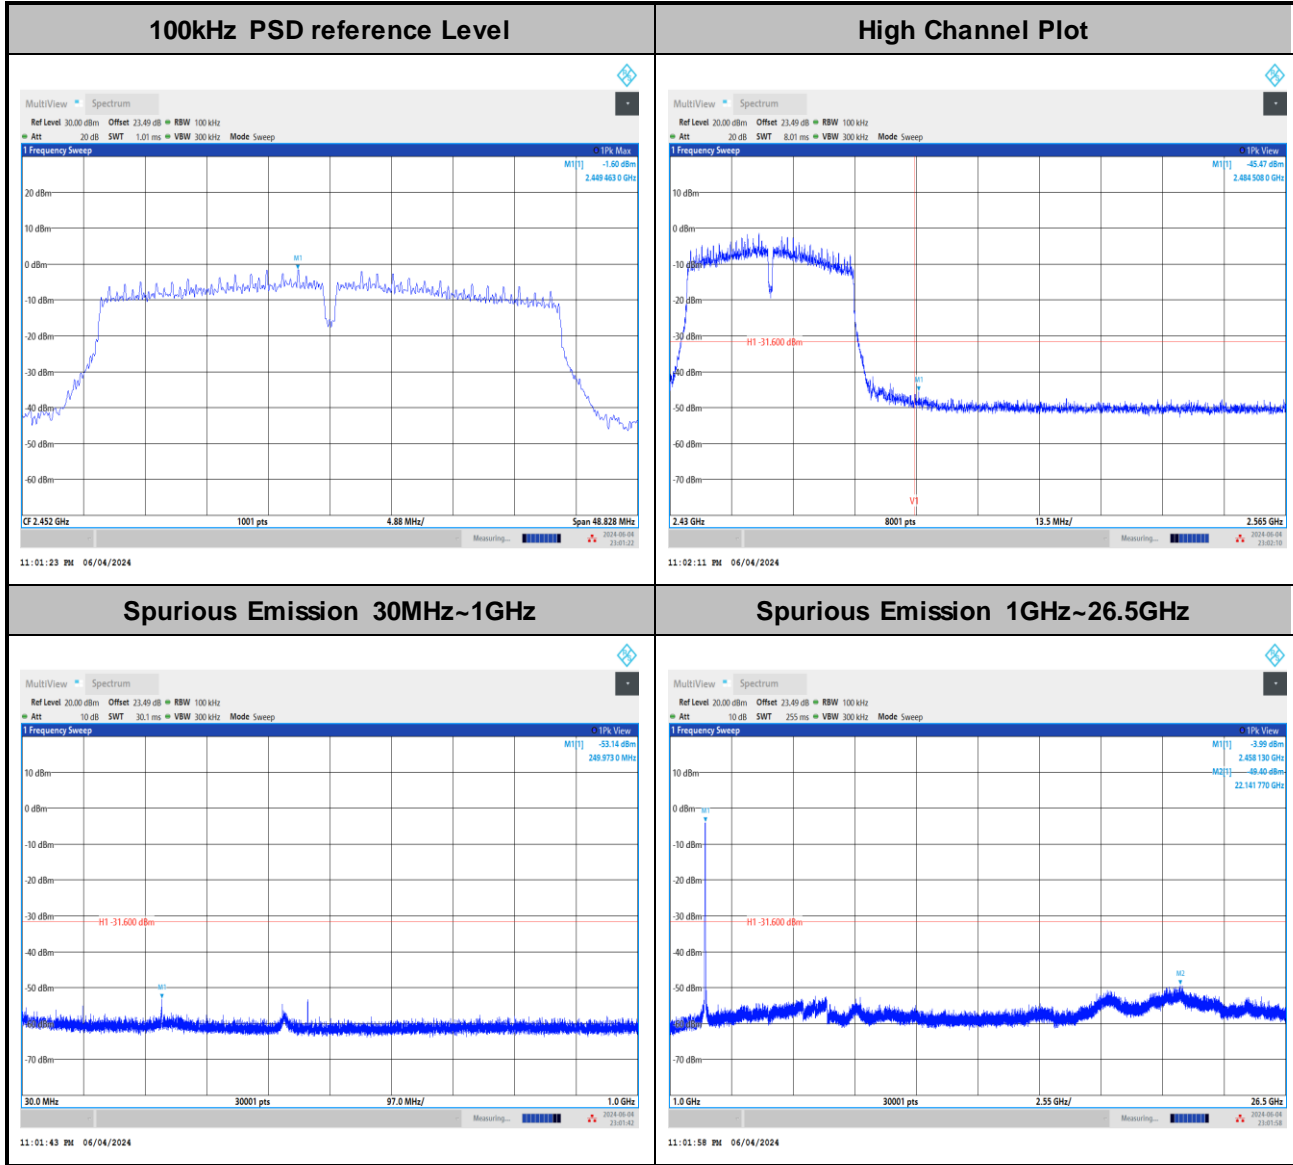


## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.7~25.6°C
		Relative Humidity :	43.6~51.8%

## EUT Information

Report NO : 441123  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

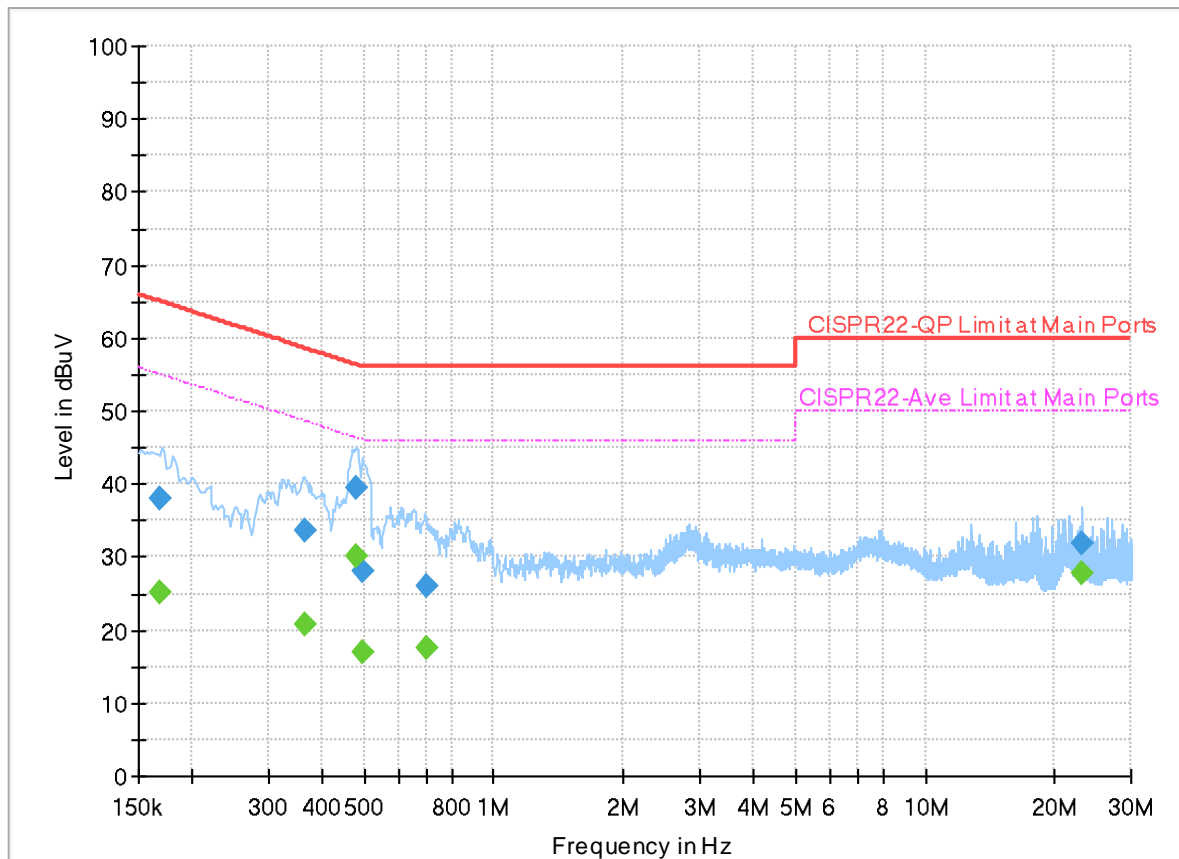


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.168180	---	25.04	55.05	30.01	L1	OFF	19.9
0.168180	37.91	---	65.05	27.14	L1	OFF	19.9
0.364560	---	20.78	48.62	27.84	L1	OFF	19.9
0.364560	33.68	---	58.62	24.94	L1	OFF	19.9
0.478860	---	30.09	46.36	16.27	L1	OFF	19.9
0.478860	39.41	---	56.36	16.95	L1	OFF	19.9
0.493620	---	16.81	46.11	29.30	L1	OFF	19.9
0.493620	28.00	---	56.11	28.11	L1	OFF	19.9
0.694500	---	17.62	46.00	28.38	L1	OFF	19.9
0.694500	26.14	---	56.00	29.86	L1	OFF	19.9
23.126640	---	27.86	50.00	22.14	L1	OFF	20.1
23.126640	31.98	---	60.00	28.02	L1	OFF	20.1

## EUT Information

Report NO : 441123  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

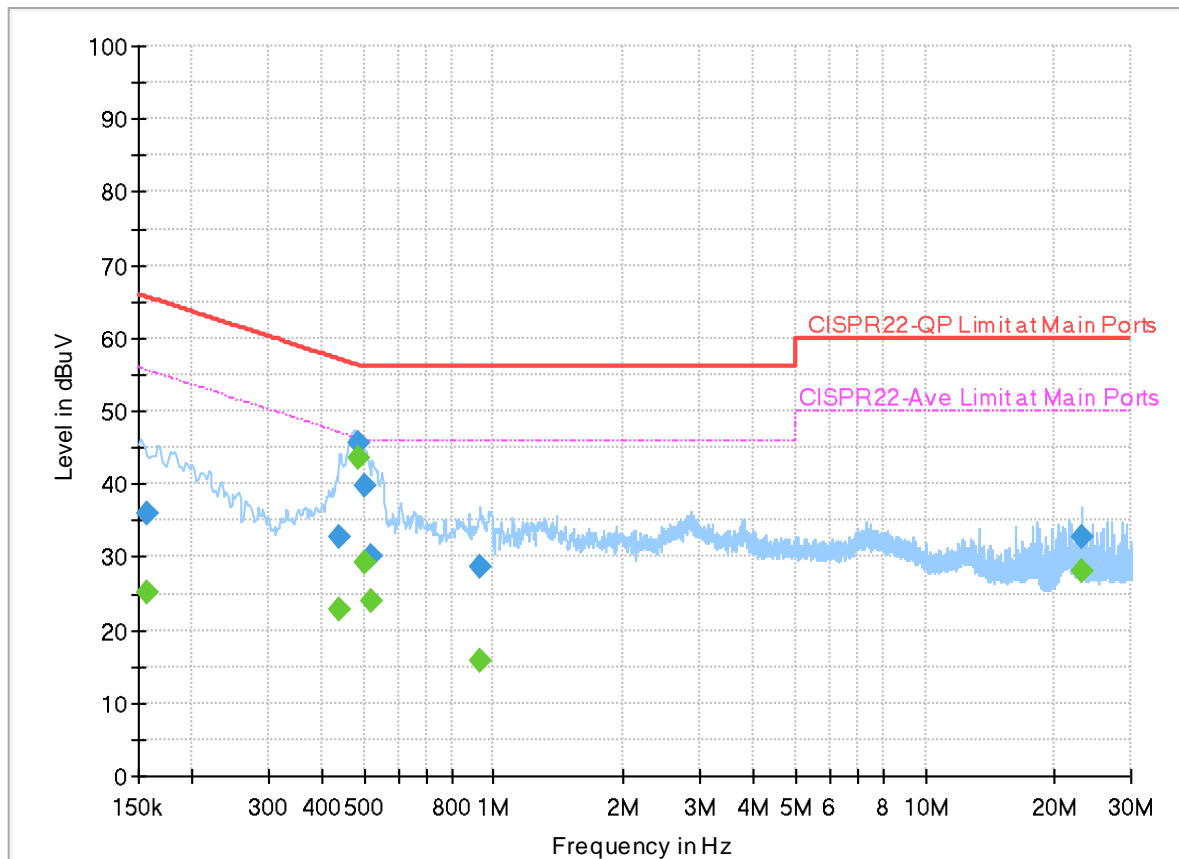

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	25.02	55.63	30.61	N	OFF	19.9
0.156750	36.04	---	65.63	29.59	N	OFF	19.9
0.435750	---	22.78	47.14	24.36	N	OFF	19.9
0.435750	32.80	---	57.14	24.34	N	OFF	19.9
0.483000	---	43.60	46.29	2.69	N	OFF	19.9
0.483000	45.56	---	56.29	10.73	N	OFF	19.9
0.503250	---	29.23	46.00	16.77	N	OFF	19.9
0.503250	39.67	---	56.00	16.33	N	OFF	19.9
0.516750	---	23.88	46.00	22.12	N	OFF	19.9
0.516750	30.26	---	56.00	25.74	N	OFF	19.9
0.927780	---	15.69	46.00	30.31	N	OFF	19.9
0.927780	28.75	---	56.00	27.25	N	OFF	19.9
23.128080	---	28.07	50.00	21.93	N	OFF	20.2
23.128080	32.78	---	60.00	27.22	N	OFF	20.2



### Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li and Lucifer Jiang	Temperature :	21.7~22.5°C
		Relative Humidity :	51~57%

Note symbol

-L	Low channel location
-R	High channel location

**C1. Radiated Spurious Emission Test Modes**

&lt;Ant. 1&gt;

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 13	2400-2483.5	1	802.11g	6	2437	6Mbps	-	LF
Mode 14	2400-2483.5	1	802.11g	6	2437	6Mbps	-	SHF

&lt;Ant. 2&gt;

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	2	802.11b	01	2412	1Mbps	-	-
Mode 8	2400-2483.5	2	802.11b	06	2437	1Mbps	-	-
Mode 9	2400-2483.5	2	802.11b	11	2462	1Mbps	-	-
Mode 10	2400-2483.5	2	802.11g	01	2412	6Mbps	-	-
Mode 11	2400-2483.5	2	802.11g	06	2437	6Mbps	-	-
Mode 12	2400-2483.5	2	802.11g	11	2462	6Mbps	-	-

MIMO &lt;Ant. 1+2&gt;

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 15	2400-2483.5	1+2	802.11n HT20	01	2412	MCS0	-	-
Mode 16	2400-2483.5	1+2	802.11n HT20	06	2437	MCS0	-	-
Mode 17	2400-2483.5	1+2	802.11n HT20	11	2462	MCS0	-	-
Mode 18	2400-2483.5	1+2	802.11n HT40	03	2422	MCS0	-	-
Mode 19	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	-
Mode 20	2400-2483.5	1+2	802.11n HT40	09	2452	MCS0	-	-
Mode 21	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	LF
Mode 22	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	SHF



## C2. Summary of each worse mode

<Ant. 1>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2387.87	41.88	54.00	-12.12	V	Avg.	Pass	-	Band Edge
1	802.11b	01	1206.00	53.42	54.00	-0.58	V	Avg.	Pass	-	Harmonic
2	802.11b	06	2388.61	41.60	54.00	-12.40	V	Avg.	Pass	-	Band Edge
2	802.11b	06	1218.50	53.48	54.00	-0.52	V	Avg.	Pass	-	Harmonic
3	802.11b	11	2489.78	44.17	54.00	-9.83	V	Avg.	Pass	-	Band Edge
3	802.11b	11	1231.00	53.45	54.00	-0.55	V	Avg.	Pass	-	Harmonic
4	802.11g	01	2389.95	52.59	54.00	-1.41	V	Avg.	Pass	-	Band Edge
4	802.11g	01	1206.00	44.67	54.00	-7.73	V	Avg.	Pass	-	Harmonic
5	802.11g	06	2389.25	52.77	54.00	-1.23	V	Avg.	Pass	-	Band Edge
5	802.11g	06	7311.00	51.72	54.00	-2.28	V	Avg.	Pass	-	Harmonic
6	802.11g	11	2484.12	53.18	54.00	-0.82	V	Avg.	Pass	-	Band Edge
6	802.11g	11	7386.00	48.36	54.00	-5.64	H	Avg.	Pass	-	Harmonic
13	WLAN Tx LF	6	214.30	32.66	43.50	-10.84	V	Peak	Pass	-	LF
14	WLAN Tx SHF	6	24754.00	41.90	74.00	-32.10	V	Peak	Pass	-	SHF

<Ant. 2>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
7	802.11b	01	2389.95	41.43	54.00	-12.57	V	Avg.	Pass	-	Band Edge
7	802.11b	01	1206.00	51.97	54.00	-2.03	H	Peak	Pass	-	Harmonic
8	802.11b	06	2388.36	41.03	54.00	-12.97	V	Avg.	Pass	-	Band Edge
8	802.11b	06	1218.50	52.19	54.00	-1.81	V	Avg.	Pass	-	Harmonic
9	802.11b	11	2491.75	63.75	74.00	-10.25	V	Peak	Pass	-	Band Edge
9	802.11b	11	1231.00	49.16	54.00	-4.84	H	Avg.	Pass	-	Harmonic
10	802.11g	01	2389.95	53.12	54.00	-0.88	V	Avg.	Pass	-	Band Edge
10	802.11g	01	1206.00	44.11	54.00	-9.89	H	Avg.	Pass	-	Harmonic
11	802.11g	06	2485.83	50.42	54.00	-3.58	V	Avg.	Pass	-	Band Edge
11	802.11g	06	7311.00	53.20	54.00	-0.80	H	Avg.	Pass	-	Harmonic
12	802.11g	11	2483.51	52.89	54.00	-1.11	V	Avg.	Pass	-	Band Edge
12	802.11g	11	7386.00	42.08	54.00	-11.92	V	Avg.	Pass	-	Harmonic

**MIMO <Ant. 1+2>**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
15	802.11n HT20	01	2389.95	52.09	54.00	-1.91	V	Avg.	Pass	-	Band Edge
15	802.11n HT20	01	1208.00	46.73	54.00	-7.27	H	Avg.	Pass	-	Harmonic
16	802.11n HT20	06	2487.53	47.75	54.00	-6.25	V	Avg.	Pass	-	Band Edge
16	802.11n HT20	06	1220.00	53.45	54.00	-0.55	H	Avg.	Pass	-	Harmonic
17	802.11n HT20	11	2483.55	52.41	54.00	-1.59	V	Avg.	Pass	-	Band Edge
17	802.11n HT20	11	1231.00	47.74	54.00	-6.53	H	Avg.	Pass	-	Harmonic
18	802.11n HT40	03	2389.41	52.04	54.00	-1.96	V	Avg.	Pass	-	Band Edge
18	802.11n HT40	03	1211.00	41.87	54.00	-12.13	H	Avg.	Pass	-	Harmonic
19	802.11n HT40	06	2389.88	53.32	54.00	-0.68	V	Avg.	Pass	-	Band Edge
19	802.11n HT40	06	1218.00	46.79	54.00	-7.21	H	Avg.	Pass	-	Harmonic
20	802.11n HT40	09	2484.40	53.30	54.00	-0.70	V	Avg.	Pass	-	Band Edge
20	802.11n HT40	09	1226.00	42.79	54.00	-11.21	H	Avg.	Pass	-	Harmonic
21	WLAN Tx LF	06	718.70	38.38	46.00	-7.62	V	Peak	Pass	-	LF
22	WLAN Tx SHF	06	24754.00	42.09	74.00	-31.91	V	Peak	Pass	-	SHF





<Ant. 1>

Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2319.18</td> <td>51.48</td> <td>74.00</td> <td>-22.60</td> <td>38.27</td> <td>17.19</td> <td>7.21</td> <td>31.69</td> <td>18.42</td> <td>182</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2319.18	51.48	74.00	-22.60	38.27	17.19	7.21	31.69	18.42	182	288	PEAK	<p>Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>94.56</td> <td>-----</td> <td>-----</td> <td>81.52</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>182</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.56	-----	-----	81.52	26.96	7.38	31.75	18.45	182	288	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2319.18	51.48	74.00	-22.60	38.27	17.19	7.21	31.69	18.42	182	288	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	94.56	-----	-----	81.52	26.96	7.38	31.75	18.45	182	288	PEAK																																																																								
Avg	<p>Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:0.810kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.74</td> <td>39.96</td> <td>54.00</td> <td>-14.04</td> <td>24.91</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>182</td> <td>288</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.74	39.96	54.00	-14.04	24.91	17.00	7.34	31.73	18.44	182	288	AVERAGE	<p>Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:0.810kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>91.38</td> <td>-----</td> <td>-----</td> <td>78.23</td> <td>17.80</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>182</td> <td>288</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.38	-----	-----	78.23	17.80	7.37	31.74	18.44	182	288	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2387.74	39.96	54.00	-14.04	24.91	17.00	7.34	31.73	18.44	182	288	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	91.38	-----	-----	78.23	17.80	7.37	31.74	18.44	182	288	AVERAGE																																																																								



Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.87</td> <td>52.47</td> <td>74.00</td> <td>-21.53</td> <td>39.42</td> <td>37.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>151</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.87	52.47	74.00	-21.53	39.42	37.00	7.34	31.73	18.44	151	121	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>106.21</td> <td>-----</td> <td>-----</td> <td>93.17</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>151</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.21	-----	-----	93.17	26.96	7.38	31.75	18.45	151	121	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2387.87	52.47	74.00	-21.53	39.42	37.00	7.34	31.73	18.44	151	121	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	106.21	-----	-----	93.17	26.96	7.38	31.75	18.45	151	121	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:3000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.87</td> <td>41.88</td> <td>54.00</td> <td>-12.12</td> <td>20.83</td> <td>37.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>151</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.87	41.88	54.00	-12.12	20.83	37.00	7.34	31.73	18.44	151	121	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:3000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.12</td> <td>-----</td> <td>-----</td> <td>98.65</td> <td>37.00</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>151</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.12	-----	-----	98.65	37.00	7.37	31.74	18.44	151	121	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2387.87	41.88	54.00	-12.12	20.83	37.00	7.34	31.73	18.44	151	121	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	103.12	-----	-----	98.65	37.00	7.37	31.74	18.44	151	121	AVERAGE																																																																				



Mode	1																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>57.31</td> <td>74.00</td> <td>-16.69</td> <td>49.84</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>253</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>51.37</td> <td>54.00</td> <td>-2.63</td> <td>43.18</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>253</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>33.79</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1206.00	57.31	74.00	-16.69	49.84	23.64	5.48	31.81	10.16	100	253	Peak	2	1206.00	51.37	54.00	-2.63	43.18	23.64	5.48	31.81	10.16	100	253	Average	3	4824.00	45.57	74.00	-28.43	33.79	32.40	10.55	32.98	1.81	--	--	PEAK	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>59.28</td> <td>74.00</td> <td>-14.72</td> <td>51.81</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>168</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>53.42</td> <td>54.00</td> <td>-0.58</td> <td>45.15</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>168</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>45.28</td> <td>74.00</td> <td>-28.88</td> <td>33.42</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1206.00	59.28	74.00	-14.72	51.81	23.64	5.48	31.81	10.16	100	168	Peak	2	1206.00	53.42	54.00	-0.58	45.15	23.64	5.48	31.81	10.16	100	168	Average	3	4824.00	45.28	74.00	-28.88	33.42	32.40	10.55	32.98	1.81	--	--	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	1206.00	57.31	74.00	-16.69	49.84	23.64	5.48	31.81	10.16	100	253	Peak																																																																																																																								
2	1206.00	51.37	54.00	-2.63	43.18	23.64	5.48	31.81	10.16	100	253	Average																																																																																																																								
3	4824.00	45.57	74.00	-28.43	33.79	32.40	10.55	32.98	1.81	--	--	PEAK																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	1206.00	59.28	74.00	-14.72	51.81	23.64	5.48	31.81	10.16	100	168	Peak																																																																																																																								
2	1206.00	53.42	54.00	-0.58	45.15	23.64	5.48	31.81	10.16	100	168	Average																																																																																																																								
3	4824.00	45.28	74.00	-28.88	33.42	32.40	10.55	32.98	1.81	--	--	PEAK																																																																																																																								



Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 88CH3-HY Condition: AVG_54 3m DRX18-E_LE20H5418EN_238712 HORIZONTAL</p>	<p>Site : 88CH3-HY Condition: AVG_54 3m DRX18-E_LE20H5418EN_238712 VERTICAL</p>



Mode	2																																																																											
	Band Edge - L																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p>Site : 830K13-HY Condition: PEAK_9E_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2328.88</td> <td>51.13</td> <td>74.86</td> <td>-22.87</td> <td>37.99</td> <td>37.28</td> <td>7.21</td> <td>31.69</td> <td>18.42</td> <td>200</td> <td>72 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2328.88	51.13	74.86	-22.87	37.99	37.28	7.21	31.69	18.42	200	72 PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>88.43</td> <td>-----</td> <td>-----</td> <td>67.44</td> <td>26.88</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>200</td> <td>72 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	88.43	-----	-----	67.44	26.88	7.41	31.76	18.46	200	72 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2328.88	51.13	74.86	-22.87	37.99	37.28	7.21	31.69	18.42	200	72 PEAK																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2437.00	88.43	-----	-----	67.44	26.88	7.41	31.76	18.46	200	72 PEAK																																																																		
Avg	<p>Site : 830K13-HY Condition: AVG_9E_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2328.88</td> <td>38.83</td> <td>54.00</td> <td>-14.17</td> <td>26.72</td> <td>27.18</td> <td>7.30</td> <td>31.72</td> <td>18.43</td> <td>200</td> <td>72 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2328.88	38.83	54.00	-14.17	26.72	27.18	7.30	31.72	18.43	200	72 AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>77.37</td> <td>-----</td> <td>-----</td> <td>64.38</td> <td>26.88</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>200</td> <td>72 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	77.37	-----	-----	64.38	26.88	7.41	31.76	18.46	200	72 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2328.88	38.83	54.00	-14.17	26.72	27.18	7.30	31.72	18.43	200	72 AVERAGE																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2437.00	77.37	-----	-----	64.38	26.88	7.41	31.76	18.46	200	72 AVERAGE																																																																		



Mode	2																																														
	Band Edge - R																																														
	2400-2483.5_802.11b_CH06_2437MHz																																														
ANT	1																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.51</td> <td>58.74</td> <td>74.00</td> <td>-23.26</td> <td>37.74</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200 72 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.51	58.74	74.00	-23.26	37.74	26.84	7.47	31.79	18.48									200 72 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2483.51	58.74	74.00	-23.26	37.74	26.84	7.47	31.79	18.48																																							
								200 72 PEAK																																							
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 HORIZONTAL RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2480.74</td> <td>39.92</td> <td>54.00</td> <td>-14.00</td> <td>24.85</td> <td>26.90</td> <td>7.49</td> <td>31.80</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200 72 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2480.74	39.92	54.00	-14.00	24.85	26.90	7.49	31.80	18.48									200 72 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2480.74	39.92	54.00	-14.00	24.85	26.90	7.49	31.80	18.48																																							
								200 72 AVERAGE																																							



Mode	2																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11b_CH06_2437MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.04</td> <td>68.81</td> <td>74.00</td> <td>-13.99</td> <td>46.90</td> <td>17.18</td> <td>7.30</td> <td>31.72</td> <td>18.43</td> <td>113</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.04	68.81	74.00	-13.99	46.90	17.18	7.30	31.72	18.43	113	135	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.34</td> <td>-----</td> <td>-----</td> <td>93.37</td> <td>26.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>113</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	106.34	-----	-----	93.37	26.86	7.41	31.76	18.46	113	135	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2388.04	68.81	74.00	-13.99	46.90	17.18	7.30	31.72	18.43	113	135	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	106.34	-----	-----	93.37	26.86	7.41	31.76	18.46	113	135	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.01</td> <td>41.60</td> <td>54.00</td> <td>-12.40</td> <td>21.55</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>113</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.01	41.60	54.00	-12.40	21.55	17.00	7.34	31.73	18.44	113	135	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>100.22</td> <td>-----</td> <td>-----</td> <td>90.23</td> <td>26.80</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>113</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.22	-----	-----	90.23	26.80	7.41	31.76	18.46	113	135	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2388.01	41.60	54.00	-12.40	21.55	17.00	7.34	31.73	18.44	113	135	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	100.22	-----	-----	90.23	26.80	7.41	31.76	18.46	113	135	AVERAGE																																																																				



Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_802.11b_CH06_2437MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.83</td> <td>57.79</td> <td>74.88</td> <td>-16.21</td> <td>44.72</td> <td>26.98</td> <td>7.49</td> <td>31.88</td> <td>18.48</td> <td>113</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.83	57.79	74.88	-16.21	44.72	26.98	7.49	31.88	18.48	113	135	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2483.83	57.79	74.88	-16.21	44.72	26.98	7.49	31.88	18.48	113	135	PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:0.810kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.26</td> <td>48.74</td> <td>54.88</td> <td>-13.26</td> <td>27.72</td> <td>26.85</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>113</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2485.26	48.74	54.88	-13.26	27.72	26.85	7.48	31.79	18.48	113	135	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2485.26	48.74	54.88	-13.26	27.72	26.85	7.48	31.79	18.48	113	135	AVERAGE																														









Mode	2																																																																																																																																																	
	Harmonic																																																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																	
ANT	1																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	<p>Site : 83CH3-MY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_238712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>Hz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 1228.58</td> <td>57.83</td> <td>74.00</td> <td>-16.97</td> <td>48.79</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>18.16 180 259 Peak</td> </tr> <tr> <td>2 1228.58</td> <td>50.23</td> <td>54.00</td> <td>-3.81</td> <td>41.95</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>18.16 180 259 Average</td> </tr> <tr> <td>3 4874.00</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>33.84</td> <td>32.60</td> <td>10.52</td> <td>32.98</td> <td>1.79 -- -- PEAK</td> </tr> <tr> <td>4 7311.00</td> <td>49.66</td> <td>74.00</td> <td>-24.34</td> <td>33.36</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82 -- -- PEAK</td> </tr> <tr> <td>5 7311.00</td> <td>39.66</td> <td>54.00</td> <td>-14.34</td> <td>23.36</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82 -- -- AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Loss Factor	Loss Factor		Hz	dBm	dBm	dB	dBm	dBm	dB	dB	cm deg	1 1228.58	57.83	74.00	-16.97	48.79	23.60	5.49	31.81	18.16 180 259 Peak	2 1228.58	50.23	54.00	-3.81	41.95	23.60	5.49	31.81	18.16 180 259 Average	3 4874.00	45.77	74.00	-28.23	33.84	32.60	10.52	32.98	1.79 -- -- PEAK	4 7311.00	49.66	74.00	-24.34	33.36	37.20	12.62	35.54	2.82 -- -- PEAK	5 7311.00	39.66	54.00	-14.34	23.36	37.20	12.62	35.54	2.82 -- -- AVERAGE	<p>Site : 83CH3-MY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_238712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>Hz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 1228.58</td> <td>68.34</td> <td>74.00</td> <td>-13.86</td> <td>51.90</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>18.16 111 156 Peak</td> </tr> <tr> <td>2 1228.58</td> <td>53.48</td> <td>54.00</td> <td>-0.52</td> <td>45.24</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>18.16 111 156 Average</td> </tr> <tr> <td>3 4874.00</td> <td>45.63</td> <td>74.00</td> <td>-28.37</td> <td>33.70</td> <td>32.60</td> <td>10.52</td> <td>32.98</td> <td>1.79 -- -- PEAK</td> </tr> <tr> <td>4 7311.00</td> <td>48.28</td> <td>74.00</td> <td>-25.72</td> <td>31.90</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82 -- -- PEAK</td> </tr> <tr> <td>5 7311.00</td> <td>39.74</td> <td>54.00</td> <td>-14.26</td> <td>23.44</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82 -- -- AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Loss Factor	Loss Factor		Hz	dBm	dBm	dB	dBm	dBm	dB	dB	cm deg	1 1228.58	68.34	74.00	-13.86	51.90	23.60	5.49	31.81	18.16 111 156 Peak	2 1228.58	53.48	54.00	-0.52	45.24	23.60	5.49	31.81	18.16 111 156 Average	3 4874.00	45.63	74.00	-28.37	33.70	32.60	10.52	32.98	1.79 -- -- PEAK	4 7311.00	48.28	74.00	-25.72	31.90	37.20	12.62	35.54	2.82 -- -- PEAK	5 7311.00	39.74	54.00	-14.26	23.44	37.20	12.62	35.54	2.82 -- -- AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Loss Factor	Loss Factor																																																																																																																																											
Hz	dBm	dBm	dB	dBm	dBm	dB	dB	cm deg																																																																																																																																										
1 1228.58	57.83	74.00	-16.97	48.79	23.60	5.49	31.81	18.16 180 259 Peak																																																																																																																																										
2 1228.58	50.23	54.00	-3.81	41.95	23.60	5.49	31.81	18.16 180 259 Average																																																																																																																																										
3 4874.00	45.77	74.00	-28.23	33.84	32.60	10.52	32.98	1.79 -- -- PEAK																																																																																																																																										
4 7311.00	49.66	74.00	-24.34	33.36	37.20	12.62	35.54	2.82 -- -- PEAK																																																																																																																																										
5 7311.00	39.66	54.00	-14.34	23.36	37.20	12.62	35.54	2.82 -- -- AVERAGE																																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Loss Factor	Loss Factor																																																																																																																																											
Hz	dBm	dBm	dB	dBm	dBm	dB	dB	cm deg																																																																																																																																										
1 1228.58	68.34	74.00	-13.86	51.90	23.60	5.49	31.81	18.16 111 156 Peak																																																																																																																																										
2 1228.58	53.48	54.00	-0.52	45.24	23.60	5.49	31.81	18.16 111 156 Average																																																																																																																																										
3 4874.00	45.63	74.00	-28.37	33.70	32.60	10.52	32.98	1.79 -- -- PEAK																																																																																																																																										
4 7311.00	48.28	74.00	-25.72	31.90	37.20	12.62	35.54	2.82 -- -- PEAK																																																																																																																																										
5 7311.00	39.74	54.00	-14.26	23.44	37.20	12.62	35.54	2.82 -- -- AVERAGE																																																																																																																																										



Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 88CH3-HY Condition: AVG_54 3m DRH18-E_LE20H5418EN_238712 HORIZONTAL</p>	<p>Site : 88CH3-HY Condition: AVG_54 3m DRH18-E_LE20H5418EN_238712 VERTICAL</p>

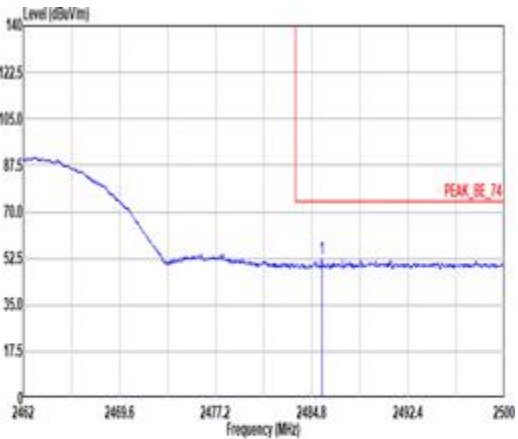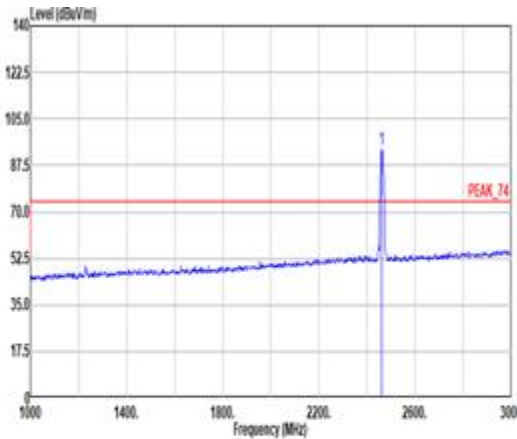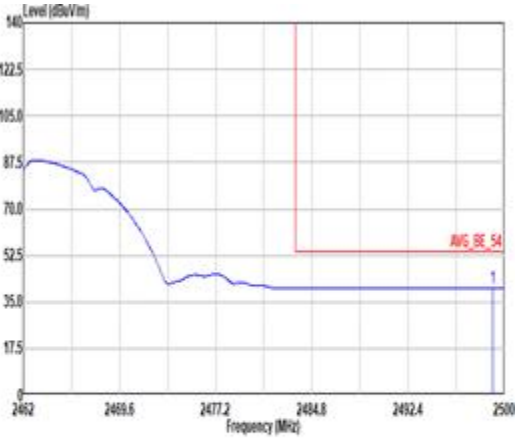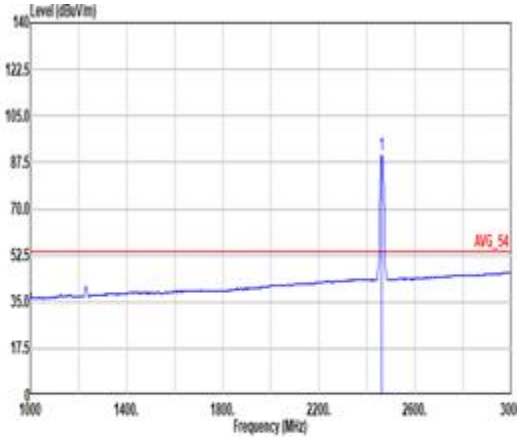

Mode	3																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.56</td> <td>52.16</td> <td>74.00</td> <td>-21.84</td> <td>39.13</td> <td>26.00</td> <td>7.40</td> <td>31.79</td> <td>18.40</td> <td>170</td> <td>213 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.56	52.16	74.00	-21.84	39.13	26.00	7.40	31.79	18.40	170	213 PEAK	 <p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>93.38</td> <td>-----</td> <td>-----</td> <td>88.37</td> <td>26.00</td> <td>7.44</td> <td>31.70</td> <td>18.47</td> <td>170</td> <td>213 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.38	-----	-----	88.37	26.00	7.44	31.70	18.47	170	213 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2485.56	52.16	74.00	-21.84	39.13	26.00	7.40	31.79	18.40	170	213 PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	93.38	-----	-----	88.37	26.00	7.44	31.70	18.47	170	213 PEAK																																																																			
Avg	 <p>Site : 830K13-HY Condition: AVG_BE_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2409.00</td> <td>48.33</td> <td>54.00</td> <td>-13.67</td> <td>27.26</td> <td>26.00</td> <td>7.40</td> <td>31.80</td> <td>18.40</td> <td>170</td> <td>213 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2409.00	48.33	54.00	-13.67	27.26	26.00	7.40	31.80	18.40	170	213 AVERAGE	 <p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>90.12</td> <td>-----</td> <td>-----</td> <td>77.19</td> <td>26.00</td> <td>7.44</td> <td>31.70</td> <td>18.47</td> <td>170</td> <td>213 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	90.12	-----	-----	77.19	26.00	7.44	31.70	18.47	170	213 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2409.00	48.33	54.00	-13.67	27.26	26.00	7.40	31.80	18.40	170	213 AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	90.12	-----	-----	77.19	26.00	7.44	31.70	18.47	170	213 AVERAGE																																																																			



Mode	3																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>185.77</td> <td>-----</td> <td>92.84</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>142</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	185.77	-----	92.84	26.80	7.44	31.78	18.47	142	148	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>185.77</td> <td>-----</td> <td>92.84</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>142</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	185.77	-----	92.84	26.80	7.44	31.78	18.47	142	148	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	185.77	-----	92.84	26.80	7.44	31.78	18.47	142	148	PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	185.77	-----	92.84	26.80	7.44	31.78	18.47	142	148	PEAK																																																																			
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>182.66</td> <td>-----</td> <td>89.73</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>142</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	182.66	-----	89.73	26.80	7.44	31.78	18.47	142	148	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>182.66</td> <td>-----</td> <td>89.73</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>142</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	182.66	-----	89.73	26.80	7.44	31.78	18.47	142	148	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	182.66	-----	89.73	26.80	7.44	31.78	18.47	142	148	AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	182.66	-----	89.73	26.80	7.44	31.78	18.47	142	148	AVERAGE																																																																			







Mode	3																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																	
ANT	1																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak Avg	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>Hz</th> <th>dBuV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1231.00</td> <td>56.97</td> <td>74.00</td> <td>-17.03</td> <td>48.71</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>113</td> <td>272</td> <td>Peak</td> </tr> <tr> <td>2 1231.00</td> <td>49.96</td> <td>54.00</td> <td>-4.04</td> <td>41.79</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>113</td> <td>272</td> <td>Average</td> </tr> <tr> <td>3 4924.00</td> <td>45.81</td> <td>74.00</td> <td>-28.19</td> <td>33.57</td> <td>32.75</td> <td>10.50</td> <td>32.98</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4 7386.00</td> <td>49.81</td> <td>74.00</td> <td>-24.19</td> <td>33.48</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5 7386.00</td> <td>39.48</td> <td>54.00</td> <td>-14.52</td> <td>23.15</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Hz	dBuV/m	dBV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1231.00	56.97	74.00	-17.03	48.71	23.60	5.50	31.81	18.17	113	272	Peak	2 1231.00	49.96	54.00	-4.04	41.79	23.60	5.50	31.81	18.17	113	272	Average	3 4924.00	45.81	74.00	-28.19	33.57	32.75	10.50	32.98	1.77	--	--	PEAK	4 7386.00	49.81	74.00	-24.19	33.48	37.13	12.81	35.60	1.99	--	--	PEAK	5 7386.00	39.48	54.00	-14.52	23.15	37.13	12.81	35.60	1.99	--	--	AVERAGE	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>Hz</th> <th>dBuV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1231.00</td> <td>68.52</td> <td>74.00</td> <td>-13.48</td> <td>52.26</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>164</td> <td>239</td> <td>Peak</td> </tr> <tr> <td>2 1231.00</td> <td>53.45</td> <td>54.00</td> <td>-0.55</td> <td>45.19</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>164</td> <td>239</td> <td>Average</td> </tr> <tr> <td>3 4924.00</td> <td>44.85</td> <td>74.00</td> <td>-29.15</td> <td>32.81</td> <td>32.75</td> <td>10.50</td> <td>32.98</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4 7386.00</td> <td>49.12</td> <td>74.00</td> <td>-24.88</td> <td>32.79</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5 7386.00</td> <td>39.58</td> <td>54.00</td> <td>-14.50</td> <td>23.17</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Hz	dBuV/m	dBV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1231.00	68.52	74.00	-13.48	52.26	23.60	5.50	31.81	18.17	164	239	Peak	2 1231.00	53.45	54.00	-0.55	45.19	23.60	5.50	31.81	18.17	164	239	Average	3 4924.00	44.85	74.00	-29.15	32.81	32.75	10.50	32.98	1.77	--	--	PEAK	4 7386.00	49.12	74.00	-24.88	32.79	37.13	12.81	35.60	1.99	--	--	PEAK	5 7386.00	39.58	54.00	-14.50	23.17	37.13	12.81	35.60	1.99	--	--	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																												
Hz	dBuV/m	dBV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1 1231.00	56.97	74.00	-17.03	48.71	23.60	5.50	31.81	18.17	113	272	Peak																																																																																																																																																																							
2 1231.00	49.96	54.00	-4.04	41.79	23.60	5.50	31.81	18.17	113	272	Average																																																																																																																																																																							
3 4924.00	45.81	74.00	-28.19	33.57	32.75	10.50	32.98	1.77	--	--	PEAK																																																																																																																																																																							
4 7386.00	49.81	74.00	-24.19	33.48	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																							
5 7386.00	39.48	54.00	-14.52	23.15	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																												
Hz	dBuV/m	dBV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1 1231.00	68.52	74.00	-13.48	52.26	23.60	5.50	31.81	18.17	164	239	Peak																																																																																																																																																																							
2 1231.00	53.45	54.00	-0.55	45.19	23.60	5.50	31.81	18.17	164	239	Average																																																																																																																																																																							
3 4924.00	44.85	74.00	-29.15	32.81	32.75	10.50	32.98	1.77	--	--	PEAK																																																																																																																																																																							
4 7386.00	49.12	74.00	-24.88	32.79	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																							
5 7386.00	39.58	54.00	-14.50	23.17	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																							



Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>

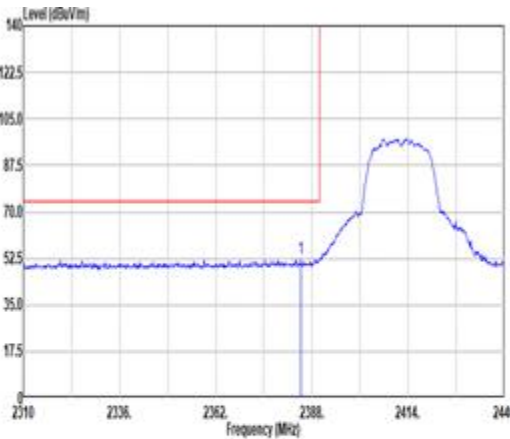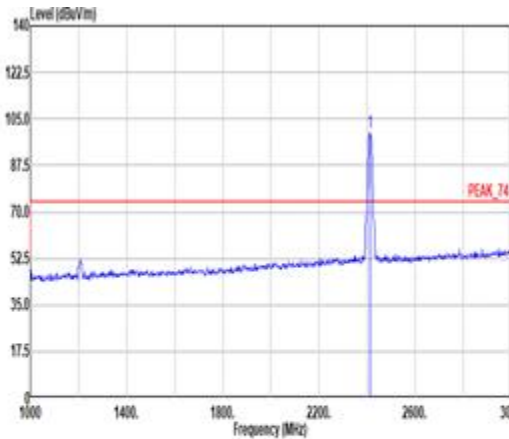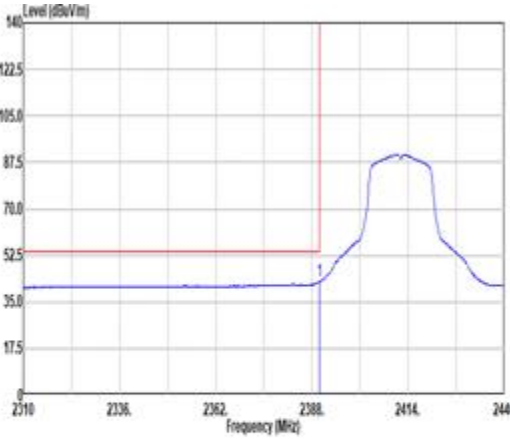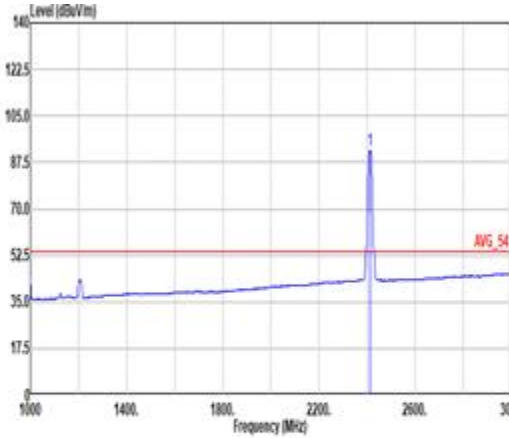

Mode	4																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.81</td> <td>52.32</td> <td>74.00</td> <td>-21.68</td> <td>39.28</td> <td>27.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>270 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.81	52.32	74.00	-21.68	39.28	27.00	7.33	31.73	18.44	100	270 PEAK	 <p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.01</td> <td>-----</td> <td>-----</td> <td>86.97</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>270 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.01	-----	-----	86.97	26.96	7.38	31.75	18.45	100	270 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2385.81	52.32	74.00	-21.68	39.28	27.00	7.33	31.73	18.44	100	270 PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2412.00	100.01	-----	-----	86.97	26.96	7.38	31.75	18.45	100	270 PEAK																																																																			
Avg	 <p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>42.61</td> <td>54.00</td> <td>-11.39</td> <td>29.56</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>270 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.61	54.00	-11.39	29.56	27.00	7.34	31.73	18.44	100	270 AVERAGE	 <p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>92.03</td> <td>-----</td> <td>-----</td> <td>70.96</td> <td>27.00</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>100</td> <td>270 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	92.03	-----	-----	70.96	27.00	7.37	31.74	18.44	100	270 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2389.95	42.61	54.00	-11.39	29.56	27.00	7.34	31.73	18.44	100	270 AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2412.00	92.03	-----	-----	70.96	27.00	7.37	31.74	18.44	100	270 AVERAGE																																																																			



Mode	4																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.75</td> <td>66.00</td> <td>74.00</td> <td>-8.00</td> <td>52.96</td> <td>17.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>154 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.75	66.00	74.00	-8.00	52.96	17.00	7.33	31.73	18.44	100	154 PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>111.68</td> <td>-----</td> <td>-----</td> <td>98.68</td> <td>26.92</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>154 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	111.68	-----	-----	98.68	26.92	7.38	31.75	18.45	100	154 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2384.75	66.00	74.00	-8.00	52.96	17.00	7.33	31.73	18.44	100	154 PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2412.00	111.68	-----	-----	98.68	26.92	7.38	31.75	18.45	100	154 PEAK																																																																			
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.59</td> <td>54.00</td> <td>-1.41</td> <td>39.54</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>154 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	52.59	54.00	-1.41	39.54	17.00	7.34	31.73	18.44	100	154 AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.33</td> <td>-----</td> <td>-----</td> <td>91.26</td> <td>17.00</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>100</td> <td>154 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.33	-----	-----	91.26	17.00	7.37	31.74	18.44	100	154 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2389.95	52.59	54.00	-1.41	39.54	17.00	7.34	31.73	18.44	100	154 AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2412.00	104.33	-----	-----	91.26	17.00	7.37	31.74	18.44	100	154 AVERAGE																																																																			





Mode	4																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>53.55</td> <td>74.00</td> <td>-20.45</td> <td>45.28</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>44.67</td> <td>54.00</td> <td>-9.33</td> <td>36.40</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>257</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>46.53</td> <td>74.00</td> <td>-27.47</td> <td>34.75</td> <td>32.40</td> <td>18.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg		1	1206.00	53.55	74.00	-20.45	45.28	23.64	5.48	31.81	18.16	100	257	Peak	2	1206.00	44.67	54.00	-9.33	36.40	23.64	5.48	31.81	18.16	100	257	Average	3	4824.00	46.53	74.00	-27.47	34.75	32.40	18.55	32.98	1.81	--	--	PEAK	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>55.46</td> <td>74.00</td> <td>-18.54</td> <td>47.19</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>162</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>46.27</td> <td>54.00</td> <td>-7.73</td> <td>38.80</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>162</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>47.15</td> <td>74.00</td> <td>-26.85</td> <td>35.37</td> <td>32.40</td> <td>18.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg		1	1206.00	55.46	74.00	-18.54	47.19	23.64	5.48	31.81	18.16	100	162	Peak	2	1206.00	46.27	54.00	-7.73	38.80	23.64	5.48	31.81	18.16	100	162	Average	3	4824.00	47.15	74.00	-26.85	35.37	32.40	18.55	32.98	1.81	--	--	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																																								
	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	1206.00	53.55	74.00	-20.45	45.28	23.64	5.48	31.81	18.16	100	257	Peak																																																																																																																								
2	1206.00	44.67	54.00	-9.33	36.40	23.64	5.48	31.81	18.16	100	257	Average																																																																																																																								
3	4824.00	46.53	74.00	-27.47	34.75	32.40	18.55	32.98	1.81	--	--	PEAK																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																																								
	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	1206.00	55.46	74.00	-18.54	47.19	23.64	5.48	31.81	18.16	100	162	Peak																																																																																																																								
2	1206.00	46.27	54.00	-7.73	38.80	23.64	5.48	31.81	18.16	100	162	Average																																																																																																																								
3	4824.00	47.15	74.00	-26.85	35.37	32.40	18.55	32.98	1.81	--	--	PEAK																																																																																																																								



Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>



Mode	5																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.11</td> <td>53.94</td> <td>74.00</td> <td>-20.06</td> <td>40.89</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>300</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.11	53.94	74.00	-20.06	40.89	17.00	7.34	31.73	18.44	300	270	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>185.28</td> <td>-----</td> <td>-----</td> <td>92.21</td> <td>26.88</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>300</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	185.28	-----	-----	92.21	26.88	7.41	31.76	18.46	300	270	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.11	53.94	74.00	-20.06	40.89	17.00	7.34	31.73	18.44	300	270	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	185.28	-----	-----	92.21	26.88	7.41	31.76	18.46	300	270	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.63</td> <td>42.13</td> <td>54.00</td> <td>-11.87</td> <td>29.00</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>300</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	42.13	54.00	-11.87	29.00	17.00	7.34	31.73	18.44	300	270	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.36</td> <td>-----</td> <td>-----</td> <td>84.39</td> <td>26.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>300</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.36	-----	-----	84.39	26.86	7.41	31.76	18.46	300	270	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.63	42.13	54.00	-11.87	29.00	17.00	7.34	31.73	18.44	300	270	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	97.36	-----	-----	84.39	26.86	7.41	31.76	18.46	300	270	AVERAGE																																																																				



Mode	5																																														
	Band Edge - R																																														
	2400-2483.5_802.11g_CH06_2437MHz																																														
ANT	1																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2C95418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.12</td> <td>51.92</td> <td>74.00</td> <td>-22.00</td> <td>36.92</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300 270 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.12	51.92	74.00	-22.00	36.92	26.84	7.47	31.79	18.48									300 270 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2484.12	51.92	74.00	-22.00	36.92	26.84	7.47	31.79	18.48																																							
								300 270 PEAK																																							
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2C95418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.19</td> <td>41.45</td> <td>54.00</td> <td>-12.55</td> <td>28.45</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300 270 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.19	41.45	54.00	-12.55	28.45	26.84	7.47	31.79	18.48									300 270 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2484.19	41.45	54.00	-12.55	28.45	26.84	7.47	31.79	18.48																																							
								300 270 AVERAGE																																							



Mode	5																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2364.74</td> <td>67.66</td> <td>74.88</td> <td>-5.34</td> <td>54.56</td> <td>27.18</td> <td>7.29</td> <td>31.72</td> <td>18.43</td> <td>151</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.74	67.66	74.88	-5.34	54.56	27.18	7.29	31.72	18.43	151	142	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>116.79</td> <td>-----</td> <td>-----</td> <td>103.84</td> <td>26.84</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>151</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	116.79	-----	-----	103.84	26.84	7.41	31.76	18.46	151	142	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2364.74	67.66	74.88	-5.34	54.56	27.18	7.29	31.72	18.43	151	142	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	116.79	-----	-----	103.84	26.84	7.41	31.76	18.46	151	142	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2369.25</td> <td>52.77</td> <td>54.00</td> <td>-1.23</td> <td>39.72</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>151</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.25	52.77	54.00	-1.23	39.72	27.00	7.34	31.73	18.44	151	142	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>109.67</td> <td>-----</td> <td>-----</td> <td>96.70</td> <td>26.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>151</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	109.67	-----	-----	96.70	26.86	7.41	31.76	18.46	151	142	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2369.25	52.77	54.00	-1.23	39.72	27.00	7.34	31.73	18.44	151	142	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	109.67	-----	-----	96.70	26.86	7.41	31.76	18.46	151	142	AVERAGE																																																																				



Mode	5																																									
	Band Edge - R																																									
	2400-2483.5_802.11g_CH06_2437MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2CR5418EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.88</td> <td>61.38</td> <td>74.00</td> <td>-12.62</td> <td>48.37</td> <td>26.85</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>151</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2484.88	61.38	74.00	-12.62	48.37	26.85	7.47	31.79	18.48	151	142	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2484.88	61.38	74.00	-12.62	48.37	26.85	7.47	31.79	18.48	151	142	PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2CR5418EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>47.41</td> <td>54.00</td> <td>-6.59</td> <td>34.41</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>151</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.56	47.41	54.00	-6.59	34.41	26.84	7.47	31.79	18.48	151	142	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2483.56	47.41	54.00	-6.59	34.41	26.84	7.47	31.79	18.48	151	142	AVERAGE																														



Mode	5																																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
Peak Avg	<p>Site : 830K3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A180N_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1218.50</td> <td>57.26</td> <td>74.00</td> <td>-16.74</td> <td>49.82</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>259</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1218.50</td> <td>47.14</td> <td>54.00</td> <td>-6.86</td> <td>38.90</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>259</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>56.71</td> <td>74.00</td> <td>-17.29</td> <td>44.78</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>300</td> <td>228</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>46.97</td> <td>54.00</td> <td>-7.03</td> <td>35.84</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>300</td> <td>228</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>59.20</td> <td>74.00</td> <td>-14.72</td> <td>42.98</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>250</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7311.00</td> <td>49.51</td> <td>54.00</td> <td>-4.49</td> <td>33.21</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>250</td> <td>215</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1218.50	57.26	74.00	-16.74	49.82	23.60	5.49	31.81	10.16	100	259	Peak	2	1218.50	47.14	54.00	-6.86	38.90	23.60	5.49	31.81	10.16	100	259	Average	3	4874.00	56.71	74.00	-17.29	44.78	32.60	10.52	32.90	1.79	300	228	PEAK	4	4874.00	46.97	54.00	-7.03	35.84	32.60	10.52	32.90	1.79	300	228	AVERAGE	5	7311.00	59.20	74.00	-14.72	42.98	37.20	12.62	35.54	2.82	250	215	PEAK	6	7311.00	49.51	54.00	-4.49	33.21	37.20	12.62	35.54	2.82	250	215	AVERAGE	<p>Site : 830K3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A180N_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1218.50</td> <td>59.83</td> <td>74.00</td> <td>-14.17</td> <td>51.59</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>156</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1218.50</td> <td>51.08</td> <td>54.00</td> <td>-2.90</td> <td>42.06</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>156</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>55.68</td> <td>74.00</td> <td>-18.32</td> <td>43.75</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>400</td> <td>312</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>45.90</td> <td>54.00</td> <td>-8.10</td> <td>35.97</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>400</td> <td>312</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>61.85</td> <td>74.00</td> <td>-12.15</td> <td>45.55</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>274</td> <td>217</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7311.00</td> <td>51.72</td> <td>54.00</td> <td>-2.28</td> <td>35.42</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>274</td> <td>217</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1218.50	59.83	74.00	-14.17	51.59	23.60	5.49	31.81	10.16	100	156	Peak	2	1218.50	51.08	54.00	-2.90	42.06	23.60	5.49	31.81	10.16	100	156	Average	3	4874.00	55.68	74.00	-18.32	43.75	32.60	10.52	32.90	1.79	400	312	PEAK	4	4874.00	45.90	54.00	-8.10	35.97	32.60	10.52	32.90	1.79	400	312	AVERAGE	5	7311.00	61.85	74.00	-12.15	45.55	37.20	12.62	35.54	2.82	274	217	PEAK	6	7311.00	51.72	54.00	-2.28	35.42	37.20	12.62	35.54	2.82	274	217	AVERAGE
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	1218.50	57.26	74.00	-16.74	49.82	23.60	5.49	31.81	10.16	100	259	Peak																																																																																																																																																																																																						
2	1218.50	47.14	54.00	-6.86	38.90	23.60	5.49	31.81	10.16	100	259	Average																																																																																																																																																																																																						
3	4874.00	56.71	74.00	-17.29	44.78	32.60	10.52	32.90	1.79	300	228	PEAK																																																																																																																																																																																																						
4	4874.00	46.97	54.00	-7.03	35.84	32.60	10.52	32.90	1.79	300	228	AVERAGE																																																																																																																																																																																																						
5	7311.00	59.20	74.00	-14.72	42.98	37.20	12.62	35.54	2.82	250	215	PEAK																																																																																																																																																																																																						
6	7311.00	49.51	54.00	-4.49	33.21	37.20	12.62	35.54	2.82	250	215	AVERAGE																																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	1218.50	59.83	74.00	-14.17	51.59	23.60	5.49	31.81	10.16	100	156	Peak																																																																																																																																																																																																						
2	1218.50	51.08	54.00	-2.90	42.06	23.60	5.49	31.81	10.16	100	156	Average																																																																																																																																																																																																						
3	4874.00	55.68	74.00	-18.32	43.75	32.60	10.52	32.90	1.79	400	312	PEAK																																																																																																																																																																																																						
4	4874.00	45.90	54.00	-8.10	35.97	32.60	10.52	32.90	1.79	400	312	AVERAGE																																																																																																																																																																																																						
5	7311.00	61.85	74.00	-12.15	45.55	37.20	12.62	35.54	2.82	274	217	PEAK																																																																																																																																																																																																						
6	7311.00	51.72	54.00	-2.28	35.42	37.20	12.62	35.54	2.82	274	217	AVERAGE																																																																																																																																																																																																						



Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>





Mode	6																																																																			
	Band Edge																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>95.11</td> <td>-----</td> <td>-----</td> <td>82.15</td> <td>26.82</td> <td>7.44</td> <td>31.77</td> <td>18.47</td> <td>300</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	2462.00	95.11	-----	-----	82.15	26.82	7.44	31.77	18.47	300	30	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>95.11</td> <td>-----</td> <td>-----</td> <td>82.15</td> <td>26.82</td> <td>7.44</td> <td>31.77</td> <td>18.47</td> <td>300</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	2462.00	95.11	-----	-----	82.15	26.82	7.44	31.77	18.47	300	30	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	2462.00	95.11	-----	-----	82.15	26.82	7.44	31.77	18.47	300	30	PEAK																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	2462.00	95.11	-----	-----	82.15	26.82	7.44	31.77	18.47	300	30	PEAK																																																								
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>42.77</td> <td>54.00</td> <td>-11.23</td> <td>29.77</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>300</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	2483.51	42.77	54.00	-11.23	29.77	26.84	7.47	31.79	18.48	300	30	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>86.74</td> <td>-----</td> <td>-----</td> <td>73.81</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>300</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	2462.00	86.74	-----	-----	73.81	26.80	7.44	31.78	18.47	300	30	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	2483.51	42.77	54.00	-11.23	29.77	26.84	7.47	31.79	18.48	300	30	AVERAGE																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	2462.00	86.74	-----	-----	73.81	26.80	7.44	31.78	18.47	300	30	AVERAGE																																																								



Mode	6																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.15</td> <td>63.68</td> <td>74.00</td> <td>-10.40</td> <td>50.68</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.40</td> <td>100</td> <td>152 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.15	63.68	74.00	-10.40	50.68	26.84	7.47	31.79	18.40	100	152 PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>118.18</td> <td>-----</td> <td>-----</td> <td>97.17</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>152 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	118.18	-----	-----	97.17	26.80	7.44	31.78	18.47	100	152 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2484.15	63.68	74.00	-10.40	50.68	26.84	7.47	31.79	18.40	100	152 PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	118.18	-----	-----	97.17	26.80	7.44	31.78	18.47	100	152 PEAK																																																																			
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.12</td> <td>53.18</td> <td>54.00</td> <td>-8.82</td> <td>40.18</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.40</td> <td>100</td> <td>152 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	53.18	54.00	-8.82	40.18	26.84	7.47	31.79	18.40	100	152 AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.65</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>152 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.65	-----	-----	89.72	26.80	7.44	31.78	18.47	100	152 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2484.12	53.18	54.00	-8.82	40.18	26.84	7.47	31.79	18.40	100	152 AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	102.65	-----	-----	89.72	26.80	7.44	31.78	18.47	100	152 AVERAGE																																																																			



Mode	6																																																																																																																																																	
	Harmonic																																																																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																	
ANT	1																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	<p>Site : 80CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1231.00</td> <td>58.73</td> <td>-23.27</td> <td>42.47</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>100</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1231.00</td> <td>41.52</td> <td>-12.48</td> <td>33.26</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>100</td> <td>257</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>47.30</td> <td>-26.70</td> <td>35.26</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>59.42</td> <td>-14.58</td> <td>43.89</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>240</td> <td>229</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>48.36</td> <td>-5.64</td> <td>32.83</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>240</td> <td>229</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	1231.00	58.73	-23.27	42.47	23.60	5.50	31.81	10.17	100	257	Peak	2	1231.00	41.52	-12.48	33.26	23.60	5.50	31.81	10.17	100	257	Average	3	4924.00	47.30	-26.70	35.26	32.75	10.50	32.90	1.77	--	--	PEAK	4	7386.00	59.42	-14.58	43.89	37.13	12.81	35.60	1.99	240	229	PEAK	5	7386.00	48.36	-5.64	32.83	37.13	12.81	35.60	1.99	240	229	AVERAGE	<p>Site : 80CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1231.00</td> <td>54.85</td> <td>-19.15</td> <td>45.79</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>100</td> <td>152</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1231.00</td> <td>44.48</td> <td>-29.52</td> <td>36.22</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>100</td> <td>152</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>46.30</td> <td>-27.70</td> <td>34.26</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>52.48</td> <td>-21.52</td> <td>36.15</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>263</td> <td>282</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>42.93</td> <td>-31.07</td> <td>26.60</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>263</td> <td>282</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	1231.00	54.85	-19.15	45.79	23.60	5.50	31.81	10.17	100	152	Peak	2	1231.00	44.48	-29.52	36.22	23.60	5.50	31.81	10.17	100	152	Average	3	4924.00	46.30	-27.70	34.26	32.75	10.50	32.90	1.77	--	--	PEAK	4	7386.00	52.48	-21.52	36.15	37.13	12.81	35.60	1.99	263	282	PEAK	5	7386.00	42.93	-31.07	26.60	37.13	12.81	35.60	1.99	263	282	AVERAGE
	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																						
1	1231.00	58.73	-23.27	42.47	23.60	5.50	31.81	10.17	100	257	Peak																																																																																																																																							
2	1231.00	41.52	-12.48	33.26	23.60	5.50	31.81	10.17	100	257	Average																																																																																																																																							
3	4924.00	47.30	-26.70	35.26	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																							
4	7386.00	59.42	-14.58	43.89	37.13	12.81	35.60	1.99	240	229	PEAK																																																																																																																																							
5	7386.00	48.36	-5.64	32.83	37.13	12.81	35.60	1.99	240	229	AVERAGE																																																																																																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																							
1	1231.00	54.85	-19.15	45.79	23.60	5.50	31.81	10.17	100	152	Peak																																																																																																																																							
2	1231.00	44.48	-29.52	36.22	23.60	5.50	31.81	10.17	100	152	Average																																																																																																																																							
3	4924.00	46.30	-27.70	34.26	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																							
4	7386.00	52.48	-21.52	36.15	37.13	12.81	35.60	1.99	263	282	PEAK																																																																																																																																							
5	7386.00	42.93	-31.07	26.60	37.13	12.81	35.60	1.99	263	282	AVERAGE																																																																																																																																							



Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>



Mode	13																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																									
ANT	1																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Site : 830K3-HY Condition: QP 3m CRL61110_62028 &amp; 003_231015 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>38.97</td><td>21.49</td><td>40.00</td><td>-18.51</td><td>20.00</td><td>24.27</td><td>1.87</td><td>32.73</td><td>0.00</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>154.16</td><td>29.63</td><td>43.50</td><td>-13.87</td><td>43.24</td><td>16.92</td><td>1.95</td><td>32.68</td><td>0.20</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>218.18</td><td>29.31</td><td>46.00</td><td>-16.69</td><td>44.55</td><td>15.06</td><td>2.21</td><td>32.68</td><td>0.17</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>311.38</td><td>29.12</td><td>46.00</td><td>-16.88</td><td>39.74</td><td>19.37</td><td>2.64</td><td>32.72</td><td>0.09</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>729.37</td><td>29.25</td><td>46.00</td><td>-16.75</td><td>38.28</td><td>27.74</td><td>3.85</td><td>32.76</td><td>0.14</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>953.44</td><td>32.88</td><td>46.00</td><td>-13.12</td><td>28.78</td><td>38.92</td><td>4.38</td><td>31.38</td><td>0.26</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	38.97	21.49	40.00	-18.51	20.00	24.27	1.87	32.73	0.00	--	Peak	2	154.16	29.63	43.50	-13.87	43.24	16.92	1.95	32.68	0.20	--	Peak	3	218.18	29.31	46.00	-16.69	44.55	15.06	2.21	32.68	0.17	--	Peak	4	311.38	29.12	46.00	-16.88	39.74	19.37	2.64	32.72	0.09	--	Peak	5	729.37	29.25	46.00	-16.75	38.28	27.74	3.85	32.76	0.14	--	Peak	6	953.44	32.88	46.00	-13.12	28.78	38.92	4.38	31.38	0.26	--	Peak	<p>Site : 830K3-HY Condition: QP 3m CRL61110_62028 &amp; 003_231015 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>25.67</td><td>40.00</td><td>-14.33</td><td>33.88</td><td>23.46</td><td>1.06</td><td>32.73</td><td>0.00</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>214.30</td><td>32.66</td><td>43.50</td><td>-10.84</td><td>48.06</td><td>14.92</td><td>2.19</td><td>32.68</td><td>0.17</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>218.18</td><td>32.68</td><td>46.00</td><td>-13.32</td><td>47.92</td><td>15.06</td><td>2.21</td><td>32.68</td><td>0.17</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>348.48</td><td>28.89</td><td>46.00</td><td>-17.11</td><td>37.94</td><td>28.83</td><td>2.74</td><td>32.72</td><td>0.18</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>736.16</td><td>30.85</td><td>46.00</td><td>-15.15</td><td>31.61</td><td>27.97</td><td>3.86</td><td>32.73</td><td>0.14</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>953.44</td><td>33.57</td><td>46.00</td><td>-12.43</td><td>29.39</td><td>38.92</td><td>4.38</td><td>31.38</td><td>0.26</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	32.91	25.67	40.00	-14.33	33.88	23.46	1.06	32.73	0.00	--	Peak	2	214.30	32.66	43.50	-10.84	48.06	14.92	2.19	32.68	0.17	--	Peak	3	218.18	32.68	46.00	-13.32	47.92	15.06	2.21	32.68	0.17	--	Peak	4	348.48	28.89	46.00	-17.11	37.94	28.83	2.74	32.72	0.18	--	Peak	5	736.16	30.85	46.00	-15.15	31.61	27.97	3.86	32.73	0.14	--	Peak	6	953.44	33.57	46.00	-12.43	29.39	38.92	4.38	31.38	0.26	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	38.97	21.49	40.00	-18.51	20.00	24.27	1.87	32.73	0.00	--	Peak																																																																																																																																																															
2	154.16	29.63	43.50	-13.87	43.24	16.92	1.95	32.68	0.20	--	Peak																																																																																																																																																															
3	218.18	29.31	46.00	-16.69	44.55	15.06	2.21	32.68	0.17	--	Peak																																																																																																																																																															
4	311.38	29.12	46.00	-16.88	39.74	19.37	2.64	32.72	0.09	--	Peak																																																																																																																																																															
5	729.37	29.25	46.00	-16.75	38.28	27.74	3.85	32.76	0.14	--	Peak																																																																																																																																																															
6	953.44	32.88	46.00	-13.12	28.78	38.92	4.38	31.38	0.26	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	32.91	25.67	40.00	-14.33	33.88	23.46	1.06	32.73	0.00	--	Peak																																																																																																																																																															
2	214.30	32.66	43.50	-10.84	48.06	14.92	2.19	32.68	0.17	--	Peak																																																																																																																																																															
3	218.18	32.68	46.00	-13.32	47.92	15.06	2.21	32.68	0.17	--	Peak																																																																																																																																																															
4	348.48	28.89	46.00	-17.11	37.94	28.83	2.74	32.72	0.18	--	Peak																																																																																																																																																															
5	736.16	30.85	46.00	-15.15	31.61	27.97	3.86	32.73	0.14	--	Peak																																																																																																																																																															
6	953.44	33.57	46.00	-12.43	29.39	38.92	4.38	31.38	0.26	--	Peak																																																																																																																																																															



Mode	14																																																															
	SHF																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																															
ANT	1																																																															
Pol.	Horizontal	Vertical																																																														
Peak	<p>Site : 83CH3-HY Condition: PEAK_74 In 88H9178_1225_238718 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>22958.00</td> <td>41.84</td> <td>74.80</td> <td>-32.96</td> <td>51.96</td> <td>39.28</td> <td>19.73</td> <td>68.31</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	22958.00	41.84	74.80	-32.96	51.96	39.28	19.73	68.31	-9.54	--	--	Peak	<p>Site : 83CH3-HY Condition: PEAK_74 In 88H9178_1225_238718 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>24754.00</td> <td>41.98</td> <td>74.80</td> <td>-32.18</td> <td>51.42</td> <td>39.59</td> <td>28.78</td> <td>68.35</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	24754.00	41.98	74.80	-32.18	51.42	39.59	28.78	68.35	-9.54	--	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	22958.00	41.84	74.80	-32.96	51.96	39.28	19.73	68.31	-9.54	--	--	Peak																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	24754.00	41.98	74.80	-32.18	51.42	39.59	28.78	68.35	-9.54	--	--	Peak																																																				



<Ant. 2>

Mode	7																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.48</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>39.27</td> <td>17.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>283</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.48	52.31	74.00	-21.69	39.27	17.00	7.33	31.73	18.44	283	185	PEAK	<p>Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.58</td> <td>-----</td> <td>-----</td> <td>87.46</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>283</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.58	-----	-----	87.46	26.96	7.38	31.75	18.45	283	185	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2385.48	52.31	74.00	-21.69	39.27	17.00	7.33	31.73	18.44	283	185	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	100.58	-----	-----	87.46	26.96	7.38	31.75	18.45	283	185	PEAK																																																																								
Avg	<p>Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:0.810kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2373.96</td> <td>48.44</td> <td>54.00</td> <td>-13.56</td> <td>27.36</td> <td>17.00</td> <td>7.31</td> <td>31.72</td> <td>18.43</td> <td>283</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.96	48.44	54.00	-13.56	27.36	17.00	7.31	31.72	18.43	283	185	AVERAGE	<p>Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:0.810kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>97.25</td> <td>-----</td> <td>-----</td> <td>84.21</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>283</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.25	-----	-----	84.21	26.96	7.38	31.75	18.45	283	185	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2373.96	48.44	54.00	-13.56	27.36	17.00	7.31	31.72	18.43	283	185	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	97.25	-----	-----	84.21	26.96	7.38	31.75	18.45	283	185	AVERAGE																																																																								



Mode	7																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.78</td> <td>52.71</td> <td>74.00</td> <td>-21.29</td> <td>39.66</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.78	52.71	74.00	-21.29	39.66	17.00	7.34	31.73	18.44	100	100	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.66</td> <td>-----</td> <td>-----</td> <td>91.62</td> <td>26.96</td> <td>7.38</td> <td>31.74</td> <td>18.45</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.66	-----	-----	91.62	26.96	7.38	31.74	18.45	100	100	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.78	52.71	74.00	-21.29	39.66	17.00	7.34	31.73	18.44	100	100	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	104.66	-----	-----	91.62	26.96	7.38	31.74	18.45	100	100	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.810kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>41.43</td> <td>54.00</td> <td>-12.57</td> <td>21.38</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	41.43	54.00	-12.57	21.38	17.00	7.34	31.73	18.44	100	100	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.810kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.55</td> <td>-----</td> <td>-----</td> <td>88.48</td> <td>27.00</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.55	-----	-----	88.48	27.00	7.37	31.74	18.44	100	100	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.95	41.43	54.00	-12.57	21.38	17.00	7.34	31.73	18.44	100	100	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	105.55	-----	-----	88.48	27.00	7.37	31.74	18.44	100	100	AVERAGE																																																																				





Mode	7																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																			
ANT	2																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>57.53</td> <td>74.00</td> <td>-16.47</td> <td>49.26</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>25</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>51.97</td> <td>54.00</td> <td>-2.03</td> <td>43.78</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>25</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>45.63</td> <td>74.00</td> <td>-28.37</td> <td>33.85</td> <td>32.48</td> <td>18.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBV/m	dBV/m	dB	dBV	dBm	dB	dB	dB	dB	cm	deg	1	1206.00	57.53	74.00	-16.47	49.26	23.64	5.48	31.81	18.16	100	25	Peak	2	1206.00	51.97	54.00	-2.03	43.78	23.64	5.48	31.81	18.16	100	25	Average	3	4824.00	45.63	74.00	-28.37	33.85	32.48	18.55	32.98	1.81	--	--	PEAK	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>55.93</td> <td>74.00</td> <td>-18.07</td> <td>47.66</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>206</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>50.18</td> <td>54.00</td> <td>-3.90</td> <td>41.83</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>18.16</td> <td>100</td> <td>206</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>45.82</td> <td>74.00</td> <td>-28.98</td> <td>33.24</td> <td>32.48</td> <td>18.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBV/m	dBV/m	dB	dBV	dBm	dB	dB	dB	dB	cm	deg	1	1206.00	55.93	74.00	-18.07	47.66	23.64	5.48	31.81	18.16	100	206	Peak	2	1206.00	50.18	54.00	-3.90	41.83	23.64	5.48	31.81	18.16	100	206	Average	3	4824.00	45.82	74.00	-28.98	33.24	32.48	18.55	32.98	1.81	--	--	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																																								
	MHz	dBV/m	dBV/m	dB	dBV	dBm	dB	dB	dB	dB	cm	deg																																																																																																																								
1	1206.00	57.53	74.00	-16.47	49.26	23.64	5.48	31.81	18.16	100	25	Peak																																																																																																																								
2	1206.00	51.97	54.00	-2.03	43.78	23.64	5.48	31.81	18.16	100	25	Average																																																																																																																								
3	4824.00	45.63	74.00	-28.37	33.85	32.48	18.55	32.98	1.81	--	--	PEAK																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																																								
	MHz	dBV/m	dBV/m	dB	dBV	dBm	dB	dB	dB	dB	cm	deg																																																																																																																								
1	1206.00	55.93	74.00	-18.07	47.66	23.64	5.48	31.81	18.16	100	206	Peak																																																																																																																								
2	1206.00	50.18	54.00	-3.90	41.83	23.64	5.48	31.81	18.16	100	206	Average																																																																																																																								
3	4824.00	45.82	74.00	-28.98	33.24	32.48	18.55	32.98	1.81	--	--	PEAK																																																																																																																								



Mode	7	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>



Mode	8																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11b_CH06_2437MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_9E_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2398.64</td> <td>51.61</td> <td>74.00</td> <td>-22.39</td> <td>36.52</td> <td>17.18</td> <td>7.27</td> <td>31.71</td> <td>18.43</td> <td>261</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2398.64	51.61	74.00	-22.39	36.52	17.18	7.27	31.71	18.43	261	187	PEAK	<p>Site : 830K13-HY Condition: PEAK_74_3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>99.73</td> <td>-----</td> <td>-----</td> <td>86.76</td> <td>26.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>261</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	99.73	-----	-----	86.76	26.86	7.41	31.76	18.46	261	187	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2398.64	51.61	74.00	-22.39	36.52	17.18	7.27	31.71	18.43	261	187	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	99.73	-----	-----	86.76	26.86	7.41	31.76	18.46	261	187	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_9E_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2375.00</td> <td>40.21</td> <td>54.00</td> <td>-13.70</td> <td>27.15</td> <td>27.05</td> <td>7.31</td> <td>31.72</td> <td>18.43</td> <td>261</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.00	40.21	54.00	-13.70	27.15	27.05	7.31	31.72	18.43	261	187	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>96.55</td> <td>-----</td> <td>-----</td> <td>83.58</td> <td>26.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>261</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.55	-----	-----	83.58	26.86	7.41	31.76	18.46	261	187	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2375.00	40.21	54.00	-13.70	27.15	27.05	7.31	31.72	18.43	261	187	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	96.55	-----	-----	83.58	26.86	7.41	31.76	18.46	261	187	AVERAGE																																																																				



Mode	8																																					
	Band Edge - R																																					
	2400-2483.5_802.11b_CH06_2437MHz																																					
ANT	2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.38</td> <td>51.72</td> <td>74.00</td> <td>-22.28</td> <td>30.72</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.38	51.72	74.00	-22.28	30.72	26.84	7.47	31.79	18.48	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2484.38	51.72	74.00	-22.28	30.72	26.84	7.47	31.79	18.48																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 HORIZONTAL RBW:1000.000kHz VBW:0.8100kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.51</td> <td>40.20</td> <td>54.00</td> <td>-13.80</td> <td>27.17</td> <td>26.86</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.51	40.20	54.00	-13.80	27.17	26.86	7.48	31.79	18.48	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2485.51	40.20	54.00	-13.80	27.17	26.86	7.48	31.79	18.48																														



Mode	8																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11b_CH06_2437MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.20</td> <td>52.23</td> <td>74.00</td> <td>-21.77</td> <td>39.19</td> <td>17.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>300</td> <td>265</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.20	52.23	74.00	-21.77	39.19	17.00	7.33	31.73	18.44	300	265	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>185.24</td> <td>-----</td> <td>-----</td> <td>92.27</td> <td>26.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>300</td> <td>265</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	185.24	-----	-----	92.27	26.86	7.41	31.76	18.46	300	265	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2386.20	52.23	74.00	-21.77	39.19	17.00	7.33	31.73	18.44	300	265	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	185.24	-----	-----	92.27	26.86	7.41	31.76	18.46	300	265	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.36</td> <td>41.63</td> <td>54.00</td> <td>-12.97</td> <td>27.90</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>300</td> <td>265</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.36	41.63	54.00	-12.97	27.90	17.00	7.34	31.73	18.44	300	265	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>185.99</td> <td>-----</td> <td>-----</td> <td>89.00</td> <td>26.80</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>300</td> <td>265</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	185.99	-----	-----	89.00	26.80	7.41	31.76	18.46	300	265	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2386.36	41.63	54.00	-12.97	27.90	17.00	7.34	31.73	18.44	300	265	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	185.99	-----	-----	89.00	26.80	7.41	31.76	18.46	300	265	AVERAGE																																																																				



Mode	8																																									
	Band Edge - R																																									
	2400-2483.5_802.11b_CH06_2437MHz																																									
ANT	2																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.19</td> <td>56.35</td> <td>74.00</td> <td>-17.65</td> <td>43.29</td> <td>26.90</td> <td>7.40</td> <td>31.80</td> <td>18.40</td> <td>300</td> <td>265</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2482.19	56.35	74.00	-17.65	43.29	26.90	7.40	31.80	18.40	300	265	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2482.19	56.35	74.00	-17.65	43.29	26.90	7.40	31.80	18.40	300	265	PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.70</td> <td>48.99</td> <td>54.00</td> <td>-13.01</td> <td>27.96</td> <td>26.86</td> <td>7.40</td> <td>31.79</td> <td>18.40</td> <td>300</td> <td>265</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2485.70	48.99	54.00	-13.01	27.96	26.86	7.40	31.79	18.40	300	265	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2485.70	48.99	54.00	-13.01	27.96	26.86	7.40	31.79	18.40	300	265	AVERAGE																														



Mode	8																																																																																																																																																																							
	Harmonic																																																																																																																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																							
ANT	2																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																						
Peak Avg	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>Hz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1218.58</td> <td>57.48</td> <td>74.00</td> <td>-16.52</td> <td>49.24</td> <td>23.68</td> <td>5.49</td> <td>31.81</td> <td>18.16</td> <td>293</td> <td>46 Peak</td> </tr> <tr> <td>2 1218.58</td> <td>52.23</td> <td>54.00</td> <td>-1.81</td> <td>43.95</td> <td>23.68</td> <td>5.49</td> <td>31.81</td> <td>18.16</td> <td>293</td> <td>46 Average</td> </tr> <tr> <td>3 4874.00</td> <td>45.79</td> <td>74.00</td> <td>-28.21</td> <td>33.86</td> <td>32.68</td> <td>10.52</td> <td>32.98</td> <td>1.79</td> <td>--</td> <td>-- PEAK</td> </tr> <tr> <td>4 7311.00</td> <td>48.55</td> <td>74.00</td> <td>-25.45</td> <td>32.25</td> <td>37.28</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>-- PEAK</td> </tr> <tr> <td>5 7311.00</td> <td>39.66</td> <td>54.00</td> <td>-14.34</td> <td>23.36</td> <td>37.28</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>-- AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1218.58	57.48	74.00	-16.52	49.24	23.68	5.49	31.81	18.16	293	46 Peak	2 1218.58	52.23	54.00	-1.81	43.95	23.68	5.49	31.81	18.16	293	46 Average	3 4874.00	45.79	74.00	-28.21	33.86	32.68	10.52	32.98	1.79	--	-- PEAK	4 7311.00	48.55	74.00	-25.45	32.25	37.28	12.62	35.54	2.82	--	-- PEAK	5 7311.00	39.66	54.00	-14.34	23.36	37.28	12.62	35.54	2.82	--	-- AVERAGE	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>Hz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1218.58</td> <td>57.24</td> <td>74.00</td> <td>-16.76</td> <td>49.00</td> <td>23.68</td> <td>5.49</td> <td>31.81</td> <td>18.16</td> <td>328</td> <td>281 Peak</td> </tr> <tr> <td>2 1218.58</td> <td>51.86</td> <td>54.00</td> <td>-2.14</td> <td>42.82</td> <td>23.68</td> <td>5.49</td> <td>31.81</td> <td>18.16</td> <td>328</td> <td>281 Average</td> </tr> <tr> <td>3 4874.00</td> <td>45.39</td> <td>74.00</td> <td>-28.61</td> <td>33.46</td> <td>32.68</td> <td>10.52</td> <td>32.98</td> <td>1.79</td> <td>--</td> <td>-- PEAK</td> </tr> <tr> <td>4 7311.00</td> <td>49.18</td> <td>74.00</td> <td>-24.82</td> <td>32.88</td> <td>37.28</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>-- PEAK</td> </tr> <tr> <td>5 7311.00</td> <td>39.72</td> <td>54.00</td> <td>-14.28</td> <td>23.42</td> <td>37.28</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>-- AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1218.58	57.24	74.00	-16.76	49.00	23.68	5.49	31.81	18.16	328	281 Peak	2 1218.58	51.86	54.00	-2.14	42.82	23.68	5.49	31.81	18.16	328	281 Average	3 4874.00	45.39	74.00	-28.61	33.46	32.68	10.52	32.98	1.79	--	-- PEAK	4 7311.00	49.18	74.00	-24.82	32.88	37.28	12.62	35.54	2.82	--	-- PEAK	5 7311.00	39.72	54.00	-14.28	23.42	37.28	12.62	35.54	2.82	--	-- AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																		
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1 1218.58	57.48	74.00	-16.52	49.24	23.68	5.49	31.81	18.16	293	46 Peak																																																																																																																																																														
2 1218.58	52.23	54.00	-1.81	43.95	23.68	5.49	31.81	18.16	293	46 Average																																																																																																																																																														
3 4874.00	45.79	74.00	-28.21	33.86	32.68	10.52	32.98	1.79	--	-- PEAK																																																																																																																																																														
4 7311.00	48.55	74.00	-25.45	32.25	37.28	12.62	35.54	2.82	--	-- PEAK																																																																																																																																																														
5 7311.00	39.66	54.00	-14.34	23.36	37.28	12.62	35.54	2.82	--	-- AVERAGE																																																																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																		
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1 1218.58	57.24	74.00	-16.76	49.00	23.68	5.49	31.81	18.16	328	281 Peak																																																																																																																																																														
2 1218.58	51.86	54.00	-2.14	42.82	23.68	5.49	31.81	18.16	328	281 Average																																																																																																																																																														
3 4874.00	45.39	74.00	-28.61	33.46	32.68	10.52	32.98	1.79	--	-- PEAK																																																																																																																																																														
4 7311.00	49.18	74.00	-24.82	32.88	37.28	12.62	35.54	2.82	--	-- PEAK																																																																																																																																																														
5 7311.00	39.72	54.00	-14.28	23.42	37.28	12.62	35.54	2.82	--	-- AVERAGE																																																																																																																																																														



Mode	8	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 88CH3-HY Condition: AVG_54 3m DRX18-E_LE20H5418EN_238712 HORIZONTAL</p>	<p>Site : 88CH3-HY Condition: AVG_54 3m DRX18-E_LE20H5418EN_238712 VERTICAL</p>





Mode	9																																																																
	Band Edge																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																
ANT	2																																																																
Pol.	Horizontal	Fundamental																																																															
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.97</td> <td>-----</td> <td>87.04</td> <td>26.00</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>301</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2462.00	99.97	-----	87.04	26.00	7.44	31.78	18.47	301	190	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.97</td> <td>-----</td> <td>87.04</td> <td>26.00</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>301</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2462.00	99.97	-----	87.04	26.00	7.44	31.78	18.47	301	190	PEAK	
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																							
1	2462.00	99.97	-----	87.04	26.00	7.44	31.78	18.47	301	190	PEAK																																																						
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																							
1	2462.00	99.97	-----	87.04	26.00	7.44	31.78	18.47	301	190	PEAK																																																						
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>48.33</td> <td>54.00</td> <td>-13.67</td> <td>27.27</td> <td>26.00</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>301</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2462.00	48.33	54.00	-13.67	27.27	26.00	7.48	31.79	18.48	301	190	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.83</td> <td>-----</td> <td>83.00</td> <td>26.00</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>301</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2462.00	96.83	-----	83.00	26.00	7.44	31.78	18.47	301	190	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																							
1	2462.00	48.33	54.00	-13.67	27.27	26.00	7.48	31.79	18.48	301	190	AVERAGE																																																					
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																							
1	2462.00	96.83	-----	83.00	26.00	7.44	31.78	18.47	301	190	AVERAGE																																																						



Mode	9																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.75</td> <td>63.75</td> <td>74.00</td> <td>-10.25</td> <td>50.60</td> <td>26.90</td> <td>7.40</td> <td>31.79</td> <td>10.40</td> <td>263</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.75	63.75	74.00	-10.25	50.60	26.90	7.40	31.79	10.40	263	252	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.88</td> <td>-----</td> <td>-----</td> <td>91.95</td> <td>26.90</td> <td>7.44</td> <td>31.78</td> <td>10.47</td> <td>263</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.88	-----	-----	91.95	26.90	7.44	31.78	10.47	263	252	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2491.75	63.75	74.00	-10.25	50.60	26.90	7.40	31.79	10.40	263	252	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	104.88	-----	-----	91.95	26.90	7.44	31.78	10.47	263	252	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.75</td> <td>41.91</td> <td>54.00</td> <td>-12.00</td> <td>28.86</td> <td>26.89</td> <td>7.40</td> <td>31.79</td> <td>10.40</td> <td>263</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.75	41.91	54.00	-12.00	28.86	26.89	7.40	31.79	10.40	263	252	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.74</td> <td>-----</td> <td>-----</td> <td>88.81</td> <td>26.90</td> <td>7.44</td> <td>31.78</td> <td>10.47</td> <td>263</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.74	-----	-----	88.81	26.90	7.44	31.78	10.47	263	252	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2480.75	41.91	54.00	-12.00	28.86	26.89	7.40	31.79	10.40	263	252	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	105.74	-----	-----	88.81	26.90	7.44	31.78	10.47	263	252	AVERAGE																																																																				



Mode	9																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																							
ANT	2																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
Peak Avg	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1231.00</td> <td>55.82</td> <td>74.00</td> <td>-18.98</td> <td>46.76</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>100</td> <td>24</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1231.00</td> <td>49.25</td> <td>54.00</td> <td>-4.84</td> <td>40.99</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>100</td> <td>24</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>45.87</td> <td>74.00</td> <td>-28.93</td> <td>33.83</td> <td>32.75</td> <td>10.50</td> <td>32.98</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>49.83</td> <td>74.00</td> <td>-24.97</td> <td>32.79</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>23.12</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1231.00	55.82	74.00	-18.98	46.76	23.60	5.50	31.81	18.17	100	24	Peak	2	1231.00	49.25	54.00	-4.84	40.99	23.60	5.50	31.81	18.17	100	24	Average	3	4924.00	45.87	74.00	-28.93	33.83	32.75	10.50	32.98	1.77	--	--	PEAK	4	7386.00	49.83	74.00	-24.97	32.79	37.13	12.81	35.60	1.99	--	--	PEAK	5	7386.00	39.45	54.00	-14.55	23.12	37.13	12.81	35.60	1.99	--	--	AVERAGE	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1231.00</td> <td>54.56</td> <td>74.00</td> <td>-19.44</td> <td>46.30</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>400</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1231.00</td> <td>47.00</td> <td>54.00</td> <td>-6.20</td> <td>39.54</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>100</td> <td>257</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>46.81</td> <td>74.00</td> <td>-27.99</td> <td>33.97</td> <td>32.75</td> <td>10.50</td> <td>32.98</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>48.56</td> <td>74.00</td> <td>-25.44</td> <td>32.23</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>39.46</td> <td>54.00</td> <td>-14.54</td> <td>23.13</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1231.00	54.56	74.00	-19.44	46.30	23.60	5.50	31.81	18.17	400	257	Peak	2	1231.00	47.00	54.00	-6.20	39.54	23.60	5.50	31.81	18.17	100	257	Average	3	4924.00	46.81	74.00	-27.99	33.97	32.75	10.50	32.98	1.77	--	--	PEAK	4	7386.00	48.56	74.00	-25.44	32.23	37.13	12.81	35.60	1.99	--	--	PEAK	5	7386.00	39.46	54.00	-14.54	23.13	37.13	12.81	35.60	1.99	--	--	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																													
1	1231.00	55.82	74.00	-18.98	46.76	23.60	5.50	31.81	18.17	100	24	Peak																																																																																																																																																																												
2	1231.00	49.25	54.00	-4.84	40.99	23.60	5.50	31.81	18.17	100	24	Average																																																																																																																																																																												
3	4924.00	45.87	74.00	-28.93	33.83	32.75	10.50	32.98	1.77	--	--	PEAK																																																																																																																																																																												
4	7386.00	49.83	74.00	-24.97	32.79	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																												
5	7386.00	39.45	54.00	-14.55	23.12	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																												
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																													
1	1231.00	54.56	74.00	-19.44	46.30	23.60	5.50	31.81	18.17	400	257	Peak																																																																																																																																																																												
2	1231.00	47.00	54.00	-6.20	39.54	23.60	5.50	31.81	18.17	100	257	Average																																																																																																																																																																												
3	4924.00	46.81	74.00	-27.99	33.97	32.75	10.50	32.98	1.77	--	--	PEAK																																																																																																																																																																												
4	7386.00	48.56	74.00	-25.44	32.23	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																												
5	7386.00	39.46	54.00	-14.54	23.13	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																												



Mode	9	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 88CH3-HY Condition: AVG_54 3m DRH10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 88CH3-HY Condition: AVG_54 3m DRH10-E_LE20H54105N_230712 VERTICAL</p>



Mode	10																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11g_CH01_2412MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>57.26</td> <td>74.00</td> <td>-16.74</td> <td>44.21</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	57.26	74.00	-16.74	44.21	27.00	7.34	31.73	18.44	100	185	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.88</td> <td>-----</td> <td>-----</td> <td>91.88</td> <td>26.92</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.88	-----	-----	91.88	26.92	7.38	31.75	18.45	100	185	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.69	57.26	74.00	-16.74	44.21	27.00	7.34	31.73	18.44	100	185	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	104.88	-----	-----	91.88	26.92	7.38	31.75	18.45	100	185	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>45.88</td> <td>54.00</td> <td>-8.12</td> <td>31.83</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.88	54.00	-8.12	31.83	27.00	7.34	31.73	18.44	100	185	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>97.44</td> <td>-----</td> <td>-----</td> <td>84.37</td> <td>27.00</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>100</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.44	-----	-----	84.37	27.00	7.37	31.74	18.44	100	185	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.95	45.88	54.00	-8.12	31.83	27.00	7.34	31.73	18.44	100	185	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	97.44	-----	-----	84.37	27.00	7.37	31.74	18.44	100	185	AVERAGE																																																																				



Mode	10																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11g_CH01_2412MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>64.83</td> <td>74.00</td> <td>-9.97</td> <td>50.90</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>200</td> <td>264</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	64.83	74.00	-9.97	50.90	17.00	7.34	31.73	18.44	200	264	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>111.16</td> <td>-----</td> <td>-----</td> <td>98.07</td> <td>17.82</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>200</td> <td>264</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	111.16	-----	-----	98.07	17.82	7.37	31.74	18.44	200	264	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.56	64.83	74.00	-9.97	50.90	17.00	7.34	31.73	18.44	200	264	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	111.16	-----	-----	98.07	17.82	7.37	31.74	18.44	200	264	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>53.12</td> <td>54.00</td> <td>-8.88</td> <td>48.07</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>200</td> <td>264</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	53.12	54.00	-8.88	48.07	17.00	7.34	31.73	18.44	200	264	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.98</td> <td>-----</td> <td>-----</td> <td>98.91</td> <td>17.80</td> <td>7.37</td> <td>31.74</td> <td>18.44</td> <td>200</td> <td>264</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.98	-----	-----	98.91	17.80	7.37	31.74	18.44	200	264	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.95	53.12	54.00	-8.88	48.07	17.00	7.34	31.73	18.44	200	264	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	103.98	-----	-----	98.91	17.80	7.37	31.74	18.44	200	264	AVERAGE																																																																				



Mode	10																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																																
ANT	2																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH03-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>45.34</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>24</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>44.11</td> <td>54.00</td> <td>-9.89</td> <td>35.84</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>24</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>46.92</td> <td>74.00</td> <td>-27.08</td> <td>35.14</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dBm	dB	dB	dB	dB	cm	deg	1	1206.00	53.61	74.00	-20.39	45.34	23.64	5.48	31.81	10.16	100	24	Peak	2	1206.00	44.11	54.00	-9.89	35.84	23.64	5.48	31.81	10.16	100	24	Average	3	4824.00	46.92	74.00	-27.08	35.14	32.40	10.55	32.98	1.81	--	--	PEAK	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH03-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1206.00</td> <td>52.16</td> <td>74.00</td> <td>-21.84</td> <td>43.89</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>400</td> <td>285</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1206.00</td> <td>42.48</td> <td>54.00</td> <td>-11.52</td> <td>34.21</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>400</td> <td>285</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>48.48</td> <td>74.00</td> <td>-25.52</td> <td>36.62</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>36.33</td> <td>54.00</td> <td>-17.67</td> <td>24.55</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dBm	dB	dB	dB	dB	cm	deg	1	1206.00	52.16	74.00	-21.84	43.89	23.64	5.48	31.81	10.16	400	285	Peak	2	1206.00	42.48	54.00	-11.52	34.21	23.64	5.48	31.81	10.16	400	285	Average	3	4824.00	48.48	74.00	-25.52	36.62	32.40	10.55	32.98	1.81	--	--	PEAK	4	4824.00	36.33	54.00	-17.67	24.55	32.40	10.55	32.98	1.81	--	--	AVERAGE
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dBm	dB	dB	dB	dB	cm	deg																																																																																																																																					
1	1206.00	53.61	74.00	-20.39	45.34	23.64	5.48	31.81	10.16	100	24	Peak																																																																																																																																					
2	1206.00	44.11	54.00	-9.89	35.84	23.64	5.48	31.81	10.16	100	24	Average																																																																																																																																					
3	4824.00	46.92	74.00	-27.08	35.14	32.40	10.55	32.98	1.81	--	--	PEAK																																																																																																																																					
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dBm	dB	dB	dB	dB	cm	deg																																																																																																																																					
1	1206.00	52.16	74.00	-21.84	43.89	23.64	5.48	31.81	10.16	400	285	Peak																																																																																																																																					
2	1206.00	42.48	54.00	-11.52	34.21	23.64	5.48	31.81	10.16	400	285	Average																																																																																																																																					
3	4824.00	48.48	74.00	-25.52	36.62	32.40	10.55	32.98	1.81	--	--	PEAK																																																																																																																																					
4	4824.00	36.33	54.00	-17.67	24.55	32.40	10.55	32.98	1.81	--	--	AVERAGE																																																																																																																																					



Mode	10	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>





Mode	11																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_9E_74 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.12</td> <td>53.68</td> <td>74.88</td> <td>-28.48</td> <td>48.55</td> <td>17.88</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>314</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.12	53.68	74.88	-28.48	48.55	17.88	7.34	31.73	18.44	314	180	PEAK	<p>Site : 830K13-HY Condition: PEAK_74_3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.88</td> <td>188.77</td> <td>-----</td> <td>-----</td> <td>95.75</td> <td>26.98</td> <td>7.42</td> <td>31.76</td> <td>18.46</td> <td>314</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.88	188.77	-----	-----	95.75	26.98	7.42	31.76	18.46	314	180	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.12	53.68	74.88	-28.48	48.55	17.88	7.34	31.73	18.44	314	180	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.88	188.77	-----	-----	95.75	26.98	7.42	31.76	18.46	314	180	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_9E_54 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:8.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.61</td> <td>43.83</td> <td>54.88</td> <td>-18.17</td> <td>38.78</td> <td>17.88</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>314</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.61	43.83	54.88	-18.17	38.78	17.88	7.34	31.73	18.44	314	180	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:8.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.88</td> <td>185.55</td> <td>-----</td> <td>-----</td> <td>88.56</td> <td>26.88</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>314</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.88	185.55	-----	-----	88.56	26.88	7.41	31.76	18.46	314	180	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2388.61	43.83	54.88	-18.17	38.78	17.88	7.34	31.73	18.44	314	180	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.88	185.55	-----	-----	88.56	26.88	7.41	31.76	18.46	314	180	AVERAGE																																																																				



Mode	11																																									
	Band Edge - R																																									
	2400-2483.5_802.11g_CH06_2437MHz																																									
ANT	2																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C95418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2481.68</td> <td>55.28</td> <td>74.00</td> <td>-18.72</td> <td>42.21</td> <td>26.98</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>314</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2481.68	55.28	74.00	-18.72	42.21	26.98	7.48	31.79	18.48	314	100	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2481.68	55.28	74.00	-18.72	42.21	26.98	7.48	31.79	18.48	314	100	PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2C95418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.25</td> <td>42.84</td> <td>54.00</td> <td>-11.16</td> <td>29.84</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>314</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2484.25	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48	314	100	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2484.25	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48	314	100	AVERAGE																														





Mode	11																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_9E_74 3m DRM18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2330.41</td> <td>58.72</td> <td>74.00</td> <td>-15.28</td> <td>45.50</td> <td>17.20</td> <td>7.21</td> <td>31.69</td> <td>18.42</td> <td>165</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2330.41	58.72	74.00	-15.28	45.50	17.20	7.21	31.69	18.42	165	334	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>117.18</td> <td>.....</td> <td>.....</td> <td>104.19</td> <td>26.00</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>165</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	117.18	.....	.....	104.19	26.00	7.41	31.76	18.46	165	334	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2330.41	58.72	74.00	-15.28	45.50	17.20	7.21	31.69	18.42	165	334	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	117.18	.....	.....	104.19	26.00	7.41	31.76	18.46	165	334	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_9E_54 3m DRM18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.06</td> <td>48.79</td> <td>54.00</td> <td>-5.21</td> <td>35.75</td> <td>17.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>165</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.06	48.79	54.00	-5.21	35.75	17.00	7.33	31.73	18.44	165	334	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>118.07</td> <td>.....</td> <td>.....</td> <td>97.00</td> <td>26.00</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>165</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	118.07	.....	.....	97.00	26.00	7.41	31.76	18.46	165	334	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2385.06	48.79	54.00	-5.21	35.75	17.00	7.33	31.73	18.44	165	334	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	118.07	.....	.....	97.00	26.00	7.41	31.76	18.46	165	334	AVERAGE																																																																				



Mode	11																																									
	Band Edge - R																																									
	2400-2483.5_802.11g_CH06_2437MHz																																									
ANT	2																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.88</td> <td>68.43</td> <td>74.88</td> <td>-5.57</td> <td>55.36</td> <td>26.98</td> <td>7.49</td> <td>31.88</td> <td>18.48</td> <td>165</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2487.88	68.43	74.88	-5.57	55.36	26.98	7.49	31.88	18.48	165	334	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2487.88	68.43	74.88	-5.57	55.36	26.98	7.49	31.88	18.48	165	334	PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:0.750kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.83</td> <td>58.42</td> <td>54.00</td> <td>-3.58</td> <td>37.39</td> <td>26.86</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>165</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2485.83	58.42	54.00	-3.58	37.39	26.86	7.48	31.79	18.48	165	334	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	2485.83	58.42	54.00	-3.58	37.39	26.86	7.48	31.79	18.48	165	334	AVERAGE																														

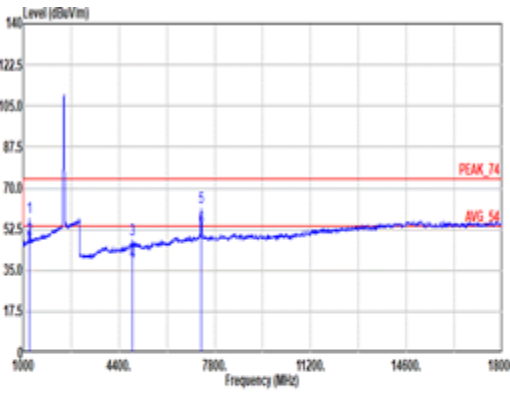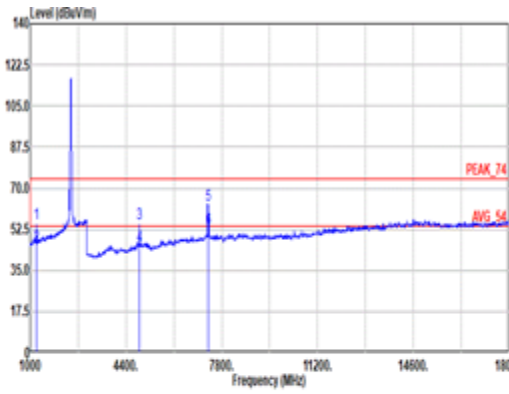

Mode	11																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																									
ANT	2																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak	 <p>Site : 830K3-HY Condition: PEAK_74 3e DRH08-E_LE2C05A180N_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1218.50</td> <td>57.73</td> <td>74.00</td> <td>-16.27</td> <td>49.49</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>27</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>1218.50</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>40.32</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>100</td> <td>27</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>48.85</td> <td>74.00</td> <td>-25.95</td> <td>36.12</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>38.42</td> <td>54.00</td> <td>-15.58</td> <td>26.49</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>61.90</td> <td>74.00</td> <td>-12.10</td> <td>45.68</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>219</td> <td>267</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7311.00</td> <td>53.20</td> <td>54.00</td> <td>-0.80</td> <td>36.90</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>219</td> <td>267</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1218.50	57.73	74.00	-16.27	49.49	23.60	5.49	31.81	10.16	100	27	PEAK	2	1218.50	48.56	54.00	-5.44	40.32	23.60	5.49	31.81	10.16	100	27	Average	3	4874.00	48.85	74.00	-25.95	36.12	32.60	10.52	32.90	1.79	100	360	PEAK	4	4874.00	38.42	54.00	-15.58	26.49	32.60	10.52	32.90	1.79	100	360	AVERAGE	5	7311.00	61.90	74.00	-12.10	45.68	37.20	12.62	35.54	2.82	219	267	PEAK	6	7311.00	53.20	54.00	-0.80	36.90	37.20	12.62	35.54	2.82	219	267	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	1218.50	57.73	74.00	-16.27	49.49	23.60	5.49	31.81	10.16	100	27	PEAK																																																																																														
2	1218.50	48.56	54.00	-5.44	40.32	23.60	5.49	31.81	10.16	100	27	Average																																																																																														
3	4874.00	48.85	74.00	-25.95	36.12	32.60	10.52	32.90	1.79	100	360	PEAK																																																																																														
4	4874.00	38.42	54.00	-15.58	26.49	32.60	10.52	32.90	1.79	100	360	AVERAGE																																																																																														
5	7311.00	61.90	74.00	-12.10	45.68	37.20	12.62	35.54	2.82	219	267	PEAK																																																																																														
6	7311.00	53.20	54.00	-0.80	36.90	37.20	12.62	35.54	2.82	219	267	AVERAGE																																																																																														
Avg	 <p>Site : 830K3-HY Condition: PEAK_74 3e DRH08-E_LE2C05A180N_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1218.50</td> <td>54.84</td> <td>74.00</td> <td>-19.16</td> <td>46.68</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>400</td> <td>260</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>1218.50</td> <td>45.68</td> <td>54.00</td> <td>-8.40</td> <td>37.36</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>400</td> <td>260</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>54.96</td> <td>74.00</td> <td>-19.04</td> <td>43.83</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>252</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>45.35</td> <td>54.00</td> <td>-8.65</td> <td>35.42</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>252</td> <td>337</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>62.72</td> <td>74.00</td> <td>-11.28</td> <td>46.42</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>200</td> <td>249</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7311.00</td> <td>52.68</td> <td>54.00</td> <td>-1.40</td> <td>36.30</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>200</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1218.50	54.84	74.00	-19.16	46.68	23.60	5.49	31.81	10.16	400	260	PEAK	2	1218.50	45.68	54.00	-8.40	37.36	23.60	5.49	31.81	10.16	400	260	Average	3	4874.00	54.96	74.00	-19.04	43.83	32.60	10.52	32.90	1.79	252	337	PEAK	4	4874.00	45.35	54.00	-8.65	35.42	32.60	10.52	32.90	1.79	252	337	AVERAGE	5	7311.00	62.72	74.00	-11.28	46.42	37.20	12.62	35.54	2.82	200	249	PEAK	6	7311.00	52.68	54.00	-1.40	36.30	37.20	12.62	35.54	2.82	200	249	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	1218.50	54.84	74.00	-19.16	46.68	23.60	5.49	31.81	10.16	400	260	PEAK																																																																																														
2	1218.50	45.68	54.00	-8.40	37.36	23.60	5.49	31.81	10.16	400	260	Average																																																																																														
3	4874.00	54.96	74.00	-19.04	43.83	32.60	10.52	32.90	1.79	252	337	PEAK																																																																																														
4	4874.00	45.35	54.00	-8.65	35.42	32.60	10.52	32.90	1.79	252	337	AVERAGE																																																																																														
5	7311.00	62.72	74.00	-11.28	46.42	37.20	12.62	35.54	2.82	200	249	PEAK																																																																																														
6	7311.00	52.68	54.00	-1.40	36.30	37.20	12.62	35.54	2.82	200	249	AVERAGE																																																																																														



Mode	11	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRH10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRH10-E_LE20H54105N_230712 VERTICAL</p>



Mode	12																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																													
ANT	2																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.41</td> <td>-----</td> <td>91.45</td> <td>26.82</td> <td>7.44</td> <td>31.77</td> <td>18.47</td> <td>178</td> <td>177</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.41	-----	91.45	26.82	7.44	31.77	18.47	178	177	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.41</td> <td>-----</td> <td>91.45</td> <td>26.82</td> <td>7.44</td> <td>31.77</td> <td>18.47</td> <td>178</td> <td>177</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.41	-----	91.45	26.82	7.44	31.77	18.47	178	177	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	104.41	-----	91.45	26.82	7.44	31.77	18.47	178	177	PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	104.41	-----	91.45	26.82	7.44	31.77	18.47	178	177	PEAK																																																																			
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.56</td> <td>-----</td> <td>83.63</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>178</td> <td>177</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.56	-----	83.63	26.80	7.44	31.78	18.47	178	177	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.56</td> <td>-----</td> <td>83.63</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>178</td> <td>177</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.56	-----	83.63	26.80	7.44	31.78	18.47	178	177	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	96.56	-----	83.63	26.80	7.44	31.78	18.47	178	177	AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	96.56	-----	83.63	26.80	7.44	31.78	18.47	178	177	AVERAGE																																																																			



Mode	12																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																													
ANT	2																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.15</td> <td>63.91</td> <td>74.00</td> <td>-18.09</td> <td>50.91</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>266</td> <td>251 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.15	63.91	74.00	-18.09	50.91	26.84	7.47	31.79	18.48	266	251 PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>111.38</td> <td>-----</td> <td>-----</td> <td>98.42</td> <td>26.82</td> <td>7.44</td> <td>31.77</td> <td>18.47</td> <td>266</td> <td>251 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.38	-----	-----	98.42	26.82	7.44	31.77	18.47	266	251 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2484.15	63.91	74.00	-18.09	50.91	26.84	7.47	31.79	18.48	266	251 PEAK																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	111.38	-----	-----	98.42	26.82	7.44	31.77	18.47	266	251 PEAK																																																																			
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>52.89</td> <td>54.00</td> <td>-1.11</td> <td>39.89</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>266</td> <td>251 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.89	54.00	-1.11	39.89	26.84	7.47	31.79	18.48	266	251 AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>183.76</td> <td>-----</td> <td>-----</td> <td>98.83</td> <td>26.80</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>266</td> <td>251 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	183.76	-----	-----	98.83	26.80	7.44	31.78	18.47	266	251 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2483.51	52.89	54.00	-1.11	39.89	26.84	7.47	31.79	18.48	266	251 AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2462.00	183.76	-----	-----	98.83	26.80	7.44	31.78	18.47	266	251 AVERAGE																																																																			





Mode	12																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																					
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																					
ANT	2																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
Peak Avg	<p>Site : 83CK23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1231.00</td> <td>49.39</td> <td>74.00</td> <td>-24.61</td> <td>41.13</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>100</td> <td>23</td> <td>Peak</td> </tr> <tr> <td>2 1231.00</td> <td>39.00</td> <td>54.00</td> <td>-14.20</td> <td>31.54</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>100</td> <td>23</td> <td>Average</td> </tr> <tr> <td>3 4924.00</td> <td>45.90</td> <td>74.00</td> <td>-28.02</td> <td>33.94</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4 7386.00</td> <td>49.81</td> <td>74.00</td> <td>-24.19</td> <td>33.48</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5 7388.00</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>23.94</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 1231.00	49.39	74.00	-24.61	41.13	23.60	5.50	31.81	10.17	100	23	Peak	2 1231.00	39.00	54.00	-14.20	31.54	23.60	5.50	31.81	10.17	100	23	Average	3 4924.00	45.90	74.00	-28.02	33.94	32.75	10.50	32.90	1.77	--	--	PEAK	4 7386.00	49.81	74.00	-24.19	33.48	37.13	12.81	35.60	1.99	--	--	PEAK	5 7388.00	40.27	54.00	-13.73	23.94	37.13	12.81	35.60	1.99	--	--	AVERAGE	<p>Site : 83CK23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1231.00</td> <td>48.81</td> <td>74.00</td> <td>-25.19</td> <td>40.55</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>400</td> <td>256</td> <td>Peak</td> </tr> <tr> <td>2 1231.00</td> <td>39.12</td> <td>54.00</td> <td>-14.88</td> <td>30.06</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>400</td> <td>256</td> <td>Average</td> </tr> <tr> <td>3 4924.00</td> <td>48.64</td> <td>74.00</td> <td>-25.36</td> <td>36.60</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>4 4924.00</td> <td>38.51</td> <td>54.00</td> <td>-15.49</td> <td>26.47</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> <tr> <td>5 7386.00</td> <td>53.31</td> <td>74.00</td> <td>-20.69</td> <td>36.90</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>211</td> <td>300</td> <td>PEAK</td> </tr> <tr> <td>6 7388.00</td> <td>42.88</td> <td>54.00</td> <td>-11.92</td> <td>25.75</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>211</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 1231.00	48.81	74.00	-25.19	40.55	23.60	5.50	31.81	10.17	400	256	Peak	2 1231.00	39.12	54.00	-14.88	30.06	23.60	5.50	31.81	10.17	400	256	Average	3 4924.00	48.64	74.00	-25.36	36.60	32.75	10.50	32.90	1.77	100	340	PEAK	4 4924.00	38.51	54.00	-15.49	26.47	32.75	10.50	32.90	1.77	100	340	AVERAGE	5 7386.00	53.31	74.00	-20.69	36.90	37.13	12.81	35.60	1.99	211	300	PEAK	6 7388.00	42.88	54.00	-11.92	25.75	37.13	12.81	35.60	1.99	211	300	AVERAGE
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																												
1 1231.00	49.39	74.00	-24.61	41.13	23.60	5.50	31.81	10.17	100	23	Peak																																																																																																																																																																											
2 1231.00	39.00	54.00	-14.20	31.54	23.60	5.50	31.81	10.17	100	23	Average																																																																																																																																																																											
3 4924.00	45.90	74.00	-28.02	33.94	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																																																											
4 7386.00	49.81	74.00	-24.19	33.48	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																											
5 7388.00	40.27	54.00	-13.73	23.94	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																											
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																												
1 1231.00	48.81	74.00	-25.19	40.55	23.60	5.50	31.81	10.17	400	256	Peak																																																																																																																																																																											
2 1231.00	39.12	54.00	-14.88	30.06	23.60	5.50	31.81	10.17	400	256	Average																																																																																																																																																																											
3 4924.00	48.64	74.00	-25.36	36.60	32.75	10.50	32.90	1.77	100	340	PEAK																																																																																																																																																																											
4 4924.00	38.51	54.00	-15.49	26.47	32.75	10.50	32.90	1.77	100	340	AVERAGE																																																																																																																																																																											
5 7386.00	53.31	74.00	-20.69	36.90	37.13	12.81	35.60	1.99	211	300	PEAK																																																																																																																																																																											
6 7388.00	42.88	54.00	-11.92	25.75	37.13	12.81	35.60	1.99	211	300	AVERAGE																																																																																																																																																																											



Mode	12	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRX10-E_LE20H54105N_230712 VERTICAL</p>



MIMO <Ant. 1+2>

Mode	15																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 83CH3-HY Condition: PEAK_96_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>53.52</td> <td>74.00</td> <td>-20.48</td> <td>40.47</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	53.52	74.00	-20.48	40.47	17.00	7.34	31.73	18.44	100	295	PEAK	<p>Site : 83CH3-HY Condition: PEAK_74_3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>183.83</td> <td>-----</td> <td>-----</td> <td>98.79</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	183.83	-----	-----	98.79	26.96	7.38	31.75	18.45	100	295	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.65	53.52	74.00	-20.48	40.47	17.00	7.34	31.73	18.44	100	295	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	183.83	-----	-----	98.79	26.96	7.38	31.75	18.45	100	295	PEAK																																																																								
Avg	<p>Site : 83CH3-HY Condition: AVG_54_3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:0.820kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>43.11</td> <td>54.00</td> <td>-18.89</td> <td>30.06</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	43.11	54.00	-18.89	30.06	17.00	7.34	31.73	18.44	100	295	AVERAGE	<p>Site : 83CH3-HY Condition: AVG_54_3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:3000.000kHz VBW:0.820kHz SuT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.46</td> <td>-----</td> <td>-----</td> <td>85.42</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.46	-----	-----	85.42	26.96	7.38	31.75	18.45	100	295	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.65	43.11	54.00	-18.89	30.06	17.00	7.34	31.73	18.44	100	295	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	98.46	-----	-----	85.42	26.96	7.38	31.75	18.45	100	295	AVERAGE																																																																								



Mode	15																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																											
ANT	1+2																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2388.78</td> <td>62.83</td> <td>74.00</td> <td>-11.97</td> <td>48.98</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>333 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.78	62.83	74.00	-11.97	48.98	27.00	7.34	31.73	18.44	100	333 PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00</td> <td>112.17</td> <td>-----</td> <td>-----</td> <td>99.13</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>333 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	112.17	-----	-----	99.13	26.96	7.38	31.75	18.45	100	333 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2388.78	62.83	74.00	-11.97	48.98	27.00	7.34	31.73	18.44	100	333 PEAK																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2412.00	112.17	-----	-----	99.13	26.96	7.38	31.75	18.45	100	333 PEAK																																																																		
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:3000.000kHz VBW:0.820kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>51.89</td> <td>54.00</td> <td>-1.91</td> <td>39.84</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>333 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	51.89	54.00	-1.91	39.84	27.00	7.34	31.73	18.44	100	333 AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:3000.000kHz VBW:0.820kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00</td> <td>106.37</td> <td>-----</td> <td>-----</td> <td>93.33</td> <td>26.96</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>333 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	106.37	-----	-----	93.33	26.96	7.38	31.75	18.45	100	333 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2389.95	51.89	54.00	-1.91	39.84	27.00	7.34	31.73	18.44	100	333 AVERAGE																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2412.00	106.37	-----	-----	93.33	26.96	7.38	31.75	18.45	100	333 AVERAGE																																																																		



Mode	15																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1286.00</td> <td>55.79</td> <td>74.00</td> <td>-18.22</td> <td>47.52</td> <td>23.62</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>326</td> <td>255</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1286.00</td> <td>46.73</td> <td>54.00</td> <td>-7.27</td> <td>38.47</td> <td>23.62</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>326</td> <td>255</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>47.83</td> <td>74.00</td> <td>-26.97</td> <td>35.25</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1286.00	55.79	74.00	-18.22	47.52	23.62	5.49	31.81	10.16	326	255	Peak	2	1286.00	46.73	54.00	-7.27	38.47	23.62	5.49	31.81	10.16	326	255	Average	3	4824.00	47.83	74.00	-26.97	35.25	32.40	10.55	32.98	1.81	--	--	PEAK	<p>Site : 83043-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1286.00</td> <td>53.53</td> <td>74.00</td> <td>-20.47</td> <td>45.26</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>400</td> <td>287</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1286.00</td> <td>44.29</td> <td>54.00</td> <td>-9.71</td> <td>36.82</td> <td>23.64</td> <td>5.48</td> <td>31.81</td> <td>10.16</td> <td>400</td> <td>287</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>47.68</td> <td>74.00</td> <td>-26.40</td> <td>35.82</td> <td>32.40</td> <td>10.55</td> <td>32.98</td> <td>1.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1286.00	53.53	74.00	-20.47	45.26	23.64	5.48	31.81	10.16	400	287	Peak	2	1286.00	44.29	54.00	-9.71	36.82	23.64	5.48	31.81	10.16	400	287	Average	3	4824.00	47.68	74.00	-26.40	35.82	32.40	10.55	32.98	1.81	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	1286.00	55.79	74.00	-18.22	47.52	23.62	5.49	31.81	10.16	326	255	Peak																																																																																																																												
2	1286.00	46.73	54.00	-7.27	38.47	23.62	5.49	31.81	10.16	326	255	Average																																																																																																																												
3	4824.00	47.83	74.00	-26.97	35.25	32.40	10.55	32.98	1.81	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	1286.00	53.53	74.00	-20.47	45.26	23.64	5.48	31.81	10.16	400	287	Peak																																																																																																																												
2	1286.00	44.29	54.00	-9.71	36.82	23.64	5.48	31.81	10.16	400	287	Average																																																																																																																												
3	4824.00	47.68	74.00	-26.40	35.82	32.40	10.55	32.98	1.81	--	--	PEAK																																																																																																																												



Mode	15	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3n DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3n DRX10-E_LE20H54105N_230712 VERTICAL</p>



16																																																																									
<b>Mode</b>	Band Edge - L																																																																								
2400-2483.5_802.11n HT20_CH06_2437MHz																																																																									
<b>ANT</b>	1+2																																																																								
<b>Pol.</b>	Horizontal																																																																								
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2382.77</td> <td>53.22</td> <td>74.00</td> <td>-20.70</td> <td>40.18</td> <td>17.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>200 184 PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>104.14</td> <td>-----</td> <td>-----</td> <td>91.17</td> <td>26.06</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>200 184 PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2382.77	53.22	74.00	-20.70	40.18	17.00	7.33	31.73	18.44	200 184 PEAK	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	104.14	-----	-----	91.17	26.06	7.41	31.76	18.46	200 184 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1 2382.77	53.22	74.00	-20.70	40.18	17.00	7.33	31.73	18.44	200 184 PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1 2437.00	104.14	-----	-----	91.17	26.06	7.41	31.76	18.46	200 184 PEAK																																																																
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2384.93</td> <td>43.97</td> <td>54.00</td> <td>-11.03</td> <td>29.93</td> <td>17.00</td> <td>7.33</td> <td>31.73</td> <td>18.44</td> <td>200 184 AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>96.71</td> <td>-----</td> <td>-----</td> <td>83.72</td> <td>26.06</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>200 184 AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2384.93	43.97	54.00	-11.03	29.93	17.00	7.33	31.73	18.44	200 184 AVERAGE	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	96.71	-----	-----	83.72	26.06	7.41	31.76	18.46	200 184 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1 2384.93	43.97	54.00	-11.03	29.93	17.00	7.33	31.73	18.44	200 184 AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1 2437.00	96.71	-----	-----	83.72	26.06	7.41	31.76	18.46	200 184 AVERAGE																																																																



Mode	16																																														
	Band Edge - R																																														
	2400-2483.5_802.11n HT20_CH06_2437MHz																																														
ANT	1+2																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DRX18-E_LE2C95A18EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.01</td> <td>55.66</td> <td>74.00</td> <td>-18.34</td> <td>42.66</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200 184 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.01	55.66	74.00	-18.34	42.66	26.84	7.47	31.79	18.48									200 184 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2483.01	55.66	74.00	-18.34	42.66	26.84	7.47	31.79	18.48																																							
								200 184 PEAK																																							
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DRX18-E_LE2C95A18EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:0.020kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.75</td> <td>42.84</td> <td>54.00</td> <td>-11.16</td> <td>29.84</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200 184 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.75	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48									200 184 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2483.75	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48																																							
								200 184 AVERAGE																																							





Mode	16																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																															
ANT	1+2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.58</td> <td>57.85</td> <td>74.85</td> <td>-16.15</td> <td>44.88</td> <td>27.88</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.58	57.85	74.85	-16.15	44.88	27.88	7.34	31.73	18.44	100	341	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>112.44</td> <td>-----</td> <td>-----</td> <td>99.45</td> <td>26.88</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>100</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	112.44	-----	-----	99.45	26.88	7.41	31.76	18.46	100	341	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.58	57.85	74.85	-16.15	44.88	27.88	7.34	31.73	18.44	100	341	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	112.44	-----	-----	99.45	26.88	7.41	31.76	18.46	100	341	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.00</td> <td>46.96</td> <td>54.00</td> <td>-7.04</td> <td>33.91</td> <td>27.88</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.00	46.96	54.00	-7.04	33.91	27.88	7.34	31.73	18.44	100	341	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.02</td> <td>-----</td> <td>-----</td> <td>93.83</td> <td>26.88</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>100</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	106.02	-----	-----	93.83	26.88	7.41	31.76	18.46	100	341	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.00	46.96	54.00	-7.04	33.91	27.88	7.34	31.73	18.44	100	341	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	106.02	-----	-----	93.83	26.88	7.41	31.76	18.46	100	341	AVERAGE																																																																				



Mode	16																																														
	Band Edge - R																																														
	2400-2483.5_802.11n HT20_CH06_2437MHz																																														
ANT	1+2																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2480.53</td> <td>57.43</td> <td>74.00</td> <td>-16.57</td> <td>44.37</td> <td>26.09</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 341 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2480.53	57.43	74.00	-16.57	44.37	26.09	7.48	31.79	18.48									100 341 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2480.53	57.43	74.00	-16.57	44.37	26.09	7.48	31.79	18.48																																							
								100 341 PEAK																																							
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:0.020kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2487.53</td> <td>47.75</td> <td>54.00</td> <td>-6.25</td> <td>34.70</td> <td>26.00</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 341 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2487.53	47.75	54.00	-6.25	34.70	26.00	7.48	31.79	18.48									100 341 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2487.53	47.75	54.00	-6.25	34.70	26.00	7.48	31.79	18.48																																							
								100 341 AVERAGE																																							







Mode	16																																																																																																																																																																																																								
	Harmonic																																																																																																																																																																																																								
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																																																																																																																								
ANT	1+2																																																																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																																																																							
Peak Avg	<p>Site : 83CK23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>Hz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1220.00</td> <td>62.28</td> <td>74.00</td> <td>-11.72</td> <td>54.83</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.16</td> <td>310</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1220.00</td> <td>53.45</td> <td>54.00</td> <td>-0.55</td> <td>45.20</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.16</td> <td>310</td> <td>262</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>45.83</td> <td>74.00</td> <td>-28.17</td> <td>33.90</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>50.86</td> <td>74.00</td> <td>-23.94</td> <td>33.76</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>48.39</td> <td>54.00</td> <td>-13.61</td> <td>24.89</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1220.00	62.28	74.00	-11.72	54.83	23.60	5.50	31.81	18.16	310	262	Peak	2	1220.00	53.45	54.00	-0.55	45.20	23.60	5.50	31.81	18.16	310	262	Average	3	4874.00	45.83	74.00	-28.17	33.90	32.60	10.52	32.90	1.79	--	--	PEAK	4	7311.00	50.86	74.00	-23.94	33.76	37.20	12.62	35.54	2.82	--	--	PEAK	5	7311.00	48.39	54.00	-13.61	24.89	37.20	12.62	35.54	2.82	--	--	AVERAGE	<p>Site : 83CK23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>Hz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1220.00</td> <td>61.15</td> <td>74.00</td> <td>-12.85</td> <td>52.90</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.16</td> <td>400</td> <td>289</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1220.00</td> <td>52.81</td> <td>54.00</td> <td>-1.99</td> <td>43.76</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.16</td> <td>400</td> <td>289</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>37.94</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>199</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>39.21</td> <td>54.00</td> <td>-14.79</td> <td>27.28</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>199</td> <td>319</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>54.31</td> <td>74.00</td> <td>-19.69</td> <td>38.81</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>206</td> <td>305</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7311.00</td> <td>43.93</td> <td>54.00</td> <td>-10.87</td> <td>27.63</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>206</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	1220.00	61.15	74.00	-12.85	52.90	23.60	5.50	31.81	18.16	400	289	Peak	2	1220.00	52.81	54.00	-1.99	43.76	23.60	5.50	31.81	18.16	400	289	Average	3	4874.00	49.87	74.00	-24.13	37.94	32.60	10.52	32.90	1.79	199	319	PEAK	4	4874.00	39.21	54.00	-14.79	27.28	32.60	10.52	32.90	1.79	199	319	AVERAGE	5	7311.00	54.31	74.00	-19.69	38.81	37.20	12.62	35.54	2.82	206	305	PEAK	6	7311.00	43.93	54.00	-10.87	27.63	37.20	12.62	35.54	2.82	206	305	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																	
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																
1	1220.00	62.28	74.00	-11.72	54.83	23.60	5.50	31.81	18.16	310	262	Peak																																																																																																																																																																																													
2	1220.00	53.45	54.00	-0.55	45.20	23.60	5.50	31.81	18.16	310	262	Average																																																																																																																																																																																													
3	4874.00	45.83	74.00	-28.17	33.90	32.60	10.52	32.90	1.79	--	--	PEAK																																																																																																																																																																																													
4	7311.00	50.86	74.00	-23.94	33.76	37.20	12.62	35.54	2.82	--	--	PEAK																																																																																																																																																																																													
5	7311.00	48.39	54.00	-13.61	24.89	37.20	12.62	35.54	2.82	--	--	AVERAGE																																																																																																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																	
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																
1	1220.00	61.15	74.00	-12.85	52.90	23.60	5.50	31.81	18.16	400	289	Peak																																																																																																																																																																																													
2	1220.00	52.81	54.00	-1.99	43.76	23.60	5.50	31.81	18.16	400	289	Average																																																																																																																																																																																													
3	4874.00	49.87	74.00	-24.13	37.94	32.60	10.52	32.90	1.79	199	319	PEAK																																																																																																																																																																																													
4	4874.00	39.21	54.00	-14.79	27.28	32.60	10.52	32.90	1.79	199	319	AVERAGE																																																																																																																																																																																													
5	7311.00	54.31	74.00	-19.69	38.81	37.20	12.62	35.54	2.82	206	305	PEAK																																																																																																																																																																																													
6	7311.00	43.93	54.00	-10.87	27.63	37.20	12.62	35.54	2.82	206	305	AVERAGE																																																																																																																																																																																													



Mode	16	
	Harmonic	
	2400-2483.5_802.11n HT20_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3n DRH10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3n DRH10-E_LE20H54105N_230712 VERTICAL</p>

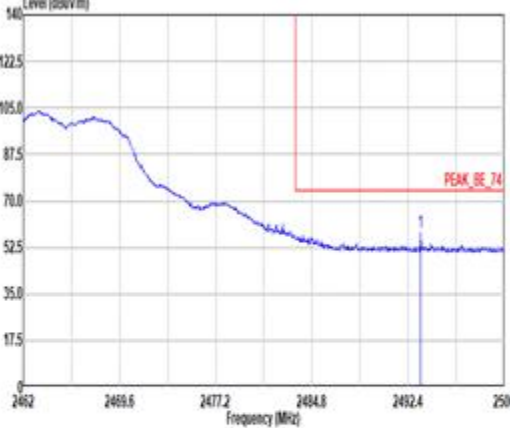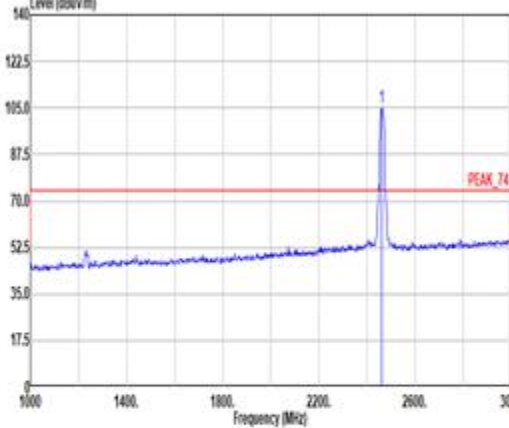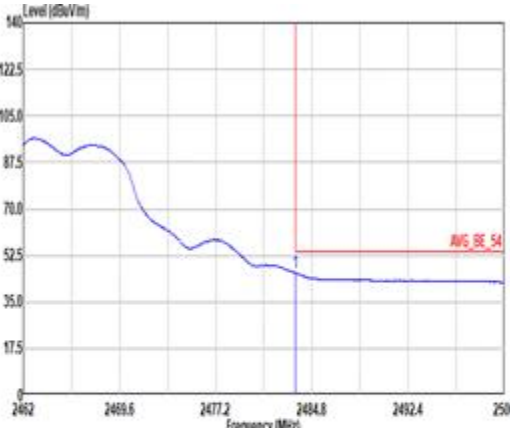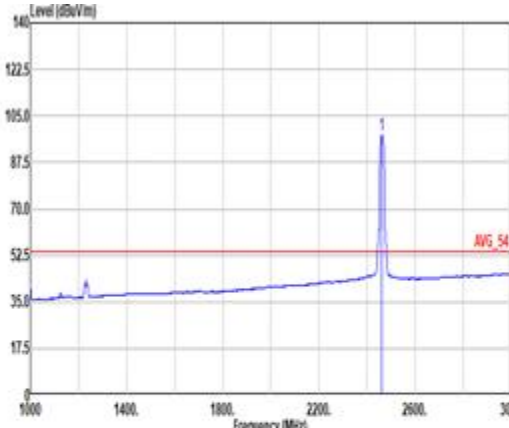

	17																																																																															
Mode	Band Edge																																																																															
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.39</td> <td>58.00</td> <td>74.00</td> <td>-15.92</td> <td>45.01</td> <td>26.98</td> <td>7.49</td> <td>31.88</td> <td>18.48</td> <td>100</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.39	58.00	74.00	-15.92	45.01	26.98	7.49	31.88	18.48	100	181	PEAK	 <p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.98</td> <td>-----</td> <td>-----</td> <td>92.04</td> <td>26.88</td> <td>7.45</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.98	-----	-----	92.04	26.88	7.45	31.78	18.47	100	181	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2493.39	58.00	74.00	-15.92	45.01	26.98	7.49	31.88	18.48	100	181	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	104.98	-----	-----	92.04	26.88	7.45	31.78	18.47	100	181	PEAK																																																																				
Avg	 <p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>45.00</td> <td>54.00</td> <td>-8.20</td> <td>32.80</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>100</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	45.00	54.00	-8.20	32.80	26.84	7.47	31.79	18.48	100	181	AVERAGE	 <p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>97.83</td> <td>-----</td> <td>-----</td> <td>84.90</td> <td>26.88</td> <td>7.44</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.83	-----	-----	84.90	26.88	7.44	31.78	18.47	100	181	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2483.51	45.00	54.00	-8.20	32.80	26.84	7.47	31.79	18.48	100	181	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	97.83	-----	-----	84.90	26.88	7.44	31.78	18.47	100	181	AVERAGE																																																																				



		17																																																																													
Mode	Band Edge																																																																														
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																														
ANT	1+2																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>112.62</td> <td>-----</td> <td>99.68</td> <td>26.88</td> <td>7.45</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	112.62	-----	99.68	26.88	7.45	31.78	18.47	100	340	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>112.62</td> <td>-----</td> <td>99.68</td> <td>26.88</td> <td>7.45</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	112.62	-----	99.68	26.88	7.45	31.78	18.47	100	340	PEAK	
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2462.00	112.62	-----	99.68	26.88	7.45	31.78	18.47	100	340	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2462.00	112.62	-----	99.68	26.88	7.45	31.78	18.47	100	340	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>52.41</td> <td>54.00</td> <td>-1.59</td> <td>39.41</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	52.41	54.00	-1.59	39.41	26.84	7.47	31.79	18.48	100	340	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.48</td> <td>-----</td> <td>92.46</td> <td>26.88</td> <td>7.45</td> <td>31.78</td> <td>18.47</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.48	-----	92.46	26.88	7.45	31.78	18.47	100	340	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2483.55	52.41	54.00	-1.59	39.41	26.84	7.47	31.79	18.48	100	340	AVERAGE																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2462.00	105.48	-----	92.46	26.88	7.45	31.78	18.47	100	340	AVERAGE																																																																				







Mode	17																																																																																																																																																																																																				
	Harmonic																																																																																																																																																																																																				
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																																																																				
ANT	1+2																																																																																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																																																																																			
Peak Avg	<p>Site : 80CK23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1231.00</td> <td>56.80</td> <td>74.00</td> <td>-17.92</td> <td>47.82</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>313</td> <td>294</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1231.00</td> <td>47.47</td> <td>54.00</td> <td>-6.53</td> <td>39.21</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>313</td> <td>294</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>46.85</td> <td>74.00</td> <td>-27.15</td> <td>34.81</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>53.44</td> <td>74.00</td> <td>-20.56</td> <td>37.11</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>306</td> <td>274</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>43.56</td> <td>54.00</td> <td>-10.44</td> <td>27.23</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>306</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1231.00	56.80	74.00	-17.92	47.82	23.60	5.50	31.81	10.17	313	294	Peak	2	1231.00	47.47	54.00	-6.53	39.21	23.60	5.50	31.81	10.17	313	294	Average	3	4924.00	46.85	74.00	-27.15	34.81	32.75	10.50	32.90	1.77	--	--	PEAK	4	7386.00	53.44	74.00	-20.56	37.11	37.13	12.81	35.60	1.99	306	274	PEAK	5	7386.00	43.56	54.00	-10.44	27.23	37.13	12.81	35.60	1.99	306	274	AVERAGE	<p>Site : 80CK23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1231.00</td> <td>53.41</td> <td>74.00</td> <td>-20.59</td> <td>45.15</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>400</td> <td>267</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1231.00</td> <td>47.18</td> <td>54.00</td> <td>-6.82</td> <td>38.92</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>10.17</td> <td>400</td> <td>267</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>51.82</td> <td>74.00</td> <td>-22.18</td> <td>39.70</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>400</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4924.00</td> <td>41.46</td> <td>54.00</td> <td>-12.54</td> <td>29.42</td> <td>32.75</td> <td>10.50</td> <td>32.90</td> <td>1.77</td> <td>400</td> <td>326</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>55.26</td> <td>74.00</td> <td>-18.74</td> <td>38.93</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>181</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7386.00</td> <td>45.00</td> <td>54.00</td> <td>-9.00</td> <td>28.67</td> <td>37.13</td> <td>12.81</td> <td>35.60</td> <td>1.99</td> <td>181</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1231.00	53.41	74.00	-20.59	45.15	23.60	5.50	31.81	10.17	400	267	Peak	2	1231.00	47.18	54.00	-6.82	38.92	23.60	5.50	31.81	10.17	400	267	Average	3	4924.00	51.82	74.00	-22.18	39.70	32.75	10.50	32.90	1.77	400	326	PEAK	4	4924.00	41.46	54.00	-12.54	29.42	32.75	10.50	32.90	1.77	400	326	AVERAGE	5	7386.00	55.26	74.00	-18.74	38.93	37.13	12.81	35.60	1.99	181	302	PEAK	6	7386.00	45.00	54.00	-9.00	28.67	37.13	12.81	35.60	1.99	181	302	AVERAGE
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																										
1	1231.00	56.80	74.00	-17.92	47.82	23.60	5.50	31.81	10.17	313	294	Peak																																																																																																																																																																																									
2	1231.00	47.47	54.00	-6.53	39.21	23.60	5.50	31.81	10.17	313	294	Average																																																																																																																																																																																									
3	4924.00	46.85	74.00	-27.15	34.81	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																																																																									
4	7386.00	53.44	74.00	-20.56	37.11	37.13	12.81	35.60	1.99	306	274	PEAK																																																																																																																																																																																									
5	7386.00	43.56	54.00	-10.44	27.23	37.13	12.81	35.60	1.99	306	274	AVERAGE																																																																																																																																																																																									
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																										
1	1231.00	53.41	74.00	-20.59	45.15	23.60	5.50	31.81	10.17	400	267	Peak																																																																																																																																																																																									
2	1231.00	47.18	54.00	-6.82	38.92	23.60	5.50	31.81	10.17	400	267	Average																																																																																																																																																																																									
3	4924.00	51.82	74.00	-22.18	39.70	32.75	10.50	32.90	1.77	400	326	PEAK																																																																																																																																																																																									
4	4924.00	41.46	54.00	-12.54	29.42	32.75	10.50	32.90	1.77	400	326	AVERAGE																																																																																																																																																																																									
5	7386.00	55.26	74.00	-18.74	38.93	37.13	12.81	35.60	1.99	181	302	PEAK																																																																																																																																																																																									
6	7386.00	45.00	54.00	-9.00	28.67	37.13	12.81	35.60	1.99	181	302	AVERAGE																																																																																																																																																																																									



Mode	17	
	Harmonic	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3n DRX10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3n DRX10-E_LE20H54105N_230712 VERTICAL</p>



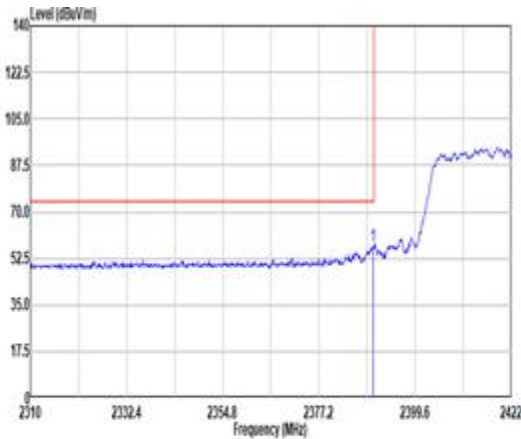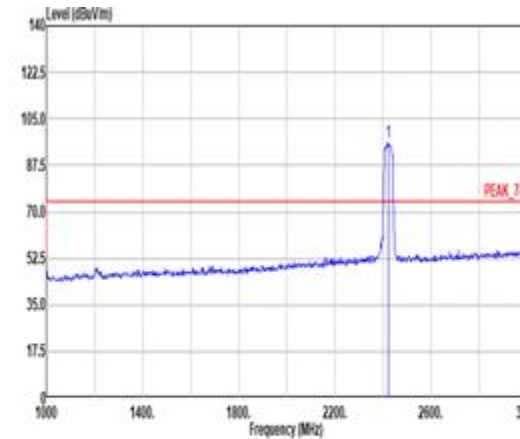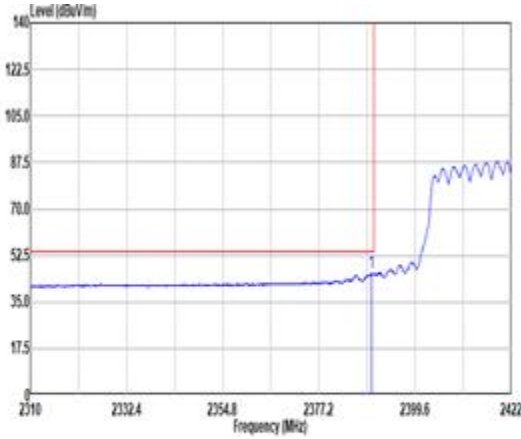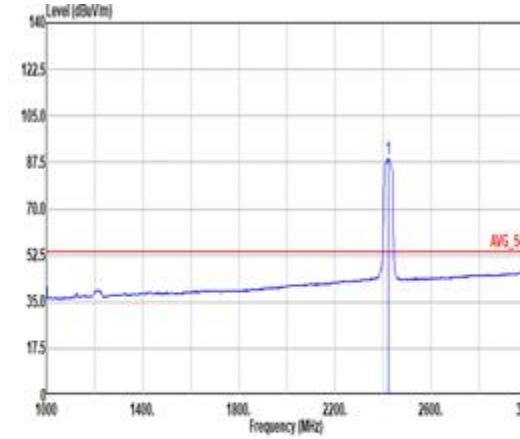

Mode	18																																																																											
	Band Edge - L																																																																											
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																											
ANT	1+2																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 80KH3-HY Condition: PEAK_9E_74 3m DRH18-E_LE2C95A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.86</td> <td>57.23</td> <td>74.88</td> <td>-16.77</td> <td>44.18</td> <td>17.88</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.86	57.23	74.88	-16.77	44.18	17.88	7.34	31.73	18.44	100	243	PEAK	 <p>Site : 80KH3-HY Condition: PEAK_74_3m DRH18-E_LE2C95A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.88</td> <td>95.88</td> <td>-----</td> <td>-----</td> <td>83.82</td> <td>26.88</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.88	95.88	-----	-----	83.82	26.88	7.38	31.75	18.45	100	243	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.86	57.23	74.88	-16.77	44.18	17.88	7.34	31.73	18.44	100	243	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2422.88	95.88	-----	-----	83.82	26.88	7.38	31.75	18.45	100	243	PEAK																																																																
Avg	 <p>Site : 80KH3-HY Condition: AVG_9E_54 3m DRH18-E_LE2C95A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.52</td> <td>45.74</td> <td>54.88</td> <td>-8.26</td> <td>32.69</td> <td>17.88</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.52	45.74	54.88	-8.26	32.69	17.88	7.34	31.73	18.44	100	243	AVERAGE	 <p>Site : 80KH3-HY Condition: AVG_54 3m DRH18-E_LE2C95A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.88</td> <td>88.81</td> <td>-----</td> <td>-----</td> <td>75.92</td> <td>26.88</td> <td>7.39</td> <td>31.75</td> <td>18.45</td> <td>100</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.88	88.81	-----	-----	75.92	26.88	7.39	31.75	18.45	100	243	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.52	45.74	54.88	-8.26	32.69	17.88	7.34	31.73	18.44	100	243	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2422.88	88.81	-----	-----	75.92	26.88	7.39	31.75	18.45	100	243	AVERAGE																																																																



Mode	18																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH03_2422MHz																																					
ANT	1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C95418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.38</td> <td>51.17</td> <td>74.00</td> <td>-22.83</td> <td>30.10</td> <td>26.90</td> <td>7.40</td> <td>31.00</td> <td>18.40</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.38	51.17	74.00	-22.83	30.10	26.90	7.40	31.00	18.40	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2484.38	51.17	74.00	-22.83	30.10	26.90	7.40	31.00	18.40																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2C95418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.04</td> <td>41.57</td> <td>54.00</td> <td>-12.43</td> <td>21.50</td> <td>26.90</td> <td>7.40</td> <td>31.00</td> <td>18.40</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.04	41.57	54.00	-12.43	21.50	26.90	7.40	31.00	18.40	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2485.04	41.57	54.00	-12.43	21.50	26.90	7.40	31.00	18.40																														



		18																																																																														
Mode	Band Edge - L																																																																															
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																															
ANT	1+2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2309.97</td> <td>64.19</td> <td>74.00</td> <td>-9.81</td> <td>51.14</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>135</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.97	64.19	74.00	-9.81	51.14	27.00	7.34	31.73	18.44	135	337	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>185.89</td> <td>-----</td> <td>-----</td> <td>92.97</td> <td>26.84</td> <td>7.38</td> <td>31.75</td> <td>18.45</td> <td>135</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	185.89	-----	-----	92.97	26.84	7.38	31.75	18.45	135	337	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2309.97	64.19	74.00	-9.81	51.14	27.00	7.34	31.73	18.44	135	337	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2422.00	185.89	-----	-----	92.97	26.84	7.38	31.75	18.45	135	337	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2309.41</td> <td>52.04</td> <td>54.00</td> <td>-1.96</td> <td>38.99</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>135</td> <td>337</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.41	52.04	54.00	-1.96	38.99	27.00	7.34	31.73	18.44	135	337	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>98.71</td> <td>-----</td> <td>-----</td> <td>85.82</td> <td>26.80</td> <td>7.39</td> <td>31.75</td> <td>18.45</td> <td>135</td> <td>337</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.71	-----	-----	85.82	26.80	7.39	31.75	18.45	135	337	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2309.41	52.04	54.00	-1.96	38.99	27.00	7.34	31.73	18.44	135	337	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2422.00	98.71	-----	-----	85.82	26.80	7.39	31.75	18.45	135	337	AVERAGE																																																																				



Mode	18																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT40_CH03_2422MHz																																										
ANT	1+2																																										
Pol.	Vertical	Fundamental																																									
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.73</td> <td>53.66</td> <td>74.00</td> <td>-20.34</td> <td>40.63</td> <td>26.06</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>135</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.73	53.66	74.00	-20.34	40.63	26.06	7.48	31.79	18.48	135	337	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	2485.73	53.66	74.00	-20.34	40.63	26.06	7.48	31.79	18.48	135	337	PEAK																															
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.71</td> <td>44.37</td> <td>54.00</td> <td>-9.63</td> <td>31.36</td> <td>26.85</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>135</td> <td>337</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.71	44.37	54.00	-9.63	31.36	26.85	7.47	31.79	18.48	135	337	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	2484.71	44.37	54.00	-9.63	31.36	26.85	7.47	31.79	18.48	135	337	AVERAGE																															



Mode	18																																																																																																																																																													
	Harmonic																																																																																																																																																													
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																																																																																													
ANT	1+2																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 80CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1221.00</td> <td>58.78</td> <td>74.00</td> <td>-23.22</td> <td>42.54</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>190</td> <td>282</td> <td>Peak</td> </tr> <tr> <td>1221.00</td> <td>41.87</td> <td>54.00</td> <td>-12.13</td> <td>33.63</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>190</td> <td>282</td> <td>Average</td> </tr> <tr> <td>4844.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>34.72</td> <td>32.48</td> <td>10.54</td> <td>32.90</td> <td>1.90</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>7266.00</td> <td>49.47</td> <td>74.00</td> <td>-24.53</td> <td>33.23</td> <td>37.20</td> <td>12.51</td> <td>35.50</td> <td>2.83</td> <td>150</td> <td>96</td> <td>PEAK</td> </tr> <tr> <td>7266.00</td> <td>40.46</td> <td>54.00</td> <td>-13.54</td> <td>24.22</td> <td>37.20</td> <td>12.51</td> <td>35.50</td> <td>2.83</td> <td>150</td> <td>96</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1221.00	58.78	74.00	-23.22	42.54	23.60	5.49	31.81	10.16	190	282	Peak	1221.00	41.87	54.00	-12.13	33.63	23.60	5.49	31.81	10.16	190	282	Average	4844.00	46.56	74.00	-27.44	34.72	32.48	10.54	32.90	1.90	--	--	PEAK	7266.00	49.47	74.00	-24.53	33.23	37.20	12.51	35.50	2.83	150	96	PEAK	7266.00	40.46	54.00	-13.54	24.22	37.20	12.51	35.50	2.83	150	96	AVERAGE	<p>Site : 80CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1221.00</td> <td>58.34</td> <td>74.00</td> <td>-23.66</td> <td>42.10</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>195</td> <td>300</td> <td>Peak</td> </tr> <tr> <td>1221.00</td> <td>41.27</td> <td>54.00</td> <td>-12.73</td> <td>33.83</td> <td>23.60</td> <td>5.49</td> <td>31.81</td> <td>10.16</td> <td>195</td> <td>300</td> <td>Average</td> </tr> <tr> <td>4844.00</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>33.93</td> <td>32.48</td> <td>10.54</td> <td>32.90</td> <td>1.90</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>7266.00</td> <td>49.59</td> <td>74.00</td> <td>-24.41</td> <td>33.35</td> <td>37.20</td> <td>12.51</td> <td>35.50</td> <td>2.83</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>7266.00</td> <td>40.90</td> <td>54.00</td> <td>-13.10</td> <td>24.66</td> <td>37.20</td> <td>12.51</td> <td>35.50</td> <td>2.83</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1221.00	58.34	74.00	-23.66	42.10	23.60	5.49	31.81	10.16	195	300	Peak	1221.00	41.27	54.00	-12.73	33.83	23.60	5.49	31.81	10.16	195	300	Average	4844.00	45.77	74.00	-28.23	33.93	32.48	10.54	32.90	1.90	--	--	PEAK	7266.00	49.59	74.00	-24.41	33.35	37.20	12.51	35.50	2.83	--	--	PEAK	7266.00	40.90	54.00	-13.10	24.66	37.20	12.51	35.50	2.83	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																																																																																						
1221.00	58.78	74.00	-23.22	42.54	23.60	5.49	31.81	10.16	190	282	Peak																																																																																																																																																			
1221.00	41.87	54.00	-12.13	33.63	23.60	5.49	31.81	10.16	190	282	Average																																																																																																																																																			
4844.00	46.56	74.00	-27.44	34.72	32.48	10.54	32.90	1.90	--	--	PEAK																																																																																																																																																			
7266.00	49.47	74.00	-24.53	33.23	37.20	12.51	35.50	2.83	150	96	PEAK																																																																																																																																																			
7266.00	40.46	54.00	-13.54	24.22	37.20	12.51	35.50	2.83	150	96	AVERAGE																																																																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																																																																																																						
1221.00	58.34	74.00	-23.66	42.10	23.60	5.49	31.81	10.16	195	300	Peak																																																																																																																																																			
1221.00	41.27	54.00	-12.73	33.83	23.60	5.49	31.81	10.16	195	300	Average																																																																																																																																																			
4844.00	45.77	74.00	-28.23	33.93	32.48	10.54	32.90	1.90	--	--	PEAK																																																																																																																																																			
7266.00	49.59	74.00	-24.41	33.35	37.20	12.51	35.50	2.83	--	--	PEAK																																																																																																																																																			
7266.00	40.90	54.00	-13.10	24.66	37.20	12.51	35.50	2.83	--	--	AVERAGE																																																																																																																																																			



Mode	18	
	Harmonic	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3n DRH10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3n DRH10-E_LE20H54105N_230712 VERTICAL</p>



Mode	19																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.74</td> <td>55.69</td> <td>74.00</td> <td>-18.31</td> <td>42.64</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.74	55.69	74.00	-18.31	42.64	27.00	7.34	31.73	18.44	100	240	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>87.59</td> <td>26.00</td> <td>7.40</td> <td>31.76</td> <td>18.45</td> <td>100</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.48	-----	-----	87.59	26.00	7.40	31.76	18.45	100	240	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2388.74	55.69	74.00	-18.31	42.64	27.00	7.34	31.73	18.44	100	240	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	100.48	-----	-----	87.59	26.00	7.40	31.76	18.45	100	240	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.74</td> <td>45.60</td> <td>54.00</td> <td>-8.40</td> <td>32.55</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>100</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.74	45.60	54.00	-8.40	32.55	27.00	7.34	31.73	18.44	100	240	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>93.69</td> <td>-----</td> <td>-----</td> <td>80.74</td> <td>26.04</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>100</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	93.69	-----	-----	80.74	26.04	7.41	31.76	18.46	100	240	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2388.74	45.60	54.00	-8.40	32.55	27.00	7.34	31.73	18.44	100	240	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	93.69	-----	-----	80.74	26.04	7.41	31.76	18.46	100	240	AVERAGE																																																																				



Mode	19																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH06_2437MHz																																					
ANT	1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C95418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.00</td> <td>52.30</td> <td>74.00</td> <td>-21.70</td> <td>39.30</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.40</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.00	52.30	74.00	-21.70	39.30	26.84	7.47	31.79	18.40	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2484.00	52.30	74.00	-21.70	39.30	26.84	7.47	31.79	18.40																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2C95418EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>43.00</td> <td>54.00</td> <td>-10.92</td> <td>30.00</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.40</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.56	43.00	54.00	-10.92	30.00	26.84	7.47	31.79	18.40	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2483.56	43.00	54.00	-10.92	30.00	26.84	7.47	31.79	18.40																														





Mode	19																																																																															
	Band Edge - L																																																																															
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																															
ANT	1+2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>63.67</td> <td>74.00</td> <td>-10.33</td> <td>50.62</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>219</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	63.67	74.00	-10.33	50.62	17.00	7.34	31.73	18.44	219	341	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>111.85</td> <td>-----</td> <td>-----</td> <td>98.18</td> <td>16.84</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>219</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	111.85	-----	-----	98.18	16.84	7.41	31.76	18.46	219	341	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.88	63.67	74.00	-10.33	50.62	17.00	7.34	31.73	18.44	219	341	PEAK																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	111.85	-----	-----	98.18	16.84	7.41	31.76	18.46	219	341	PEAK																																																																				
Avg	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>53.32</td> <td>54.00</td> <td>-8.68</td> <td>48.27</td> <td>17.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>219</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	53.32	54.00	-8.68	48.27	17.00	7.34	31.73	18.44	219	341	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>103.89</td> <td>-----</td> <td>-----</td> <td>98.92</td> <td>16.86</td> <td>7.41</td> <td>31.76</td> <td>18.46</td> <td>219</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	103.89	-----	-----	98.92	16.86	7.41	31.76	18.46	219	341	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.88	53.32	54.00	-8.68	48.27	17.00	7.34	31.73	18.44	219	341	AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2437.00	103.89	-----	-----	98.92	16.86	7.41	31.76	18.46	219	341	AVERAGE																																																																				



Mode	19																																							
	Band Edge - R																																							
	2400-2483.5_802.11n HT40_CH06_2437MHz																																							
ANT	1+2																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2C95418EN_230712 VERTICAL RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2489.16</td> <td>63.12</td> <td>74.00</td> <td>-10.88</td> <td>50.06</td> <td>26.09</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>219 341 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2489.16	63.12	74.00	-10.88	50.06	26.09	7.48	31.79	18.48	219 341 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 2489.16	63.12	74.00	-10.88	50.06	26.09	7.48	31.79	18.48	219 341 PEAK																															
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2C95418EN_230712 VERTICAL RBW:3000.000kHz VBW:1.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2485.30</td> <td>49.97</td> <td>54.00</td> <td>-4.03</td> <td>36.95</td> <td>26.05</td> <td>7.48</td> <td>31.79</td> <td>18.48</td> <td>219 341 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2485.30	49.97	54.00	-4.03	36.95	26.05	7.48	31.79	18.48	219 341 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 2485.30	49.97	54.00	-4.03	36.95	26.05	7.48	31.79	18.48	219 341 AVERAGE																															



Mode	19																																																																																																																																																																																																				
	Harmonic																																																																																																																																																																																																				
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																																																																																				
ANT	1+2																																																																																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																																																																																			
Peak Avg	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1218.00</td> <td>55.74</td> <td>74.00</td> <td>-18.26</td> <td>47.50</td> <td>23.60</td> <td>5.40</td> <td>31.81</td> <td>10.16</td> <td>185</td> <td>206</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1218.00</td> <td>46.79</td> <td>54.00</td> <td>-7.21</td> <td>38.55</td> <td>23.60</td> <td>5.40</td> <td>31.81</td> <td>10.16</td> <td>185</td> <td>206</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>50.57</td> <td>74.00</td> <td>-23.43</td> <td>38.64</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>257</td> <td>51</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>4874.00</td> <td>39.29</td> <td>54.00</td> <td>-14.71</td> <td>27.36</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>257</td> <td>51</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>50.70</td> <td>74.00</td> <td>-23.30</td> <td>34.40</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>7312.00</td> <td>40.66</td> <td>54.00</td> <td>-13.34</td> <td>24.36</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1218.00	55.74	74.00	-18.26	47.50	23.60	5.40	31.81	10.16	185	206	Peak	2	1218.00	46.79	54.00	-7.21	38.55	23.60	5.40	31.81	10.16	185	206	Average	3	4874.00	50.57	74.00	-23.43	38.64	32.60	10.52	32.90	1.79	257	51	PEAK	4	4874.00	39.29	54.00	-14.71	27.36	32.60	10.52	32.90	1.79	257	51	AVERAGE	5	7311.00	50.70	74.00	-23.30	34.40	37.20	12.62	35.54	2.82	--	--	PEAK	6	7312.00	40.66	54.00	-13.34	24.36	37.20	12.62	35.54	2.82	--	--	AVERAGE	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1218.00</td> <td>54.33</td> <td>74.00</td> <td>-19.67</td> <td>46.89</td> <td>23.60</td> <td>5.40</td> <td>31.81</td> <td>10.16</td> <td>195</td> <td>306</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>1218.00</td> <td>44.65</td> <td>54.00</td> <td>-9.35</td> <td>36.41</td> <td>23.60</td> <td>5.40</td> <td>31.81</td> <td>10.16</td> <td>195</td> <td>306</td> <td>Average</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>35.60</td> <td>32.60</td> <td>10.52</td> <td>32.90</td> <td>1.79</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>53.83</td> <td>74.00</td> <td>-20.17</td> <td>36.73</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>217</td> <td>308</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7312.00</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>27.45</td> <td>37.20</td> <td>12.62</td> <td>35.54</td> <td>2.82</td> <td>217</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	1218.00	54.33	74.00	-19.67	46.89	23.60	5.40	31.81	10.16	195	306	Peak	2	1218.00	44.65	54.00	-9.35	36.41	23.60	5.40	31.81	10.16	195	306	Average	3	4874.00	47.53	74.00	-26.47	35.60	32.60	10.52	32.90	1.79	--	--	PEAK	4	7311.00	53.83	74.00	-20.17	36.73	37.20	12.62	35.54	2.82	217	308	PEAK	5	7312.00	43.75	54.00	-10.25	27.45	37.20	12.62	35.54	2.82	217	308	AVERAGE
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																										
1	1218.00	55.74	74.00	-18.26	47.50	23.60	5.40	31.81	10.16	185	206	Peak																																																																																																																																																																																									
2	1218.00	46.79	54.00	-7.21	38.55	23.60	5.40	31.81	10.16	185	206	Average																																																																																																																																																																																									
3	4874.00	50.57	74.00	-23.43	38.64	32.60	10.52	32.90	1.79	257	51	PEAK																																																																																																																																																																																									
4	4874.00	39.29	54.00	-14.71	27.36	32.60	10.52	32.90	1.79	257	51	AVERAGE																																																																																																																																																																																									
5	7311.00	50.70	74.00	-23.30	34.40	37.20	12.62	35.54	2.82	--	--	PEAK																																																																																																																																																																																									
6	7312.00	40.66	54.00	-13.34	24.36	37.20	12.62	35.54	2.82	--	--	AVERAGE																																																																																																																																																																																									
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																										
1	1218.00	54.33	74.00	-19.67	46.89	23.60	5.40	31.81	10.16	195	306	Peak																																																																																																																																																																																									
2	1218.00	44.65	54.00	-9.35	36.41	23.60	5.40	31.81	10.16	195	306	Average																																																																																																																																																																																									
3	4874.00	47.53	74.00	-26.47	35.60	32.60	10.52	32.90	1.79	--	--	PEAK																																																																																																																																																																																									
4	7311.00	53.83	74.00	-20.17	36.73	37.20	12.62	35.54	2.82	217	308	PEAK																																																																																																																																																																																									
5	7312.00	43.75	54.00	-10.25	27.45	37.20	12.62	35.54	2.82	217	308	AVERAGE																																																																																																																																																																																									



Mode	19	
	Harmonic	
	2400-2483.5_802.11n HT40_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3n DRH10-E_LE20H54105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3n DRH10-E_LE20H54105N_230712 VERTICAL</p>



		20																																																																																		
Mode		Band Edge - L																																																																																		
		2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																		
ANT		1+2																																																																																		
Pol.		Horizontal	Fundamental																																																																																	
Peak	<p>Site : 830K13-HY Condition: PEAK_BE_74 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.80</td> <td>51.87</td> <td>74.00</td> <td>-22.03</td> <td>36.93</td> <td>37.01</td> <td>7.32</td> <td>31.72</td> <td>18.43</td> <td>237</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.80	51.87	74.00	-22.03	36.93	37.01	7.32	31.72	18.43	237	169	PEAK	<p>Site : 830K13-HY Condition: PEAK_74 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>99.18</td> <td>-----</td> <td>-----</td> <td>86.16</td> <td>26.98</td> <td>7.43</td> <td>31.77</td> <td>18.46</td> <td>237</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	99.18	-----	-----	86.16	26.98	7.43	31.77	18.46	237	169	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2379.80	51.87	74.00	-22.03	36.93	37.01	7.32	31.72	18.43	237	169	PEAK																																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2452.00	99.18	-----	-----	86.16	26.98	7.43	31.77	18.46	237	169	PEAK																																																																								
Avg	<p>Site : 830K13-HY Condition: AVG_BE_54 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2363.53</td> <td>41.89</td> <td>54.00</td> <td>-12.11</td> <td>21.79</td> <td>27.18</td> <td>7.29</td> <td>31.72</td> <td>18.43</td> <td>237</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.53	41.89	54.00	-12.11	21.79	27.18	7.29	31.72	18.43	237	169	AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DR118-E_LE2CPS418EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>91.46</td> <td>-----</td> <td>-----</td> <td>78.44</td> <td>26.98</td> <td>7.43</td> <td>31.77</td> <td>18.46</td> <td>237</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	91.46	-----	-----	78.44	26.98	7.43	31.77	18.46	237	169	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2363.53	41.89	54.00	-12.11	21.79	27.18	7.29	31.72	18.43	237	169	AVERAGE																																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2452.00	91.46	-----	-----	78.44	26.98	7.43	31.77	18.46	237	169	AVERAGE																																																																								



Mode	20																																						
	Band Edge - R																																						
	2400-2483.5_802.11n HT40_CH09_2452MHz																																						
ANT	1+2																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2C95418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.64</td> <td>57.57</td> <td>74.00</td> <td>-16.03</td> <td>44.96</td> <td>26.85</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>237 109 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.64	57.57	74.00	-16.03	44.96	26.85	7.47	31.79	18.48	237 109 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 2484.64	57.57	74.00	-16.03	44.96	26.85	7.47	31.79	18.48	237 109 PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2C95418EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:1.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.35</td> <td>46.01</td> <td>54.00</td> <td>-7.99</td> <td>33.01</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.48</td> <td>237 109 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.35	46.01	54.00	-7.99	33.01	26.84	7.47	31.79	18.48	237 109 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 2484.35	46.01	54.00	-7.99	33.01	26.84	7.47	31.79	18.48	237 109 AVERAGE																														



Mode	20																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 830K13-HY Condition: PEAK_9E_74 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.66</td> <td>54.17</td> <td>74.00</td> <td>-19.83</td> <td>41.12</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>185</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.66	54.17	74.00	-19.83	41.12	27.00	7.34	31.73	18.44	185	95 PEAK	<p>Site : 830K13-HY Condition: PEAK_74_3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>109.81</td> <td>-----</td> <td>-----</td> <td>95.99</td> <td>26.90</td> <td>7.43</td> <td>31.77</td> <td>18.46</td> <td>185</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	109.81	-----	-----	95.99	26.90	7.43	31.77	18.46	185	95 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.66	54.17	74.00	-19.83	41.12	27.00	7.34	31.73	18.44	185	95 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	109.81	-----	-----	95.99	26.90	7.43	31.77	18.46	185	95 PEAK																																																																							
Avg	<p>Site : 830K13-HY Condition: AVG_9E_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>44.93</td> <td>54.00</td> <td>-9.07</td> <td>31.80</td> <td>27.00</td> <td>7.34</td> <td>31.73</td> <td>18.44</td> <td>185</td> <td>95 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	44.93	54.00	-9.07	31.80	27.00	7.34	31.73	18.44	185	95 AVERAGE	<p>Site : 830K13-HY Condition: AVG_54 3m DRM18-E_LE2CPS418EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>87.85</td> <td>26.90</td> <td>7.43</td> <td>31.77</td> <td>18.46</td> <td>185</td> <td>95 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	100.87	-----	-----	87.85	26.90	7.43	31.77	18.46	185	95 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.30	44.93	54.00	-9.07	31.80	27.00	7.34	31.73	18.44	185	95 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	100.87	-----	-----	87.85	26.90	7.43	31.77	18.46	185	95 AVERAGE																																																																							



Mode	20																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH09_2452MHz																																					
ANT	1+2																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 80CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.54</td> <td>65.82</td> <td>74.00</td> <td>-8.18</td> <td>52.81</td> <td>26.85</td> <td>7.47</td> <td>31.79</td> <td>18.40 185 95 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.54	65.82	74.00	-8.18	52.81	26.85	7.47	31.79	18.40 185 95 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2484.54	65.82	74.00	-8.18	52.81	26.85	7.47	31.79	18.40 185 95 PEAK																														
Avg	<p>Site : 80CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5418EN_230712 VERTICAL : RBW:3000.000kHz VBW:1.500kHz SUT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.48</td> <td>53.38</td> <td>54.00</td> <td>-0.70</td> <td>48.38</td> <td>26.84</td> <td>7.47</td> <td>31.79</td> <td>18.40 185 95 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.48	53.38	54.00	-0.70	48.38	26.84	7.47	31.79	18.40 185 95 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2484.48	53.38	54.00	-0.70	48.38	26.84	7.47	31.79	18.40 185 95 AVERAGE																														





Mode	20																																																																																																																																																																															
	Harmonic																																																																																																																																																																															
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																																																																															
ANT	1+2																																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																																														
Peak Avg	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>Hz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1226.00</td> <td>52.12</td> <td>74.00</td> <td>-21.88</td> <td>43.86</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>186</td> <td>289</td> <td>Peak</td> </tr> <tr> <td>2 1226.00</td> <td>42.79</td> <td>54.00</td> <td>-11.21</td> <td>34.53</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>186</td> <td>289</td> <td>Average</td> </tr> <tr> <td>3 4984.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>34.54</td> <td>32.71</td> <td>10.51</td> <td>32.98</td> <td>1.78</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4 7356.00</td> <td>50.45</td> <td>74.00</td> <td>-23.55</td> <td>34.11</td> <td>37.19</td> <td>12.73</td> <td>35.58</td> <td>2.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5 7356.00</td> <td>48.52</td> <td>54.00</td> <td>-13.48</td> <td>24.18</td> <td>37.19</td> <td>12.73</td> <td>35.58</td> <td>2.00</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Hz	dBm	dB	dBm	dB	dB	dB	cm	deg	1 1226.00	52.12	74.00	-21.88	43.86	23.60	5.50	31.81	18.17	186	289	Peak	2 1226.00	42.79	54.00	-11.21	34.53	23.60	5.50	31.81	18.17	186	289	Average	3 4984.00	46.56	74.00	-27.44	34.54	32.71	10.51	32.98	1.78	--	--	PEAK	4 7356.00	50.45	74.00	-23.55	34.11	37.19	12.73	35.58	2.00	--	--	PEAK	5 7356.00	48.52	54.00	-13.48	24.18	37.19	12.73	35.58	2.00	--	--	AVERAGE	<p>Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_238712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>Hz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1226.00</td> <td>50.27</td> <td>74.00</td> <td>-23.73</td> <td>42.81</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>197</td> <td>314</td> <td>Peak</td> </tr> <tr> <td>2 1226.00</td> <td>40.69</td> <td>54.00</td> <td>-13.31</td> <td>32.43</td> <td>23.60</td> <td>5.50</td> <td>31.81</td> <td>18.17</td> <td>197</td> <td>314</td> <td>Average</td> </tr> <tr> <td>3 4984.00</td> <td>45.67</td> <td>74.00</td> <td>-28.33</td> <td>33.65</td> <td>32.71</td> <td>10.51</td> <td>32.98</td> <td>1.78</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4 7356.00</td> <td>49.83</td> <td>74.00</td> <td>-24.17</td> <td>33.49</td> <td>37.19</td> <td>12.73</td> <td>35.58</td> <td>2.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>5 7356.00</td> <td>48.36</td> <td>54.00</td> <td>-13.64</td> <td>24.82</td> <td>37.19</td> <td>12.73</td> <td>35.58</td> <td>2.00</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Hz	dBm	dB	dBm	dB	dB	dB	cm	deg	1 1226.00	50.27	74.00	-23.73	42.81	23.60	5.50	31.81	18.17	197	314	Peak	2 1226.00	40.69	54.00	-13.31	32.43	23.60	5.50	31.81	18.17	197	314	Average	3 4984.00	45.67	74.00	-28.33	33.65	32.71	10.51	32.98	1.78	--	--	PEAK	4 7356.00	49.83	74.00	-24.17	33.49	37.19	12.73	35.58	2.00	--	--	PEAK	5 7356.00	48.36	54.00	-13.64	24.82	37.19	12.73	35.58	2.00	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
Hz	dBm	dB	dBm	dB	dB	dB	cm	deg																																																																																																																																																																								
1 1226.00	52.12	74.00	-21.88	43.86	23.60	5.50	31.81	18.17	186	289	Peak																																																																																																																																																																					
2 1226.00	42.79	54.00	-11.21	34.53	23.60	5.50	31.81	18.17	186	289	Average																																																																																																																																																																					
3 4984.00	46.56	74.00	-27.44	34.54	32.71	10.51	32.98	1.78	--	--	PEAK																																																																																																																																																																					
4 7356.00	50.45	74.00	-23.55	34.11	37.19	12.73	35.58	2.00	--	--	PEAK																																																																																																																																																																					
5 7356.00	48.52	54.00	-13.48	24.18	37.19	12.73	35.58	2.00	--	--	AVERAGE																																																																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
Hz	dBm	dB	dBm	dB	dB	dB	cm	deg																																																																																																																																																																								
1 1226.00	50.27	74.00	-23.73	42.81	23.60	5.50	31.81	18.17	197	314	Peak																																																																																																																																																																					
2 1226.00	40.69	54.00	-13.31	32.43	23.60	5.50	31.81	18.17	197	314	Average																																																																																																																																																																					
3 4984.00	45.67	74.00	-28.33	33.65	32.71	10.51	32.98	1.78	--	--	PEAK																																																																																																																																																																					
4 7356.00	49.83	74.00	-24.17	33.49	37.19	12.73	35.58	2.00	--	--	PEAK																																																																																																																																																																					
5 7356.00	48.36	54.00	-13.64	24.82	37.19	12.73	35.58	2.00	--	--	AVERAGE																																																																																																																																																																					



Mode	20	
	Harmonic	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 80CH3-HY Condition: AVG_54 3m DRH10-E_LE20HSA105N_230712 HORIZONTAL</p>	<p>Site : 80CH3-HY Condition: AVG_54 3m DRH10-E_LE20HSA105N_230712 VERTICAL</p>