




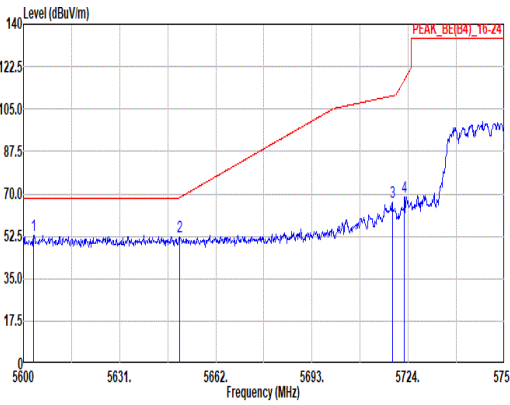

	59																																																																																																																						
Mode	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing peaks at 5603.26, 5650.38, 5718.89, and 5722.76 MHz. A red line indicates the limit for PEAK_BE(B4)_16-24.</p> <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5603.26</td> <td>52.96</td> <td>68.20</td> <td>-15.24</td> <td>38.27</td> <td>33.12</td> <td>11.21</td> <td>33.00</td> <td>4.16</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.38</td> <td>52.33</td> <td>68.48</td> <td>-16.15</td> <td>37.45</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.89</td> <td>66.67</td> <td>110.49</td> <td>-43.82</td> <td>51.54</td> <td>33.78</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.76</td> <td>68.85</td> <td>117.09</td> <td>-48.24</td> <td>53.72</td> <td>33.79</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5603.26	52.96	68.20	-15.24	38.27	33.12	11.21	33.00	4.16	114	72	PEAK	2	5650.38	52.33	68.48	-16.15	37.45	33.40	11.14	33.83	4.17	114	72	PEAK	3	5718.89	66.67	110.49	-43.82	51.54	33.78	11.04	33.87	4.18	114	72	PEAK	4	5722.76	68.85	117.09	-48.24	53.72	33.79	11.03	33.87	4.18	114	72	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 5755.00 MHz. A red line indicates the limit for PEAK(U)NI.</p> <p>Site : 03CH23-HY Condition: PEAK(U)NI 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>101.05</td> <td>-----</td> <td>-----</td> <td>85.88</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	101.05	-----	-----	85.88	33.88	10.99	33.89	4.19	114	72	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5603.26	52.96	68.20	-15.24	38.27	33.12	11.21	33.00	4.16	114	72	PEAK																																																																																																											
2	5650.38	52.33	68.48	-16.15	37.45	33.40	11.14	33.83	4.17	114	72	PEAK																																																																																																											
3	5718.89	66.67	110.49	-43.82	51.54	33.78	11.04	33.87	4.18	114	72	PEAK																																																																																																											
4	5722.76	68.85	117.09	-48.24	53.72	33.79	11.03	33.87	4.18	114	72	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	101.05	-----	-----	85.88	33.88	10.99	33.89	4.19	114	72	PEAK																																																																																																											
Avg.	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 5755.00 MHz. A red line indicates the limit for AVG_54.</p> <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.25</td> <td>-----</td> <td>-----</td> <td>79.05</td> <td>33.92</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>114</td> <td>72</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	94.25	-----	-----	79.05	33.92	10.98	33.89	4.19	114	72	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	94.25	-----	-----	79.05	33.92	10.98	33.89	4.19	114	72	AVERAGE																																																																																																											

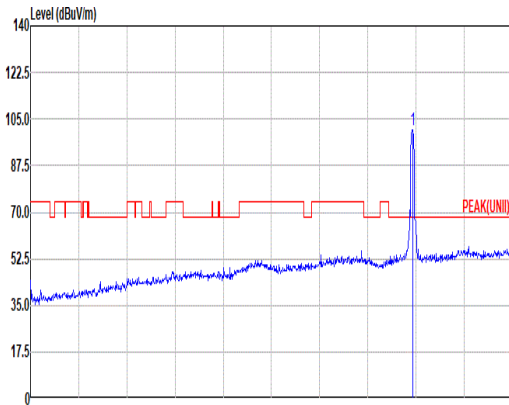

Mode	59																																																																						
	Band Edge - R																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																						
ANT	1+2																																																																						
Pol.	Horizontal	Fundamental																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th rowspan="2">Peak</th> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th colspan="2">Limit</th> <th rowspan="2">Read Level</th> <th rowspan="2">Ant Factor</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp Factor</th> <th rowspan="2">Aux Factor</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>50.50</td> <td>111.61</td> <td>-61.11</td> <td>35.28</td> <td>33.90</td> <td>11.11</td> <td>33.95</td> <td>4.16</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.56</td> <td>51.45</td> <td>105.60</td> <td>-54.15</td> <td>36.17</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>51.24</td> <td>68.46</td> <td>-17.22</td> <td>35.78</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.63</td> <td>52.76</td> <td>68.20</td> <td>-15.44</td> <td>37.31</td> <td>33.95</td> <td>11.38</td> <td>34.00</td> <td>4.12</td> <td>114</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	dBuV/m	dB	dBuV	dB/m	1	5854.65	50.50	111.61	-61.11	35.28	33.90	11.11	33.95	4.16	114	72	PEAK	2	5873.56	51.45	105.60	-54.15	36.17	33.90	11.19	33.96	4.15	114	72	PEAK	3	5924.65	51.24	68.46	-17.22	35.78	33.95	11.38	33.99	4.12	114	72	PEAK	4	5925.63	52.76	68.20	-15.44	37.31	33.95	11.38	34.00	4.12	114	72	PEAK	Blank
Peak	Freq				Level	Limit									Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																	
		dBuV/m	dB	dBuV		dB/m																																																																	
1	5854.65	50.50	111.61	-61.11	35.28	33.90	11.11	33.95	4.16	114	72	PEAK																																																											
2	5873.56	51.45	105.60	-54.15	36.17	33.90	11.19	33.96	4.15	114	72	PEAK																																																											
3	5924.65	51.24	68.46	-17.22	35.78	33.95	11.38	33.99	4.12	114	72	PEAK																																																											
4	5925.63	52.76	68.20	-15.44	37.31	33.95	11.38	34.00	4.12	114	72	PEAK																																																											

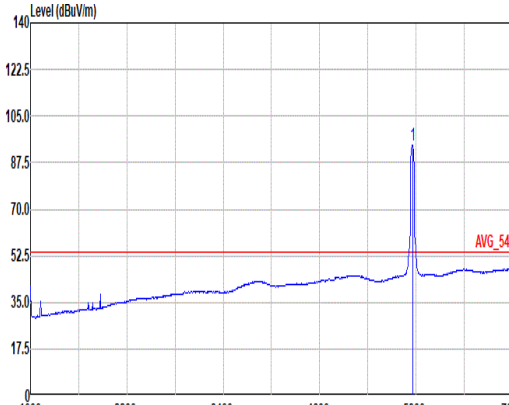

	59																																																																																																																														
Mode	Band Edge - L																																																																																																																														
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																														
ANT	1+2																																																																																																																														
Pol.	Vertical	Fundamental																																																																																																																													
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5643.87</td> <td>55.44</td> <td>68.20</td> <td>-12.76</td> <td>40.59</td> <td>33.36</td> <td>11.15</td> <td>33.83</td> <td>4.17</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.84</td> <td>54.51</td> <td>68.82</td> <td>-14.31</td> <td>39.62</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.87</td> <td>78.31</td> <td>109.92</td> <td>-31.61</td> <td>63.19</td> <td>33.77</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.61</td> <td>80.43</td> <td>116.74</td> <td>-36.31</td> <td>65.30</td> <td>33.79</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5643.87	55.44	68.20	-12.76	40.59	33.36	11.15	33.83	4.17	207	187	PEAK	2	5650.84	54.51	68.82	-14.31	39.62	33.41	11.14	33.83	4.17	207	187	PEAK	3	5716.87	78.31	109.92	-31.61	63.19	33.77	11.04	33.87	4.18	207	187	PEAK	4	5722.61	80.43	116.74	-36.31	65.30	33.79	11.03	33.87	4.18	207	187	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U)11 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>113.59</td> <td>-----</td> <td>-----</td> <td>98.41</td> <td>33.90</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	113.59	-----	-----	98.41	33.90	10.98	33.89	4.19	207	187	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5643.87	55.44	68.20	-12.76	40.59	33.36	11.15	33.83	4.17	207	187	PEAK																																																																																																																			
2	5650.84	54.51	68.82	-14.31	39.62	33.41	11.14	33.83	4.17	207	187	PEAK																																																																																																																			
3	5716.87	78.31	109.92	-31.61	63.19	33.77	11.04	33.87	4.18	207	187	PEAK																																																																																																																			
4	5722.61	80.43	116.74	-36.31	65.30	33.79	11.03	33.87	4.18	207	187	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5755.00	113.59	-----	-----	98.41	33.90	10.98	33.89	4.19	207	187	PEAK																																																																																																																			
Avg.	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>106.34</td> <td>-----</td> <td>-----</td> <td>91.16</td> <td>33.90</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>207</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	106.34	-----	-----	91.16	33.90	10.98	33.89	4.19	207	187	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5755.00	106.34	-----	-----	91.16	33.90	10.98	33.89	4.19	207	187	AVERAGE																																																																																																																			



Mode	59																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>54.71</td> <td>111.17</td> <td>-56.46</td> <td>39.48</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.56</td> <td>53.06</td> <td>105.60</td> <td>-52.54</td> <td>37.78</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>52.22</td> <td>68.31</td> <td>-16.09</td> <td>36.76</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.82</td> <td>53.53</td> <td>68.20</td> <td>-14.67</td> <td>38.08</td> <td>33.95</td> <td>11.38</td> <td>34.00</td> <td>4.12</td> <td>207</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Loss	Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5854.84	54.71	111.17	-56.46	39.48	33.90	11.12	33.95	4.16	207	187	PEAK	2	5873.56	53.06	105.60	-52.54	37.78	33.90	11.19	33.96	4.15	207	187	PEAK	3	5924.85	52.22	68.31	-16.09	36.76	33.95	11.38	33.99	4.12	207	187	PEAK	4	5925.82	53.53	68.20	-14.67	38.08	33.95	11.38	34.00	4.12	207	187	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Level	Loss	Factor	Factor	dB	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5854.84	54.71	111.17	-56.46	39.48	33.90	11.12	33.95	4.16	207	187	PEAK																																																																								
2	5873.56	53.06	105.60	-52.54	37.78	33.90	11.19	33.96	4.15	207	187	PEAK																																																																								
3	5924.85	52.22	68.31	-16.09	36.76	33.95	11.38	33.99	4.12	207	187	PEAK																																																																								
4	5925.82	53.53	68.20	-14.67	38.08	33.95	11.38	34.00	4.12	207	187	PEAK																																																																								






Mode	59																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg.	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>57.41</td> <td>74.00</td> <td>-16.59</td> <td>40.71</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>185</td> <td>341</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>51.30</td> <td>54.00</td> <td>-2.70</td> <td>34.60</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>185</td> <td>341</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>57.12</td> <td>68.20</td> <td>-11.08</td> <td>40.96</td> <td>40.00</td> <td>18.99</td> <td>46.17</td> <td>3.34</td> <td>297</td> <td>65</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	57.41	74.00	-16.59	40.71	38.50	15.64	39.64	2.20	185	341	Peak	2	11510.00	51.30	54.00	-2.70	34.60	38.50	15.64	39.64	2.20	185	341	Average	3	17265.00	57.12	68.20	-11.08	40.96	40.00	18.99	46.17	3.34	297	65	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>58.95</td> <td>74.00</td> <td>-15.05</td> <td>42.25</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>303</td> <td>107</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>52.82</td> <td>54.00</td> <td>-1.18</td> <td>36.12</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>303</td> <td>107</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>58.32</td> <td>68.20</td> <td>-9.88</td> <td>42.16</td> <td>40.00</td> <td>18.99</td> <td>46.17</td> <td>3.34</td> <td>400</td> <td>180</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	58.95	74.00	-15.05	42.25	38.50	15.64	39.64	2.20	303	107	Peak	2	11510.00	52.82	54.00	-1.18	36.12	38.50	15.64	39.64	2.20	303	107	Average	3	17265.00	58.32	68.20	-9.88	42.16	40.00	18.99	46.17	3.34	400	180	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11510.00	57.41	74.00	-16.59	40.71	38.50	15.64	39.64	2.20	185	341	Peak																																																																																																																												
2	11510.00	51.30	54.00	-2.70	34.60	38.50	15.64	39.64	2.20	185	341	Average																																																																																																																												
3	17265.00	57.12	68.20	-11.08	40.96	40.00	18.99	46.17	3.34	297	65	Peak																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11510.00	58.95	74.00	-15.05	42.25	38.50	15.64	39.64	2.20	303	107	Peak																																																																																																																												
2	11510.00	52.82	54.00	-1.18	36.12	38.50	15.64	39.64	2.20	303	107	Average																																																																																																																												
3	17265.00	58.32	68.20	-9.88	42.16	40.00	18.99	46.17	3.34	400	180	Peak																																																																																																																												



Mode	59	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p>	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p>

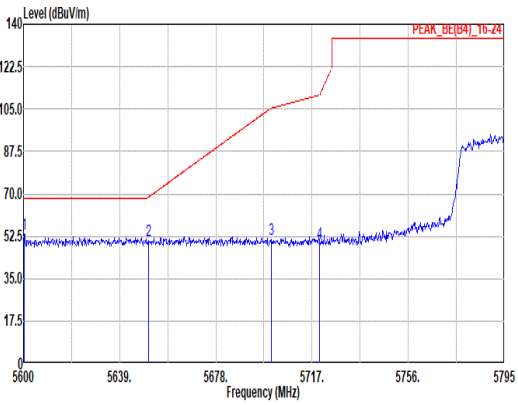
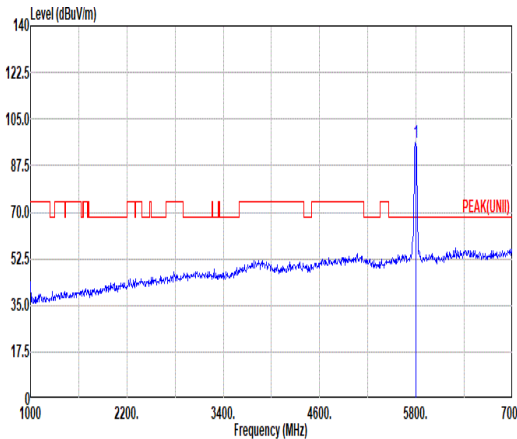
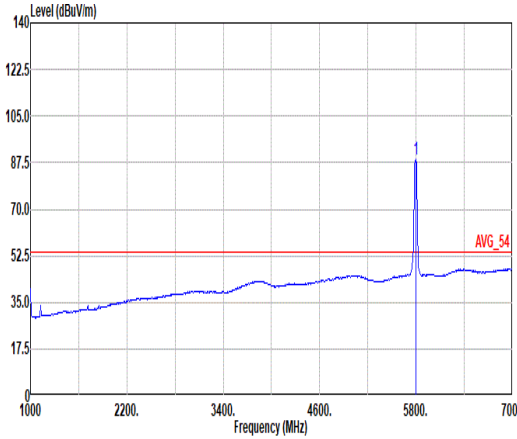


Mode	60																																																																																																																														
	Band Edge - L																																																																																																																														
	U-NII-3_5.725-5.85_802.11n_HT40_CH159_5795MHz																																																																																																																														
ANT	1+2																																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																																													
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5600.39</td> <td>53.23</td> <td>68.20</td> <td>-14.97</td> <td>38.55</td> <td>33.10</td> <td>11.22</td> <td>33.00</td> <td>4.16</td> <td>400</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.70</td> <td>50.65</td> <td>68.72</td> <td>-18.07</td> <td>35.77</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>400</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.62</td> <td>51.20</td> <td>105.37</td> <td>-54.17</td> <td>36.12</td> <td>33.70</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>400</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>49.60</td> <td>111.07</td> <td>-61.47</td> <td>34.48</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>400</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5600.39	53.23	68.20	-14.97	38.55	33.10	11.22	33.00	4.16	400	255	PEAK	2	5650.70	50.65	68.72	-18.07	35.77	33.40	11.14	33.83	4.17	400	255	PEAK	3	5700.62	51.20	105.37	-54.17	36.12	33.70	11.06	33.86	4.18	400	255	PEAK	4	5720.12	49.60	111.07	-61.47	34.48	33.78	11.03	33.87	4.18	400	255	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>96.13</td> <td>-----</td> <td>-----</td> <td>80.93</td> <td>33.98</td> <td>10.93</td> <td>33.91</td> <td>4.20</td> <td>400</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5795.00	96.13	-----	-----	80.93	33.98	10.93	33.91	4.20	400	255	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																						
1	5600.39	53.23	68.20	-14.97	38.55	33.10	11.22	33.00	4.16	400	255	PEAK																																																																																																																			
2	5650.70	50.65	68.72	-18.07	35.77	33.40	11.14	33.83	4.17	400	255	PEAK																																																																																																																			
3	5700.62	51.20	105.37	-54.17	36.12	33.70	11.06	33.86	4.18	400	255	PEAK																																																																																																																			
4	5720.12	49.60	111.07	-61.47	34.48	33.78	11.03	33.87	4.18	400	255	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																						
1	5795.00	96.13	-----	-----	80.93	33.98	10.93	33.91	4.20	400	255	PEAK																																																																																																																			
Avg.	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>88.93</td> <td>-----</td> <td>-----</td> <td>73.74</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>400</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5795.00	88.93	-----	-----	73.74	33.99	10.92	33.92	4.20	400	255	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																						
1	5795.00	88.93	-----	-----	73.74	33.99	10.92	33.92	4.20	400	255	AVERAGE																																																																																																																			



Mode	60																																																																											
	Band Edge - R																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																											
ANT	1+2																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.83</td> <td>50.61</td> <td>111.19</td> <td>-60.58</td> <td>35.38</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>400</td> <td>255 PEAK</td> </tr> <tr> <td>2 5874.36</td> <td>53.54</td> <td>105.38</td> <td>-51.84</td> <td>38.26</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>400</td> <td>255 PEAK</td> </tr> <tr> <td>3 5924.27</td> <td>51.09</td> <td>68.74</td> <td>-17.65</td> <td>35.63</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>400</td> <td>255 PEAK</td> </tr> <tr> <td>4 5933.88</td> <td>52.59</td> <td>68.20</td> <td>-15.61</td> <td>37.10</td> <td>33.97</td> <td>11.41</td> <td>34.00</td> <td>4.11</td> <td>400</td> <td>255 PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.83	50.61	111.19	-60.58	35.38	33.90	11.12	33.95	4.16	400	255 PEAK	2 5874.36	53.54	105.38	-51.84	38.26	33.90	11.19	33.96	4.15	400	255 PEAK	3 5924.27	51.09	68.74	-17.65	35.63	33.95	11.38	33.99	4.12	400	255 PEAK	4 5933.88	52.59	68.20	-15.61	37.10	33.97	11.41	34.00	4.11	400	255 PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5854.83	50.61	111.19	-60.58	35.38	33.90	11.12	33.95	4.16	400	255 PEAK																																																																		
2 5874.36	53.54	105.38	-51.84	38.26	33.90	11.19	33.96	4.15	400	255 PEAK																																																																		
3 5924.27	51.09	68.74	-17.65	35.63	33.95	11.38	33.99	4.12	400	255 PEAK																																																																		
4 5933.88	52.59	68.20	-15.61	37.10	33.97	11.41	34.00	4.11	400	255 PEAK																																																																		

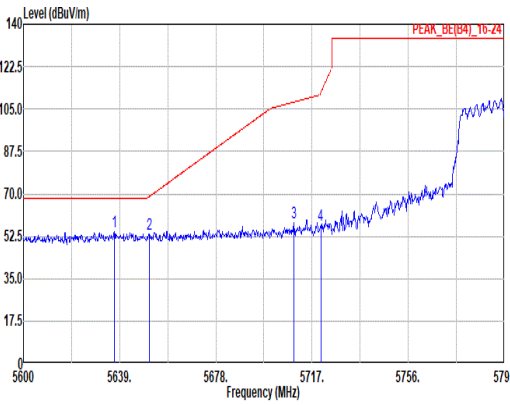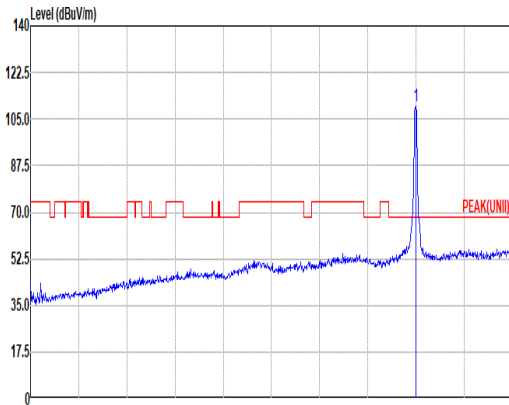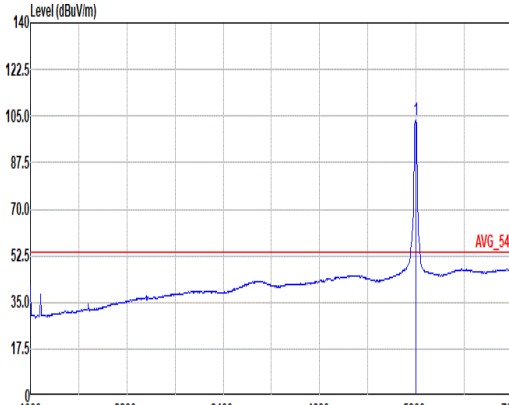

	60																																																																																																																														
Mode	Band Edge - L																																																																																																																														
	U-NII-3_5.725-5.85_802.11n_HT40_CH159_5795MHz																																																																																																																														
ANT	1+2																																																																																																																														
Pol.	Vertical	Fundamental																																																																																																																													
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5636.86</td> <td>54.45</td> <td>68.20</td> <td>-13.75</td> <td>39.62</td> <td>33.32</td> <td>11.16</td> <td>33.02</td> <td>4.17</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>53.52</td> <td>68.87</td> <td>-15.35</td> <td>38.63</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5709.59</td> <td>58.05</td> <td>107.89</td> <td>-49.84</td> <td>42.95</td> <td>33.74</td> <td>11.05</td> <td>33.87</td> <td>4.18</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.51</td> <td>57.29</td> <td>111.96</td> <td>-54.67</td> <td>42.17</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5636.86	54.45	68.20	-13.75	39.62	33.32	11.16	33.02	4.17	215	190	PEAK	2	5650.90	53.52	68.87	-15.35	38.63	33.41	11.14	33.83	4.17	215	190	PEAK	3	5709.59	58.05	107.89	-49.84	42.95	33.74	11.05	33.87	4.18	215	190	PEAK	4	5720.51	57.29	111.96	-54.67	42.17	33.78	11.03	33.87	4.18	215	190	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>109.84</td> <td>-----</td> <td>-----</td> <td>94.65</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	109.84	-----	-----	94.65	33.99	10.92	33.92	4.20	215	190	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5636.86	54.45	68.20	-13.75	39.62	33.32	11.16	33.02	4.17	215	190	PEAK																																																																																																																			
2	5650.90	53.52	68.87	-15.35	38.63	33.41	11.14	33.83	4.17	215	190	PEAK																																																																																																																			
3	5709.59	58.05	107.89	-49.84	42.95	33.74	11.05	33.87	4.18	215	190	PEAK																																																																																																																			
4	5720.51	57.29	111.96	-54.67	42.17	33.78	11.03	33.87	4.18	215	190	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5795.00	109.84	-----	-----	94.65	33.99	10.92	33.92	4.20	215	190	PEAK																																																																																																																			
Avg.	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>103.62</td> <td>-----</td> <td>-----</td> <td>88.43</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>215</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	103.62	-----	-----	88.43	33.99	10.92	33.92	4.20	215	190	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5795.00	103.62	-----	-----	88.43	33.99	10.92	33.92	4.20	215	190	AVERAGE																																																																																																																			



Mode	60																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.06</td> <td>57.08</td> <td>112.95</td> <td>-55.87</td> <td>41.06</td> <td>33.90</td> <td>11.11</td> <td>33.95</td> <td>4.16</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.36</td> <td>54.95</td> <td>105.38</td> <td>-50.43</td> <td>39.67</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.74</td> <td>52.38</td> <td>68.40</td> <td>-16.02</td> <td>36.92</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.69</td> <td>54.22</td> <td>68.20</td> <td>-13.98</td> <td>38.70</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>215</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line	Level	Factor	Loss	Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5854.06	57.08	112.95	-55.87	41.06	33.90	11.11	33.95	4.16	215	190	PEAK	2	5874.36	54.95	105.38	-50.43	39.67	33.90	11.19	33.96	4.15	215	190	PEAK	3	5924.74	52.38	68.40	-16.02	36.92	33.95	11.38	33.99	4.12	215	190	PEAK	4	5938.69	54.22	68.20	-13.98	38.70	33.98	11.43	34.00	4.11	215	190	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Level	Line	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1	5854.06	57.08	112.95	-55.87	41.06	33.90	11.11	33.95	4.16	215	190	PEAK																																																																								
2	5874.36	54.95	105.38	-50.43	39.67	33.90	11.19	33.96	4.15	215	190	PEAK																																																																								
3	5924.74	52.38	68.40	-16.02	36.92	33.95	11.38	33.99	4.12	215	190	PEAK																																																																								
4	5938.69	54.22	68.20	-13.98	38.70	33.98	11.43	34.00	4.11	215	190	PEAK																																																																								






Mode	60																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																																																	
ANT	1+2																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg.	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11590.00</td> <td>58.83</td> <td>74.00</td> <td>-15.17</td> <td>42.22</td> <td>38.42</td> <td>15.72</td> <td>39.74</td> <td>2.21</td> <td>178</td> <td>339</td> <td>Peak</td> </tr> <tr> <td>2 11590.00</td> <td>52.34</td> <td>54.00</td> <td>-1.66</td> <td>35.73</td> <td>38.42</td> <td>15.72</td> <td>39.74</td> <td>2.21</td> <td>178</td> <td>339</td> <td>Average</td> </tr> <tr> <td>3 17385.00</td> <td>55.20</td> <td>68.20</td> <td>-13.00</td> <td>39.18</td> <td>39.90</td> <td>19.06</td> <td>46.33</td> <td>3.39</td> <td>302</td> <td>65</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11590.00	58.83	74.00	-15.17	42.22	38.42	15.72	39.74	2.21	178	339	Peak	2 11590.00	52.34	54.00	-1.66	35.73	38.42	15.72	39.74	2.21	178	339	Average	3 17385.00	55.20	68.20	-13.00	39.18	39.90	19.06	46.33	3.39	302	65	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11590.00</td> <td>59.26</td> <td>74.00</td> <td>-14.74</td> <td>42.65</td> <td>38.42</td> <td>15.72</td> <td>39.74</td> <td>2.21</td> <td>236</td> <td>247</td> <td>Peak</td> </tr> <tr> <td>2 11590.00</td> <td>53.06</td> <td>54.00</td> <td>-0.94</td> <td>36.45</td> <td>38.42</td> <td>15.72</td> <td>39.74</td> <td>2.21</td> <td>236</td> <td>247</td> <td>Average</td> </tr> <tr> <td>3 17385.00</td> <td>56.26</td> <td>68.20</td> <td>-11.94</td> <td>40.24</td> <td>39.90</td> <td>19.06</td> <td>46.33</td> <td>3.39</td> <td>400</td> <td>173</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11590.00	59.26	74.00	-14.74	42.65	38.42	15.72	39.74	2.21	236	247	Peak	2 11590.00	53.06	54.00	-0.94	36.45	38.42	15.72	39.74	2.21	236	247	Average	3 17385.00	56.26	68.20	-11.94	40.24	39.90	19.06	46.33	3.39	400	173	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11590.00	58.83	74.00	-15.17	42.22	38.42	15.72	39.74	2.21	178	339	Peak																																																																																																																							
2 11590.00	52.34	54.00	-1.66	35.73	38.42	15.72	39.74	2.21	178	339	Average																																																																																																																							
3 17385.00	55.20	68.20	-13.00	39.18	39.90	19.06	46.33	3.39	302	65	Peak																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11590.00	59.26	74.00	-14.74	42.65	38.42	15.72	39.74	2.21	236	247	Peak																																																																																																																							
2 11590.00	53.06	54.00	-0.94	36.45	38.42	15.72	39.74	2.21	236	247	Average																																																																																																																							
3 17385.00	56.26	68.20	-11.94	40.24	39.90	19.06	46.33	3.39	400	173	Peak																																																																																																																							



Mode	60	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p>	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p>

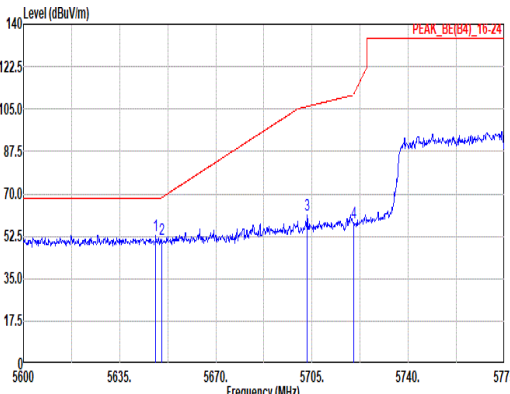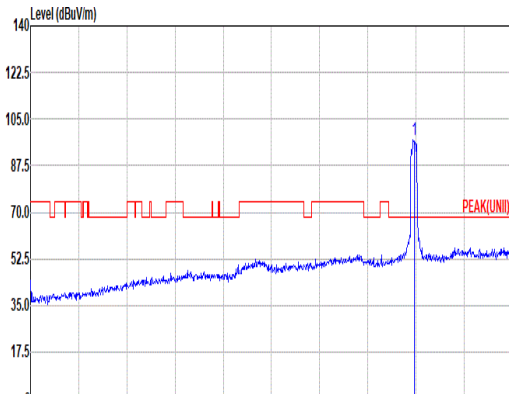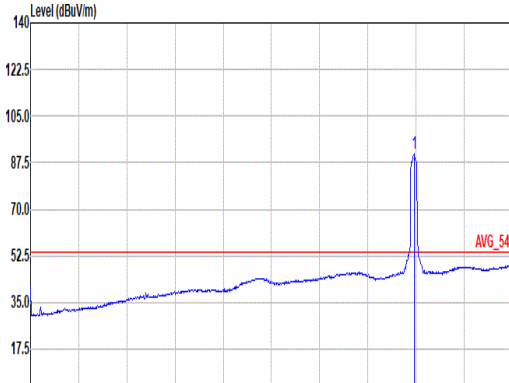

Mode	61																																																																																																																														
	Band Edge - L																																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																														
ANT	1+2																																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																																													
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.13</td> <td>52.84</td> <td>68.20</td> <td>-15.36</td> <td>37.96</td> <td>33.39</td> <td>11.15</td> <td>33.83</td> <td>4.17</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>51.05</td> <td>68.37</td> <td>-17.32</td> <td>36.17</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.25</td> <td>61.31</td> <td>106.11</td> <td>-44.80</td> <td>46.22</td> <td>33.71</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>58.21</td> <td>110.91</td> <td>-52.70</td> <td>43.09</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.13	52.84	68.20	-15.36	37.96	33.39	11.15	33.83	4.17	101	68	PEAK	2	5650.23	51.05	68.37	-17.32	36.17	33.40	11.14	33.83	4.17	101	68	PEAK	3	5703.25	61.31	106.11	-44.80	46.22	33.71	11.06	33.86	4.18	101	68	PEAK	4	5720.05	58.21	110.91	-52.70	43.09	33.78	11.03	33.87	4.18	101	68	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.08</td> <td>-----</td> <td>-----</td> <td>81.89</td> <td>33.93</td> <td>10.97</td> <td>33.90</td> <td>4.19</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	97.08	-----	-----	81.89	33.93	10.97	33.90	4.19	101	68	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5640.13	52.84	68.20	-15.36	37.96	33.39	11.15	33.83	4.17	101	68	PEAK																																																																																																																			
2	5650.23	51.05	68.37	-17.32	36.17	33.40	11.14	33.83	4.17	101	68	PEAK																																																																																																																			
3	5703.25	61.31	106.11	-44.80	46.22	33.71	11.06	33.86	4.18	101	68	PEAK																																																																																																																			
4	5720.05	58.21	110.91	-52.70	43.09	33.78	11.03	33.87	4.18	101	68	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5775.00	97.08	-----	-----	81.89	33.93	10.97	33.90	4.19	101	68	PEAK																																																																																																																			
Avg.	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>90.67</td> <td>-----</td> <td>-----</td> <td>75.48</td> <td>33.95</td> <td>10.95</td> <td>33.91</td> <td>4.20</td> <td>101</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	90.67	-----	-----	75.48	33.95	10.95	33.91	4.20	101	68	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5775.00	90.67	-----	-----	75.48	33.95	10.95	33.91	4.20	101	68	AVERAGE																																																																																																																			



Mode	61																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>55.15</td> <td>110.86</td> <td>-55.71</td> <td>39.92</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5863.73</td> <td>56.97</td> <td>108.35</td> <td>-51.38</td> <td>41.72</td> <td>33.90</td> <td>11.15</td> <td>33.96</td> <td>4.16</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.58</td> <td>52.29</td> <td>69.25</td> <td>-16.96</td> <td>36.84</td> <td>33.95</td> <td>11.37</td> <td>33.99</td> <td>4.12</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5939.15</td> <td>52.94</td> <td>68.20</td> <td>-15.26</td> <td>37.42</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>101</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Loss	Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.98	55.15	110.86	-55.71	39.92	33.90	11.12	33.95	4.16	101	68	PEAK	2	5863.73	56.97	108.35	-51.38	41.72	33.90	11.15	33.96	4.16	101	68	PEAK	3	5923.58	52.29	69.25	-16.96	36.84	33.95	11.37	33.99	4.12	101	68	PEAK	4	5939.15	52.94	68.20	-15.26	37.42	33.98	11.43	34.00	4.11	101	68	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Level	Loss	Factor	Factor	dB	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.98	55.15	110.86	-55.71	39.92	33.90	11.12	33.95	4.16	101	68	PEAK																																																																								
2	5863.73	56.97	108.35	-51.38	41.72	33.90	11.15	33.96	4.16	101	68	PEAK																																																																								
3	5923.58	52.29	69.25	-16.96	36.84	33.95	11.37	33.99	4.12	101	68	PEAK																																																																								
4	5939.15	52.94	68.20	-15.26	37.42	33.98	11.43	34.00	4.11	101	68	PEAK																																																																								



Mode	61																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																
ANT	1+2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.83</td> <td>58.21</td> <td>68.20</td> <td>-9.99</td> <td>43.34</td> <td>33.39</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>57.17</td> <td>68.24</td> <td>-11.07</td> <td>42.29</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.25</td> <td>72.40</td> <td>106.11</td> <td>-33.71</td> <td>57.31</td> <td>33.71</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>70.43</td> <td>111.71</td> <td>-41.28</td> <td>55.31</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.83	58.21	68.20	-9.99	43.34	33.39	11.14	33.83	4.17	176	185	PEAK	2	5650.05	57.17	68.24	-11.07	42.29	33.40	11.14	33.83	4.17	176	185	PEAK	3	5703.25	72.40	106.11	-33.71	57.31	33.71	11.06	33.86	4.18	176	185	PEAK	4	5720.40	70.43	111.71	-41.28	55.31	33.78	11.03	33.87	4.18	176	185	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U)11 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>106.93</td> <td>-----</td> <td>-----</td> <td>91.73</td> <td>33.98</td> <td>10.93</td> <td>33.91</td> <td>4.20</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	106.93	-----	-----	91.73	33.98	10.93	33.91	4.20	176	185	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5640.83	58.21	68.20	-9.99	43.34	33.39	11.14	33.83	4.17	176	185	PEAK																																																																																																																					
2	5650.05	57.17	68.24	-11.07	42.29	33.40	11.14	33.83	4.17	176	185	PEAK																																																																																																																					
3	5703.25	72.40	106.11	-33.71	57.31	33.71	11.06	33.86	4.18	176	185	PEAK																																																																																																																					
4	5720.40	70.43	111.71	-41.28	55.31	33.78	11.03	33.87	4.18	176	185	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5775.00	106.93	-----	-----	91.73	33.98	10.93	33.91	4.20	176	185	PEAK																																																																																																																					
Avg.	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>100.74</td> <td>-----</td> <td>-----</td> <td>85.55</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>176</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.74	-----	-----	85.55	33.94	10.96	33.90	4.19	176	185	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5775.00	100.74	-----	-----	85.55	33.94	10.96	33.90	4.19	176	185	AVERAGE																																																																																																																					



Mode	61																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>62.66</td> <td>111.26</td> <td>-48.60</td> <td>47.43</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.73</td> <td>64.55</td> <td>106.40</td> <td>-41.85</td> <td>49.28</td> <td>33.90</td> <td>11.18</td> <td>33.96</td> <td>4.15</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>53.10</td> <td>68.22</td> <td>-15.12</td> <td>37.64</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5927.25</td> <td>54.80</td> <td>68.20</td> <td>-13.40</td> <td>39.34</td> <td>33.95</td> <td>11.39</td> <td>34.00</td> <td>4.12</td> <td>176</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.80	62.66	111.26	-48.60	47.43	33.90	11.12	33.95	4.16	176	185	PEAK	2	5870.73	64.55	106.40	-41.85	49.28	33.90	11.18	33.96	4.15	176	185	PEAK	3	5924.98	53.10	68.22	-15.12	37.64	33.95	11.38	33.99	4.12	176	185	PEAK	4	5927.25	54.80	68.20	-13.40	39.34	33.95	11.39	34.00	4.12	176	185	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																												
1	5854.80	62.66	111.26	-48.60	47.43	33.90	11.12	33.95	4.16	176	185	PEAK																																																																								
2	5870.73	64.55	106.40	-41.85	49.28	33.90	11.18	33.96	4.15	176	185	PEAK																																																																								
3	5924.98	53.10	68.22	-15.12	37.64	33.95	11.38	33.99	4.12	176	185	PEAK																																																																								
4	5927.25	54.80	68.20	-13.40	39.34	33.95	11.39	34.00	4.12	176	185	PEAK																																																																								



Mode	61																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																															
ANT	1+2																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																														
Peak Avg.	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 11550.00</td> <td>56.33</td> <td>74.00</td> <td>-17.67</td> <td>39.64</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>174</td> <td>337</td> <td>Peak</td> </tr> <tr> <td>2 11550.00</td> <td>50.80</td> <td>54.00</td> <td>-3.20</td> <td>34.11</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>174</td> <td>337</td> <td>Average</td> </tr> <tr> <td>3 17325.00</td> <td>58.47</td> <td>68.20</td> <td>-9.73</td> <td>42.39</td> <td>39.95</td> <td>19.02</td> <td>46.25</td> <td>3.36</td> <td>296</td> <td>63</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 11550.00	56.33	74.00	-17.67	39.64	38.50	15.68	39.69	2.20	174	337	Peak	2 11550.00	50.80	54.00	-3.20	34.11	38.50	15.68	39.69	2.20	174	337	Average	3 17325.00	58.47	68.20	-9.73	42.39	39.95	19.02	46.25	3.36	296	63	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 11550.00</td> <td>58.33</td> <td>74.00</td> <td>-15.67</td> <td>41.64</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>337</td> <td>105</td> <td>Peak</td> </tr> <tr> <td>2 11550.00</td> <td>53.15</td> <td>54.00</td> <td>-0.85</td> <td>36.46</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>337</td> <td>105</td> <td>Average</td> </tr> <tr> <td>3 17325.00</td> <td>58.79</td> <td>68.20</td> <td>-9.41</td> <td>42.71</td> <td>39.95</td> <td>19.02</td> <td>46.25</td> <td>3.36</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 11550.00	58.33	74.00	-15.67	41.64	38.50	15.68	39.69	2.20	337	105	Peak	2 11550.00	53.15	54.00	-0.85	36.46	38.50	15.68	39.69	2.20	337	105	Average	3 17325.00	58.79	68.20	-9.41	42.71	39.95	19.02	46.25	3.36	--	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 11550.00	56.33	74.00	-17.67	39.64	38.50	15.68	39.69	2.20	174	337	Peak																																																																																																																					
2 11550.00	50.80	54.00	-3.20	34.11	38.50	15.68	39.69	2.20	174	337	Average																																																																																																																					
3 17325.00	58.47	68.20	-9.73	42.39	39.95	19.02	46.25	3.36	296	63	Peak																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 11550.00	58.33	74.00	-15.67	41.64	38.50	15.68	39.69	2.20	337	105	Peak																																																																																																																					
2 11550.00	53.15	54.00	-0.85	36.46	38.50	15.68	39.69	2.20	337	105	Average																																																																																																																					
3 17325.00	58.79	68.20	-9.41	42.71	39.95	19.02	46.25	3.36	--	--	Peak																																																																																																																					



Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg.	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p>	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p>



Mode	62																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n_HT20_CH157_5785MHz																																																																																																																																																																																																																	
ANT	1+2																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
QP/ Peak	<p>Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>21.44</td><td>40.00</td><td>-18.56</td><td>28.64</td><td>24.48</td><td>1.07</td><td>32.75</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>148.34</td><td>27.79</td><td>43.50</td><td>-15.71</td><td>41.20</td><td>17.20</td><td>1.90</td><td>32.70</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>233.70</td><td>28.41</td><td>46.00</td><td>-17.59</td><td>42.17</td><td>16.51</td><td>2.29</td><td>32.73</td><td>0.17</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>317.12</td><td>28.27</td><td>46.00</td><td>-17.73</td><td>38.06</td><td>19.45</td><td>2.66</td><td>32.79</td><td>0.09</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>744.89</td><td>29.60</td><td>46.00</td><td>-16.40</td><td>30.13</td><td>28.30</td><td>3.89</td><td>32.86</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>903.97</td><td>39.54</td><td>46.00</td><td>-6.46</td><td>38.16</td><td>29.01</td><td>4.25</td><td>32.09</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	21.44	40.00	-18.56	28.64	24.48	1.07	32.75	0.00	--	--	Peak	2	148.34	27.79	43.50	-15.71	41.20	17.20	1.90	32.70	0.19	--	--	Peak	3	233.70	28.41	46.00	-17.59	42.17	16.51	2.29	32.73	0.17	--	--	Peak	4	317.12	28.27	46.00	-17.73	38.06	19.45	2.66	32.79	0.09	--	--	Peak	5	744.89	29.60	46.00	-16.40	30.13	28.30	3.89	32.86	0.14	--	--	Peak	6	903.97	39.54	46.00	-6.46	38.16	29.01	4.25	32.09	0.21	--	--	Peak	<p>Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>24.11</td><td>40.00</td><td>-15.89</td><td>32.40</td><td>23.40</td><td>1.06</td><td>32.75</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>214.30</td><td>28.14</td><td>43.50</td><td>-15.36</td><td>43.54</td><td>14.96</td><td>2.19</td><td>32.72</td><td>0.17</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>224.97</td><td>31.64</td><td>46.00</td><td>-14.36</td><td>46.32</td><td>15.64</td><td>2.24</td><td>32.73</td><td>0.17</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>330.70</td><td>26.41</td><td>46.00</td><td>-19.59</td><td>36.65</td><td>19.76</td><td>2.70</td><td>32.80</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>732.28</td><td>31.01</td><td>46.00</td><td>-14.99</td><td>31.87</td><td>28.04</td><td>3.85</td><td>32.89</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>896.21</td><td>37.30</td><td>46.00</td><td>-8.70</td><td>35.95</td><td>29.05</td><td>4.24</td><td>32.15</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	32.91	24.11	40.00	-15.89	32.40	23.40	1.06	32.75	0.00	--	--	Peak	2	214.30	28.14	43.50	-15.36	43.54	14.96	2.19	32.72	0.17	--	--	Peak	3	224.97	31.64	46.00	-14.36	46.32	15.64	2.24	32.73	0.17	--	--	Peak	4	330.70	26.41	46.00	-19.59	36.65	19.76	2.70	32.80	0.10	--	--	Peak	5	732.28	31.01	46.00	-14.99	31.87	28.04	3.85	32.89	0.14	--	--	Peak	6	896.21	37.30	46.00	-8.70	35.95	29.05	4.24	32.15	0.21	--	--	Peak
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	30.00	21.44	40.00	-18.56	28.64	24.48	1.07	32.75	0.00	--	--	Peak																																																																																																																																																																																																						
2	148.34	27.79	43.50	-15.71	41.20	17.20	1.90	32.70	0.19	--	--	Peak																																																																																																																																																																																																						
3	233.70	28.41	46.00	-17.59	42.17	16.51	2.29	32.73	0.17	--	--	Peak																																																																																																																																																																																																						
4	317.12	28.27	46.00	-17.73	38.06	19.45	2.66	32.79	0.09	--	--	Peak																																																																																																																																																																																																						
5	744.89	29.60	46.00	-16.40	30.13	28.30	3.89	32.86	0.14	--	--	Peak																																																																																																																																																																																																						
6	903.97	39.54	46.00	-6.46	38.16	29.01	4.25	32.09	0.21	--	--	Peak																																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	32.91	24.11	40.00	-15.89	32.40	23.40	1.06	32.75	0.00	--	--	Peak																																																																																																																																																																																																						
2	214.30	28.14	43.50	-15.36	43.54	14.96	2.19	32.72	0.17	--	--	Peak																																																																																																																																																																																																						
3	224.97	31.64	46.00	-14.36	46.32	15.64	2.24	32.73	0.17	--	--	Peak																																																																																																																																																																																																						
4	330.70	26.41	46.00	-19.59	36.65	19.76	2.70	32.80	0.10	--	--	Peak																																																																																																																																																																																																						
5	732.28	31.01	46.00	-14.99	31.87	28.04	3.85	32.89	0.14	--	--	Peak																																																																																																																																																																																																						
6	896.21	37.30	46.00	-8.70	35.95	29.05	4.24	32.15	0.21	--	--	Peak																																																																																																																																																																																																						



Mode	63																																																																																									
	SHF																																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																									
ANT	1+2																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 1m SHF_1223_230710 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>26756.00</td> <td>41.75</td> <td>68.20</td> <td>-26.45</td> <td>49.37</td> <td>40.54</td> <td>21.73</td> <td>60.35</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>37646.00</td> <td>46.67</td> <td>68.20</td> <td>-21.53</td> <td>49.67</td> <td>43.33</td> <td>26.18</td> <td>62.97</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	26756.00	41.75	68.20	-26.45	49.37	40.54	21.73	60.35	-9.54	--	Peak	2	37646.00	46.67	68.20	-21.53	49.67	43.33	26.18	62.97	-9.54	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 1m SHF_1223_230710 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>19826.00</td> <td>39.45</td> <td>74.00</td> <td>-34.55</td> <td>56.20</td> <td>37.91</td> <td>18.35</td> <td>63.47</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>38504.00</td> <td>47.76</td> <td>68.20</td> <td>-20.44</td> <td>50.07</td> <td>44.06</td> <td>26.67</td> <td>63.50</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	19826.00	39.45	74.00	-34.55	56.20	37.91	18.35	63.47	-9.54	--	Peak	2	38504.00	47.76	68.20	-20.44	50.07	44.06	26.67	63.50	-9.54	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																
1	26756.00	41.75	68.20	-26.45	49.37	40.54	21.73	60.35	-9.54	--	Peak																																																																															
2	37646.00	46.67	68.20	-21.53	49.67	43.33	26.18	62.97	-9.54	--	Peak																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																
1	19826.00	39.45	74.00	-34.55	56.20	37.91	18.35	63.47	-9.54	--	Peak																																																																															
2	38504.00	47.76	68.20	-20.44	50.07	44.06	26.67	63.50	-9.54	--	Peak																																																																															




Appendix D. Duty Cycle Plots


<For Radiated Spurious Emission test>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	95.89	1400	0.71	750Hz
2	802.11a	95.88	1395	0.72	750Hz
1+2	802.11n HT20	95.62	1310	0.76	820Hz
1+2	802.11n HT40	91.53	648	1.54	1.6kHz
1+2	802.11ac VHT80	76.11	188	5.32	5.6kHz

<Ant. 1>


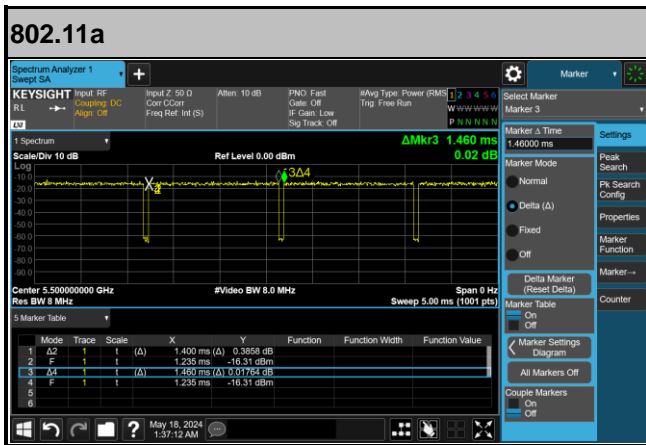


<Ant. 2>

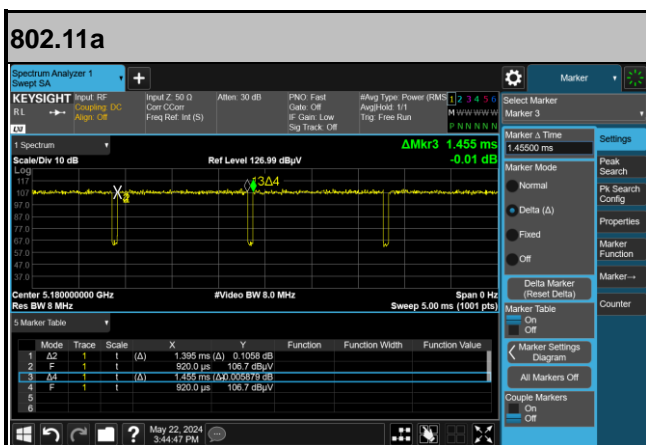



MIMO <Ant. 1+2>

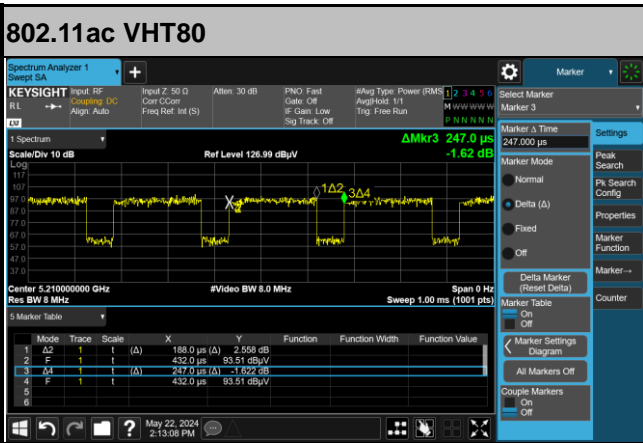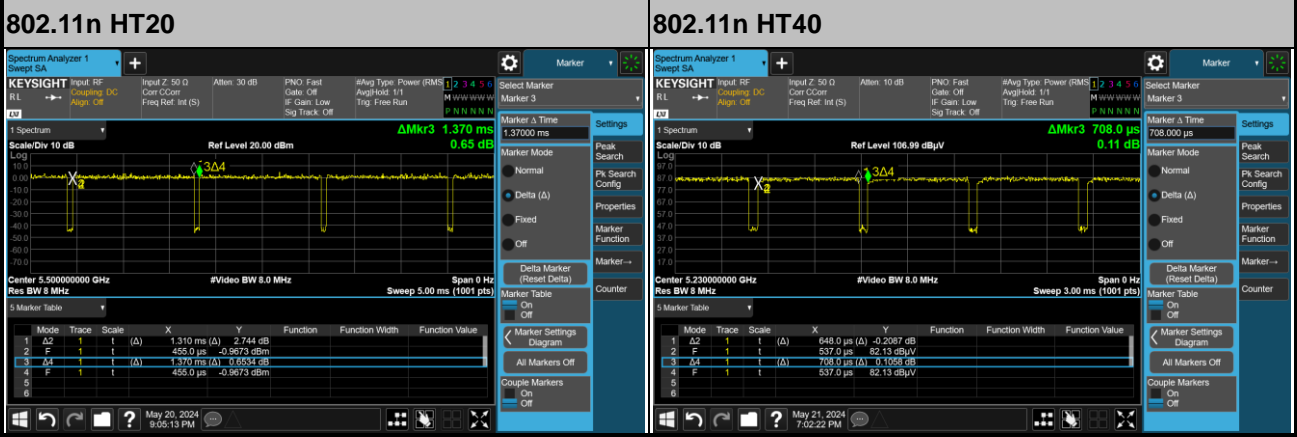



<For Conducted test>

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
1	802.11a	95.52	1385	0.20
2	802.11a	95.63	1400	0.19
1+2	802.11n HT20 for Ant 1	95.63	1400	0.19
1+2	802.11n HT20 for Ant 2	96.15	1400	0.17
1+2	802.11n HT40 for Ant 1	98.04	-	-
1+2	802.11n HT40 for Ant 2	98.05	-	-
1+2	802.11ac VHT20 for Ant 1	95.29	1315	0.21
1+2	802.11ac VHT20 for Ant 2	95.29	1315	0.21
1+2	802.11ac VHT40 for Ant 1	98.05	-	-
1+2	802.11ac VHT40 for Ant 2	98.05	-	-
1+2	802.11ac VHT80 for Ant 1	97.89	2780	0.09
1+2	802.11ac VHT80 for Ant 2	97.89	2780	0.09

<Ant. 1>

