

Report No.: SEWM2309000386RG01

Rev.: 01 Page: 1 of 40

## **TEST REPORT**

Application No.: SEWM2309000386RG

**Applicant:** Xiaomi Communications Co., Ltd.

Address of Applicant: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing,

China, 100085

Manufacturer: Xiaomi Communications Co., Ltd.

Address of Manufacturer: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing,

China, 100085

**EUT Description:** Mobile Phone **Model No.:** 23113RKC6G

Trade Mark: POCO

FCC ID: 2AFZZRKC6G
Standards: 47 CFR Part 2
47 CFR Part 22
47 CFR Part 24

47 CFR Part 24 47 CFR Part 27 47 CFR Part 96


**Date of Receipt:** 2023/09/25

**Date of Test:** 2023/09/25 to 2023/10/31

**Date of Issue:** 2023/11/03

Test Result : PASS \*

Authorized Signature:



Well Wei Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Erms-and-Conditions.aspx.and">https://mww.sgs.com/en/Erms-and-Conditions/Erms-e-Documents, subject to Terms and Conditions for Electronic Documents at <a href="https://mww.sgs.com/en/Terms-and-Conditions/Ferms-e-Document.aspx.Attention">https://mww.sgs.com/en/Terms-and-Conditions/Ferms-e-Document.aspx.Attention</a> is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein, any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SEWM2309000386RG01

Rev.: 01 2 of 40 Page:

### **Version**

Revision Record					
Version	Version Chapter Date Modifier Remark				
01		2023/11/03		Original	

Prepared By	(Levi Li) / Test Engineer
Checked By	Stone Gu) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 3 of 40

### **Contents**

1	Versi	ion	2
2	Test	Summary	5
	2.1	GSM 850/UMTS Band 5/LTE Band 5	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	6
	2.3	UMTS Band 4 /LTE Band 4 /66	7
	2.4	LTE Band 7/38/41/CA_7C/ CA_38C	8
	2.5	LTE Band 48	10
3	Gene	eral Information	12
	3.1	Details of Client	12
	3.2	Test Location	12
	3.3	Test Facility	12
	3.4	General Description of EUT	13
	3.5	Test Mode	14
	3.6	Test Environment	14
	3.7	Description of Support Units	14
	3.8	Technical Specification	15
	3.9	Test Frequencies	19
4	Desc	ription of Tests	25
	4.1	Conducted Output Power	25
	4.2	Effective (Isotropic) Radiated Power of Transmitter	26
	4.3	Occupied Bandwidth	27
	4.4	Band Edge at Antenna Terminals	28
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	29
	4.6	Peak-Average Ratio	30
	4.7	Field Strength of Spurious Radiation	31
	4.8	Frequency Stability / Temperature Variation	32
	4.9	Test Setups	33
		4.9.1 Test Setup 1	33
		4.9.2 Test Setup 2	33
		4.9.3 Test Setup 3	34



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. Florit, No. 1, Runsherg Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Papart No :	SEWM2309000386RG01
Report No.:	SEVVIVIZ3U9UUU380RGU

Rev.:	01	
Page:	4 of 40	

	4.10 Test Conditions	35
5	Main Test Instruments	37
6	Measurement Uncertainty	39
7	Appendixes	40



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 5 of 40

## 2 Test Summary

### 2.1 GSM 850/UMTS Band 5/LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP≤7W	Section 1 of Appendix B.1&B.2&B.5	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.2&B.5	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.1&B.2&B.5	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.1&B.2&B.5	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.1&B.2&B.5	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 6 of Appendix B.1&B.2&B.5	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	±2.5ppm.	Section 7 of Appendix B.1&B.2&B.5	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 6 of 40

### 2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1&B.2&B.3	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.2&B.3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.1&B.2&B.3	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.1&B.2&B.3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.1&B.2&B.3	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 6 of Appendix B.1&B.2&B.3	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §24.235	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.1&B.2&B.3	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 7 of 40

### 2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.2&B.4&B.10	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.2&B.4&B.10	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.2&B.4&B.10	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.2&B.4&B.10	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.2&B.4&B.10	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 6 of Appendix B.2&B.4&B.10	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.2&B.4&B.10	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 8 of 40

### 2.4 LTE Band 7/38/41/CA\_7C/ CA\_38C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.6&B.7&B.8&	Pass
Output Data Peak-Average Ratio		≤13 dB	B.11&B.12 Section 2 of Appendix B.6&B.7&B.8& B.11&B.12	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.6&B.7&B.8& B.11&B.12	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 4 of Appendix B.6&B.7&B.8& B.11&B.12	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz  9 kHz 95 MHz × MHz 10th harmonics X=Max {6MHz, EBW}	Section 5 of Appendix B.6&B.7&B.8& B.11&B.12	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.6&B.7&B.8& B.11&B.12	Pass
Frequency	§2.1055(a)(1)(b)	Within authorized bands of	Section 7 of	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Then document control to reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, orgery or fatisitisation of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND-Occheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 9 of 40 Page:

		<u> </u>		
Stability	§2.1055(d)(2)	operation/frequency block.	Appendix	
	§27.54		B.6&B.7&B.8&	
			B.11&B.12	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 10 of 40 Page:

### 2.5 LTE Band 48

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §96.41	EIRP ≤ 23dBm/10MHz	Section 1 of Appendix B.9	Pass
Peak-Average Ratio	§96.41	FCC: Limit≤13 dB	Section 2 of Appendix B.9	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.9	Pass
Adjacent Channel Leakage Ratio	§96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.	Section 4 of Appendix B.9	Pass
Band Edges Compliance	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.	Section 5 of Appendix B.9	Pass
Spurious Emission at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz.  (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz	Section 6 of Appendix B.9	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 11 of 40

		or above 3720 MHz shall not exceed -40dBm/MHz.		
Field Strength of Spurious Radiation	§2.1053, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz.  (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.	Section 7 of Appendix B.9	Pass
Frequency Stability	§2.1055, §96.41	Within authorized bands of operation/ frequency block.	Section 8 of Appendix B.9	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

邮编: 215000 t

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 12 of 40

### 3 General Information

### 3.1 Details of Client

Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, King-p Li

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

### • FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-An



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 13 of 40

### 3.4 General Description of EUT

EUT Description:	Mobile Phone			
Model No.:	23113RKC6G			
Trade Mark:	POCO			
Hardware Version:	13510N11			
Software Version:	Xiaomi HyperOS 1	.0		
Power Supply:	Lithium Battery (3.8	39V)		
IMEL.	RF Conducted		:867826060045564 :867826060045572	
IMEI:	RSE		:867826060040961 :867826060040979	
Antenna Type:	PIFA Antenna			
	GSM850:	-5.6dE	Bi(Ant0); -4.1dBi(Ant1);	
	GSM1900:	-2.3dE	Bi(Ant2); -2.7dBi(Ant5);	
	WCDMA Band II:	-2.3dE	Bi(Ant2); -2.7dBi(Ant5);	
	WCDMA Band IV:	-2.3dE	Bi(Ant2); -1dBi(Ant3); -2dBi	(Ant5);
	WCDMA Band V:	-5.6dE	Bi(Ant0); -4.1dBi(Ant1);	
	LTE Band 2:	-2.3dE	Bi(Ant2); -2.7dBi(Ant5);	
	LTE Band 4:	-2.3dE	Bi(Ant2); -1.6dBi(Ant3); -2d	Bi(Ant5);
	LTE Band 5:	-5.6dE	Bi(Ant0); -4.1dBi(Ant1);	
Antenna Gain:	LTE Band 7:	-2.2dE	Bi(Ant2); -2dBi(Ant3); -1.6dl	Bi(Ant5);
	LTE Band 38:	-1.7dE	Bi(Ant2); -2dBi(Ant3); -2dBi	(Ant4); -1.6dBi(Ant5);
	LTE Band 41:	-2.2dE	Bi(Ant2); -2dBi(Ant3); -2dBi	(Ant4); -1.6dBi(Ant5);
	LTE Band 48:	-3dBi(	Ant6); -2.5dBi(Ant7); -3.4d	Bi(Ant8); -3.8dBi(Ant9);
	LTE Band 66:	-2.3dE	Bi(Ant2); -1.6dBi(Ant3); -2d	Bi(Ant5);
	LTE CA_7C:	-2.2dE	Bi(Ant2); -2dBi(Ant3); -1.6d	Bi(Ant5);
	LTE CA_38C:	-1.7dE	Bi(Ant2); -2dBi(Ant3); -2dBi	(Ant4); -1.6dBi(Ant5);
	Note: The antenna gain a manufacturer.	are deriv	ed from the gain informatio	n report provided by the
RF Cable:	4.5dB(Below 1GHz	<u>z</u> )	4.8dB(1.0~2.4GHz)	5.2dB(2.4~3.4GHz)

#### Remark

- 1. All antennas of EIRP are tested, and only the worst data is presented.
- 2. As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pitot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 14 of 40

### 3.5 Test Mode

Test Mode	Test Modes Description			
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
GSM/TM2	GSM system, EGPRS, 8PSK modulation			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2	LTE system, 16QAM modulation			
LTE/TM3	LTE system, 64QAM modulation			
LTE/TM4	LTE system, 256QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

### 3.6 Test Environment

NT: Normal Temperature

Environment Parameter	101.0 kPa Selected Values During Tests			
Relative Humidity	44-46 % RH Ambient			
Value	Temperature(°C)	Voltage(V)		
NTNV	22~23	3.89		
LTLV	-30	3.6		
LTHV	-30	4.25		
HTLV	50	3.6		
HTHV	50	4.25		
Remark:				
NV: Normal Voltage LV: Lov	v Extreme Test Voltage	lV: High Extreme Test Voltage		

LT: Low Extreme Test Temperature

### 3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Ems-and-Conditions.aspx.and">https://mww.sgs.com/en/Ems-and-Conditions.aspx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.Attention">https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.Attention</a> is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this lest report refer only to the sample(s) tested and such sample(s) are retained of days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com

HT: High Extreme Test Temperature



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 15 of 40

### 3.8 Technical Specification

Characteristics	Description							
Radio System Type	⊠ GSM	⊠ UMTS						
	Band		TX	TX		RX	RX	
	GSM850		824	824 to 849 MHz		869 to 8	94 MHz	
	GSM1900		18	50 to 19	10 MHz	1930 to	1990 MHz	
	UMTS Band II		18	50 to 19	10 MHz	1930 to	1990 MHz	
	UMTS Band I\	/	17	10 to 17	55 MHz	2110 to	2155 MHz	
	UMTS Band V	1	824	4 to 849	MHz	869 to 8	94 MHz	
	LTE Band 2		18	50 to 19	10 MHz	1930 to	1990 MHz	
Supported Frequency Range	LTE Band 4		17	10 to 17	55 MHz	2110 to	2155 MHz	
Supported Frequency Trange	LTE Band 5		824	4 to 849	MHz	869 to 8	94 MHz	
	LTE Band 7		25	00 to 25	70 MHz	2620 to	2690 MHz	
	LTE Band 38		25	70 to 26	20 MHz	2570 to	2620 MHz	
	LTE Band 41		249	2496 to 2690MHz		2496 to	2496 to 2690MHz	
	LTE Band 48		35	50 to 37	00 MHz	3550 to	3700 MHz	
	LTE Band 66		17	10 to 17	80 MHz	2110 to	2180 MHz	
	LTE CA: LTE UL CA_7C; LTE UL CA_38C;							
	GSM system:		$\boxtimes 0$	.2 MHz				
	UMTS system	:	⊠5 MHz					
	LTE Band 2		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
			⊠1	5 MHz	⊠20 MHz			
	LTE Band 4		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LTE Danu 4		⊠1	5 MHz	⊠20 MHz			
	LTE Band 5		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
Supported Channel Bandwidth	LTE Band 7		$\boxtimes$ 5	MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	LTE Band 38		$\boxtimes$ 5	MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	LTE Band 41		⊠5	MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	LTE Band 48		$\boxtimes 5$	MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	LTE Band 66		⊠1	.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LIL Dallu 00		⊠1	5MHz	⊠20MHz			
	LTE Band CA	7C	⊠1	0MHz+2	20MHz	⊠15MHz+	10MHz	
	LIL Danu CA	_/ _	⊠1	5MHz+	15MHz	⊠15MHz+	20MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 16 of 40 Page:

			Pag		OT 4U	
				z+10MHz	⊠20MHz+	·15MHz
			⊠20MH	z+20MHz		
	LTE Band CA_38C		⊠15MH	z+15MHz	⊠20MHz+	-20MHz
		Note: WCDMA supports HSUPA, HSDPA, DC-HSDPA worst case was tested and the data displayed in this re				but only the
Characteristics	Description					
	GSM:	GM	SK	8PSK		
	GSM850	245	KGXW	248KG7W		
	GSM1900	246	KGXW	248KG7W		
	UMTS:	QPS	SK			
	Band II	4M1	7F9W			
	Band IV	4M1	5F9W			
	Band V	4M1	4F9W			
	E-UTRA:	QPS	SK	16QAM	64QAM	256QAM
	LTE Band 2	1M1	1G7D	1M11W7D	1M11W7D	1M10W7D
		2M7	'0G7D	2M70W7D	2M70W7D	2M70W7D
		4M4	8G7D	4M48W7D	4M48W7D	4M48W7D
Designation of Emissions		8M8	4G7D	8M94W7D	8M94W7D	8M94W7D
(Remark: the necessary		13M	I5G7D	13M5W7D	13M5W7D	13M5W7D
bandwidth of which is the worst value from the		17M	19G7D	17M9W7D	17M9W7D	17M9W7D
measured occupied		1M1	1G7D	1M11W7D	1M11W7D	1M11W7D
bandwidths for each type of channel bandwidth		2M7	'0G7D	2M70W7D	2M70W7D	2M69W7D
configuration.)	LTE Band 4	4M4	8G7D	4M47W7D	4M48W7D	4M48W7D
	LIE Dallu 4	8M8	3G7D	8M96W7D	8M95W7D	8M94W7D
		13M	I5G7D	13M5W7D	13M5W7D	13M5W7D
		17M	19G7D	17M9W7D	17M9W7D	18M0W7D
		1M1	1G7D	1M11W7D	1M10W7D	1M11W7D
	LTE Pand 5	2M6	9G7D	2M70W7D	2M70W7D	2M71W7D
	LTE Band 5	4M4	8G7D	4M48W7D	4M48W7D	D 1M10W7D D 2M70W7D D 4M48W7D D 13M5W7D D 17M9W7D D 1M11W7D D 2M69W7D D 4M48W7D D 13M5W7D D 13M5W7D D 13M5W7D D 4M48W7D D 14M48W7D D 4M48W7D D 8M95W7D D 13M5W7D
		8M8	4G7D	8M94W7D	8M94W7D	8M95W7D
		4M4	8G7D	4M48W7D	4M48W7D	4M48W7D
	LTE Band 7	8M9	3G7D	8M95W7D	8M93W7D	8M95W7D
	LTE Band 7	13M	I5G7D	13M5W7D	13M5W7D	13M5W7D
		17M	19G7D	17M9W7D	18M0W7D	17M9W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 17 of 40

	28M3G7D	28M3W7D	28M3W7D	28M3W7D	
LTE Band CA_38C	75RB+75RE	3:			
	37M6G7D	37M7W7D	37M8W7D	37M7W7D	
	100RB+100	RB:		-	
	32M6G7D	32M6W7D	32M7W7D	32M6W7D	
	100RB+75R	RB:			
	27M8G7D	27M7W7D	27M8W7D	27M7W7D	
	100RB+50R	RB:			
LTE Band CA_7C	32M6G7D	32M6W7D	32M6W7D	32M6W7D	
				17M9W7D 4M48W7D 8M91W7D 13M5W7D 17M9W7D 4M51W7D 9M01W7D 13M5W7D 18M0W7D 1M11W7D 2M70W7D 4M48W7D 8M94W7D 13M5W7D 17M9W7D 27M7W7D 23M2W7D 23M2W7D 23M2W7D 32M6W7D 32M6W7D 32M6W7D	
	### AM47G7D #### AM48W7D ####################################	28M4W7D			
			23M2W7D	23M2W7D	
			4M49W7D       4M48W7D         8M94W7D       8M91W7D         13M5W7D       13M5W7D         17M9W7D       4M51W7D         8M98W7D       9M01W7D         13M5W7D       13M5W7D         18M0W7D       18M0W7D         1M11W7D       1M11W7D         2M70W7D       2M70W7D         4M48W7D       4M48W7D         8M94W7D       13M5W7D         13M5W7D       13M5W7D         17M9W7D       17M9W7D         27M8W7D       27M7W7D         28M3W7D       28M4W7D         32M6W7D       32M6W7D         32M6W7D       32M6W7D         37M8W7D       37M7W7D		
	17M9G7D 17M9W7D 17M9W7D 50RB+100RB:	27M7W7D			
			17 MARIN 1 D	17181818171	
LTE Band 66					
				2M70W7D 4M48W7D 8M94W7D 13M5W7D	
LTE Band 48					
ETE Balla TT	13M5G7D	13M5W7D	13M5W7D	13M5W7D	
LTE Band 41	8M94G7D	8M93W7D	8M94W7D	8M91W7D	
	4M47G7D	4M48W7D	4M49W7D	4M48W7D	
	17M9G7D	17M9W7D	17M9W7D	17M9W7D	
LIL Dalla 30	13M5G7D	13M5W7D	13M5W7D	13M5W7D	
LTE Band 38	8M95G7D	8M94W7D	8M95W7D	8M93W7D	
	4M47G7D	4M48W7D	4M47W7D	4M48W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 18 of 40 Page:

	00RB+100RB:		
37	M8G7D 37M7W7E	37M7W7D	37M7W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 19 of 40

### 3.9 Test Frequencies

Toot Made	Test Mode TX / RX		RF Channel			
rest Mode			Middle (M)	High (H)		
	TX	Channel 128	Channel 190	Channel 251		
GSM850	17	824.2MHz	836.6 MHz	848.8 MHz		
	RX	Channel 128	Channel 190	Channel 251		
	KA.	869.2 MHz	881.6 MHz	893.8 MHz		

Test Mode	TX / RX		RF Channel	
1 est Mode	IA/IX	Low (L)	Middle (M)	High (H)
	TX	Channel 512	Channel 661	Channel 810
GSM1900	17	1850.2MHz	1880.0 MHz	1909.8 MHz
G5M1900	RX	Channel 512	Channel 661	Channel 810
	KA.	1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX		RF Channel			
i est ivioue	IA / IXA	Low (L)	Middle (M)	High (H)		
	TX	Channel 9262	Channel 9400	Channel 9538		
WCDMA Band II	IX	1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDIVIA Band II	DV	Channel 9662	Channel 9800	Channel 9938		
	RX	1932.4 MHz	1932.4 MHz 1960.0 MHz 1987.			

Test Mode	TX / RX	TY / PY RF Channel					
i est ivioue	IA/IX	Low (L)	Middle (M)	High (H)			
		Channel 1312	Channel 1413	Channel 1513			
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz			
WCDIVIA BATILITY	DV	Channel 1537	Channel 1638	Channel 1738			
	RX	2112.4 MHz	2132.6 MHz	2152.6 MHz			

Test Mode	TY / DY	TX / RX RF Channel					
1 est Mode	IA / IXA	Low (L)	Middle (M)	High (H)			
	TX	Channel 4132	Channel 4182	Channel 4233			
WCDMA Band V	1.	826.4MHz	836.4 MHz	846.6 MHz			
VVCDIVIA Barid V	DV	Channel 4357	Channel 4407	Channel 4458			
	RX	871.4 MHz	881.4 MHz	891.6 MHz			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 20 of 40 Page:

		->//->/		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	DV	Channel 607	Channel 900	Channel 1193
		RX	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		IX	1931.5 MHz	1960 MHz	1988.5 MHz
			Channel 18625	Channel 18900	Channel 19175
	5MHz	TX	1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2		KA	1932.5 MHz	1960 MHz	1987.5 MHz
LIE Dallu Z			Channel 18650	Channel 18900	Channel 19150
		TX	1855 MHz	1880 MHz	1905 MHz
	10MHz	RX	Channel 650	Channel 900	Channel 1150
		IXX	1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
		INA	1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		INA	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 21 of 40 Page:

Took Mode	D a sa also si alitha	TV / DV	Ţ.	RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	DV	Channel 1975	Channel 2175	Channel 2375
		RX	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KΛ	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	5MHz	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE David 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4			Channel 20000	Channel 20175	Channel 20350
		TX	1715 MHz	1732.5 MHz	1750 MHz
	10MHz	RX	Channel 2000	Channel 2175	Channel 2350
		NA.	2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		TOX	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300
		RX	2120 MHz	2132.5MHz	2145 MHz

Test Mode	Bandwidth	TX / RX	RF Channel				
i est iviode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)		
			Channel 20407	Channel 20525	Channel 20643		
		TX	824.7 MHz	836.5 MHz	848.3 MHz		
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643		
		NA .	869.7 MHz	881.5 MHz	893.3 MHz		
			Channel 20415	Channel 20525	Channel 20635		
		TX	825.5 MHz	836.5 MHz	847.5 MHz		
	3MHz	RX	Channel 2415	Channel 2525	Channel 2635		
LTE David E		INA	870.5 MHz	881.5 MHz	892.5 MHz		
LTE Band 5			Channel 20425	Channel 20525	Channel 20625		
	51411	TX	826.5 MHz	836.5 MHz	846.5 MHz		
	5MHz	DV	Channel 2425	Channel 2525	Channel 2625		
		RX	871.5 MHz	881.5 MHz	891.5 MHz		
			Channel 20450	Channel 20525	Channel 20600		
		TX	829 MHz	836.5 MHz	844 MHz		
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600		
		INA.	874 MHz	881.5 MHz	889 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 22 of 40 Page:

Toot Made	Dondwidth	TV / DV	_	RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		INA	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
		TX	2505 MHz	2535 MHz	2565 MHz
	10MHz	RX	Channel 2800	Channel 3100	Channel 3400
LTC Daniel 7		KA	2625 MHz	2655 MHz	2685 MHz
LTE Band 7			Channel 20825	Channel 21100	Channel 21375
	451411	TX	2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	RX	Channel 2825	Channel 3100	Channel 3375
		KA	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
		IXA	2630 MHz	2655 MHz	2680 MHz

Test Mode	Bandwidth	TX / RX	RF Channel				
rest Mode	Danuwiuin	17/77	Low (L)	Middle (M)	High (H)		
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225		
	SIVITZ	17/17/	2572.5 MHz	2595 MHz	2617.5 MHz		
	10MHz	10MHz TX/RX	Channel 37800	Channel38000	Channel 38200		
LTC Dand 20	TUIVITZ	17/17/	2575 MHz	2595 MHz	2615 MHz		
LTE Band 38	15MH-	TX/RX	Channel 37825	Channel38000	Channel 38175		
	15MHz	17/17/	2577.5 MHz	2595 MHz	2612.5 MHz		
	00MI I-	TX/RX	Channel 37850	Channel38000	Channel 38150		
	20MHz	17/11/	2580 MHz	2595 MHz	2610 MHz		

Toot Mode	Pandwidth	TX / RX	RF Channel				
Test Mode	Bandwidth	IX/KX	Low (L)	Middle (M)	High (H)		
			Channel 39675	Channel40620	Channel 41565		
	5MHz	TX / RX	2498.5 MHz	2593 MHz	2687.5 MHz		
			Channel 39700	Channel40620	Channel 41540		
LTE Band 41	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz		
(2496-2690)			Channel 39725	Channel40620	Channel 41515		
(= : : : = : : )	15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz		
			Channel 39750	Channel40620	Channel 41490		
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 23 of 40 Page:

Test Mode	Bandwidth	TX / RX	RF Channel				
rest Mode	Danuwiuin		Low (L)	Middle (M)	High (H)		
	ENAL I-	TV/DV	Channel 55265	Channel55990	Channel 56715		
	5MHz	TX/RX	3552.5 MHz	3625.0 MHz	3697.5 MHz		
	400411-	MHz TX/RX	Channel 55290	Channel55990	Channel 56690		
LTC Dand 40	10MHz		3555.0 MHz	3625.0 MHz	3695.0 MHz		
LTE Band 48	451411-	TV/DV	Channel 55315	Channel55990	Channel 56665		
	15MHZ	15MHz TX/RX	3557.5 MHz	3625.0 MHz	3692.5 MHz		
	001411-	TV/DV	Channel 55340	Channel55990	Channel 56640		
	20MHz	TX/RX	3560.0 MHz	3625.0 MHz	3690.0 MHz		

		->//->/		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67129
		KA.	2110.7 MHz	2145MHz	2179.3 MHz
			Channel 131987	Channel 132322	Channel 132657
		TX	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	RX	Channel 66451	Channel 66786	Channel 67121
		KA.	2111.5 MHz	2145MHz	2178.5MHz
			Channel 131997	Channel 132322	Channel 132647
	5.4.1	TX	1712.5 MHz	1745 MHz	1777.5 MHz
	5MHz	RX	Channel 66461	Channel 66786	Channel 67111
LTE Band 66		KA.	2112.5 MHz	2145MHz	2177.5 MHz
(RX 2110-2180)			Channel 132022	Channel 132322	Channel 132622
		TX	1715 MHz	1745 MHz	1775 MHz
	10MHz	RX	Channel 66486	Channel 66786	Channel 67086
		100	2115 MHz	2145MHz	2175 MHz
			Channel 132047	Channel 132322	Channel 132597
		TX	1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67061
		100	2117.5 MHz	2145MHz	2172.5 MHz
			Channel 132072	Channel 132322	Channel 132572
		TX	1720 MHz	1745 MHz	1770 MHz
	20MHz	DV	Channel 66536	Channel 66786	Channel 67036
		RX	2120 MHz	2145MHz	2170 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 24 of 40

Table 4.3.1.1.7A-1: Test frequencies for CA\_7C

Range	CC-Combo / N <sub>RB_agg</sub> [RB]		CC1 Note1				CC2 Note1				
		BW [RB]	NuL	fuL [MHz]	N <sub>DL</sub>	f <sub>DL</sub> [MHz]	BW [RB]	NuL	fuL [MHz]	N <sub>DL</sub>	f <sub>DL</sub> [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1:	Carriers in inc	reasing f	requency	order.							

Table 4.3.1.2.6A-1: Test frequencies for CA\_38C

Range	CC- Combo / NRB_agg [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	N <sub>UL/DL</sub>	ful/bl [MHz]	BW [RB]	N <sub>UL/DL</sub>	f <sub>UL/DL</sub> [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610
Note 1:	Carriers in increasing frequency order.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01

Page: 25 of 40

### 4 Description of Tests

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.tetentions for arm to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 30 days only.



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 26 of 40

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio



Report No.: SEWM2309000386RG01

Rev.: 27 of 40 Page:

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-an

t (86-512) 62992980

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 28 of 40 Page:

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- The trace was allowed to stabilize





Report No.: SEWM2309000386RG01

Rev.: 01 Page: 29 of 40

### 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents with the formation is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is a third through the formation of the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor of lastification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained 50 days only.



Report No.: SEWM2309000386RG01

Rev.: 01

30 of 40 Page:

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-an

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 31 of 40

### 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB $\mu$ V/m) = Measured amplitude level (dB $\mu$ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB $\mu$ V/m) = Measured amplitude level (dB $\mu$ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

### Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (85-75) 8307 1443.

South of No. 6 Plant, No. 1, Runsheng Read, Sozhou Industrial Park, Sozhou Area, Chiria (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区润胜路1号的6号厂房南部 鄉編: 215000 t (86–512) 62992980 t (86–512) 62992980

92980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 32 of 40 Page:

### 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2309000386RG01


Rev.: 01 Page: 33 of 40

### 4.9 Test Setups

### 4.9.1 Test Setup 1

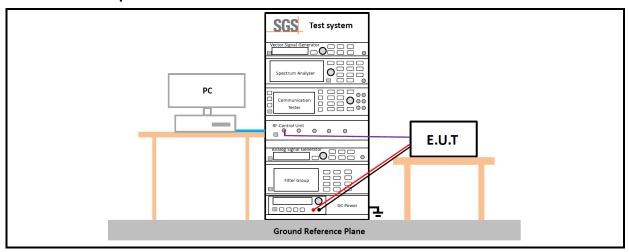

### 4.9.2 Test Setup 2

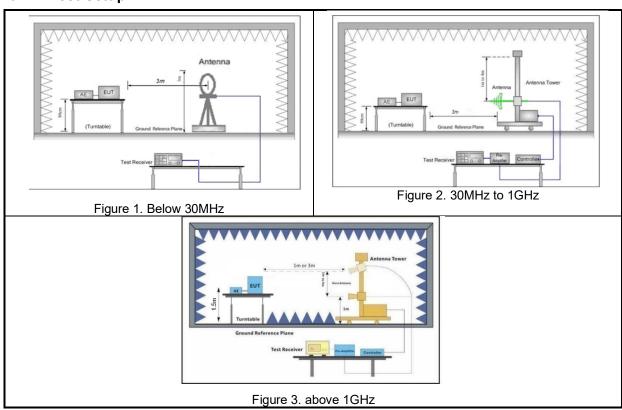



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-and-Con


South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 34 of 40

### 4.9.3 Test Setup 3

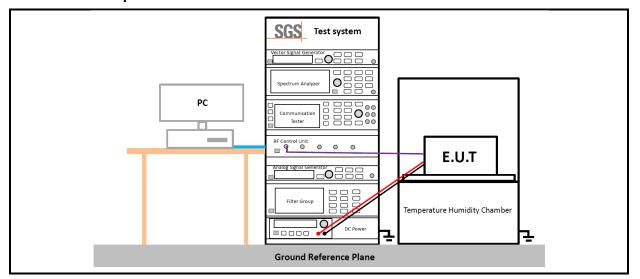



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 35 of 40 Page:

### 4.10 Test Conditions

Transmit Output Power Data - Average Power, Total					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3;LTE/TM4				
	Peak-to-Average Ratio				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3;LTE/TM4				
	Bandwidth - Occupied Bandwidth				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3;LTE/TM4				
	Bandwidth - Emission Bandwidth				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3;LTE/TM4				
Adjacent Channel Leakage Ratio					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	LTE/TM1				
Band Edges Compliance					
Test Case	Test Conditions				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 36 of 40

T 45 : 4 1: 40: 4 2 2 4 124:				
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, H (L= low channel, H= high channel)			
Test Mode	GSM/TM1;GSM/TM2; UMTS/TM1;LTE/TM1			
Spurious Emission at Antenna Terminals				
Test Case Test Conditions				
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	GSM/TM1;GSM/TM2; UMTS/TM1;LTE/TM1			
Field Strength of Spurious Radiation				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 2			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1 Remark: All bandwidth and modulation of GSM/UMTS/LTE have been pre tested, and only the worst results are reflected in the report.			
Frequency Stability				
Test Case	Test Conditions			
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage			
rest Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.			
Test Setup	Test Setup 3			
RF Channels (TX)	M (M= middle channel)			
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1			
Test Mode	The report only show the bandwidth with the worst case.			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 37 of 40 Page:

#### **Main Test Instruments** 5

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2023/05/11	2024/05/10
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2023/09/12	2024/09/11
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01 Page: 38 of 40

RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2023/02/07	2024/02/06
Signal Analyzer	ROHDE& SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2023/05/13	2024/05/12
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2023/05/13	2024/05/12
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2024/05/11
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2024/05/12
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2023/02/06	2024/02/05
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2023/02/06	2024/02/05
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2023/02/08	2024/02/07
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWM2309000386RG01

Rev.: 01

Page: 39 of 40

### 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k -30MHz)
7	Dedicted Emission	± 4.8dB (30M -1GHz)
7	Radiated Emission	± 4.8dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)

#### Remark:

The  $U_{lab}$  (lab Uncertainty) is less than  $U_{cispr/ETSI}$  (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SEWM2309000386RG01

Rev.: 01 40 of 40 Page:

### 7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	GSM 850&1900
Appendix B.2	WCDMA Band II&IV&V
Appendix B.3	LTE Band 2
Appendix B.4	LTE Band 4
Appendix B.5	LTE Band 5
Appendix B.6	LTE Band 7
Appendix B.7	LTE Band 38
Appendix B.8	LTE Band 41
Appendix B.9	LTE Band 48
Appendix B.10	LTE Band 66
Appendix B.11	LTE CA_7C
Appendix B.12	LTE CA_38C

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn