




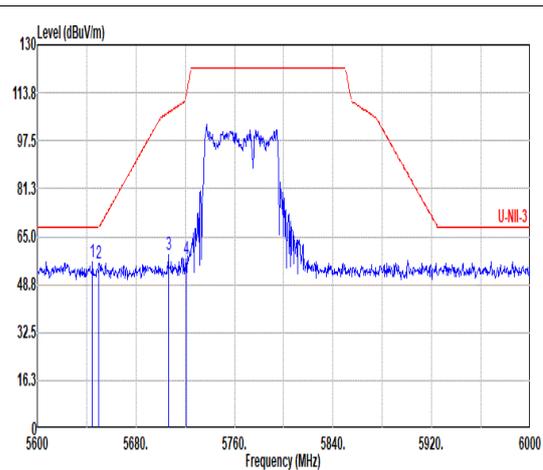

Mode	66																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Puncturing 20M ③_5775MHz																																																																																			
ANT	CDD 6+17																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.40</td> <td>52.94</td> <td>112.27</td> <td>-59.33</td> <td>39.93</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5867.20</td> <td>58.04</td> <td>107.48</td> <td>-49.44</td> <td>44.97</td> <td>34.77</td> <td>10.46</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>53.86</td> <td>69.23</td> <td>-15.37</td> <td>40.47</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.80</td> <td>54.27</td> <td>68.20</td> <td>-13.93</td> <td>40.75</td> <td>35.16</td> <td>10.53</td> <td>32.17</td> <td>0.00</td> <td>300</td> <td>245</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5854.40	52.94	112.27	-59.33	39.93	34.72	10.45	32.16	0.00	300	245	PEAK	2	5867.20	58.04	107.48	-49.44	44.97	34.77	10.46	32.16	0.00	300	245	PEAK	3	5923.60	53.86	69.23	-15.37	40.47	35.04	10.51	32.16	0.00	300	245	PEAK	4	5942.80	54.27	68.20	-13.93	40.75	35.16	10.53	32.17	0.00	300	245	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																											
1	5854.40	52.94	112.27	-59.33	39.93	34.72	10.45	32.16	0.00	300	245	PEAK																																																																								
2	5867.20	58.04	107.48	-49.44	44.97	34.77	10.46	32.16	0.00	300	245	PEAK																																																																								
3	5923.60	53.86	69.23	-15.37	40.47	35.04	10.51	32.16	0.00	300	245	PEAK																																																																								
4	5942.80	54.27	68.20	-13.93	40.75	35.16	10.53	32.17	0.00	300	245	PEAK																																																																								

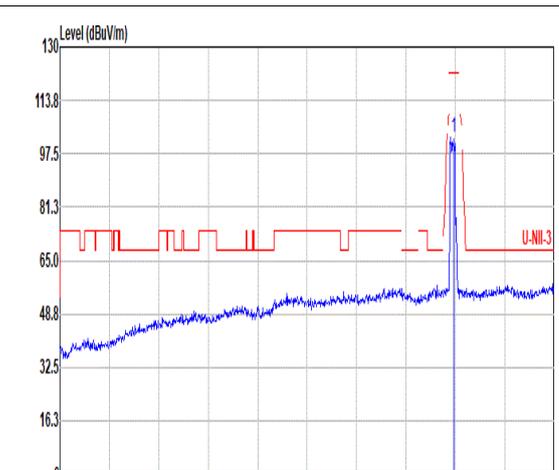

Mode	74																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Large RU 484+242 ④_5775MHz																																																																																																																						
ANT	CDD 6+17																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.80</td> <td>56.54</td> <td>68.20</td> <td>-11.66</td> <td>39.37</td> <td>34.59</td> <td>12.58</td> <td>30.00</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>56.14</td> <td>68.20</td> <td>-12.06</td> <td>38.97</td> <td>34.60</td> <td>12.58</td> <td>30.01</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.40</td> <td>58.96</td> <td>107.09</td> <td>-48.13</td> <td>41.81</td> <td>34.61</td> <td>12.65</td> <td>30.11</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.80</td> <td>57.63</td> <td>112.72</td> <td>-55.09</td> <td>40.45</td> <td>34.64</td> <td>12.67</td> <td>30.13</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5644.80	56.54	68.20	-11.66	39.37	34.59	12.58	30.00	0.00	100	115	PEAK	2	5650.00	56.14	68.20	-12.06	38.97	34.60	12.58	30.01	0.00	100	115	PEAK	3	5706.40	58.96	107.09	-48.13	41.81	34.61	12.65	30.11	0.00	100	115	PEAK	4	5720.80	57.63	112.72	-55.09	40.45	34.64	12.67	30.13	0.00	100	115	PEAK	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>102.61</td> <td>-----</td> <td>-----</td> <td>85.41</td> <td>34.68</td> <td>12.69</td> <td>30.17</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	102.61	-----	-----	85.41	34.68	12.69	30.17	0.00	100	115	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5644.80	56.54	68.20	-11.66	39.37	34.59	12.58	30.00	0.00	100	115	PEAK																																																																																																											
2	5650.00	56.14	68.20	-12.06	38.97	34.60	12.58	30.01	0.00	100	115	PEAK																																																																																																											
3	5706.40	58.96	107.09	-48.13	41.81	34.61	12.65	30.11	0.00	100	115	PEAK																																																																																																											
4	5720.80	57.63	112.72	-55.09	40.45	34.64	12.67	30.13	0.00	100	115	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	102.61	-----	-----	85.41	34.68	12.69	30.17	0.00	100	115	PEAK																																																																																																											
Avg	Blank	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>93.14</td> <td>-----</td> <td>-----</td> <td>75.92</td> <td>34.70</td> <td>12.71</td> <td>30.19</td> <td>0.00</td> <td>100</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	93.14	-----	-----	75.92	34.70	12.71	30.19	0.00	100	115	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	93.14	-----	-----	75.92	34.70	12.71	30.19	0.00	100	115	AVERAGE																																																																																																											

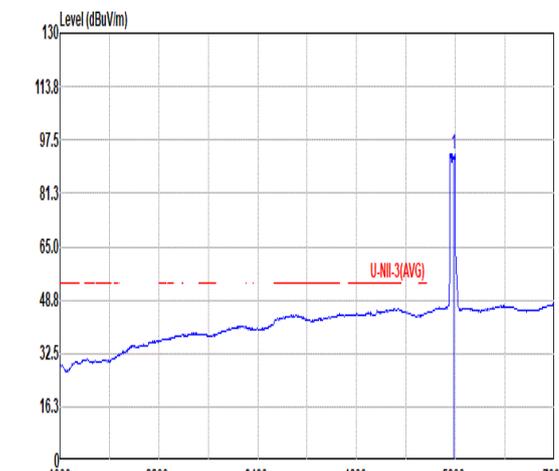

Mode	74																																																																		
	Band Edge - R																																																																		
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Large RU 484+242 ①_5775MHz																																																																		
ANT	CDD 6+17																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.40</td> <td>53.69</td> <td>112.27</td> <td>-58.58</td> <td>36.37</td> <td>34.83</td> <td>12.86</td> <td>30.37</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>54.35</td> <td>105.47</td> <td>-51.12</td> <td>36.88</td> <td>34.95</td> <td>12.90</td> <td>30.38</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>55.22</td> <td>69.23</td> <td>-14.01</td> <td>37.54</td> <td>35.10</td> <td>12.98</td> <td>30.40</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.20</td> <td>57.39</td> <td>68.20</td> <td>-10.81</td> <td>39.70</td> <td>35.10</td> <td>13.00</td> <td>30.41</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5854.40	53.69	112.27	-58.58	36.37	34.83	12.86	30.37	0.00	100	115	PEAK	2	5874.40	54.35	105.47	-51.12	36.88	34.95	12.90	30.38	0.00	100	115	PEAK	3	5923.60	55.22	69.23	-14.01	37.54	35.10	12.98	30.40	0.00	100	115	PEAK	4	5933.20	57.39	68.20	-10.81	39.70	35.10	13.00	30.41	0.00	100	115	PEAK	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5854.40	53.69	112.27	-58.58	36.37	34.83	12.86	30.37	0.00	100	115	PEAK																																																							
2	5874.40	54.35	105.47	-51.12	36.88	34.95	12.90	30.38	0.00	100	115	PEAK																																																							
3	5923.60	55.22	69.23	-14.01	37.54	35.10	12.98	30.40	0.00	100	115	PEAK																																																							
4	5933.20	57.39	68.20	-10.81	39.70	35.10	13.00	30.41	0.00	100	115	PEAK																																																							



Mode	74																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Large RU 484+242 ①_5775MHz																																																																																																																						
ANT	CDD 6+17																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.20</td> <td>56.62</td> <td>68.20</td> <td>-11.58</td> <td>39.49</td> <td>34.56</td> <td>12.56</td> <td>29.99</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>53.16</td> <td>68.50</td> <td>-15.34</td> <td>35.99</td> <td>34.60</td> <td>12.58</td> <td>30.01</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5708.00</td> <td>57.10</td> <td>107.54</td> <td>-50.44</td> <td>39.94</td> <td>34.62</td> <td>12.65</td> <td>30.11</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.20</td> <td>57.38</td> <td>113.64</td> <td>-56.26</td> <td>40.20</td> <td>34.64</td> <td>12.67</td> <td>30.13</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5629.20	56.62	68.20	-11.58	39.49	34.56	12.56	29.99	0.00	297	66	PEAK	2	5650.40	53.16	68.50	-15.34	35.99	34.60	12.58	30.01	0.00	297	66	PEAK	3	5708.00	57.10	107.54	-50.44	39.94	34.62	12.65	30.11	0.00	297	66	PEAK	4	5721.20	57.38	113.64	-56.26	40.20	34.64	12.67	30.13	0.00	297	66	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>99.04</td> <td>-----</td> <td>-----</td> <td>81.75</td> <td>34.79</td> <td>12.76</td> <td>30.26</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	99.04	-----	-----	81.75	34.79	12.76	30.26	0.00	297	66	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5629.20	56.62	68.20	-11.58	39.49	34.56	12.56	29.99	0.00	297	66	PEAK																																																																																																											
2	5650.40	53.16	68.50	-15.34	35.99	34.60	12.58	30.01	0.00	297	66	PEAK																																																																																																											
3	5708.00	57.10	107.54	-50.44	39.94	34.62	12.65	30.11	0.00	297	66	PEAK																																																																																																											
4	5721.20	57.38	113.64	-56.26	40.20	34.64	12.67	30.13	0.00	297	66	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	99.04	-----	-----	81.75	34.79	12.76	30.26	0.00	297	66	PEAK																																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>91.49</td> <td>-----</td> <td>-----</td> <td>74.20</td> <td>34.79</td> <td>12.76</td> <td>30.26</td> <td>0.00</td> <td>297</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	91.49	-----	-----	74.20	34.79	12.76	30.26	0.00	297	66	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	91.49	-----	-----	74.20	34.79	12.76	30.26	0.00	297	66	AVERAGE																																																																																																											



Mode	74																																																																		
	Band Edge - R																																																																		
	U-NII-3_5.725-5.85_802.11BE EHT80_CH155_Large RU 484+242 ④_5775MHz																																																																		
ANT	CDD 6+17																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Level (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>53.20</td> <td>111.36</td> <td>-58.16</td> <td>35.88</td> <td>34.83</td> <td>12.86</td> <td>30.37</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.00</td> <td>55.45</td> <td>105.58</td> <td>-50.13</td> <td>37.99</td> <td>34.94</td> <td>12.90</td> <td>30.38</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>53.79</td> <td>68.35</td> <td>-14.56</td> <td>36.12</td> <td>35.10</td> <td>12.98</td> <td>30.41</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.40</td> <td>55.26</td> <td>68.20</td> <td>-12.94</td> <td>37.58</td> <td>35.10</td> <td>12.99</td> <td>30.41</td> <td>0.00</td> <td>297</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (cm)	Remark	1	5854.80	53.20	111.36	-58.16	35.88	34.83	12.86	30.37	0.00	297	66	PEAK	2	5874.00	55.45	105.58	-50.13	37.99	34.94	12.90	30.38	0.00	297	66	PEAK	3	5924.80	53.79	68.35	-14.56	36.12	35.10	12.98	30.41	0.00	297	66	PEAK	4	5930.40	55.26	68.20	-12.94	37.58	35.10	12.99	30.41	0.00	297	66	PEAK	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (cm)	Remark																																																							
1	5854.80	53.20	111.36	-58.16	35.88	34.83	12.86	30.37	0.00	297	66	PEAK																																																							
2	5874.00	55.45	105.58	-50.13	37.99	34.94	12.90	30.38	0.00	297	66	PEAK																																																							
3	5924.80	53.79	68.35	-14.56	36.12	35.10	12.98	30.41	0.00	297	66	PEAK																																																							
4	5930.40	55.26	68.20	-12.94	37.58	35.10	12.99	30.41	0.00	297	66	PEAK																																																							



Mode	38	
	18G-40G	
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz	
ANT	CDD 6+17	
Pol.	Horizontal	Vertical
Peak Avg		



Mode	38																																																																																																																																																																																																																										
	30-1G																																																																																																																																																																																																																										
	U-NII-3_5.725-5.85_802.11BE EHT40_CH151_Full_5755MHz																																																																																																																																																																																																																										
ANT	CDD 6+17																																																																																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																																																																																									
Peak																																																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>20.76</td><td>40.00</td><td>-19.24</td><td>28.50</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>62.01</td><td>14.21</td><td>40.00</td><td>-25.79</td><td>33.42</td><td>12.52</td><td>1.17</td><td>32.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>144.46</td><td>16.05</td><td>43.50</td><td>-27.45</td><td>30.58</td><td>16.49</td><td>1.81</td><td>32.83</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>241.46</td><td>22.48</td><td>46.00</td><td>-23.52</td><td>34.99</td><td>17.90</td><td>2.37</td><td>32.78</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>278.32</td><td>23.35</td><td>46.00</td><td>-22.65</td><td>34.67</td><td>18.93</td><td>2.55</td><td>32.80</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>728.40</td><td>28.22</td><td>46.00</td><td>-17.78</td><td>31.44</td><td>25.57</td><td>4.13</td><td>32.92</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>		Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.00	20.76	40.00	-19.24	28.50	24.57	0.71	33.02	0.00	---	---	Peak	2	62.01	14.21	40.00	-25.79	33.42	12.52	1.17	32.90	0.00	---	---	Peak	3	144.46	16.05	43.50	-27.45	30.58	16.49	1.81	32.83	0.00	---	---	Peak	4	241.46	22.48	46.00	-23.52	34.99	17.90	2.37	32.78	0.00	---	---	Peak	5	278.32	23.35	46.00	-22.65	34.67	18.93	2.55	32.80	0.00	---	---	Peak	6	728.40	28.22	46.00	-17.78	31.44	25.57	4.13	32.92	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>21.79</td><td>40.00</td><td>-18.21</td><td>29.53</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>42.61</td><td>22.32</td><td>40.00</td><td>-17.68</td><td>36.78</td><td>17.57</td><td>0.93</td><td>32.96</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>62.01</td><td>17.55</td><td>40.00</td><td>-22.45</td><td>36.76</td><td>12.52</td><td>1.17</td><td>32.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>252.13</td><td>22.09</td><td>46.00</td><td>-23.91</td><td>33.97</td><td>18.46</td><td>2.43</td><td>32.77</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>461.65</td><td>22.13</td><td>46.00</td><td>-23.87</td><td>29.10</td><td>22.78</td><td>3.28</td><td>33.03</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>736.16</td><td>27.49</td><td>46.00</td><td>-18.51</td><td>30.54</td><td>25.67</td><td>4.15</td><td>32.87</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>		Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.00	21.79	40.00	-18.21	29.53	24.57	0.71	33.02	0.00	---	---	Peak	2	42.61	22.32	40.00	-17.68	36.78	17.57	0.93	32.96	0.00	---	---	Peak	3	62.01	17.55	40.00	-22.45	36.76	12.52	1.17	32.90	0.00	---	---	Peak	4	252.13	22.09	46.00	-23.91	33.97	18.46	2.43	32.77	0.00	---	---	Peak	5	461.65	22.13	46.00	-23.87	29.10	22.78	3.28	33.03	0.00	---	---	Peak	6	736.16	27.49	46.00	-18.51	30.54	25.67	4.15	32.87	0.00	---	---
	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	30.00	20.76	40.00	-19.24	28.50	24.57	0.71	33.02	0.00	---	---	Peak																																																																																																																																																																																																															
2	62.01	14.21	40.00	-25.79	33.42	12.52	1.17	32.90	0.00	---	---	Peak																																																																																																																																																																																																															
3	144.46	16.05	43.50	-27.45	30.58	16.49	1.81	32.83	0.00	---	---	Peak																																																																																																																																																																																																															
4	241.46	22.48	46.00	-23.52	34.99	17.90	2.37	32.78	0.00	---	---	Peak																																																																																																																																																																																																															
5	278.32	23.35	46.00	-22.65	34.67	18.93	2.55	32.80	0.00	---	---	Peak																																																																																																																																																																																																															
6	728.40	28.22	46.00	-17.78	31.44	25.57	4.13	32.92	0.00	---	---	Peak																																																																																																																																																																																																															
	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	30.00	21.79	40.00	-18.21	29.53	24.57	0.71	33.02	0.00	---	---	Peak																																																																																																																																																																																																															
2	42.61	22.32	40.00	-17.68	36.78	17.57	0.93	32.96	0.00	---	---	Peak																																																																																																																																																																																																															
3	62.01	17.55	40.00	-22.45	36.76	12.52	1.17	32.90	0.00	---	---	Peak																																																																																																																																																																																																															
4	252.13	22.09	46.00	-23.91	33.97	18.46	2.43	32.77	0.00	---	---	Peak																																																																																																																																																																																																															
5	461.65	22.13	46.00	-23.87	29.10	22.78	3.28	33.03	0.00	---	---	Peak																																																																																																																																																																																																															
6	736.16	27.49	46.00	-18.51	30.54	25.67	4.15	32.87	0.00	---	---	Peak																																																																																																																																																																																																															



Mode	41																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.85_802.11a_CH144_5720MHz																																																																															
ANT	CDD 6+17																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>47.07</td> <td>74.00</td> <td>-26.93</td> <td>59.03</td> <td>38.08</td> <td>16.32</td> <td>66.36</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	47.07	74.00	-26.93	59.03	38.08	16.32	66.36	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>45.66</td> <td>74.00</td> <td>-28.34</td> <td>57.62</td> <td>38.08</td> <td>16.32</td> <td>66.36</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	45.66	74.00	-28.34	57.62	38.08	16.32	66.36	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11440.00	47.07	74.00	-26.93	59.03	38.08	16.32	66.36	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11440.00	45.66	74.00	-28.34	57.62	38.08	16.32	66.36	0.00	--	PEAK																																																																						



Mode	42																																																																											
	Harmonic																																																																											
	U-NII-2C_5.47-5.85_802.11BE EHT20_CH144_Full_5720MHz																																																																											
ANT	CDD 6+17																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>46.69</td> <td>74.00</td> <td>-27.31</td> <td>58.65</td> <td>38.08</td> <td>16.32</td> <td>66.36</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11440.00	46.69	74.00	-27.31	58.65	38.08	16.32	66.36	0.00	-- -- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>45.07</td> <td>74.00</td> <td>-28.93</td> <td>57.03</td> <td>38.08</td> <td>16.32</td> <td>66.36</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11440.00	45.07	74.00	-28.93	57.03	38.08	16.32	66.36	0.00	-- -- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11440.00	46.69	74.00	-27.31	58.65	38.08	16.32	66.36	0.00	-- -- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11440.00	45.07	74.00	-28.93	57.03	38.08	16.32	66.36	0.00	-- -- PEAK																																																																			



Mode	43																																																																																											
	Harmonic																																																																																											
	U-NII-2C_5.47-5.85_802.11BE EHT40_CH142_Full_5710MHz																																																																																											
ANT	CDD 6+17																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>46.51</td> <td>74.00</td> <td>-27.49</td> <td>58.53</td> <td>38.04</td> <td>16.31</td> <td>66.37</td> <td>0.00</td> <td>--</td> <td>--</td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg					1	11420.00	46.51	74.00	-27.49	58.53	38.04	16.31	66.37	0.00	--	--			PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>44.82</td> <td>74.00</td> <td>-29.18</td> <td>56.84</td> <td>38.04</td> <td>16.31</td> <td>66.37</td> <td>0.00</td> <td>--</td> <td>--</td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg					1	11420.00	44.82	74.00	-29.18	56.84	38.04	16.31	66.37	0.00	--	--			PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	11420.00	46.51	74.00	-27.49	58.53	38.04	16.31	66.37	0.00	--	--			PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	11420.00	44.82	74.00	-29.18	56.84	38.04	16.31	66.37	0.00	--	--			PEAK																																																																														







Mode	44																																																																											
	Harmonic																																																																											
	U-NII-2C_5.47-5.85_802.11BE EHT80_CH138_Full_5690MHz																																																																											
ANT	CDD 6+17																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11380.00</td> <td>44.86</td> <td>74.00</td> <td>-29.14</td> <td>56.99</td> <td>37.98</td> <td>16.29</td> <td>66.40</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11380.00	44.86	74.00	-29.14	56.99	37.98	16.29	66.40	0.00	-- -- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11380.00</td> <td>45.36</td> <td>74.00</td> <td>-28.64</td> <td>57.49</td> <td>37.98</td> <td>16.29</td> <td>66.40</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11380.00	45.36	74.00	-28.64	57.49	37.98	16.29	66.40	0.00	-- -- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11380.00	44.86	74.00	-29.14	56.99	37.98	16.29	66.40	0.00	-- -- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11380.00	45.36	74.00	-28.64	57.49	37.98	16.29	66.40	0.00	-- -- PEAK																																																																			



		75																																																																																																		
Mode		Co-location Band Edge																																																																																																		
		802.11be EHT20_CH36_5180MHz_Full																																																																																																		
ANT		CDD 6+17																																																																																																		
Pol.	Horizontal	Fundamental																																																																																																		
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5100 to 5200 MHz. A red horizontal line indicates a limit at approximately 65.0 dBuV/m. A blue curve shows the measured signal with a peak at 5180.05 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.05</td> <td>63.15</td> <td>74.00</td> <td>-10.85</td> <td>47.21</td> <td>34.11</td> <td>12.03</td> <td>30.20</td> <td>0.00</td> <td>100</td> <td>63 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.05	63.15	74.00	-10.85	47.21	34.11	12.03	30.20	0.00	100	63 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates a limit at approximately 65.0 dBuV/m. Two blue peaks are visible at 2473.20 MHz and 5180.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2473.20</td> <td>104.34</td> <td>-----</td> <td>-----</td> <td>94.74</td> <td>32.35</td> <td>8.21</td> <td>30.96</td> <td>0.00</td> <td>100</td> <td>63 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>109.47</td> <td>-----</td> <td>-----</td> <td>93.36</td> <td>34.24</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>100</td> <td>63 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2473.20	104.34	-----	-----	94.74	32.35	8.21	30.96	0.00	100	63 Peak	2	5180.00	109.47	-----	-----	93.36	34.24	12.06	30.19	0.00	100	63 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5148.05	63.15	74.00	-10.85	47.21	34.11	12.03	30.20	0.00	100	63 PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2473.20	104.34	-----	-----	94.74	32.35	8.21	30.96	0.00	100	63 Peak																																																																																									
2	5180.00	109.47	-----	-----	93.36	34.24	12.06	30.19	0.00	100	63 PEAK																																																																																									
Avg	<p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5100 to 5200 MHz. A red horizontal line indicates a limit at approximately 48.8 dBuV/m. A blue curve shows the averaged signal with a peak at 5146.43 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.43</td> <td>49.85</td> <td>54.00</td> <td>-4.15</td> <td>33.91</td> <td>34.11</td> <td>12.03</td> <td>30.20</td> <td>0.00</td> <td>100</td> <td>63 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.43	49.85	54.00	-4.15	33.91	34.11	12.03	30.20	0.00	100	63 AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates a limit at approximately 48.8 dBuV/m. Two blue peaks are visible at 2473.20 MHz and 5180.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2473.20</td> <td>100.68</td> <td>-----</td> <td>-----</td> <td>91.08</td> <td>32.35</td> <td>8.21</td> <td>30.96</td> <td>0.00</td> <td>100</td> <td>63 Average</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>100.76</td> <td>-----</td> <td>-----</td> <td>84.65</td> <td>34.24</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>100</td> <td>63 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2473.20	100.68	-----	-----	91.08	32.35	8.21	30.96	0.00	100	63 Average	2	5180.00	100.76	-----	-----	84.65	34.24	12.06	30.19	0.00	100	63 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5146.43	49.85	54.00	-4.15	33.91	34.11	12.03	30.20	0.00	100	63 AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2473.20	100.68	-----	-----	91.08	32.35	8.21	30.96	0.00	100	63 Average																																																																																									
2	5180.00	100.76	-----	-----	84.65	34.24	12.06	30.19	0.00	100	63 AVERAGE																																																																																									

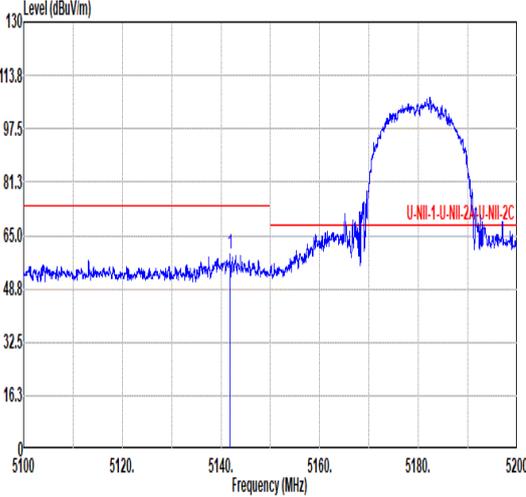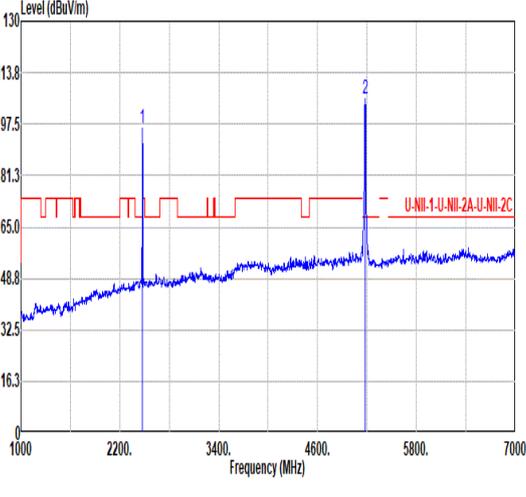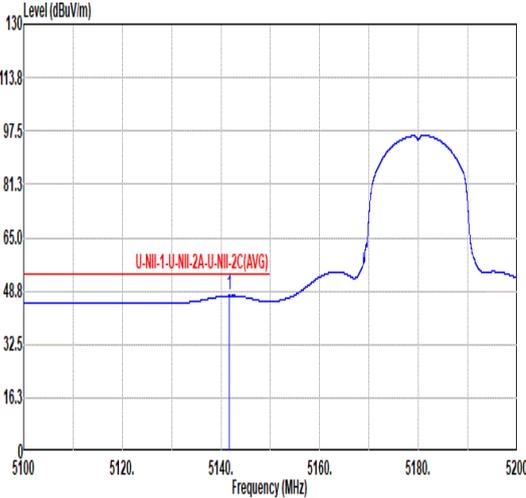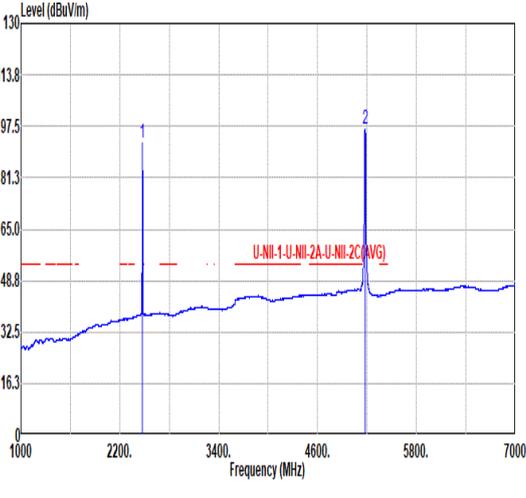

		75																																																																																																						
Mode		Co-location Band Edge																																																																																																						
		802.11be EHT20_CH36_5180MHz_Full																																																																																																						
ANT		CDD 6+17																																																																																																						
Pol.		Vertical					Fundamental																																																																																																	
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5100 5120 5140 5160 5180 5200</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.85</td> <td>59.54</td> <td>74.00</td> <td>-14.46</td> <td>43.59</td> <td>34.13</td> <td>12.03</td> <td>30.21</td> <td>0.00</td> <td>338</td> <td>235 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5141.85	59.54	74.00	-14.46	43.59	34.13	12.03	30.21	0.00	338	235 PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2473.20</td> <td>96.07</td> <td>-----</td> <td>-----</td> <td>86.47</td> <td>32.35</td> <td>8.21</td> <td>30.96</td> <td>0.00</td> <td>338</td> <td>235 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>105.46</td> <td>-----</td> <td>-----</td> <td>89.37</td> <td>34.22</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>338</td> <td>235 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2473.20	96.07	-----	-----	86.47	32.35	8.21	30.96	0.00	338	235 Peak	2	5180.00	105.46	-----	-----	89.37	34.22	12.06	30.19	0.00	338	235 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5141.85	59.54	74.00	-14.46	43.59	34.13	12.03	30.21	0.00	338	235 PEAK																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2473.20	96.07	-----	-----	86.47	32.35	8.21	30.96	0.00	338	235 Peak																																																																																													
2	5180.00	105.46	-----	-----	89.37	34.22	12.06	30.19	0.00	338	235 PEAK																																																																																													
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5100 5120 5140 5160 5180 5200</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.75</td> <td>47.37</td> <td>54.00</td> <td>-6.63</td> <td>31.42</td> <td>34.13</td> <td>12.03</td> <td>30.21</td> <td>0.00</td> <td>338</td> <td>235 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5141.75	47.37	54.00	-6.63	31.42	34.13	12.03	30.21	0.00	338	235 AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2473.20</td> <td>92.33</td> <td>-----</td> <td>-----</td> <td>82.73</td> <td>32.35</td> <td>8.21</td> <td>30.96</td> <td>0.00</td> <td>338</td> <td>235 Average</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>96.55</td> <td>-----</td> <td>-----</td> <td>80.46</td> <td>34.22</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>338</td> <td>235 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2473.20	92.33	-----	-----	82.73	32.35	8.21	30.96	0.00	338	235 Average	2	5180.00	96.55	-----	-----	80.46	34.22	12.06	30.19	0.00	338	235 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5141.75	47.37	54.00	-6.63	31.42	34.13	12.03	30.21	0.00	338	235 AVERAGE																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2473.20	92.33	-----	-----	82.73	32.35	8.21	30.96	0.00	338	235 Average																																																																																													
2	5180.00	96.55	-----	-----	80.46	34.22	12.06	30.19	0.00	338	235 AVERAGE																																																																																													



Mode	75																																																																																									
	Co-location Harmonic																																																																																									
	802.11be EHT20_CH36_5180MHz_Full																																																																																									
ANT	CDD 6+17																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak																																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.06</td> <td>68.20</td> <td>-22.14</td> <td>56.51</td> <td>37.46</td> <td>17.54</td> <td>65.45</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.00	46.06	68.20	-22.14	56.51	37.46	17.54	65.45	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.93</td> <td>68.20</td> <td>-23.27</td> <td>55.38</td> <td>37.46</td> <td>17.54</td> <td>65.45</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.00	44.93	68.20	-23.27	55.38	37.46	17.54	65.45	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10360.00	46.06	68.20	-22.14	56.51	37.46	17.54	65.45	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10360.00	44.93	68.20	-23.27	55.38	37.46	17.54	65.45	0.00	---	---	PEAK																																																																														



Mode	75																																																																																					
	Co-location Band Edge																																																																																					
	Bluetooth-LE_CH38_2478MHz																																																																																					
ANT	16																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>55.75</td> <td>74.00</td> <td>-18.25</td> <td>40.12</td> <td>32.37</td> <td>8.23</td> <td>30.97</td> <td>6.00</td> <td>132</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	55.75	74.00	-18.25	40.12	32.37	8.23	30.97	6.00	132	112	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>110.36</td> <td>-----</td> <td>-----</td> <td>94.75</td> <td>32.36</td> <td>8.22</td> <td>30.97</td> <td>6.00</td> <td>132</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	110.36	-----	-----	94.75	32.36	8.22	30.97	6.00	132	112	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2483.50	55.75	74.00	-18.25	40.12	32.37	8.23	30.97	6.00	132	112	PEAK																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2478.00	110.36	-----	-----	94.75	32.36	8.22	30.97	6.00	132	112	PEAK																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.67</td> <td>54.00</td> <td>-7.33</td> <td>31.04</td> <td>32.37</td> <td>8.23</td> <td>30.97</td> <td>6.00</td> <td>132</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.67	54.00	-7.33	31.04	32.37	8.23	30.97	6.00	132	112	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>108.39</td> <td>-----</td> <td>-----</td> <td>92.78</td> <td>32.36</td> <td>8.22</td> <td>30.97</td> <td>6.00</td> <td>132</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	108.39	-----	-----	92.78	32.36	8.22	30.97	6.00	132	112	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2483.50	46.67	54.00	-7.33	31.04	32.37	8.23	30.97	6.00	132	112	AVERAGE																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2478.00	108.39	-----	-----	92.78	32.36	8.22	30.97	6.00	132	112	AVERAGE																																																																										







Mode	75																																																																																							
	Co-location Band Edge																																																																																							
	Bluetooth-LE_CH38_2478MHz																																																																																							
ANT	16																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>56.02</td> <td>74.00</td> <td>-17.98</td> <td>40.39</td> <td>32.37</td> <td>8.23</td> <td>30.97</td> <td>6.00</td> <td>400</td> <td>191</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	56.02	74.00	-17.98	40.39	32.37	8.23	30.97	6.00	400	191	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>107.49</td> <td>-----</td> <td>-----</td> <td>91.88</td> <td>32.36</td> <td>8.22</td> <td>30.97</td> <td>6.00</td> <td>400</td> <td>191</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	107.49	-----	-----	91.88	32.36	8.22	30.97	6.00	400	191	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2483.68	56.02	74.00	-17.98	40.39	32.37	8.23	30.97	6.00	400	191	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	107.49	-----	-----	91.88	32.36	8.22	30.97	6.00	400	191	PEAK																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>45.76</td> <td>54.00</td> <td>-8.24</td> <td>30.13</td> <td>32.37</td> <td>8.23</td> <td>30.97</td> <td>6.00</td> <td>400</td> <td>191</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	45.76	54.00	-8.24	30.13	32.37	8.23	30.97	6.00	400	191	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>105.31</td> <td>-----</td> <td>-----</td> <td>89.70</td> <td>32.36</td> <td>8.22</td> <td>30.97</td> <td>6.00</td> <td>400</td> <td>191</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	105.31	-----	-----	89.70	32.36	8.22	30.97	6.00	400	191	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2483.50	45.76	54.00	-8.24	30.13	32.37	8.23	30.97	6.00	400	191	AVERAGE																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	105.31	-----	-----	89.70	32.36	8.22	30.97	6.00	400	191	AVERAGE																																																																												







Mode	75																																																																																																																		
	Co-location Harmonic																																																																																																																		
	Bluetooth-LE_CH38_2478MHz																																																																																																																		
ANT	16																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																	
Peak Avg																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>41.50</td> <td>74.00</td> <td>-32.50</td> <td>61.49</td> <td>33.92</td> <td>11.84</td> <td>65.75</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>57.47</td> <td>74.00</td> <td>-16.53</td> <td>77.04</td> <td>34.22</td> <td>12.06</td> <td>65.85</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4956.00	41.50	74.00	-32.50	61.49	33.92	11.84	65.75	0.00	---	---	PEAK	2	5180.00	57.47	74.00	-16.53	77.04	34.22	12.06	65.85	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>40.62</td> <td>74.00</td> <td>-33.38</td> <td>60.61</td> <td>33.92</td> <td>11.84</td> <td>65.75</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>55.32</td> <td>74.00</td> <td>-18.68</td> <td>74.89</td> <td>34.22</td> <td>12.06</td> <td>65.85</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4956.00	40.62	74.00	-33.38	60.61	33.92	11.84	65.75	0.00	---	---	PEAK	2	5180.00	55.32	74.00	-18.68	74.89	34.22	12.06	65.85	0.00	---	---
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	4956.00	41.50	74.00	-32.50	61.49	33.92	11.84	65.75	0.00	---	---	PEAK																																																																																																							
2	5180.00	57.47	74.00	-16.53	77.04	34.22	12.06	65.85	0.00	---	---	Peak																																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	4956.00	40.62	74.00	-33.38	60.61	33.92	11.84	65.75	0.00	---	---	PEAK																																																																																																							
2	5180.00	55.32	74.00	-18.68	74.89	34.22	12.06	65.85	0.00	---	---	Peak																																																																																																							

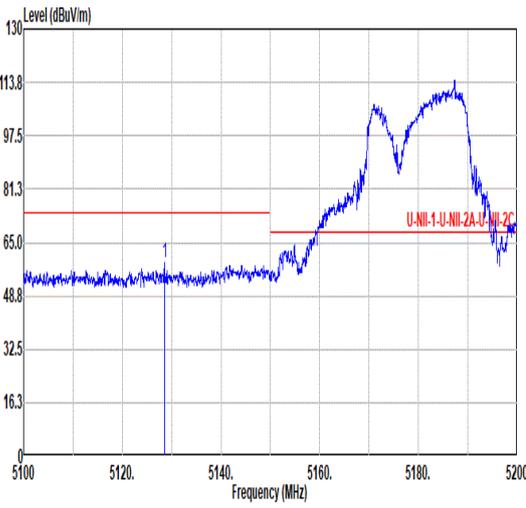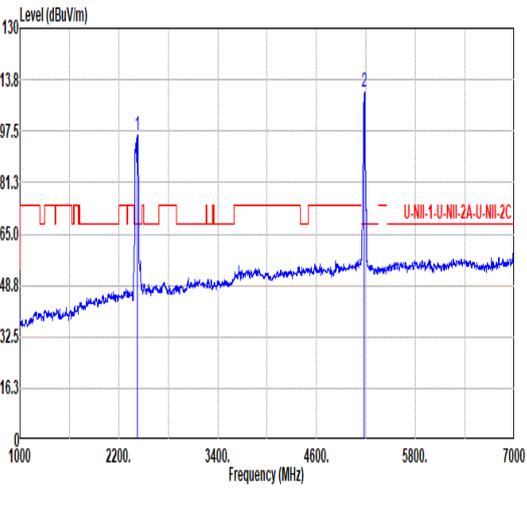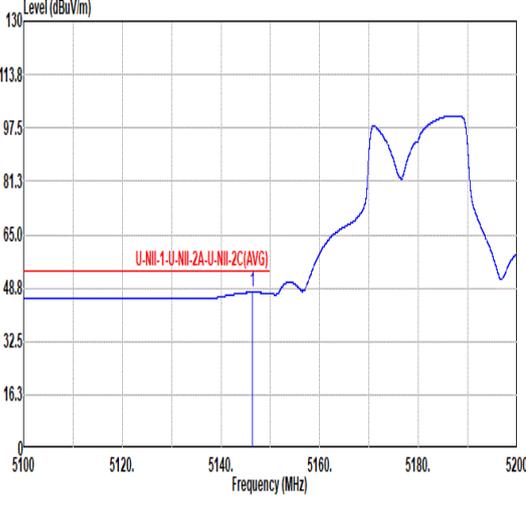
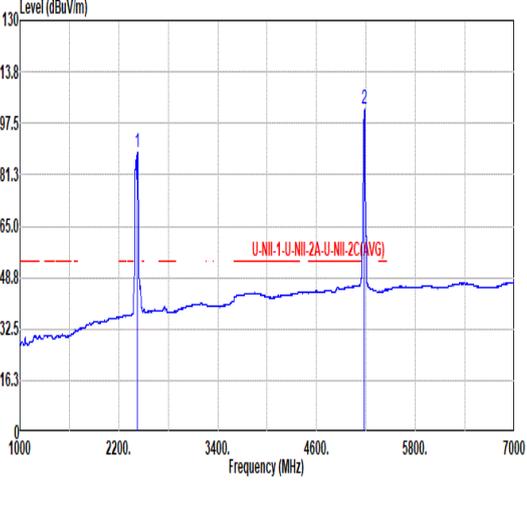


		76																																																																																																					
Mode	Co-location Band Edge																																																																																																						
	802.11be EHT20_CH36_5180MHz_Full																																																																																																						
ANT	CDD 6+17																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5128.55</td> <td>58.68</td> <td>74.00</td> <td>-15.32</td> <td>42.68</td> <td>34.19</td> <td>12.02</td> <td>30.21</td> <td>0.00</td> <td>100</td> <td>60</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5128.55	58.68	74.00	-15.32	42.68	34.19	12.02	30.21	0.00	100	60	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2425.20</td> <td>96.22</td> <td>-----</td> <td>-----</td> <td>86.79</td> <td>32.25</td> <td>8.12</td> <td>30.94</td> <td>0.00</td> <td>100</td> <td>60</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>109.92</td> <td>-----</td> <td>-----</td> <td>93.81</td> <td>34.24</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>100</td> <td>60</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2425.20	96.22	-----	-----	86.79	32.25	8.12	30.94	0.00	100	60	Peak	2	5180.00	109.92	-----	-----	93.81	34.24	12.06	30.19	0.00	100	60	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5128.55	58.68	74.00	-15.32	42.68	34.19	12.02	30.21	0.00	100	60	PEAK																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	2425.20	96.22	-----	-----	86.79	32.25	8.12	30.94	0.00	100	60	Peak																																																																																											
2	5180.00	109.92	-----	-----	93.81	34.24	12.06	30.19	0.00	100	60	PEAK																																																																																											
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.35</td> <td>47.51</td> <td>54.00</td> <td>-6.49</td> <td>31.57</td> <td>34.11</td> <td>12.03</td> <td>30.20</td> <td>0.00</td> <td>100</td> <td>60</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.35	47.51	54.00	-6.49	31.57	34.11	12.03	30.20	0.00	100	60	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2425.20</td> <td>88.45</td> <td>-----</td> <td>-----</td> <td>79.02</td> <td>32.25</td> <td>8.12</td> <td>30.94</td> <td>0.00</td> <td>100</td> <td>60</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>101.92</td> <td>-----</td> <td>-----</td> <td>85.81</td> <td>34.24</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>100</td> <td>60</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2425.20	88.45	-----	-----	79.02	32.25	8.12	30.94	0.00	100	60	Average	2	5180.00	101.92	-----	-----	85.81	34.24	12.06	30.19	0.00	100	60	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5146.35	47.51	54.00	-6.49	31.57	34.11	12.03	30.20	0.00	100	60	AVERAGE																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	2425.20	88.45	-----	-----	79.02	32.25	8.12	30.94	0.00	100	60	Average																																																																																											
2	5180.00	101.92	-----	-----	85.81	34.24	12.06	30.19	0.00	100	60	AVERAGE																																																																																											

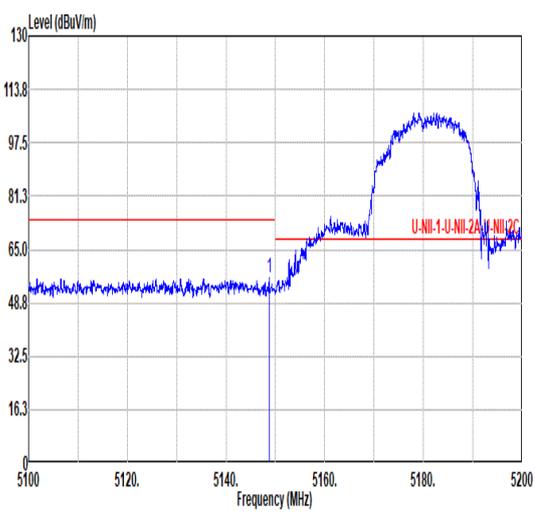
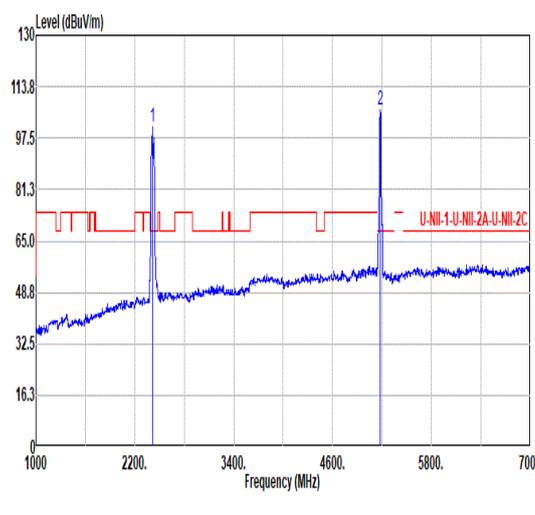
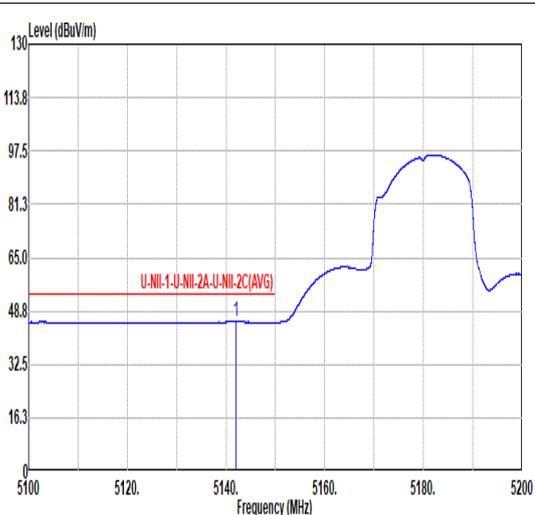
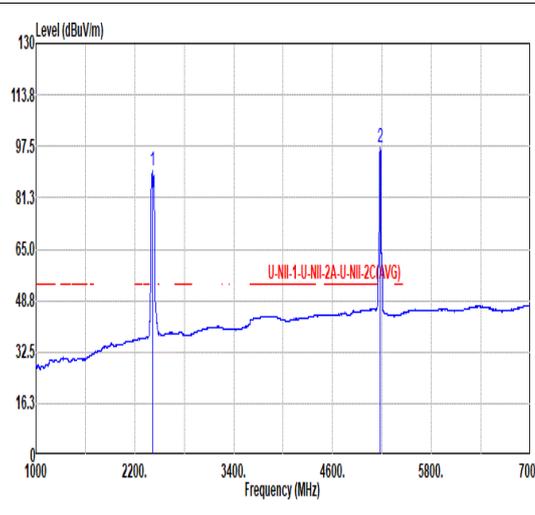


		76																																																																																																						
Mode		Co-location Band Edge																																																																																																						
		802.11be EHT20_CH36_5180MHz_Full																																																																																																						
ANT		CDD 6+17																																																																																																						
Pol.		Vertical					Fundamental																																																																																																	
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal between 5100 and 5200 MHz. A red horizontal line indicates the limit at approximately 65 dBuV/m. A peak is observed at 5180 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.75</td> <td>56.42</td> <td>74.00</td> <td>-17.58</td> <td>40.49</td> <td>34.10</td> <td>12.03</td> <td>30.20</td> <td>0.00</td> <td>300</td> <td>232 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.75	56.42	74.00	-17.58	40.49	34.10	12.03	30.20	0.00	300	232 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. Two peaks are marked with '1' and '2'. A red horizontal line indicates the limit at approximately 65 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2413.20</td> <td>100.83</td> <td>-----</td> <td>-----</td> <td>91.44</td> <td>32.23</td> <td>8.10</td> <td>30.94</td> <td>0.00</td> <td>300</td> <td>232 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>106.25</td> <td>-----</td> <td>-----</td> <td>90.16</td> <td>34.22</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>300</td> <td>232 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2413.20	100.83	-----	-----	91.44	32.23	8.10	30.94	0.00	300	232 Peak	2	5180.00	106.25	-----	-----	90.16	34.22	12.06	30.19	0.00	300	232 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5148.75	56.42	74.00	-17.58	40.49	34.10	12.03	30.20	0.00	300	232 PEAK																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2413.20	100.83	-----	-----	91.44	32.23	8.10	30.94	0.00	300	232 Peak																																																																																													
2	5180.00	106.25	-----	-----	90.16	34.22	12.06	30.19	0.00	300	232 PEAK																																																																																													
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal between 5100 and 5200 MHz. A red horizontal line indicates the limit at approximately 48 dBuV/m. The signal is labeled 'U-NII-1-U-NII-2A-U-NII-2C(AVG)'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.05</td> <td>45.48</td> <td>54.00</td> <td>-8.52</td> <td>29.53</td> <td>34.13</td> <td>12.03</td> <td>30.21</td> <td>0.00</td> <td>300</td> <td>232 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5142.05	45.48	54.00	-8.52	29.53	34.13	12.03	30.21	0.00	300	232 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. Two peaks are marked with '1' and '2'. A red horizontal line indicates the limit at approximately 48 dBuV/m. The signal is labeled 'U-NII-1-U-NII-2A-U-NII-2C(AVG)'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2413.20</td> <td>89.55</td> <td>-----</td> <td>-----</td> <td>80.16</td> <td>32.23</td> <td>8.10</td> <td>30.94</td> <td>0.00</td> <td>300</td> <td>232 Average</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>97.11</td> <td>-----</td> <td>-----</td> <td>81.02</td> <td>34.22</td> <td>12.06</td> <td>30.19</td> <td>0.00</td> <td>300</td> <td>232 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2413.20	89.55	-----	-----	80.16	32.23	8.10	30.94	0.00	300	232 Average	2	5180.00	97.11	-----	-----	81.02	34.22	12.06	30.19	0.00	300	232 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	5142.05	45.48	54.00	-8.52	29.53	34.13	12.03	30.21	0.00	300	232 AVERAGE																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2413.20	89.55	-----	-----	80.16	32.23	8.10	30.94	0.00	300	232 Average																																																																																													
2	5180.00	97.11	-----	-----	81.02	34.22	12.06	30.19	0.00	300	232 AVERAGE																																																																																													

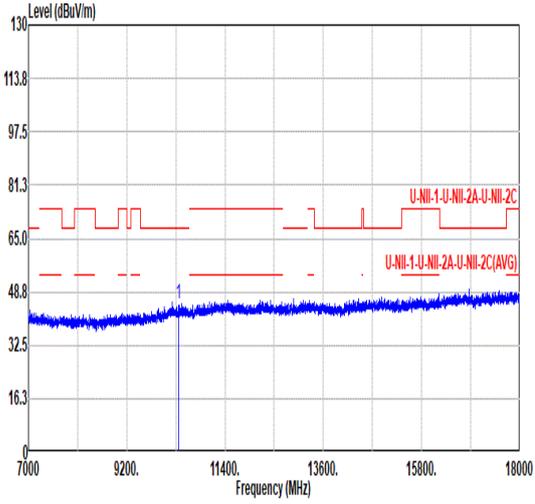
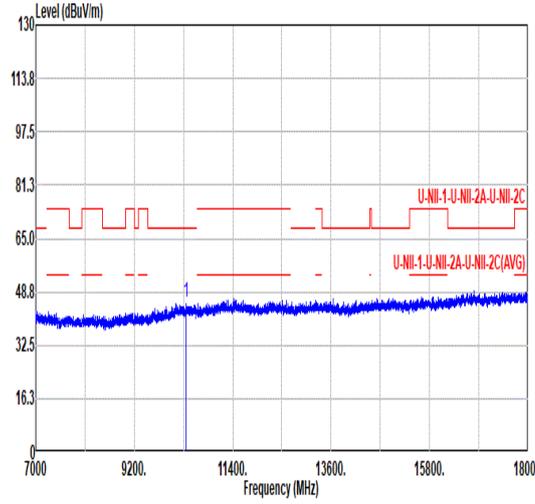


Mode	76																																																																																							
	Co-location Harmonic																																																																																							
	802.11be EHT20_CH36_5180MHz_Full																																																																																							
ANT	CDD 6+17																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.00</td> <td>68.20</td> <td>-23.20</td> <td>55.45</td> <td>37.46</td> <td>17.54</td> <td>65.45</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	45.00	68.20	-23.20	55.45	37.46	17.54	65.45	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.44</td> <td>68.20</td> <td>-22.76</td> <td>55.89</td> <td>37.46</td> <td>17.54</td> <td>65.45</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	45.44	68.20	-22.76	55.89	37.46	17.54	65.45	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10360.00	45.00	68.20	-23.20	55.45	37.46	17.54	65.45	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10360.00	45.44	68.20	-22.76	55.89	37.46	17.54	65.45	0.00	---	---	PEAK																																																																													

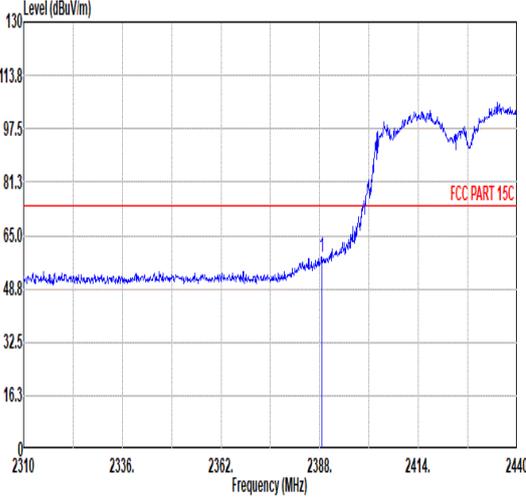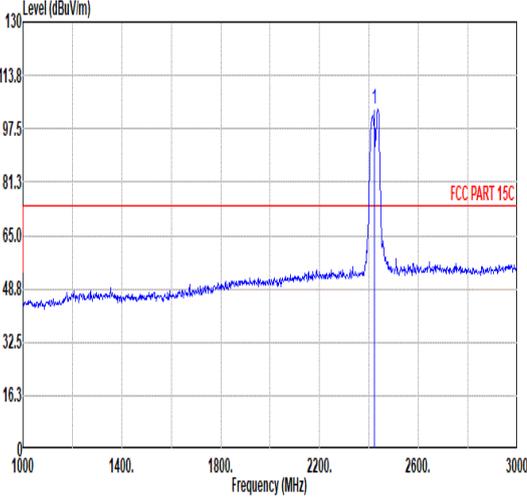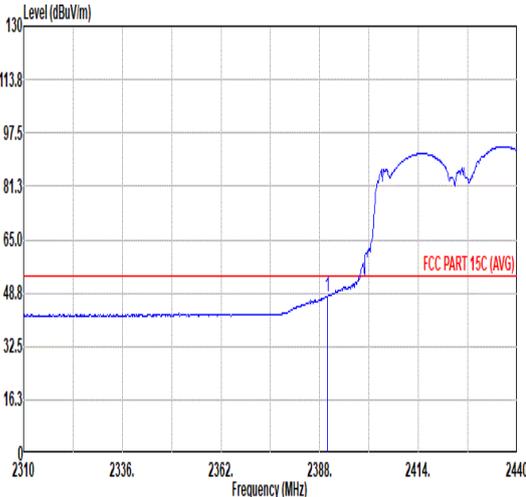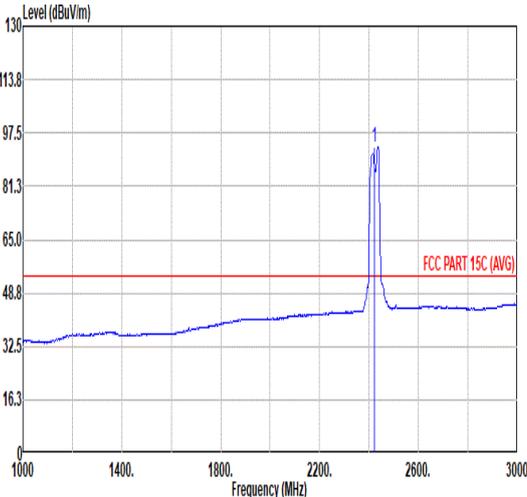

Mode	76																																																																																							
	Co-location Band Edge																																																																																							
	802.11be EHT40_CH03_2422MHz_Full																																																																																							
ANT	CDD 7+16																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>58.33</td> <td>74.00</td> <td>-15.67</td> <td>43.08</td> <td>32.13</td> <td>8.05</td> <td>30.93</td> <td>6.00</td> <td>306</td> <td>322 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.65	58.33	74.00	-15.67	43.08	32.13	8.05	30.93	6.00	306	322 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>103.46</td> <td>-----</td> <td>-----</td> <td>88.00</td> <td>32.27</td> <td>8.14</td> <td>30.95</td> <td>6.00</td> <td>306</td> <td>322 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2422.00	103.46	-----	-----	88.00	32.27	8.14	30.95	6.00	306	322 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2388.65	58.33	74.00	-15.67	43.08	32.13	8.05	30.93	6.00	306	322 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	103.46	-----	-----	88.00	32.27	8.14	30.95	6.00	306	322 PEAK																																																																													
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>47.59</td> <td>54.00</td> <td>-6.41</td> <td>32.33</td> <td>32.14</td> <td>8.05</td> <td>30.93</td> <td>6.00</td> <td>306</td> <td>322 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	47.59	54.00	-6.41	32.33	32.14	8.05	30.93	6.00	306	322 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>93.19</td> <td>-----</td> <td>-----</td> <td>77.73</td> <td>32.27</td> <td>8.14</td> <td>30.95</td> <td>6.00</td> <td>306</td> <td>322 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2422.00	93.19	-----	-----	77.73	32.27	8.14	30.95	6.00	306	322 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.95	47.59	54.00	-6.41	32.33	32.14	8.05	30.93	6.00	306	322 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	93.19	-----	-----	77.73	32.27	8.14	30.95	6.00	306	322 AVERAGE																																																																													

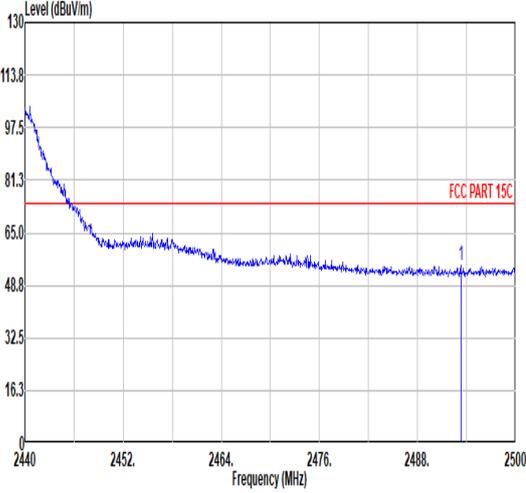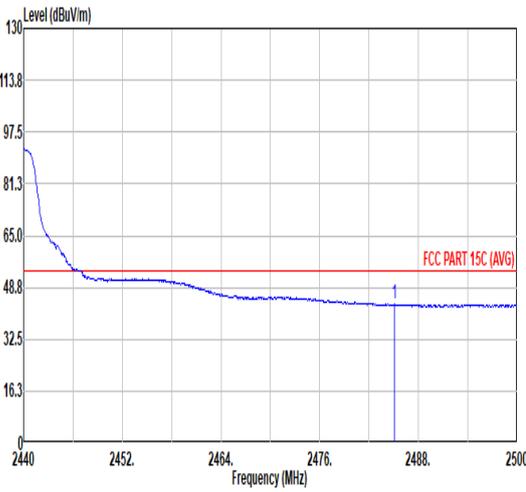

Mode	76																																													
	Co-location Band Edge																																													
	802.11be EHT40_CH03_2422MHz_Full																																													
ANT	CDD 7+16																																													
Pol.	Horizontal	Fundamental																																												
Peak	 <table border="1" data-bbox="268 1131 794 1249"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.28</td> <td>54.90</td> <td>74.00</td> <td>-19.10</td> <td>39.23</td> <td>32.39</td> <td>8.25</td> <td>30.97</td> <td>6.00</td> <td>306</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2493.28	54.90	74.00	-19.10	39.23	32.39	8.25	30.97	6.00	306	322	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2493.28	54.90	74.00	-19.10	39.23	32.39	8.25	30.97	6.00	306	322	PEAK																																		
Avg	 <table border="1" data-bbox="268 1803 794 1921"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.06</td> <td>43.64</td> <td>54.00</td> <td>-10.36</td> <td>28.00</td> <td>32.37</td> <td>8.24</td> <td>30.97</td> <td>6.00</td> <td>306</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.06	43.64	54.00	-10.36	28.00	32.37	8.24	30.97	6.00	306	322	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2485.06	43.64	54.00	-10.36	28.00	32.37	8.24	30.97	6.00	306	322	AVERAGE																																		



Mode	76																																																																																									
	Co-location Band Edge																																																																																									
	802.11be EHT40_CH03_2422MHz_Full																																																																																									
ANT	CDD 7+16																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>57.82</td> <td>74.00</td> <td>-16.18</td> <td>42.56</td> <td>32.14</td> <td>8.05</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.69	57.82	74.00	-16.18	42.56	32.14	8.05	30.93	6.00	100	159	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>104.21</td> <td>-----</td> <td>-----</td> <td>88.73</td> <td>32.28</td> <td>8.15</td> <td>30.95</td> <td>6.00</td> <td>100</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2422.00	104.21	-----	-----	88.73	32.28	8.15	30.95	6.00	100	159	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.69	57.82	74.00	-16.18	42.56	32.14	8.05	30.93	6.00	100	159	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2422.00	104.21	-----	-----	88.73	32.28	8.15	30.95	6.00	100	159	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.13</td> <td>45.79</td> <td>54.00</td> <td>-8.21</td> <td>30.54</td> <td>32.13</td> <td>8.05</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.13	45.79	54.00	-8.21	30.54	32.13	8.05	30.93	6.00	100	159	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>93.42</td> <td>-----</td> <td>-----</td> <td>77.94</td> <td>32.28</td> <td>8.15</td> <td>30.95</td> <td>6.00</td> <td>100</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2422.00	93.42	-----	-----	77.94	32.28	8.15	30.95	6.00	100	159	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2388.13	45.79	54.00	-8.21	30.54	32.13	8.05	30.93	6.00	100	159	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2422.00	93.42	-----	-----	77.94	32.28	8.15	30.95	6.00	100	159	AVERAGE																																																																														



Mode	76																																												
	Co-location Band Edge																																												
	802.11be EHT40_CH03_2422MHz_Full																																												
ANT	CDD 7+16																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.92</td> <td>56.05</td> <td>74.00</td> <td>-17.95</td> <td>40.42</td> <td>32.37</td> <td>8.23</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>159 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.92	56.05	74.00	-17.95	40.42	32.37	8.23	30.97	6.00	100	159 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.92	56.05	74.00	-17.95	40.42	32.37	8.23	30.97	6.00	100	159 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.86</td> <td>44.11</td> <td>54.00</td> <td>-9.89</td> <td>28.48</td> <td>32.37</td> <td>8.23</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>159 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.86	44.11	54.00	-9.89	28.48	32.37	8.23	30.97	6.00	100	159 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.86	44.11	54.00	-9.89	28.48	32.37	8.23	30.97	6.00	100	159 AVERAGE																																		



Mode	76																																																																																																																	
	Co-location Harmonic																																																																																																																	
	802.11be EHT40_CH03_2422MHz_Full																																																																																																																	
ANT	CDD 7+16																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.00</td> <td>41.52</td> <td>74.00</td> <td>-32.48</td> <td>61.63</td> <td>34.19</td> <td>11.62</td> <td>65.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5188.00</td> <td>65.18</td> <td>74.00</td> <td>-8.82</td> <td>84.73</td> <td>34.25</td> <td>12.06</td> <td>65.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	41.52	74.00	-32.48	61.63	34.19	11.62	65.92	0.00	---	---	PEAK	2	5188.00	65.18	74.00	-8.82	84.73	34.25	12.06	65.86	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.00</td> <td>41.49</td> <td>74.00</td> <td>-32.51</td> <td>61.60</td> <td>34.19</td> <td>11.62</td> <td>65.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5187.20</td> <td>64.89</td> <td>74.00</td> <td>-9.11</td> <td>84.44</td> <td>34.25</td> <td>12.06</td> <td>65.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	41.49	74.00	-32.51	61.60	34.19	11.62	65.92	0.00	---	---	PEAK	2	5187.20	64.89	74.00	-9.11	84.44	34.25	12.06	65.86	0.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	4844.00	41.52	74.00	-32.48	61.63	34.19	11.62	65.92	0.00	---	---	PEAK																																																																																																						
2	5188.00	65.18	74.00	-8.82	84.73	34.25	12.06	65.86	0.00	---	---	Peak																																																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	4844.00	41.49	74.00	-32.51	61.60	34.19	11.62	65.92	0.00	---	---	PEAK																																																																																																						
2	5187.20	64.89	74.00	-9.11	84.44	34.25	12.06	65.86	0.00	---	---	Peak																																																																																																						




### Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.97	-	-	10Hz
802.11be EHT20	100	-	-	10Hz
802.11be EHT40	100	-	-	10Hz
802.11be EHT80	100	-	-	10Hz
802.11be EHT160	100	-	-	10Hz
802.11be EHT20 RU26	100	-	-	10Hz
802.11be EHT20 RU52	100	-	-	10Hz
802.11be EHT20 RU106	100	-	-	10Hz
802.11be EHT20- Small RU52+26	100	-	-	10Hz
802.11be EHT20- Small RU106+26	100	-	-	10Hz
802.11be EHT80- Large RU484+24	98.08	-	-	10Hz
802.11be EHT160- Large RU996+484	98.16	-	-	10Hz
802.11be EHT160- Large RU996+996+996	98.16	-	-	10Hz
802.11be EHT80 Puncturing 20M	100	-	-	10Hz
802.11be EHT160 Puncturing 20M	100	-	-	10Hz
802.11be EHT160 Puncturing 40M	100	-	-	10Hz




802.11a

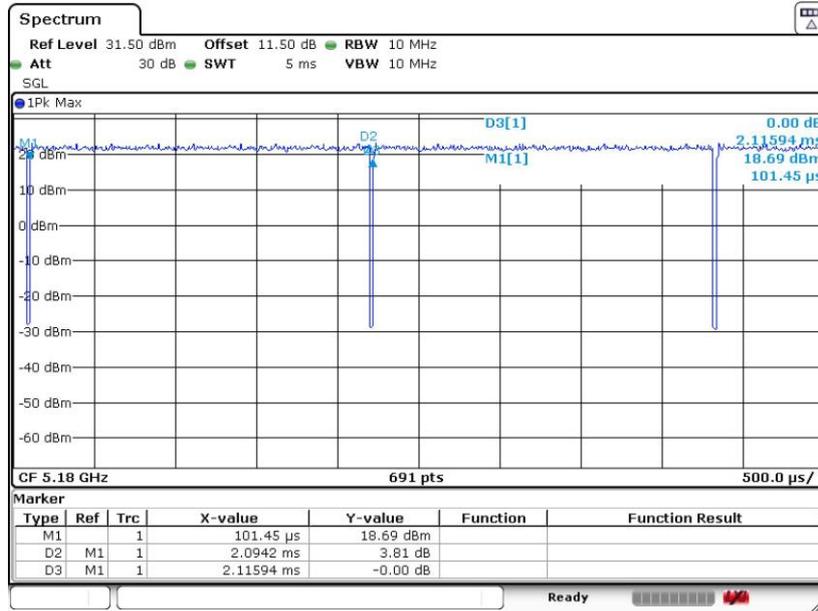

Date: 20.SEP.2024 02:21:27


802.11be EHT20

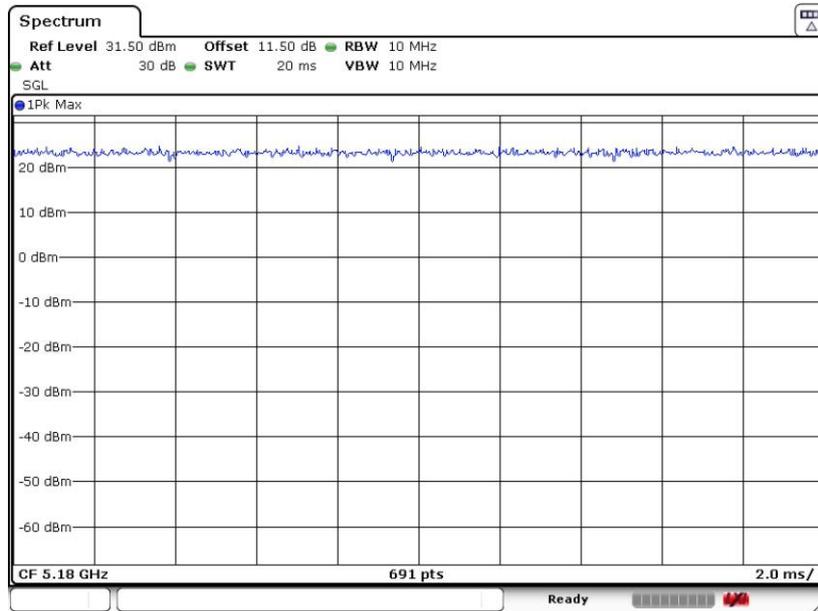

Date: 20.SEP.2024 04:00:46




802.11be EHT40

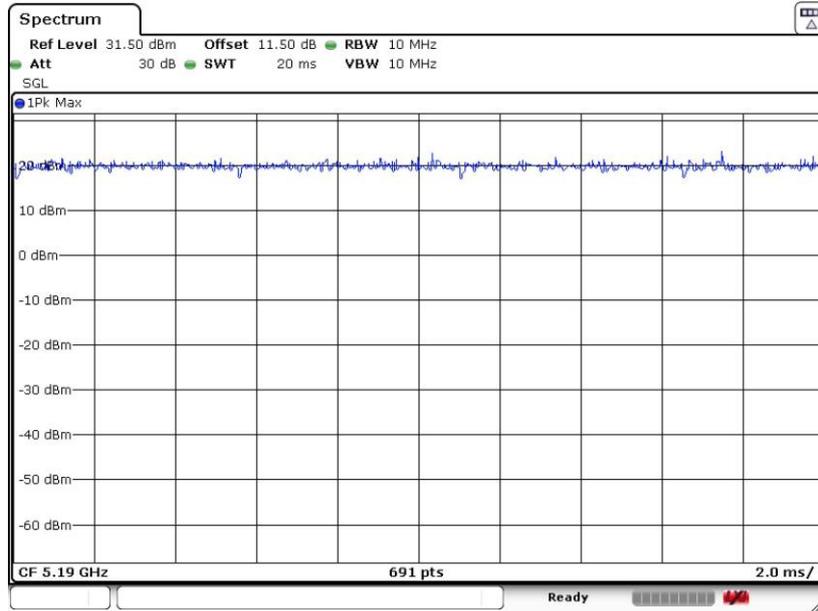

Date: 20.SEP.2024 04:01:37


802.11be EHT80

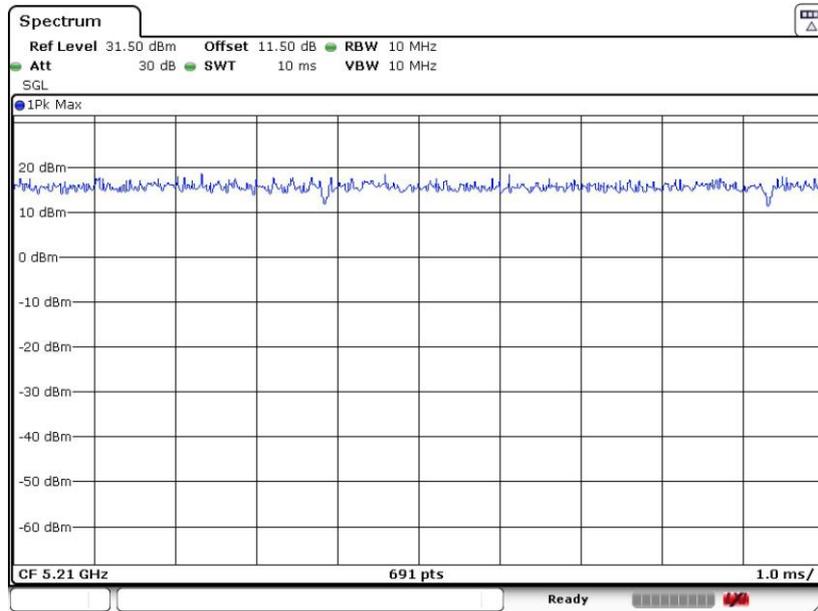

Date: 20.SEP.2024 04:02:30




802.11be EHT160

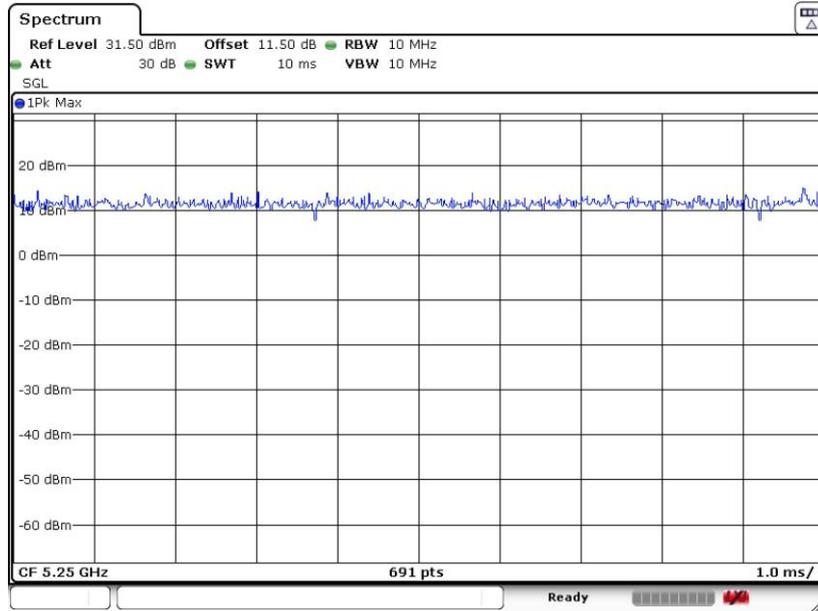

Date: 20.SEP.2024 03:59:26


802.11be EHT20 RU26

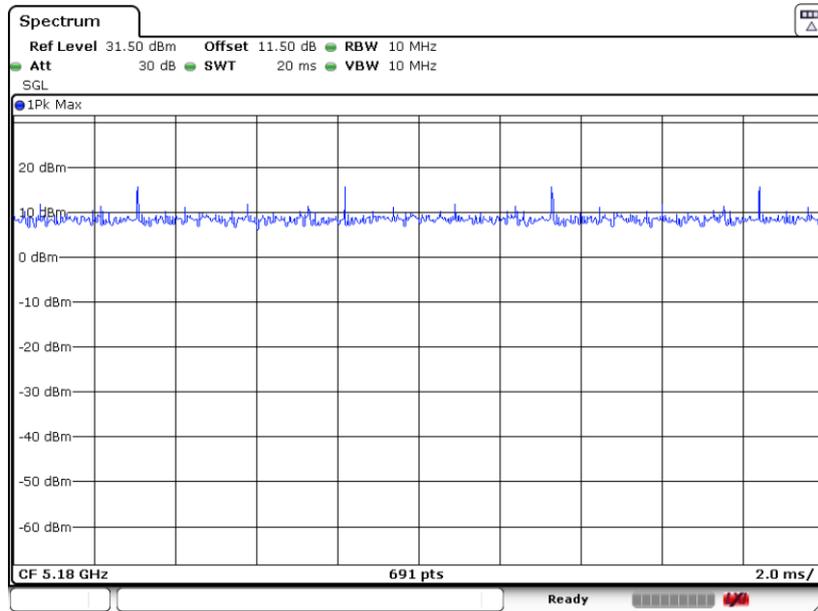

Date: 1.OCT.2024 14:31:10




802.11be EHT20 RU52

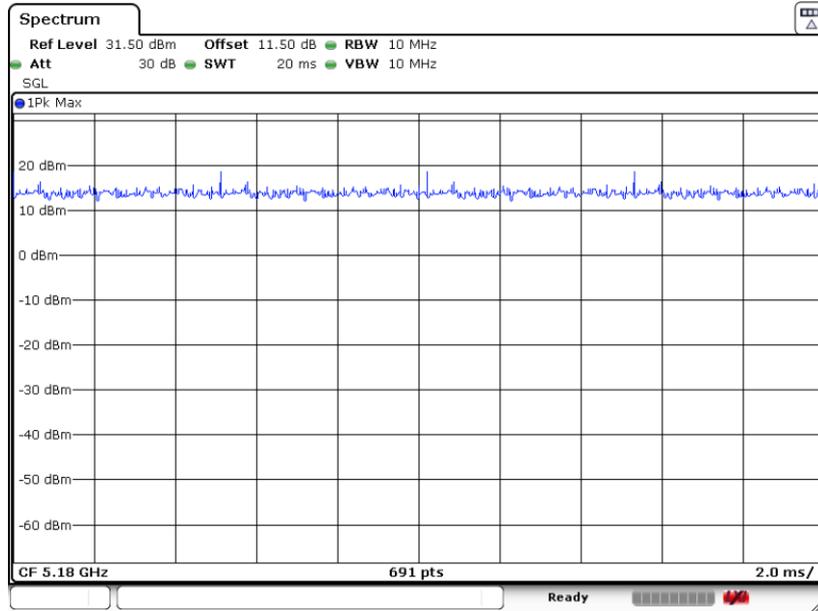

Date: 1.OCT.2024 14:32:16


802.11be EHT20 RU106

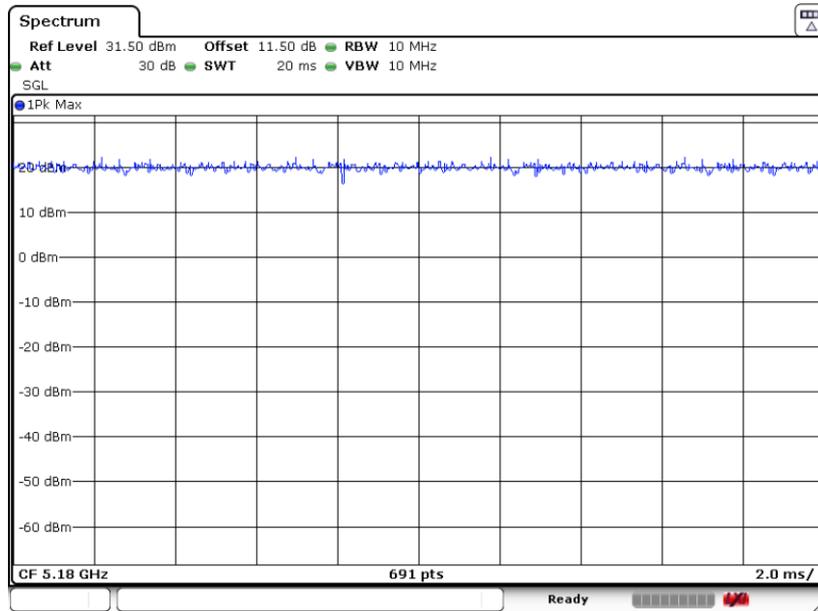

Date: 1.OCT.2024 14:33:35




802.11be EHT20-Small RU52+26

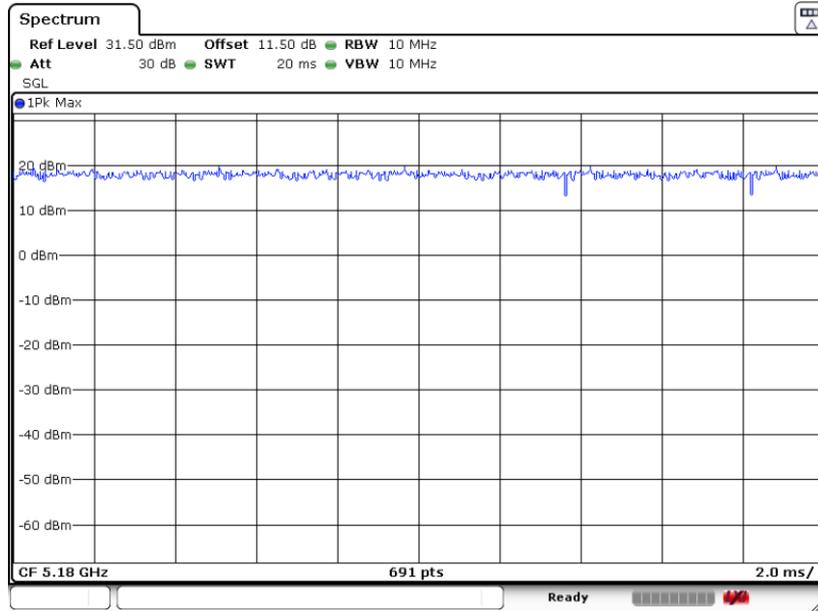

Date: 1.OCT.2024 14:34:21


802.11be EHT20-Small RU106+26

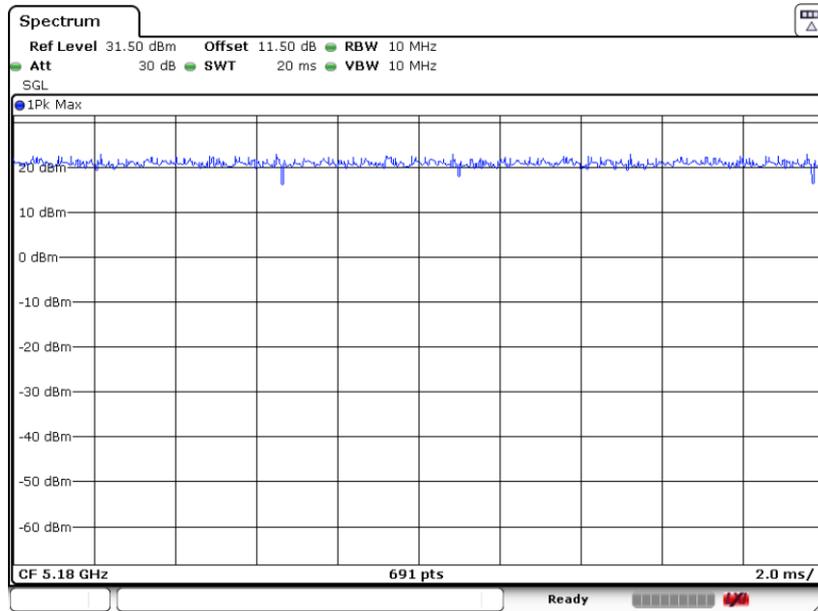

Date: 1.OCT.2024 14:35:12




802.11be EHT80-Large RU484+242

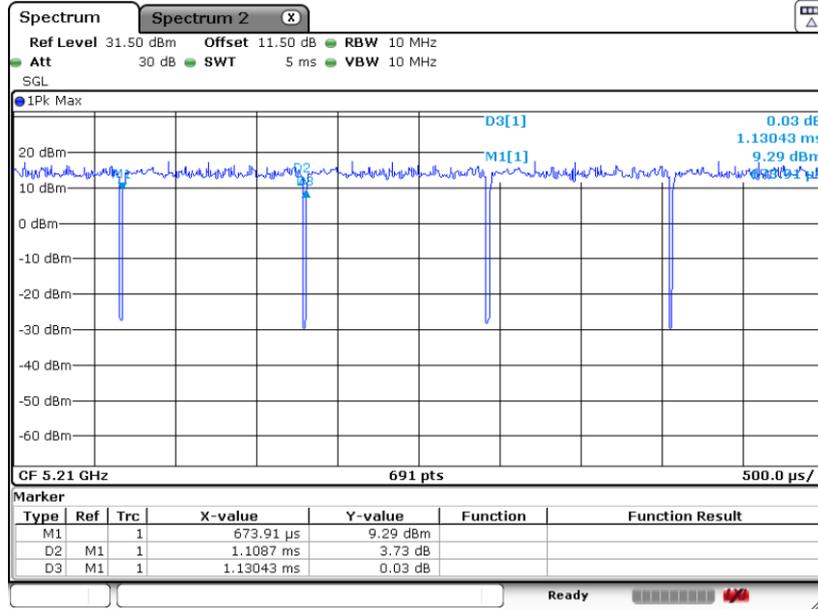

Date: 1.OCT.2024 14:39:55


802.11be EHT160-Large RU996+484

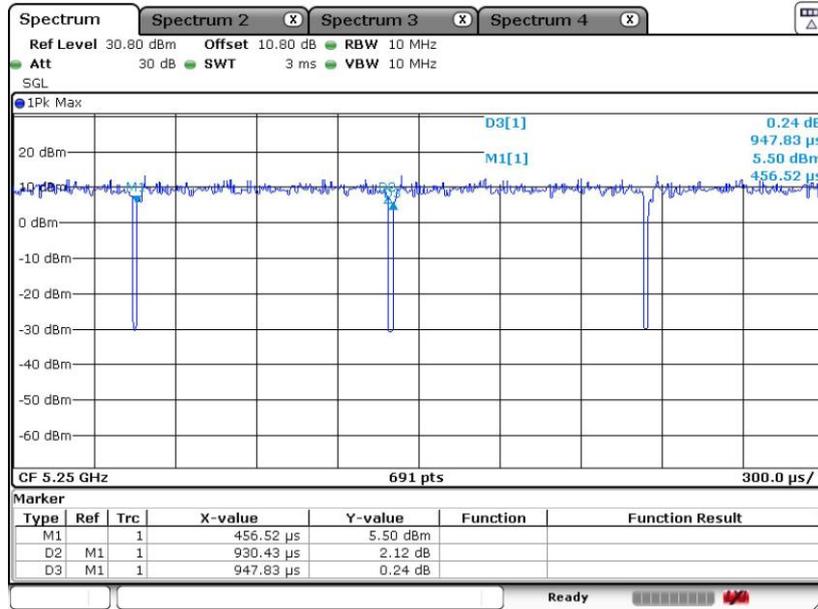

Date: 1.JAN.2003 19:49:25




802.11be EHT160-Large RU996 + 996

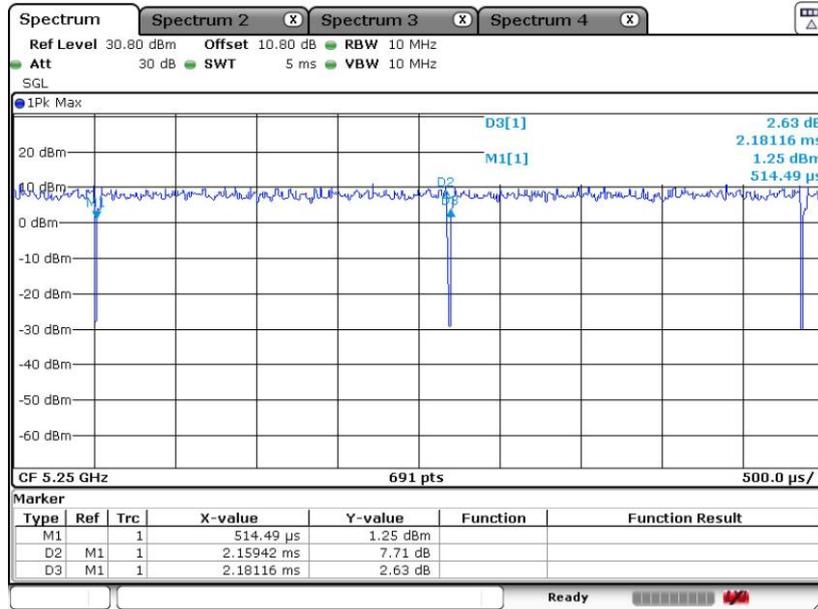

Date: 1.JAN.2003 19:45:07


802.11be EHT80-Puncturing 20M

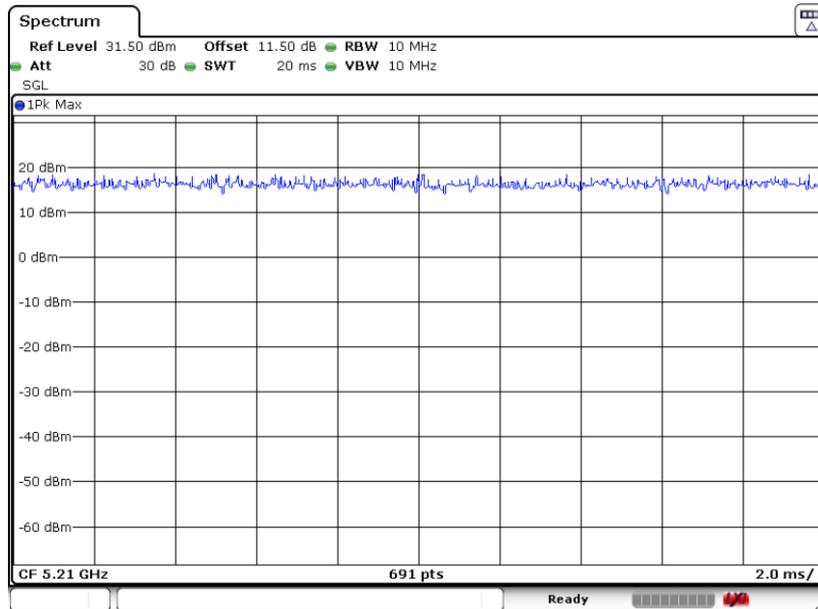

Date: 1.OCT.2024 14:37:52




### 802.11be EHT160-Puncturing 20M

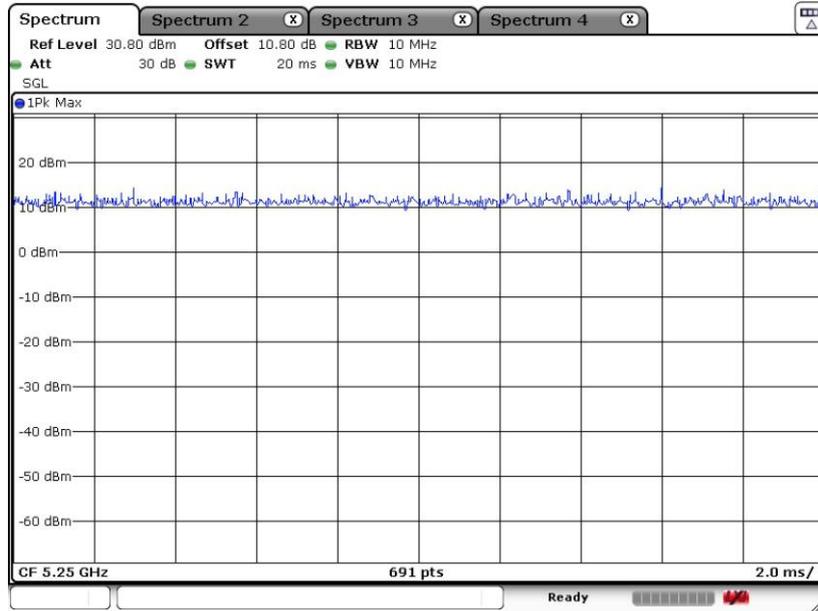

Date: 1.JAN.2003 19:56:53

### 802.11be EHT160-Puncturing 40M

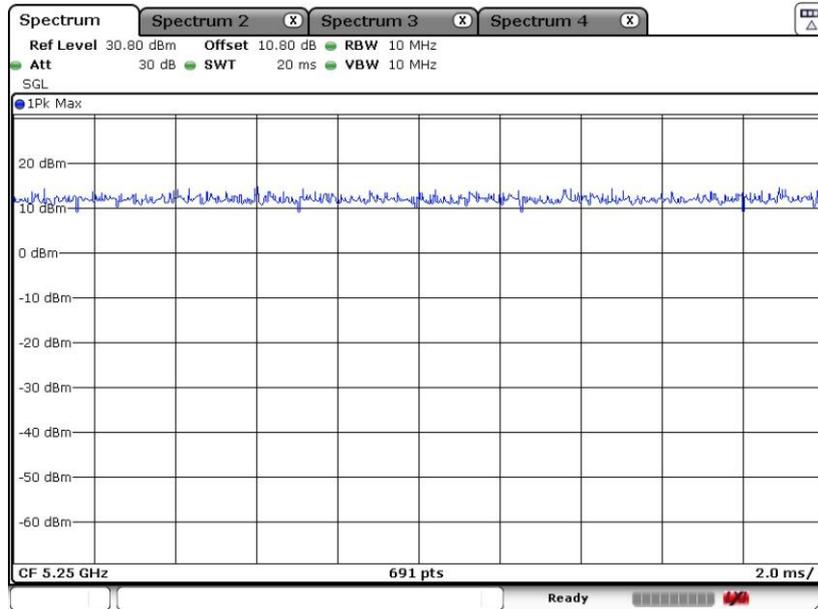

Date: 1.JAN.2003 19:58:09