

# TEST REPORT

**Reference No.**..... : WTS18S07118477-2W  
**FCC ID** ..... : 2AG32EG7035LM11  
**Applicant**..... : Baicells Technologies Co., Ltd.  
**Address**..... : 3F, Hui Yuan Development Building, No.1 Shangdi Information  
Industry Base, Haidian Dist., Beijing, China  
**Manufacturer** ..... : The same as above  
**Address**..... : The same as above  
**Product**..... : LTE Outdoor CPE  
**Model(s)** ..... : EG7035L-M11  
**Brand Name** ..... : BaiCells  
**Standards**..... : FCC CFR47 Part 15.247: 2017  
**Date of Receipt sample** .... : 2018-07-18  
**Date of Test** ..... : 2018-07-19 to 2018-07-31  
**Date of Issue**..... : 2018-08-03  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

**Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District,  
Shenzhen, Guangdong, China**

**Tel :+86-755-83551033**

**Fax:+86-755-83552400**

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Laboratories Introduction

**Waltek Services (Shenzhen) Co., Ltd** is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

**Test Facility:****A. Accreditations for Conformity Assessment (International)**

Country/Region	Accreditation Body	Scope	Note
USA	<b>A2LA</b> <b>(Certificate No.: 4243.01)</b>	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	<b>International Services</b>	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. IC Canada Registration No.: 7760A			

**B. TCBs and Notify Bodies Recognized Testing Laboratory.**

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 LABORATORIES INTRODUCTION.....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>4</b>
<b>4 REVISION HISTORY .....</b>	<b>5</b>
<b>5 GENERAL INFORMATION.....</b>	<b>6</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	6
5.2 DETAILS OF E.U.T. ....	6
5.3 CHANNEL LIST.....	6
5.4 TEST MODE .....	7
<b>6 TEST SUMMARY .....</b>	<b>8</b>
<b>7 EQUIPMENT USED DURING TEST .....</b>	<b>9</b>
7.1 EQUIPMENTS LIST .....	9
7.2 DESCRIPTION OF SUPPORT UNITS .....	10
7.3 MEASUREMENT UNCERTAINTY .....	10
7.4 TEST EQUIPMENT CALIBRATION .....	10
<b>8 CONDUCTED EMISSION .....</b>	<b>11</b>
8.1 E.U.T. OPERATION .....	11
8.2 EUT SETUP.....	11
8.3 MEASUREMENT DESCRIPTION .....	11
8.4 CONDUCTED EMISSION TEST RESULT .....	12
<b>9 RADIATED EMISSIONS.....</b>	<b>14</b>
9.1 EUT OPERATION.....	14
9.2 TEST SETUP .....	15
9.3 SPECTRUM ANALYZER SETUP .....	16
9.4 TEST PROCEDURE .....	17
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
9.6 SUMMARY OF TEST RESULTS .....	18
<b>10 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>28</b>
10.1 TEST PROCEDURE.....	28
10.2 TEST RESULT .....	29
<b>11 BAND EDGE MEASUREMENT .....</b>	<b>39</b>
11.1 TEST PROCEDURE .....	39
11.2 TEST RESULT .....	40
<b>12 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>43</b>
12.1 TEST PROCEDURE:.....	43
12.2 TEST RESULT: .....	43
<b>13 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>49</b>
13.1 TEST PROCEDURE:.....	49
13.2 TEST RESULT: .....	50
<b>14 POWER SPECTRAL DENSITY .....</b>	<b>56</b>
14.1 TEST PROCEDURE:.....	56
14.2 TEST RESULT: .....	56
<b>15 ANTENNA REQUIREMENT .....</b>	<b>62</b>
<b>16 RF EXPOSURE.....</b>	<b>63</b>
<b>17 PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>	<b>64</b>

#### 4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S07118 477-2W	2018-07-18	2018-07-19 to 2018-07- 31	2018-08-03	original	-	Valid

## 5 General Information

### 5.1 General Description of E.U.T.

Product: LTE Outdoor CPE  
 Model(s): EG7035L-M11  
 Model Description: N/A  
 Storage Location: Internal Storage  
 Note: N/A

### 5.2 Details of E.U.T.

Operation Frequency: LTE Band 43: 3652.5~3697.5MHz  
 WiFi 802.11b/g/n HT20: 2412~2462MHz  
 Type of Modulation: LTE: QPSK, 16QAM  
 WiFi: CCK, OFDM  
 Antenna installation: LTE: Internal antenna  
 WiFi: Internal antenna  
 Antenna Gain: LTE: 10dBi  
 WiFi: 0dBi  
 Ratings: DC 24V, 0.5A

### 5.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

## 5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

## 6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS



## 7 Equipment Used during Test

### 7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018-04-29	2019-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-09	2019-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-04-09	2019-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-04-09	2019-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-04-13	2019-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-09	2019-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-04-13	2019-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-12	2018-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

## 7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 7.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 <sup>-7</sup> Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

### 8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

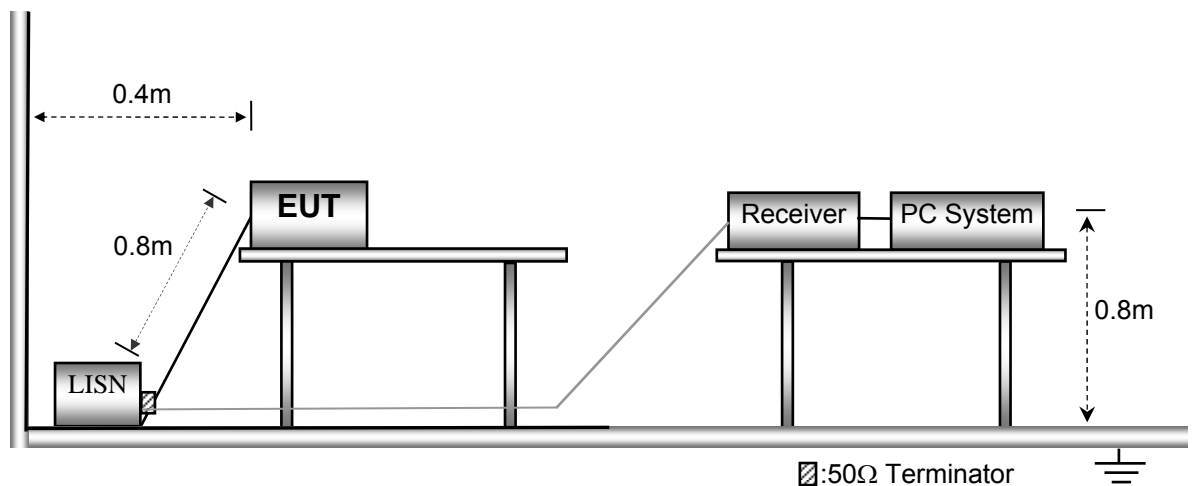

### 8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( 802.11b mode low channel )

Live line:

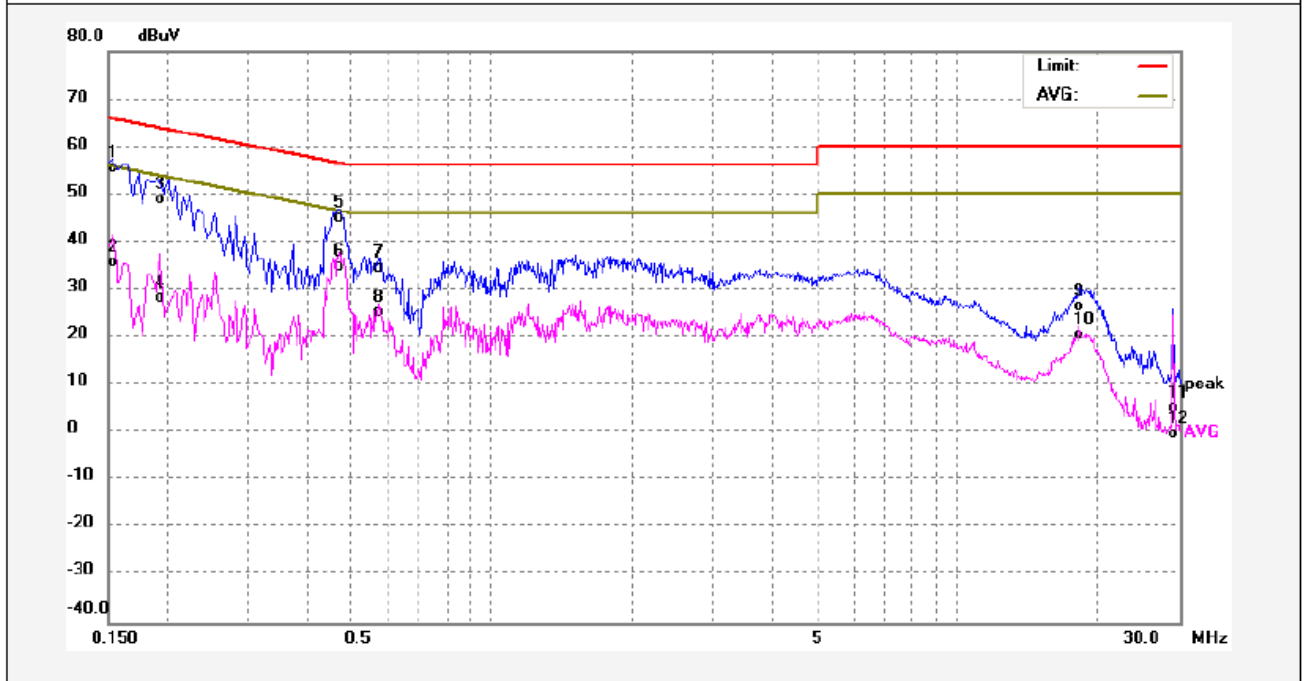

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	45.26	10.27	55.53	65.78	-10.25	QP	
2	0.1539	25.41	10.27	35.68	55.78	-20.10	AVG	
3	0.1940	38.53	10.32	48.85	63.86	-15.01	QP	
4	0.1940	17.98	10.32	28.30	53.86	-25.56	AVG	
5	0.4700	34.65	10.42	45.07	56.51	-11.44	QP	
6	0.4700	24.35	10.42	34.77	46.51	-11.74	AVG	
7	0.5740	24.00	10.47	34.47	56.00	-21.53	QP	
8	0.5740	14.93	10.47	25.40	46.00	-20.60	AVG	
9	18.3660	15.71	10.79	26.50	60.00	-33.50	QP	
10	18.3660	9.78	10.79	20.57	50.00	-29.43	AVG	
11	29.2100	-5.05	10.31	5.26	60.00	-54.74	QP	
12	29.2100	-10.54	10.31	-0.23	50.00	-50.23	AVG	

Neutral line:

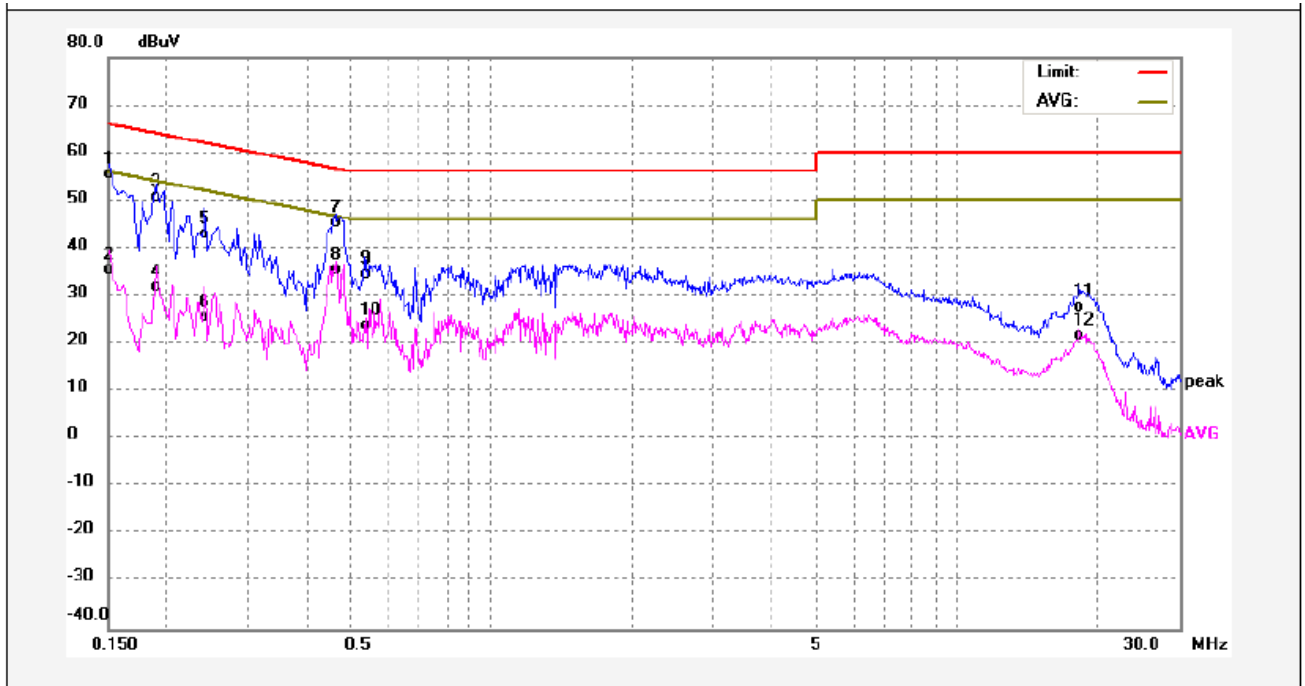

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	45.19	10.26	55.45	65.99	-10.54	QP	
2	0.1500	25.30	10.26	35.56	55.99	-20.43	AVG	
3	0.1900	40.34	10.31	50.65	64.03	-13.38	QP	
4	0.1900	21.56	10.31	31.87	54.03	-22.16	AVG	
5	0.2420	32.51	10.38	42.89	62.02	-19.13	QP	
6	0.2420	15.16	10.38	25.54	52.02	-26.48	AVG	
7	0.4620	34.87	10.42	45.29	56.66	-11.37	QP	
8	0.4620	25.04	10.42	35.46	46.66	-11.20	AVG	
9	0.5340	24.09	10.44	34.53	56.00	-21.47	QP	
10	0.5340	13.32	10.44	23.76	46.00	-22.24	AVG	
11	18.2460	16.71	10.80	27.51	60.00	-32.49	QP	
12	18.2460	10.89	10.80	21.69	50.00	-28.31	AVG	

## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

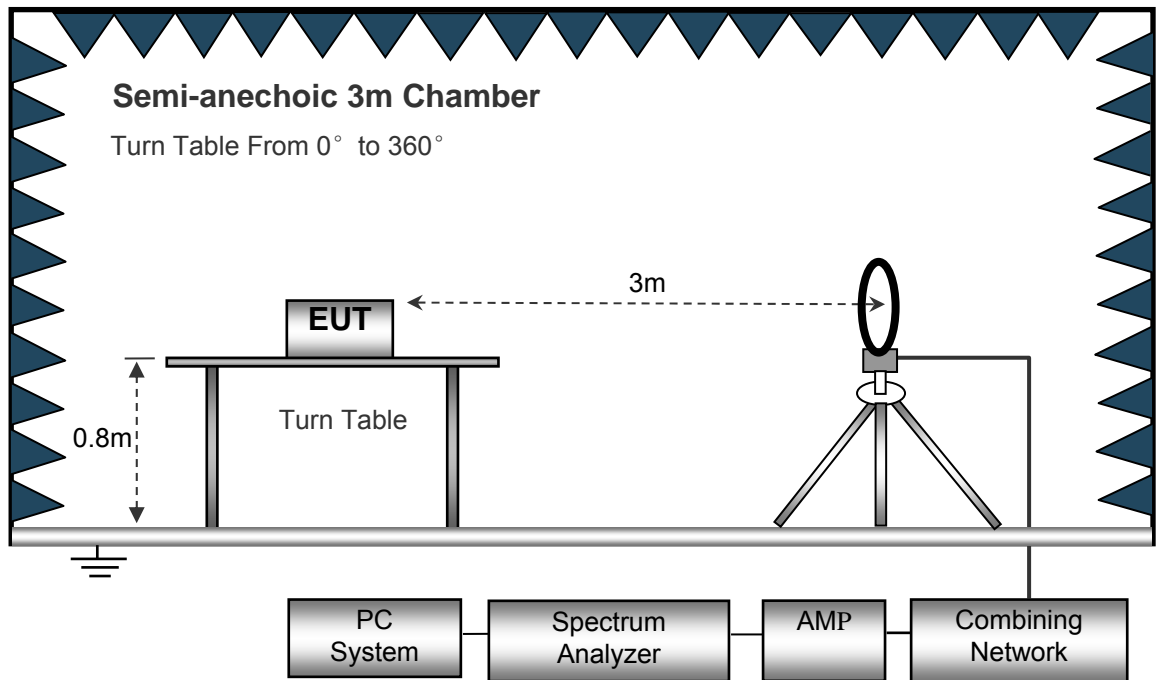

The test setup for emission measurement from 30 MHz to 1 GHz.

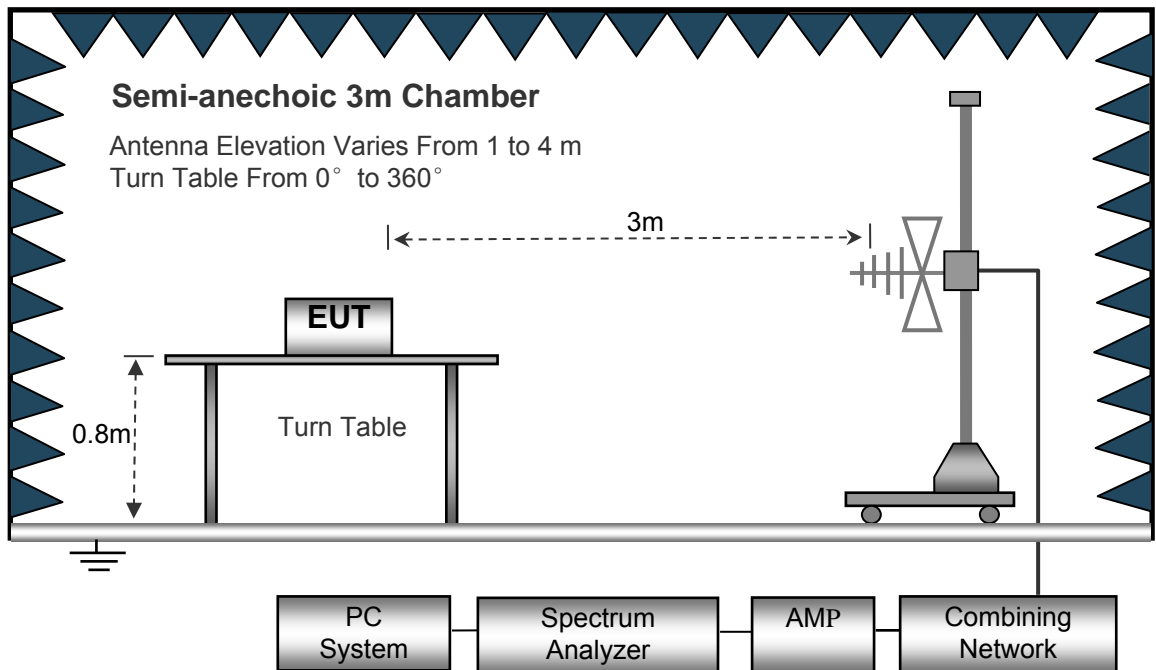

The test setup for emission measurement above 1 GHz.

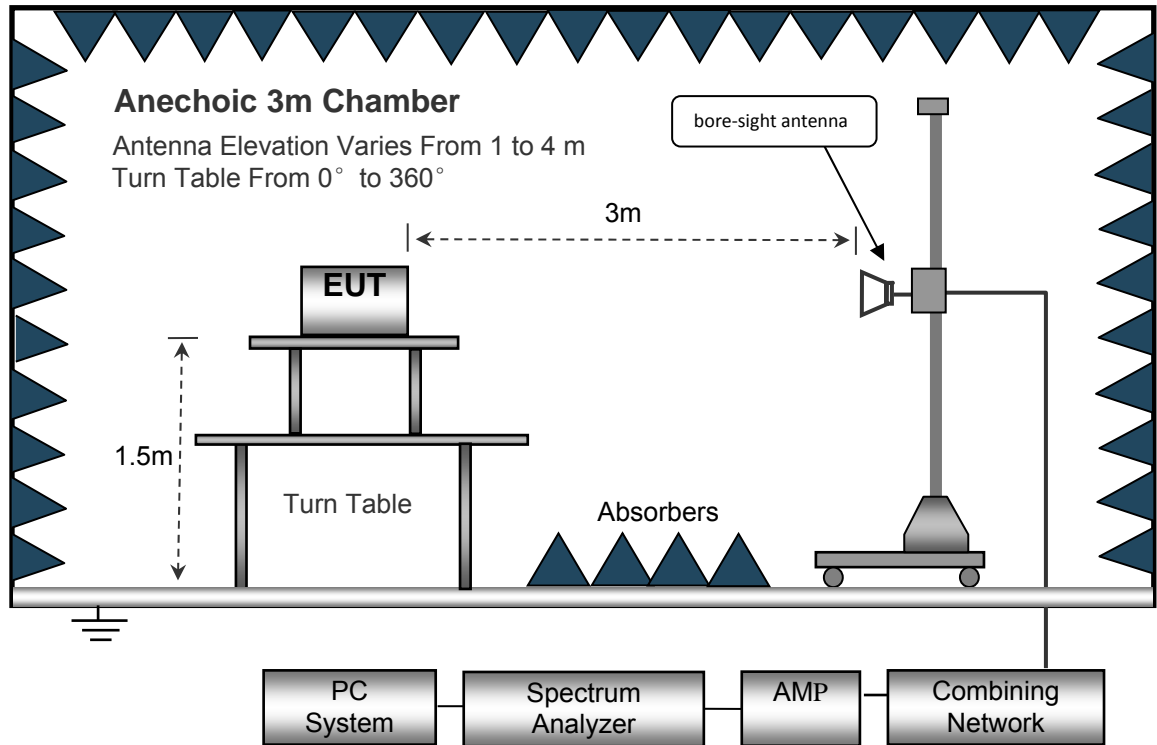

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz



## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.032	25.42	QP	21.84	40.00	7.26	29.54	-22.28
8.305	26.15	QP	21.02	40.00	7.17	29.54	-22.37
26.125	25.66	QP	20.55	40.00	6.21	29.54	-23.33
802.11g							
6.032	25.08	QP	21.84	40.00	6.92	29.54	-22.62
8.305	26.87	QP	21.02	40.00	7.89	29.54	-21.65
26.125	25.63	QP	20.55	40.00	6.18	29.54	-23.36
802.11n(HT20)							
6.032	25.46	QP	21.84	40.00	7.30	29.54	-22.24
8.305	26.16	QP	21.02	40.00	7.18	29.54	-22.36
26.125	27.10	QP	20.55	40.00	7.65	29.54	-21.89

**Test Frequency : 30MHz ~ 18GHz****802.11b:**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.49	42.55	QP	178.14	1.74	H	11.02	31.53	46.00	-14.47
223.49	36.39	QP	68.73	1.48	V	11.02	25.37	46.00	-20.63
4824.00	51.21	PK	295.79	1.46	V	1.08	50.13	74.00	-23.87
4824.00	46.03	Ave	295.79	1.46	V	1.08	44.95	54.00	-9.05
7236.00	40.34	PK	166.32	2.00	H	1.33	41.67	74.00	-32.33
7236.00	40.17	Ave	166.32	2.00	H	1.33	41.50	54.00	-12.50
2335.60	45.38	PK	118.77	1.43	V	13.11	32.27	74.00	-41.73
2335.60	39.42	Ave	118.77	1.43	V	13.11	26.31	54.00	-27.69
2379.24	44.81	PK	211.71	1.15	H	13.06	31.75	74.00	-42.25
2379.24	36.26	Ave	211.71	1.15	H	13.04	23.22	54.00	-30.78
2491.88	43.45	PK	175.21	1.79	V	13.00	30.45	74.00	-43.55
2491.88	36.85	Ave	175.21	1.79	V	13.00	23.85	54.00	-30.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.49	41.16	QP	74.21	1.22	H	11.02	30.14	46.00	-15.86
223.49	36.72	QP	124.45	1.12	V	11.02	25.70	46.00	-20.30
4874.00	51.33	PK	285.64	1.84	V	1.08	50.25	74.00	-23.75
4874.00	45.69	Ave	285.64	1.84	V	1.08	44.61	54.00	-9.39
7311.00	40.61	PK	98.83	1.97	H	2.21	42.82	74.00	-31.18
7311.00	38.90	Ave	98.83	1.97	H	2.21	41.11	54.00	-12.89
2312.68	46.50	PK	147.31	1.51	V	13.19	33.31	74.00	-40.69
2312.68	38.63	Ave	147.31	1.51	V	13.19	25.44	54.00	-28.56
2362.44	42.49	PK	247.84	1.48	H	13.14	29.35	74.00	-44.65
2362.44	36.24	Ave	247.84	1.48	H	13.14	23.10	54.00	-30.90
2496.85	42.04	PK	154.53	1.27	V	13.08	28.96	74.00	-45.04
2496.85	38.80	Ave	154.53	1.27	V	13.08	25.72	54.00	-28.28

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.49	42.10	QP	33.42	1.63	H	11.02	31.08	46.00	-14.92
223.49	36.28	QP	47.53	1.32	V	11.02	25.26	46.00	-20.74
4924.00	52.82	PK	195.62	1.30	V	1.08	51.74	74.00	-22.26
4924.00	46.71	Ave	195.62	1.30	V	1.08	45.63	54.00	-8.37
7386.00	40.67	PK	244.25	1.33	H	2.84	43.51	74.00	-30.49
7386.00	37.54	Ave	244.25	1.33	H	2.84	40.38	54.00	-13.62
2341.15	46.45	PK	83.21	1.21	V	13.11	33.34	74.00	-40.66
2341.15	39.03	Ave	83.21	1.21	V	13.11	25.92	54.00	-28.08
2387.75	43.08	PK	308.16	1.27	H	13.06	30.02	74.00	-43.98
2387.75	37.77	Ave	308.16	1.27	H	13.04	24.73	54.00	-29.27
2497.24	44.34	PK	161.49	1.67	V	13.00	31.34	74.00	-42.66
2497.24	38.38	Ave	161.49	1.67	V	13.00	25.38	54.00	-28.62

**802.11g:**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
223.49	42.05	QP	206.72	1.84	H	11.02	31.03	46.00	-14.97
223.49	35.97	QP	49.64	1.98	V	11.02	24.95	46.00	-21.05
4824.00	52.71	PK	165.35	1.88	V	1.08	51.63	74.00	-22.37
4824.00	45.63	Ave	165.35	1.88	V	1.08	44.55	54.00	-9.45
7236.00	40.99	PK	264.56	1.62	H	1.33	42.32	74.00	-31.68
7236.00	36.80	Ave	264.56	1.62	H	1.33	38.13	54.00	-15.87
2325.37	46.93	PK	26.61	1.22	V	13.11	33.82	74.00	-40.18
2325.37	37.61	Ave	26.61	1.22	V	13.11	24.50	54.00	-29.50
2352.29	42.19	PK	262.71	1.73	H	13.06	29.13	74.00	-44.87
2352.29	36.28	Ave	262.71	1.73	H	13.04	23.24	54.00	-30.76
2499.66	43.26	PK	69.94	1.96	V	13.00	30.26	74.00	-43.74
2499.66	36.85	Ave	69.94	1.96	V	13.00	23.85	54.00	-30.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.49	42.79	QP	42.31	1.49	H	11.02	31.77	46.00	-14.23
223.49	34.99	QP	267.77	1.77	V	11.02	23.97	46.00	-22.03
4874.00	52.04	PK	71.18	1.62	V	1.08	50.96	74.00	-23.04
4874.00	46.14	Ave	71.18	1.62	V	1.08	45.06	54.00	-8.94
7311.00	41.14	PK	126.62	1.17	H	2.21	43.35	74.00	-30.65
7311.00	37.34	Ave	126.62	1.17	H	2.21	39.55	54.00	-14.45
2338.53	45.12	PK	99.95	1.68	V	13.11	32.01	74.00	-41.99
2338.53	37.35	Ave	99.95	1.68	V	13.11	24.24	54.00	-29.76
2367.51	44.77	PK	126.64	1.95	H	13.06	31.71	74.00	-42.29
2367.51	37.33	Ave	126.64	1.95	H	13.04	24.29	54.00	-29.71
2491.80	44.43	PK	340.81	1.96	V	13.00	31.43	74.00	-42.57
2491.80	38.25	Ave	340.81	1.96	V	13.00	25.25	54.00	-28.75

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.49	44.20	QP	60.95	1.15	H	11.02	33.18	46.00	-12.82
223.49	34.51	QP	306.30	1.16	V	11.02	23.49	46.00	-22.51
4924.00	53.14	PK	57.65	1.20	V	1.08	52.06	74.00	-21.94
4924.00	44.99	Ave	57.65	1.20	V	1.08	43.91	54.00	-10.09
7386.00	42.01	PK	45.88	1.57	H	2.84	44.85	74.00	-29.15
7386.00	36.85	Ave	45.88	1.57	H	2.84	39.69	54.00	-14.31
2315.14	46.62	PK	265.55	1.75	V	13.11	33.51	74.00	-40.49
2315.14	38.85	Ave	265.55	1.75	V	13.11	25.74	54.00	-28.26
2382.45	43.05	PK	245.24	1.01	H	13.06	29.99	74.00	-44.01
2382.45	36.06	Ave	245.24	1.01	H	13.04	23.02	54.00	-30.98
2491.08	44.58	PK	12.17	1.19	V	13.00	31.58	74.00	-42.42
2491.08	38.60	Ave	12.17	1.19	V	13.00	25.60	54.00	-28.40



**802.11n (HT20):**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.49	44.83	QP	10.14	1.58	H	11.02	33.81	46.00	-12.19
223.49	34.92	QP	176.63	1.61	V	11.02	23.90	46.00	-22.10
4824.00	53.89	PK	5.66	1.40	V	1.08	52.81	74.00	-21.19
4824.00	45.77	Ave	5.66	1.40	V	1.08	44.69	54.00	-9.31
7236.00	43.35	PK	248.54	1.66	H	1.33	44.68	74.00	-29.32
7236.00	37.69	Ave	248.54	1.66	H	1.33	39.02	54.00	-14.98
2312.70	46.59	PK	75.60	1.58	V	13.11	33.48	74.00	-40.52
2312.70	38.65	Ave	75.60	1.58	V	13.11	25.54	54.00	-28.46
2383.14	42.92	PK	320.51	1.99	H	13.06	29.86	74.00	-44.14
2383.14	37.83	Ave	320.51	1.99	H	13.04	24.79	54.00	-29.21
2487.41	42.74	PK	348.92	1.77	V	13.00	29.74	74.00	-44.26
2487.41	38.18	Ave	348.92	1.77	V	13.00	25.18	54.00	-28.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Middle Channel 2437MHz									
223.49	45.57	QP	146.46	1.19	H	11.02	34.55	46.00	-11.45
223.49	36.14	QP	282.72	1.89	V	11.02	25.12	46.00	-20.88
4874.00	53.25	PK	115.71	1.15	V	1.08	52.17	74.00	-21.83
4874.00	46.50	Ave	115.71	1.15	V	1.08	45.42	54.00	-8.58
7311.00	44.32	PK	85.19	1.94	H	2.21	46.53	74.00	-27.47
7311.00	36.19	Ave	85.19	1.94	H	2.21	38.40	54.00	-15.60
2323.90	45.77	PK	78.65	1.21	V	13.11	32.66	74.00	-41.34
2323.90	38.67	Ave	78.65	1.21	V	13.11	25.56	54.00	-28.44
2368.91	44.05	PK	348.35	1.89	H	13.06	30.99	74.00	-43.01
2368.91	38.71	Ave	348.35	1.89	H	13.04	25.67	54.00	-28.33
2490.12	42.51	PK	10.01	1.01	V	13.00	29.51	74.00	-44.49
2490.12	38.60	Ave	10.01	1.01	V	13.00	25.60	54.00	-28.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: High Channel 2462MHz									
223.49	46.57	QP	152.04	1.91	H	11.02	35.55	46.00	-10.45
223.49	37.33	QP	313.27	1.08	V	11.02	26.31	46.00	-19.69
4924.00	53.74	PK	128.23	1.10	V	1.08	52.66	74.00	-21.34
4924.00	47.39	Ave	128.23	1.10	V	1.08	46.31	54.00	-7.69
7386.00	43.09	PK	303.98	1.61	H	2.84	45.93	74.00	-28.07
7386.00	37.64	Ave	303.98	1.61	H	2.84	40.48	54.00	-13.52
2312.36	46.98	PK	83.15	1.97	V	13.11	33.87	74.00	-40.13
2312.36	37.68	Ave	83.15	1.97	V	13.11	24.57	54.00	-29.43
2384.66	43.42	PK	7.19	1.28	H	13.06	30.36	74.00	-43.64
2384.66	38.32	Ave	7.19	1.28	H	13.04	25.28	54.00	-28.72
2484.28	44.20	PK	291.94	1.45	V	13.00	31.20	74.00	-42.80
2484.28	37.84	Ave	291.94	1.45	V	13.00	24.84	54.00	-29.16

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247  
Test Method: KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017  
Test Result: PASS  
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Blow 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 1GHz:

For WIFI mode

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

### 10.2 Test Result

#### 9KHz – 30MHz


802.11b

#### Low Channel

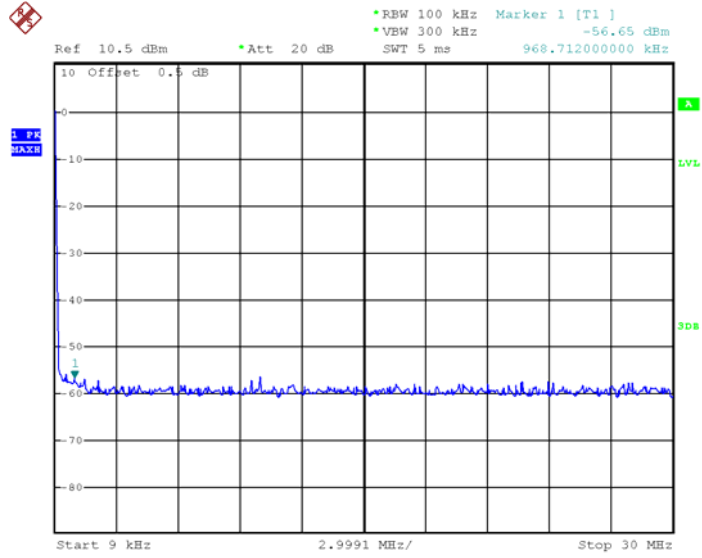


Date: 2.AUG.2018 05:01:16

#### Middle Channel

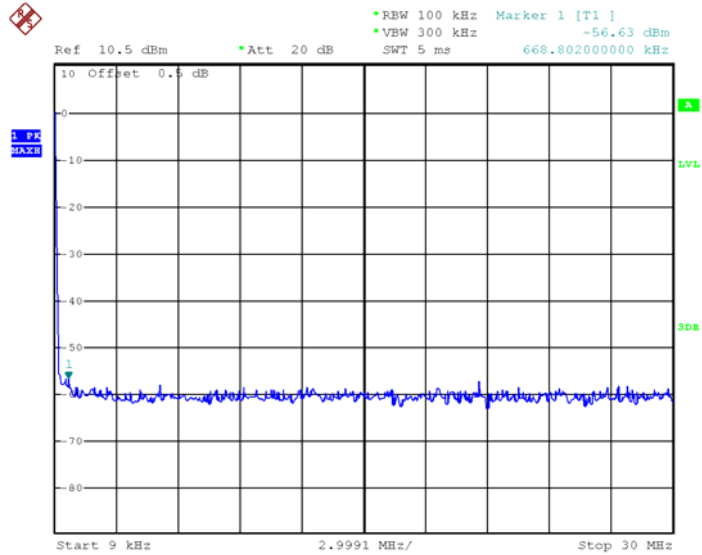

Date: 2.AUG.2018 05:01:24


### High Channel

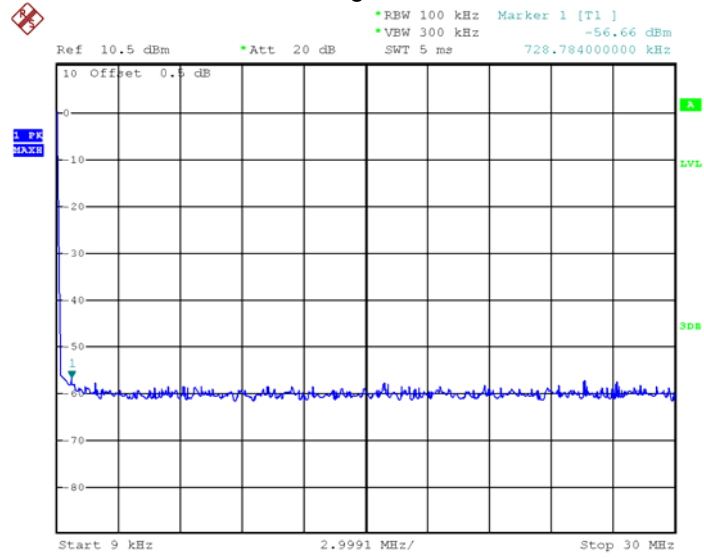


Date: 2.AUG.2018 05:01:38

### 802.11g


#### Low Channel

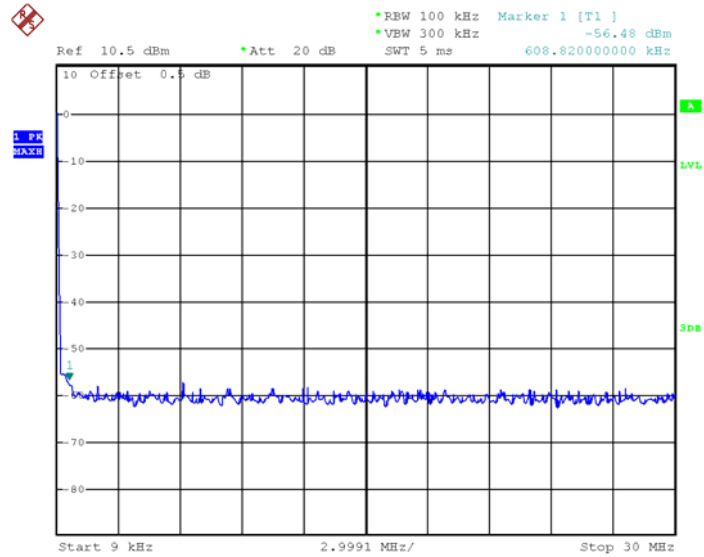

Date: 2.AUG.2018 05:01:46

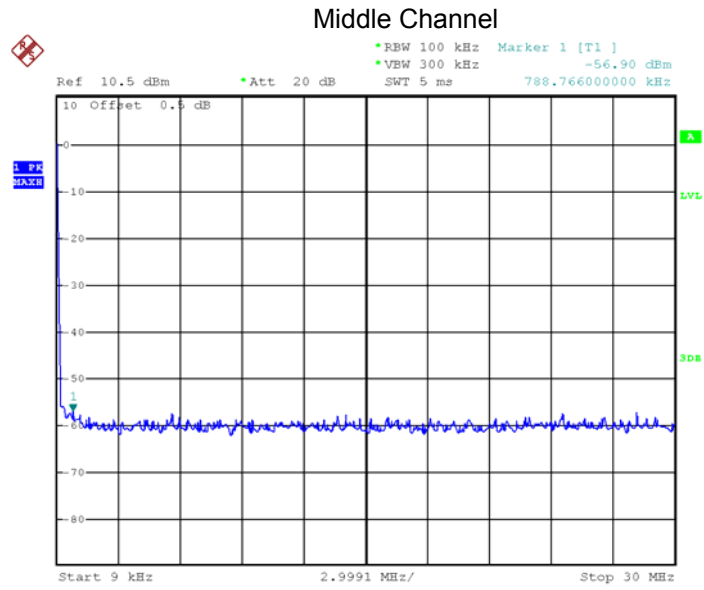


Date: 2.AUG.2018 05:01:58

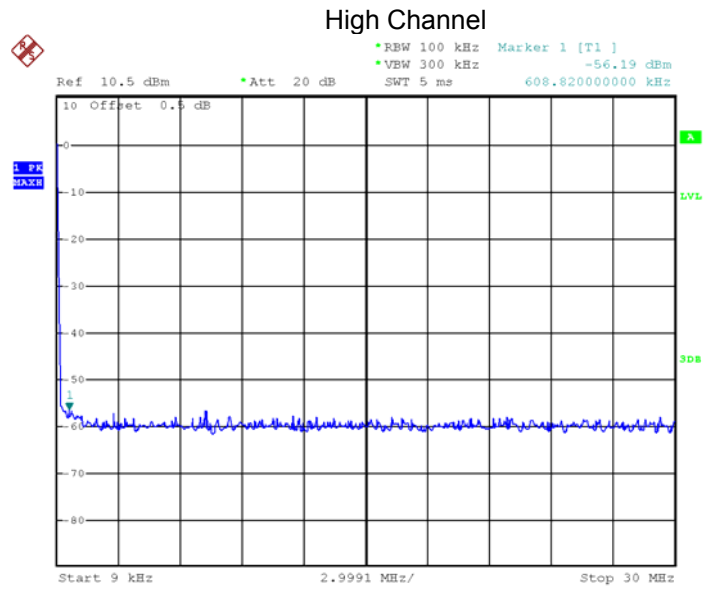

Date: 2.AUG.2018 05:02:13


### 802.11n HT20

#### Low Channel

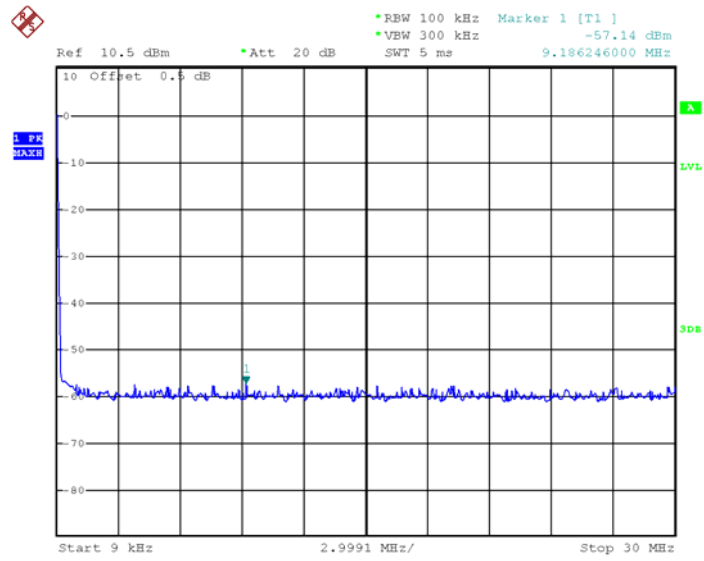


Date: 2.AUG.2018 05:02:43

#### Middle Channel

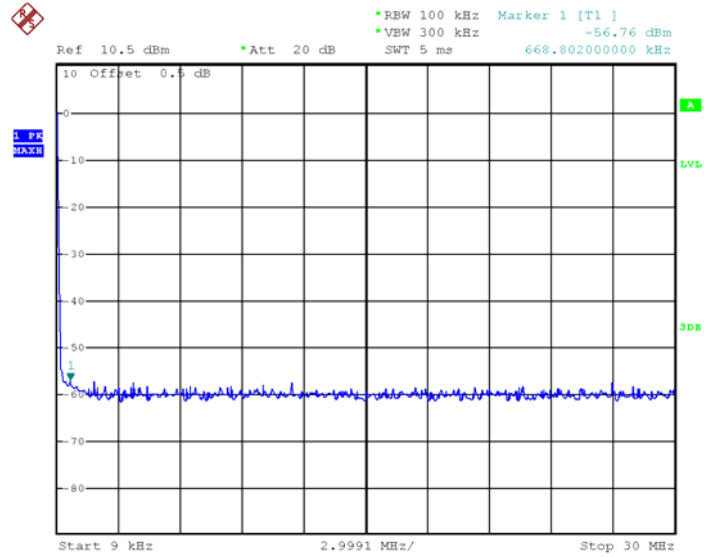

Date: 2.AUG.2018 05:02:57



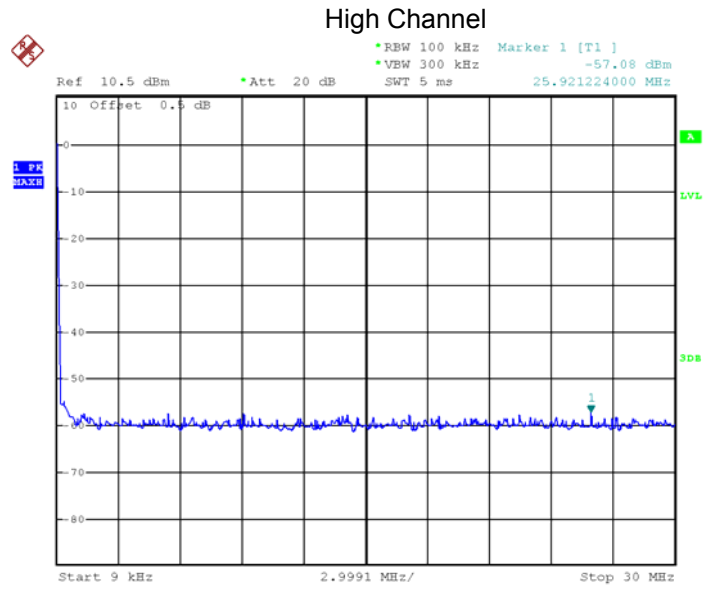

Date: 2.AUG.2018 05:03:14

Above 30MHz

802.11b

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



802.11g


Low Channel

Fundamental



Middle Channel

Fundamental

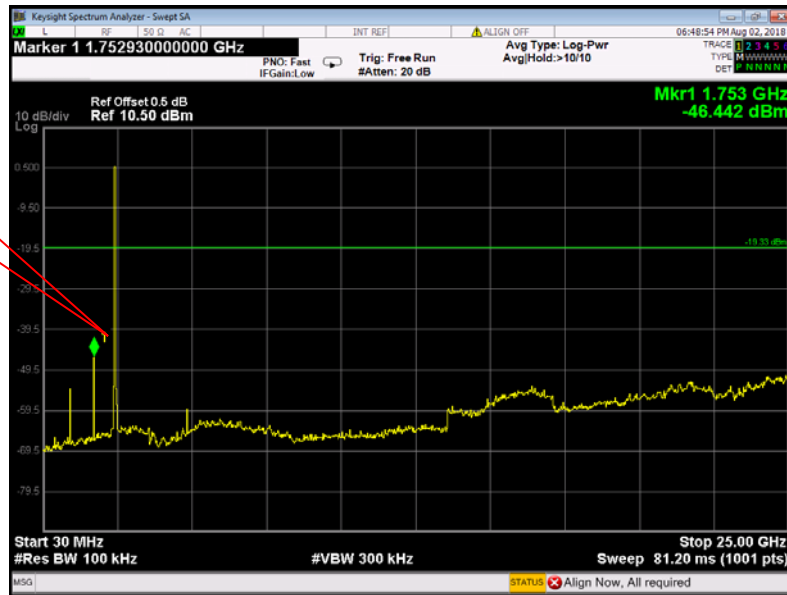

High Channel

Fundamental



802.11n HT20

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



## 11 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting


### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.2 Test Result


Test result plots shown as follows:

#### TX 11b: Band edge-left side

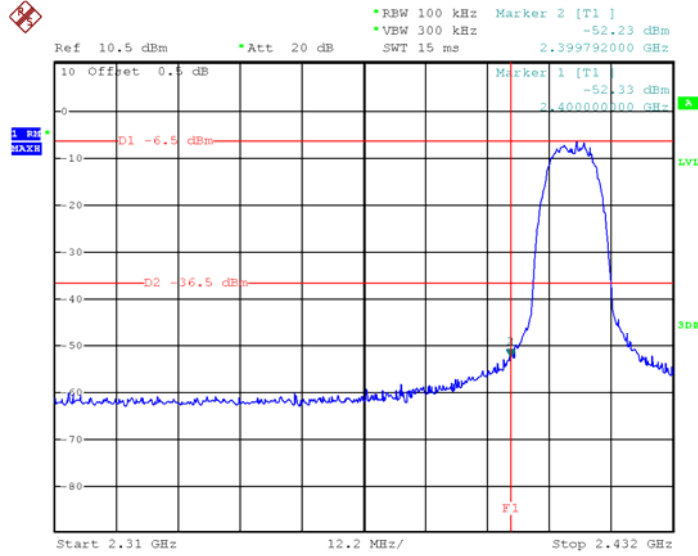

Date: 2.AUG.2018 02:48:24


#### TX 11b: Band edge-right side

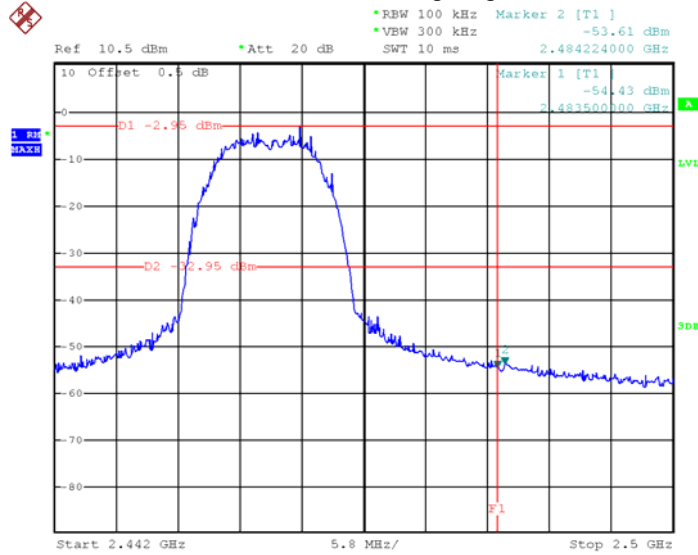

Date: 2.AUG.2018 03:59:26




### TX 11g: Band edge-left side

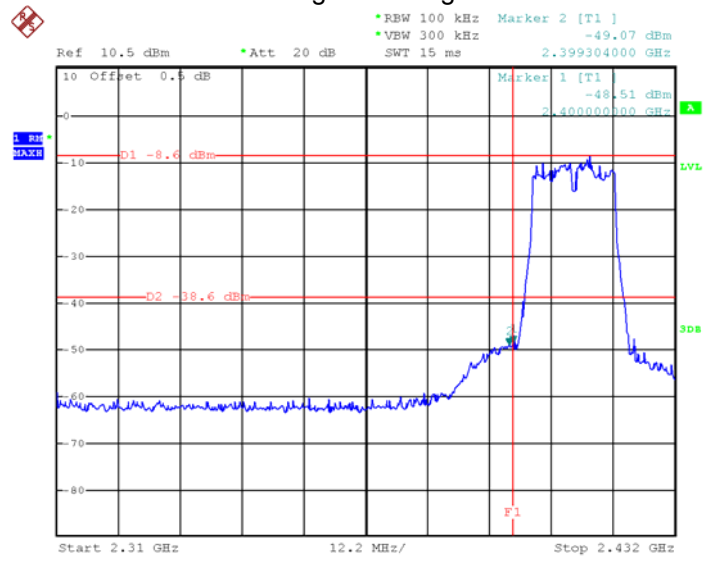


Date: 2.AUG.2018 04:19:43

### TX 11g: Band edge-right side

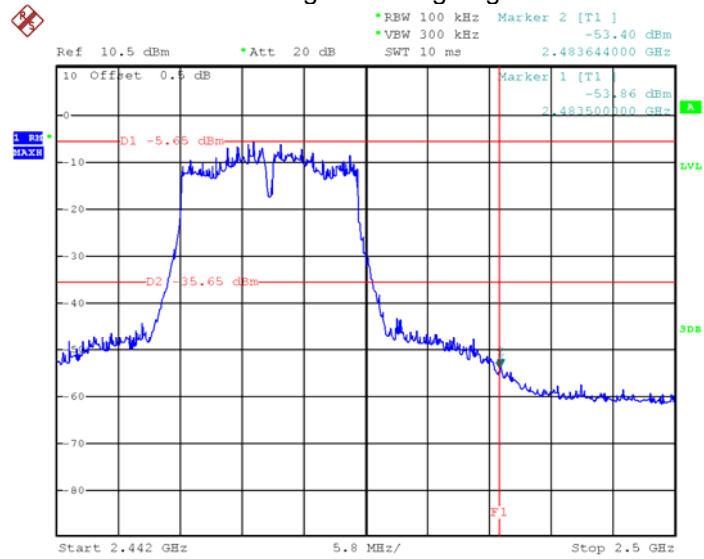


Date: 2.AUG.2018 04:31:01

### TX 11n HT20: Band edge-left side

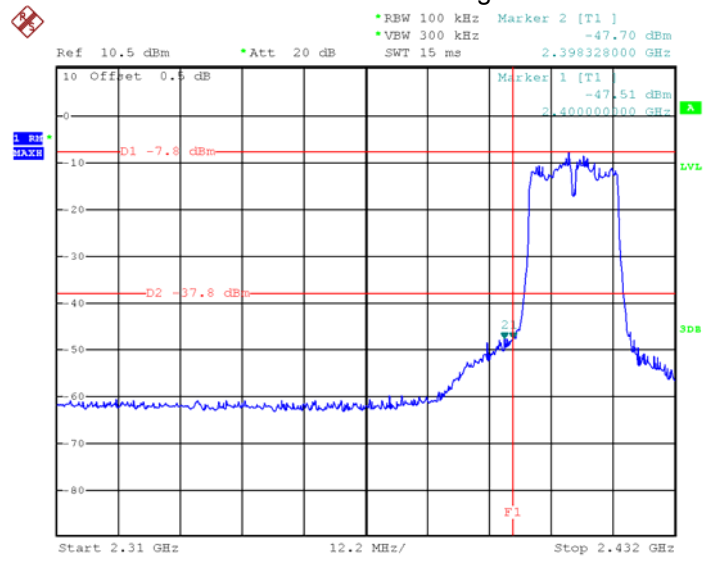

Date: 2.AUG.2018 04:40:16

### TX 11n HT20: Band edge-right side

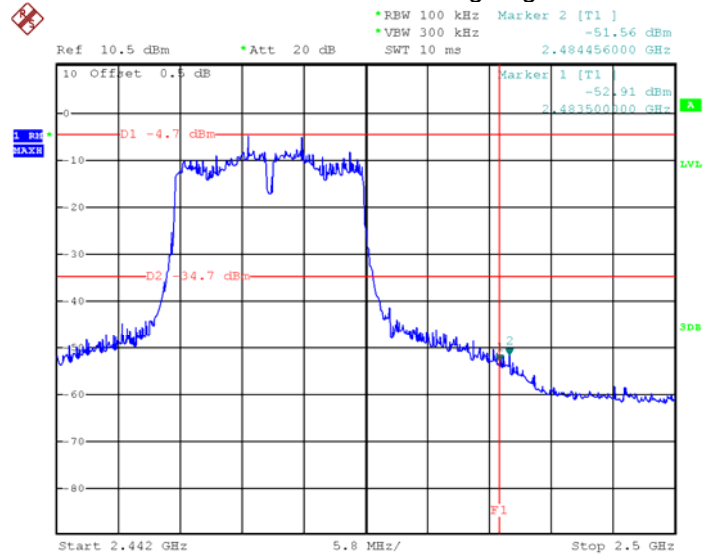

Date: 2.AUG.2018 04:49:43

## 12 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017


### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


### 12.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	10.112	12.160
	Channel 6	10.112	12.128
	Channel 11	10.112	12.128
TX 11g	Channel 1	16.500	16.550
	Channel 6	16.500	16.550
	Channel 11	16.450	16.500
TX 11n HT20	Channel 1	17.658	17.604
	Channel 6	17.650	17.604
	Channel 11	17.550	17.604

Test result plot:

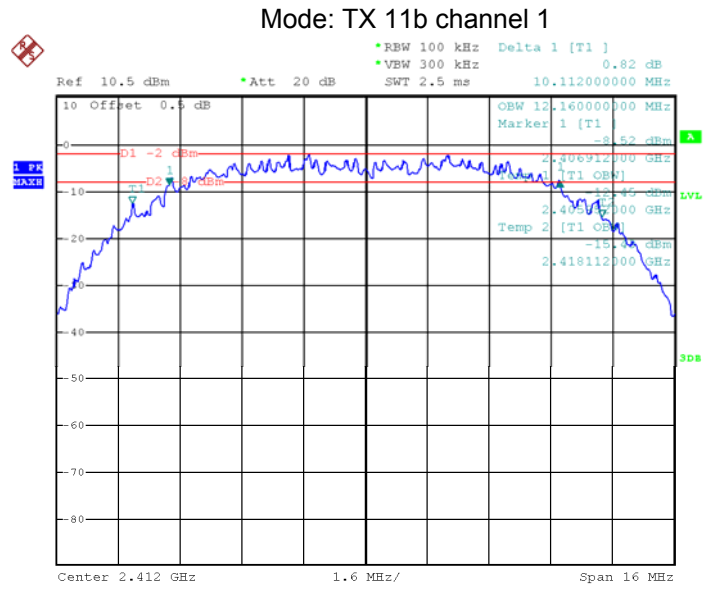


Date: 2.AUG.2018 02:33:25

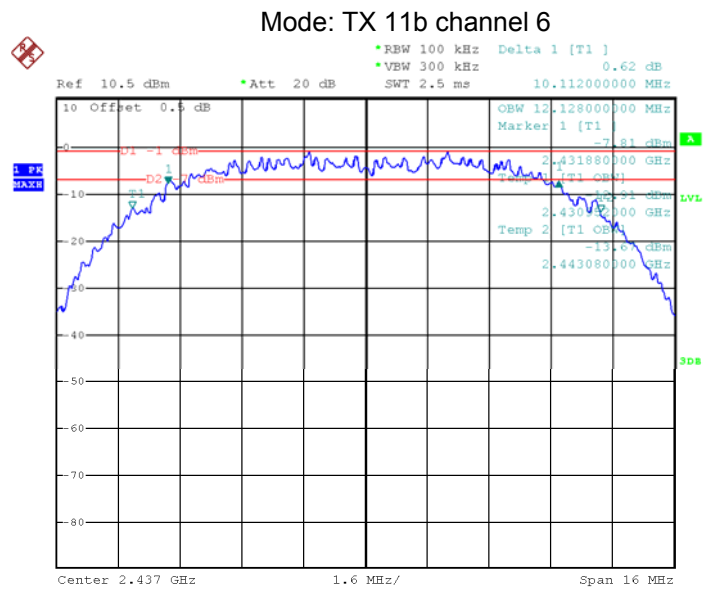


Date: 2.AUG.2018 03:15:28

### Mode: TX 11b channel 11

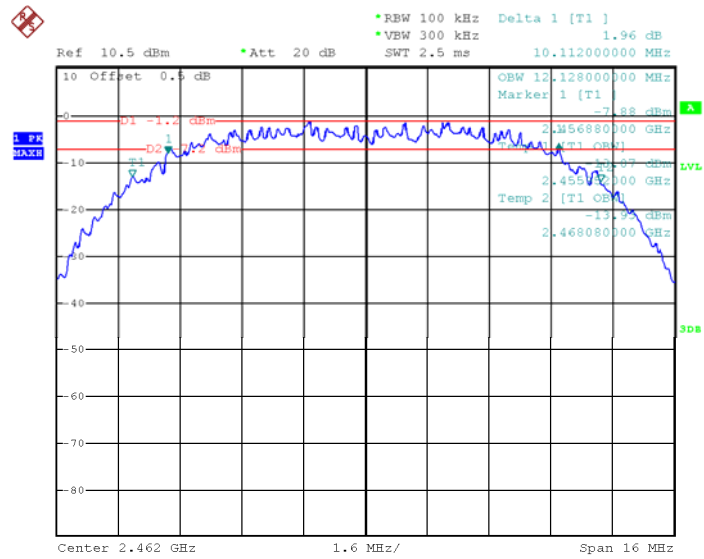


Date: 2.AUG.2018 03:56:07

### Mode: TX 11g channel 1

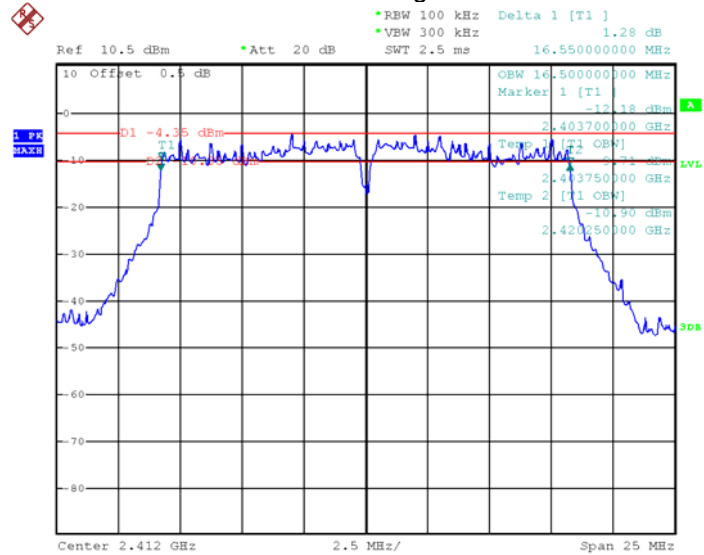


Date: 2.AUG.2018 04:17:11

### Mode: TX 11g channel 6

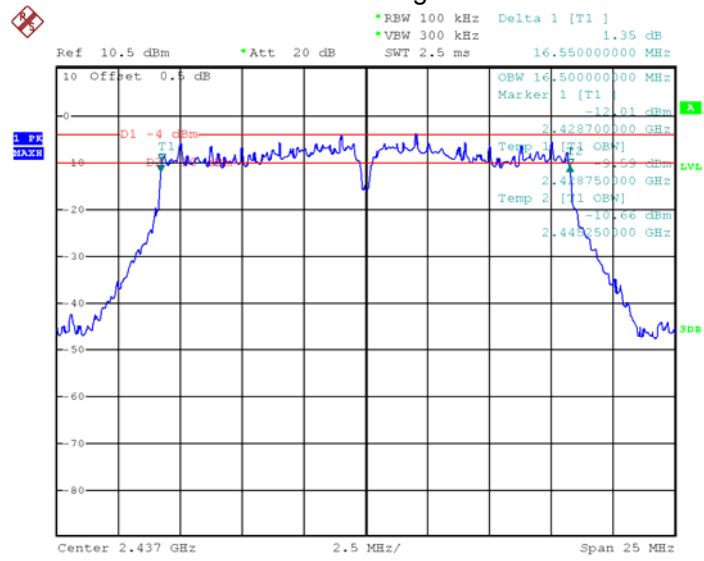


Date: 2.AUG.2018 04:22:44

### Mode: TX 11g channel 11

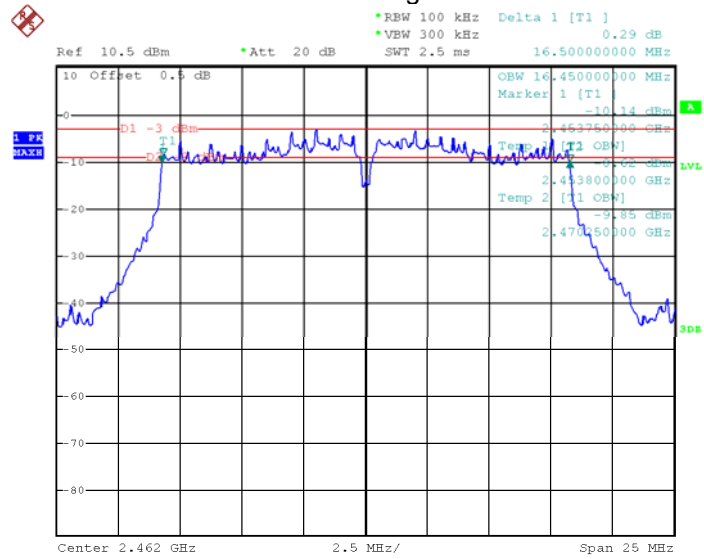


Date: 2.AUG.2018 04:27:43

### Mode: TX 11n HT20 channel 1

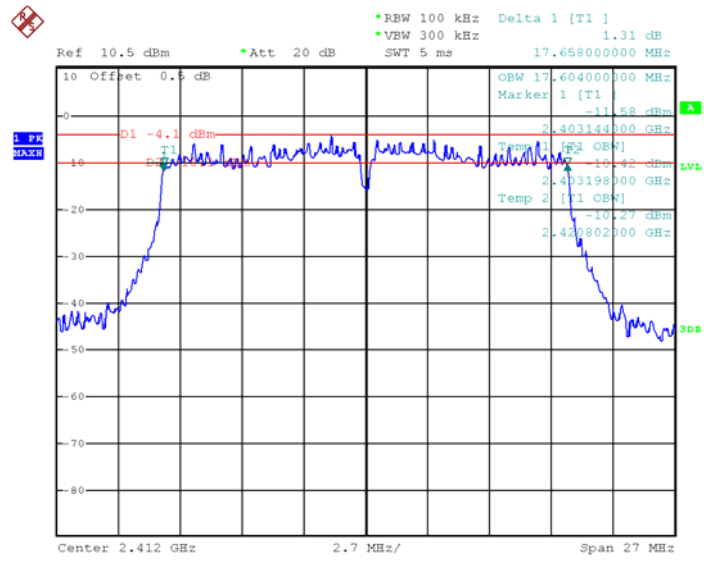


Date: 2.AUG.2018 04:37:05

### Mode: TX 11n HT20 channel 6

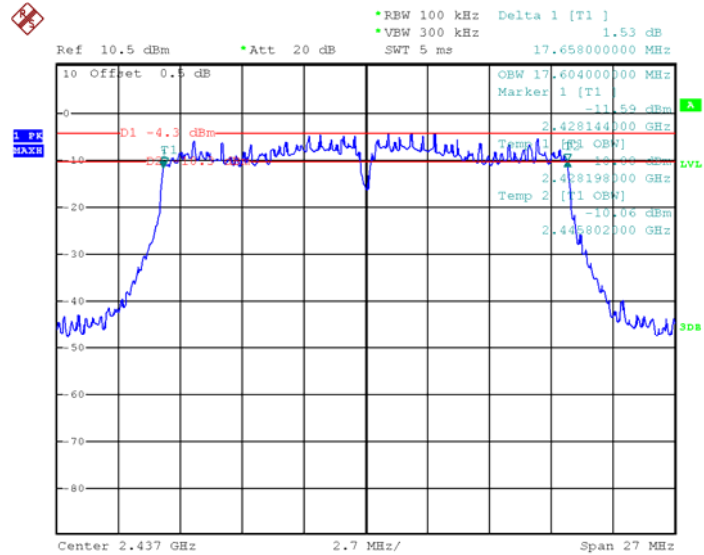

Date: 2.AUG.2018 04:43:20

Mode: TX 11n HT20 channel 11

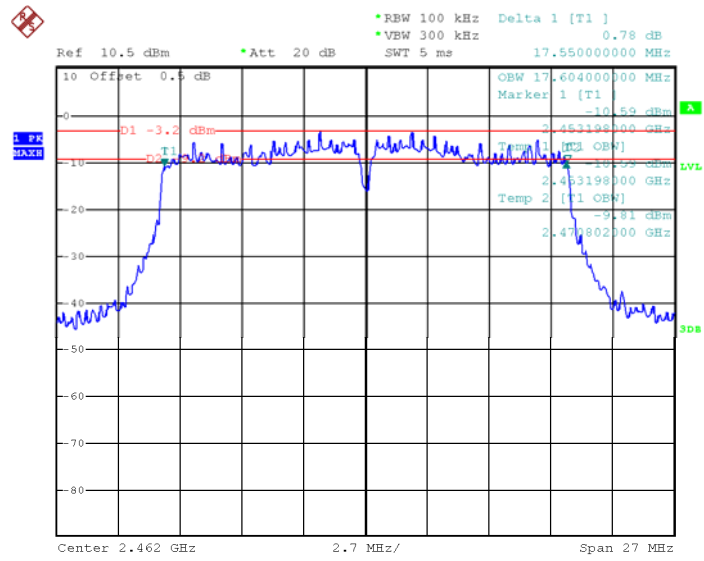

Date: 2.AUG.2018 04:47:08



## 13 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017

### 13.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

a)Set the RBW = 1 MHz.

b)Set the VBW  $\geq 3$  RBW

c)Set the span  $\geq 1.5$  x DTS bandwidth.

d)Detector = peak.

e)Sweep time = auto couple.

f)Trace mode = max hold.

g)Allow trace to fully stabilize.


h)Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

**13.2 Test Result:**

<b>Operation mode</b>	<b>Channel Frequency (MHz)</b>	<b>Maximum Peak Output Power (dBm)</b>
TX 11b	Low-2412	13.25
	Middle-2437	<b>14.42</b>
	High-2462	14.20
TX 11g	Low-2412	13.73
	Middle-2437	13.67
	High-2462	13.80
TX 11n HT20	Low-2412	13.63
	Middle-2437	13.66
	High-2462	13.58
<b>Limit: 1W/30dBm</b>		


### Test Plot

Mode: TX 11b channel 1

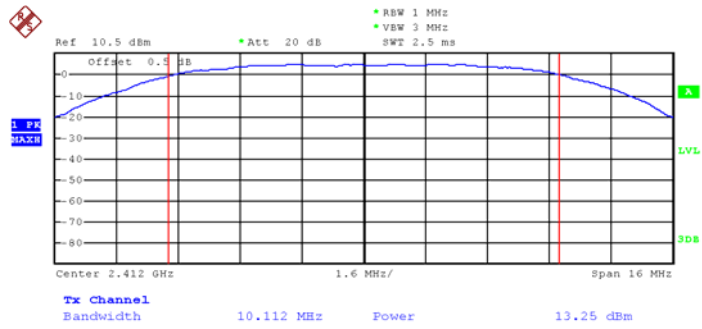


Date: 2.AUG.2018 02:34:03


Mode: TX 11b channel 6

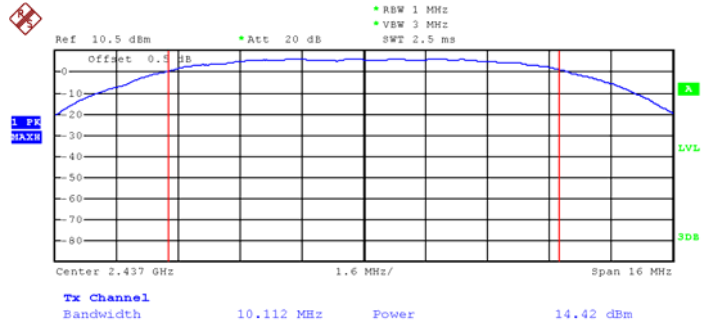


Date: 2.AUG.2018 03:16:09

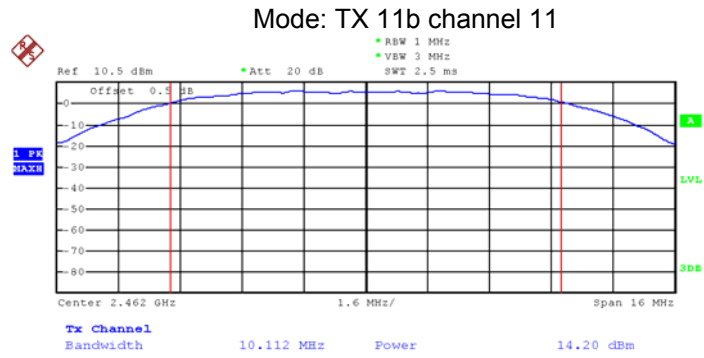


Date: 2.AUG.2018 03:54:45

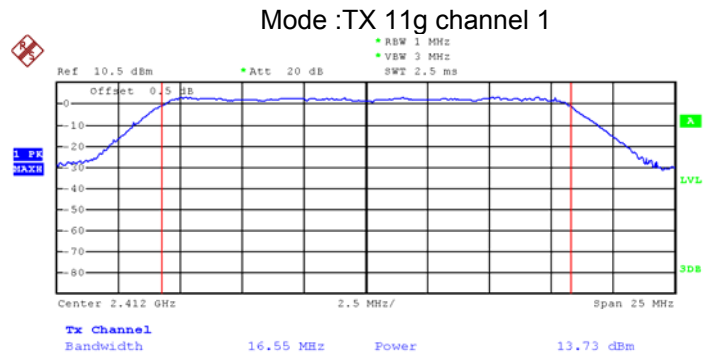

Date: 2.AUG.2018 04:17:43

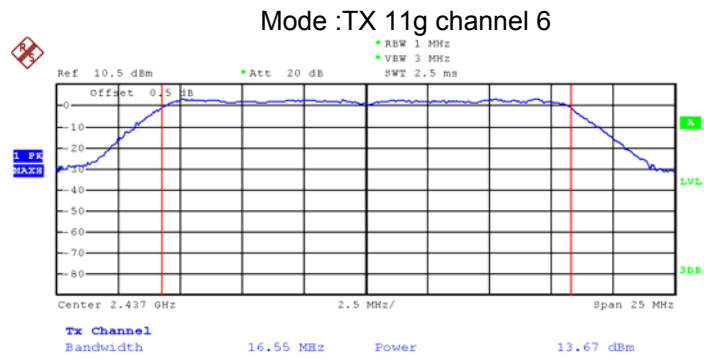


Date: 2.AUG.2018 04:24:34

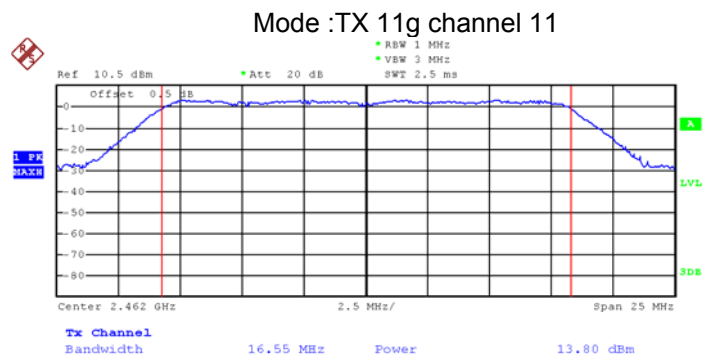


Date: 2.AUG.2018 04:25:26

Mode: TX 11n HT20 channel 1

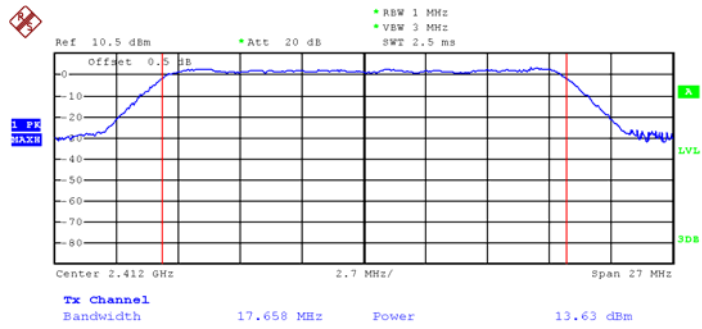


Date: 2.AUG.2018 04:37:38

Mode: TX 11n HT20 channel 6

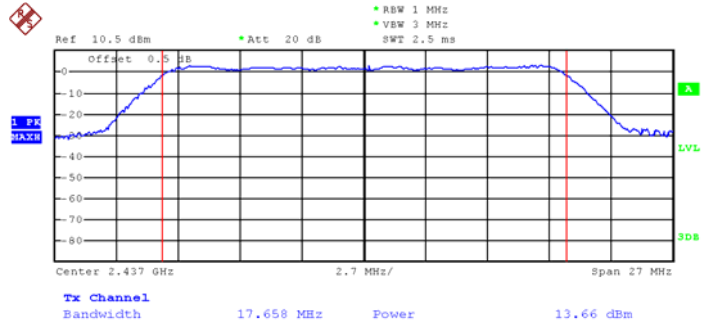

Date: 2.AUG.2018 04:41:50

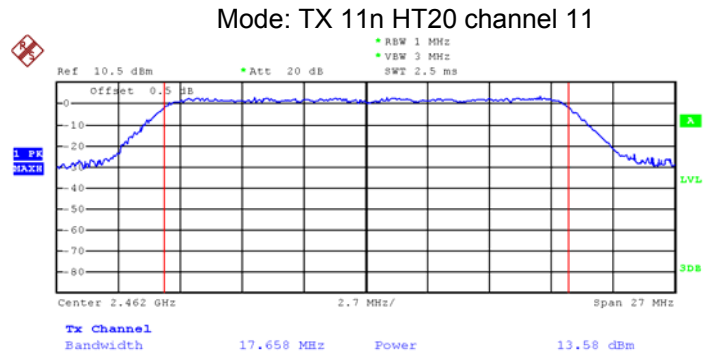

Date: 2.AUG.2018 04:45:37

## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017

### 14.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

### 14.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral density (dBm)
TX 11b	Low-2412	-15.22
	Middle-2437	-14.35
	High-2462	-14.47
TX 11g	Low-2412	-18.97
	Middle-2437	-17.52
	High-2462	-18.88
TX 11n HT20	Low-2412	-19.46
	Middle-2437	-19.07
	High-2462	-17.20
<b>Limit: 8dBm per 3kHz</b>		




### Test Plot Mode: TX 11b channel 1

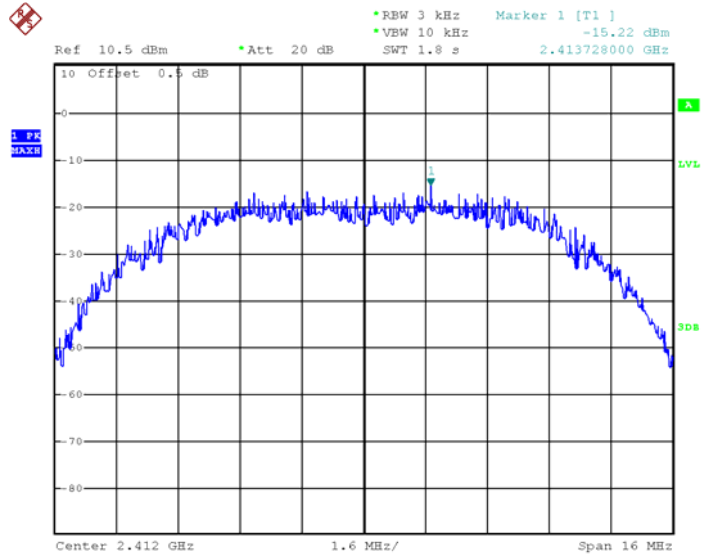


Date: 2.AUG.2018 02:35:22

### Mode: TX 11b channel 6

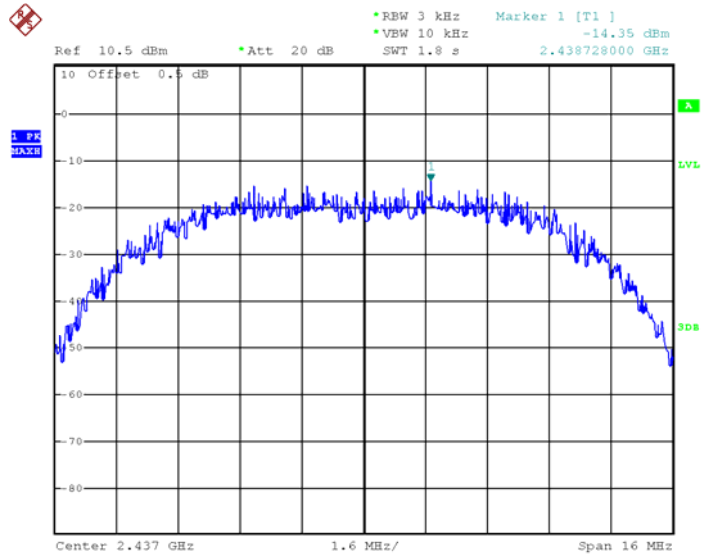


Date: 2.AUG.2018 03:16:33

Mode: TX 11b channel 11

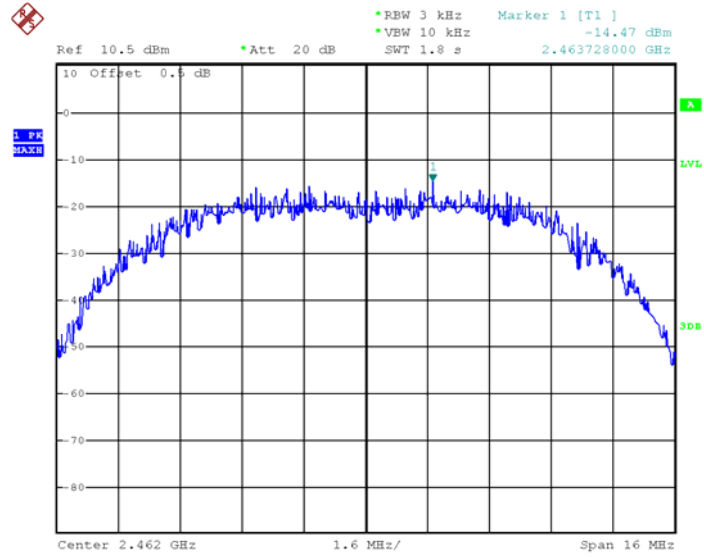


Date: 2.AUG.2018 03:56:35


Mode :TX 11g channel 1

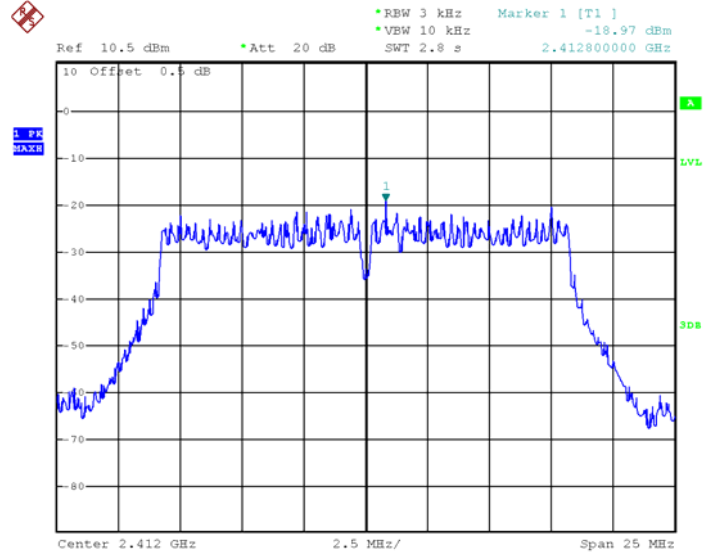

Date: 2.AUG.2018 04:18:21

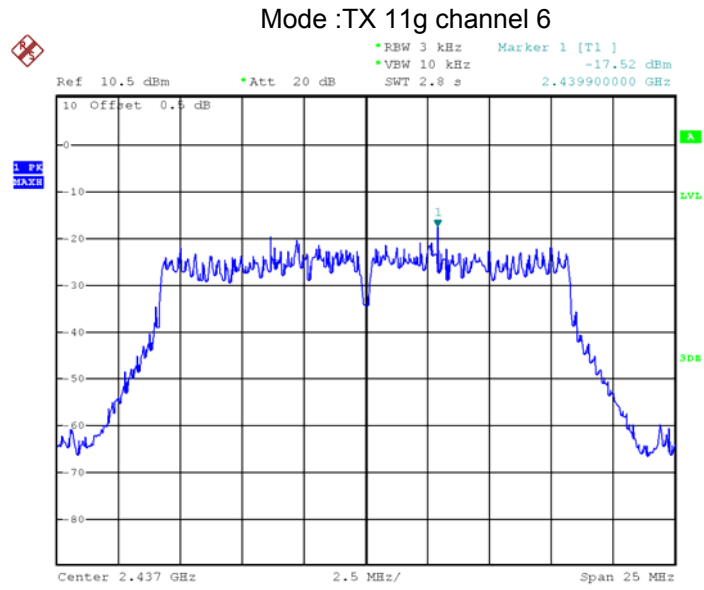


Date: 2.AUG.2018 04:23:50

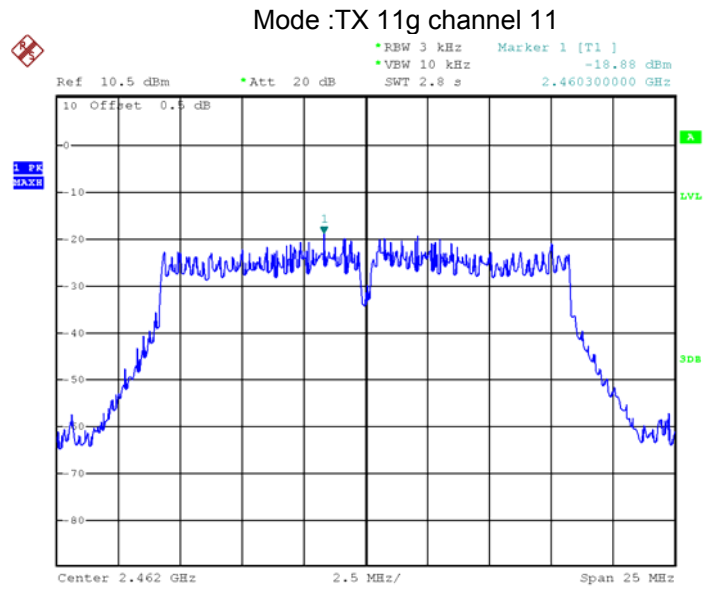


Date: 2.AUG.2018 04:28:51

Mode: TX 11n HT20 channel 1

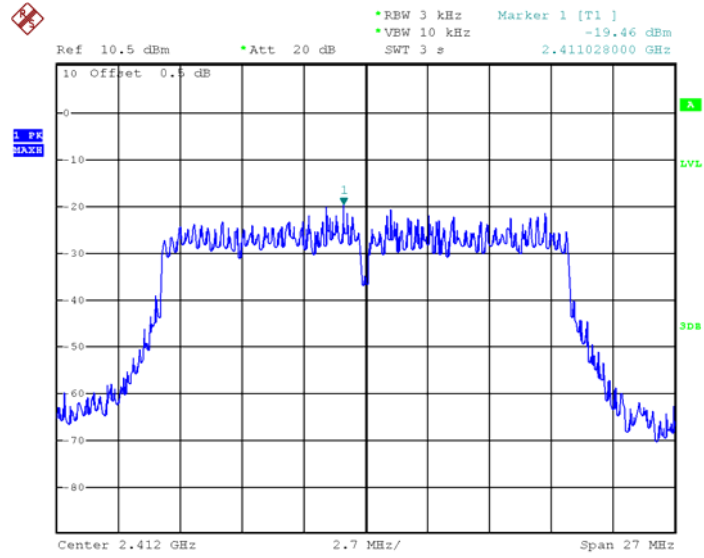


Date: 2.AUG.2018 04:38:05

Mode: TX 11n HT20 channel 6

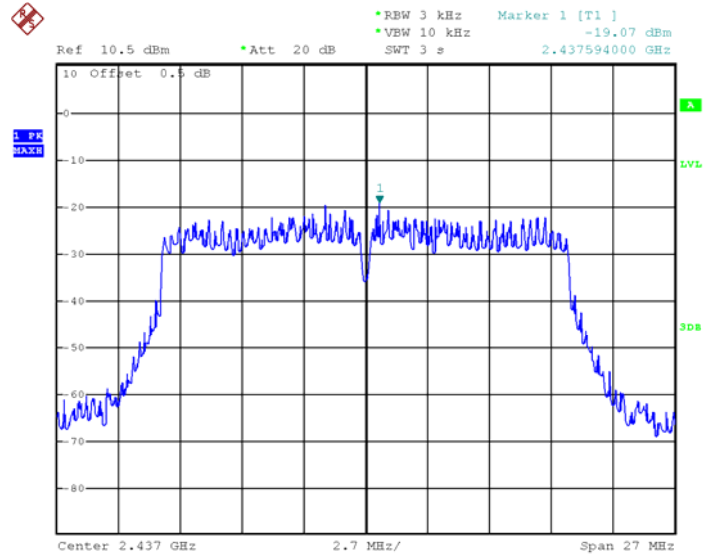

Date: 2.AUG.2018 04:44:07

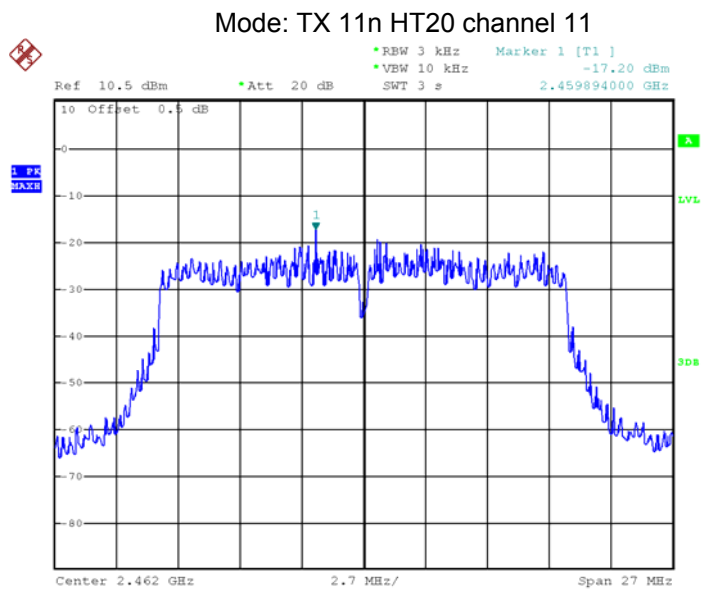

Date: 2.AUG.2018 04:47:52

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

## **16 RF Exposure**

Remark: refer to test report: WTS18S07118477-3W.

## **17 Photographs of Test Setup and EUT.**

Note: Please refer to appendix: WTS18S07118477W\_Photo.

=====**End of Report**=====