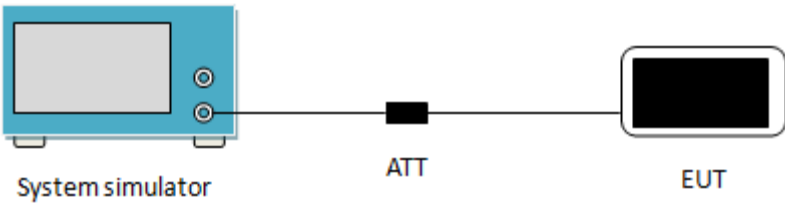


6.3 Occupy Bandwidth

Test Requirement:	FCC part 96.41(E)(3)
Test setup:	 <p>The diagram shows a blue 'System simulator' box on the left, connected by a line to a black square labeled 'ATT' (Attenuator) in the center, which is then connected to a black rectangle labeled 'EUT' (Equipment Under Test) on the right.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. The transmitter shall be operated at its maximum carrier power measured under normal test conditions. 3. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. 4. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


Test Channel	Bandwidth (MHz)	Modulation	Ant. Port	26dB Occupy bandwidth (MHz)	99% Occupy bandwidth (MHz)
Lowest	10	QPSK	Ant 1	9.29	8.91
			Ant 2	9.28	8.91
			Ant 3	9.29	8.91
			Ant 4	9.34	8.90
		64QAM	Ant 1	9.31	8.91
			Ant 2	9.30	8.91
			Ant 3	9.27	8.91
			Ant 4	9.29	8.90
Middle	10	QPSK	Ant 1	9.30	8.91
			Ant 2	9.33	8.91
			Ant 3	9.29	8.89
			Ant 4	9.29	8.91
		64QAM	Ant 1	9.33	8.91
			Ant 2	9.29	8.90
			Ant 3	9.27	8.91
			Ant 4	9.31	8.91
Highest	10	QPSK	Ant 1	9.27	8.91
			Ant 2	9.30	8.91
			Ant 3	9.30	8.89
			Ant 4	9.33	8.91
		64QAM	Ant 1	9.33	8.91
			Ant 2	9.34	8.91
			Ant 3	9.29	8.90
			Ant 4	9.29	8.91
Lowest	20	QPSK	Ant 1	18.52	17.84
			Ant 2	18.49	17.82
			Ant 3	18.49	17.80
			Ant 4	18.50	17.80
		64QAM	Ant 1	18.47	17.80
			Ant 2	18.51	17.84
			Ant 3	18.48	17.80
			Ant 4	18.48	17.82
Middle	20	QPSK	Ant 1	18.51	17.81
			Ant 2	18.50	17.81
			Ant 3	18.50	17.83
			Ant 4	18.51	17.79
		64QAM	Ant 1	18.47	17.82
			Ant 2	18.49	17.80
			Ant 3	18.49	17.82
			Ant 4	18.49	17.81
Highest	20	QPSK	Ant 1	18.49	17.82
			Ant 2	18.49	17.79
			Ant 3	18.48	17.75
			Ant 4	18.49	17.81
		64QAM	Ant 1	18.49	17.83
			Ant 2	18.49	17.82
			Ant 3	18.50	17.81
			Ant 4	18.48	17.80

Test plot as follows:


LTE Band 48
BW: 10MHz, QPSK

Ant 1


Ant 2

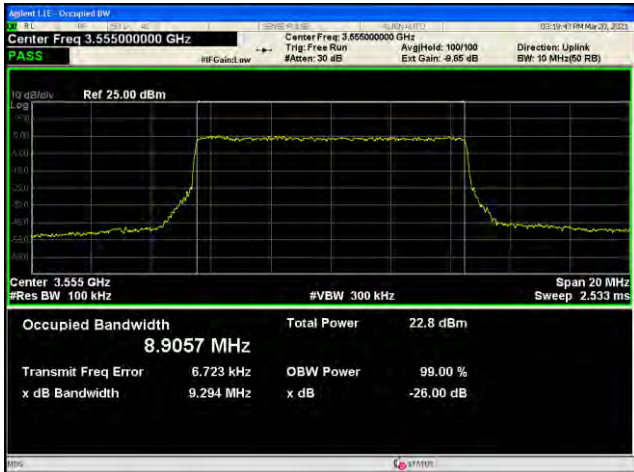


Lowest channel

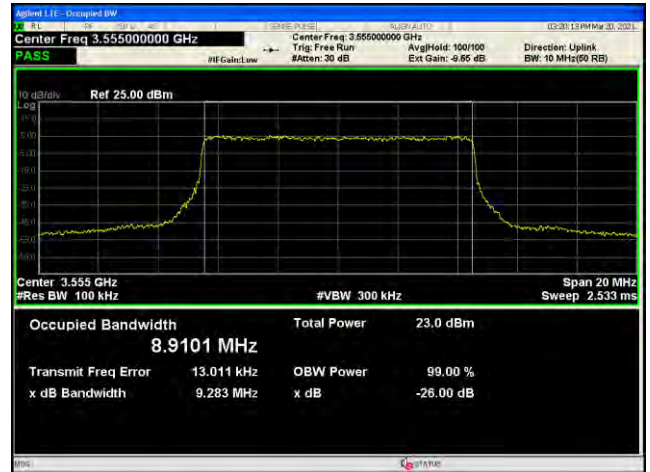


Lowest channel

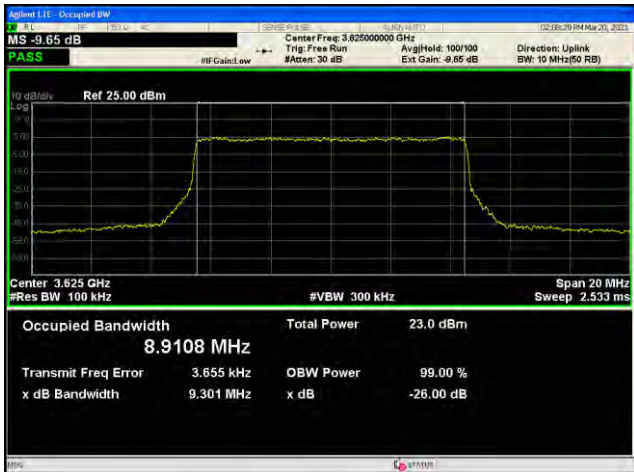


Middle channel

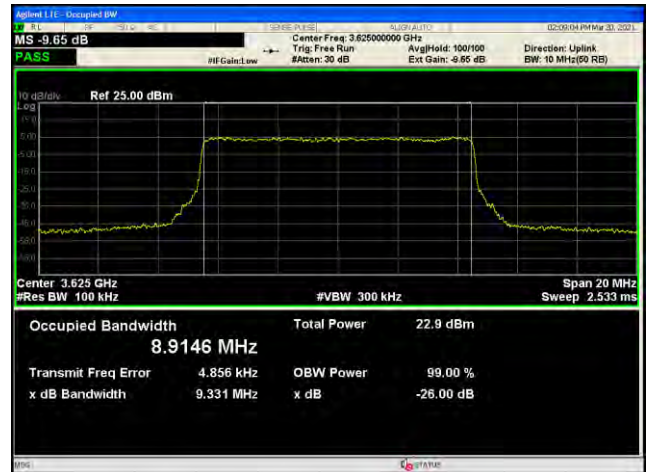


Middle channel

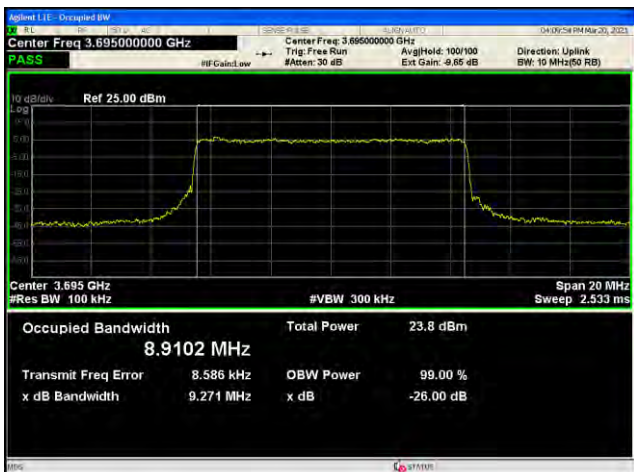

Highest channel

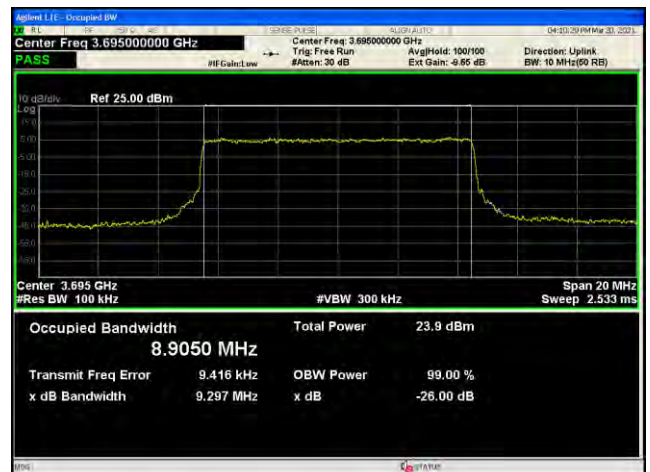


Highest channel

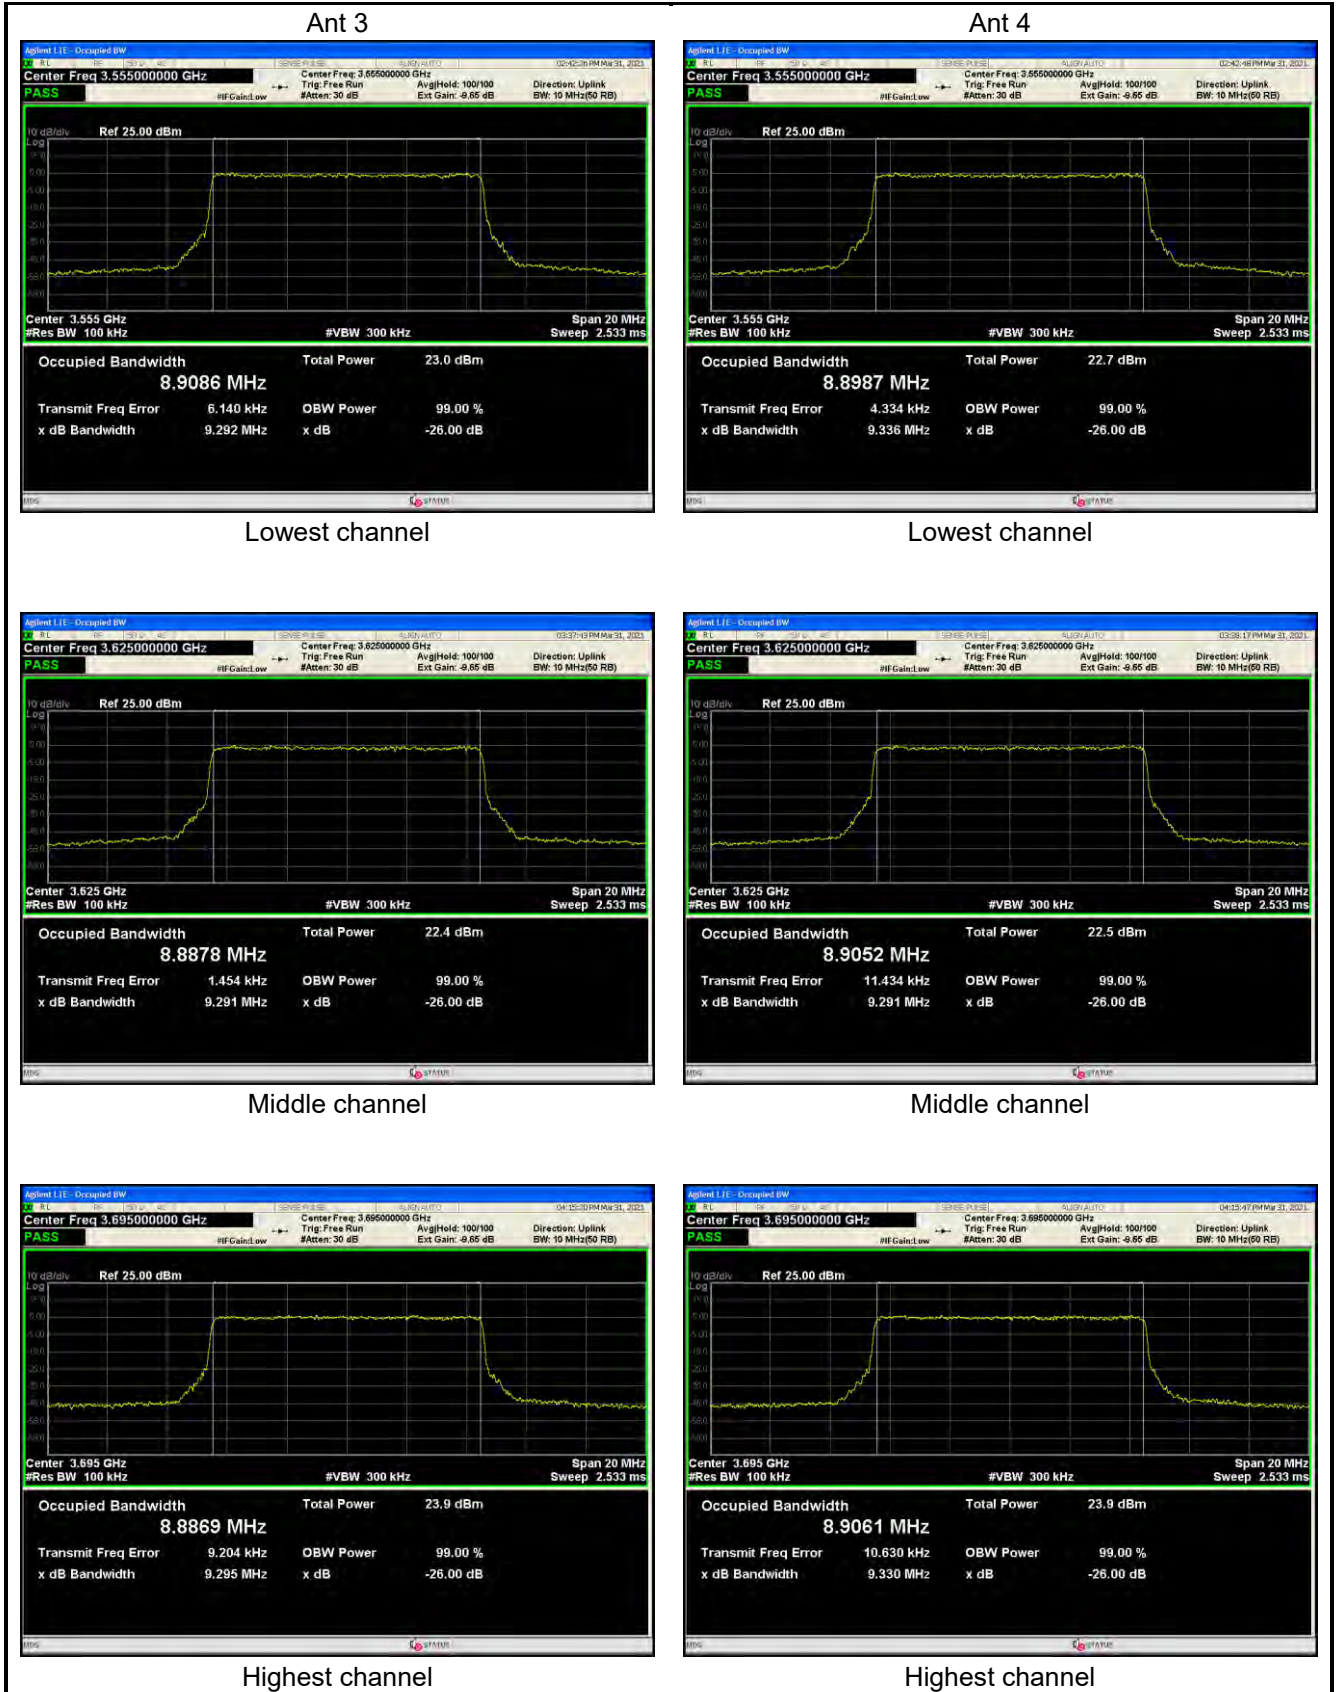


LTE Band 48
BW: 10MHz, 64QAM

Ant 1


Ant 2

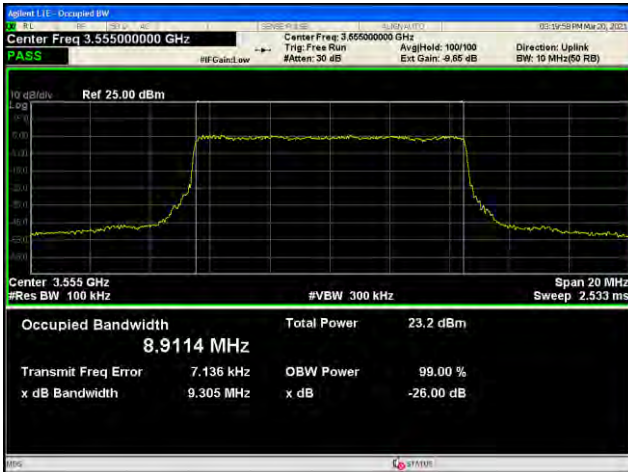


Lowest channel

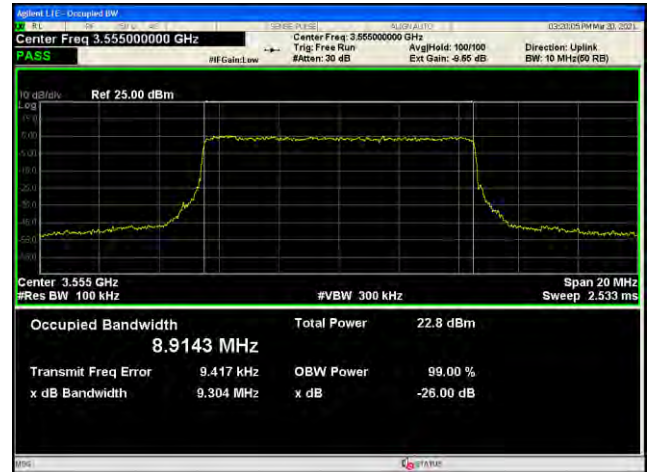


Lowest channel

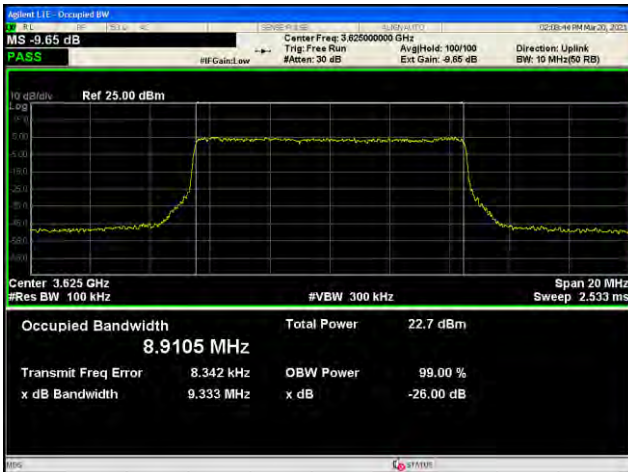


Middle channel

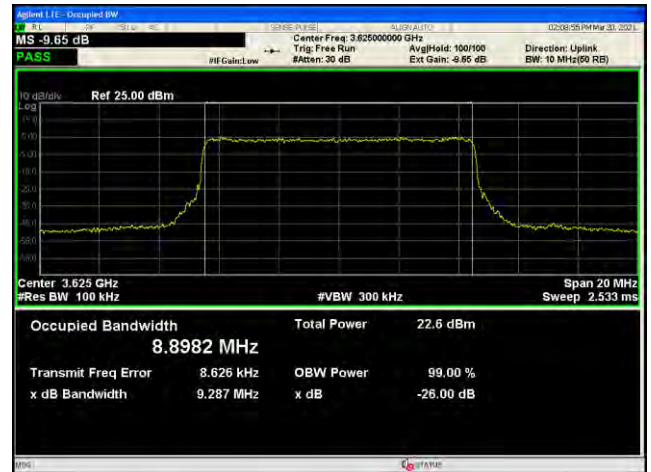


Middle channel

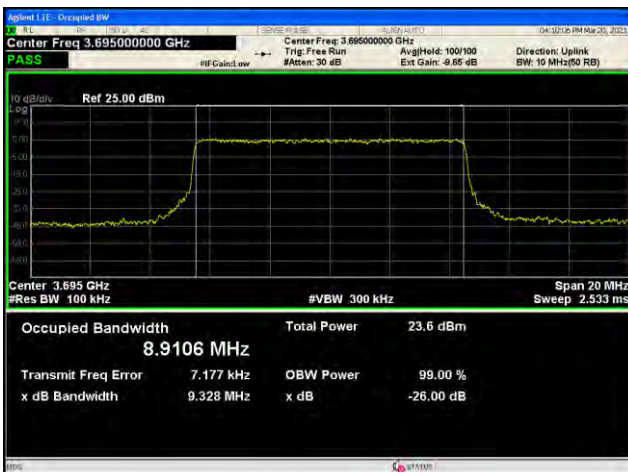

Highest channel

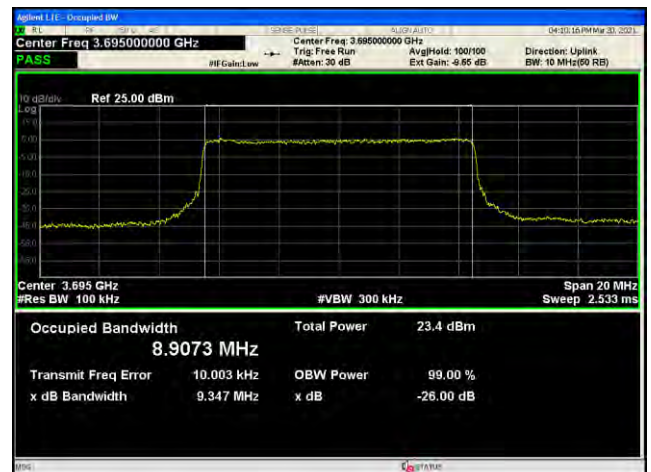


Highest channel

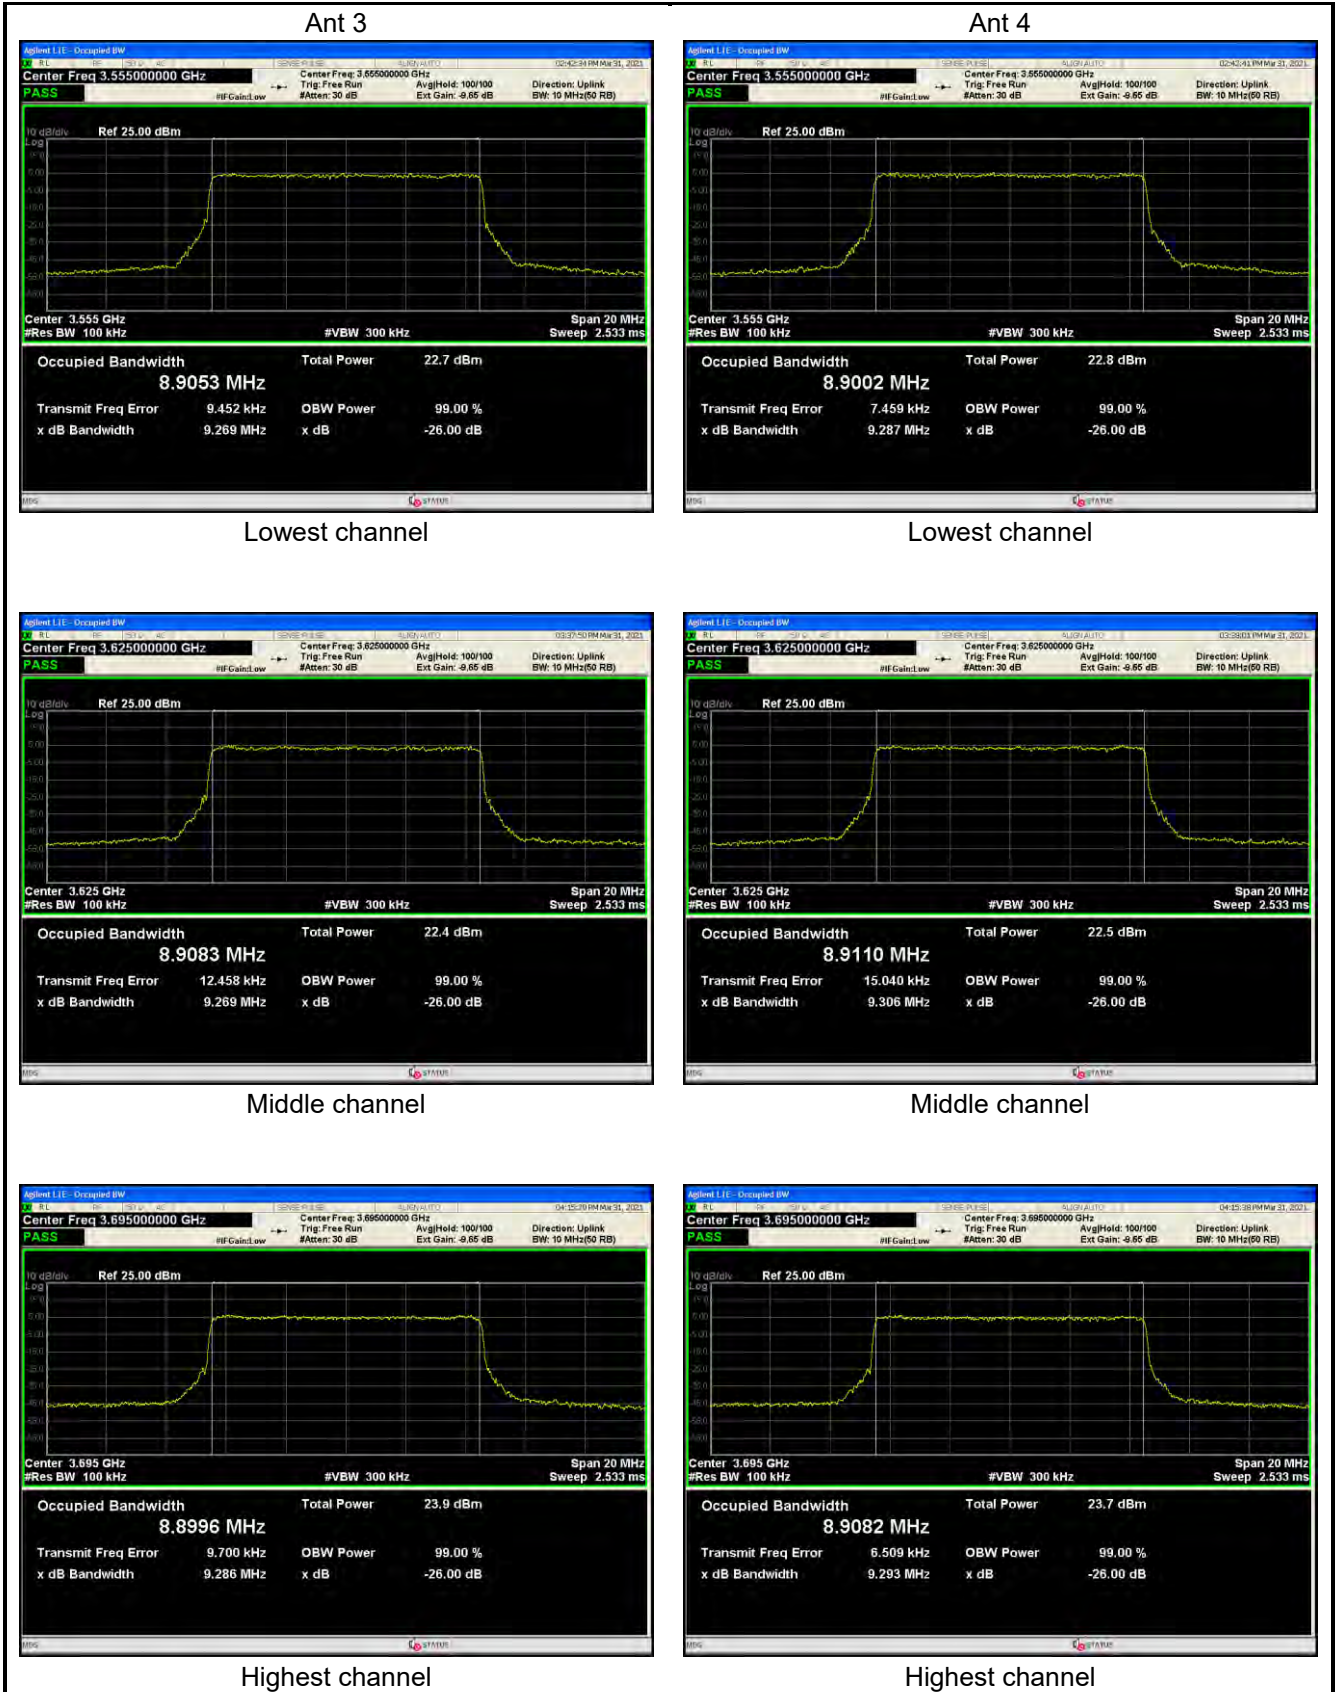


LTE Band 48:
BW: 20MHz QPSK

Ant 1


Ant 2

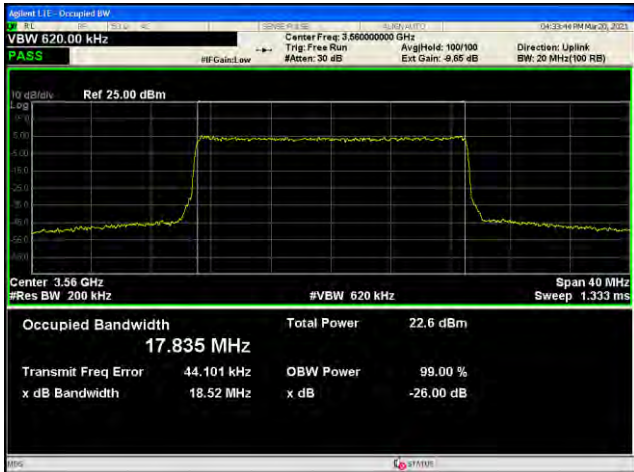


Lowest channel

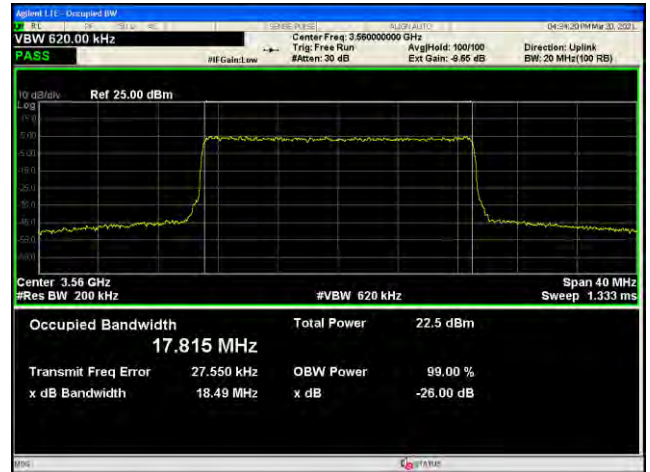


Lowest channel

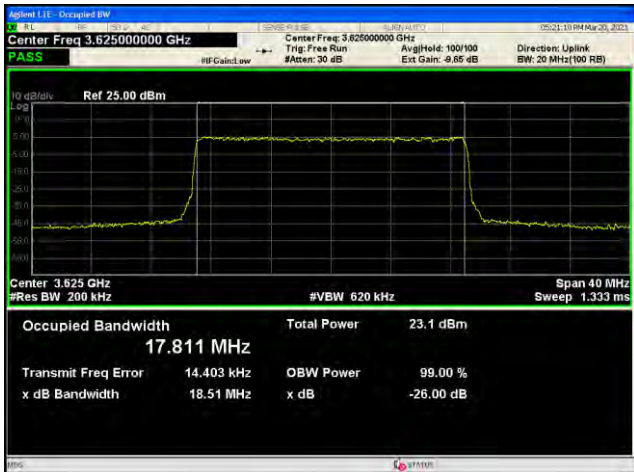


Middle channel

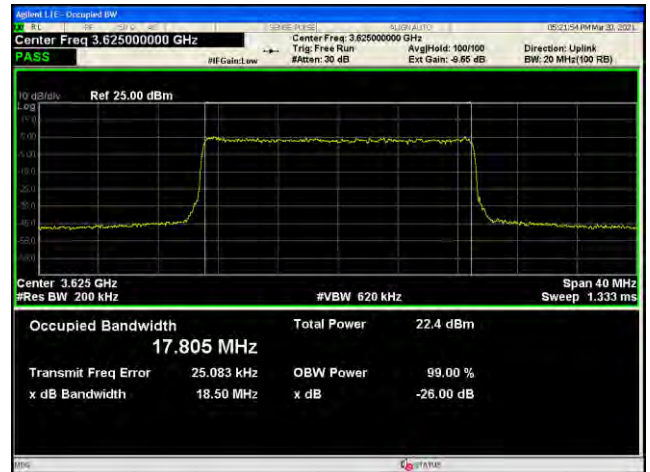

Middle channel

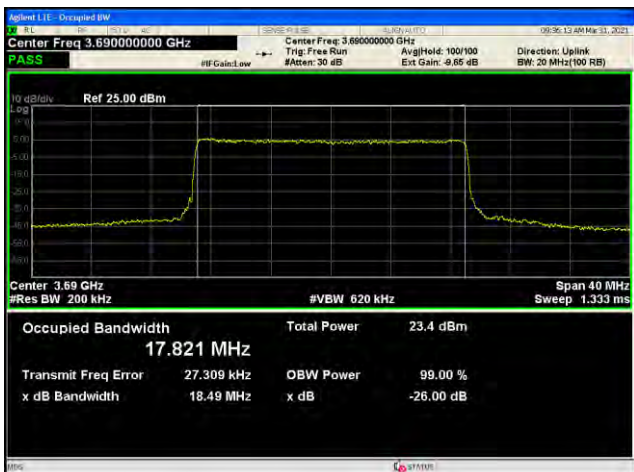

Highest channel

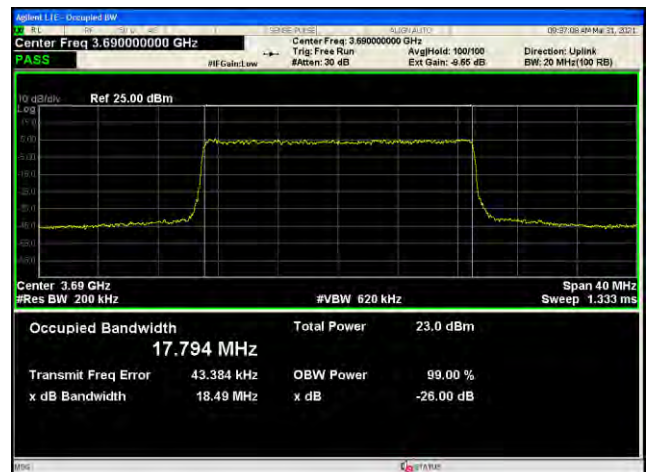


Highest channel



LTE Band 48
BW: 20MHz, 64QAM

Ant 1


Ant 2

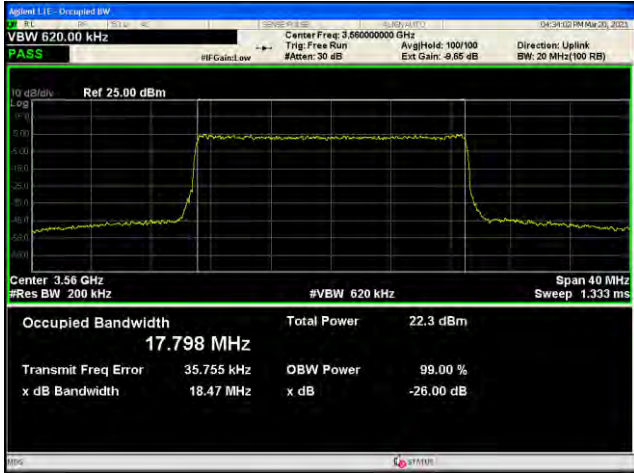


Lowest channel




Lowest channel

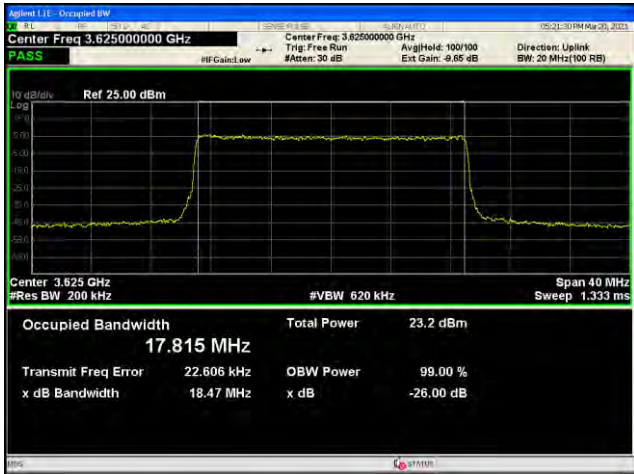


Middle channel

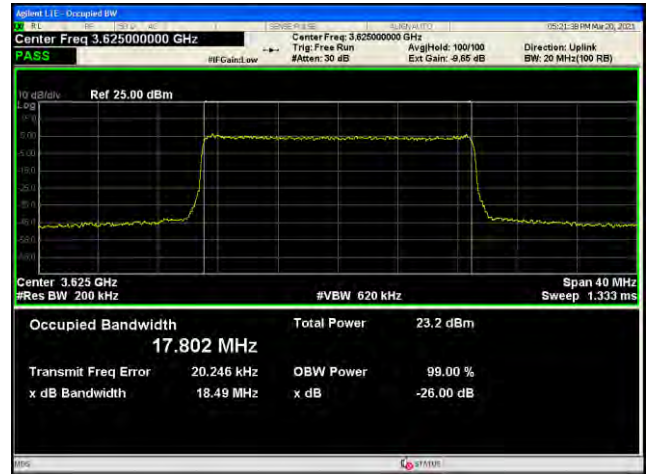


Middle channel

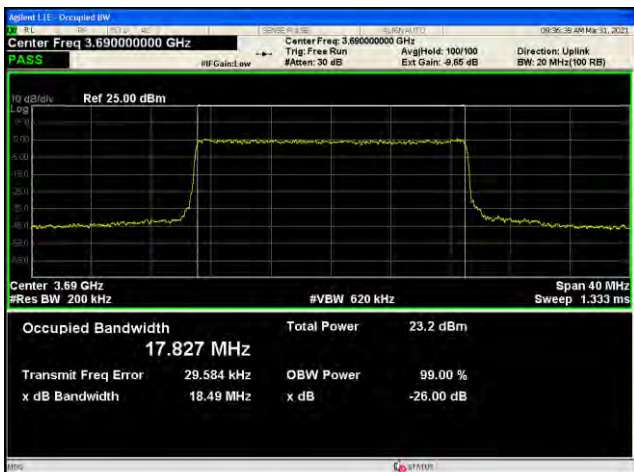


Highest channel

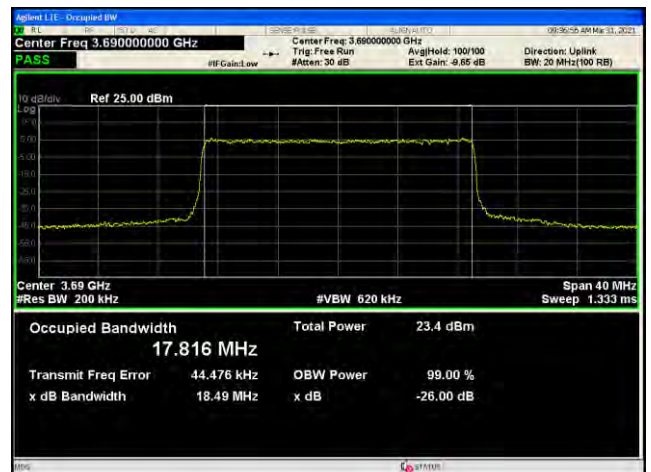


Highest channel

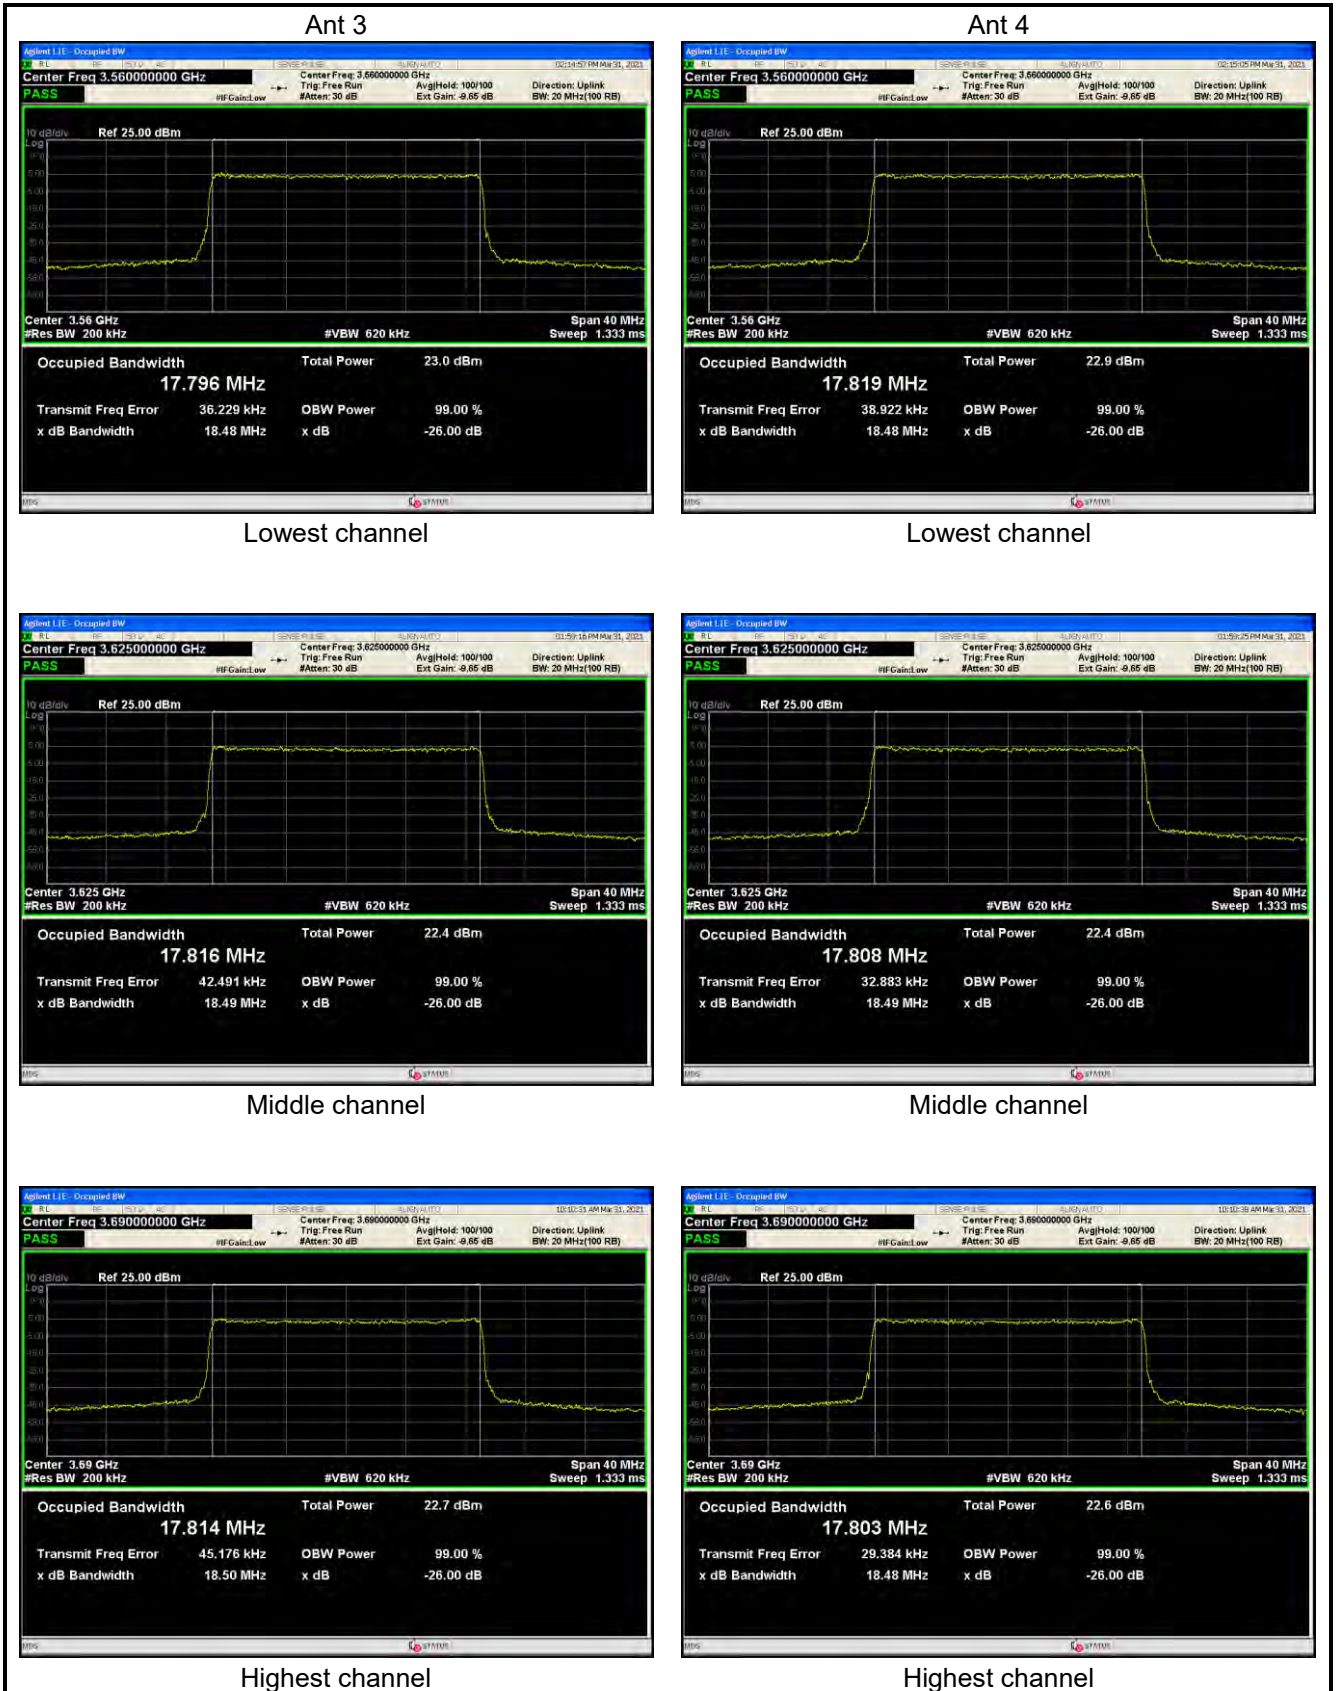



6.4 Emission Mask

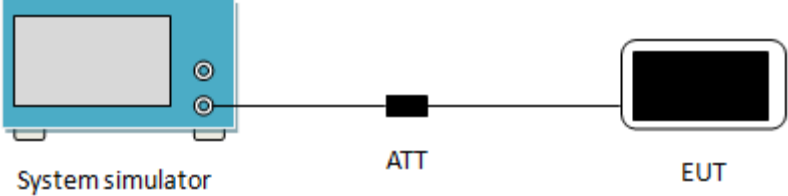
Test Requirement:	FCC part 96.41(e)(1)(2)
Limit:	-13 dBm/Mhz at frequencies within 0-10MHz of channel edge -25 dBm/MHz at frequencies greater than 10MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz
Test setup:	 <p>The diagram shows a blue 'System simulator' box on the left, connected by a line to a black 'ATT' (attenuator) block in the center, which is then connected to a black 'EUT' (Equipment Under Test) box on the right.</p>
Test Procedure:	<p>5 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.</p> <p>6 RBW=1MHz, VBW=3MHz, Detector mode= RMS, Trace mode: Power averaging over 100 sweeps</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	PASS

Test plots as below:

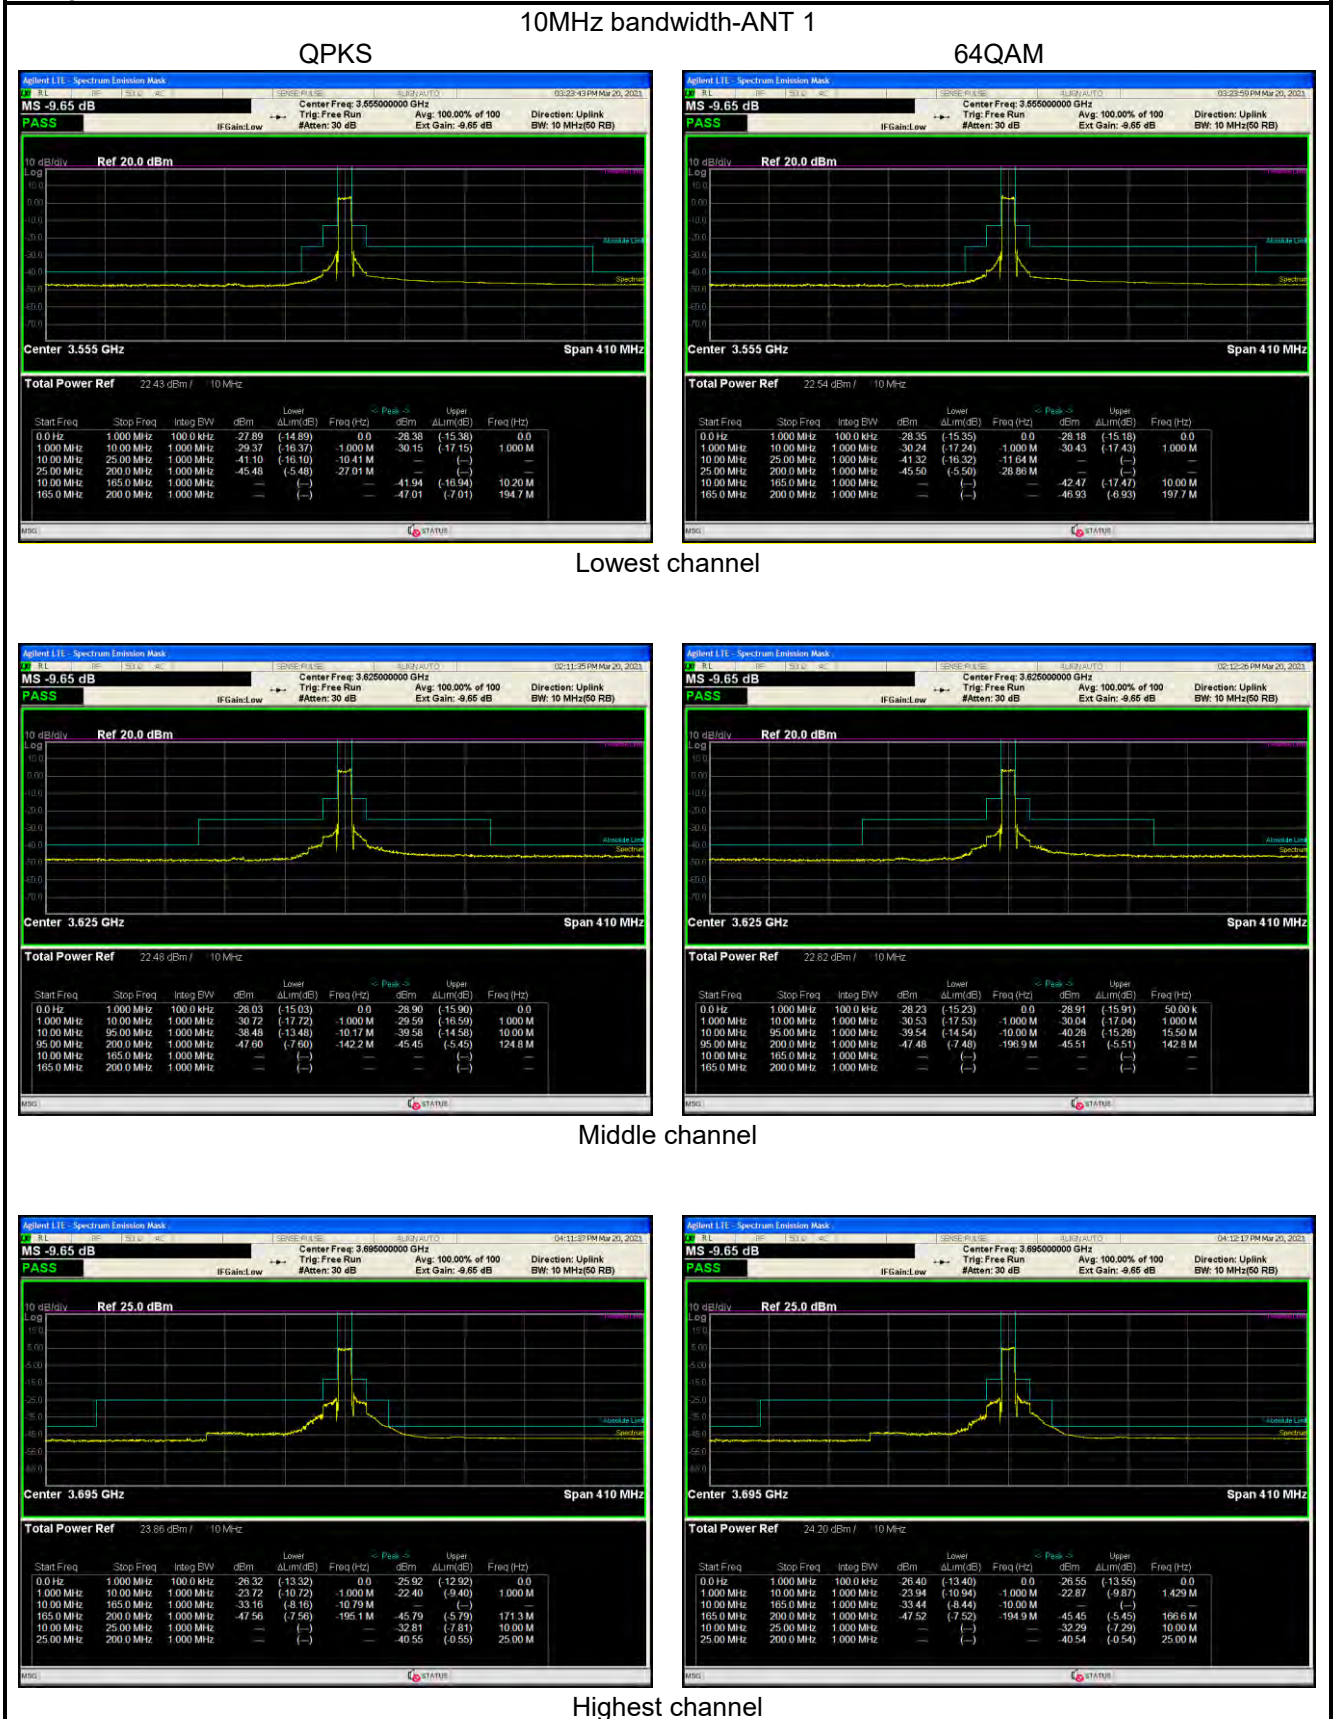

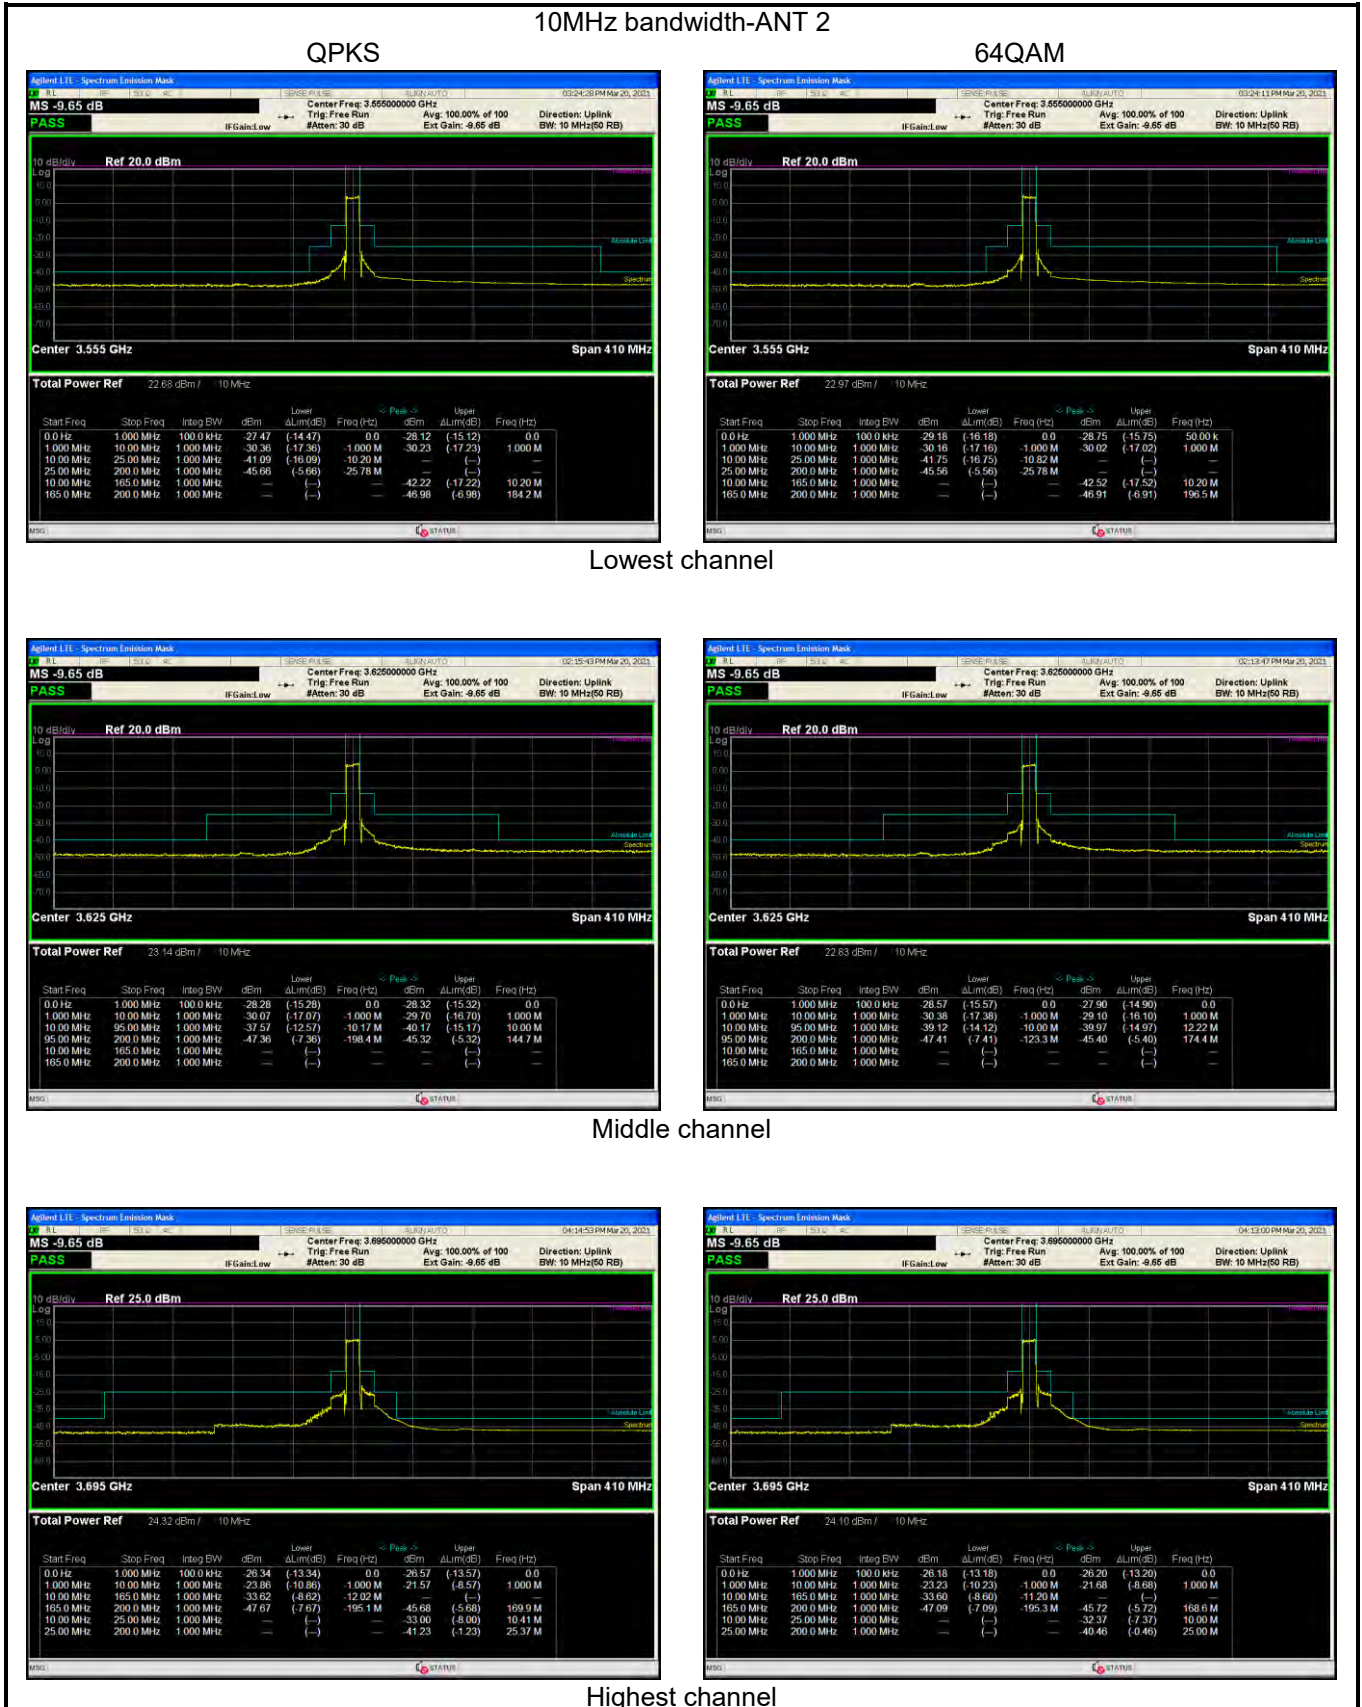


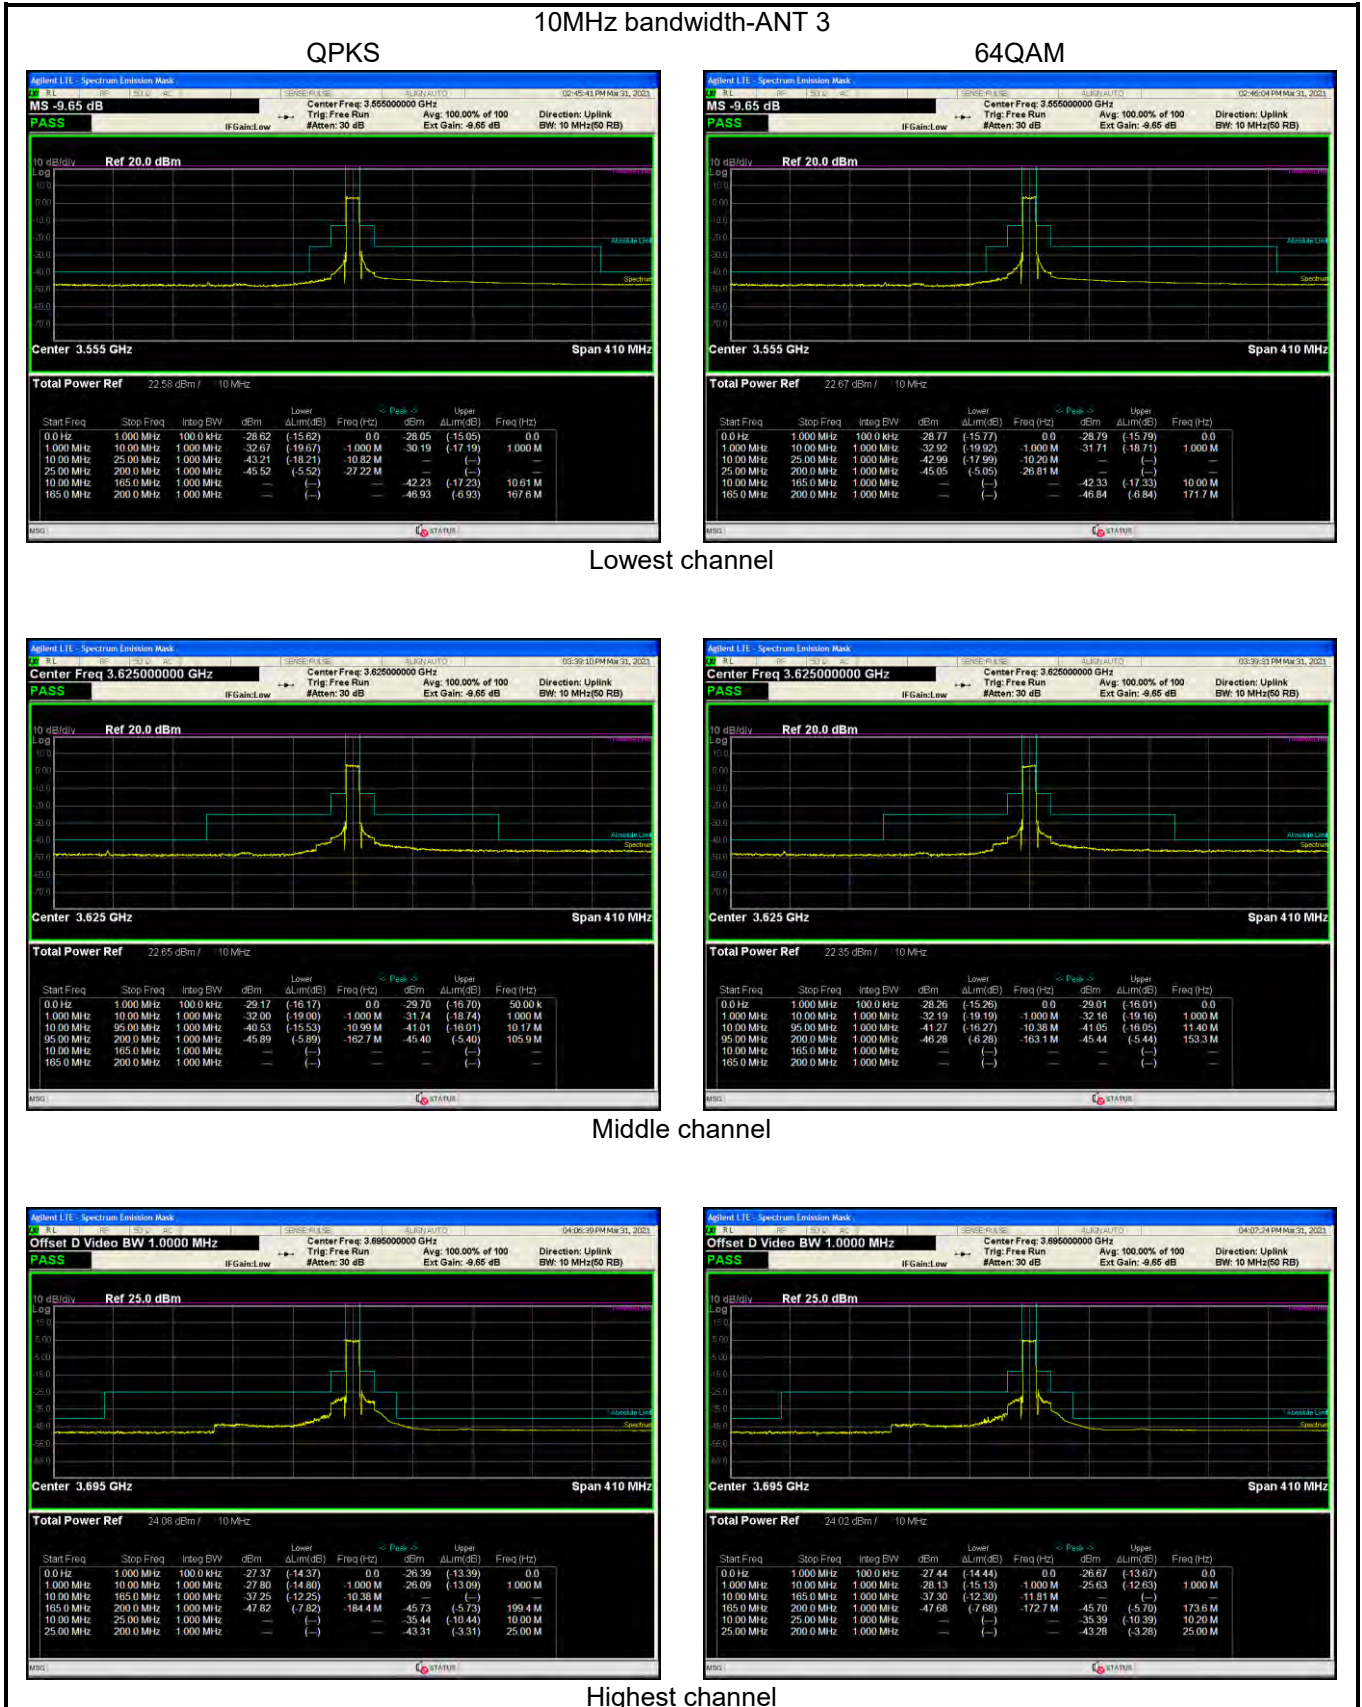


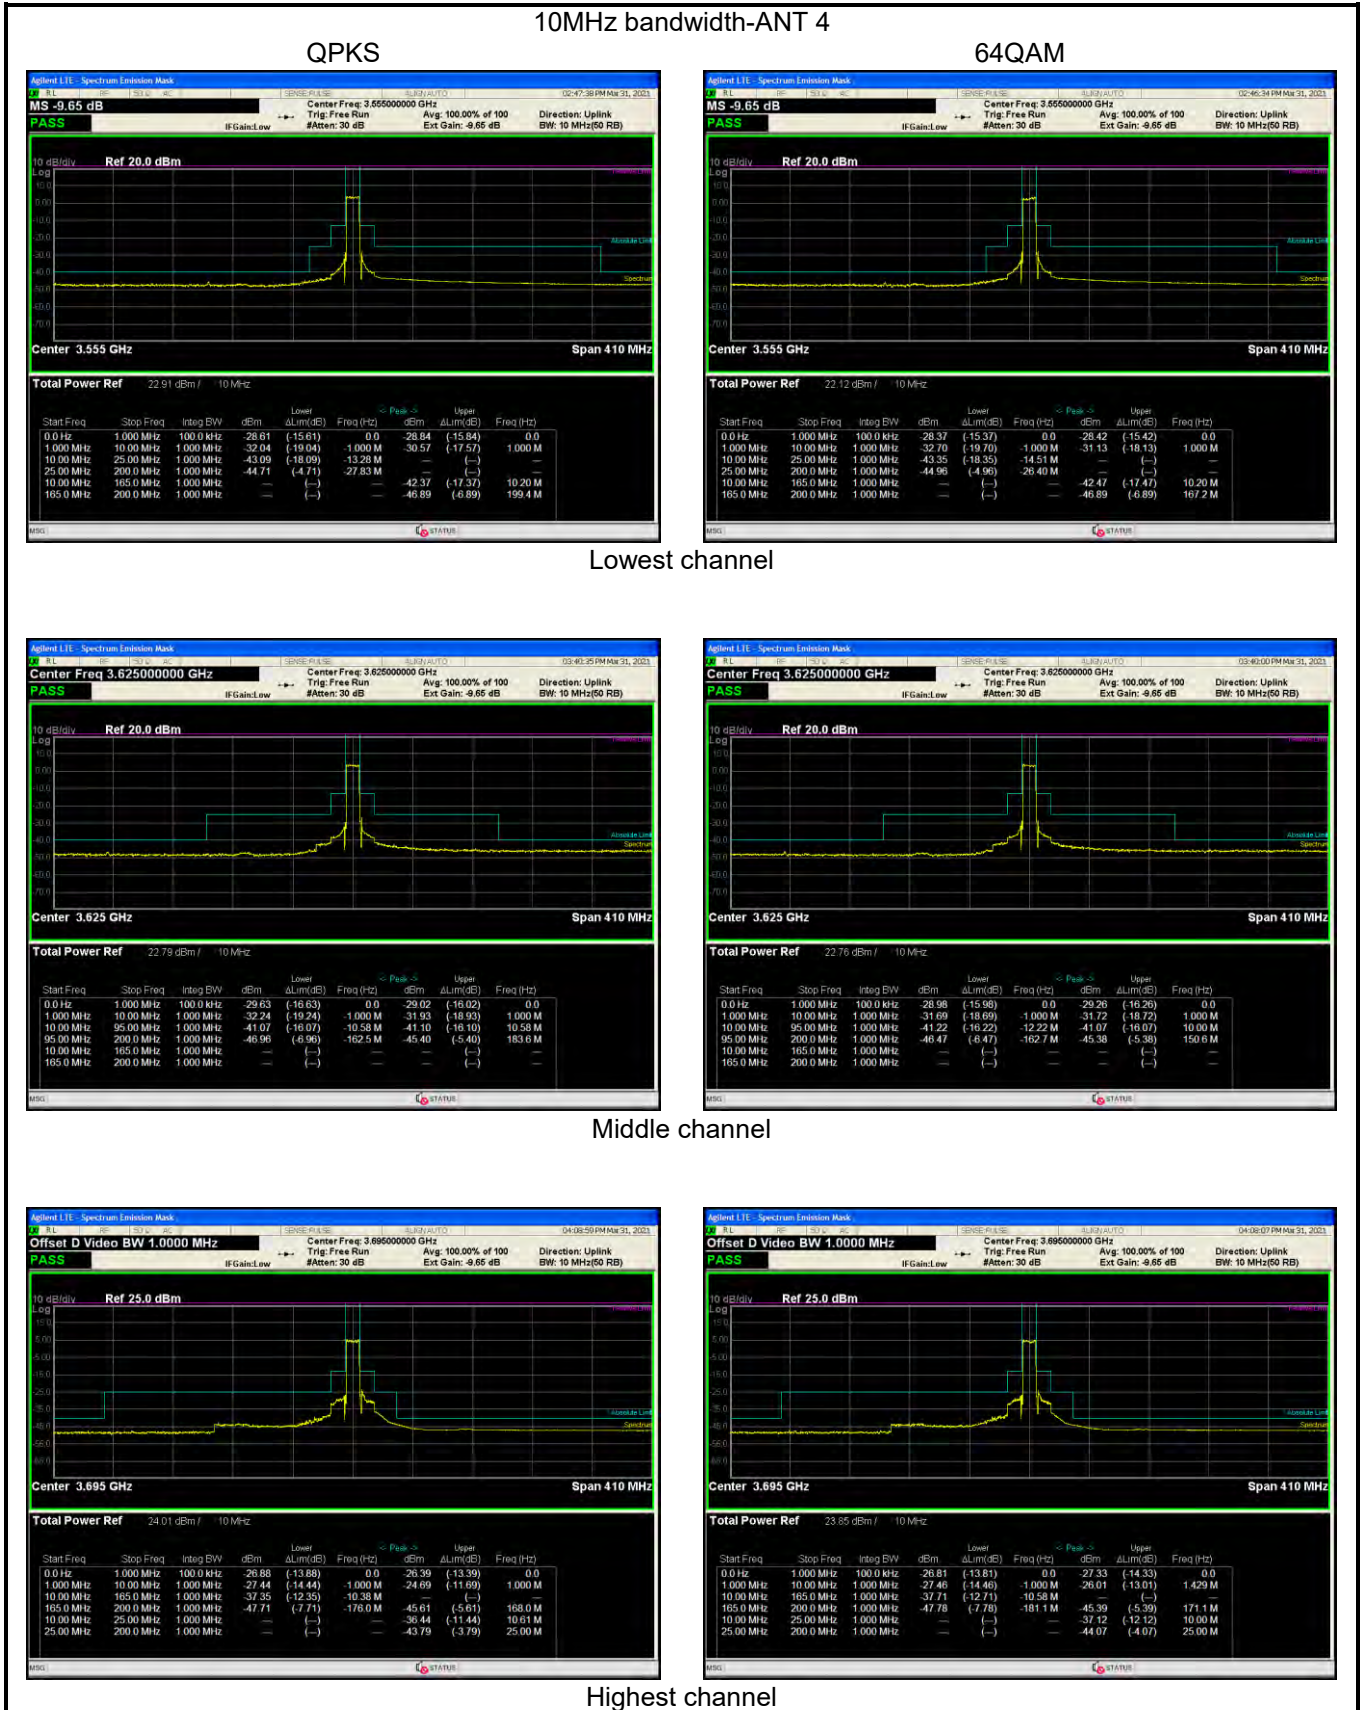



20MHz bandwidth-ANT 1

QPKS



64QAM

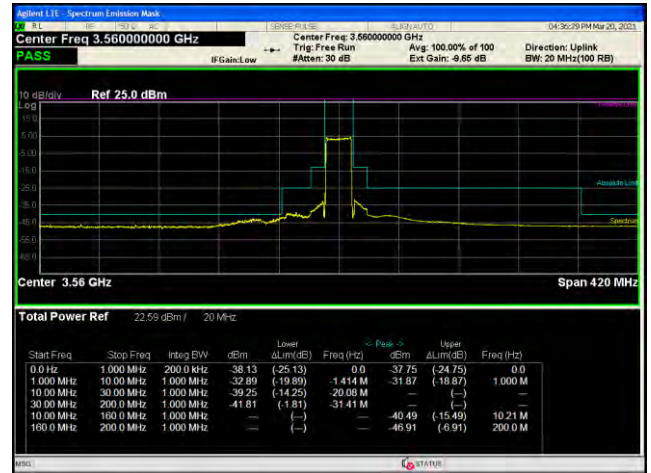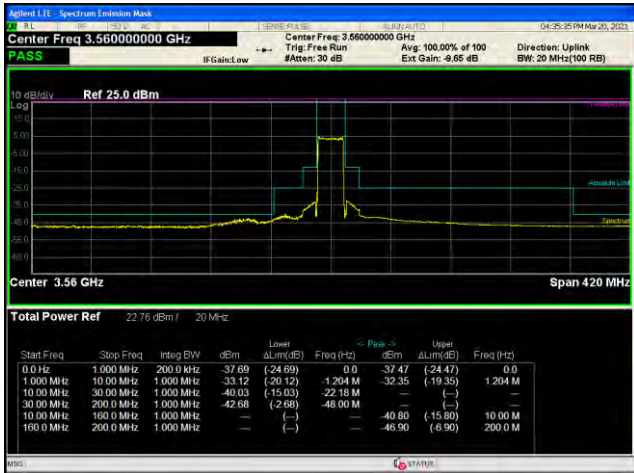

Lowest channel

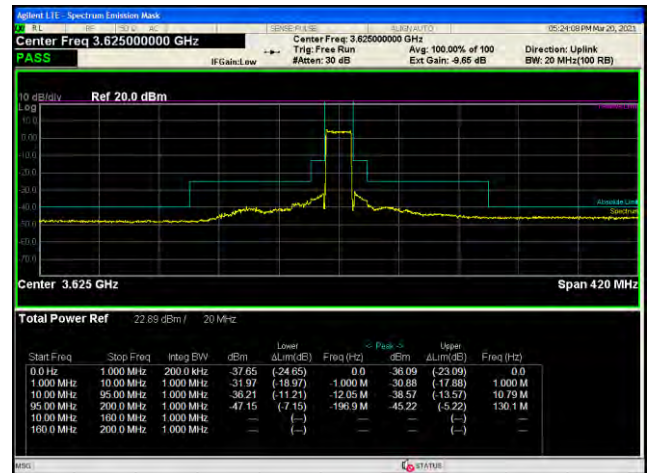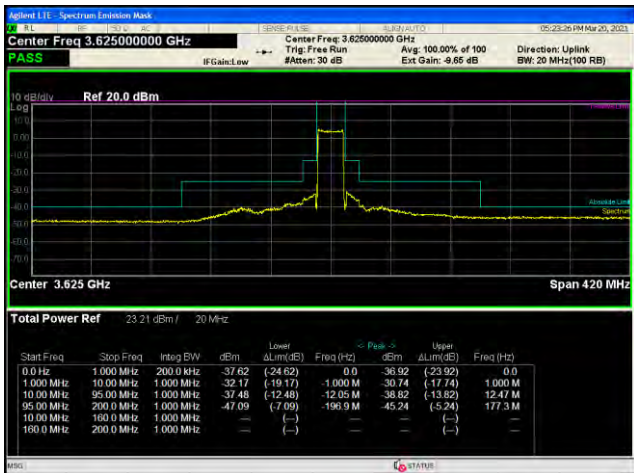

Middle channel

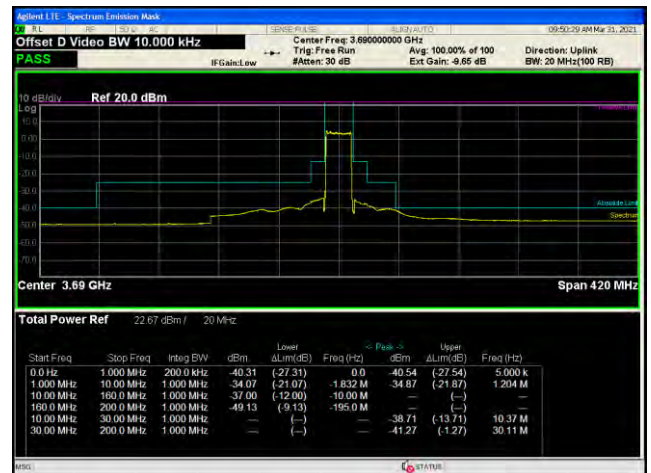
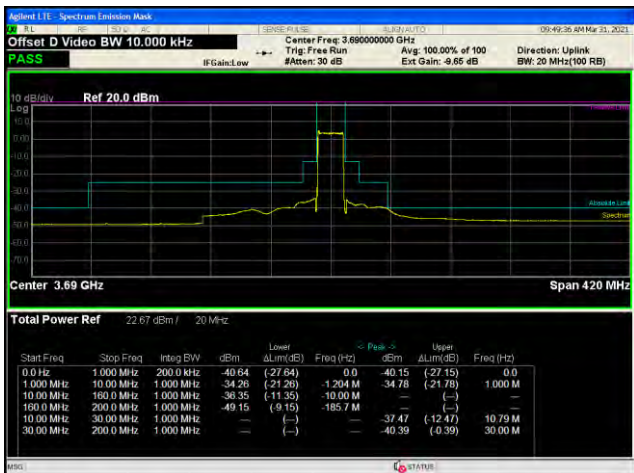


Highest channel



20MHz bandwidth-ANT 2

QPKS



64QAM

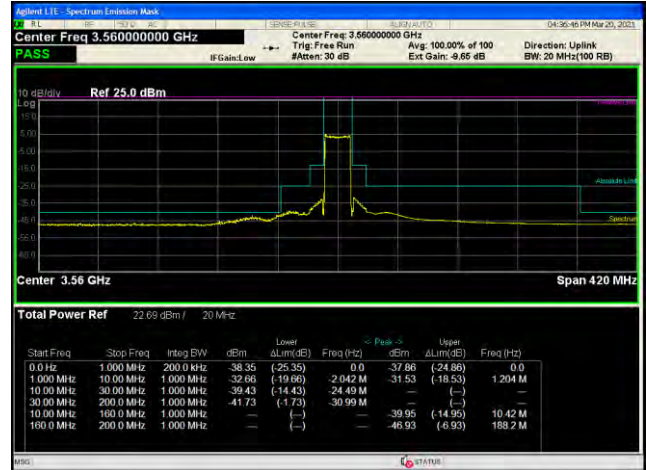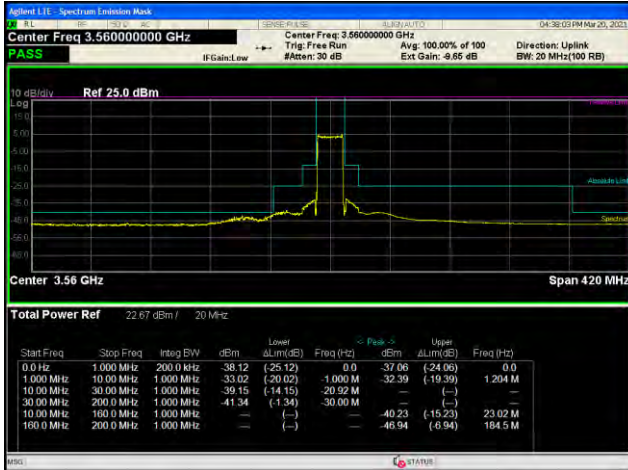

Lowest channel

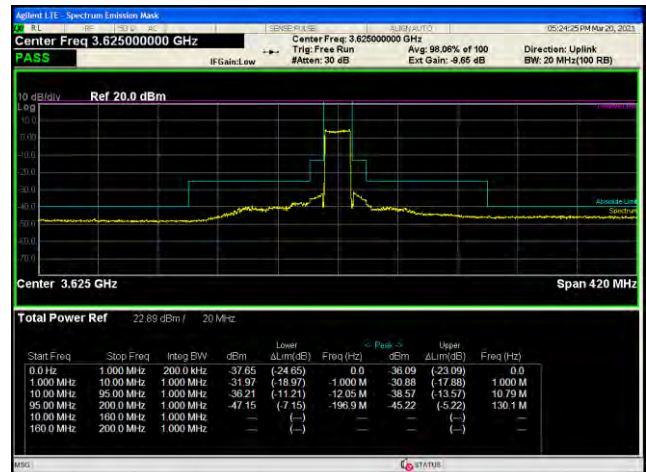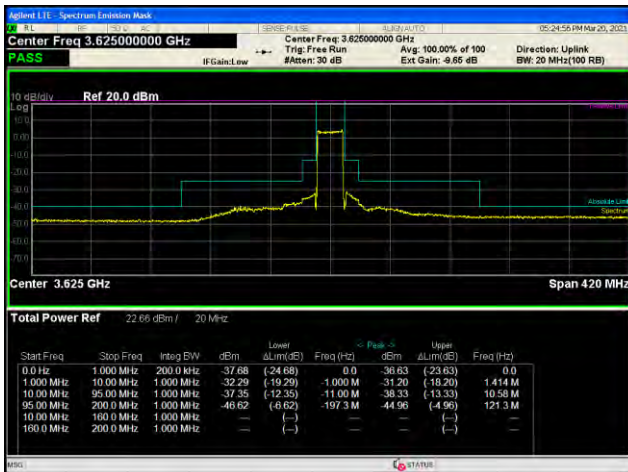

Middle channel

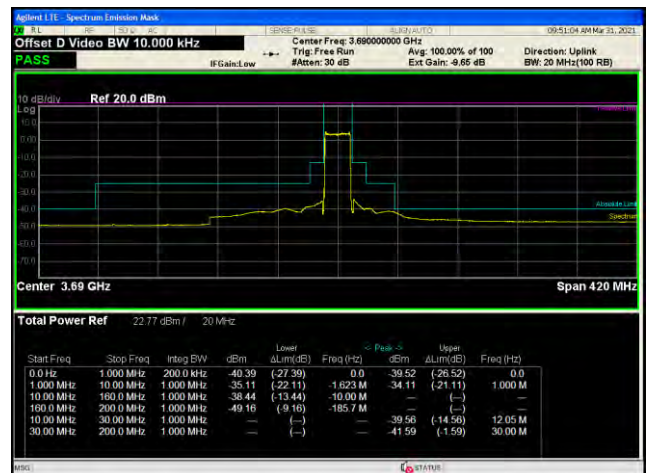
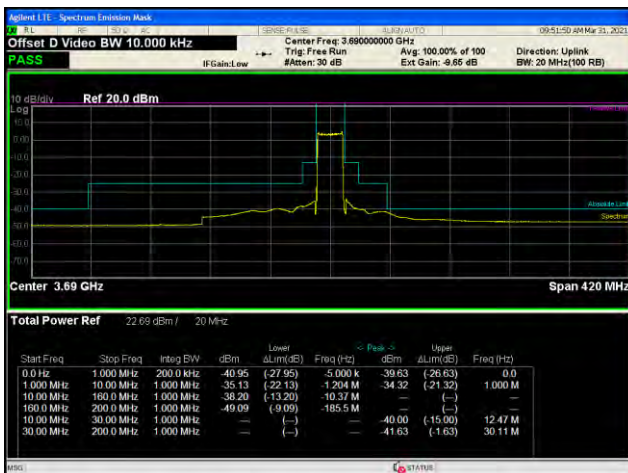


Highest channel



20MHz bandwidth-ANT 3

QPKS



64QAM

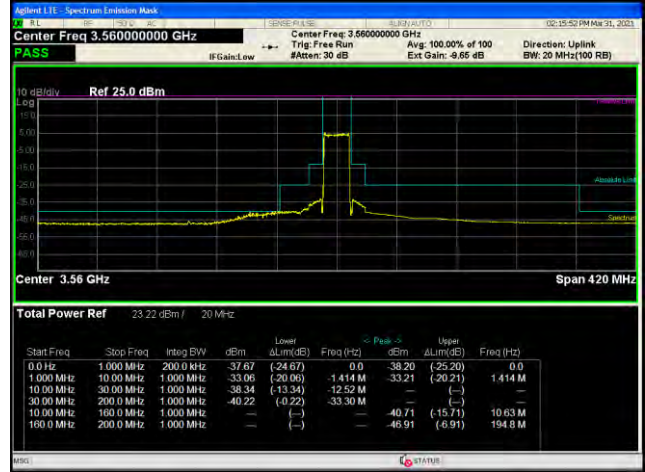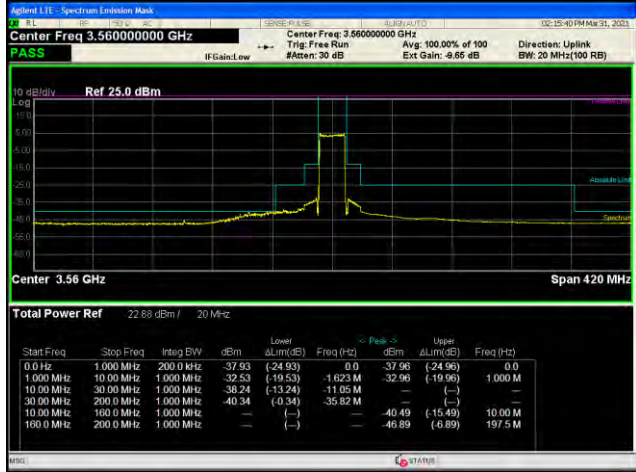


Lowest channel

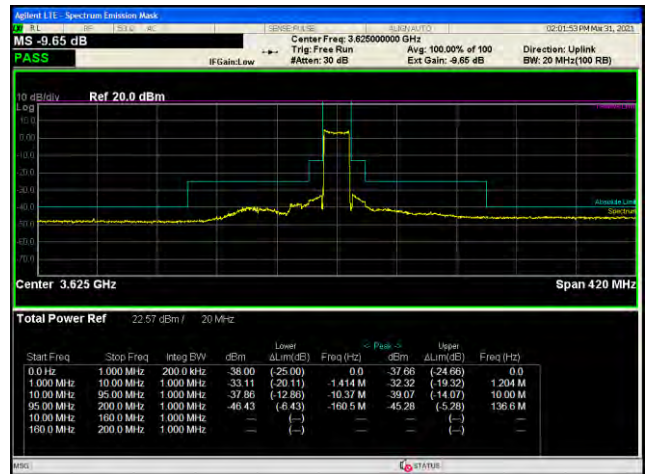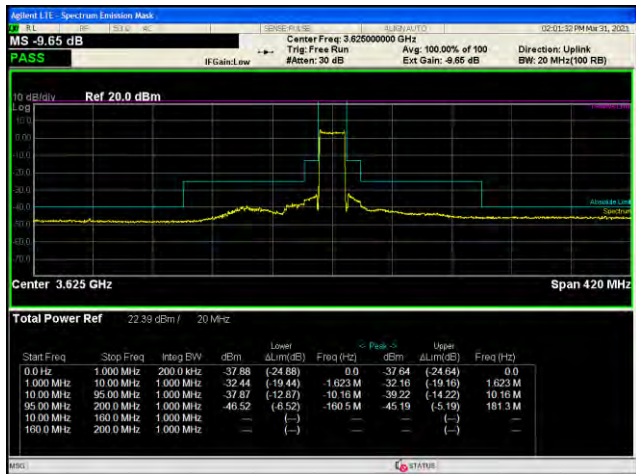


Middle channel

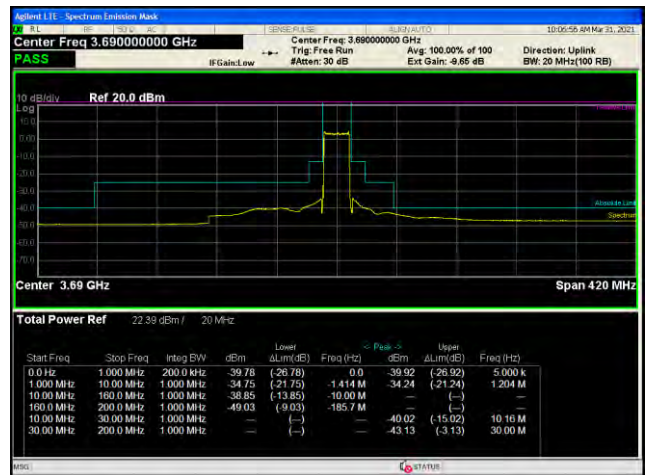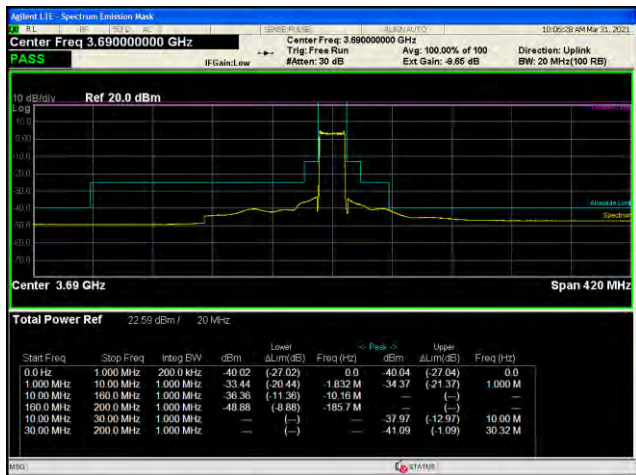

Highest channel

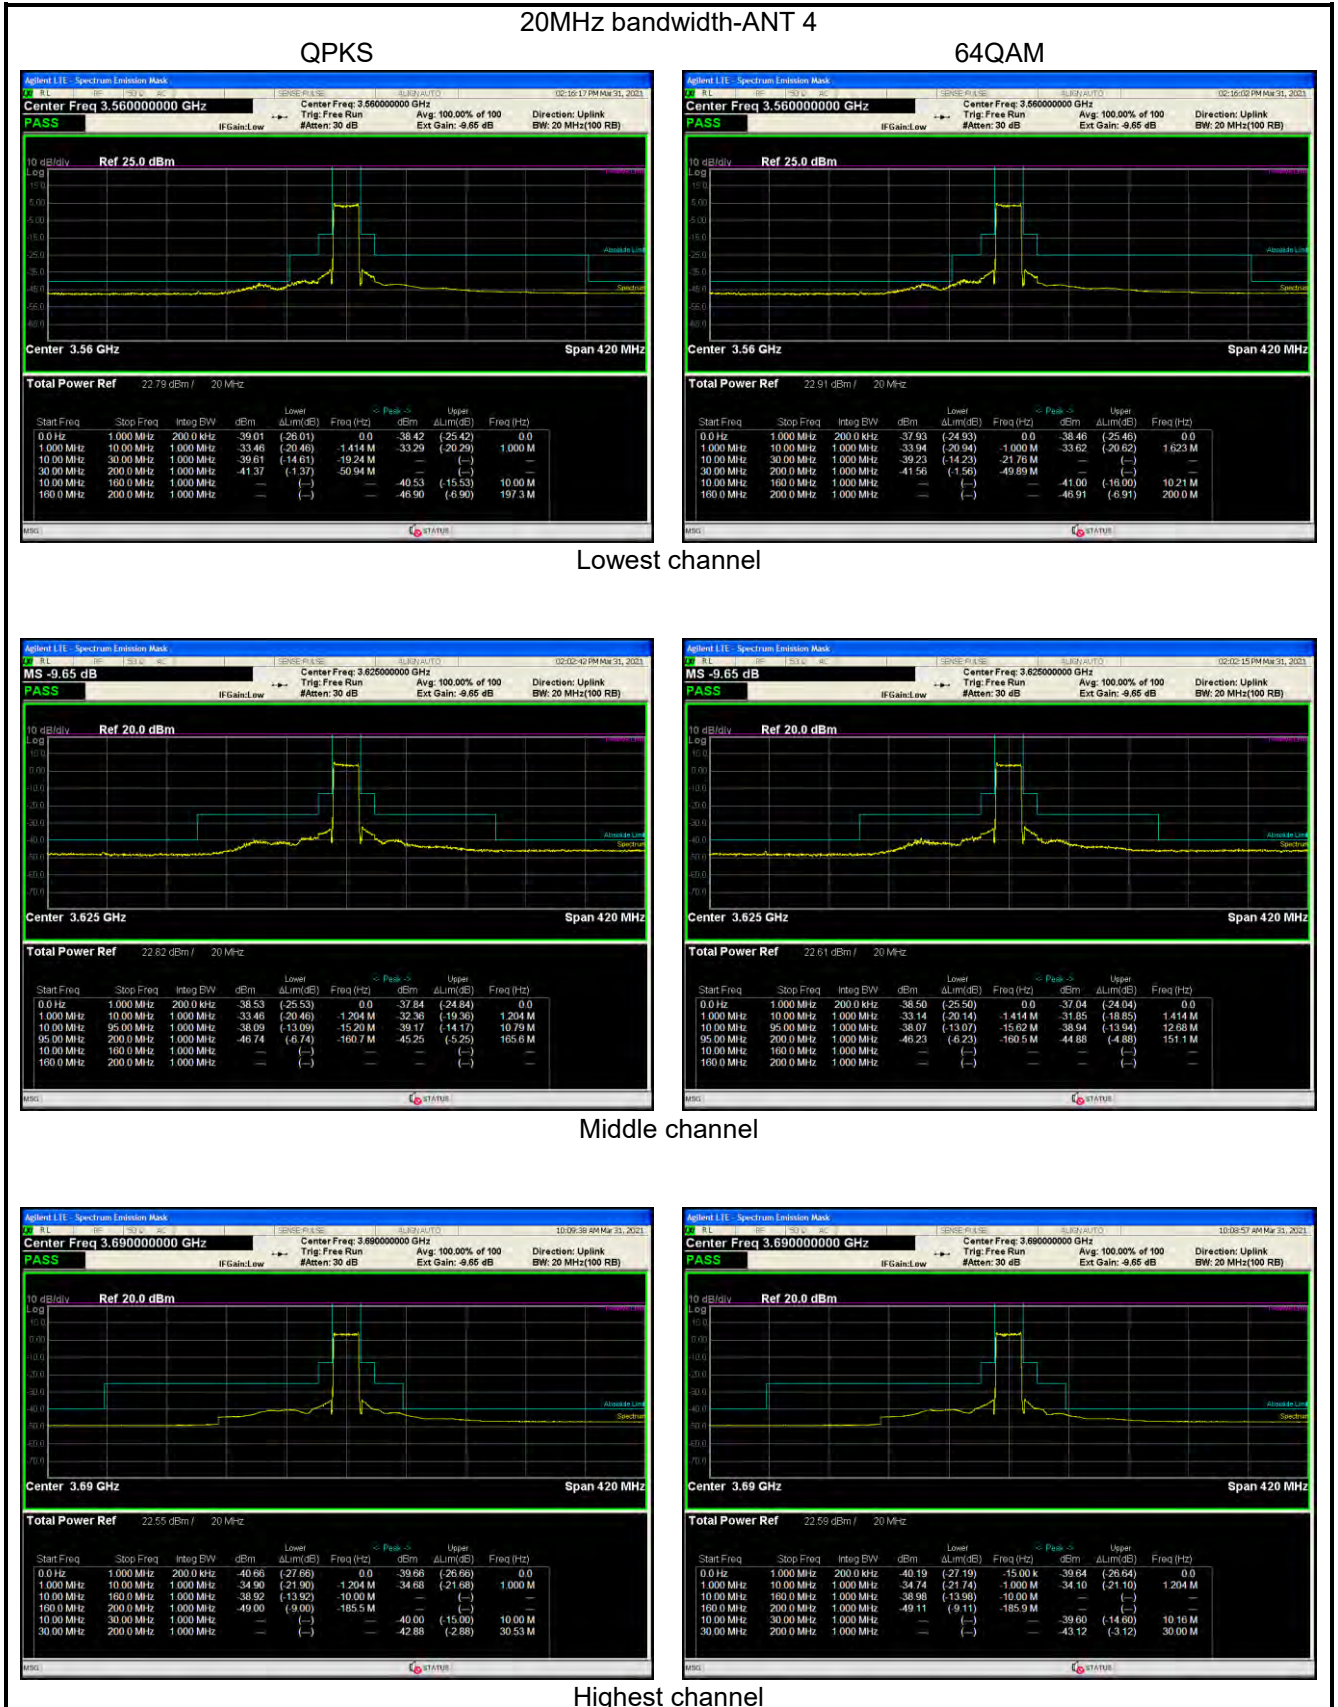

6.5 Out of band emission at antenna terminals

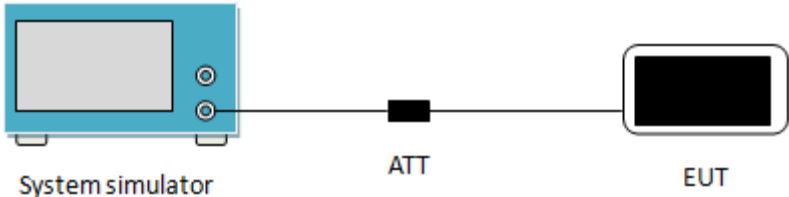Test Requirement:	FCC part 96.41(e)(1)(2)
Limit:	-40 dBm/MHz
	 <p style="text-align: center;">System simulator ATT EUT</p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: RBW =1 MHz, VBW=3 MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	The emission evaluation for MIMO mode is exempted because all the emissions on SISO mode are lower (at least) by 3.0dB than the limit masks.

Test plots as follows (worst case):
Spurious emission

LTE Band 48(10 MHz 64QAM)- ANT 1
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(10 MHz 64QAM)-ANT 2
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz




26.5GHz~40GHz

Highest channel



30MHz~26.5GHz

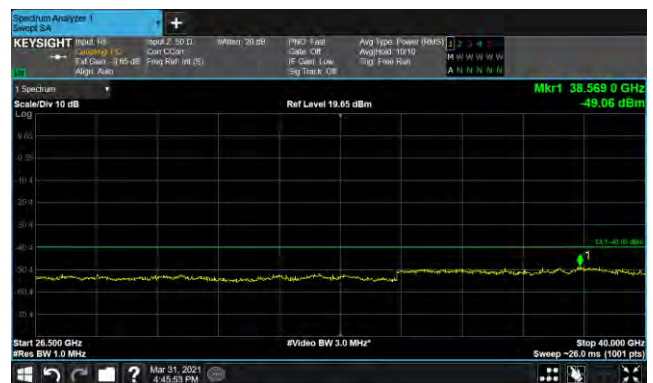

26.5GHz~40GHz

LTE Band 48(10 MHz 64QAM)-ANT 3
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz




26.5GHz~40GHz

LTE Band 48(10 MHz 64QAM)-ANT 4
Lowest channel



30MHz~26.5GHz

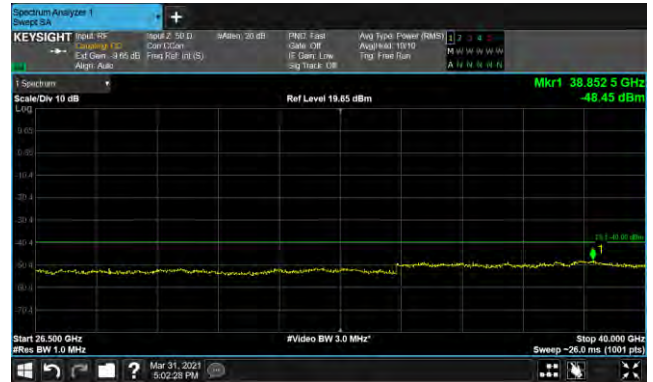

26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(10 MHz QPSK)-ANT 1
Lowest channel



30MHz~26.5GHz




26.5GHz~40GHz

Middle channel



30MHz~26.5GHz

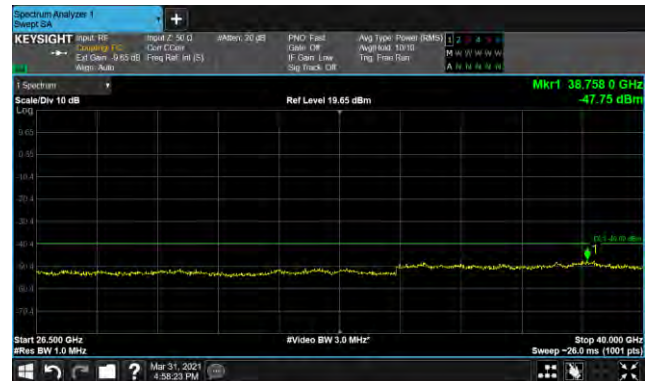


26.5GHz~40GHz

Highest channel



30MHz~26.5GHz

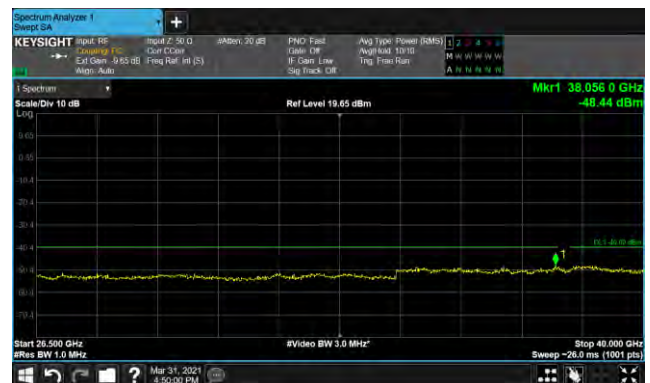

26.5GHz~40GHz

LTE Band 48(10 MHz QPSK)-ANT 2
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(10 MHz QPSK)-ANT 3
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz




26.5GHz~40GHz

Highest channel



30MHz~26.5GHz

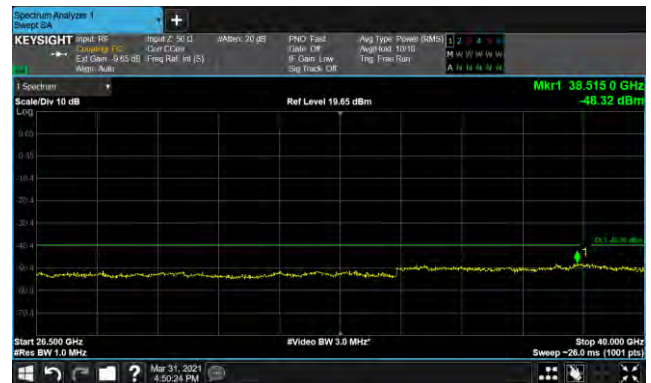

26.5GHz~40GHz

LTE Band 48(10 MHz QPSK)-ANT 4
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(20 MHz 64QAM)-ANT 1
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(20 MHz 64QAM)-ANT 2
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(20 MHz 64QAM)-ANT 3
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(20 MHz 64QAM)-ANT 4
Lowest channel



30MHz~26.5GHz




26.5GHz~40GHz

Middle channel



30MHz~26.5GHz

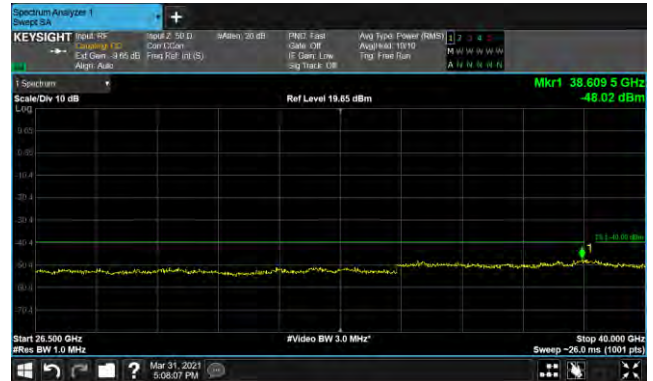


26.5GHz~40GHz

Highest channel



30MHz~26.5GHz

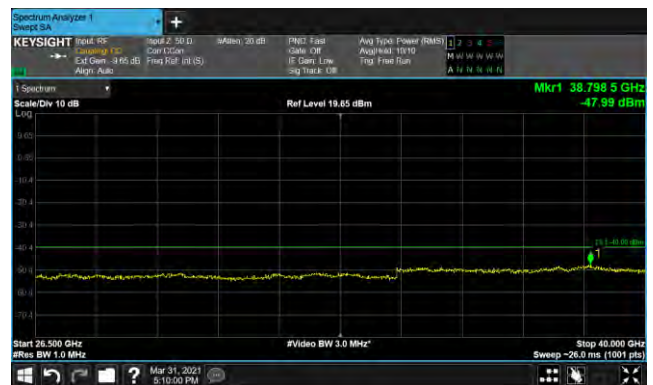

26.5GHz~40GHz

LTE Band 48(20 MHz QPSK)-ANT 1
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz




26.5GHz~40GHz

Highest channel



30MHz~26.5GHz

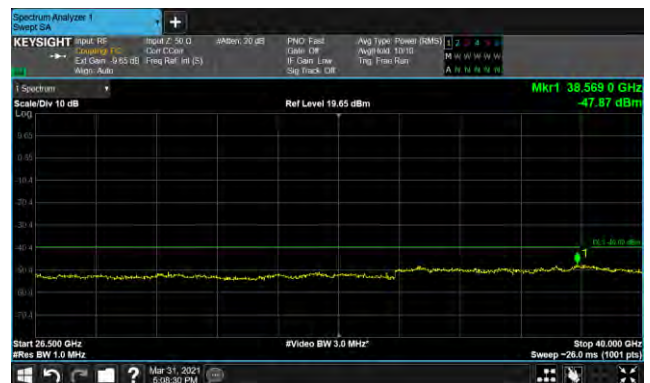

26.5GHz~40GHz

LTE Band 48(20 MHz QPSK)-ANT 2
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(20 MHz QPSK)-ANT 3
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel



30MHz~26.5GHz



26.5GHz~40GHz

LTE Band 48(20 MHz QPSK)-ANT 4
Lowest channel



30MHz~26.5GHz



26.5GHz~40GHz

Middle channel



30MHz~26.5GHz



26.5GHz~40GHz

Highest channel






30MHz~26.5GHz



26.5GHz~40GHz

6.6 Field strength of spurious radiation measurement
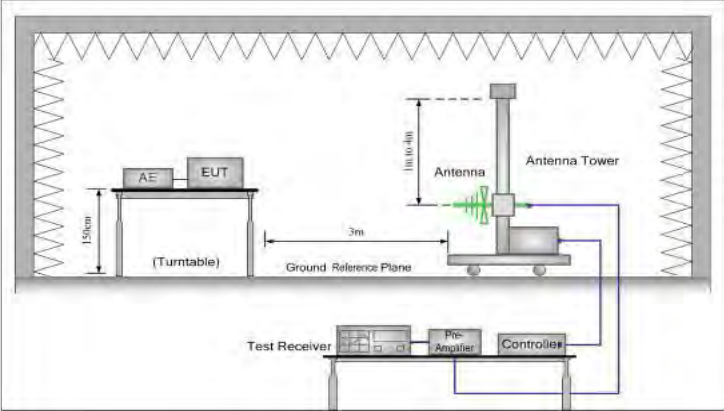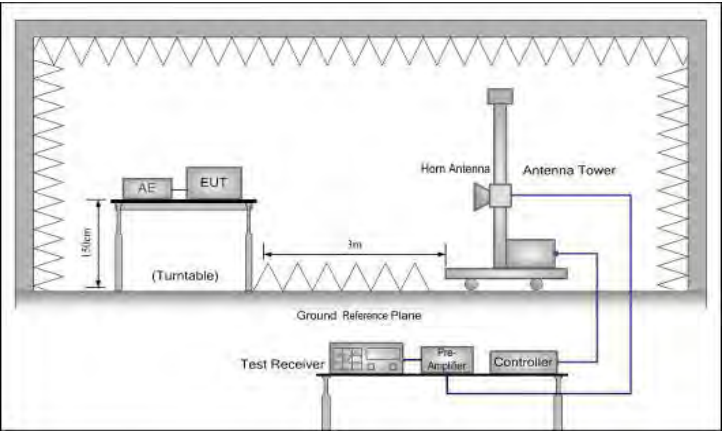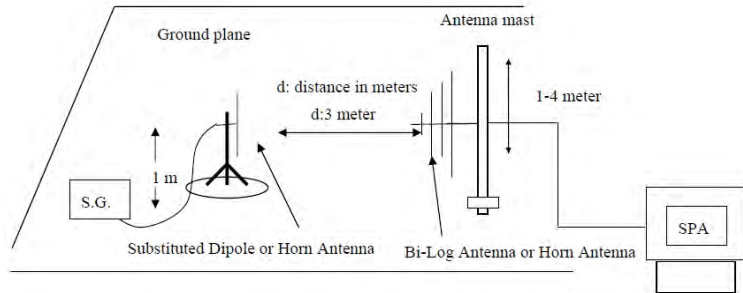
<p>Test Requirement:</p>	<p>Part 96.41(e)(1)(2)</p>
<p>Limit:</p>	<p>-40 dBm/MHz</p>
<p>Test setup:</p>	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

	<p>4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.</p> $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed
Remark:	During the test, pre-scan the QPSK, 64QAM modulation, and found the QPSK modulation is the worst case.

Measurement Data (worst case):

Band 48 (10 MHz) QPSK							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
7110.00	-56.52	11.27	1.36	-46.61	-40.00	-6.61	7110.00
10665.00	-53.67	11.30	1.85	-44.22	-40.00	-4.22	10665.00
14220.00	-53.23	11.63	1.98	-43.58	-40.00	-3.58	14220.00
7110.00	-57.49	11.27	1.36	-47.58	-40.00	-7.58	7110.00
10665.00	-55.04	11.30	1.85	-45.59	-40.00	-5.59	10665.00
14220.00	-53.68	11.63	1.98	-44.03	-40.00	-4.03	14220.00
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
7250.00	-56.63	11.35	1.37	-46.65	-40.00	-6.65	Vertical
10875.00	-53.32	11.18	1.86	-44.00	-40.00	-4.00	Vertical
14500.00	-53.17	12.05	1.99	-43.11	-40.00	-3.11	Vertical
7250.00	-57.52	11.35	1.37	-47.54	-40.00	-7.54	Horizontal
10875.00	-55.02	11.18	1.86	-45.70	-40.00	-5.70	Horizontal
14500.00	-54.03	12.05	1.99	-43.97	-40.00	-3.97	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
7390.00	-56.41	11.43	1.41	-46.39	-40.00	-6.39	Vertical
11085.00	-52.97	11.23	1.88	-43.62	-40.00	-3.62	Vertical
14780.00	-53.86	12.47	2.01	-43.40	-40.00	-3.40	Vertical
7390.00	-57.66	11.43	1.41	-47.64	-40.00	-7.64	Horizontal
11085.00	-55.35	11.23	1.88	-46.00	-40.00	-6.00	Horizontal
14780.00	-54.81	12.47	2.01	-44.35	-40.00	-4.35	Horizontal
<p><i>Remark:</i> The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</p>							

Band 48 (20 MHz) QPSK							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
7120.00	-56.16	11.27	1.36	-46.25	-40.00	-6.25	Vertical
10680.00	-53.45	11.29	1.85	-44.01	-40.00	-4.01	Vertical
14240.00	-53.54	11.66	1.99	-43.87	-40.00	-3.87	Vertical
7120.00	-57.81	11.27	1.36	-47.90	-40.00	-7.90	Horizontal
10680.00	-55.89	11.29	1.85	-46.45	-40.00	-6.45	Horizontal
14240.00	-53.94	11.66	1.99	-44.27	-40.00	-4.27	Horizontal
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
7250.00	-56.48	11.35	1.37	-46.50	-40.00	-6.50	Vertical
10875.00	-53.32	11.18	1.86	-44.00	-40.00	-4.00	Vertical
14500.00	-54.07	12.05	1.99	-44.01	-40.00	-4.01	Vertical
7250.00	-58.21	11.35	1.37	-48.23	-40.00	-8.23	Horizontal
10875.00	-55.96	11.18	1.86	-46.64	-40.00	-6.64	Horizontal
14500.00	-54.20	12.05	1.99	-44.14	-40.00	-4.14	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
7380.00	-56.94	11.43	1.41	-46.92	-40.00	-6.92	Vertical
11070.00	-53.74	11.21	1.88	-44.41	-40.00	-4.41	Vertical
14760.00	-54.24	12.44	2.00	-43.80	-40.00	-3.80	Vertical
7380.00	-58.04	11.43	1.41	-48.02	-40.00	-8.02	Horizontal
11070.00	-56.25	11.21	1.88	-46.92	-40.00	-6.92	Horizontal
14760.00	-54.40	12.44	2.00	-43.96	-40.00	-3.96	Horizontal
<i>Remark:</i>							
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>							

6.7 Frequency stability V.S. Temperature measurement


Test Requirement:	FCC Part 2.1055(a)(b)																																																																														
Limit:	<p>FCC:</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th rowspan="2">Fixed and base stations (±ppm)</th> <th colspan="2">Mobile stations (±ppm)</th> </tr> <tr> <th>Over 2 watts output power</th> <th>2 watts or less output power</th> </tr> </thead> <tbody> <tr><td>Below 25</td><td>100</td><td>100</td><td>200</td></tr> <tr><td>25-50</td><td>20</td><td>20</td><td>50</td></tr> <tr><td>72-76</td><td>5</td><td></td><td>50</td></tr> <tr><td>150-174</td><td>5</td><td>5</td><td>50</td></tr> <tr><td>216-220</td><td>1.0</td><td></td><td>1.0</td></tr> <tr><td>220-222</td><td>0.1</td><td>1.5</td><td>1.5</td></tr> <tr><td>421-512</td><td>2.5</td><td>5</td><td>5</td></tr> <tr><td>806-809</td><td>1.0</td><td>1.5</td><td>1.5</td></tr> <tr><td>809-824</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>851-854</td><td>1.0</td><td>1.5</td><td>1.5</td></tr> <tr><td>854-869</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>896-901</td><td>0.1</td><td>1.5</td><td>1.5</td></tr> <tr><td>902-928</td><td>2.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>902-928</td><td>2.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>929-930</td><td>1.5</td><td></td><td></td></tr> <tr><td>935-940</td><td>0.1</td><td>1.5</td><td>1.5</td></tr> <tr><td>1427-1435</td><td>300</td><td>300</td><td>300</td></tr> <tr><td>Above 2450</td><td></td><td></td><td></td></tr> </tbody> </table>	Frequency range (MHz)	Fixed and base stations (±ppm)	Mobile stations (±ppm)		Over 2 watts output power	2 watts or less output power	Below 25	100	100	200	25-50	20	20	50	72-76	5		50	150-174	5	5	50	216-220	1.0		1.0	220-222	0.1	1.5	1.5	421-512	2.5	5	5	806-809	1.0	1.5	1.5	809-824	1.5	2.5	2.5	851-854	1.0	1.5	1.5	854-869	1.5	2.5	2.5	896-901	0.1	1.5	1.5	902-928	2.5	2.5	2.5	902-928	2.5	2.5	2.5	929-930	1.5			935-940	0.1	1.5	1.5	1427-1435	300	300	300	Above 2450			
Frequency range (MHz)	Fixed and base stations (±ppm)			Mobile stations (±ppm)																																																																											
		Over 2 watts output power	2 watts or less output power																																																																												
Below 25	100	100	200																																																																												
25-50	20	20	50																																																																												
72-76	5		50																																																																												
150-174	5	5	50																																																																												
216-220	1.0		1.0																																																																												
220-222	0.1	1.5	1.5																																																																												
421-512	2.5	5	5																																																																												
806-809	1.0	1.5	1.5																																																																												
809-824	1.5	2.5	2.5																																																																												
851-854	1.0	1.5	1.5																																																																												
854-869	1.5	2.5	2.5																																																																												
896-901	0.1	1.5	1.5																																																																												
902-928	2.5	2.5	2.5																																																																												
902-928	2.5	2.5	2.5																																																																												
929-930	1.5																																																																														
935-940	0.1	1.5	1.5																																																																												
1427-1435	300	300	300																																																																												
Above 2450																																																																															
Test setup:	<p>Note : Measurement setup for testing on Antenna connector</p>																																																																														
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached 																																																																														
Test Instruments:	Refer to section 5.10 for details																																																																														
Test mode:	Refer to section 5.3 for details																																																																														
Test results:	Passed																																																																														
Remark:	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.																																																																														

Measurement Data (the worst channel):

Reference Frequency: Lowest channel=3555.0MHz(10MHz for QPSK)			
Power supplied (Vac)	Temperature (°C)	Frequency error	
		Hz	ppm
120.00	-10	187	0.052602
	0	176	0.049508
	10	180	0.050633
	20	144	0.040506
	30	150	0.042194
	40	132	0.037131
	50	126	0.035443
Reference Frequency: Lowest channel=3560.0MHz(20MHz for QPSK)			
Power supplied (Vac)	Temperature (°C)	Frequency error	
		Hz	ppm
120.00	-10	187	0.052528
	0	165	0.046348
	10	174	0.048876
	20	123	0.034551
	30	160	0.044944
	40	144	0.040449
	50	150	0.042135

Reference Frequency: Lowest channel=3555.0MHz(10MHz for 64QAM)			
Power supplied (Vac)	Temperature (°C)	Frequency error	
		Hz	ppm
120.00	-10	199	0.055977
	0	181	0.050914
	10	165	0.046414
	20	171	0.048101
	30	123	0.034599
	40	132	0.037131
	50	136	0.038256
Reference Frequency: Lowest channel=3560.0MHz(20MHz for 64QAM)			
Power supplied (Vac)	Temperature (°C)	Frequency error	
		Hz	ppm
120.00	-10	198	0.055618
	0	180	0.050562
	10	156	0.043820
	20	132	0.037079
	30	144	0.040449
	40	171	0.048034
	50	105	0.029494

6.8 Frequency stability V.S. Voltage measurement

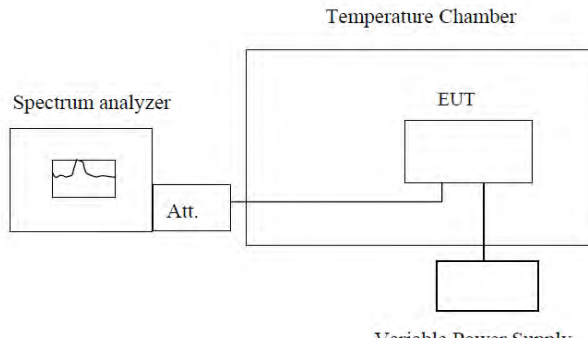Test Requirement:	FCC Part 2.1055(b)																																																																														
Limit:	<p>FCC:</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th rowspan="2">Fixed and base stations (±ppm)</th> <th colspan="2">Mobile stations (±ppm)</th> </tr> <tr> <th>Over 2 watts output power</th> <th>2 watts or less output power</th> </tr> </thead> <tbody> <tr><td>Below 25</td><td>100</td><td>100</td><td>200</td></tr> <tr><td>25-50</td><td>20</td><td>20</td><td>50</td></tr> <tr><td>72-76</td><td>5</td><td></td><td>50</td></tr> <tr><td>150-174</td><td>5</td><td>5</td><td>50</td></tr> <tr><td>216-220</td><td>1.0</td><td></td><td>1.0</td></tr> <tr><td>220-222</td><td>0.1</td><td>1.5</td><td>1.5</td></tr> <tr><td>421-512</td><td>2.5</td><td>5</td><td>5</td></tr> <tr><td>806-809</td><td>1.0</td><td>1.5</td><td>1.5</td></tr> <tr><td>809-824</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>851-854</td><td>1.0</td><td>1.5</td><td>1.5</td></tr> <tr><td>854-869</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>896-901</td><td>0.1</td><td>1.5</td><td>1.5</td></tr> <tr><td>902-928</td><td>2.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>902-928</td><td>2.5</td><td>2.5</td><td>2.5</td></tr> <tr><td>929-930</td><td>1.5</td><td></td><td></td></tr> <tr><td>935-940</td><td>0.1</td><td>1.5</td><td>1.5</td></tr> <tr><td>1427-1435</td><td>300</td><td>300</td><td>300</td></tr> <tr><td>Above 2450</td><td></td><td></td><td></td></tr> </tbody> </table>	Frequency range (MHz)	Fixed and base stations (±ppm)	Mobile stations (±ppm)		Over 2 watts output power	2 watts or less output power	Below 25	100	100	200	25-50	20	20	50	72-76	5		50	150-174	5	5	50	216-220	1.0		1.0	220-222	0.1	1.5	1.5	421-512	2.5	5	5	806-809	1.0	1.5	1.5	809-824	1.5	2.5	2.5	851-854	1.0	1.5	1.5	854-869	1.5	2.5	2.5	896-901	0.1	1.5	1.5	902-928	2.5	2.5	2.5	902-928	2.5	2.5	2.5	929-930	1.5			935-940	0.1	1.5	1.5	1427-1435	300	300	300	Above 2450			
Frequency range (MHz)	Fixed and base stations (±ppm)			Mobile stations (±ppm)																																																																											
		Over 2 watts output power	2 watts or less output power																																																																												
Below 25	100	100	200																																																																												
25-50	20	20	50																																																																												
72-76	5		50																																																																												
150-174	5	5	50																																																																												
216-220	1.0		1.0																																																																												
220-222	0.1	1.5	1.5																																																																												
421-512	2.5	5	5																																																																												
806-809	1.0	1.5	1.5																																																																												
809-824	1.5	2.5	2.5																																																																												
851-854	1.0	1.5	1.5																																																																												
854-869	1.5	2.5	2.5																																																																												
896-901	0.1	1.5	1.5																																																																												
902-928	2.5	2.5	2.5																																																																												
902-928	2.5	2.5	2.5																																																																												
929-930	1.5																																																																														
935-940	0.1	1.5	1.5																																																																												
1427-1435	300	300	300																																																																												
Above 2450																																																																															
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>																																																																														
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change. 																																																																														
Test Instruments:	Refer to section 5.10 for details																																																																														
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.																																																																														
Test results:	Passed																																																																														
Remark:	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.																																																																														

Measurement Data (the worst channel):

Reference Frequency: Lowest channel=3555.0MHz(10MHz for QPSK)			
Temperature (°C)	Power supplied (Vac)	Frequency error	
		Hz	ppm
25	102.00	89	0.025035
	120.00	78	0.021941
	138.00	90	0.025316
Reference Frequency: Lowest channel=3560.0MHz(20MHz for QPSK)			
Temperature (°C)	Power supplied (Vac)	Frequency error	
		Hz	ppm
25	102.00	99	0.027809
	120.00	71	0.019944
	138.00	80	0.022472

Reference Frequency: Lowest channel=3555.0MHz(10MHz for 64QAM)			
Temperature (°C)	Power supplied (Vac)	Frequency error	
		Hz	ppm
25	102.00	84	0.023629
	120.00	96	0.027004
	138.00	73	0.020534
Reference Frequency: Lowest channel=3560.0MHz(20MHz for 64QAM)			
Temperature (°C)	Power supplied (Vac)	Frequency error	
		Hz	ppm
25	102.00	98	0.027528
	120.00	85	0.023876
	138.00	60	0.016854