



FCC PART 15.247

TEST REPORT

For

Conquer (China) Industry Co., Ltd

A-703, Building 2, Tianan Cyber Park, HuangGe North Road, LongGang District, Shenzhen 518172, P.R. China.

FCC ID: 2AG3PCQL1581

Report Type: Original Report	Product Name: Bluetooth Speaker
Test Engineer: <u>Kevin Hu</u>	
Report Number: <u>RDG170618801</u>	
Report Date: <u>2017-07-11</u>	
Reviewed By: <u>Henry Ding</u> EMC Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Hui long wan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65525123, Fax: 028-65525125 www.baclcorp.com	

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP	11
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS	12
TEST DATA.....	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA.....	18
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST.....	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS	22
TEST PROCEDURE.....	22
TEST DATA.....	22
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	28
APPLICABLE STANDARD	28
TEST PROCEDURE.....	28
TEST EQUIPMENT LIST AND DETAILS	28

TEST DATA.....	28
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE.....	34
TEST EQUIPMENT LIST AND DETAILS	34
TEST DATA.....	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	38
APPLICABLE STANDARD	38
TEST PROCEDURE.....	38
TEST EQUIPMENT LIST AND DETAILS	38
TEST DATA.....	38
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	54
APPLICABLE STANDARD	54
TEST PROCEDURE.....	54
TEST EQUIPMENT LIST AND DETAILS	54
TEST DATA.....	54
FCC §15.247(d) - BAND EDGES TESTING	56
APPLICABLE STANDARD	56
TEST PROCEDURE.....	56
TEST EQUIPMENT LIST AND DETAILS	56
TEST DATA.....	57
EXHIBIT A - EUT PHOTOGRAPHS.....	61
EUT – ALL VIEW	61
EUT – TOP VIEW	61
EUT – BOTTOM VIEW	62
EUT – SIDE VIEW.....	62
EUT – SIDE VIEW.....	63
EUT – UNCOVER VIEW	63
EUT – PCB TOP VIEW	64
EUT – PCB BOTTOM VIEW	64
EUT – CHIP1 VIEW	65
EUT – CHIP2 VIEW	65
EUT – BT ANTENNA VIEW	66
EUT – BATTERY TOP VIEW	66
EUT – BATTERY BOTTOM VIEW	67
EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	68
CONDUCTED EMISSION - FRONT VIEW	68
CONDUCTED EMISSION - SIDE VIEW	68
RADIATED EMISSION BELOW 1GHz VIEW	69
RADIATED EMISSION ABOVE 1GHz VIEW	69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **Conquer (China) Industry Co., Ltd**'s product, model number: **CQL1581 (FCC ID: 2AG3PCQL1581)** (the "EUT") in this report was a **Bluetooth Speaker**, which was measured approximately: 9 cm (L) x 16 cm (W) x18 cm (H), rated input voltage: DC3.7V from battery or DC 5 V from USB port.

**All measurement and test data in this report was gathered from final production sample, serial number: 170618801(assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-06-20, and EUT conformed to test requirement.*

Objective

This report is prepared on behalf of **Conquer (China) Industry Co., Ltd** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All of the measurements detailed in this Test Report were performed by Bay Area Compliance Laboratories Corp. (Chengdu).

The Bay Area Compliance Laboratories Corp. Chengdu's measurement Uncertainties (calculated for a k=2 Coverage Factor corresponding to approximately 95% Coverage) were as follows:

- For all of the AC Line Conducted Emissions Tests reported herein: ±3.17 dB.
- For of all of the Direct Antenna Conducted Emissions Tests reported herein: ±0.56 dB.
- For of all of the direct Radiated Emissions Tests reported herein are:
30 MHz to 200 MHz: ±4.7 dB;
200 MHz to 1 GHz: ±6.0 dB;
1 GHz to 6 GHz: ±5.13dB; and,
6 GHz to 40 GHz: ±5.47dB.

And the uncertainty will not be taken into consideration for all test data recorded in the report.

Test Facility

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

Test software “BK3256 RF Test-V1.3” was used in test, the maximum power level was configured as below setting:

Test Software Version	BK3256 RF Test-V1.3		
Test Frequency	2402MHz	2441MHz	2480MHz
GFSK	3	3	3
$\pi/4$ -DQPSK	3	3	3
8DPSK	3	3	3

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HuaJin	AC Adapter	HJ-0501000E1-US	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (cm)	From Port	To
USB Cable	No	No	44	Adapter	EUT

Block Diagram of Test Setup

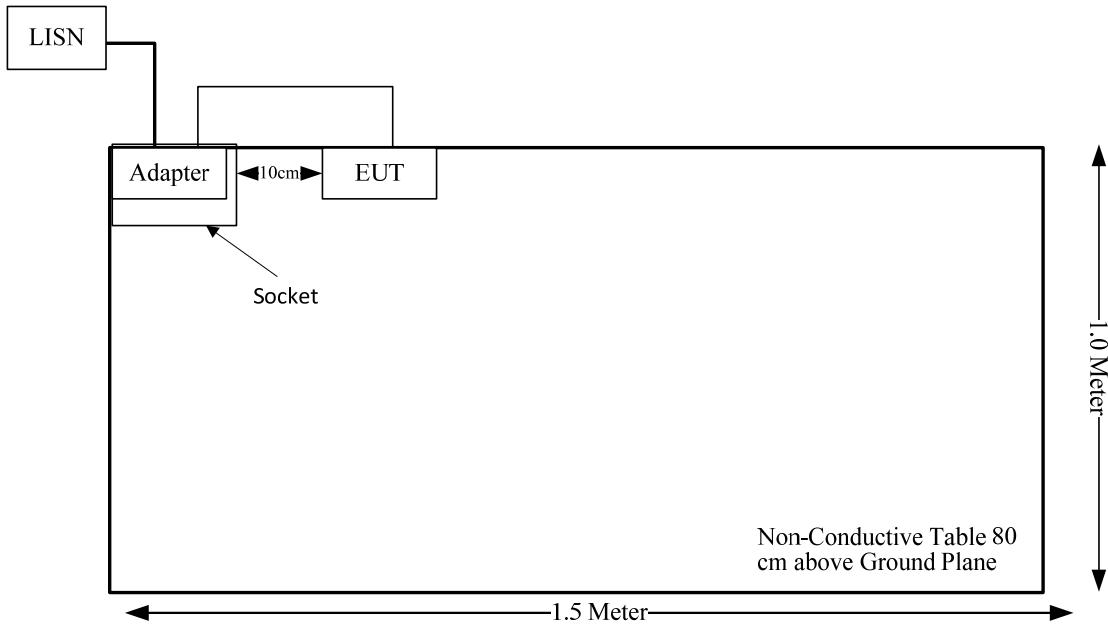

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Output Power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	0	1.00	-2	0.63	20.00	0.0001	1.0

Note: The maximum tune-up power including tolerance was declared by manufacturer.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

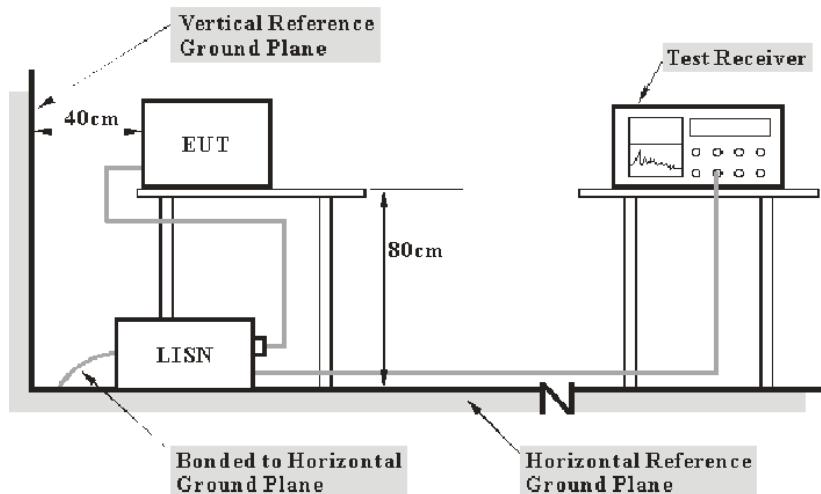

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	100018	2016-12-02	2017-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	DE14781	2016-10-31	2017-10-30
Unknown	Conducted Cable	Unknown	NO.5	2016-11-10	2017-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.


Test Data

Environmental Conditions

Temperature:	27.6 °C
Relative Humidity:	45.3 %
ATM Pressure:	100.1 kPa


The testing was performed by Tom Tang on 2017-06-29.

Test Mode: Operating

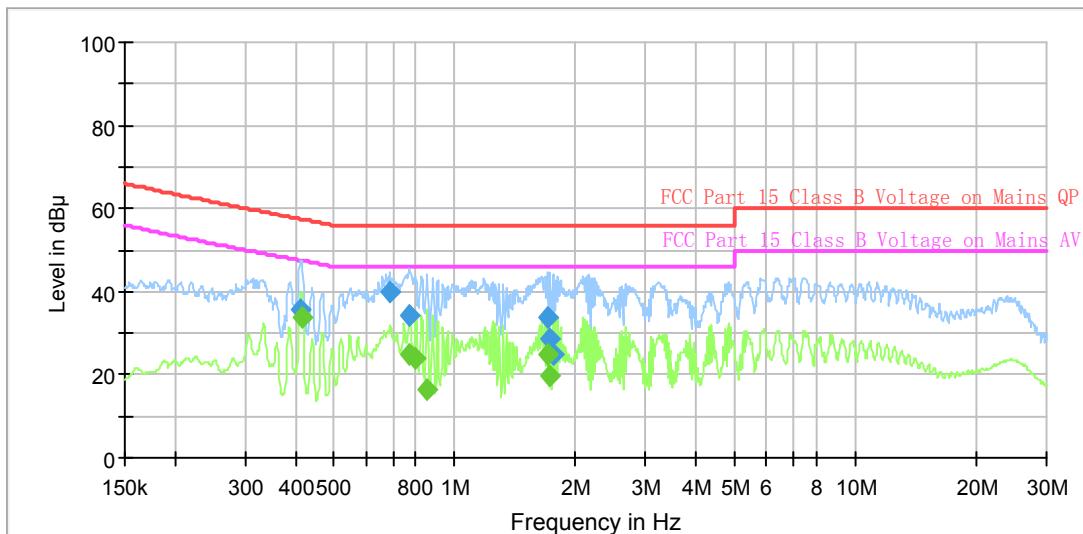AC120V, 60 Hz, Line:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.411833	35.6	9.000	L1	19.8	21.9	57.5	Compliance
0.689239	39.9	9.000	L1	19.8	16.1	56.0	Compliance
0.770750	34.3	9.000	L1	19.8	21.7	56.0	Compliance
1.705779	34.0	9.000	L1	19.8	22.0	56.0	Compliance
1.733235	28.5	9.000	L1	19.8	27.5	56.0	Compliance
1.761134	24.8	9.000	L1	19.8	31.2	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.413480	33.9	9.000	L1	19.8	13.5	47.5	Compliance
0.770750	24.8	9.000	L1	19.8	21.2	46.0	Compliance
0.798946	24.1	9.000	L1	19.8	21.9	46.0	Compliance
0.851641	16.2	9.000	L1	19.8	29.8	46.0	Compliance
1.705779	25.0	9.000	L1	19.8	21.0	46.0	Compliance
1.733235	19.5	9.000	L1	19.8	26.5	46.0	Compliance

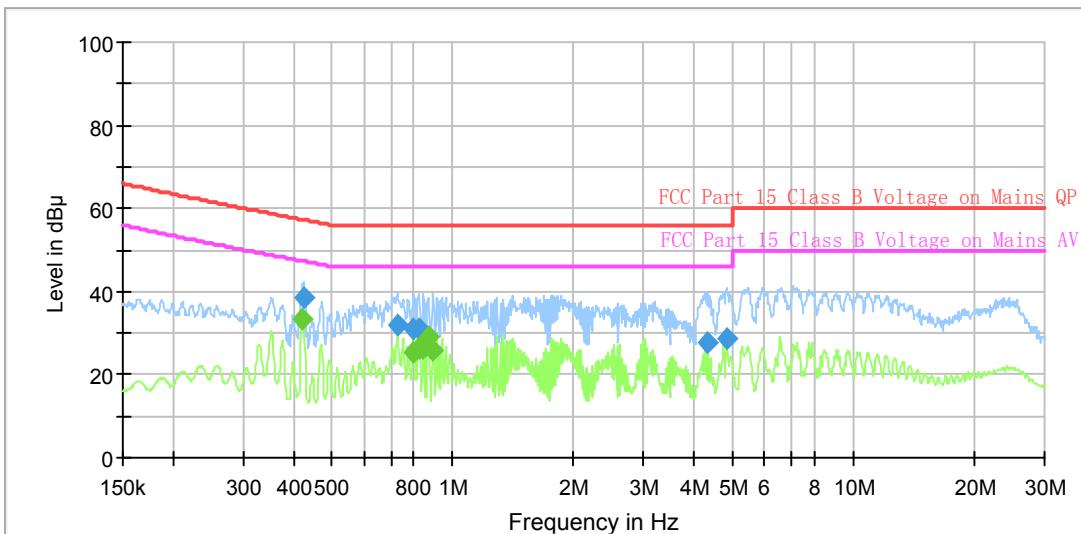AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.423503	38.3	9.000	N	19.6	19.0	57.3	Compliance
0.728856	31.8	9.000	N	19.5	24.2	56.0	Compliance
0.798946	30.8	9.000	N	19.5	25.2	56.0	Compliance
0.821586	31.2	9.000	N	19.5	24.8	56.0	Compliance
4.323921	27.6	9.000	N	19.6	28.4	56.0	Compliance
4.816017	28.7	9.000	N	19.6	27.3	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.421816	33.3	9.000	N	19.6	14.0	47.3	Compliance
0.798946	25.2	9.000	N	19.5	20.8	46.0	Compliance
0.821586	26.5	9.000	N	19.5	19.5	46.0	Compliance
0.844869	26.1	9.000	N	19.5	19.9	46.0	Compliance
0.868811	28.9	9.000	N	19.5	17.1	46.0	Compliance
0.889872	25.8	9.000	N	19.5	20.2	46.0	Compliance


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

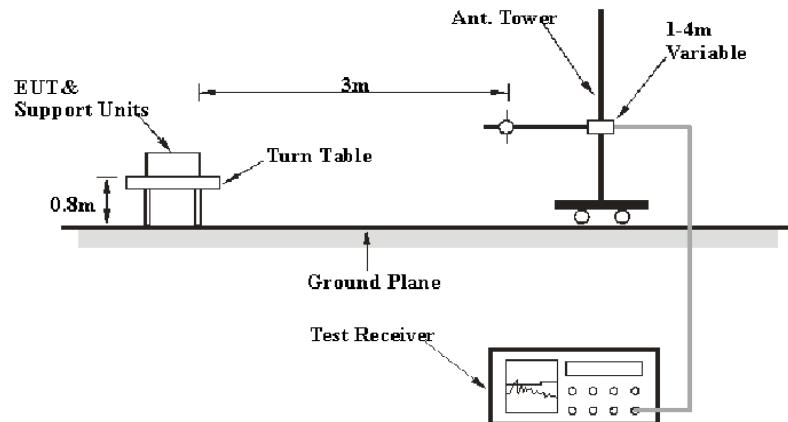

Above 1GHz:

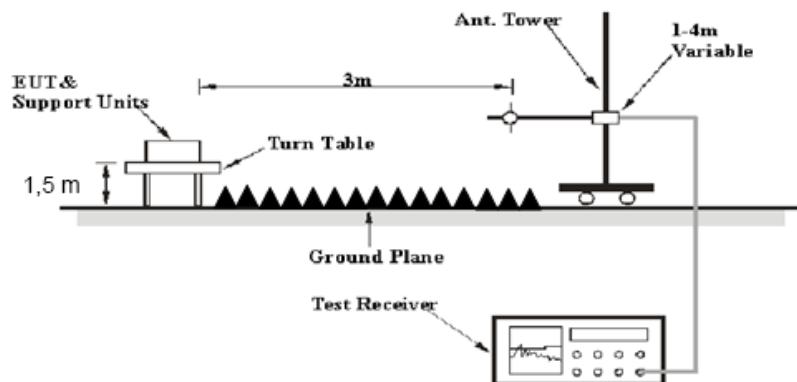

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A121808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2015-06-16	2018-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2017-05-20	2018-05-19
HP	Amplifier	8449B	3008A00277	2016-12-02	2017-12-01
EMCT	Semi-Anechoic Chamber	966	966-1	2015-04-24	2018-04-23
Unknown	RF Cable (below 1GHz)	Unknown	NO.1	2016-11-10	2017-11-09
Unknown	RF Cable (below 1GHz)	Unknown	NO.4	2016-11-10	2017-11-09
Unknown	RF Cable (above 1GHz)	Unknown	NO.2	2016-11-10	2017-11-09

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	26.7 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa

* The testing was performed by Kevin Hu on 2017-06-30.

Test Mode: Transmitting

30 MHz-25GHz:*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	61.14	PK	H	28.71	3.00	0.00	92.85	N/A	N/A
2402	52.17	AV	H	28.71	3.00	0.00	83.88	N/A	N/A
2402	58.67	PK	V	28.71	3.00	0.00	90.38	N/A	N/A
2402	47.57	AV	V	28.71	3.00	0.00	79.28	N/A	N/A
2390	30.91	PK	H	28.67	3.00	0.00	62.58	74.00	11.42
2390	18.18	AV	H	28.67	3.00	0.00	49.85	54.00	4.15
4804	50.04	PK	H	33.85	5.12	26.87	62.14	74.00	11.86
4804	37.17	AV	H	33.85	5.12	26.87	49.27	54.00	4.73
7206	39	PK	H	36.39	6.16	26.35	55.20	74.00	18.80
7206	25.64	AV	H	36.39	6.16	26.35	41.84	54.00	12.16
1523	39.73	PK	H	25.12	2.69	26.35	41.19	74.00	32.81
1523	23.88	AV	H	25.12	2.69	26.35	25.34	54.00	28.66
42.24	43.1	QP	H	13.43	0.31	28.52	28.32	40.00	11.68
43.21	44.5	QP	H	12.75	0.33	28.52	29.06	40.00	10.94
Middle Channel: 2441 MHz									
2441	60.17	PK	H	28.82	3.00	0.00	91.99	N/A	N/A
2441	51.63	AV	H	28.82	3.00	0.00	83.45	N/A	N/A
2441	58.1	PK	V	28.82	3.00	0.00	89.92	N/A	N/A
2441	46.69	AV	V	28.82	3.00	0.00	78.51	N/A	N/A
4882	49.13	PK	H	34.07	5.09	26.87	61.42	74.00	12.58
4882	36.46	AV	H	34.07	5.09	26.87	48.75	54.00	5.25
7323	38.27	PK	H	36.55	6.22	26.40	54.64	74.00	19.36
7323	24.37	AV	H	36.55	6.22	26.40	40.74	54.00	13.26
1523	38.78	PK	H	25.12	2.69	26.35	40.24	74.00	33.76
1523	25.57	AV	H	25.12	2.69	26.35	27.03	54.00	26.97
3346	39.26	PK	H	31.43	3.95	26.53	48.11	74.00	25.89
3346	23.55	AV	H	31.43	3.95	26.53	32.40	54.00	21.60
42.24	43.37	QP	H	13.43	0.31	28.52	28.59	40.00	11.41
43.21	44.64	QP	H	12.75	0.33	28.52	29.20	40.00	10.80
High Channel: 2480 MHz									
2480	59.65	PK	H	28.94	2.99	0.00	91.58	N/A	N/A
2480	51.1	AV	H	28.94	2.99	0.00	83.03	N/A	N/A
2480	57.18	PK	V	28.94	2.99	0.00	89.11	N/A	N/A
2480	45.92	AV	V	28.94	2.99	0.00	77.85	N/A	N/A
2483.5	30.6	PK	H	28.95	2.99	0.00	62.54	74.00	11.46
2483.5	17.74	AV	H	28.95	2.99	0.00	49.68	54.00	4.32
4960	48.53	PK	H	34.29	5.05	26.88	60.99	74.00	13.01
4960	35.84	AV	H	34.29	5.05	26.88	48.30	54.00	5.70
7440	37.67	PK	H	36.72	6.27	26.45	54.21	74.00	19.79
7440	23.69	AV	H	36.72	6.27	26.45	40.23	54.00	13.77
1523	39.24	PK	H	25.12	2.69	26.35	40.70	74.00	33.30
1523	23.71	AV	H	25.12	2.69	26.35	25.17	54.00	28.83
42.24	44.21	QP	H	13.43	0.31	28.52	29.43	40.00	10.57
43.21	45.06	QP	H	12.75	0.33	28.52	29.62	40.00	10.38

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	61.07	PK	H	28.71	3.00	0.00	92.78	N/A	N/A
2402	46.64	AV	H	28.71	3.00	0.00	78.35	N/A	N/A
2402	56.31	PK	V	28.71	3.00	0.00	88.02	N/A	N/A
2402	42.04	AV	V	28.71	3.00	0.00	73.75	N/A	N/A
2390	29.17	PK	H	28.67	3.00	0.00	60.84	74.00	13.16
2390	18.22	AV	H	28.67	3.00	0.00	49.89	54.00	4.11
4804	49.66	PK	H	33.85	5.12	26.87	61.76	74.00	12.24
4804	36.47	AV	H	33.85	5.12	26.87	48.57	54.00	5.43
7206	40.14	PK	H	36.39	6.16	26.35	56.34	74.00	17.66
7206	24.57	AV	H	36.39	6.16	26.35	40.77	54.00	13.23
1523	41.65	PK	H	25.12	2.69	26.35	43.11	74.00	30.89
1523	25.29	AV	H	25.12	2.69	26.35	26.75	54.00	27.25
42.24	43.74	QP	H	13.43	0.31	28.52	28.96	40.00	11.04
43.21	45.5	QP	H	12.75	0.33	28.52	30.06	40.00	9.94
Middle Channel: 2441 MHz									
2441	60.42	PK	H	28.82	3.00	0.00	92.24	N/A	N/A
2441	45.77	AV	H	28.82	3.00	0.00	77.59	N/A	N/A
2441	55.6	PK	V	28.82	3.00	0.00	87.42	N/A	N/A
2441	41.51	AV	V	28.82	3.00	0.00	73.33	N/A	N/A
4882	48.64	PK	H	34.07	5.09	26.87	60.93	74.00	13.07
4882	35.44	AV	H	34.07	5.09	26.87	47.73	54.00	6.27
7323	39.38	PK	H	36.55	6.22	26.40	55.75	74.00	18.25
7323	23.37	AV	H	36.55	6.22	26.40	39.74	54.00	14.26
1523	38.53	PK	H	25.12	2.69	26.35	39.99	74.00	34.01
1523	25.52	AV	H	25.12	2.69	26.35	26.98	54.00	27.02
3346	39.08	PK	H	31.43	3.95	26.53	47.93	74.00	26.07
3346	23.11	AV	H	31.43	3.95	26.53	31.96	54.00	22.04
42.24	43.27	QP	H	13.43	0.31	28.52	28.49	40.00	11.51
43.21	45.94	QP	H	12.75	0.33	28.52	30.50	40.00	9.50
High Channel: 2480 MHz									
2480	59.49	PK	H	28.94	2.99	0.00	91.42	N/A	N/A
2480	45.14	AV	H	28.94	2.99	0.00	77.07	N/A	N/A
2480	54.67	PK	V	28.94	2.99	0.00	86.60	N/A	N/A
2480	40.58	AV	V	28.94	2.99	0.00	72.51	N/A	N/A
2483.5	30.71	PK	H	28.95	2.99	0.00	62.65	74.00	11.35
2483.5	17.78	AV	H	28.95	2.99	0.00	49.72	54.00	4.28
4960	47.87	PK	H	34.29	5.05	26.88	60.33	74.00	13.67
4960	34.73	AV	H	34.29	5.05	26.88	47.19	54.00	6.81
7440	38.25	PK	H	36.72	6.27	26.45	54.79	74.00	19.21
7440	22.45	AV	H	36.72	6.27	26.45	38.99	54.00	15.01
1523	39.38	PK	H	25.12	2.69	26.35	40.84	74.00	33.16
1523	23.84	AV	H	25.12	2.69	26.35	25.30	54.00	28.70
42.24	43.96	QP	H	13.43	0.31	28.52	29.18	40.00	10.82
43.21	44.97	QP	H	12.75	0.33	28.52	29.53	40.00	10.47

EDR Mode (8DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	60.99	PK	H	28.71	3.00	0.00	92.70	N/A	N/A
2402	46.31	AV	H	28.71	3.00	0.00	78.02	N/A	N/A
2402	56.75	PK	V	28.71	3.00	0.00	88.46	N/A	N/A
2402	42.54	AV	V	28.71	3.00	0.00	74.25	N/A	N/A
2390	29.55	PK	H	28.67	3.00	0.00	61.22	74.00	12.78
2390	18.49	AV	H	28.67	3.00	0.00	50.16	54.00	3.84
4804	49.63	PK	H	33.85	5.12	26.87	61.73	74.00	12.27
4804	36.18	AV	H	33.85	5.12	26.87	48.28	54.00	5.72
7206	36.39	PK	H	36.39	6.16	26.35	52.59	74.00	21.41
7206	29.53	AV	H	36.39	6.16	26.35	45.73	54.00	8.27
1523	42.33	PK	H	25.12	2.69	26.35	43.79	74.00	30.21
1523	27.61	AV	H	25.12	2.69	26.35	29.07	54.00	24.93
42.24	44.23	QP	H	13.43	0.31	28.52	29.45	40.00	10.55
43.21	45.11	QP	H	12.75	0.33	28.52	29.67	40.00	10.33
Middle Channel: 2441 MHz									
2441	59.77	PK	H	28.82	3.00	0.00	91.59	N/A	N/A
2441	45.74	AV	H	28.82	3.00	0.00	77.56	N/A	N/A
2441	55.66	PK	V	28.82	3.00	0.00	87.48	N/A	N/A
2441	41.69	AV	V	28.82	3.00	0.00	73.51	N/A	N/A
4882	48.4	PK	H	34.07	5.09	26.87	60.69	74.00	13.31
4882	35.54	AV	H	34.07	5.09	26.87	47.83	54.00	6.17
7323	35.48	PK	H	36.55	6.22	26.40	51.85	74.00	22.15
7323	28.4	AV	H	36.55	6.22	26.40	44.77	54.00	9.23
1523	38.32	PK	H	25.12	2.69	26.35	39.78	74.00	34.22
1523	24.9	AV	H	25.12	2.69	26.35	26.36	54.00	27.64
3346	38.92	PK	H	31.43	3.95	26.53	47.77	74.00	26.23
3346	22.9	AV	H	31.43	3.95	26.53	31.75	54.00	22.25
42.24	45.07	QP	H	13.43	0.31	28.52	30.29	40.00	9.71
43.21	45.53	QP	H	12.75	0.33	28.52	30.09	40.00	9.91
High Channel: 2480 MHz									
2480	58.88	PK	H	28.94	2.99	0.00	90.81	N/A	N/A
2480	44.51	AV	H	28.94	2.99	0.00	76.44	N/A	N/A
2480	54.55	PK	V	28.94	2.99	0.00	86.48	N/A	N/A
2480	40.39	AV	V	28.94	2.99	0.00	72.32	N/A	N/A
2483.5	30.87	PK	H	28.95	2.99	0.00	62.81	74.00	11.19
2483.5	17.77	AV	H	28.95	2.99	0.00	49.71	54.00	4.29
4960	47.71	PK	H	34.29	5.05	26.88	60.17	74.00	13.83
4960	34.8	AV	H	34.29	5.05	26.88	47.26	54.00	6.74
7440	35.35	PK	H	36.72	6.27	26.45	51.89	74.00	22.11
7440	27.76	AV	H	36.72	6.27	26.45	44.30	54.00	9.70
1523	39.46	PK	H	25.12	2.69	26.35	40.92	74.00	33.08
1523	23.28	AV	H	25.12	2.69	26.35	24.74	54.00	29.26
42.24	44.6	QP	H	13.43	0.31	28.52	29.82	40.00	10.18
43.21	45.97	QP	H	12.75	0.33	28.52	30.53	40.00	9.47

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
Unknown	RF attenuator	10dB	10dB-2	Each Time	/
Unknown	RF Cable	Unknown	C-3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	28.6°C
Relative Humidity:	62 %
ATM Pressure:	100.1 kPa

* The testing was performed by Kevin Hu on 2017-06-30.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.006	0.73
	Middle	2441	1.002	0.73
	High	2480	1.002	0.74
EDR ($\pi/4$ -DQPSK)	Low	2402	0.990	0.87
	Middle	2441	1.010	0.87
	High	2480	0.994	0.87
EDR (8DPSK)	Low	2402	1.006	0.87
	Middle	2441	1.002	0.87
	High	2480	1.002	0.87

Note: Limit= $(2/3) \times 20\text{dB}$ bandwidth


BDR Mode (GFSK):

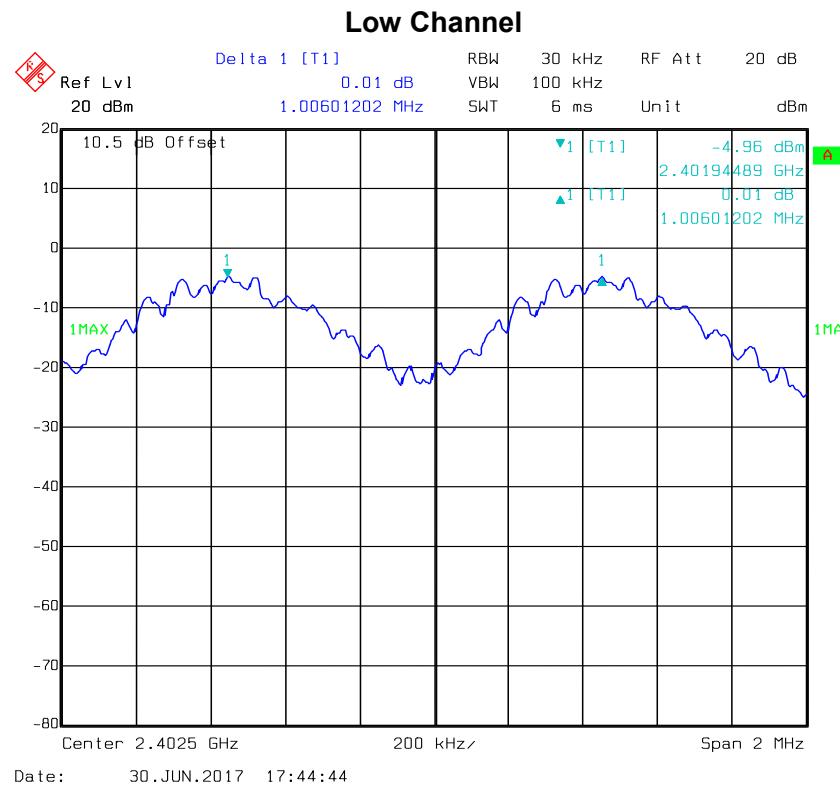

Middle Channel

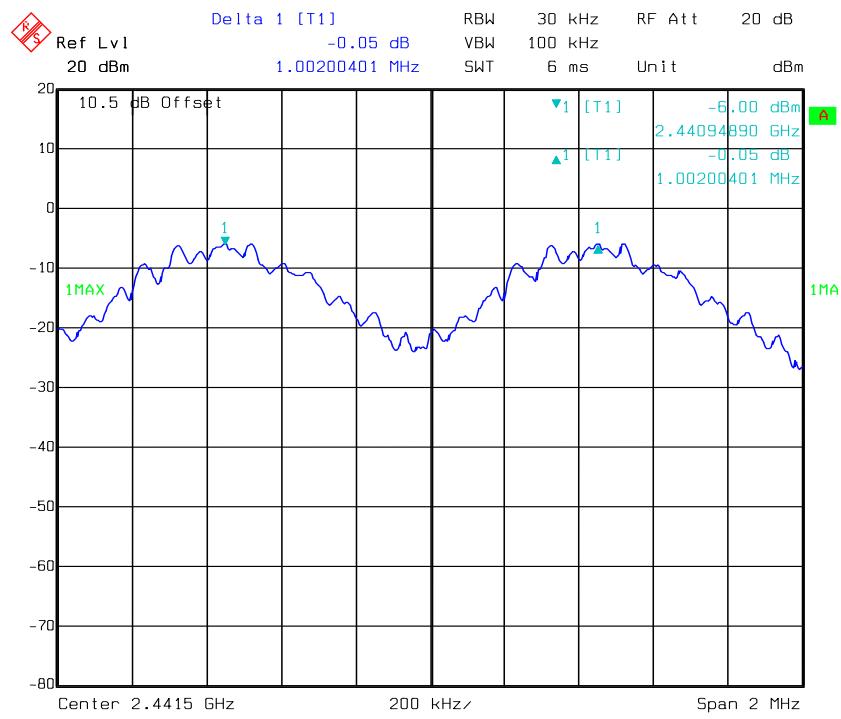


High Channel

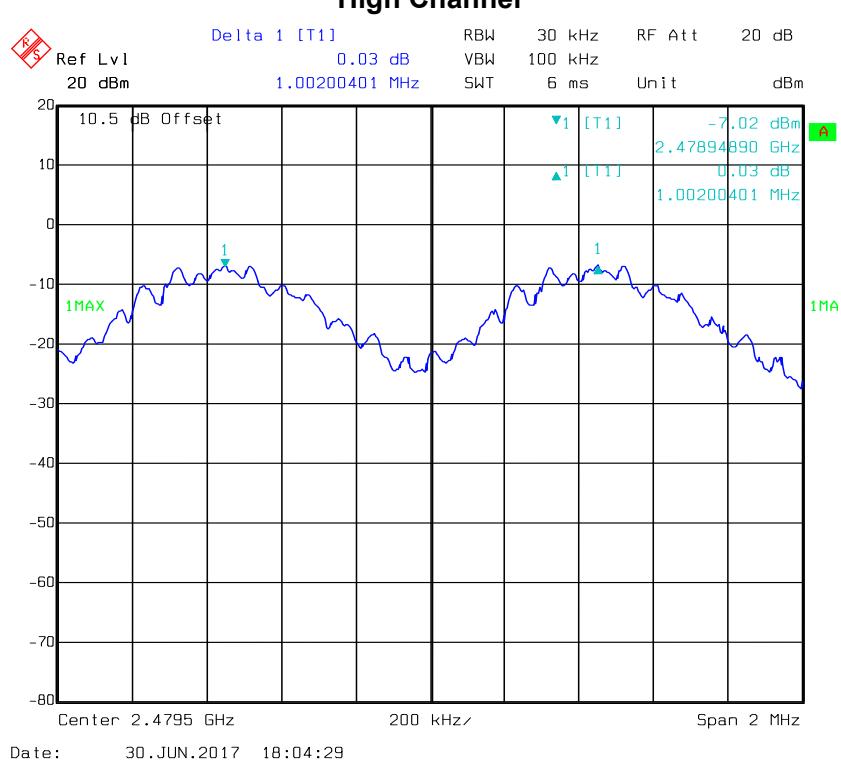


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

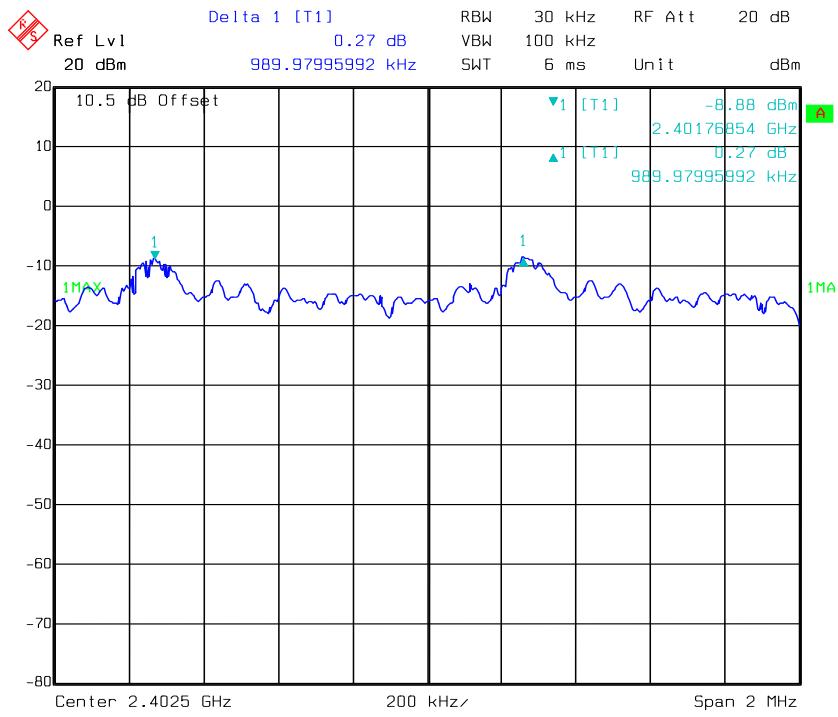


Date: 30.JUN.2017 18:06:17

Middle Channel

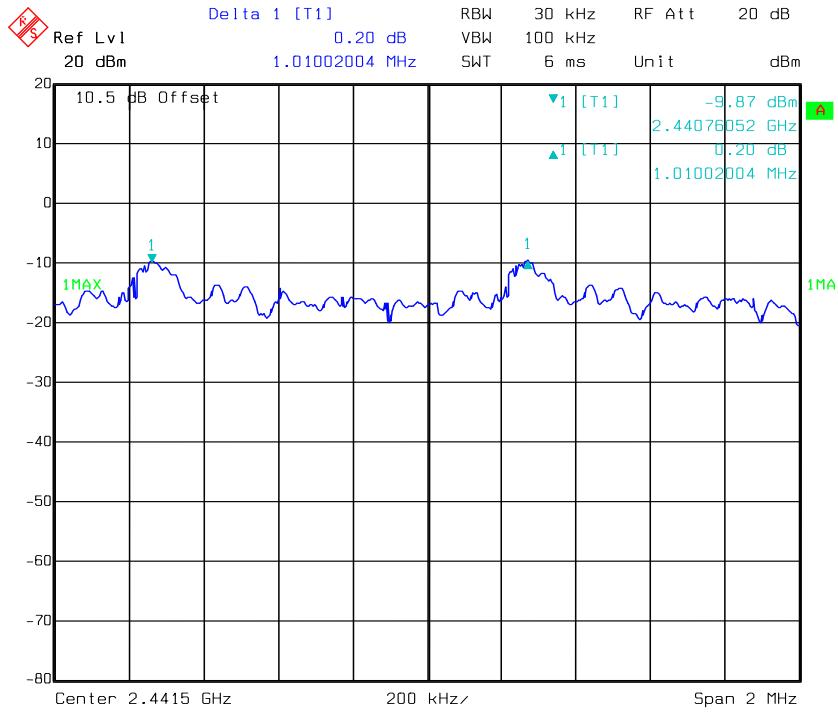


Date: 30.JUN.2017 18:07:35

High Channel

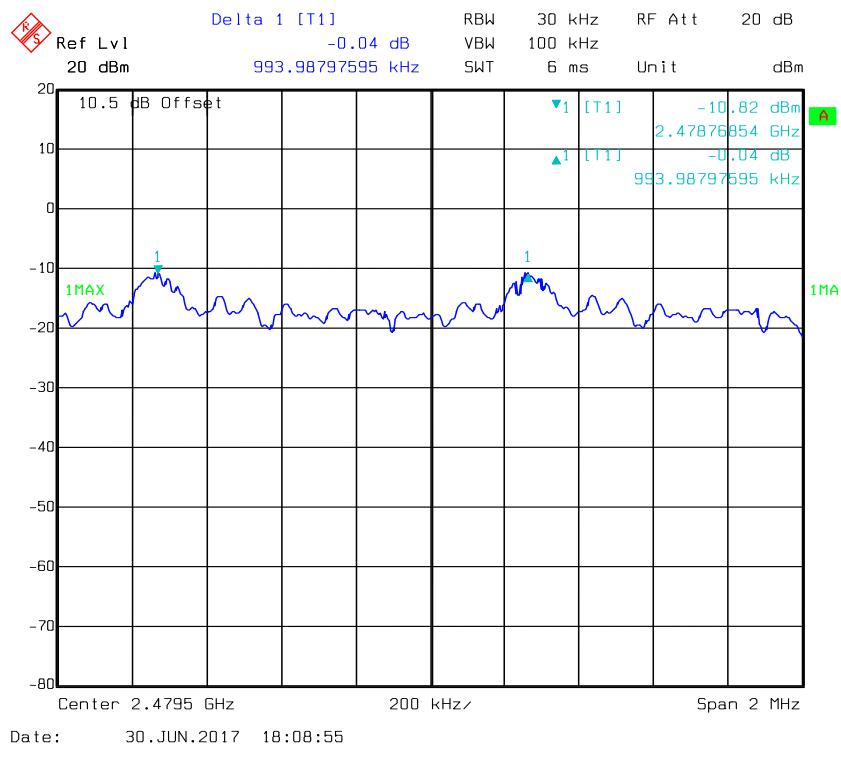


EDR Mode (8DPSK):

Low Channel

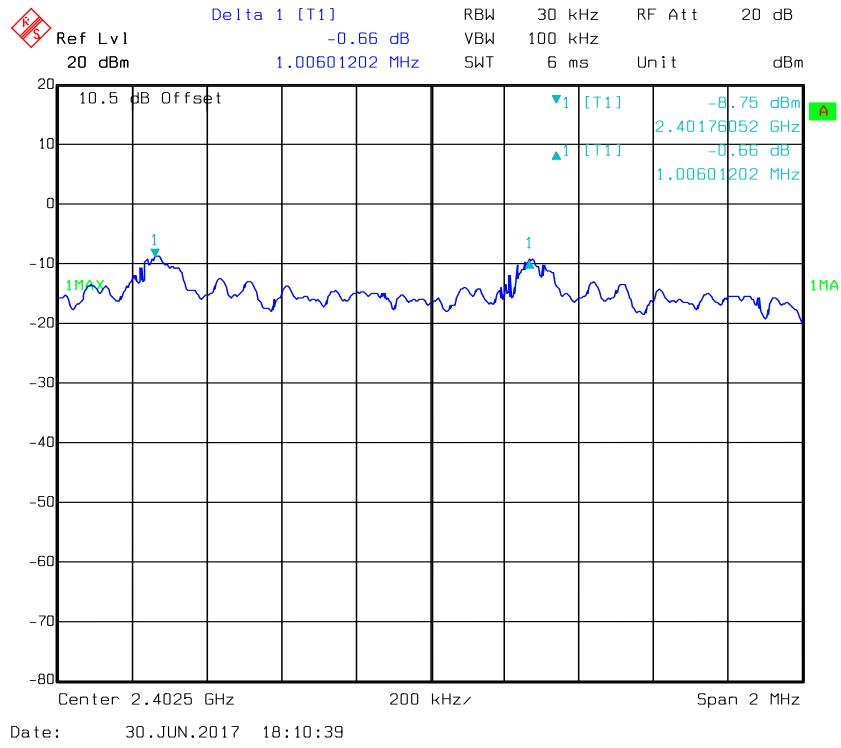


Middle Channel

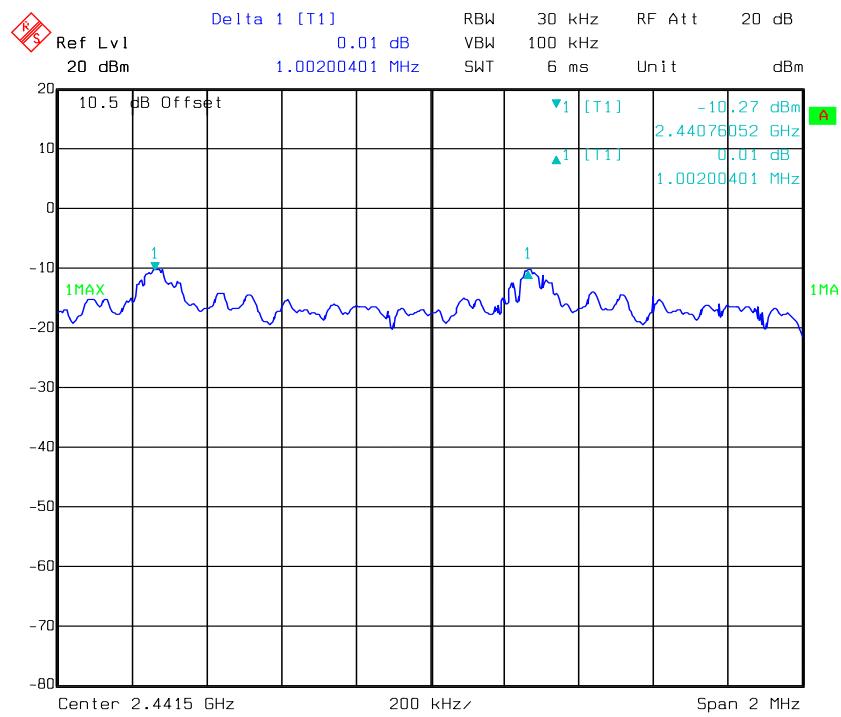

Date: 30.JUN.2017 18:14:51

High Channel

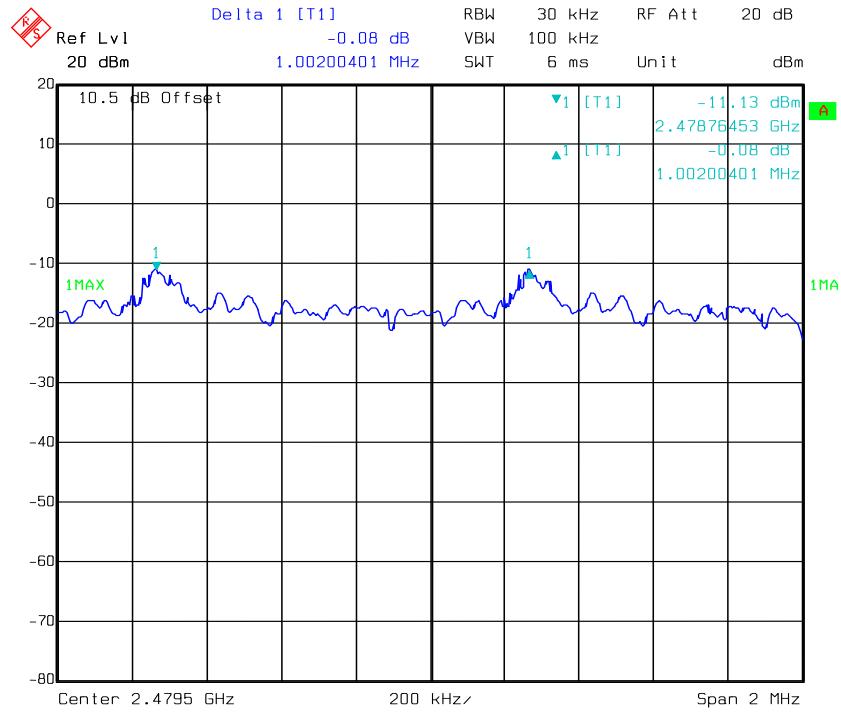

Date: 30.JUN.2017 18:16:13

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
Unknown	RF attenuator	10dB	10dB-2	Each Time	/
Unknown	RF Cable	Unknown	C-3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data

Environmental Conditions

Temperature:	28.6°C
Relative Humidity:	62 %
ATM Pressure:	100.1 kPa


* The testing was performed by Kevin Hu on 2017-06-30.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.10
	Middle	2441	1.10
	High	2480	1.11
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.30
	Middle	2441	1.30
	High	2480	1.30
EDR Mode (8DPSK)	Low	2402	1.30
	Middle	2441	1.30
	High	2480	1.30

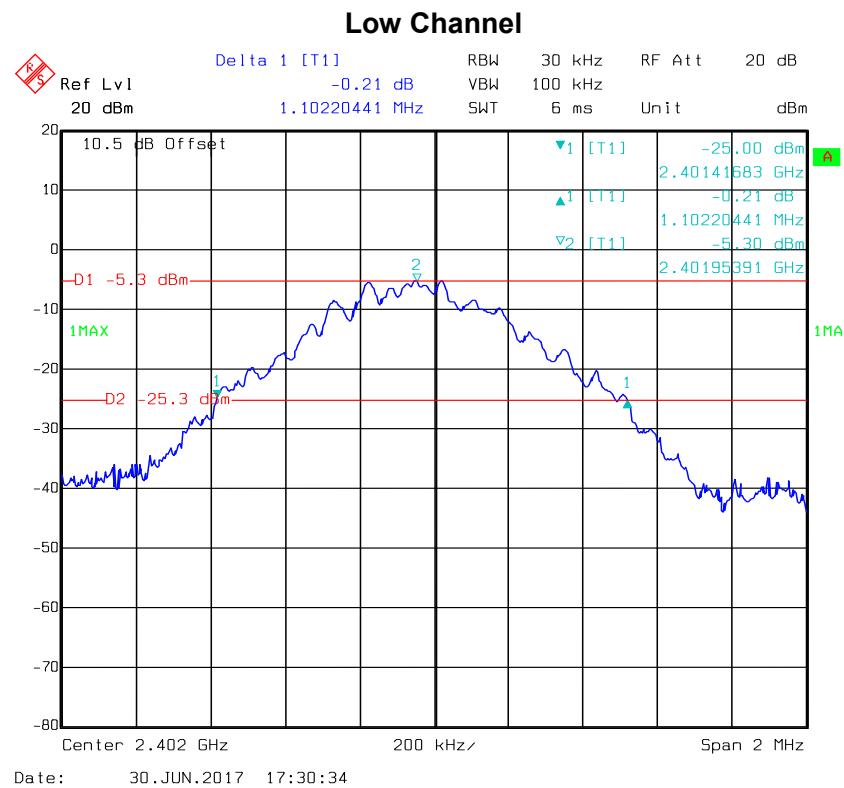
BDR Mode (GFSK):

Middle Channel

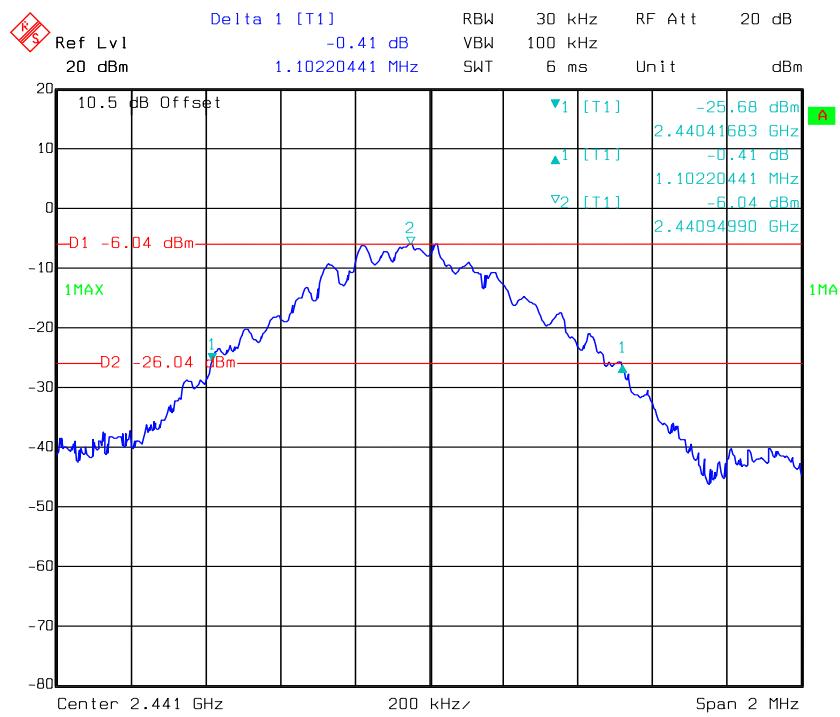

Date: 30.JUN.2017 17:32:04


High Channel

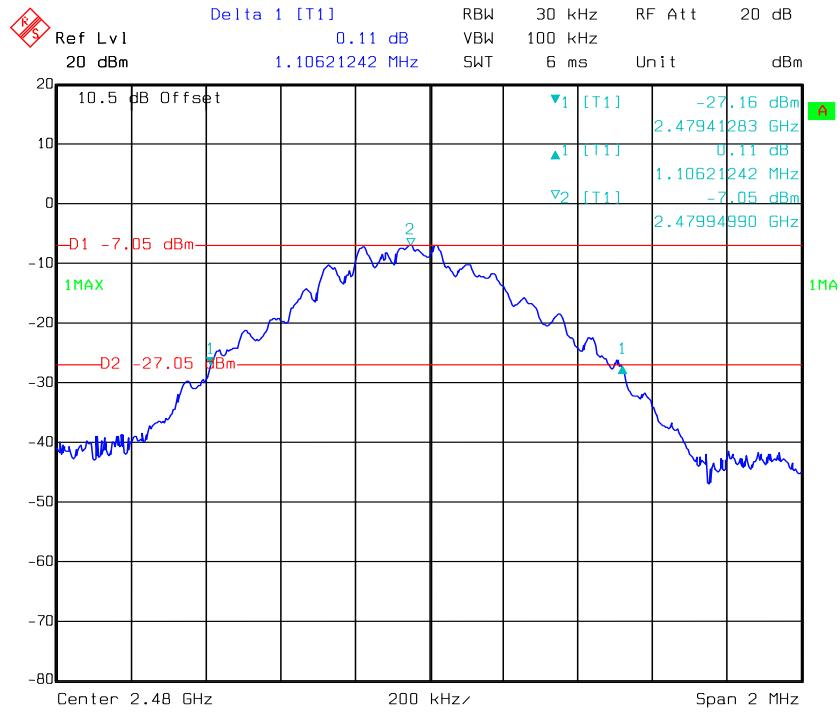


Date: 30.JUN.2017 17:33:03

EDR Mode ($\pi/4$ -DQPSK):


Low Channel

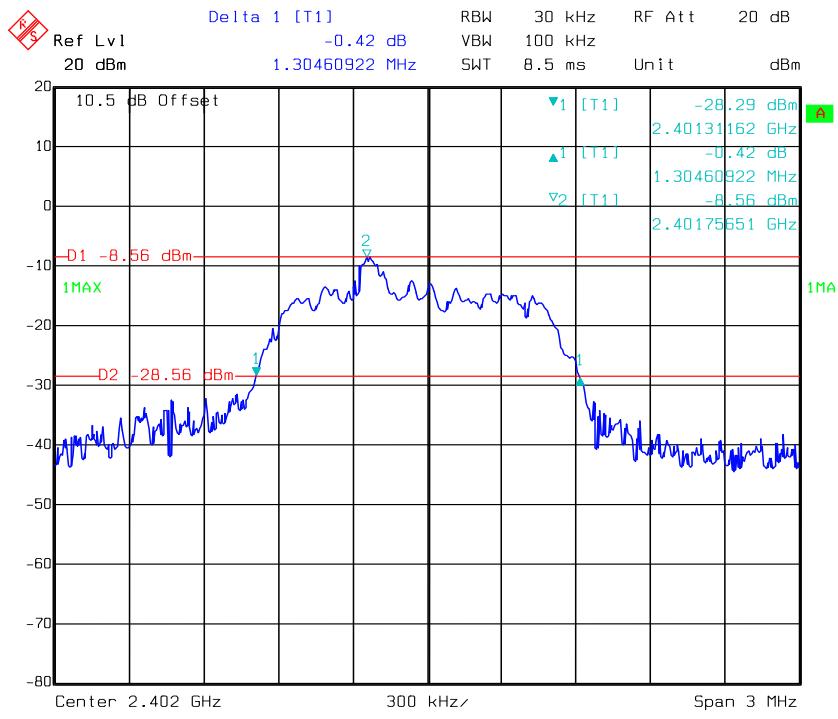

Middle Channel

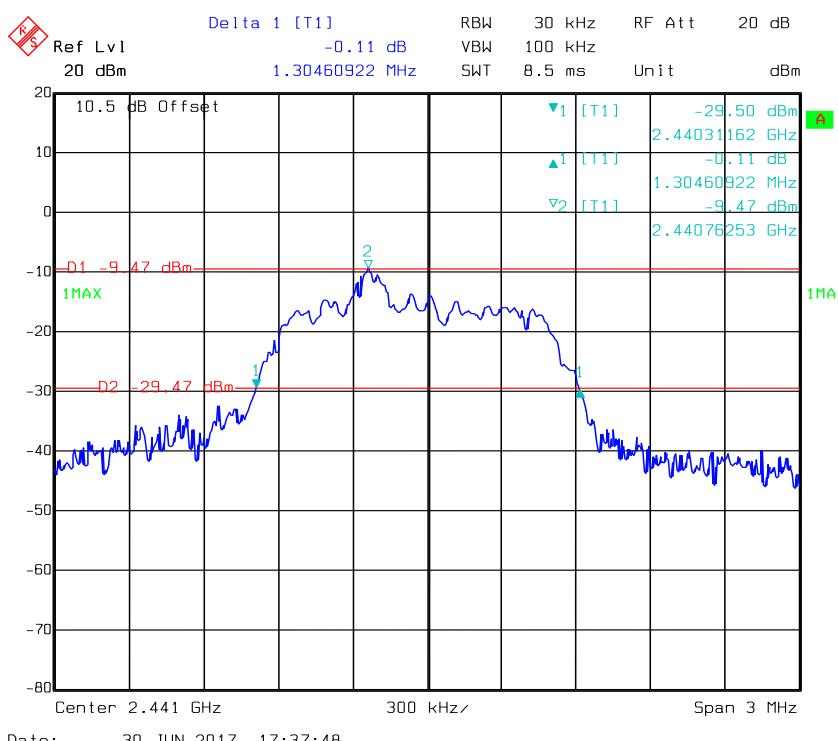


High Channel

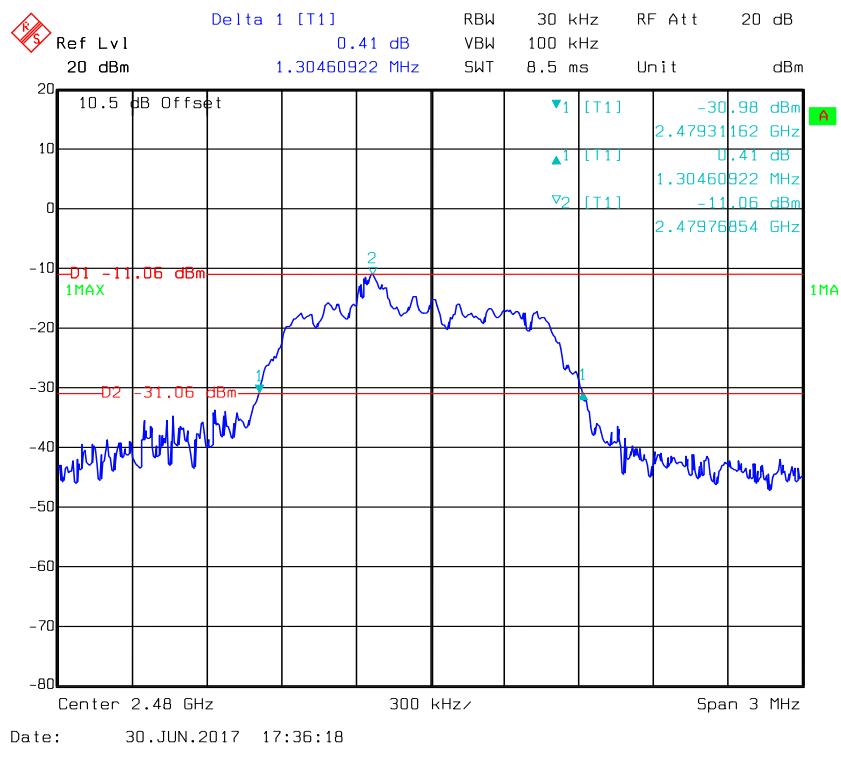


EDR Mode (8DPSK):

Low Channel

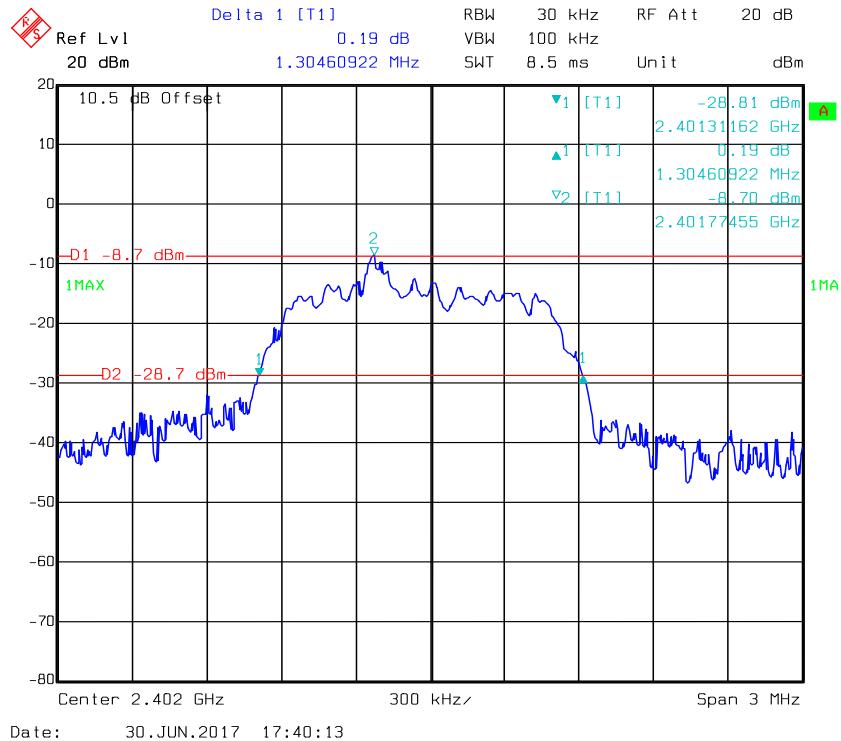


Middle Channel

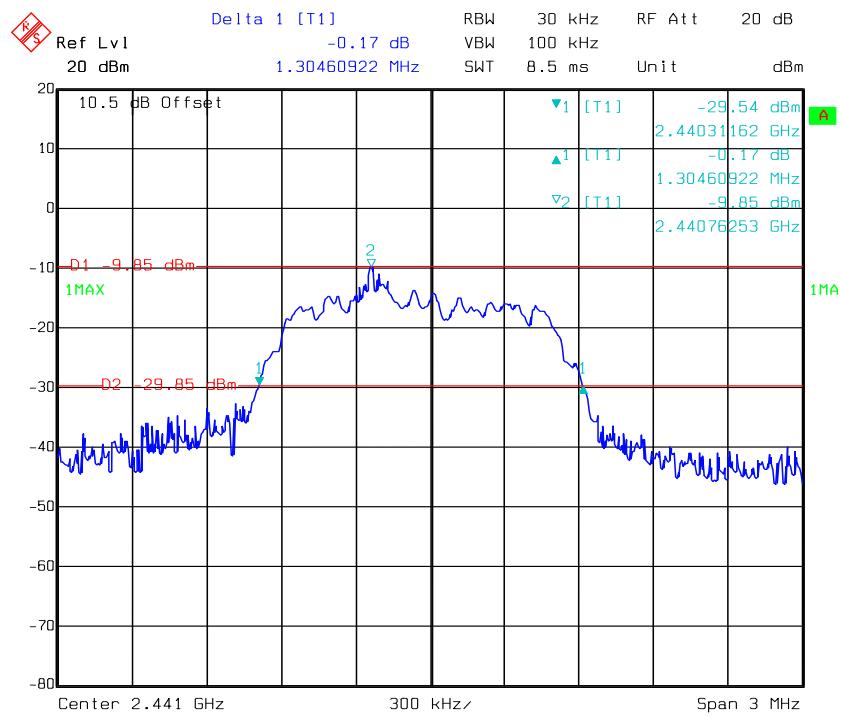

Date: 30.JUN.2017 17:41:39

High Channel

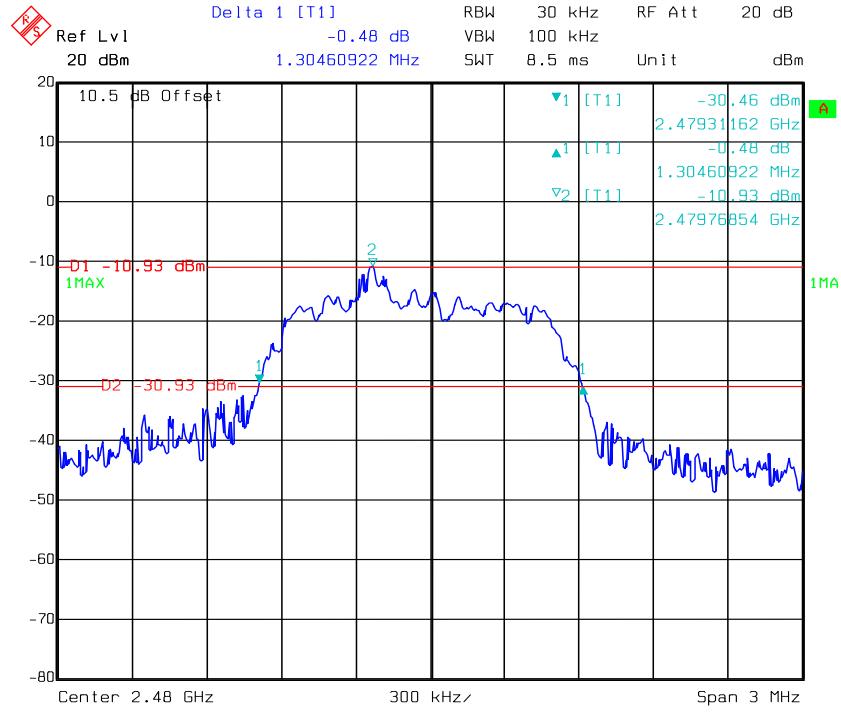

Date: 30.JUN.2017 17:42:35

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
Unknown	RF attenuator	10dB	10dB-2	Each Time	/
Unknown	RF Cable	Unknown	C-3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data

Environmental Conditions

Temperature:	28.6°C
Relative Humidity:	62 %
ATM Pressure:	100.1 kPa

* The testing was performed by Kevin Hu on 2017-06-30.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

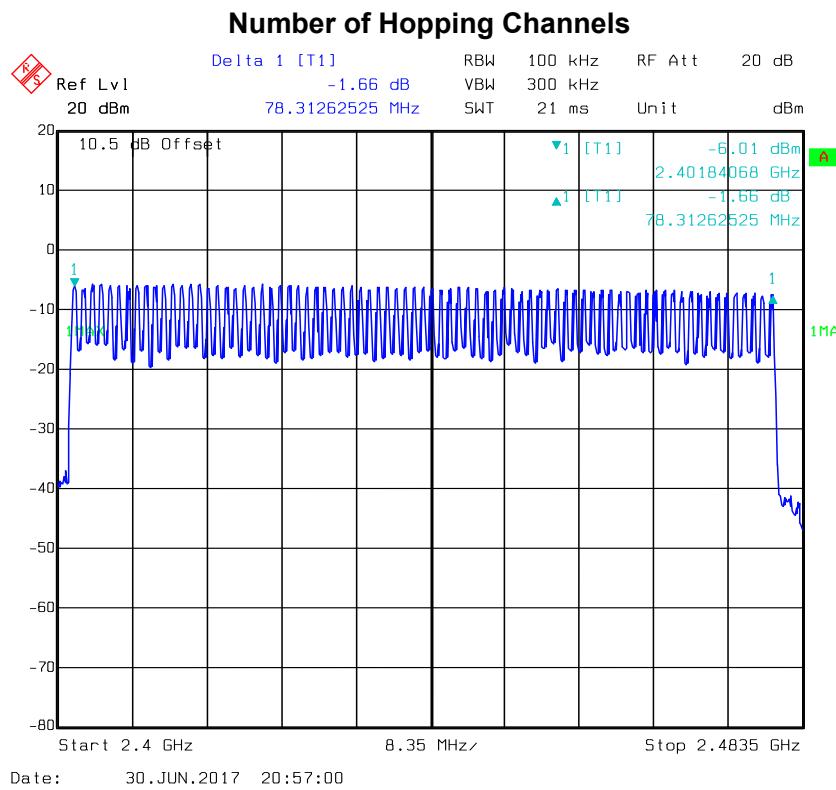


EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

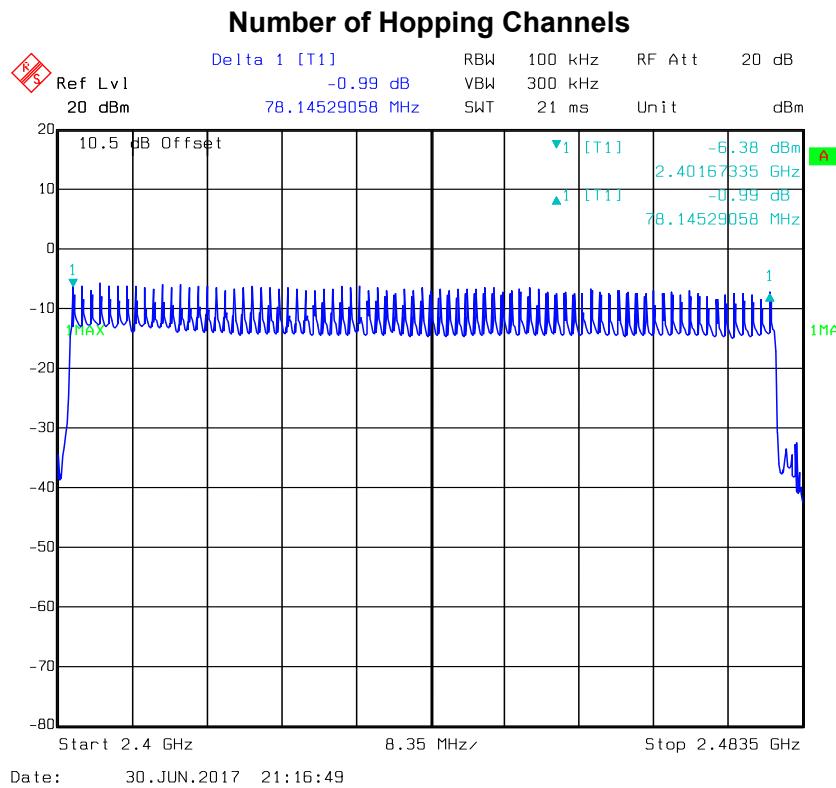

EDR Mode (8DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

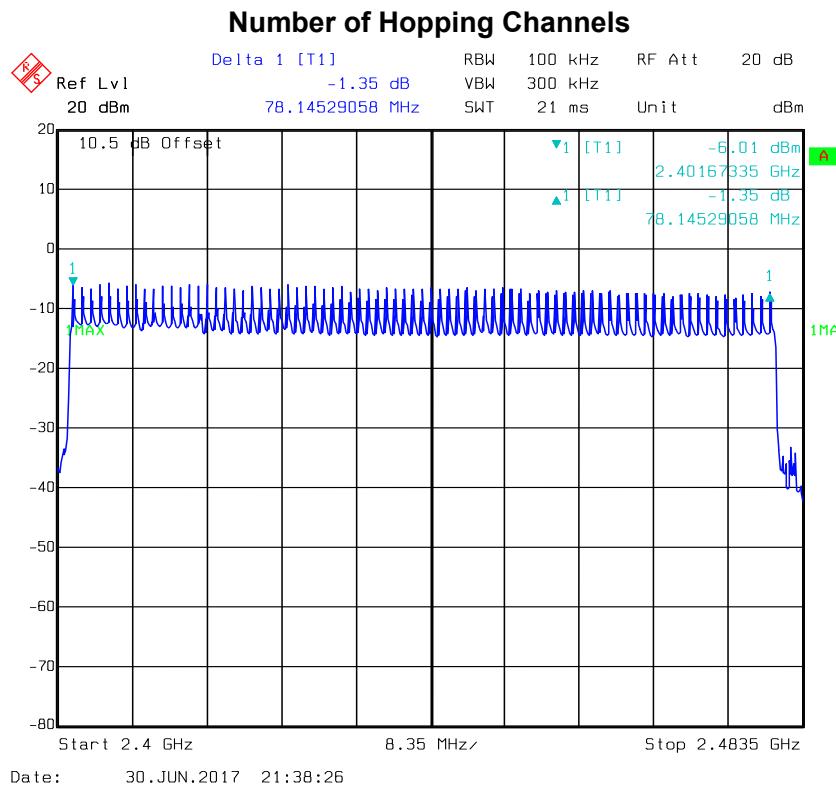

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
Unknown	RF attenuator	10dB	10dB-2	Each Time	/
Unknown	RF Cable	Unknown	C-3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data

Environmental Conditions

Temperature:	28.6°C
Relative Humidity:	62 %
ATM Pressure:	100.1 kPa

* The testing was performed by Kevin Hu on 2017-06-30.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
<i>DH1</i>	Low	0.415	0.133	0.4	Compliance
	Middle	0.415	0.133	0.4	Compliance
	High	0.415	0.133	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
<i>DH3</i>	Low	1.671	0.267	0.4	Compliance
	Middle	1.671	0.267	0.4	Compliance
	High	1.671	0.267	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
<i>DH5</i>	Low	2.976	0.317	0.4	Compliance
	Middle	2.976	0.317	0.4	Compliance
	High	2.976	0.317	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


DH1: Low Channel

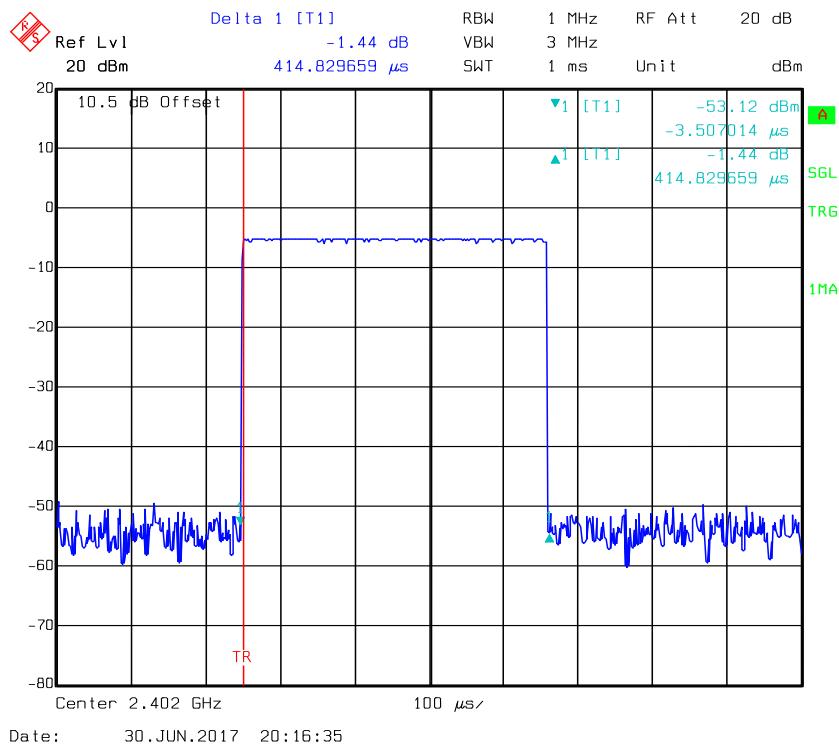


DH1: Middle Channel

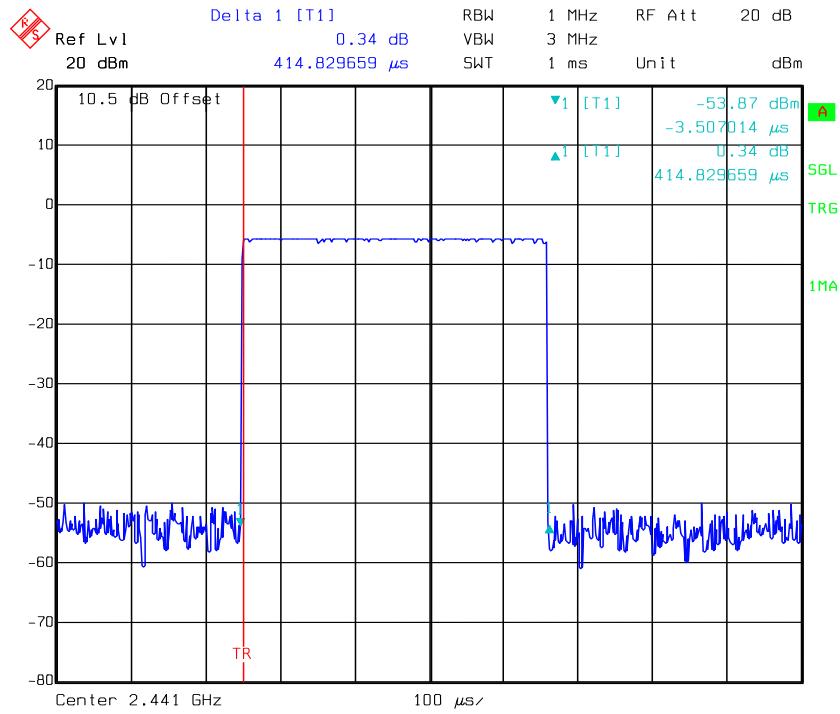


DH1: High Channel

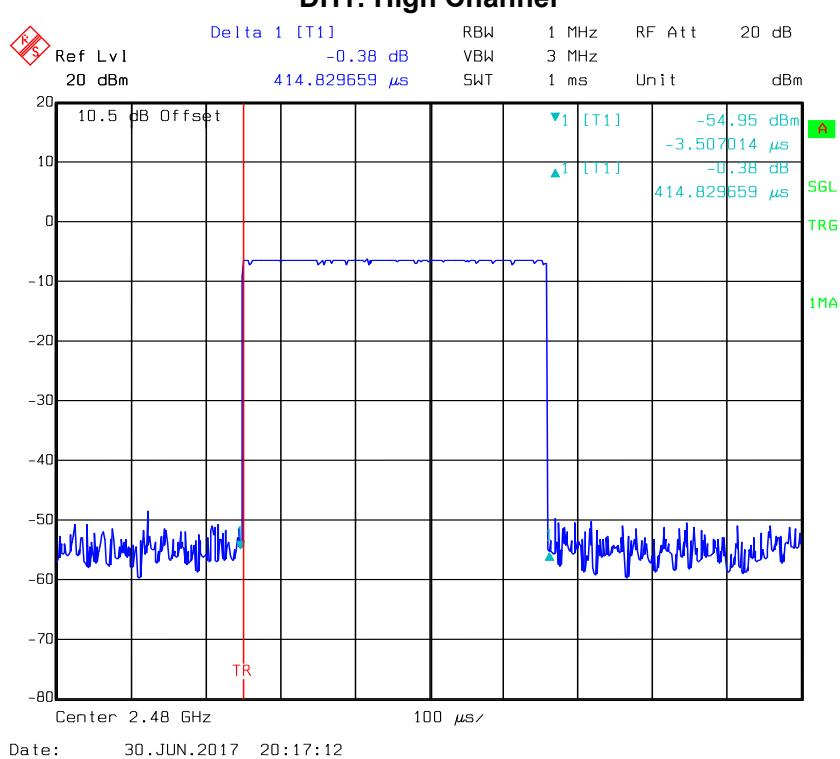


DH3: Low Channel

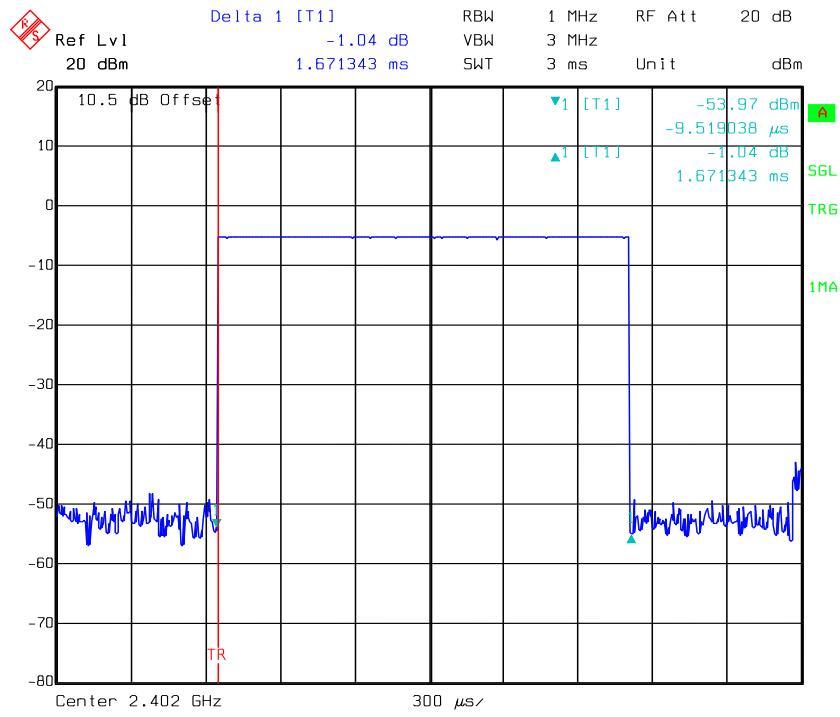

DH3: Middle Channel

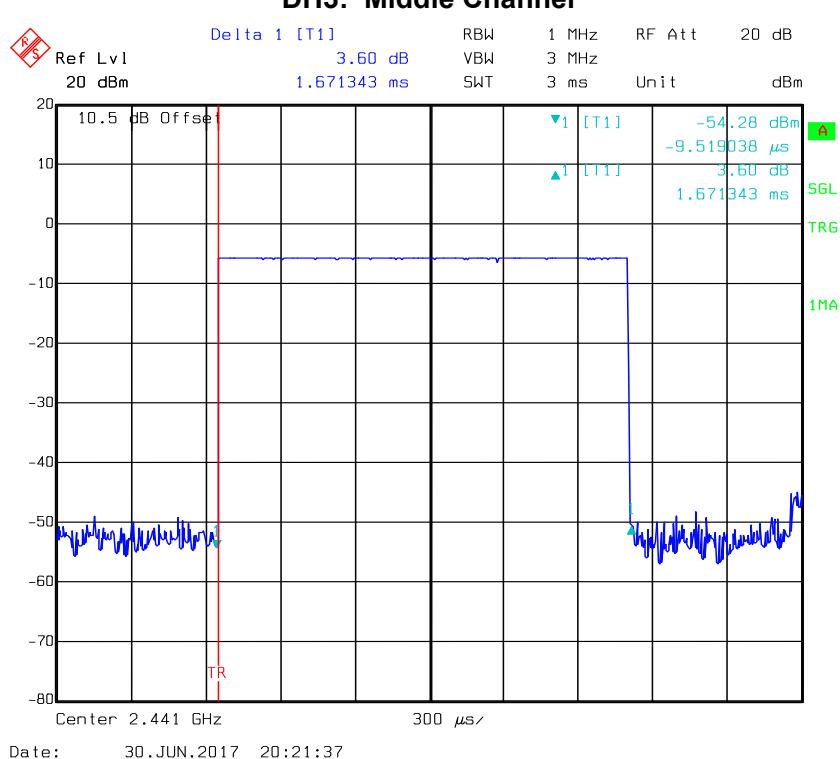


DH3: High Channel

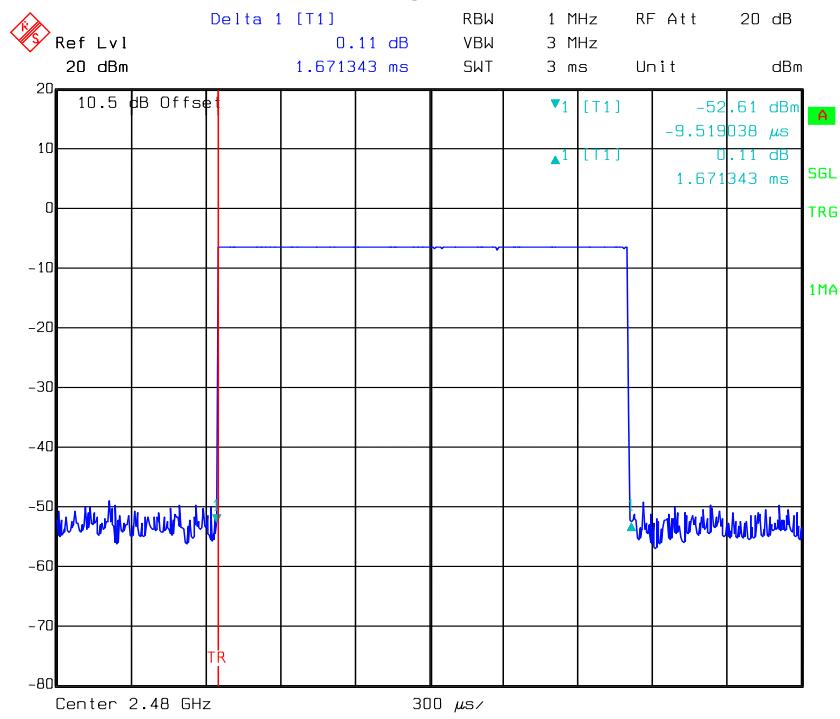


Date: 30.JUN.2017 20:19:59

DH5: Low Channel

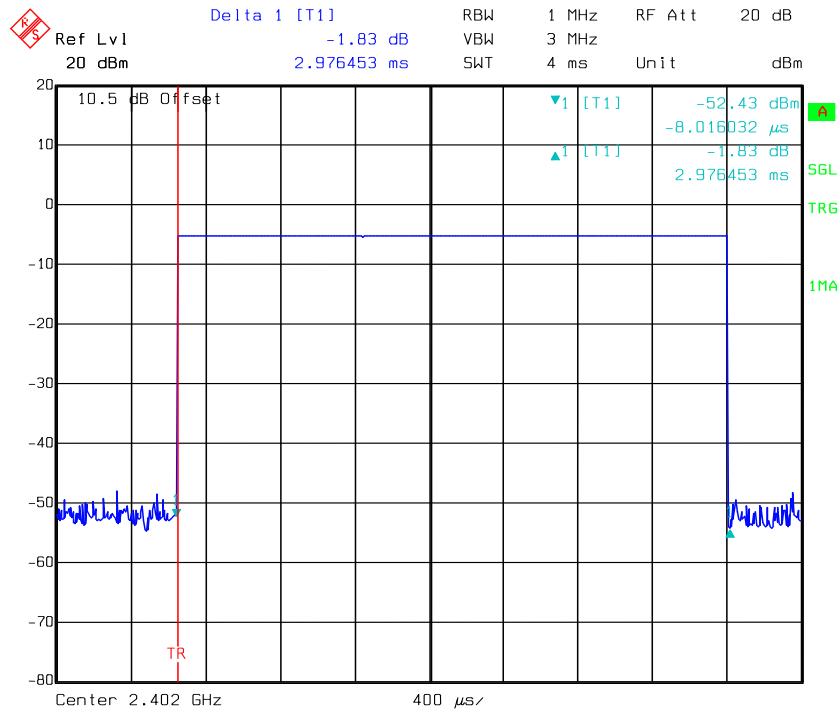


Date: 30.JUN.2017 20:35:33

DH5: Middle Channel

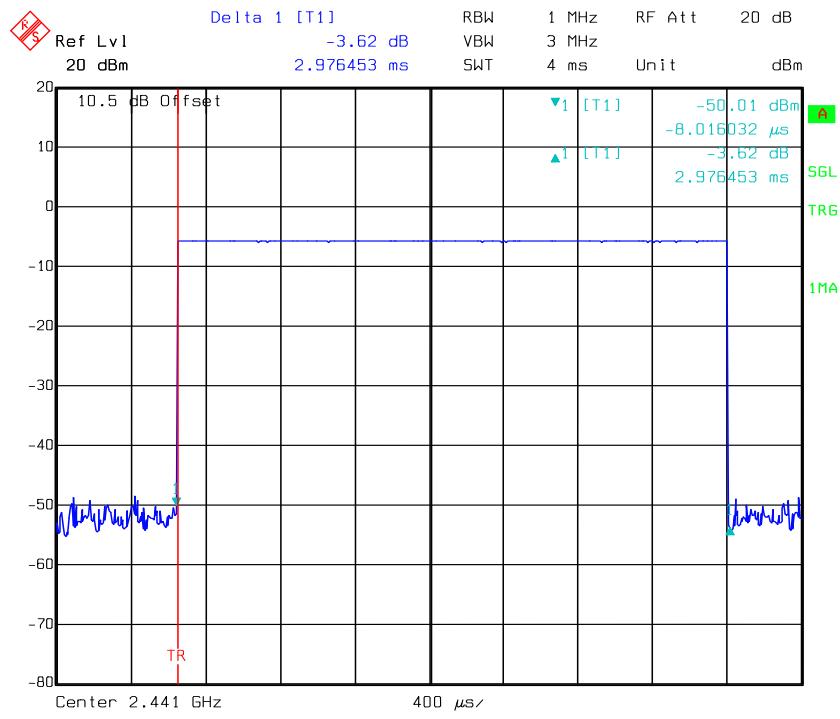


DH5: High Channel

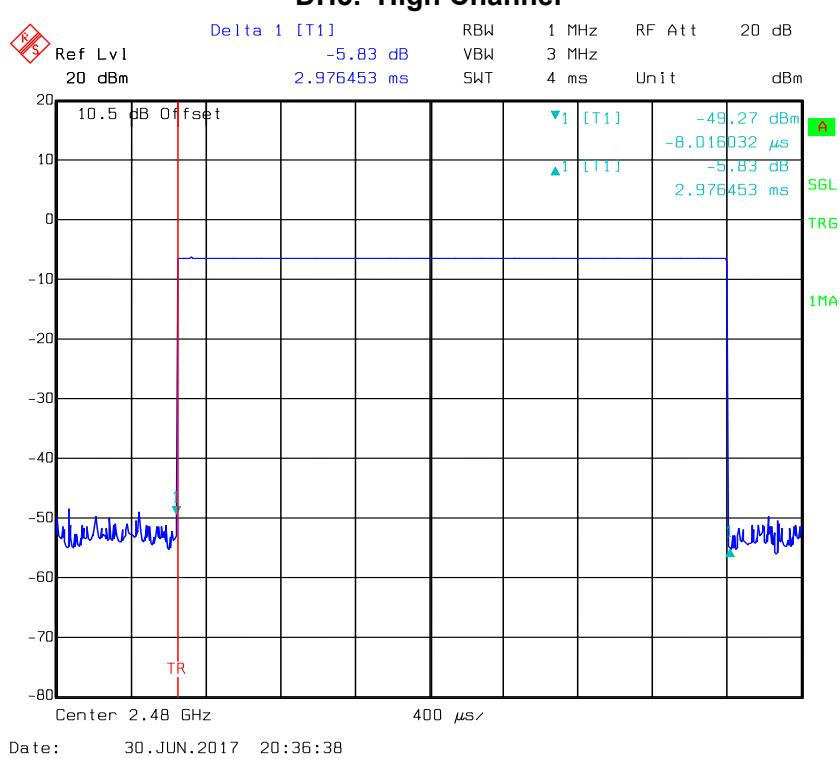


EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.415	0.133	0.4	Compliance
	Middle	0.415	0.133	0.4	Compliance
	High	0.415	0.133	0.4	Compliance
Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s					
2DH3	Low	1.671	0.267	0.4	Compliance
	Middle	1.671	0.267	0.4	Compliance
	High	1.671	0.267	0.4	Compliance
Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s					
2DH5	Low	2.976	0.317	0.4	Compliance
	Middle	2.976	0.317	0.4	Compliance
	High	2.976	0.317	0.4	Compliance
Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s					

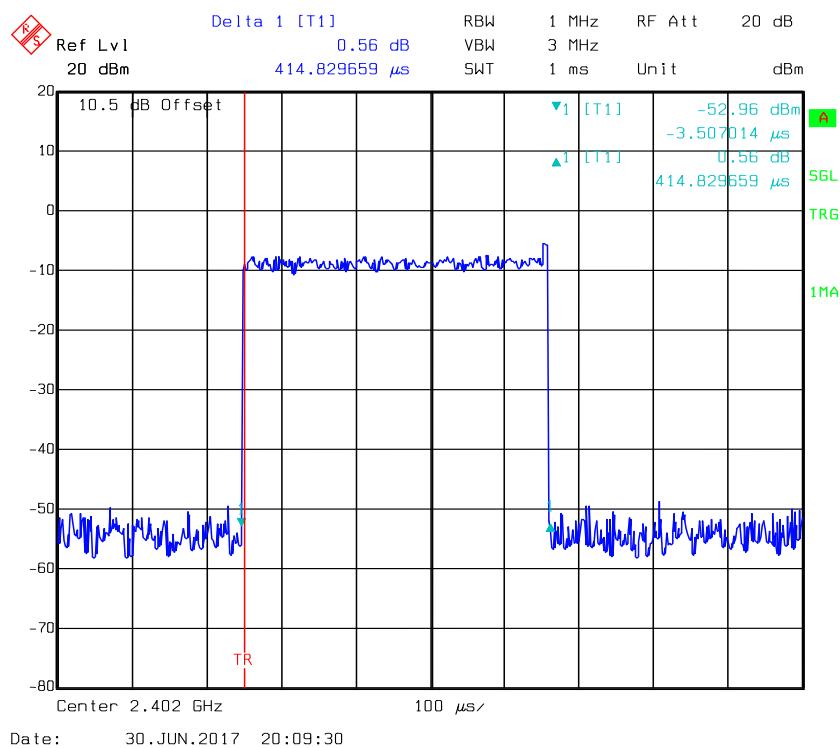2DH1: Low Channel


2DH1: Middle Channel

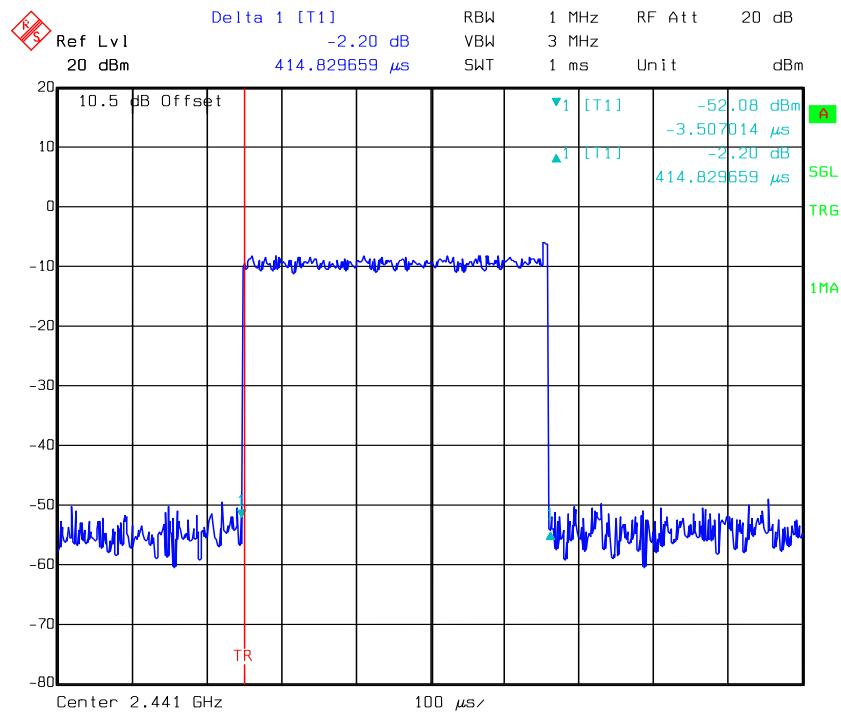


2DH1: High Channel

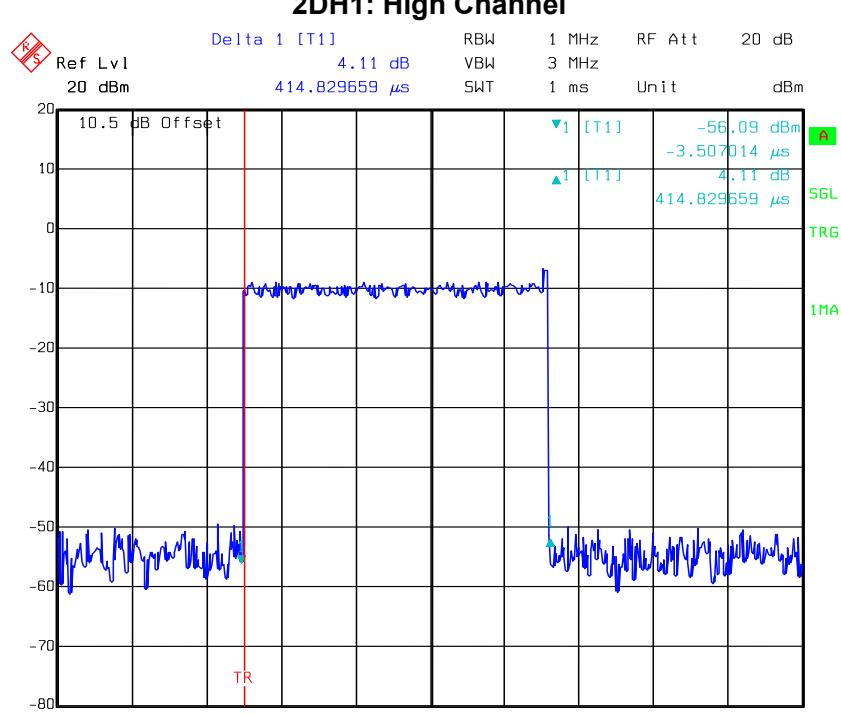


2DH3: Low Channel

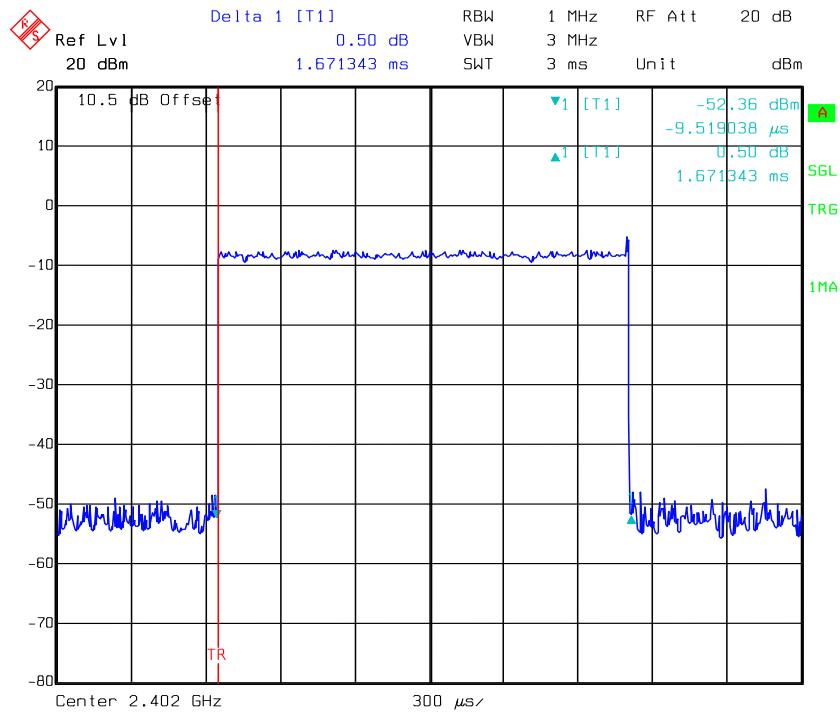

2DH3: Middle Channel

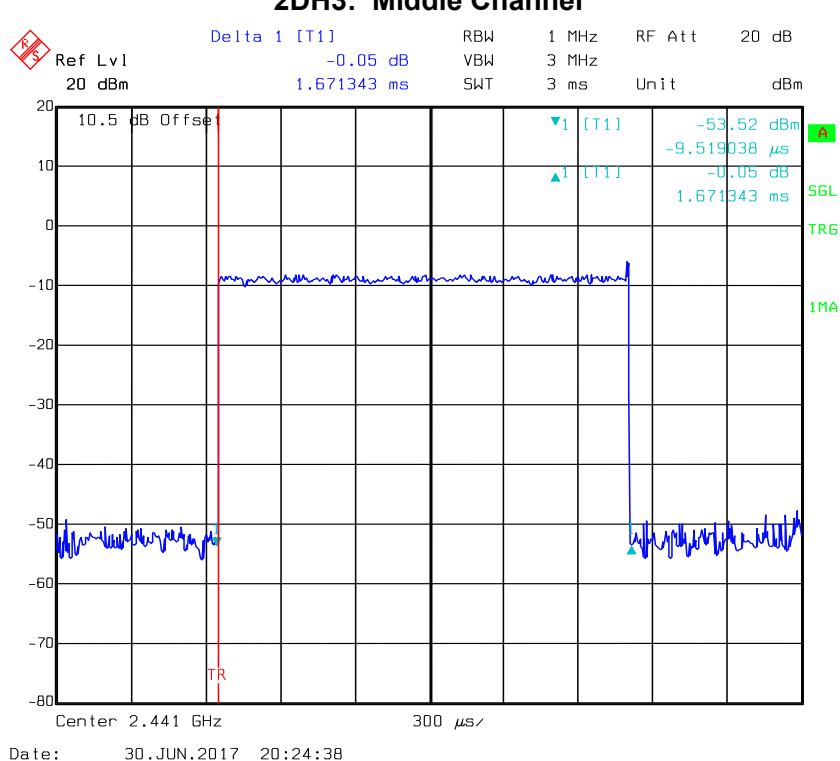


2DH3: High Channel

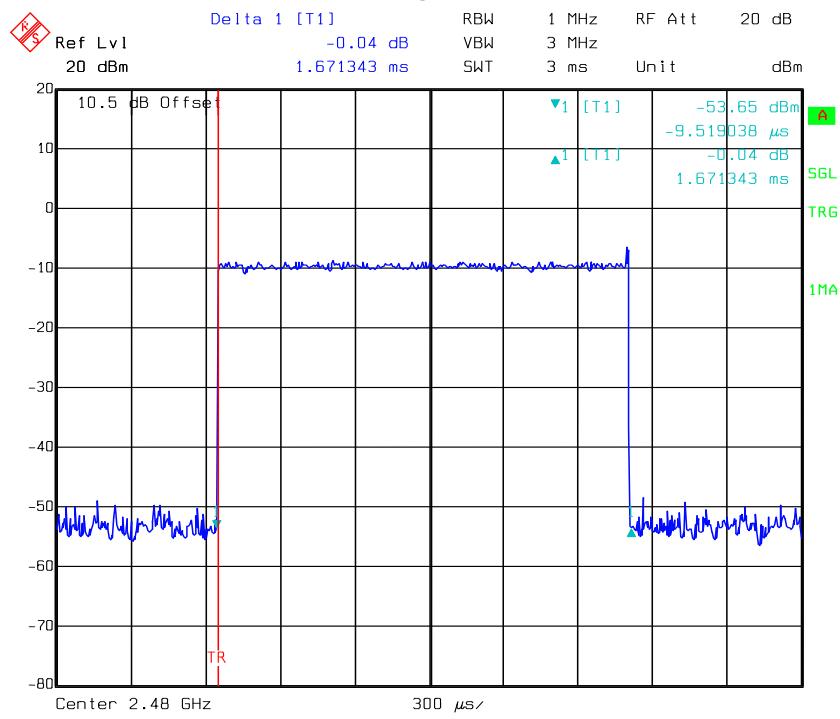


Date: 30.JUN.2017 20:25:00

2DH5: Low Channel

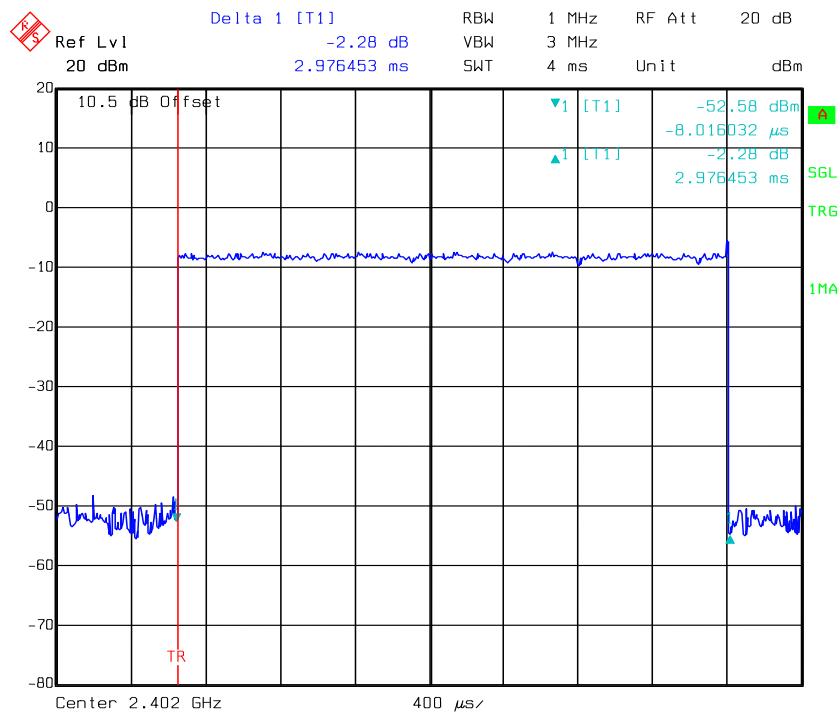


Date: 30.JUN.2017 20:38:11

2DH5: Middle Channel

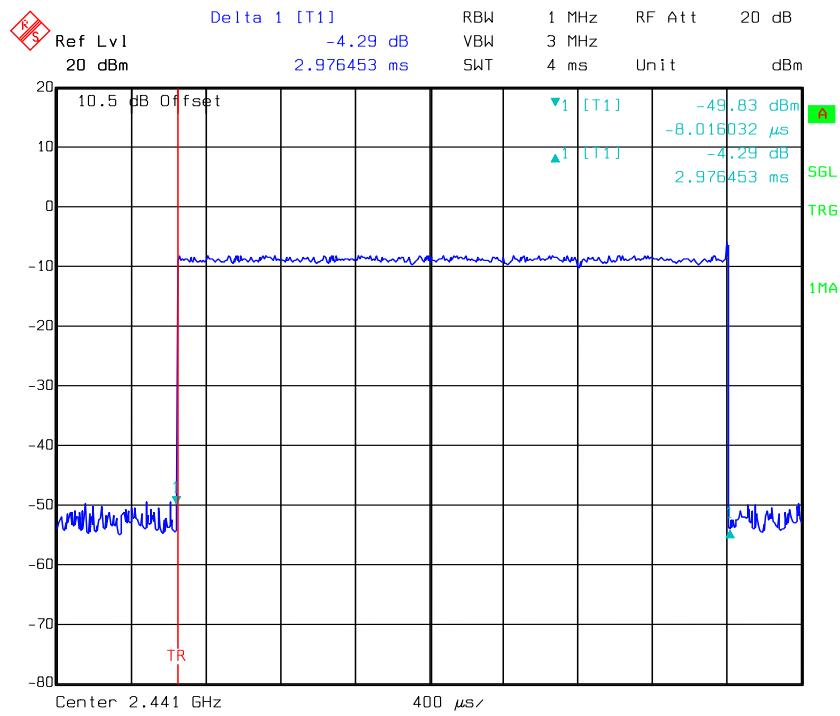


2DH5: High Channel

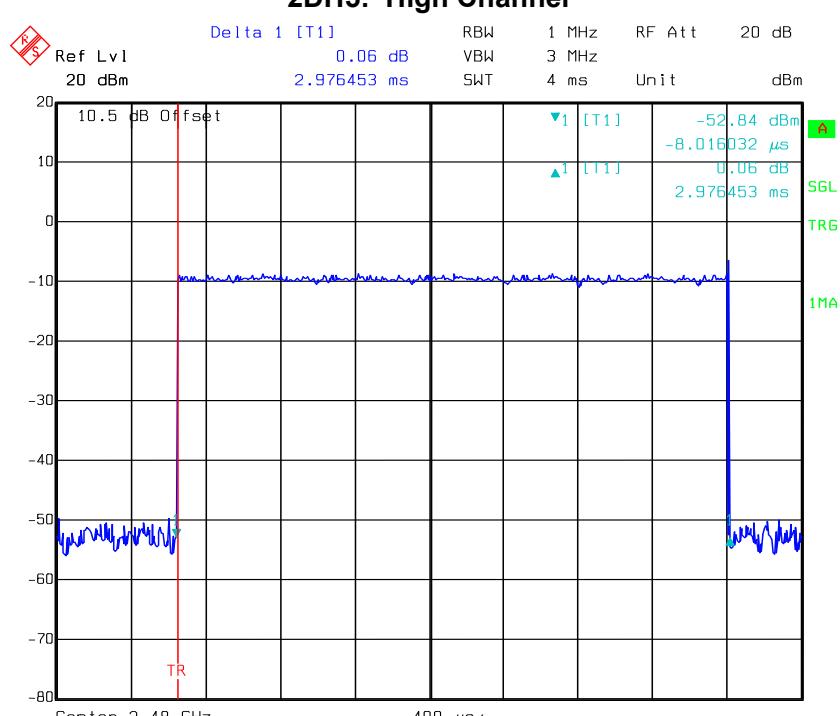


EDR Mode (8DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.415	0.133	0.4	Compliance
	Middle	0.415	0.133	0.4	Compliance
	High	0.415	0.133	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s					
3DH3	Low	1.671	0.267	0.4	Compliance
	Middle	1.671	0.267	0.4	Compliance
	High	1.671	0.267	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s					
3DH5	Low	2.976	0.317	0.4	Compliance
	Middle	2.976	0.317	0.4	Compliance
	High	2.976	0.317	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s					

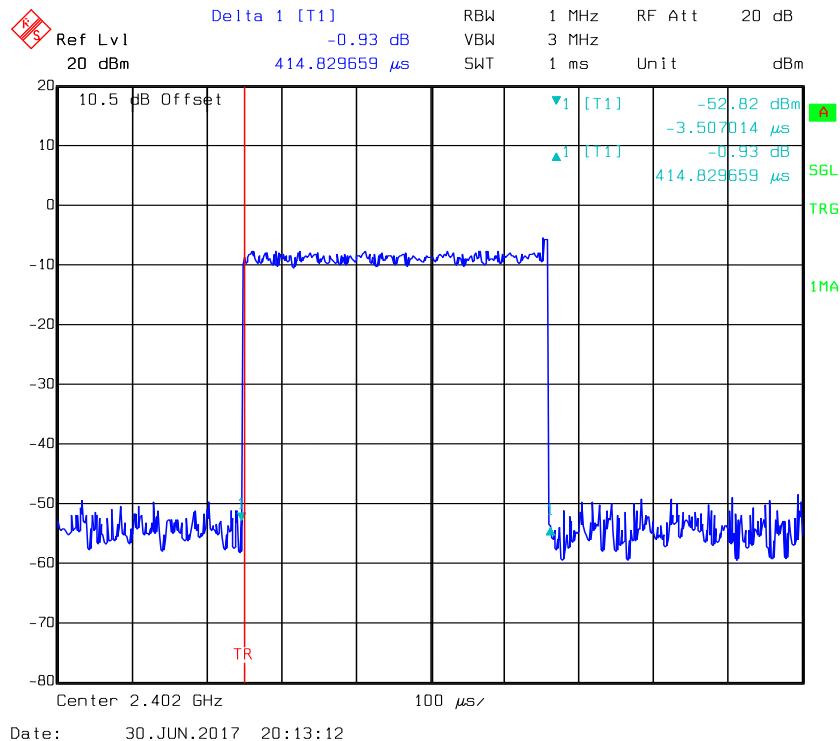3DH1: Low Channel


3DH1: Middle Channel

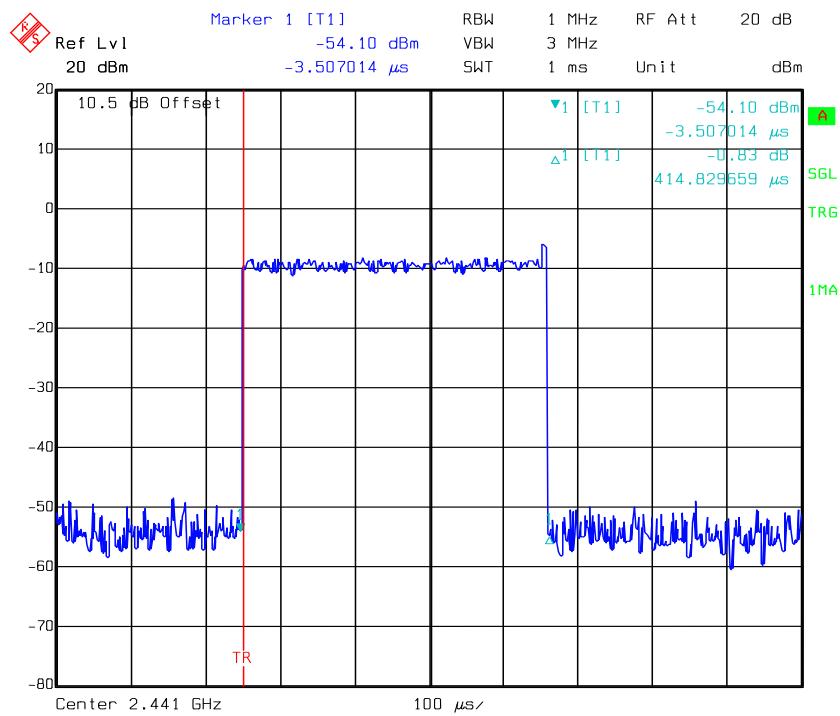


3DH1: High Channel

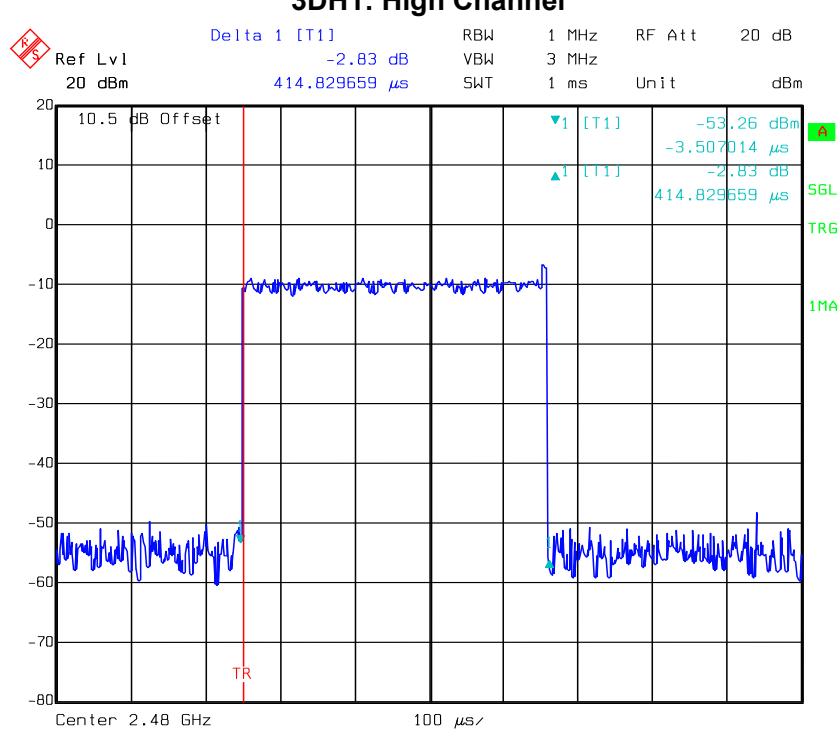


3DH3: Low Channel

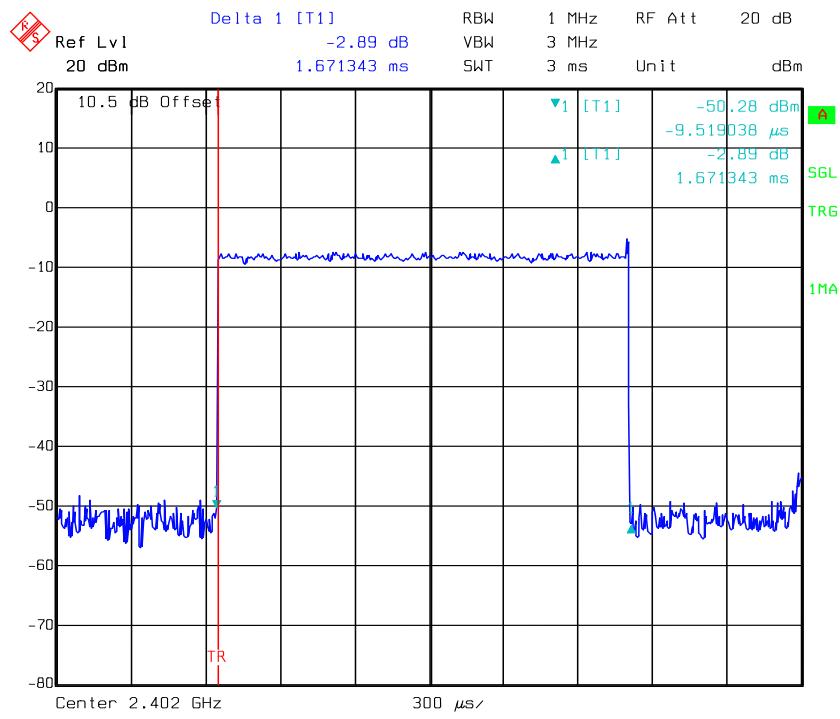


3DH3: Middle Channel

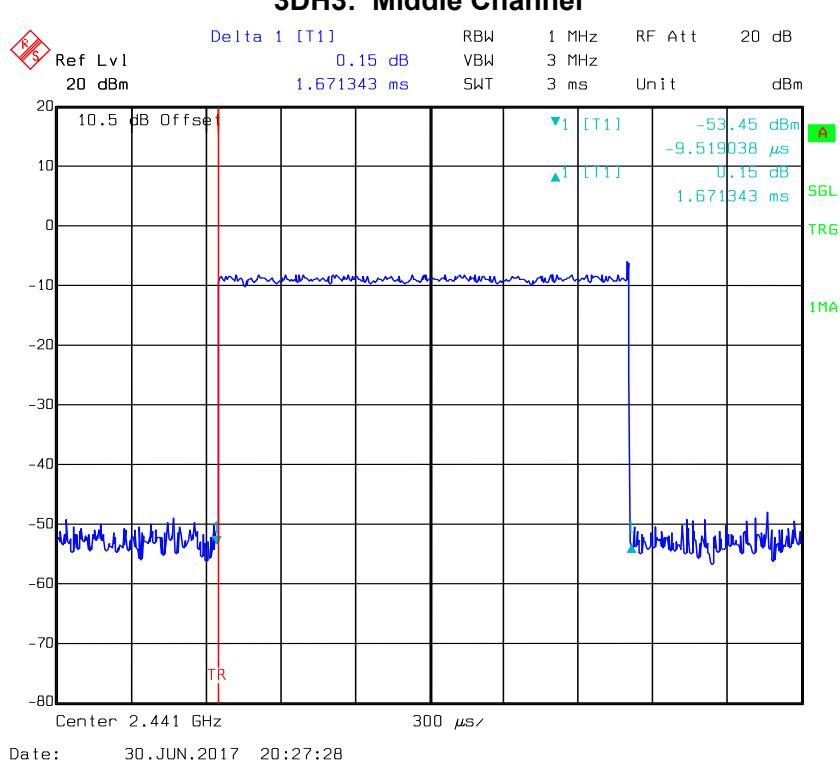


3DH3: High Channel

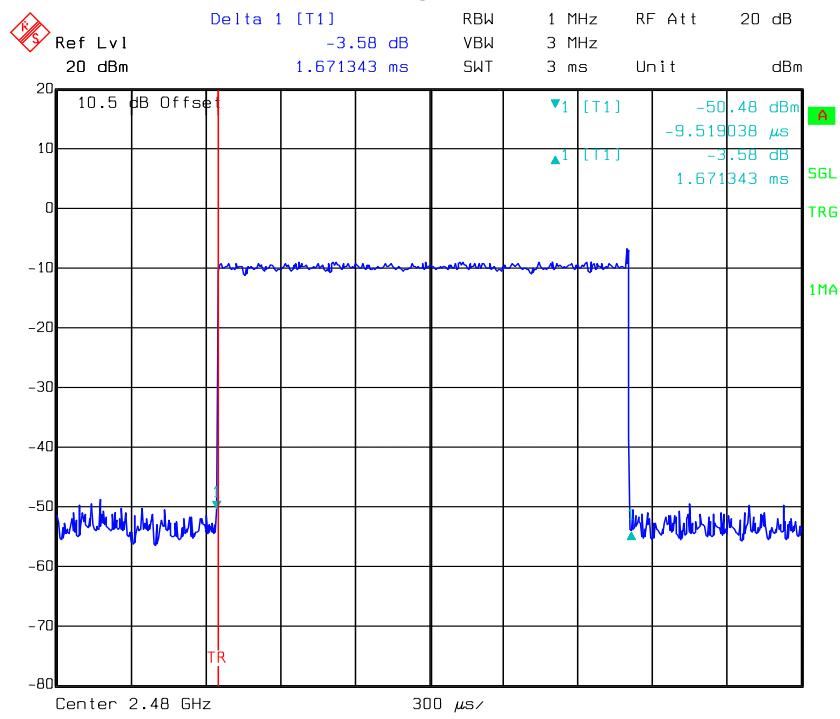


3DH5: Low Channel

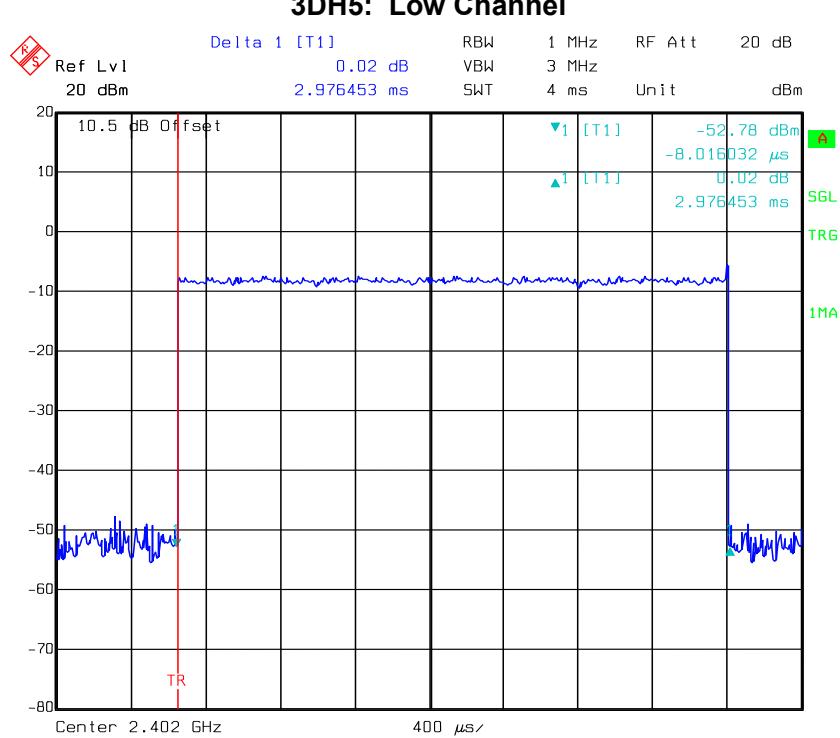

3DH5: Middle Channel

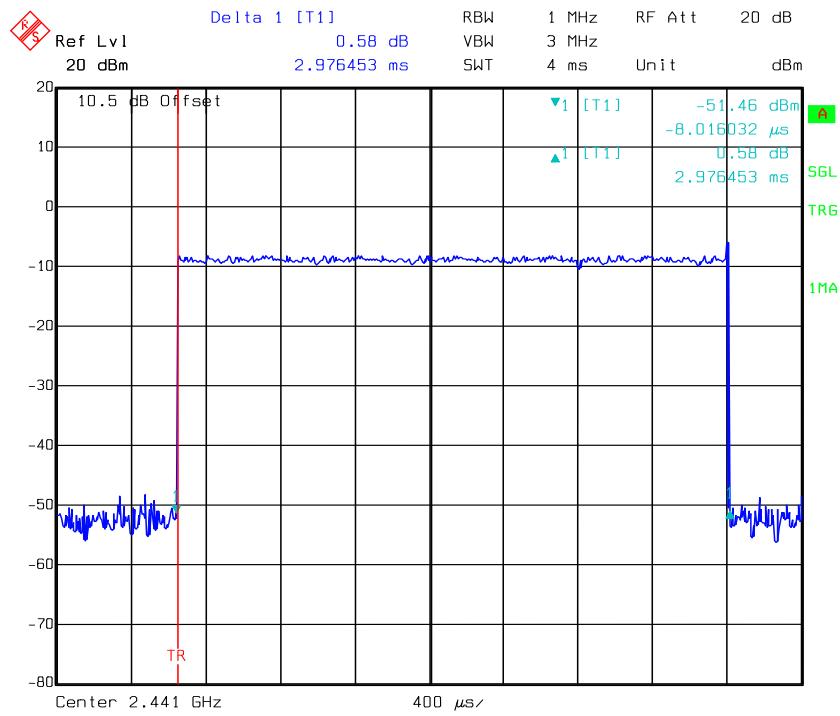

3DH5: High Channel

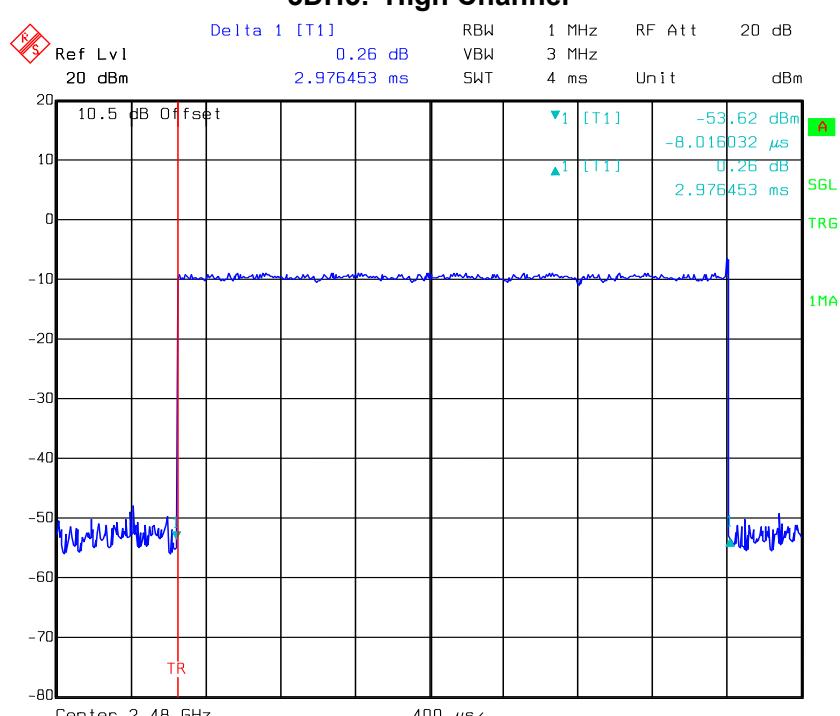


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.

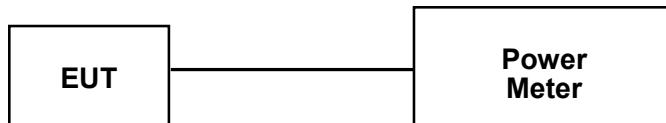

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54170074	2017-01-03	2018-01-02
Agilent	P-Series Power Meter	N1912A	MY5000798	2017-01-03	2018-01-02
Unknown	RF Cable	Unknown	C-5	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data

Environmental Conditions

Temperature:	28.6°C
Relative Humidity:	62 %
ATM Pressure:	100.1 kPa

* The testing was performed by Kevin Hu on 2017-06-30.

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Conducted Peak Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	-2.04	30
	2441	-3.02	30
	2480	-4.03	30
EDR Mode ($\pi/4$ -DQPSK)	2402	-2.04	30
	2441	-3.14	30
	2480	-4.16	30
EDR Mode (8DPSK)	2402	-2.04	30
	2441	-3.14	30
	2480	-4.16	30

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
Unknown	RF attenuator	10dB	10dB-2	Each Time	/
Unknown	RF Cable	Unknown	C-3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data


Environmental Conditions


Temperature:	28.6°C
Relative Humidity:	62 %
ATM Pressure:	100.1 kPa

* The testing was performed by Kevin Hu on 2017-06-30.


Test Result: Compliance


BDR Mode (GFSK):

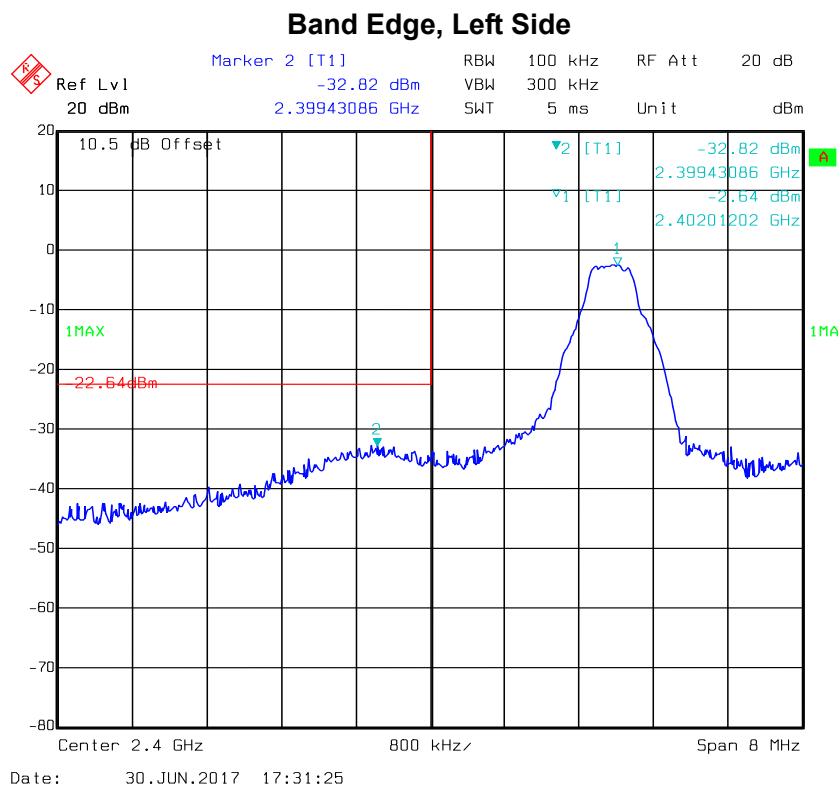

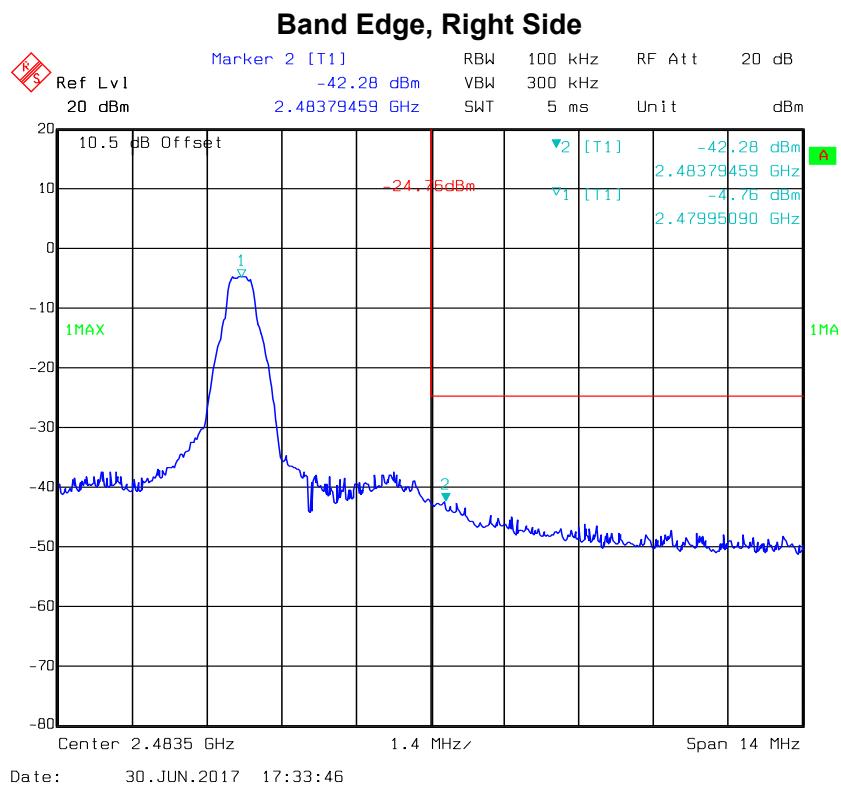


EDR Mode ($\pi/4$ -DQPSK):

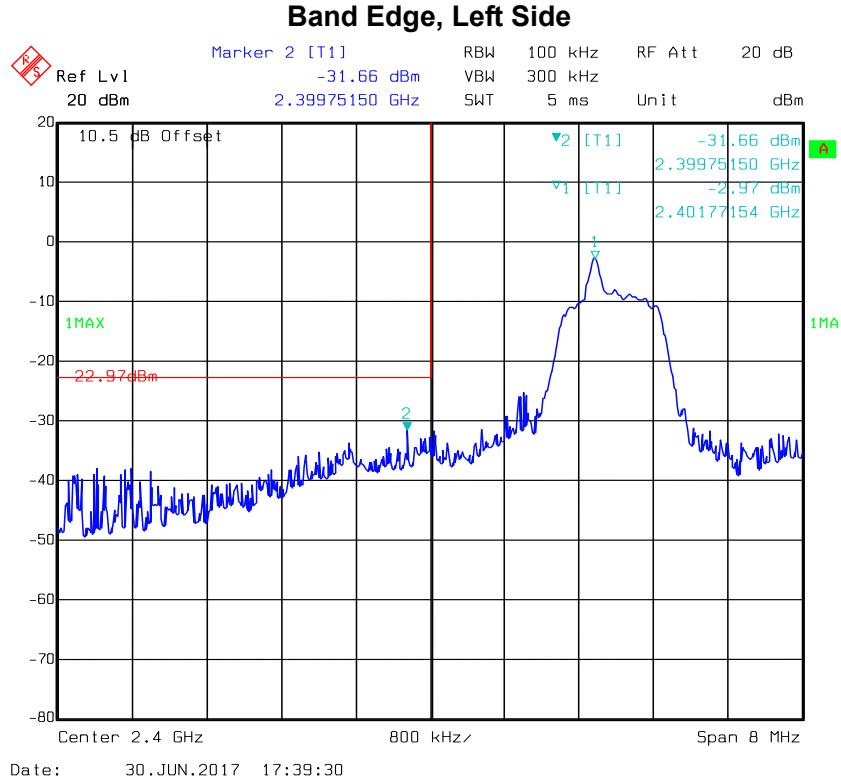

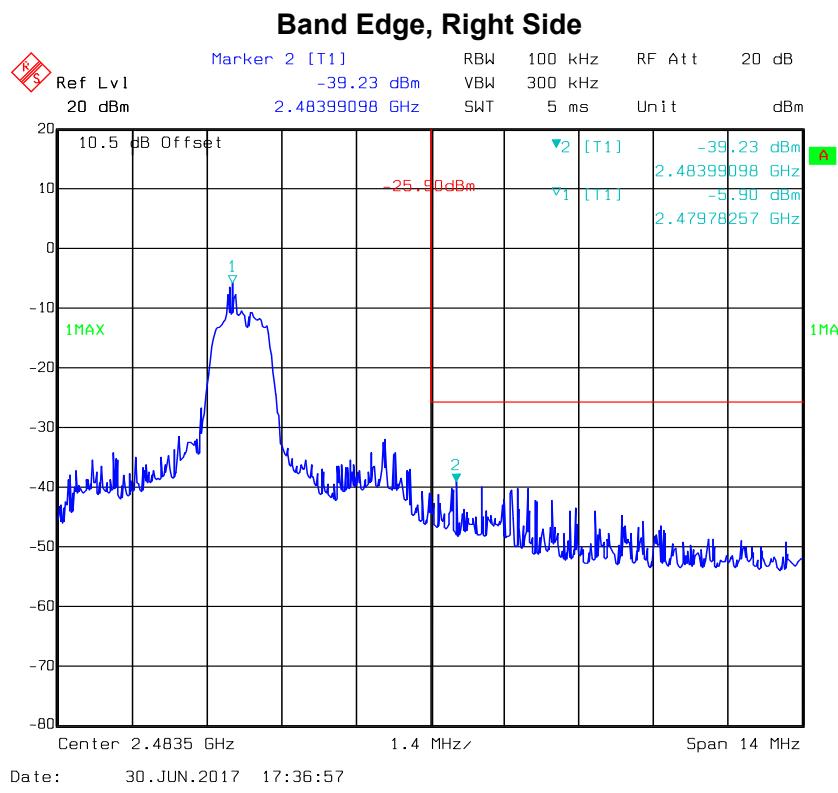

EDR Mode (8DPSK):

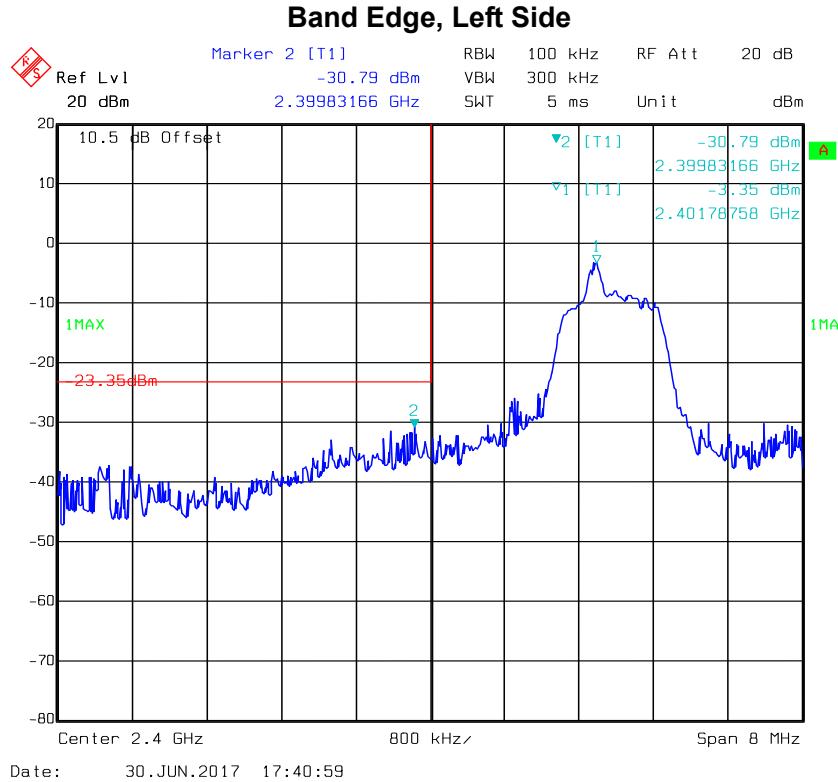


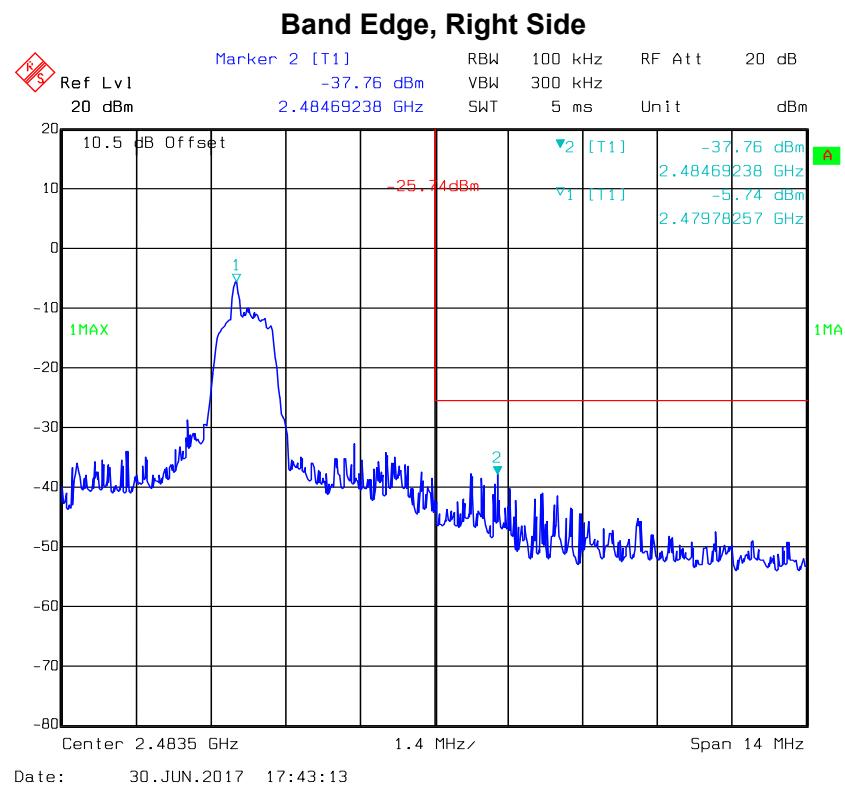


EXHIBIT A - EUT PHOTOGRAPHS

EUT – All View



EUT – Top View

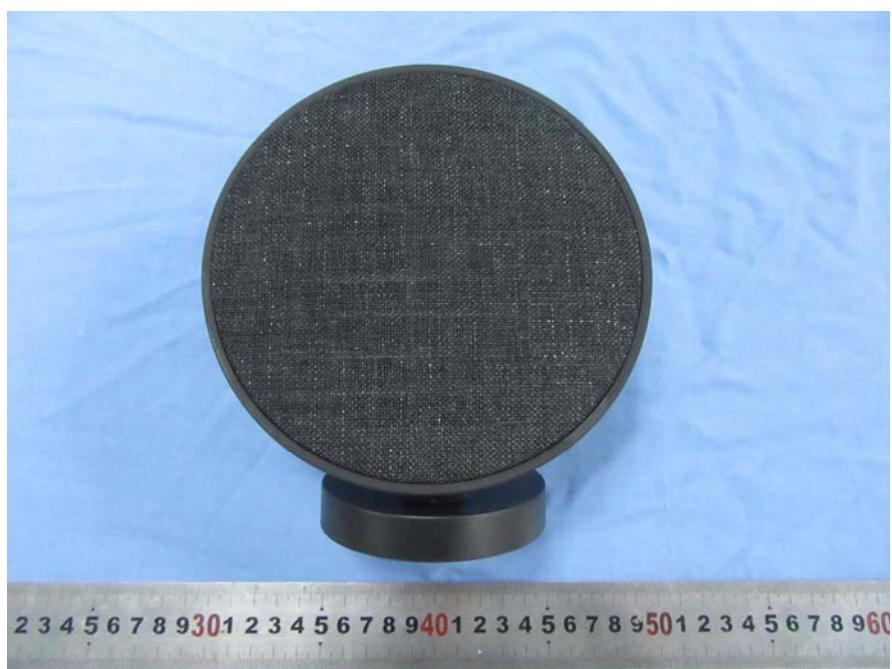

EUT – Bottom View



EUT – Side View




EUT – Side View




EUT – Uncover View




EUT – PCB Top View

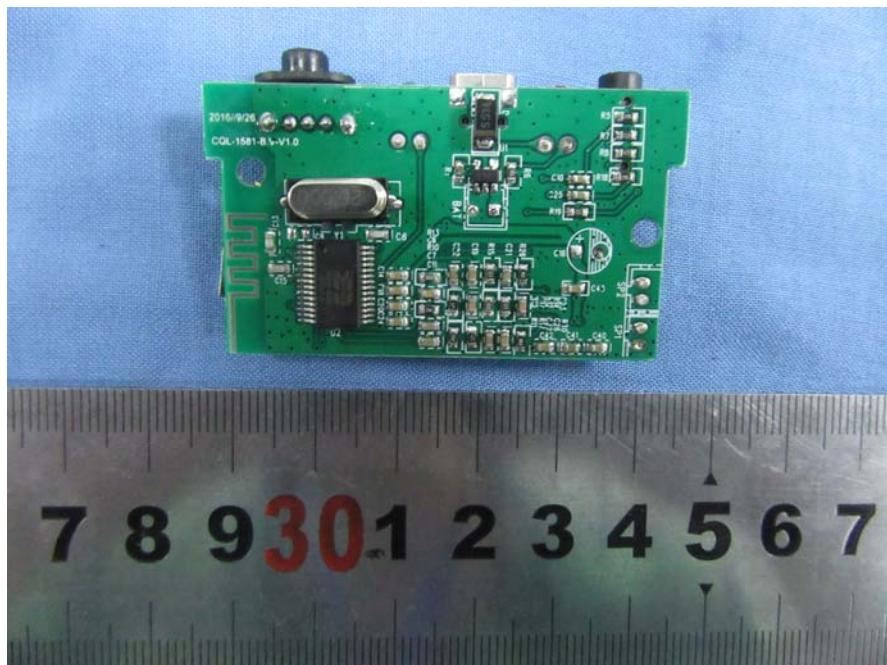


EUT – PCB Bottom View

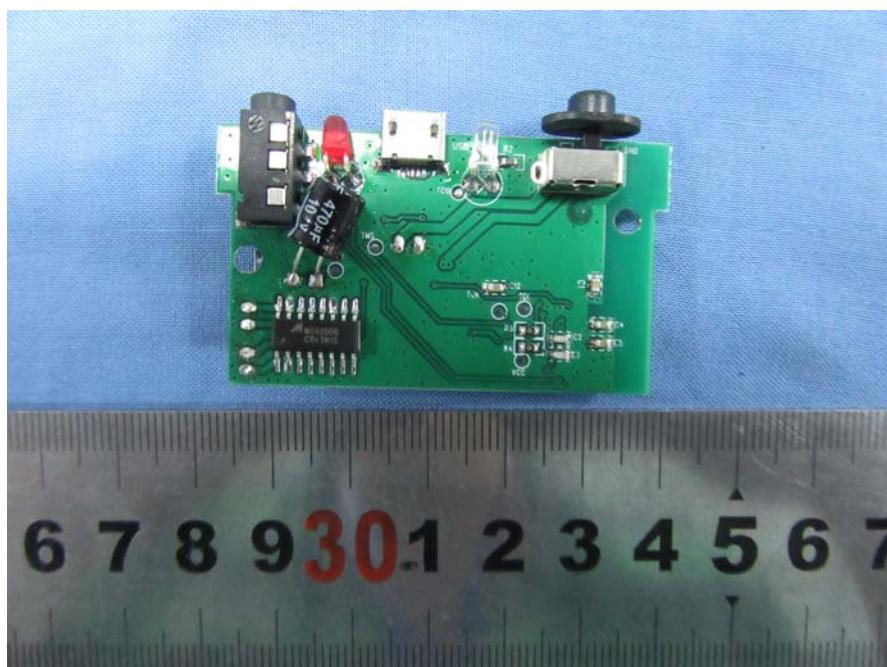


EUT – Chip1 View

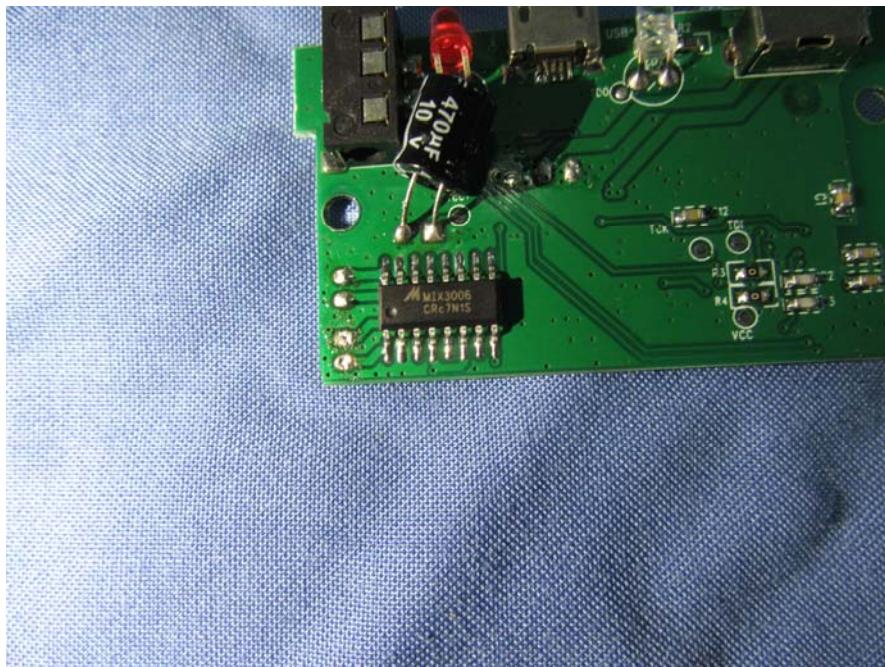


EUT – Chip2 View

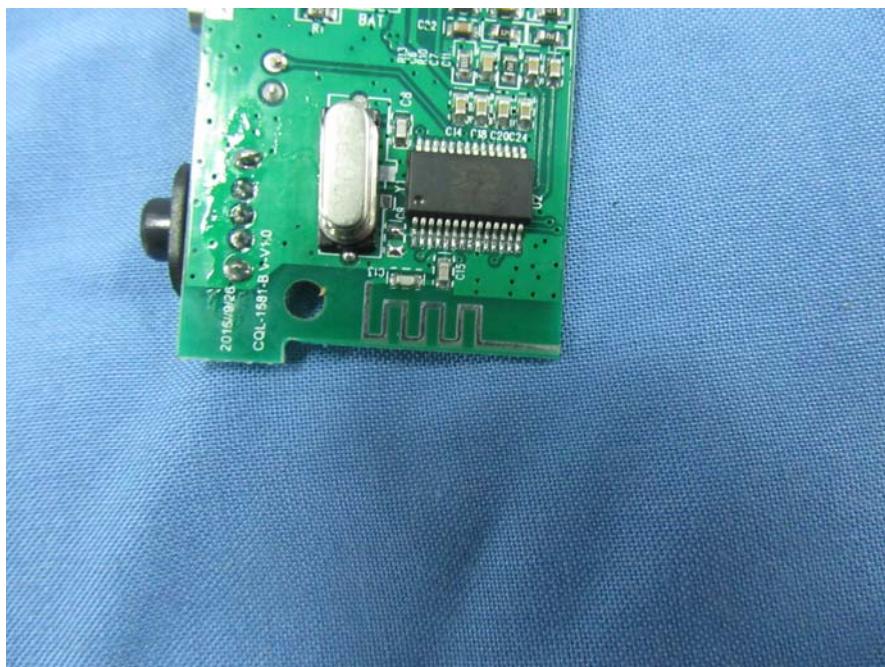

EUT – BT Antenna View

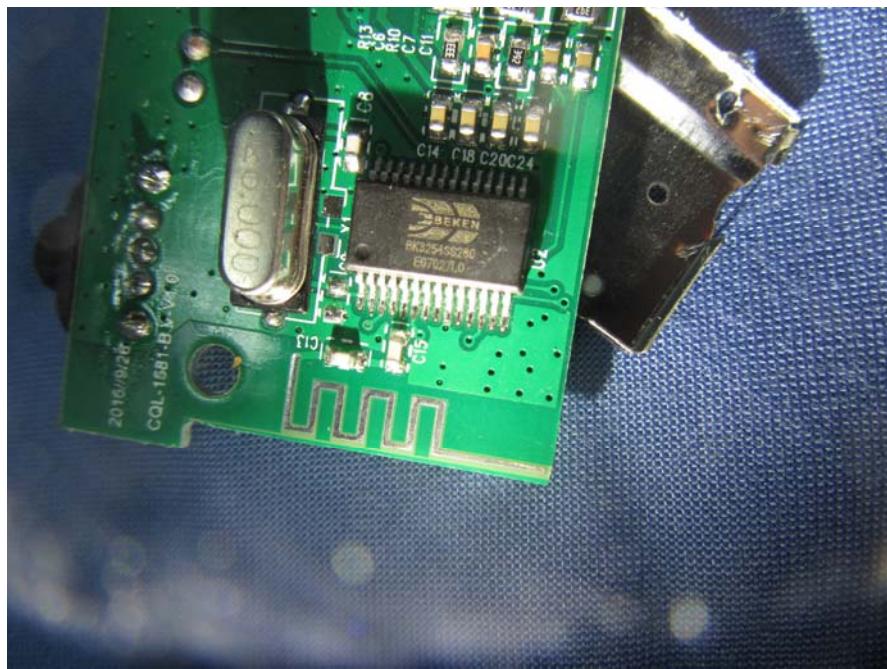

EUT – Battery Top View

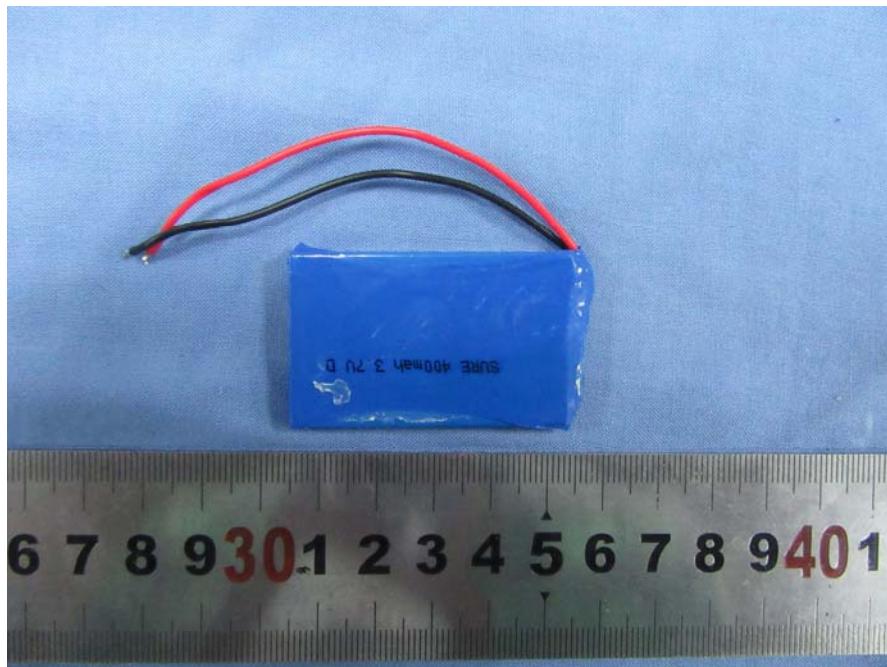

EUT – Battery Bottom View

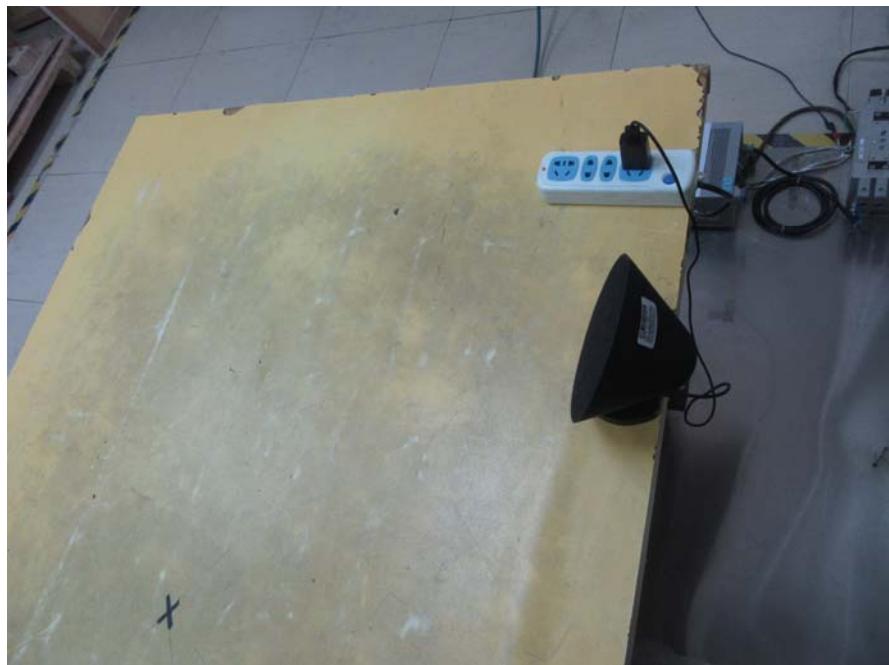


EXHIBIT B - TEST SETUP PHOTOGRAPHS


Conducted Emission - Front View




Conducted Emission - Side View



Radiated Emission Below 1GHz View

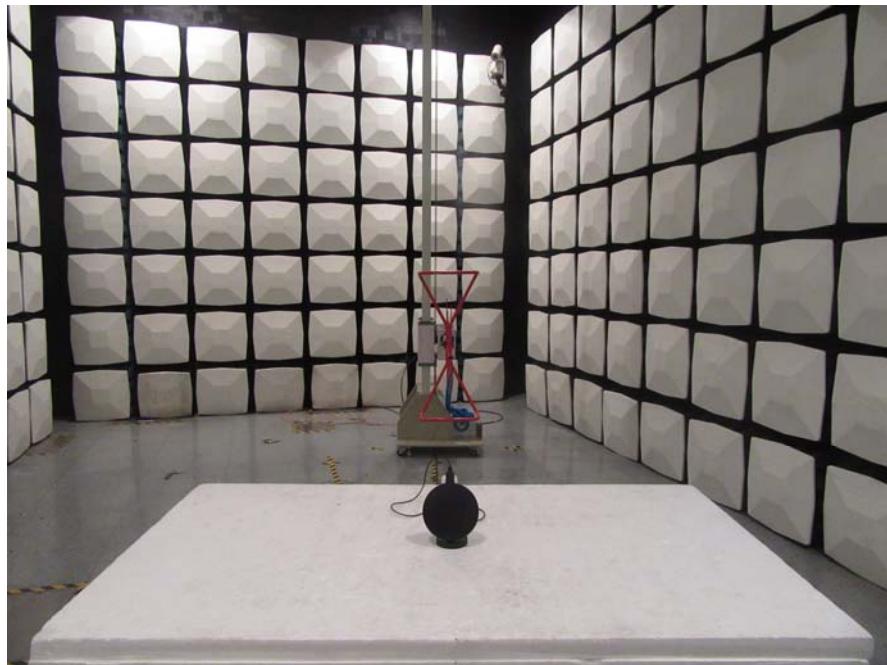

Radiated Emission Above 1GHz View

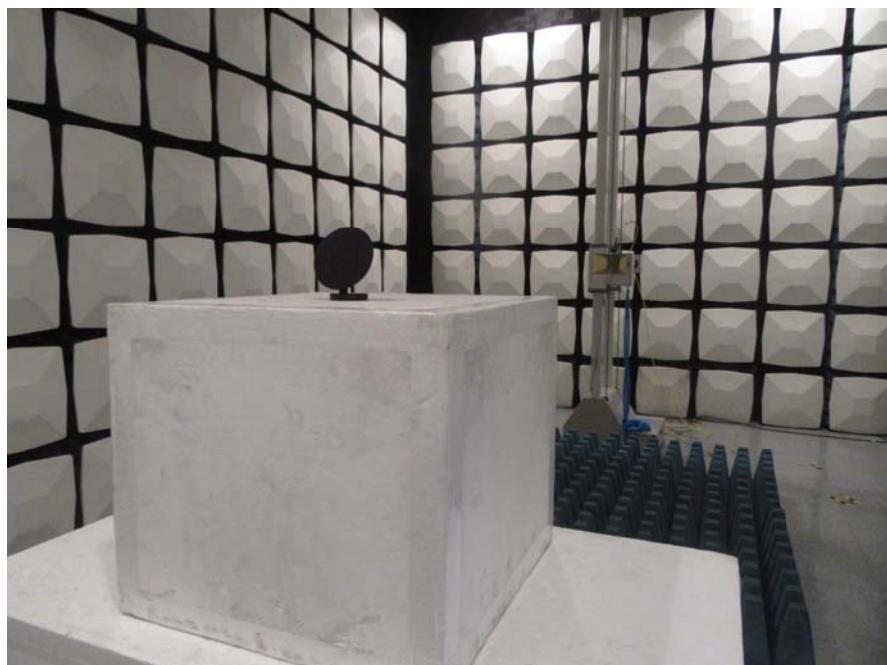

***** **END OF REPORT** *****