



# FCC PART 22H, PART 24E

## MEASUREMENT AND TEST REPORT

For

### CLC HONG KONG LIMITED

1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon,  
Hong Kong

**FCC ID: 2AG4WA104**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Ram 3G
<b>Test Engineer:</b> <u>Allen Qiao</u> <i>Allen Qiao</i>	
<b>Report Number:</b> <u>RDG151120006-00B</u>	
<b>Report Date:</b> <u>2015-12-01</u>	
<b>Reviewed By:</b> <u>Jerry Zhang</u> EMC Manager	<i>Jerry Zhang</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
JUSTIFICATION .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
CONFIGURATION OF TEST SETUP .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
TEST RESULT .....	9
<b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>	<b>10</b>
<b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
TEST PROCEDURE .....	11
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA .....	15
<b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - OCCUPIED BANDWIDTH .....</b>	<b>22</b>
APPLICABLE STANDARD .....	22
TEST PROCEDURE .....	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA .....	22
<b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA .....	29
<b>FCC §2.1053, §22.917 &amp; §24.238 - SPURIOUS RADIATED EMISSIONS .....</b>	<b>43</b>
APPLICABLE STANDARD .....	43
TEST PROCEDURE .....	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA .....	44
<b>FCC §22.917(A) &amp; §24.238(A) - BAND EDGES.....</b>	<b>46</b>
APPLICABLE STANDARD .....	46
TEST PROCEDURE .....	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA .....	47
<b>FCC §2.1055, §22.355 &amp; §24.235 - FREQUENCY STABILITY.....</b>	<b>58</b>

APPLICABLE STANDARD .....	58
TEST PROCEDURE .....	58
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA .....	59
<b>DECLARATION LETTER.....</b>	<b>65</b>

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *CLC HONG KONG LIMITED*'s product, model number: *A104 (FCC ID: 2AG4WA104)* (the "EUT") in this report was a *Ram 3G*, which was measured approximately: 12.8 cm (L) x 5.7 cm (W) x 1.6 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5.0V charging from adapter.

Adapter information:

Model: PMC03

Input: AC100-240V

Output: DC 5V, 500mA

*Note: The model A104 have different samples , they are the same electromagnetic emissions and electromagnetic compatibility characteristics, the difference between them is the colour, the details was explained in the attached declaration letter.*

*All measurement and test data in this report was gathered from production sample serial number: 151120006 (Assigned byBACL, Dongguan). The EUT was received on 2015-11-23.*

### Objective

This report is prepared on behalf of *CLC HONG KONG LIMITED* . in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2AG4WA104  
FCC Part 15C DSS submissions with FCC ID: 2AG4WA104

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA-603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.

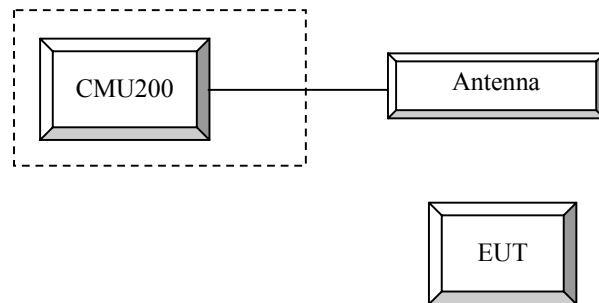
### Equipment Modifications

No modification was made to the EUT.

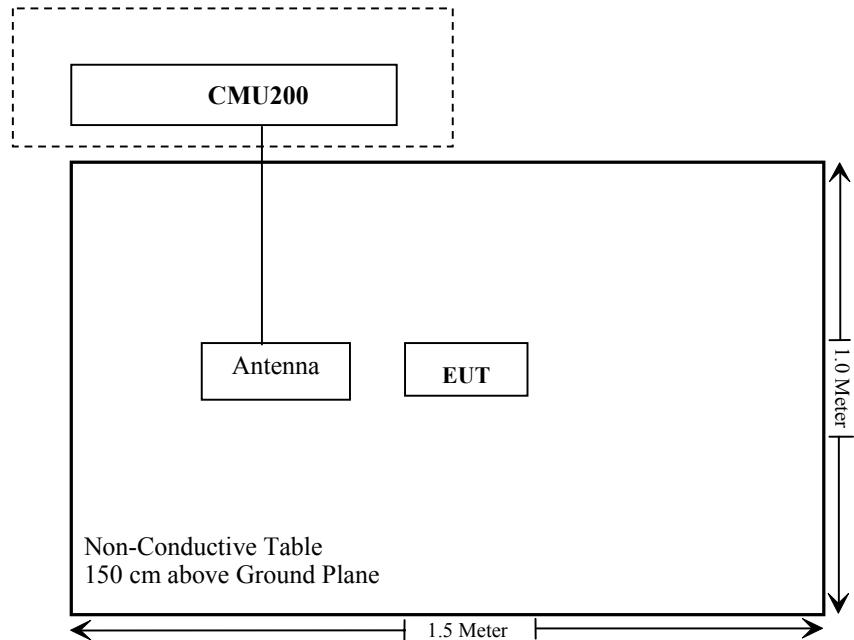
### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
N/A	ANTENNA	N/A	N/A

### Configuration of Test Setup



### Block Diagram of Test Setup



## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

## **FCC §1.1310 & §2.1093- RF EXPOSURE**

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliant, please refer to the SAR report: RDG151120006-20.

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

According to FCC § 2.1047(d), Part 22H & 24E, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

### Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### Test Procedure

#### GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 >	4 dB
Slot Config >	Unchanged (if already set under MS signal)
TCH >	choose desired test channel
Hopping >	Off
Main Timeslot >	3
Network	Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)
Bit Stream >	2E9-1 PSR Bit Stream
AF/RF Connection	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Press Signal on to turn on the signal and change settings

### WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1		
	Rel99 RMC	12.2kbps RMC		
	Power Control Algorithm	Algorithm2		
	$\beta c / \beta d$	8/15		

### WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	$\beta c$	2/15	12/15	15/15	15/15
	$\beta d$	15/15	15/15	8/15	4/15
	$\beta d$ (SF)	64			
	$\beta c / \beta d$	2/15	12/15	15/8	15/4
	$\beta hs$	4/15	24/15	30/15	30/15
<b>HSDPA Specific Settings</b>	MPR(dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$Ahs = \beta hs / \beta c$	30/15			

**WCDMA HSUPA**

The following tests were conducted according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification.

	<b>Mode</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>
	<b>Subset</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
<b>WCDM A General Settings</b>	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
<b>HSDPA Specific Settings</b>	$\beta_c / \beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
<b>HSUPA Specific Settings</b>	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
<b>HSUPA Specific Settings</b>	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCl	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

**HSPA+**

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

<b>Sub-test</b>	$\beta_c$ (Note 3)	$\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	<b>CM</b> (dB) (Note 2)	<b>MPR</b> (dB) (Note 2)	<b>AG Index</b> (Note 4)	<b>E-TFCI</b> (Note 5)	<b>E-TFCI</b> (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

**DC-HSDPA**

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

<b>Parameter</b>	<b>Unit</b>	<b>Value</b>
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1:	The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.	
Note 2:	Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.	

*Radiated method:*

ANSI/TIA-603-D section 2.2.17

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS LINDGREN	Horn Antenna	3115	000 527 35	2013-09-06	2016-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2013-09-06	2016-09-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25.2 °C
<b>Relative Humidity:</b>	49%
<b>ATM Pressure:</b>	100.6kPa

The testing was performed by Allen Qiao on 2015-11-28.

**Conducted Output Power****Cellular Band (Part 22H) & PCS Band (Part 24E)**

Band	Channel No.	Peak Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	32.50	32.61	31.77	30.12	29.31	27.64	27.32	27.24	27.32
	190	32.60	32.62	31.75	30.10	29.32	27.70	27.38	27.35	27.30
	251	32.60	32.62	31.73	30.09	29.31	27.72	27.40	27.36	27.35
PCS	512	28.60	28.58	27.76	26.19	25.40	22.70	22.52	22.08	21.48
	661	28.50	28.42	27.56	26.01	25.25	22.71	22.68	22.32	21.85
	810	28.30	28.20	27.36	25.78	25.79	22.81	22.80	22.47	22.06

**WCDMA Band II (PART 24E)**

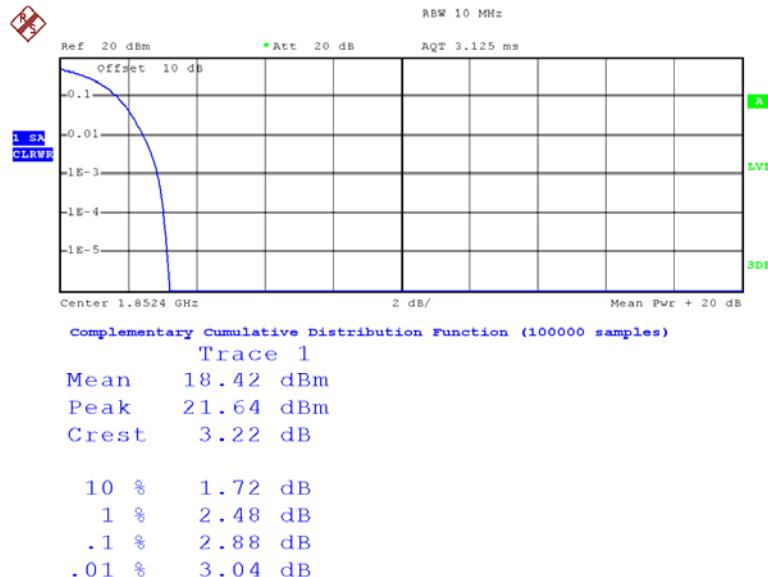
Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.68	2.88	22.42	2.84	22.24	2.72
HSDPA	1	21.48	2.91	21.21	2.86	21.10	2.68
	2	21.43	2.84	21.13	2.89	21.14	2.74
	3	21.52	2.86	21.24	2.79	21.08	2.73
	4	21.44	2.81	21.22	2.83	21.11	2.69
HSUPA	1	21.35	2.93	21.40	2.85	21.02	2.65
	2	21.51	2.85	21.32	2.82	21.09	2.74
	3	21.43	2.87	21.20	2.81	21.23	2.76
	4	21.40	2.90	21.14	2.78	21.04	2.71
	5	21.35	2.89	21.17	2.77	21.19	2.66

**WCDMA Band V (PART 22H)**

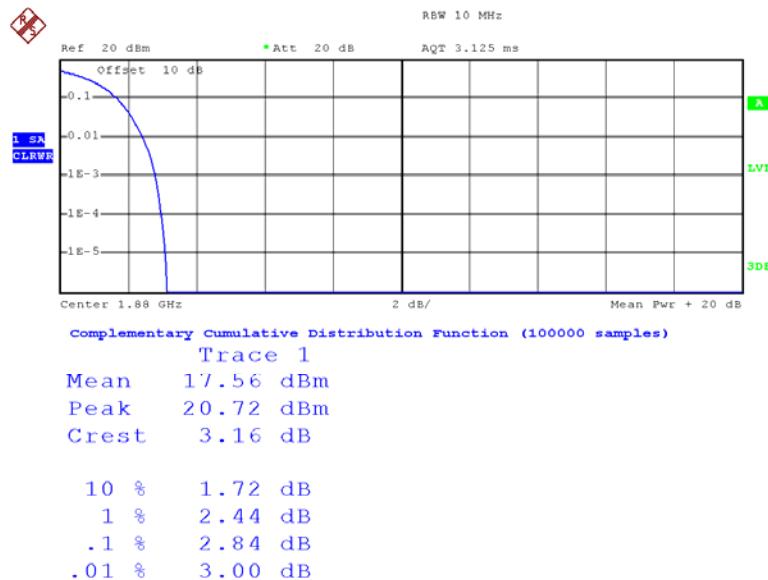
Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.52	2.96	22.44	2.96	22.65	2.92
HSDPA	1	21.46	2.93	21.35	2.94	21.43	2.96
	2	21.42	2.88	21.38	2.91	21.41	2.91
	3	21.38	2.97	21.24	2.93	21.39	2.85
	4	21.43	2.99	21.31	2.87	21.48	2.89
HSUPA	1	21.41	2.89	21.24	2.97	21.35	2.94
	2	21.37	2.91	21.30	2.98	21.42	2.93
	3	21.32	2.92	21.33	2.88	21.45	2.86
	4	21.39	2.93	21.26	2.93	21.37	2.88
	5	21.45	2.87	21.29	2.91	21.36	2.95

Note: peak-to-average ratio (PAR) <13 dB.

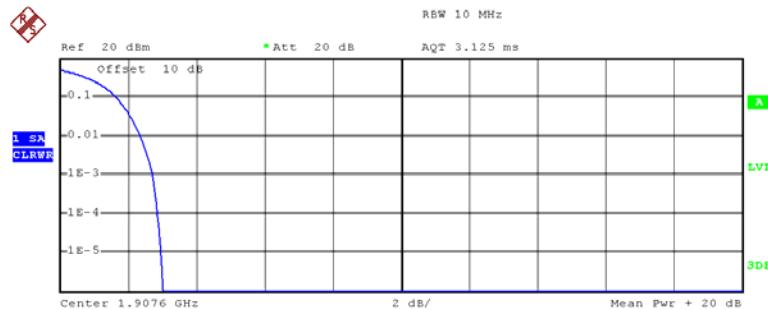
Peak-to-average ratio (PAR)

**WCDMA Band II (PART 24E)****Low Channel**

Date: 28.NOV.2015 19:14:33

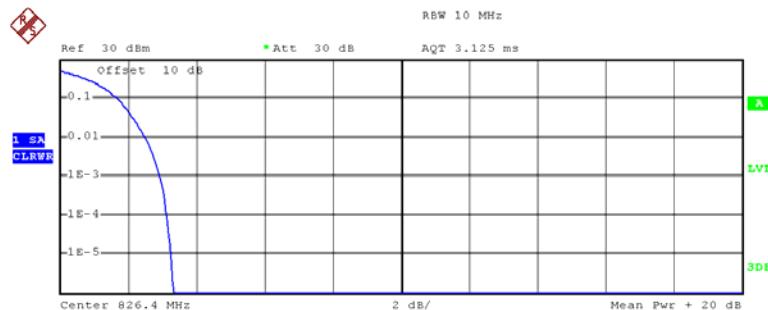
**Middle Channel**

Date: 28.NOV.2015 19:15:16

**High Channel**

10 %	1.68 dB
1 %	2.36 dB
.1 %	2.72 dB
.01 %	2.88 dB

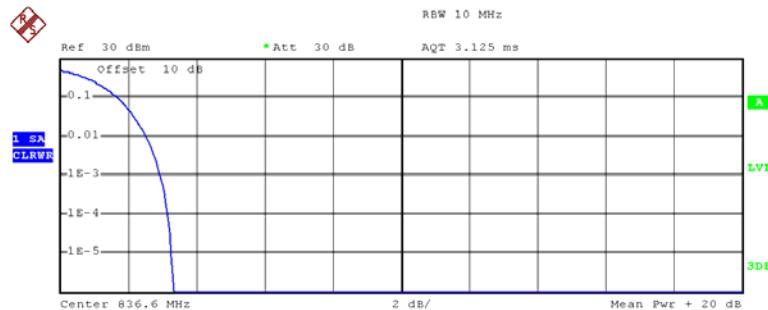
Date: 28.NOV.2015 19:15:47

**WCDMA Band V (PART 22H)****Low Channel**

10 %	1.72 dB
1 %	2.52 dB
.1 %	2.96 dB
.01 %	3.16 dB

Date: 28.NOV.2015 19:21:09

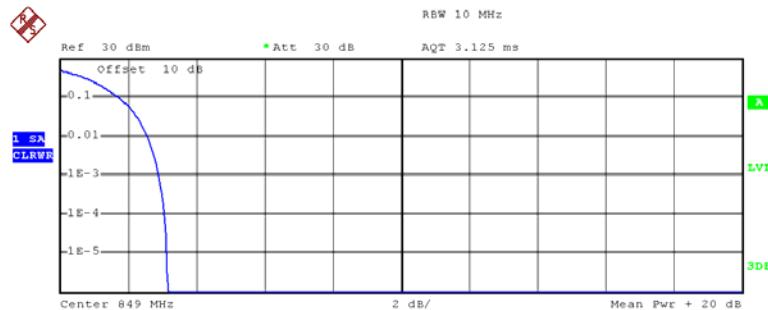
### Middle Channel



10 %	1.72 dB
1 %	2.56 dB
.1 %	2.96 dB
.01 %	3.16 dB

Date: 28.NOV.2015 19:21:45

### High Channel



10 %	1.76 dB
1 %	2.60 dB
.1 %	2.92 dB
.01 %	3.08 dB

Date: 28.NOV.2015 19:22:23

## ERP &amp; EIRP

## Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>GSM 850_Middle Channel</b>								
836.600	H	89.88	15	0.0	1.0	14.0	38.45	24.5
836.600	V	103.58	31.8	0.0	1.0	30.8	38.45	7.7
<b>EGPRS 850_Middle Channel</b>								
836.600	H	85.61	10.7	0.0	1.0	9.7	38.45	28.8
836.600	V	98.86	27.1	0.0	1.0	26.1	38.45	12.4
<b>WCDMA Band V_Middle Channel</b>								
836.600	H	85.85	10.9	0.0	1.0	9.9	38.45	28.6
836.600	V	91.73	19.9	0.0	1.0	18.9	38.45	19.6

## Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>PCS 1900_Middle Channel</b>								
1880.000	H	88.41	16.8	11.7	1.4	27.1	33.0	5.9
1880.000	V	87.16	15.7	11.7	1.4	26.0	33.0	7.0
<b>EGPRS1900_Middle Channel</b>								
1880.000	H	87.05	15.5	11.7	1.4	25.8	33.0	7.2
1880.000	V	85.49	14	11.7	1.4	24.3	33.0	8.7
<b>WCDMA Band II_Middle Channel</b>								
1880.000	H	83.03	11.4	11.7	1.4	21.7	33.0	11.3
1880.000	V	82.60	11.1	11.7	1.4	21.4	33.0	11.6

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

## FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH

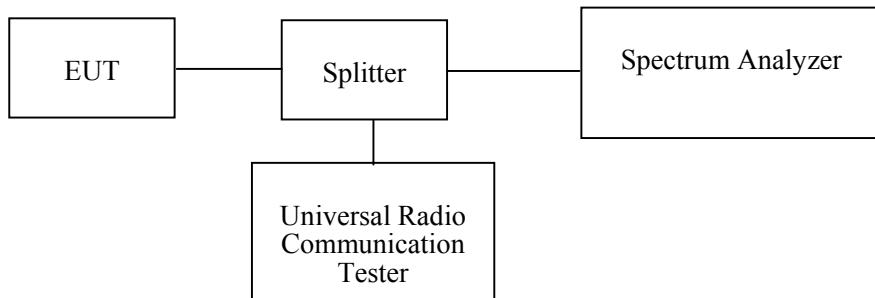
### Applicable Standard

FCC §2.1049, §22.917 and §22.905, §24.238.

### Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	24.6~26 °C
Relative Humidity:	45~50 %
ATM Pressure:	100.1~100.9 kPa

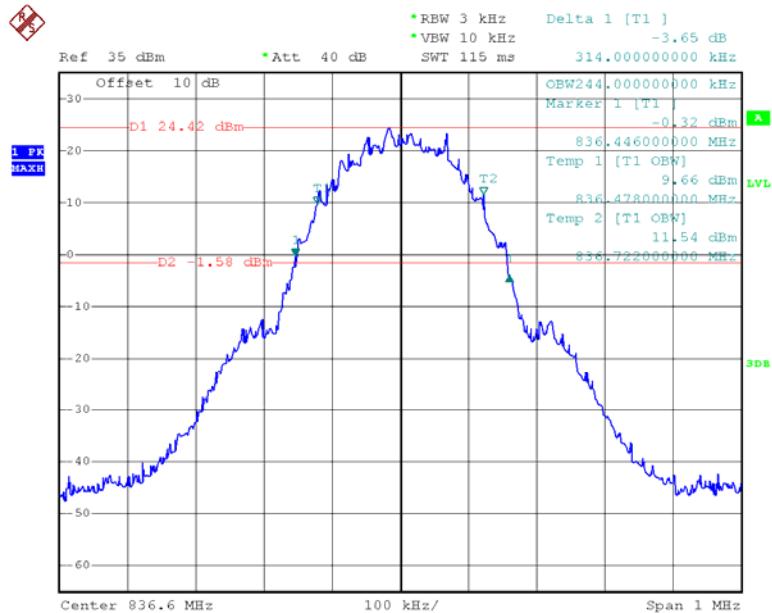
*The testing was performed by Allen Qiao from 2015-11-27 to 2015-11-28.*

*Test Mode: Transmitting*

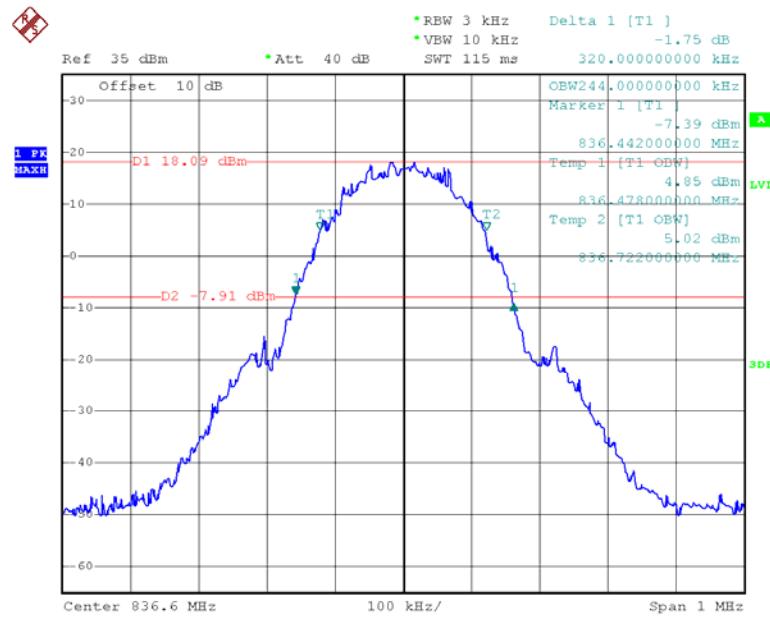
*Test Result: Compliant. Please refer to the following table and plots.*

Band	Channel No.	Mode	99% Occupied Bandwidth	26 dB Occupied Bandwidth
			kHz	kHz
Cellular	190	GSM	244	314
		EDGE	244	320
PCS	661	PCS	250	320
		EDGE	246	314
WCDMA Band II	9400	Rel 99	4180	4700
	9400	HSDPA	4180	4700
	9400	HSUPA	4180	4740
WCDMA Band V	4183	Rel 99	4160	4700
	4183	HSDPA	4160	4720
	4183	HSUPA	4160	4700

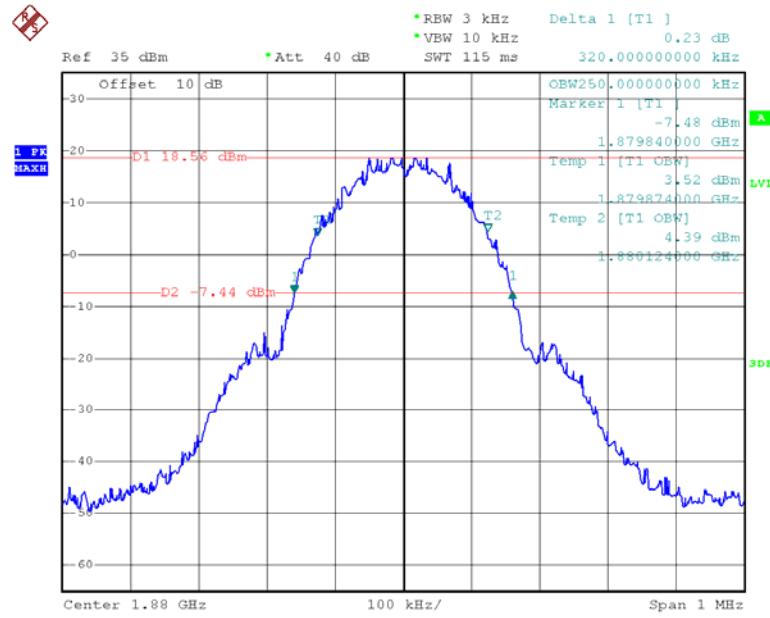
### GMSK 850 Cellular Band



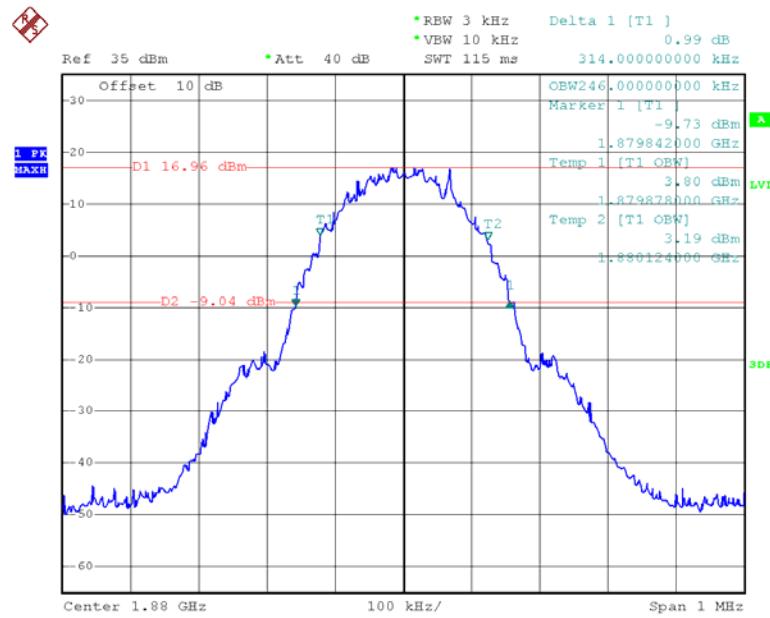
Date: 27.NOV.2015 21:53:42

**EDGE 850 Cellular Band**

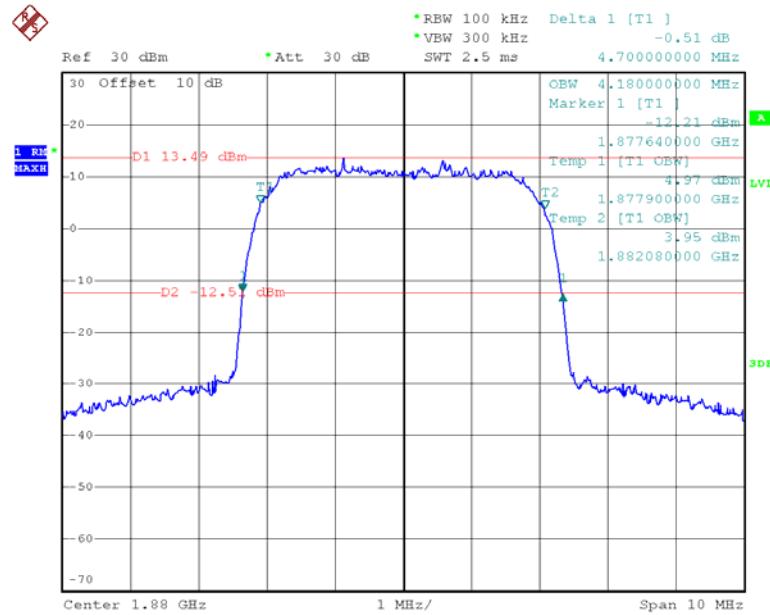
Date: 27.NOV.2015 22:10:28

**GMSK PCS Band**

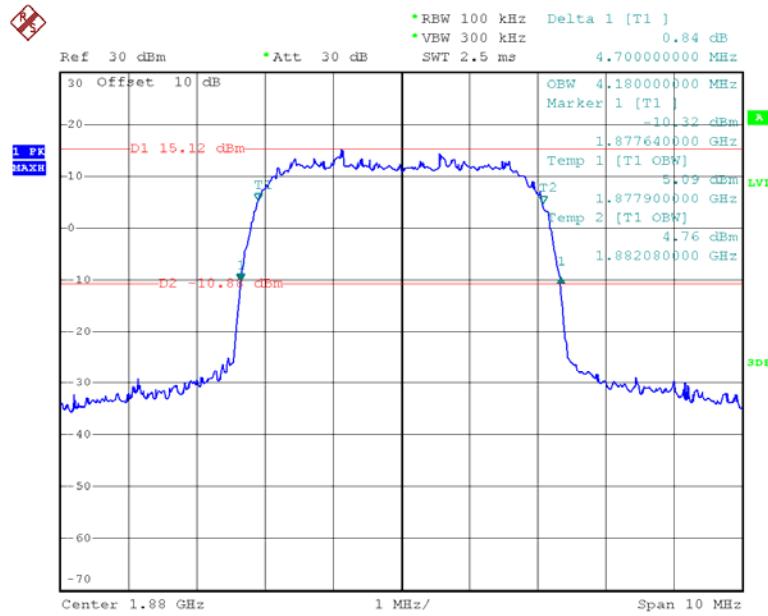
Date: 27.NOV.2015 23:07:52

**EDGE PCS Band**

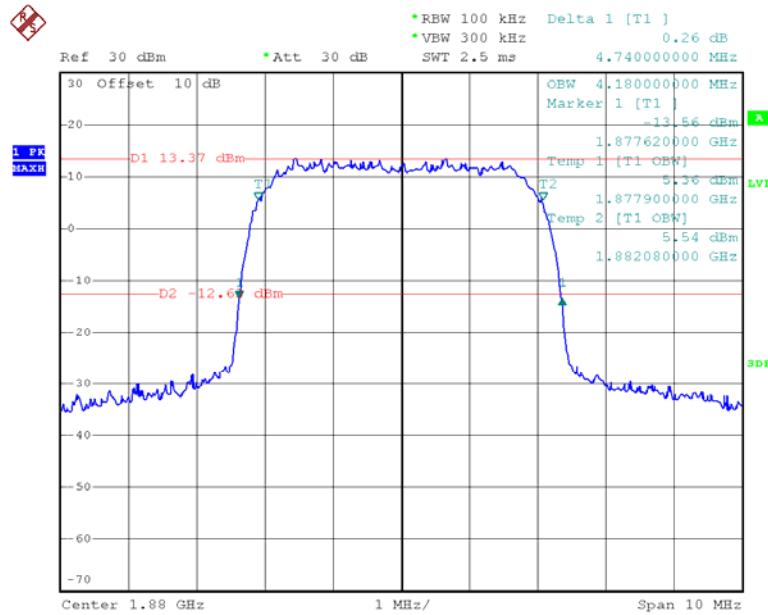
Date: 27.NOV.2015 23:00:57

**REL99 Band II**

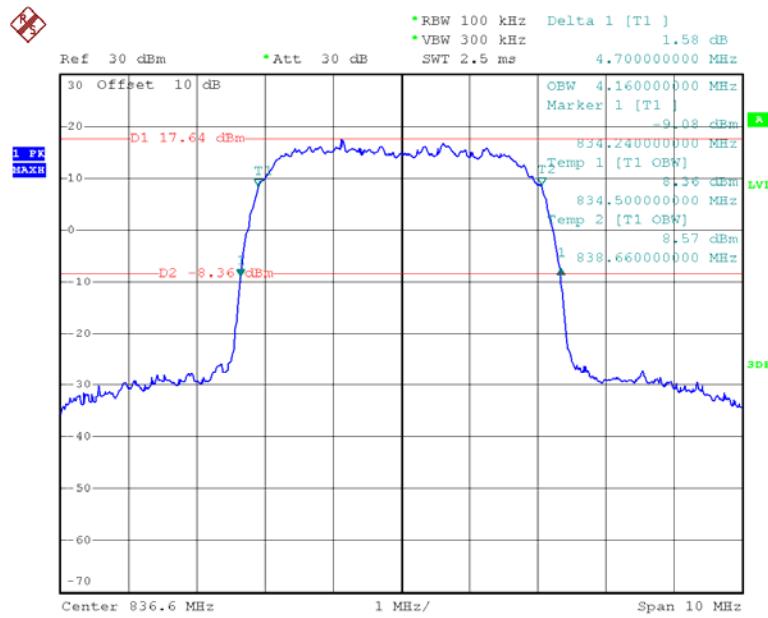
Date: 28.NOV.2015 18:41:07

**HSDPA Band II**

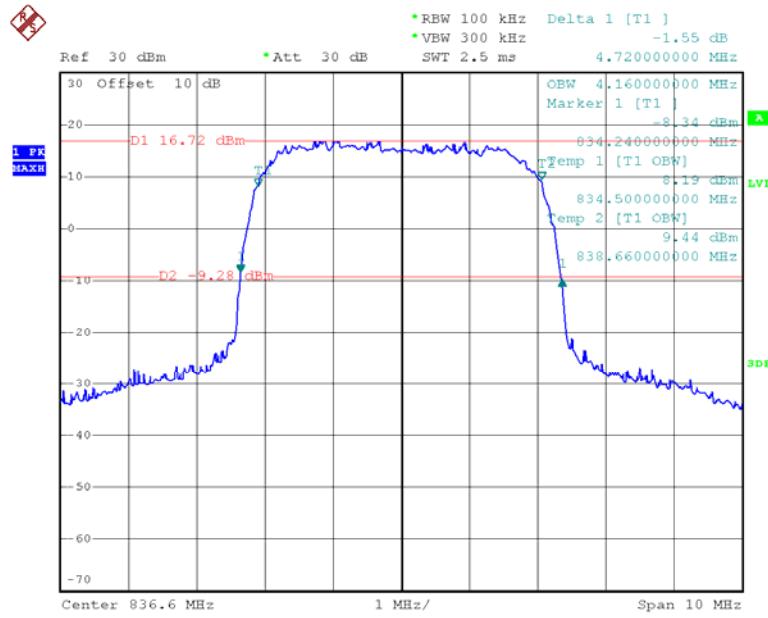
Date: 28.NOV.2015 20:02:16

**HSUPA Band II**

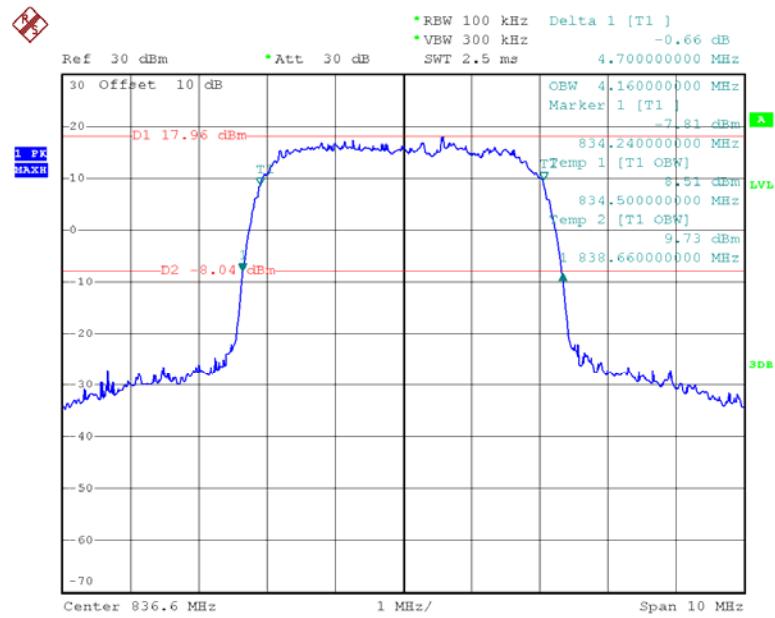
Date: 28.NOV.2015 20:08:07

**REL99 Band V**

Date: 28.NOV.2015 19:27:30

**HSDPA Band V**

Date: 28.NOV.2015 20:19:14

**HSUPA Band V**

Date: 28.NOV.2015 20:13:42

## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

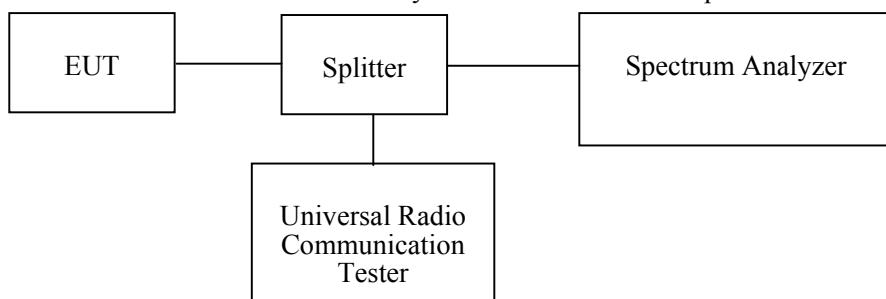
### Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

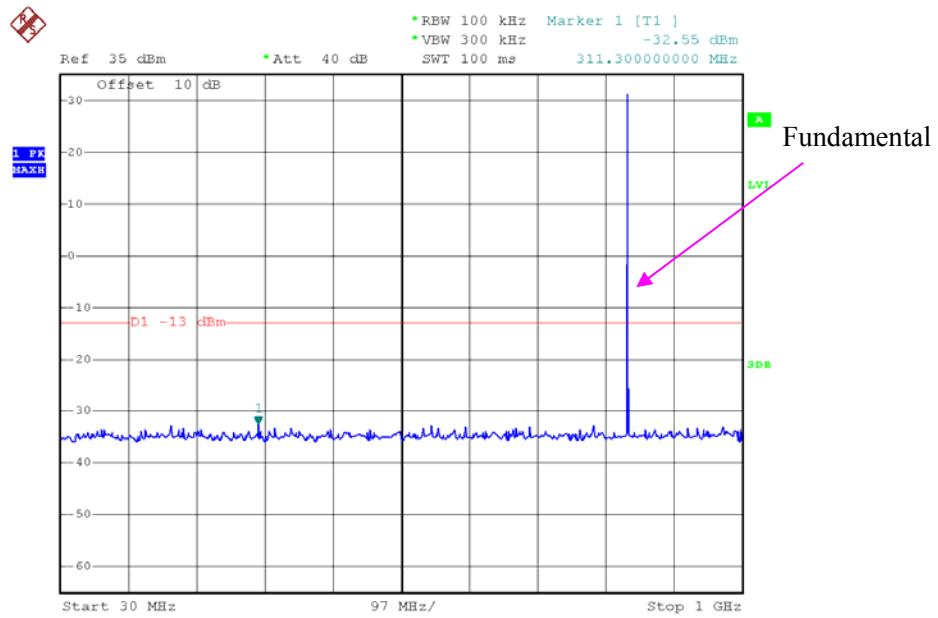
### Test Data

#### Environmental Conditions

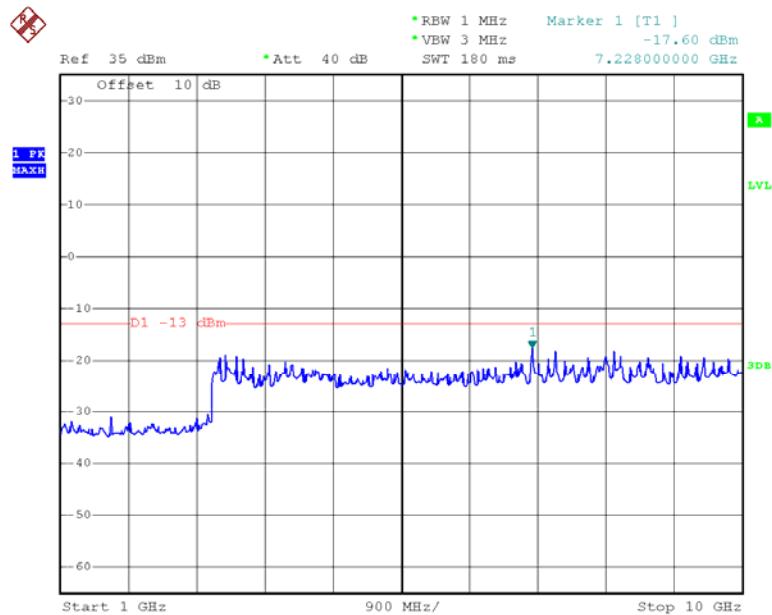
Temperature:	24.6~26 °C
Relative Humidity:	45~50 %
ATM Pressure:	100.1~100.9 kPa

*The testing was performed by Allen Qiao from 2015-11-27 to 2015-11-28.*

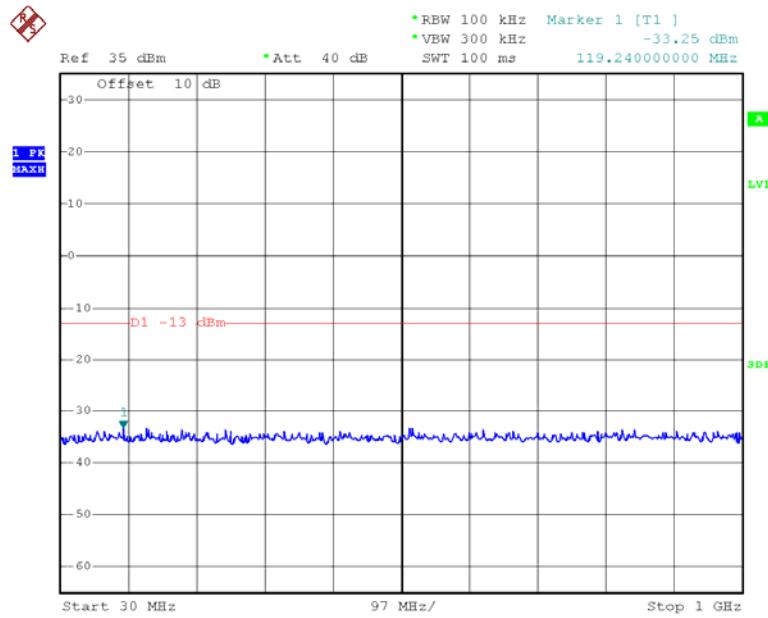
Please refer to the following plots.

**GSM850\_Middle Channel**

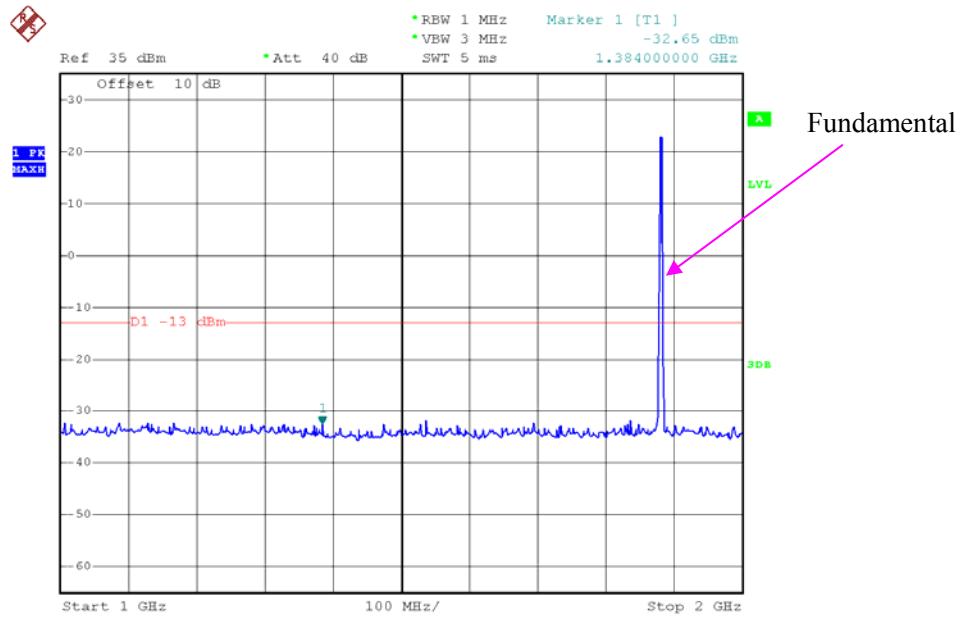
Date: 27.NOV.2015 22:35:11



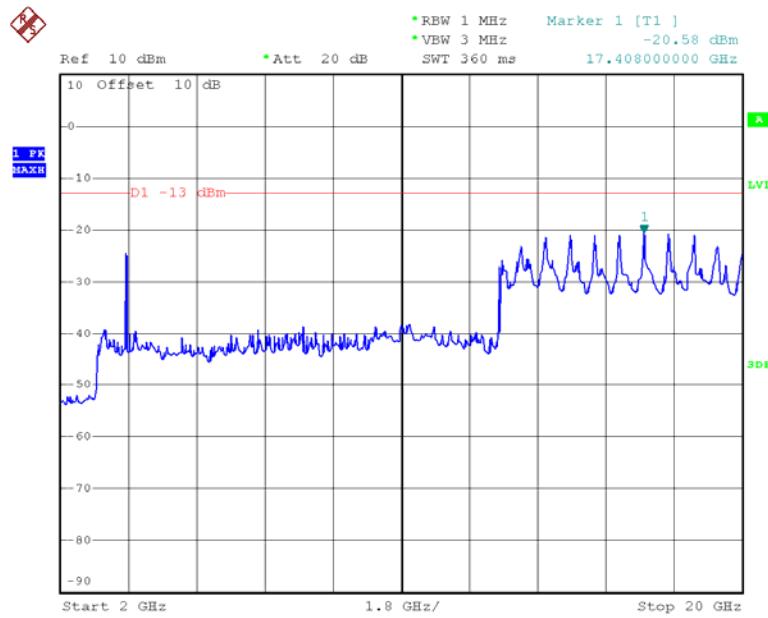
Date: 27.NOV.2015 22:36:14

**PCS 1900\_Middle Channel**

Date: 27.NOV.2015 23:26:22

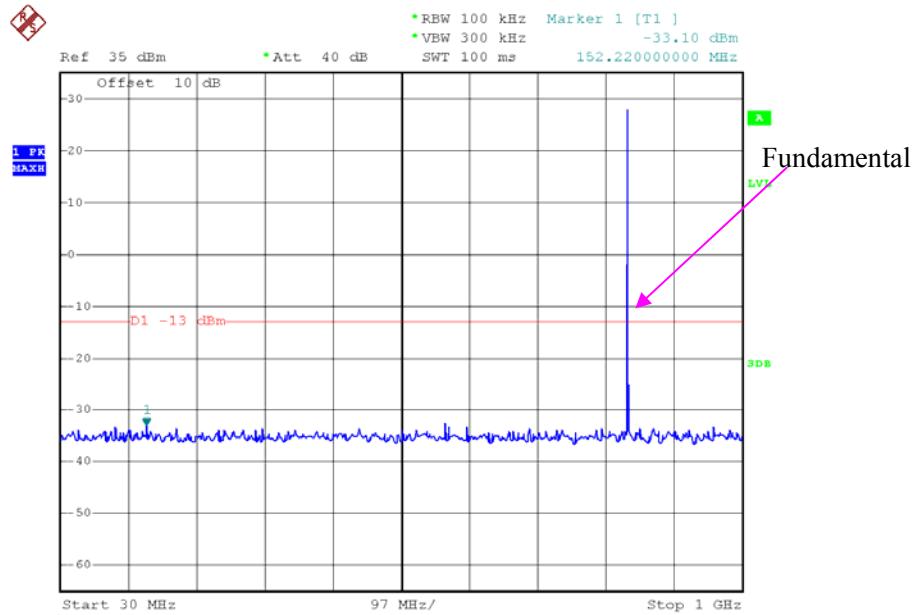


Date: 27.NOV.2015 23:30:33

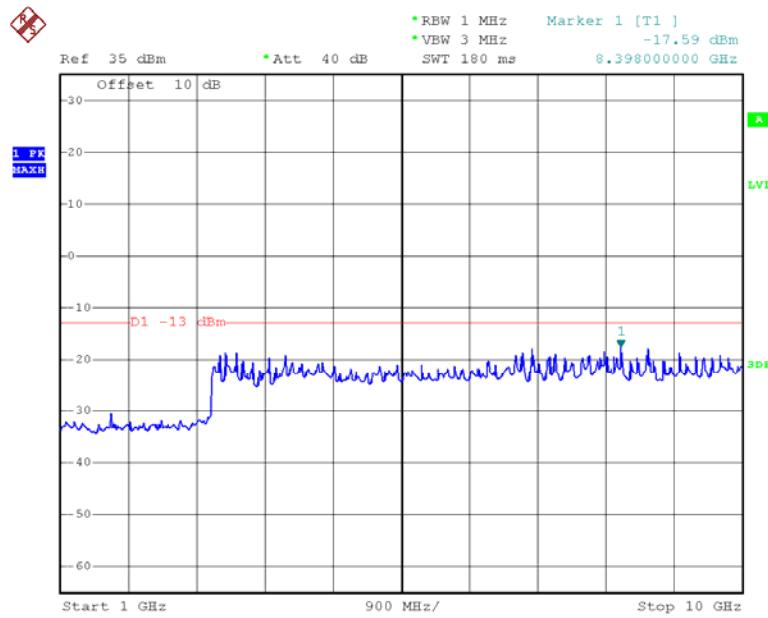


Date: 27.NOV.2015 23:32:55

### EDGE850\_Middle Channel

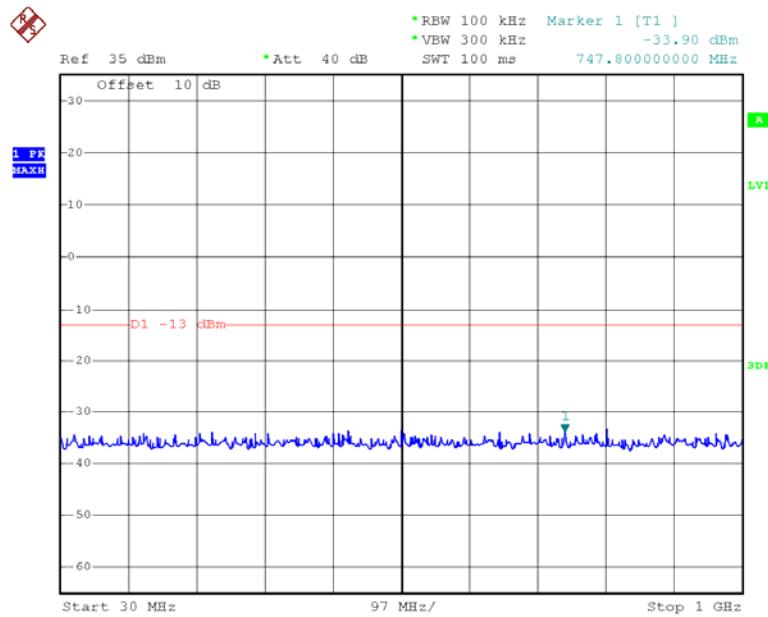


Date: 27.NOV.2015 22:35:35

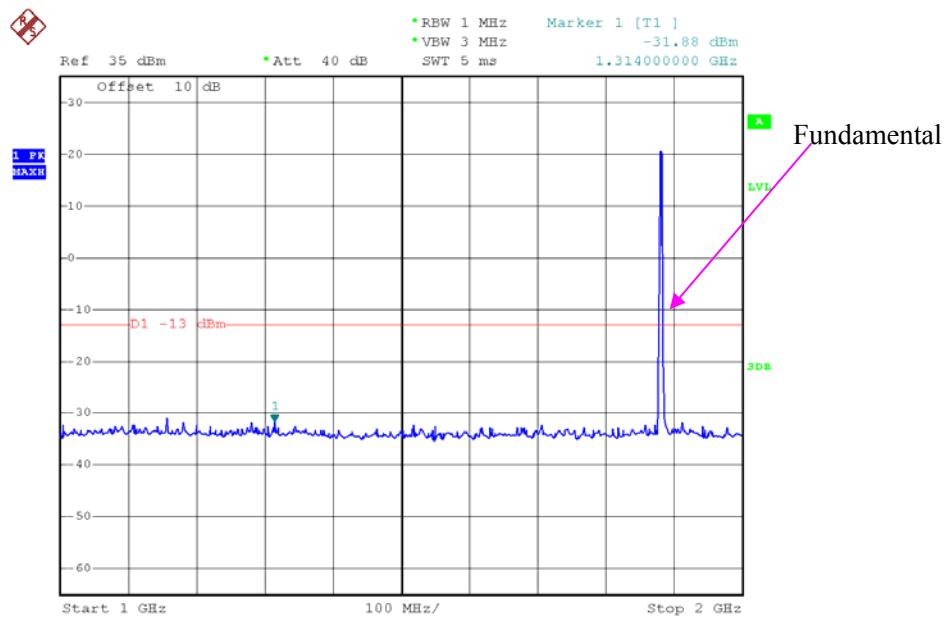


Date: 27.NOV.2015 22:36:52

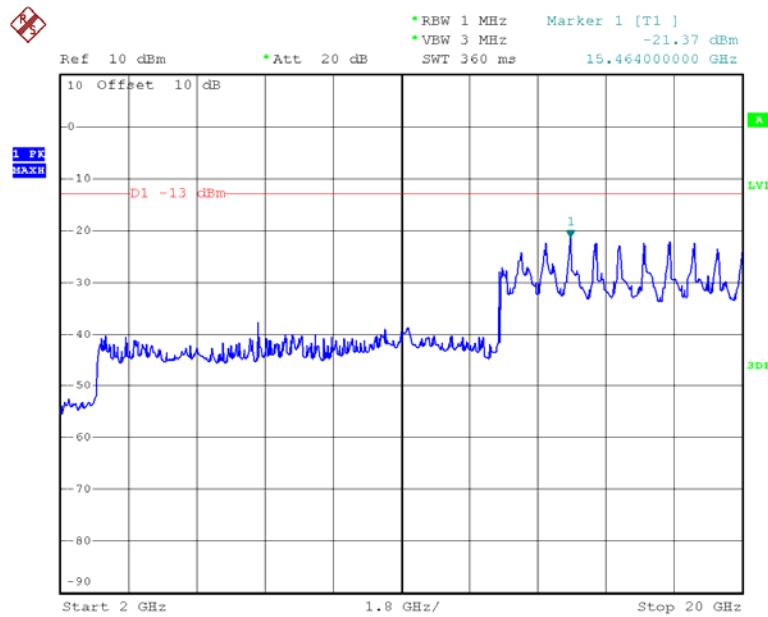
### EDGE1900\_Middle Channel



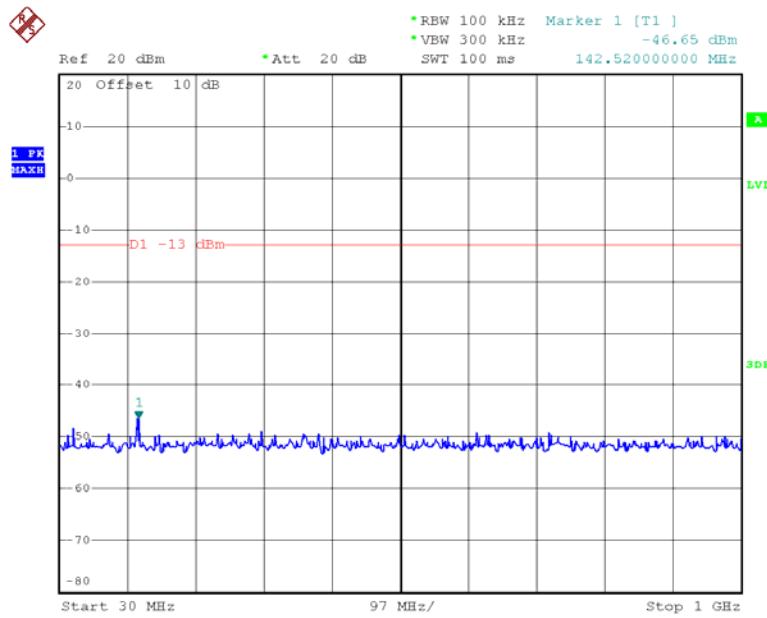
Date: 27.NOV.2015 23:26:37



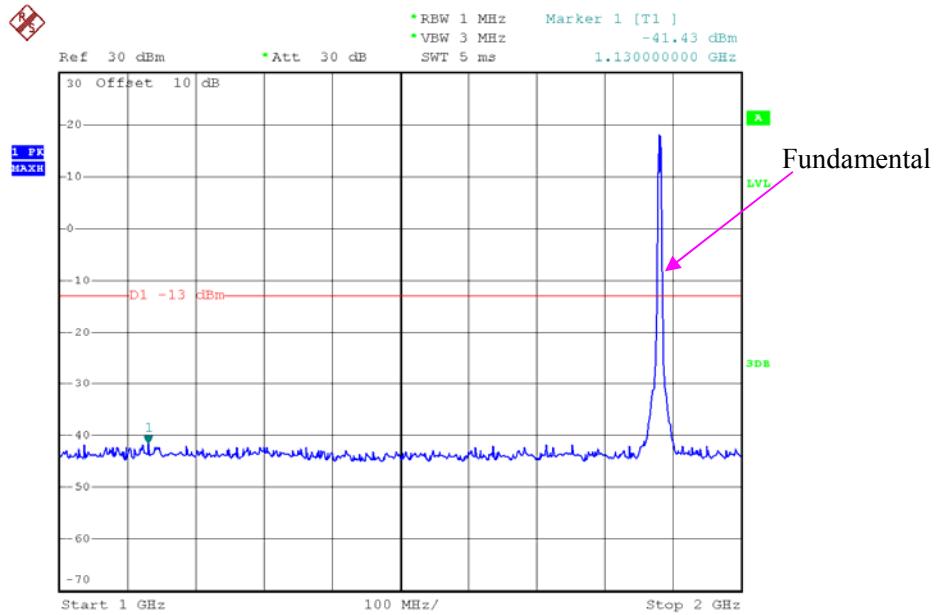
Date: 27.NOV.2015 23:31:02



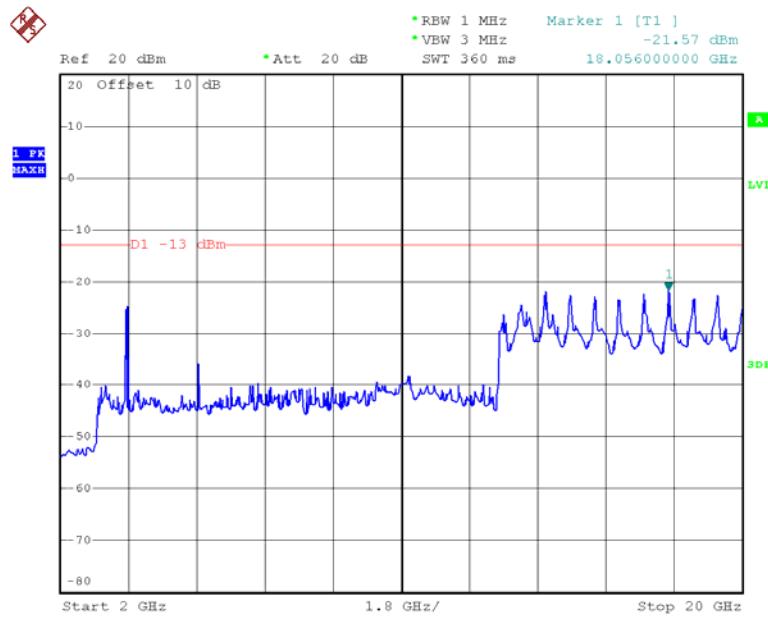
Date: 27.NOV.2015 23:33:04

**REL99 Band II\_ Middle Channel**

Date: 28.NOV.2015 19:05:32

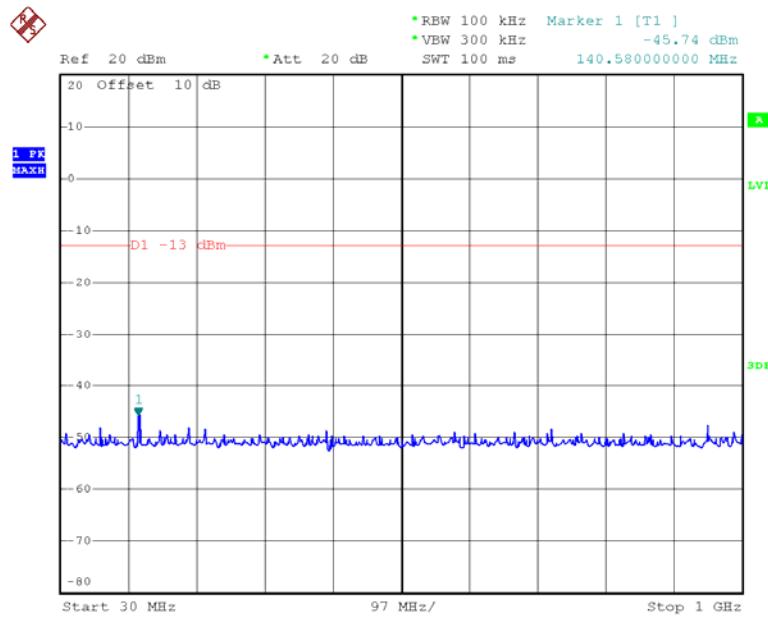


Date: 28.NOV.2015 19:43:44

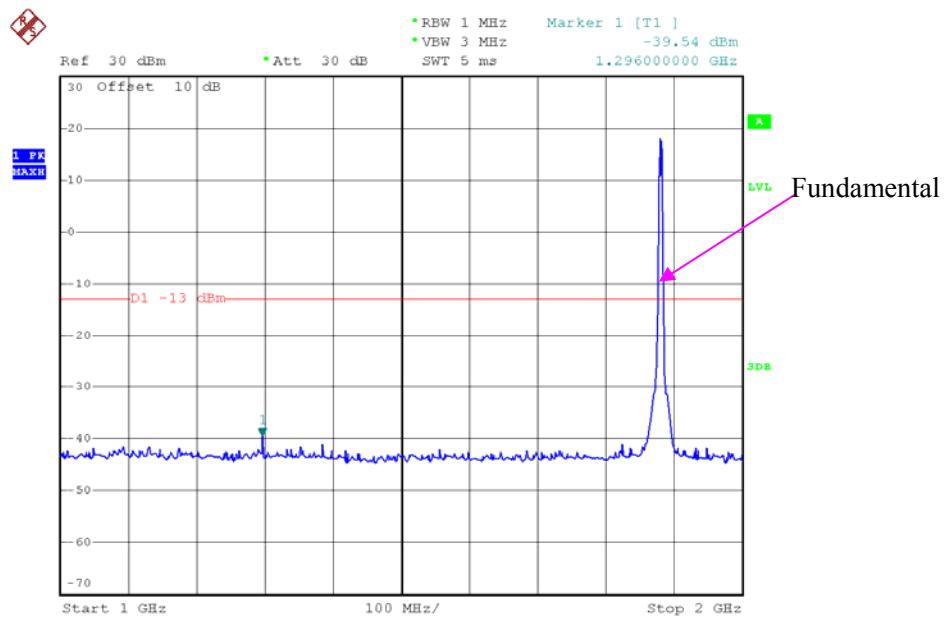


Date: 28.NOV.2015 18:58:31

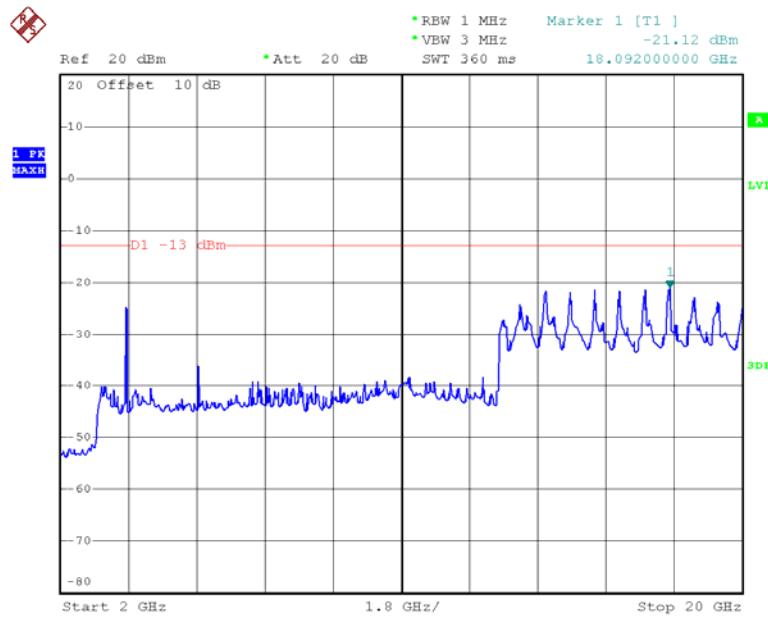
### HSDPA Band II \_Middle Channel



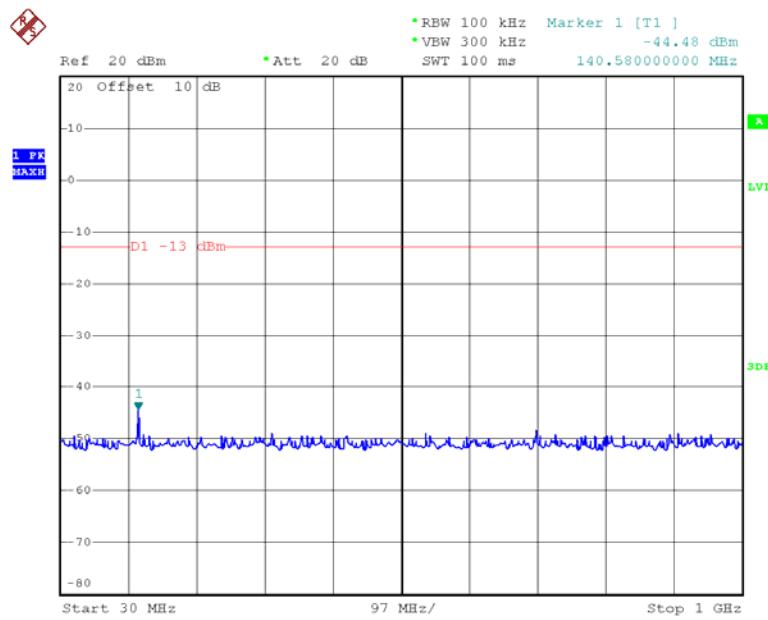
Date: 28.NOV.2015 19:04:24



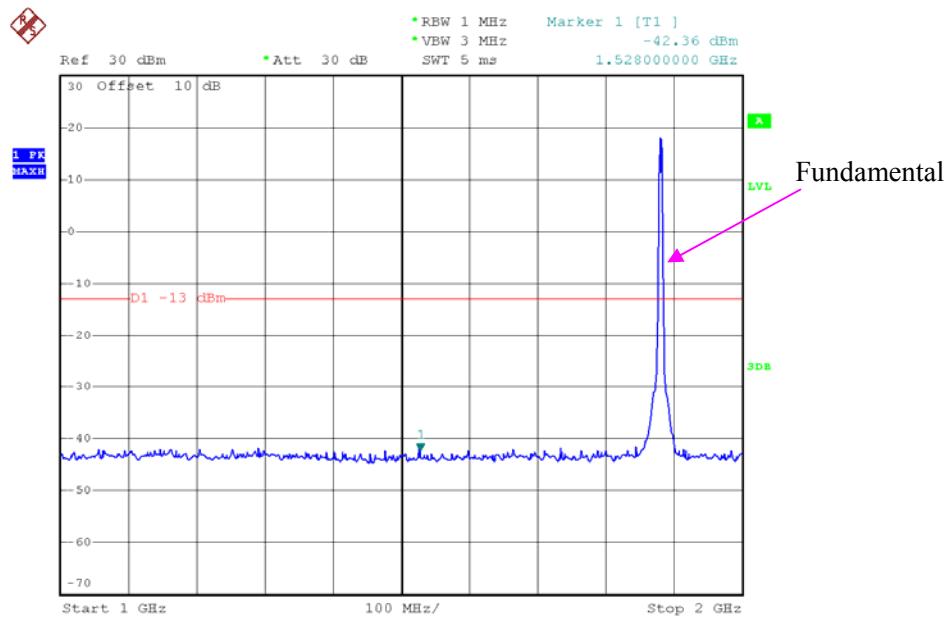
Date: 28.NOV.2015 19:42:54



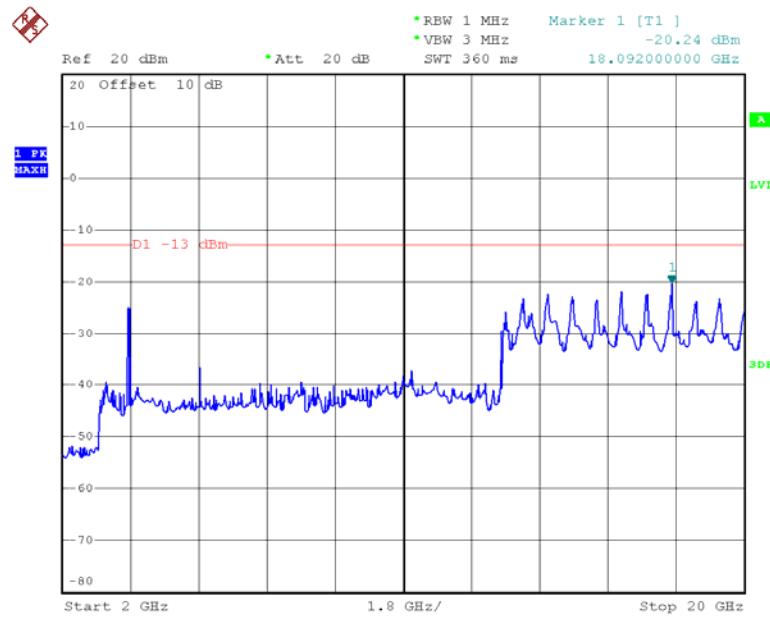
Date: 28.NOV.2015 18:57:32

**HSUPA Band II \_ Middle Channel**

Date: 28.NOV.2015 19:04:46

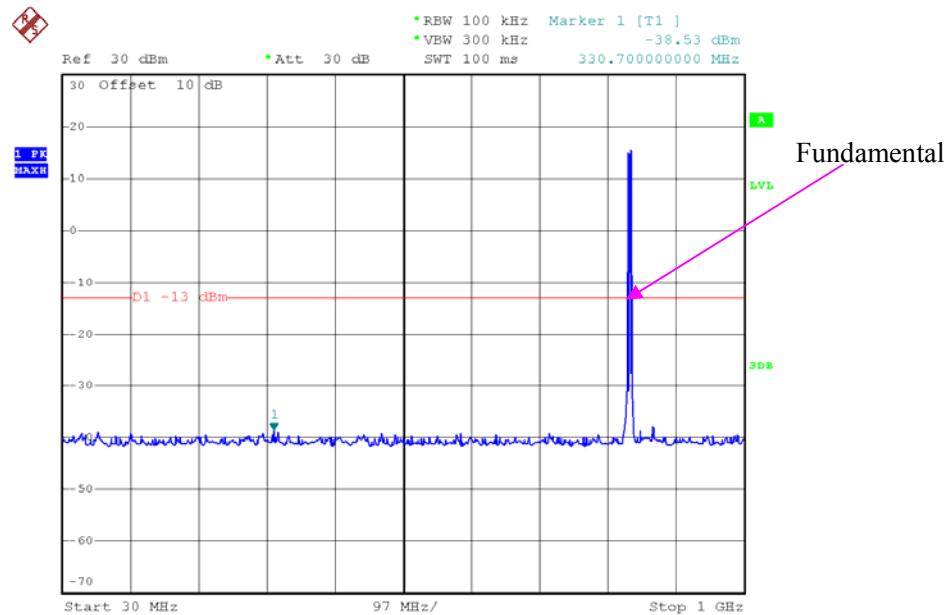


Date: 28.NOV.2015 19:43:24

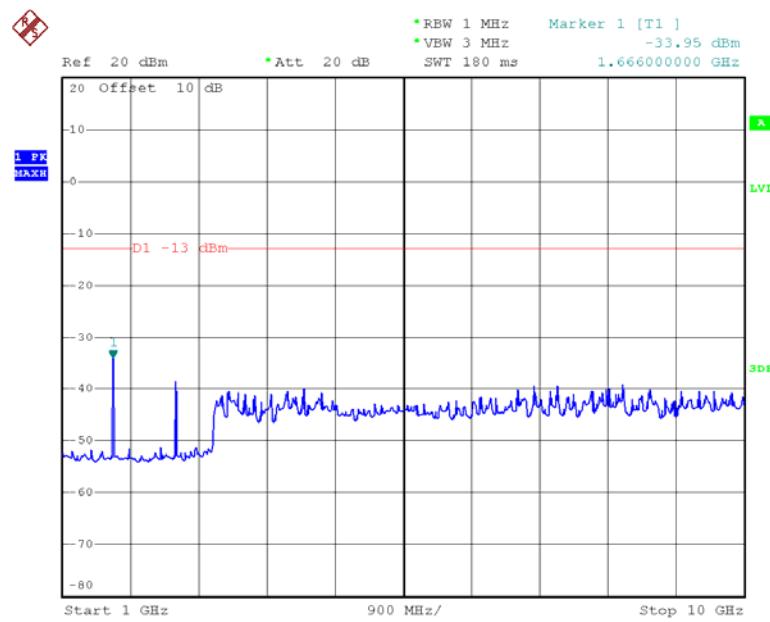


Date: 28.NOV.2015 18:58:14

### REL99 Band V\_ Middle Channel

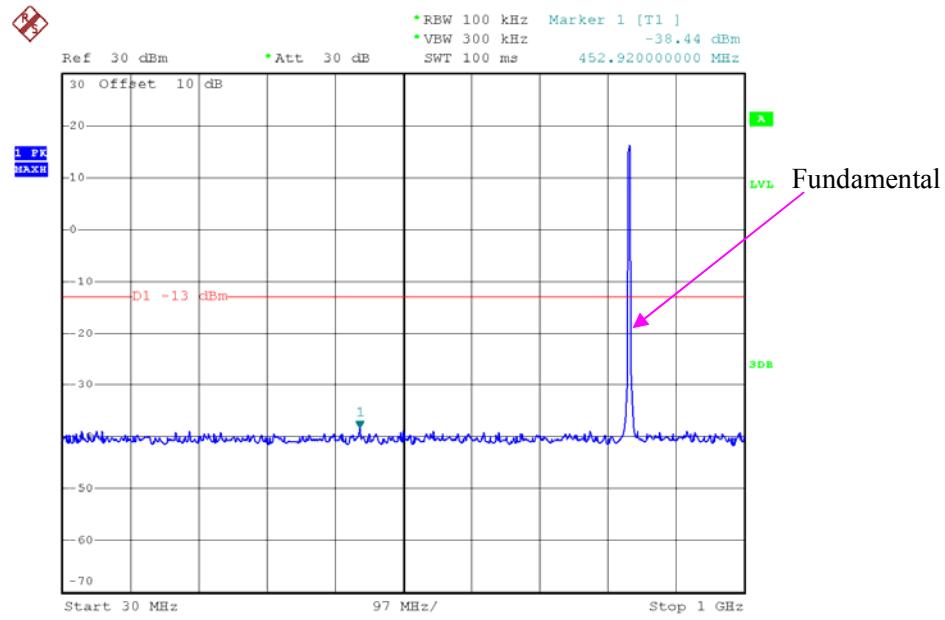


Date: 28.NOV.2015 19:34:53

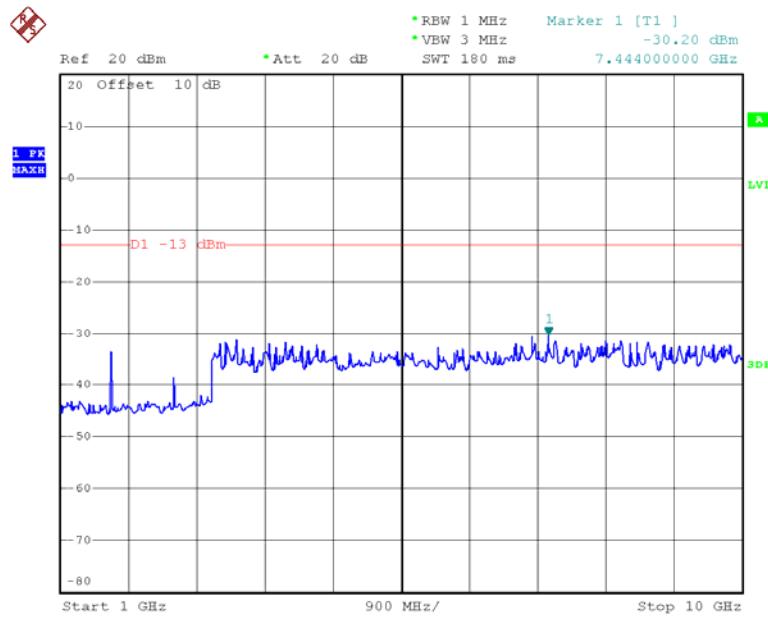


Date: 28.NOV.2015 19:37:33

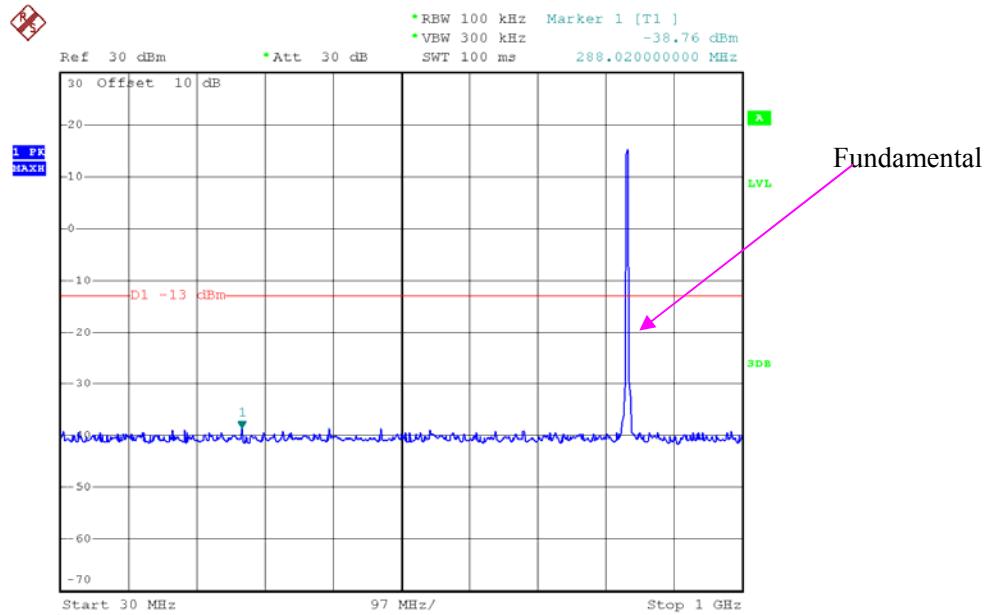
### HSDPA Band V\_Middle Channel



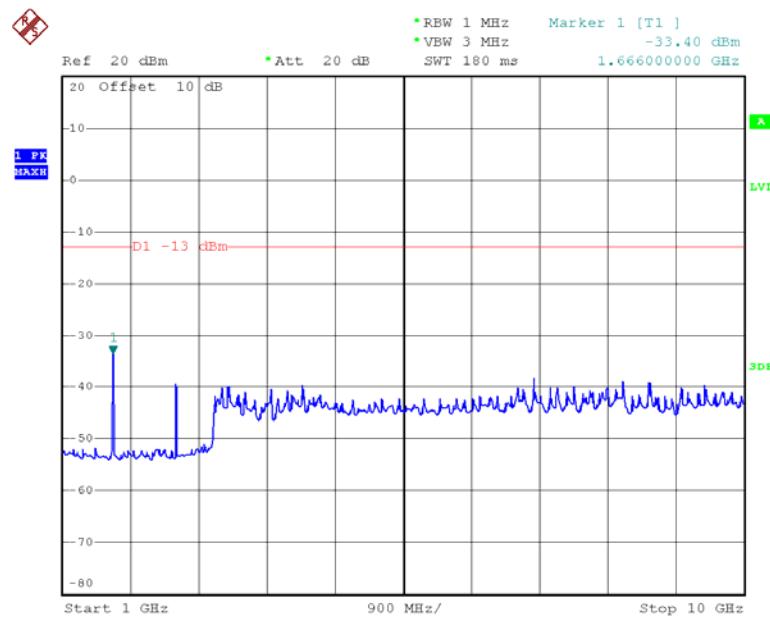
Date: 28.NOV.2015 19:33:36



Date: 28.NOV.2015 19:36:59

**HSUPA Band V\_Middle Channel**

Date: 28.NOV.2015 19:34:09



Date: 28.NOV.2015 19:37:13

## FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

### Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10} (\text{power out in Watts})$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2015-09-06	2018-09-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	24.5 °C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	101.2 kPa

The testing was performed by Allen Qiao on 2015-11-24

EUT Operation Mode: Transmitting

**Cellular Band (PART 22H)****30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>Frequency: 836.6 MHz</b>								
1673.200	H	42.86	-58.2	10.6	1.5	-49.1	-13.0	36.1
1673.200	V	52.34	-49	10.6	1.5	-39.9	-13.0	26.9
2509.800	H	42.14	-55.9	13.1	2.8	-45.6	-13.0	32.6
2509.800	V	39.52	-57.6	13.1	2.8	-47.3	-13.0	34.3
243.100	H	35.71	-72.4	0.0	0.5	-72.9	-13.0	59.9
257.600	V	36.15	-69.5	0.0	0.5	-70.0	-13.0	57.0

**WCDMA Band V (PART 22H)**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>Frequency: 836.6 MHz</b>								
1673.200	H	38.29	-62.8	10.6	1.5	-53.7	-13.0	40.7
1673.200	V	41.34	-60	10.6	1.5	-50.9	-13.0	37.9
231.800	H	35.82	-72.2	0.0	0.5	-72.7	-13.0	59.7
264.500	V	36.76	-68.8	0.0	0.5	-69.3	-13.0	56.3

**PCS Band (PART 24E)****30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>Frequency: 1880 MHz</b>								
3760.000	H	56.74	-37.6	13.8	2.9	-26.7	-13.0	13.7
3760.000	V	55.68	-37.4	13.8	2.9	-26.5	-13.0	13.5
246.700	H	35.64	-72.5	0.0	0.5	-73.0	-13.0	60.0
261.400	V	36.76	-68.8	0.0	0.5	-69.3	-13.0	56.3

**WCDMA Band II (PART 24E)**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>Frequency: 1880 MHz</b>								
3760.000	H	60.19	-34.1	13.8	2.9	-23.2	-13.0	10.2
3760.000	V	56.47	-36.6	13.8	2.9	-25.7	-13.0	12.7
253.700	H	35.48	-72.6	0.0	0.5	-73.1	-13.0	60.1
264.200	V	36.73	-68.8	0.0	0.5	-69.3	-13.0	56.3

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

## FCC §22.917(a) & §24.238(a) - BAND EDGES

### Applicable Standard

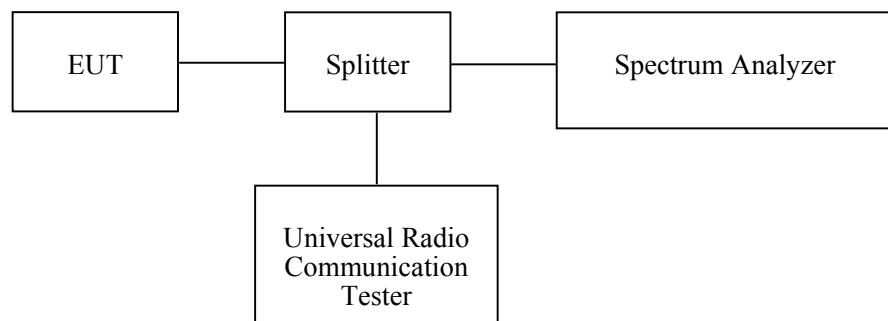
According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

## Test Data

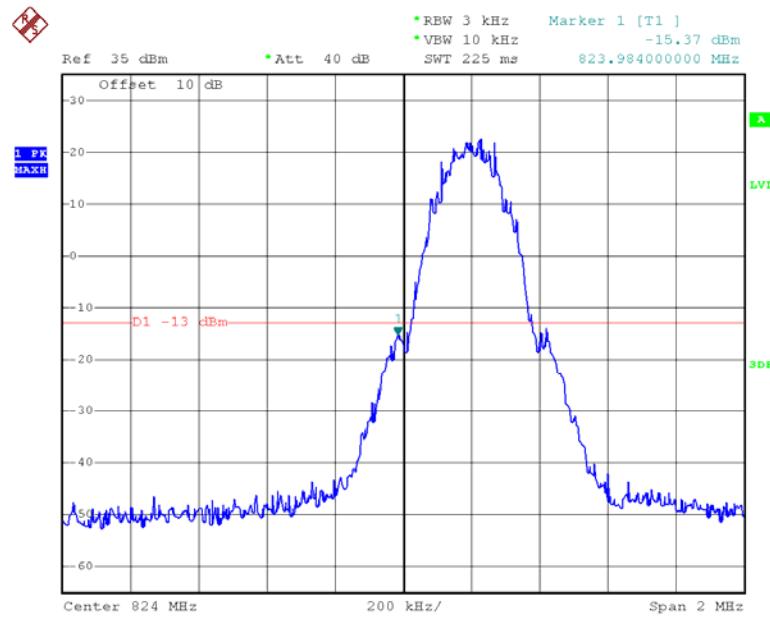
### Environmental Conditions

<b>Temperature:</b>	24.6~26 °C
<b>Relative Humidity:</b>	45~50 %
<b>ATM Pressure:</b>	100.1~100.9 kPa

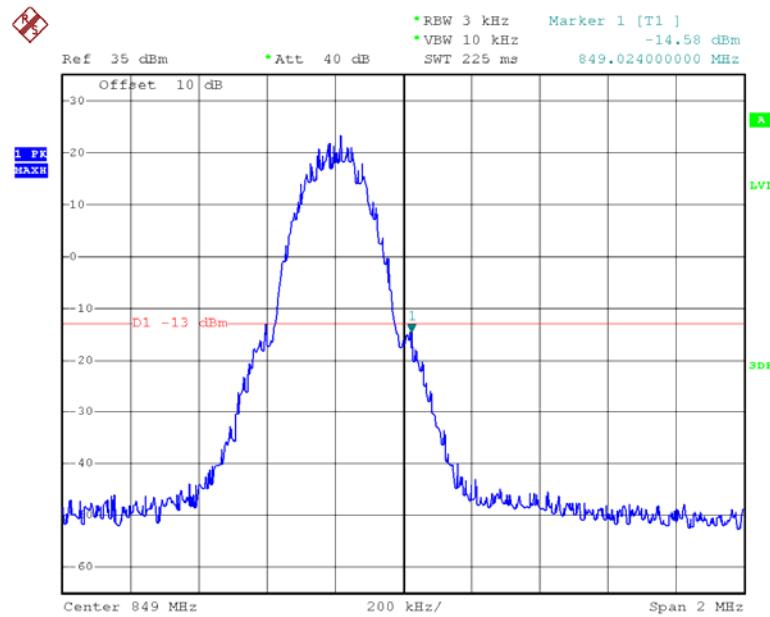
*The testing was performed by Allen Qiao from 2015-11-27 to 2015-11-28.*

*Test Mode: Transmitting*

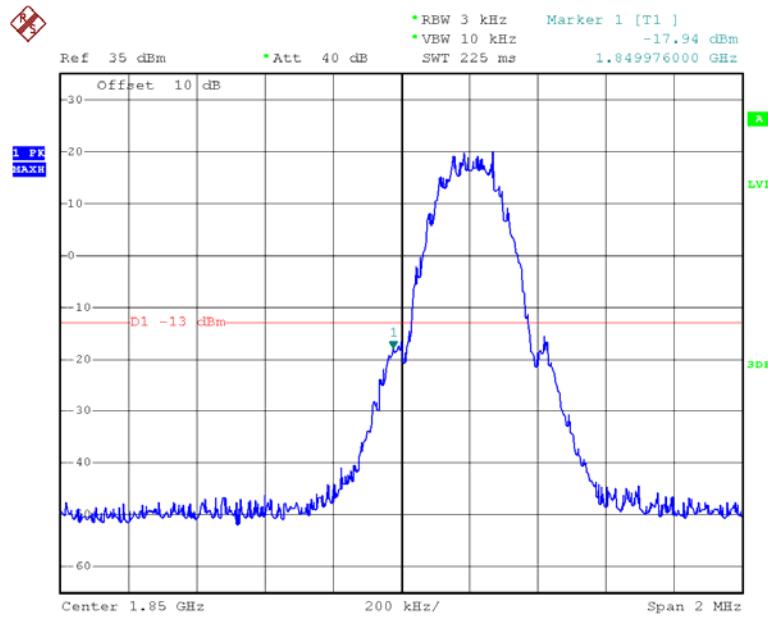
*Test Result: Compliant. Please refer to the following plots.*

**GSM 850, Left Band Edge**

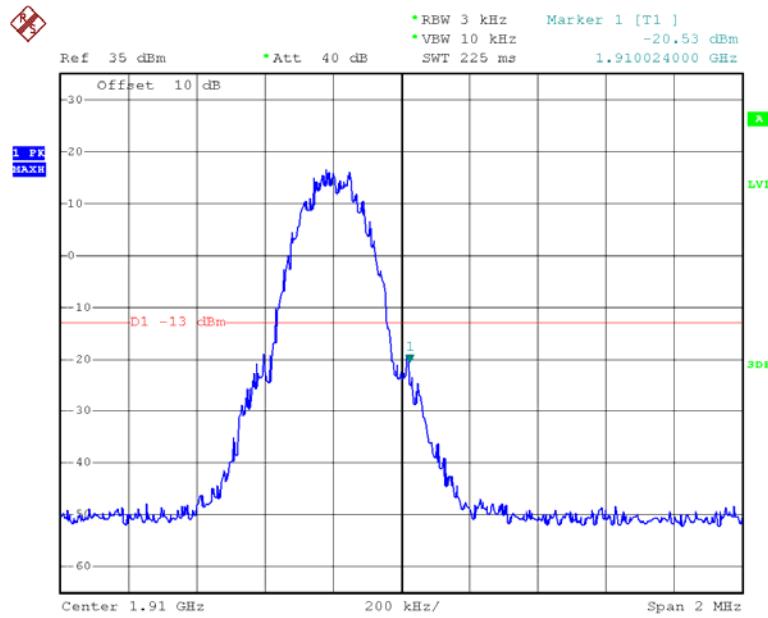
Date: 27.NOV.2015 22:03:31

**GSM 850, Right Band Edge**

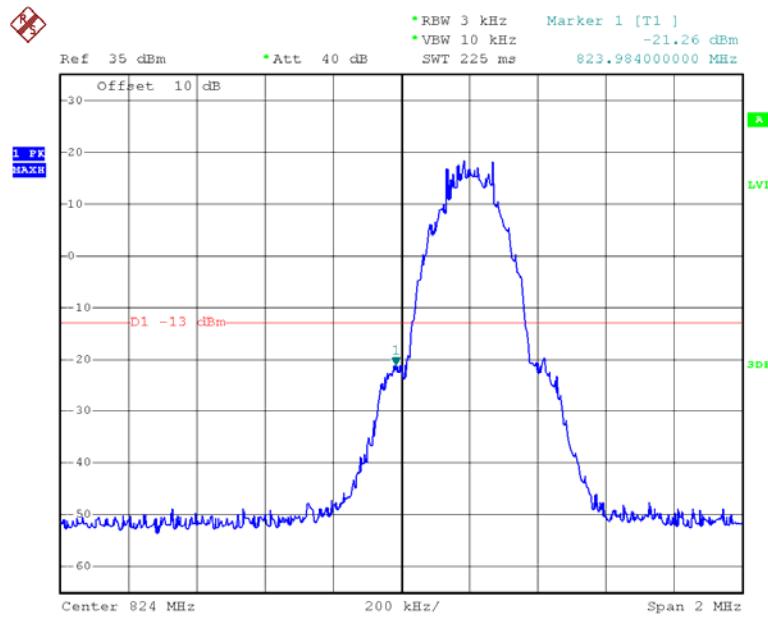
Date: 27.NOV.2015 22:04:11

**PCS 1900, Left Band Edge**

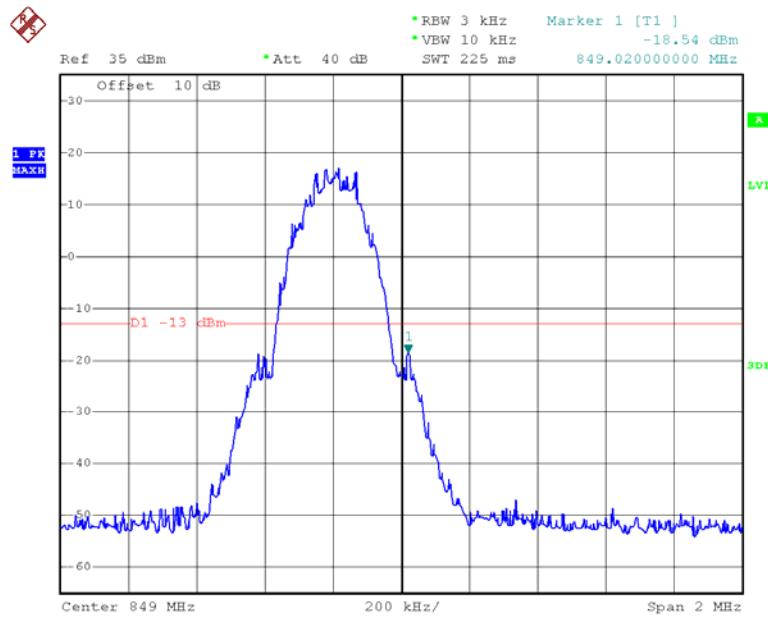
Date: 27.NOV.2015 23:13:40

**PCS 1900, Right Band Edge**

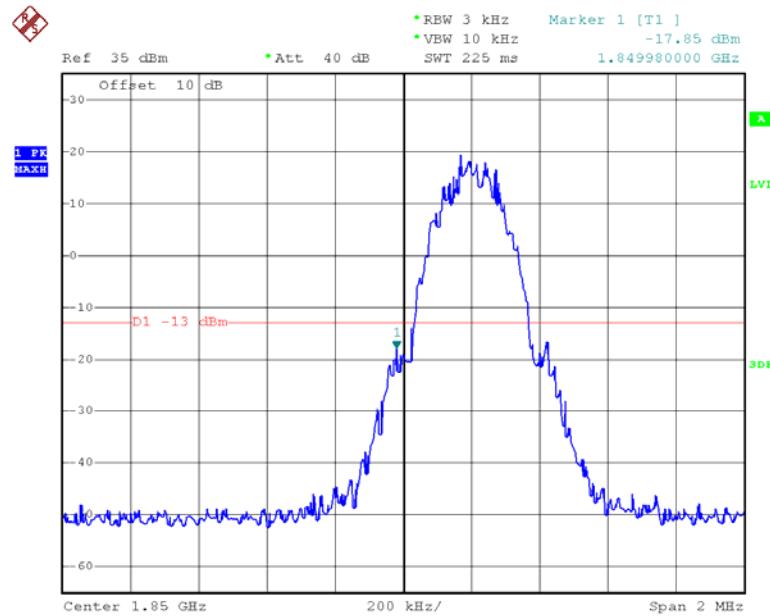
Date: 27.NOV.2015 23:14:31

**EDGE850, Left Band Edge**

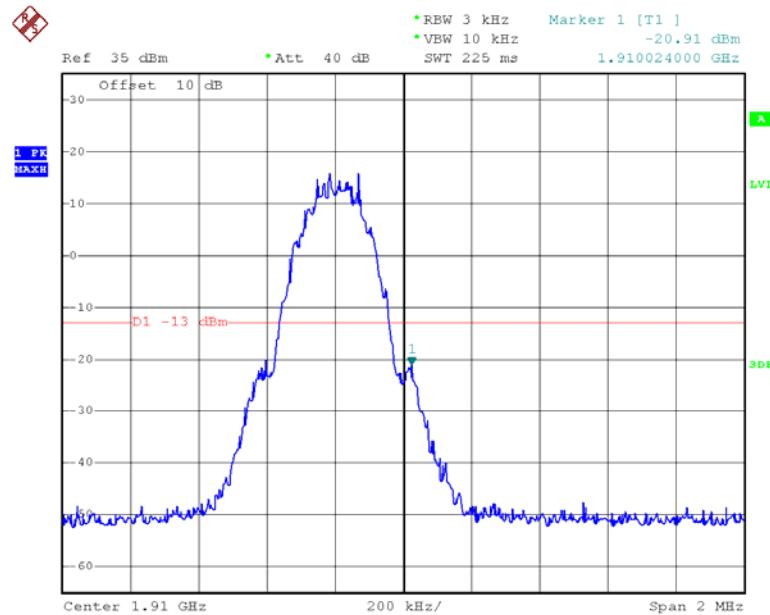
Date: 27.NOV.2015 22:05:57

**EDGE850, Right Band Edge**

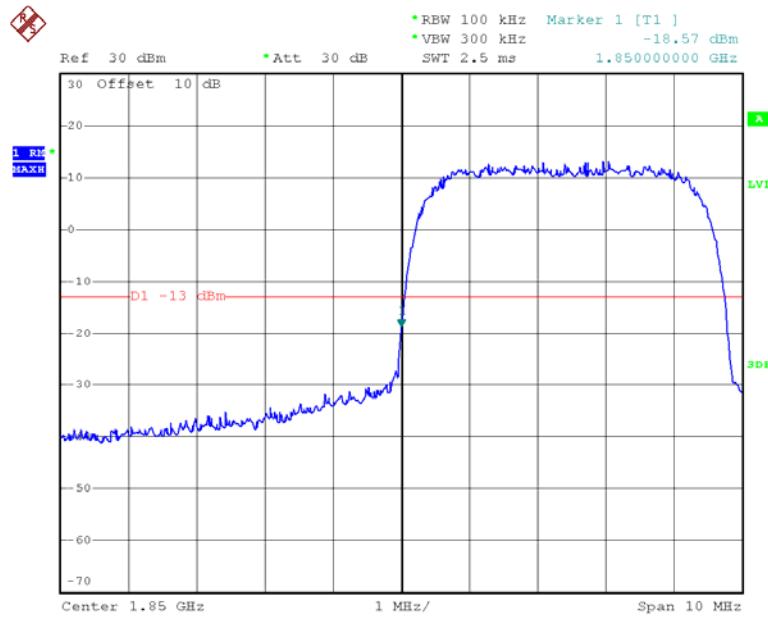
Date: 27.NOV.2015 22:04:53

**EDGE 1900, Left Band Edge**

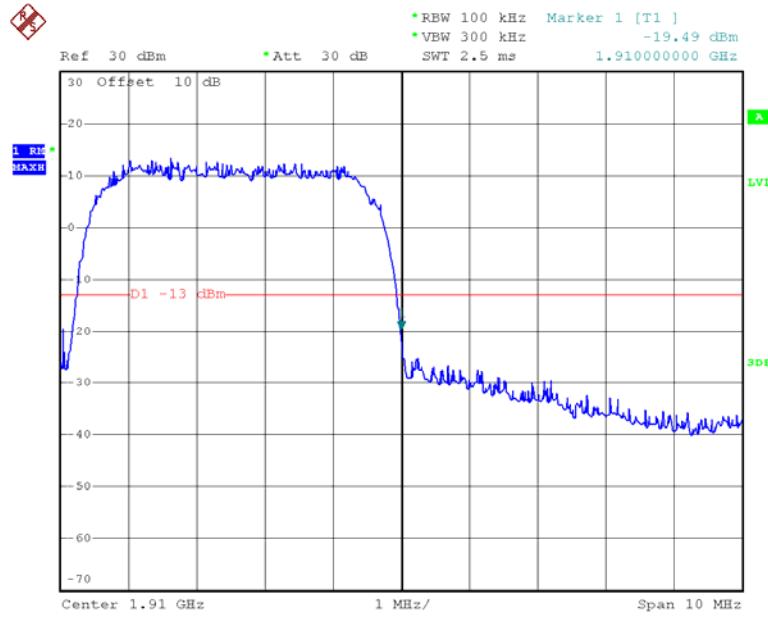
Date: 27.NOV.2015 23:16:54

**EDGE 1900, Right Band Edge**

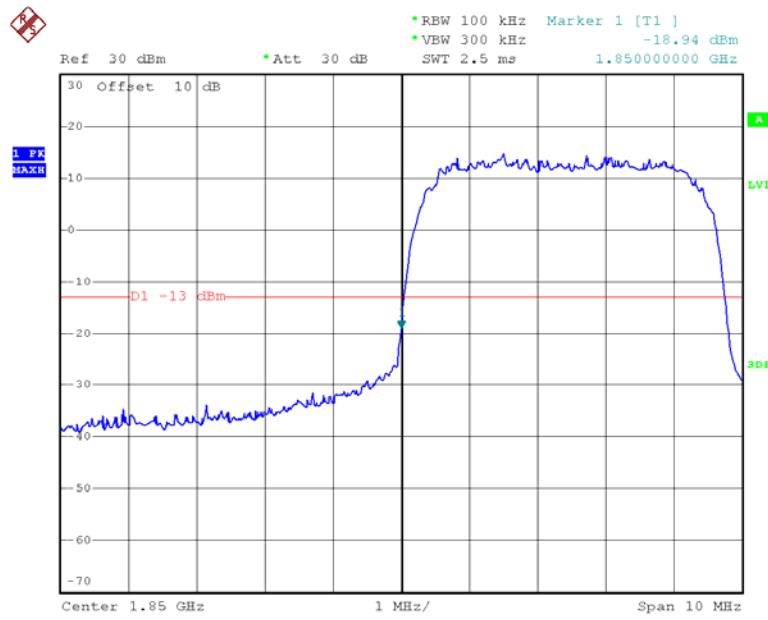
Date: 27.NOV.2015 23:16:02

**REL99 Band II, Left Band Edge**

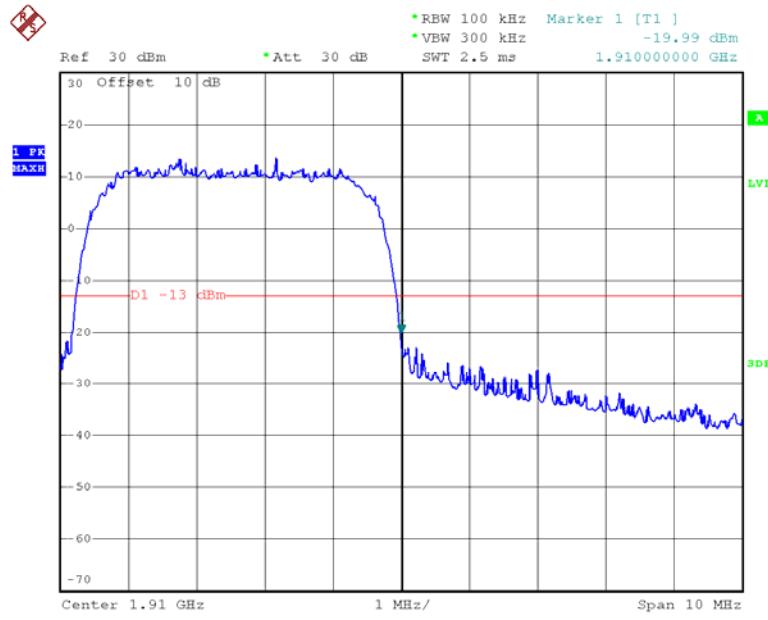
Date: 28.NOV.2015 18:41:58

**REL99 Band II, Right Band Edge**

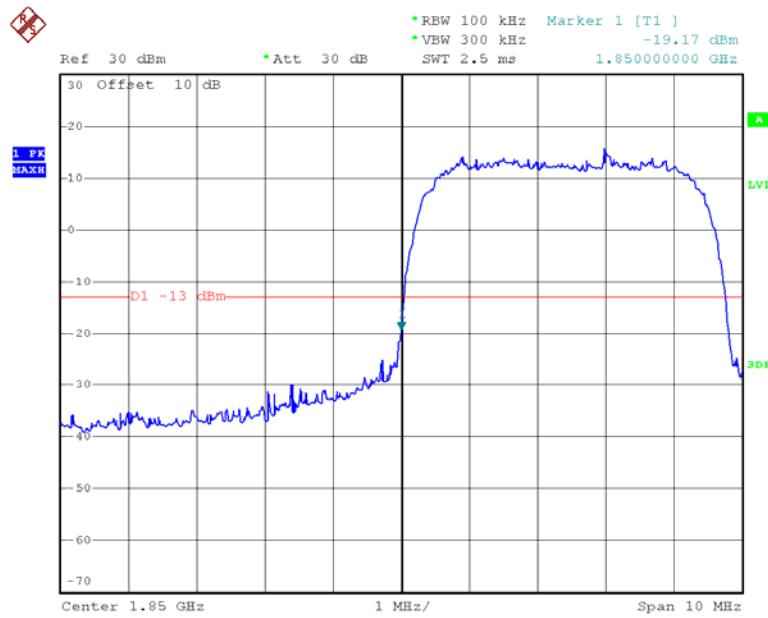
Date: 28.NOV.2015 18:37:14

**HSDPA Band II, Left Band Edge**

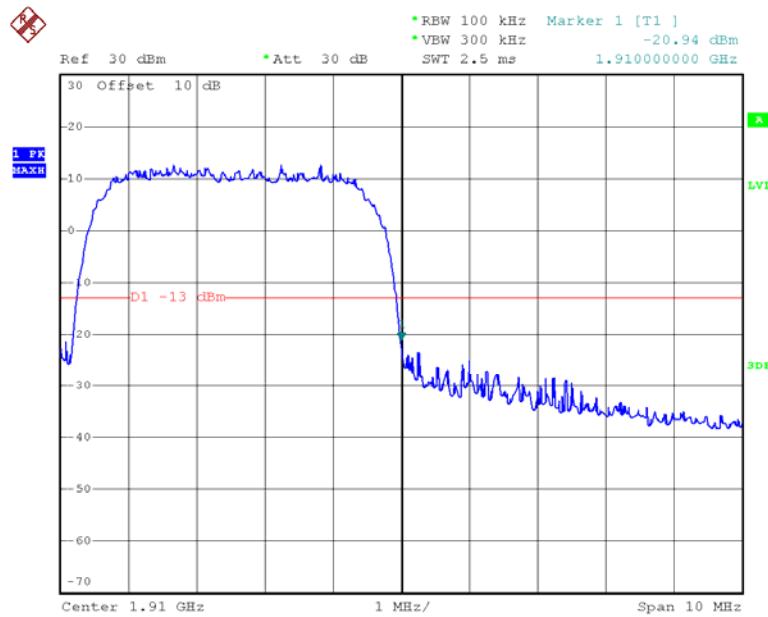
Date: 28.NOV.2015 20:03:40

**HSDPA Band II, Right Band Edge**

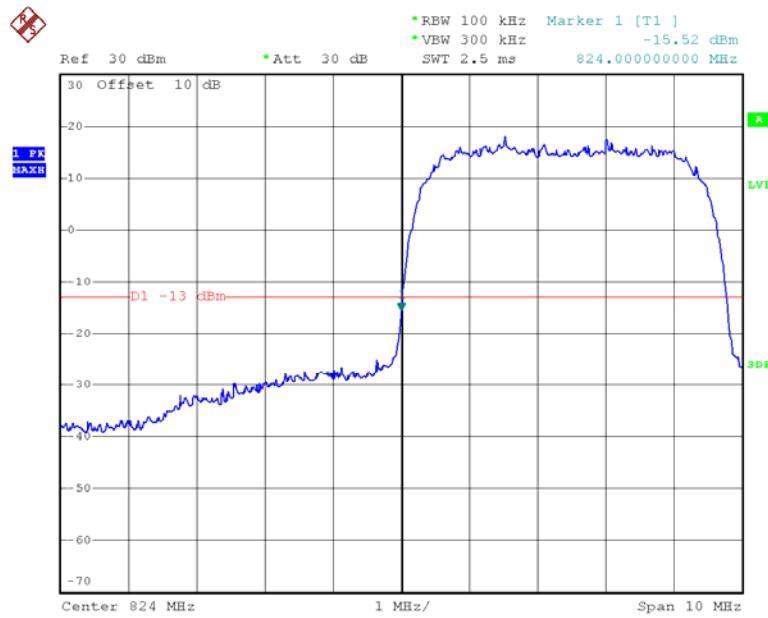
Date: 28.NOV.2015 20:04:08

**HSUPA Band II, Left Band Edge**

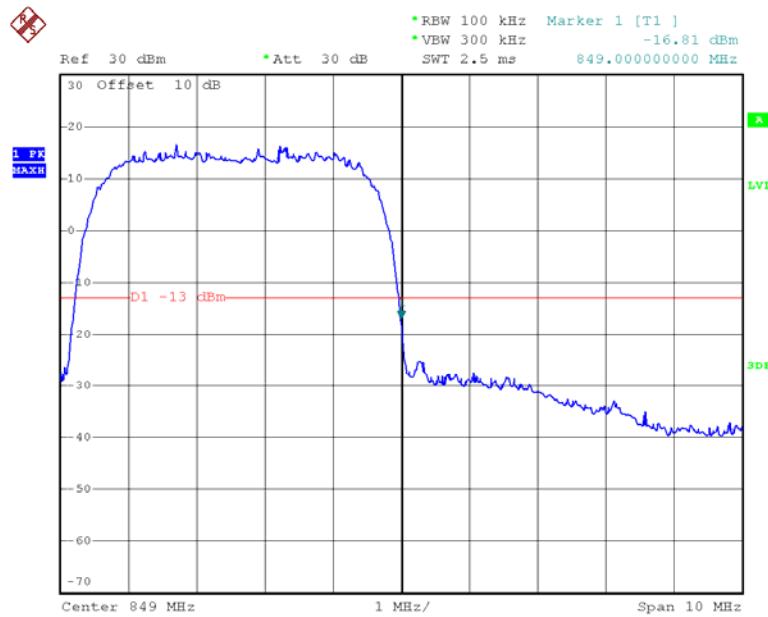
Date: 28.NOV.2015 20:08:54

**HSUPA Band II, Right Band Edge**

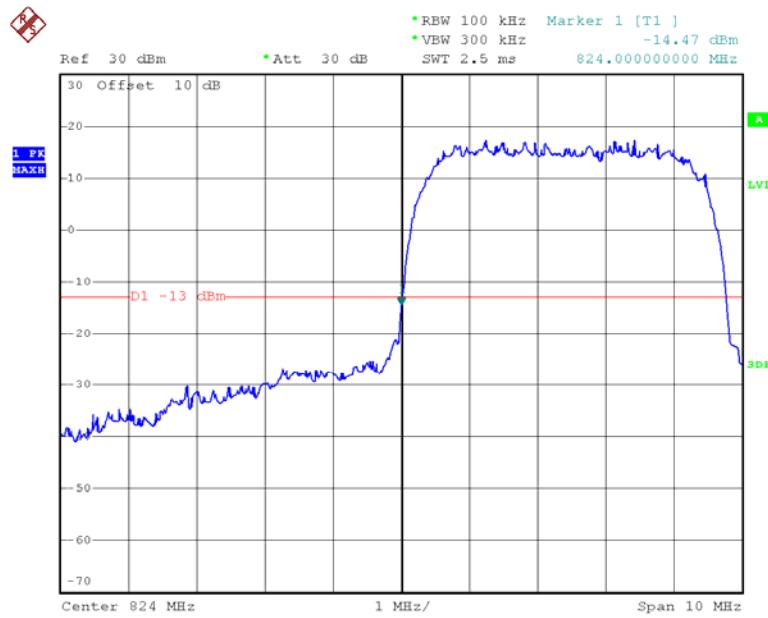
Date: 28.NOV.2015 20:09:20

**REL99 Band V, Left Band Edge**

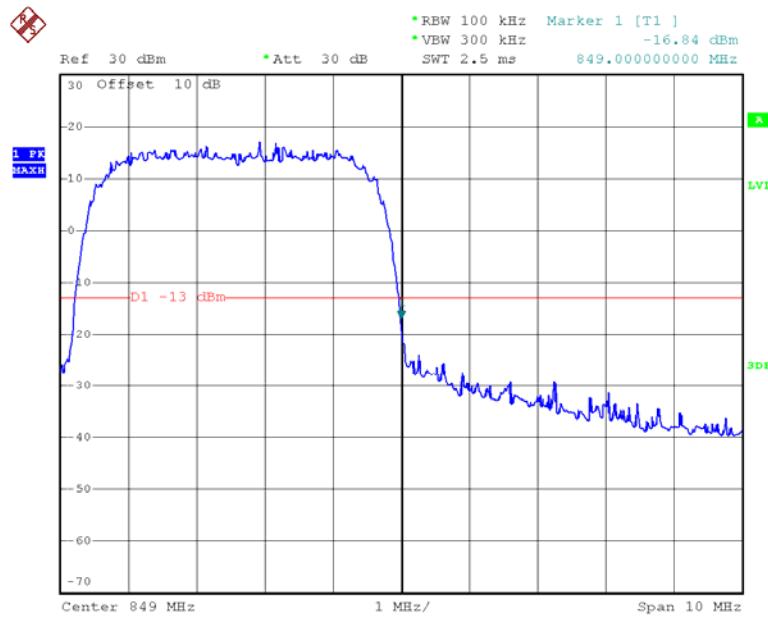
Date: 28.NOV.2015 19:29:44

**REL99 Band V Right Band Edge**

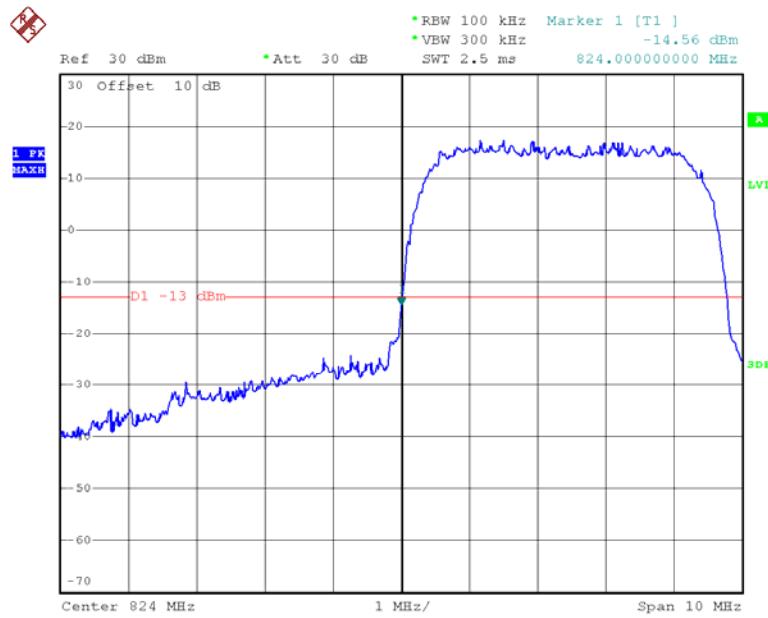
Date: 28.NOV.2015 19:30:28

**HSDPA Band V, Left Band Edge**

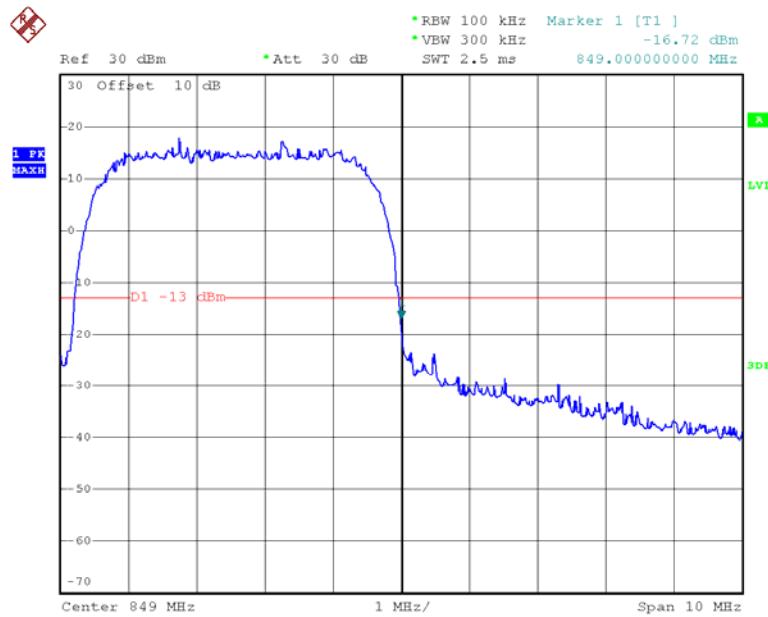
Date: 28.NOV.2015 20:17:40

**HSDPA Band V, Right Band Edge**

Date: 28.NOV.2015 20:17:16

**HSUPA Band V, Left Band Edge**

Date: 28.NOV.2015 20:15:15

**HSUPA Band V, Right Band Edge**

Date: 28.NOV.2015 20:15:38

## FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

### Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

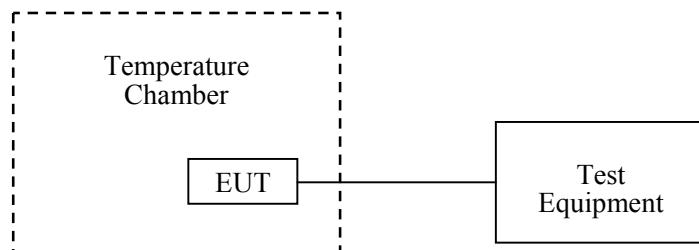
According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

### Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.



## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2015-09-10	2016-09-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-07-28	2016-07-27

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions

Temperature:	24.5 °C
Relative Humidity:	42%
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2015-11-24

### Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.7	1	0.001	2.5
-20		-1	-0.001	
-10		2	0.002	
0		4	0.005	
10		0	0.000	
20		-2	-0.002	
30		-1	-0.001	
40		2	0.002	
50		3	0.004	
25		1	0.001	
	3.5	2	0.002	
	4.2			

EDGE, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.7	3	0.004	2.5
-20		1	0.001	
-10		2	0.002	
0		0	0.000	
10		-1	-0.001	
20		4	0.005	
30		2	0.002	
40		3	0.004	
50		1	0.001	
25		3.5	2	0.002
		4.2	-1	-0.001

**WCDMA Band V: Re199**

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.7	1	0.001	2.5
-20		0	0.000	
-10		3	0.004	
0		4	0.005	
10		1	0.001	
20		-1	-0.001	
30		-2	-0.002	
40		1	0.001	
50		3	0.004	
25		3.5	2	0.002
		4.2	1	0.001

**WCDMA Band V: HSDPA**

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.7	4	0.005	2.5
-20		2	0.002	
-10		3	0.004	
0		5	0.006	
10		2	0.002	
20		0	0.000	
30		1	0.001	
40		-2	-0.002	
50		6	0.007	
25		3.5	-1	
		4.2	1	0.001

**WCDMA Band V: HSUPA**

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.7	3	0.004	2.5
-20		1	0.001	
-10		-1	-0.001	
0		2	0.002	
10		4	0.005	
20		3	0.004	
30		1	0.001	
40		-1	-0.001	
50		3	0.004	
25		3.5	1	
		4.2	2	0.002

**PCS Band (Part 24E)**

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V <sub>DC</sub>	Hz	ppm	
-30	3.7	7	0.004	Compliance
-20		5	0.003	
-10		1	0.001	
0		2	0.001	
10		6	0.003	
20		4	0.002	
30		3	0.002	
40		1	0.001	
50		4	0.002	
25		5	0.003	
	4.2	2	0.001	

EDGE, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V <sub>DC</sub>	Hz	ppm	
-30	3.7	4	0.002	Compliance
-20		6	0.003	
-10		1	0.001	
0		3	0.002	
10		5	0.003	
20		4	0.002	
30		2	0.001	
40		0	0.000	
50		5	0.003	
25		3.5	0.002	
	4.2	4	0.002	

**WCDMA Band II: Re199**

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	$V_{DC}$	Hz	ppm	
-30	3.7	-1	-0.001	Compliance
-20		2	0.001	
-10		0	0.000	
0		1	0.001	
10		4	0.002	
20		2	0.001	
30		3	0.002	
40		2	0.001	
50		2	0.001	
25	3.5	1	0.001	
	4.2	0	0.000	

**WCDMA Band II: HSDPA**

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	$V_{DC}$	Hz	ppm	
-30	3.7	5	0.003	Compliance
-20		4	0.002	
-10		3	0.002	
0		4	0.002	
10		6	0.003	
20		1	0.001	
30		-2	-0.001	
40		-1	-0.001	
50		2	0.001	
25	3.5	3	0.002	
	4.2	1	0.001	

**WCDMA Band II: HSUPA**

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V <sub>DC</sub>	Hz	ppm	
-30	3.7	4	0.002	Compliance
-20		3	0.002	
-10		1	0.001	
0		5	0.003	
10		1	0.001	
20		-1	-0.001	
30		0	0.000	
40		3	0.002	
50		1	0.001	
25	3.5	2	0.001	
	4.2	4	0.002	

## DECLARATION LETTER

CLC HONG KONG LIMITED

Add: 1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong

Tel: +852 21229685

Fax: +852 39044979

## DECLARATION OF SIMILARITY

Date: 2015-12-28

Dear Sir or Madam:

We, CLC HONG KONG LIMITED, hereby declare that product name: Ram 3G, model: A104, they are the same electromagnetic emissions and electromagnetic compatibility characteristics. A description of the difference among the 2 samples and those that are declared similar are as follows:

1) They have different colours: orange and black

The rest are the same.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature:

Kam Chong  
Manager



\*\*\*\*\* END OF REPORT \*\*\*\*\*