

Declaration-MIF for HAC RF Interference Evaluation

To whom It May Concern,

This device, with FCC ID: 2AG4WZ404 , Hearing Aid Compatibility Requirement is going to be certified under **ANSI C63.19-2011 version per Part20.19.**


The M rating was determined by measuring the maximum steady state average E-field values on dB(V/m) as documented in the HAC report and adding the MIF value in dB(V/m) using theoretical values provided by **ANSI C63.19-2011** under

UMTS-FDD(WCDMA)	-20.00dB
GSM-FDD(TDMA,GMSK)	+3.50dB

We confirm that the SATIMO simulation provided represents all the air interface modes applicable for a HAC rating for this handset.

Yours Sincerely,

Client's signature:

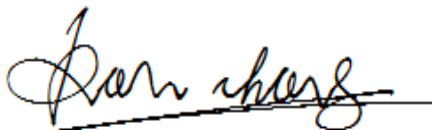

Client's name / title: Kam Chong / Manager

Contact information / address:1011A, 10/F., Harbour Centre Tower 1,
No.1 Hok Cheung St.,Hung Hom, Kowloon, Hong Kong