



TESTING LABORATORY  
CERTIFICATE #4820.01



# FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

## CLC HONG KONG LIMITED

1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong

**FCC ID: 2AG4WZ519**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Gator 5
<b>Report Number:</b>	<u>RDG181102001-00C</u>
<b>Report Date:</b>	<u>2018-11-28</u>
<b>Reviewed By:</b>	<u>Jerry Zhang EMC Manager</u> <i>Jerry Zhang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxihu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
JUSTIFICATION .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
CONFIGURATION OF TEST SETUP .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
TEST RESULT .....	9
<b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>	<b>10</b>
<b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
TEST PROCEDURE .....	11
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA .....	15
<b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - OCCUPIED BANDWIDTH .....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
TEST PROCEDURE .....	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA .....	20
<b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA .....	25
<b>FCC §2.1053, §22.917 &amp; §24.238 &amp; §27.53 - SPURIOUS RADIATED EMISSIONS .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA .....	32
<b>FCC §22.917(A) &amp; §24.238(A)- BAND EDGES.....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA .....	35
<b>FCC §2.1055, §22.355 &amp; §24.235 - FREQUENCY STABILITY .....</b>	<b>44</b>

APPLICABLE STANDARD .....	44
TEST PROCEDURE .....	44
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA .....	45

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		Gator 5
<b>EUT Model:</b>		Z519
<b>FCC ID:</b>		2AG4WZ519
<b>Rated Input Voltage:</b>		DC3.8V from Li-ion Rechargeable Battery or DC5V from adapter
<b>Adapter Information</b>	<b>Model Name:</b>	PMC43
	<b>Input:</b>	100-240V, 50/60Hz
	<b>Output:</b>	DC5.0V, 1.0A
<b>External Dimension:</b>		148mm(L)*75 mm(W)*13.5 mm(H)
<b>Serial Number:</b>		181102001
<b>EUT Received Date:</b>		2018.11.07

### Objective

This report is prepared on behalf of *CLC HONG KONG LIMITED* in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AG4WZ519.  
 FCC Part 15C DSS submissions with FCC ID: 2AG4WZ519.  
 FCC Part 15B JBP submissions with FCC ID: 2AG4WZ519.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
 Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

**Measurement Uncertainty**

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode.


### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	110 822
N/A	ANTENNA	N/A	N/A

### Configuration of Test Setup

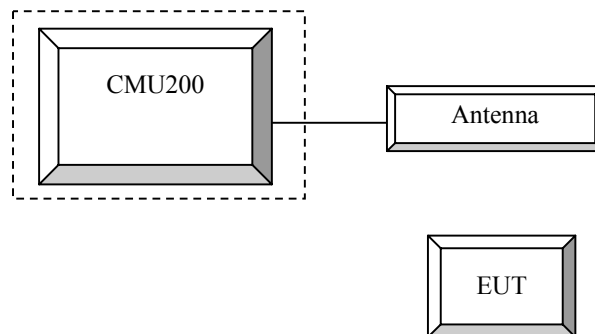

**Block Diagram of Test Setup**

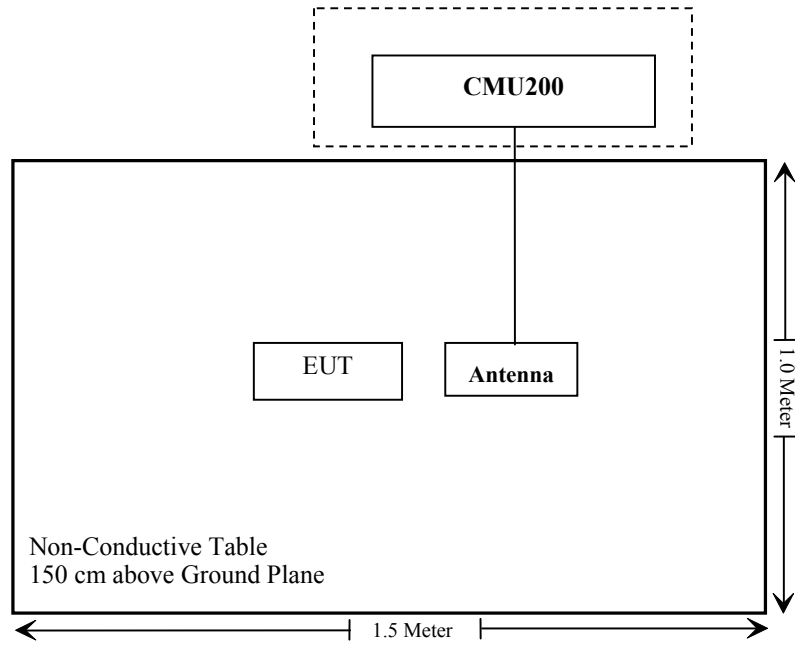

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c);	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Spurious Radiation Emissions	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance



---

## **FCC §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RDG181102001-20.

---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## **FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**

### **Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **Test Procedure**

#### **GSM/GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900  
 Press Connection control to choose the different menus  
 Press RESET > choose all the reset all settings  
 Connection Press Signal Off to turn off the signal and change settings  
 Network Support > GSM + GPRS or GSM + EGSM  
 Main Service > Packet Data  
 Service selection > Test Mode A – Auto Slot Config. off  
 MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting  
     > Slot configuration > Uplink/Gamma  
     > 33 dBm for GPRS 850  
     > 30 dBm for GPRS 1900  
     > 27 dBm for EGPRS 850  
     > 26 dBm for EGPRS 1900  
 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel  
 Frequency Offset > + 0 Hz  
 Mode > BCCH and TCH  
 BCCH Level > -85 dBm (May need to adjust if link is not stable)  
 BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off  
 P0 > 4 dB  
 Slot Config > Unchanged (if already set under MS signal)  
 TCH > choose desired test channel  
 Hopping > Off  
 Main Timeslot > 3  
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream  
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input  
 Connection Press Signal on to turn on the signal and change settings

**WCDMA-Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	<b><math>\beta_c / \beta_d</math></b>	8/15

**WCDMA HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
	$\beta_c / \beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
<b>HSDPA Specific Settings</b>	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

**WCDMA HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	<b>Mode</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>
	<b>Subset</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
<b>HSDPA Specific Settings</b>	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
<b>HSUPA Specific Settings</b>	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

**HSPA+**

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	$\beta_c$ (Note3)	$\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105

- Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .
- Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
- Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.
- Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.
- Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

**DC-HSDPA**

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
<p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p>		

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
R&S	Universal Radio Communication Tester	CMU200	106 891	2017-12-14	2018-12-14
Agilent	Signal Generator	E8247C	MY43321350	2017-12-11	2018-12-11
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	26.4~26.6 °C
<b>Relative Humidity:</b>	36~50 %
<b>ATM Pressure:</b>	100.1~100.8 kPa

\* The testing was performed by Kami Zhou & Neil Liao from 2018-11-16 to 2018-11-19.

*Test Result: Compliance*

**Conducted Output Power**

**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)				
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
Cellular	128	31.10	31.06	30.40	28.91	27.92
	190	31.10	31.00	30.37	28.88	27.91
	251	31.10	30.99	30.36	28.89	27.89
PCS	512	29.60	29.59	28.94	27.39	26.42
	661	29.80	29.76	29.10	27.59	26.53
	810	29.80	29.74	29.08	27.60	26.55

**WCDMA Band II**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.71	3.17	23.10	3.14	22.15	3.04
HSDPA	1	21.88	4.17	21.95	3.81	21.76	3.62
	2	21.65	4.32	21.08	3.75	21.64	3.74
	3	22.11	4.02	21.65	4.32	21.71	4.23
	4	21.68	4.02	21.48	3.84	21.74	3.68
HSUPA	1	21.97	3.94	21.68	4.20	21.89	3.56
	2	21.58	3.91	21.68	4.05	21.68	3.44
	3	21.64	3.79	21.48	4.17	21.47	3.53
	4	21.55	3.94	21.44	4.20	21.48	3.65
	5	22.38	4.03	22.18	4.32	21.58	3.50
DC-HSDPA	1	21.68	3.88	22.38	4.29	21.38	3.68
	2	21.59	3.91	21.68	4.17	21.08	3.59
	3	22.08	4.09	21.47	4.26	21.65	3.41
	4	21.38	3.88	21.48	4.08	21.42	3.62
HSPA+ (16QAM)	1	22.08	3.91	21.46	4.23	21.48	3.53



## WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.54	2.79	22.79	3.21	22.60	2.50
HSDPA	1	21.18	4.20	21.64	3.91	21.33	3.17
	2	21.08	4.11	21.74	3.82	21.26	3.11
	3	21.38	4.35	21.74	4.20	21.23	4.08
	4	21.48	4.29	21.64	4.06	21.43	3.20
HSUPA	1	21.28	3.59	21.56	3.53	21.37	3.37
	2	21.18	3.59	21.64	3.44	21.36	3.52
	3	20.78	3.53	21.71	3.50	21.33	3.49
	4	20.79	3.53	21.74	3.59	21.23	3.22
	5	20.77	3.56	21.75	3.65	21.35	3.22
DC-HSDPA	1	21.18	3.59	21.54	3.41	21.31	3.49
	2	21.08	3.59	21.64	3.44	21.38	3.46
	3	21.68	3.74	21.55	3.62	21.41	3.43
	4	21.48	3.44	21.57	3.50	21.44	3.22
HSPA+ (16QAM)	1	21.44	3.59	21.55	3.59	21.49	3.49

ERP & EIRP

**Part 22H**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>GSM 850 Middle Channel</b>								
836.60	H	94.30	19.38	0.00	0.97	18.41	38.45	20.04
836.60	V	99.69	27.90	0.00	0.97	26.93	38.45	11.52
<b>WCDMA Band V Middle Channel</b>								
836.60	H	83.63	8.71	0.00	0.97	7.74	38.45	30.71
836.60	V	89.30	17.51	0.00	0.97	16.54	38.45	21.91

**Part 24E**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>PCS 1900 Middle Channel</b>								
1880.00	H	89.79	17.18	11.66	2.66	26.18	33.00	6.82
1880.00	V	92.27	19.80	11.66	2.66	28.80	33.00	4.20
<b>WCDMA Band II Middle Channel</b>								
1880.00	H	80.31	7.70	11.66	2.66	16.70	33.00	16.30
1880.00	V	86.62	14.15	11.66	2.66	23.15	33.00	9.85

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

**FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH**


**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

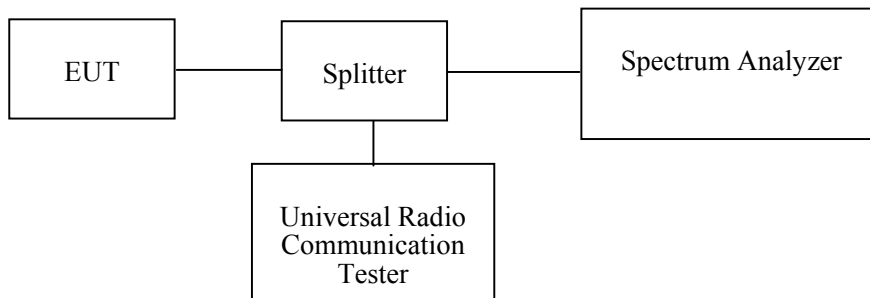

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	53 %
<b>ATM Pressure:</b>	100.5 kPa


\* The testing was performed by Elena Lei on 2018-11-17.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	M	GSM	0.246	0.317
PCS		PCS	0.245	0.316
WCDMA Band II		Rel 99	4.167	4.728
		HSDPA	4.167	4.744
		HSUPA	4.167	4.696
WCDMA Band V		Rel 99	4.151	4.696
		HSDPA	4.151	4.696
		HSUPA	4.183	4.712

### GSM 850 Cellular Band

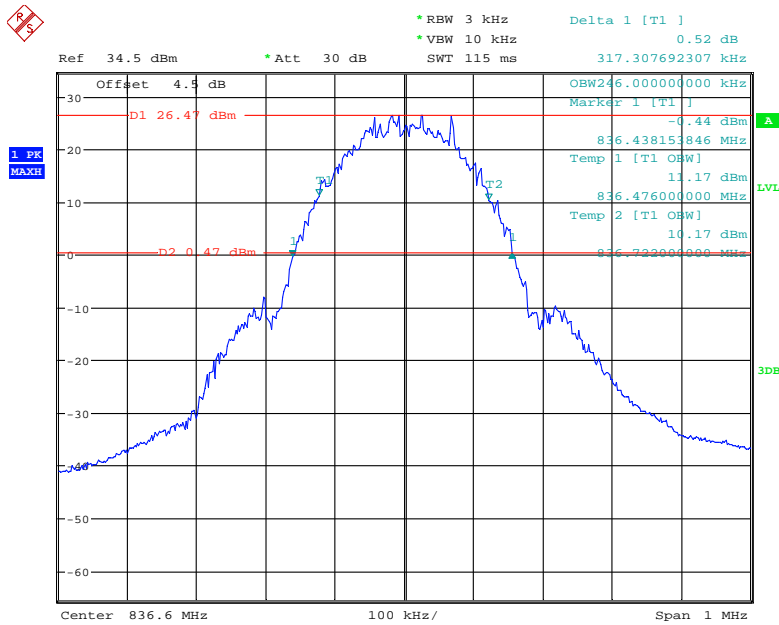


Date: 17.NOV.2018 13:50:49

### GSM PCS1900 Cellular Band

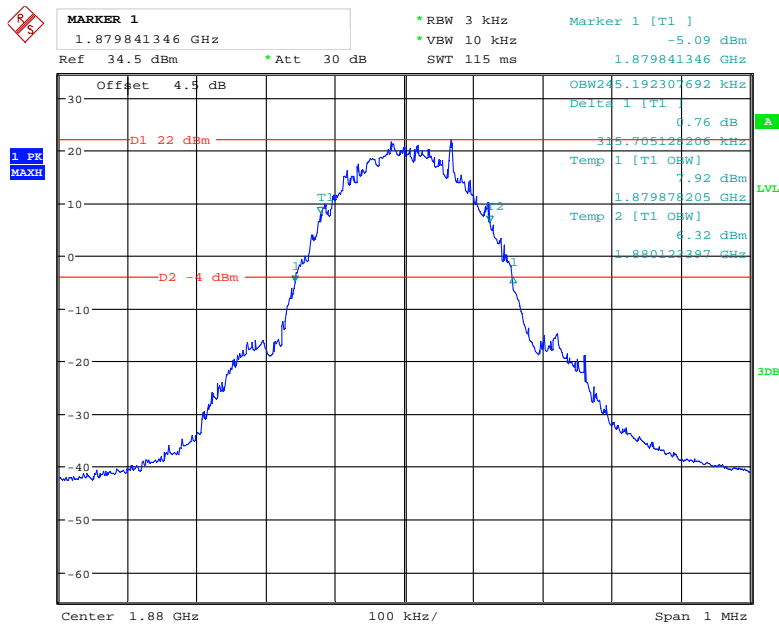


Date: 17.NOV.2018 14:08:49

### REL99 Band II

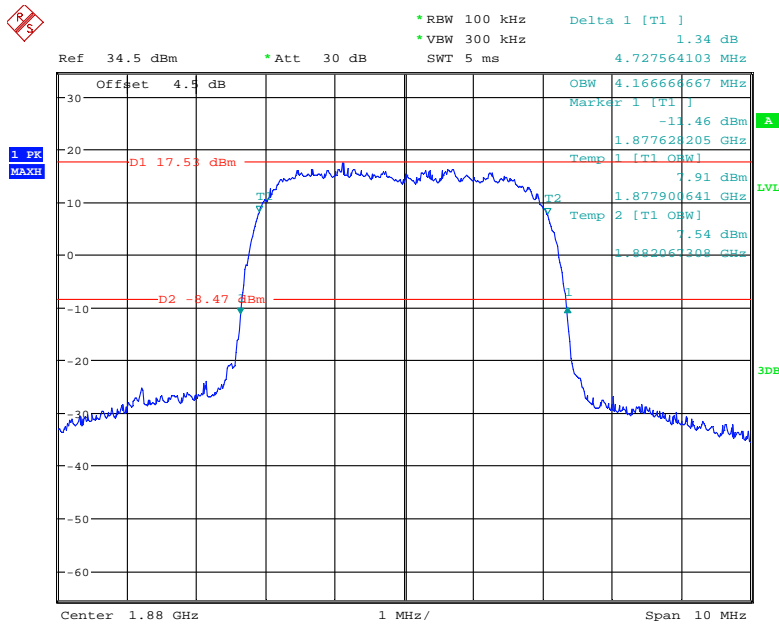


Date: 17.NOV.2018 14:36:20

### HSDPA Band II

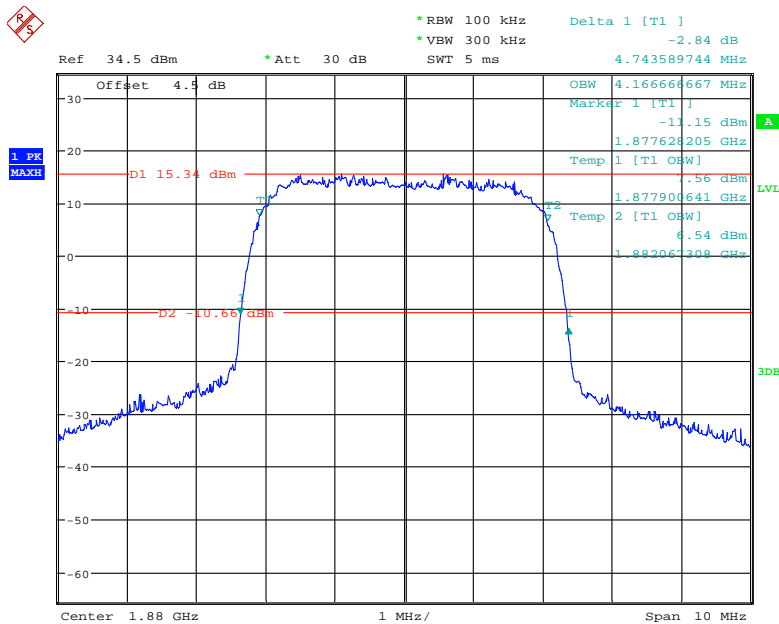


Date: 17.NOV.2018 14:37:56

### HSUPA Band II

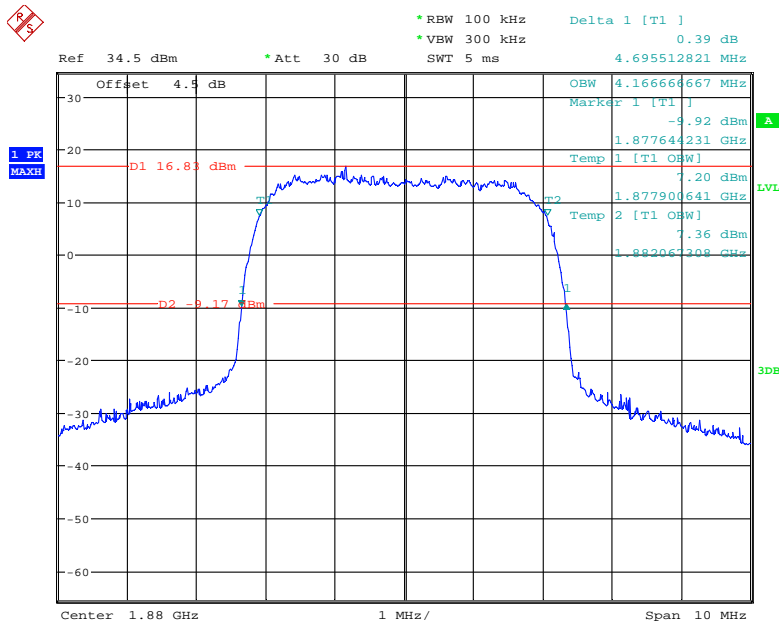


Date: 17.NOV.2018 14:41:29

### REL99 Band V

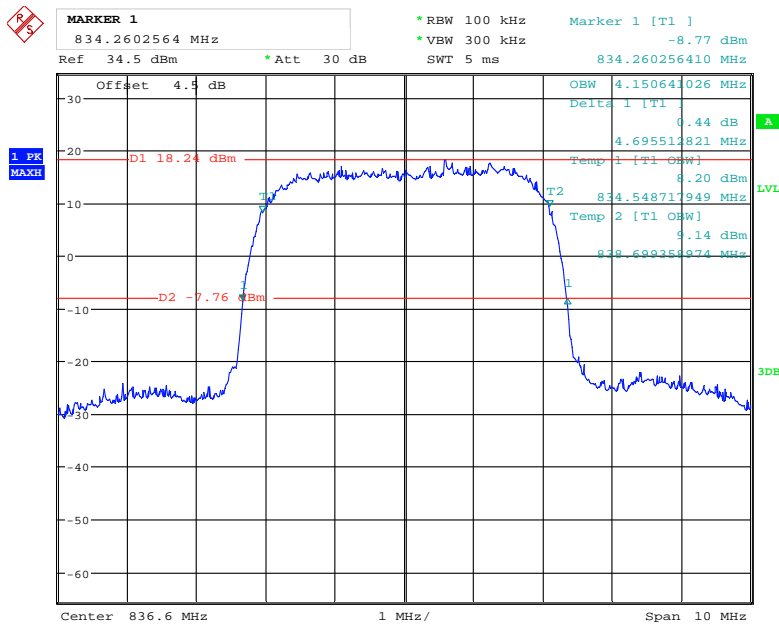


Date: 17.NOV.2018 14:35:09

### HSDPA Band V

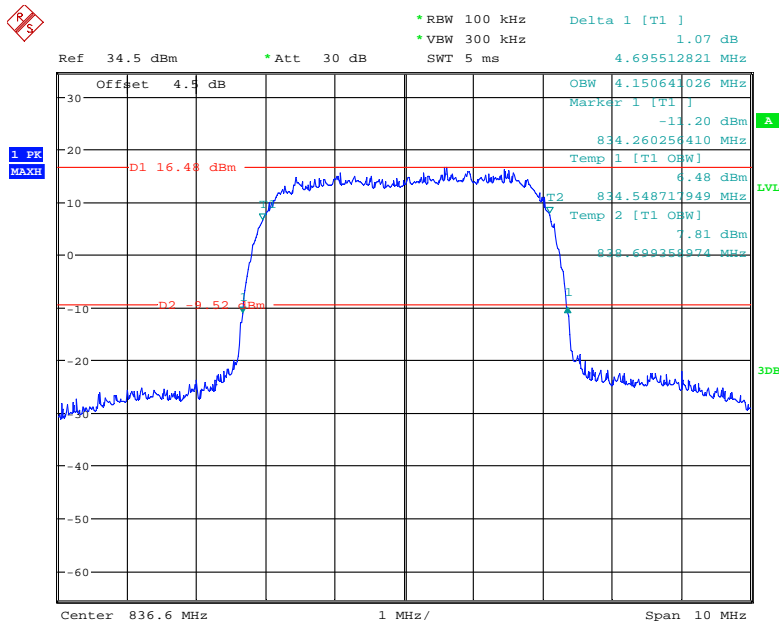

Date: 17.NOV.2018 14:38:46

### HSUPA Band V

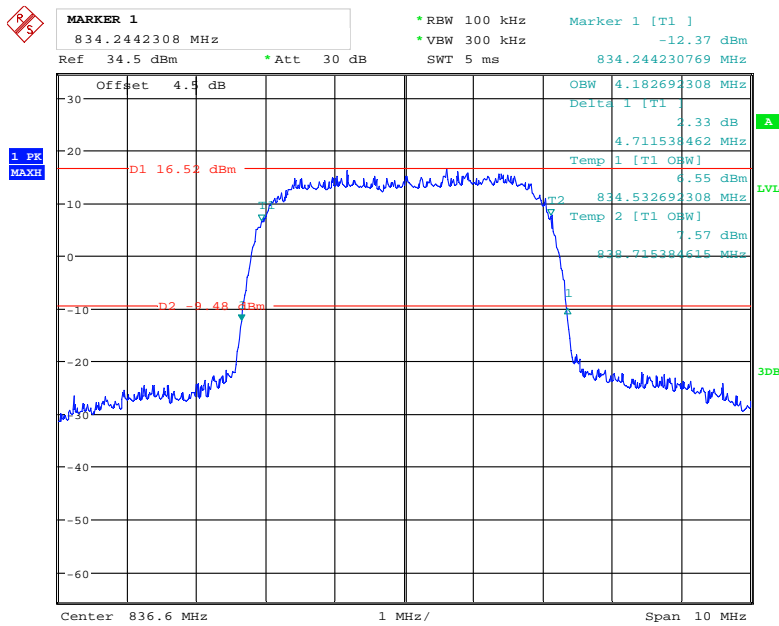

Date: 17.NOV.2018 14:39:59



## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

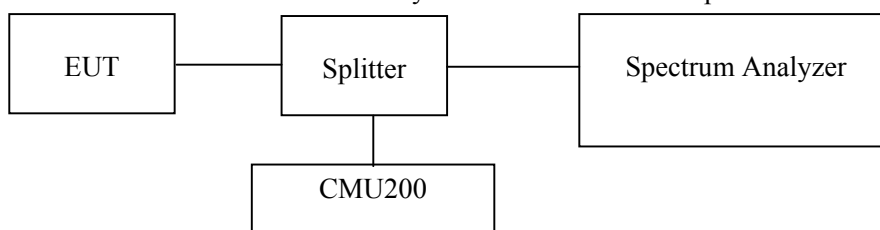

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	25.1~27 °C
<b>Relative Humidity:</b>	53~56 %
<b>ATM Pressure:</b>	100.2~100.5 kPa


\* The testing was performed by Elena Lei from 2018-11-17 to 2018-11-27.

Test Result: Compliance. Please refer to the following plots.

### GSM850\_Middle Channel

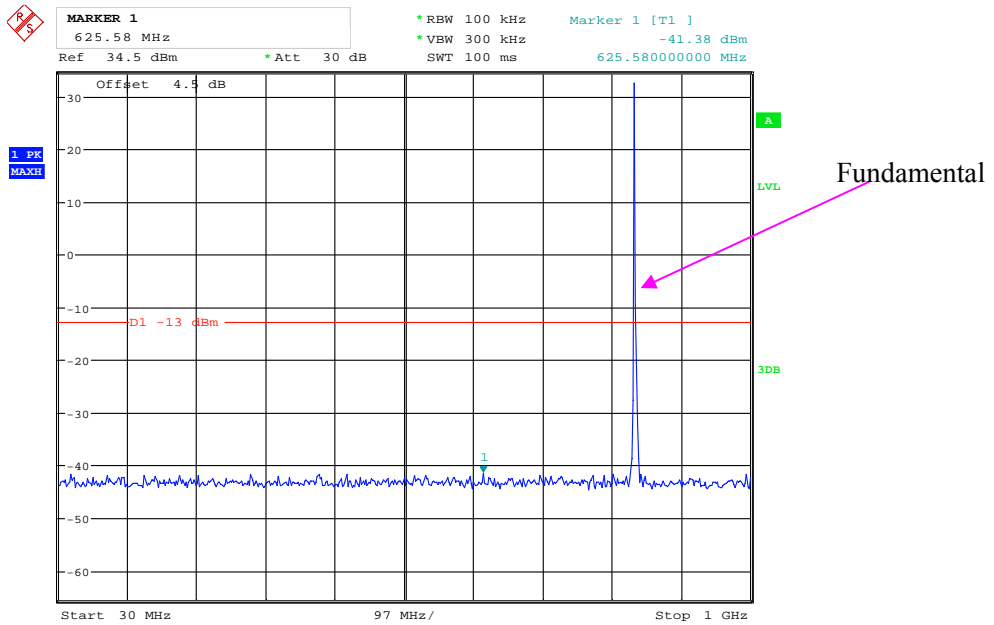


Date: 17.NOV.2018 13:56:47

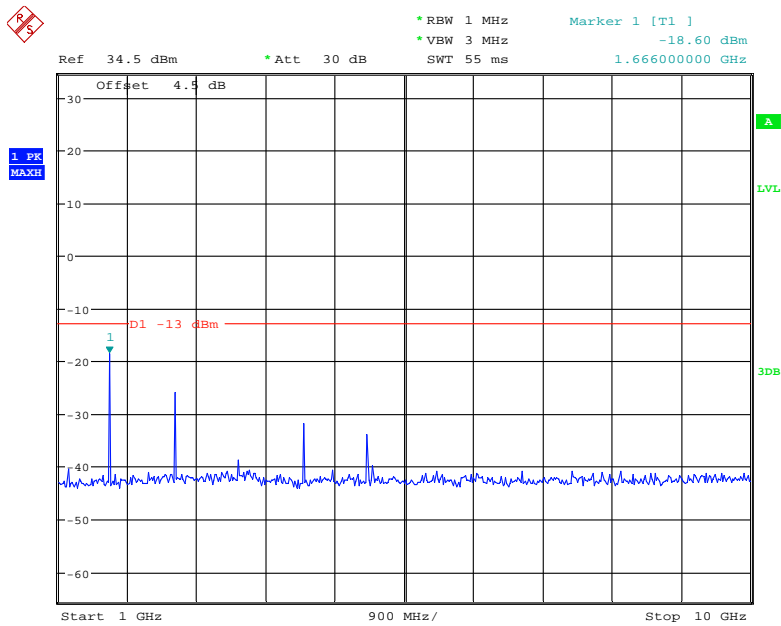


Date: 17.NOV.2018 13:58:30

### PCS 1900\_ Middle Channel

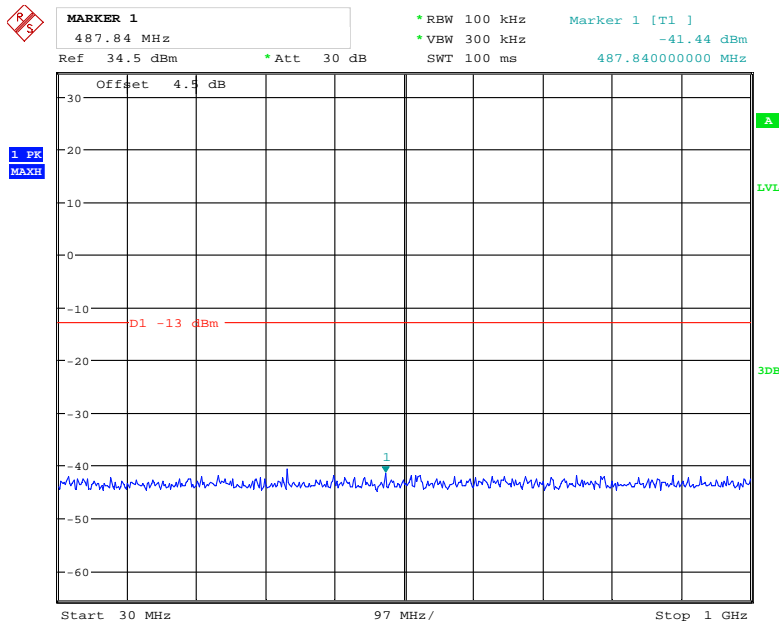


Date: 17.NOV.2018 14:01:34

Fundamental

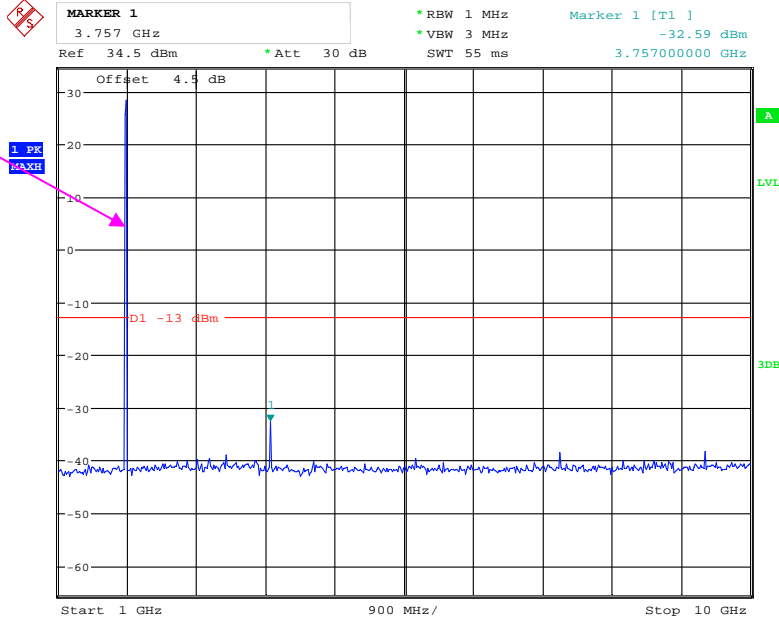


Date: 17.NOV.2018 14:00:57

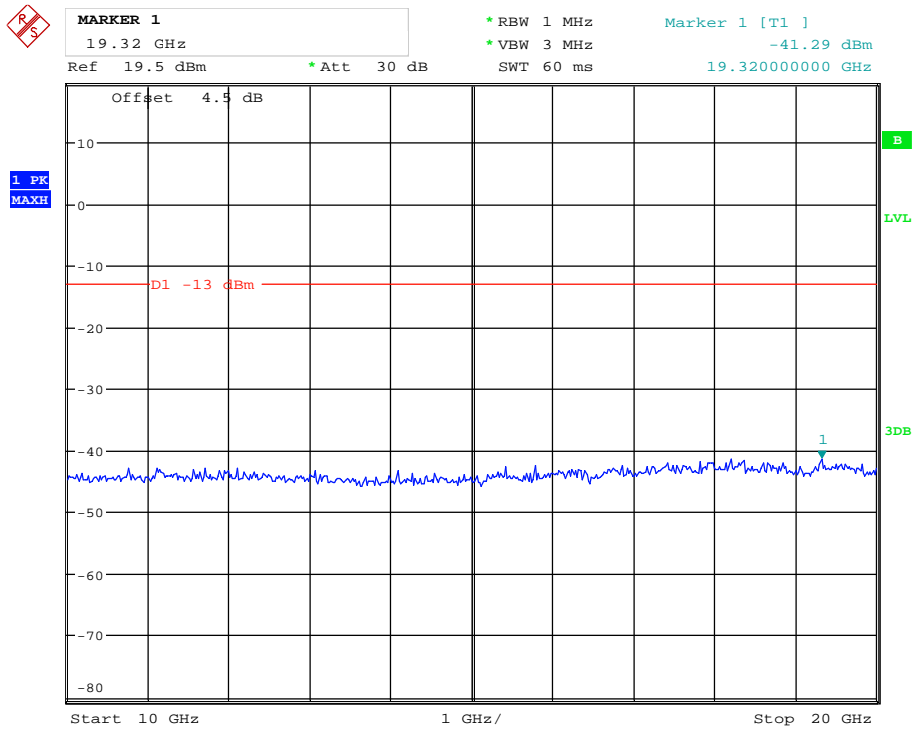


Date: 27.NOV.2018 16:34:50

**REL99 Band II\_Middle Channel**

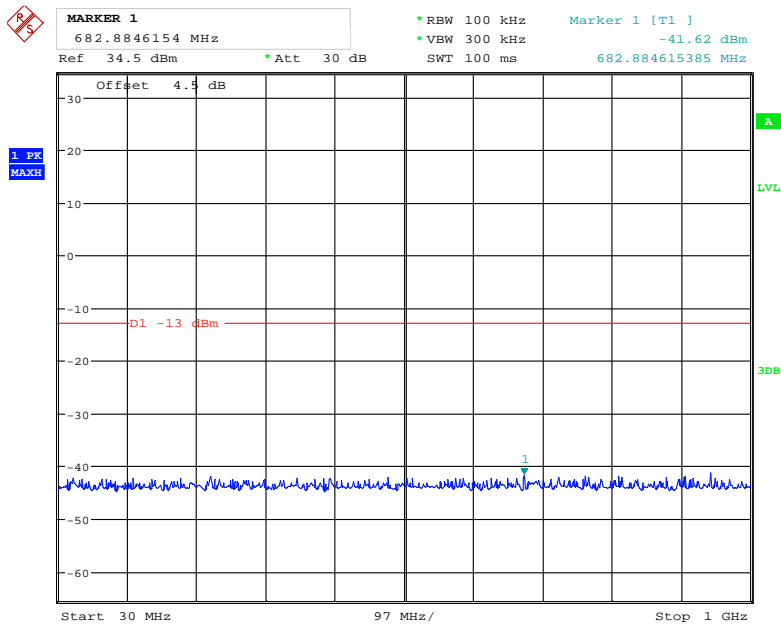


Date: 17.NOV.2018 14:31:27

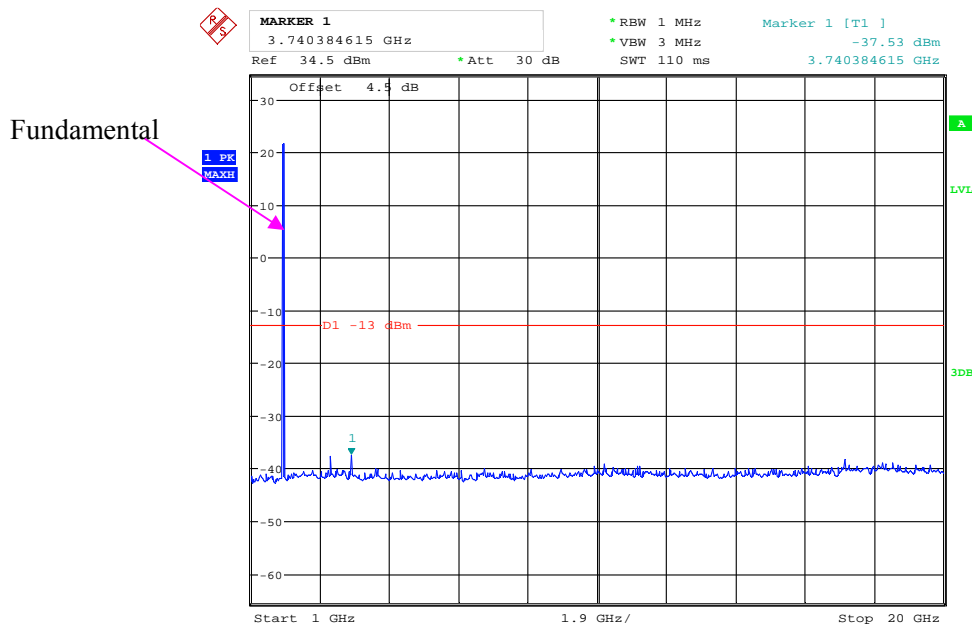


Date: 17.NOV.2018 14:32:01

### Rel 99 Band V\_ Middle Channel

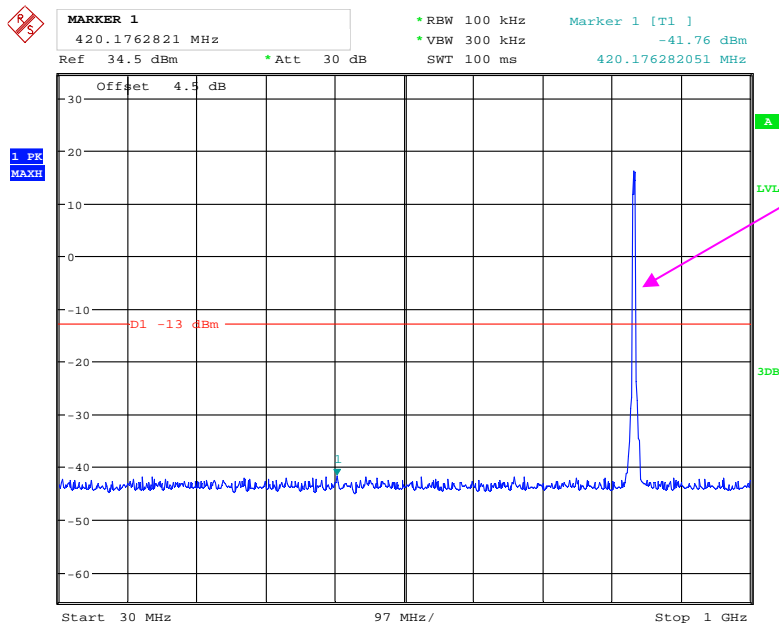

Date: 17.NOV.2018 14:33:09

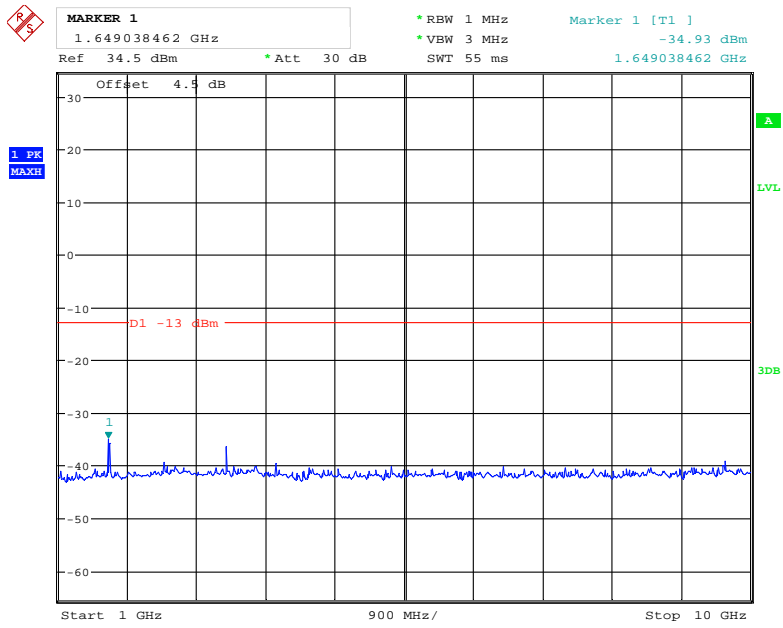

Date: 17.NOV.2018 14:32:44

---

## **FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS**

---

### **Applicable Standard**

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

### **Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg(\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10}(\text{power out in Watts})$

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Signal Generator	E8247C	MY43321350	2017-12-11	2018-12-11
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2017-09-05	2018-09-05
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2018-06-16	2019-06-16
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	26.4~26.6 °C
<b>Relative Humidity:</b>	36~50 %
<b>ATM Pressure:</b>	100.1~100.8 kPa

\* The testing was performed by Kami Zhou & Neil Liao from 2018-11-16 to 2018-11-19.

Test Result: Compliance.



EUT Operation Mode: Transmitting

**Cellular Band (PART 22H)**

**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850, Frequency:836.600 MHz								
1673.200	H	74.10	-40.11	10.6	0.73	-30.2	-13.0	17.2
1673.200	V	63.12	-51.69	10.6	0.73	-41.8	-13.0	28.8
2509.800	H	62.31	-50.71	13.1	1.25	-38.9	-13.0	25.9
2509.800	V	60.79	-52.26	13.1	1.25	-40.4	-13.0	27.4
3346.400	H	59.10	-51.56	13.8	1.61	-39.3	-13.0	26.3
3346.400	V	56.20	-54.51	13.8	1.61	-42.3	-13.0	29.3
700.300	H	43.44	-57.98	0.0	0.94	-58.9	-13.0	45.9
298.720	V	44.17	-65.88	0.0	0.52	-66.4	-13.0	53.4
WCDMA Band V R99, Frequency:836.600 MHz								
1673.200	H	47.13	-67.08	10.6	0.73	-57.2	-13.0	44.2
1673.200	V	47.65	-67.16	10.6	0.73	-57.3	-13.0	44.3
2509.800	H	46.33	-66.69	13.1	1.25	-54.8	-13.0	41.8
2509.800	V	46.52	-66.53	13.1	1.25	-54.7	-13.0	41.7
3346.400	H	45.61	-65.05	13.8	1.61	-52.8	-13.0	39.8
3346.400	V	46.05	-64.66	13.8	1.61	-52.4	-13.0	39.4
701.240	H	44.97	-56.43	0.0	0.94	-57.4	-13.0	44.4
299.660	V	44.06	-65.94	0.0	0.52	-66.5	-13.0	53.5

**PCS Band (PART 24E)****30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Frequency:1880.000 MHz								
3760.000	H	71.62	-37.18	13.8	1.63	-25.1	-13.0	12.1
3760.000	V	75.11	-33.56	13.8	1.63	-21.4	-13.0	8.4
5640.000	H	65.66	-40.37	14.0	1.31	-27.7	-13.0	14.7
5640.000	V	68.46	-37.45	14.0	1.31	-24.7	-13.0	11.7
7520.000	H	51.16	-49.16	13.2	1.33	-37.3	-13.0	24.3
7520.000	V	52.19	-48.6	13.2	1.33	-36.7	-13.0	23.7
328.760	H	46.07	-61.47	0.0	0.55	-62.0	-13.0	49.0
299.660	V	44.33	-65.67	0.0	0.52	-66.2	-13.0	53.2
WCDMA Band II, R99, Frequency:1880.000 MHz								
3760.000	H	52.86	-55.94	13.8	1.63	-43.8	-13.0	30.8
3760.000	V	56.42	-52.25	13.8	1.63	-40.1	-13.0	27.1
5640.000	H	60.92	-45.11	14.0	1.31	-32.4	-13.0	19.4
5640.000	V	61.16	-44.75	14.0	1.31	-32.0	-13.0	19.0
7520.000	H	57.39	-42.93	13.2	1.33	-31.1	-13.0	18.1
7520.000	V	62.18	-38.61	13.2	1.33	-26.7	-13.0	13.7
701.240	H	45.52	-55.88	0.0	0.94	-56.8	-13.0	43.8
891.360	V	44.79	-54.64	0.0	1.04	-55.7	-13.0	42.7

## Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

## FCC §22.917(a) & §24.238(a)- BAND EDGES


### Applicable Standard

FCC § 2.1053, §22.917, § 24.238.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

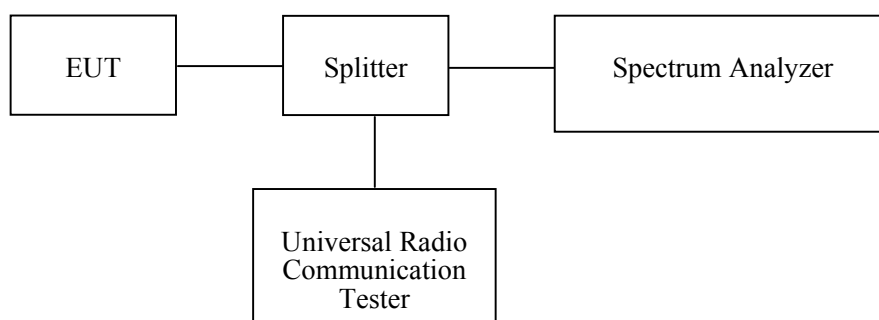

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	53 %
<b>ATM Pressure:</b>	100.5 kPa

\* The testing was performed by Elena Lei on 2018-11-17.

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to the following plots.*

### GSM 850, Left Band Edge

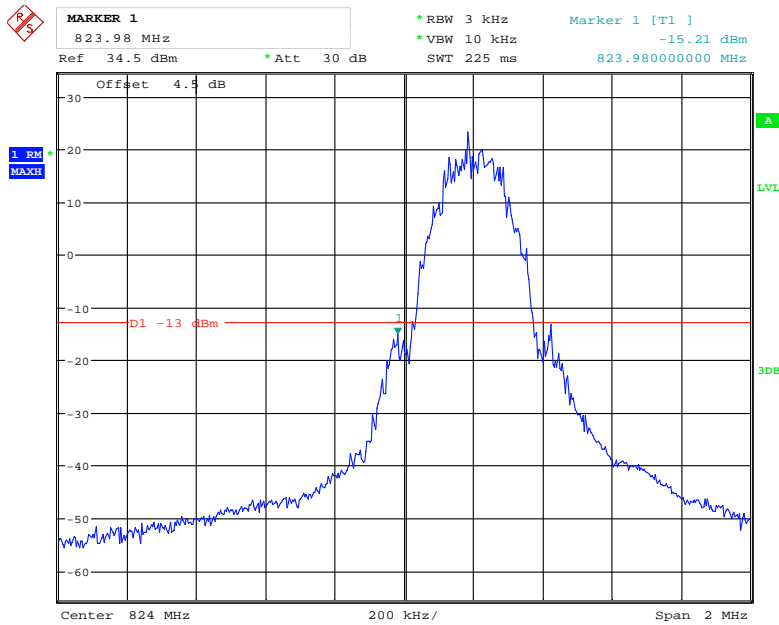


Date: 17.NOV.2018 13:52:47

### GSM 850, Right Band Edge

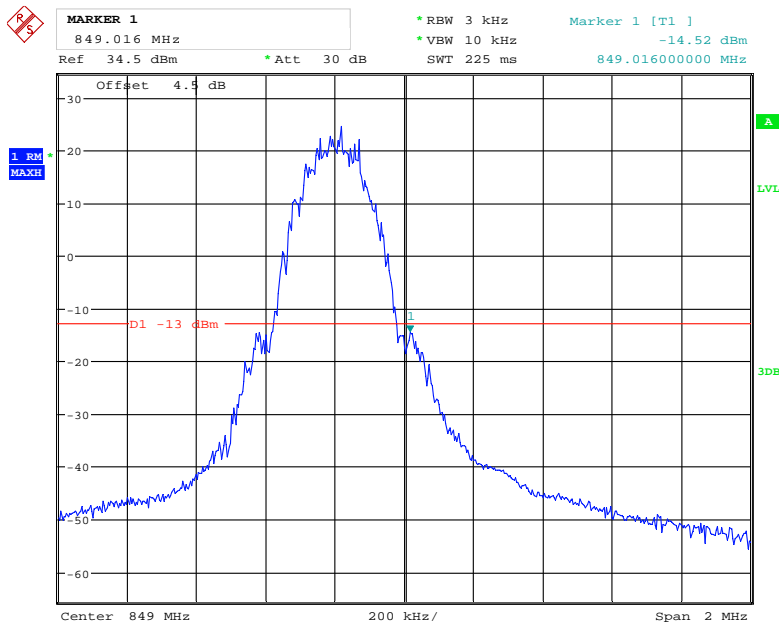


Date: 17.NOV.2018 13:54:21

**GSM 1900, Left Band Edge**

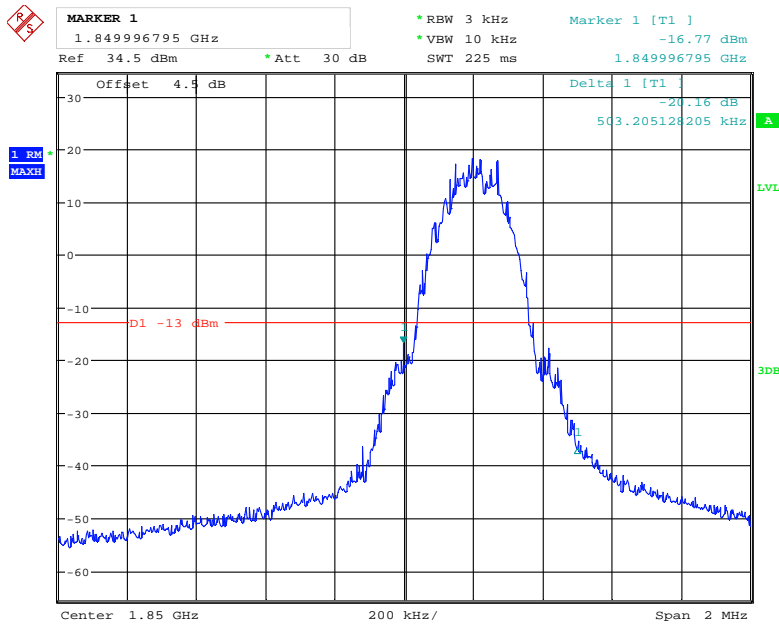

Date: 17.NOV.2018 14:10:48


**GSM 1900, Right Band Edge**

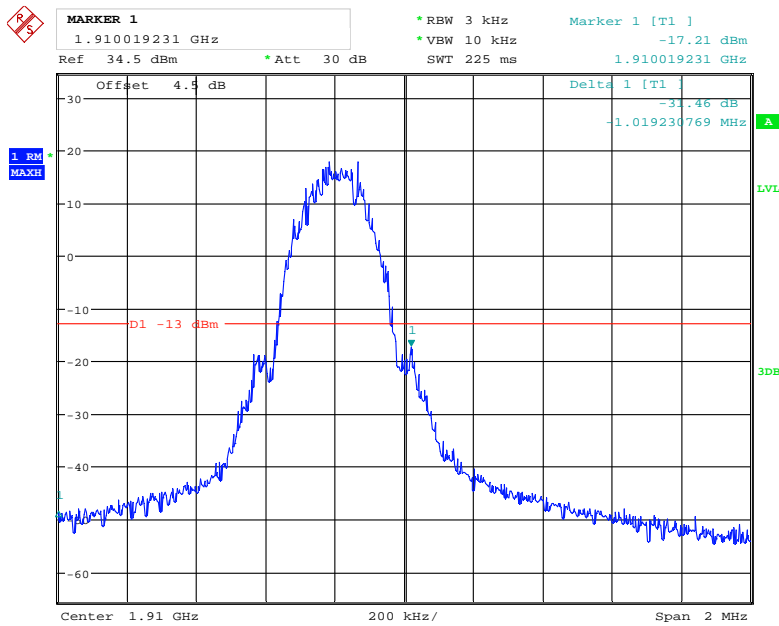

Date: 17.NOV.2018 14:11:23


WCDMA Band II:

**REL99 Band II, Left Band Edge**

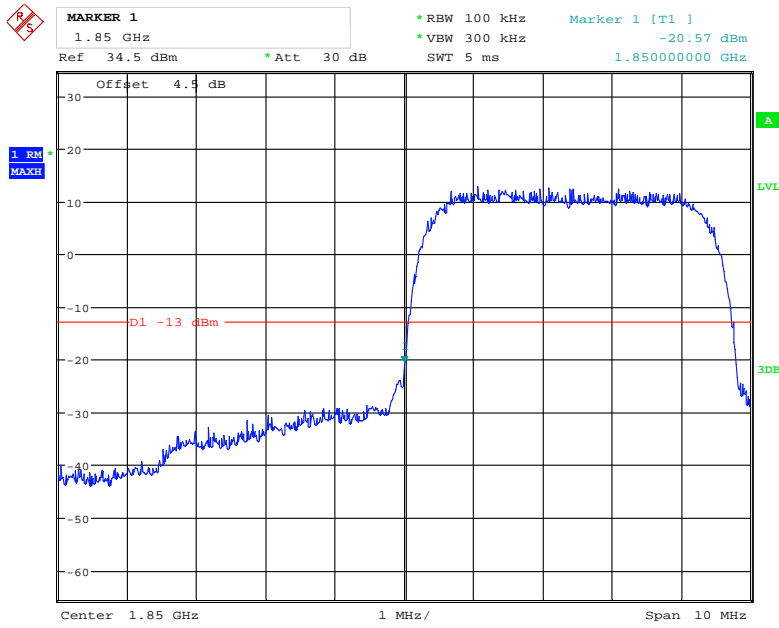


Date: 17.NOV.2018 14:29:37

**REL99 Band II, Right Band Edge**

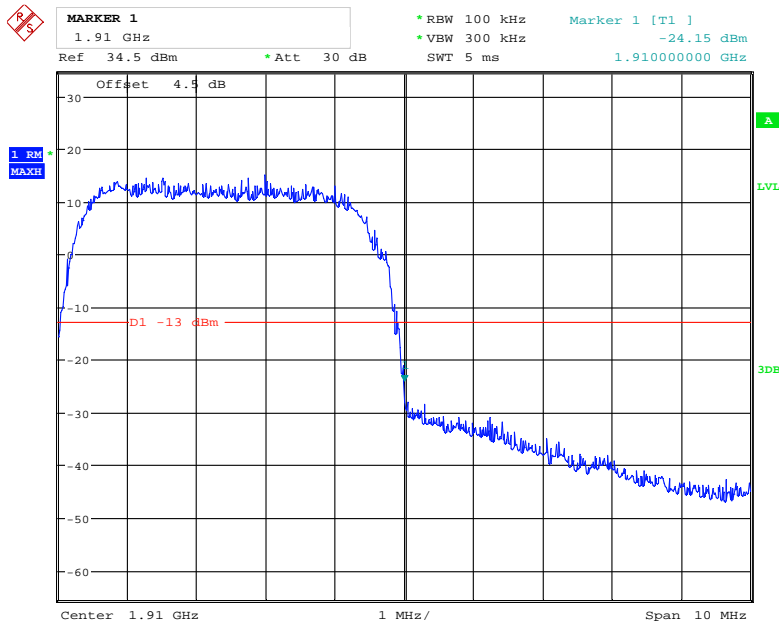


Date: 17.NOV.2018 14:29:55

### HSDPA Band II, Left Band Edge

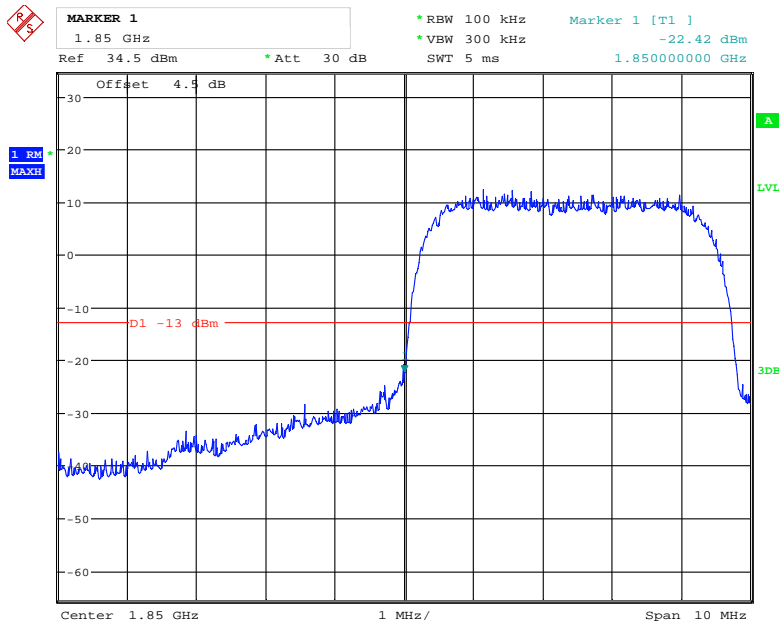


Date: 17.NOV.2018 14:27:46

### HSDPA Band II, Right Band Edge

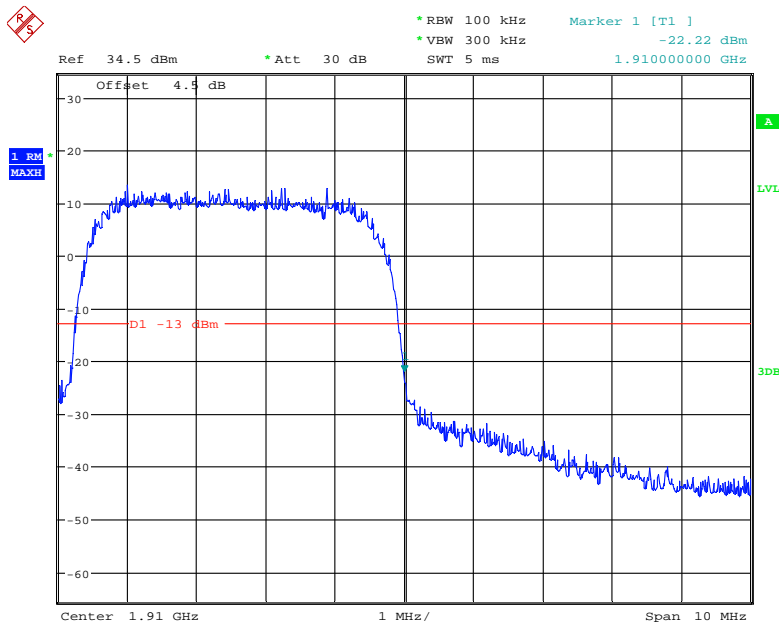


Date: 17.NOV.2018 14:27:22

### HSUPA Band II, Left Band Edge

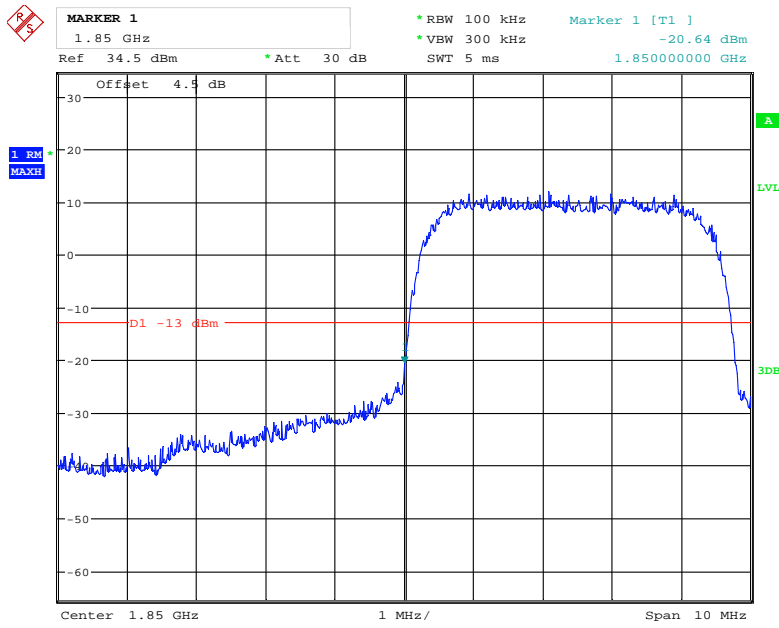

Date: 17.NOV.2018 14:26:07

### HSUPA Band II, Right Band Edge

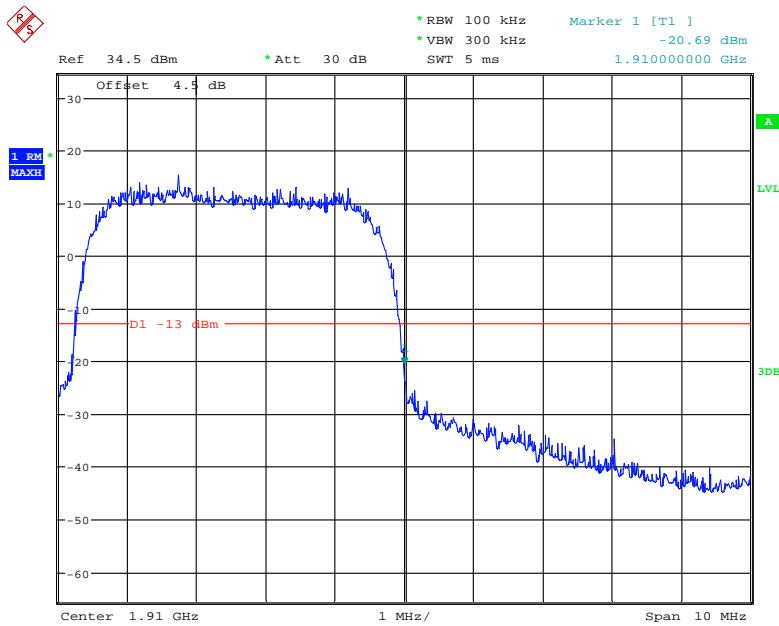


Date: 17.NOV.2018 14:26:53




WCDMA Band V

REL99 Band V, Left Band Edge

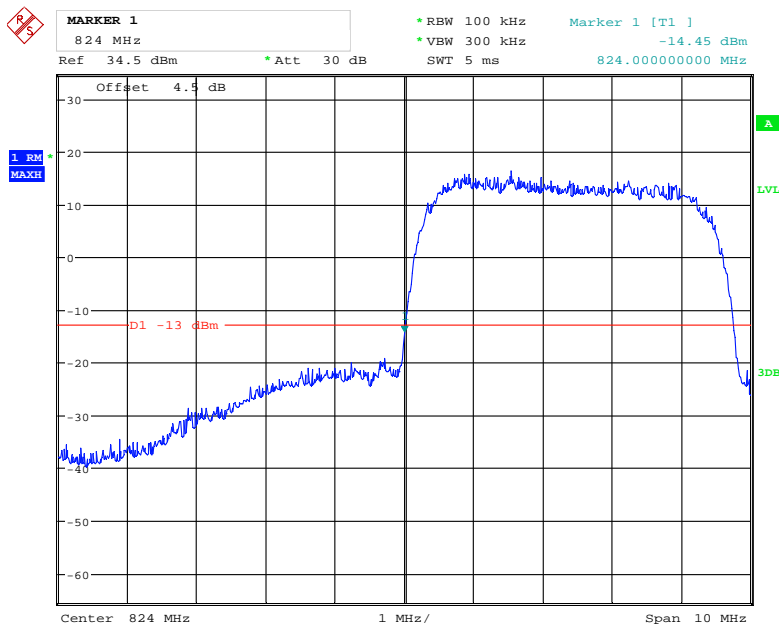


Date: 17.NOV.2018 14:29:16

REL99 Band V Right Band Edge

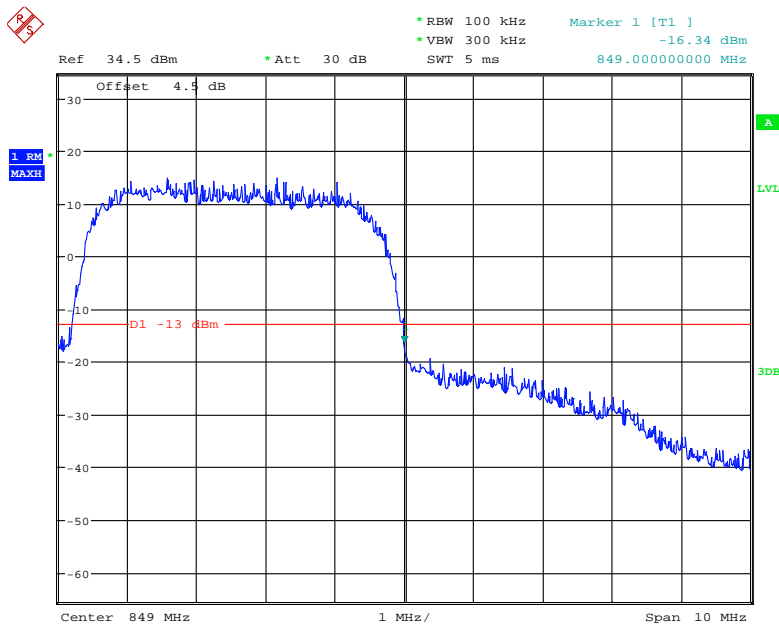


Date: 17.NOV.2018 14:28:58

### HSDPA Band V, Left Band Edge

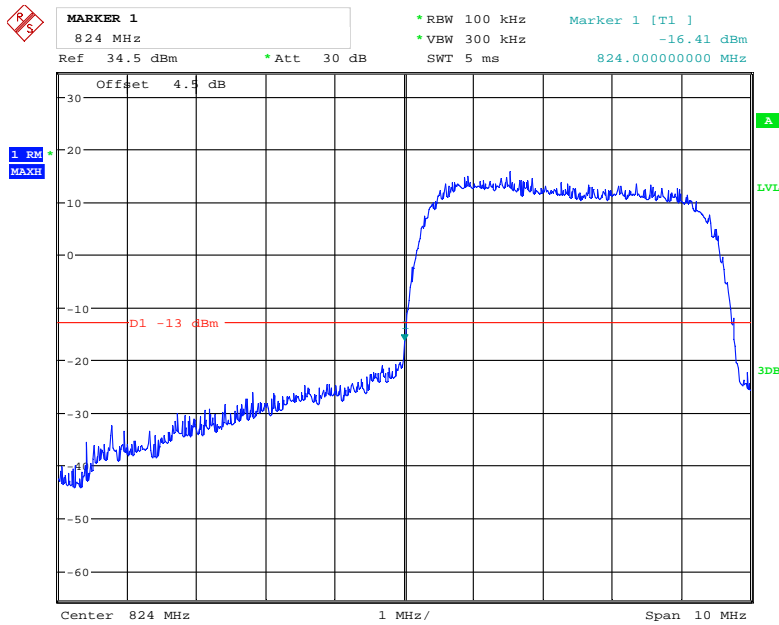


Date: 17.NOV.2018 14:28:12

### HSDPA Band V, Right Band Edge

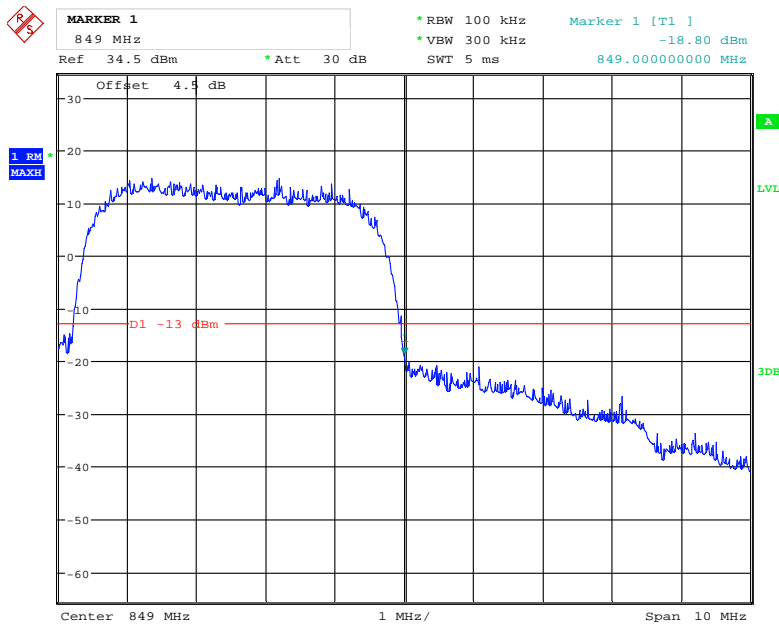


Date: 17.NOV.2018 14:28:40

### HSUPA Band V, Left Band Edge

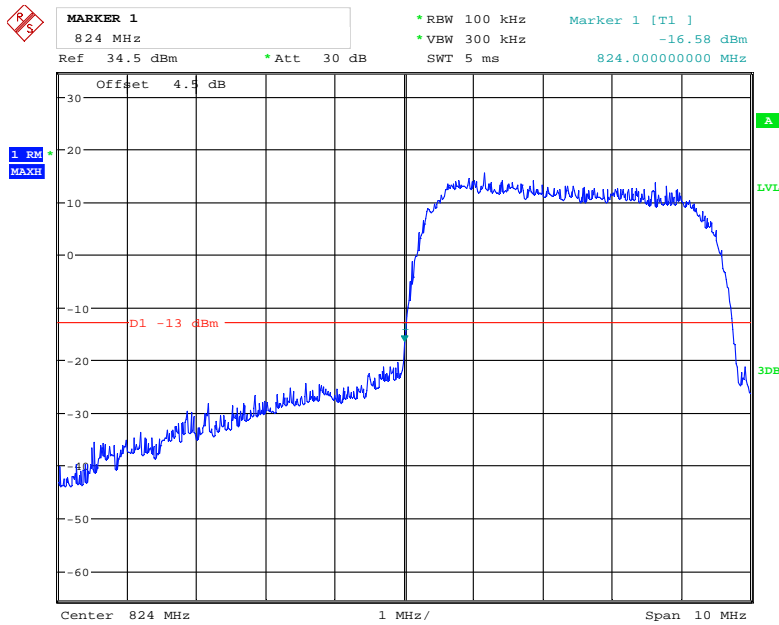

Date: 17.NOV.2018 14:25:18

### HSUPA Band V, Right Band Edge

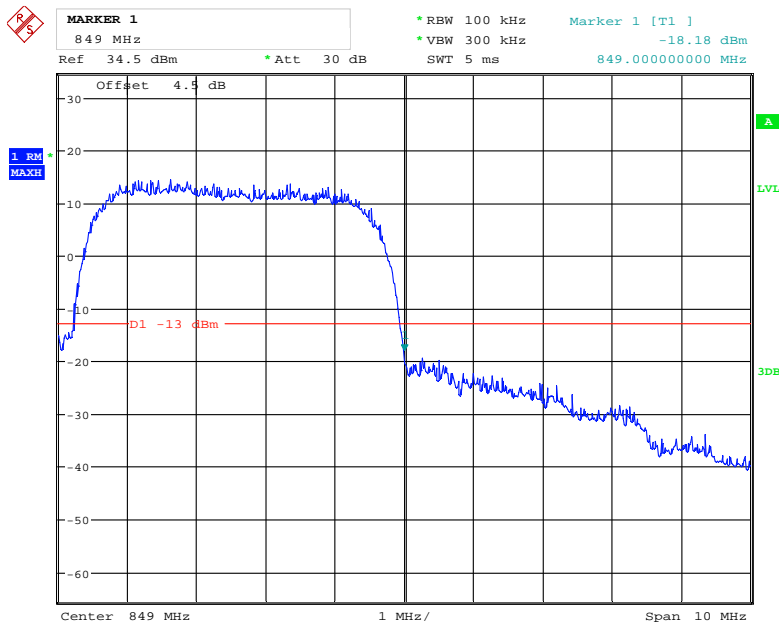

Date: 17.NOV.2018 14:25:02

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY**

**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

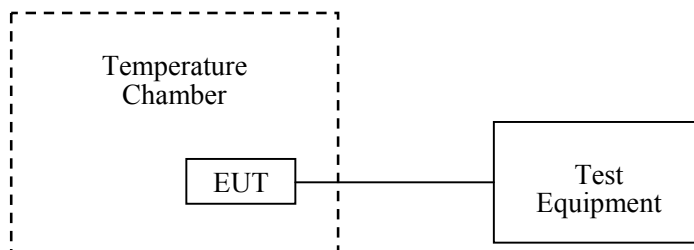

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	106 891	2017-12-14	2018-12-14
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2018-3-26	2019-3-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
UNI-T	Multimeter	UT39A	M130199938	2018-05-09	2019-05-09
Pro instrument	DC Power Supply	pps3300	N/A	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	53 %
<b>ATM Pressure:</b>	100.5 kPa

\* The testing was performed by Elena Lei on 2018-11-17.

Test Result: Compliance.

**Cellular Band**

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.8	16	0.019125030	2.5
-20		15	0.017929716	
-10		12	0.014343772	
0		11	0.013148458	
10		15	0.017929716	
20		19	0.022710973	
30		20	0.023906287	
40		18	0.021515659	
50		16	0.019125030	
20		3.6	19	
20	4.3	21	0.025101602	

**PCS Band**

<b>GMSK, Middle Channel, <math>f_c = 1880.0</math> MHz</b>				
<b>Temperature</b>	<b>Voltage</b>	<b>Frequency Error</b>	<b>Frequency Error</b>	<b>Results</b>
<b>°C</b>	<b>V<sub>DC</sub></b>	<b>Hz</b>	<b>ppm</b>	
-30	3.8	22	0.011702128	Pass
-20		26	0.013829787	
-10		21	0.011170213	
0		29	0.015425532	
10		25	0.013297872	
20		27	0.014361702	
30		26	0.013829787	
40		24	0.012765957	
50		26	0.013829787	
20		3.6	30	
20	4.3	33	0.017553191	

**WCDMA Band II: R99**

<b>Middle Channel, <math>f_c = 1880.0</math> MHz</b>				
<b>Temperature</b>	<b>Voltage</b>	<b>Frequency Error</b>	<b>Frequency Error</b>	<b>Results</b>
<b>°C</b>	<b>V<sub>DC</sub></b>	<b>Hz</b>	<b>ppm</b>	
-30	3.8	2	0.001063830	Pass
-20		8	0.004255319	
-10		6	0.003191489	
0		4	0.002127660	
10		3	0.001595745	
20		5	0.002659574	
30		6	0.003191489	
40		4	0.002127660	
50		2	0.001063830	
20		3.6	1	
20	4.3	6	0.003191489	

**WCDMA Band V: R99**

<b>Middle Channel, <math>f_c = 836.6</math> MHz</b>				
<b>Temperature</b>	<b>Voltage</b>	<b>Frequency Error</b>	<b>Frequency Error</b>	<b>Limit</b>
<b>°C</b>	<b>V<sub>DC</sub></b>	<b>Hz</b>	<b>ppm</b>	<b>ppm</b>
-30	3.8	5	0.005976572	2.5
-20		2	0.002390629	
-10		3	0.003585943	
0		1	0.001195314	
10		6	0.007171886	
20		5	0.005976572	
30		4	0.004781257	
40		2	0.002390629	
50		7	0.008367201	
20		3.6	6	
20	4.3	2	0.002390629	

**\*\*\*\*\* END OF REPORT \*\*\*\*\***