

Test Report

FCC Part15 Subpart C

Product Name : Mi Drone
Model No. : FXQ01FM
FCC ID : 2AG53FXQ01FM
IC : 21054-FXQ01FM

Applicant : BEIJING FIMI TECHNOLOGY LIMITED
Address : 07C, Block A, Floor 7, No.28 Xinxu Road Jia,
Haidian District, Beijing, China

Date of Receipt : Dec. 09, 2015
Test Date : Dec. 09, 2015~ Jan.21, 2016
Issued Date : May. 06, 2016
Report No. : 15C2018R-RF-US-P06V01
Report Version : V 1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.


Test Report Certification

Issued Date : May. 06, 2016


Report No. : 15C2018R-RF-US-P06V01




Product Name : Mi Drone
 Applicant : BEIJING FIMI TECHNOLOGY LIMITED
 Address : 07C, Block A, Floor 7, No.28 Xinxu Road Jia, Haidian District, Beijing, China
 Manufacturer : BEIJING FIMI TECHNOLOGY LIMITED
 Address : 07C, Block A, Floor 7, No.28 Xinxu Road Jia, Haidian District, Beijing, China
 Model No. : FXQ01FM
 FCC ID : 2AG53FXQ01FM
 IC : 21054-FXQ01FM
 EUT Voltage : DC 15.2V
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2014
 ANSI C63.4: 2014; ANSI C63.10: 2013
 Industry Canada RSS-Gen Issue 4/RSS-247 Issue 1
 Test Result : Complied
 Performed Location : Quietek Corporation - Suzhou EMC Laboratory
 No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu, China
 TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
 FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : 

 (Senior Adm. Specialist: Alice Ni)

Reviewed By : 

 (Senior Engineer: Frank He)

Approved By : 

 (Engineering Manager : Harry Zhao)

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

| | | |
|----------------------|----------|-----------------------|
| Taiwan R.O.C. | : | BSMI, NCC, TAF |
| USA | : | FCC |
| Japan | : | VCCI |
| China | : | CNAS |

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/english/about/certificates.aspx?bval=5>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : http://www.quietek.com/index_en.aspx
If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

| Description | Page |
|---|------|
| 1. General Information..... | 8 |
| 1.1. EUT Description | 8 |
| 1.2. Mode of Operation | 10 |
| 1.3. Tested System Details..... | 11 |
| 1.4. Configuration of Tested System | 12 |
| 1.5. EUT Exercise Software | 13 |
| 2. Technical Test..... | 14 |
| 2.1. Summary of Test Result | 14 |
| 2.2. Test Environment | 16 |
| 3. Conducted Emission | 17 |
| 3.1. Test Equipment | 17 |
| 3.2. Test Setup | 17 |
| 3.3. Limit..... | 18 |
| 3.4. Test Procedure | 18 |
| 3.5. Uncertainty | 18 |
| 3.6. Test Result | 19 |
| 4. Radiated Emission | 21 |
| 4.1. Test Equipment | 21 |
| 4.2. Test Setup | 22 |
| 4.3. Limit..... | 23 |
| 4.4. Test Procedure | 23 |
| 4.5. Uncertainty | 24 |
| 4.6. Test Result | 25 |
| 5. 20dB Bandwidth | 30 |
| 5.1. Test Equipment | 30 |
| 5.2. Test Setup | 30 |
| 5.3. Limit..... | 30 |
| 5.4. Test Procedure | 31 |
| 5.5. Uncertainty | 31 |
| 5.6. Test Result | 32 |
| 6. Carrier Frequency Separation | 34 |
| 6.1. Test Equipment | 34 |
| 6.2. Test Setup | 34 |
| 6.3. Limit..... | 34 |
| 6.4. Test Procedure | 35 |
| 6.5. Uncertainty | 35 |
| 6.6. Test Result | 36 |

| | | |
|-------|--|----|
| 7. | Number of Hopping Frequencies | 38 |
| 7.1. | Test Equipment | 38 |
| 7.2. | Test Setup | 38 |
| 7.3. | Limit..... | 38 |
| 7.4. | Test Procedure | 39 |
| 7.5. | Uncertainty | 39 |
| 7.6. | Test Result | 40 |
| 8. | Time of Occupancy (Dwell Time)..... | 41 |
| 8.1. | Test Equipment | 41 |
| 8.2. | Test Setup | 41 |
| 8.3. | Limit..... | 41 |
| 8.4. | Test Procedure | 42 |
| 8.5. | Uncertainty | 42 |
| 8.6. | Test Result | 43 |
| 9. | Peak Output Power | 45 |
| 9.1. | Test Equipment | 45 |
| 9.2. | Test Setup | 45 |
| 9.3. | Limit..... | 45 |
| 9.4. | Test Procedure | 46 |
| 9.5. | Uncertainty | 46 |
| 9.6. | Test Result | 47 |
| 10. | Band-edge Compliance of RF Conducted Emissions | 48 |
| 10.1. | Test Equipment | 48 |
| 10.2. | Test Setup | 48 |
| 10.3. | Limit..... | 48 |
| 10.4. | Test Procedure | 49 |
| 10.5. | Uncertainty | 49 |
| 10.6. | Test Result | 50 |
| 11. | Spurious RF Conducted Emissions..... | 52 |
| 11.1. | Test Equipment | 52 |
| 11.2. | Test Setup | 52 |
| 11.3. | Limit..... | 52 |
| 11.4. | Test Procedure | 53 |
| 11.5. | Uncertainty | 53 |
| 11.6. | Test Result | 54 |
| 12. | Radiated Emission Band Edge..... | 56 |
| 12.1. | Test Equipment | 56 |
| 12.2. | Test Setup | 57 |

12.3. Limit.....57
12.4. Test Procedure57
12.5. Uncertainty58
12.6. Test Result59

History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|-----------------------|---------|-----------------------|---------------|
| 15C2018R-RF-US-P06V01 | V1.0 | Initial Issued Report | May. 06, 2016 |
| | | | |
| | | | |
| | | | |

1. General Information

1.1. EUT Description

| | |
|-----------------------|---------------------------|
| Product Name | Mi Drone |
| Model No. | FXQ01FM |
| Working Voltage | DC 15.2V |
| Spread Frequency Mode | FHSS |
| Frequency Range | 2426.2- 2461 MHz |
| Channel Number | 30 |
| Channel Separation | 1.2MHz |
| Type of Modulation | FHSS |
| Data Rate | 1Mbps |
| Antenna Type | Reference to Antenna List |
| Peak Antenna Gain | Reference to Antenna List |

Working Frequency of Each Channel:

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|------------|---------|------------|---------|------------|---------|------------|
| 01 | 2426.2 MHz | 02 | 2427.4 MHz | 03 | 2428.6 MHz | 04 | 2429.8 MHz |
| 05 | 2431 MHz | 06 | 2432.2 MHz | 07 | 2433.4 MHz | 08 | 2434.6 MHz |
| 09 | 2435.8 MHz | 10 | 2437 MHz | 11 | 2438.2 MHz | 12 | 2439.4 MHz |
| 13 | 2440.6 MHz | 14 | 2441.8 MHz | 15 | 2443 MHz | 16 | 2444.2 MHz |
| 17 | 2445.4 MHz | 18 | 2446.6 MHz | 19 | 2447.8 MHz | 20 | 2449 MHz |
| 21 | 2450.2 MHz | 22 | 2451.4 MHz | 23 | 2452.6 MHz | 24 | 2453.8 MHz |
| 25 | 2455 MHz | 26 | 2456.2 MHz | 27 | 2457.4 MHz | 28 | 2458.6 MHz |
| 29 | 2459.8 MHz | 30 | 2461 MHz | N/A | N/A | N/A | N/A |

Antenna List

| No. | Antenna | Manufacturer | Model No. | Peak Gain |
|-----|------------------|--------------|-----------|--------------------|
| #1 | Internal Antenna | N/A | N/A | 2.85dBi for 2.4GHz |
| #2 | Internal Antenna | N/A | N/A | 2.85dBi for 2.4GHz |

1.2 Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| |
|----------------------|
| Test Mode |
| Mode 1:Transmit Mode |

Note:


1. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
2. Regards to the frequency band operation for systems using FHSS modulation: normal operation (hopping) was selected to test for conducted, and the lowest, highest frequency channel for radiation spurious test.
3. The extreme test condition for voltage and temperature were declared by the manufacturer.
4. The reading values of all the test items contain cable loss.

1.3 Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product | Manufacturer | Model No. | Serial No. | Power Cord |
|------------|--------------|-----------|-----------------|------------|
| 1 Notebook | Asus | N80V | 8BN0AS226971468 | N/A |

1.4 Configuration of Tested System

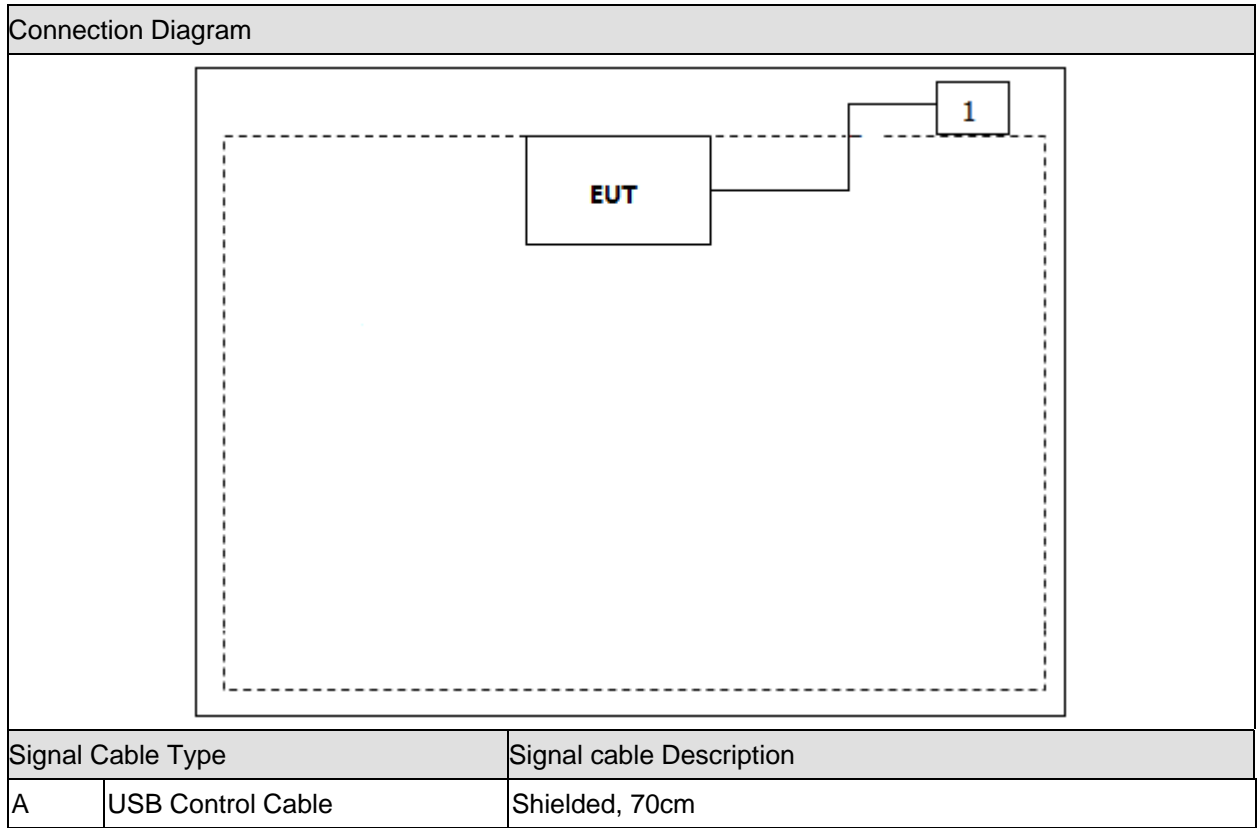

1.5 EUT Exercise Software

| | |
|---|--|
| 1 | Setup the EUT and simulators as shown on above. |
| 2 | Turn on the power of all equipment. |
| 3 | Run the RF test software, and set the test mode and channel, then press OK to start continue Transmit. |

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

For FCC

| Performed Test Item | Normative References | Test Performed | Deviation |
|---|--|----------------|-----------|
| Conducted Emission | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.207 | Yes | No |
| Radiated Emission | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.209 | Yes | No |
| 20dB Bandwidth | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(a)(1) | Yes | No |
| Carrier Frequency Separation | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(a)(1) | Yes | No |
| Number of Hopping Frequencies | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(a)(1)(iii) | Yes | No |
| Time of Occupancy (Dwell Time) | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(a)(1)(iii) | Yes | No |
| Peak Output Power | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(b)(1) | Yes | No |
| Band-edge Compliance of RF Conducted Emissions | FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.215(c), 15.247(d) | Yes | No |
| Spurious RF Conducted Emissions | FCC CFR Title 47 Part 15 Subpart C: 2014 15.247(d) | Yes | No |
| Radiated Emission Band Edge | FCC CFR Title 47 Part 15 Subpart C: 2014 15.247(d) | Yes | No |

For IC

| Performed Test Item | Normative References | Test Performed | Deviation |
|---|---------------------------------|----------------|-----------|
| Conducted Emission | RSS-Gen Issue 4 Section 8.8 | Yes | No |
| Radiated Emission | RSS-Gen Issue 4 Section 8.9 | Yes | No |
| 20dB Bandwidth | RSS-247 Issue 1 Section 5.1 | Yes | No |
| Carrier Frequency Separation | RSS-247 Issue 1 Section 5.1 | Yes | No |
| Number of Hopping Frequencies | RSS-247 Issue 1 Section 5.1 | Yes | No |
| Time of Occupancy (Dwell Time) | RSS-247 Issue 1 Section 5.1 | Yes | No |
| Peak Output Power | RSS-247 Issue 1 Section 5.4 | Yes | No |
| Band-edge Compliance of RF Conducted Emissions | RSS-247 Issue 1 Section 5.5 | Yes | No |
| Spurious RF Conducted Emissions | RSS-247 Issue 1 Section 5.5 | Yes | No |
| Radiated Emission Band Edge | RSS-Gen Issue 4 Section 8.10 | Yes | No |

2.2. Test Environment

| Items | Required (IEC 68-1) | Actual |
|----------------------------|---------------------|----------|
| Temperature (°C) | 15-35 | 21 |
| Humidity (%RH) | 25-75 | 50 |
| Barometric pressure (mbar) | 860-1060 | 950-1000 |

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| EMI Test Receiver | R&S | ESCI | 100726 | 2016.03.10 |
| Two-Line V-Network | R&S | ENV216 | 100043 | 2016.03.10 |
| Two-Line V-Network | R&S | ENV216 | 100044 | 2016.09.16 |
| 50ohm Coaxial Switch | Anritsu | MP59B | 6200464462 | 2016.03.01 |
| 50ohm Termination | SHX | TF2 | 07081401 | 2016.09.16 |
| Temperature/Humidity Meter | zhicheng | ZC1-2 | TR1-TH | 2017.01.04 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

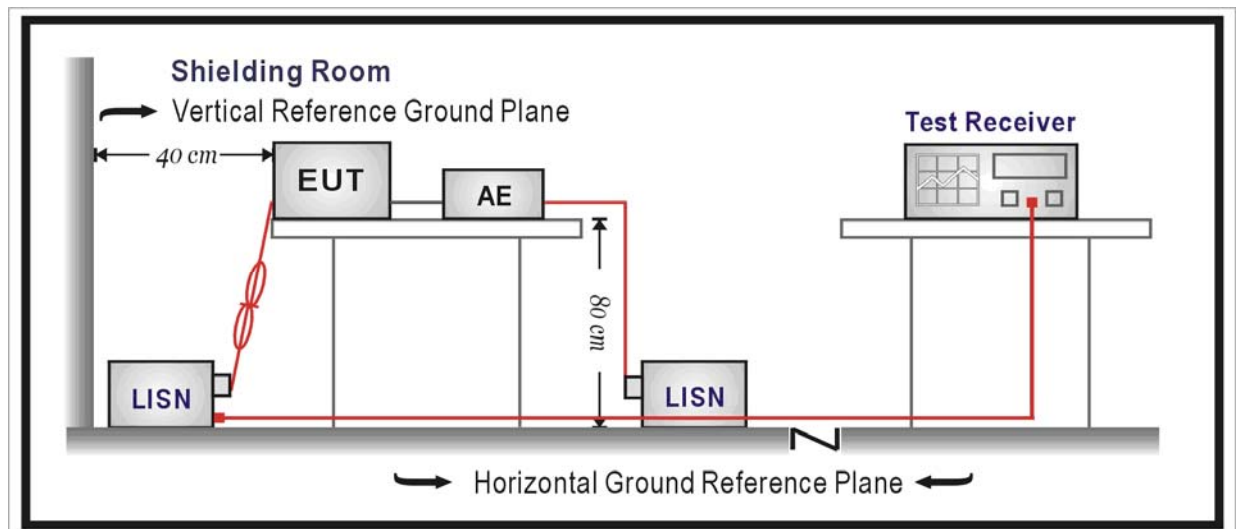

3.3. Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits | | |
|---|-----------|-----------|
| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

According to FCC ANSI C63.4: 2014 & ANSI C63.10: 2013.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB


3.6. Test Result

| | |
|--|---------------------|
| Site: TR1 | Time: 2015/12/24 |
| Limit: FCC_Part15.107_CE_AC Power_ClassB | Margin: 0 |
| Probe: ENV216-L1 | Polarity: Line |
| EUT: Mi Drone | Power: AC 120V/60Hz |
| Note: Mode 1 | |

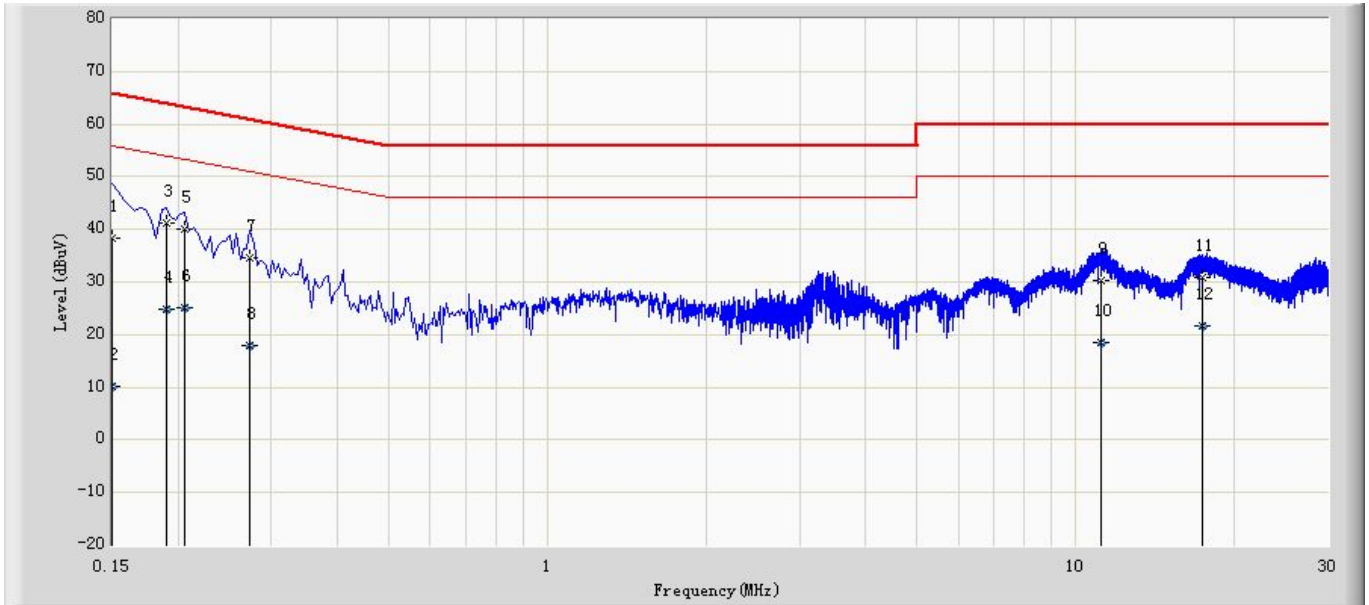

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Probe (dB) | Cable (dB) | Amp (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|------------|------------|----------|------|
| 1 | | 0.150 | 38.382 | 28.646 | -27.618 | 66.000 | 9.676 | 0.060 | 0.000 | QP |
| 2 | | 0.150 | 10.202 | 0.466 | -45.798 | 56.000 | 9.676 | 0.060 | 0.000 | AV |
| 3 | * | 0.190 | 41.342 | 31.632 | -22.695 | 64.037 | 9.650 | 0.060 | 0.000 | QP |
| 4 | | 0.190 | 24.840 | 15.130 | -29.197 | 54.037 | 9.650 | 0.060 | 0.000 | AV |
| 5 | | 0.206 | 40.105 | 30.395 | -23.260 | 63.365 | 9.650 | 0.060 | 0.000 | QP |
| 6 | | 0.206 | 25.118 | 15.408 | -28.247 | 53.365 | 9.650 | 0.060 | 0.000 | AV |
| 7 | | 0.274 | 34.539 | 24.837 | -26.457 | 60.996 | 9.642 | 0.060 | 0.000 | QP |
| 8 | | 0.274 | 17.886 | 8.184 | -33.110 | 50.996 | 9.642 | 0.060 | 0.000 | AV |
| 9 | | 11.154 | 30.430 | 20.400 | -29.570 | 60.000 | 9.740 | 0.290 | 0.000 | QP |
| 10 | | 11.154 | 18.363 | 8.333 | -31.637 | 50.000 | 9.740 | 0.290 | 0.000 | AV |
| 11 | | 17.414 | 30.973 | 20.736 | -29.027 | 60.000 | 9.817 | 0.420 | 0.000 | QP |
| 12 | | 17.414 | 21.547 | 11.310 | -28.453 | 50.000 | 9.817 | 0.420 | 0.000 | AV |

| | |
|--|---------------------|
| Site: TR1 | Time: 2015/12/24 |
| Limit: FCC_Part15.107_CE_AC Power_ClassB | Margin: 0 |
| Probe: ENV216-N | Polarity: Neutral |
| EUT: Mi Drone | Power: AC 120V/60Hz |
| Note: Mode 1 | |

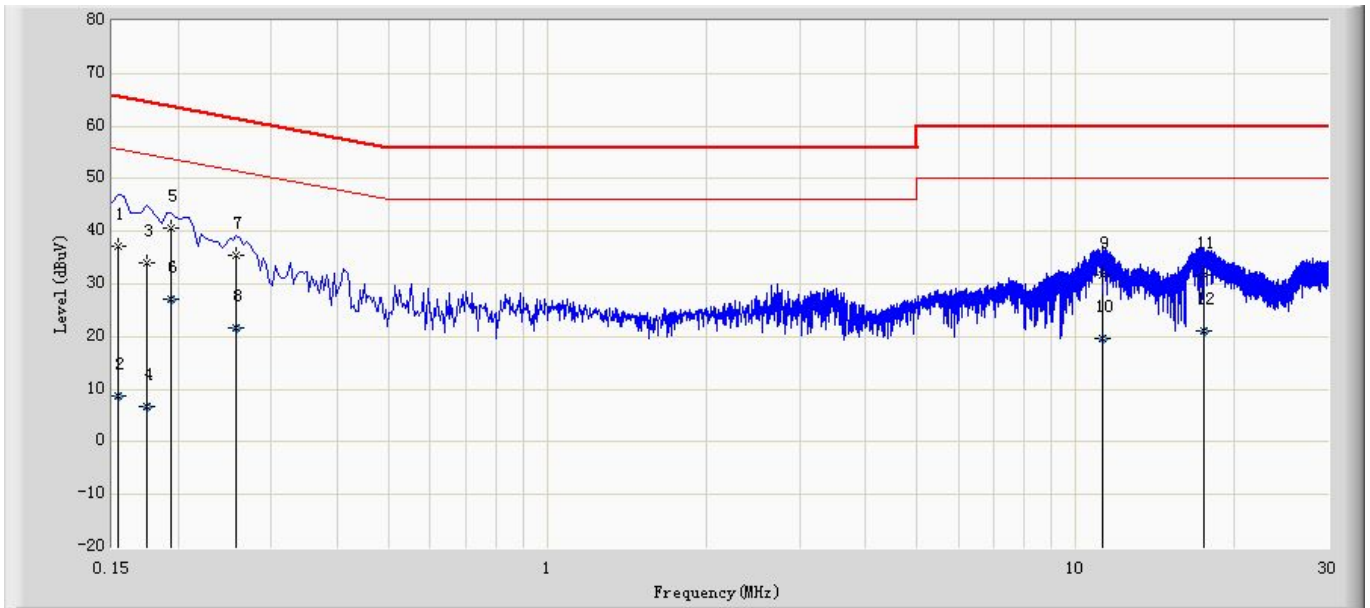

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Probe (dB) | Cable (dB) | Amp (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|------------|------------|----------|------|
| 1 | | 0.154 | 37.221 | 27.488 | -28.560 | 65.781 | 9.673 | 0.060 | 0.000 | QP |
| 2 | | 0.154 | 8.654 | -1.079 | -47.127 | 55.781 | 9.673 | 0.060 | 0.000 | AV |
| 3 | | 0.174 | 33.946 | 24.221 | -30.821 | 64.767 | 9.665 | 0.060 | 0.000 | QP |
| 4 | | 0.174 | 6.690 | -3.035 | -48.077 | 54.767 | 9.665 | 0.060 | 0.000 | AV |
| 5 | * | 0.194 | 40.687 | 30.967 | -23.177 | 63.864 | 9.660 | 0.060 | 0.000 | QP |
| 6 | | 0.194 | 27.167 | 17.447 | -26.697 | 53.864 | 9.660 | 0.060 | 0.000 | AV |
| 7 | | 0.258 | 35.358 | 25.641 | -26.138 | 61.496 | 9.657 | 0.060 | 0.000 | QP |
| 8 | | 0.258 | 21.633 | 11.916 | -29.863 | 51.496 | 9.657 | 0.060 | 0.000 | AV |
| 9 | | 11.218 | 31.587 | 21.547 | -28.413 | 60.000 | 9.750 | 0.290 | 0.000 | QP |
| 10 | | 11.218 | 19.669 | 9.629 | -30.331 | 50.000 | 9.750 | 0.290 | 0.000 | AV |
| 11 | | 17.470 | 31.791 | 21.541 | -28.209 | 60.000 | 9.830 | 0.420 | 0.000 | QP |
| 12 | | 17.470 | 21.041 | 10.791 | -28.959 | 50.000 | 9.830 | 0.420 | 0.000 | AV |

4. Radiated Emission

4.1. Test Equipment

Radiated Emission / AC-2


| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|--------------|------------|---------------|
| EMI Test Receiver | R&S | ESCI | 100573 | 2016.03.10 |
| Loop Antenna | R&S | HFH2-Z2 | 833799/003 | 2016.11.25 |
| Bilog Antenna | Teseq GmbH | CBL6112D | 27611 | 2016.10.10 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC2-C | 2016.03.01 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | AC2-TH | 2017.01.04 |

Radiated Emission / AC-5


| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|--------------|-------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Preamplifier | Miteq | NSP1800-25 | 1364185 | 2016.05.03 |
| Preamplifier | Quietek | AP-040G | CHM-0906001 | 2016.05.03 |
| Bilog Antenna | Teseq GmbH | CBL6112D | 27612 | 2016.10.15 |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9120D | 499 | 2016.06.08 |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9170 | 294 | 2016.04.10 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC5-C1 | 2016.03.01 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC5-C2 | 2016.03.01 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 102 | AC5-C3 | 2016.03.01 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | AC5-TH | 2017.01.04 |

4.2. Test Setup


Below 30MHz Test Setup:

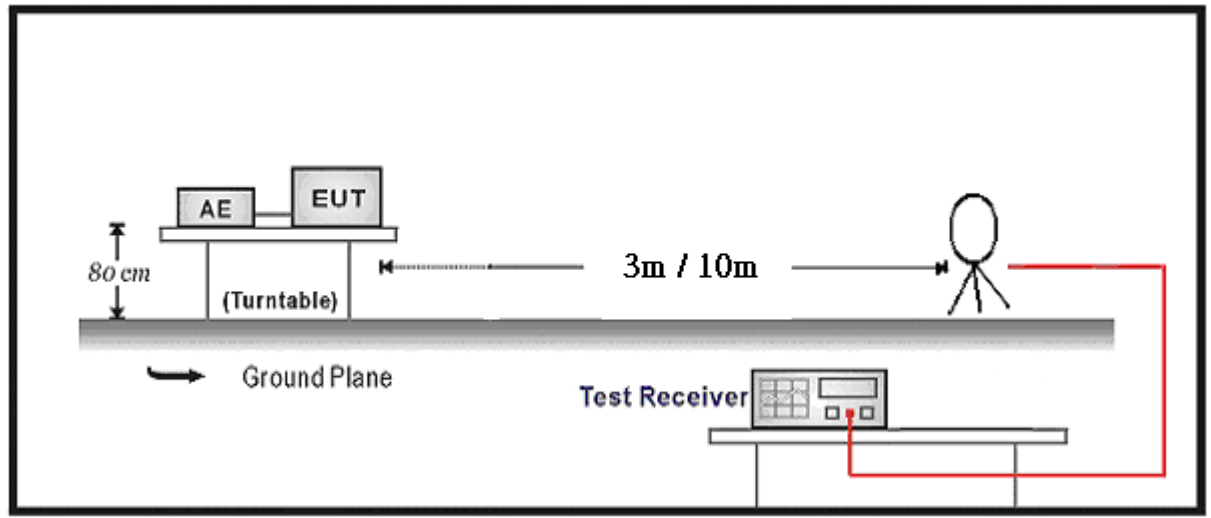

Below 1GHz Test Setup:

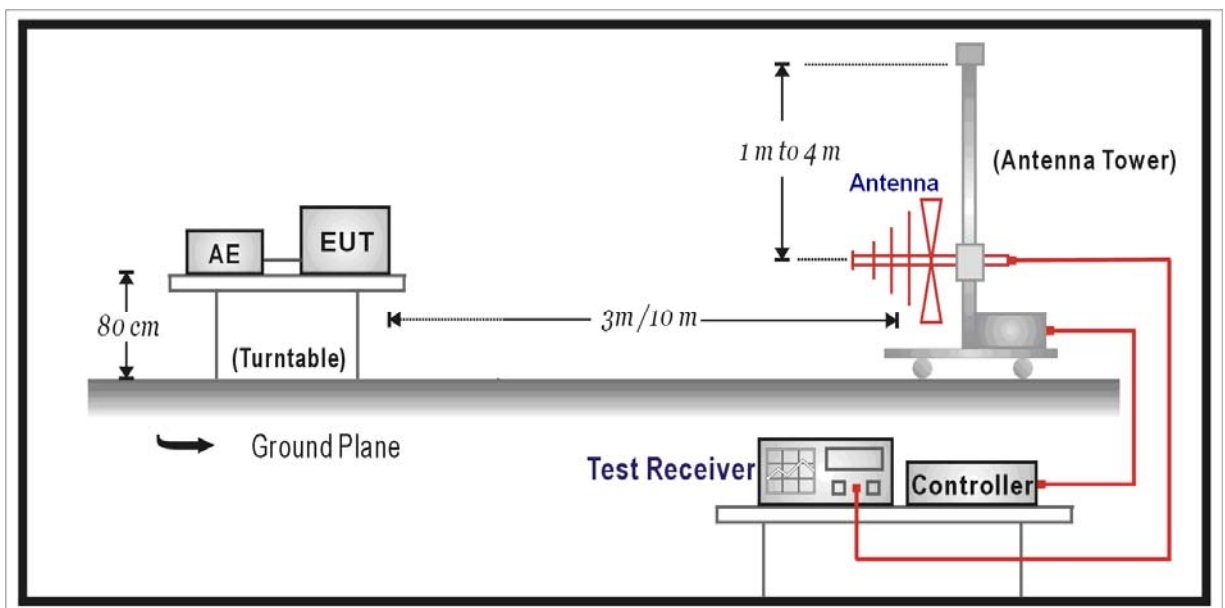

Above 1GHz Test Setup:

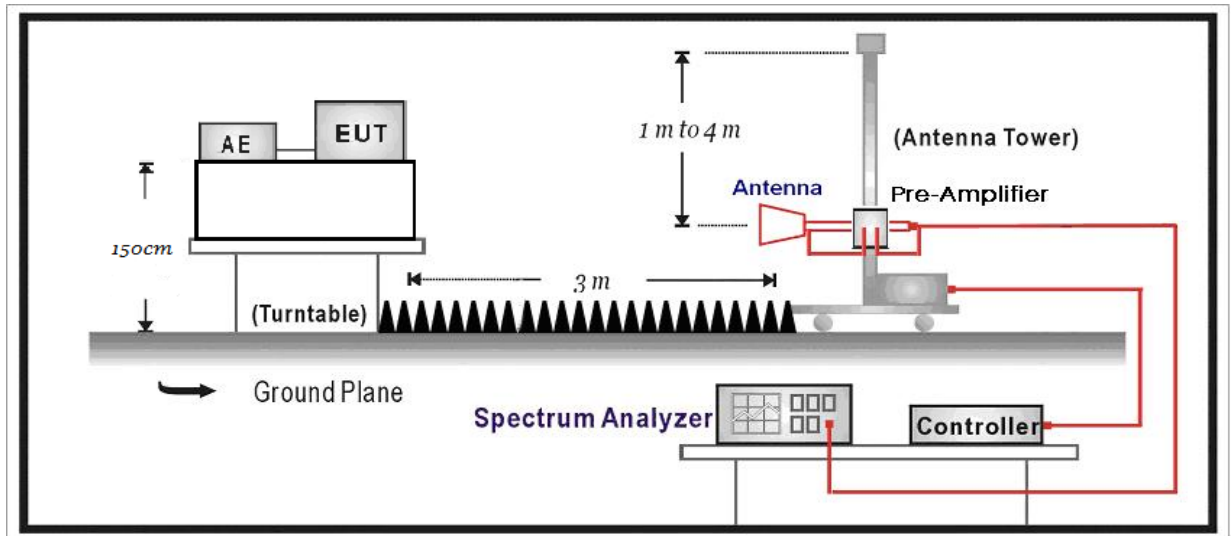

4.3. Limit

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|--------------|----------------|
| Frequency (MHz) | Distance (m) | Level (dBuV/m) |
| 30 - 88 | 3 | 40 |
| 88 - 216 | 3 | 43.5 |
| 216 - 960 | 3 | 46 |
| Above 960 | 3 | 54 |

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

According to ANSI C63.4: 2014; ANSI C63.10: 2013.

The EUT is placed on a turn table which is 1.5 meter for above 1G and 0.8 meter for below 1G above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level.

This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2014 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60~10 degrees for H-plane and 90~10 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1GHz is defined as ± 3.9 dB
below 1GHz is defined as ± 3.8 dB

4.6. Test Result


All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average = Peak Measure Level+ Duty Factor

Duty Factor= $20 \cdot \text{LOG}(\text{Pulse Number} \cdot \text{On Time} / 100) = -27.51 \text{ dB}$ in worst condition in normal use.

Pulse Number

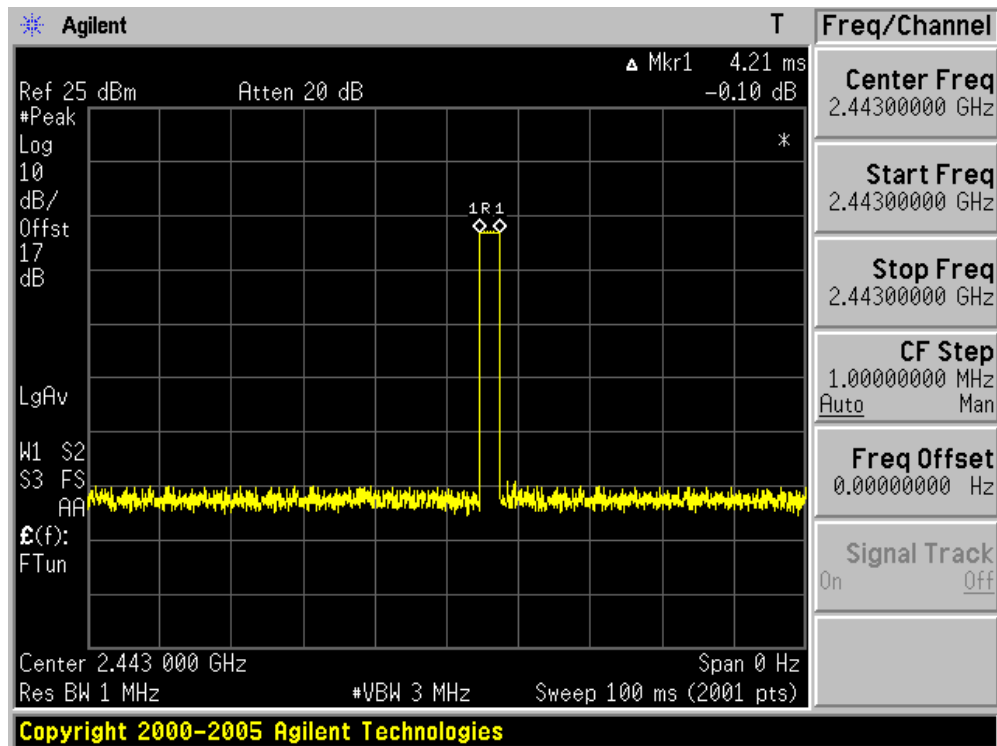

Mode 1: Transmit Mode


| Chain | CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-------|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| Ant 1 | 01 | H | 4852.4 | 34.4 | 8.1 | 42.5 | 54(Note2) | -11.5 | PK |
| | | V | 4852.4 | 33.8 | 8.1 | 41.9 | 54(Note2) | -12.1 | PK |
| | | H | 7278.6 | 29.4 | 12.5 | 41.9 | 54(Note2) | -12.1 | PK |
| | | V | 7278.6 | 29.6 | 12.5 | 42.1 | 54(Note2) | -11.9 | PK |
| | | H | 9704.8 | 20.6 | 15.9 | 36.5 | 54(Note2) | -17.5 | PK |
| | | V | 9704.8 | 22.7 | 15.9 | 38.6 | 54(Note2) | -15.4 | PK |
| | 15 | H | 4886.0 | 34.0 | 8.6 | 42.6 | 54(Note2) | -11.4 | PK |
| | | V | 4886.0 | 33.5 | 8.6 | 42.1 | 54(Note2) | -11.9 | PK |
| | | H | 7329.0 | 27.3 | 12.8 | 40.1 | 54(Note2) | -13.9 | PK |
| | | V | 7329.0 | 27.3 | 12.8 | 40.1 | 54(Note2) | -13.9 | PK |
| | | H | 9772.0 | 26.0 | 16.3 | 42.3 | 54(Note2) | -11.7 | PK |
| | | V | 9772.0 | 23.1 | 16.3 | 39.4 | 54(Note2) | -14.6 | PK |
| | 30 | H | 4922.0 | 31.9 | 9.0 | 40.9 | 54(Note2) | -13.1 | PK |
| | | V | 4922.0 | 33.5 | 9.0 | 42.5 | 54(Note2) | -11.5 | PK |
| | | H | 7383.0 | 24.2 | 13.6 | 37.8 | 54(Note2) | -16.2 | PK |
| | | V | 7380.0 | 25.2 | 13.6 | 38.8 | 54(Note2) | -15.2 | PK |
| | | H | 9844.0 | 25.0 | 16.8 | 41.8 | 54(Note2) | -12.2 | PK |
| | | V | 9844.0 | 21.2 | 16.8 | 38.0 | 54(Note2) | -16.0 | PK |

| Chain | CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-------|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| Ant 2 | 01 | H | 4852.4 | 34.2 | 8.1 | 42.3 | 54(Note2) | -11.7 | PK |
| | | V | 4852.4 | 33.6 | 8.1 | 41.7 | 54(Note2) | -12.3 | PK |
| | | H | 7278.6 | 29.6 | 12.5 | 42.1 | 54(Note2) | -11.9 | PK |
| | | V | 7278.6 | 28.1 | 12.5 | 40.6 | 54(Note2) | -13.4 | PK |
| | | H | 9704.8 | 23.8 | 15.9 | 39.7 | 54(Note2) | -14.3 | PK |
| | | V | 9704.8 | 23.7 | 15.9 | 39.6 | 54(Note2) | -14.4 | PK |
| | 15 | H | 4886.0 | 34.0 | 8.6 | 42.6 | 54(Note2) | -11.4 | PK |
| | | V | 4886.0 | 33.2 | 8.6 | 41.8 | 54(Note2) | -12.2 | PK |
| | | H | 7329.0 | 26.1 | 12.8 | 38.9 | 54(Note2) | -15.1 | PK |
| | | V | 7329.0 | 30.0 | 12.8 | 42.8 | 54(Note2) | -11.2 | PK |
| | | H | 9772.0 | 26.8 | 16.3 | 43.1 | 54(Note2) | -10.9 | PK |
| | | V | 9772.0 | 21.7 | 16.3 | 38.0 | 54(Note2) | -16.0 | PK |
| | 30 | H | 4922.0 | 33.4 | 9.0 | 42.4 | 54(Note2) | -11.6 | PK |
| | | V | 4922.0 | 31.8 | 9.0 | 40.8 | 54(Note2) | -13.2 | PK |
| | | H | 7383.0 | 26.2 | 13.6 | 39.8 | 54(Note2) | -14.2 | PK |
| | | V | 7380.0 | 25.2 | 13.6 | 38.8 | 54(Note2) | -15.2 | PK |
| | | H | 9844.0 | 22.9 | 16.8 | 39.7 | 54(Note2) | -14.3 | PK |
| | | V | 9844.0 | 21.5 | 16.8 | 38.3 | 54(Note2) | -15.7 | PK |

- Note 1: The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 6dB below the limits, therefore no data appear in the report.
- 2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
- 3: Measure Level = Reading Level + Factor.


The worst case of Radiated Emission below 1GHz:

| | |
|-------------------------------------|--------------------------|
| Engineer: Scott | |
| Site: AC2 | Time: 2015/12/24 - 11:55 |
| Limit: FCC_Part15.109_RE(3m)_ClassB | Margin: 0 |
| Probe: AC2_10M(30-1000M) | Polarity: Horizontal |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1 | |

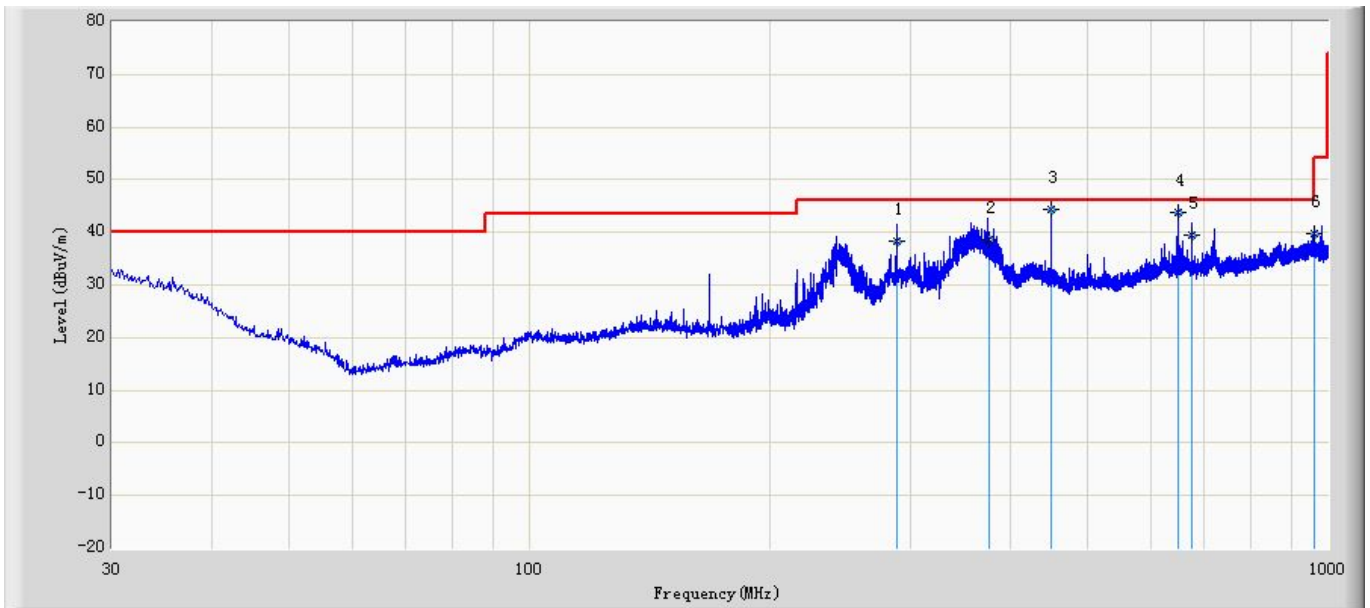

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | | 288.610 | 38.362 | 46.504 | -7.638 | 46.000 | -8.142 | QP |
| 2 | | 375.860 | 38.681 | 44.184 | -7.319 | 46.000 | -5.503 | QP |
| 3 | * | 450.014 | 44.374 | 47.834 | -1.626 | 46.000 | -3.460 | QP |
| 4 | | 648.026 | 43.746 | 44.225 | -2.254 | 46.000 | -0.479 | QP |
| 5 | | 676.330 | 39.349 | 39.915 | -6.651 | 46.000 | -0.566 | QP |
| 6 | | 960.203 | 39.822 | 37.710 | -14.178 | 54.000 | 2.112 | QP |

| | |
|-------------------------------------|--------------------------|
| Engineer: Scott | |
| Site: AC2 | Time: 2015/12/24 - 12:15 |
| Limit: FCC_Part15.109_RE(3m)_ClassB | Margin: 0 |
| Probe: AC2_10M(30-1000M) | Polarity: Vertical |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1 | |

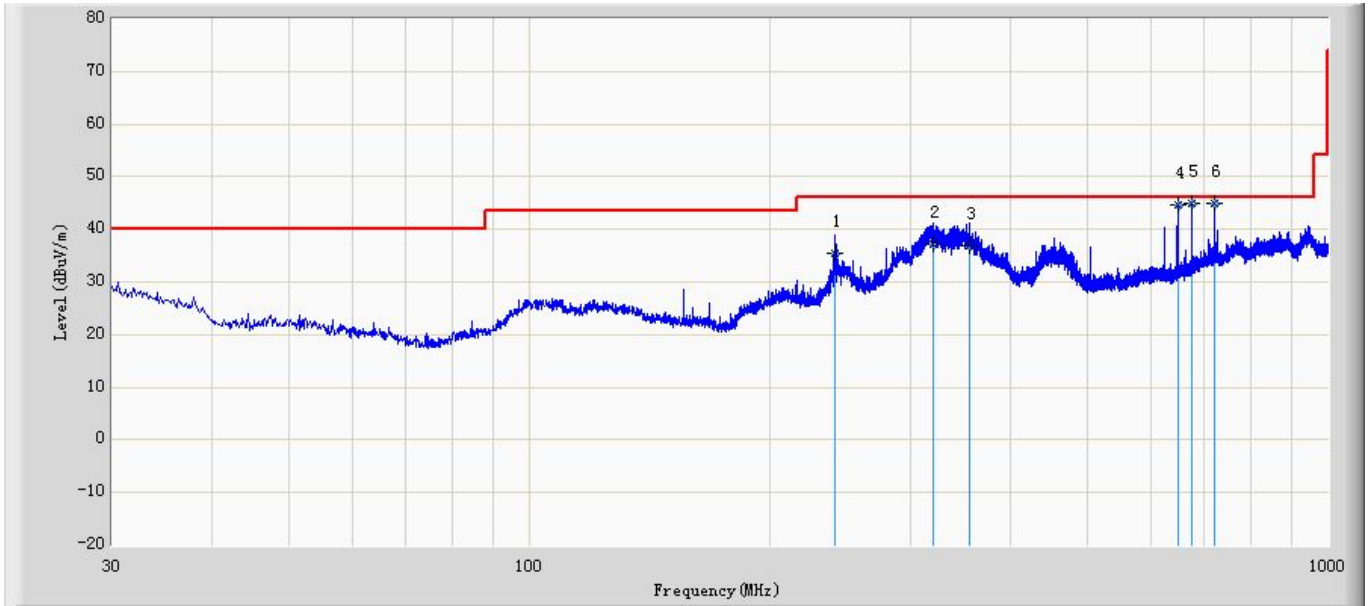

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | | 241.330 | 35.360 | 45.343 | -10.640 | 46.000 | -9.983 | QP |
| 2 | | 320.160 | 37.091 | 44.195 | -8.909 | 46.000 | -7.104 | QP |
| 3 | | 355.263 | 36.924 | 43.010 | -9.076 | 46.000 | -6.086 | QP |
| 4 | | 648.037 | 44.763 | 45.241 | -1.237 | 46.000 | -0.478 | QP |
| 5 | | 676.034 | 44.897 | 45.459 | -1.103 | 46.000 | -0.562 | QP |
| 6 | * | 720.035 | 44.993 | 45.338 | -1.007 | 46.000 | -0.345 | QP |

5. 20dB Bandwidth


5.1 Test Equipment

20dB Bandwidth / TR8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2 Test Setup

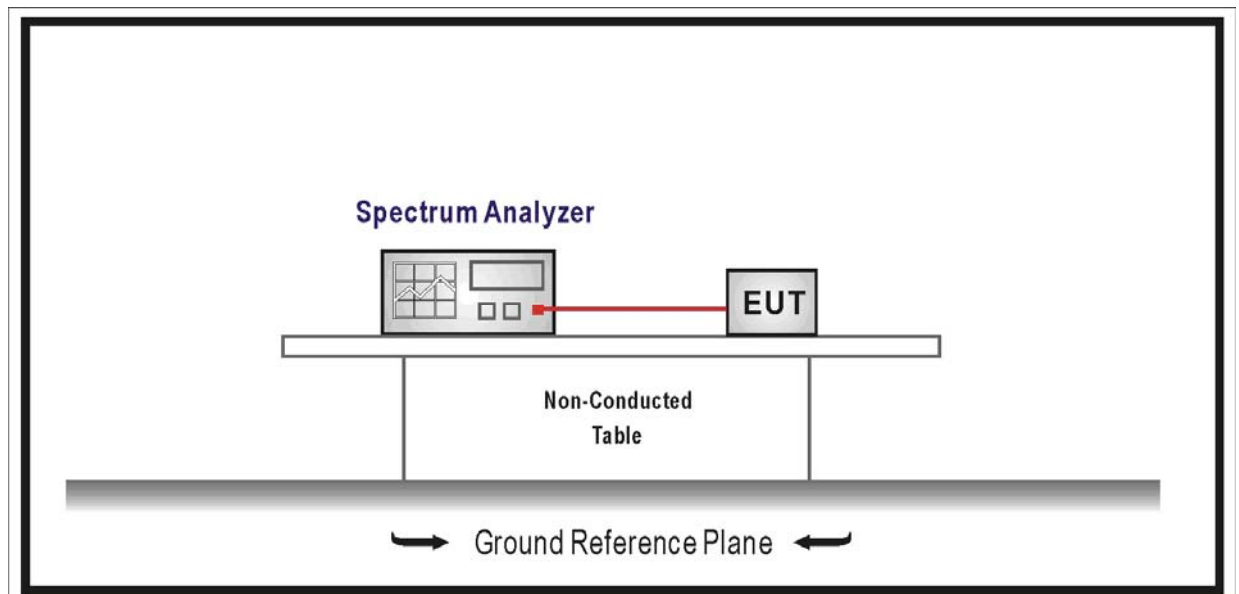

5.3 Limit

- For frequency hopping systems operating in 2400-2483.5 MHz band, no limitation.
- For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

The 20dB bandwidth must be contained within the frequency band designated in the rule section under which the equipment is operated.

5.4 Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW \cong 1% of the 20dB bandwidth

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

5.5 Uncertainty


The measurement uncertainty is defined as ± 1 kHz

5.6 Test Result


| | | |
|-----------|---|-----------------------|
| Product | : | Mi Drone |
| Test Item | : | Occupied Bandwidth |
| Test Site | : | TR-8 |
| Test Mode | : | Mode 1: Transmit Mode |

| Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | 99% Bandwidth (kHz) |
|-------------|-----------------|----------------------|---------------------|
| 01 | 2426.2 | 164.5 | 191.34 |
| 15 | 2443 | 164.7 | 207.46 |
| 30 | 2461 | 165.0 | 231.19 |


Channel 01 (2426.2MHz)

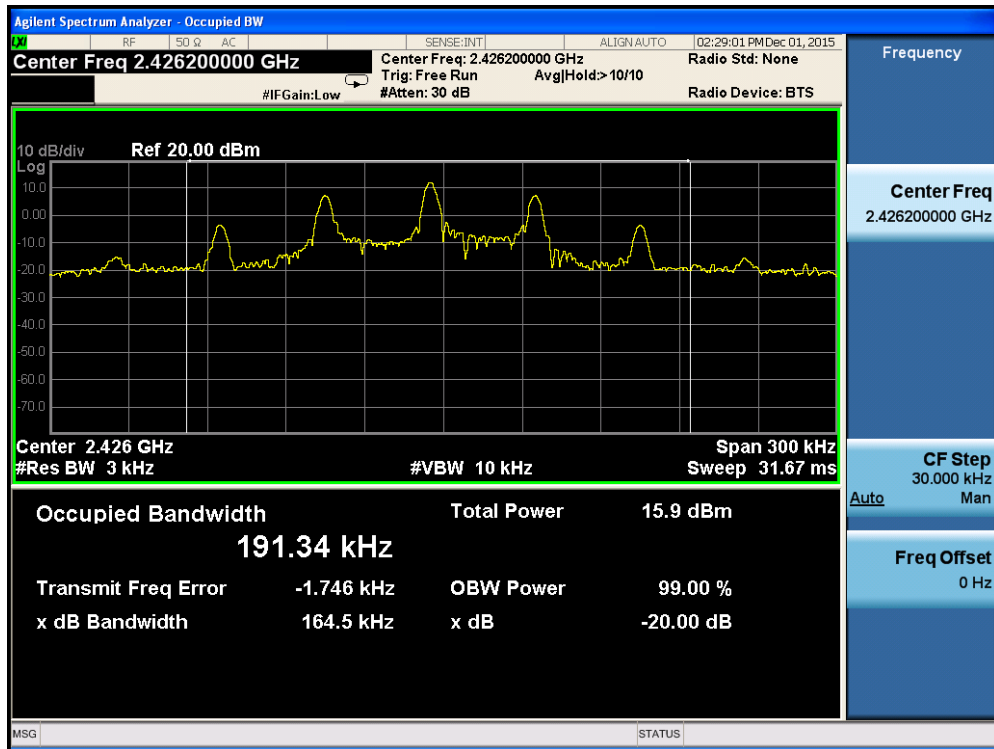

Channel 15 (2443MHz)

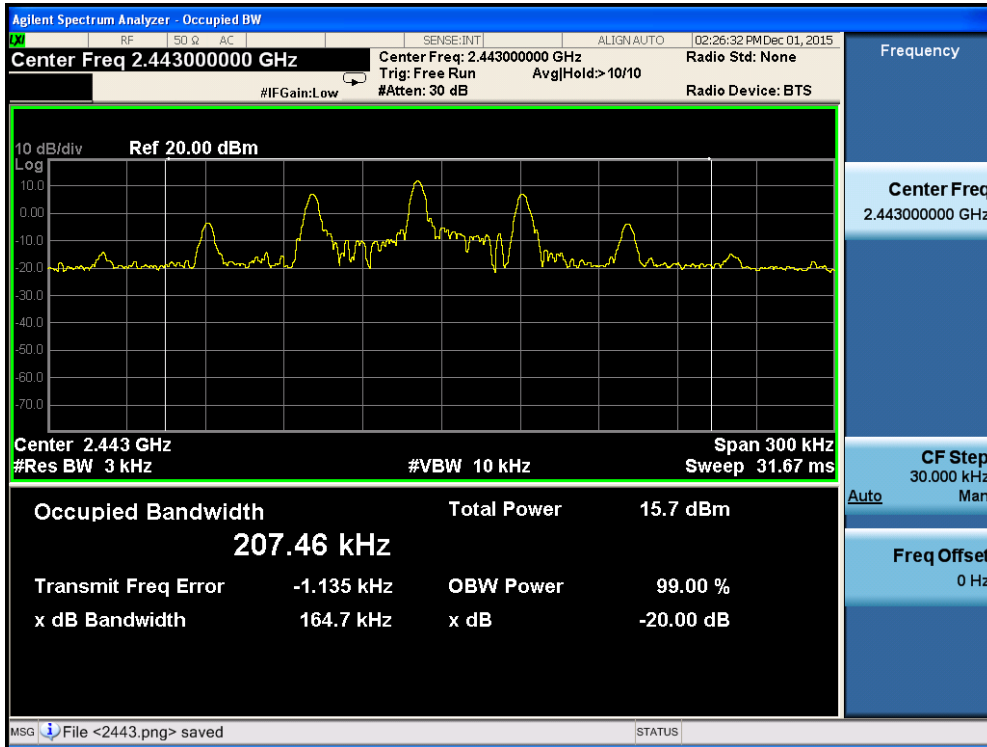

Channel 30 (2461MHz)

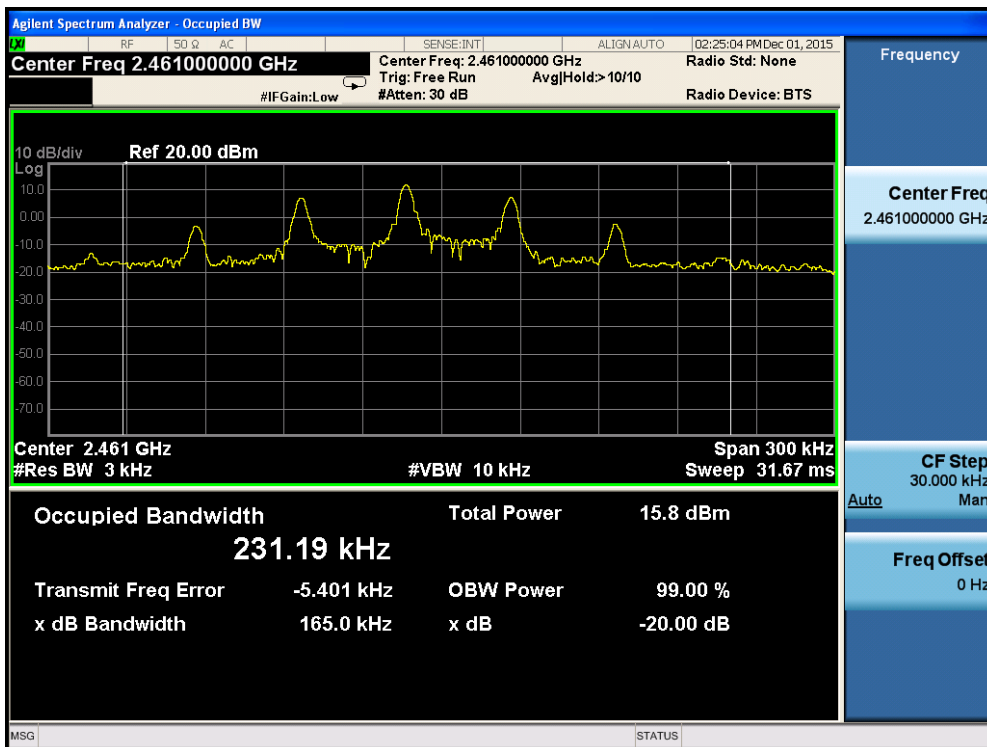

Note: For this test item, the modulation of each mode we have evaluated each antennas, presented data in the report is the worst case.

6. Carrier Frequency Separation


6.1. Test Equipment

Carrier Frequency Separation / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

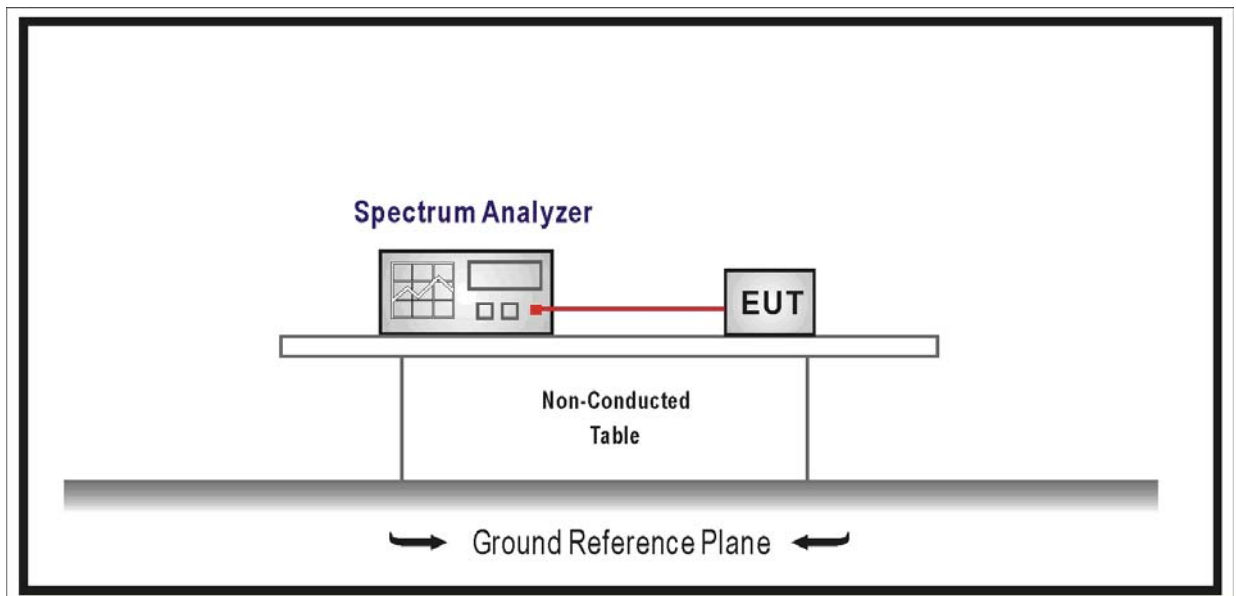

6.3. Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping

channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

6.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

6.6. Test Result


| | | |
|-----------|---|------------------------------|
| Product | : | Mi Drone |
| Test Item | : | Carrier Frequency Separation |
| Test Site | : | TR-8 |
| Test Mode | : | Mode 1: Transmit Mode |

| Channel No. | Frequency (MHz) | Carrier Frequency Separation (kHz) | Limit (kHz) | Result |
|-------------|-----------------|------------------------------------|-------------------------------|--------|
| 01 | 2426.2 | 1200 | >25 kHz or 2/3 of 20 dB BW | Pass |
| 15 | 2443 | 1200 | >25 kHz or 2/3 of 20 dB BW | Pass |
| 30 | 2461 | 1200 | >25 kHz or 2/3 of 20 dB BW | Pass |


Channel 01 (2426.2MHz)

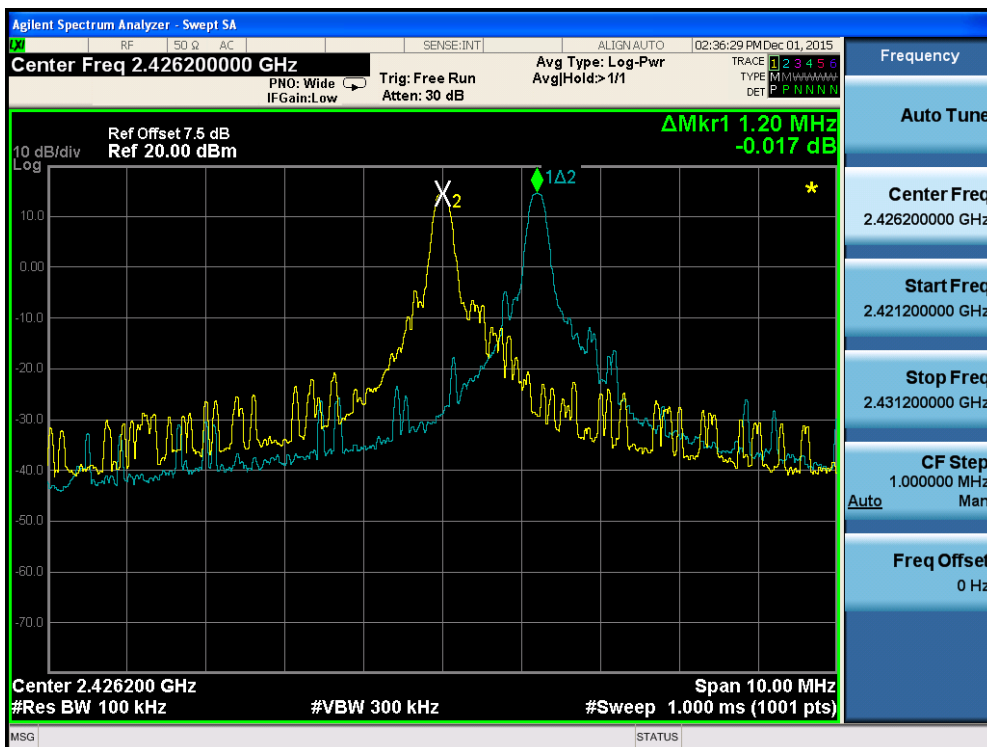

Channel 15 (2443MHz)

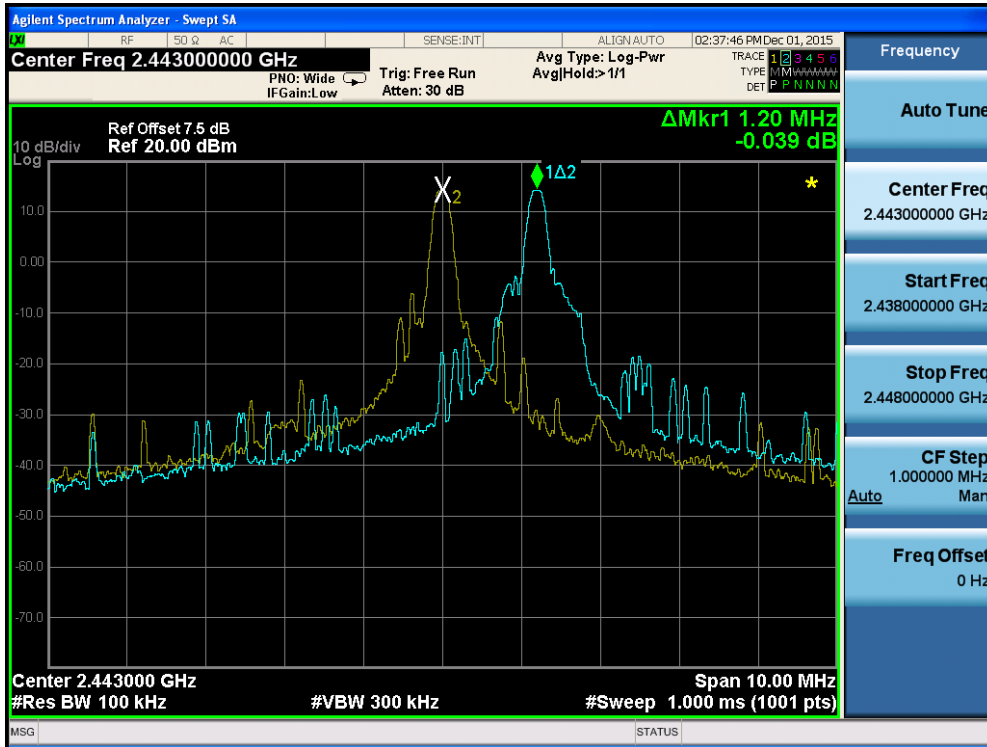

Channel 30 (2461MHz)

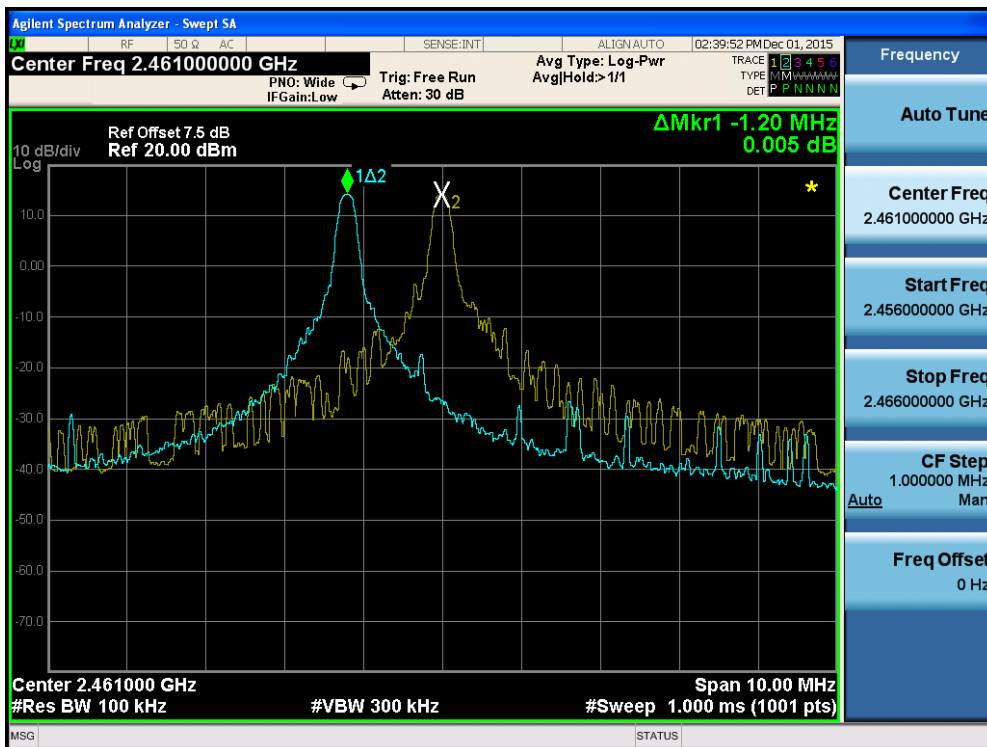

Note: For this test item, the modulation of each mode we have evaluated each antennas, presented data in the report is the worst case.

7. Number of Hopping Frequencies


7.1. Test Equipment

Number of Hopping Frequencies / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

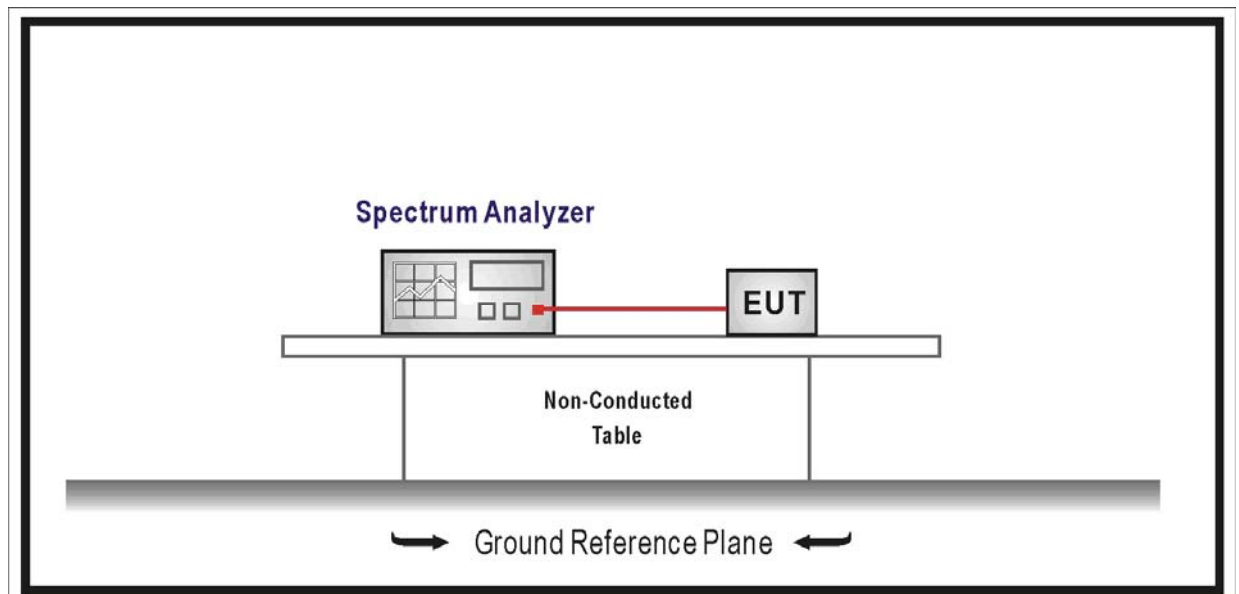

7.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
- For frequency hopping systems operating in 902-928 MHz band shall use at least 50 hopping frequencies.
- For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

7.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \cong 1% of the span

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to bread the span up to sections, in order to clearly show all of the hopping frequencies.

7.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result

| | | |
|-----------|---|-------------------------------|
| Product | : | Mi Drone |
| Test Item | : | Number of Hopping Frequencies |
| Test Site | : | TR-8 |
| Test Mode | : | Mode 1: Transmit Mode |

| Frequency Band (MHz) | Number of Hopping Frequencies | Limit | Result |
|----------------------|-------------------------------|-------|--------|
| 2426.2 - 2461 | 30 | >15 | Pass |

2400 - 2480 MHz

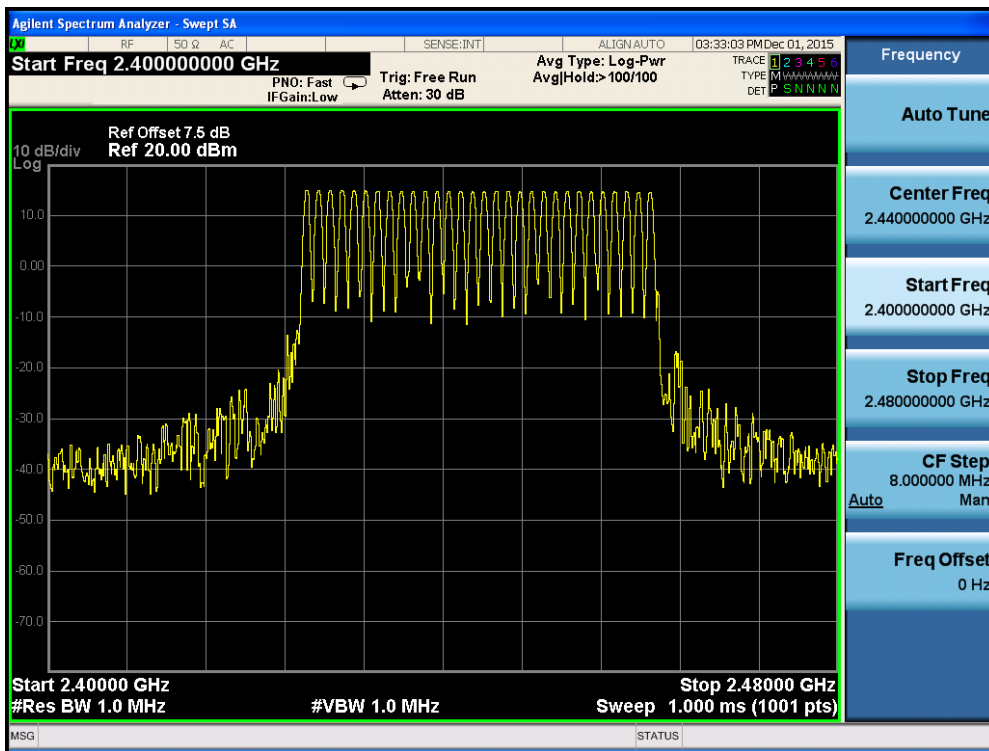

Note: For this test item, the modulation of each mode we have evaluated each antennas, presented data in the report is the worst case.

8. Time of Occupancy (Dwell Time)


8.1. Test Equipment

Time of Occupancy (Dwell Time) / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

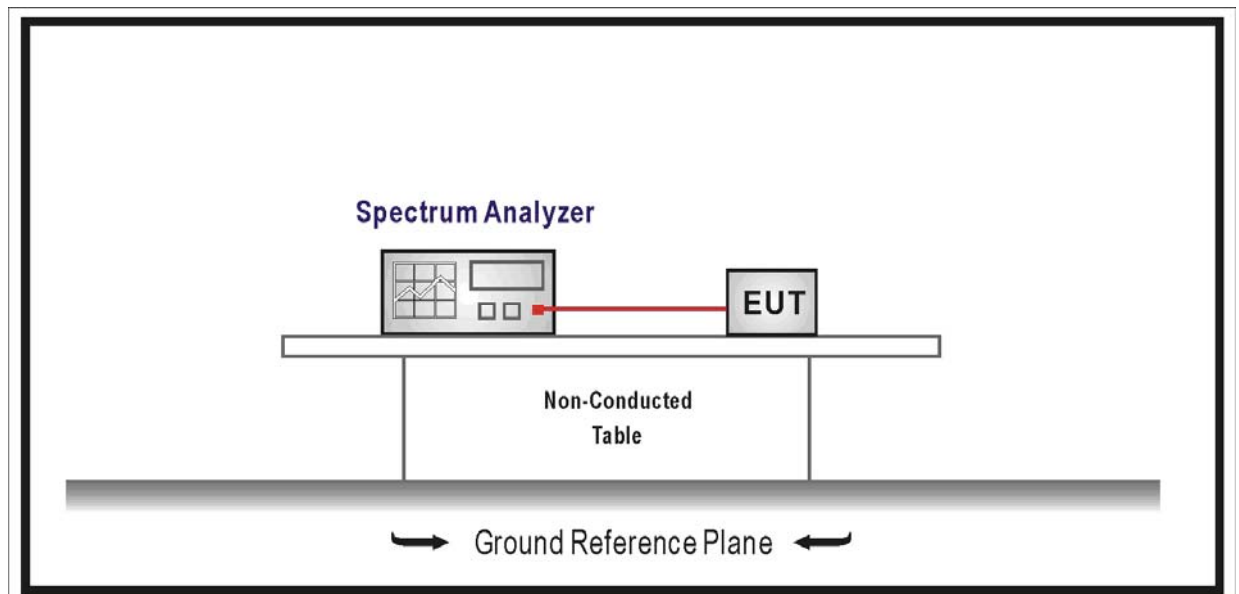

8.3. Limit

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75

hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1MHz

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

8.5. Uncertainty

The measurement uncertainty is defined as ± 0.1 us

8.6. Test Result


| | | |
|-----------|---|--------------------------------|
| Product | : | Mi Drone |
| Test Item | : | Time of Occupancy (Dwell Time) |
| Test Site | : | TR-8 |
| Test Mode | : | Normal Mode(Hopping) |


| Channel No. | Frequency (MHz) | Time of Occupancy (ms) | Limit (ms) | Result |
|-------------|-----------------|------------------------|------------|--------|
| 15 | 2443 | 304.336 | < 400 | Pass |

Test Time Period: $0.4 \times 30 = 12\text{sec}$.

- 2443MHz, The Maximum Occupancy Time Within 12sec: $3.308\text{ms} \times 92 = 304.336\text{msec}$

Channel 15 (2443MHz)

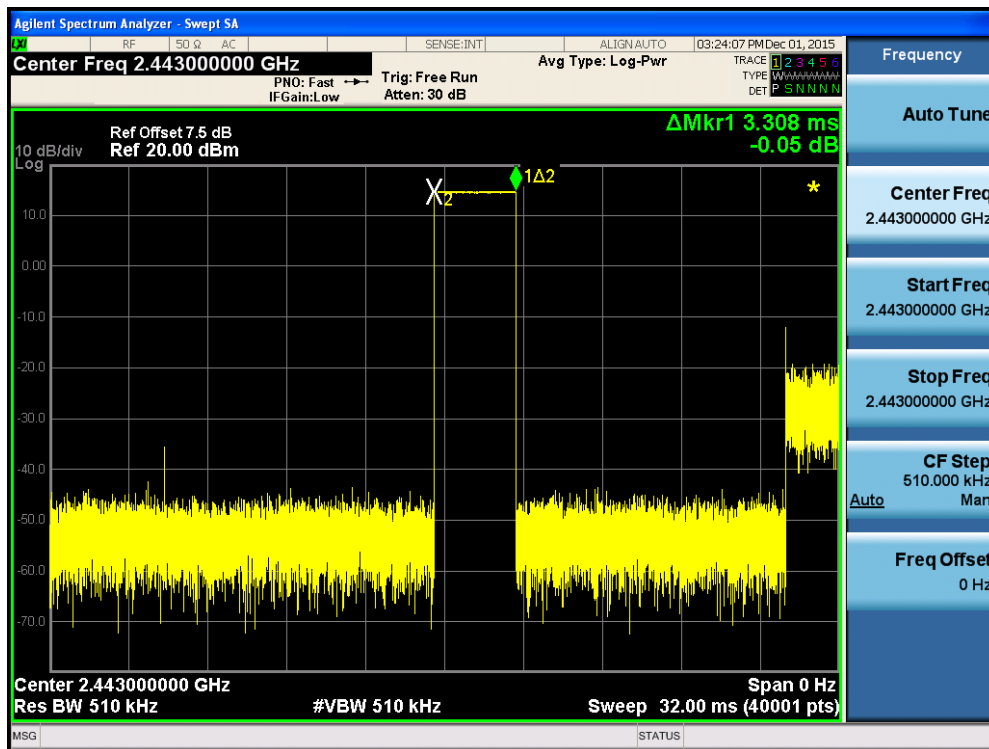

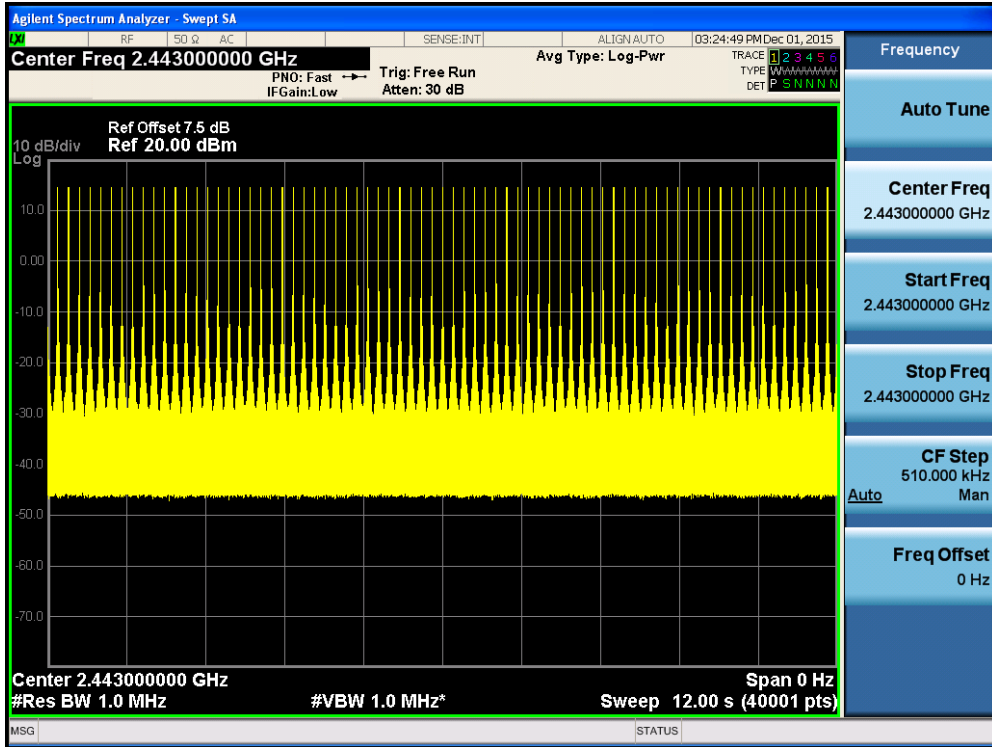

Note: For this test item, the modulation of each mode we have evaluated each antennas, presented data in the report is the worst case.

9. Peak Output Power


9.1. Test Equipment

Peak Output Power / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

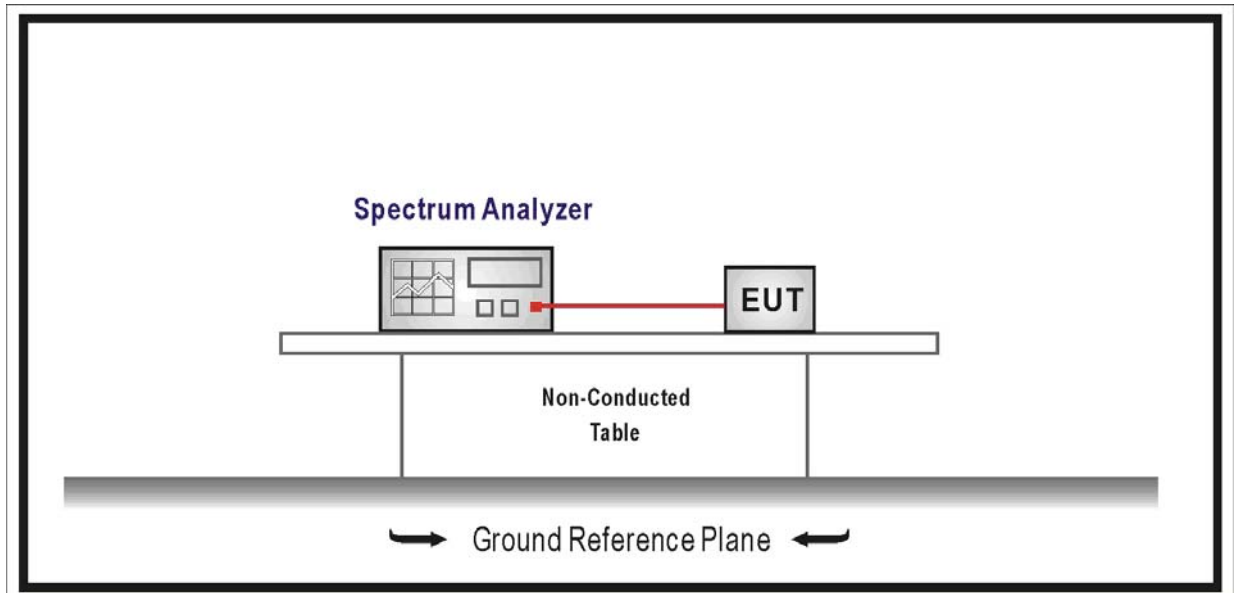

9.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Note: the conducted output power limit specified above is based on the use the antennas with

directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured.

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss).

9.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

9.6. Test Result

| | | |
|-----------|---|-----------------------|
| Product | : | Mi Drone |
| Test Item | : | Power Output |
| Test Site | : | TR-8 |
| Test Mode | : | Mode 1: Transmit Mode |

| Channel No. | Frequency (MHz) | Measurement Power Output (dBm) | | Limit (dBm) | Result |
|-------------|-----------------|--------------------------------|-----------|-------------|--------|
| | | Antenna 1 | Antenna 2 | | |
| 01 | 2426.2 | 14.01 | 13.97 | 21.00 | Pass |
| 15 | 2443 | 13.82 | 13.68 | 21.00 | Pass |
| 30 | 2461 | 13.70 | 13.71 | 21.00 | Pass |

10. Band-edge Compliance of RF Conducted Emissions


10.1. Test Equipment

Band-edge Compliance of RF Conducted Emissions / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

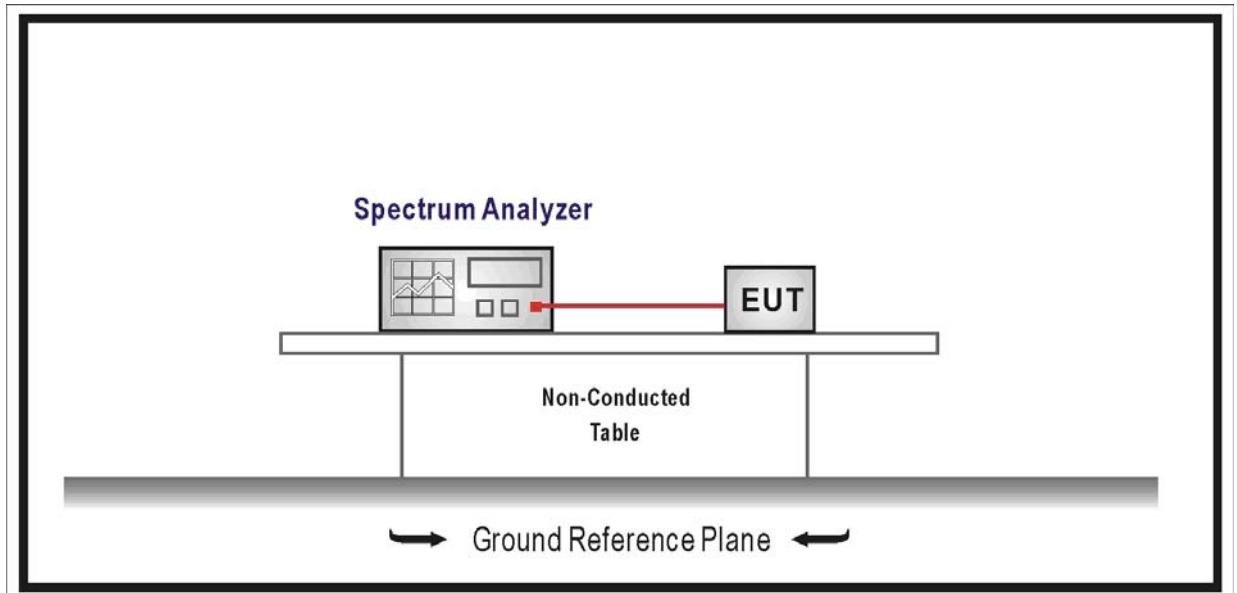

10.3. Limit

- Intentional radiators operating under the alternative provisions to the general emission limits as contained in 15.217 through 15.257 and in Subpart E of FCC part 15, must be designed to ensure that 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz

bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) of FCC part 15 is not required.

10.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.

RBW \cong 1% of the span

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge.

Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.


10.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB


10.6. Test Result

| | | |
|-----------|---|--|
| Product | : | Mi Drone |
| Test Item | : | Band-edge Compliance of RF Conducted Emissions |
| Test Site | : | TR-8 |
| Test Mode | : | Mode 1: Transmit Mode |

Channel 01 (2426.2MHz)

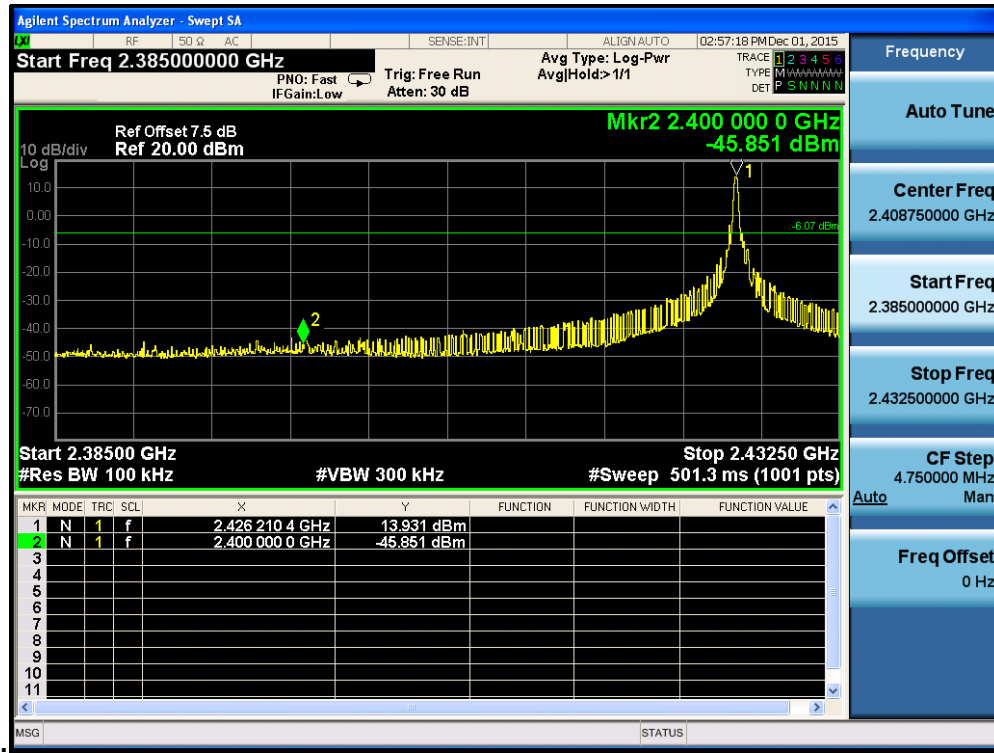

Channel 30 (2461MHz)

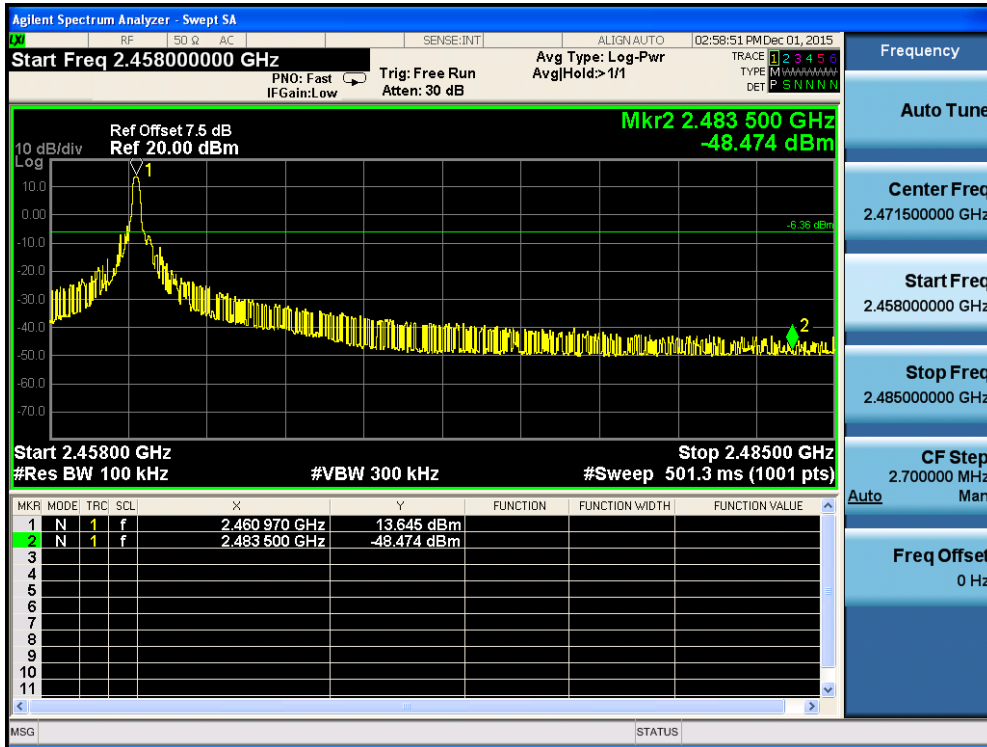

Note: For this test item, the modulation of each mode we have evaluated each antennas, presented data in the report is the worst case.

11. Spurious RF Conducted Emissions


11.1. Test Equipment

Spurious RF Conducted Emissions / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | TR8-TH | 2016.04.09 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

11.2. Test Setup

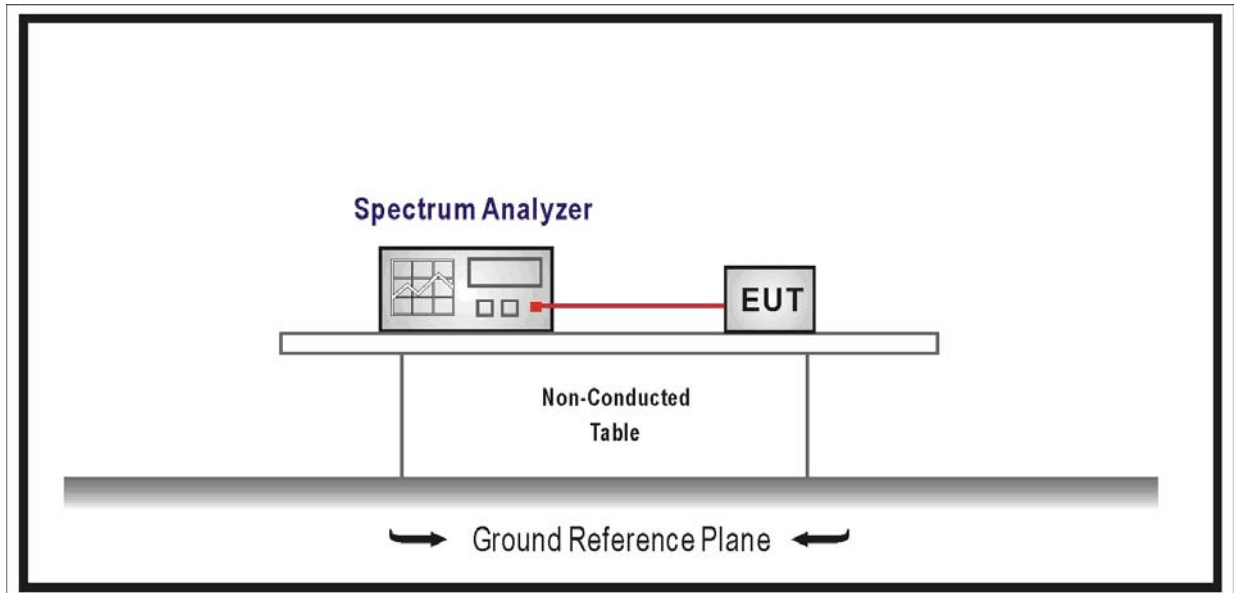

11.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in

Section 15.209(a) of FCC part 15 is not required.

11.4. Test Procedure

According to ANSI C63.10: 2013.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

The level displayed must comply with the limit specified in this section.


11.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB


11.6. Test Result

| | | |
|-----------|---|---------------------------------|
| Product | : | Mi Drone |
| Test Item | : | Spurious RF Conducted Emissions |
| Test Site | : | TR-8 |
| Test Mode | : | Mode 1: Transmit Mode |


Channel 01 (2426.2MHz)

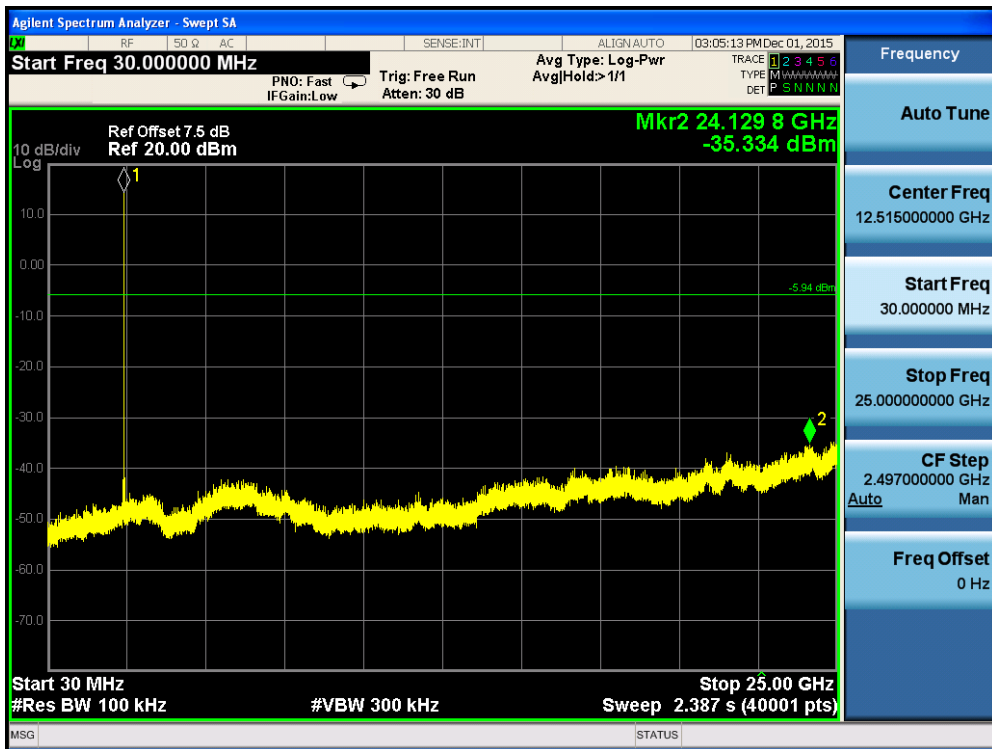

Channel 15 (2443MHz)

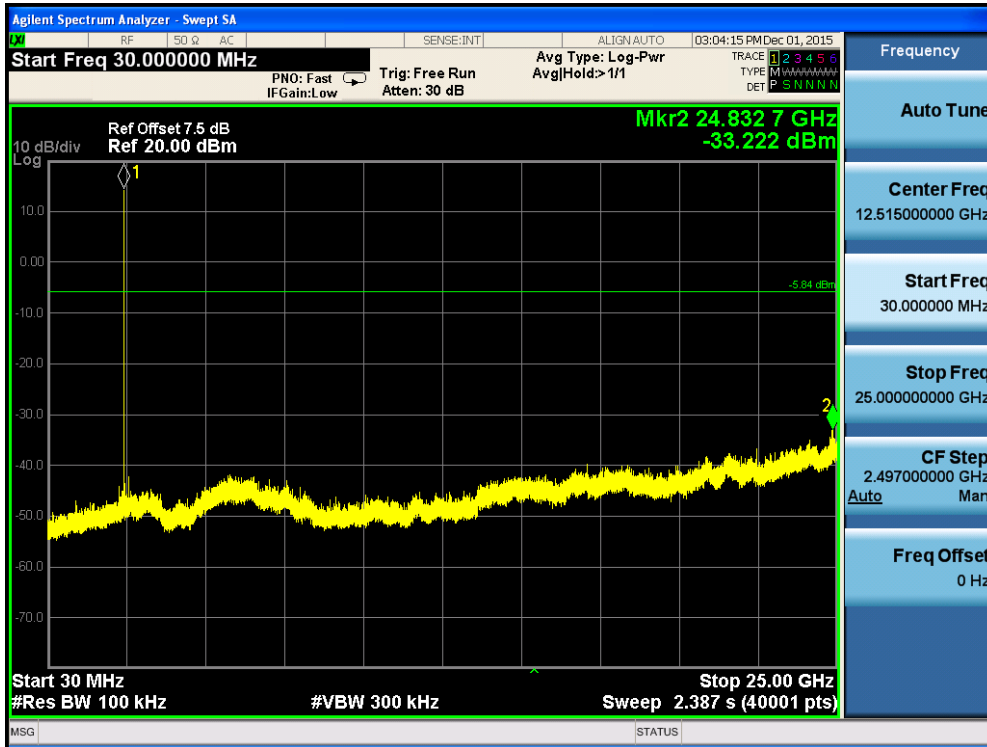

Channel 30 (2461MHz)

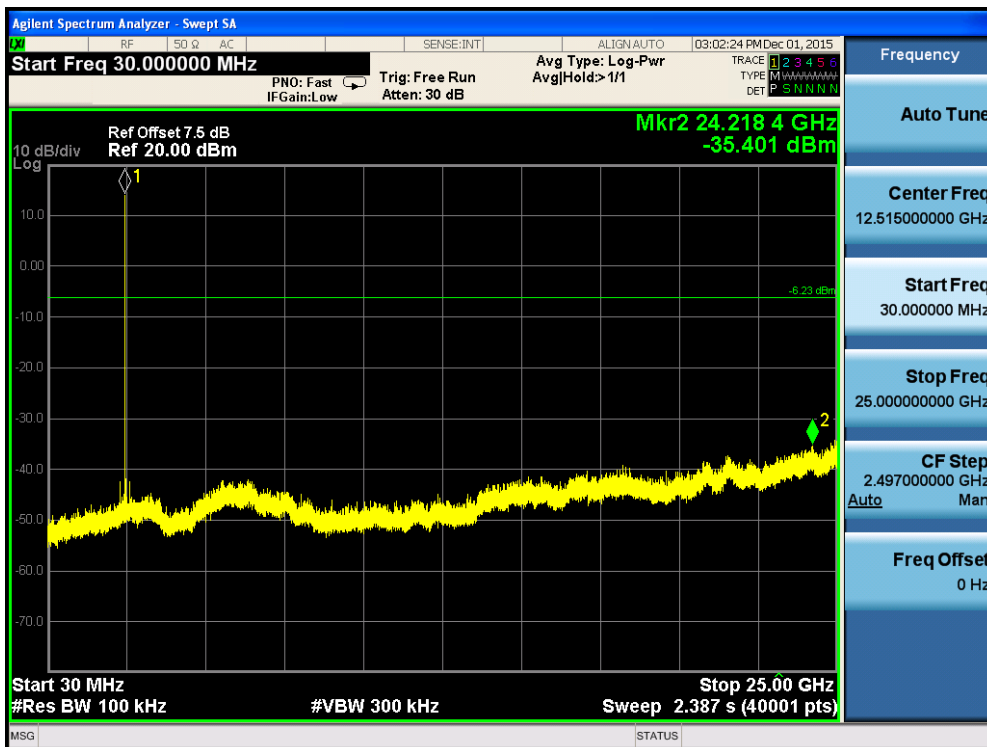

Note: For this test item, the modulation of each mode we have evaluated each antennas, presented data in the report is the worst case.


12. Radiated Emission Band Edge

12.1. Test Equipment

Radiated Emission Band Edge / AC-5

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|-------------------------------|--------------|--------------|-------------|---------------|
| Spectrum Analyzer | Agilent | N9010A | MY48030494 | 2016.03.10 |
| Preamplifier | Miteq | NSP1800-25 | 1364185 | 2016.05.03 |
| Preamplifier | QuieTek | AP-040G | CHM-0906001 | 2016.05.03 |
| Bilog Antenna | Teseq GmbH | CBL6112D | 27612 | 2016.10.15 |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9120D | 733 | 2016.02.26 |
| DRG Horn | ETS-Lindgren | 3117 | 00167055 | 2016.07.16 |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9170 | 294 | 2016.03.01 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC5-C1 | 2016.03.01 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC5-C2 | 2016.03.01 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 102 | AC5-C3 | 2016.08.07 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | AC5-TH | 2017.01.04 |

12.2. Test Setup

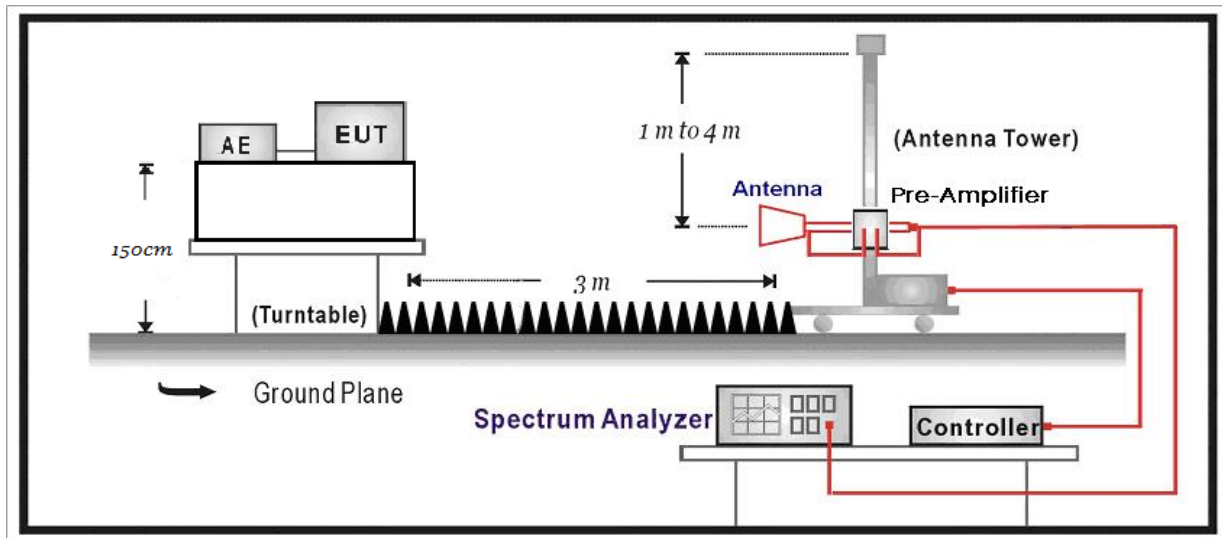

12.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) of FCC part 15.

12.4. Test Procedure

According to ANSI C63.10: 2013& ANSI C63.4: 2014

This test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205 of FCC part 15. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being

corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b) of FCC part 15.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209 of FCC Part 15. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit of FCC part 15.

If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method may be employed.

12.5. Uncertainty

The measurement uncertainty above 1GHz is defined as $\pm 3.9 \text{ dB}$
below 1GHz is defined as $\pm 3.8 \text{ dB}$

12.6. Test Result


All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;


Average = Peak Measure Level+ Duty Factor

Duty Factor= $20 \cdot \text{LOG}(\text{Pulse Number} \cdot \text{On Time}/100) = -27.51\text{dB}$ in worst condition in normal use.

Pulse Number

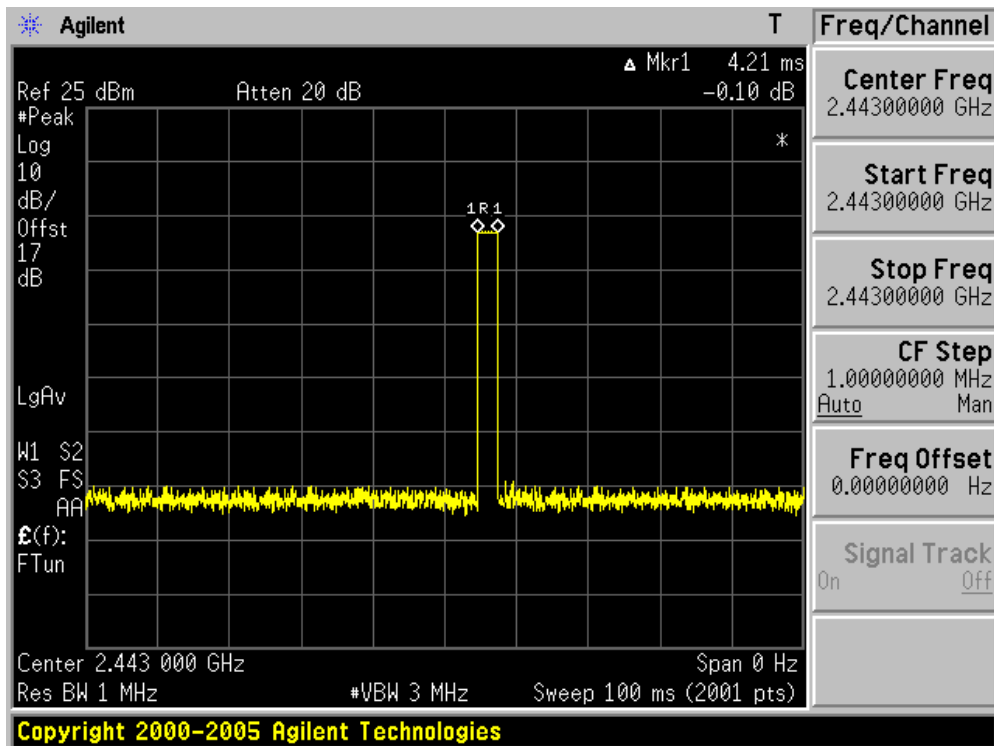


| | |
|--|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 17:40 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnmit at channel 2426.2Mhz Ant 1 | |

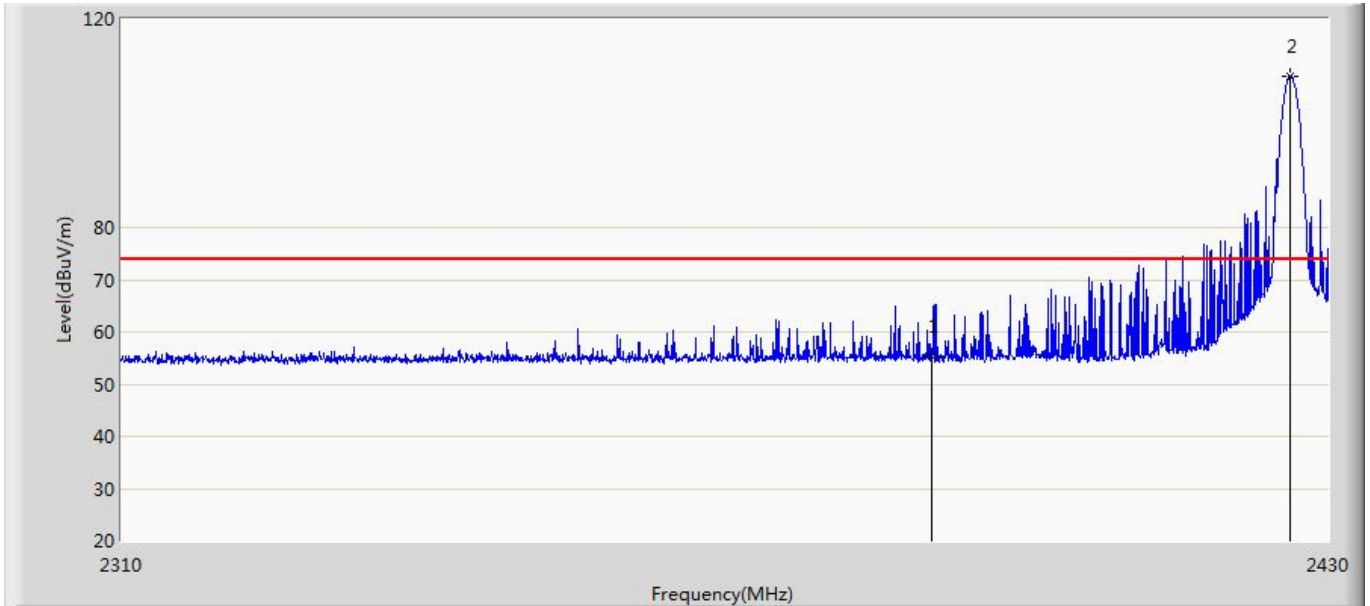

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | | 2390.000 | 55.282 | 17.927 | -18.718 | 74.000 | 37.355 | PK |
| 2 | * | 2426.100 | 108.981 | 71.552 | N/A | N/A | 37.430 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | | 2390.000 | 55.282 | 27.772 | -26.228 | 54.000 | -27.51 | AV |
| 3 | * | 2426.100 | 108.981 | 81.471 | N/A | N/A | -27.51 | AV |


| | |
|--|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 17:43 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnmit at channel 2426.2Mhz Ant 1 | |

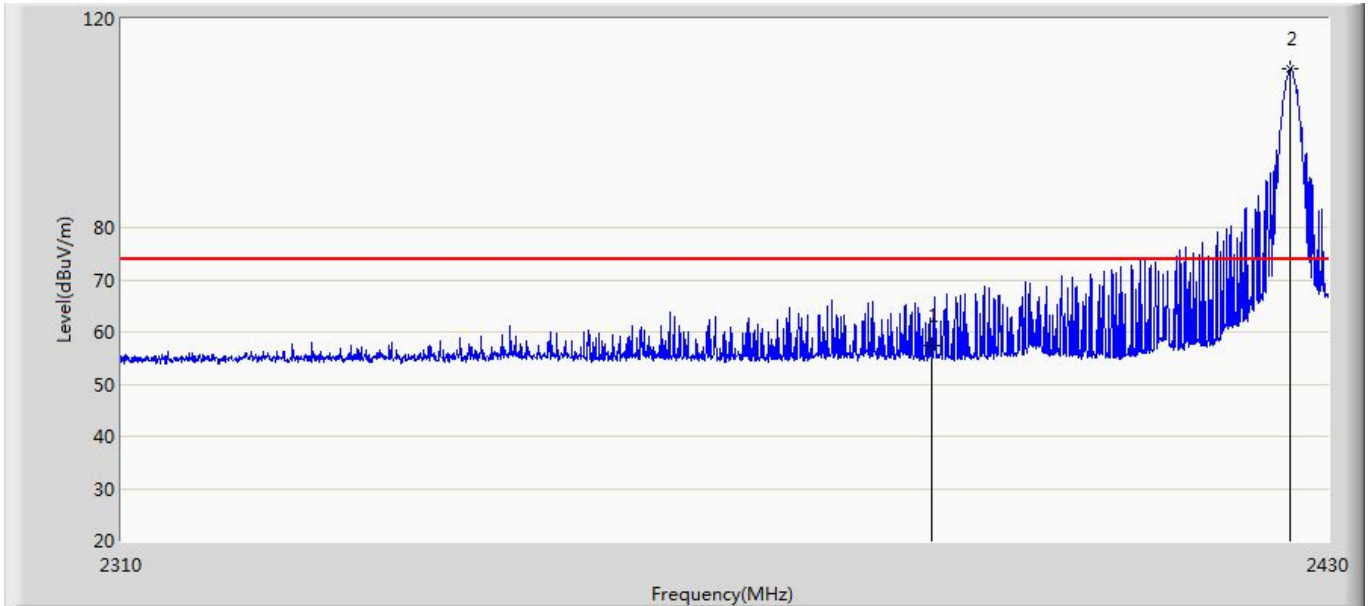

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | | 2390.000 | 57.381 | 20.026 | -16.619 | 74.000 | 37.355 | PK |
| 2 | * | 2426.100 | 110.462 | 73.033 | N/A | N/A | 37.430 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | | 2390.000 | 57.381 | 29.871 | -24.129 | 54.000 | -27.51 | AV |
| 3 | * | 2426.100 | 110.462 | 82.952 | N/A | N/A | -27.51 | AV |


| | |
|--|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 17:47 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnmit at channel 2426.2Mhz Ant 2 | |

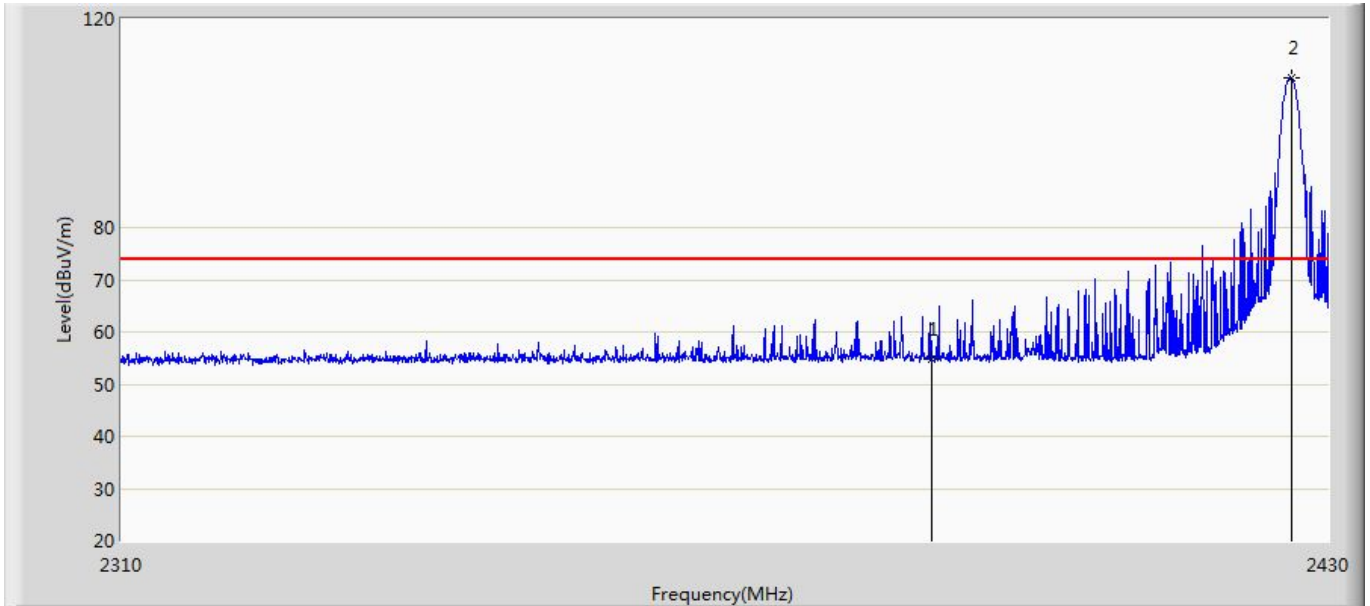

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | | 2390.000 | 54.642 | 17.287 | -19.358 | 74.000 | 37.355 | PK |
| 2 | * | 2426.280 | 108.785 | 71.355 | N/A | N/A | 37.431 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | | 2390.000 | 54.642 | 27.132 | -26.868 | 54.000 | -27.51 | AV |
| 3 | * | 2426.280 | 108.785 | 81.275 | N/A | N/A | -27.51 | AV |


| | |
|--|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 17:51 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnmit at channel 2426.2Mhz Ant 2 | |

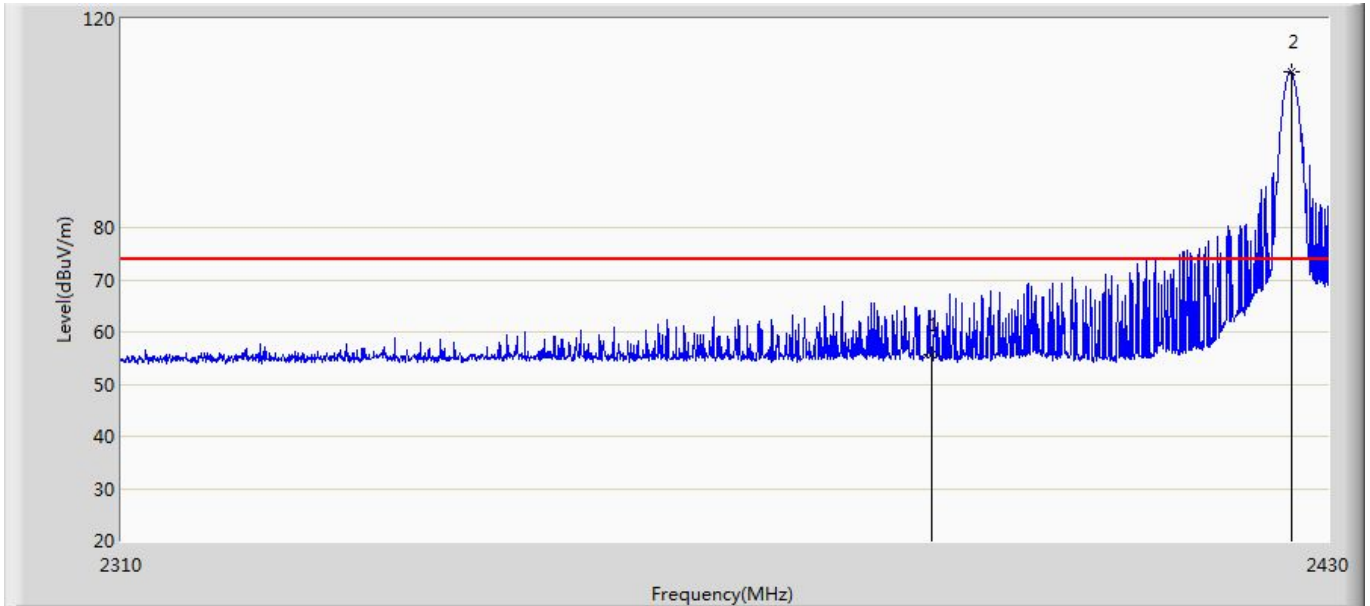

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | | 2390.000 | 55.679 | 18.324 | -18.321 | 74.000 | 37.355 | PK |
| 2 | * | 2426.280 | 109.836 | 72.406 | N/A | N/A | 37.431 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | | 2390.000 | 55.679 | 28.169 | -25.831 | 54.000 | -27.51 | AV |
| 2 | * | 2426.280 | 109.836 | 82.326 | N/A | N/A | -27.51 | AV |


| | |
|--|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 17:55 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnmit at channel 2461Mhz Ant 1 | |

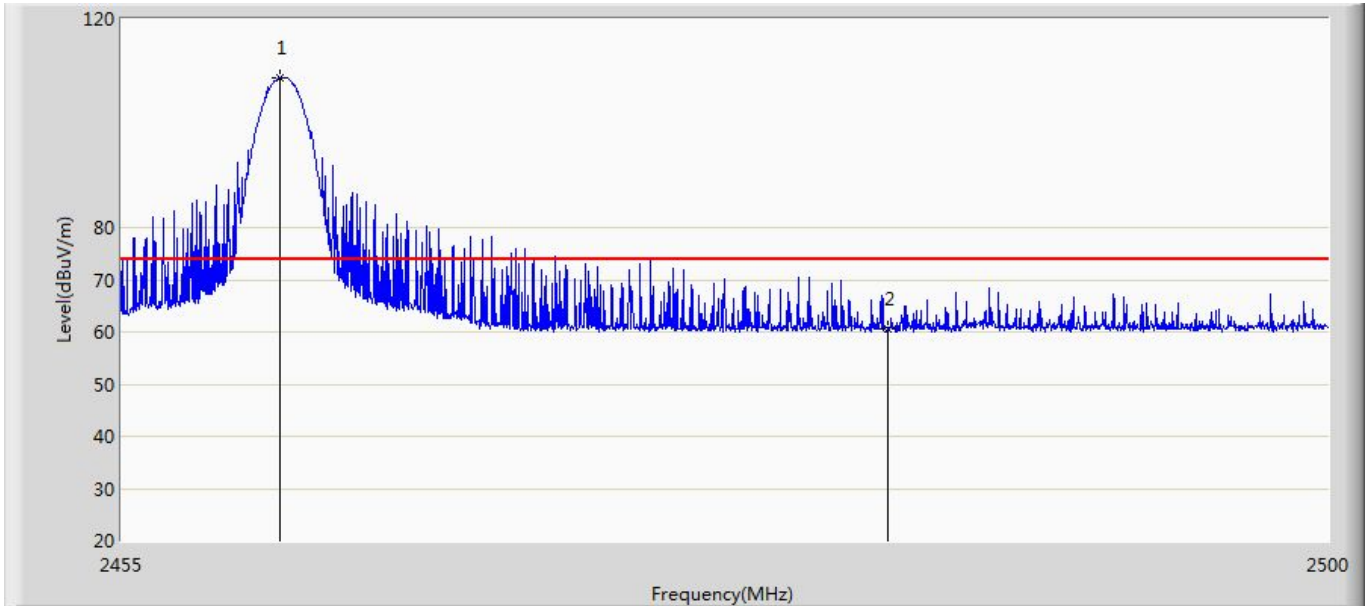

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | * | 2460.895 | 108.682 | 71.261 | N/A | N/A | 37.422 | PK |
| 2 | | 2483.500 | 60.629 | 23.118 | -13.371 | 74.000 | 37.511 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | * | 2460.895 | 108.682 | 81.172 | N/A | N/A | -27.51 | AV |
| 2 | | 2483.500 | 60.629 | 33.119 | -20.881 | 54.000 | -27.51 | AV |


| | |
|---|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 17:58 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnit at channel 2461Mhz Ant 1 | |

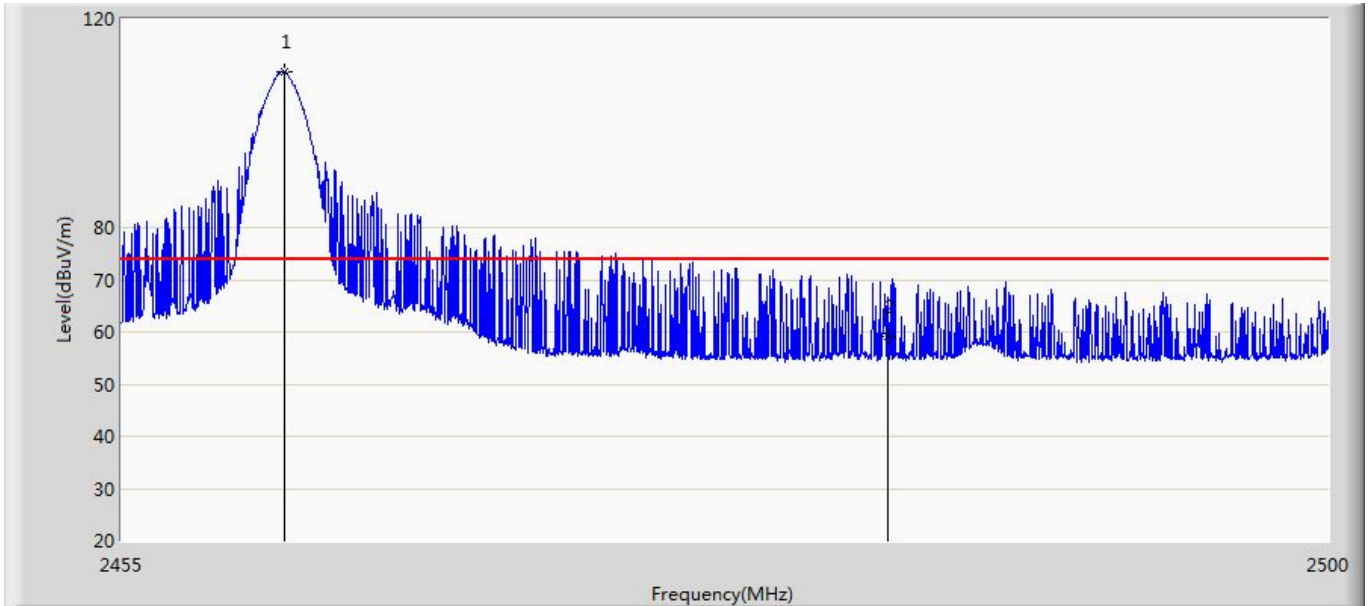

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | * | 2461.052 | 109.764 | 72.343 | N/A | N/A | 37.421 | PK |
| 2 | | 2483.500 | 59.249 | 21.738 | -14.751 | 74.000 | 37.511 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | * | 2461.052 | 109.764 | 82.254 | N/A | N/A | -27.51 | AV |
| 2 | | 2483.500 | 59.249 | 31.739 | -22.261 | 54.000 | -27.51 | AV |


| | |
|---|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 18:03 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnit at channel 2461Mhz Ant 2 | |

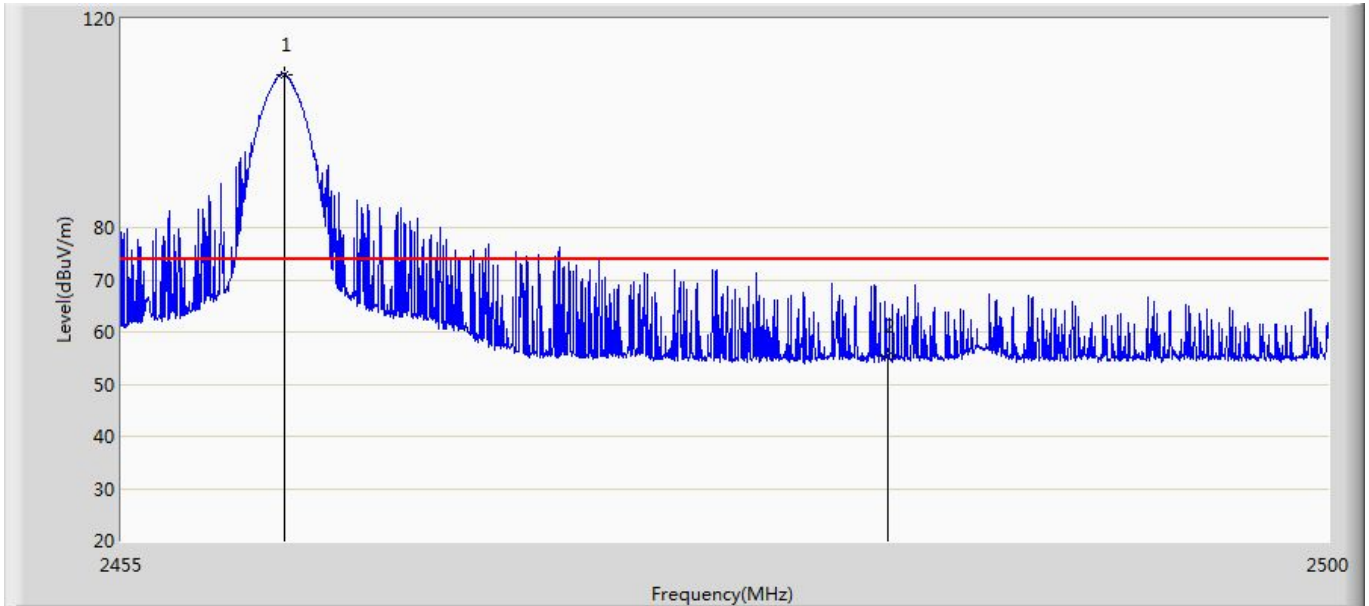

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | * | 2461.052 | 109.413 | 71.992 | N/A | N/A | 37.421 | PK |
| 2 | | 2483.500 | 55.439 | 17.928 | -18.561 | 74.000 | 37.511 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | * | 2461.052 | 109.413 | 81.903 | N/A | N/A | -27.51 | AV |
| 2 | | 2483.500 | 55.439 | 27.929 | -26.071 | 54.000 | -27.51 | AV |

| | |
|---|--------------------------|
| Engineer: Damon | |
| Site: AC5 | Time: 2015/12/17 - 18:06 |
| Limit: FCC_Part15.209_RE(3m) | Margin: 0 |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical |
| EUT: Mi Drone | Power: By Battery |
| Note: Mode 1:Trasnit at channel 2461Mhz Ant 2 | |

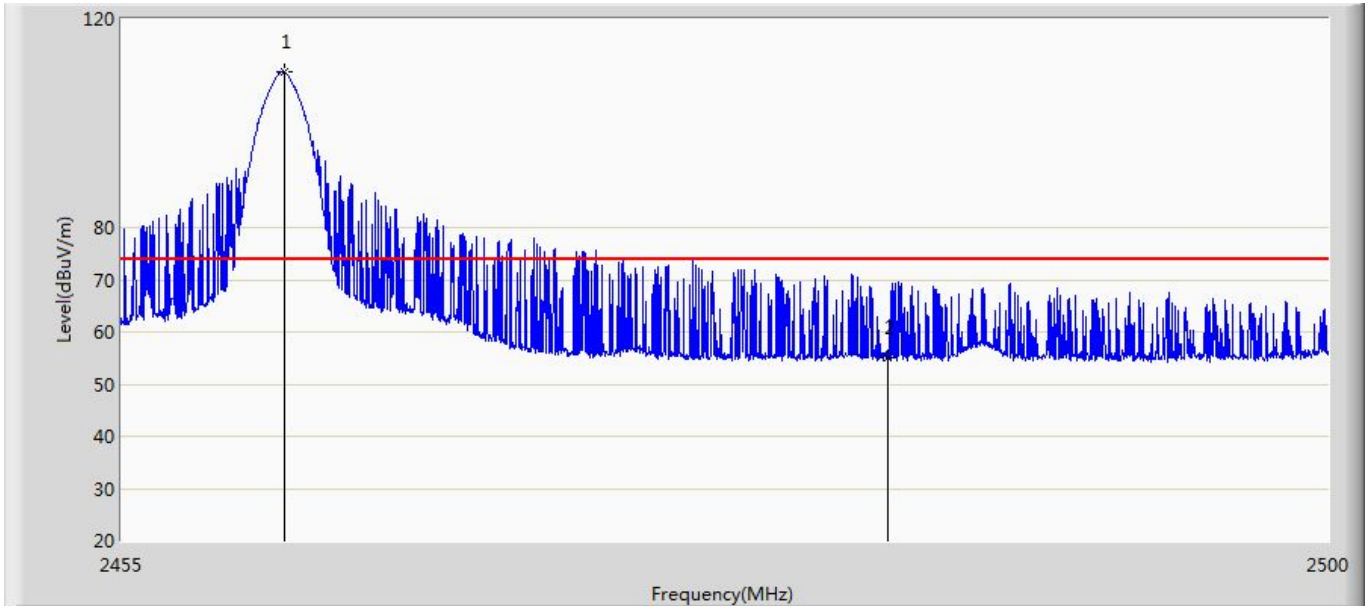

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1 | * | 2461.052 | 109.755 | 72.334 | N/A | N/A | 37.421 | PK |
| 2 | | 2483.500 | 55.072 | 17.561 | -18.928 | 74.000 | 37.511 | PK |

| No | Mark | Frequency (MHz) | Peak Level (dBuV/m) | AV Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Duty Factor (dB) | Type |
|----|------|-----------------|---------------------|-----------------|-----------------|----------------|------------------|------|
| 1 | * | 2461.052 | 109.755 | 82.245 | N/A | N/A | -27.51 | AV |
| 2 | | 2483.500 | 55.072 | 27.562 | -26.438 | 54.000 | -27.51 | AV |

————— The End —————