

RF Exposure Evaluation

Product:	Remote Control
Model no.:	RMT-03
FCC ID:	2AG62RMT-03
Rating:	3.0VDC (2 x 1.5VDC AAA batteries)
RF Transmission Frequency:	2402MHz
Modulation:	GFSK
Antenna Type:	PCB Antenna
Max Antenna Gain:	0 dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Remote Control supports 2.402GHz wireless functions
Reference Report	68.910.22.0034.01

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to 447498 D04 Interim General RF Exposure Guidance v01 and §1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.


This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption.

The max output power of the product is 0.531 mW, which is less than 1 mW.

Result: Compliance

TUV SUD China, Shenzhen Branch

Reviewed by:

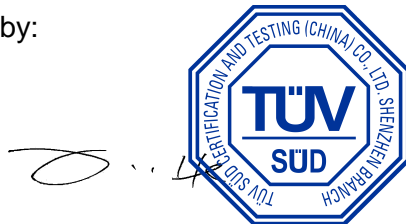

Jessie He/ Project Manager
Date: 2022-06-06

Prepared By:



Myron Yu/Project Engineer
Date: 2022-06-06