



DATE: 9 November 2020

**I.T.L. (PRODUCT TESTING) LTD.
FCC/IC Radio Test Report**

for

Pointer Telocation

Equipment under test:

Asset Tracking Device

LV300.PS*

LV300*

CelloTrack XT LTE C1*

*See customer table on page 8

Tested by: _____


M. Zohar

Approved by: _____


D. Shidlow

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Pointer Telocation

Asset Tracking Device

LV300.PS

FCC ID: 2AG69CTPW

IC: 9975A-CTPW

This report concerns:	Original Grant:	
	Class I Change:	
	Class II Change:	X
Equipment type:	FCC: (DTS) Digital Transmission System	
	IC: Spread Spectrum Digital Device (2400-2483.5)	
Limits used:	47CFR15 Section 15.247	
	RSS 247, Issue 2, February 2017, Section 5	
	RSS-Gen, Issue 5, April 2018	

Measurement procedure used is KDB 558074 D01 v03r05 and ANSI C63.10:2013 and RSS Gen, Issue 5

Application for Certification
prepared by:
R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7120101
Israel
E-mail rpinchuck@itlglobal.org

Applicant for this device:
(different from "prepared by")
Igor Rogov
Pointer Telocation
14 Hamelacha, PO Box 11473
Rosh Haain
Israel
Tel: +972 73 2622320
E-mail: Igorr@pointer.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	9
3.	CONDUCTED & RADIATED MEASUREMENT TEST SET-UP PHOTOS	10
4.	MAXIMUM CONDUCTED OUTPUT POWER	13
4.1	Test Specification	13
4.2	Test Procedure	13
4.3	Test Limit	13
4.4	Test Results	13
4.5	Test Equipment Used; Maximum Peak Power Output	15
5.	OCCUPIED BANDWIDTH	16
5.1	Test Specification	16
5.2	Test Procedure	16
5.3	Test Limit	16
5.4	Test Results	16
5.5	Test Equipment Used; Occupied Bandwidth	18
6.	SPURIOUS RADIATED EMISSIONS	19
6.1	Test Specification	19
6.3	FCC Test Limit	20
6.4	IC Test Limit	20
6.5	Test Results	21
6.6	Test Instrumentation Used; Emissions in Restricted Frequency Bands	23
7.	ANTENNA GAIN/INFORMATION	24
8.	R.F EXPOSURE/SAFETY	25
9.	APPENDIX A - CORRECTION FACTORS	26
9.1	Correction factors for RF OATS Cable 35m	26
9.2	Correction factor for RF cable for Anechoic Chamber	27
9.3	Correction factors for Active Loop Antenna	28
9.4	Correction factors for biconical antenna	29
9.5	Correction factors for log periodic antenna	30
9.6	Correction factors for Double –Ridged Waveguide Horn ANTENNA	31
9.7	Correction factors for Horn Antenna Model: SWH-28	32



1. General Information

1.1 Administrative Information

Manufacturer:	Pointer Telocation
Manufacturer's Address:	14 Hamelacha, PO Box 11473 Roash Haain, Israel Tel: +972 73 2622320
Manufacturer's Representative:	Igor Rogov
Equipment Under Test (E.U.T):	Asset Tracking Device
Equipment PMN:	1. LV300.PS (tested device) 2. LV300 3. CelloTrack XT LTE C1
Equipment Serial No.:	2310283
Equipment HVIN:	1. 3010 2. 3011 3. 3012
Date of Receipt of E.U.T:	March 31, 2020
Start of Test:	March 31, 2020
End of Test:	March 31, 2020
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	FCC Part 15, Subpart C RSS 247, Issue 2, February 2017, Section 5 RSS-Gen, Issue 5, April 2018



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. Innovation, Science and Economic Development Canada (ISED) CAB identifier: IL1002.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

The CelloTrack product line is designed for advanced asset tracking and remote monitoring, featuring enhanced functionality with full fleet management capabilities, robustness and ease of installation, suitable for a wide variety of asset management applications.

The CelloTrack product line is available in two variants – a standalone version and a power version, which includes extended battery life and the ability to connect external sensors via two configurable GPIOs. Models are suitable for 2G, 3G and 4G (LTE) cellular communication technologies.

1.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in KDB 558074 D01 v05r02, ANSI C63.10: 2013 and RSS Gen, Issue 5. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01. Its FCC Designation Number is IL1005 and its Innovation, Science and Economic Development Canada (ISED) CAB identifier is IL1002.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site:

30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.19 dB

>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.51 dB



2. System Test Configuration

2.1 Justification

1. The E.U.T. was originally FCC certified on 04/30/2019 under FCC ID: 2AG69CTPW and IC certified on 5/19/2019 under IC: 9975A-CTPW.
2. Currently, the below changes were made to the original E.U.T.s.

Original PMN	Original HVIN	changes	New PMN	New HVIN
CelloTrack POWER XT LTE C1 NA	3013	<ol style="list-style-type: none"> 1. Antenna changed to support Global /worldwide LTE channels 2. SIM holder changed to Nano SIM 3. Additional power Circuit for supporting external sensor added 	LV300.PS	3010
CelloTrack POWER XT LTE C1 NA	3013	<ol style="list-style-type: none"> 1. Antenna changed to support Global /worldwide LTE channels 2. SIM holder changed to Nano SIM. 	LV300	3011
CelloTrack XT LTE C1 NA	3014	<ol style="list-style-type: none"> 1. Antenna added to support Global /worldwide LTE channels 2. SIM holder changed to Nano SIM. 	CelloTrack XT LTE C1	3012

3. A C2PC is requested based on the above listed changes. The following tests were performed: maximum conducted output power, occupied bandwidth and spurious radiated emissions.
4. The E.U.T. met the requirements of a C2PC.
5. The E.U.T contains an IEEE 802.15.1 transceiver.
6. The unit was evaluated while transmitting at the low channel (2402MHz), the mid channel (2440MHz) and the high channel (2480MHz).
7. Conducted emission method was performed with the EUT connected to a spectrum analyzer via 30dB attenuator.
8. Final radiated emission test for spurious emission for the new model was performed after exploratory emission testing that was performed in 3 orthogonal polarities to determine the “worst case” radiation.
9. According to the following results the worst case axis was the X axis for all channels.

Orientation	Frequency	2 nd Harmonic	3 rd Harmonic
	(MHz)	(dBuV/m)	(dBuV/m)
X axis	2402.0	45.1(N.L)	46.1(N.L)
	2440.0	44.7(N.L)	46.6(N.L)
	2480.0	44.9(N.L)	46.9(N.L)
Y axis	2402.0	44.0(N.L)	46.1(N.L)
	2440.0	43.9(N.L)	46.0(N.L)
	2480.0	44.9(N.L)	47.0(N.L)
Z axis	2402.0	44.2(N.L)	46.0(N.L)
	2440.0	44.7(N.L)	46.5(N.L)
	2480.0	43.5(N.L)	46.1(N.L)

Figure 1. Screening Results

2.2 EUT Exercise Software

No special exercise software was used.

2.3 Special Accessories

No special accessories were used.

2.4 Equipment Modifications

No modifications were necessary in order to achieve compliance.

2.5 Configuration of Tested System

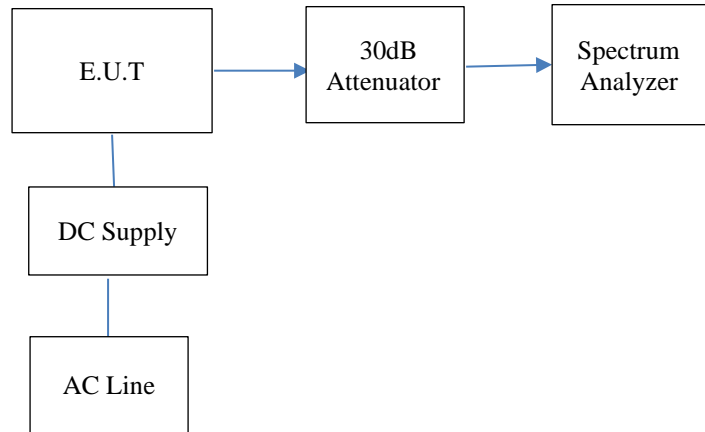


Figure 2. Configuration of Tested System Conducted

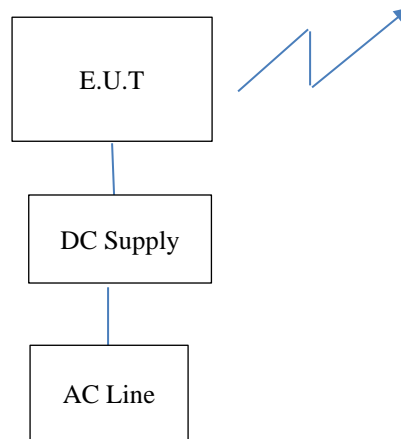


Figure 3. Configuration of Tested System Radiated

3. Conducted & Radiated Measurement Test Set-Up Photos

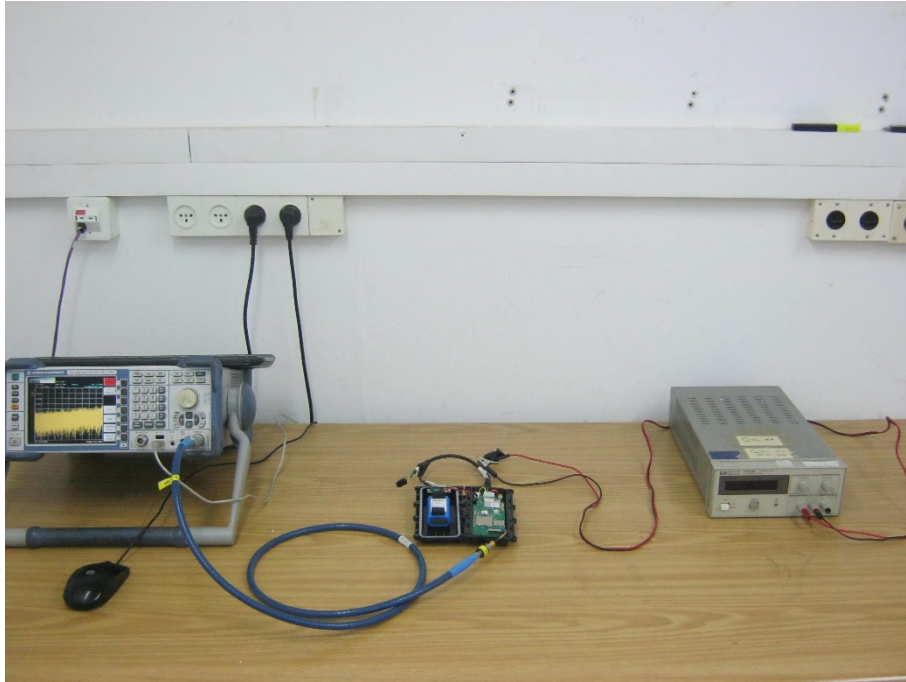


Figure 4. Conducted Emission Test



Figure 5. Radiated Emission Test, 0.009-30MHz



Figure 6. Radiated Emission Test, 30-200MHz



Figure 7. Radiated Emission Test, 200-1000MHz



Figure 8. Radiated Emission Test, 1-18GHz



Figure 9. Radiated Emission Test, 18-26.5GHz

4. Maximum Conducted Output Power

4.1 Test Specification

FCC, Part 15, Subpart C, Section 247(b)(3)

RSS 247, Issue 2, Section 5.4(d)

4.2 Test Procedure

(Temperature (22°C)/ Humidity (60%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (total loss=30.0 dB). Special attention was taken to prevent Spectrum Analyzer RF input overload.

4.3 Test Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

4.4 Test Results

Protocol Type	Unit	Operation Frequency	Power	Power	Limit	Margin
	(old/new)					
BLE	Original (CelloTrack POWER XT LTE C1 NA)	2402.0	4.9	3.09	1000.0	-996.91
		2440.0	4.7	2.95	1000.0	-997.05
		2480.0	4.4	2.75	1000.0	-997.25
	New (LV300.PS)	2402.0	4.9	3.09	1000.0	-996.91
		2440.0	4.7	2.95	1000.0	-997.05
		2480.0	4.3	2.69	1000.0	-997.31

Figure 10 Maximum Peak Power Output

JUDGEMENT: Passed by 996.91 mW

For additional information see *Figure 11* to *Figure 13*.

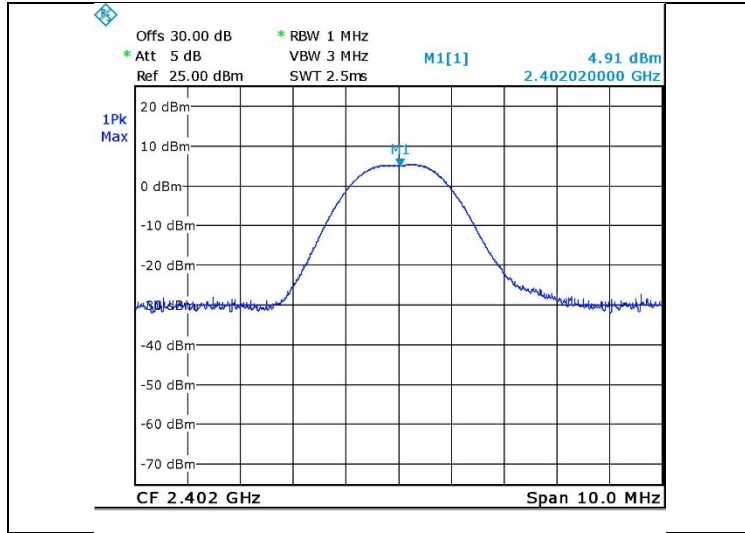


Figure 11. 2402.0 MHz, BLE

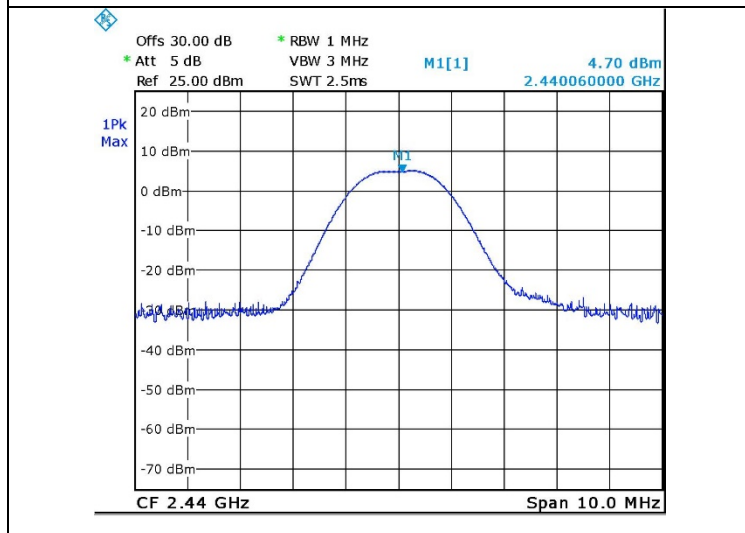


Figure 12. 2440.0 MHz, BLE

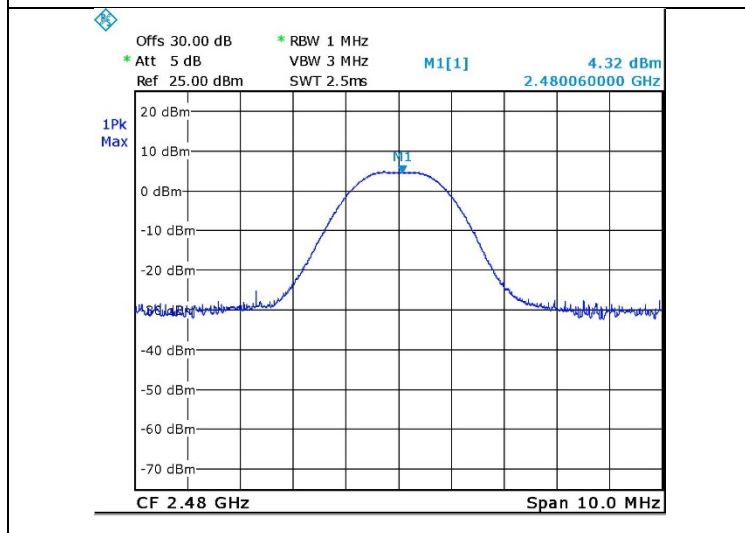


Figure 13. 2480.0 MHz, BLE



4.5 Test Equipment Used; Maximum Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	March 10, 2020	March 31, 2021
30dB Attenuator	MCL	BW-S30W5	533	December 24, 2018	December 31, 2020
RF Cable	Huber Suner	Sucofelex	28239/4PEA	December 24, 2018	December 31, 2020

Figure 14 Test Equipment Used

5. Occupied Bandwidth

5.1 Test Specification

FCC, Part 2, Sub part J, Section 2.1049

RSS-Gen, Issue 5: 2014, Section 6.6

5.2 Test Procedure

(Temperature (20°C)/ Humidity (62%RH))

The E.U.T. operation mode and test set-up are as described in Section 2 of this report.

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (total loss= 30.0dB). Special attention was taken to prevent Spectrum Analyzer RF input overload.

The RBW set to the range of 1% to 5% of the OBW. The span was set to ~ 3 times the OBW.

99% occupied bandwidth function was set on.

5.3 Test Limit

N/A

5.4 Test Results

Protocol Type	Operation Frequency	Reading
	(MHz)	(MHz)
BLE	2402.0	1.0
	2440.0	1.0
	2480.0	1.0

Figure 15. Bandwidth Test Results

JUDGEMENT: N/A

See additional information in *Figure 16* to *Figure 18*.

Occupied Bandwidth

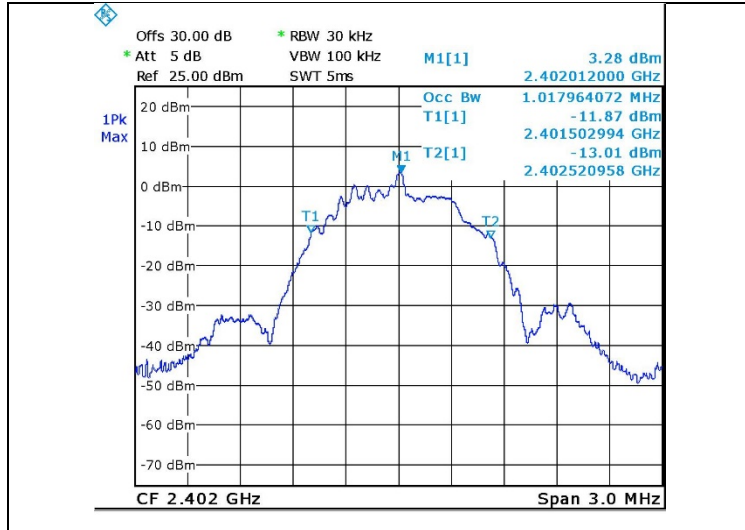


Figure 16. 2402.0 MHz, BLE

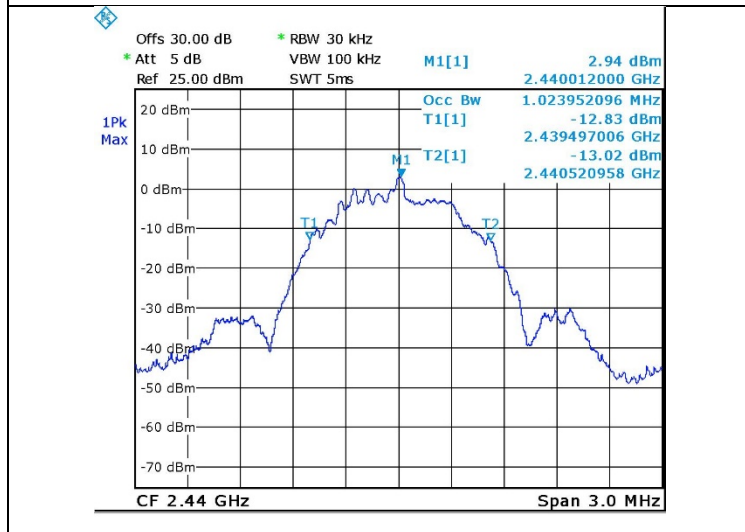


Figure 17. 2440.0 MHz, BLE

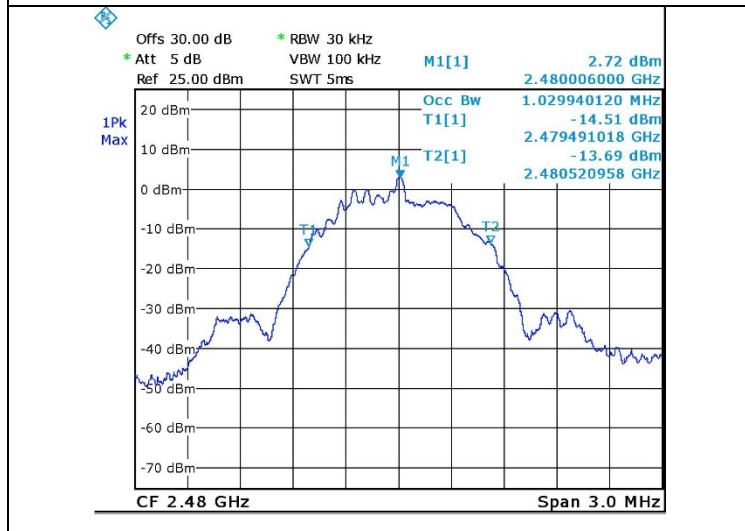


Figure 18. 2480.0 MHz, BLE



5.5 Test Equipment Used; Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	March 10, 2020	March 31, 2021
30dB Attenuator	MCL	BW-S30W5	533	December 24, 2018	December 31, 2020
RF Cable	Huber Suner	Sucofelex	28239/4PEA	December 24, 2018	December 31, 2020

Figure 19 Test Equipment Used



6. Spurious Radiated Emissions

6.1 Test Specification

FCC Part 15, Subpart C, Sections 15.209, 15.205, 15.247(d)

RSS 247, Issue 2, Section 3.3

RSS Gen, Issue 5, Section 8.10

6.2 Test Procedure

(Temperature (23°C)/ Humidity (55%RH))

The E.U.T. operation mode and test set-up are as described in Section 2 of this report.

For measurements between 0.009-30MHz:

The E.U.T was tested inside the shielded room and placed on a non-metallic table, 0.8 meters above the ground. The emissions were measured at a distance of 3 meters. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The frequency range 0.009MHz-30MHz was scanned.

For measurements between 30-1000MHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The emissions were measured at a distance of 3 meters. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The frequency range 30MHz -1000MHz was scanned and the list of the highest emissions was verified and updated accordingly.

For measurements between 1GHz-25GHz:

The E.U.T was tested inside the shielded room and placed on a non-metallic table, 1.5 meters above the ground. The emissions were measured at a distance of 3 meters. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The frequency range 1GHz -25GHz was scanned.

The highest radiation is described in the tables below.

6.3 FCC Test Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)	Field Strength* (dBµV/m)	Field Strength* (dBµV/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

Figure 20 Table of Limits

6.4 IC Test Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Magnetic Field strength (microampere/meter)	Measurement distance (meters)	Magnetic Field strength (dBµA/m)	Magnetic Field strength * (dBµA/m)@3m
0.009-0.490	6.37/F(kHz)	300	-3.0-(-37.7)	77.0-42.2
0.490-1.705	63.7/F(kHz)	30	-17.7-(-28.5)	22.3-11.4
1.705-30.0	0.08	30	-21.9	18.0
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dBµV/m)	Field strength * (dBµV/m)@3m
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.



6.5 Test Results

JUDGEMENT: Passed by 0.2 dB

For the operation frequency of 2402 MHz, the margin between the emission level and the specification limit is in the worst case 11.4dB at the frequency of 2390.0 MHz, horizontal polarization.

For the operation frequency of 2480 MHz, the margin between the emission level and the specification limit is in the worst case 0.2dB at the frequency of 2483.5 MHz, horizontal polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C Sections 15.209, 15.205, 15.247(d) specifications.

The details of the highest emissions are given in *Figure 21*.



Radiated Emission

E.U.T Description Asset Tracking Device
Type LV300.PS
Serial Number: 2310283

Specifications: FCC, Part 15, Subpart C, Sections 15.209, 15.205, 15.247(d)
RSS 247, Issue 2, Section 3.3; RSS Gen, Issue 5, Section 8.10

Antenna Polarization: Horizontal/Vertical Frequency Range: 9kHz to 25.0 GHz
Protocol Type: BLE Detector: Peak, Average

Operation Frequency	Freq.	Pol	Peak Reading	Peak Limit	Peak Margin	Average Reading	Average Limit	Average Margin
(MHz)	(MHz)	(H/V)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2402.0	2390.0	V	52.4	74.0	-21.6	-	54.0	-
	2390.0	H	53.1	74.0	-20.9	-	54.0	-
	4804.0	V	44.7	74.0	-29.3	-	54.0	-
	4804.0	H	45.1	74.0	-28.9	-	54.0	-
2440.0	4880.0	V	44.1	74.0	-29.9	-	54.0	-
	4880.0	H	44.7	74.0	-29.3	-	54.0	-
	7320.0	V	45.9	74.0	-28.1	-	54.0	-
	7320.0	H	46.6	74.0	-27.4	-	54.0	-
2480.0	4960.0	V	44.4	74.0	-29.6	-	54.0	-
	4960.0	H	44.9	74.0	-29.1	-	54.0	-
	2483.5	V	63.3	74.0	-10.7	53.3	54.0	-0.7
	2483.5	H	63.4	74.0	-10.6	53.5	54.0	-0.5

Figure 21. Radiated Emission Results, New

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



6.6 Test Instrumentation Used; Emissions in Restricted Frequency Bands

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	March 9, 2020	March 31, 2021
EMI Receiver	HP	8542E	3906A00276	March 11, 2020	March 31, 2021
RF Filter Section	HP	85420E	3705A00248	March 11, 2020	March 31, 2021
Spectrum Analyzer	HP	8593EM	3826A00265	March 9, 2020	March 31, 2021
Active Loop Antenna	EMCO	6502	9506-2950	February 5, 2019	February 28, 2021
Biconical Antenna	EMCO	3110B	9912-3337	May 21, 2019	May 31, 2020
Log Periodic Antenna	EMCO	3146	9505-4081	May 31, 2018	May 31, 2020
Horn Antenna	ETS	3115	29845	May 31, 2018	May 31, 2021
Horn Antenna	ARA	SWH-28	1007	December 31, 2017	December 31, 2020
Low Noise Amplifier 1GHz-18GHz	Miteq	AFSX4-02001800-50-8P	-	December 24, 2018	December 31, 2020
RF Cable Chamber	Commscope ORS	0623 WBC-400	G020132	December 24, 2018	December 31, 2020
RF Cable Oats	EIM	RG214-11N(X2)		May 26, 2019	May 31, 2020
Filter Band Pass 4-20 GHz	Meuro	MFL040120H50	902252	December 24, 2018	December 31, 2020
MicroWave System Amplifier	HP	83006A	3104A00589	NCR	NCR
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	9608-1497	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Figure 22 Test Equipment Used



7. Antenna Gain/Information

The antenna gain is +1.88 dBi, chip



DATASHEET
Part No. 1001312
Product: Wi-Fi/Bluetooth
Ceramic Antennas

Part No. 1001312

Wi-Fi / BT / Zigbee Ceramic Antennas

2.4 GHz

Supports: Wi-Fi applications, Agriculture, Automotive, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage

8. R.F Exposure/Safety

The typical placement of the E.U.T. is on wall mounted. The typical distance between the E.U.T. and the user is at least 20cm.

Calculation of Maximum Permissible Exposure (MPE)

Based on 47CFR1 Section 1.1307(b)(1) and RSS 102 Issue 5, Table 4 Requirements

- (a) FCC Limit at 2402 MHz is: $1 \frac{mW}{cm^2}$

Using Table 1 of 47CFR1 Section 1.1310 limit for general population/uncontrolled exposures, the above levels are an average over 30 minutes.

- (b) ISED Limit: 300-6000MHz = $0.02619f^{0.6834} \text{ W/m}^2 =$
 $0.02619 \times 2402^{0.6834} = 0.02619 \times 204.31 = 5.35 \text{ W/m}^2 = 0.535 \text{ mW/cm}^2$

- (c) The power density produced by the E.U.T. is:

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t = Conducted Transmitted Power 4.9 dBm = 3.09 mW

G_t = Antenna Gain 1.88 dBi = 1.54 numeric

R = Distance From Transmitter 20 cm

- (d) The peak power density produced by the E.U.T. is:

$$S = 3.09 * 1.54 / 4\pi(20)^2 = 9.47 \times 10^{-4} \text{ mW/cm}^2$$

- (e) This is below the FCC/ISED limit.



9. APPENDIX A - CORRECTION FACTORS

9.1 *Correction factors for RF OATS Cable 35m*
ITL #1911

Frequency (MHz)	loss (dB)
30.0	1.3
50.0	1.7
100.0	2.6
200.0	3.7
300.0	4.7
400.0	5.5
500.0	6.3
600.0	7.0
700.0	7.6
800.0	8.4
900.0	9.0
1000.0	9.6



9.2 Correction factor for RF cable for Anechoic Chamber

ITL #1840

Frequency (GHz)	loss Result (dB)
0.5	-1.0
1.0	-1.4
1.5	-1.7
2.0	-2.0
2.5	-2.3
3.0	-2.6
3.5	-2.8
4.0	-3.1
4.5	-3.3
5.0	-3.6
5.5	-3.7
6.0	-4.0
6.5	-4.4
7.0	-4.7
7.5	-4.8
8.0	-5.0
8.5	-5.1
9.0	-5.6
9.5	-5.8
10.0	-6.0
10.5	-6.2
11.0	-6.2
11.5	-6.0
12.0	-6.0
12.5	-6.1
13.0	-6.3
13.5	-6.5
14.0	-6.7
14.5	-7.0
15.0	-7.3
15.5	-7.5
16.0	-7.6
16.5	-8.0
17.0	-8.0
17.5	-8.1
18.0	-8.2
18.5	-8.2
19.0	-8.3
19.5	-8.6
20.0	-8.5

NOTES:

1. The cable is manufactured by Commscope
2. The cable type is 0623 WBC-400, serial # G020132 and 10m long



9.3 Correction factors for Active Loop Antenna
Model 6502 S/N 9506-2950
ITL # 1075:

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8



9.4 Correction factors for biconical antenna
ITL #1356
Model: EMCO 3110B
Serial No.: 9912-3337

Frequency	ITL 1356 AF
[MHz]	[dB/m]
30	14.77
35	13.46
40	12.57
45	11.62
50	10.87
60	9.19
70	9.52
80	9.55
90	9.27
100	10.20
120	11.18
140	12.02
160	12.62
180	13.44
200	14.82



9.5 Correction factors for log periodic antenna
ITL # 1349
Model:EMCO 3146
Serial No.: 9505-4081

Frequency	ITL 1349 AF
[MHz]	[dB/m]
200	11.31
250	11.85
300	14.47
400	15.12
500	17.69
600	18.45
700	20.52
800	20.77
900	21.97
1000	23.21



**9.6 Correction factors for
Horn ANTENNA**

Double –Ridged Waveguide

**Model: 3115
Serial number:29845
3 meter range; ITL # 1352**

FREQUENCY	AFE	FREQUENCY	AFE
(GHz)	(dB/m)	(GHz)	(dB/m)
0.75	25	9.5	38
1.0	23.5	10.0	38.5
1.5	26.0	10.5	38.5
2.0	29.0	11.0	38.5
2.5	27.5	11.5	38.5
3.0	30.0	12.0	38.0
3.5	31.5	12.5	38.5
4.0	32.5	13.0	40.0
4.5	32.5	13.5	41.0
5.0	33.0	14.0	40.0
5.5	35.0	14.5	39.0
6.0	36.5	15.0	38.0
6.5	36.5	15.5	37.5
7.0	37.5	16.0	37.5
7.5	37.5	16.5	39.0
8.0	37.5	17.0	40.0
8.5	38.0	17.5	42.0
9.0	37.5	18.0	42.5



9.7 Correction factors for Horn Antenna Model: SWH-28

CALIBRATION DATA

3 m distance

Frequency, MHz	Measured antenna factor, dB/m ¹⁾
18000	32.4
18500	32.0
19000	32.3
19500	32.4
20000	32.3
20500	32.8
21000	32.8
21500	32.7
22000	33.1
22500	33.0
23000	33.1
23500	33.8
24000	33.5
24500	33.5
25000	33.8
25500	33.9
26000	34.2
26500	34.7

¹⁾ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.