



Shenzhen CTA Testing Technology Co., Ltd.
Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,
Fuhai Street, Bao'an District, Shenzhen, China

FCC PART 15 SUBPART CTEST REPORT

FCC PART 15.407

Report Reference No.....: **CTA24072303503**

FCC ID.....: **2AG7C-A880**

Compiled by

(position+printed name+signature)...: File administrators Jinghua Xiao

Supervised by

(position+printed name+signature)...: Test Engineer Lushan Kong

Approved by

(position+printed name+signature)...: Manager Eric Wang

Date of issue.....: Aug. 27, 2024

Representative Laboratory Name. : Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou
Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: Hangzhou Meari Technology Co., Ltd.

Address.....: Building 4, Huiding Intelligent Innovation Center, No. 825, Ruquan
Road, Changhe Street, Binjiang District, Hangzhou, Zhejiang, China

Test specification.....:

Standard.....: **FCC Part 15.407**

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: CAMERA WIFI Module

Trade Mark.....: N/A

Manufacturer.....: Hangzhou Meari Technology Co., Ltd.

Model/Type reference.....: A880

Listed Models: Speed 22Q, Speed 22F, OP1, OP1T, OP1Q, OP1F, Speed 24Q,
Speed 24F, Mini 9Q, Mini 9T, Mini 12Q, Mini 12T, Mini 8T, Mini 8Q,
Mini 16T, Mini 16Q, M1T, M1Q, IN1T, IN1Q, M4T, M4Q, P2T, P2F,
P2Q, P4F, P4Q, DOME1, DOME1T, PETCAM1F, PETCAM1

Operation Frequency.....: From 5180MHz to 5240MHz/ 5260MHz to 5320MHz/ 5500MHz to
5700MHz/ 5745MHz to 5825MHz

Hardware Version: A880 Ver 1.2

Software Version.....: N/A

Rating.....: DC 3.3V

Result.....: **PASS**

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT**Test Report No. : CTA24072303503**

Aug. 27, 2024

Date of issue

Equipment under Test : CAMERA WIFI Module

Model /Type : A880

Listed model : Speed 22Q, Speed 22F, OP1, OP1T, OP1Q, OP1F, Speed 24Q, Speed 24F, Mini 9Q, Mini 9T, Mini 12Q, Mini 12T, Mini 8T, Mini 8Q, Mini 16T, Mini 16Q, M1T, M1Q, IN1T, IN1Q, M4T, M4Q, P2T, P2F, P2Q, P4F, P4Q, DOME1, DOME1T, PETCAM1F, PETCAM1

Applicant : Hangzhou Meari Technology Co., Ltd.

Address : Building 4, Huiding Intelligent Innovation Center, No. 825,Ruquan Road, Changhe Street, Binjiang District, Hangzhou, Zhejiang, China

Manufacturer : Hangzhou Meari Technology Co., Ltd.

Address : 4F of Building 1 and 2-4F of Building 2, No. 91 Chutian Road, Xixing Street, Binjiang District, Hangzhou, Zhejiang, China

Test Result:**PASS**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. Short description of the Equipment under Test (EUT)	6
2.5. EUT operation mode	6
2.6. Block Diagram of Test Setup	8
2.7. Related Submittal(s) / Grant (s)	8
2.8. EUT Exercise Software	8
2.9. Special Accessories	8
2.10. External I/O Cable	8
2.11. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Test Description	10
3.6. Equipments Used during the Test	12
4. TEST CONDITIONS AND RESULTS	13
4.1. AC Power Conducted Emission	13
4.2. Radiated Emission	15
4.3. Duty Cycle	23
4.4. Maximum Average Output Power	24
4.5. Power Spectral Density	25
4.6. 99% and 6dB Bandwidth	26
4.7. 99% and 26dBc Bandwidth	27
4.8. Conducted Spurious Emissions and Band Edge Compliance	28
4.9. Frequency Stability	30
4.10. Antenna Requirement	34
5. TEST SETUP PHOTOS OF THE EUT	35
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	35

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): General technical requirements.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02 General U-NII Test Procedures New Rules v02r01](#): UNII, U-NII, U-NII Test Procedures

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul. 16, 2024
Testing commenced on	:	Jul. 16, 2024
Testing concluded on	:	Aug. 26, 2024

2.2. Product Description

Product Name	CAMERA WIFI Module
Trade Mark	N/A
Model/Type reference	A880
List Models	Speed 22Q, Speed 22F, OP1, OP1T, OP1Q, OP1F, Speed 24Q, Speed 24F, Mini 9Q, Mini 9T, Mini 12Q, Mini 12T, Mini 8T, Mini 8Q, Mini 16T, Mini 16Q, M1T, M1Q, IN1T, IN1Q, M4T, M4Q, P2T, P2F, P2Q, P4F, P4Q, DOME1, DOME1T, PETCAM1F, PETCAM1
Model Declaration	PCB board, structure and internal of these model(s) are the same, Only the model name different , So no additional models were tested.
Power supply:	DC 3.3V
Sample ID	CTA240723035-1#& CTA240723035-2#
Bluetooth	
Operation frequency	2402-2480MHz
Channel Number	40 channels for Bluetooth (DTS)
Channel Spacing	2MHz for Bluetooth (DTS)
Modulation Type	GFSK for Bluetooth (DTS)
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11Channel for IEEE 802.11b/g/n/ax(HT20) 7 Channel for IEEE 802.11n/ax (HT40)
Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE40: OFDMA (64QAM, 16QAM, QPSK,BPSK)
WIFI(5.2G/5.3G/5.7G Band)	
Frequency Range	5150MHz ~ 5250MHz, 5250MHz ~ 5350MHz, 5500MHz ~ 5700MHz
Channel Number	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 8 Channels for 20MHz bandwidth(5500-5700MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 4 Channels for 40MHz bandwidth(5510-5670MHz)
Modulation Type	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

	IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz)
Modulation Type	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	Omni Antenna, 2.91dBi(Max.) for 2.4G Band and 3.81dBi(Max.) for 5G Band; FPC Antenna, 4.66dBi(Max.) for 2.4G Band and 2.96dBi(Max.) for 5G Band

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.3V

2.4. Short description of the Equipment under Test (EUT)

This is a CAMERA WIFI Module.

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX.

Antenna	Chain0 (ANT0)			Chain1 (ANT1)			Simultaneously
Bandwidth Mode	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz	/
IEEE 802.11a	☒	☐	☐	☐	☐	☐	☐
IEEE 802.11n	☒	☒	☐	☐	☐	☐	☐
IEEE 802.11ac	☒	☒	☐	☐	☐	☐	☐
IEEE 802.11ax	☒	☒	☐	☐	☐	☐	☐

IEEE 802.11a/n20/n40/ac20/ac40/ax20/ax40:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

U-NII-2A		U-NII-2A		U-NII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

U-NII-2C		U-NII-2C		U-NII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550		
108	5540	118	5590		
112	5560	134	5670		
116	5580				
132	5660				
136	5680				
140	5700				

U-NII-3		U-NII-3		U-NII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11ac VHT20 mode (HCH).

2.6. Block Diagram of Test Setup



2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AG7C-A880** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (IPOP order) provided by application.

Test Method	IPOP order		
Frequency	5180MHz	5190MHz	5210MHz
	5260MHz	5270MHz	5290MHz
	5500MHz	5510MHz	5530MHz
	5745MHz	5755MHz	5775MHz
802.11a (20MHz)	Default	Default	Default
802.11n (20MHz)	Default	Default	Default
802.11n (40MHz)	Default	Default	Default
802.11ac (20MHz)	Default	Default	Default
802.11ac (40MHz)	Default	Default	Default
802.11ax (20MHz)	Default	Default	Default
802.11ax (40MHz)	Default	Default	Default

2.9. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO.,LTD.	Adapter	TPA-46050200UU	--	IC

2.10. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	Non-Shielded, 1.0m
SD Card Port	1	N/A

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao' an District, Shenzhen, China, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.02 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Output Peak power	30MHz~18GHz	0.55 dB	(1)
Power spectral density	/	0.57 dB	(1)
Spectrum bandwidth	/	1.1%	(1)
Radiated spurious emission (30MHz-1GHz)	30~1000MHz	4.10 dB	(1)
Radiated spurious emission (1GHz-18GHz)	1~18GHz	4.32 dB	(1)
Radiated spurious emission (18GHz-40GHz)	18-40GHz	5.54 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

3.5. Test Description

Applied Standard: RSS-247 Issue 3 / RSS-Gen Issue 5				
FCC Rules	Description of Test	Test Sample	Result	Remark
/	On Time and Duty Cycle	CTA240723035-1#	Compliant	Appendix C Appendix D Appendix E Appendix F
§15.407(a)	Maximum Conducted Output Power	CTA240723035-1#	Compliant	Appendix C Appendix D Appendix E Appendix F
§15.407(a)	Power Spectral Density	CTA240723035-1#	Compliant	Appendix C Appendix D Appendix E Appendix F
§15.407(a)	26dB&6dB Bandwidth and 99% Bandwidth	CTA240723035-1#	Compliant	Appendix C Appendix D Appendix E Appendix F
§15.209, §15.407(b)	Radiated Emissions	CTA240723035-1#	Compliant	Note 1
§15.209, §15.407(b)	Conducted Spurious Emissions and Band Edges Test	CTA240723035-1#	Compliant	Appendix C Appendix D Appendix E Appendix F
§15.209, §15.407(b)	Emissions at Restricted Band	CTA240723035-1# CTA240723035-2#	Compliant	Appendix C Appendix D Appendix E Appendix F
§15.407(g)	Frequency Stability	CTA240723035-1#	Compliant	Note 1
§15.407(a)	AC Mians Line Conducted Emissions	CTA240723035-2#	Compliant	Note 1
§15.203 §15.407(h)	Antenna Requirements	CTA240723035-1#	Compliant	Note 1
§15.407 §2.1091	RF Exposure	/	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	802.11a	6 Mbps
Power Spectral Density	802.11ac20/ac40 802.11n HT20/40 802.11ax20/ax40	MCS0
6dB Bandwidth		
26dB Bandwidth		
Radiated Emission30M~1GHz& Radiated Emission 1GHz~10 th Harmonic		
Band Edge	802.11a	6 Mbps
	802.11ac20/ac40 802.11n HT20/40 802.11ax20/ax40	MCS0

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2024/08/01	2025/07/31
LISN	R&S	ENV216	CTA-314	2024/08/01	2025/07/31
EMI Test Receiver	R&S	ESPI	CTA-307	2024/08/01	2025/07/31
EMI Test Receiver	R&S	ESCI	CTA-306	2024/08/01	2025/07/31
Spectrum Analyzer	Agilent	N9020A	CTA-301	2024/08/01	2025/07/31
Spectrum Analyzer	R&S	FSP	CTA-337	2024/08/01	2025/07/31
Vector Signa generator	Agilent	N5182A	CTA-305	2024/08/01	2025/07/31
Analog Signal Generator	R&S	SML03	CTA-304	2024/08/01	2025/07/31
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	R&S	CTA-302	2024/08/01	2025/07/31
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2024/08/01	2025/07/31
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2023/10/17	2024/10/16
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2023/10/13	2024/10/12
Loop Antenna	Zhinan	ZN30900C	CTA-311	2023/10/17	2024/10/16
Horn Antenna	Beijing Hangwei Dayang	OBH100400	CTA-336	2024/08/06	2025/08/05
Antenna Power	Suzhou Keletuo eectronic Technology Co.,LTD	BK-*AT-BS	N/A	N/A	N/A
Amplifier	Schwarzbeck	BBV 9745	CTA-312	2024/08/01	2025/07/31
Amplifier	Taiwan chengyi	EMC051845B	CTA-313	2024/08/01	2025/07/31
Directional coupler	NARDA	4226-10	CTA-303	2024/08/01	2025/07/31
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2024/08/01	2025/07/31
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2024/08/01	2025/07/31
Automated filter bank	Tonscend	JS0806-F	CTA-404	2024/08/01	2025/07/31
Power Sensor	Agilent	U2021XA	CTA-405	2024/08/01	2025/07/31
Amplifier	Schwarzbeck	BBV9719	CTA-406	2024/08/01	2025/07/31

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

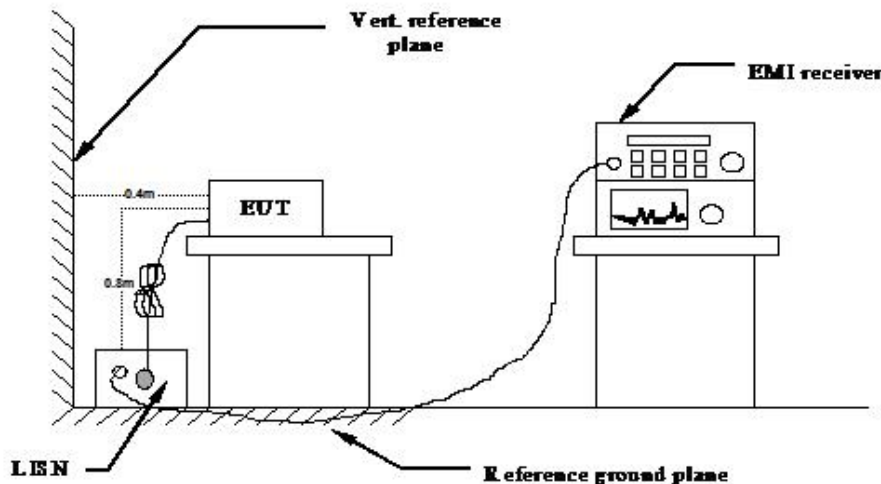

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 All support equipments received AC power from a second LISN, if any.
- 5 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 7 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) and § RSS-Gen Issue 5 AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

TEST RESULTS

Remark: We measured Conducted Emission at all mode in AC 120V/60Hz, the worst case was recorded .


Temperature	25℃	Humidity	60%
Test Engineer	Lushan Kong	Configurations	IEEE 802.11n20 HCH

Power supply:

AC 120V/60Hz

Polarization

L

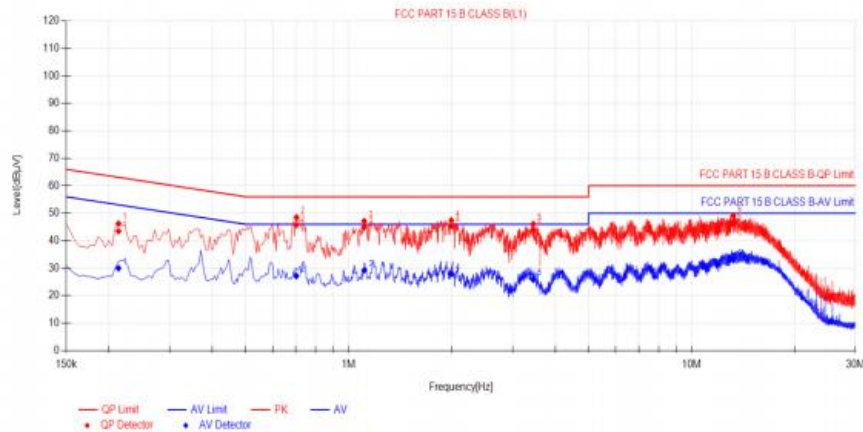**Suspected List**


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Type	Verdict
1	0.213	35.75	46.25	10.50	63.09	16.84	PK	L1	PASS
2	0.7035	38.02	48.52	10.50	56.00	7.48	PK	L1	PASS
3	1.1085	36.69	47.19	10.50	56.00	8.81	PK	L1	PASS
4	1.9905	36.94	47.44	10.50	56.00	8.56	PK	L1	PASS
5	3.4485	35.57	46.07	10.50	56.00	9.93	PK	L1	PASS
6	13.2045	38.58	49.08	10.50	60.00	10.92	PK	L1	PASS

Power supply:

AC 120V/60Hz

Polarization

N

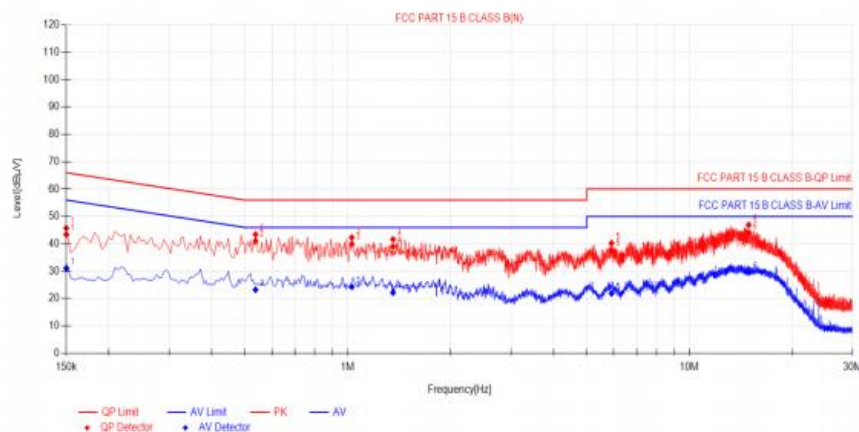**Suspected List**

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Type	Verdict
1	0.15	35.25	45.75	10.50	66.00	20.25	PK	N	PASS
2	0.537	32.95	43.45	10.50	56.00	12.55	PK	N	PASS
3	1.0275	31.83	42.33	10.50	56.00	13.67	PK	N	PASS
4	1.356	31.16	41.66	10.50	56.00	14.34	PK	N	PASS
5	5.9145	29.78	40.28	10.50	60.00	19.72	PK	N	PASS
6	14.9055	36.42	46.92	10.50	60.00	13.08	PK	N	PASS

NOTE: All the modes have been tested and recorded worst mode in the report (FPC Antenna).


Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

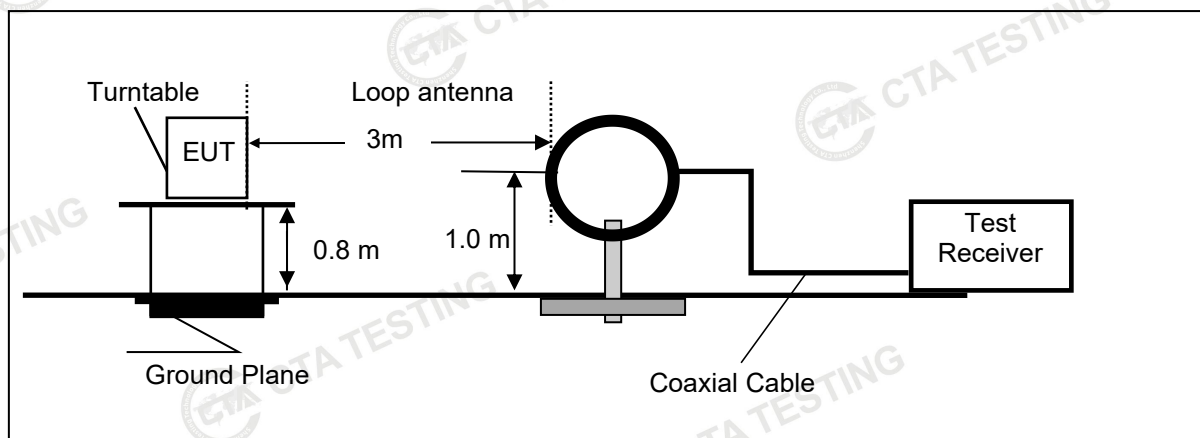

Frequency range 30MHz – 1000MHz

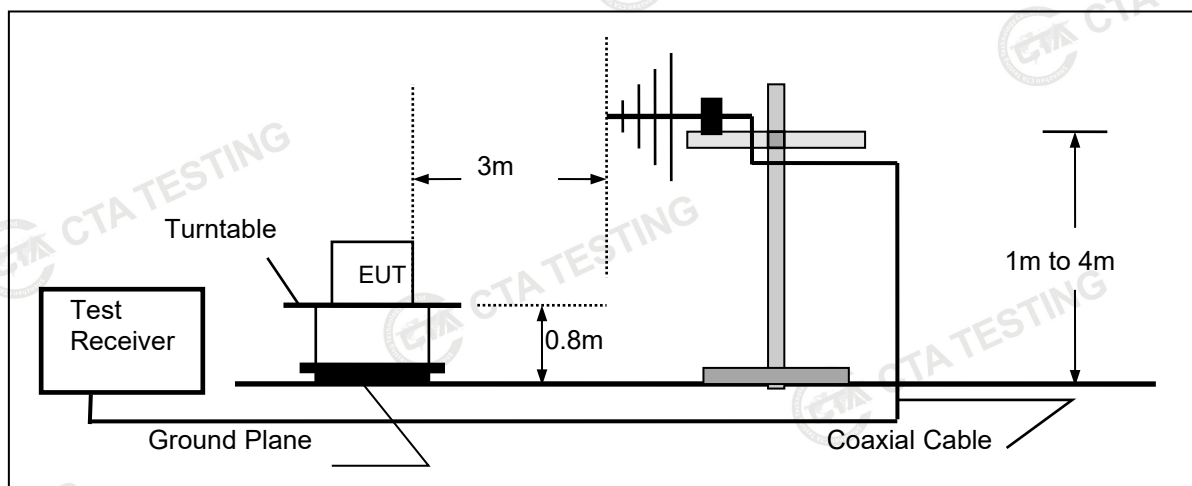

Frequency range above 1GHz

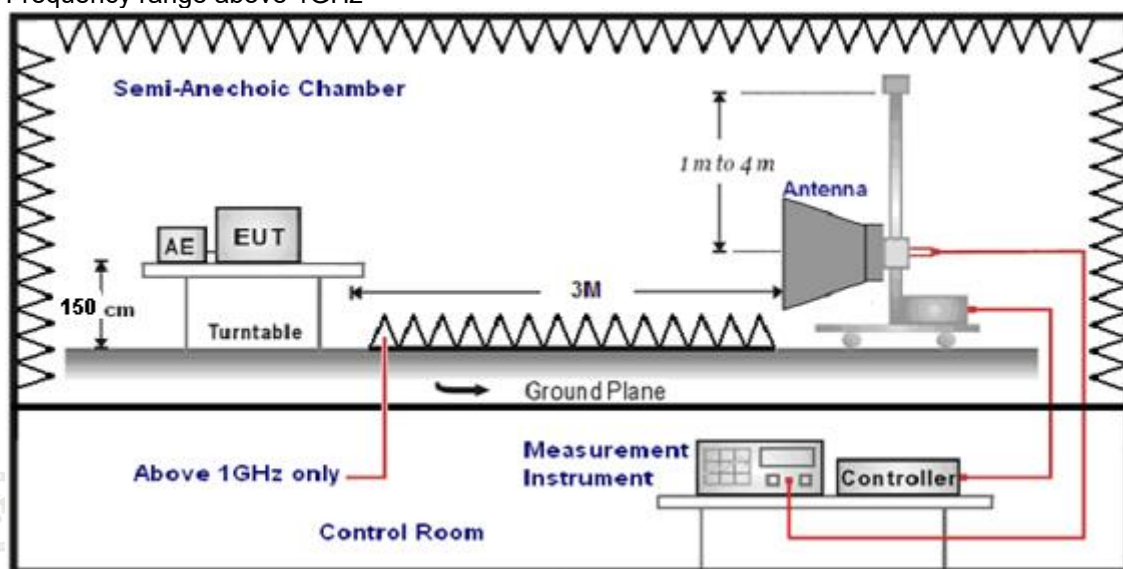

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 24MHz and maximum operation frequency was 5825MHz.so radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the bandedge)	68.2
	-17 (within 10 MHz of band edge)	78.2

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+40\log(30/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at all mode from 9KHz to 25GHz in AC 120V/60Hz and the worst case was recorded.

Temperature	23.4℃	Humidity	54.5%
Test Engineer	Lushan Kong	Configurations	IEEE 802.11n20 HCH

For 9 KHz~30MHz

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

For 30MHz-1GHz


Horizontal

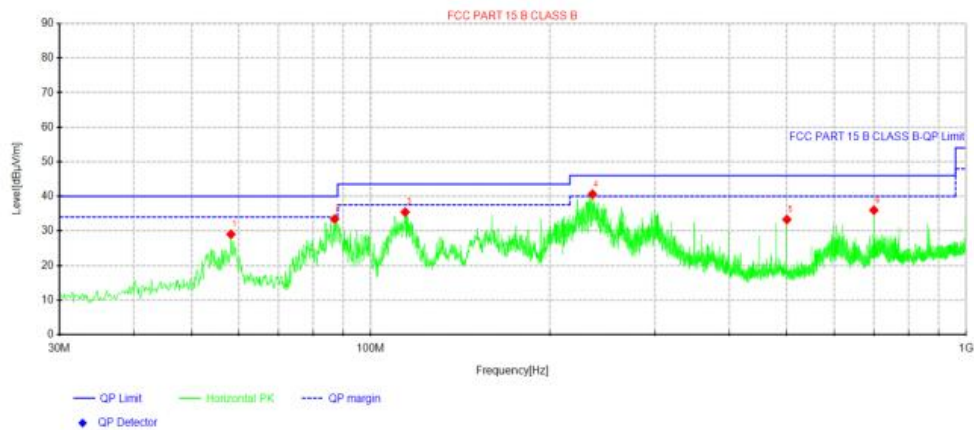

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.2512	41.79	29.02	-12.77	40.00	10.98	100	282	Horizontal
2	86.9875	49.33	33.44	-15.89	40.00	6.56	100	178	Horizontal
3	114.268	49.43	35.45	-13.98	43.50	8.05	100	154	Horizontal
4	235.761	53.53	40.63	-12.90	46.00	5.37	100	212	Horizontal
5	499.965	42.56	33.30	-9.26	46.00	12.70	100	190	Horizontal
6	700.027	41.27	35.99	-5.28	46.00	10.01	100	178	Horizontal

Vertical

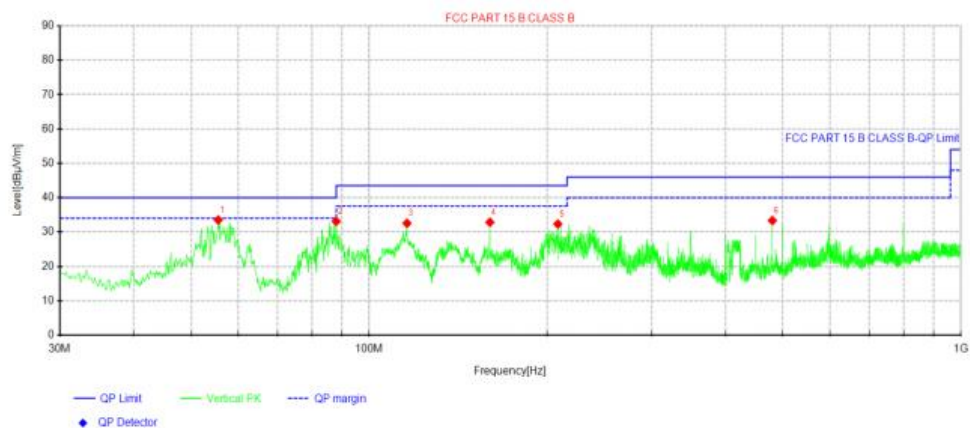

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.5838	45.59	33.51	-12.08	40.00	6.49	100	218	Vertical
2	87.9575	48.82	33.13	-15.69	40.00	6.87	100	289	Vertical
3	115.845	46.62	32.55	-14.07	43.50	10.95	100	79	Vertical
4	159.98	49.00	32.86	-16.14	43.50	10.64	100	350	Vertical
5	208.358	45.57	32.33	-13.24	43.50	11.17	100	206	Vertical
6	480.08	42.91	33.35	-9.56	46.00	12.65	100	265	Vertical

NOTE: All the modes have been tested and recorded worst mode in the report (Omni Antenna).

For Greater than 1GHz

5150-5250MHz:

IEEE 802.11a (Worst Case)

802.11a Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.69	38.55	33.13	11.26	57.37	68.20	-10.83	Peak	Horizontal
1	10360	31.61	38.55	33.13	11.26	48.29	54.00	-5.71	AV	Horizontal
1	10360	40.71	38.55	33.13	11.26	57.39	68.20	-10.81	Peak	Vertical
1	10360	29.62	38.55	33.13	11.26	46.30	54.00	-7.70	AV	Vertical

802.11a Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	40.63	38.55	33.13	11.26	57.31	68.20	-10.89	Peak	Horizontal
1	10400	30.66	38.55	33.13	11.26	47.34	54.00	-6.66	AV	Horizontal
1	10400	40.33	38.55	33.13	11.26	57.01	68.20	-11.19	Peak	Vertical
1	10400	29.06	38.55	33.13	11.26	45.74	54.00	-8.26	AV	Vertical

802.11a Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.28	38.55	33.13	11.26	55.96	68.20	-12.24	Peak	Horizontal
1	10480	31.02	38.55	33.13	11.26	47.70	54.00	-6.30	AV	Horizontal
1	10480	41.58	38.55	33.13	11.26	58.26	68.20	-9.94	Peak	Vertical
1	10480	29.14	38.55	33.13	11.26	45.82	54.00	-8.18	AV	Vertical

5260-5320MHz:**IEEE 802.11a (Worst Case)****802.11a Mode Channel 52 5260 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10520	40.94	38.55	33.13	11.26	57.62	68.20	-10.58	Peak	Horizontal
1	10520	31.25	38.55	33.13	11.26	47.93	54.00	-6.07	AV	Horizontal
1	10520	42.00	38.55	33.13	11.26	58.68	68.20	-9.52	Peak	Vertical
1	10520	29.31	38.55	33.13	11.26	45.99	54.00	-8.01	AV	Vertical

802.11a Mode Channel 56 5280 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10560	40.78	38.55	33.13	11.26	57.46	68.20	-10.74	Peak	Horizontal
1	10560	31.49	38.55	33.13	11.26	48.17	54.00	-5.83	AV	Horizontal
1	10560	41.28	38.55	33.13	11.26	57.96	68.20	-10.24	Peak	Vertical
1	10560	28.48	38.55	33.13	11.26	45.16	54.00	-8.84	AV	Vertical

802.11a Mode Channel 64 5320 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10640	39.55	38.55	33.13	11.26	56.23	68.20	-11.97	Peak	Horizontal
1	10640	31.48	38.55	33.13	11.26	48.16	54.00	-5.84	AV	Horizontal
1	10640	41.14	38.55	33.13	11.26	57.82	68.20	-10.38	Peak	Vertical
1	10640	28.82	38.55	33.13	11.26	45.50	54.00	-8.50	AV	Vertical

5500-5700MHz:

IEEE 802.11a (Worst Case)

802.11a Mode_Channel 100_5500 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11000	40.30	38.55	33.13	11.26	56.98	68.20	-11.22	Peak	Horizontal
1	11000	31.77	38.55	33.13	11.26	48.45	54.00	-5.55	AV	Horizontal
1	11000	41.37	38.55	33.13	11.26	58.05	68.20	-10.15	Peak	Vertical
1	11000	28.66	38.55	33.13	11.26	45.34	54.00	-8.66	AV	Vertical

802.11a Mode_Channel 120_5600 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11200	40.41	38.55	33.13	11.26	57.09	68.20	-11.11	Peak	Horizontal
1	11200	30.94	38.55	33.13	11.26	47.62	54.00	-6.38	AV	Horizontal
1	11200	41.11	38.55	33.13	11.26	57.79	68.20	-10.41	Peak	Vertical
1	11200	28.42	38.55	33.13	11.26	45.10	54.00	-8.90	AV	Vertical

802.11a Mode_Channel 140_5700 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11400	39.65	38.55	33.13	11.26	56.33	68.20	-11.87	Peak	Horizontal
1	11400	30.27	38.55	33.13	11.26	46.95	54.00	-7.05	AV	Horizontal
1	11400	41.48	38.55	33.13	11.26	58.16	68.20	-10.04	Peak	Vertical
1	11400	29.22	38.55	33.13	11.26	45.90	54.00	-8.10	AV	Vertical

5725-5850MHz:

IEEE 802.11a (Worst Case)

802.11a Mode Channel 149 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.21	38.55	33.13	11.26	55.89	68.20	-12.31	Peak	Horizontal
1	11490	30.86	38.55	33.13	11.26	47.54	54.00	-6.46	AV	Horizontal
1	11490	41.39	38.55	33.13	11.26	58.07	68.20	-10.13	Peak	Vertical
1	11490	29.27	38.55	33.13	11.26	45.95	54.00	-8.05	AV	Vertical

802.11a Mode Channel 157 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.02	38.55	33.13	11.26	56.70	68.20	-11.50	Peak	Horizontal
1	11570	30.21	38.55	33.13	11.26	46.89	54.00	-7.11	AV	Horizontal
1	11570	40.96	38.55	33.13	11.26	57.64	68.20	-10.56	Peak	Vertical
1	11570	28.50	38.55	33.13	11.26	45.18	54.00	-8.82	AV	Vertical

802.11a Mode Channel 165 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.00	38.55	33.13	11.26	55.68	68.20	-12.52	Peak	Horizontal
1	11650	31.02	38.55	33.13	11.26	47.70	54.00	-6.30	AV	Horizontal
1	11650	40.66	38.55	33.13	11.26	57.34	68.20	-10.86	Peak	Vertical
1	11650	29.90	38.55	33.13	11.26	46.58	54.00	-7.42	AV	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. Margin = Result Level - Limit
3. The other emission levels were very low against the limit.
4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

NOTE: All the modes have been tested and recorded worst mode in the report (Omni Antenna).

4.3. Duty Cycle

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NIII Test Procedures New Rules v02r01 Duty Cycle (x), Transmission Duration (T):

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal
- The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zerospan measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

For reporting purpose only.

Please refer to Appendix C.3.

Please refer to Appendix D.3.

Please refer to Appendix E.3.

Please refer to Appendix F.3.

4.4. Maximum Average Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NIII Test Procedures New Rules v02r01 Measurement using a Power Meter (PM):

- a. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied
 1. The EUT is configured to transmit continuously or to transmit with a constant duty cycle
 2. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b. If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section II.B
- c. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency (MHz)	Limit
5150-5250	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)
5250-5350	50mW (24dBm)
5470-5725	50mW (24dBm)
5725-5850	1 Watt (30dBm)
Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)	

TEST RESULTS

For reporting purpose only.

Please refer to Appendix C.4.

Please refer to Appendix D.4.

Please refer to Appendix E.4.

Please refer to Appendix F.4.

4.5. Power Spectral Density

TEST CONFIGURATION

EUT

SPECTRUM
ANALYZER

TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01: The rules require "maximum power spectral density" measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.

- Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
 - Use the peak search function on the instrument to find the peak of the spectrum and record its value.
 - Make the following adjustments to the peak value of the spectrum, if applicable:
 - If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
 - The result is the Maximum PSD over 1 MHz reference bandwidth.
 - For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
 - Set $VBW \geq 3$ RBW.
 - If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / \text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz} / \text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.
- Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.
- Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to § 15.407(a): The maximum output power should be not exceed follow:

Frequency (MHz)	Limit
5150-5250	Other then Mobile and portable: 17dBm/MHz Mobile and portable: 11dBm/MHz
5250-5350	11dBm/MHz
5470-5725	11dBm/MHz
5725-5850	30dBm/500kHz

TEST RESULTS

For reporting purpose only.

Please refer to Appendix C.5.

Please refer to Appendix D.5.

Please refer to Appendix E.5.

Please refer to Appendix F.5.

4.6. 99% and 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01 for one of the following procedures may be used for section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a. Set RBW = 100kHz.
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT

For Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz

TEST RESULTS

For reporting purpose only.

Please refer to Appendix F.1.

Please refer to Appendix F.2.

4.7. 99% and 26dBc Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01 for one of the following procedures may be used for Emission Bandwidth (EBW) measurement:

- Set RBW = 220 kHz/430kHz/820kHz (approximately 1% of the emission bandwidth).
- Set the video bandwidth (VBW) = 3*RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT

No Limits for 26dBc Bandwidth

TEST RESULTS

For reporting purpose only.

Please refer to Appendix C.1.

Please refer to Appendix C.2.

Please refer to Appendix D.1.


Please refer to Appendix D.2.

Please refer to Appendix E.1.

Please refer to Appendix E.2.

4.8. Conducted Spurious Emissions and Band Edge Compliance

TEST CONFIGURATION

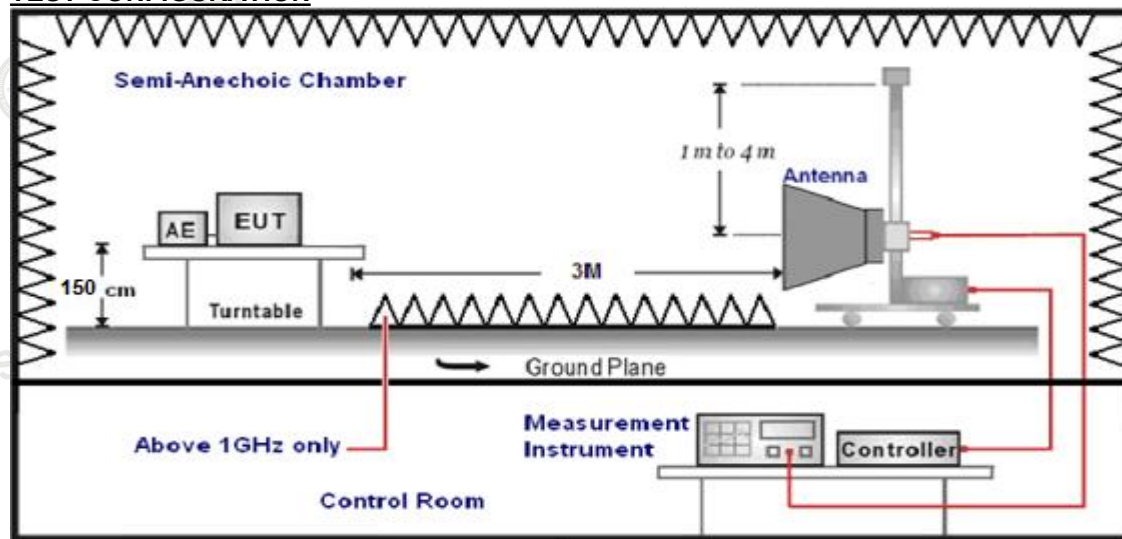

LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+40\log(30/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the band edge)	68.2
	-17 (within 10 MHz of band edge)	78.2

TEST PROCEDURE

- The EUT was placed on a turn table which is 1.5m above 1GHz.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed..
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
1GHz-18GHz	Double Ridged Horn Antenna	3

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-18GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST RESULTS**For Conducted at Restricted Band Measurement**

For reporting purpose only.

Please refer to Appendix C.8.

Please refer to Appendix D.8.

Please refer to Appendix E.8.

Please refer to Appendix F.8.

NOTE: All the modes have been tested and recorded worst mode in the report (Omni Antenna)

For Conducted Band edge Measurement

For reporting purpose only.

Please refer to Appendix C.6.

Please refer to Appendix D.6.

Please refer to Appendix E.6.

Please refer to Appendix F.6.

For Conducted Spurious Emissions Measurement

For reporting purpose only.

Please refer to Appendix C.7.

Please refer to Appendix D.7.

Please refer to Appendix E.7.

Please refer to Appendix F.7.

4.9. Frequency Stability

Standard Applicable

According to FCC §15.407(g) "Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user manual."


According to FCC §2.1055(a) "The frequency stability shall be measured with variation of ambient temperature as follows:"

(1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(2) From -20° to + 50° centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.

(3) From 0° to + 50° centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

Test Configuration

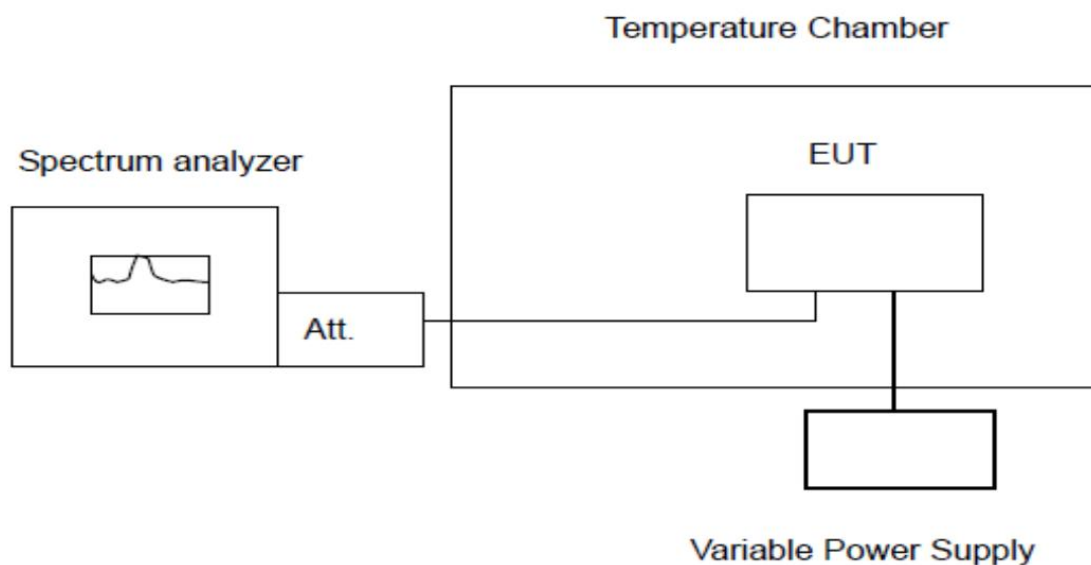

Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 degree operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30 degree. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 degree increased per stage until the highest temperature of +50 degree reached.

Test Results

PASS

Remark:

1. Measured all conditions and recorded worst case.

IEEE 802.11a Mode / 5180 – 5240 MHz / 5180 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5171.692384	5150 – 5250	PASS
20	DC 3.0V	5171.557432	5150 – 5250	PASS
50	DC 3.3V	5171.625684	5150 – 5250	PASS
40	DC 3.3V	5171.667216	5150 – 5250	PASS
30	DC 3.3V	5171.504325	5150 – 5250	PASS
20	DC 3.3V	5171.695834	5150 – 5250	PASS
10	DC 3.3V	5171.512932	5150 – 5250	PASS
0	DC 3.3V	5171.539598	5150 – 5250	PASS
-10	DC 3.3V	5171.563908	5150 – 5250	PASS
-20	DC 3.3V	5171.643173	5150 – 5250	PASS
-30	DC 3.3V	5171.636628	5150 – 5250	PASS

IEEE 802.11a Mode / 5180 – 5240 MHz / 5240 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5248.630850	5150 – 5250	PASS
20	DC 3.0V	5248.592250	5150 – 5250	PASS
50	DC 3.3V	5248.607407	5150 – 5250	PASS
40	DC 3.3V	5248.693051	5150 – 5250	PASS
30	DC 3.3V	5248.638957	5150 – 5250	PASS
20	DC 3.3V	5248.628875	5150 – 5250	PASS
10	DC 3.3V	5248.695171	5150 – 5250	PASS
0	DC 3.3V	5248.609477	5150 – 5250	PASS
-10	DC 3.3V	5248.580038	5150 – 5250	PASS
-20	DC 3.3V	5248.664201	5150 – 5250	PASS
-30	DC 3.3V	5248.632933	5150 – 5250	PASS

IEEE 802.11a Mode / 5260 – 5320 MHz / 5260 MHz

Environment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5251.534885	5250 – 5350	PASS
20	DC 3.0V	5251.507622	5250 – 5350	PASS
50	DC 3.3V	5251.587351	5250 – 5350	PASS
40	DC 3.3V	5251.519543	5250 – 5350	PASS
30	DC 3.3V	5251.538920	5250 – 5350	PASS
20	DC 3.3V	5251.541794	5250 – 5350	PASS
10	DC 3.3V	5251.681034	5250 – 5350	PASS
0	DC 3.3V	5251.581249	5250 – 5350	PASS
-10	DC 3.3V	5251.620139	5250 – 5350	PASS
-20	DC 3.3V	5251.597737	5250 – 5350	PASS
-30	DC 3.3V	5251.681556	5250 – 5350	PASS

IEEE 802.11a Mode / 5260 – 5320 MHz / 5320 MHz

Environment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5328.601559	5250 – 5350	PASS
20	DC 3.0V	5328.686959	5250 – 5350	PASS
50	DC 3.3V	5328.511680	5250 – 5350	PASS
40	DC 3.3V	5328.680903	5250 – 5350	PASS
30	DC 3.3V	5328.669953	5250 – 5350	PASS
20	DC 3.3V	5328.684108	5250 – 5350	PASS
10	DC 3.3V	5328.572910	5250 – 5350	PASS
0	DC 3.3V	5328.566866	5250 – 5350	PASS
-10	DC 3.3V	5328.686405	5250 – 5350	PASS
-20	DC 3.3V	5328.548689	5250 – 5350	PASS
-30	DC 3.3V	5328.692560	5250 – 5350	PASS

IEEE 802.11a Mode / 5500 – 5700 MHz / 5500 MHz

Environment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5491.591192	5470 – 5725	PASS
20	DC 3.0V	5491.699065	5470 – 5725	PASS
50	DC 3.3V	5491.578060	5470 – 5725	PASS
40	DC 3.3V	5491.621002	5470 – 5725	PASS
30	DC 3.3V	5491.640987	5470 – 5725	PASS
20	DC 3.3V	5491.667322	5470 – 5725	PASS
10	DC 3.3V	5491.556143	5470 – 5725	PASS
0	DC 3.3V	5491.654974	5470 – 5725	PASS
-10	DC 3.3V	5491.640514	5470 – 5725	PASS
-20	DC 3.3V	5491.615344	5470 – 5725	PASS
-30	DC 3.3V	5491.642875	5470 – 5725	PASS

IEEE 802.11a Mode / 5500 – 5700 MHz / 5700 MHz

Environment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5708.505504	5470 – 5725	PASS
20	DC 3.0V	5708.632135	5470 – 5725	PASS
50	DC 3.3V	5708.510945	5470 – 5725	PASS
40	DC 3.3V	5708.521875	5470 – 5725	PASS
30	DC 3.3V	5708.660767	5470 – 5725	PASS
20	DC 3.3V	5708.582444	5470 – 5725	PASS
10	DC 3.3V	5708.588085	5470 – 5725	PASS
0	DC 3.3V	5708.554294	5470 – 5725	PASS
-10	DC 3.3V	5708.686015	5470 – 5725	PASS
-20	DC 3.3V	5708.621089	5470 – 5725	PASS
-30	DC 3.3V	5708.679869	5470 – 5725	PASS

IEEE 802.11a Mode / 5745 – 5825 MHz / 5745 MHz

Environment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5736.662529	5725 – 5850	PASS
20	DC 3.0V	5736.602050	5725 – 5850	PASS
50	DC 3.3V	5736.542946	5725 – 5850	PASS
40	DC 3.3V	5736.511408	5725 – 5850	PASS
30	DC 3.3V	5736.598208	5725 – 5850	PASS
20	DC 3.3V	5736.649268	5725 – 5850	PASS
10	DC 3.3V	5736.577011	5725 – 5850	PASS
0	DC 3.3V	5736.520987	5725 – 5850	PASS
-10	DC 3.3V	5736.580913	5725 – 5850	PASS
-20	DC 3.3V	5736.553715	5725 – 5850	PASS
-30	DC 3.3V	5736.621572	5725 – 5850	PASS

IEEE 802.11a Mode / 5745 – 5825 MHz / 5825 MHz

Environment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 3.6V	5833.641316	5725 – 5850	PASS
20	DC 3.0V	5833.536407	5725 – 5850	PASS
50	DC 3.3V	5833.683030	5725 – 5850	PASS
40	DC 3.3V	5833.637791	5725 – 5850	PASS
30	DC 3.3V	5833.581789	5725 – 5850	PASS
20	DC 3.3V	5833.545702	5725 – 5850	PASS
10	DC 3.3V	5833.532941	5725 – 5850	PASS
0	DC 3.3V	5833.618568	5725 – 5850	PASS
-10	DC 3.3V	5833.572697	5725 – 5850	PASS
-20	DC 3.3V	5833.574094	5725 – 5850	PASS
-30	DC 3.3V	5833.818218	5725 – 5850	PASS

4.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The antenna is Omni&FPC Aantenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 3.81dBi&2.96dBi.

Reference to the Test Report: **CTA24072303501.**

5. TEST SETUP PHOTOS OF THE EUT

Reference to the test report No. CTA24072303501.

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No. CTA24072303501.

.....End of Report.....