



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# Test Report

**Report No. :** CQASZ20190500017EX-01

**Applicant:** Hangzhou Meari Technology Co., Ltd.

**Address of Applicant:** No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA

**Manufacturer:** Hangzhou Meari Technology Co., Ltd.

**Address of Manufacturer:** No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA

**Equipment Under Test (EUT):**

**Product:** IP Camera

**All Models:** Bullet 2S, Bullet 2

**Test Model No.:** Bullet 2S

**Brand Name:** N/A

**FCC ID:** 2AG7C-BULLET2S

**Standards:** 47 CFR FCC Part 15 Subpart C 15.247

**Date of Test:** May 06, 2019 to May 30, 2019

**Date of Issue:** May 30, 2019

**Test Result :** PASS

**Tested By:**

*Daisy Qin*

(Daisy Qin)

**Reviewed By:**

*Aaron Ma*

(Aaron Ma)

**Approved By:**

*Jack Ai*

( Jack Ai)



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 2 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190500017EX-01	Rev.01	Initial report	May 30, 2019

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

## 4 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 TEST SUMMARY .....</b>	<b>3</b>
<b>4 CONTENTS .....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST ENVIRONMENT .....	7
5.4 DESCRIPTION OF SUPPORT UNITS .....	7
5.5 TEST LOCATION .....	7
5.6 TEST FACILITY .....	7
5.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	8
5.8 DEVIATION FROM STANDARDS .....	8
5.9 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	8
5.11 EQUIPMENT LIST .....	9
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>10</b>
6.1 ANTENNA REQUIREMENT .....	10
6.2 CONDUCTED EMISSIONS .....	11
6.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER .....	14
6.4 6dB OCCUPY BANDWIDTH .....	15
6.5 POWER SPECTRAL DENSITY .....	20
6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	25
6.7 RF CONDUCTED SPURIOUS EMISSIONS .....	29
6.8 RADIATED SPURIOUS EMISSIONS.....	43
6.8.1 Radiated emission below 1GHz.....	46
6.8.2 Transmitter emission above 1GHz.....	48
6.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....	50
<b>7 PHOTOGRAPHS - EUT TEST SETUP .....</b>	<b>56</b>
<b>8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>	<b>58</b>

## 5 General Information

### 5.1 Client Information

Applicant:	Hangzhou Meari Technology Co., Ltd.
Address of Applicant:	No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA
Manufacturer:	Hangzhou Meari Technology Co., Ltd.
Address of Manufacturer:	No.91, Chutian Road,Xixing Block, Binjiang, Hangzhou, 310051 Zhejiang, CHINA

### 5.2 General Description of EUT

Product Name:	IP Camera
Model No.:	Bullet 2S
Trade Mark:	N/A
Hardware version:	V1.1
Software version:	V1.0
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(H40): 2422MHz~2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM IEEE for 802.11n(HT20): OFDM IEEE for 802.11n(HT40): OFDM
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Test Software of EUT:	RF test (manufacturer declare )
Antenna Type	Internal Antenna
Antenna Gain	2.5dBi
Power Supply:	DC 12V from adapter
Adapter Information:	MODEL: KA1201A-1201000US INPUT:100~240V ~50/60Hz 0.4A Max OUTPUT: 12V 1000mA

Note: Please refer to the instruction manual for details.

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	/	/

Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
/	/	4	2427MHz	7	2442MHz	/	/
/	/	5	2432MHz	8	2447MHz	/	/
3	2422MHz	6	2437MHz	9	2452MHz	/	/

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note: Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

### 5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar
Transmitting mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. Note: In the process of transmitting of EUT, the duty cycle >98%.

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
AC Adapter	/	KA1201A-1201000US	AC/DC	FCC SDOC

### 5.5 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 5.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 5.8 Deviation from Standards

None.

## 5.9 Abnormalities from Standard Conditions

None.

## 5.10 Other Information Requested by the Customer

None.




## 5.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2018/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Spectrum analyzer	Agilent	E4440A	CQA-103	2018/10/28	2019/10/27
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2018/9/26	2019/9/25
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)	
	<p>15.203 requirement:  An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:  The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:		
<p>The antenna is internal antenna. The best case gain of the antenna is 2.5dBi.</p>		


## 6.2 Conducted Emissions

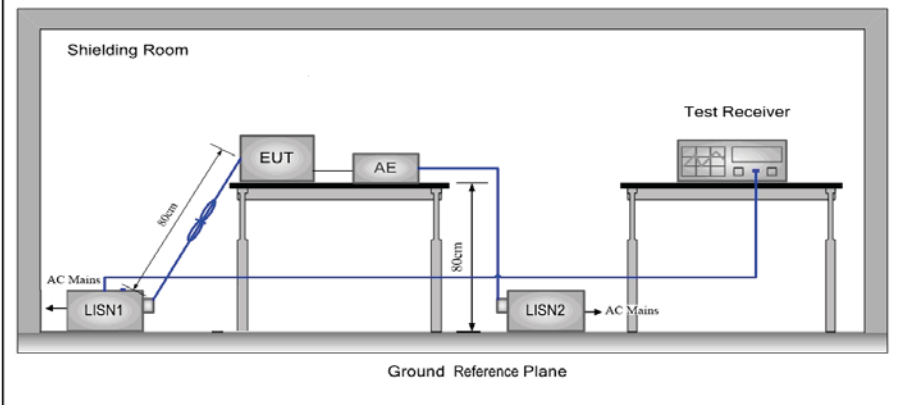Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>		
Test Setup:			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.		

Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at highest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

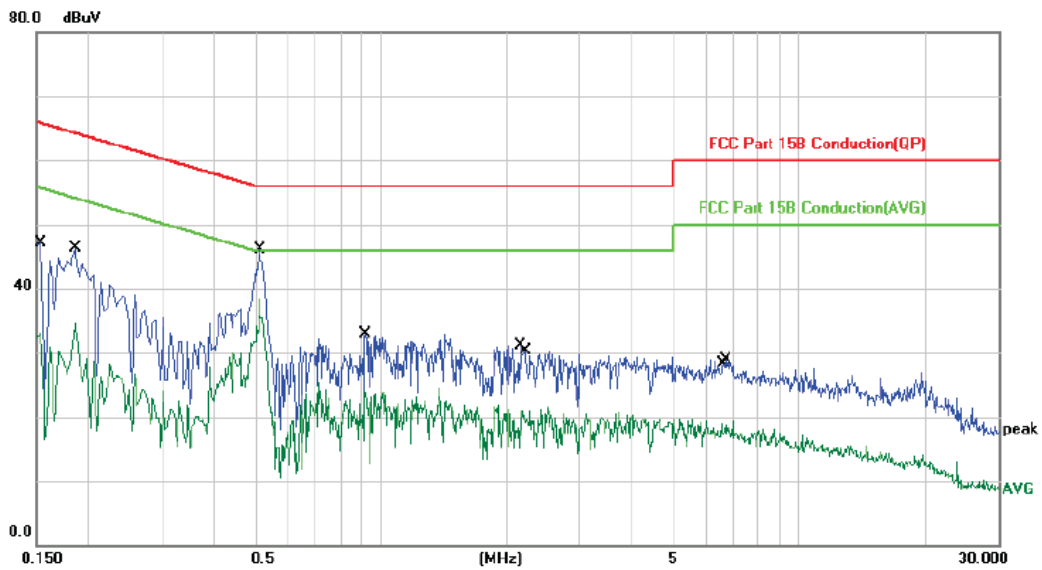


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1539	46.89	0.17	47.06	65.78	-18.72	QP	
2		0.1539	32.97	0.17	33.14	55.78	-22.64	AVG	
3		0.1860	46.08	0.19	46.27	64.21	-17.94	QP	
4		0.1860	34.50	0.19	34.69	54.21	-19.52	AVG	
5		0.5140	45.72	0.32	46.04	56.00	-9.96	QP	
6	*	0.5140	37.91	0.32	38.23	46.00	-7.77	AVG	
7		0.9180	23.83	0.30	24.13	46.00	-21.87	AVG	
8		0.9220	32.50	0.30	32.80	56.00	-23.20	QP	
9		2.1580	31.01	0.15	31.16	56.00	-24.84	QP	
10		2.1980	20.76	0.14	20.90	46.00	-25.10	AVG	
11		6.5540	18.96	0.00	18.96	50.00	-31.04	AVG	
12		6.6660	28.97	0.00	28.97	60.00	-31.03	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

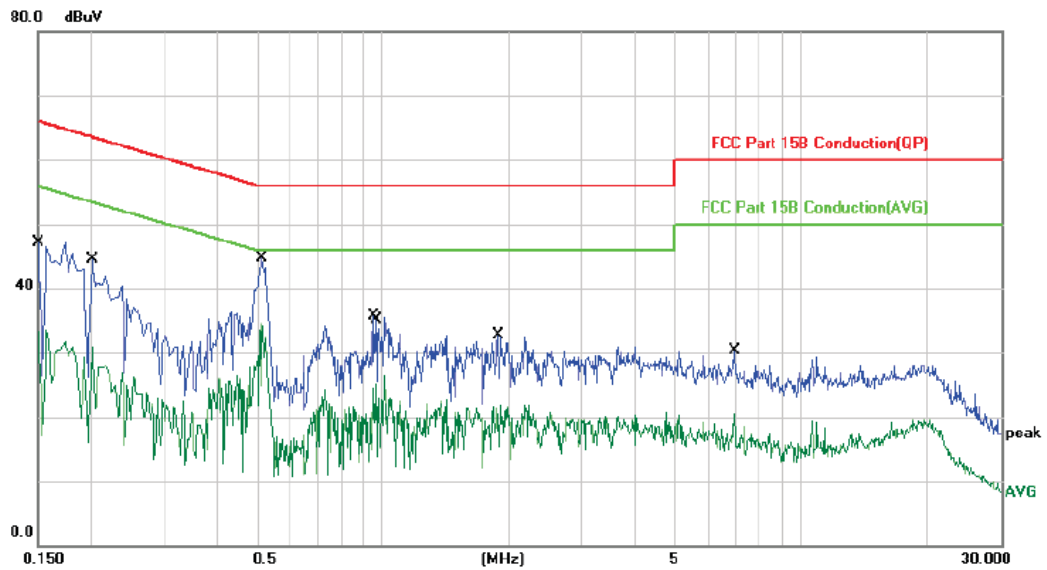


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dB	Over dB	Detector	Comment
1	0.1500	46.99	0.17	47.16	65.99	-18.83	QP	
2	0.1516	26.63	0.17	26.80	55.91	-29.11	AVG	
3	0.2007	25.88	0.19	26.07	53.58	-27.51	AVG	
4	0.2020	44.37	0.19	44.56	63.52	-18.96	QP	
5 *	0.5180	44.46	0.32	44.78	56.00	-11.22	QP	
6	0.5180	34.13	0.32	34.45	46.00	-11.55	AVG	
7	0.9500	35.34	0.30	35.64	56.00	-20.36	QP	
8	0.9660	24.86	0.29	25.15	46.00	-20.85	AVG	
9	1.8740	21.03	0.18	21.21	46.00	-24.79	AVG	
10	1.8940	32.44	0.17	32.61	56.00	-23.39	QP	
11	6.9380	30.34	-0.02	30.32	60.00	-29.68	QP	
12	6.9380	20.61	-0.02	20.59	50.00	-29.41	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 6.3 Conducted Peak & Average Output Power

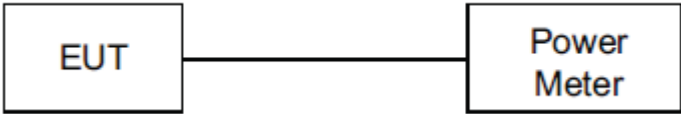
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

#### WIFI

Type	Test channel	Peak Output Power (dBm)	Average Output Power dBm)	Limit (dBm)	Result
802.11b	Lowest	14.114	10.08	30.00	Pass
	Middle	14.355	10.13		
	Highest	15.270	10.24		
802.11g	Lowest	14.170	10.06	30.00	Pass
	Middle	12.847	9.43		
	Highest	12.987	9.39		
802.11n(HT20)	Lowest	13.282	9.61	30.00	Pass
	Middle	13.284	9.55		
	Highest	13.341	9.58		
802.11n(HT40)	Lowest	13.743	9.47	30.00	Pass
	Middle	12.763	9.34		
	Highest	12.568	9.26		

Note: 1.The test results including the cable lose.

## 6.4 6dB Occupy Bandwidth

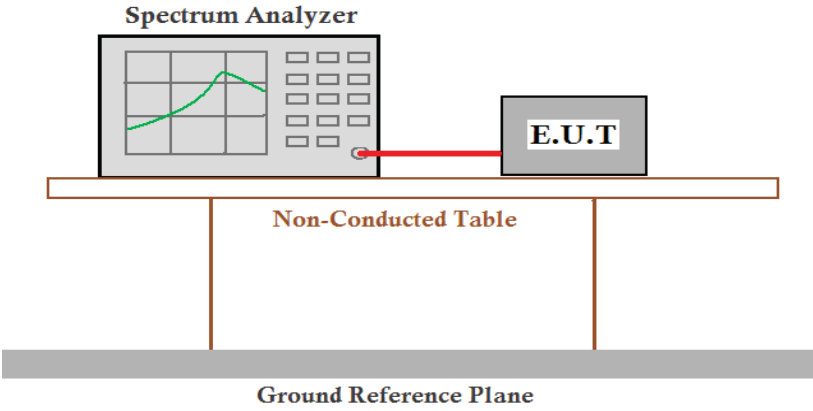Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass



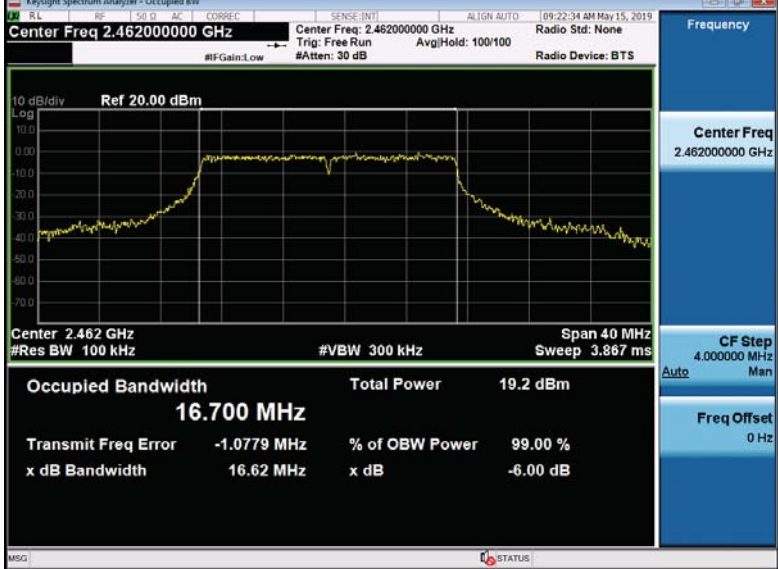
### Measurement Data



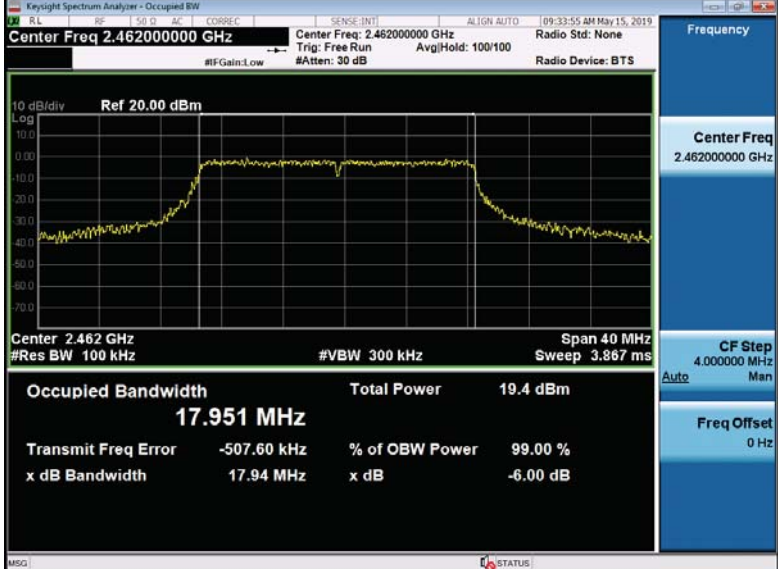
Type	hannel	6dB Bandwidth (MHz)	Limit (KHz)	Result
8 2.11b	Lowest	10.108	≥500	Pass
	Middle	10.085		
	Highest	10.104		
802.11g	Lowest	16.587	≥500	Pass
	Middle	16.571		
	Highest	16.624		
802.11n(HT20)	Lowest	17.835	≥500	Pass
	Middle	17.855		
	Highest	17.936		
802.11n(HT40)	Lowest	36.509	≥500	Pass
	M ddle	36.514		
	Highest	36.519		




Test plot as follows:

Graphs_6dB Occupy Bandwidth	
<p>11B/LCH</p>	<p>Center Freq: 2.41200000 GHz</p> <p>Occupied Bandwidth: 15.363 MHz</p> <p>Total Power: 20.9 dBm</p> <p>Transmit Freq Error: 64.095 kHz</p> <p>x dB Bandwidth: 10.11 MHz</p>
<p>11B/MCH</p>	<p>Center Freq: 2.43700000 GHz</p> <p>Occupied Bandwidth: 15.364 MHz</p> <p>Total Power: 21.1 dBm</p> <p>Transmit Freq Error: 75.631 kHz</p> <p>x dB Bandwidth: 10.09 MHz</p>
<p>11B/HCH</p>	<p>Center Freq: 2.46200000 GHz</p> <p>Occupied Bandwidth: 15.415 MHz</p> <p>Total Power: 22.1 dBm</p> <p>Transmit Freq Error: -248.59 kHz</p> <p>x dB Bandwidth: 10.10 MHz</p>

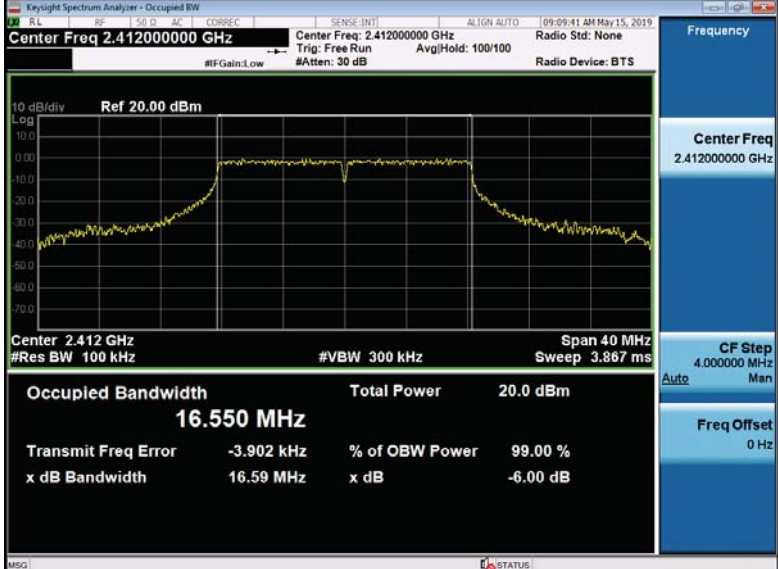


<p>11G/LCH</p>	 <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Radio Std: None</p> <p>Frequency: 2.41200000 GHz</p> <p>CF Step: 4.000000 MHz</p> <p>Freq Offset: 0 Hz</p> <p>Occupied Bandwidth: 16.55 MHz</p> <p>Total Power: 20.0 dBm</p> <p>Transmit Freq Error: -3.902 kHz</p> <p>% of OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.59 MHz</p> <p>x dB: -6.00 dB</p>
<p>11G/MCH</p>	 <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Radio Std: None</p> <p>Frequency: 2.43700000 GHz</p> <p>CF Step: 4.000000 MHz</p> <p>Freq Offset: 0 Hz</p> <p>Occupied Bandwidth: 16.533 MHz</p> <p>Total Power: 18.8 dBm</p> <p>Transmit Freq Error: 34.175 kHz</p> <p>% of OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.57 MHz</p> <p>x dB: -6.00 dB</p>
<p>11G/HCH</p>	 <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Radio Std: None</p> <p>Frequency: 2.46200000 GHz</p> <p>CF Step: 4.000000 MHz</p> <p>Freq Offset: 0 Hz</p> <p>Occupied Bandwidth: 16.700 MHz</p> <p>Total Power: 19.2 dBm</p> <p>Transmit Freq Error: -1.0779 MHz</p> <p>% of OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.62 MHz</p> <p>x dB: -6.00 dB</p>
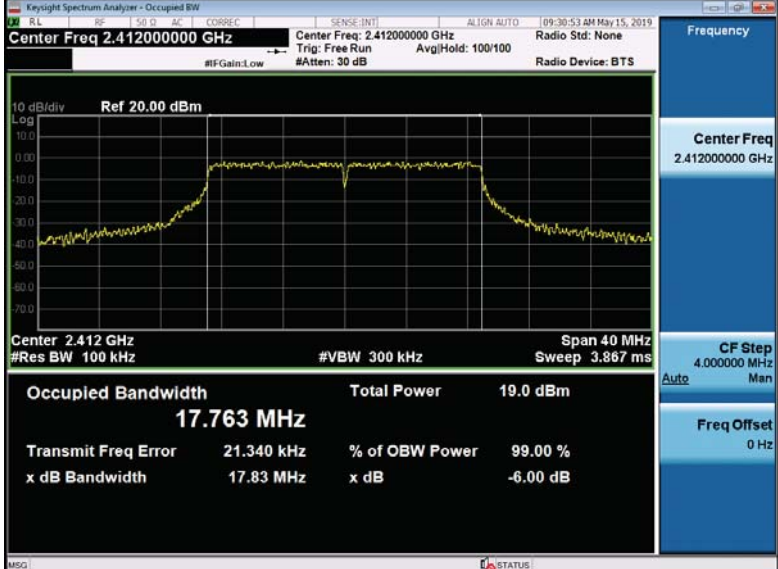
<p>11N20/LCH</p>	 <p>Center Freq: 2.41200000 GHz</p> <p>Occupied Bandwidth: 17.763 MHz</p> <p>Total Power: 19.0 dBm</p> <p>Transmit Freq Error: 21.340 kHz</p> <p>x dB Bandwidth: 17.83 MHz</p>
<p>11N20/MCH</p>	 <p>Center Freq: 2.43700000 GHz</p> <p>Occupied Bandwidth: 17.774 MHz</p> <p>Total Power: 19.0 dBm</p> <p>Transmit Freq Error: 38.147 kHz</p> <p>x dB Bandwidth: 17.86 MHz</p>
<p>11N20/HCH</p>	 <p>Center Freq: 2.46200000 GHz</p> <p>Occupied Bandwidth: 17.951 MHz</p> <p>Total Power: 19.4 dBm</p> <p>Transmit Freq Error: -507.60 kHz</p> <p>x dB Bandwidth: 17.94 MHz</p>
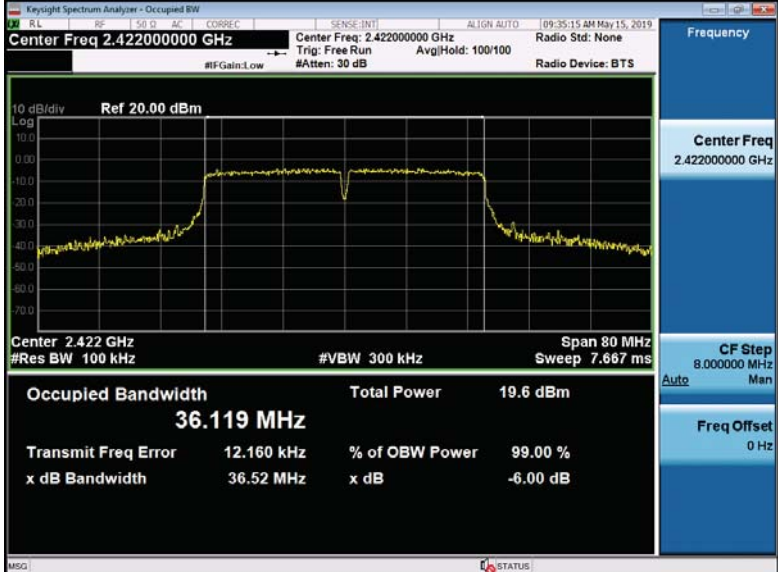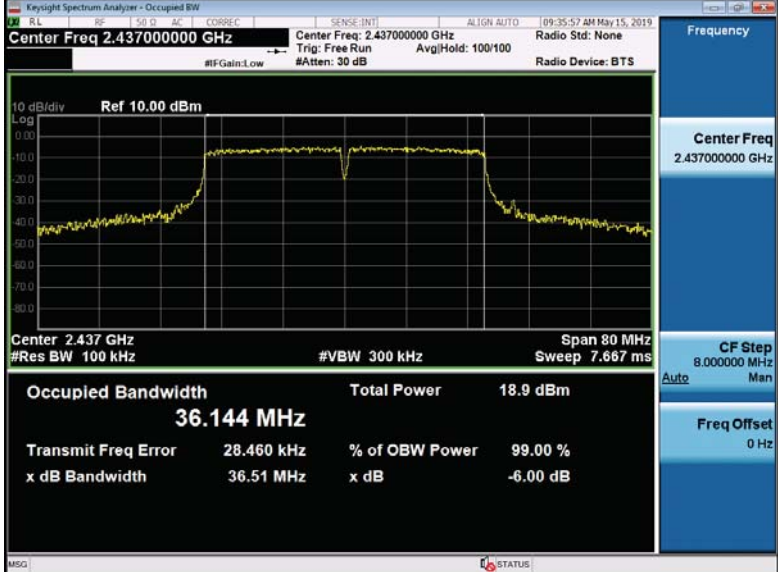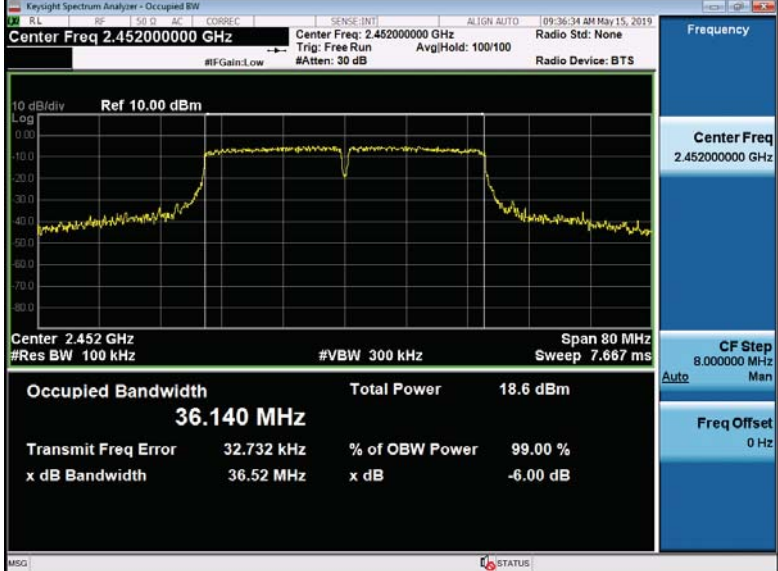
<p>11N40/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW          Center Freq 2.42200000 GHz          Center Freq: 2.42200000 GHz          Trig: Free Run Avg/Hold: 100/100          Radio Std: None          Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm          Log          0.00          -10.00          -20.00          -30.00          -40.00          -50.00          -60.00          -70.00</p> <p>Center 2.422 GHz          #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms</p> <p><b>Occupied Bandwidth 36.119 MHz</b> Total Power 19.6 dBm</p> <p>Transmit Freq Error 12.160 kHz % of OBW Power 99.00 %          x dB Bandwidth 36.52 MHz x dB -6.00 dB</p> <p>Frequency          Center Freq 2.42200000 GHz          CF Step 8.000000 MHz          Freq Offset 0 Hz</p>
<p>11N40/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW          Center Freq 2.43700000 GHz          Center Freq: 2.43700000 GHz          Trig: Free Run Avg/Hold: 100/100          Radio Std: None          Radio Device: BTS</p> <p>10 dB/div Ref 10.00 dBm          Log          0.00          -10.00          -20.00          -30.00          -40.00          -50.00          -60.00          -70.00</p> <p>Center 2.437 GHz          #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms</p> <p><b>Occupied Bandwidth 36.144 MHz</b> Total Power 18.9 dBm</p> <p>Transmit Freq Error 28.460 kHz % of OBW Power 99.00 %          x dB Bandwidth 36.51 MHz x dB -6.00 dB</p> <p>Frequency          Center Freq 2.43700000 GHz          CF Step 8.000000 MHz          Freq Offset 0 Hz</p>
<p>11N40/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW          Center Freq 2.45200000 GHz          Center Freq: 2.45200000 GHz          Trig: Free Run Avg/Hold: 100/100          Radio Std: None          Radio Device: BTS</p> <p>10 dB/div Ref 10.00 dBm          Log          0.00          -10.00          -20.00          -30.00          -40.00          -50.00          -60.00          -70.00</p> <p>Center 2.452 GHz          #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms</p> <p><b>Occupied Bandwidth 36.140 MHz</b> Total Power 18.6 dBm</p> <p>Transmit Freq Error 32.732 kHz % of OBW Power 99.00 %          x dB Bandwidth 36.52 MHz x dB -6.00 dB</p> <p>Frequency          Center Freq 2.45200000 GHz          CF Step 8.000000 MHz          Freq Offset 0 Hz</p>

## 6.5 Power Spectral Density

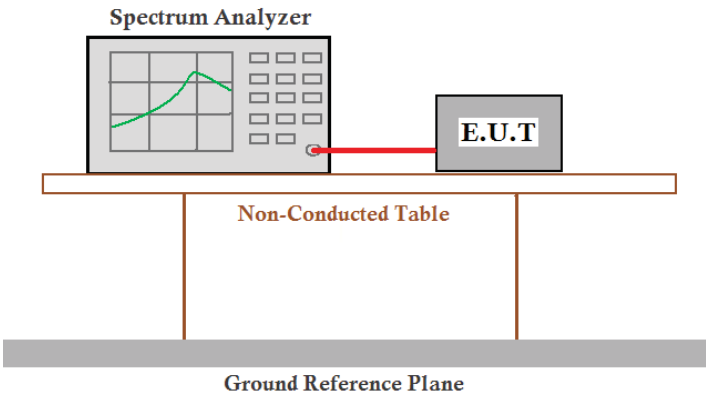


Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass

### Measurement Data




Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	Lowest	-14.243	8	Pass
	Middle	-14.751		
	High st	-14.427		
802.11g	Lowest	-14.507	8	Pass
	Middle	-15.717		
	Highest	-14.471		
802.11n(HT20)	Lowest	-15.221	8	Pass
	Middle	-15.850		
	Highest	-13.642		
802.11n(HT40)	Lowest	-15.564	8	Pass
	Middle	-17.789		
	Highest	-16.774		




Test plot as follows:

Graphs

<p>11B/LCH</p>	
<p>11B/MCH</p>	
<p>11B/HCH</p>	


<p>11G/LCH</p>	
<p>11G/MCH</p>	
<p>11G/HCH</p>	
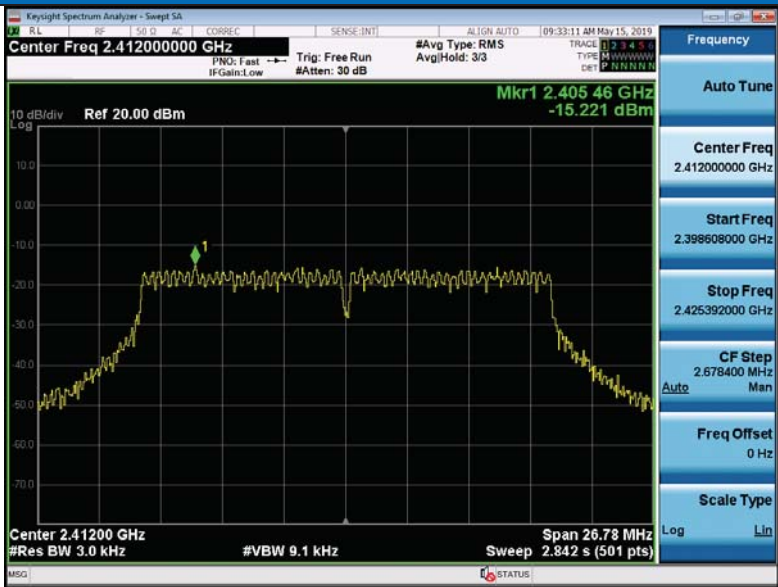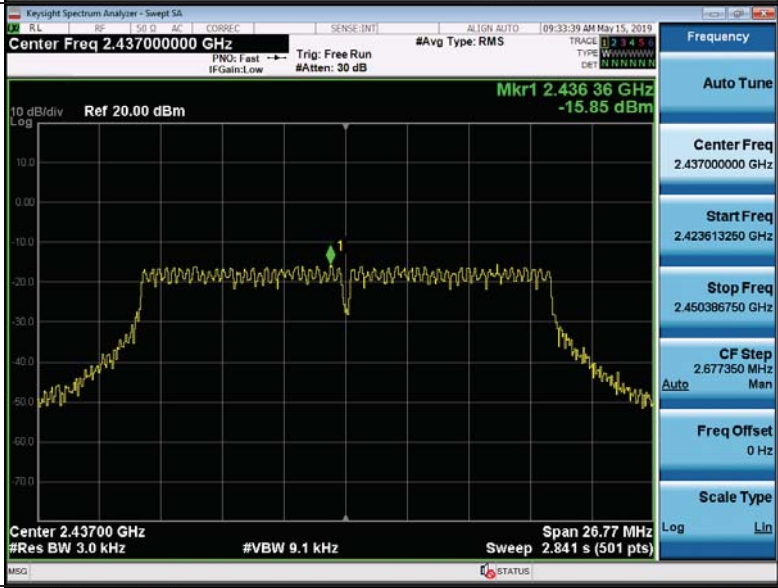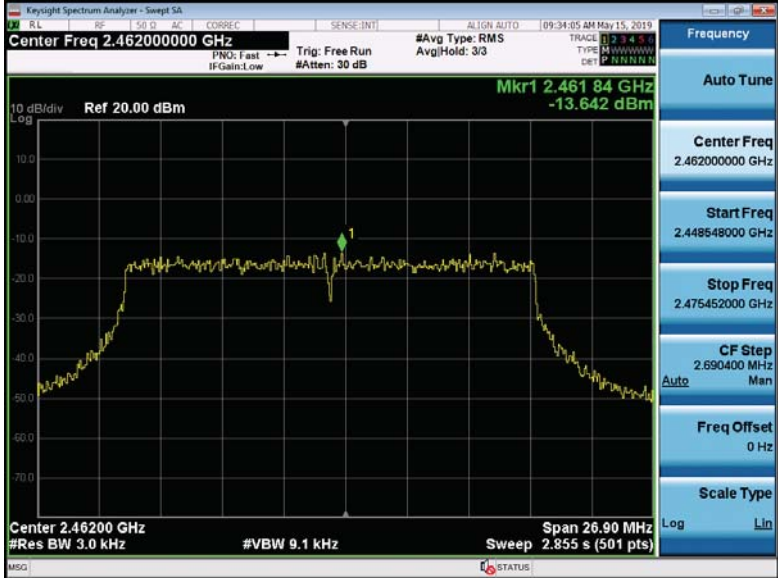
<p>11N20/LCH</p>	
<p>11N20/MCH</p>	
<p>11N20/HCH</p>	

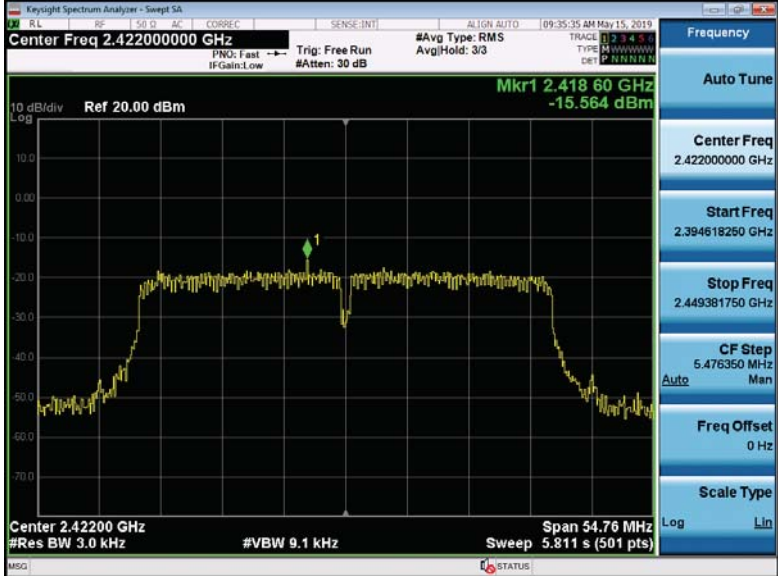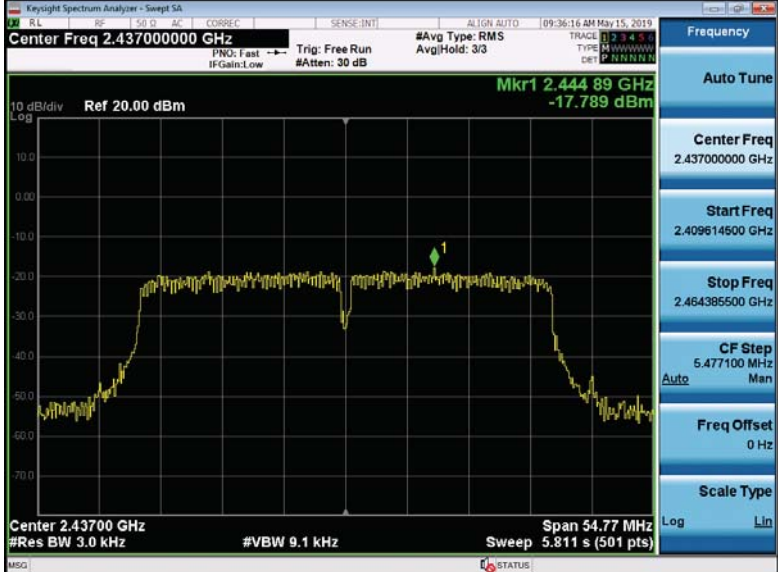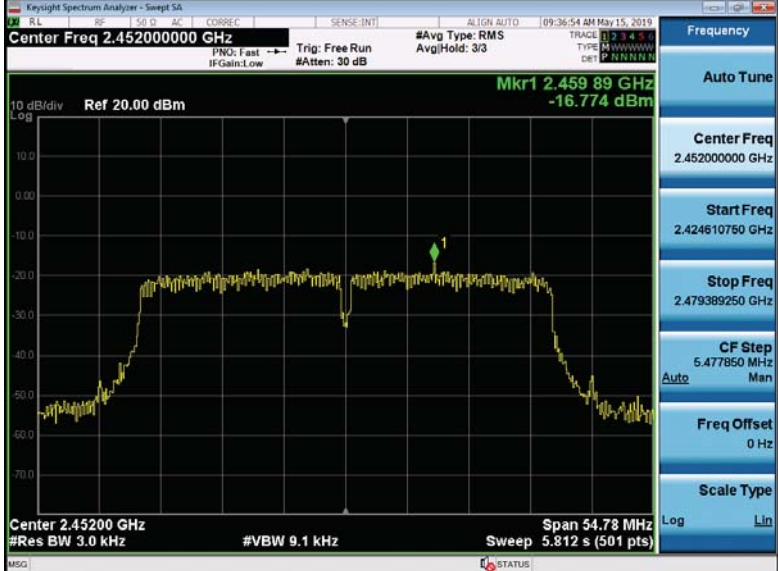
<p>11N40/LCH</p>	
<p>11N40/MCH</p>	
<p>11N40/HCH</p>	



## 6.6 Band-edge for RF Conducted Emissions

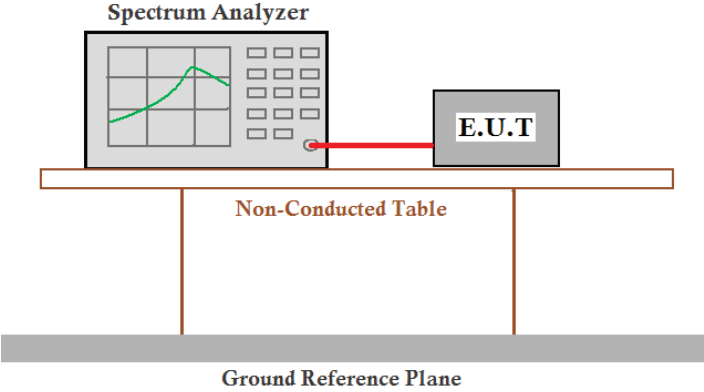Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test plot as follows:

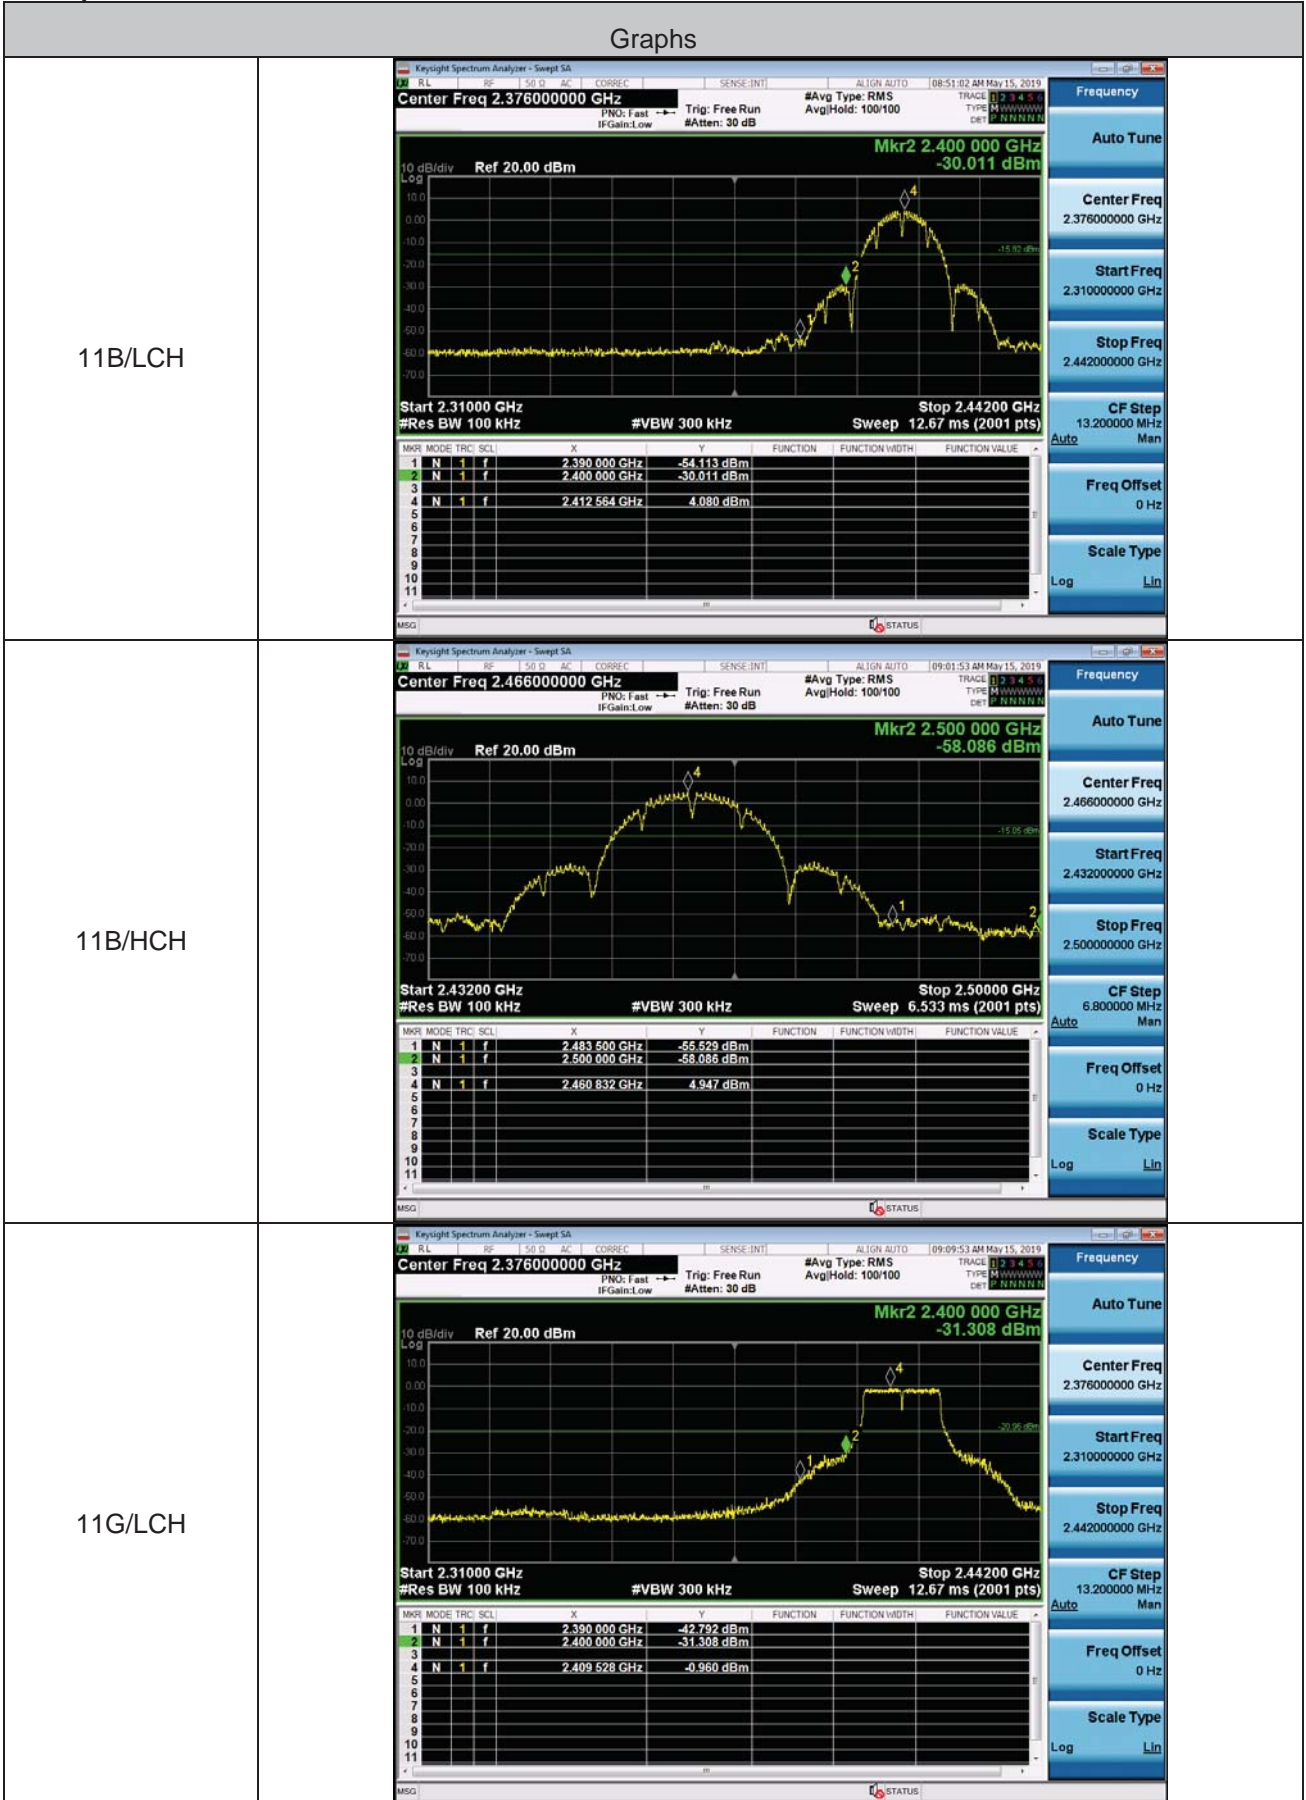


<p>11G/HCH</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.46600000 GHz</p> <p>Start Freq 2.43200000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 6.800000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log</p>
<p>11N20/LCH</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.37600000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.44200000 GHz</p> <p>CF Step 13.200000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log</p>
<p>11N20/HCH</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.46600000 GHz</p> <p>Start Freq 2.43200000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 6.800000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log</p>


<p>11N40/LCH</p>	<p>Center Freq 2.39600000 GHz</p> <p>Mkr2 2.400 000 GHz -33.805 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.48200 GHz #VBW 300 kHz Sweep 16.53 ms (2001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-41.358 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-33.805 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.417 930 GHz</td> <td>-4.832 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.390 000 GHz	-41.358 dBm				2	N	1	f	2.400 000 GHz	-33.805 dBm				3									4	N	1	f	2.417 930 GHz	-4.832 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.390 000 GHz	-41.358 dBm																																																																																																								
2	N	1	f	2.400 000 GHz	-33.805 dBm																																																																																																								
3																																																																																																													
4	N	1	f	2.417 930 GHz	-4.832 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>11N40/HCH</p>	<p>Center Freq 2.44600000 GHz</p> <p>Mkr2 2.500 000 GHz -53.548 dBm</p> <p>Start 2.39200 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 10.40 ms (2001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-42.584 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-53.548 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.448 538 GHz</td> <td>-5.183 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 500 GHz	-42.584 dBm				2	N	1	f	2.500 000 GHz	-53.548 dBm				3									4	N	1	f	2.448 538 GHz	-5.183 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.483 500 GHz	-42.584 dBm																																																																																																								
2	N	1	f	2.500 000 GHz	-53.548 dBm																																																																																																								
3																																																																																																													
4	N	1	f	2.448 538 GHz	-5.183 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													


## 6.7 RF Conducted Spurious Emissions

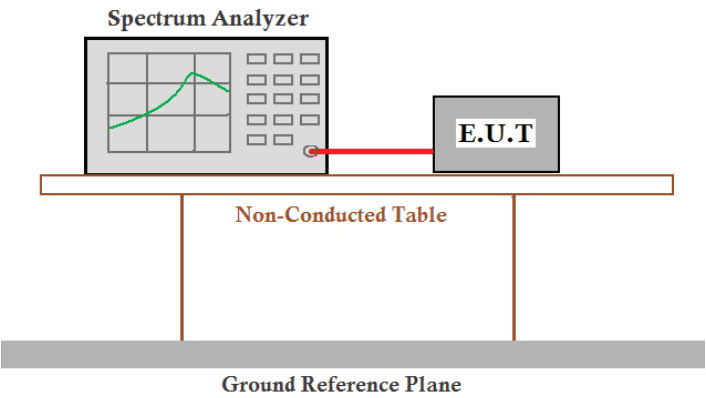Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>The diagram illustrates the test setup for RF conducted spurious emissions. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p>
	Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test plot as follows:

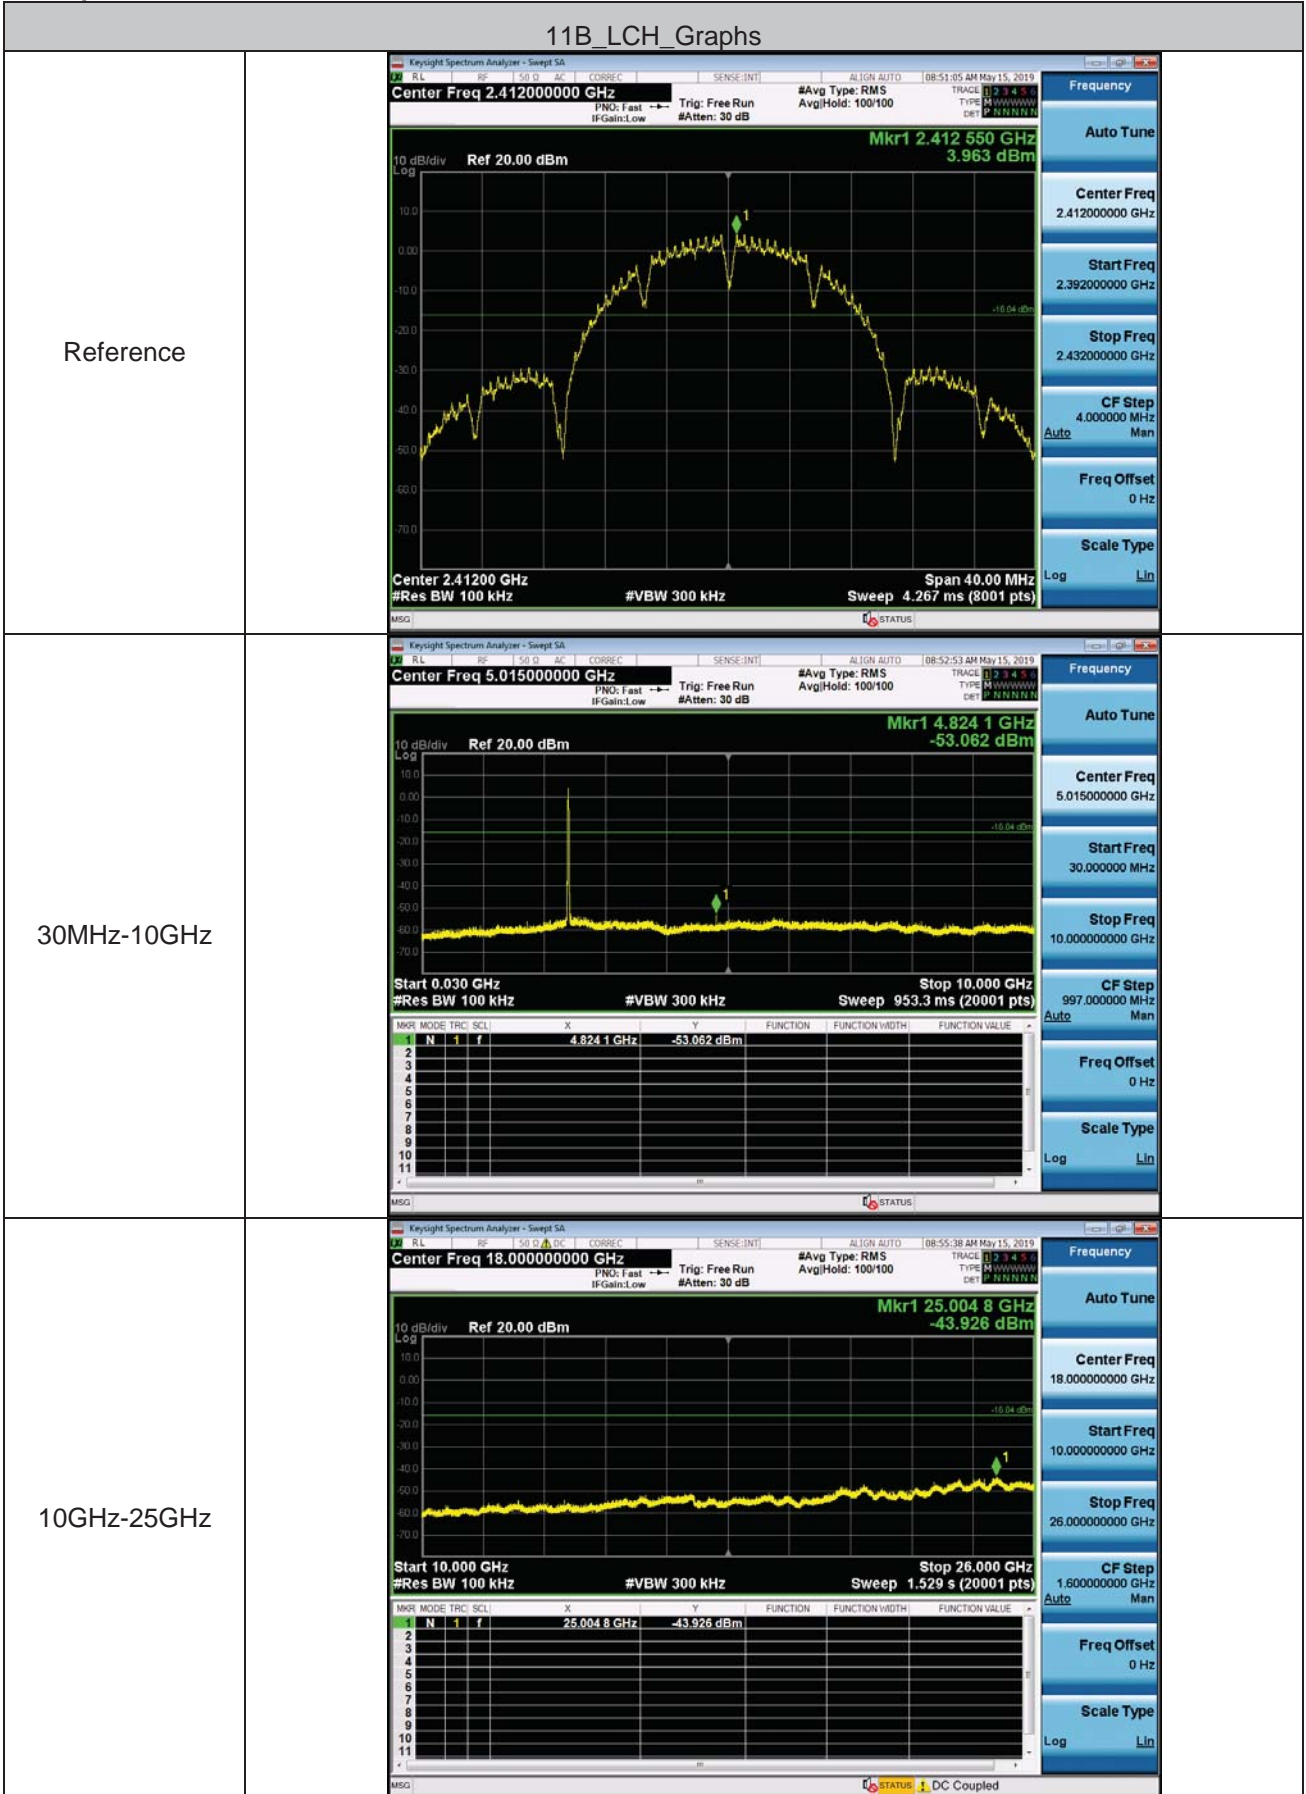


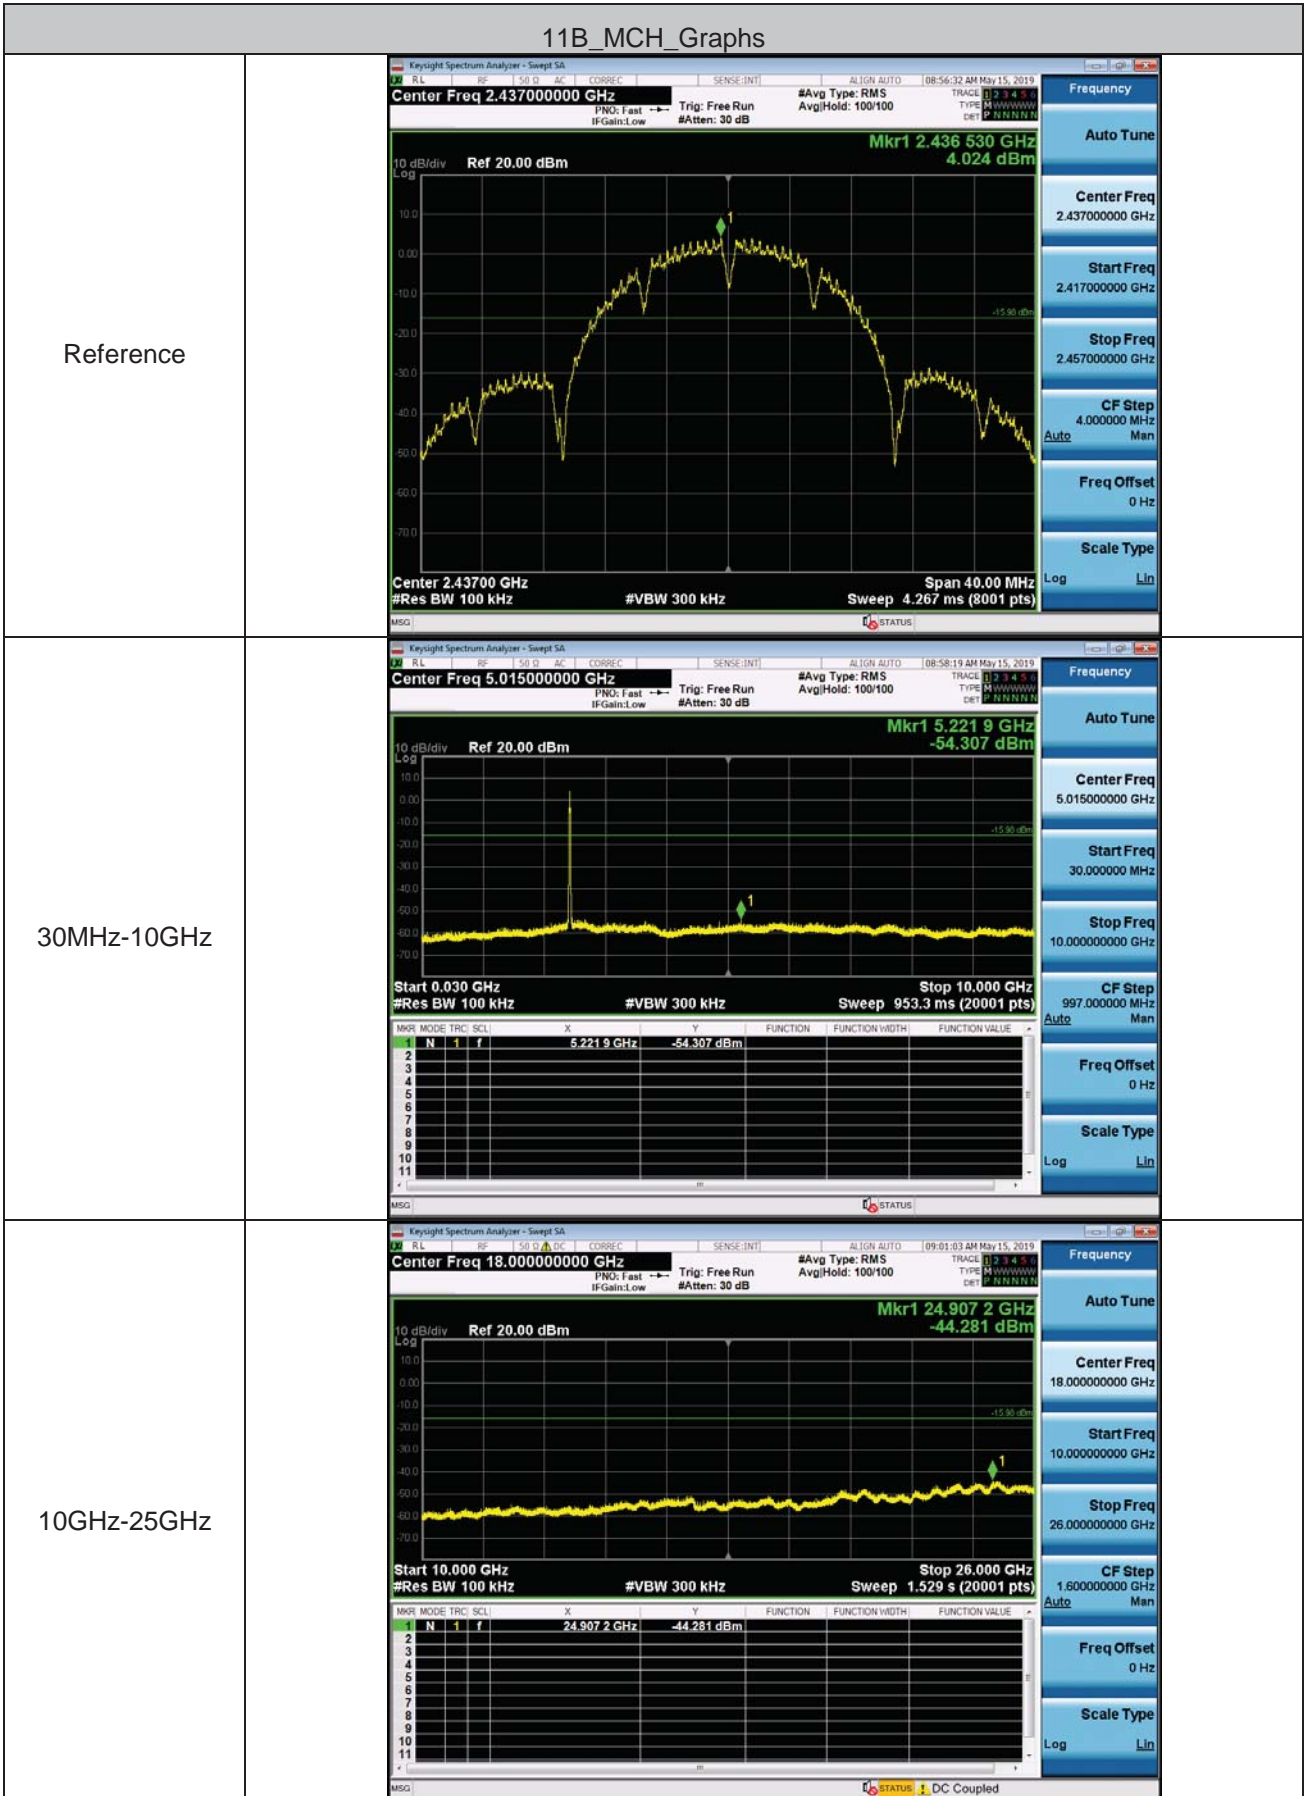


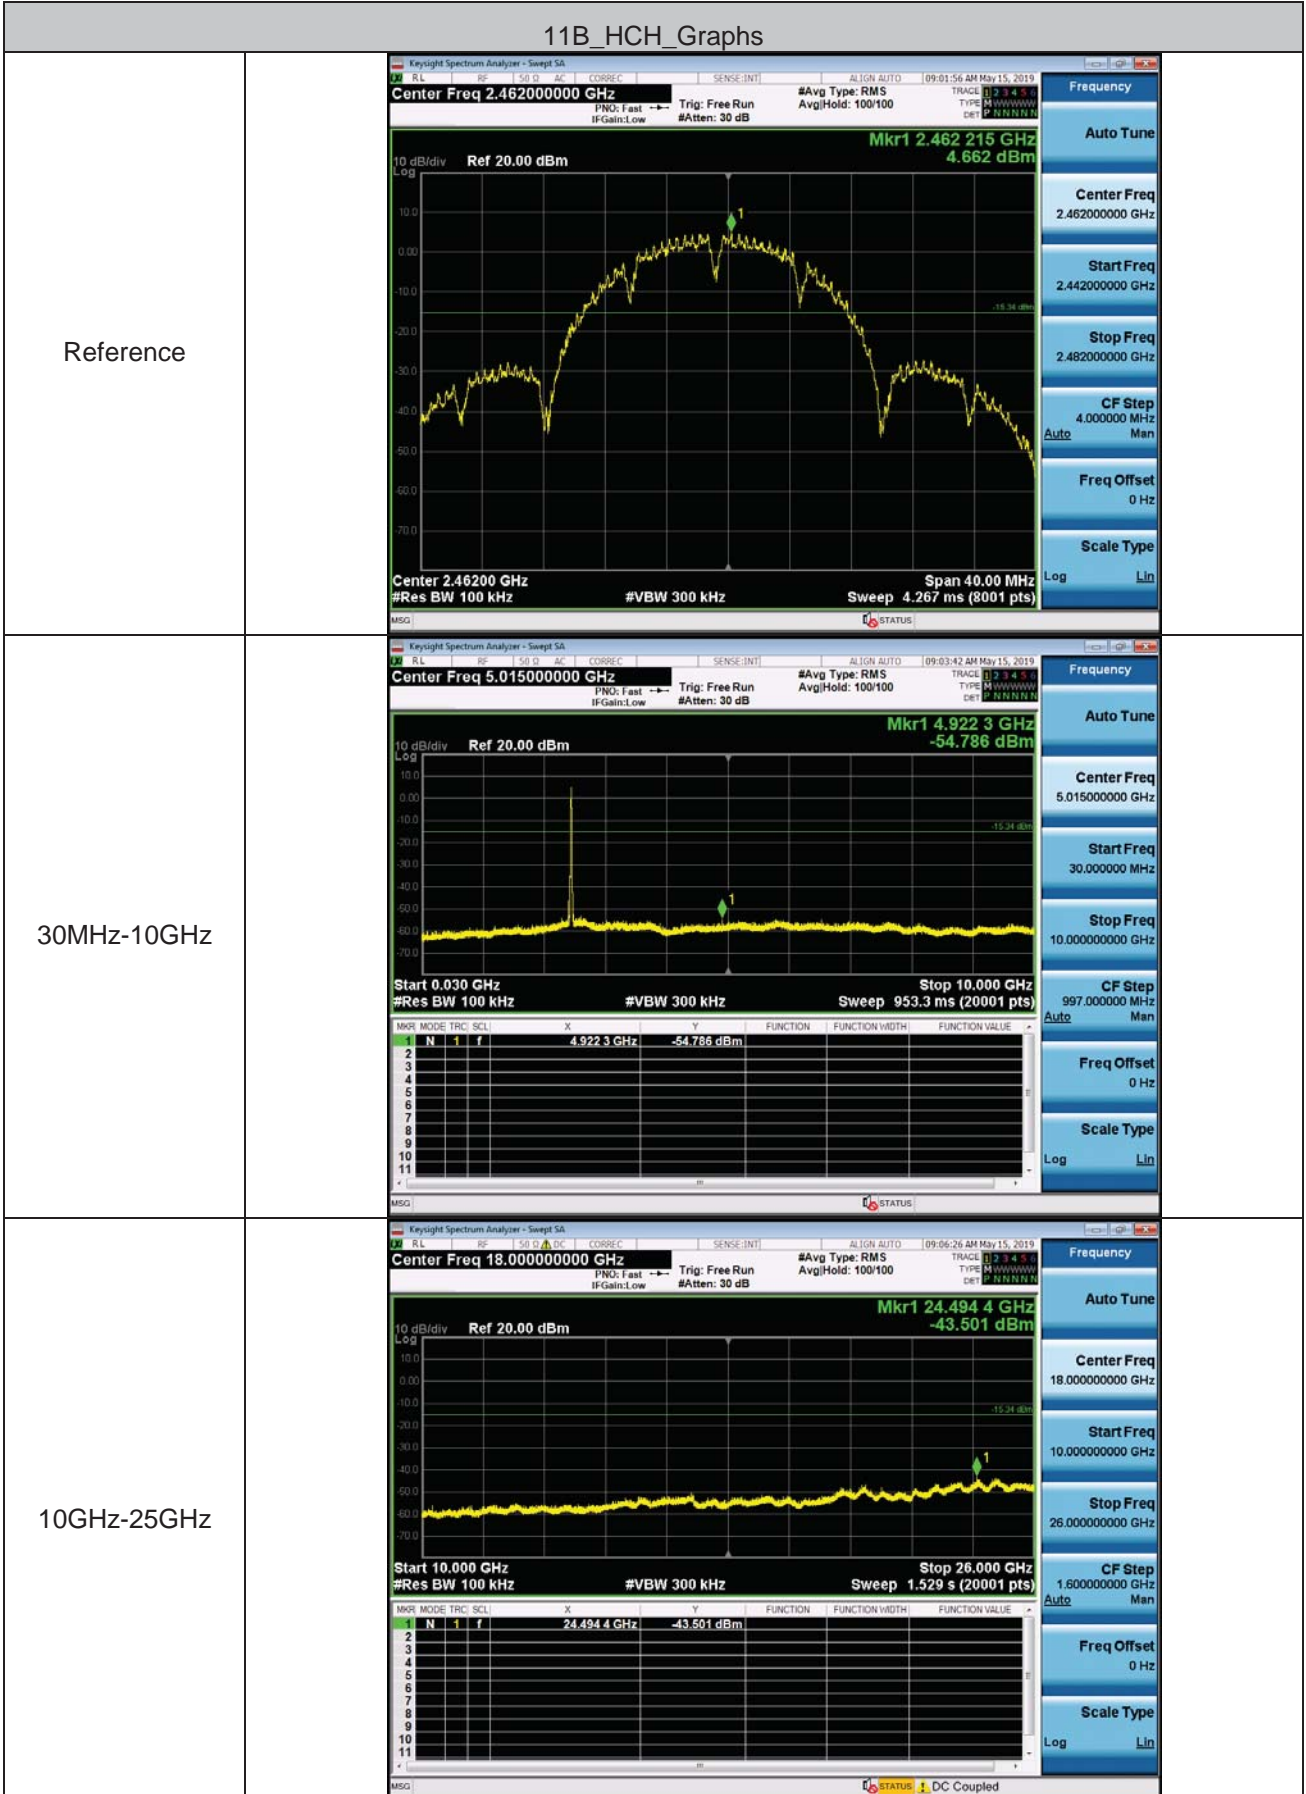






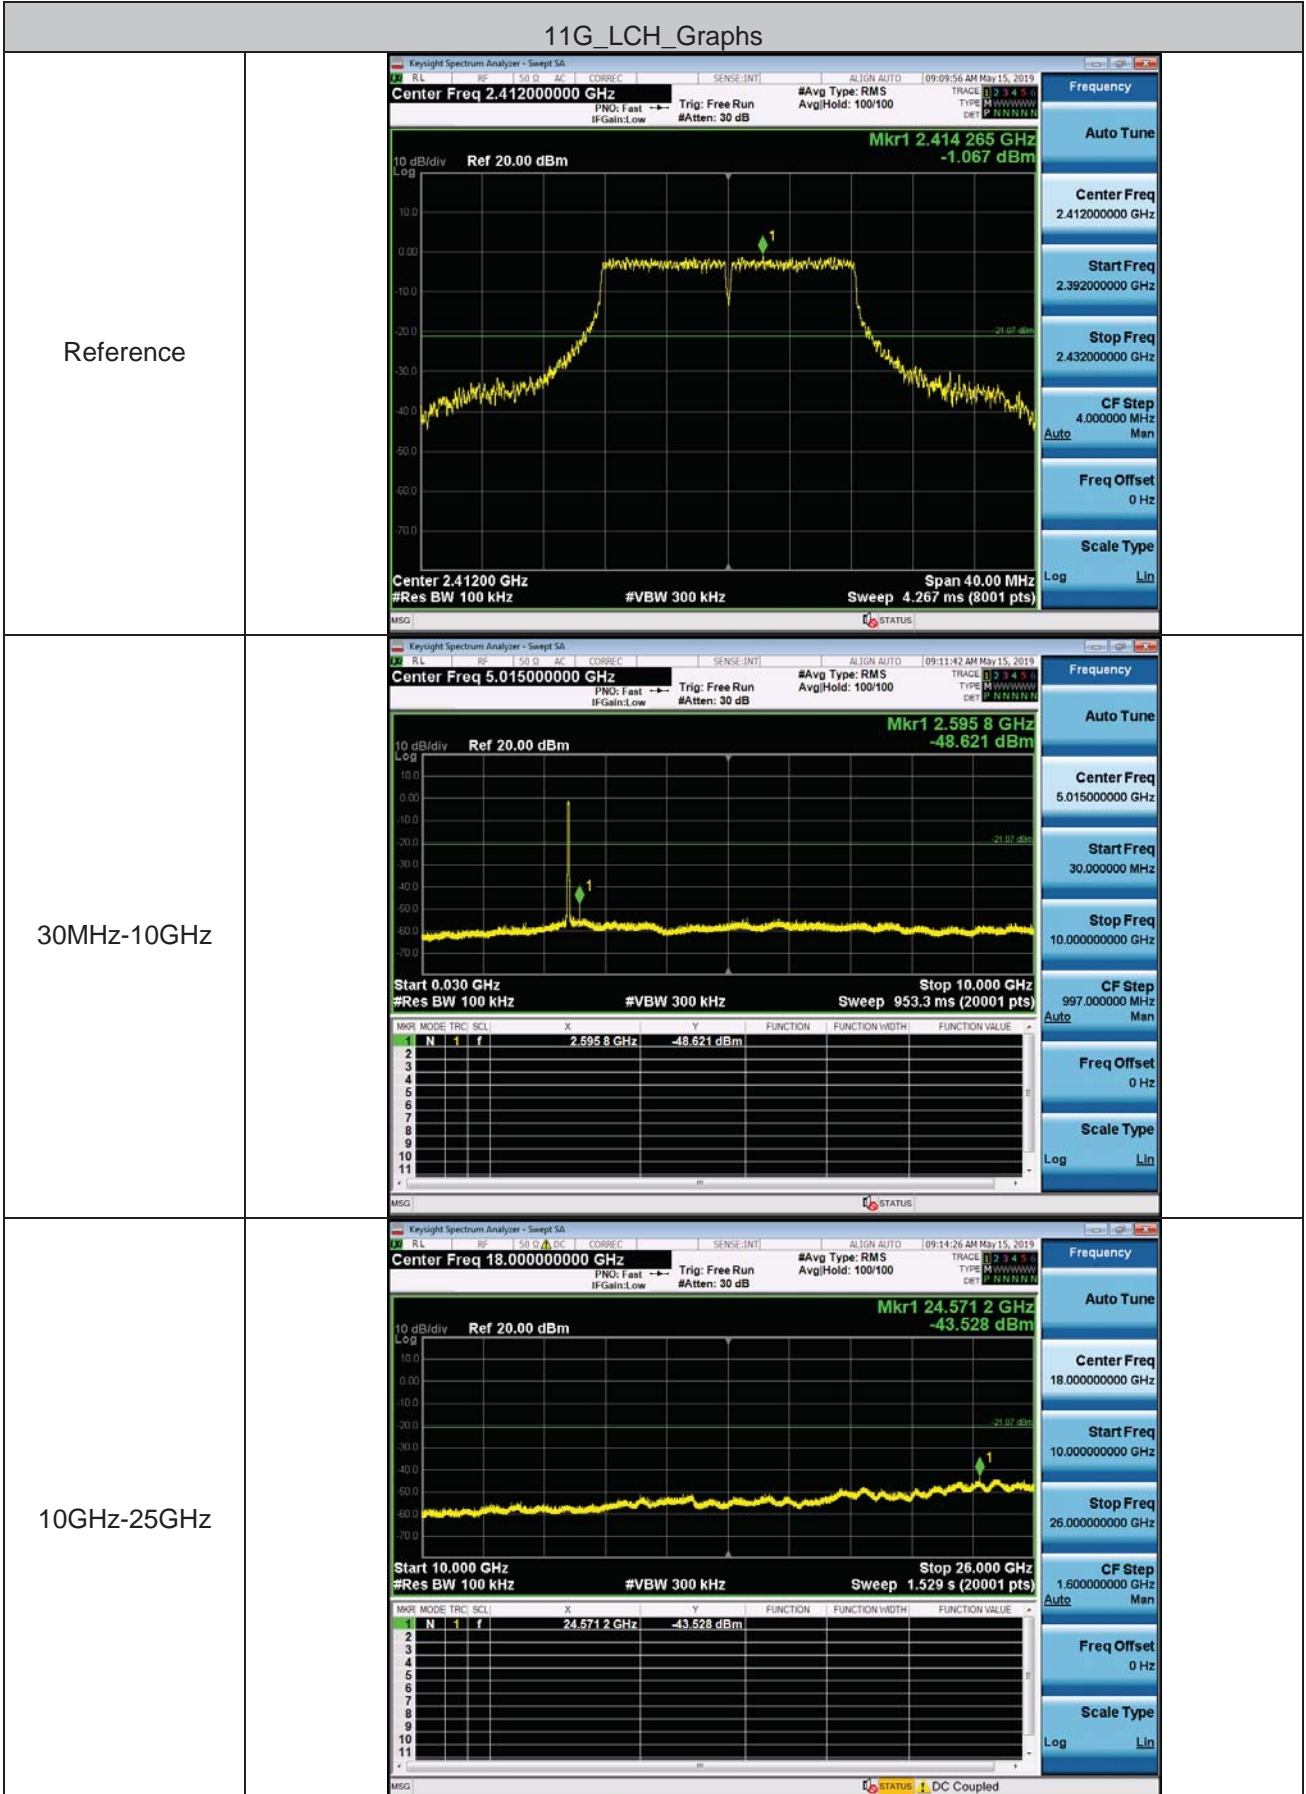


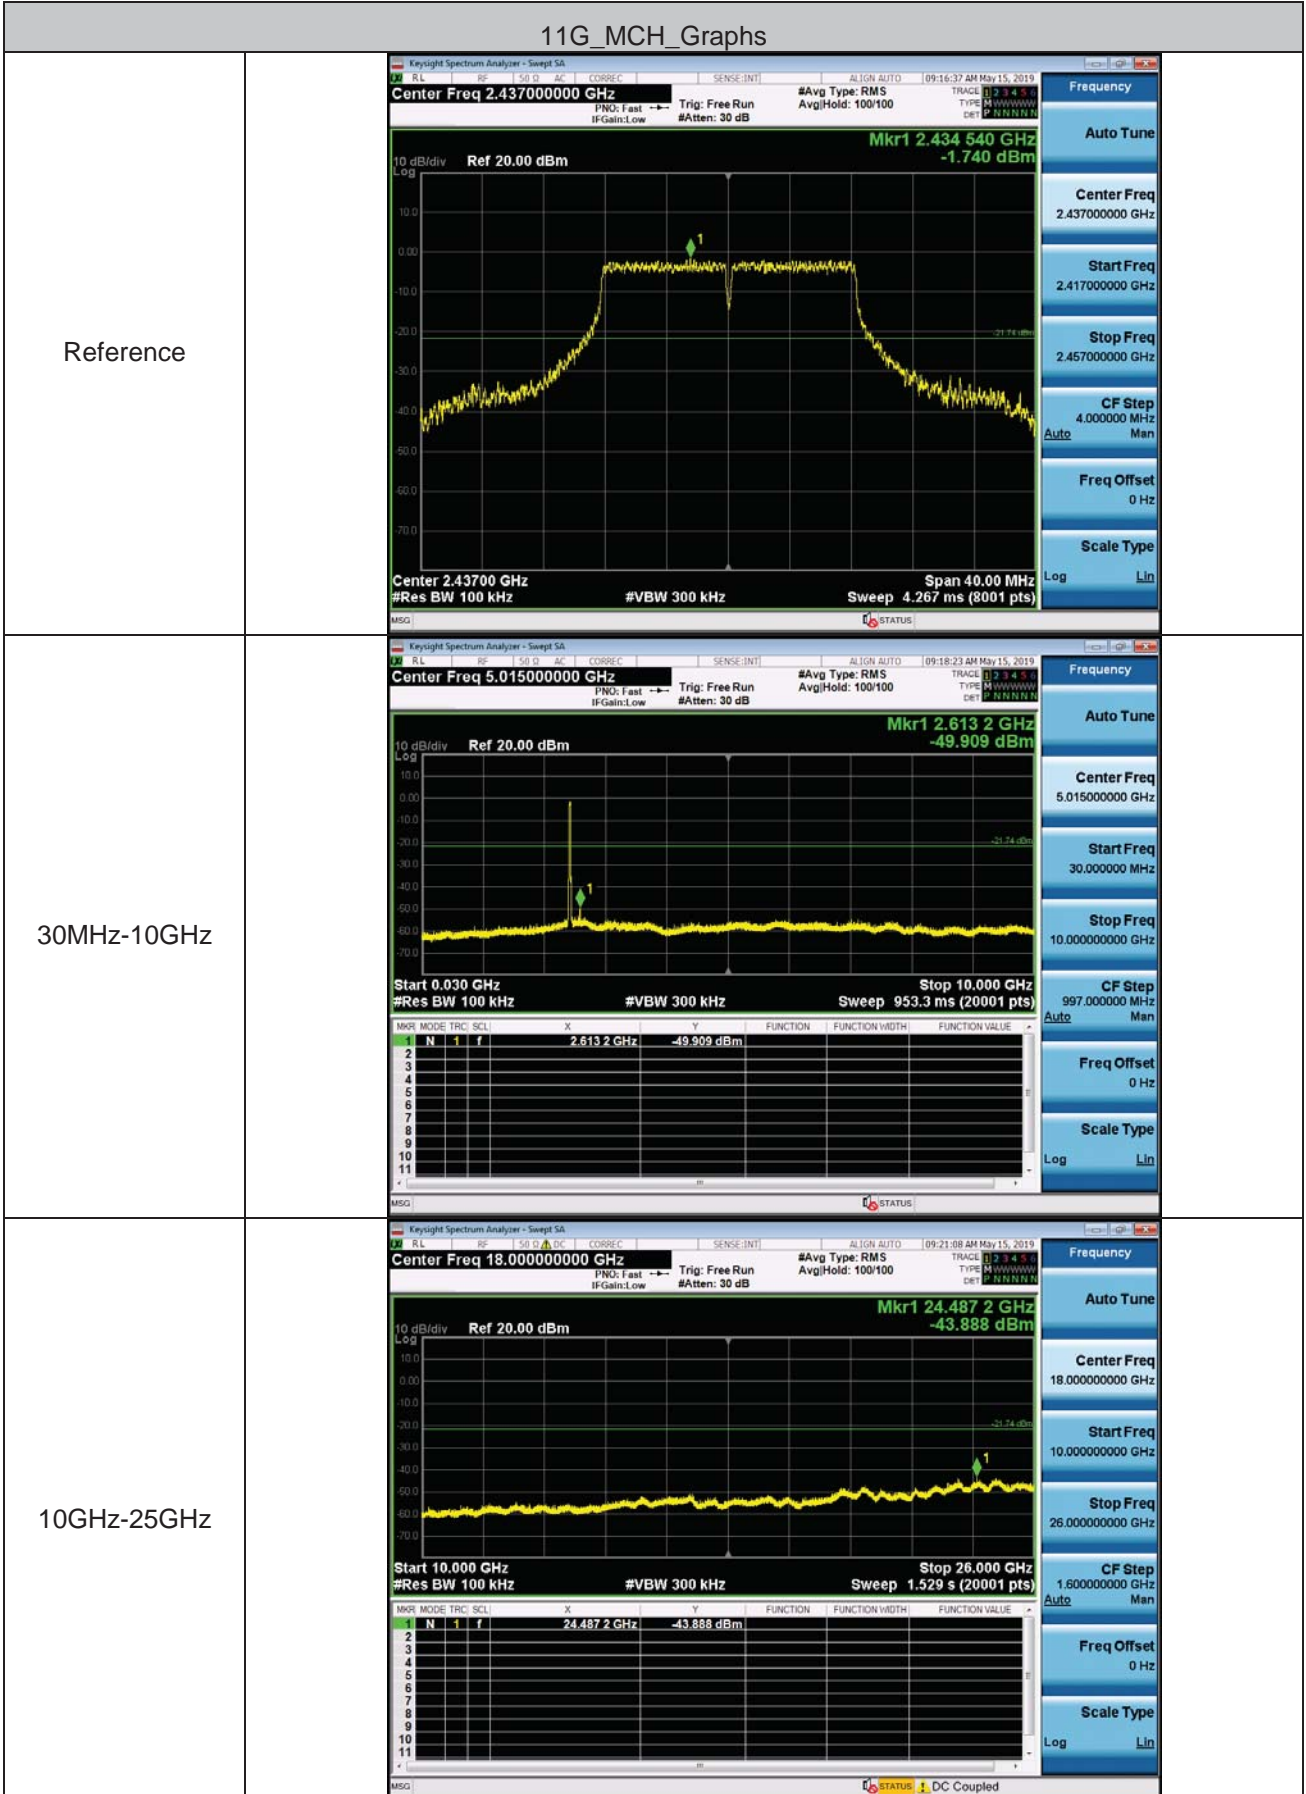

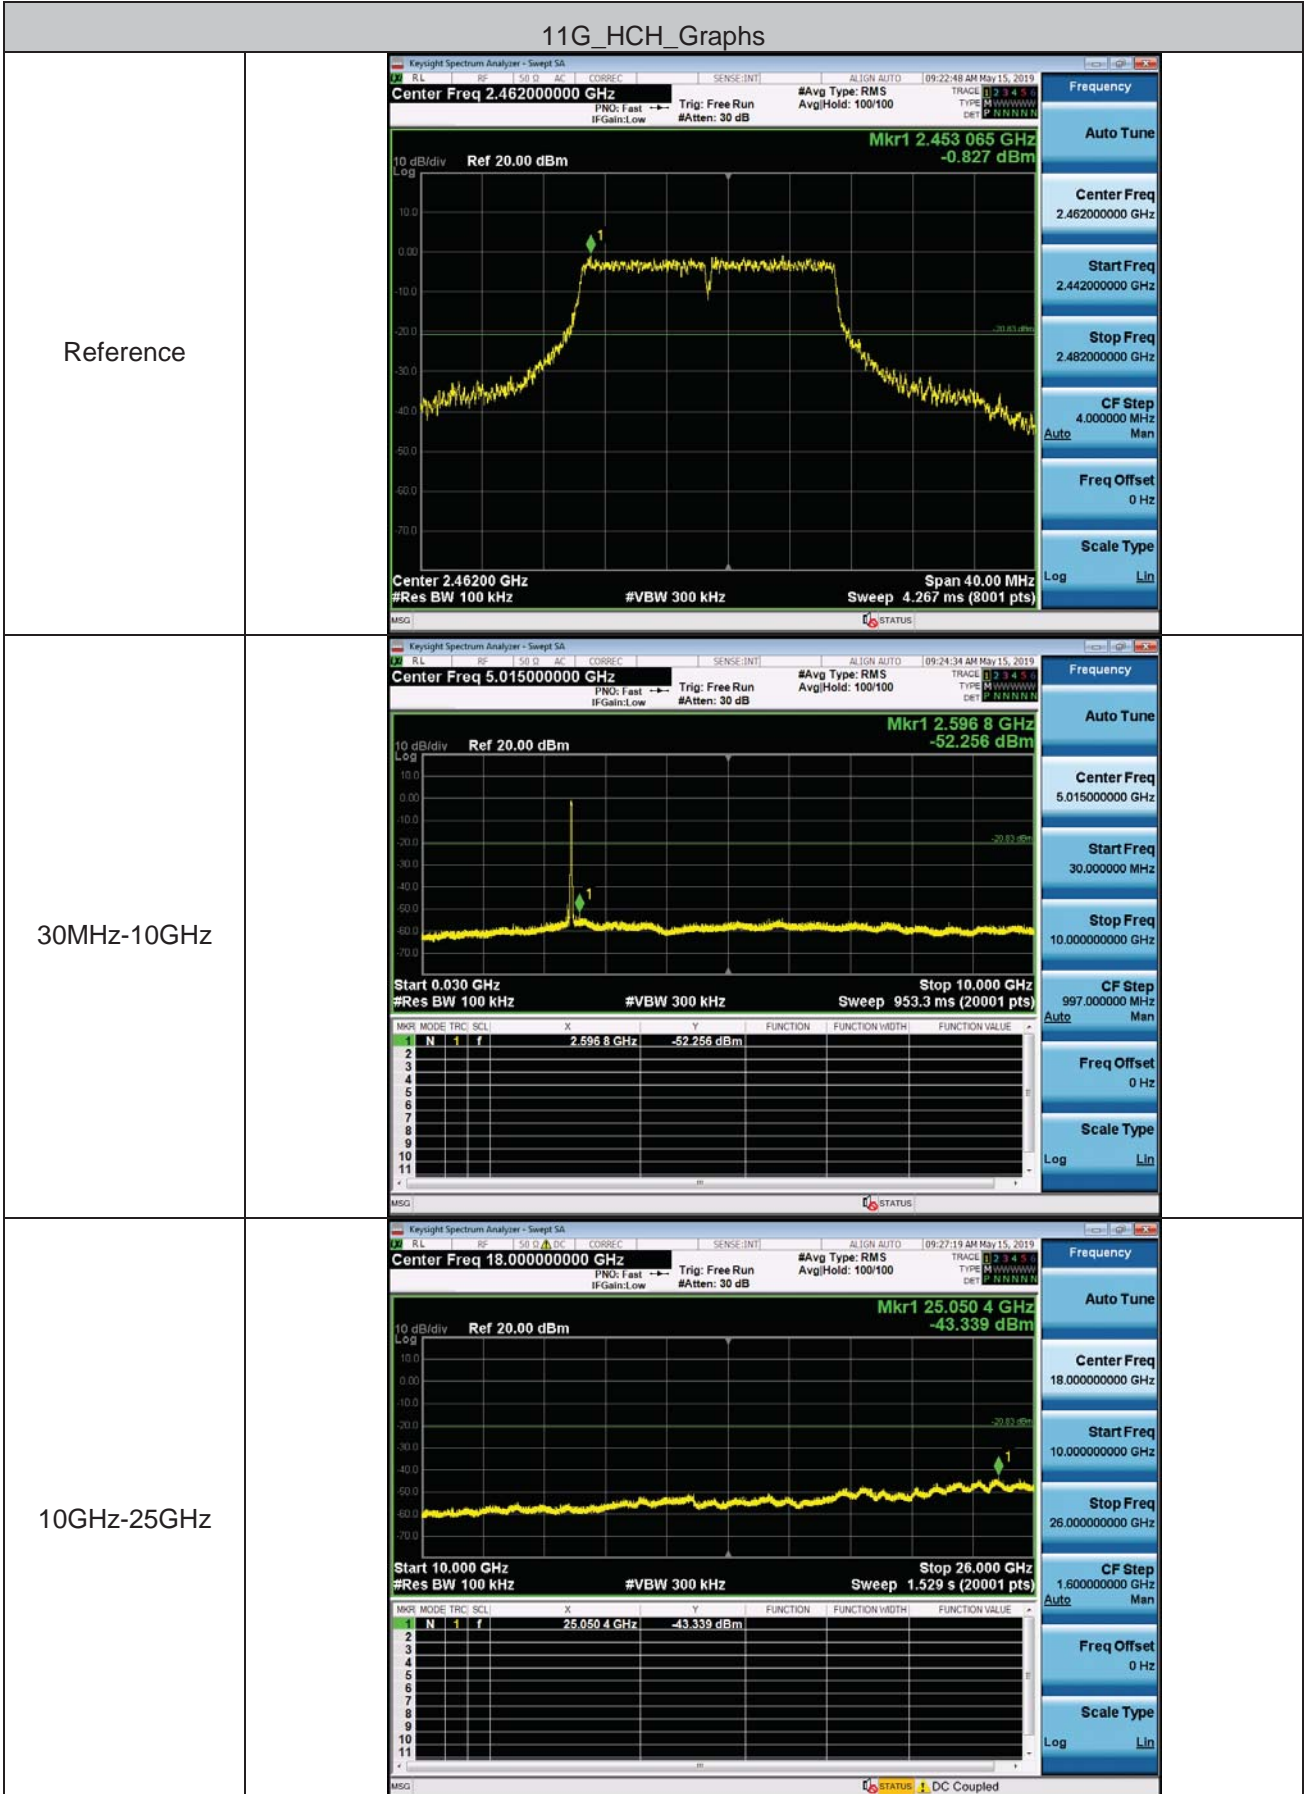

11N20\_LCH\_Graphs

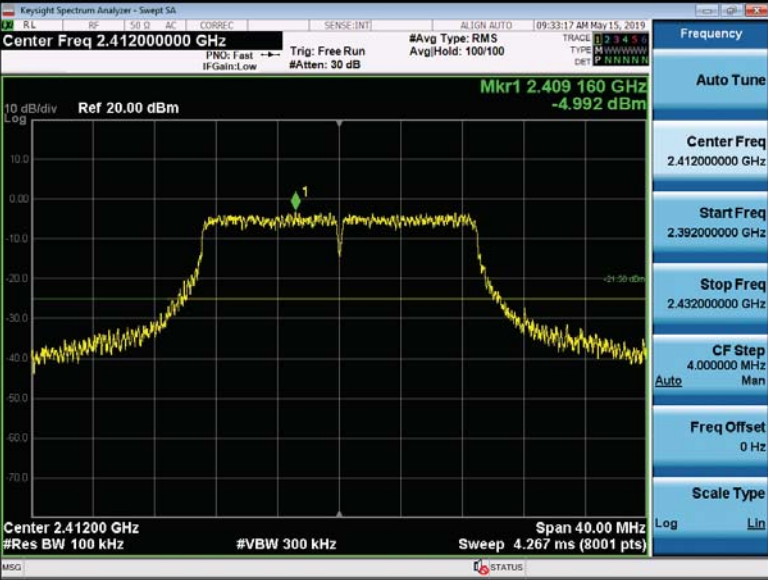
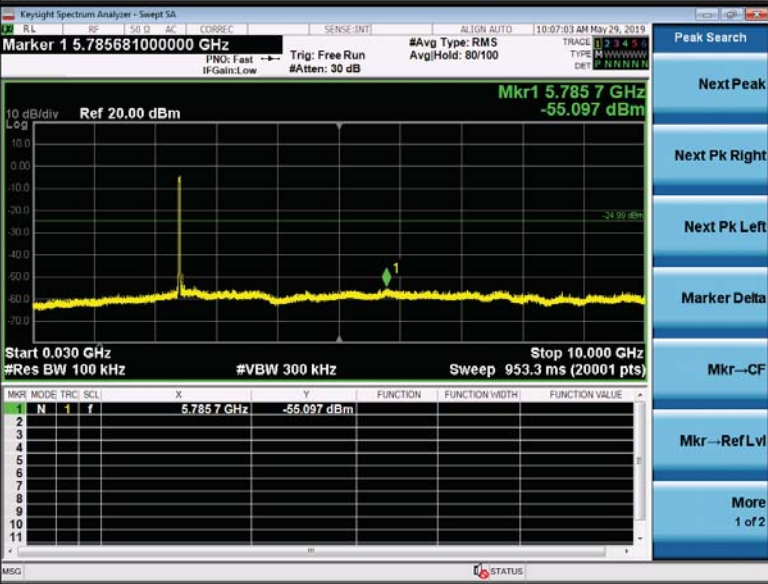
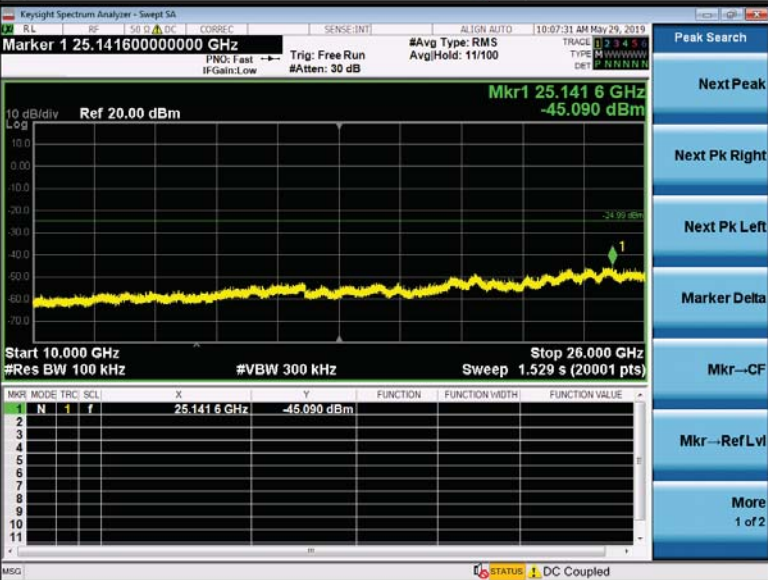
Reference	
30MHz-10GHz	
10GHz-25GHz	

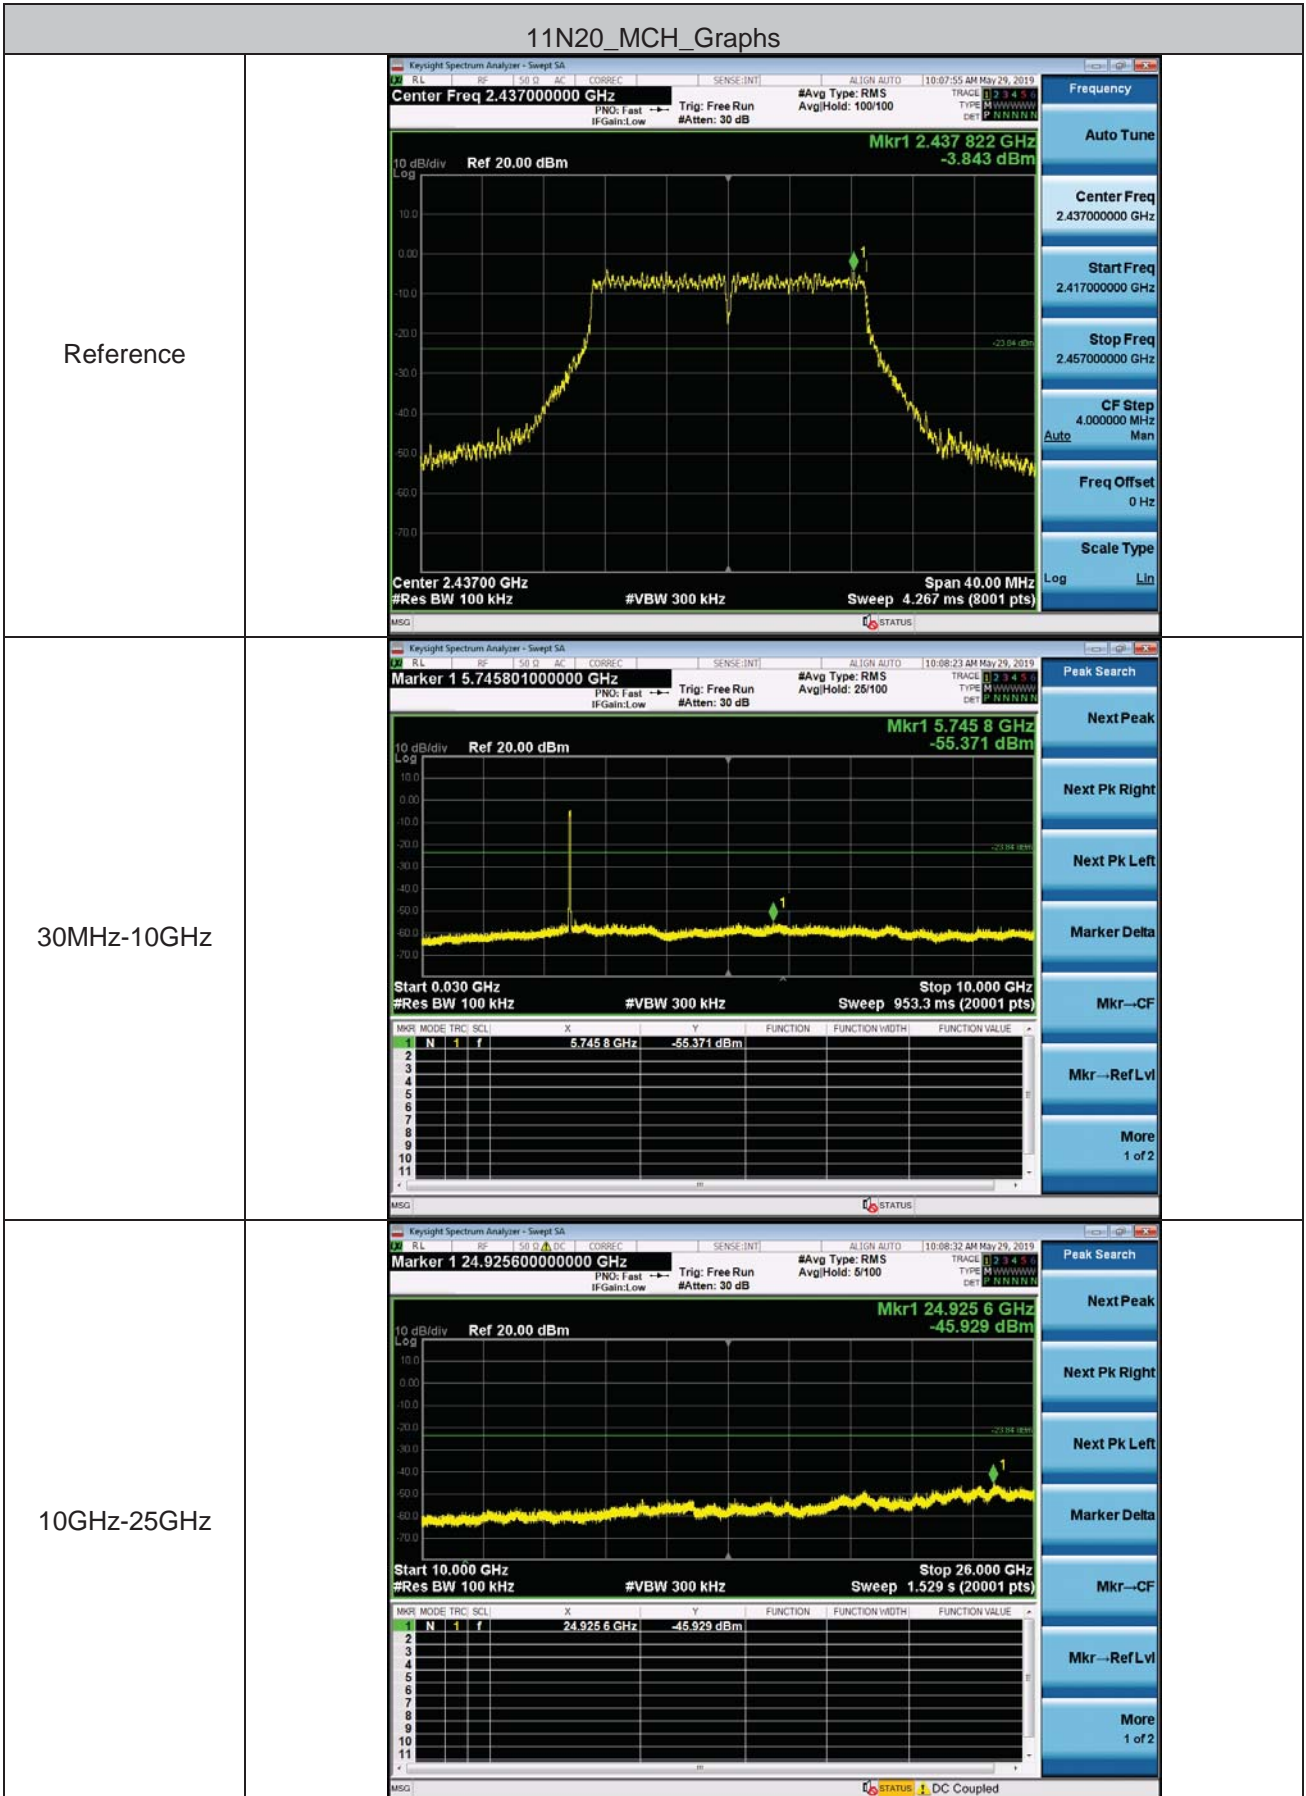

11N20\_HCH\_Graphs


<p>Reference</p>	<p>KeySight Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Mkr1 2.469955 GHz -3.805 dBm 10 dB/div Ref 20.00 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.267 ms (8001 pts)</p>																																																																																																												
<p>30MHz-10GHz</p>	<p>KeySight Spectrum Analyzer - Sweep SA Marker 1 5.768732000000 GHz Mkr1 5.7687 GHz -54.541 dBm 10 dB/div Ref 20.00 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 953.3 ms (20001 pts)</p> <table border="1"> <thead> <tr> <th>Mkr</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>5.7687 GHz</td> <td>-54.541 dBm</td> <td></td> <td></td> <td></td> </tr> <tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	5.7687 GHz	-54.541 dBm				2									3									4									5									6									7									8									9									10									11								
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	5.7687 GHz	-54.541 dBm																																																																																																								
2																																																																																																													
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>10GHz-25GHz</p>	<p>KeySight Spectrum Analyzer - Sweep SA Marker 1 24.544000000000 GHz Mkr1 24.5440 GHz -46.177 dBm 10 dB/div Ref 20.00 dBm Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.529 s (20001 pts)</p> <table border="1"> <thead> <tr> <th>Mkr</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>24.5440 GHz</td> <td>-46.177 dBm</td> <td></td> <td></td> <td></td> </tr> <tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	24.5440 GHz	-46.177 dBm				2									3									4									5									6									7									8									9									10									11								
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	24.5440 GHz	-46.177 dBm																																																																																																								
2																																																																																																													
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

11N40\_LCH\_Graphs

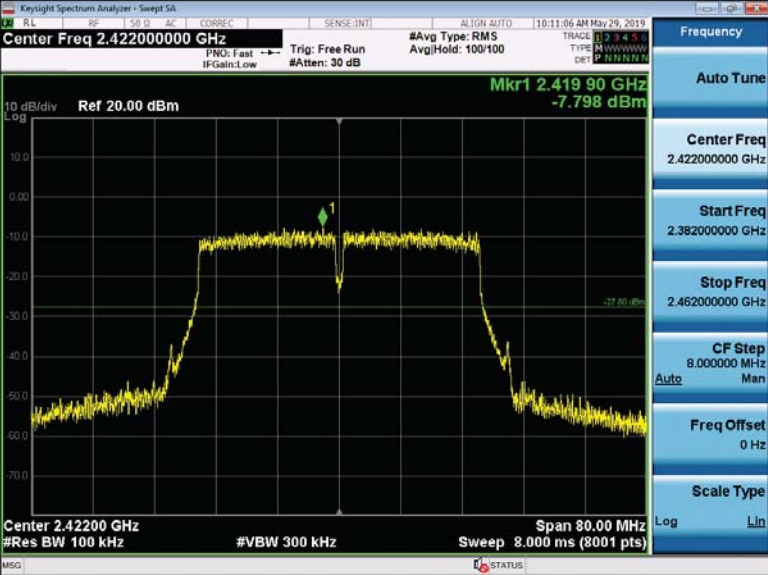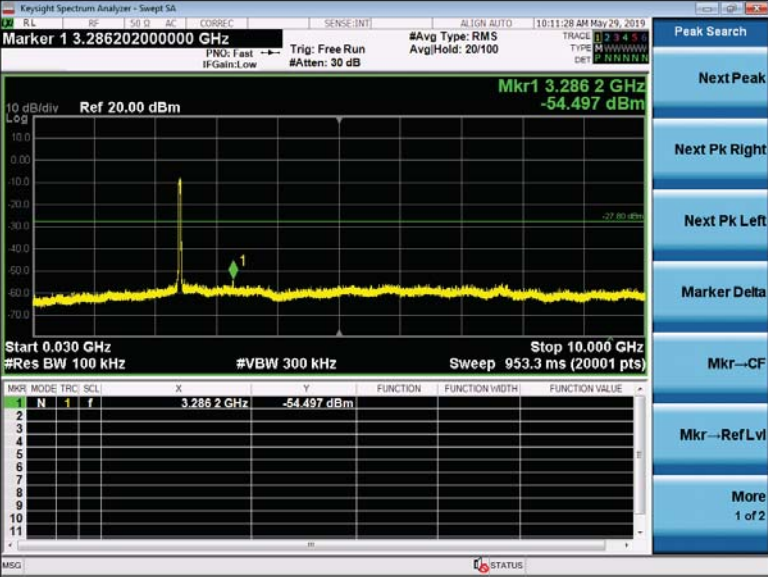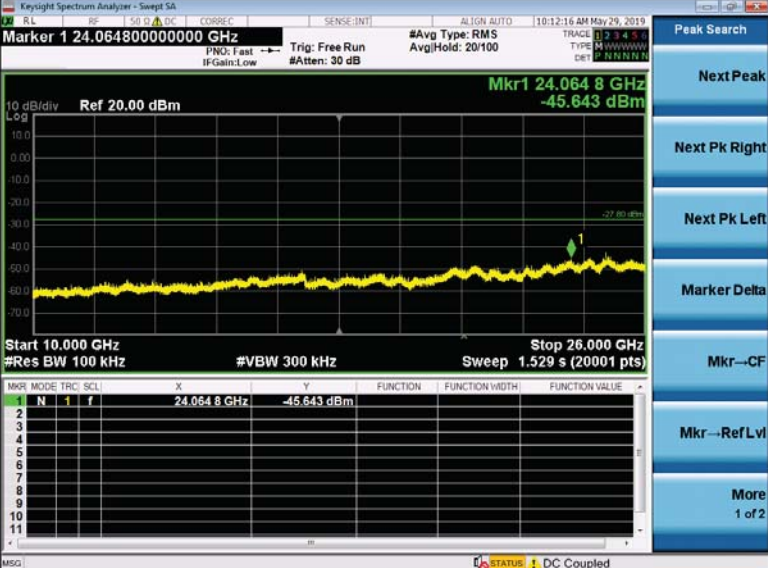
Reference	 <p>Center Freq 2.42200000 GHz</p> <p>Mkr1 2.419 90 GHz -7.798 dBm</p> <p>Center 2.42200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (8001 pts)</p>																																																																																																												
30MHz-10GHz	 <p>Marker 1 3.2862000000 GHz</p> <p>Mkr1 3.286 2 GHz -54.497 dBm</p> <p>Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 953.3 ms (20001 pts)</p> <table border="1" data-bbox="555 1317 1206 1514"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>3.286 2 GHz</td> <td>-54.497 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	3.286 2 GHz	-54.497 dBm				2									3									4									5									6									7									8									9									10									11								
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	3.286 2 GHz	-54.497 dBm																																																																																																								
2																																																																																																													
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
10GHz-25GHz	 <p>Marker 1 24.064800000000 GHz</p> <p>Mkr1 24.064 8 GHz -45.643 dBm</p> <p>Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.529 s (20001 pts)</p> <table border="1" data-bbox="555 1899 1206 2089"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>24.064 8 GHz</td> <td>-45.643 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	24.064 8 GHz	-45.643 dBm				2									3									4									5									6									7									8									9									10									11								
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	24.064 8 GHz	-45.643 dBm																																																																																																								
2																																																																																																													
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

11N40\_MCH\_Graphs


Reference

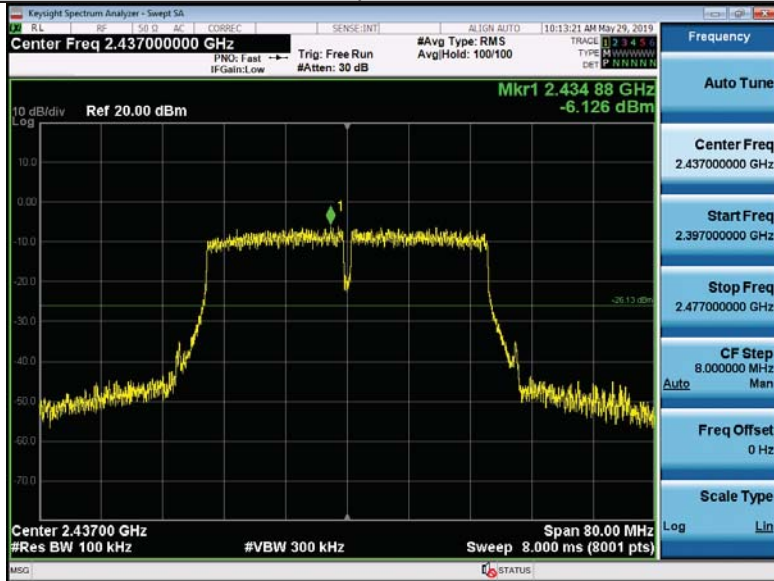


30MHz-10GHz

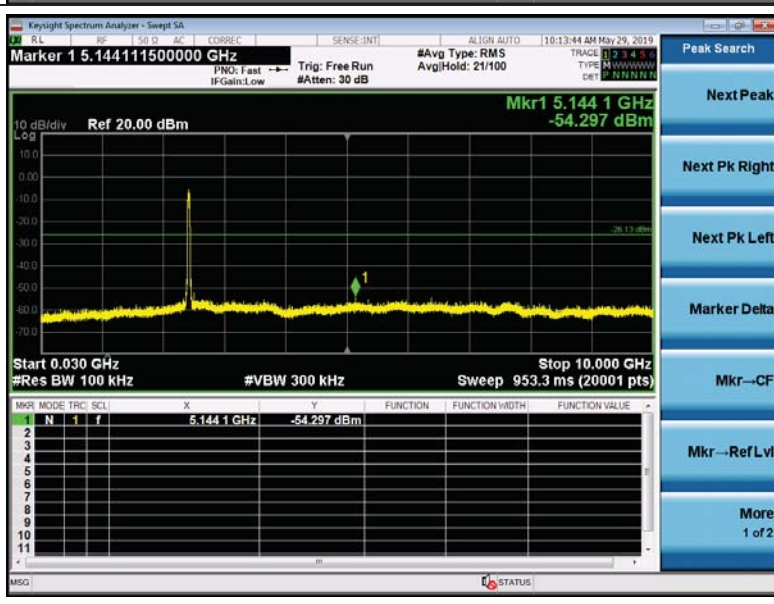

10GHz-25GHz

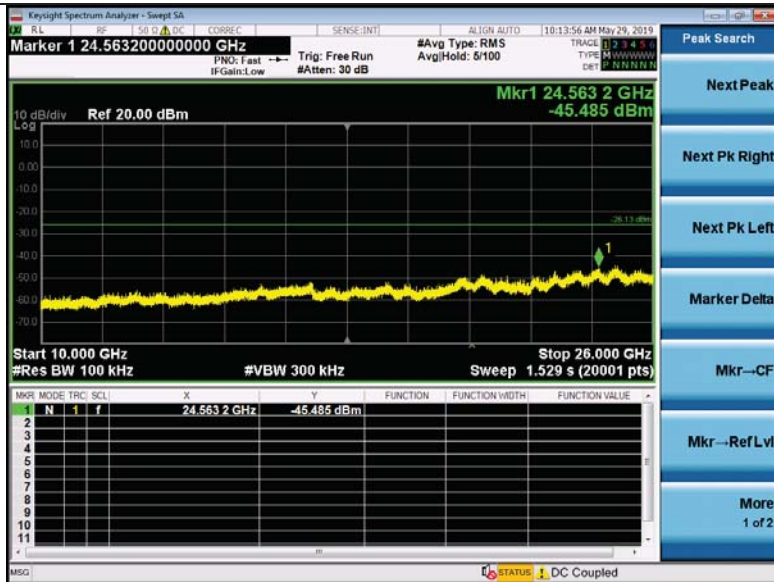



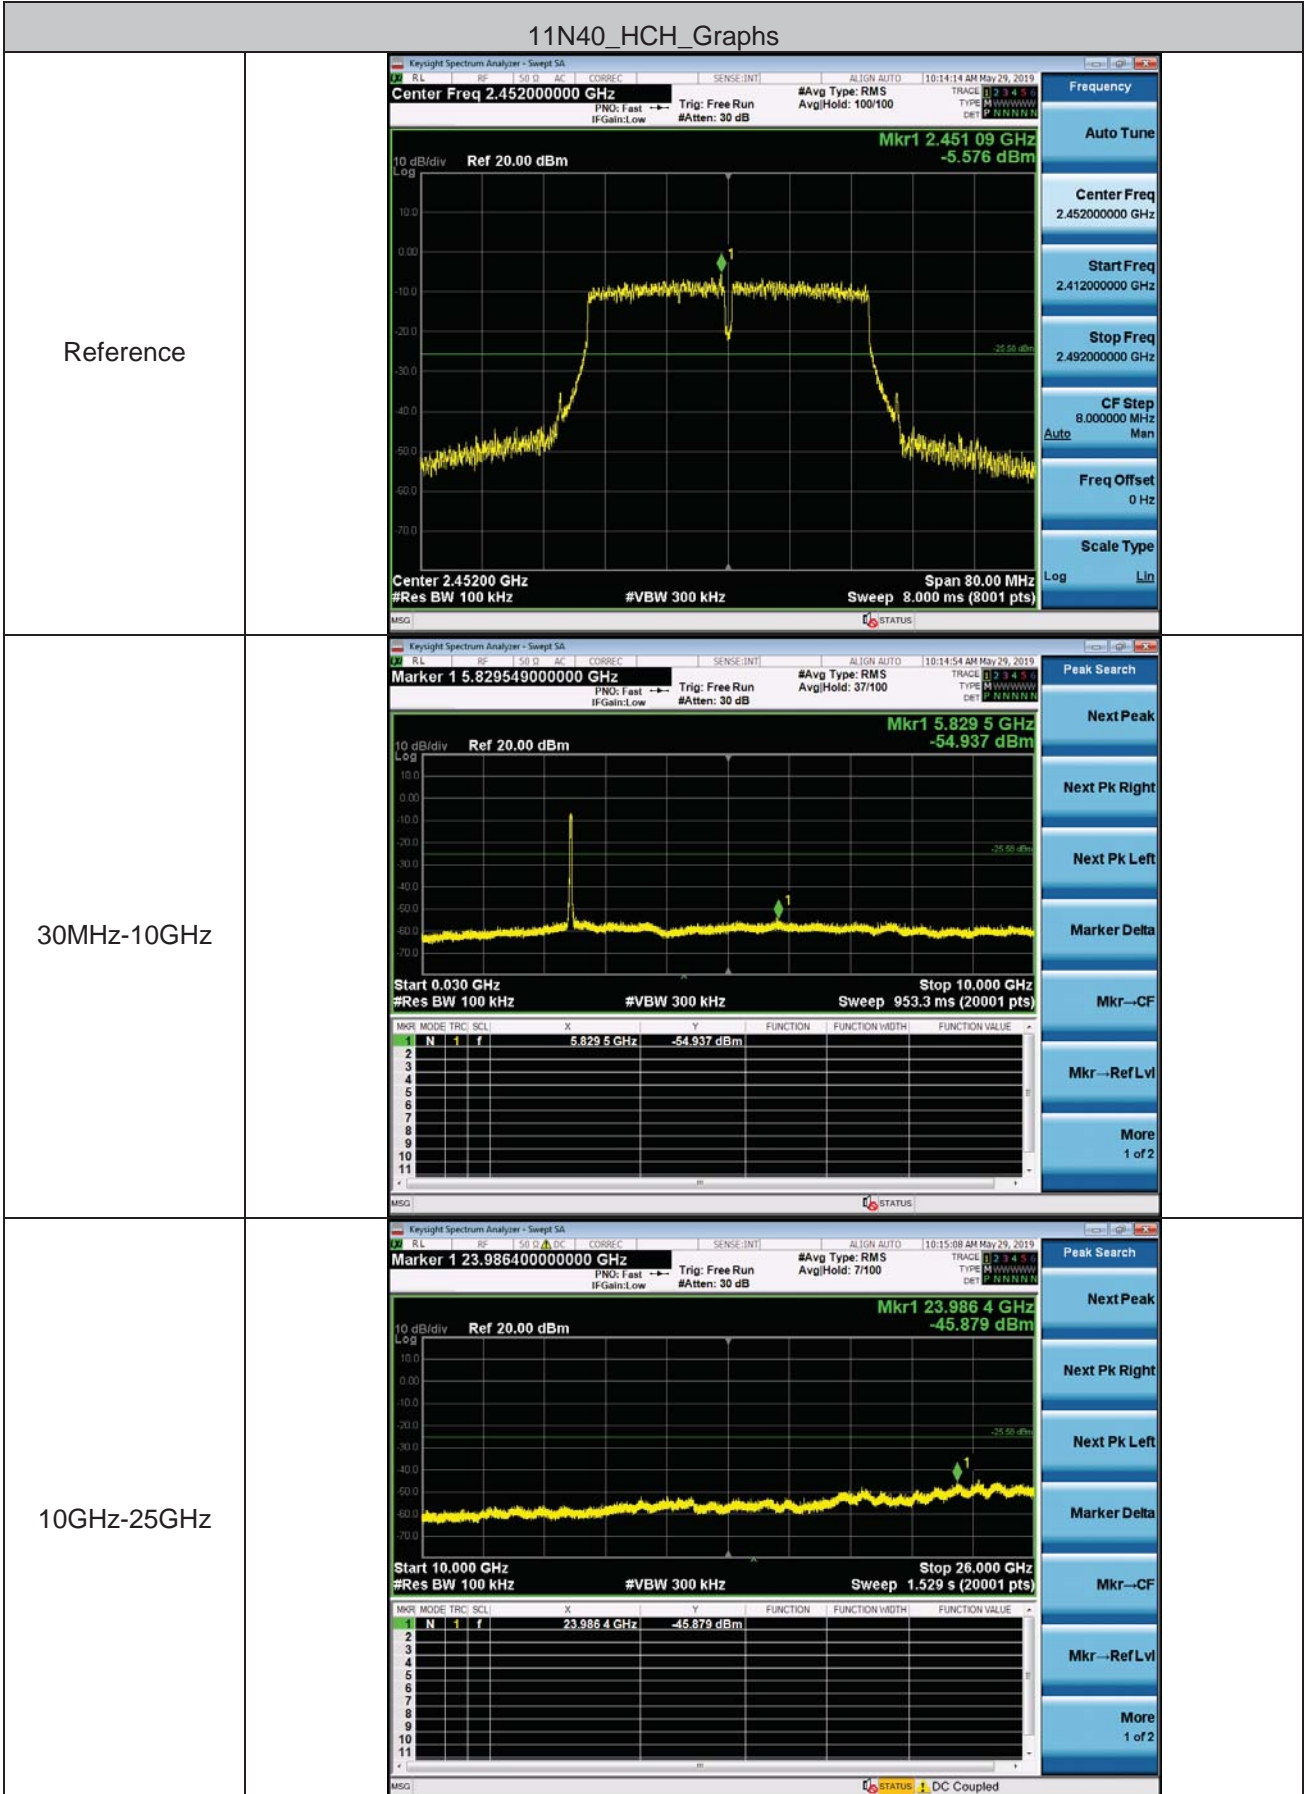

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 6.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Test Setup:

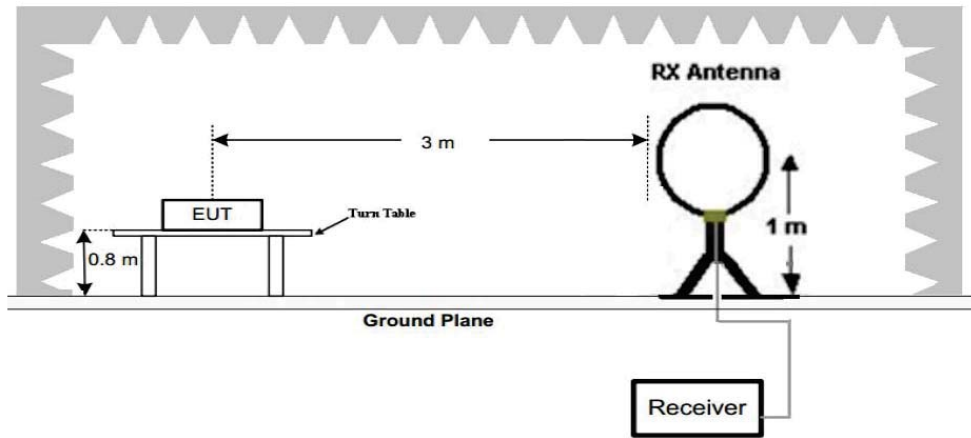


Figure 1. Below 30MHz

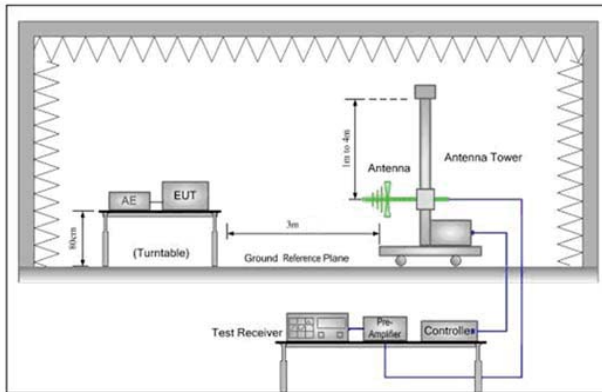


Figure 2. 30MHz to 1GHz

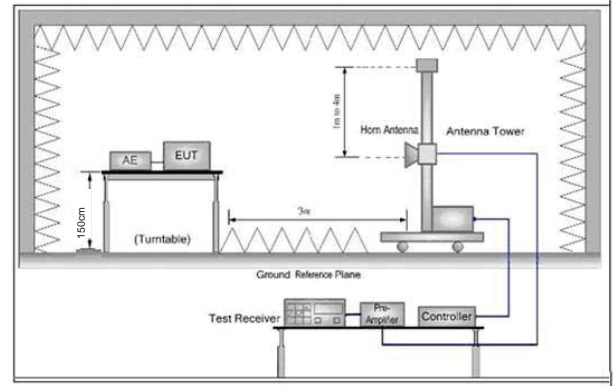


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for

	<p>the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode</p>
Final Test Mode:	<p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at highest channel is the worst case.</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass

### 6.8.1 Radiated emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

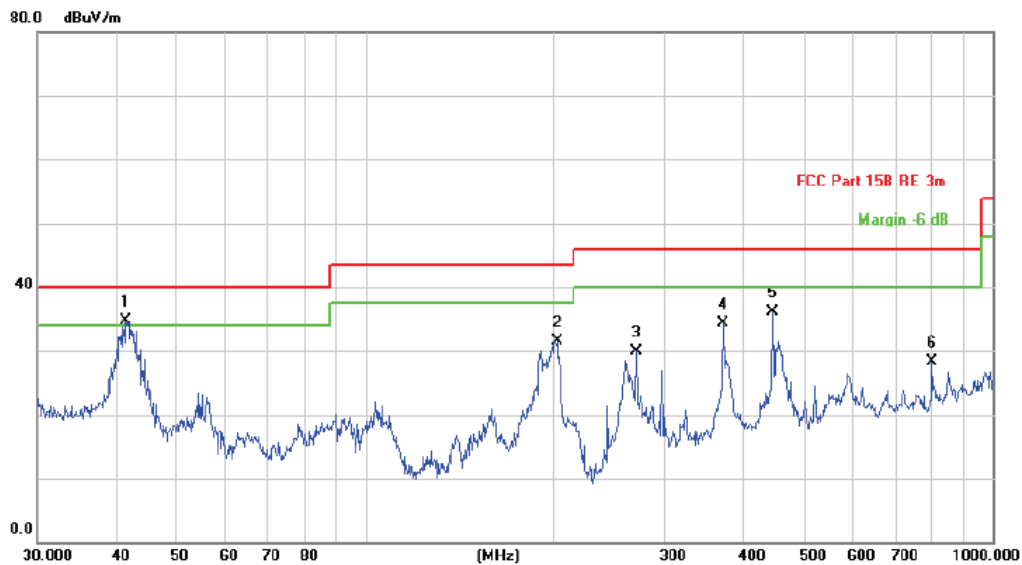

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	41.5670	46.95	-12.32	34.63	40.00	-5.37	QP
2		202.1005	44.67	-13.20	31.47	43.50	-12.03	QP
3		270.3748	41.44	-11.48	29.96	46.00	-16.04	QP
4		372.0045	44.02	-9.70	34.32	46.00	-11.68	QP
5		446.4141	43.22	-7.09	36.13	46.00	-9.87	QP
6		801.7863	29.19	-0.85	28.34	46.00	-17.66	QP

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

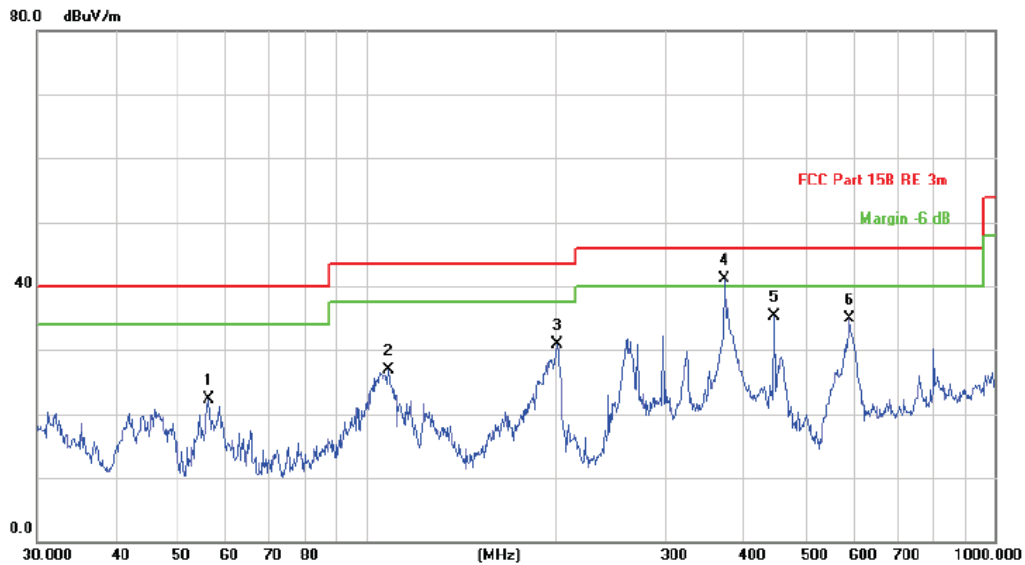

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		56.1974	40.63	-18.33	22.30	40.00	-17.70	QP
2		108.6470	40.90	-13.95	26.95	43.50	-16.55	QP
3		201.3930	44.37	-13.41	30.96	43.50	-12.54	QP
4	*	372.0045	50.48	-9.45	41.03	46.00	-4.97	QP
5		446.4141	42.71	-7.47	35.24	46.00	-10.76	QP
6		588.9051	39.04	-4.13	34.91	46.00	-11.09	QP

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Pre-amplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

**6.8.2 Transmitter emission above 1GHz**

Test mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4824.000	60.33	-4.26	56.07	74	-17.93	PK	H
4824.000	46.67	-4.26	42.41	54	-11.59	AV	H
7236.000	58.99	1.18	60.17	74	-13.83	PK	H
7236.000	42.17	1.18	43.35	54	-10.65	AV	H
4824.000	62.55	-4.26	58.29	74	-15.71	PK	V
4824.000	47.70	-4.26	43.44	54	-10.56	AV	V
7236.000	60.49	1.18	61.67	74	-12.33	PK	V
7236.000	42.10	1.18	43.28	54	-10.72	AV	V

Test mode:		802.11b(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4874.000	60.38	-4.12	56.26	74	-17.74	PK	H
4874.000	45.99	-4.12	41.87	54	-12.13	AV	H
7311.000	60.14	1.46	61.60	74	-12.40	PK	H
7311.000	41.53	1.46	42.99	54	-11.01	AV	H
4874.000	60.39	-4.12	56.27	74	-17.73	PK	V
4874.000	47.82	-4.12	43.70	54	-10.30	AV	V
7311.000	59.96	1.46	61.42	74	-12.58	PK	V
7311.000	42.04	1.46	43.50	54	-10.50	AV	V



Test mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	59.48	-4.03	55.45	74	-18.55	PK	H
4924.000	46.95	-4.03	42.92	54	-11.08	AV	H
7386.000	60.50	1.66	62.16	74	-11.84	PK	H
7386.000	42.95	1.66	44.61	54	-9.39	AV	H
4924.000	63.59	-4.03	59.56	74	-14.44	PK	V
4924.000	46.13	-4.03	42.10	54	-11.90	AV	V
7386.000	60.25	1.66	61.91	74	-12.09	PK	V
7386.000	42.64	1.66	44.30	54	-9.70	AV	V

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

### 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz		54.0	Average Value
		74.0	Peak Value

Test Setup:

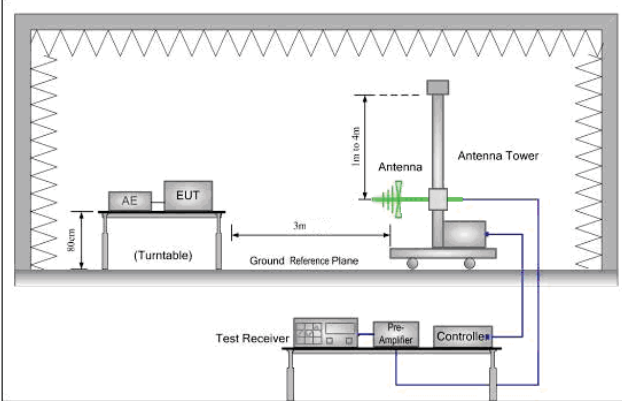


Figure 1. 30MHz to 1GHz

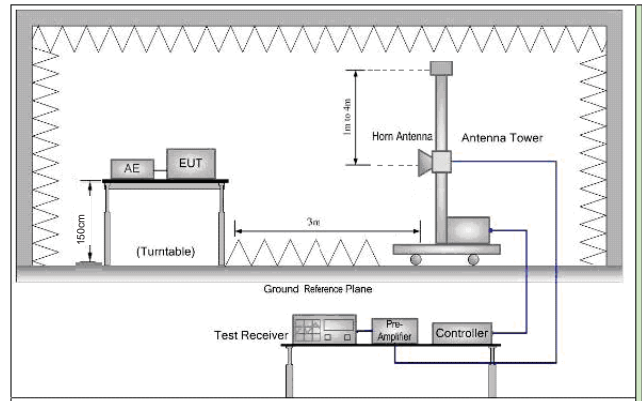


Figure 2. Above 1 GHz

Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p> <p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p>
-----------------	--

	<p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel , the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode.</p>
Final Test Mode:	<p>Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case</p> <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass

**Test data:**

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	59.85	-9.2	50.65	74	-23.35	PK	H
2390.000	47.92	-9.2	38.72	54	-15.28	AV	H
2400.000	59.81	-9.39	50.42	74	-23.58	PK	H
2400.000	41.80	-9.39	32.41	54	-21.59	AV	H
2390.000	60.60	-9.2	51.40	74	-22.60	PK	V
2390.000	47.71	-9.2	38.51	54	-15.49	AV	V
2400.000	60.71	-9.39	51.32	74	-22.68	PK	V
2400.000	42.88	-9.39	33.49	54	20.51	AV	V

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	59.36	-9.29	50.07	74	-23.93	PK	H
2483.500	47.16	-9.29	37.87	54	-16.13	AV	H
2483.500	59.79	-9.29	50.50	74	-23.50	PK	V
2483.500	41.94	-9.29	32.65	54	-21.35	AV	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	61.93	-9.2	52.73	74	-21.27	PK	H
2390.000	46.97	-9.2	37.77	54	-16.23	AV	H
2400.000	59.36	-9.39	49.97	74	-24.03	PK	H
2400.000	41.55	-9.39	32.16	54	-21.84	AV	H
2390.000	63.02	-9.2	53.82	74	-20.18	PK	V
2390.000	46.09	-9.2	36.89	54	-17.11	AV	V
2400.000	59.77	-9.39	50.38	74	-23.62	PK	V
2400.000	41.85	-9.39	32.46	54	-21.54	AV	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	62.22	-9.29	52.93	74	-21.07	PK	H
2483.500	47.38	-9.29	38.09	54	-15.91	AV	H
2483.500	59.90	-9.29	50.61	74	-23.39	PK	V
2483.500	42.89	-9.29	33.60	54	-20.40	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	63.60	-9.29	54.31	74	-19.69	PK	H
2390.000	47.37	-9.29	38.08	54	-15.92	AV	H
2400.000	60.77	-9.29	51.48	74	-22.52	PK	H
2400.000	41.18	-9.29	31.89	54	22.11	AV	H
2390.000	60.25	-9.29	50.96	74	-23.04	PK	V
2390.000	47.32	-9.29	38.03	54	-15.97	AV	V
2400.000	60.34	-9.29	51.05	74	-22.95	PK	V
2400.000	41.61	-9.29	32.32	54	21.68	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	59.31	-9.29	50.02	74	-23.98	PK	H
2483.500	47.67	-9.29	38.38	54	-15.62	AV	H
2483.500	60.55	-9.29	51.26	74	-22.74	PK	V
2483.500	41.07	-9.29	31.78	54	-22.22	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	62.20	-9.2	53.00	74	-21.00	PK	H
2390.000	47.01	-9.2	37.81	54	-16.19	AV	H
2400.000	59.80	-9.39	50.41	74	-23.59	PK	H
2400.000	42.01	-9.39	32.62	54	-21.38	AV	H
2390.000	63.16	-9.2	53.96	74	-20.04	PK	V
2390.000	47.83	-9.2	38.63	54	-15.37	AV	V
2400.000	59.88	-9.39	50.49	74	-23.51	PK	V
2400.000	42.81	-9.39	33.42	54	-20.58	AV	V



Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	60.49	-9.2	51.29	74	-22.71	PK	H
2483.500	46.55	-9.2	37.35	54	-16.65	AV	H
2483.500	60.15	-9.29	50.86	74	-23.14	PK	V
2483.500	41.74	-9.29	32.45	54	-21.55	AV	V

**Note:**


The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Pre-amplifier Factor*

## 7 Photographs - EUT Test Setup

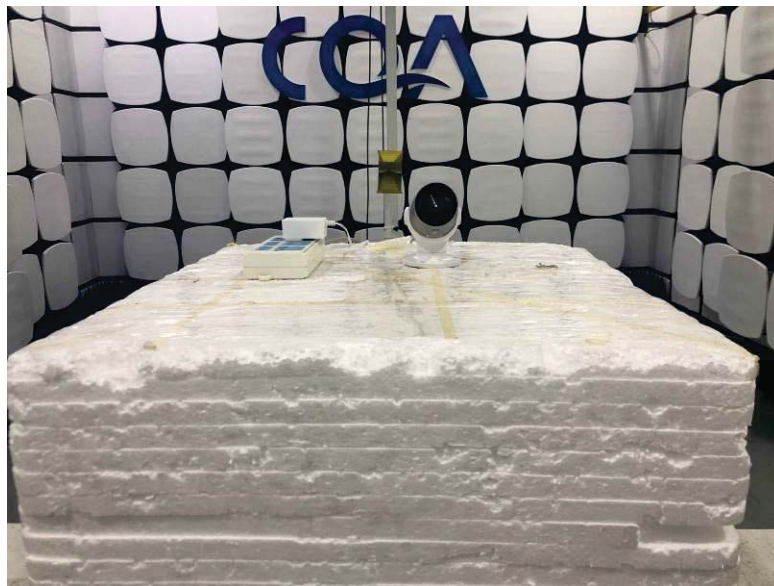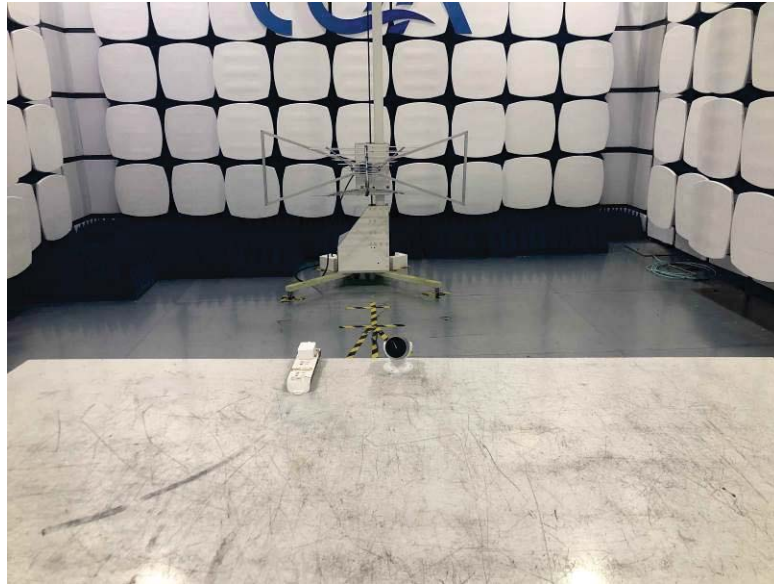





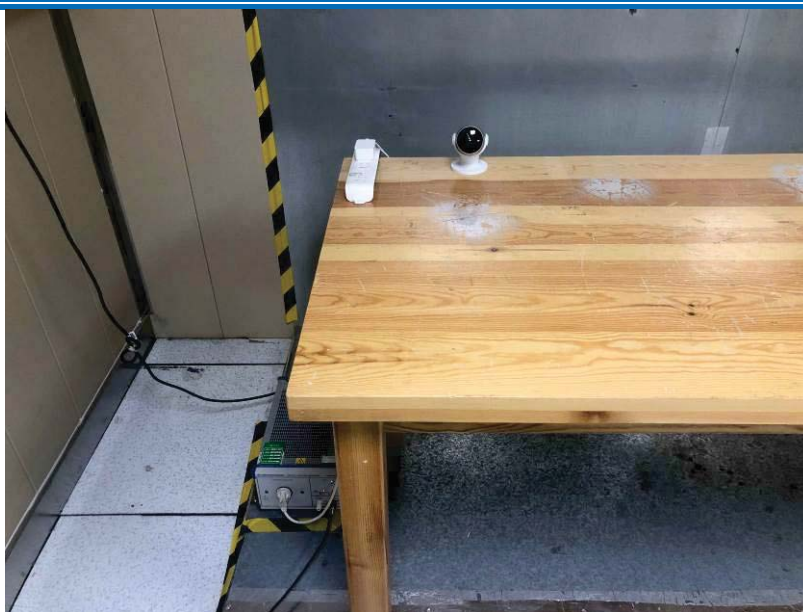


## 8 Photographs - EUT Constructional Details



### External photos


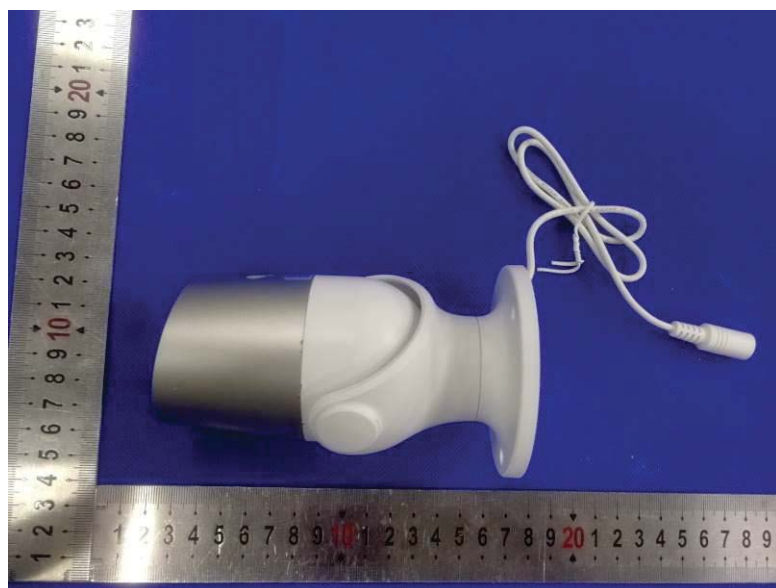



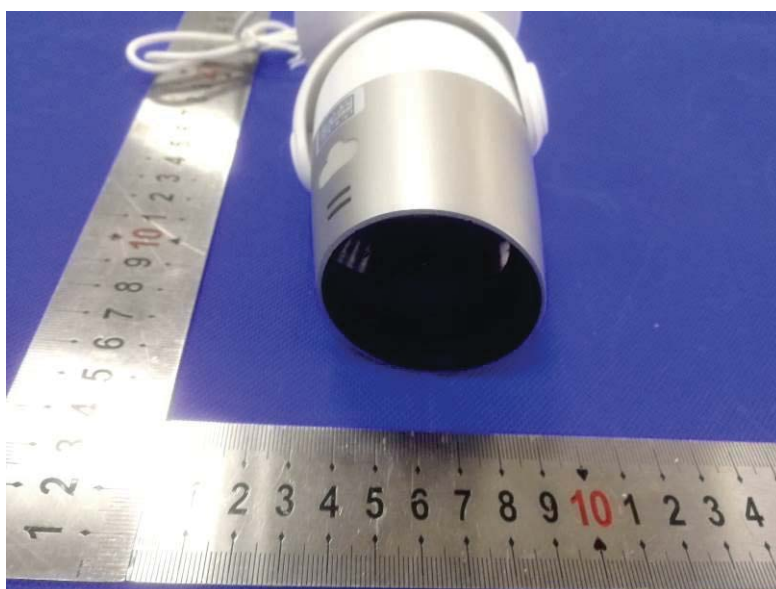


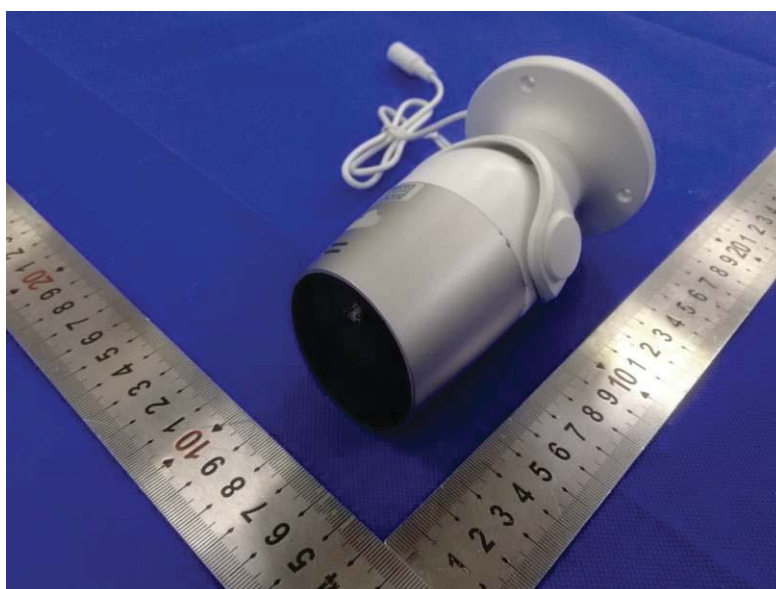


**Internal photos**

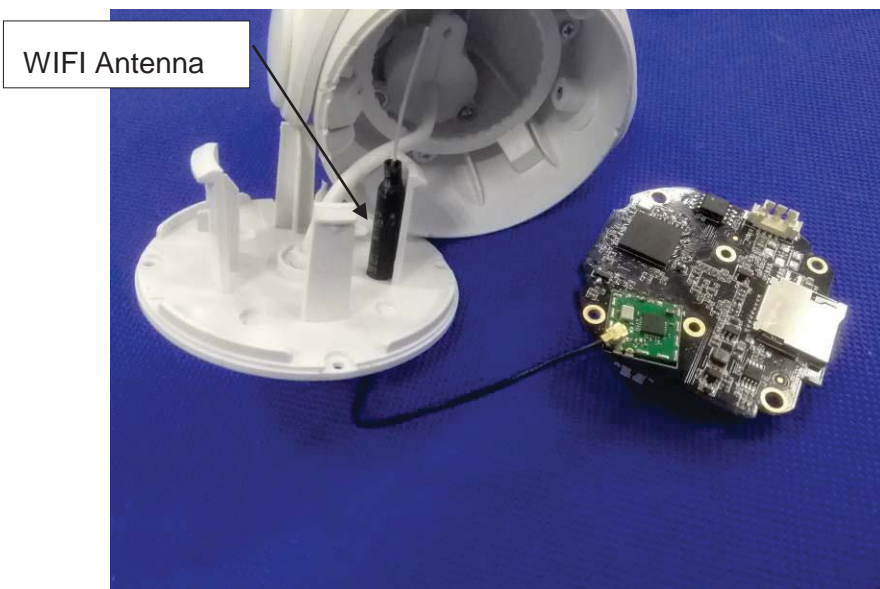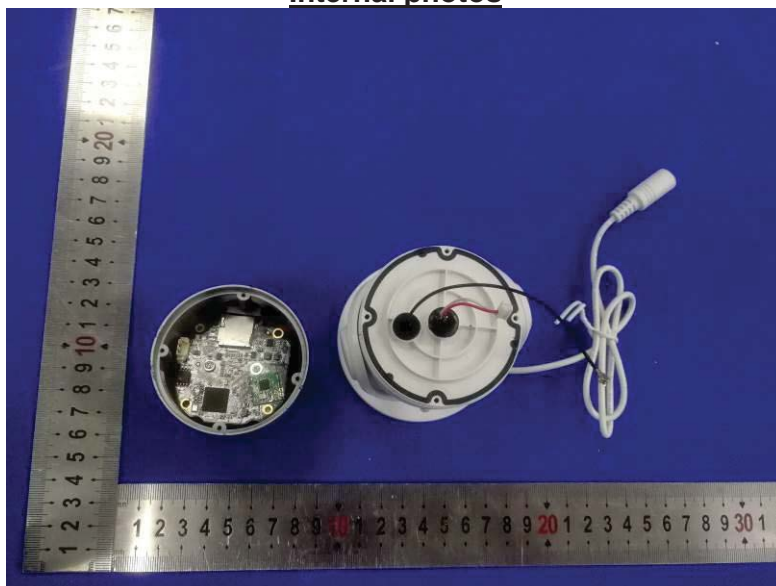

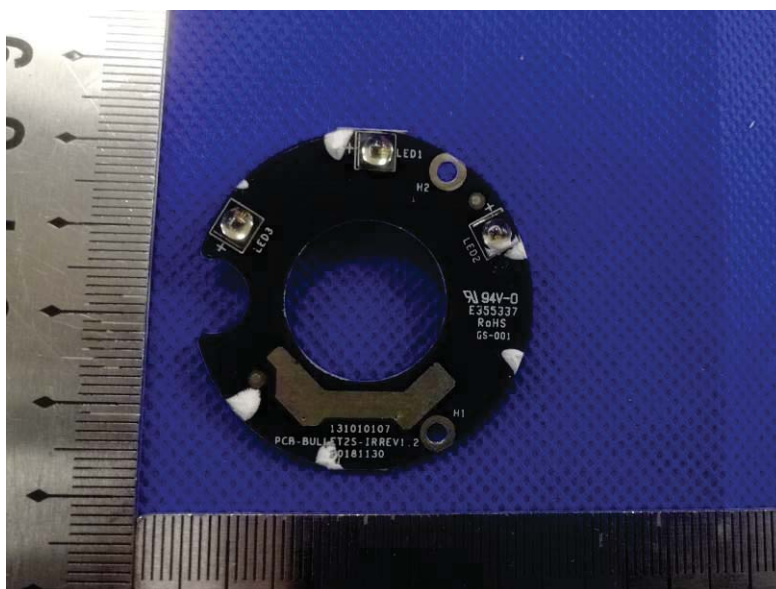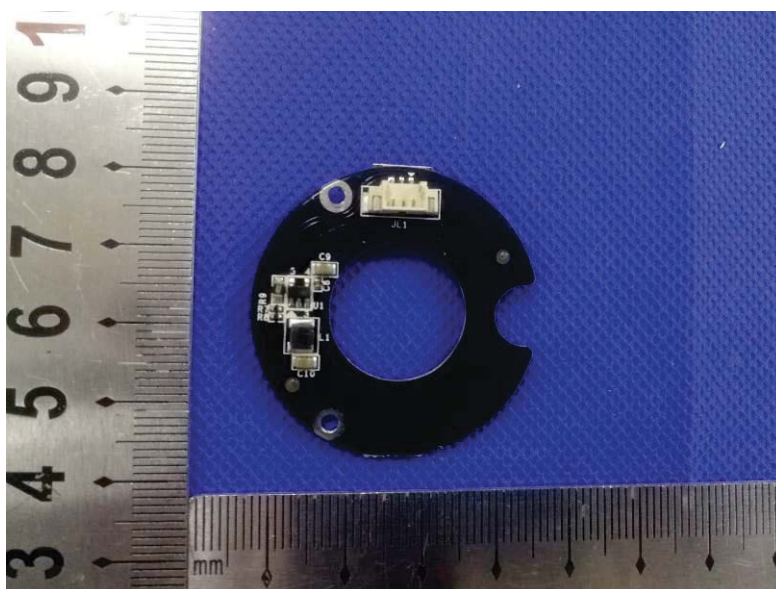

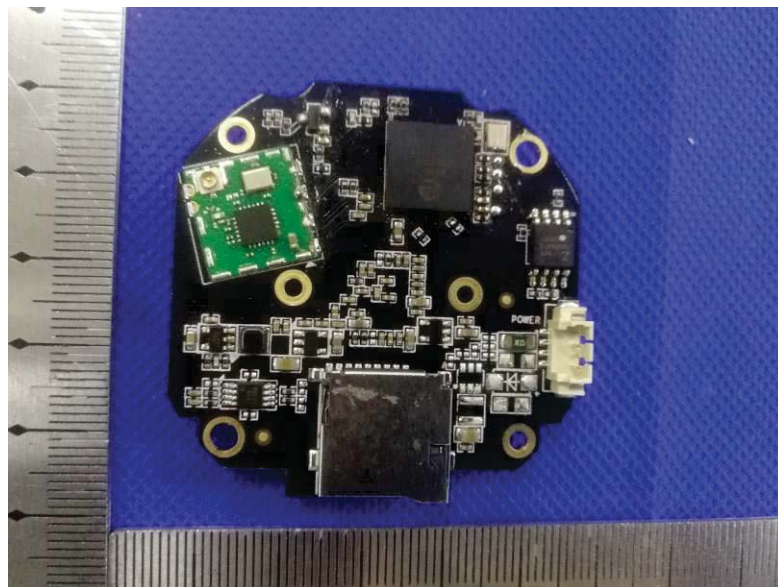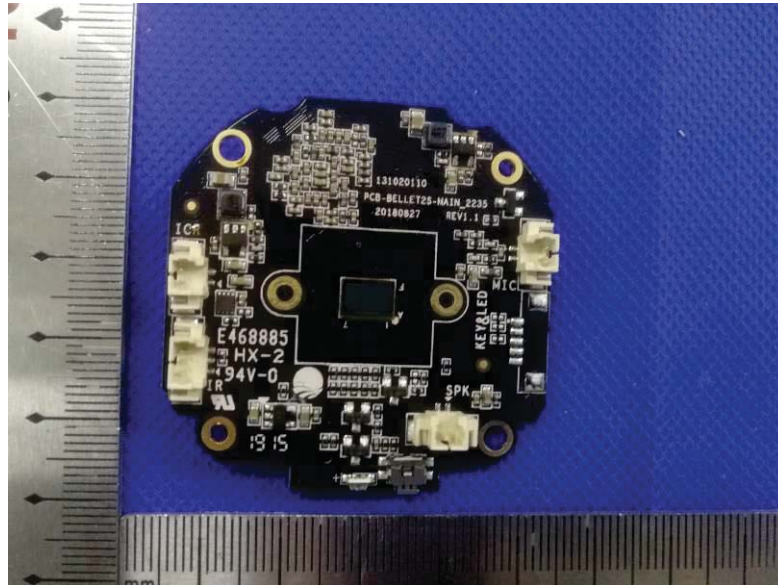

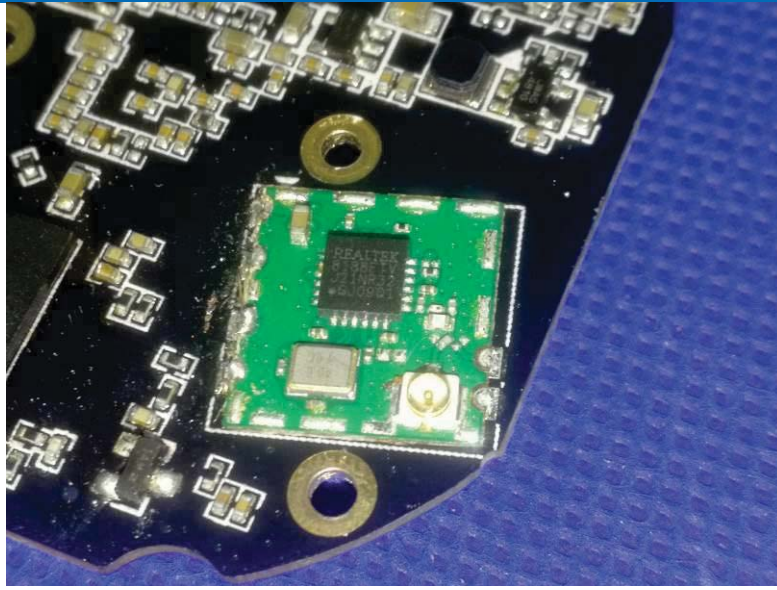

**THE END**