

Case No. : <u>GTS20231020001-1-84</u>
Ambient Condition: <u>24</u> °C, <u>48</u> %RH
According Standard: <u>■Part15E</u>
Test Date: <u>2024.1.12</u> Test Engineer: <u>Evan ouyang</u>


Appendix C.1: Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.120	5169.920	5190.040	---	---
		5200	20.000	5189.960	5209.960	---	---
		5240	19.920	5229.880	5249.800	---	---
11N20SISO	Ant1	5180	22.080	5169.640	5191.720	---	---
		5200	21.720	5189.840	5211.560	---	---
		5240	20.520	5229.600	5250.120	---	---

Test Graphs


11A_Ant1_5180

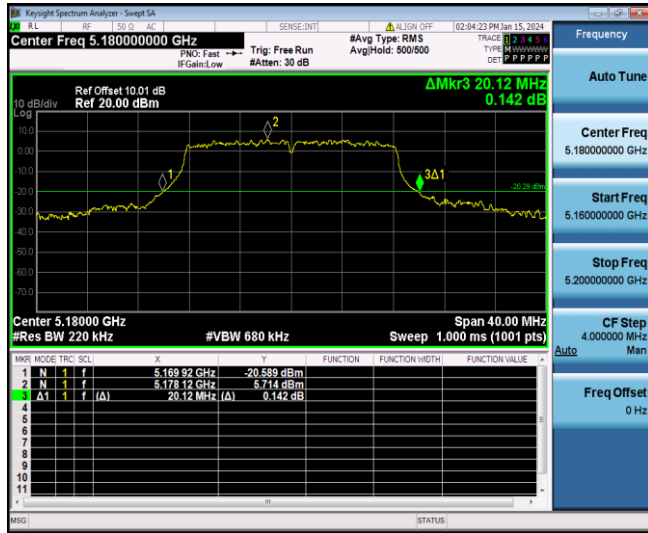


11A_Ant1_5200




11A_Ant1_5240

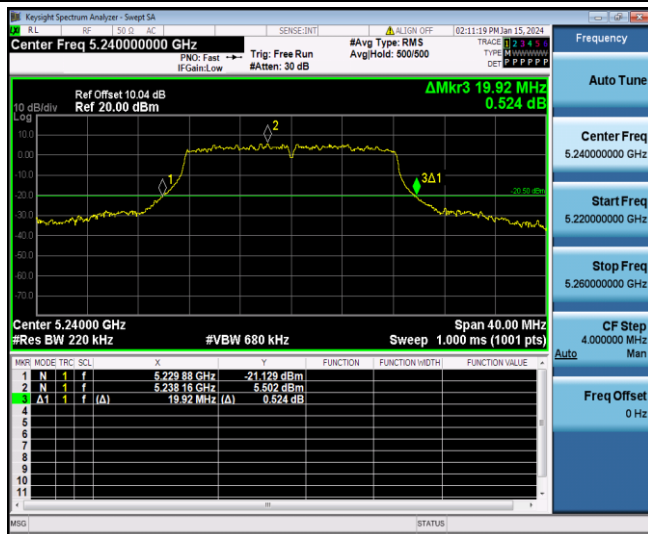

11N20SISO_Ant1_5180

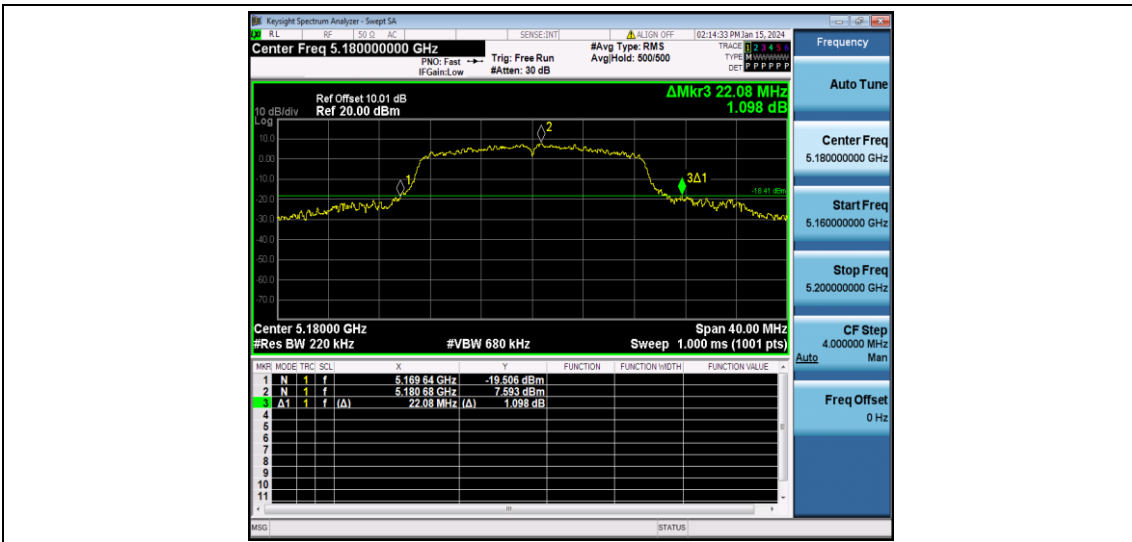

11N20SISO_Ant1_5200

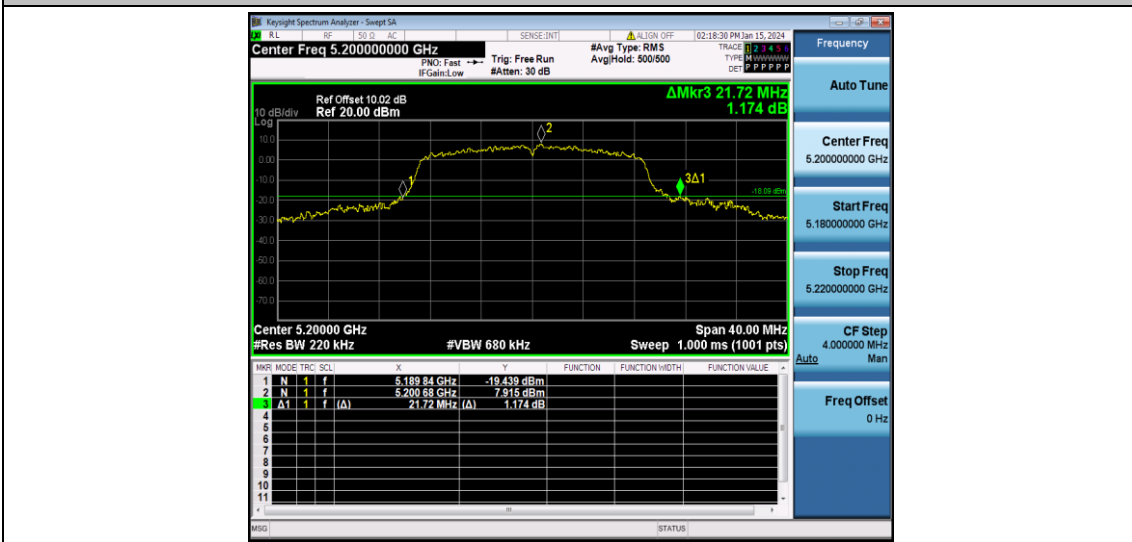

11N20SISO_Ant1_5240



Appendix C.2: Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.773	5171.5870	5188.3600	---	---
		5200	16.760	5191.6010	5208.3610	---	---
		5240	16.759	5231.5795	5248.3385	---	---
11N20SISO	Ant1	5180	17.684	5171.1699	5188.8539	---	---
		5200	17.682	5191.1874	5208.8694	---	---
		5240	17.639	5231.1506	5248.7896	---	---

Test Graphs


11A_Ant1_5180



11A_Ant1_5200



11A_Ant1_5240

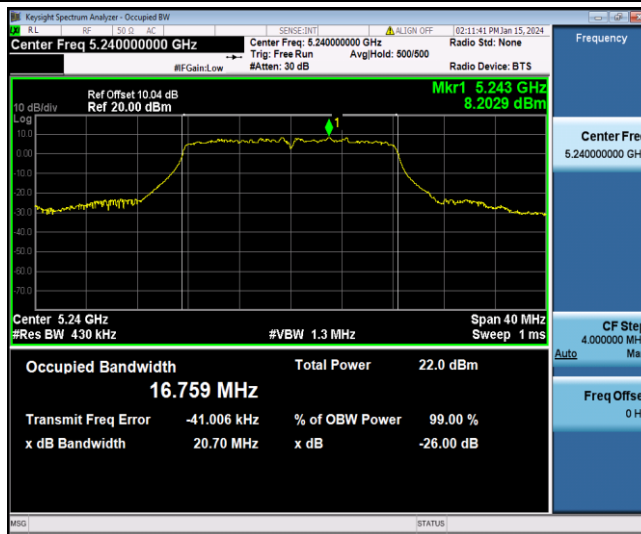


11N20SISO_Ant1_5180



11N20SISO_Ant1_5200



11N20SISO_Ant1_5240

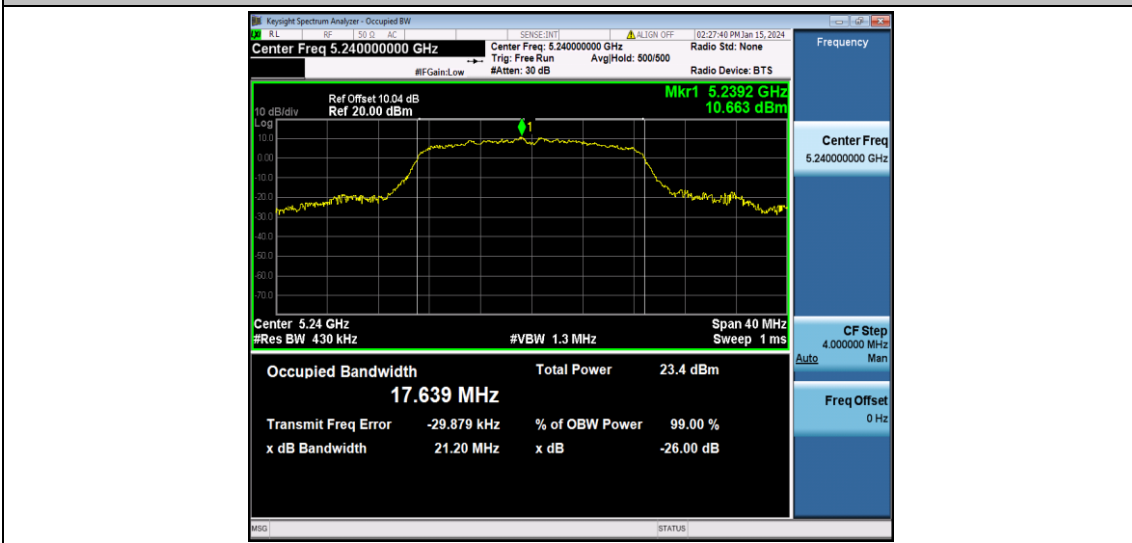


Appendix C.3: Duty Cycle

Test Result


TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
11A	Ant1	5180	30.00	30.00	100.00	0.00	0.03
		5200	30.00	30.00	100.00	0.00	0.03
		5240	30.00	30.00	100.00	0.00	0.03
11N20SISO	Ant1	5180	30.00	30.00	100.00	0.00	0.03
		5200	30.00	30.00	100.00	0.00	0.03
		5240	30.00	30.00	100.00	0.00	0.03

Test Graphs


11A_Ant1_5180

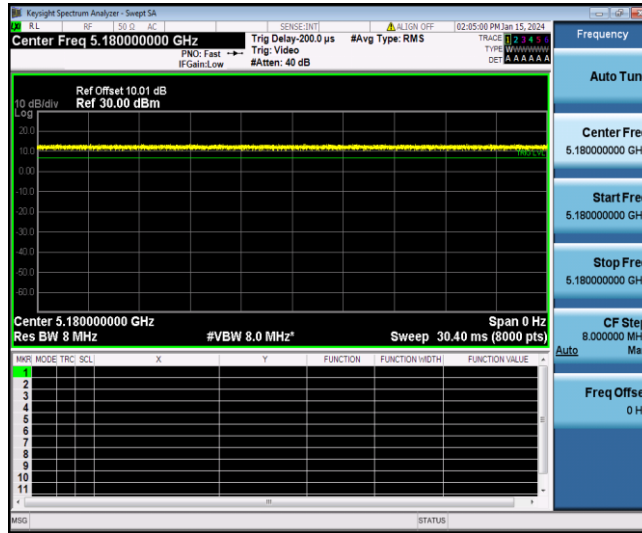


11A_Ant1_5200

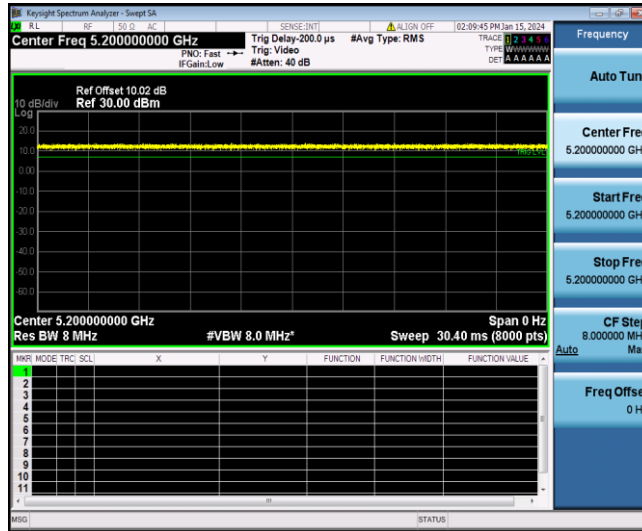


11A_Ant1_5240

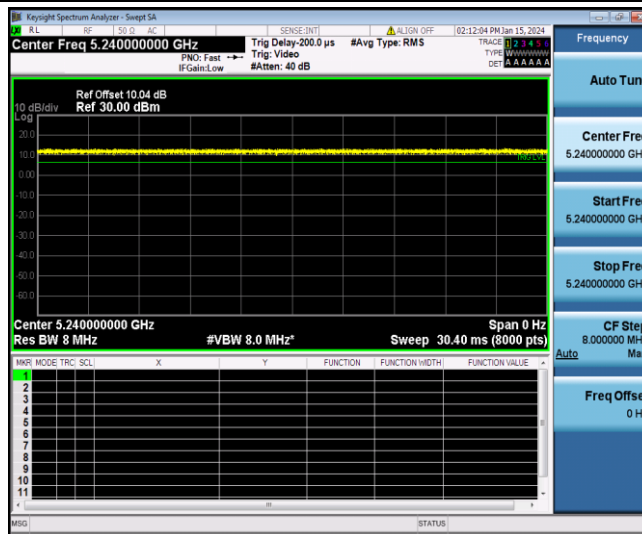


11N20SISO_Ant1_5180

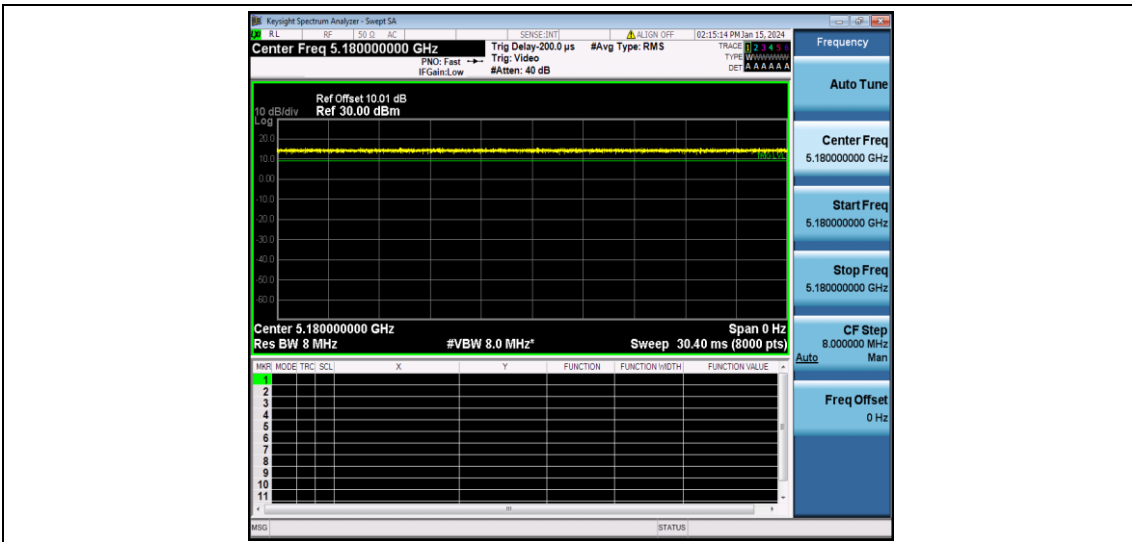

11N20SISO_Ant1_5200

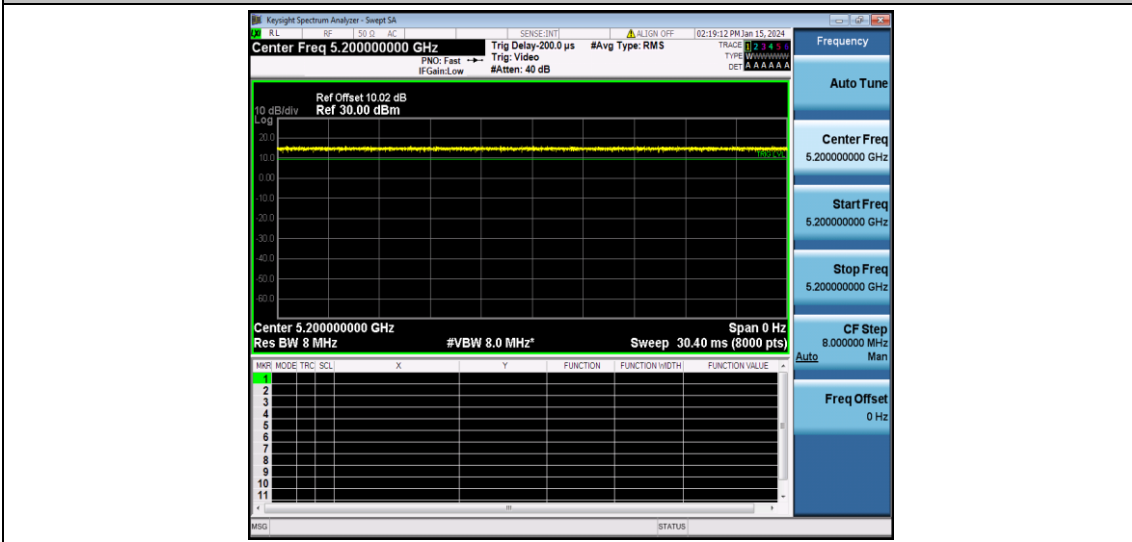

11N20SISO_Ant1_5240

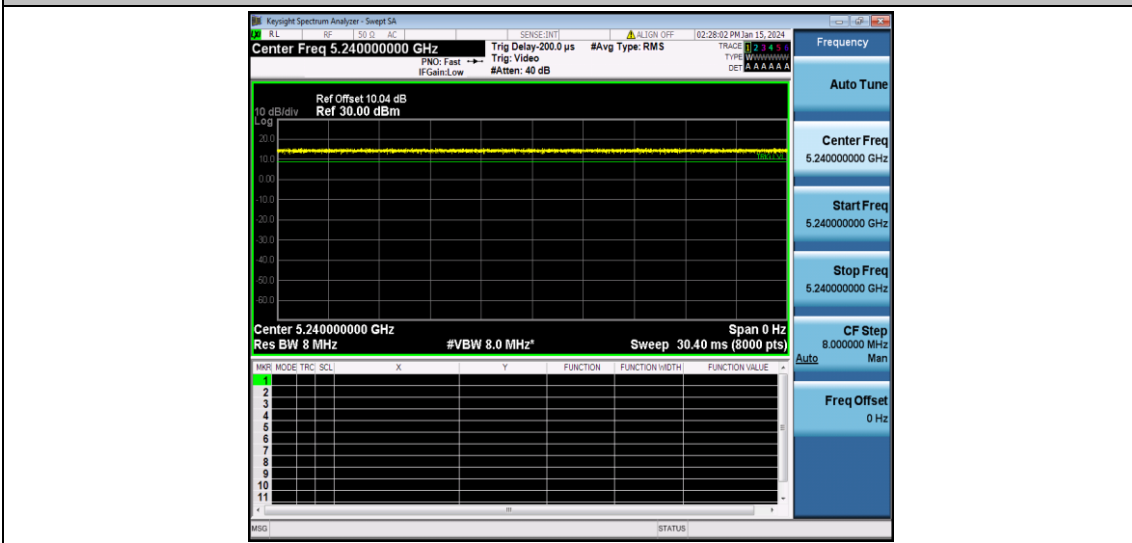

Appendix C.4: Maximum conducted output power

Test Result Channel Power

Omni Antenna:

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	17.38	100.00	0.00	17.38	≤23.98	PASS
		5200	17.43	100.00	0.00	17.43	≤23.98	PASS
		5240	17.92	100.00	0.00	17.92	≤23.98	PASS
11N20SIS O	Ant1	5180	16.89	100.00	0.00	16.89	≤23.98	PASS
		5200	17.23	100.00	0.00	17.23	≤23.98	PASS
		5240	16.80	100.00	0.00	16.80	≤23.98	PASS

FPC Antenna:

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	17.38	100.00	0.00	17.38	≤23.98	PASS
		5200	17.43	100.00	0.00	17.43	≤23.98	PASS
		5240	17.92	100.00	0.00	17.92	≤23.98	PASS
11N20SIS O	Ant1	5180	16.89	100.00	0.00	16.89	≤23.98	PASS
		5200	17.23	100.00	0.00	17.23	≤23.98	PASS
		5240	16.80	100.00	0.00	16.80	≤23.98	PASS

Note:

- The Duty Cycle Factor and RBW Factor is compensated in the data.

Appendix C.5: Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	3.77	≤10.00	PASS
		5200	3.91	≤10.00	PASS
		5240	3.46	≤10.00	PASS
11N20SISO	Ant1	5180	6.26	≤10.00	PASS
		5200	6.66	≤10.00	PASS
		5240	6.34	≤10.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

11A_Ant1_5180

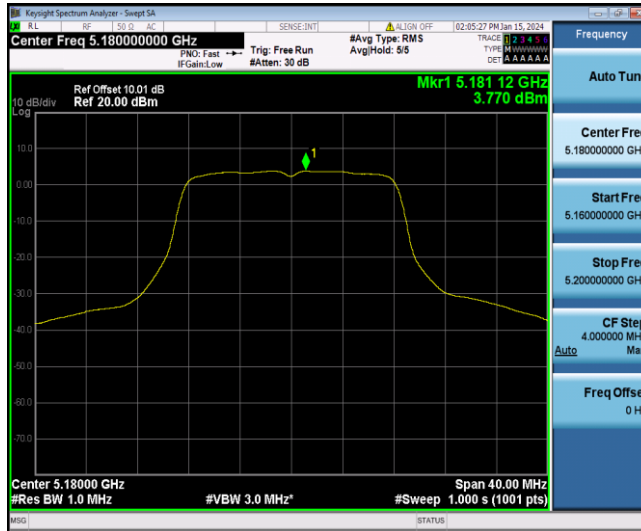


11A_Ant1_5200

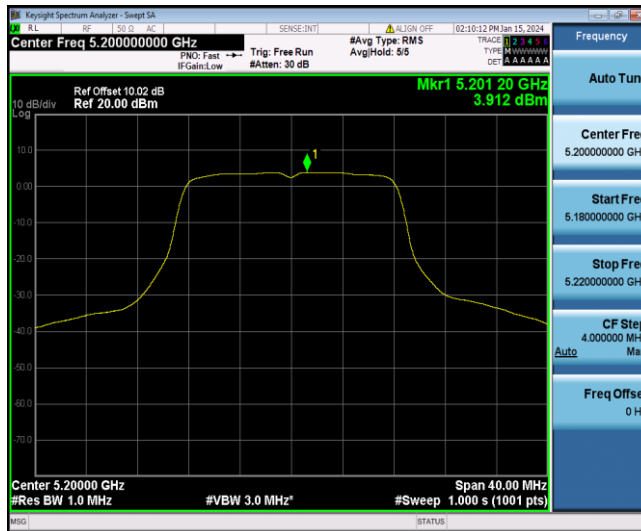

11A_Ant1_5240




11N20SISO_Ant1_5180

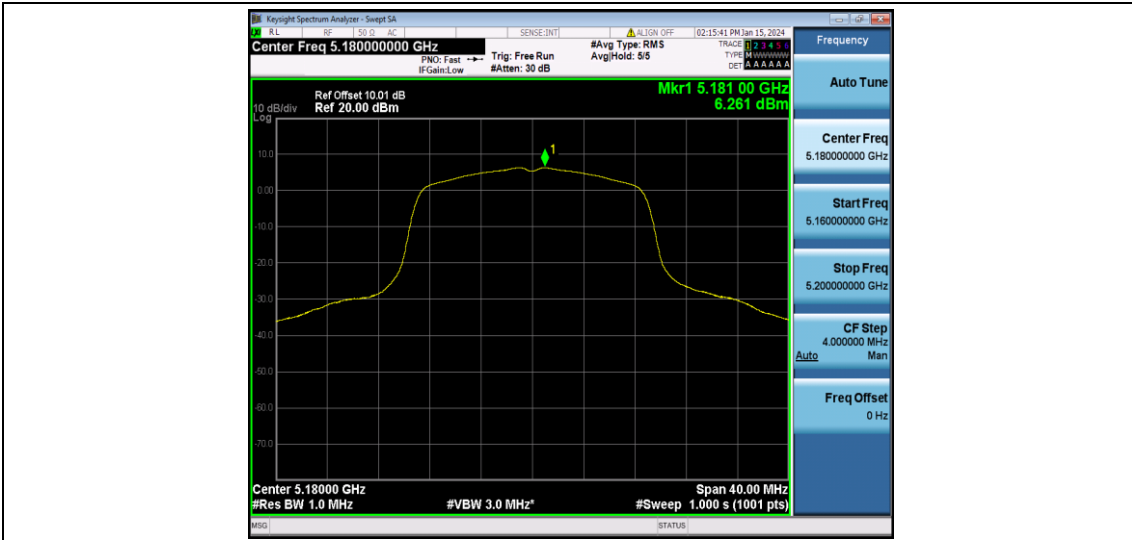

11N20SISO_Ant1_5200



11N20SISO_Ant1_5240

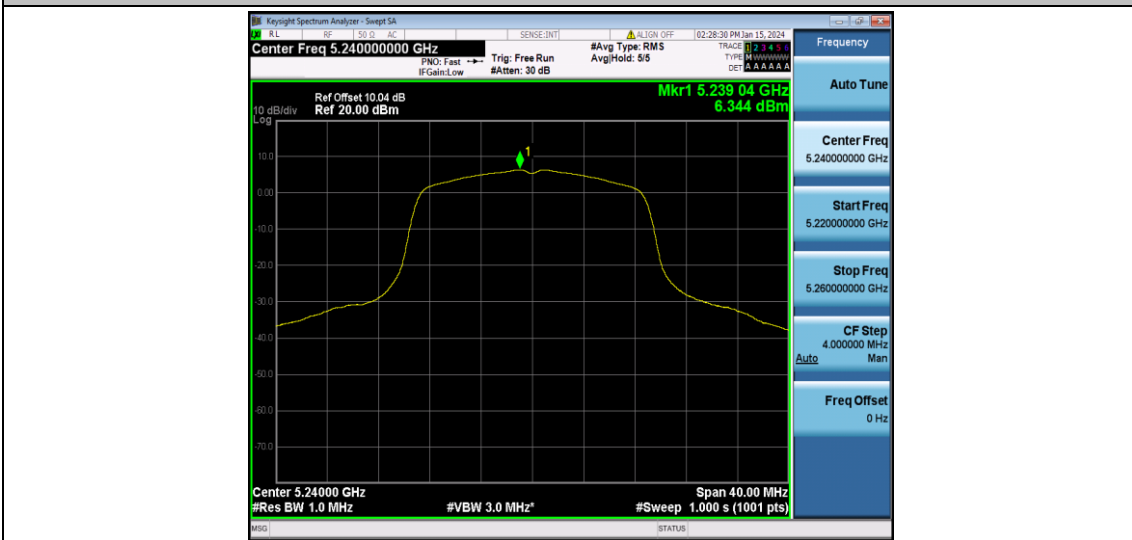


Appendix C.6: Band edge measurements

Test Result B1

TestMode	Antenna	ChName	Freq(MHz)	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-34.36	≤-27	PASS
		High	5240	-37.4	≤-27	PASS
11N20SISO	Ant1	Low	5180	-31.68	≤-27	PASS
		High	5240	-37.04	≤-27	PASS

Test Graphs B1


11A_Ant1_Low_5180

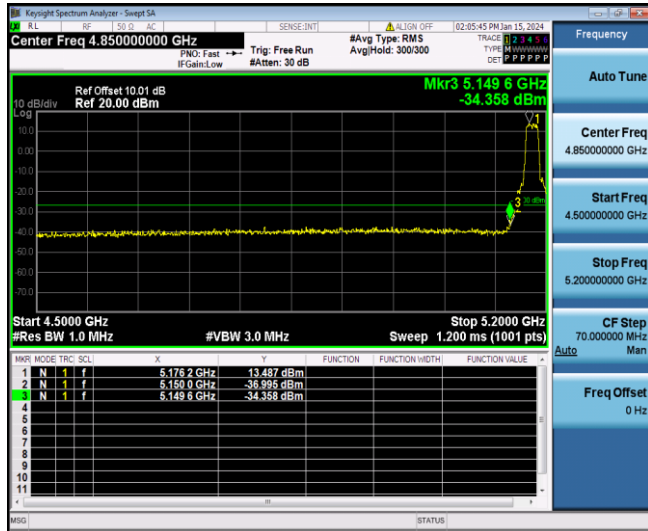

11A_Ant1_High_5240



11N20SISO_Ant1_Low_5180

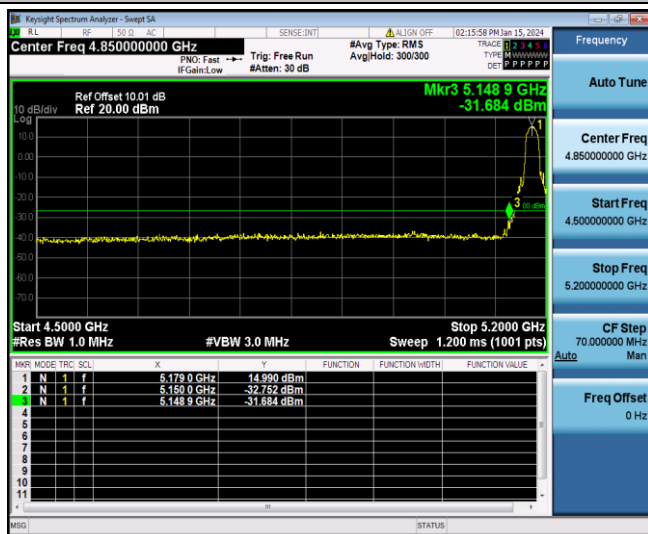

11N20SISO_Ant1_High_5240




Appendix C.7: Conducted Spurious Emission

Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~5140	5106.1	-45.84	≤-27	PASS
			5360~40000	23484.94	-37.52	≤-27	PASS
		5200	30~5140	4949.06	-44.49	≤-27	PASS
			5360~40000	24189.69	-37.34	≤-27	PASS
		5240	30~5140	5082.94	-45.17	≤-27	PASS
			5360~40000	24282.74	-37.08	≤-27	PASS
11N20SISO	Ant1	5180	30~5140	5139.49	-43.55	≤-27	PASS
			5360~40000	26599.66	-36.57	≤-27	PASS
		5200	30~5140	5121.09	-44.3	≤-27	PASS
			5360~40000	24281.29	-36.93	≤-27	PASS
		5240	30~5140	5086.35	-43.39	≤-27	PASS
			5360~40000	24286.34	-36.93	≤-27	PASS

Test Graphs


11A_Ant1_5180_30~5140

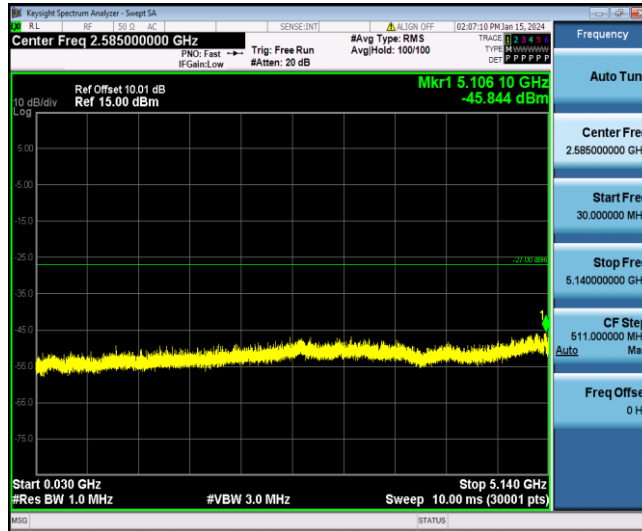


11A_Ant1_5180_5360~40000

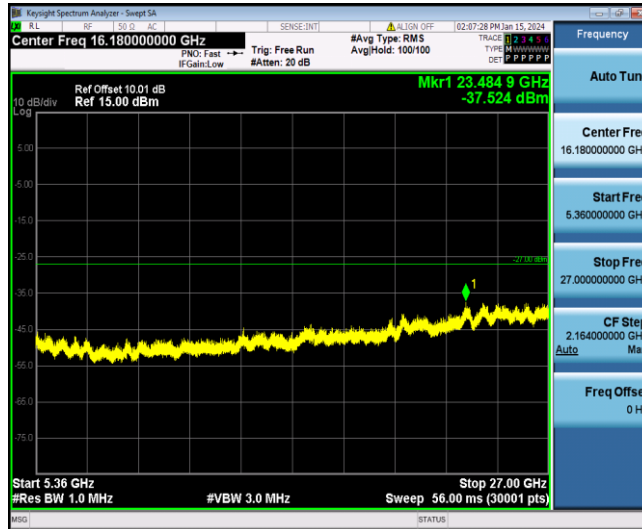

11A_Ant1_5200_30~5140

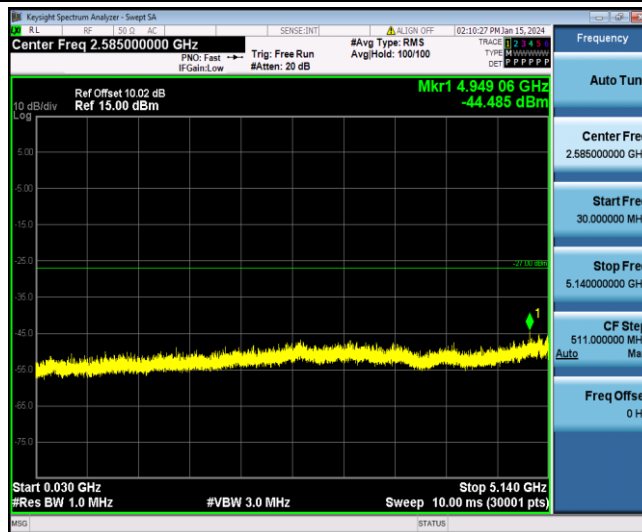

11A_Ant1_5200_5360~40000

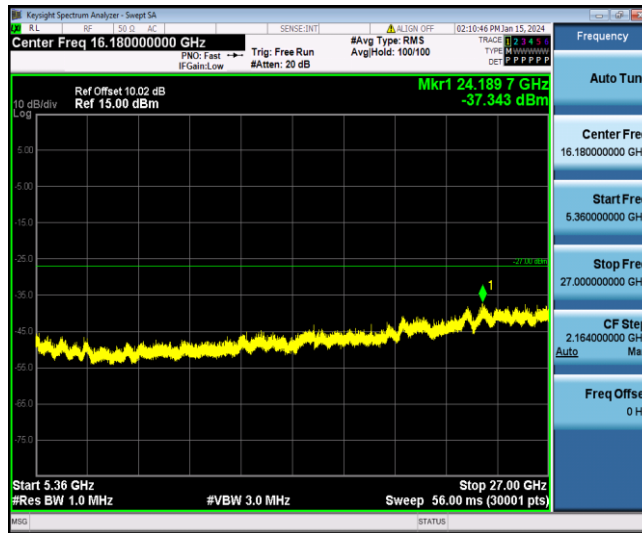

11A_Ant1_5240_30~5140



11A_Ant1_5240_5360~40000




11N20SISO_Ant1_5180_30~5140




11N20SISO_Ant1_5180_5360~40000




11N20SISO_Ant1_5200_30~5140

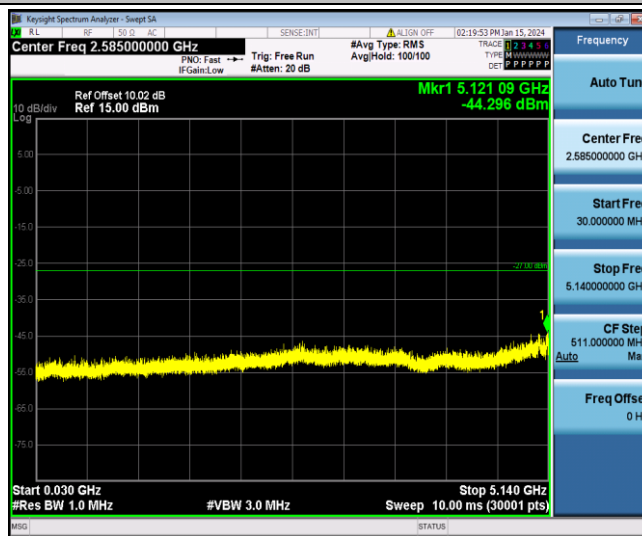


11N20SISO_Ant1_5200_5360~40000

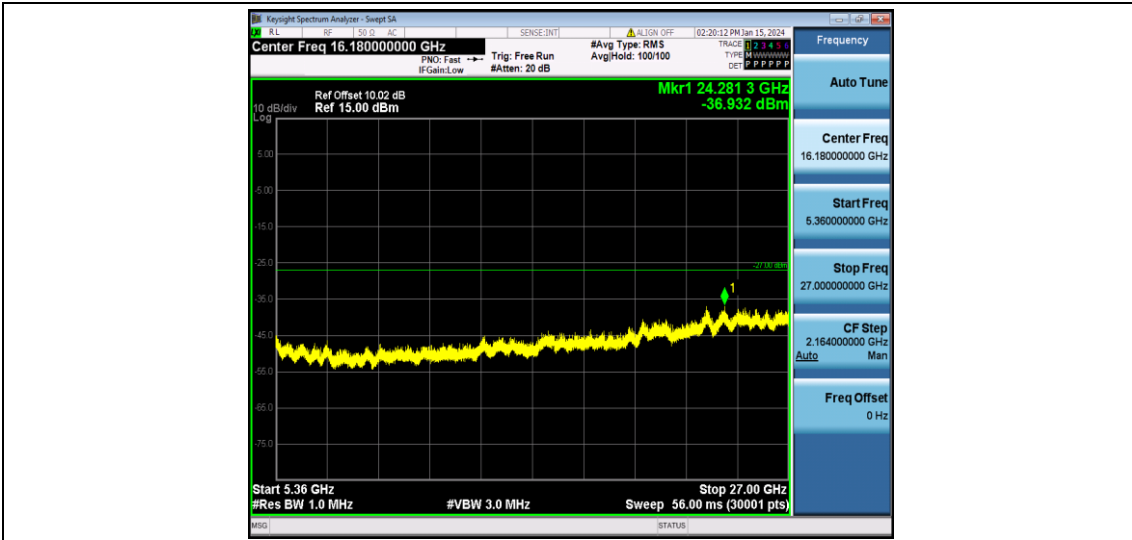

11N20SISO_Ant1_5240_30~5140

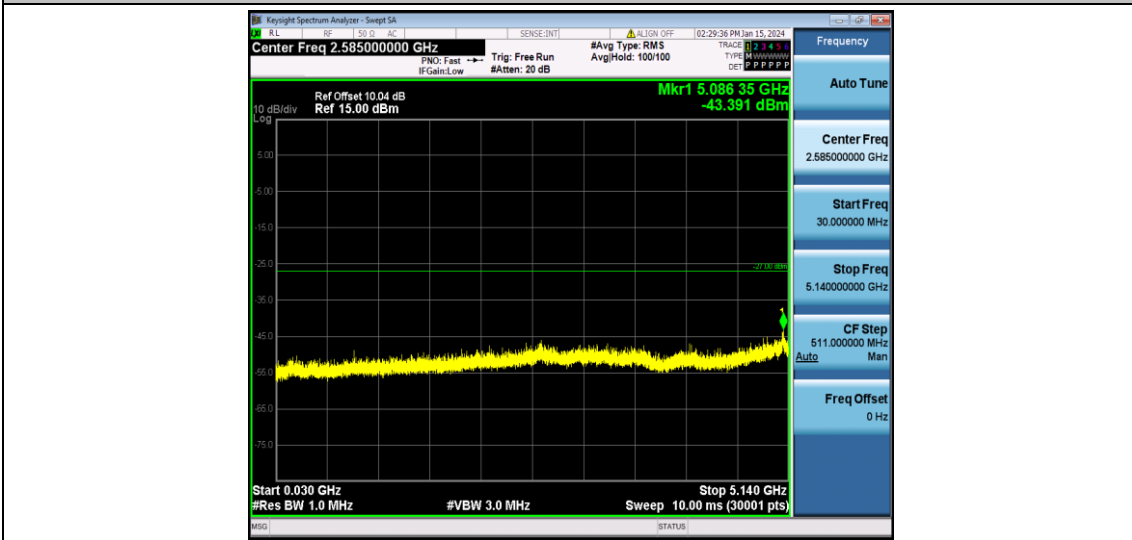

11N20SISO_Ant1_5240_5360~40000

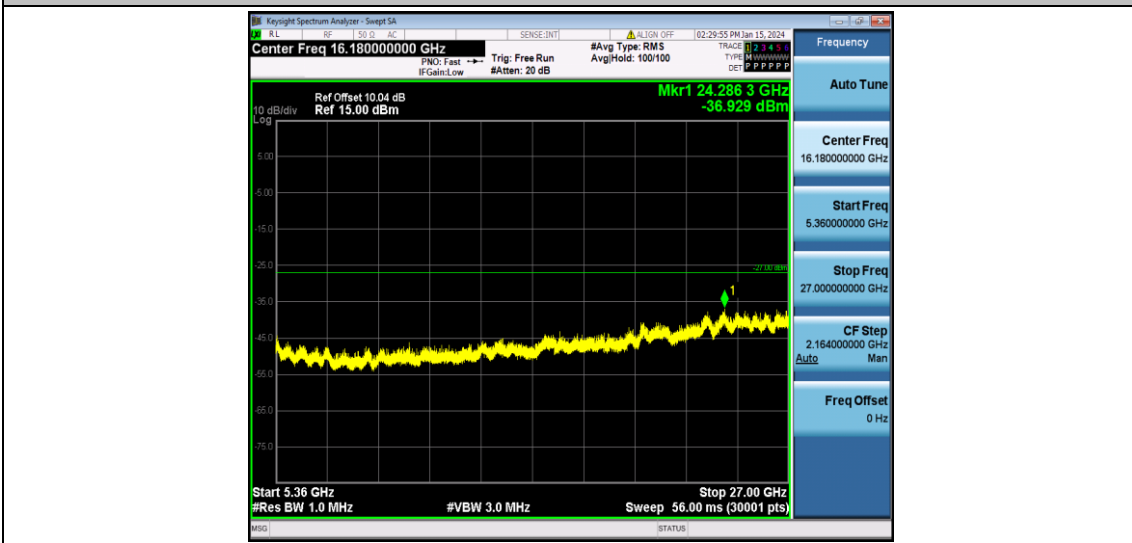

Appendix C.8: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-48.04	≤-41.20	47.16	≤54	PASS
				AV	5149.600	-45.64	≤-41.20	49.56	≤54	PASS
				AV	5150.000	-45.39	≤-41.20	49.81	≤54	PASS
				Peak	4500.000	-49.36	≤-21.20	45.84	≤74	PASS
				Peak	5046.700	-37.73	≤-21.20	57.47	≤74	PASS
				Peak	5150.000	-40.67	≤-21.20	54.53	≤74	PASS
		High	5240	AV	5350.000	-46.87	≤-41.20	48.33	≤54	PASS
				AV	5456.640	-45.93	≤-41.20	49.27	≤54	PASS
				AV	5460.000	-46.01	≤-41.20	49.19	≤54	PASS
				Peak	5350.000	-43.74	≤-21.20	51.46	≤74	PASS
				Peak	5438.160	-38.01	≤-21.20	57.19	≤74	PASS
				Peak	5460.000	-43.29	≤-21.20	51.91	≤74	PASS
11N20SIS O	Ant1	Low	5180	AV	4500.000	-48.08	≤-41.20	47.12	≤54	PASS
				AV	5149.600	-44.51	≤-41.20	50.69	≤54	PASS
				AV	5150.000	-44.13	≤-41.20	51.07	≤54	PASS
				Peak	4500.000	-45.78	≤-21.20	49.42	≤74	PASS
				Peak	4913.700	-36.53	≤-21.20	58.67	≤74	PASS
				Peak	5150.000	-43.87	≤-21.20	51.33	≤74	PASS
		High	5240	AV	5350.000	-46.66	≤-41.20	48.54	≤54	PASS
				AV	5455.680	-45.72	≤-41.20	49.48	≤54	PASS
				AV	5460.000	-45.78	≤-41.20	49.42	≤54	PASS
				Peak	5350.000	-47.26	≤-21.20	47.94	≤74	PASS
				Peak	5419.440	-36.88	≤-21.20	58.32	≤74	PASS
				Peak	5460.000	-41.76	≤-21.20	53.44	≤74	PASS

Note:


2. The Antenna Gain is compensated in the graph.
3. The Duty Cycle Factor and RBW Factor is compensated in the graph.
4. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


11A_Ant1_Low_5180_AV

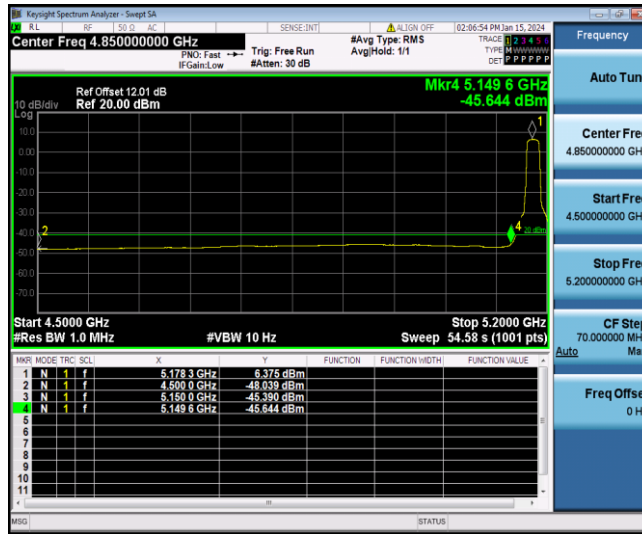


11A_Ant1_Low_5180_Peak

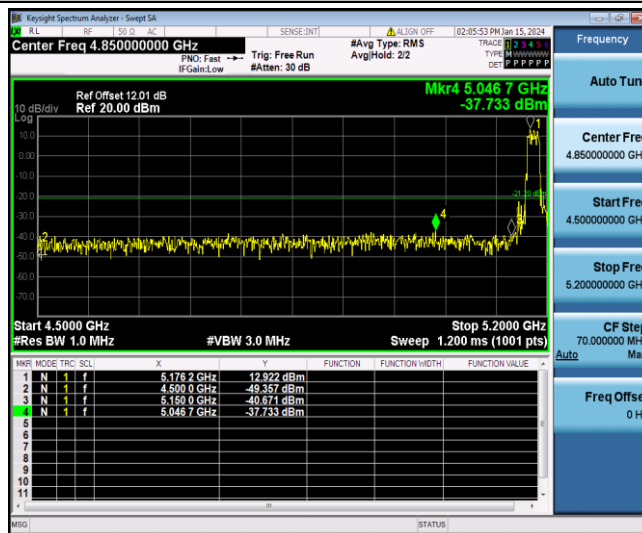


11A_Ant1_High_5240_AV

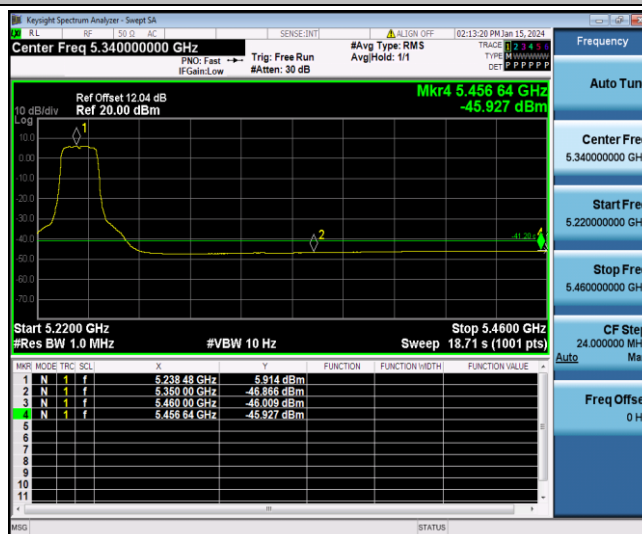


11A_Ant1_High_5240_Peak

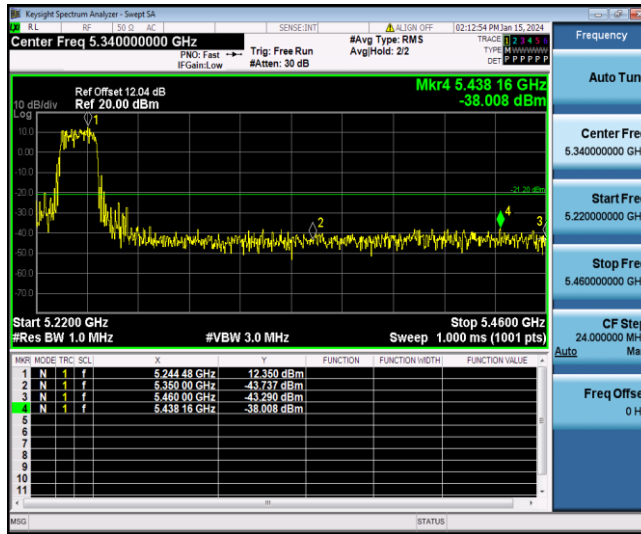


11N20SISO_Ant1_Low_5180_AV

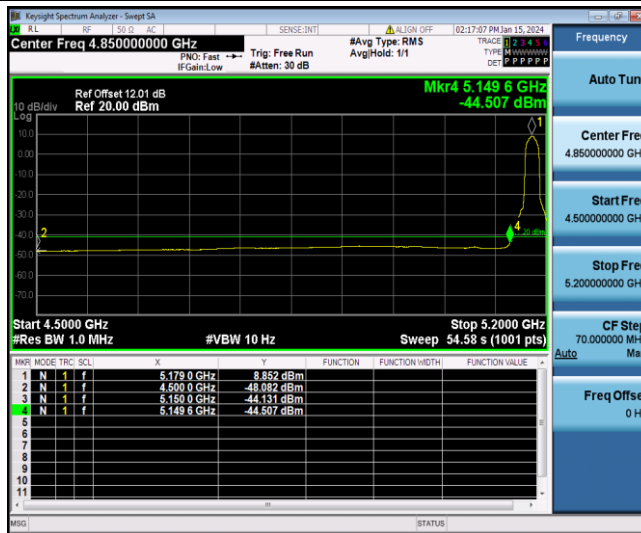

11N20SISO_Ant1_Low_5180_Peak

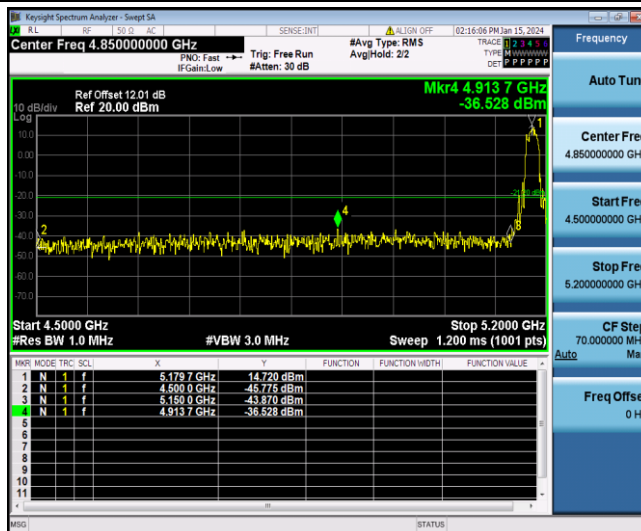

11N20SISO_Ant1_High_5240_AV

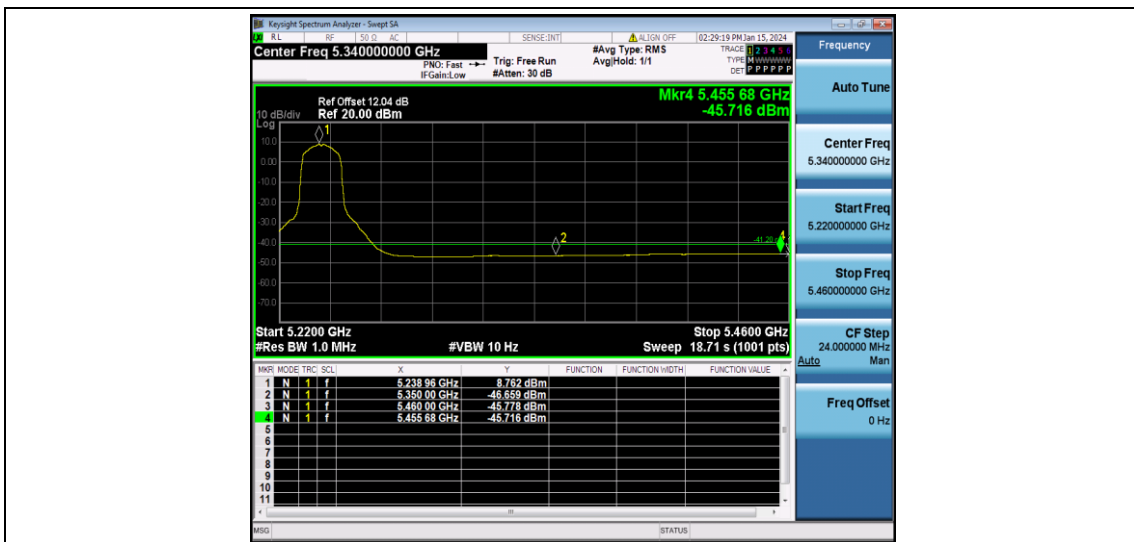

11N20SISO_Ant1_High_5240_Peak

