

## RF Test Report

Applicant : Plume Design, Inc.

Product Name : SuperPod Aon

Trade Name : Plume Design, Inc.

Model Number : G2A

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Received Date : Nov. 23, 2022

Test Period : Dec. 07, 2022 ~ Feb. 21, 2023

Issued Date : Apr. 21, 2023

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range : 9 kHz to 40 GHz  
Test Firm MRA designation number: TW0010 (Bade test site)  
Test Firm MRA designation number: TW0034 (Wugu test site)

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

### Revision History

Version	Issued Date	Revisions	Revised By
00	Apr. 21, 2023	Initial Issue	Snow Wang

## Verification of Compliance

Applicant : Plume Design, Inc.

Product Name : SuperPod Aon

Trade Name : Plume Design, Inc.

Model Number : G2A

FCC ID : 2AG7G-G2A

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
	1.1. Summary of Test Result .....	5
	1.2. Testing Location .....	6
	1.3. Measurement Uncertainty .....	6
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology .....</b>	<b>14</b>
	3.1. Mode of Operation .....	14
	3.2. EUT Test Step .....	19
	3.3. Configuration of Test System Details .....	20
	3.4. Test Instruments .....	21
	3.5. Test Site Environment .....	24
<b>4</b>	<b>Measurement Procedure .....</b>	<b>25</b>
	4.1. AC Power Conducted Emission Measurement .....	25
	4.2. Transmitter Radiated Emissions Measurement .....	27
	4.3. Maximum Conducted Output Power and Transmit power control Measurement .....	32
	4.4. 26 dB RF Bandwidth Measurement .....	33
	4.5. 6 dB RF Bandwidth Measurement .....	34
	4.6. Maximum Power Spectral Density Measurement .....	35
	4.7. Automatically discontinue transmission .....	36
	4.8. Antenna Requirement .....	36
<b>5</b>	<b>Test Results .....</b>	<b>42</b>
	5.1. Conducted Emission .....	42
	5.2. Radiated Emission Measurement .....	44
	5.3. Conducted Test Results .....	44

**Appendix A. Test Data**

**Appendix B. Test Plots**

**Appendix C. Radiated Emission**

**Appendix D. Test Setup Photographs**

# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(b)(9) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26 dB RF Bandwidth	Reference	---
15.407(e)	6 dB RF Bandwidth	PASS	---
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(c)	Automatically discontinue transmission	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	---

### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address:  No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address:  No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	1.9 dB
	30 MHz ~ 1000 MHz	4.9 dB
	1000 MHz ~ 18000 MHz	5.0 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.4 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		$1.3 \times 10^{-7}$
Duty Cycle		1.1 %
Time Occupancy		1.5 %

## 2 EUT Description

Applicant	Plume Design, Inc. 325 Lytton Ave., Palo Alto, CA 94301			
Product Name	SuperPod Aon			
Trade Name	Plume Design, Inc.			
Model Number	G2A			
FCC ID	2AG7G-G2A			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	802.11a / 802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20	U-NII Band 1	5180 – 5240	4
		U-NII Band 2-A	5260 – 5320	4
		U-NII Band 2-C	5500 – 5700	11
		Straddle band	5720	1
		U-NII Band 3	5745 – 5825	5
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40	U-NII Band 1	5190 – 5230	2
		U-NII Band 2-A	5270 – 5310	2
		U-NII Band 2-C	5510 – 5670	5
		Straddle band	5710	1
		U-NII Band 3	5755 – 5795	2
	802.11ac VHT80 / 802.11ax HE80	U-NII Band 1	5210	1
		U-NII Band 2-A	5290	1
		U-NII Band 2-C	5530 – 5610	2
		Straddle band	5690	1
		U-NII Band 3	5775	1
	802.11ac VHT160 / 802.11ax HE160	U-NII Band 1	5250	1
U-NII Band 2-A				
U-NII Band 2-C		5570	1	
Modulation Type	OFDM/OFDMA			
Antenna Delivery	Reference section 3.1			
Operate Temp. Range	-30 ~ +50 °C			
EUT Power Rating	100-240 V, 50-60 Hz, 0.45 A			

Antenna information				
Type	Antenna		Frequency	Max. Gain (dBi)
IFA Antenna	5G L1	ANT-0	U-NII Band 1	4.00
			U-NII Band 2-A	3.30
	5G L2	ANT-1	U-NII Band 1	2.50
			U-NII Band 2-A	2.40
	5G L3	ANT-2	U-NII Band 1	3.80
			U-NII Band 2-A	3.80
	5G L4	ANT-3	U-NII Band 1	3.00
			U-NII Band 2-A	2.30
	5G H1	ANT-0	U-NII Band 2-C	5.90
			U-NII Band 3	5.90
	5G H2	ANT-1	U-NII Band 2-C	3.80
			U-NII Band 3	3.70

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		V
Fixed point-to-point access points		---
Client devices		---



SISO 1X1		
Frequency Band		RF Output Power (W)
802.11a	U-NII Band 1	0.377
	U-NII Band 2-A	0.179
	U-NII Band 2-C	0.171
	U-NII Band 3	0.304
802.11n HT20	U-NII Band 1	0.261
	U-NII Band 2-A	0.176
	U-NII Band 2-C	0.203
	U-NII Band 3	0.265
802.11n HT40	U-NII Band 1	0.303
	U-NII Band 2-A	0.198
	U-NII Band 2-C	0.205
	U-NII Band 3	0.258
802.11ac VHT20	U-NII Band 1	0.272
	U-NII Band 2-A	0.183
	U-NII Band 2-C	0.185
	U-NII Band 3	0.253
802.11ac VHT40	U-NII Band 1	0.309
	U-NII Band 2-A	0.207
	U-NII Band 2-C	0.212
	U-NII Band 3	0.268
802.11ac VHT80	U-NII Band 1	0.087
	U-NII Band 2-A	0.136
	U-NII Band 2-C	0.218
	U-NII Band 3	0.279
802.11ac VHT160	U-NII Band 1	0.041
	U-NII Band 2-A	0.041
	U-NII Band 2-C	0.087
802.11ax HE20	U-NII Band 1	0.303
	U-NII Band 2-A	0.204
	U-NII Band 2-C	0.208
	U-NII Band 3	0.282
802.11ax HE40	U-NII Band 1	0.332
	U-NII Band 2-A	0.230
	U-NII Band 2-C	0.237
	U-NII Band 3	0.300
802.11ax HE80	U-NII Band 1	0.097
	U-NII Band 2-A	0.147
	U-NII Band 2-C	0.231
	U-NII Band 3	0.303
802.11ax HE160	U-NII Band 1	0.048
	U-NII Band 2-A	0.047
	U-NII Band 2-C	0.094

## MIMO Low Band B1 &amp; B2A 4X4

Frequency Band		RF Output Power (W)
802.11a	U-NII Band 1	0.232
	U-NII Band 2-A	0.070
802.11n HT20	U-NII Band 1	0.267
	U-NII Band 2-A	0.080
802.11n HT40	U-NII Band 1	0.439
	U-NII Band 2-A	0.141
802.11ac VHT20	U-NII Band 1	0.270
	U-NII Band 2-A	0.081
802.11ac VHT40	U-NII Band 1	0.460
	U-NII Band 2-A	0.149
802.11ac VHT80	U-NII Band 1	0.201
	U-NII Band 2-A	0.225
802.11ac VHT160	U-NII Band 1	0.103
	U-NII Band 2-A	0.096
802.11ax HE20	U-NII Band 1	0.279
	U-NII Band 2-A	0.083
802.11ax HE40	U-NII Band 1	0.460
	U-NII Band 2-A	0.149
802.11ax HE80	U-NII Band 1	0.206
	U-NII Band 2-A	0.231
802.11ax HE160	U-NII Band 1	0.117
	U-NII Band 2-A	0.115

## MIMO High Band\_B2C &amp; B3 2X2

Frequency Band		RF Output Power (W)
802.11a	U-NII Band 2-C	0.102
	U-NII Band 3	0.449
802.11n HT20	U-NII Band 2-C	0.105
	U-NII Band 3	0.445
802.11n HT40	U-NII Band 2-C	0.193
	U-NII Band 3	0.480
802.11ac VHT20	U-NII Band 2-C	0.111
	U-NII Band 3	0.476
802.11ac VHT40	U-NII Band 2-C	0.207
	U-NII Band 3	0.506
802.11ac VHT80	U-NII Band 2-C	0.207
	U-NII Band 3	0.343
802.11ac VHT160	U-NII Band 2-C	0.155
802.11ax HE20	U-NII Band 2-C	0.125
	U-NII Band 3	0.543
802.11ax HE40	U-NII Band 2-C	0.234
	U-NII Band 3	0.568
802.11ax HE80	U-NII Band 2-C	0.244
	U-NII Band 3	0.374
802.11ax HE160	U-NII Band 2-C	0.178

Beamforming on
MIMO Low Band B1 & B2A 4X4

Frequency Band		RF Output Power (W)
802.11n HT20	U-NII Band 1	0.307
	U-NII Band 2-A	0.074
802.11n HT40	U-NII Band 1	0.497
	U-NII Band 2-A	0.116
802.11ac VHT20	U-NII Band 1	0.347
	U-NII Band 2-A	0.082
802.11ac VHT40	U-NII Band 1	0.555
	U-NII Band 2-A	0.129
802.11ac VHT80	U-NII Band 1	0.158
	U-NII Band 2-A	0.131
802.11ac VHT160	U-NII Band 1	0.063
	U-NII Band 2-A	0.058
802.11ax HE20	U-NII Band 1	0.390
	U-NII Band 2-A	0.092
802.11ax HE40	U-NII Band 1	0.627
	U-NII Band 2-A	0.146
802.11ax HE80	U-NII Band 1	0.177
	U-NII Band 2-A	0.149
802.11ax HE160	U-NII Band 1	0.076
	U-NII Band 2-A	0.069

Beamforming on
MIMO High Band_B2C & B3 2X2

Frequency Band	RF Output Power (W)	
802.11n HT20	U-NII Band 2-C	0.071
	U-NII Band 3	0.278
802.11n HT40	U-NII Band 2-C	0.124
	U-NII Band 3	0.312
802.11ac VHT20	U-NII Band 2-C	0.072
	U-NII Band 3	0.283
802.11ac VHT40	U-NII Band 2-C	0.126
	U-NII Band 3	0.319
802.11ac VHT80	U-NII Band 2-C	0.116
	U-NII Band 3	0.344
802.11ac VHT160	U-NII Band 2-C	0.054
802.11ax HE20	U-NII Band 2-C	0.073
	U-NII Band 3	0.289
802.11ax HE40	U-NII Band 2-C	0.128
	U-NII Band 3	0.325
802.11ax HE80	U-NII Band 2-C	0.122
	U-NII Band 3	0.350
802.11ax HE160	U-NII Band 2-C	0.055

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11a	V
802.11n HT20	
802.11n HT40	
802.11ac VHT20	
802.11ac VHT40	
802.11ac VHT80	
802.11ac VHT160	
802.11ax HE20	V
802.11ax HE40	V
802.11ax HE80	V
802.11ax HE160	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: Investigation has been done on all the possible configurations for searching the worst cases (HE20/HE40/HE80/HE160 covers HT20/HT40/VHT20/VHT40/VHT80/VHT160). The table is a list of the test modes show in this test report.

Note 2: IEEE 802.11ax measurement results only support Full RU.

Note 3: This product supports normal mode and Beamforming on mode. According to power table, the normal mode is worst power. So, normal mode has to test and record results for Conducted.

**SISO 1x1**

Test Mode	ANT-0
802.11a	V
802.11n HT20	V
802.11n HT40	V
802.11n VHT20	V
802.11n VHT40	V
802.11n VHT80	V
802.11n VHT160	V
802.11ax HE20	V
802.11ax HE40	V
802.11ax HE80	V
802.11ax HE160	V

**MIMO Low Band B1 & B2A 4X4**

Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
802.11a	V	V	V	V	V
802.11n HT20	V	V	V	V	V
802.11n HT40	V	V	V	V	V
802.11n VHT20	V	V	V	V	V
802.11n VHT40	V	V	V	V	V
802.11n VHT80	V	V	V	V	V
802.11n VHT160	V	V	V	V	V
802.11ax HE20	V	V	V	V	V
802.11ax HE40	V	V	V	V	V
802.11ax HE80	V	V	V	V	V
802.11ax HE160	V	V	V	V	V

**MIMO High Band\_B2C & B3 2X2**

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11a	V	V	V
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11n VHT20	V	V	V
802.11n VHT40	V	V	V
802.11n VHT80	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11ax HE80	V	V	V

**Beamforming on\_MIMO Low Band B1 & B2A 4X4**

Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
802.11n HT20	V	V	V	V	V
802.11n HT40	V	V	V	V	V
802.11n VHT20	V	V	V	V	V
802.11n VHT40	V	V	V	V	V
802.11n VHT80	V	V	V	V	V
802.11ax HE20	V	V	V	V	V
802.11ax HE40	V	V	V	V	V
802.11ax HE80	V	V	V	V	V
802.11ax HE160	V	V	V	V	V



## Beamforming on\_MIMO High Band\_B2C &amp; B3 2X2

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11n VHT20	V	V	V
802.11n VHT40	V	V	V
802.11n VHT80	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11ax HE80	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11a	4TX (CDD)	6	U-NII Band 1	36, 40, 48
	2TX (CDD)		U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11n HT20	4TX (CDD/Beamforming on)	26	U-NII Band 1	36, 40, 48
	2TX (CDD/Beamforming on)	13	U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11n HT40	4TX (CDD/Beamforming on)	54	U-NII Band 1	38, 46
	2TX (CDD/Beamforming on)	27	U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134, 142
			U-NII Band 3	142, 151, 159
802.11ac VHT20	4TX (CDD/Beamforming on)	26	U-NII Band 1	36, 40, 48
	2TX (CDD/Beamforming on)	13	U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11ac VHT40	4TX (CDD/Beamforming on)	54	U-NII Band 1	38, 46
	2TX (CDD/Beamforming on)	27	U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134, 142
			U-NII Band 3	142, 151, 159
802.11ac VHT80	4TX (CDD/Beamforming on)	117.2	U-NII Band 1	42
	2TX (CDD/Beamforming on)	58.2	U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ac VHT160	4TX (CDD/Beamforming on)	234	U-NII Band 1 & U-NII Band 2-A	50
	2TX (CDD/Beamforming on)	117	U-NII Band 2-C	114
802.11ax HE20	4TX (CDD/Beamforming on)	MCS0	U-NII Band 1	36, 40, 48
	2TX (CDD/Beamforming on)		U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11ax HE40	4TX (CDD/Beamforming on)	MCS0	U-NII Band 1	38, 46
	2TX (CDD/Beamforming on)		U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134, 142
			U-NII Band 3	142, 151, 159
802.11ax HE80	4TX (CDD/Beamforming on)	MCS0	U-NII Band 1	42
	2TX (CDD/Beamforming on)		U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ax HE160	4TX (CDD/Beamforming on)	MCS0	U-NII Band 1 & U-NII Band 2-A	50
	2TX (CDD/Beamforming on)	MCS0	U-NII Band 2-C	114


### 3.2. EUT Test Step

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

### 3.3. Configuration of Test System Details

Conduction Emission

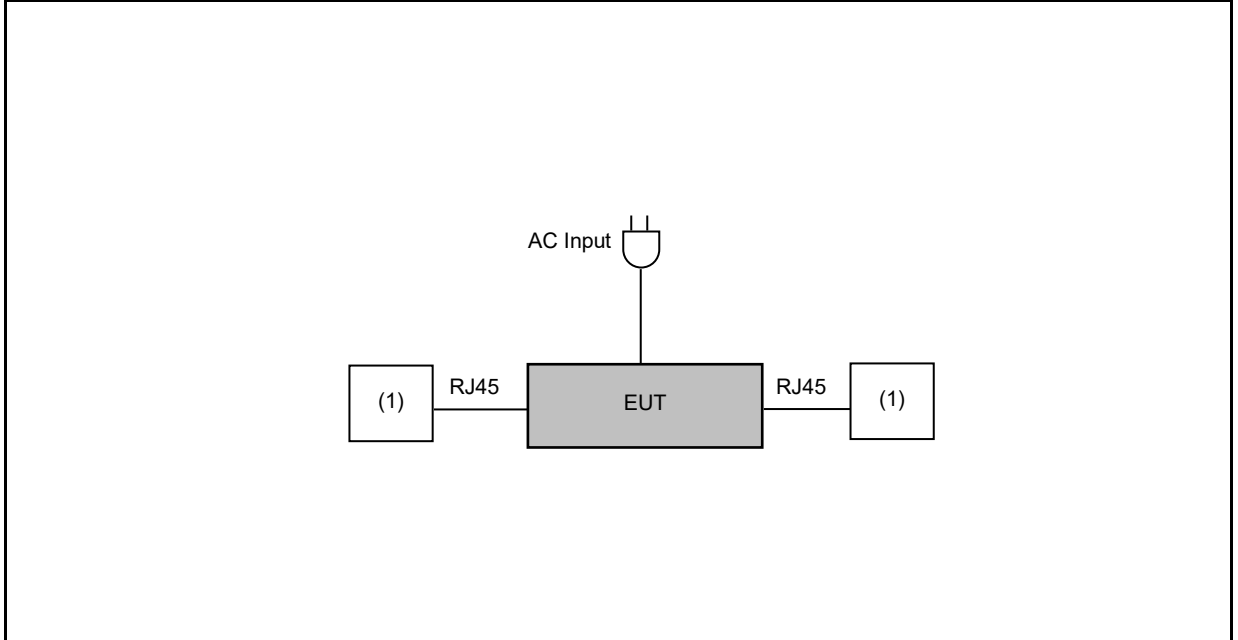

Radiated Emission

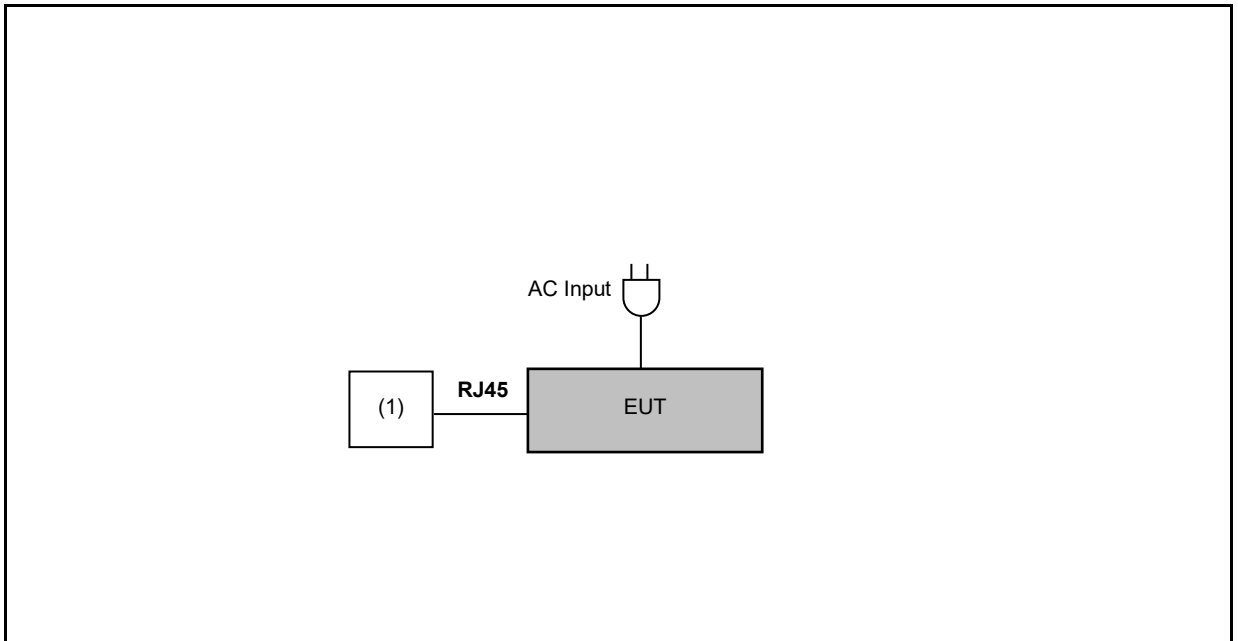

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Remark
(1)	Notebook	acer	N19C1	---	---

### 3.4. Test Instruments

For Conducted Emission  
Test Period: Jan. 06, 2023  
Testing Engineer: Jason Yeh

Test Site		Conduction01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI	100367	May 19, 2022	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	100722	Nov. 02, 2021	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	101000	Nov. 26, 2021	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101040	Apr. 06, 2022	1 year
<input checked="" type="checkbox"/>	RF Cable	Woken	00100D1380194M	TE-02-03	May 27, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

For Conducted

Test Period: Dec. 08 ~ Feb. 21, 2023

Testing Engineer: Brian Lin, Andy Lu, Louis Shen

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Power Sensor	Agilent	N1921A	MY45241957	Nov. 30, 2022	1 year
<input checked="" type="checkbox"/>	Power Meter	Agilent	N1911A	MY45101619	Nov. 30, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 16, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 21, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022	1 year
<input type="checkbox"/>	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 28, 2022	1 year
<input type="checkbox"/>	Signal Generator	Keysight	N5182B	MY53052569	Apr. 16, 2022	1 year
<input type="checkbox"/>	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 16, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022 Jan. 06, 2023	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022 Jan. 06, 2023	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Dec. 07 ~ Feb. 14, 2023

Testing Engineer: Hung Chou , Andy Lu , Kerry Xu , Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 13, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Dec. 29, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 14, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Feb. 27, 2022	1 year
<input checked="" type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 14, 2022 Jan. 07, 2023	1 year
<input type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 07, 2022	1 year
<input type="checkbox"/>	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330 A1F	001	Jul. 21, 2022	1 year
<input type="checkbox"/>	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 19, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 21, 2022	1 year
<input checked="" type="checkbox"/>	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Sep. 02, 2022	1 year
<input checked="" type="checkbox"/>	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 28, 2022	1 year
<input type="checkbox"/>	Active Loop Antenna (9 kHz~30 MHz)	Schwarzbeck Mess-Elektronik	FMZB 1513-60	1513-60-031	Feb. 17, 2022	1 year
<input type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 22, 2022	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 03, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 13, 2022	1 year
<input type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 25, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 25, 2022	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Dec. 07 ~ Feb. 14, 2023

Testing Engineer: Hung Chou , Andy Lu , Kerry Xu , Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 05, 2022	1 year
<input type="checkbox"/>	RF Cable	EMCI	EMC104-N-N-6000	TE01-1	Feb. 18, 2022	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	Feb. 18, 2022	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	Feb. 18, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 04, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022 Jan. 06, 2023	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75




## 4 Measurement Procedure

### 4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

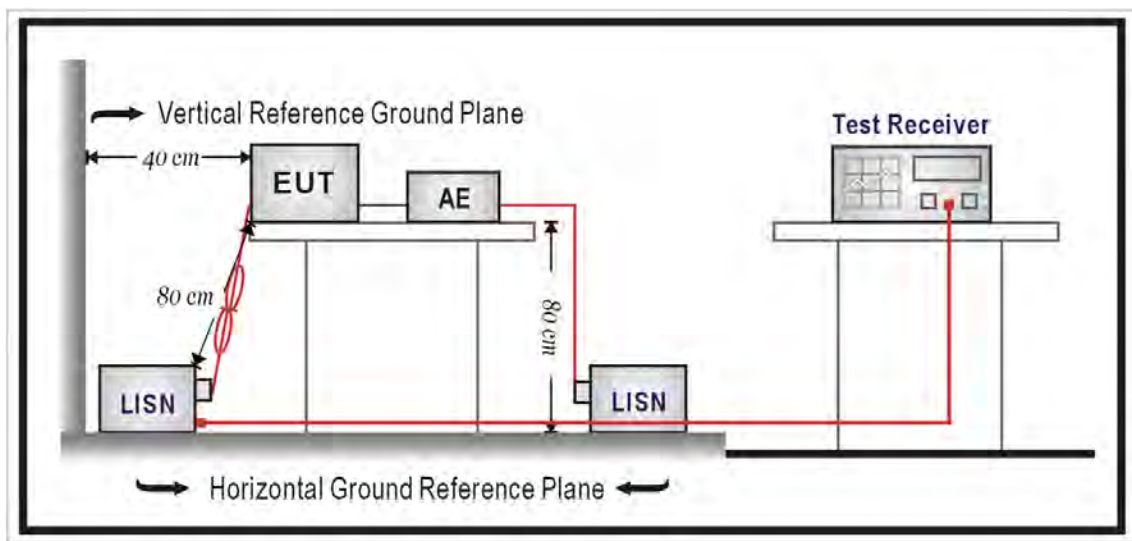

#### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All  $50 \Omega$  ports of the LISN shall be resistively terminated into  $50 \Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

## 4.2. Transmitter Radiated Emissions Measurement

### ■ Limit

(1) Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(d) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

EIRP (dBm)	Field Strength at 3 m (dBuV/m)
-27	68.3

(2) Limits of Radiated Emission Measurement


Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


- Note:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
  3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

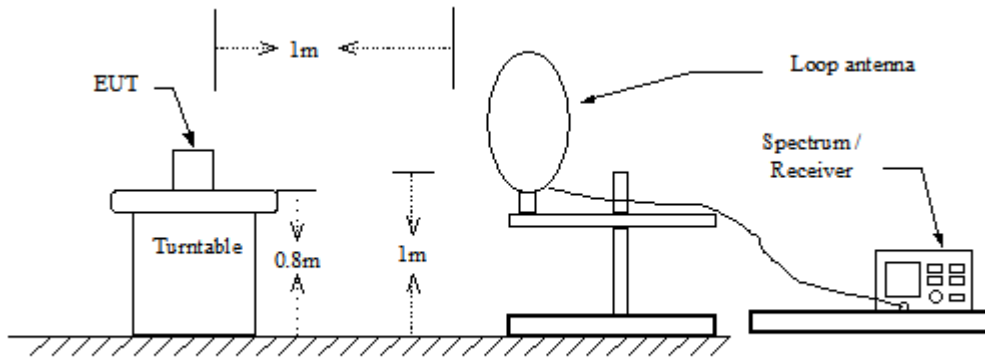

30 MHz ~ 1 GHz

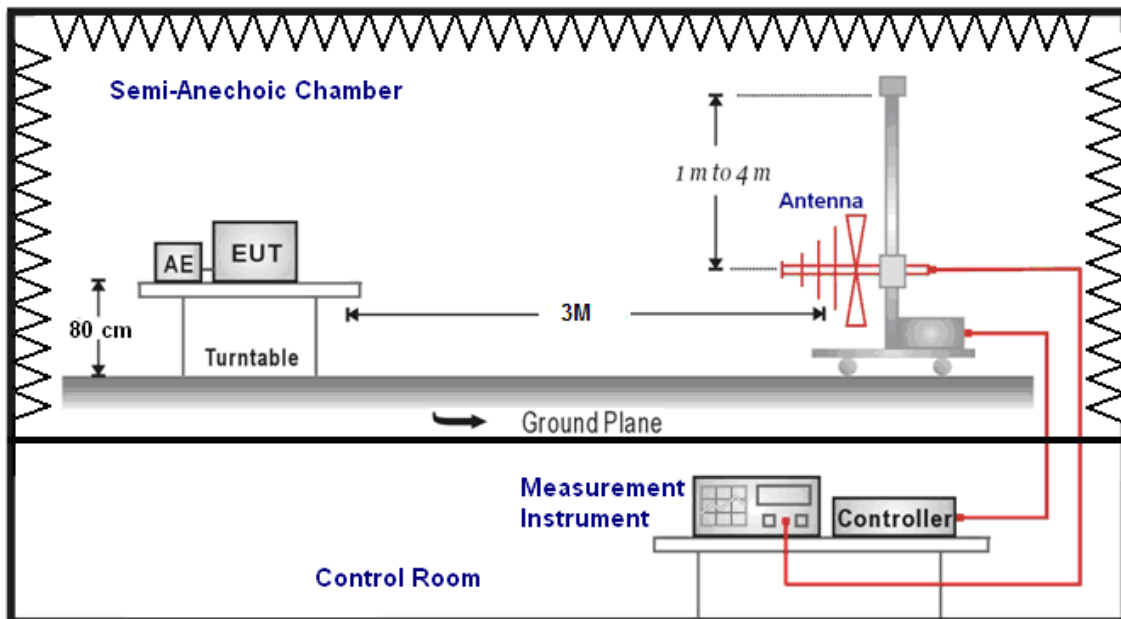

Above 1 GHz

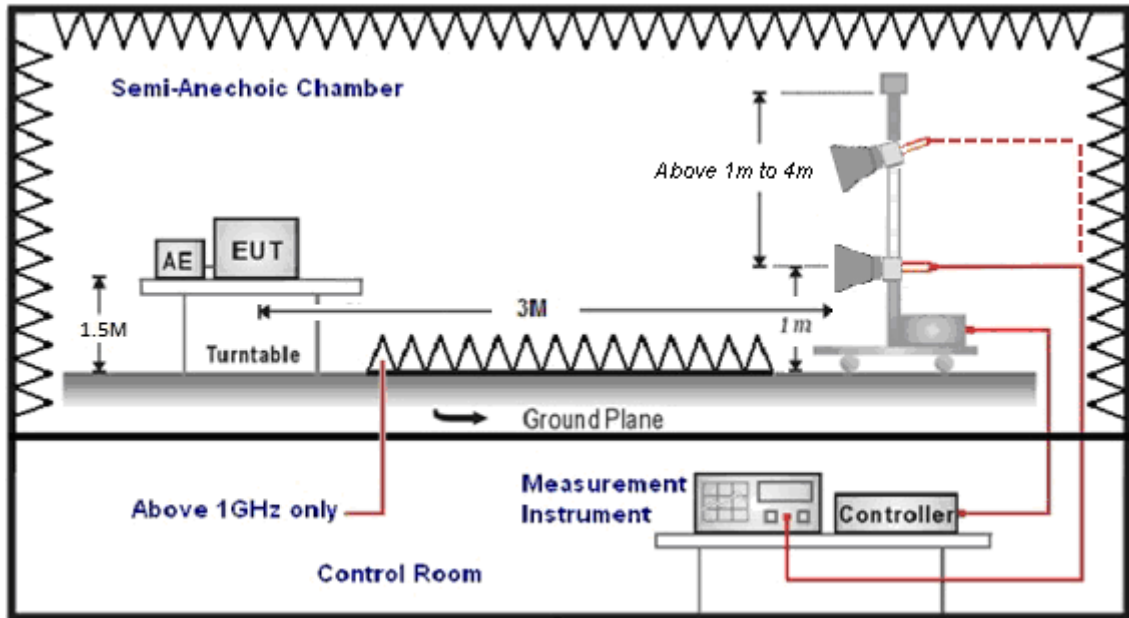

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

### Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak


### 4.3. Maximum Conducted Output Power and Transmit power control Measurement

■ **Limit**

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Master
5.150 ~ 5.250 GHz	The lesser of 1 W (30 dBm)
5.250 ~ 5.350 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.470 ~ 5.725 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.725 ~ 5.850 GHz	The lesser of 1 W (30 dBm)

Accordinging FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

■ **Test Setup**

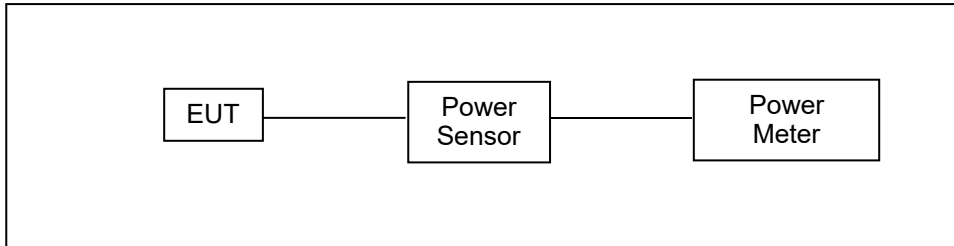

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)




#### 4.4. 26 dB RF Bandwidth Measurement

■ Limit

N/A

■ Test Setup

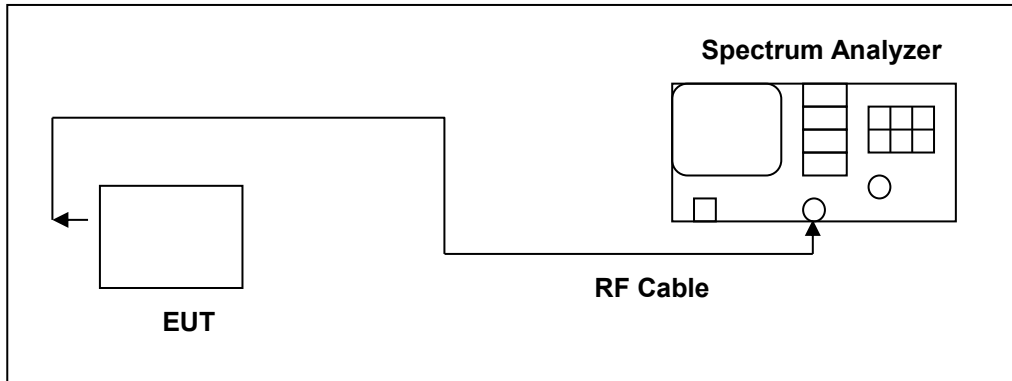

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.4.1, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 4.5. 6 dB RF Bandwidth Measurement

■ **Limit**

**6 dB RF Bandwidth**

Systems using digital modulation techniques may operate in the 5725~5825 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

■ **Test Setup**

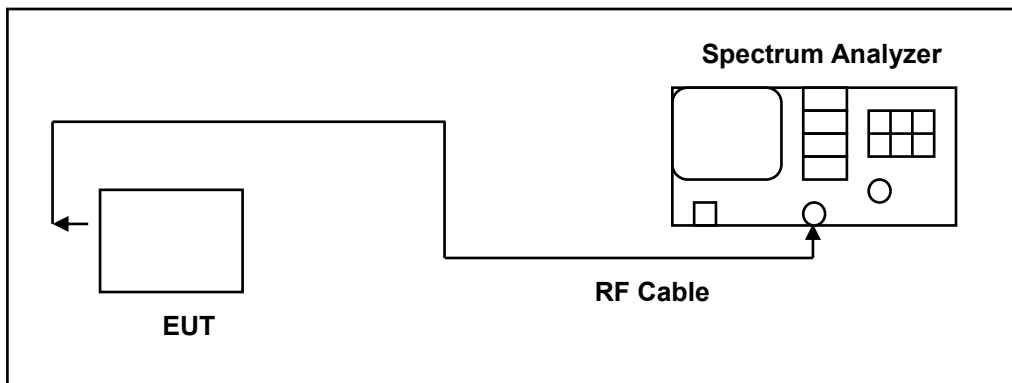

■ **Test Procedure**

**6 dB RF Bandwidth**

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.


## 4.6. Maximum Power Spectral Density Measurement

### ■ Limit

Frequency Range (MHz)	FCC Limit
	Master
5.150 ~ 5.250 GHz	17 dBm/MHz
5.250 ~ 5.350 GHz	11 dBm/MHz
5.470 ~ 5.725 GHz	11 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500 kHz

According to FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

### ■ Test Setup

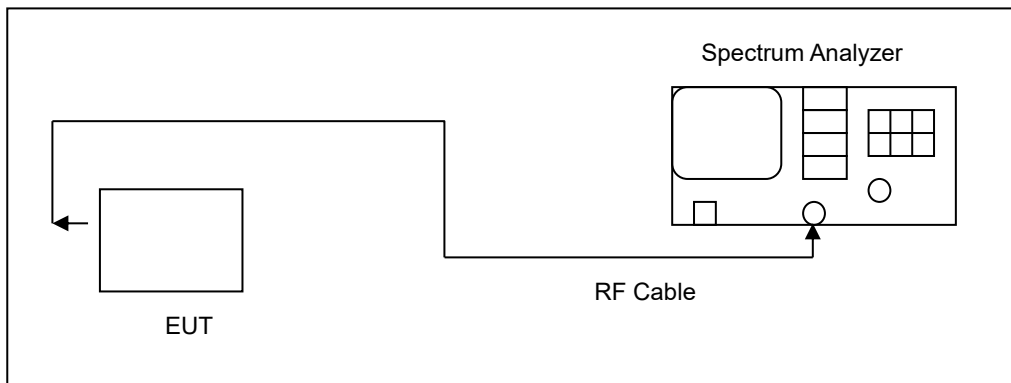

### ■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850 MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850 MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz}/100 \text{ kHz})$  to the measured result.

#### 4.7. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

- **Declare**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

#### 4.8. Antenna Requirement

- **Requirement**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- **Antenna Connector Construction**

See section 2 – antenna information.

**Directional Gain Calculated**

SISO 1x1
----------

Test mode	Band	Transmission Type	Antenna				Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
			Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)				
802.11a	Band 1	Ant-0	4.00	-	-	-	4.00	4.00	0.00	0.00
	Band 2-A		3.30	-	-	-	3.30	3.30	0.00	0.00
	Band 2-C		5.90	-	-	-	5.90	5.90	0.00	0.00
	Band 3		5.90	-	-	-	5.90	5.90	0.00	0.00
802.11n HT20 802.11n HT40 802.11ac VHT20 802.11ac VHT40 802.11ac VHT80 802.11ac VHT160 802.11ax HE20 802.11ax HE40 802.11ax HE80 802.11ax HE160	Band 1	Ant-0	4.00	-	-	-	4.00	4.00	0.00	0.00
	Band 2-A		3.30	-	-	-	3.30	3.30	0.00	0.00
	Band 2-C		5.90	-	-	-	5.90	5.90	0.00	0.00
	Band 3		5.90	-	-	-	5.90	5.90	0.00	0.00

**MIMO Low Band B1 & B2A 4X4**

Test mode	Band	Transmission Type	Antenna				Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
			Ant-0	Ant-1	Ant-2	Ant-3				
			(dBi)	(dBi)	(dBi)	(dBi)				
802.11a	Band 1	CDD	4.00	2.50	3.80	3.00	4.00	9.37	0.00	3.37
	Band 2-A		3.30	2.40	3.80	2.30	3.80	8.99	0.00	2.99
	Band 2-C		-	-	-	-	-	-	-	-
	Band 3		-	-	-	-	-	-	-	-
802.11n HT20 802.11n HT40 802.11ac VHT20 802.11ac VHT40 802.11ac VHT80 802.11ac VHT160 802.11ax HE20 802.11ax HE40 802.11ax HE80 802.11ax HE160	Band 1	CDD	4.00	2.50	3.80	3.00	4.00	9.37	0.00	3.37
Band 2-A	3.30		2.40	3.80	2.30	3.80	8.99	0.00	2.99	
Band 2-C	-		-	-	-	-	-	-	-	
Band 3	-		-	-	-	-	-	-	-	

If transmit signals are correlated, then Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$

If all transmit signals are completely uncorrelated, then Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$

**MIMO High Band\_B2C & B3 2X2**

Test mode	Band	Transmission Type	Antenna				Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
			Ant-0	Ant-1	Ant-2	Ant-3				
			(dBi)	(dBi)	(dBi)	(dBi)				
802.11a	Band 1	CDD	-	-	-	-	-	-	-	
	Band 2-A		-	-	-	-	-	-	-	
	Band 2-C		5.90	3.80	-	-	5.90	7.92	0.00	1.92
	Band 3		5.90	3.70	-	-	5.90	7.88	0.00	1.88
802.11n HT20 802.11n HT40	Band 1	CDD	-	-	-	-	-	-	-	
802.11ac VHT20 802.11ac VHT40 802.11ac VHT80	Band 2-A		-	-	-	-	-	-	-	
802.11ac VHT160 802.11ax HE20 802.11ax HE40	Band 2-C		5.90	3.80	-	-	5.90	7.92	0.00	1.92
802.11ax HE80 802.11ax HE160	Band 3		5.90	3.70	-	-	5.90	7.88	0.00	1.88

If transmit signals are correlated, then Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$   
 If all transmit signals are completely uncorrelated, then Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$

## Beamforming on\_MIMO Low Band B1 &amp; B2A 4X4

Test mode	Band	Transmission Type	Antenna				Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
			Ant-0	Ant-1	Ant-2	Ant-3				
			(dBi)	(dBi)	(dBi)	(dBi)				
802.11a	Band 1	MIMO	4.00	2.50	3.80	3.00	7.24	7.24	1.24	1.24
	Band 2-A		3.30	2.40	3.80	2.30	8.09	8.09	2.09	2.09
	Band 2-C		-	-	-	-	-	-	-	-
	Band 3		-	-	-	-	-	-	-	-
802.11n HT20 802.11n HT40 802.11ac VHT20 802.11ac VHT40 802.11ac VHT80 802.11ac VHT160 802.11ax HE20 802.11ax HE40 802.11ax HE80 802.11ax HE160	Band 1	MIMO	4.00	2.50	3.80	3.00	7.24	7.24	1.24	1.24
Band 2-A	3.30		2.40	3.80	2.30	8.09	8.09	2.09	2.09	
Band 2-C	-		-	-	-	-	-	-	-	
Band 3	-		-	-	-	-	-	-	-	

Directional Gain = Array Gain + Max Gain



## Beamforming on\_MIMO High Band\_B2C &amp; B3 2X2


Test mode	Band	Transmission Type	Antenna				Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
			Ant-0	Ant-1	Ant-2	Ant-3				
			(dBi)	(dBi)	(dBi)	(dBi)				
802.11a	Band 1	MIMO	-	-	-	-	-	-	-	-
	Band 2-A		-	-	-	-	-	-	-	-
	Band 2-C		5.90	3.80	-	-	8.88	8.88	2.88	2.88
	Band 3		5.90	3.70	-	-	8.90	8.90	2.90	2.90
802.11n HT20 802.11n HT40	Band 1	MIMO	-	-	-	-	-	-	-	-
802.11ac VHT20 802.11ac VHT40 802.11ac VHT80	Band 2-A		-	-	-	-	-	-	-	-
802.11ac VHT160 802.11ax HE20 802.11ax HE40	Band 2-C		5.90	3.80	-	-	8.88	8.88	2.88	2.88
802.11ax HE80 802.11ax HE160	Band 3		5.90	3.70	-	-	8.90	8.90	2.90	2.90

Directional Gain = Array Gain + Max Gain

## 5 Test Results

### 5.1. Conducted Emission

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:			

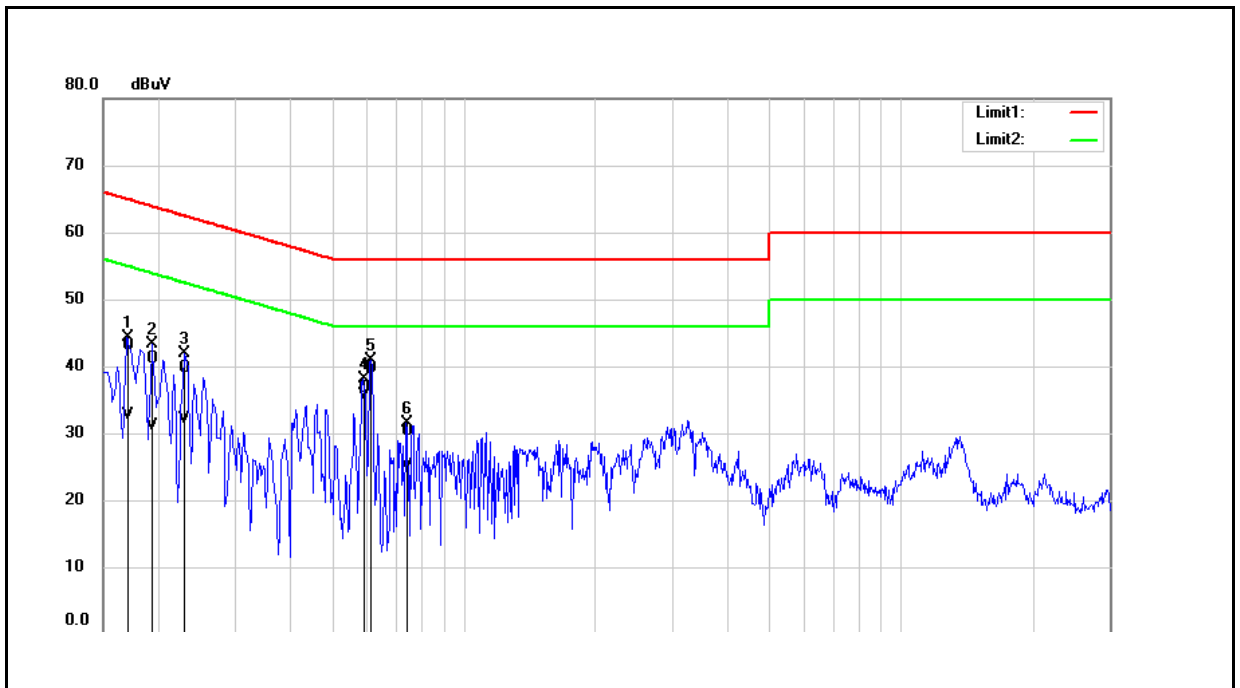


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1700	33.50	23.26	9.54	43.04	32.80	64.96	54.96	-21.92	-22.16	Pass
2	0.1940	31.63	21.47	9.54	41.17	31.01	63.86	53.86	-22.69	-22.85	Pass
3	0.2300	30.20	22.49	9.54	39.74	32.03	62.45	52.45	-22.71	-20.42	Pass
4	0.5900	27.22	26.16	9.55	36.77	35.71	56.00	46.00	-19.23	-10.29	Pass
5	0.6140	30.16	29.47	9.55	39.71	39.02	56.00	46.00	-16.29	-6.98	Pass
6	0.7420	20.71	15.44	9.57	30.28	25.01	56.00	46.00	-25.72	-20.99	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:			

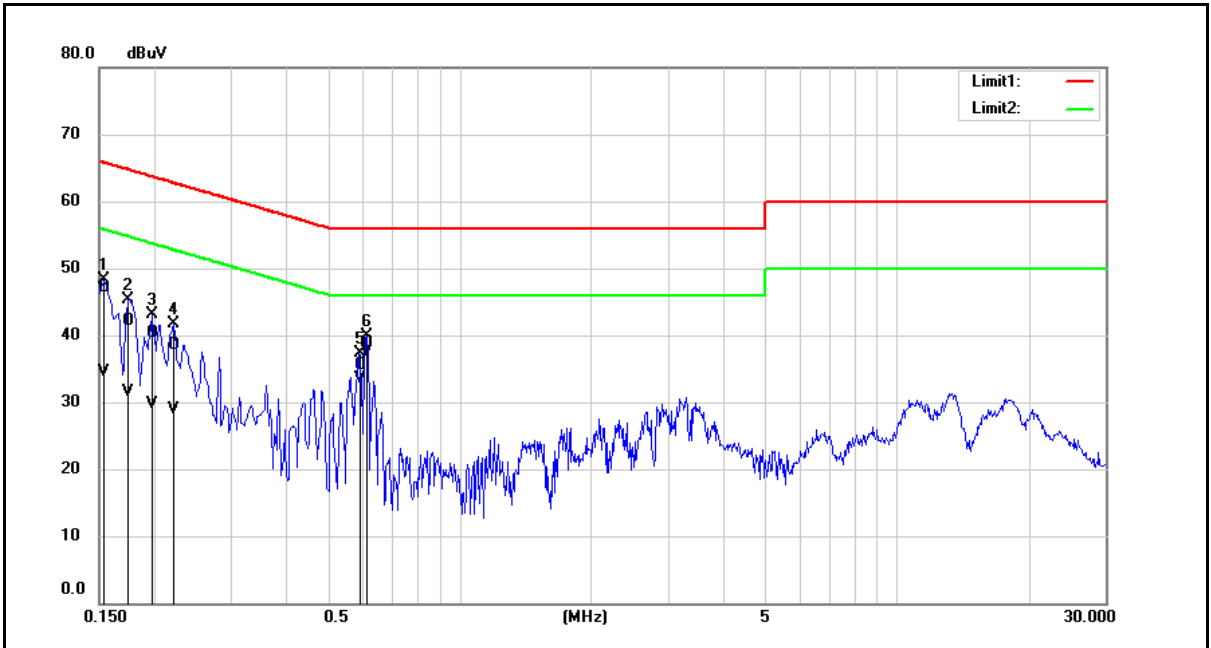

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	37.45	24.86	9.60	47.05	34.46	65.78	55.78	-18.73	-21.32	Pass
2	0.1740	32.57	21.98	9.60	42.17	31.58	64.77	54.77	-22.60	-23.19	Pass
3	0.1980	30.62	20.10	9.60	40.22	29.70	63.69	53.69	-23.47	-23.99	Pass
4	0.2220	28.98	19.35	9.60	38.58	28.95	62.74	52.74	-24.16	-23.79	Pass
5	0.5900	25.84	23.98	9.61	35.45	33.59	56.00	46.00	-20.55	-12.41	Pass
6	0.6140	29.23	27.97	9.61	38.84	37.58	56.00	46.00	-17.16	-8.42	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## 5.2. Radiated Emission Measurement

Reference Appendix C

## 5.3. Conducted Test Results

### Duty cycle

Reference Appendix A / Appendix B

### Maximum Conducted Output Power and Transmit power control Measurement

Reference Appendix A

### 26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

### 6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

### Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---