



# FCC RADIO TEST REPORT

**FCC ID** : 2AG7G-J1A  
**Equipment** : Plume Adaptive Wi-Fi  
**Brand Name** : Plume Design, Inc.  
**Model Name** : J1A  
**Applicant** : Plume Design, Inc.  
325 Lytton Ave., Palo Alto, CA 94301  
**Manufacturer** : Plume Design, Inc.  
325 Lytton Ave., Palo Alto, CA 94301  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Oct. 07, 2021 and testing was performed from Oct. 21, 2021 to Dec. 27, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	6
1.3 Testing Location .....	6
1.4 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Carrier Frequency Channel .....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	11
2.6 Measurement Results Explanation Example.....	11
<b>3 Test Result.....</b>	<b>12</b>
3.1 6dB and 99% Bandwidth Measurement .....	12
3.2 Output Power Measurement.....	17
3.3 Power Spectral Density Measurement .....	18
3.4 Conducted Band Edges and Spurious Emission Measurement .....	23
3.5 Radiated Band Edges and Spurious Emission Measurement .....	29
3.6 AC Conducted Emission Measurement.....	33
3.7 Antenna Requirements .....	35
<b>4 List of Measuring Equipment .....</b>	<b>36</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>37</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR1O0638A	01	Initial issue of report	Jan. 18, 2022



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	1.09 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	11.15 dB under the limit at 0.688 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Danny Lee**

**Report Producer: Vivian Hsu**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/n/ac/ax and UWB.

Product Specification subjective to this standard	
<b>Antenna Type</b>	<b>WLAN</b> <b>&lt;2400 MHz ~ 2483.5 MHz&gt;</b> <Ant. 3>: IFA Antenna <Ant. 4>: IFA Antenna <b>&lt;5180 MHz ~ 5240 MHz&gt;</b> <Ant. 1>: IFA Antenna <Ant. 2>: IFA Antenna <Ant. 3>: IFA Antenna <Ant. 4>: IFA Antenna <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> <Ant. 1>: IFA / Slot Antenna <Ant. 2>: IFA / Slot Antenna <Ant. 3>: IFA / Slot Antenna <Ant. 4>: IFA / Slot Antenna <b>&lt;5500MHz ~ 5825 MHz&gt;</b> <Ant. 1>: IFA / Slot Antenna <Ant. 2>: IFA / Slot Antenna <Ant. 3>: IFA / Slot Antenna <Ant. 4>: IFA / Slot Antenna <b>&lt;5925 MHz ~ 6425 MHz&gt;</b> <Ant. 5>: IFA Antenna <Ant. 6>: IFA Antenna <Ant. 7>: IFA Antenna <Ant. 8>: IFA Antenna <b>&lt;6425 MHz ~ 6525 MHz&gt;</b> <Ant. 5>: IFA Antenna <Ant. 6>: IFA Antenna <Ant. 7>: IFA Antenna <Ant. 8>: IFA Antenna <b>&lt;6525 MHz ~ 6875 MHz&gt;</b> <Ant. 5>: IFA Antenna <Ant. 6>: IFA Antenna <Ant. 7>: IFA Antenna <Ant. 8>: IFA Antenna <b>&lt;6875 MHz ~ 7125 MHz&gt;</b> <Ant. 5>: IFA Antenna <Ant. 6>: IFA Antenna <Ant. 7>: IFA Antenna <Ant. 8>: IFA Antenna <b>Bluetooth - LE:</b> IFA Antenna <b>UWB:</b> IFA Antenna



Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	3

Remark: The above EUT's information is declared by manufacturer. Please refer to Comments and Explanations in report summary.

### 1.2 Modification of EUT

No modifications made to the EUT during the testing.

### 1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	<b>Sporton Site No.</b> CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	<b>Sporton Site No.</b> TH05-HY (TAF Code: 3786)
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

FCC designation No.: TW1190 and TW3786



## **1.4 Applicable Standards**

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	





## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Conducted Test Cases</b>	<b>Bluetooth – LE / GFSK</b>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>AC Conducted Emission</b>	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + WLAN (5GHz) Link + WLAN (6GHz) Link + UWB Link + LAN Link + WAN Link

### 2.3 Connection Diagram of Test System



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	Notebook	Dell	P79G	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	PC	msi	9461NGW	PD99461NG	Unshielded, 3.0m	Unshielded, 1.8m
6.	Plume Adaptive Wi-Fi	Plume Design Inc.	J1A	2AG7G-J1A	N/A	N/A



## 2.5 EUT Operation Test Setup

The RF test items, utility “Putty Release 0.62” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

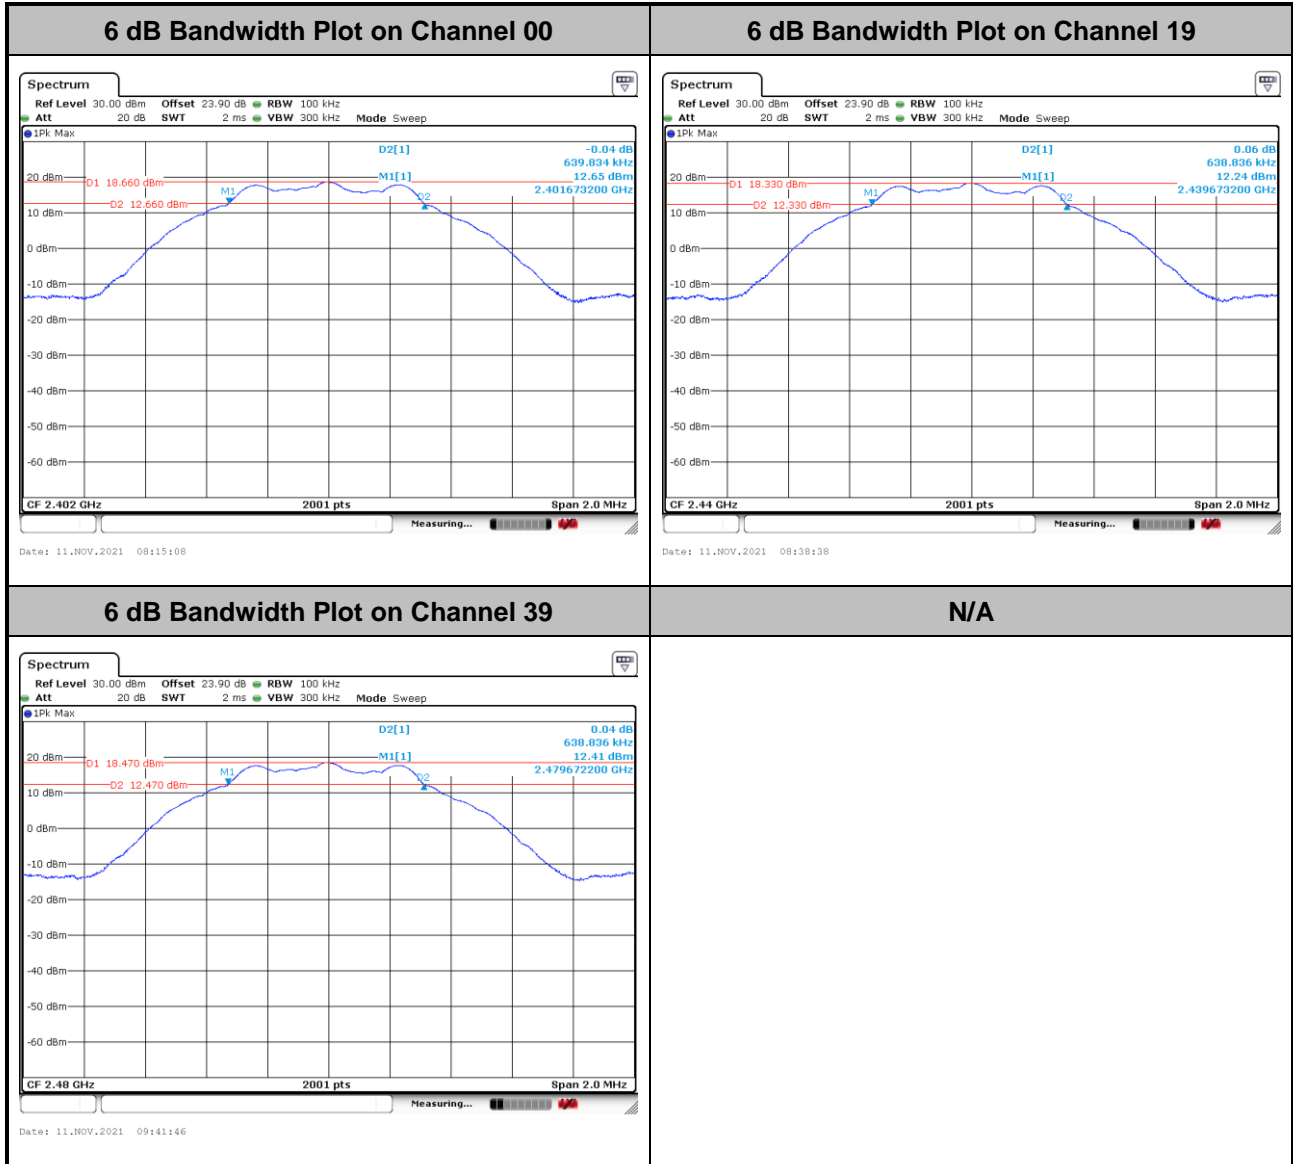



<2Mbps>

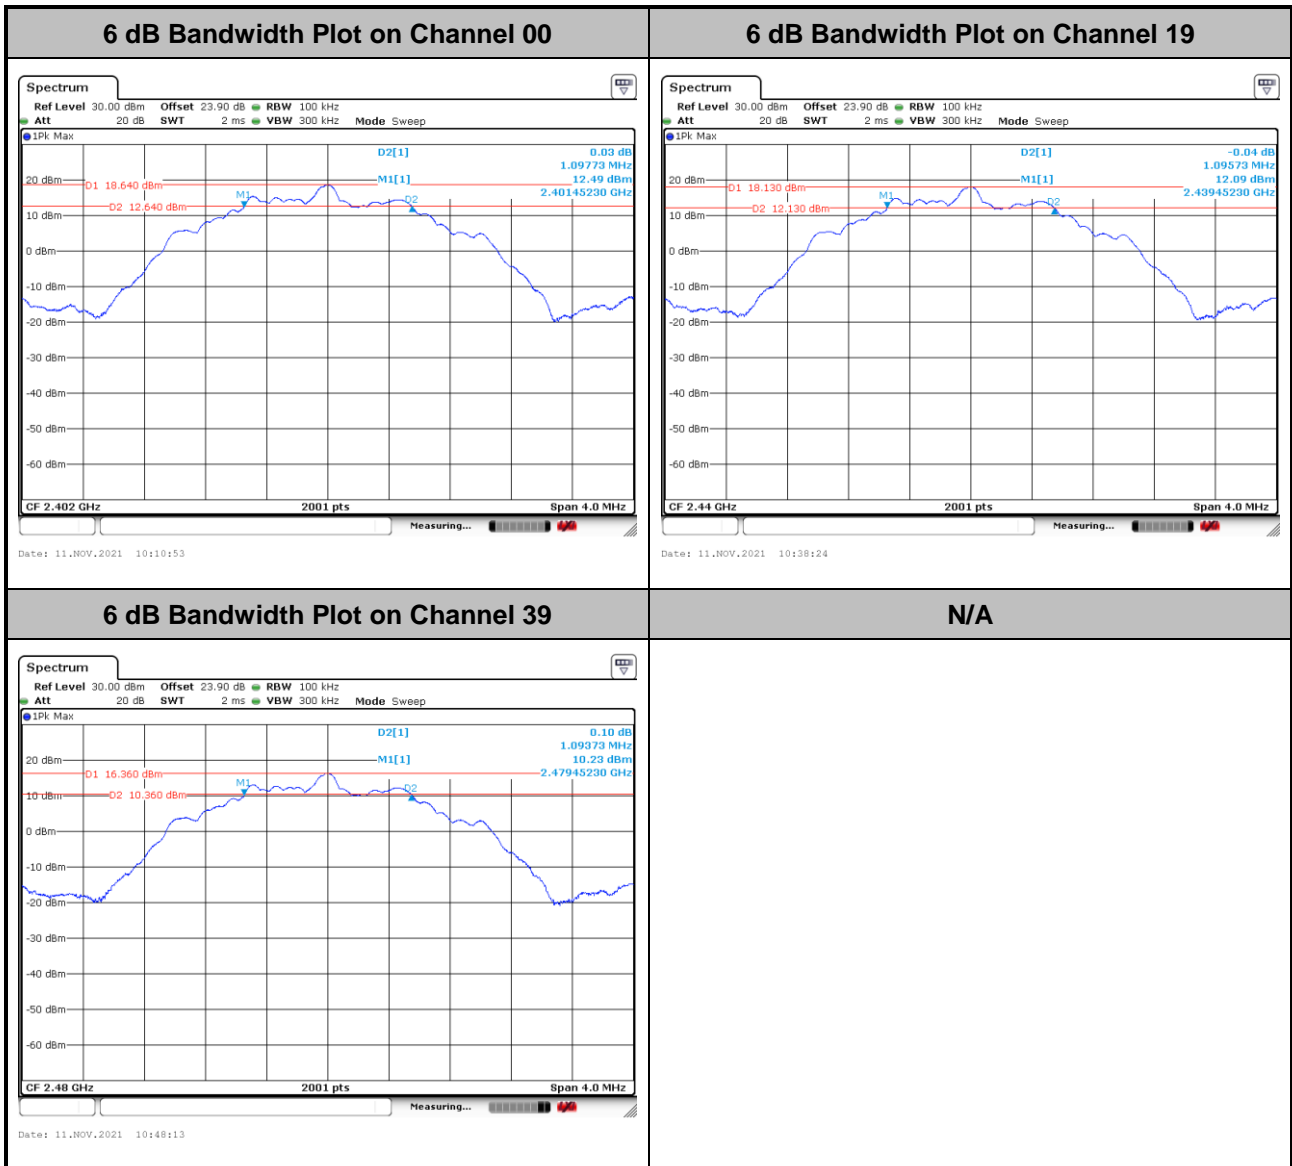




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

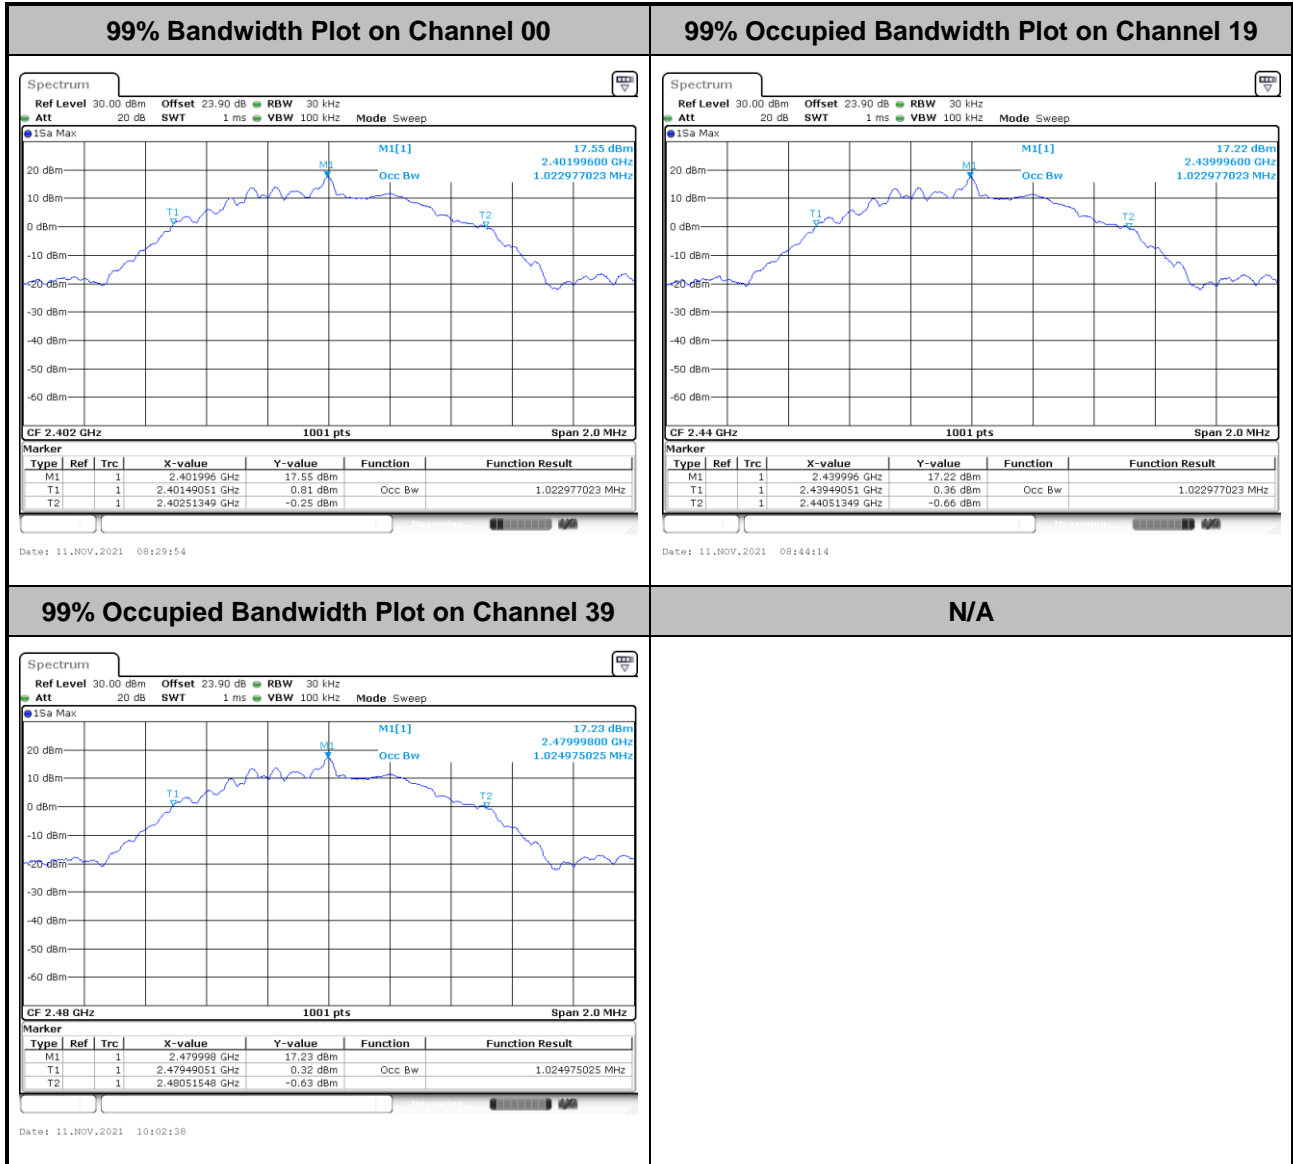

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

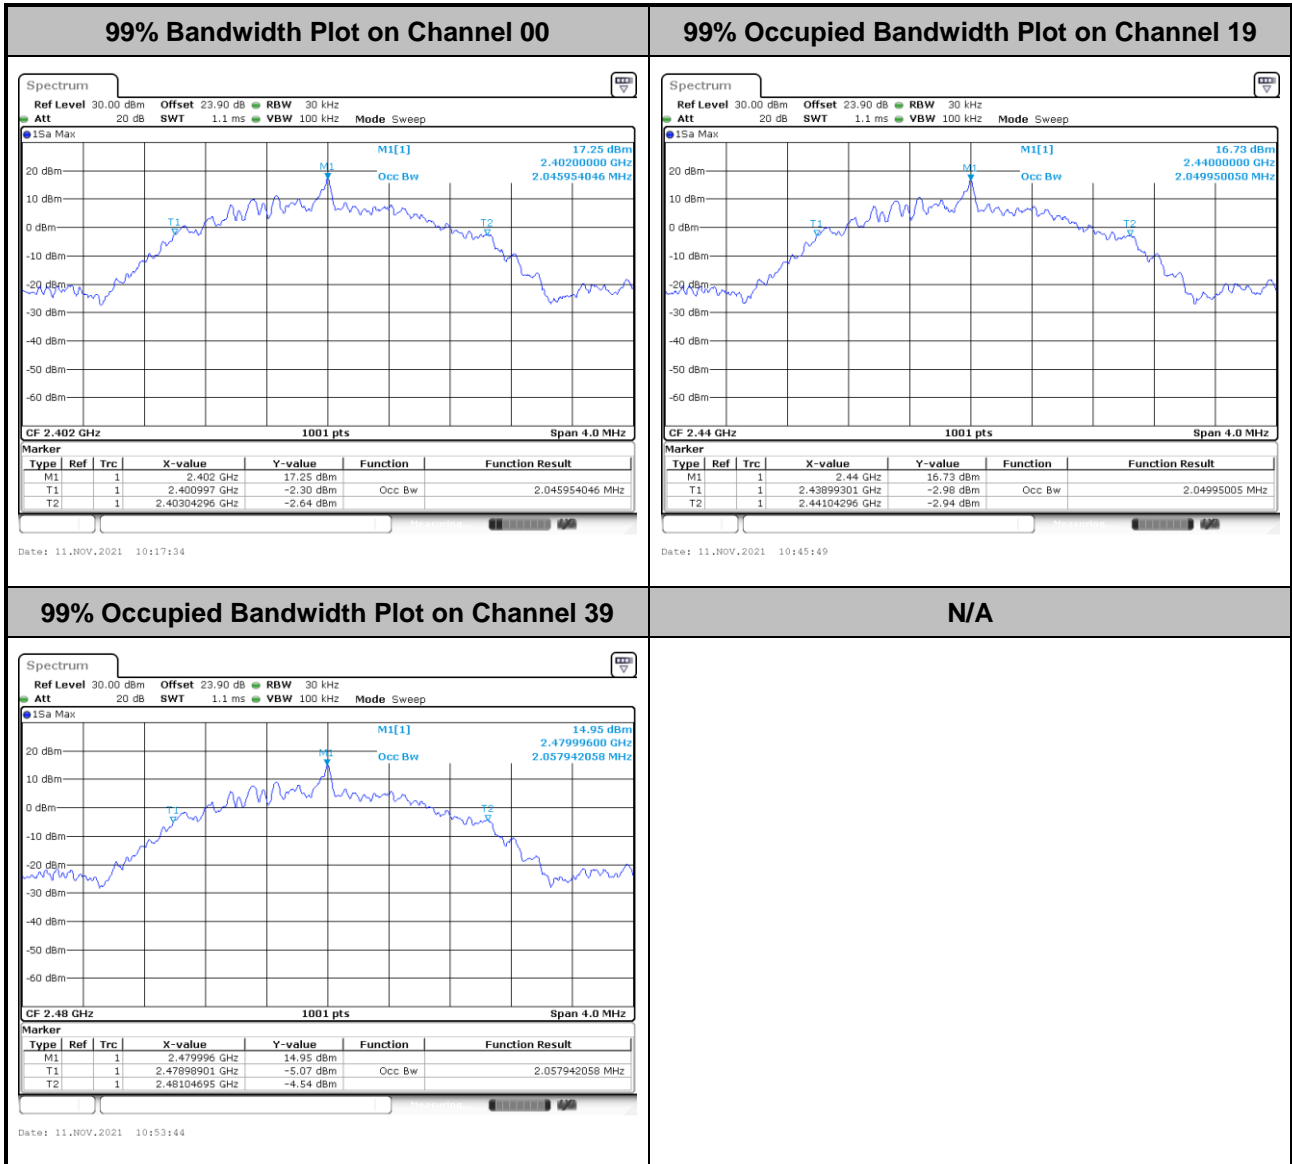

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

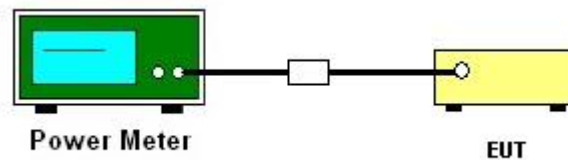

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

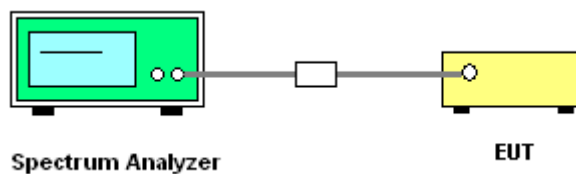


#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

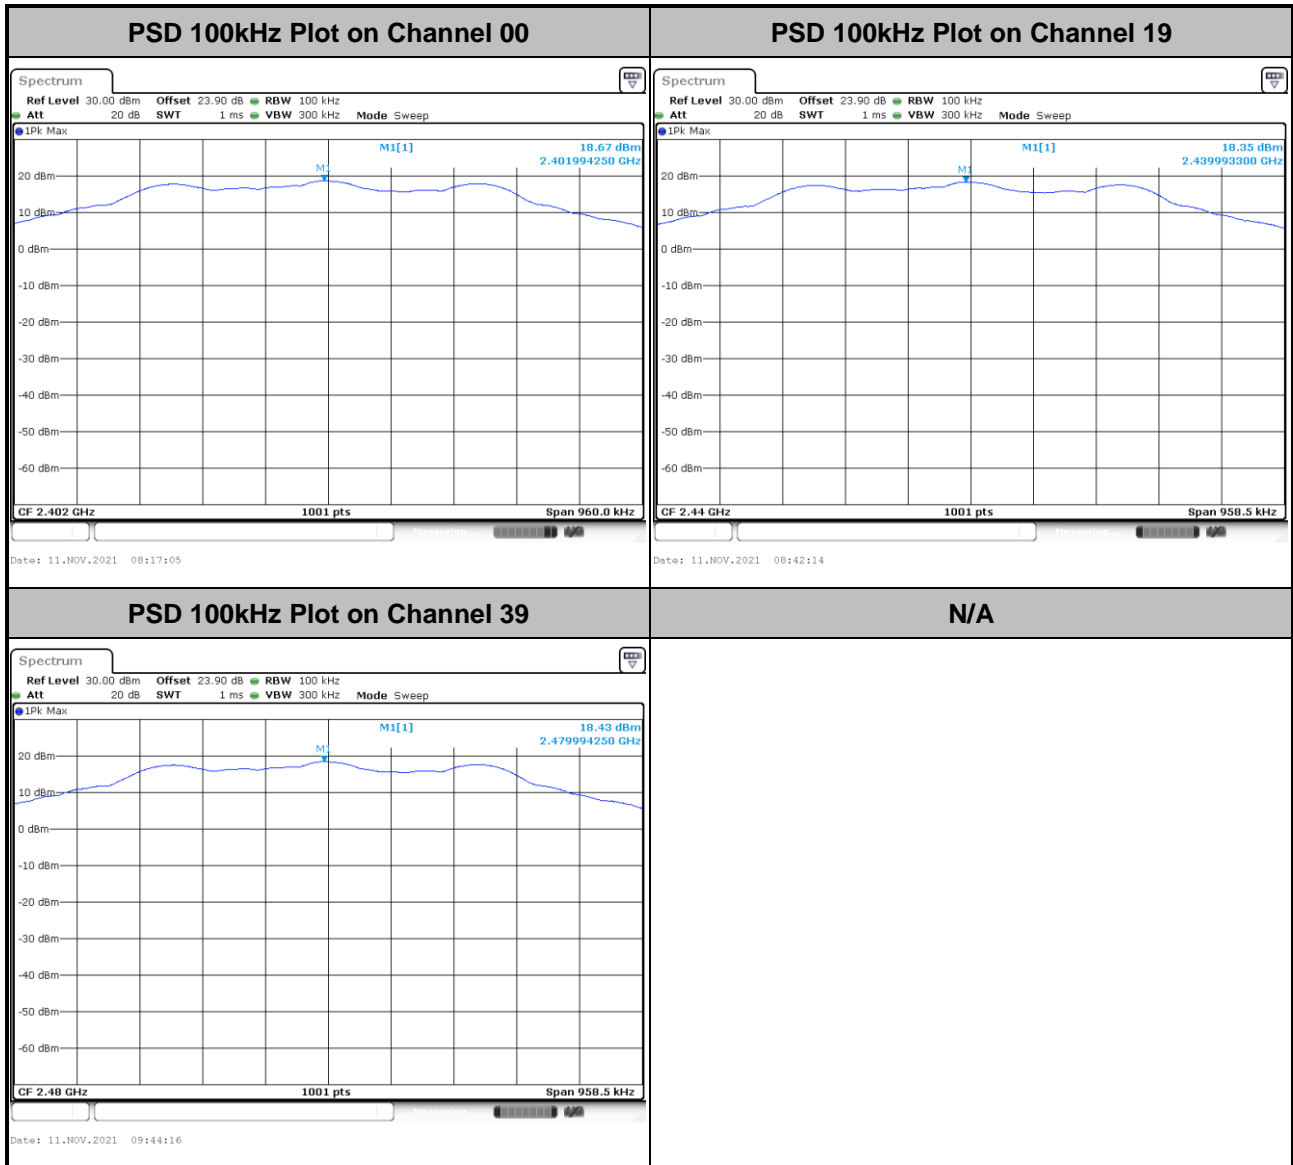




<2Mbps>

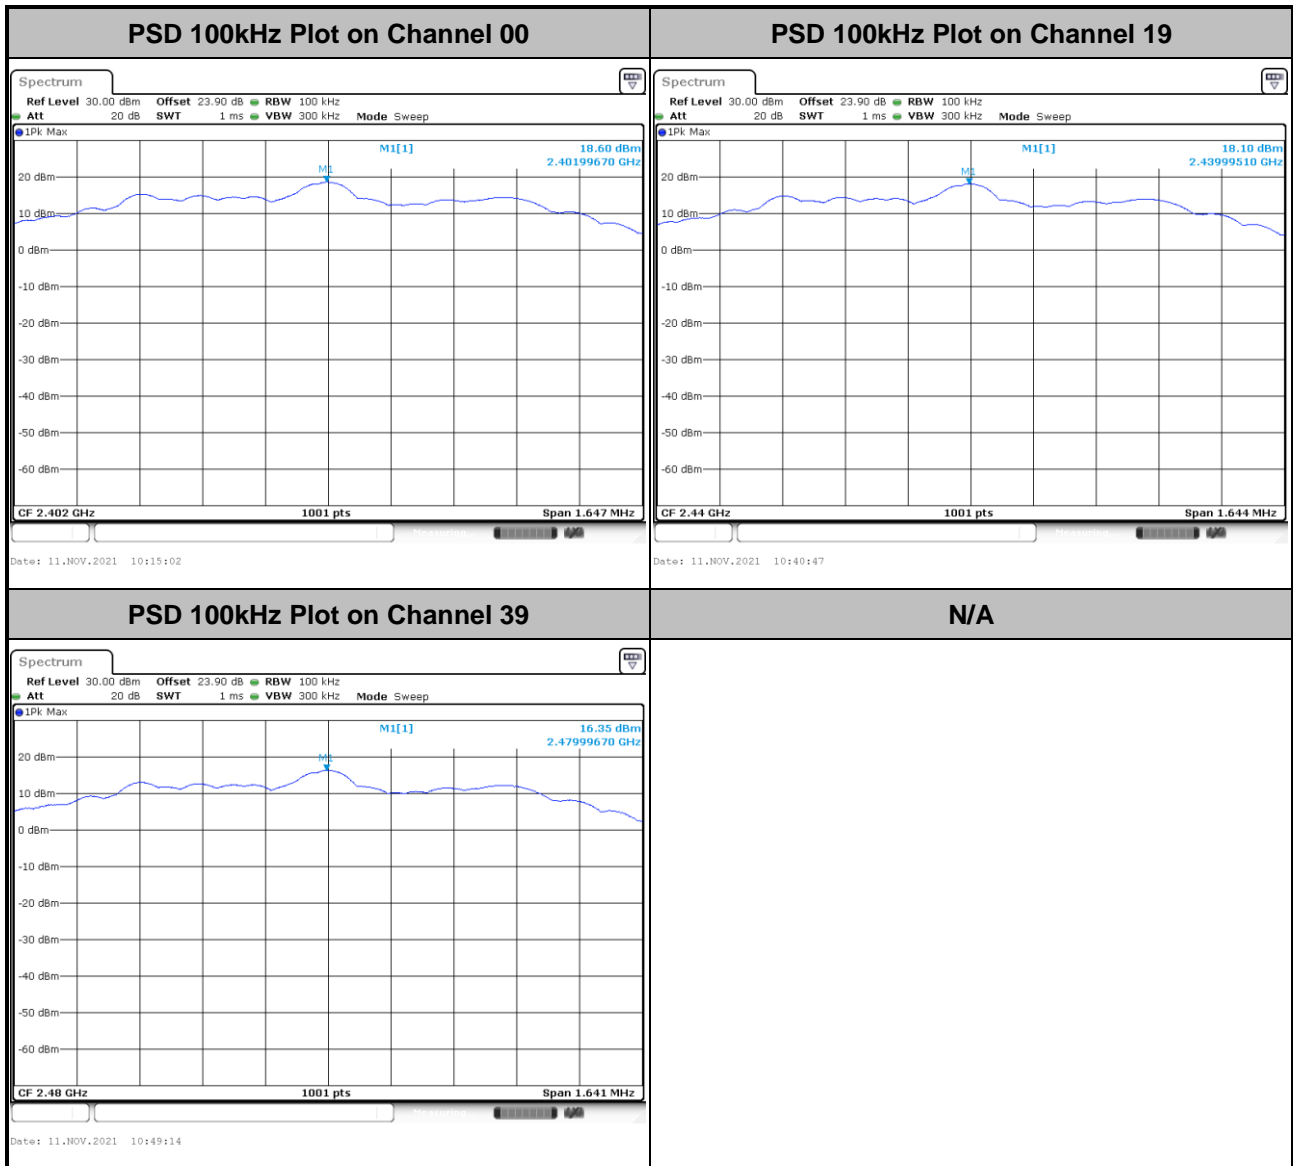




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

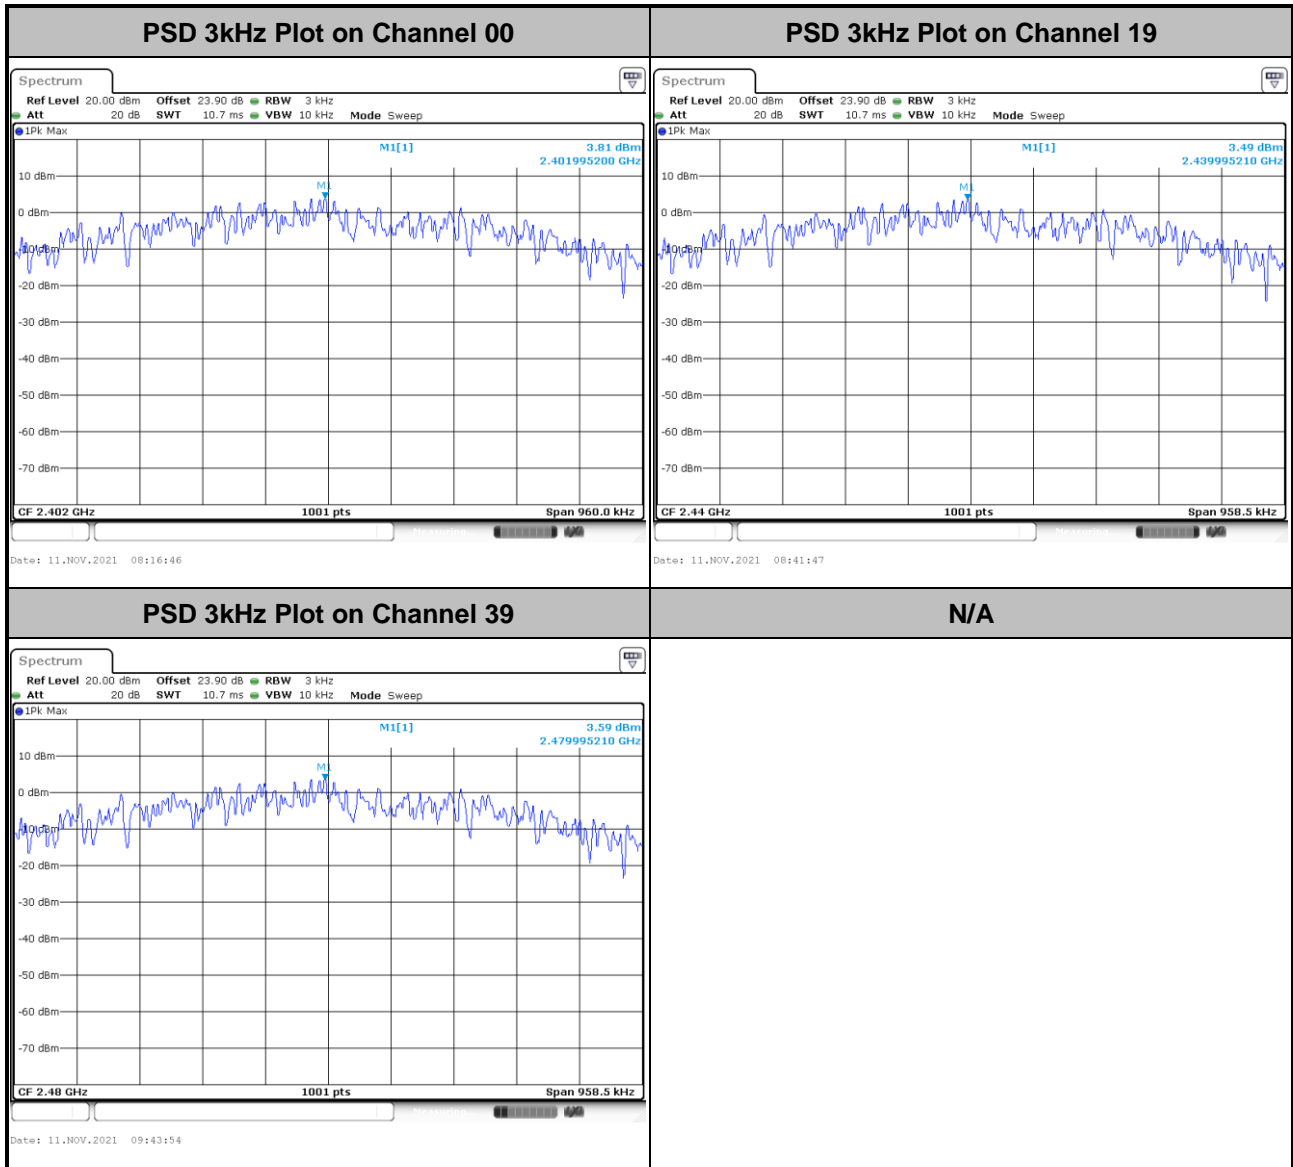



<2Mbps>

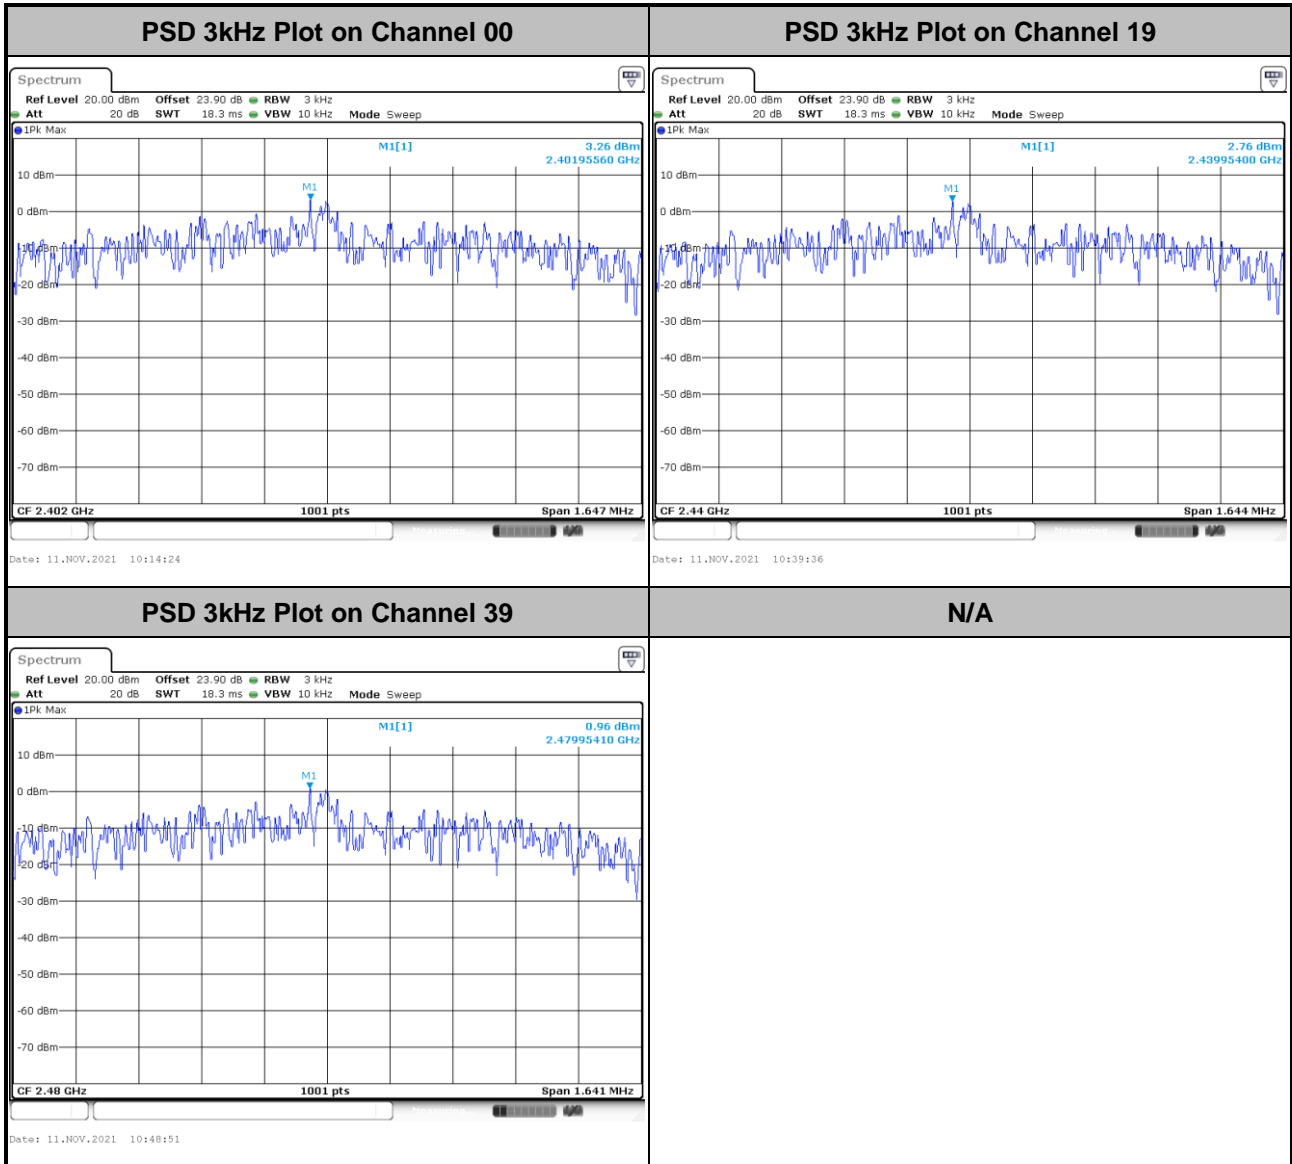

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup






### 3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

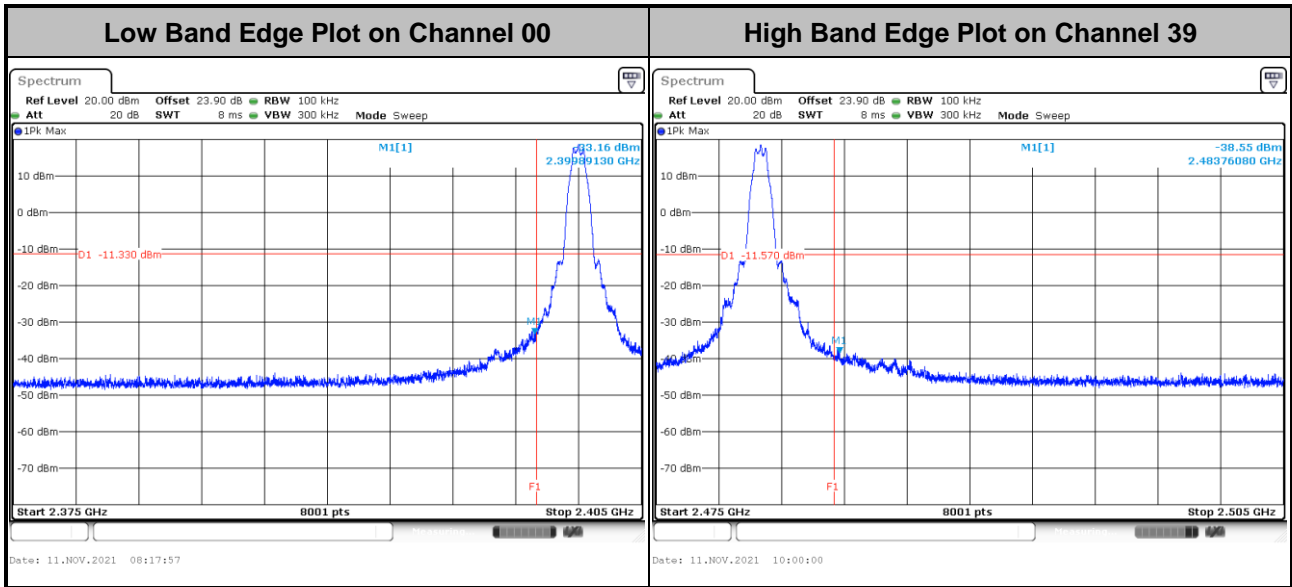

<2Mbps>

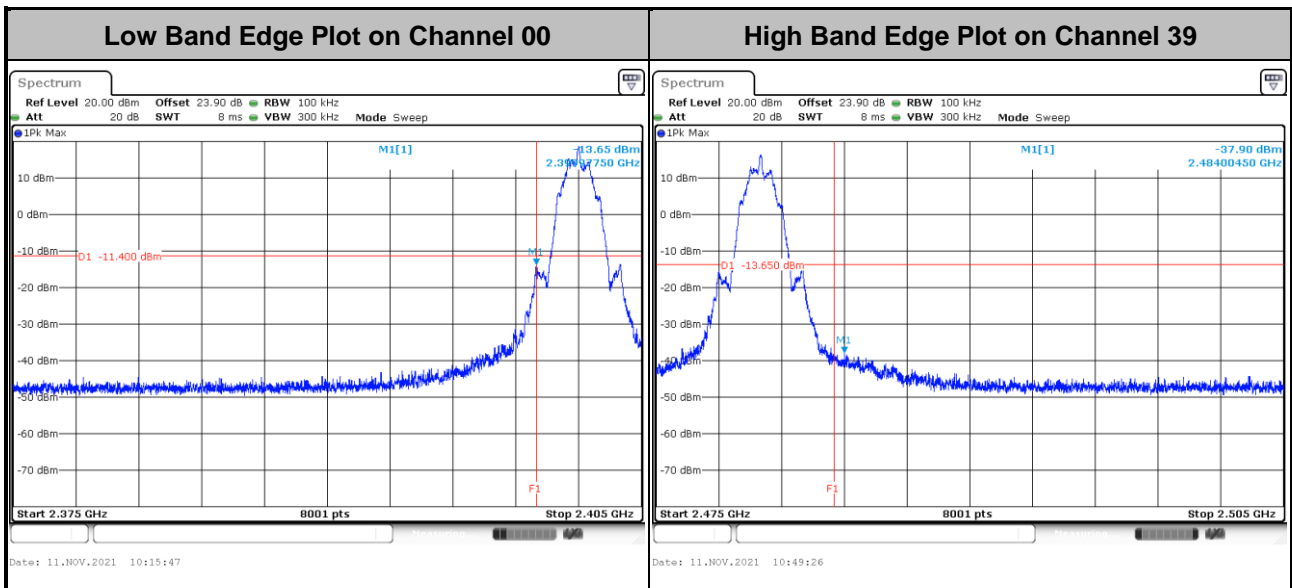







### 3.4.6 Test Result of Conducted Spurious Emission Plots


<1Mbps>

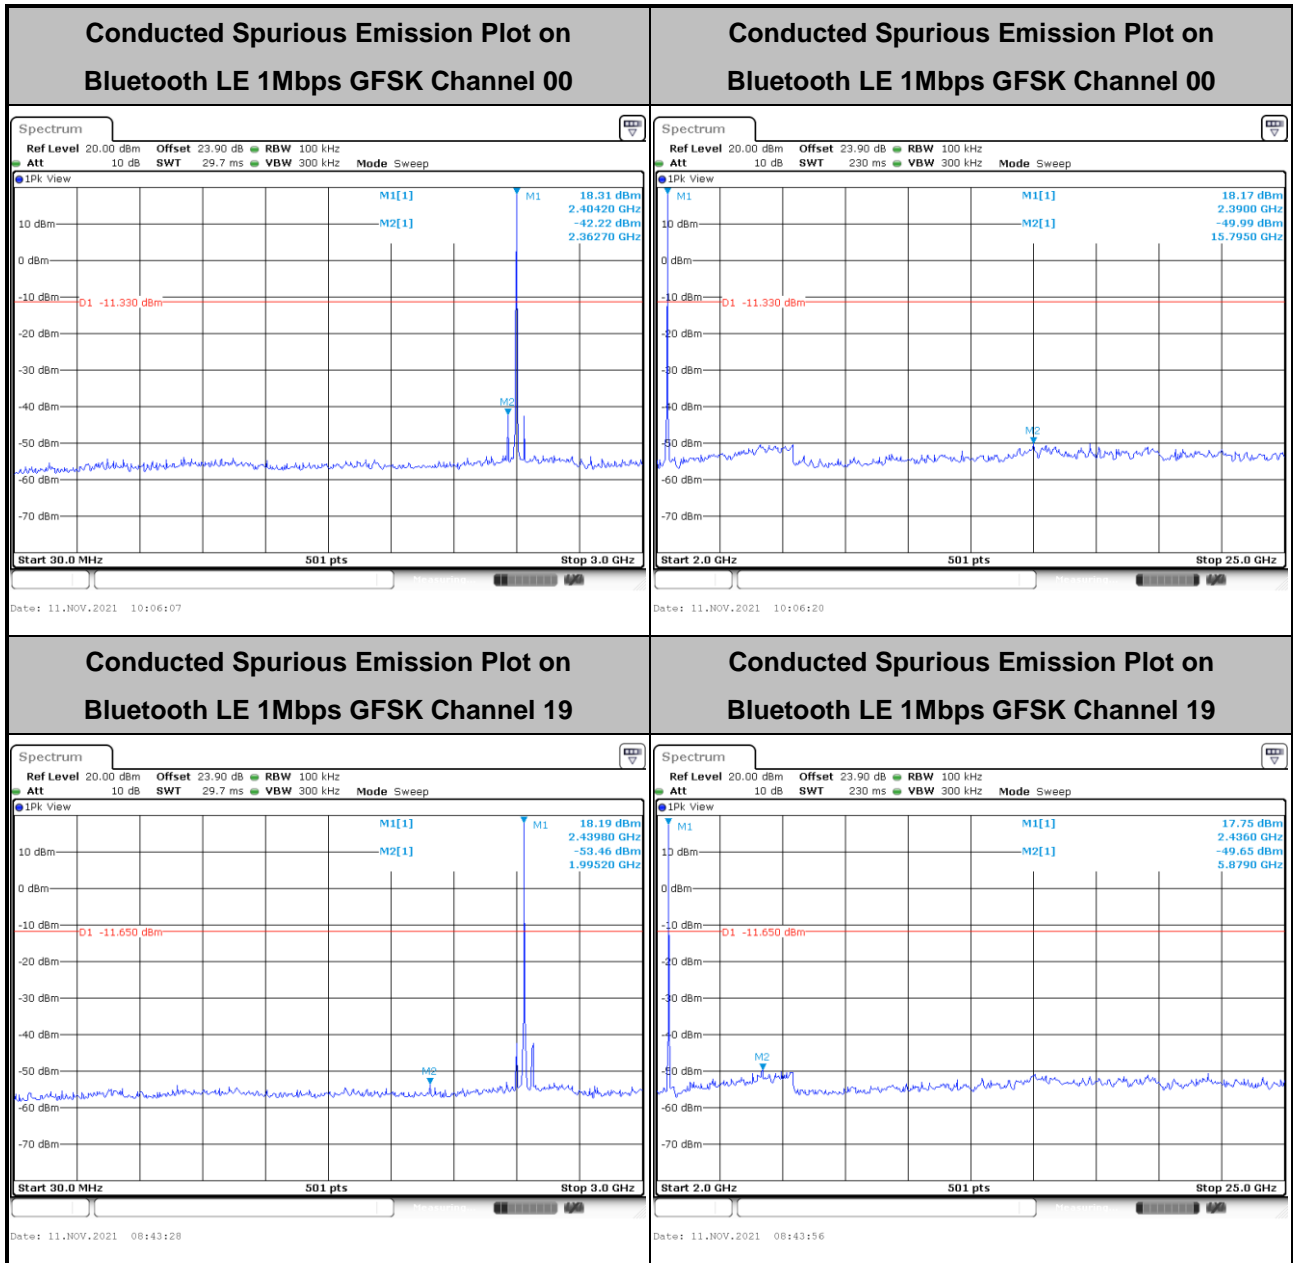


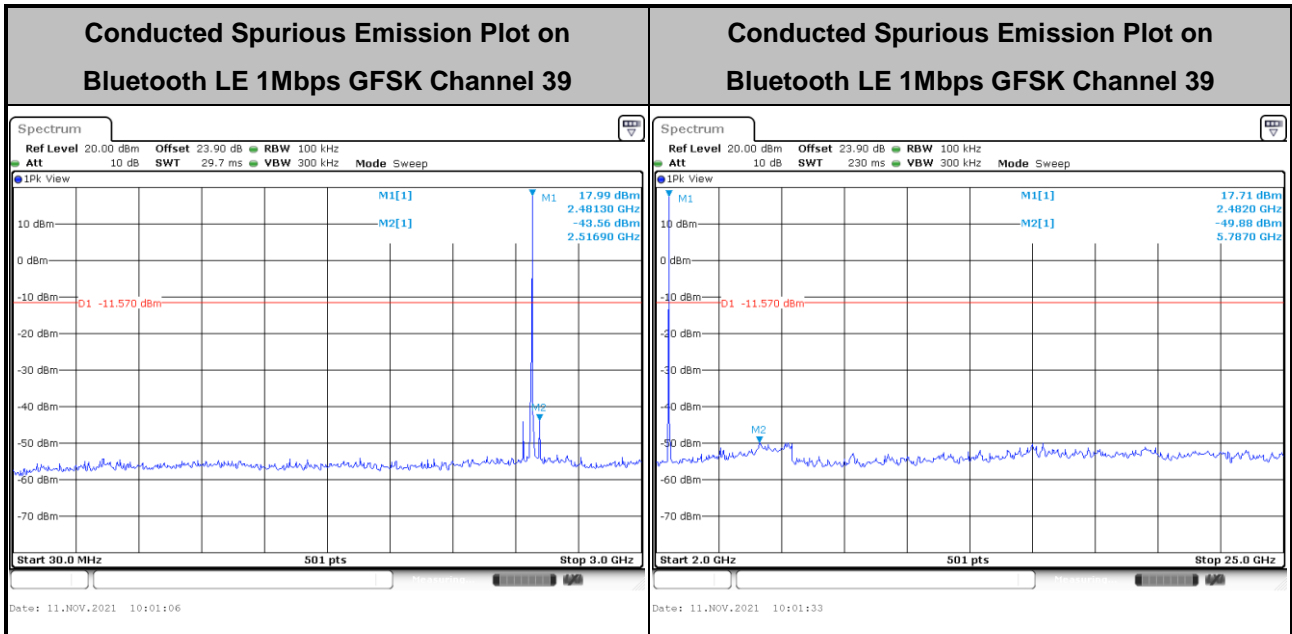



<2Mbps>

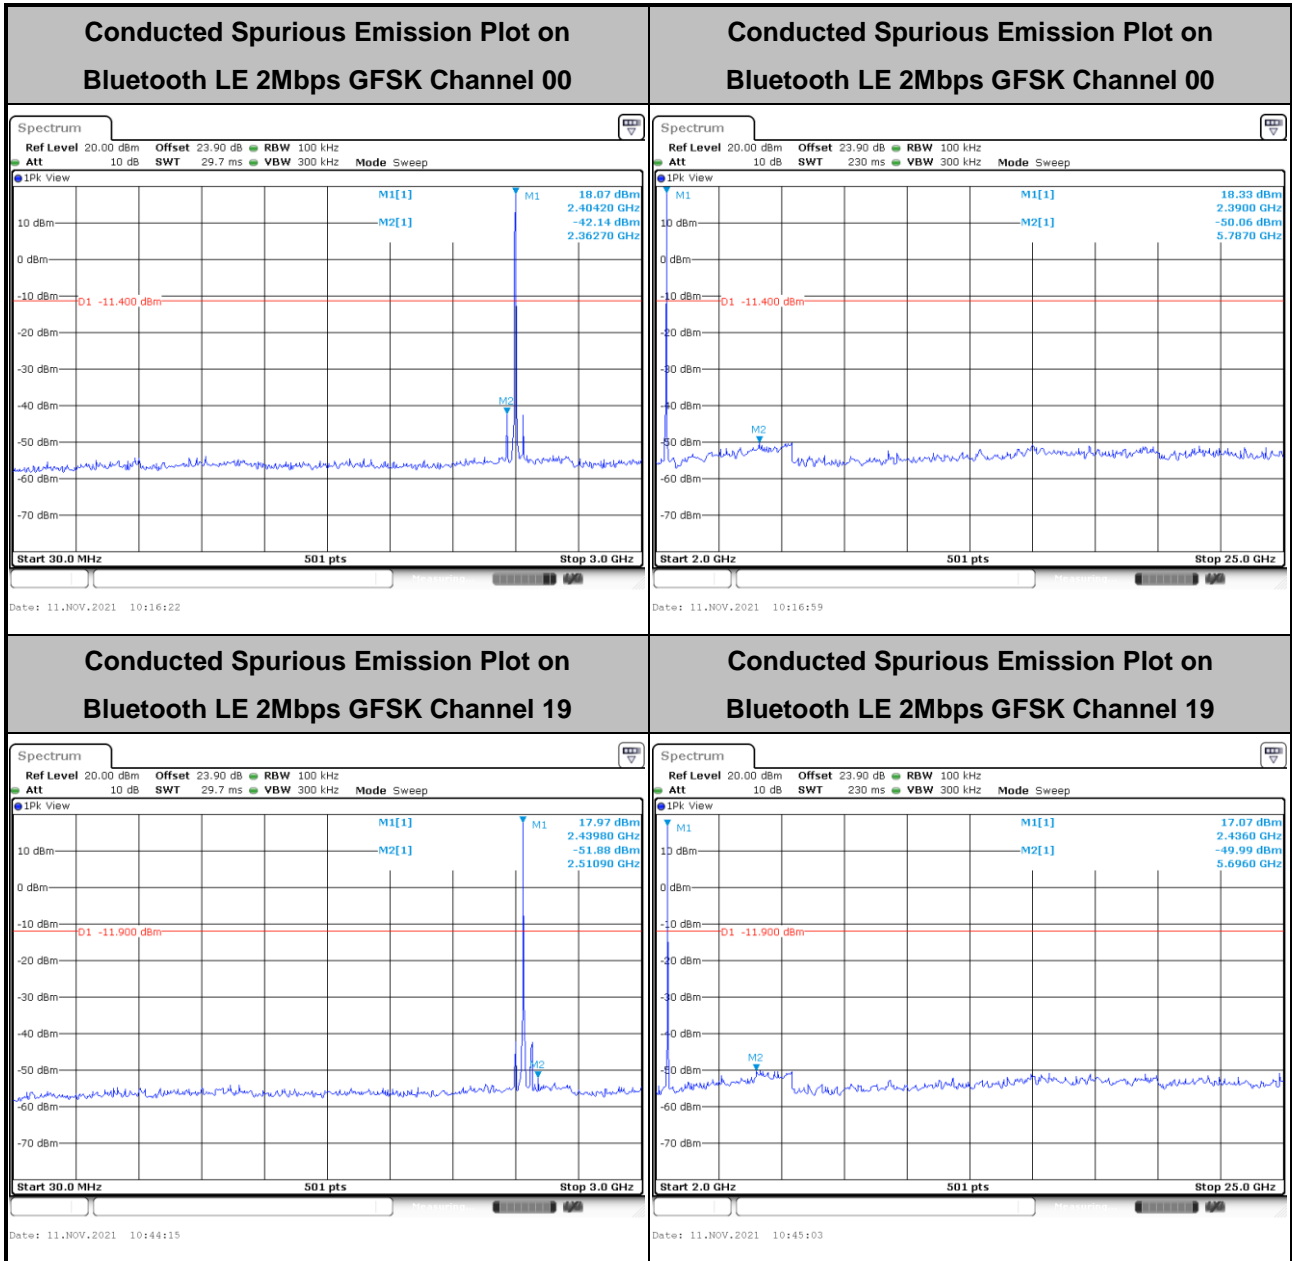

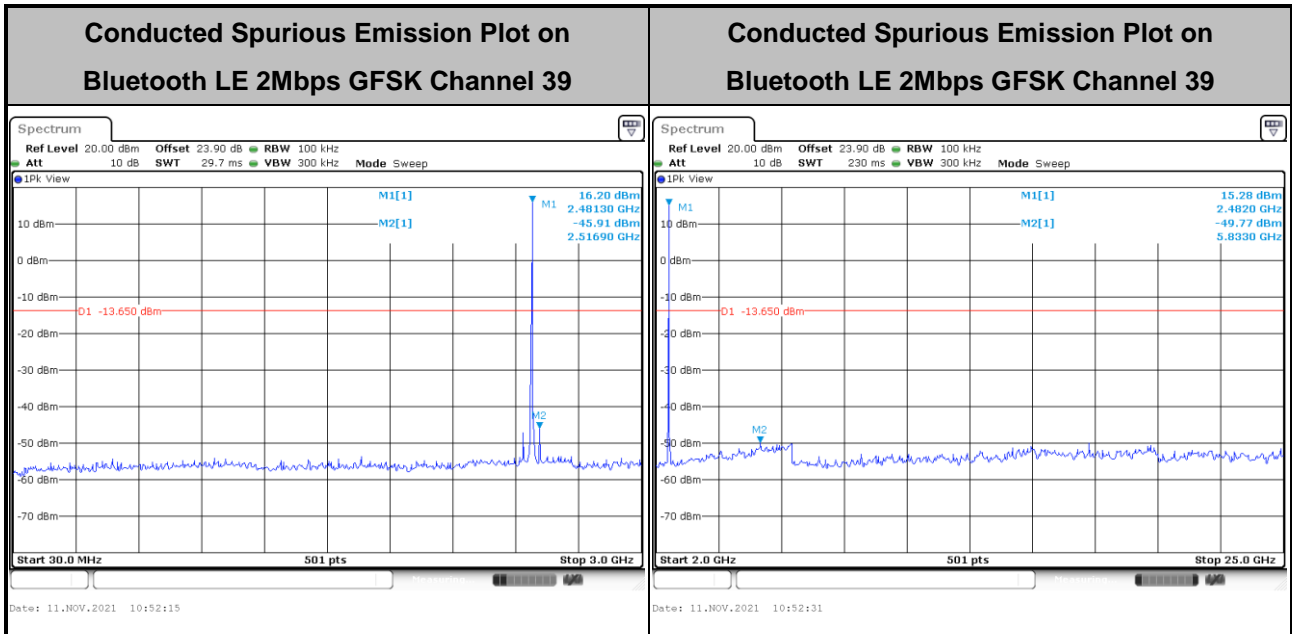



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

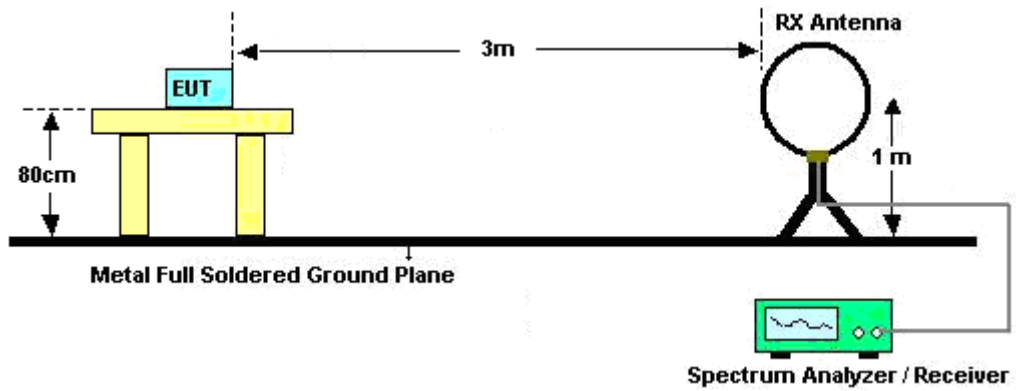


For radiated test from 30MHz to 1GHz

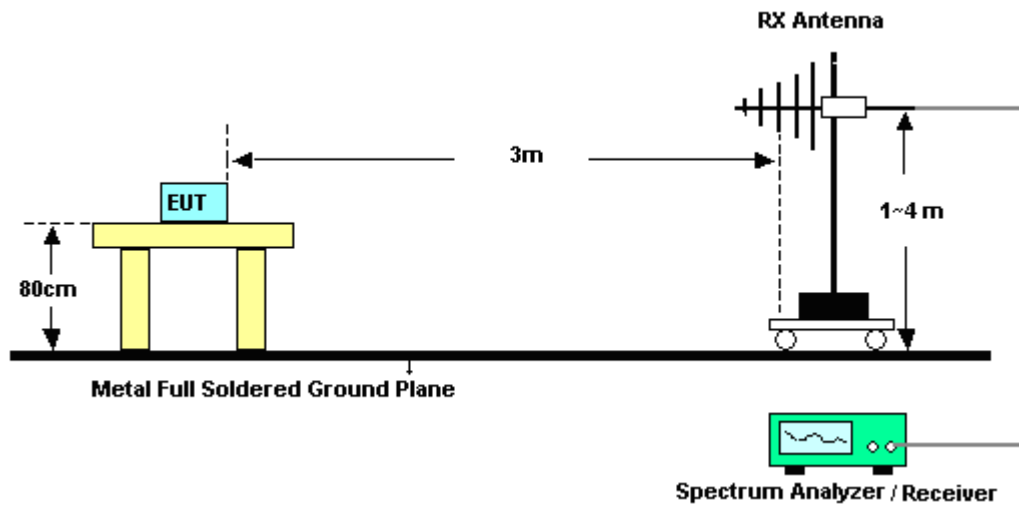

For radiated test from 1GHz to 18GHz

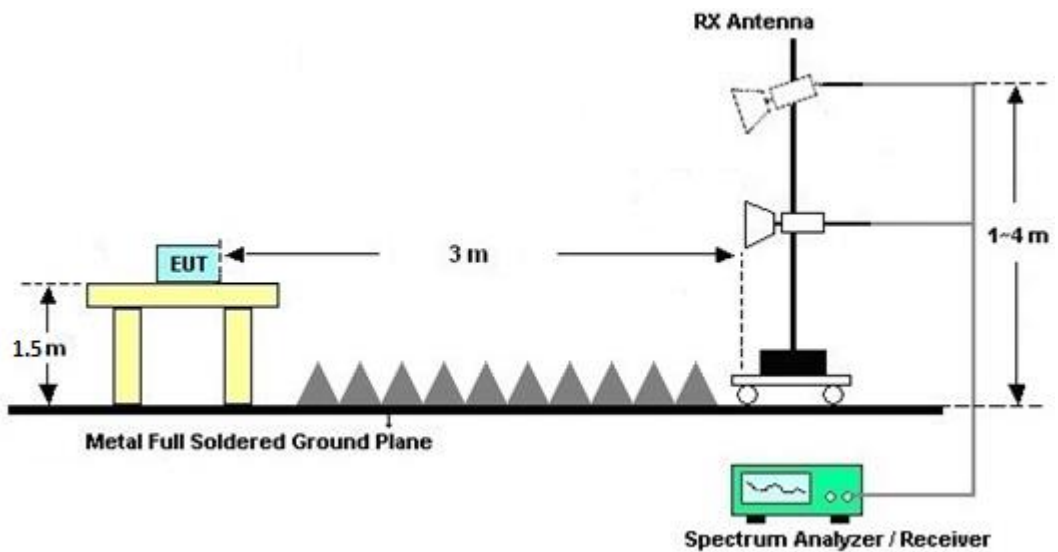

For radiated test above 18GHz

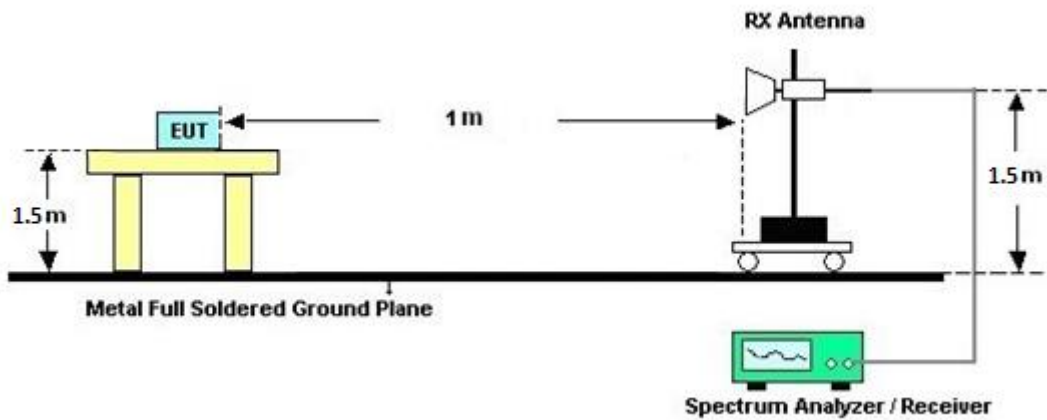

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.





### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

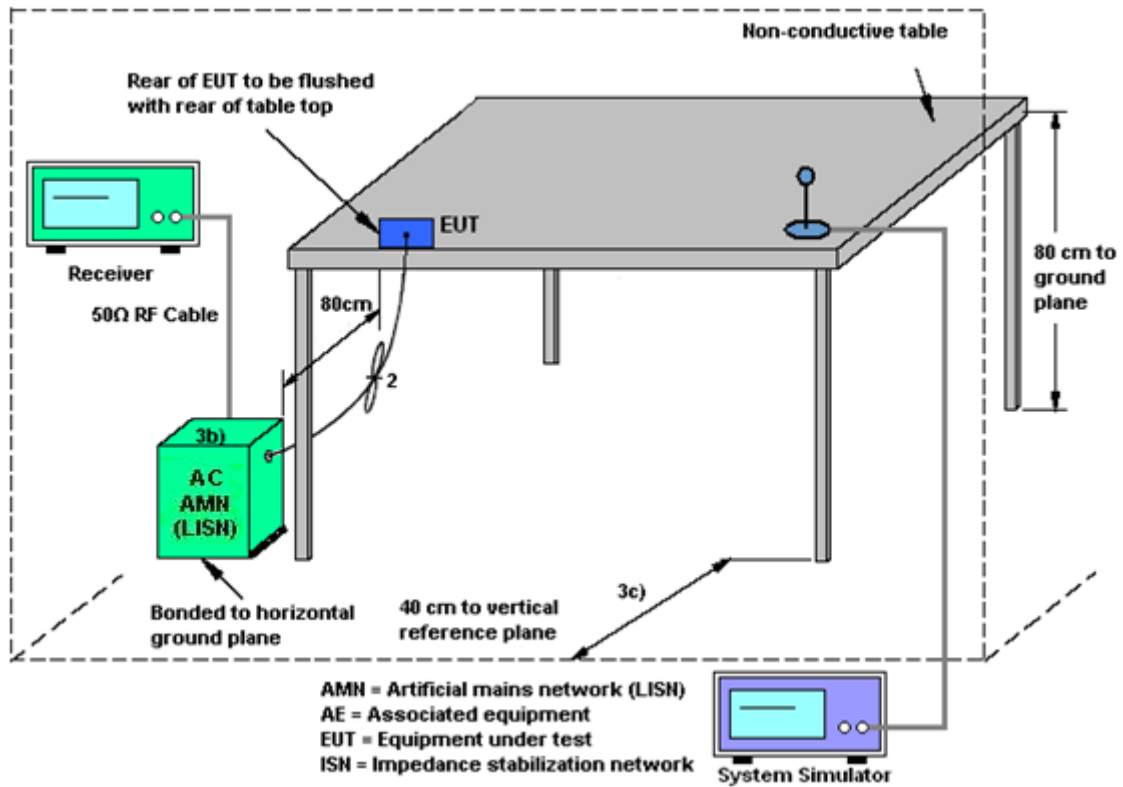

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Oct. 21, 2021~ Dec. 27, 2021	Jan. 03, 2022	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	35419 & 03	30MHz~1GHz	Apr. 28, 2021	Oct. 21, 2021~ Dec. 27, 2021	Apr. 27, 2022	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Oct. 21, 2021~ Nov. 28, 2021	Nov. 30, 2021	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Oct. 25, 2021	Nov. 29, 2021~ Dec. 27, 2021	Oct. 24, 2022	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170251	18GHz~40GHz	Dec. 02, 2020	Oct. 21, 2021~ Nov. 29, 2021	Dec. 01, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	Nov. 30, 2021~ Dec. 27, 2021	Nov. 29, 2022	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	Oct. 21, 2021~ Dec. 27, 2021	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz~18GHz	Apr. 22, 2021	Oct. 21, 2021~ Dec. 27, 2021	Apr. 21, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	Oct. 21, 2021~ Dec. 27, 2021	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	Oct. 21, 2021~ Dec. 27, 2021	Jul. 22, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2021	Oct. 21, 2021~ Dec. 27, 2021	Jul. 21, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682-4	30MHz to 18GHz	Feb. 24, 2021	Oct. 21, 2021~ Dec. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971-4	9kHz to 18GHz	Feb. 24, 2021	Oct. 21, 2021~ Dec. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655-4	9kHz to 18GHz	Feb. 24, 2021	Oct. 21, 2021~ Dec. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,8016 06/2	18GHz~40GHz	Feb. 24, 2021	Oct. 21, 2021~ Dec. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 17, 2021	Oct. 21, 2021~ Dec. 27, 2021	Sep. 16, 2022	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Oct. 21, 2021~ Dec. 27, 2021	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Oct. 21, 2021~ Dec. 27, 2021	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Oct. 21, 2021~ Dec. 27, 2021	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 09, 2021	Oct. 21, 2021~ Dec. 27, 2021	Mar. 08, 2022	Radiation (03CH07-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 14, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Dec. 14, 2021	Nov. 30, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Dec. 14, 2021	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Dec. 14, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Dec. 14, 2021	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Dec. 14, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO12	10MHz~6GHz	Dec. 16, 2020	Nov. 08, 2021~ Nov. 11, 2021	Dec. 15, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101565	10Hz ~ 40GHz	Nov. 13, 2020	Nov. 08, 2021~ Nov. 11, 2021	Nov. 12, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	Nov. 08, 2021~ Nov. 11, 2021	Mar. 16, 2022	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.0 dB
---	--------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2021/11/8~2021/11/11	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.023	0.640	0.50	Pass
BLE	1Mbps	1	19	2440	1.023	0.639	0.50	Pass
BLE	1Mbps	1	39	2480	1.025	0.639	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	18.70	30.00	3.00	21.70	36.00	Pass
BLE	1Mbps	1	19	2440	18.30	30.00	3.00	21.30	36.00	Pass
BLE	1Mbps	1	39	2480	18.30	30.00	3.00	21.30	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	18.67	3.81	3.00	8.00	Pass
BLE	1Mbps	1	19	2440	18.35	3.49	3.00	8.00	Pass
BLE	1Mbps	1	39	2480	18.43	3.59	3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.046	1.098	0.50	Pass
BLE	2Mbps	1	19	2440	2.050	1.096	0.50	Pass
BLE	2Mbps	1	39	2480	2.058	1.094	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	18.60	30.00	3.00	21.60	36.00	Pass
BLE	2Mbps	1	19	2440	18.30	30.00	3.00	21.30	36.00	Pass
BLE	2Mbps	1	39	2480	16.10	30.00	3.00	19.10	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	18.60	3.26	3.00	8.00	Pass
BLE	2Mbps	1	19	2440	18.10	2.76	3.00	8.00	Pass
BLE	2Mbps	1	39	2480	16.35	0.96	3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%



## EUT Information

Report NO : 100638  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

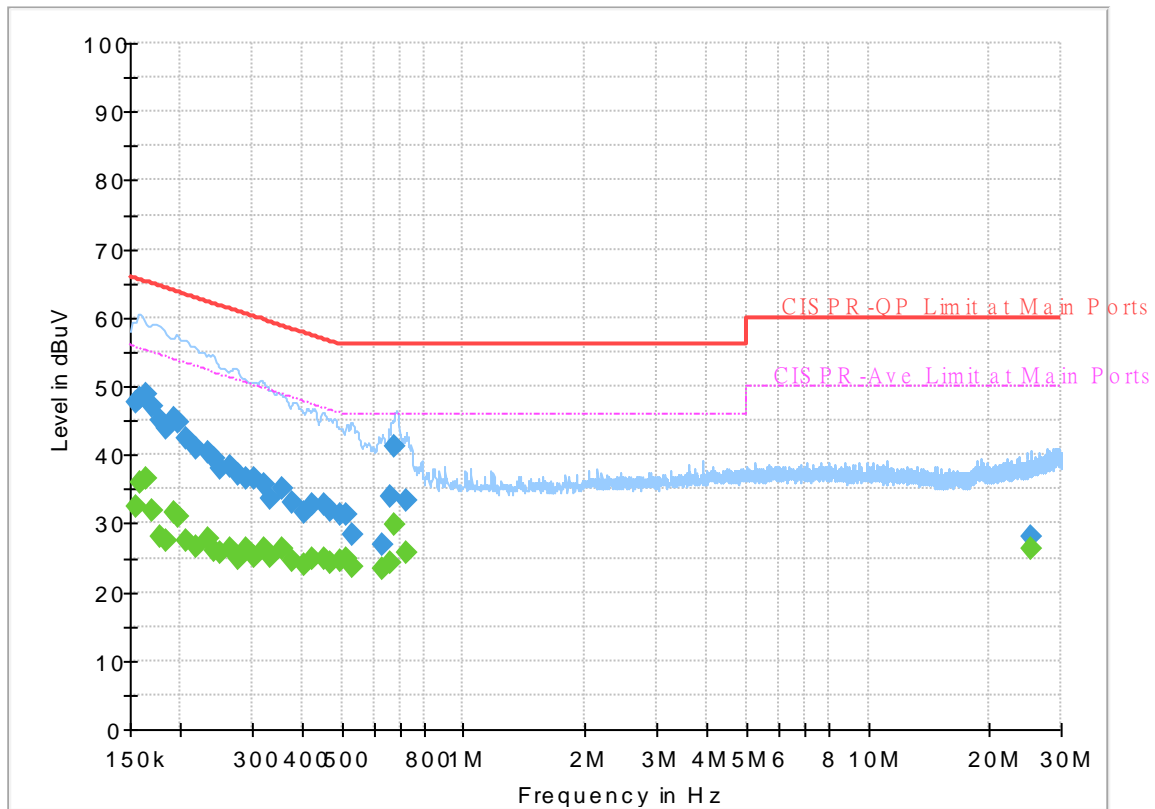

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	32.41	55.75	23.34	L1	OFF	19.6
0.154500	47.70	---	65.75	18.05	L1	OFF	19.6
0.159000	---	35.89	55.52	19.63	L1	OFF	19.6
0.159000	48.32	---	65.52	17.20	L1	OFF	19.6
0.163500	---	36.68	55.28	18.60	L1	OFF	19.6
0.163500	48.80	---	65.28	16.48	L1	OFF	19.6
0.170250	---	32.00	54.95	22.95	L1	OFF	19.6
0.170250	46.95	---	64.95	18.00	L1	OFF	19.6
0.177000	---	28.04	54.63	26.59	L1	OFF	19.6
0.177000	44.96	---	64.63	19.67	L1	OFF	19.6
0.183750	---	27.46	54.31	26.85	L1	OFF	19.6
0.183750	43.72	---	64.31	20.59	L1	OFF	19.6
0.192750	---	31.47	53.92	22.45	L1	OFF	19.6
0.192750	45.37	---	63.92	18.55	L1	OFF	19.6
0.197250	---	31.09	53.73	22.64	L1	OFF	19.6
0.197250	44.77	---	63.73	18.96	L1	OFF	19.6
0.206250	---	27.41	53.36	25.95	L1	OFF	19.6
0.206250	42.34	---	63.36	21.02	L1	OFF	19.6
0.217500	---	26.52	52.91	26.39	L1	OFF	19.6
0.217500	41.03	---	62.91	21.88	L1	OFF	19.6
0.233250	---	27.74	52.33	24.59	L1	OFF	19.6

0.233250	40.33	---	62.33	22.00	L1	OFF	19.6
0.242250	---	25.95	52.02	26.07	L1	OFF	19.6
0.242250	39.38	---	62.02	22.64	L1	OFF	19.6
0.251250	---	25.61	51.72	26.11	L1	OFF	19.6
0.251250	37.88	---	61.72	23.84	L1	OFF	19.6
0.264750	---	26.36	51.28	24.92	L1	OFF	19.6
0.264750	38.42	---	61.28	22.86	L1	OFF	19.6
0.278250	---	24.94	50.87	25.93	L1	OFF	19.6
0.278250	37.10	---	60.87	23.77	L1	OFF	19.6
0.289500	---	26.25	50.54	24.29	L1	OFF	19.6
0.289500	36.64	---	60.54	23.90	L1	OFF	19.6
0.305250	---	25.29	50.10	24.81	L1	OFF	19.6
0.305250	36.62	---	60.10	23.48	L1	OFF	19.6
0.321000	---	26.21	49.68	23.47	L1	OFF	19.6
0.321000	35.64	---	59.68	24.04	L1	OFF	19.6
0.334500	---	25.16	49.34	24.18	L1	OFF	19.6
0.334500	33.57	---	59.34	25.77	L1	OFF	19.6
0.354750	---	26.34	48.85	22.51	L1	OFF	19.6
0.354750	35.03	---	58.85	23.82	L1	OFF	19.6
0.377250	---	24.59	48.34	23.75	L1	OFF	19.6
0.377250	33.04	---	58.34	25.30	L1	OFF	19.6
0.404250	---	24.06	47.77	23.71	L1	OFF	19.6
0.404250	31.51	---	57.77	26.26	L1	OFF	19.6
0.424500	---	24.93	47.36	22.43	L1	OFF	19.7
0.424500	32.72	---	57.36	24.64	L1	OFF	19.7
0.453750	---	24.85	46.81	21.96	L1	OFF	19.7
0.453750	32.75	---	56.81	24.06	L1	OFF	19.7
0.469500	---	24.18	46.52	22.34	L1	OFF	19.7
0.469500	31.83	---	56.52	24.69	L1	OFF	19.7
0.494250	---	24.44	46.10	21.66	L1	OFF	19.7
0.494250	31.14	---	56.10	24.96	L1	OFF	19.7
0.514500	---	24.73	46.00	21.27	L1	OFF	19.8
0.514500	31.30	---	56.00	24.70	L1	OFF	19.8
0.530250	---	23.81	46.00	22.19	L1	OFF	19.8
0.530250	28.47	---	56.00	27.53	L1	OFF	19.8
0.631500	---	23.29	46.00	22.71	L1	OFF	19.9
0.631500	27.00	---	56.00	29.00	L1	OFF	19.9
0.660750	---	24.30	46.00	21.70	L1	OFF	19.9
0.660750	33.81	---	56.00	22.19	L1	OFF	19.9
0.676500	---	29.75	46.00	16.25	L1	OFF	19.9
0.676500	41.26	---	56.00	14.74	L1	OFF	19.9
0.721500	---	25.85	46.00	20.15	L1	OFF	19.9
0.721500	33.38	---	56.00	22.62	L1	OFF	19.9
25.161000	---	26.35	50.00	23.65	L1	OFF	20.6
25.161000	28.19	---	60.00	31.81	L1	OFF	20.6

# EUT Information

Report NO : 100638  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

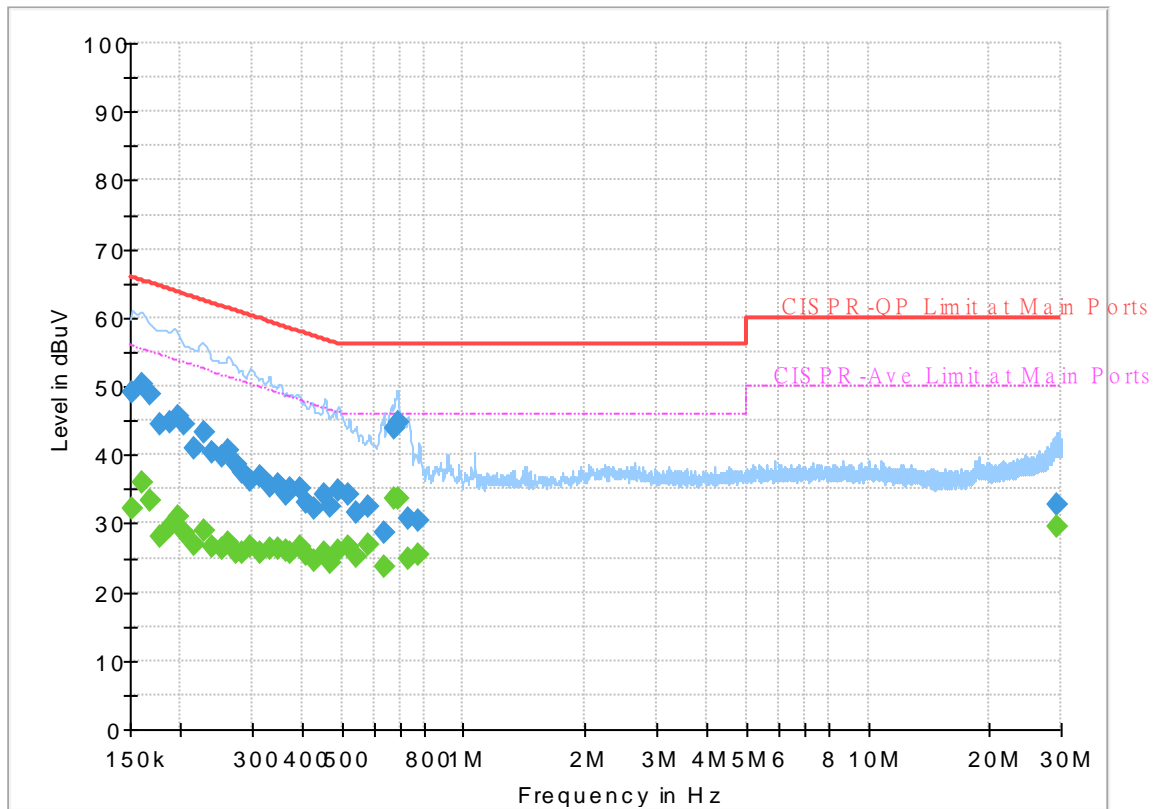

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	32.13	55.88	23.75	N	OFF	19.6
0.152250	49.21	---	65.88	16.67	N	OFF	19.6
0.161250	---	36.07	55.40	19.33	N	OFF	19.6
0.161250	50.39	---	65.40	15.01	N	OFF	19.6
0.168000	---	33.37	55.06	21.69	N	OFF	19.6
0.168000	48.91	---	65.06	16.15	N	OFF	19.6
0.177000	---	28.18	54.63	26.45	N	OFF	19.6
0.177000	44.52	---	64.63	20.11	N	OFF	19.6
0.188250	---	29.62	54.11	24.49	N	OFF	19.6
0.188250	44.75	---	64.11	19.36	N	OFF	19.6
0.197250	---	31.12	53.73	22.61	N	OFF	19.6
0.197250	45.67	---	63.73	18.06	N	OFF	19.6
0.204000	---	28.68	53.45	24.77	N	OFF	19.6
0.204000	44.49	---	63.45	18.96	N	OFF	19.6
0.215250	---	26.90	53.00	26.10	N	OFF	19.6
0.215250	40.97	---	63.00	22.03	N	OFF	19.6
0.228750	---	28.82	52.50	23.68	N	OFF	19.6
0.228750	43.19	---	62.50	19.31	N	OFF	19.6
0.240000	---	26.73	52.10	25.37	N	OFF	19.6
0.240000	40.34	---	62.10	21.76	N	OFF	19.6
0.253500	---	26.21	51.64	25.43	N	OFF	19.6

0.253500	39.65	---	61.64	21.99	N	OFF	19.6
0.262500	---	27.29	51.35	24.06	N	OFF	19.6
0.262500	40.59	---	61.35	20.76	N	OFF	19.6
0.273750	---	25.74	51.00	25.26	N	OFF	19.6
0.273750	38.68	---	61.00	22.32	N	OFF	19.6
0.282750	---	25.62	50.74	25.12	N	OFF	19.6
0.282750	37.55	---	60.74	23.19	N	OFF	19.6
0.298500	---	26.51	50.28	23.77	N	OFF	19.6
0.298500	36.26	---	60.28	24.02	N	OFF	19.6
0.314250	---	25.65	49.86	24.21	N	OFF	19.6
0.314250	36.85	---	59.86	23.01	N	OFF	19.6
0.332250	---	26.37	49.40	23.03	N	OFF	19.6
0.332250	35.38	---	59.40	24.02	N	OFF	19.6
0.350250	---	26.36	48.96	22.60	N	OFF	19.6
0.350250	35.65	---	58.96	23.31	N	OFF	19.6
0.363750	---	26.05	48.64	22.59	N	OFF	19.6
0.363750	34.18	---	58.64	24.46	N	OFF	19.6
0.375000	---	25.88	48.39	22.51	N	OFF	19.6
0.375000	35.12	---	58.39	23.27	N	OFF	19.6
0.393000	---	26.52	48.00	21.48	N	OFF	19.6
0.393000	35.08	---	58.00	22.92	N	OFF	19.6
0.408750	---	25.34	47.67	22.33	N	OFF	19.6
0.408750	32.95	---	57.67	24.72	N	OFF	19.6
0.429000	---	24.57	47.27	22.70	N	OFF	19.7
0.429000	32.04	---	57.27	25.23	N	OFF	19.7
0.453750	---	25.64	46.81	21.17	N	OFF	19.7
0.453750	34.18	---	56.81	22.63	N	OFF	19.7
0.467250	---	24.40	46.56	22.16	N	OFF	19.7
0.467250	32.32	---	56.56	24.24	N	OFF	19.7
0.492000	---	26.15	46.13	19.98	N	OFF	19.7
0.492000	34.87	---	56.13	21.26	N	OFF	19.7
0.516750	---	26.52	46.00	19.48	N	OFF	19.8
0.516750	34.17	---	56.00	21.83	N	OFF	19.8
0.543750	---	25.02	46.00	20.98	N	OFF	19.8
0.543750	31.69	---	56.00	24.31	N	OFF	19.8
0.584250	---	26.89	46.00	19.11	N	OFF	19.8
0.584250	32.53	---	56.00	23.47	N	OFF	19.8
0.636000	---	23.68	46.00	22.32	N	OFF	19.9
0.636000	28.60	---	56.00	27.40	N	OFF	19.9
0.676500	---	33.54	46.00	12.46	N	OFF	19.9
0.676500	43.94	---	56.00	12.06	N	OFF	19.9
0.687750	---	33.62	46.00	12.38	N	OFF	19.9
0.687750	44.85	---	56.00	11.15	N	OFF	19.9
0.728250	---	24.74	46.00	21.26	N	OFF	20.0
0.728250	30.80	---	56.00	25.20	N	OFF	20.0
0.777750	---	25.45	46.00	20.55	N	OFF	20.0
0.777750	30.41	---	56.00	25.59	N	OFF	20.0
29.370750	---	29.58	50.00	20.42	N	OFF	20.8
29.370750	32.61	---	60.00	27.39	N	OFF	20.8



### Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	17.9~24.6°C
		Relative Humidity :	53.1~69.0%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		2363.445	56.44	-17.56	74	42.01	31.83	18	35.4	297	279	P	H	
		2363.655	50.99	-3.01	54	36.56	31.83	18	35.4	297	279	A	H	
	*	2402	109.84	-	-	95.21	31.9	18.15	35.42	297	279	P	H	
	*	2402	109.37	-	-	94.74	31.9	18.15	35.42	297	279	A	H	
													H	
			2340.765	55.31	-18.69	74	41	31.8	17.91	35.4	100	123	P	V
			2363.55	48.65	-5.35	54	34.22	31.83	18	35.4	100	123	A	V
	*		2402	106.83	-	-	92.2	31.9	18.15	35.42	100	123	P	V
	*		2402	106.15	-	-	91.52	31.9	18.15	35.42	100	123	A	V
														V
BLE CH 19 2440MHz		2315.88	54.15	-19.85	74	40.01	31.73	17.8	35.39	119	293	P	H	
		2387.7	45.64	-8.36	54	31.02	31.9	18.13	35.41	119	293	A	H	
	*	2440	109.47	-	-	94.48	32.2	18.22	35.43	119	293	P	H	
	*	2440	108.88	-	-	93.89	32.2	18.22	35.43	119	293	A	H	
			2489.22	54.88	-19.12	74	39.49	32.6	18.24	35.45	119	293	P	H
			2491.25	46.35	-7.65	54	30.95	32.6	18.25	35.45	119	293	A	H
			2381.82	54.68	-19.32	74	40.11	31.87	18.11	35.41	100	0	P	V
			2383.92	45.3	-8.7	54	30.72	31.87	18.12	35.41	100	0	A	V
	*		2440	105.28	-	-	90.29	32.2	18.22	35.43	100	0	P	V
	*		2440	104.77	-	-	89.78	32.2	18.22	35.43	100	0	A	V
			2498.32	54.56	-19.44	74	39.16	32.6	18.26	35.46	100	0	P	V
			2499.72	46.39	-7.61	54	30.99	32.6	18.26	35.46	100	0	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	107.65	-	-	92.4	32.47	18.23	35.45	321	282	P	H
	*	2480	107.22	-	-	91.97	32.47	18.23	35.45	321	282	A	H
		2484.24	57.18	-16.82	74	41.93	32.47	18.23	35.45	100	287	P	H
		2483.64	50.1	-3.9	54	34.85	32.47	18.23	35.45	100	287	A	H
													H
	*	2480	105.68	-	-	90.43	32.47	18.23	35.45	341	351	P	V
	*	2480	105.01	-	-	89.76	32.47	18.23	35.45	341	351	A	V
		2483.8	57.47	-16.53	74	42.22	32.47	18.23	35.45	338	0	P	V
		2483.84	48.98	-5.02	54	33.73	32.47	18.23	35.45	338	0	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	42.04	-31.96	74	53.32	34	12.71	57.99	-	-	P	H	
		14475	46.55	-27.45	74	43.29	39.28	22.07	58.09	-	-	P	H	
		15855	48.77	-25.23	74	41.51	40.76	23.45	56.95	-	-	P	H	
		15855	37.9	-16.1	54	30.64	40.76	23.45	56.95	-	-	A	H	
		17820	51.33	-22.67	74	40.31	41.9	25.21	56.09	-	-	P	H	
		17820	41.38	-12.62	54	30.36	41.9	25.21	56.09	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4804	42.32	-31.68	74	53.6	34	12.71	57.99	-	-	P	V
			14499	46.56	-27.44	74	43.26	39.3	22.09	58.09	-	-	P	V
			15705	48.56	-25.44	74	41.74	40.6	23.3	57.08	-	-	P	V
			15705	37.54	-16.46	54	30.72	40.6	23.3	57.08	-	-	A	V
			17775	52.18	-21.82	74	41.24	41.88	25.17	56.11	-	-	P	V
			17775	41.22	-12.78	54	30.28	41.88	25.17	56.11	-	-	A	V
													V	
													V	
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.
- The emission level close to 18GHz is checked that the average emission level is noise floor only.



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 19 2440MHz		4880	42.38	-31.62	74	53.52	34.1	12.66	57.9	-	-	P	H	
		7320	41.73	-32.27	74	49.19	35.6	14.86	57.92	-	-	P	H	
		14499	46.72	-27.28	74	43.42	39.3	22.09	58.09	-	-	P	H	
		15885	49	-25	74	41.65	40.8	23.48	56.93	-	-	P	H	
		15885	38.18	-15.82	54	30.83	40.8	23.48	56.93	-	-	A	H	
		17880	51.73	-22.27	74	40.62	41.9	25.26	56.05	-	-	P	H	
		17880	41.46	-12.54	54	30.35	41.9	25.26	56.05	-	-	A	H	
														H
														H
														H
														H
														H
			4880	43.45	-30.55	74	54.59	34.1	12.66	57.9	-	-	P	V
			7320	41.17	-32.83	74	48.63	35.6	14.86	57.92	-	-	P	V
			14475	47	-27	74	43.74	39.28	22.07	58.09	-	-	P	V
			15840	49.03	-24.97	74	41.82	40.74	23.44	56.97	-	-	P	V
			15840	37.7	-16.3	54	30.49	40.74	23.44	56.97	-	-	A	V
			17865	51.63	-22.37	74	40.54	41.9	25.25	56.06	-	-	P	V
			17865	41.43	-12.57	54	30.34	41.9	25.25	56.06	-	-	A	V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> <li>The emission level close to 18GHz is checked that the average emission level is noise floor only.</li> </ol>													





BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 39 2480MHz		4960	41.22	-32.78	74	52.21	34.2	12.62	57.81	-	-	P	H	
		7440	42.52	-31.48	74	49.97	35.6	14.99	58.04	-	-	P	H	
		14475	46.97	-27.03	74	43.71	39.28	22.07	58.09	-	-	P	H	
		15870	48.25	-25.75	74	40.94	40.78	23.47	56.94	-	-	P	H	
		15870	37.95	-16.05	54	30.64	40.78	23.47	56.94	-	-	A	H	
		17790	51.5	-22.5	74	40.53	41.9	25.18	56.11	-	-	P	H	
		17790	41.4	-12.6	54	30.43	41.9	25.18	56.11	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4960	40.67	-33.33	74	51.66	34.2	12.62	57.81	-	-	P	V
			7440	39.98	-34.02	74	47.43	35.6	14.99	58.04	-	-	P	V
			14499	46.51	-27.49	74	43.21	39.3	22.09	58.09	-	-	P	V
			15795	48.39	-25.61	74	41.32	40.68	23.4	57.01	-	-	P	V
			15795	37.88	-16.12	54	30.81	40.68	23.4	57.01	-	-	A	V
			17910	51.05	-22.95	74	39.89	41.9	25.29	56.03	-	-	P	V
			17910	41.5	-12.5	54	30.34	41.9	25.29	56.03	-	-	A	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> <li>The emission level close to 18GHz is checked that the average emission level is noise floor only.</li> </ol>													



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2363.445	56.74	-17.26	74	42.31	31.83	18	35.4	299	258	P	H	
		2363.34	51.19	-2.81	54	36.76	31.83	18	35.4	299	258	A	H	
	*	2402	110.42	-	-	95.79	31.9	18.15	35.42	299	258	P	H	
	*	2402	109.32	-	-	94.69	31.9	18.15	35.42	299	258	A	H	
													H	
														H
			2363.34	55.5	-18.5	74	41.07	31.83	18	35.4	100	118	P	V
			2363.655	49.43	-4.57	54	35	31.83	18	35.4	100	118	A	V
	*		2402	107.32	-	-	92.69	31.9	18.15	35.42	100	118	P	V
	*		2402	106.23	-	-	91.6	31.9	18.15	35.42	100	118	A	V
														V
													V	
BLE CH 19 2440MHz		2330.44	54.25	-19.75	74	40.01	31.77	17.86	35.39	121	288	P	H	
		2381.96	46.65	-7.35	54	32.11	31.87	18.08	35.41	121	288	A	H	
	*	2440	108.64	-	-	93.68	32.2	18.19	35.43	121	288	P	H	
	*	2440	107.6	-	-	92.64	32.2	18.19	35.43	121	288	A	H	
			2499.93	55.34	-18.66	74	39.95	32.6	18.25	35.46	121	288	P	H
			2489.36	47.8	-6.2	54	32.41	32.6	18.24	35.45	121	288	A	H
			2370.62	54.36	-19.64	74	39.88	31.87	18.02	35.41	400	323	P	V
			2386.44	47.07	-6.93	54	32.48	31.9	18.1	35.41	400	323	A	V
	*		2440	105.81	-	-	90.85	32.2	18.19	35.43	400	323	P	V
	*		2440	104.72	-	-	89.76	32.2	18.19	35.43	400	323	A	V
			2491.53	55.05	-18.95	74	39.66	32.6	18.24	35.45	400	323	P	V
		2493.7	47.52	-6.48	54	32.14	32.6	18.24	35.46	400	323	A	V	



<b>BLE CH 39 2480MHz</b>	*	2480	104.74	-	-	89.49	32.47	18.23	35.45	277	272	P	H
	*	2480	103.66	-	-	88.41	32.47	18.23	35.45	277	272	A	H
		2483.72	59.67	-14.33	74	44.42	32.47	18.23	35.45	277	268	P	H
		2483.52	52.91	-1.09	54	37.66	32.47	18.23	35.45	277	268	A	H
													H
													H
	*	2480	102.75	-	-	87.5	32.47	18.23	35.45	332	1	P	V
	*	2480	101.5	-	-	86.25	32.47	18.23	35.45	332	1	A	V
		2483.64	57.03	-16.97	74	41.78	32.47	18.23	35.45	338	329	P	V
		2483.52	50.58	-3.42	54	35.33	32.47	18.23	35.45	338	329	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	41.72	-32.28	74	53	34	12.71	57.99	-	-	P	H	
		14490	46.55	-27.45	74	43.26	39.3	22.08	58.09	-	-	P	H	
		15855	48.49	-25.51	74	41.23	40.76	23.45	56.95	-	-	P	H	
		15855	37.93	-16.07	54	30.67	40.76	23.45	56.95	-	-	A	H	
		17910	51.25	-22.75	74	40.09	41.9	25.29	56.03	-	-	P	H	
		17910	41.31	-12.69	54	30.15	41.9	25.29	56.03	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4804	42.12	-31.88	74	53.4	34	12.71	57.99	-	-	P	V
			14505	46.57	-27.43	74	43.26	39.3	22.1	58.09	-	-	P	V
			16155	49.21	-24.79	74	41.09	41.15	23.74	56.77	-	-	P	V
			16155	38.78	-15.22	54	30.66	41.15	23.74	56.77	-	-	A	V
			17925	51.51	-22.49	74	40.33	41.9	25.3	56.02	-	-	P	V
			17925	41.39	-12.61	54	30.21	41.9	25.3	56.02	-	-	A	V
													V	
													V	
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.
- The emission level close to 18GHz is checked that the average emission level is noise floor only.



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 19 2440MHz		4880	41.22	-32.78	74	52.36	34.1	12.66	57.9	-	-	P	H	
		7320	42.86	-31.14	74	50.32	35.6	14.86	57.92	-	-	P	H	
		14490	47.12	-26.88	74	43.83	39.3	22.08	58.09	-	-	P	H	
		15810	48.76	-25.24	74	41.64	40.7	23.41	56.99	-	-	P	H	
		15810	37.71	-16.29	54	30.59	40.7	23.41	56.99	-	-	A	H	
		17955	51.28	-22.72	74	40.06	41.9	25.33	56.01	-	-	P	H	
		17955	41.41	-12.59	54	30.19	41.9	25.33	56.01	-	-	A	H	
														H
														H
														H
														H
														H
			4880	41.25	-32.75	74	52.39	34.1	12.66	57.9	-	-	P	V
			7320	41.43	-32.57	74	48.89	35.6	14.86	57.92	-	-	P	V
			14475	46.94	-27.06	74	43.68	39.28	22.07	58.09	-	-	P	V
			15840	48.28	-25.72	74	41.07	40.74	23.44	56.97	-	-	P	V
			15840	37.85	-16.15	54	30.64	40.74	23.44	56.97	-	-	A	V
			17835	50.94	-23.06	74	39.9	41.9	25.22	56.08	-	-	P	V
			17835	41.13	-12.87	54	30.09	41.9	25.22	56.08	-	-	A	V
														V
													V	
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.
- The emission level close to 18GHz is checked that the average emission level is noise floor only.



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 39 2480MHz		4960	41.6	-32.4	74	52.59	34.2	12.62	57.81	-	-	P	H	
		7440	40.76	-33.24	74	48.21	35.6	14.99	58.04	-	-	P	H	
		14475	46.35	-27.65	74	43.09	39.28	22.07	58.09	-	-	P	H	
		15855	49.24	-24.76	74	41.98	40.76	23.45	56.95	-	-	P	H	
		15855	38	-16	54	30.74	40.76	23.45	56.95	-	-	A	H	
		17985	51.46	-22.54	74	40.19	41.9	25.36	55.99	-	-	P	H	
		17985	41.36	-12.64	54	30.09	41.9	25.36	55.99	-	-	A	H	
														H
														H
														H
														H
														H
			4960	41.32	-32.68	74	52.31	34.2	12.62	57.81	-	-	P	V
			7440	40.85	-33.15	74	48.3	35.6	14.99	58.04	-	-	P	V
			14475	46.46	-27.54	74	43.2	39.28	22.07	58.09	-	-	P	V
			15975	48.12	-25.88	74	40.42	40.97	23.58	56.85	-	-	P	V
			15975	38.14	-15.86	54	30.44	40.97	23.58	56.85	-	-	A	V
			17880	51.42	-22.58	74	40.31	41.9	25.26	56.05	-	-	P	V
			17880	41.27	-12.73	54	30.16	41.9	25.26	56.05	-	-	A	V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> <li>The emission level close to 18GHz is checked that the average emission level is noise floor only.</li> </ol>													



Emission above 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		19295	38.1	-35.9	74	54.99	37.83	5.08	59.8	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24531	36.61	-37.39	74	48.92	38.7	6.77	57.78	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		105.33	31.7	-11.8	43.5	43.42	16.52	1.75	29.99	-	-	P	H	
		183.63	31.99	-11.51	43.5	44.88	14.81	2.27	29.97	-	-	P	H	
		216.57	33	-13	46	45.89	14.64	2.44	29.97	-	-	P	H	
		338.5	29.39	-16.61	46	36.49	19.94	2.94	29.98	-	-	P	H	
		500.2	30.99	-15.01	46	33.47	23.82	3.55	29.85	-	-	P	H	
		959.4	32.66	-13.34	46	25.62	30.8	4.91	28.67	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	33.25	-6.75	40	37.81	24.57	0.9	30.03	-	-	P	V
			57	28.78	-11.22	40	45.27	12.17	1.35	30.01	-	-	P	V
			198.75	33.45	-10.05	43.5	46.11	14.96	2.35	29.97	-	-	P	V
			500.2	34.09	-11.91	46	36.57	23.82	3.55	29.85	-	-	P	V
			881.7	31.66	-14.34	46	27.36	28.69	4.64	29.03	-	-	P	V
			953.8	32.84	-13.16	46	26.16	30.49	4.89	28.7	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	17.9~24.6°C
		Relative Humidity :	53.1~69.0%

### Note symbol

-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Horizontal		Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

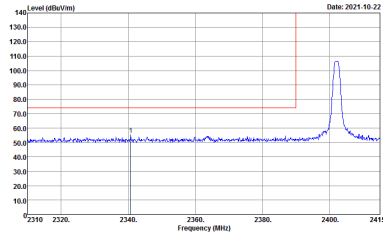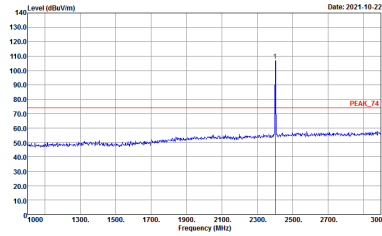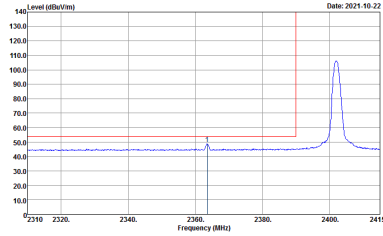
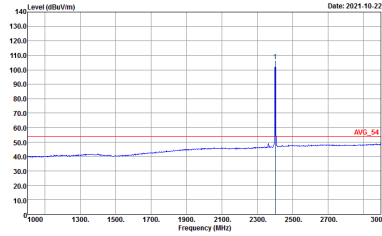


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Peak. The plot shows a sharp peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH07-HY Condition : : PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a sharp peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2402 MHz, labeled 'PEAK_F4'.</p> <p>Site : 03CH07-HY Condition : : PEAK_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Avg. The plot shows a broader peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH07-HY Condition : : AVG_BE_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a broader peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2402 MHz, labeled 'AVG_F4'.</p> <p>Site : 03CH07-HY Condition : : AVG_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>

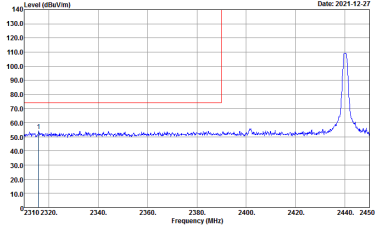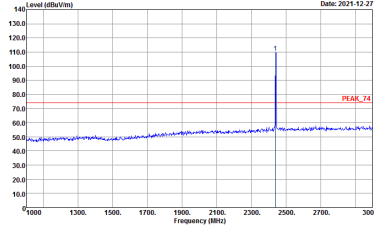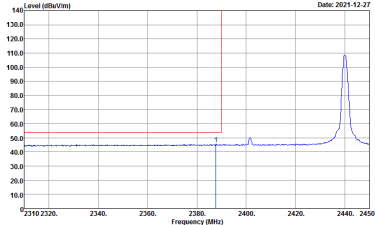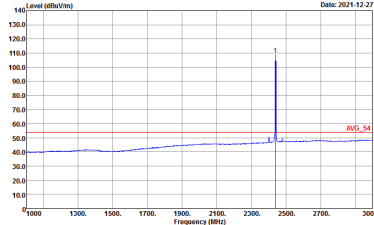

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2450 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz, labeled 'PEAK_74'.</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2450 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL            : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz, labeled 'AVG_54'.</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL            : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

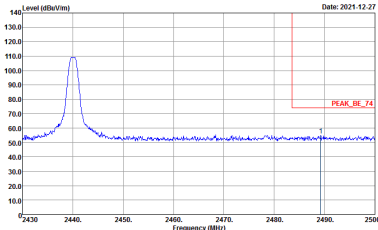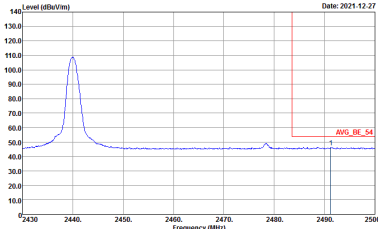



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HV Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : REW:1000.000kHz VBW:3.000kHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HV Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : REW:1000.000kHz VBW:3.000kHz SWF:Auto</p>	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Vertical Peak Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) for 2440MHz. The plot shows a sharp peak at 2440MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2450 MHz. A red horizontal line is drawn at approximately 105 dBm/100kHz. The plot is dated 2021-12-27.</p> <p>Site : 03CH07-HY Condition : :PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	<p>Fundamental Peak Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) for 2440MHz. The plot shows a sharp peak at 2440MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz. The plot is dated 2021-12-27.</p> <p>Site : 03CH07-HY Condition : :PEAK_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	<p>Vertical Avg Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) for 2440MHz. The plot shows a sharp peak at 2440MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2450 MHz. A red horizontal line is drawn at approximately 50 dBm/100kHz. The plot is dated 2021-12-27.</p> <p>Site : 03CH07-HY Condition : :AVG_BE_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>	<p>Fundamental Avg Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) for 2440MHz. The plot shows a sharp peak at 2440MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 50 dBm/100kHz. The plot is dated 2021-12-27.</p> <p>Site : 03CH07-HY Condition : :AVG_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>





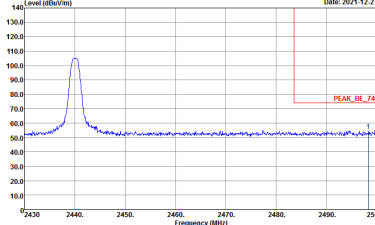
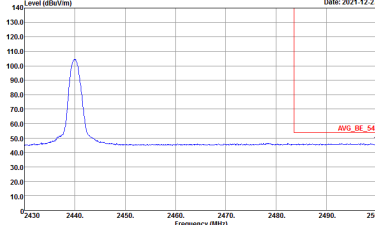


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HV Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : REW:1000.000kHz VBW:3.000kHz SWFAuto</p>	Left blank
Avg.	 <p>Site : 03CH07-HV Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : REW:1000.000kHz VBW:3.000kHz SWFAuto</p>	Left blank

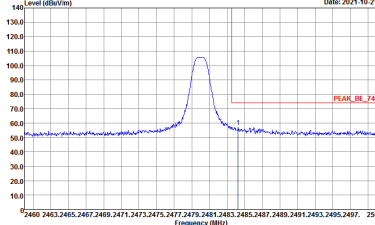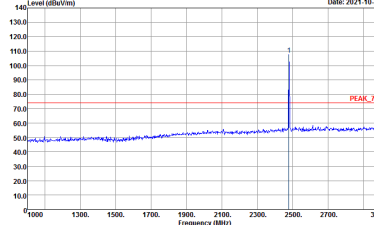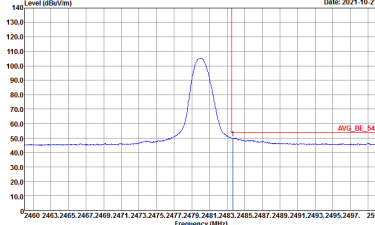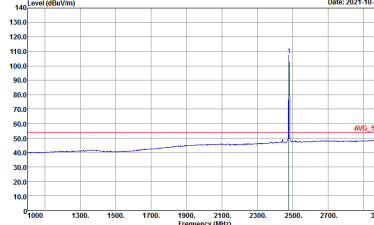

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2021-10-21</p> <p>Level (dBm/1m) vs Frequency (MHz)</p> <p>Peak: PEAK_BE_Y4</p> <p>Site Condition: 03CH07-HY, PEAK_BE_78.3m HF_ANT_00075962 HORIZONTAL, RBW:1000.000kHz VBW:3.000kHz SWFA:Auto</p>	 <p>Date: 2021-10-21</p> <p>Level (dBm/1m) vs Frequency (MHz)</p> <p>Peak: PEAK_Z4</p> <p>Site Condition: 03CH07-HY, PEAK_Z8.3m HF_ANT_00075962 HORIZONTAL, RBW:1000.000kHz VBW:3000.000kHz SWFA:Auto</p>
Avg.	 <p>Date: 2021-10-21</p> <p>Level (dBm/1m) vs Frequency (MHz)</p> <p>Avg: AVG_BE_S4</p> <p>Site Condition: 03CH07-HY, AVG_BE_S4 3m HF_ANT_00075962 HORIZONTAL, RBW:1000.000kHz VBW:3.000kHz SWFA:Auto</p>	 <p>Date: 2021-10-21</p> <p>Level (dBm/1m) vs Frequency (MHz)</p> <p>Avg: AVG_Z4</p> <p>Site Condition: 03CH07-HY, AVG_S4 3m HF_ANT_00075962 HORIZONTAL, RBW:1000.000kHz VBW:3.000kHz SWFA:Auto</p>

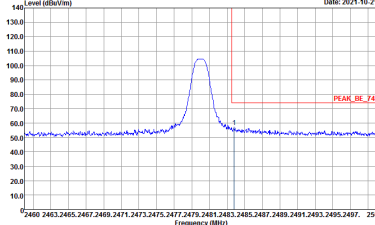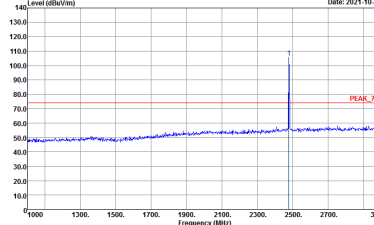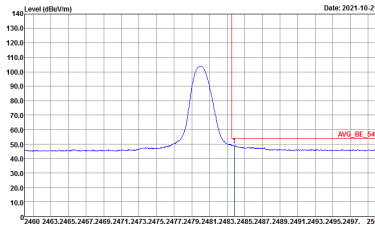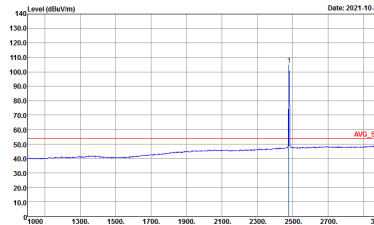

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Date: 2021-10-21</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Date: 2021-10-21</p> <p>Site : 03CH07-HY Condition : PEAK_F4 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	 <p>Date: 2021-10-21</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>	 <p>Date: 2021-10-21</p> <p>Site : 03CH07-HY Condition : AVG_F4 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>





2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>

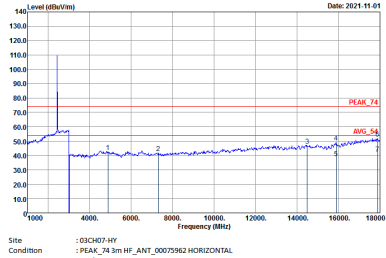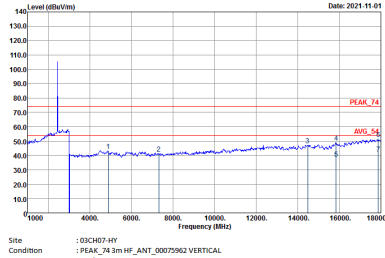

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>

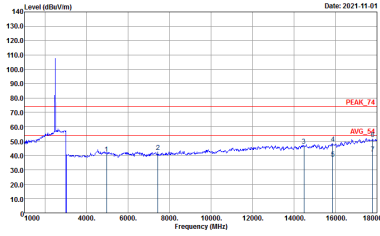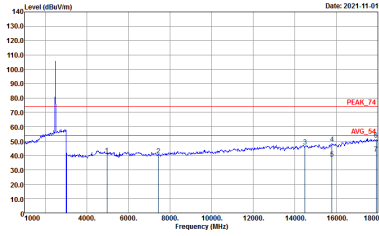

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Peak Vertical. The plot shows a sharp peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Peak Fundamental. The plot shows a sharp peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1900 to 3000 MHz. A red vertical line marks the peak at 2402 MHz. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : PEAK_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	<p>Level (dBuV/m) vs Frequency (MHz) for Avg Vertical. The plot shows a peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : AVG_BE_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Avg Fundamental. The plot shows a peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1900 to 3000 MHz. A red vertical line marks the peak at 2402 MHz. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : AVG_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTA:Auto</p>	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTA:Auto</p>
Avg.	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWTA:Auto</p>	<p>Date: 2021-10-22</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWTA:Auto</p>

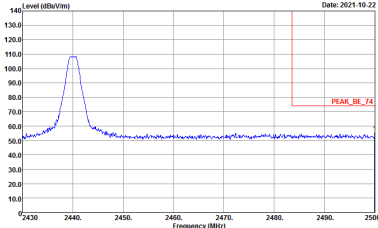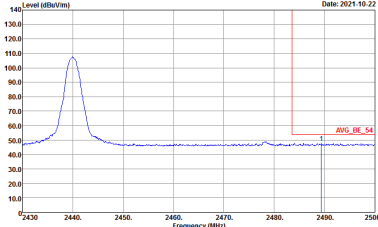

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2021-10-22</p> <p>Site : 03CH07-HV Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : REW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Date: 2021-10-22</p> <p>Site : 03CH07-HV Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : REW:1000.000kHz VBW:10.000kHz SWF:Auto</p>	<p>Left blank</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Peak measurement. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2450 MHz. A sharp peak is visible at approximately 2440 MHz. A red vertical line is drawn at the peak frequency. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : :PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	<p>Fundamental Peak Spectrum Plot. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A sharp peak is visible at approximately 2440 MHz. A red horizontal line is drawn at the peak level, labeled 'PEAK_X4'. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : :PEAK_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	<p>Vertical Average Spectrum Plot. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2450 MHz. A peak is visible at approximately 2440 MHz. A red vertical line is drawn at the peak frequency. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : :AVG_BE_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>	<p>Fundamental Average Spectrum Plot. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A peak is visible at approximately 2440 MHz. A red horizontal line is drawn at the peak level, labeled 'AVG_X4'. The date is 2021-10-22.</p> <p>Site : 03CH07-HY Condition : :AVG_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	<p>Site : 03CH07-HV Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : REW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	Left blank
Avg.	<p>Site : 03CH07-HV Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : REW:1000.000kHz VBW:10.000kHz SWF:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	<p>Date: 2021-10-22</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	<p>Date: 2021-10-22</p> <p>Site Condition : 03CH07-HY : PEAK_F4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	<p>Date: 2021-10-22</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>	<p>Date: 2021-10-22</p> <p>Site Condition : 03CH07-HY : AVG_F4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>

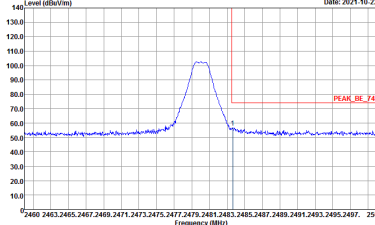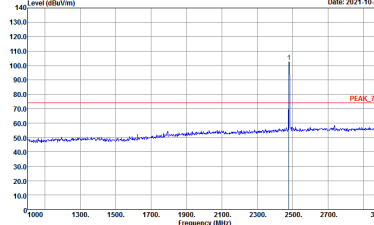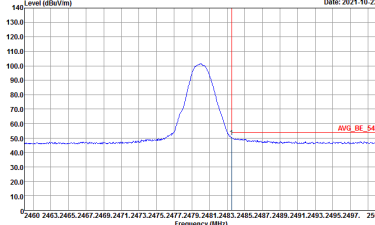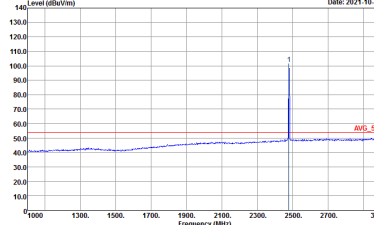

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 105 dBuV/m. The plot includes a red vertical line at the peak and a red horizontal line labeled 'PEAK_BE_Y4'.</p> <p>Site : 03CH07-HY Condition : PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 105 dBuV/m. The plot includes a red vertical line at the peak and a red horizontal line labeled 'PEAK_X4'.</p> <p>Site : 03CH07-HY Condition : PEAK_X8.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level of the signal. The average level is approximately 55 dBuV/m. The plot includes a red vertical line at the peak and a red horizontal line labeled 'AVG_BE_S4'.</p> <p>Site : 03CH07-HY Condition : AVG_BE_S4 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level of the signal. The average level is approximately 55 dBuV/m. The plot includes a red vertical line at the peak and a red horizontal line labeled 'AVG_X4'.</p> <p>Site : 03CH07-HY Condition : AVG_S4 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWF:Auto</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>

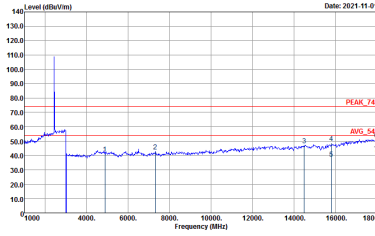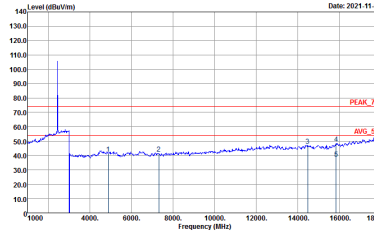

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



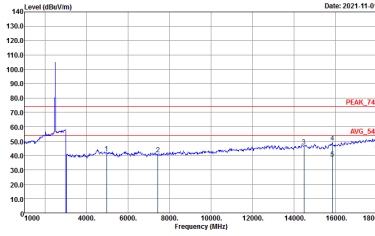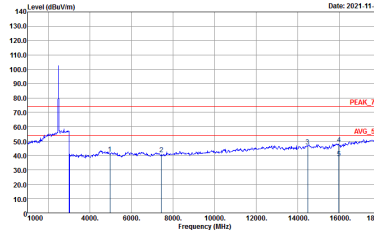

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



Emission above 18GHz

2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_9170251 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_9170251 VERTICAL</p>



Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL</p>



## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	63.11	396	2.52	3kHz
Bluetooth - LE for 2Mbps	35.20	220	4.55	10kHz

