

## RF Test Report

Applicant : Plume Design, Inc.

Product Name : SuperPod with WiFi 6E

Trade Name : Plume Design, Inc.

Model Number : M1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Received Date : Dec. 12, 2022

Test Period : Feb. 06 ~ Nov. 16, 2023

Issued Date : Jan. 11, 2024

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range: 9 kHz to 325 GHz  
Test Firm Registration Number: 226252 (Bade test site)  
Test Firm Registration Number: 191812 (Wugu test site)

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

**Revision History**

Version	Issued Date	Revisions	Revised By
00	Jan. 11, 2024	Initial Issue	Emma Chao

## Verification of Compliance

Applicant : Plume Design, Inc.

Product Name : SuperPod with WiFi 6E

Trade Name : Plume Design, Inc.

Model Number : M1A

FCC ID : 2AG7G-M1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
1.1.	Summary of Test Result .....	5
1.2.	Testing Location .....	6
1.3.	Measurement Uncertainty .....	6
1.4.	Test Site Environment.....	6
<b>2</b>	<b>EUT Description.....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>9</b>
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step .....	11
3.3.	Configuration of Test System Details.....	12
3.4.	Test Instruments .....	13
<b>4</b>	<b>Measurement Procedure.....</b>	<b>15</b>
4.1.	AC Power Line Conducted Emission Measurement.....	15
4.2.	Radiated Emission Measurement.....	17
4.3.	Maximum Conducted Output Power Measurement.....	21
4.4.	6 dB RF Bandwidth Measurement.....	22
4.5.	Maximum Power Spectral Density Measurement.....	23
4.6.	Out of Band Conducted Emissions Measurement.....	24
4.7.	Antenna Measurement .....	25
<b>5</b>	<b>Test Results .....</b>	<b>27</b>
5.1.	Conducted Emission.....	27
5.2.	Radiated Emission Measurement.....	29
5.3.	Conducted Test Results.....	321

**Appendix A. Test Data**

**Appendix B. Test Plots**

**Appendix C. Test Setup Photographs**

# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address:  No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address:  No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	1.9 dB
	30 MHz ~ 1000 MHz	4.9 dB
	1000 MHz ~ 18000 MHz	5.0 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.4 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	

## 1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(\*)The measurement ambient temperature is within this range.

## 2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Max. RF Output Power).

Applicant	Plume Design, Inc. 325 Lytton Ave., Palo Alto, CA 94301, United States			
Product Name	SuperPod with WiFi 6E			
Trade Name	Plume Design, Inc.			
Model Number	M1A			
FCC ID	2AG7G-M1A			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 / 800 GI (ns)
802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
802.11n HT20	2412 ~ 2462	OFDM	20 MHz	Up to 144.4 Mbps
802.11n HT40	2422 ~ 2452	OFDM	40 MHz	Up to 300 Mbps
802.11n VHT20	2412 ~ 2462	OFDM	20 MHz	Up to 173.3 Mbps
802.11n VHT40	2422 ~ 2452	OFDM	40 MHz	Up to 400 Mbps
802.11ax HE20	2412 ~ 2462	OFDMA	20 MHz	MCS11
802.11ax HE40	2422 ~ 2452	OFDMA	40 MHz	MCS11
Antenna information	ANT		Type	Max. Gain (dBi)
	ANT-0 (Ant. 7)		PIFA Antenna	2.20
	ANT-1 (Ant. 6)		PIFA Antenna	-0.70
Antenna Delivery	See section 3.1			
EUT Power Rating	100-240 V, 50-60 Hz, 0.6 A			

1X1	
Frequency Band	Max. RF Output Power (W)
802.11b	0.564
802.11g	0.433
802.11n HT20	0.412
802.11n HT40	0.197
802.11n VHT20	0.425
802.11n VHT40	0.203
802.11ax HE20	0.441
802.11ax HE40	0.215

2X2	
Frequency Band	Max. RF Output Power (W)
802.11b	0.953
802.11g	0.916
802.11n HT20	0.864
802.11n HT40	0.377
802.11n VHT20	0.887
802.11n VHT40	0.386
802.11ax HE20	0.925
802.11ax HE40	0.394

Beamforming on	
Frequency Band	Max. RF Output Power (W)
802.11n HT20	0.643
802.11n HT40	0.393
802.11n VHT20	0.652
802.11n VHT40	0.399
802.11ax HE20	0.665
802.11ax HE40	0.404



### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11b	V
802.11g	V
802.11n HT20	
802.11n HT40	
802.11n VHT20	V
802.11n VHT40	V
802.11ax HE20	V
802.11ax HE40	V

Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: Investigation has been done on all the possible configurations for searching the worst cases (2.4 GHz VHT20/VHT40 covers HT20/HT40). The table is a list of the test modes show in this test report.

Note 2: 802.11 ax only support full RU.

1X1

Test Mode	ANT-0
802.11b	V
802.11g	V
802.11n HT20	V
802.11n HT40	V
802.11n VHT20	V
802.11n VHT40	V
802.11ax HE20	V
802.11ax HE40	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
802.11b	1TX	1	1, 6, 11
802.11g	1TX	6	1, 6, 11
802.11n HT20	1TX	6.5	1, 6, 11
802.11n HT40	1TX	13.5	3, 6, 9
802.11n VHT20	1TX	6.5	1, 6, 11
802.11n VHT40	1TX	13.5	3, 6, 9
802.11ax HE20	1TX	MCS0	1, 6, 11
802.11ax HE40	1TX	MCS0	3, 6, 9

**2X2**

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11b	V	V	V
802.11g	V	V	V
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11n VHT20	V	V	V
802.11n VHT40	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
802.11b	2TX (CDD)	1	1, 6, 11
802.11g	2TX (CDD)	6	1, 6, 11
802.11n HT20	2TX (CDD)	13	1, 6, 11
802.11n HT40	2TX (CDD)	27	3, 6, 9
802.11n VHT20	2TX (CDD)	13	1, 6, 11
802.11n VHT40	2TX (CDD)	27	3, 6, 9
802.11ax HE20	2TX (CDD)	MCS0	1, 6, 11
802.11ax HE40	2TX (CDD)	MCS0	3, 6, 9

### 3.2. EUT Test Step


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

### 3.3. Configuration of Test System Details

#### Conducted Emissions

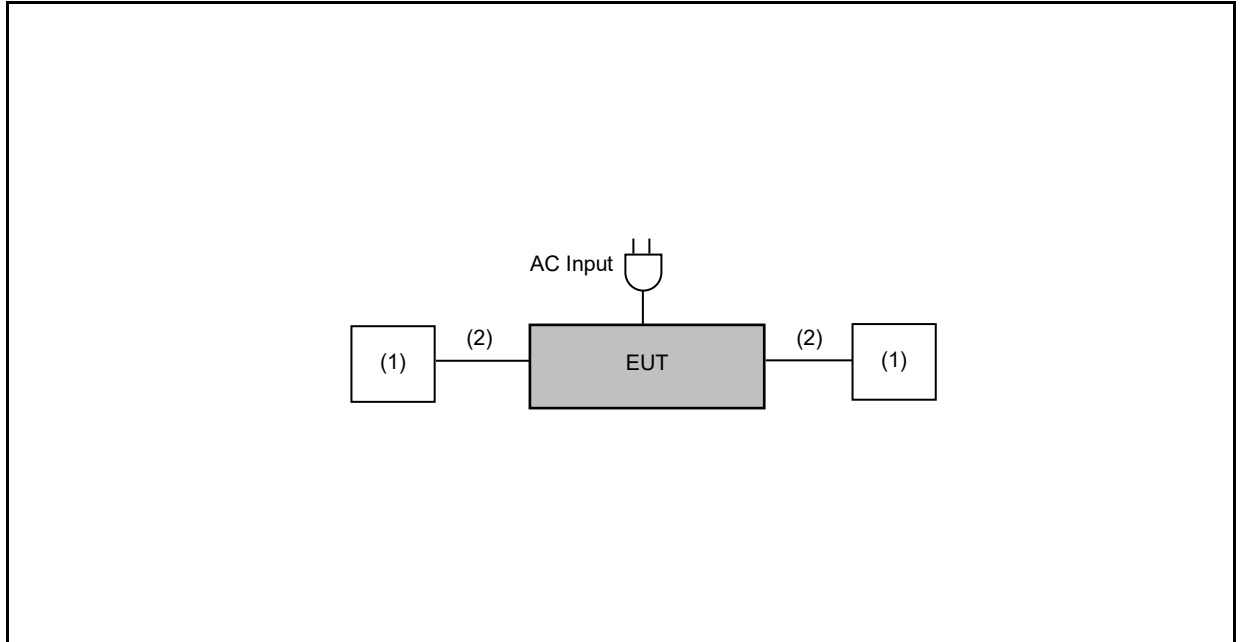

#### Radiated Emission

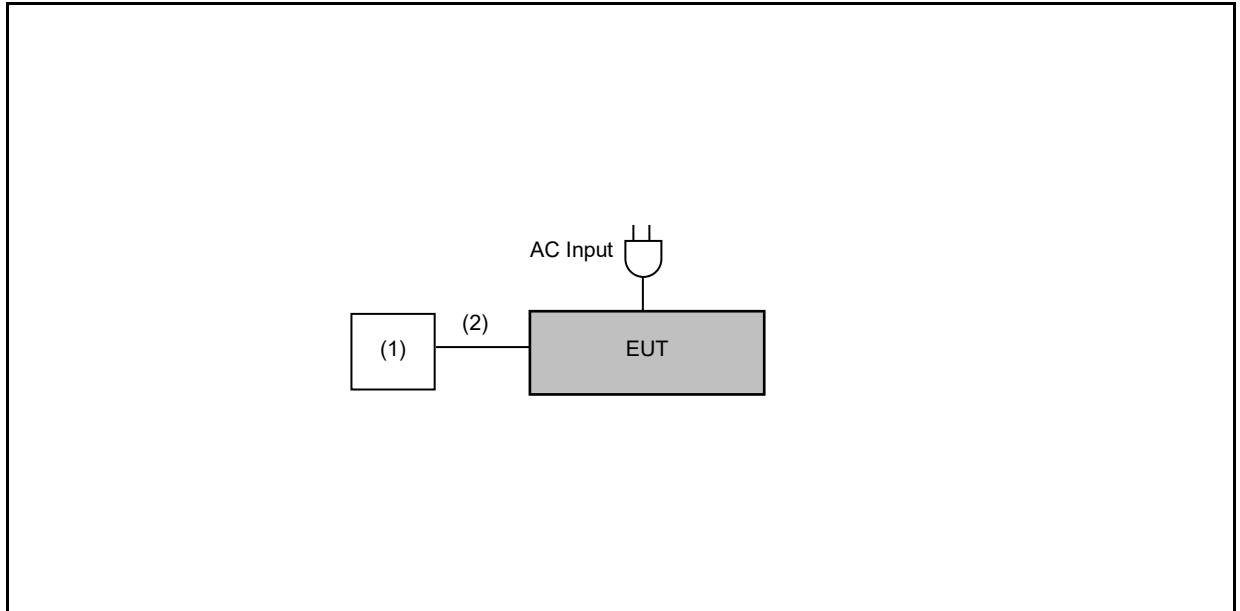

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	HP	440G1	---	---
(2)	RJ45	---	---	---	---

### 3.4. Test Instruments

For Conducted Emission  
 Test Period: Mar. 03, 2023  
 Testing Engineer: Jayson Hsieh

Test Site		Conduction01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI	100367	May 19, 2022	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	100722	Nov. 02, 2022	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	101000	Nov. 23, 2022	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101040	Apr. 06, 2022	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101140	Jan. 12, 2023	1 year
<input checked="" type="checkbox"/>	RF Cable	Woken	00100D1380194M	TE-02-03	May 27, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

For Conducted  
 Test Period: Feb. 06 ~ Nov. 16, 2023  
 Testing Engineer: Andy Lu, Brian Lin

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Power Sensor	Anritsu	MA2411B	1126022	Sep. 04, 2022 Aug. 31, 2023	1 year
<input checked="" type="checkbox"/>	Power Meter	Anritsu	ML2495A	1135009	Sep. 04, 2022 Aug. 31, 2023	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 21, 2022 Jul. 20, 2023	1 year
<input type="checkbox"/>	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022 Sep. 04, 2023	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Dec. 29, 2022	1 year
<input type="checkbox"/>	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 28, 2022 Mar. 29, 2023	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021 Mar. 20, 2023	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022 Jun. 05, 2023	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022 Jan. 06, 2023	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Jan. 10 ~ Nov. 12, 2023

Testing Engineer: Kerry Xu, Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 13, 2022 Jan. 07, 2023	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Dec. 29, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 14, 2022 Apr. 18, 2023	1 year
<input checked="" type="checkbox"/>	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330 A1F	001	Jul. 21, 2022 Jul. 24, 2023	1 year
<input type="checkbox"/>	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 19, 2022 Oct. 31, 2023	1 year
<input checked="" type="checkbox"/>	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 21, 2022 Jul. 24, 2023	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 22, 2022 Jun. 26, 2023	1 year
<input type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 03, 2022 Jun. 13, 2023	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 13, 2022 Jul. 07, 2023	1 year
<input type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 25, 2022 Jul. 21, 2023	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 25, 2022 Jul. 21, 2023	1 year
<input type="checkbox"/>	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 05, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 04, 2022 Aug. 10, 2023	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 04, 2022 Aug. 10, 2023	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 04, 2022 Aug. 10, 2023	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021 Mar. 20, 2023	2 years
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022 Jan. 06, 2023	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.


## 4 Measurement Procedure

### 4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

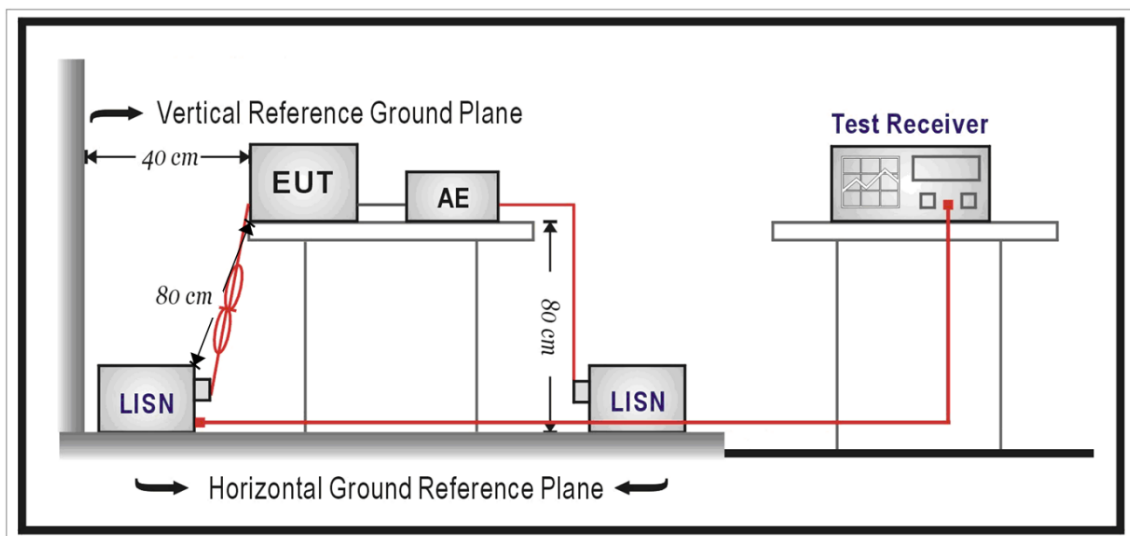

### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All  $50 \Omega$  ports of the LISN shall be resistively terminated into  $50 \Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.



## 4.2. Radiated Emission Measurement

### ■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### ■ Setup


9 kHz ~ 30 MHz

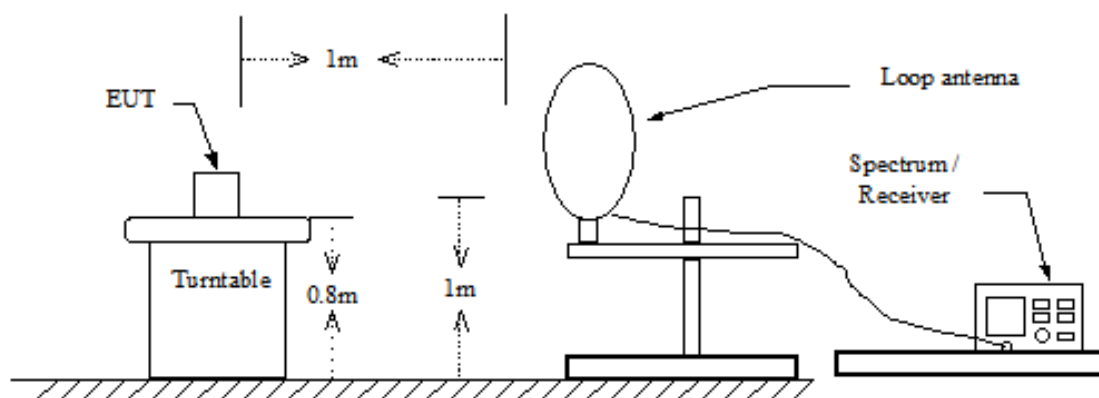

Below 1 GHz

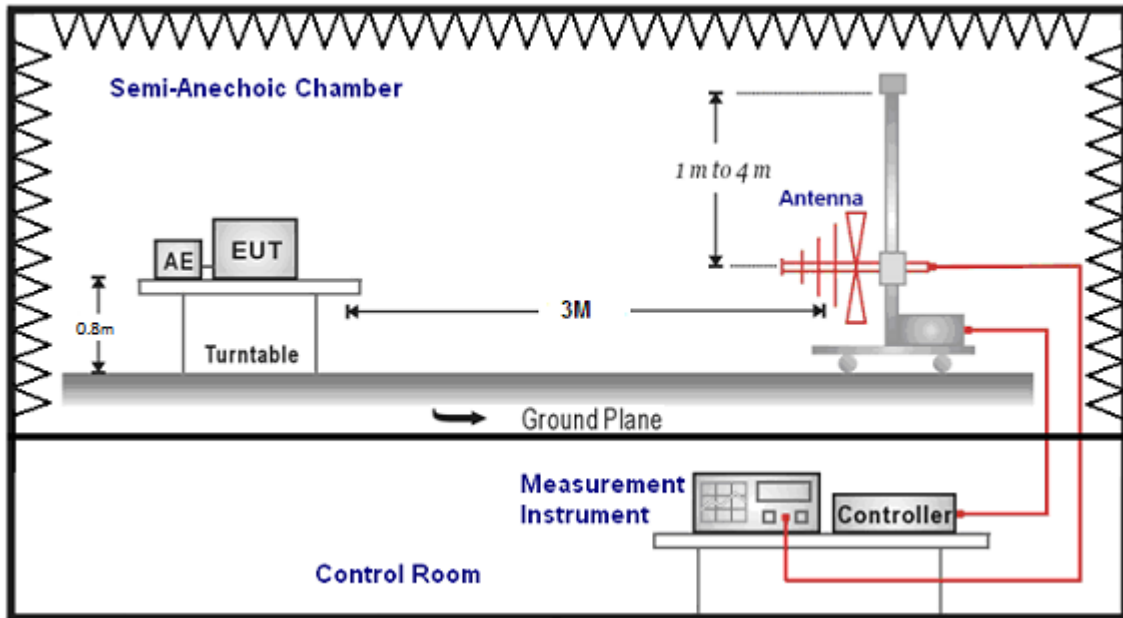

Above 1 GHz

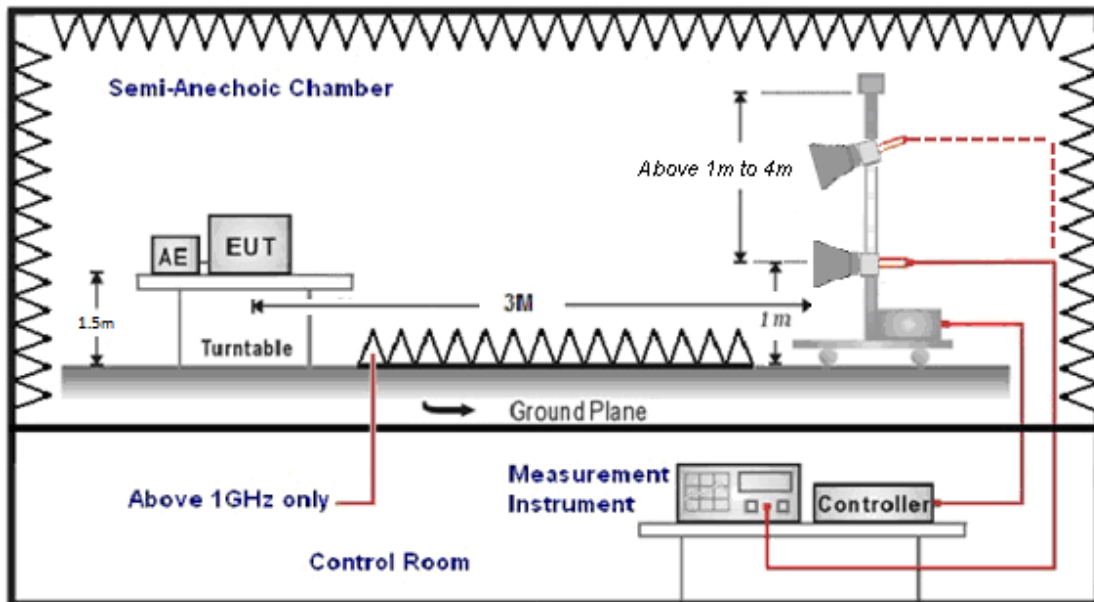

### ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.


### 4.3. Maximum Conducted Output Power Measurement

■ **Limit**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ **Test Setup**

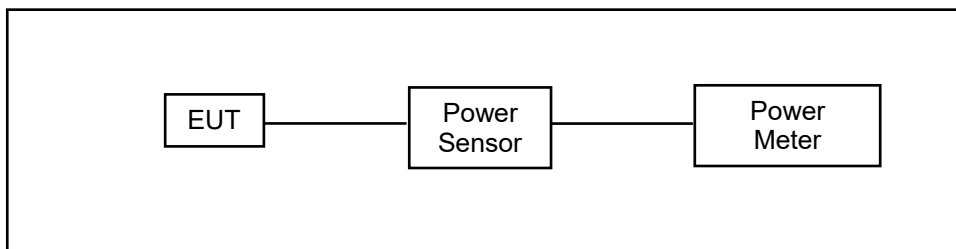

■ **Test Procedure**

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

#### 4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ **Test Setup**

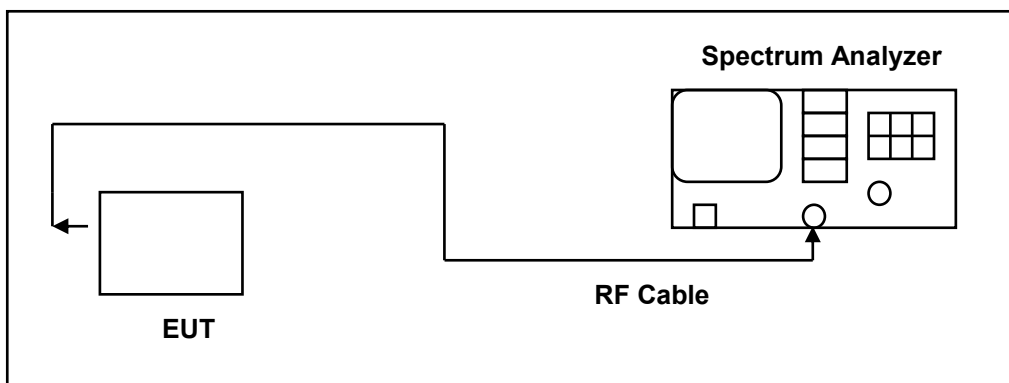

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

## 4.5. Maximum Power Spectral Density Measurement

### ■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### ■ Test Setup

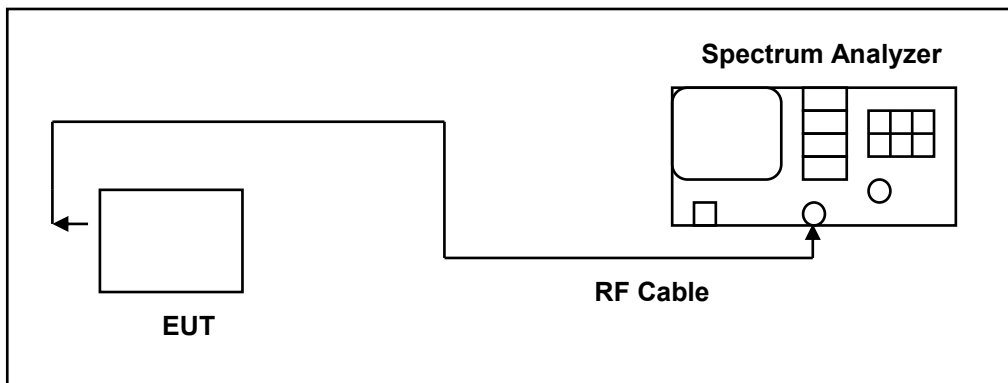

### ■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 4.6. Out of Band Conducted Emissions Measurement

### ■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### ■ Test Setup

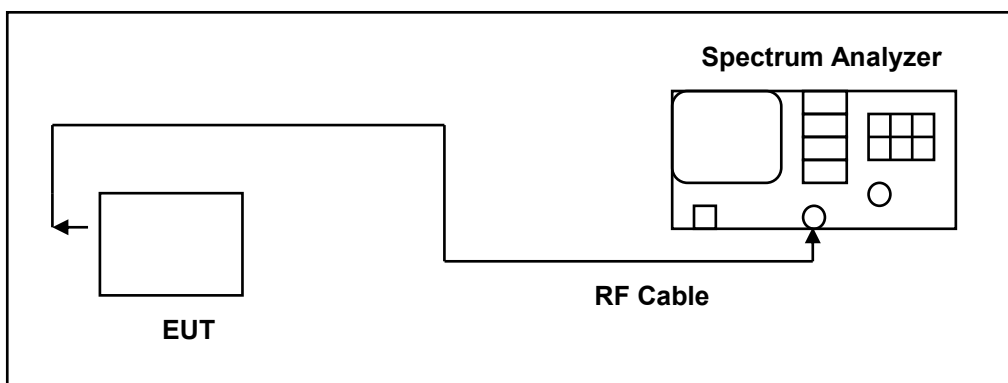

### ■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.



## 4.7. Antenna Measurement

### ■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ■ Antenna Description

See section 2 – antenna information.

### ■ Directional Gain Calculated

SISO 1x1									
Test mode	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
		ANT-0	ANT-1	ANT-2	ANT-3				
		(dBi)	(dBi)	(dBi)	(dBi)				
802.11b	Ant-0	2.20		-	-	2.20	2.20	0.00	0.00
802.11g	Ant-0	2.20		-	-	2.20	2.20	0.00	0.00
802.11n HT20 802.11n HT40 802.11n VHT20 802.11n VHT40 802.11ax HE20 802.11ax HE40	Ant-0	2.20		-	-	2.20	2.20	0.00	0.00

MIMO 2x2
----------

Test mode	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
		ANT-0	ANT-1	ANT-2	ANT-3				
		(dBi)	(dBi)	(dBi)	(dBi)				
802.11b	CDD	2.20	-0.70	-	-	2.20	2.72	0.00	0.00
802.11g	CDD	2.20	-0.70	-	-	2.20	2.72	0.00	0.00
802.11n HT20 802.11n HT40 802.11n VHT20 802.11n VHT40 802.11ax HE20 802.11ax HE40	CDD	2.20	-0.70	-	-	2.20	2.72	0.00	0.00

Directional gain (Power)= GANT

Directional gain (PSD)= Array Gain

Beamforming on MIMO 2x2
-------------------------

Test mode	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
		ANT-0	ANT-1	ANT-2	ANT-3				
		(dBi)	(dBi)	(dBi)	(dBi)				
802.11n HT20 802.11n HT40 802.11n VHT20 802.11n VHT40 802.11ax HE20 802.11ax HE40	MIMO	2.20	-0.70	-	-	4.92	4.92	0.00	0.00


Directional gain (Power)= GANT + Array Gain

Directional gain (PSD)= GANT + Array Gain

## 5 Test Results

### 5.1. Conducted Emission

Standard:	Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit Mode		
Description:			

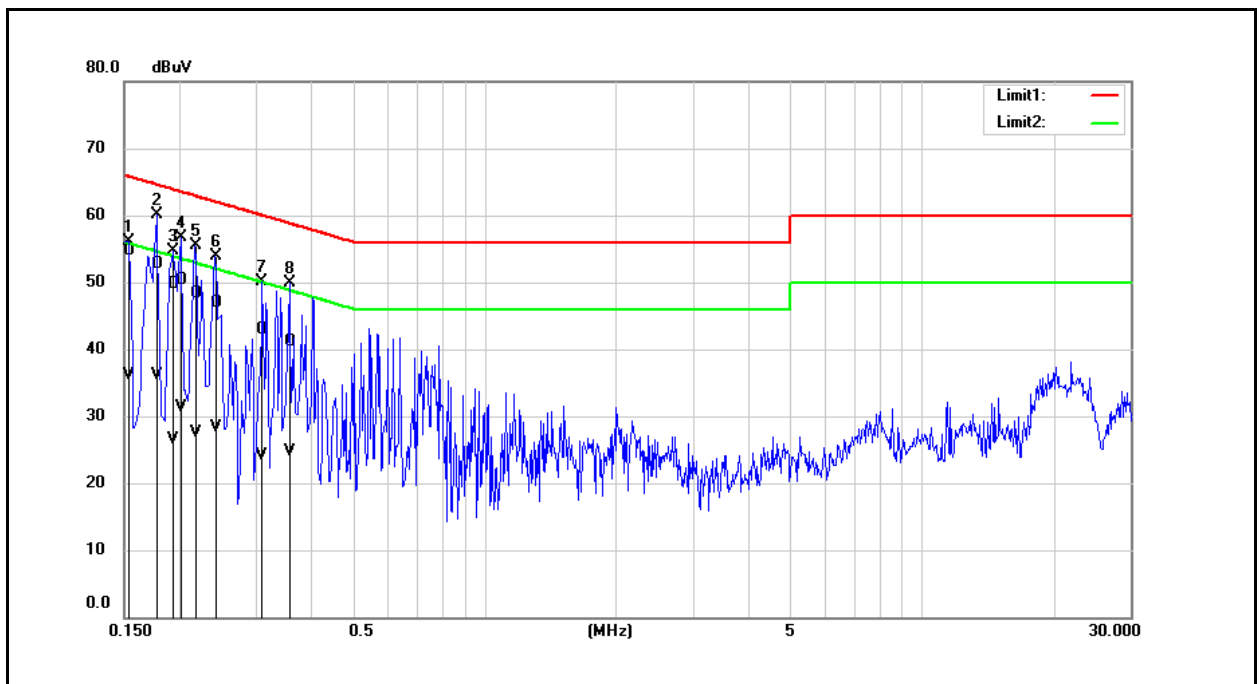


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	45.26	26.59	9.54	54.80	36.13	65.78	55.78	-10.98	-19.65	Pass
2	0.1780	43.11	26.51	9.54	52.65	36.05	64.58	54.58	-11.93	-18.53	Pass
3	0.1940	40.22	17.06	9.54	49.76	26.60	63.86	53.86	-14.10	-27.26	Pass
4	0.2020	40.74	21.72	9.54	50.28	31.26	63.53	53.53	-13.25	-22.27	Pass
5	0.2180	38.84	18.04	9.54	48.38	27.58	62.89	52.89	-14.51	-25.31	Pass
6	0.2420	37.38	18.69	9.54	46.92	28.23	62.03	52.03	-15.11	-23.80	Pass
7	0.3100	33.38	14.59	9.54	42.92	24.13	59.97	49.97	-17.05	-25.84	Pass
8	0.3580	31.62	15.23	9.55	41.17	24.78	58.77	48.77	-17.60	-23.99	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit Mode		
Description:			

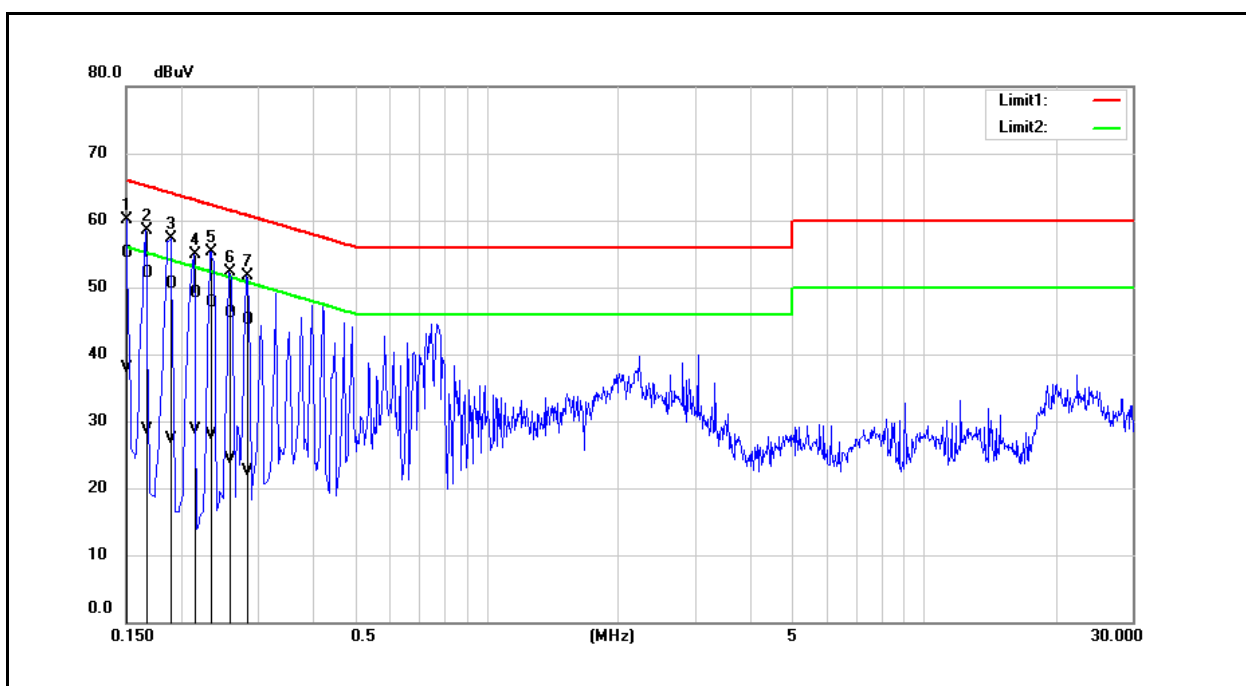

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	45.57	28.40	9.60	55.17	38.00	66.00	56.00	-10.83	-18.00	Pass
2	0.1660	42.53	19.15	9.60	52.13	28.75	65.16	55.16	-13.03	-26.41	Pass
3	0.1900	40.87	17.80	9.60	50.47	27.40	64.04	54.04	-13.57	-26.64	Pass
4	0.2140	39.51	19.01	9.60	49.11	28.61	63.05	53.05	-13.94	-24.44	Pass
5	0.2340	38.09	18.31	9.60	47.69	27.91	62.31	52.31	-14.62	-24.40	Pass
6	0.2580	36.48	14.63	9.60	46.08	24.23	61.50	51.50	-15.42	-27.27	Pass
7	0.2820	35.45	12.97	9.60	45.05	22.57	60.76	50.76	-15.71	-28.19	Pass


Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## 5.2. Radiated Emission Measurement

Below 1 GHz

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Transmit mode		
Remark:			

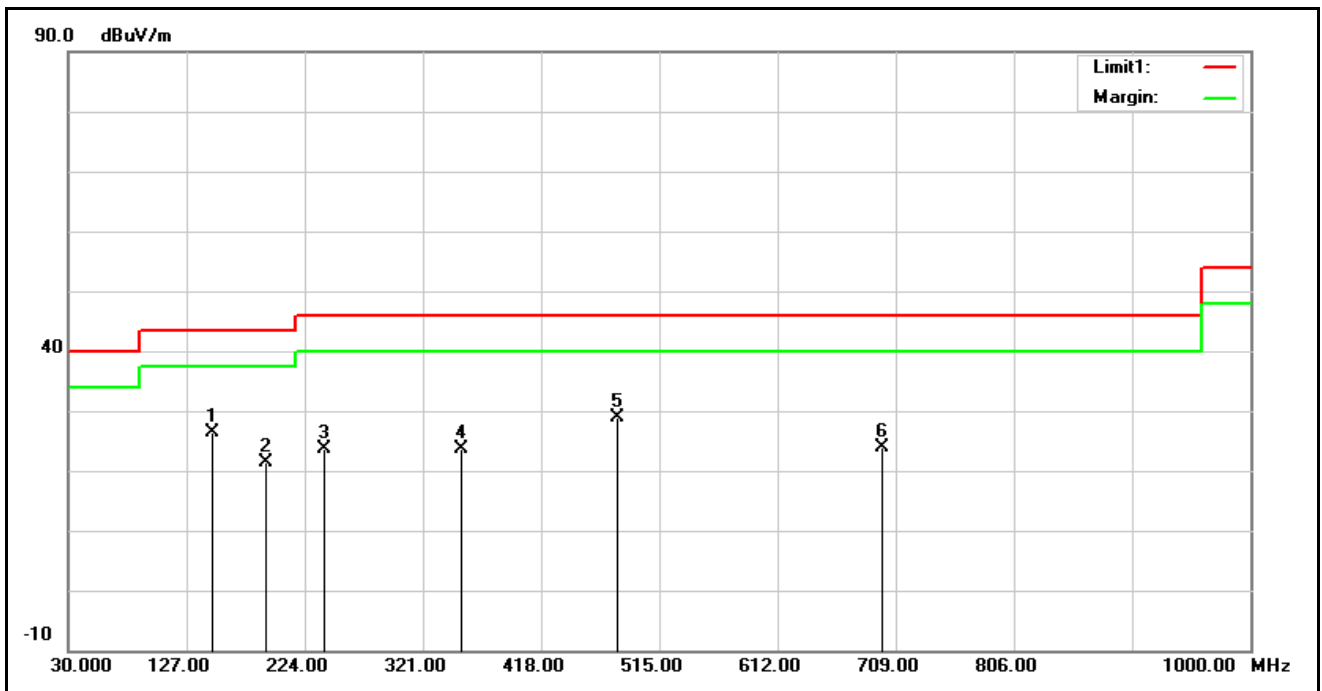


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	148.3400	50.26	-23.97	26.29	43.50	-17.21	QP
2	191.9900	47.32	-26.02	21.30	43.50	-22.20	QP
3	240.4900	48.41	-24.80	23.61	46.00	-22.39	QP
4	353.0100	45.15	-21.60	23.55	46.00	-22.45	QP
5	480.0800	47.16	-18.37	28.79	46.00	-17.21	QP
6	697.3600	38.38	-14.46	23.92	46.00	-22.08	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Transmit mode		
Remark:			

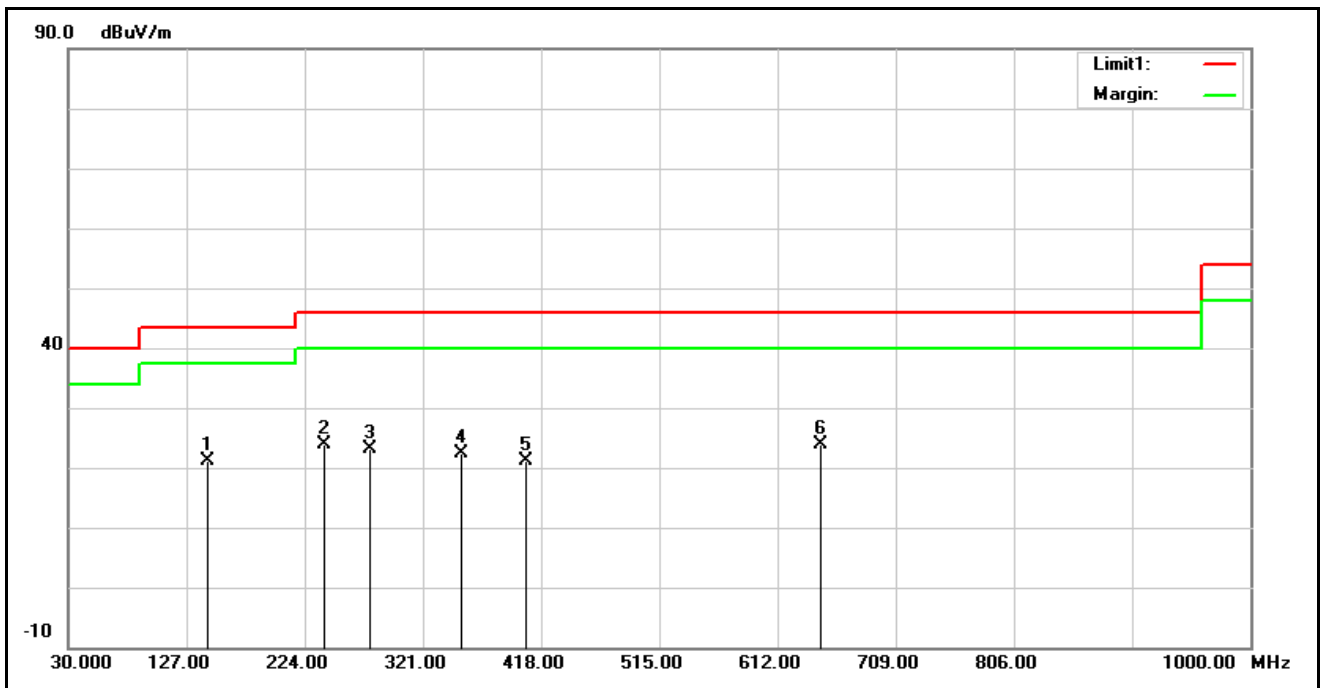

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	144.4600	45.40	-24.26	21.14	43.50	-22.36	QP
2*	240.4900	48.79	-24.80	23.99	46.00	-22.01	QP
3	277.3500	46.85	-23.66	23.19	46.00	-22.81	QP
4	352.0400	44.03	-21.63	22.40	46.00	-23.60	QP
5	405.3900	41.26	-20.10	21.16	46.00	-24.84	QP
6	646.9200	39.42	-15.57	23.85	46.00	-22.15	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

1X1

Harmonic


Above 1 GHz

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

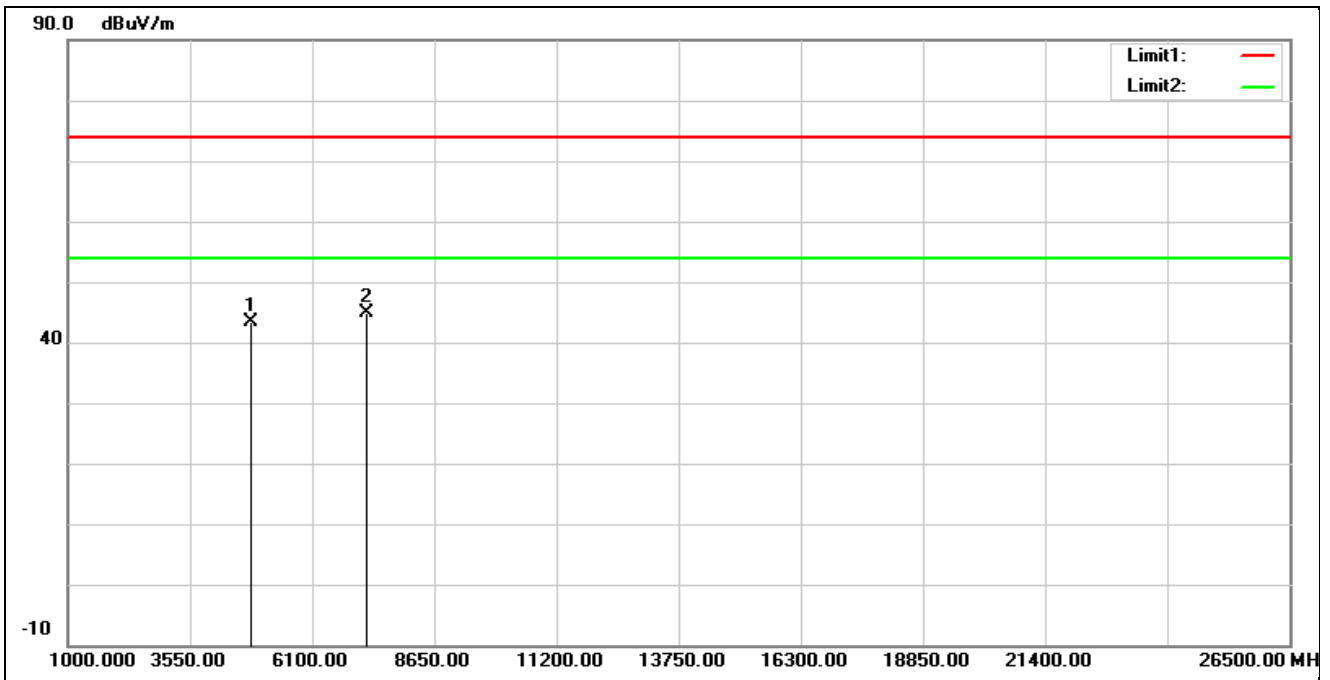

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	42.98	0.28	43.26	74.00	-30.74	peak
2*	7236.000	36.89	7.96	44.85	74.00	-29.15	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

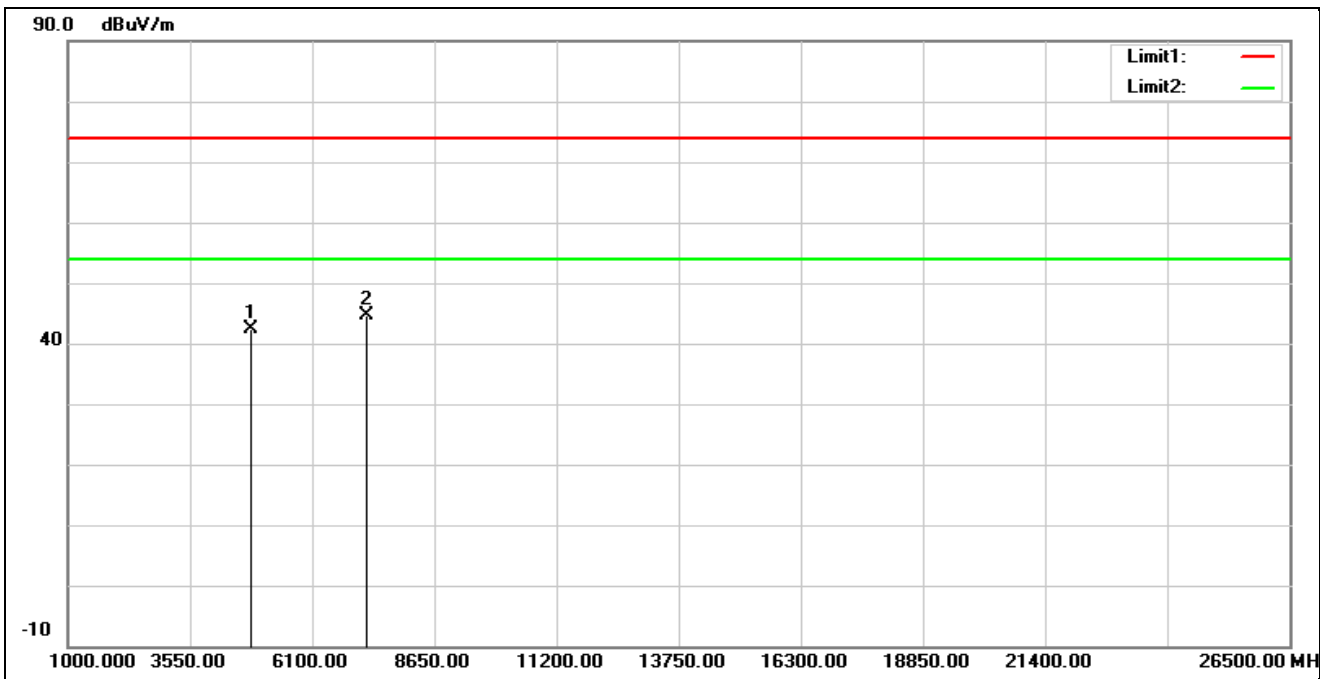

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	42.02	0.28	42.30	74.00	-31.70	peak
2*	7236.000	36.68	7.96	44.64	74.00	-29.36	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

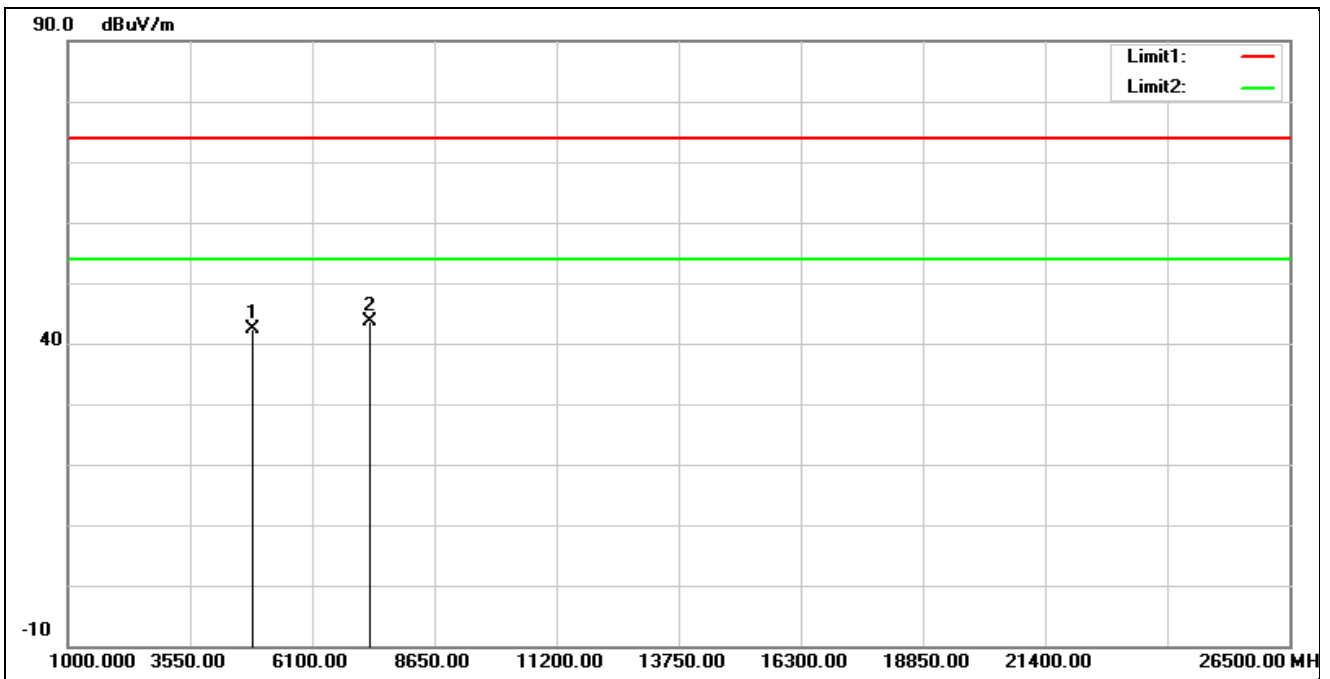


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	41.98	0.36	42.34	74.00	-31.66	peak
2*	7311.000	35.65	7.98	43.63	74.00	-30.37	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

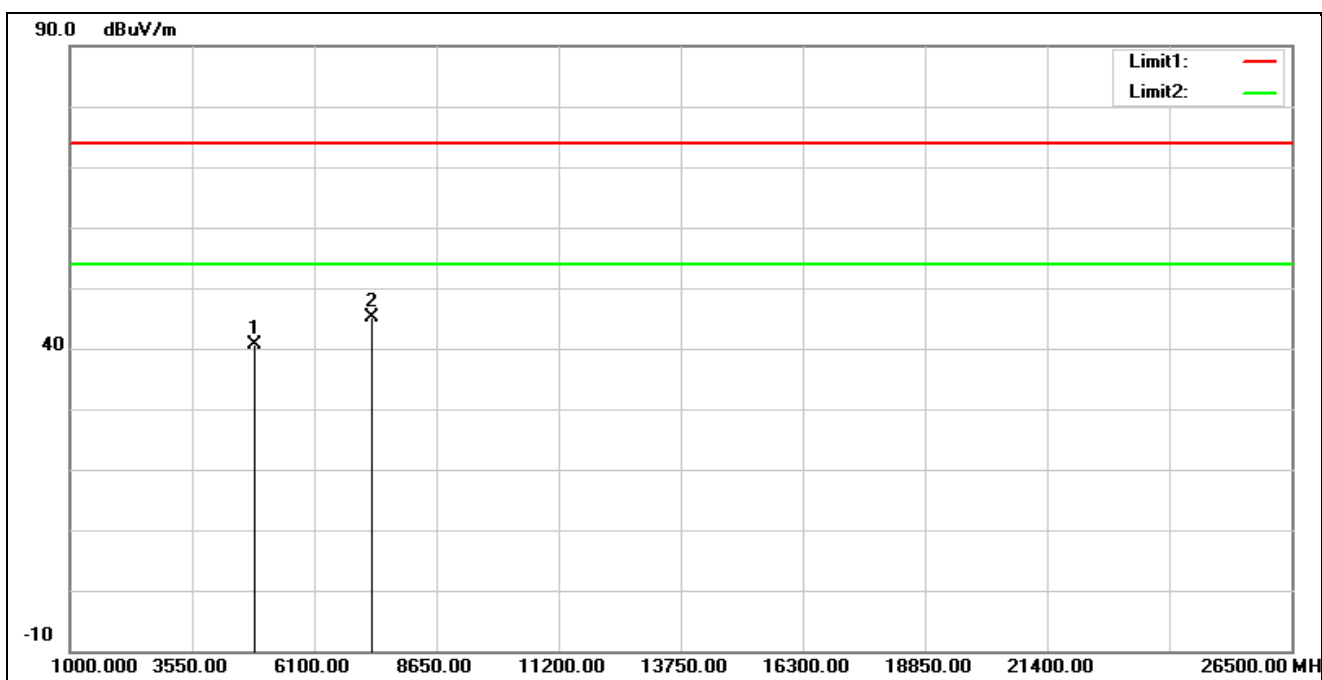


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	40.30	0.36	40.66	74.00	-33.34	peak
2*	7311.000	37.22	7.98	45.20	74.00	-28.80	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

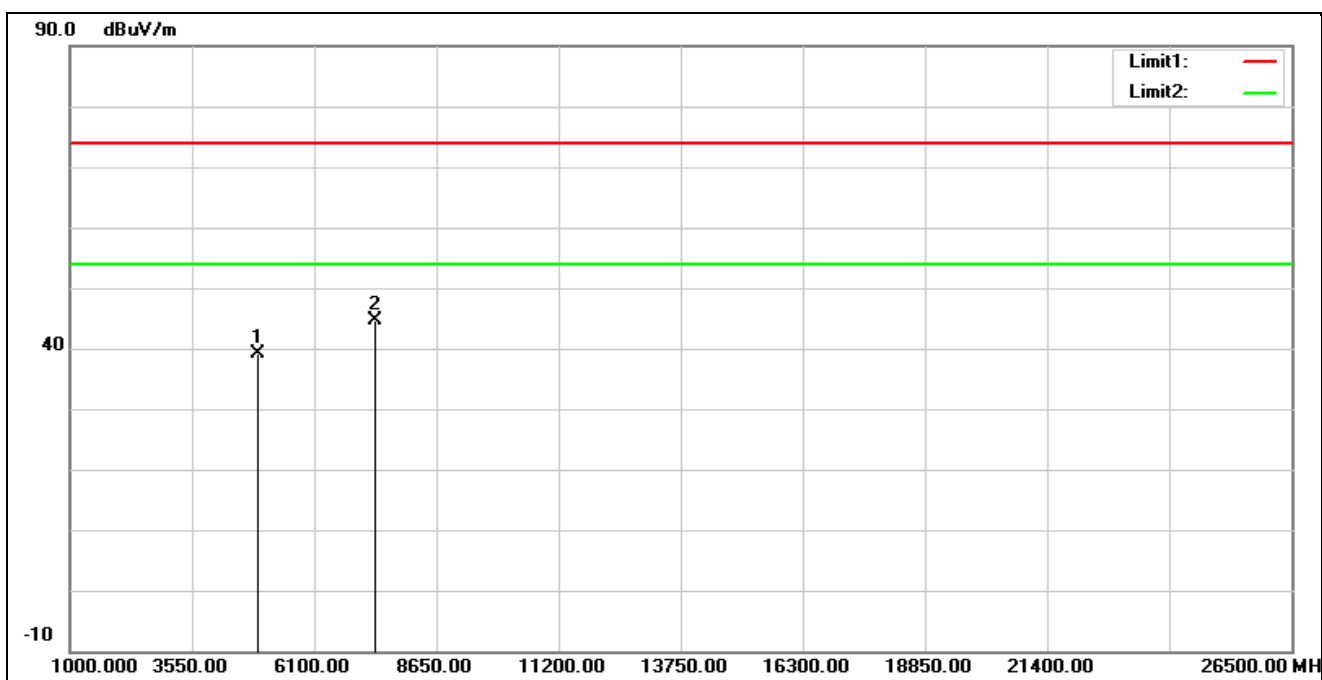


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.69	0.50	39.19	74.00	-34.81	peak
2*	7386.000	36.44	8.11	44.55	74.00	-29.45	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

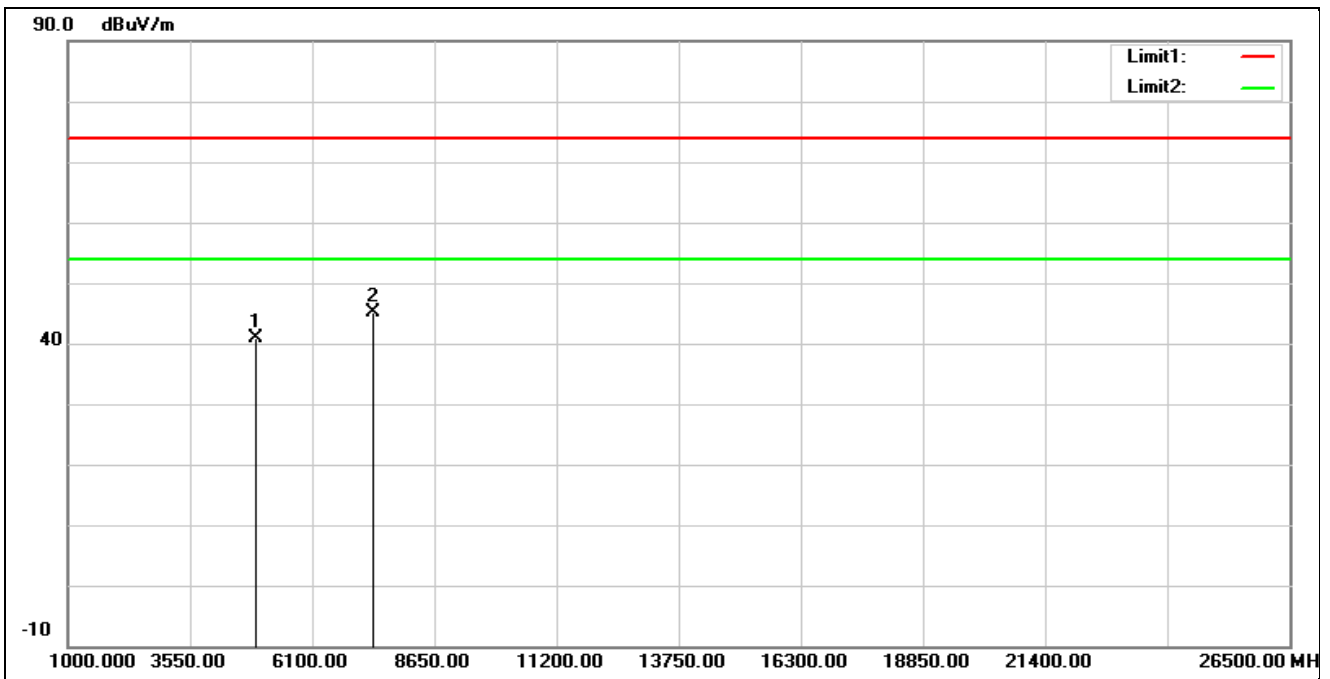


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	40.31	0.50	40.81	74.00	-33.19	peak
2*	7386.000	37.13	8.11	45.24	74.00	-28.76	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

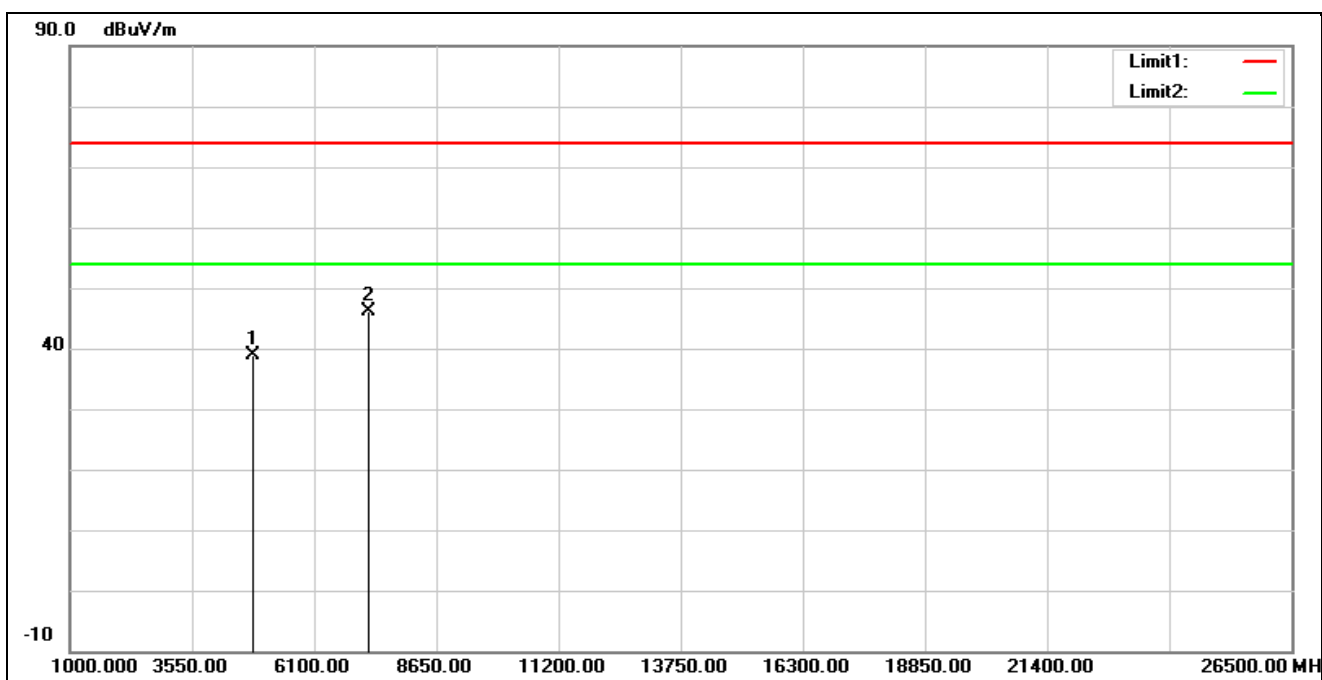


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.63	0.28	38.91	74.00	-35.09	peak
2*	7236.000	38.21	7.96	46.17	74.00	-27.83	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

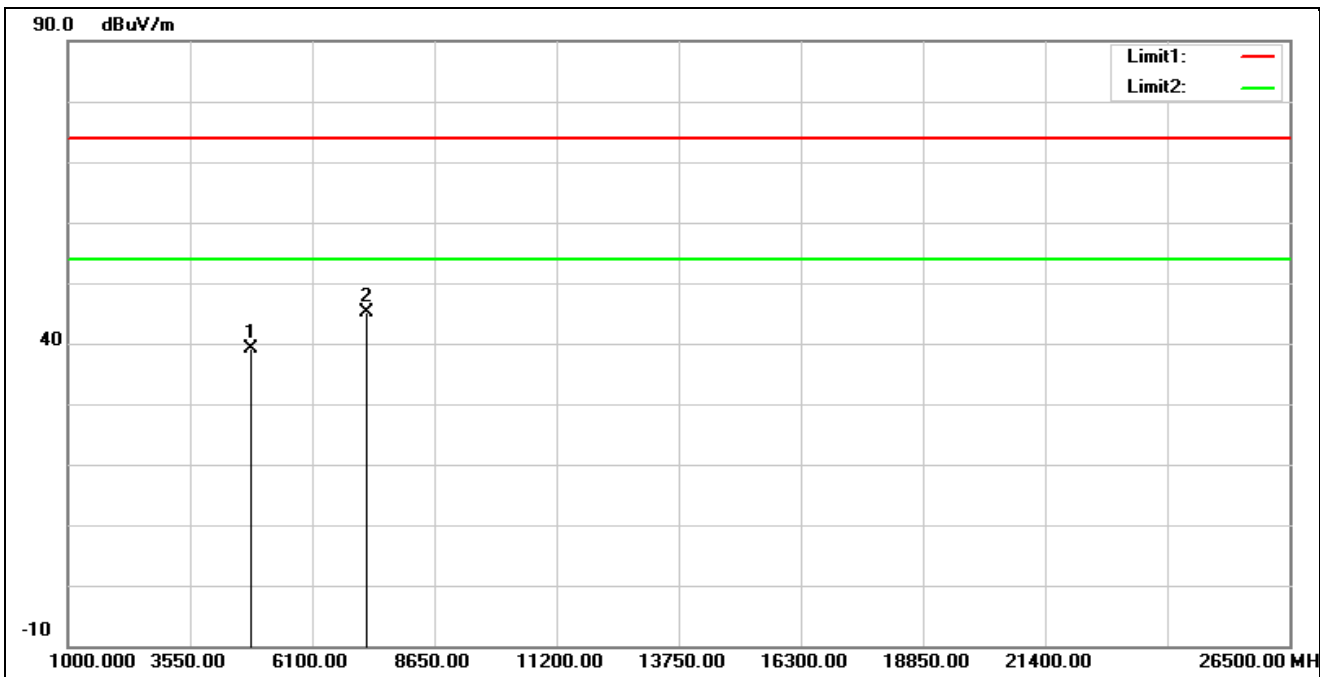


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.77	0.28	39.05	74.00	-34.95	peak
2*	7236.000	37.14	7.96	45.10	74.00	-28.90	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

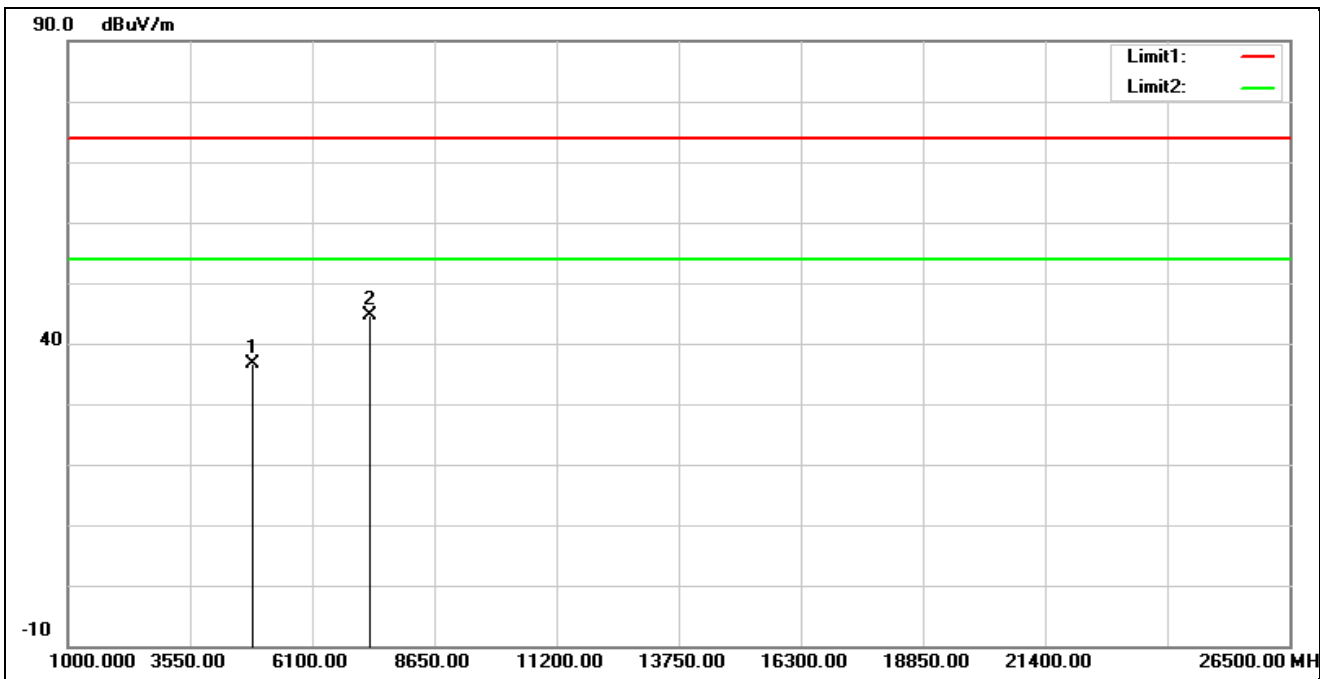

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.32	0.36	36.68	74.00	-37.32	peak
2*	7311.000	36.64	7.98	44.62	74.00	-29.38	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

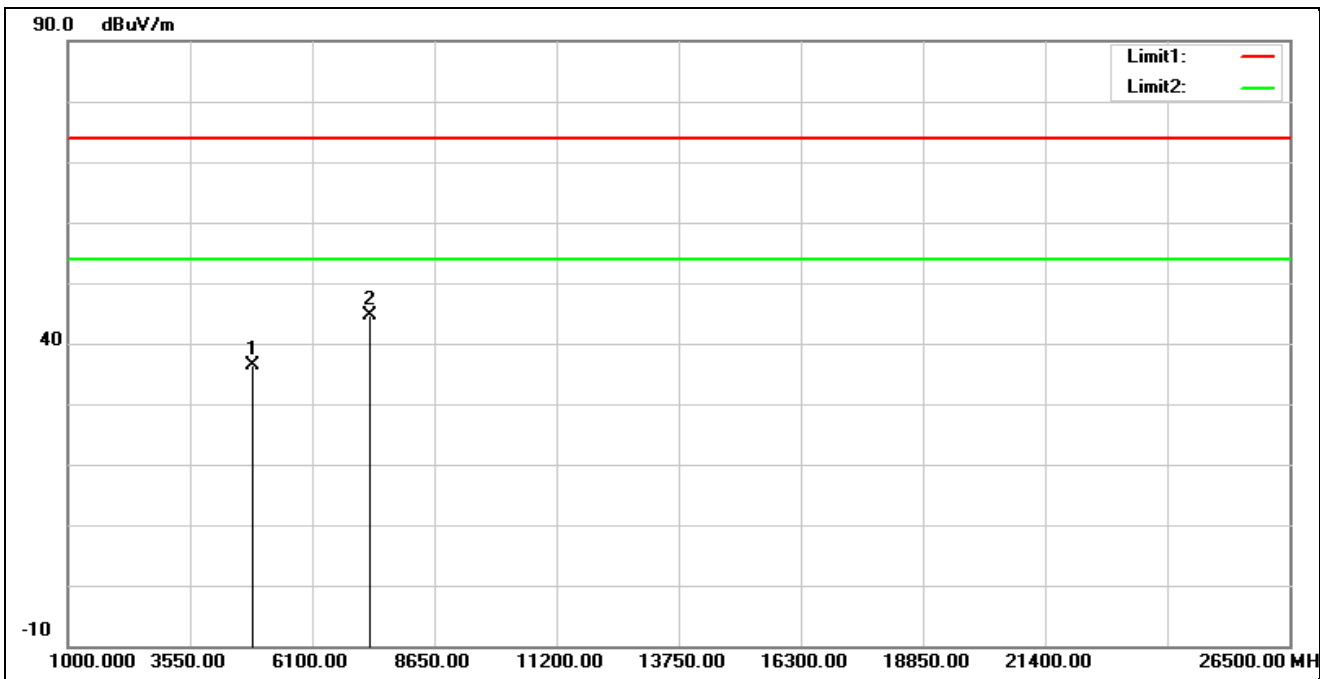

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.08	0.36	36.44	74.00	-37.56	peak
2*	7311.000	36.56	7.98	44.54	74.00	-29.46	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

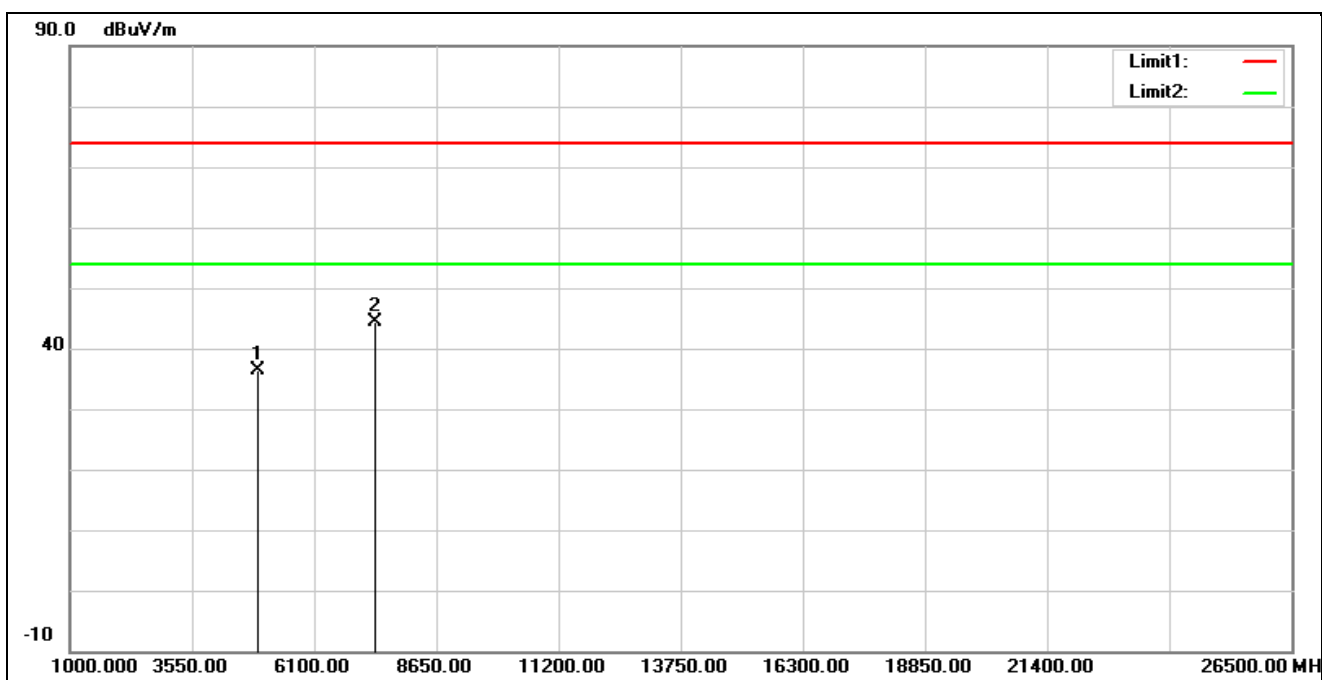


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.81	0.50	36.31	74.00	-37.69	peak
2*	7386.000	36.23	8.11	44.34	74.00	-29.66	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

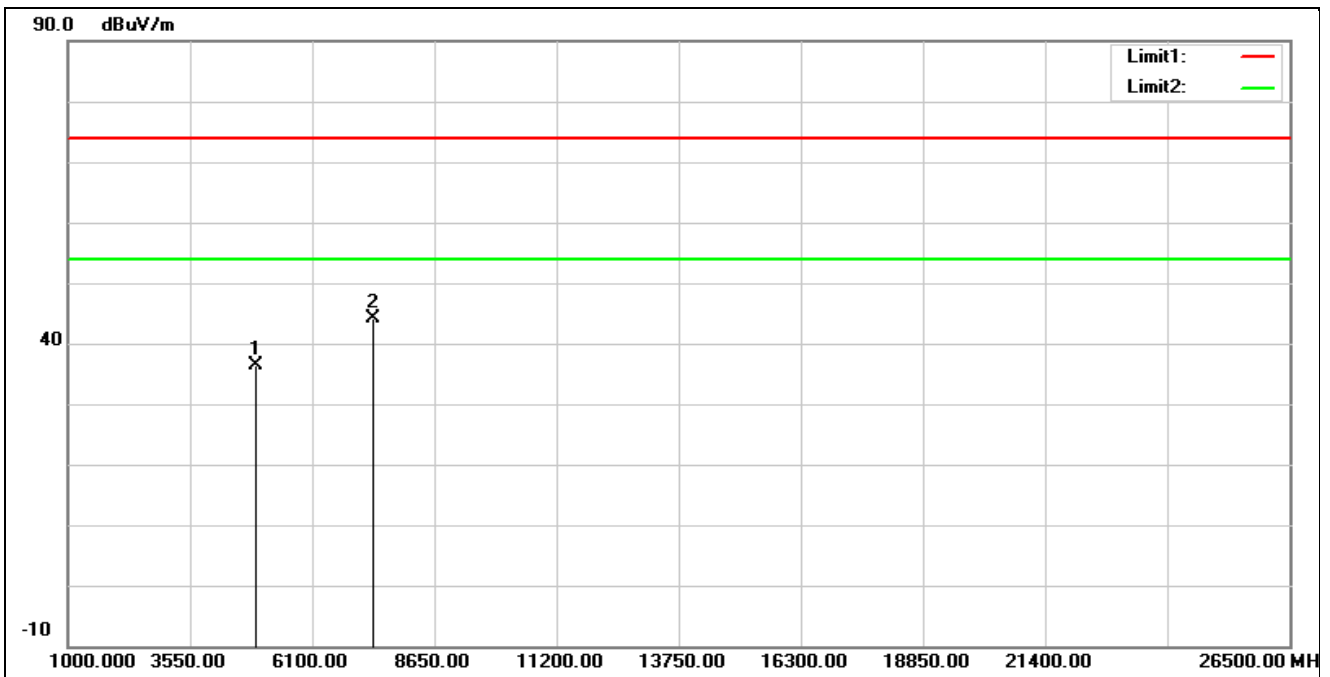


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.92	0.50	36.42	74.00	-37.58	peak
2*	7386.000	35.94	8.11	44.05	74.00	-29.95	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

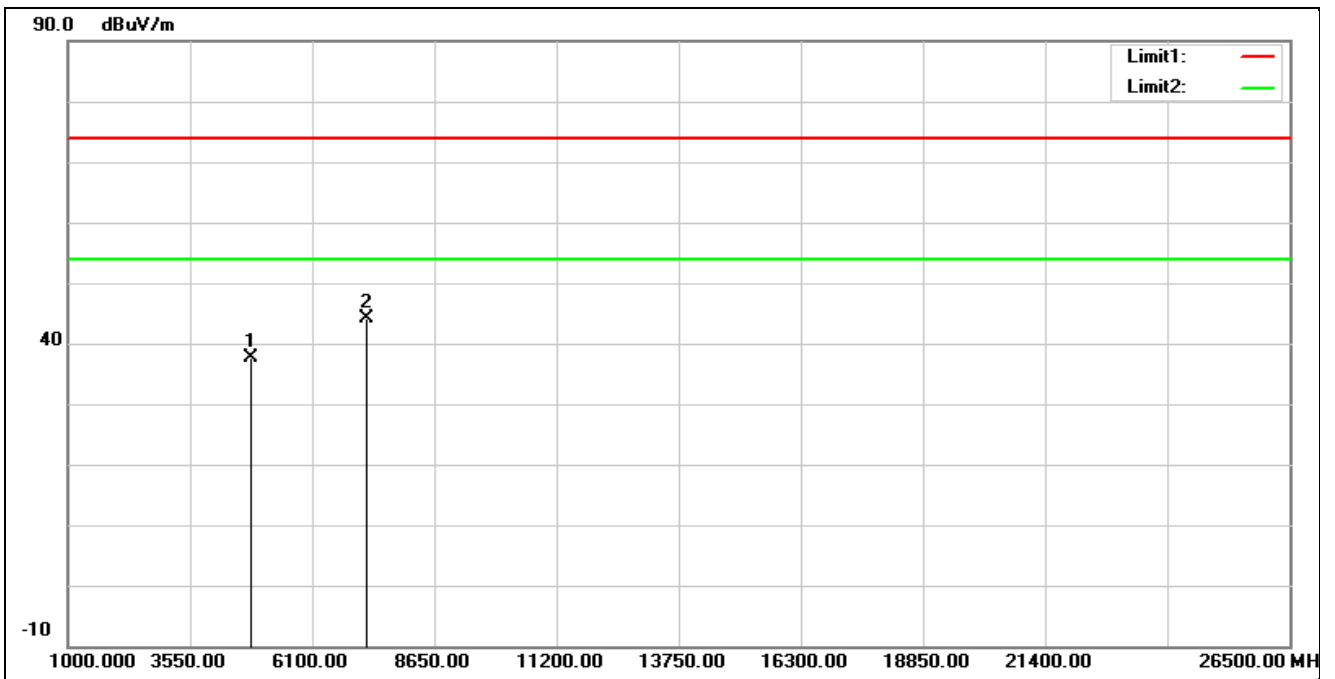


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.92	-0.23	37.69	74.00	-36.31	peak
2*	7236.000	37.52	6.52	44.04	74.00	-29.96	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

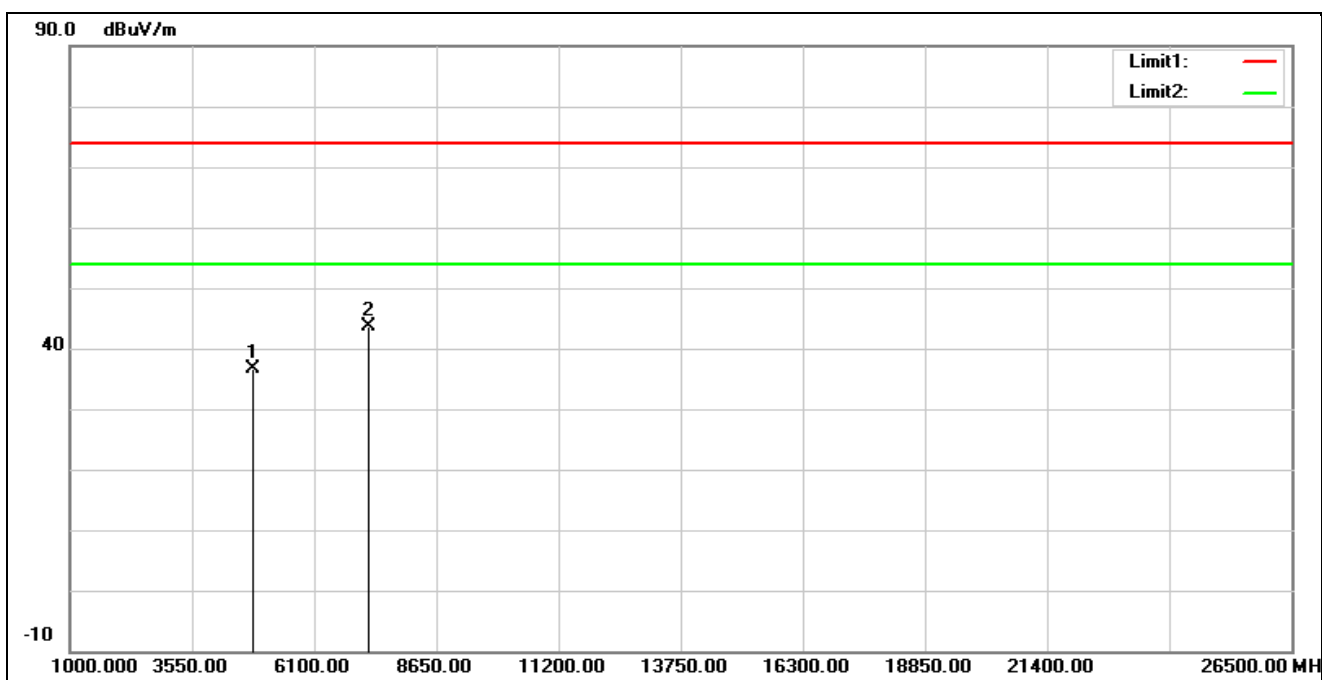


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.80	-0.23	36.57	74.00	-37.43	peak
2*	7236.000	37.23	6.52	43.75	74.00	-30.25	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

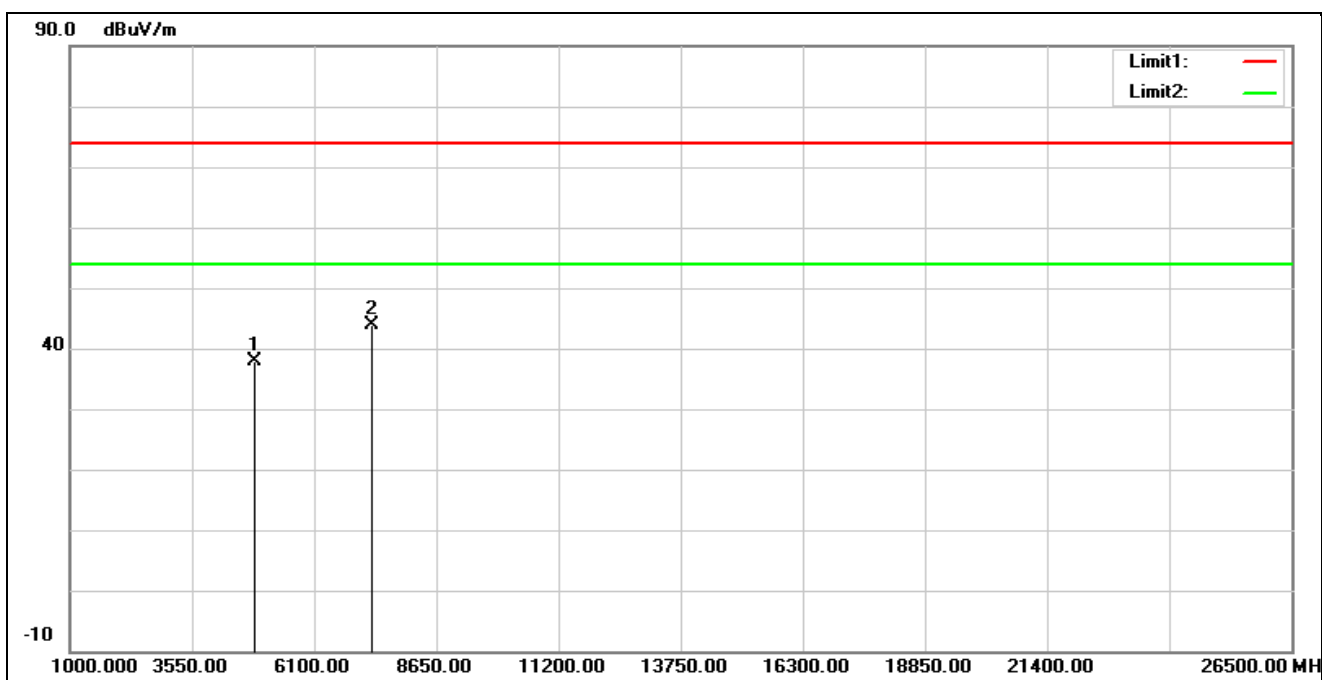


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.13	-0.13	38.00	74.00	-36.00	peak
2*	7311.000	37.63	6.23	43.86	74.00	-30.14	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

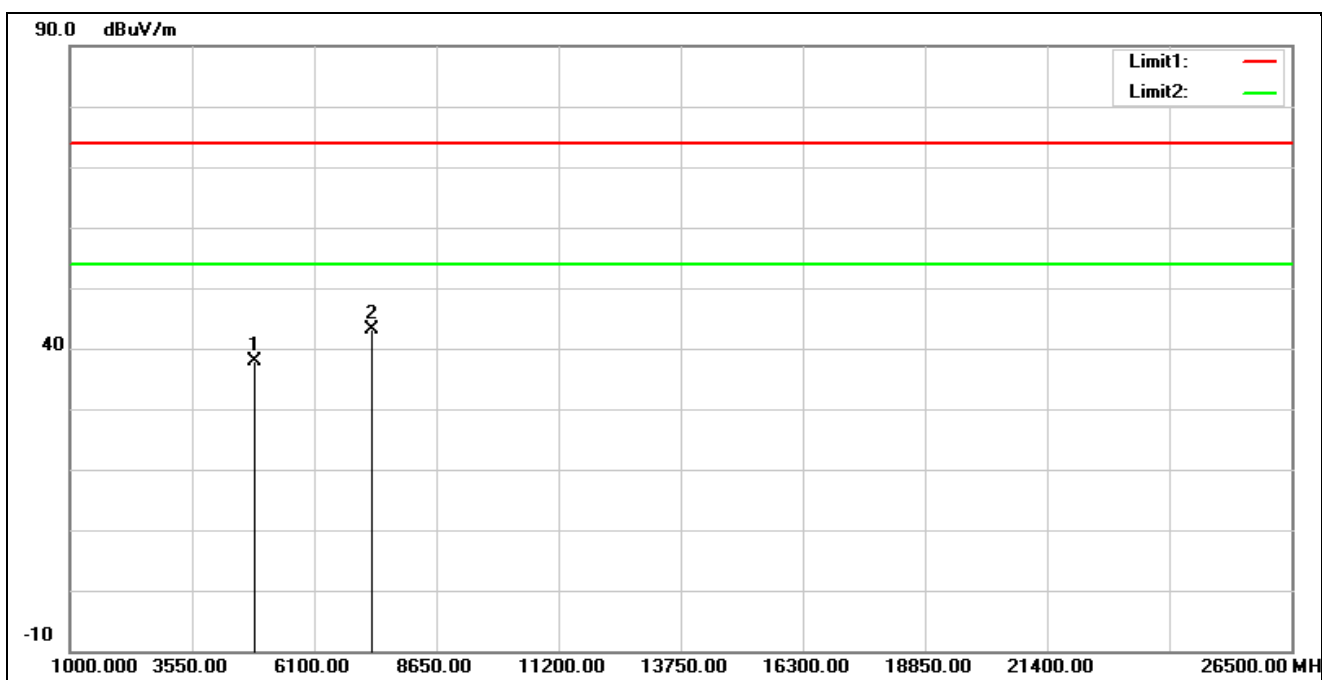


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.03	-0.13	37.90	74.00	-36.10	peak
2*	7311.000	36.86	6.23	43.09	74.00	-30.91	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

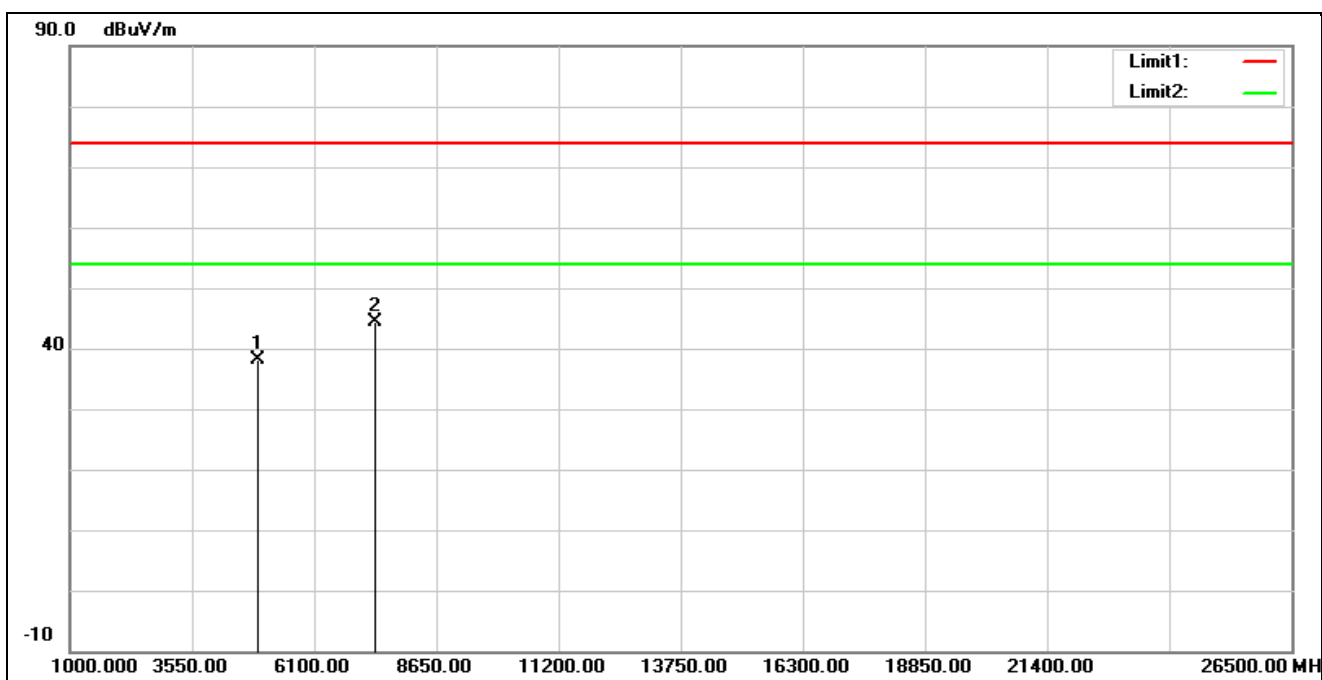

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.01	0.01	38.02	74.00	-35.98	peak
2*	7386.000	37.99	6.33	44.32	74.00	-29.68	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

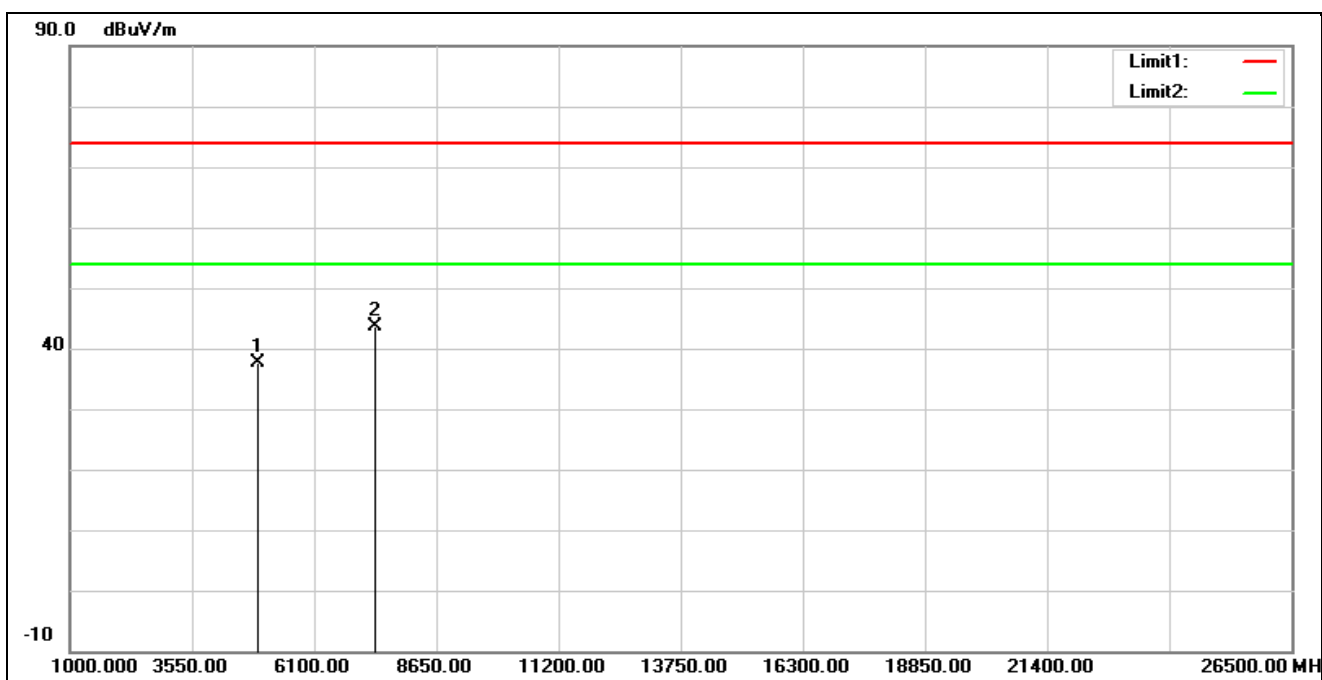

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.50	0.01	37.51	74.00	-36.49	peak
2*	7386.000	37.36	6.33	43.69	74.00	-30.31	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

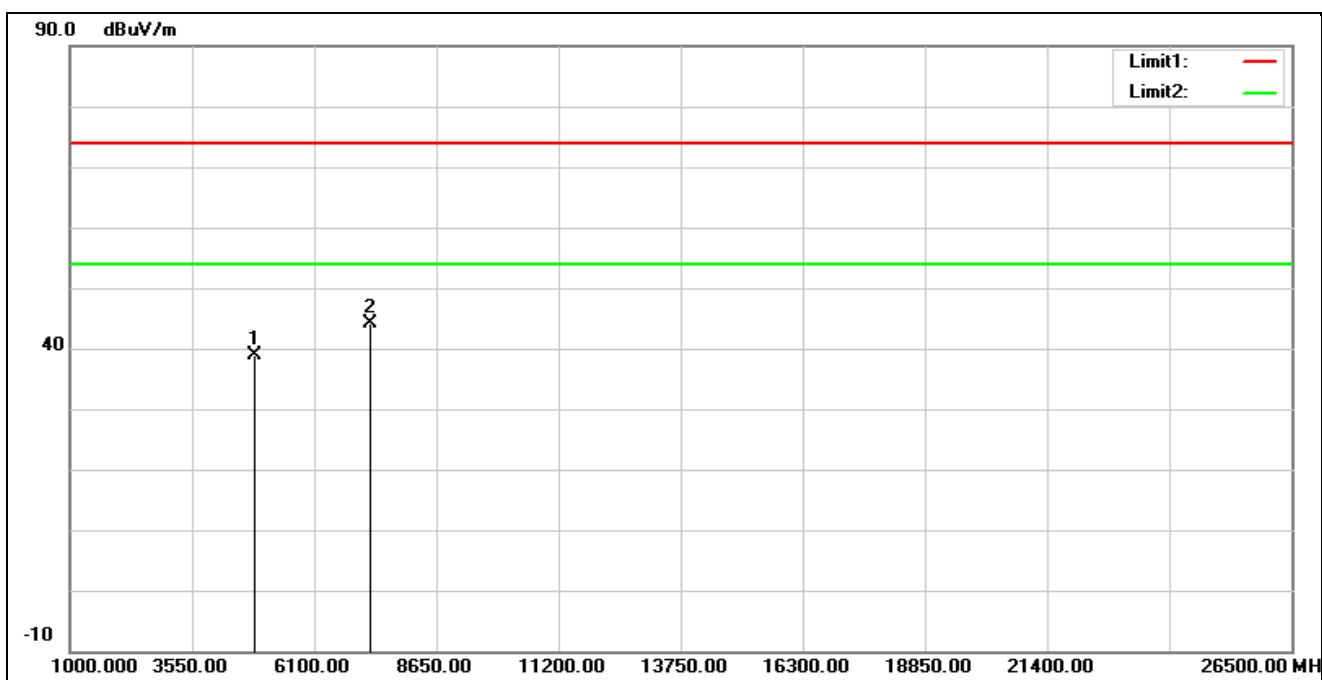


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.99	-0.15	38.84	74.00	-35.16	peak
2*	7266.000	37.66	6.45	44.11	74.00	-29.89	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

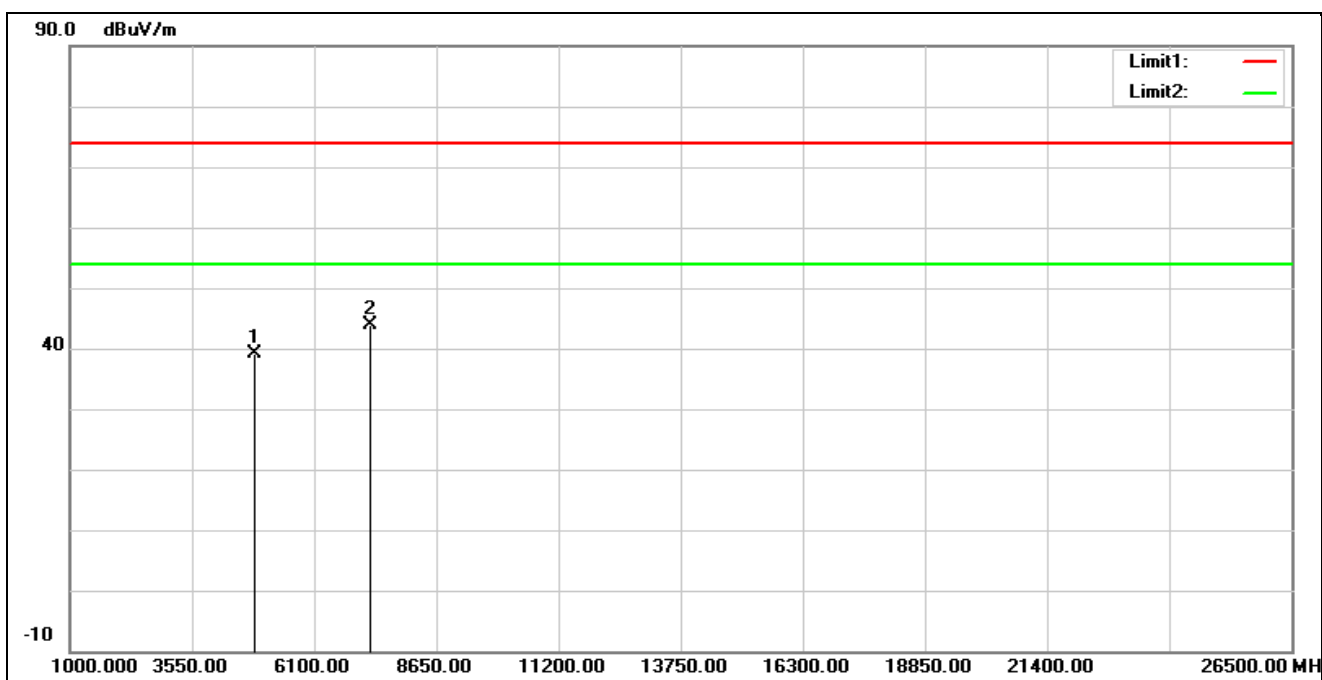


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	39.36	-0.15	39.21	74.00	-34.79	peak
2*	7266.000	37.47	6.45	43.92	74.00	-30.08	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

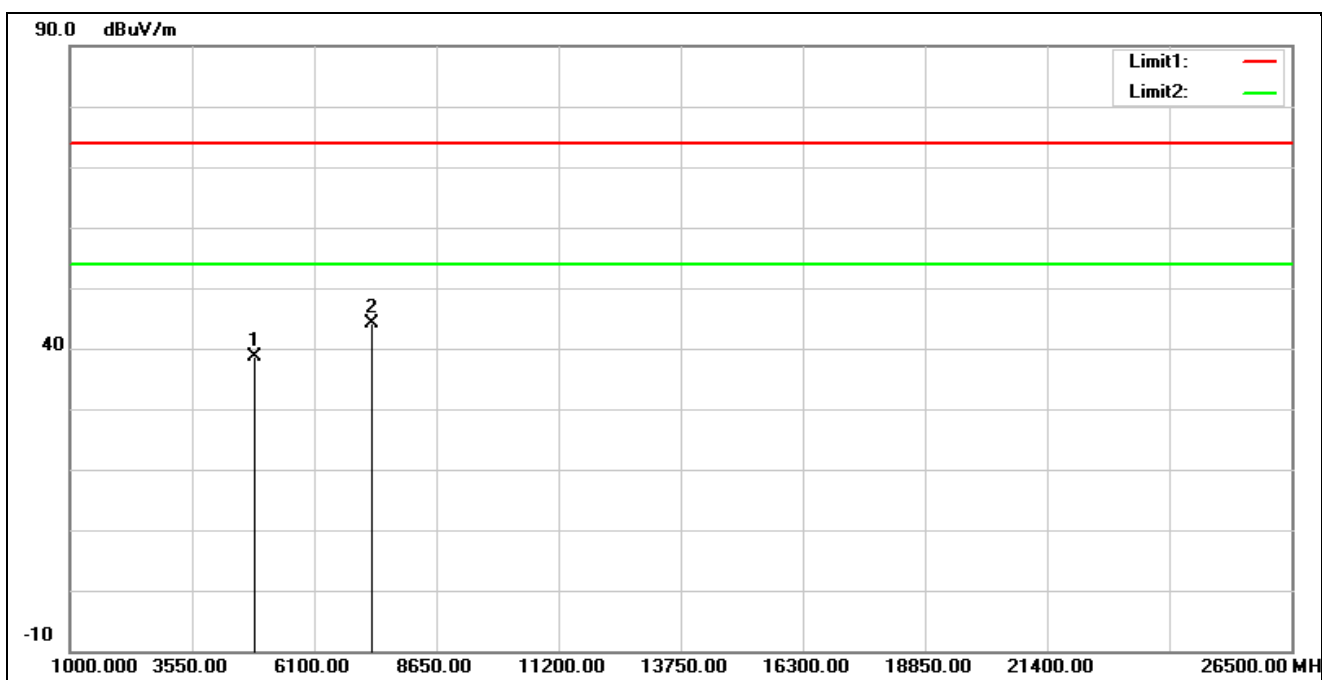


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.71	-0.13	38.58	74.00	-35.42	peak
2*	7311.000	37.88	6.23	44.11	74.00	-29.89	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

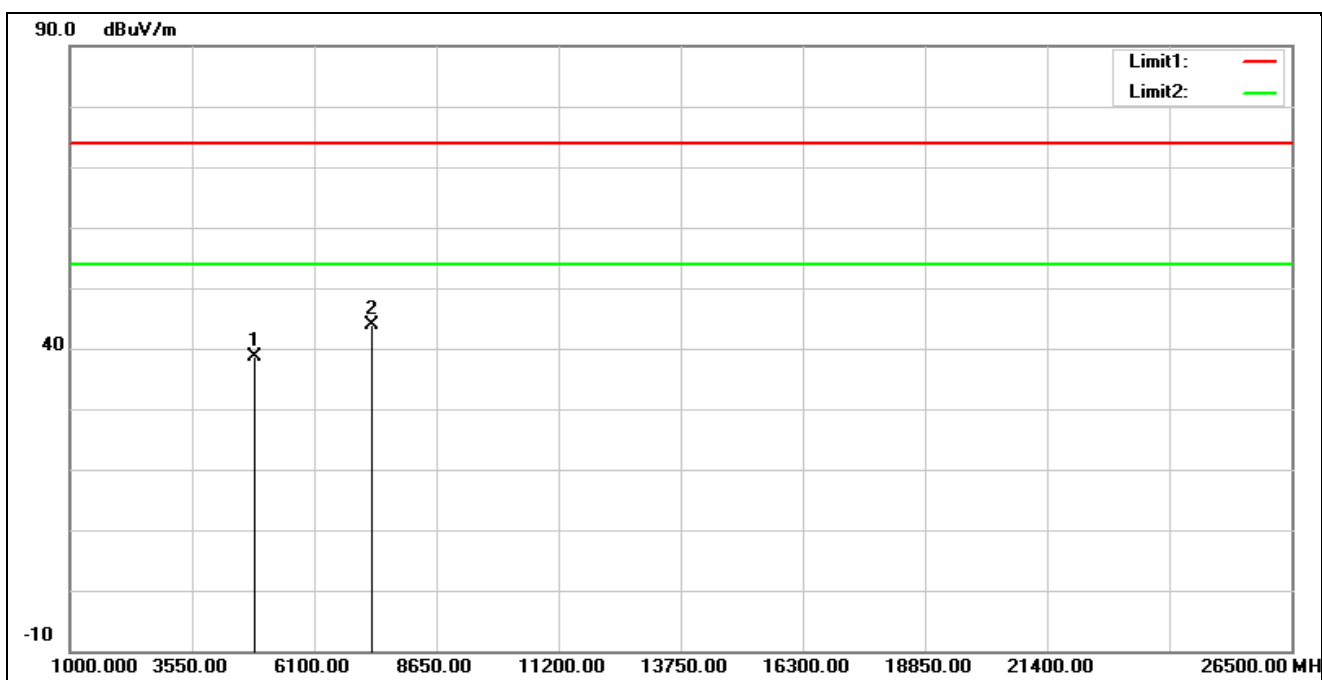


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.76	-0.13	38.63	74.00	-35.37	peak
2*	7311.000	37.54	6.23	43.77	74.00	-30.23	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

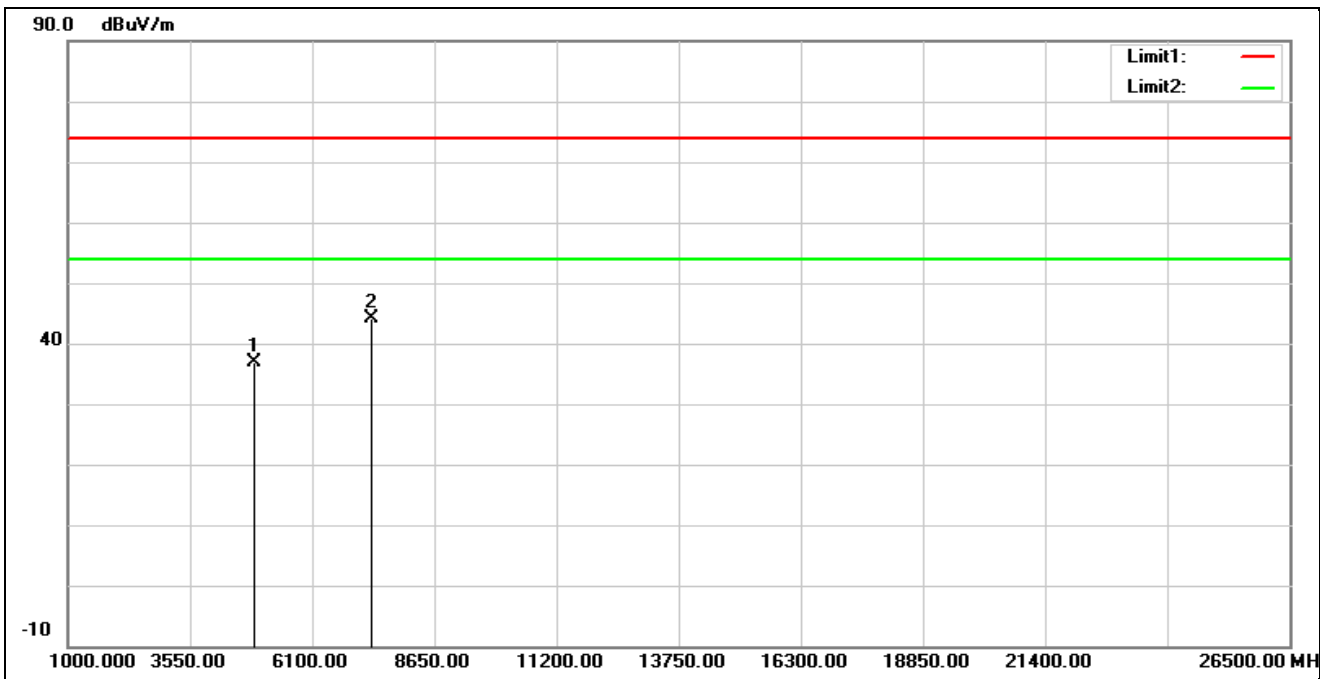


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.01	-0.11	36.90	74.00	-37.10	peak
2*	7356.000	37.86	6.19	44.05	74.00	-29.95	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

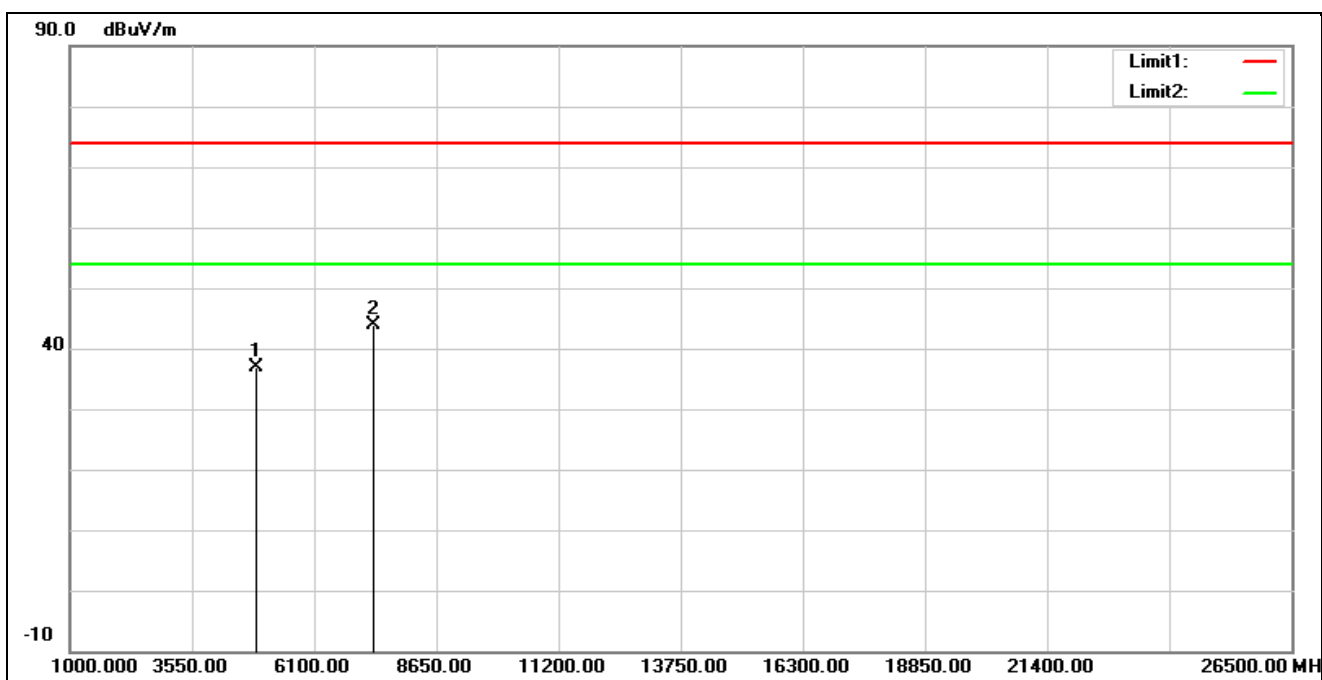


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	36.95	-0.11	36.84	74.00	-37.16	peak
2*	7356.000	37.66	6.19	43.85	74.00	-30.15	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

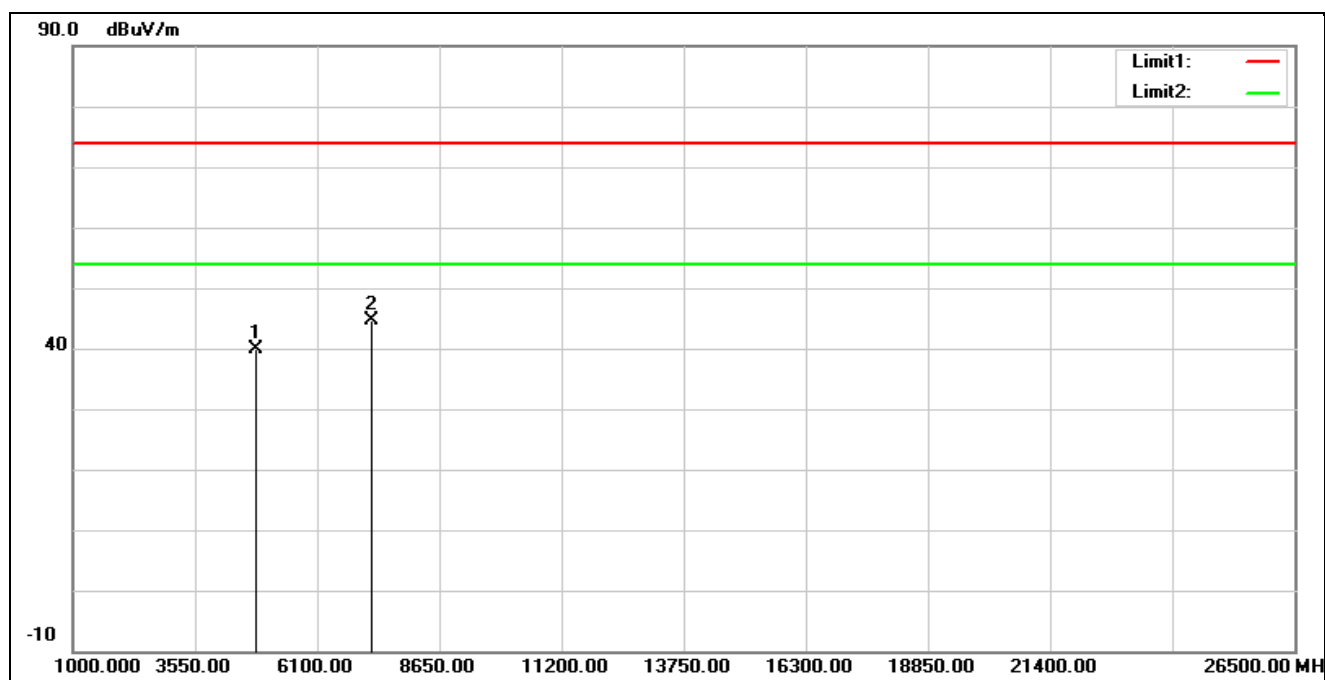

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	39.67	0.28	39.95	74.00	-34.05	peak
2*	7236.000	36.70	7.96	44.66	74.00	-29.34	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

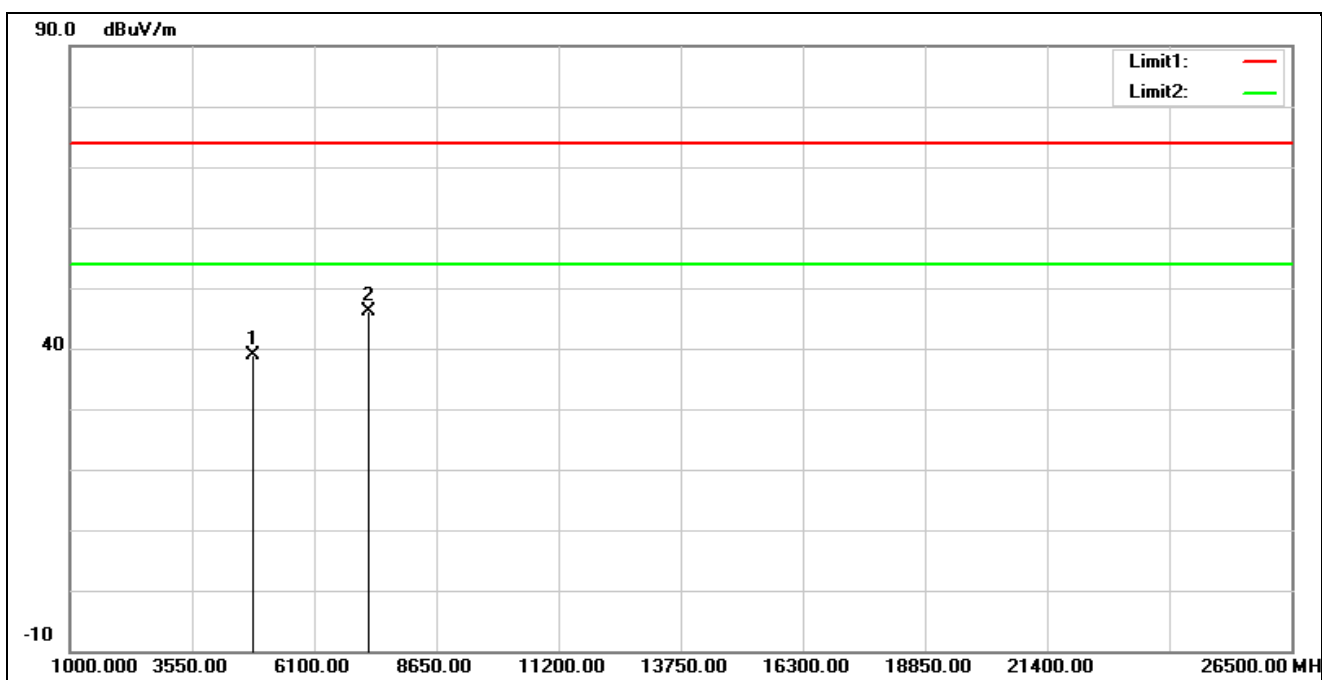

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.58	0.28	38.86	74.00	-35.14	peak
2*	7236.000	38.20	7.96	46.16	74.00	-27.84	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

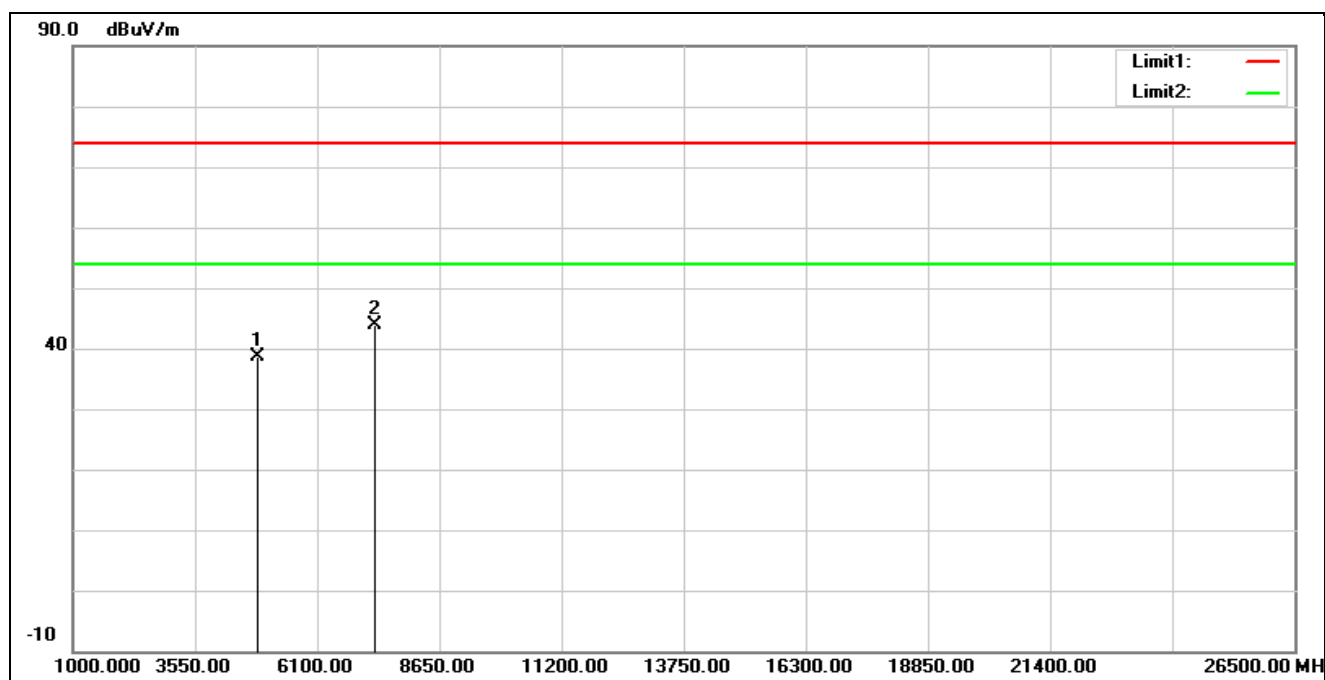


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.33	0.36	38.69	74.00	-35.31	peak
2*	7311.000	35.80	7.98	43.78	74.00	-30.22	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

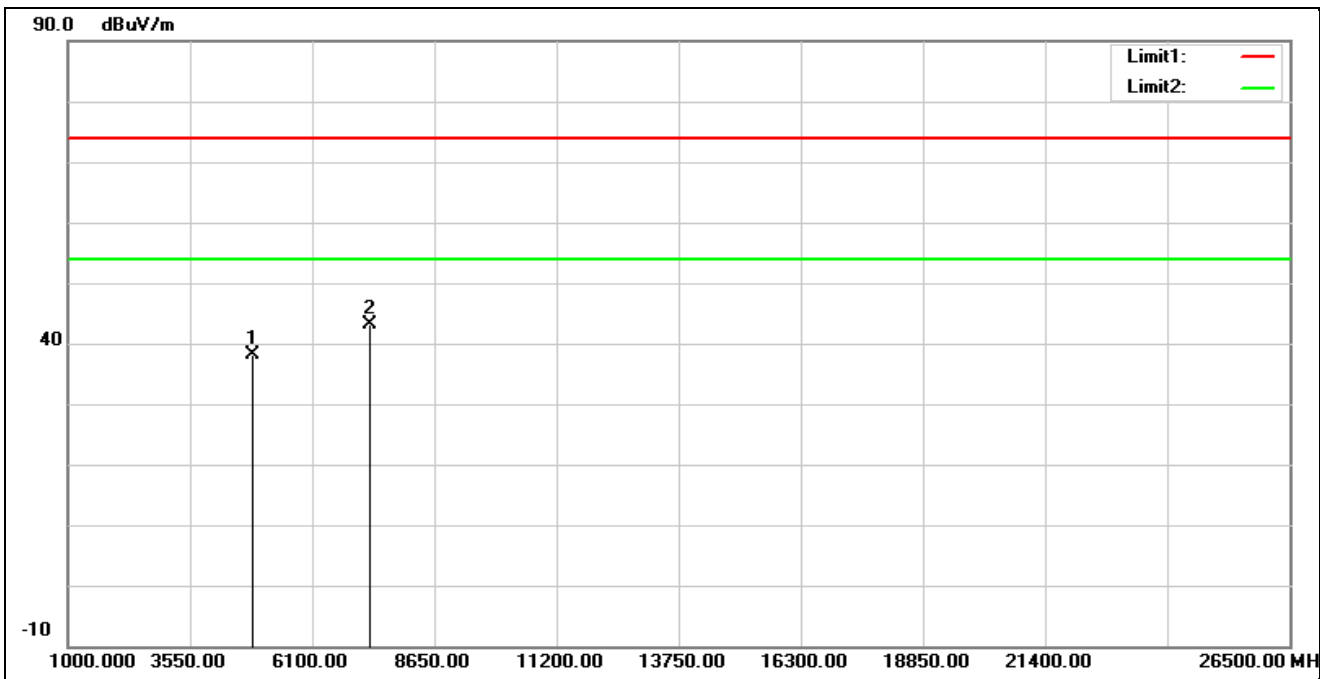


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.79	0.36	38.15	74.00	-35.85	peak
2*	7311.000	35.18	7.98	43.16	74.00	-30.84	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

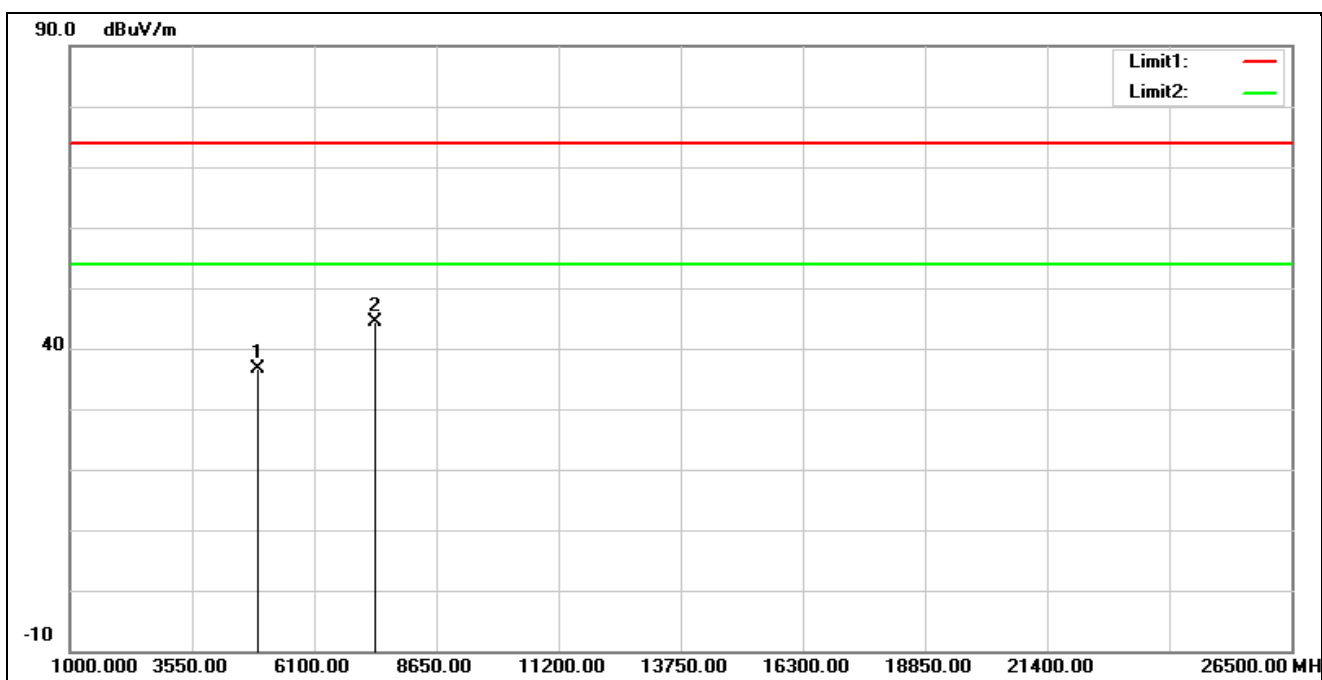


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.25	0.50	36.75	74.00	-37.25	peak
2*	7386.000	36.31	8.11	44.42	74.00	-29.58	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

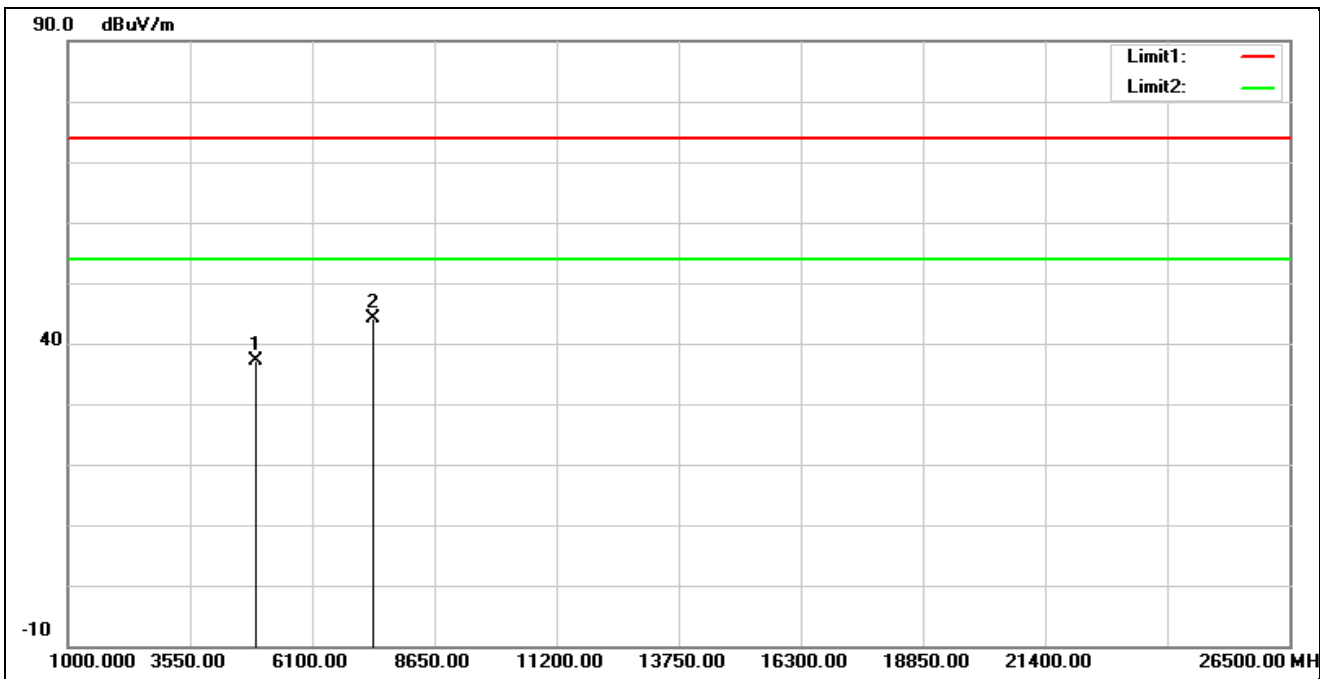


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.72	0.50	37.22	74.00	-36.78	peak
2*	7386.000	35.99	8.11	44.10	74.00	-29.90	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

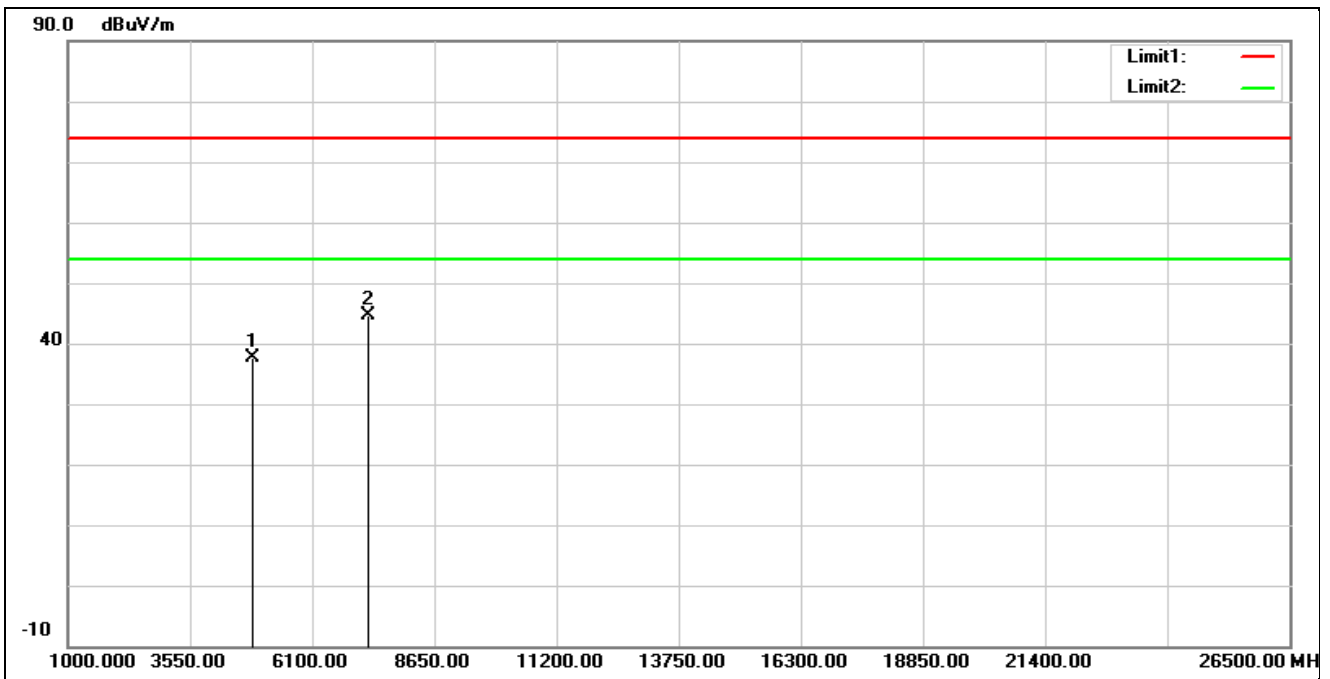


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.38	0.28	37.66	74.00	-36.34	peak
2*	7266.000	36.63	8.02	44.65	74.00	-29.35	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

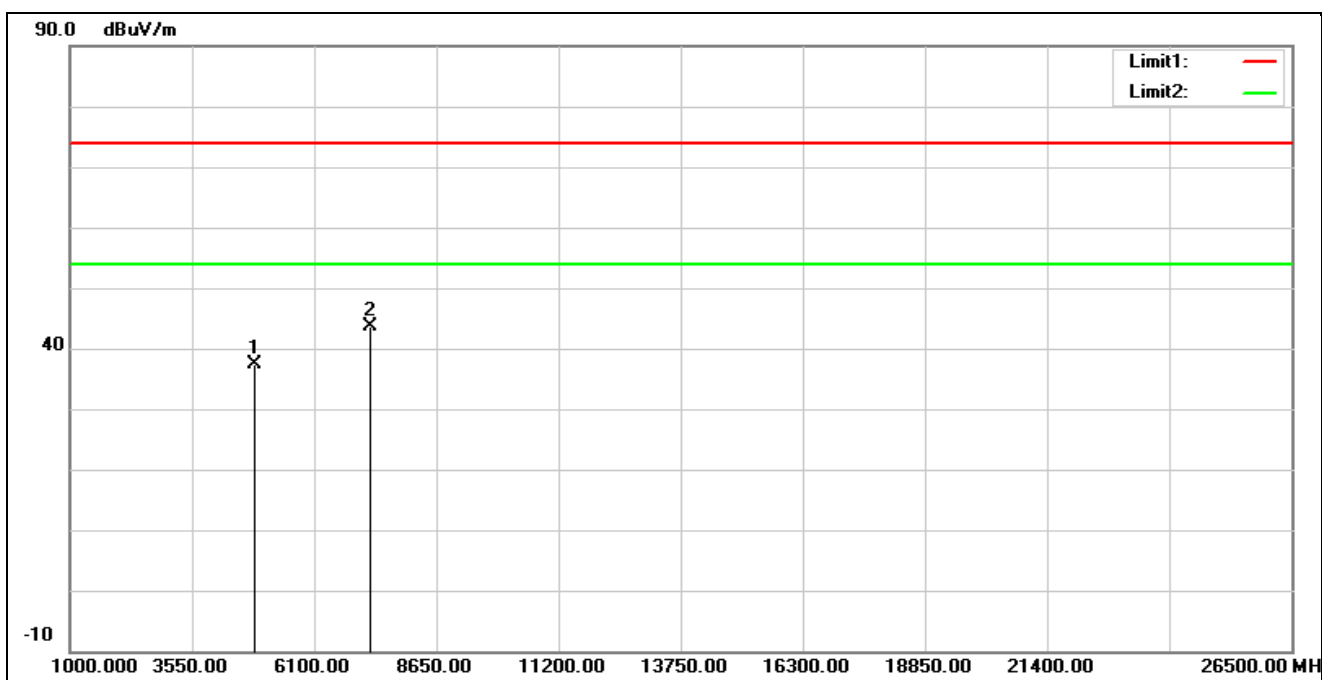


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.10	0.28	37.38	74.00	-36.62	peak
2*	7266.000	35.55	8.02	43.57	74.00	-30.43	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

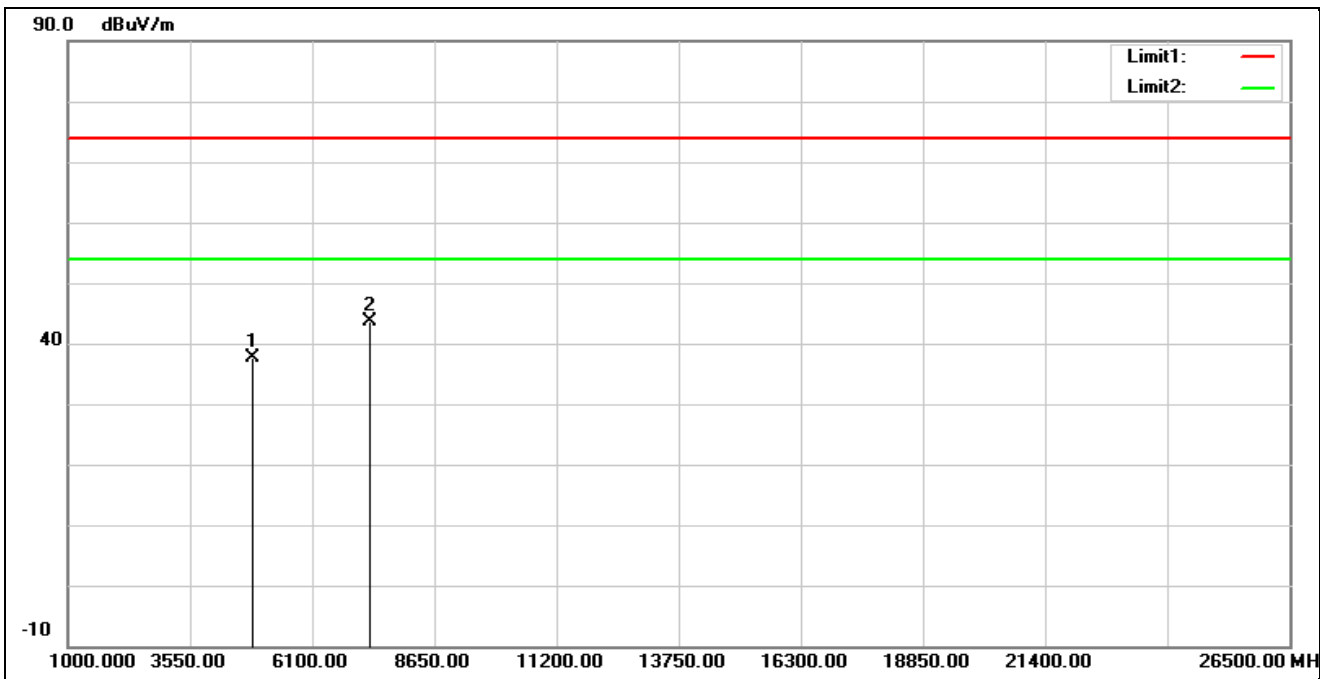

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.15	0.36	37.51	74.00	-36.49	peak
2*	7311.000	35.61	7.98	43.59	74.00	-30.41	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

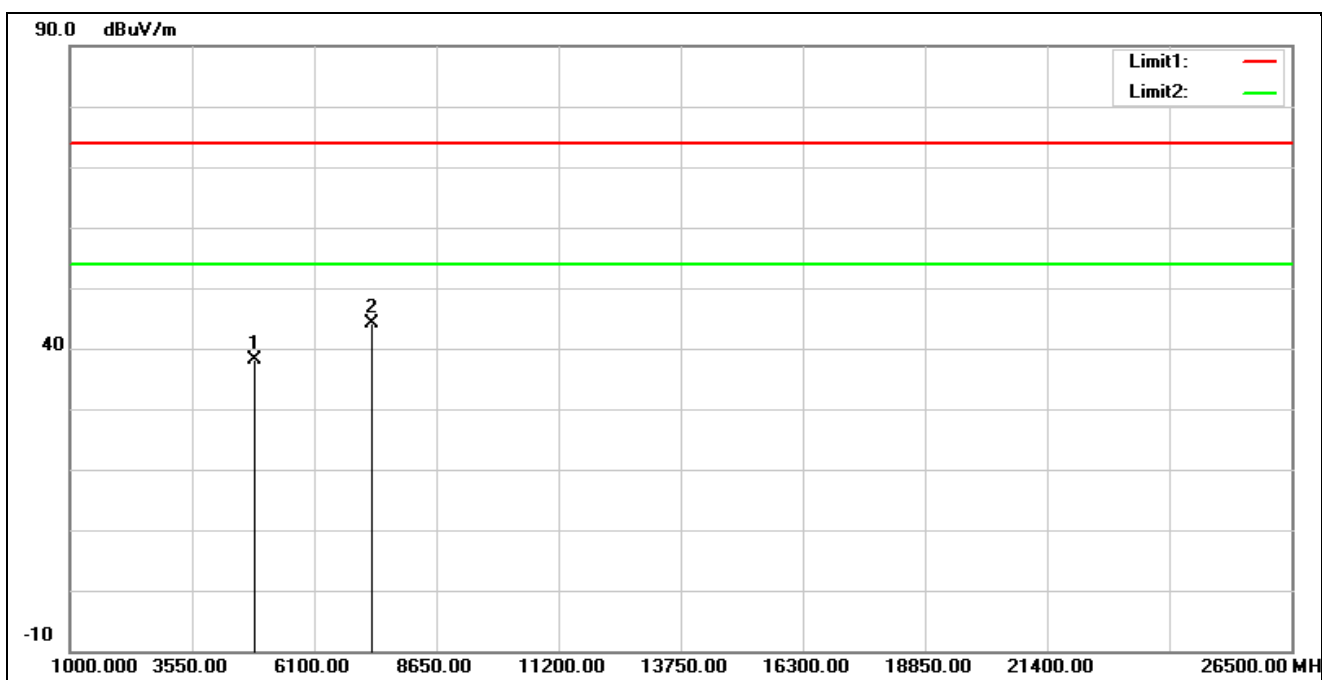

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.80	0.36	38.16	74.00	-35.84	peak
2*	7311.000	36.20	7.98	44.18	74.00	-29.82	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

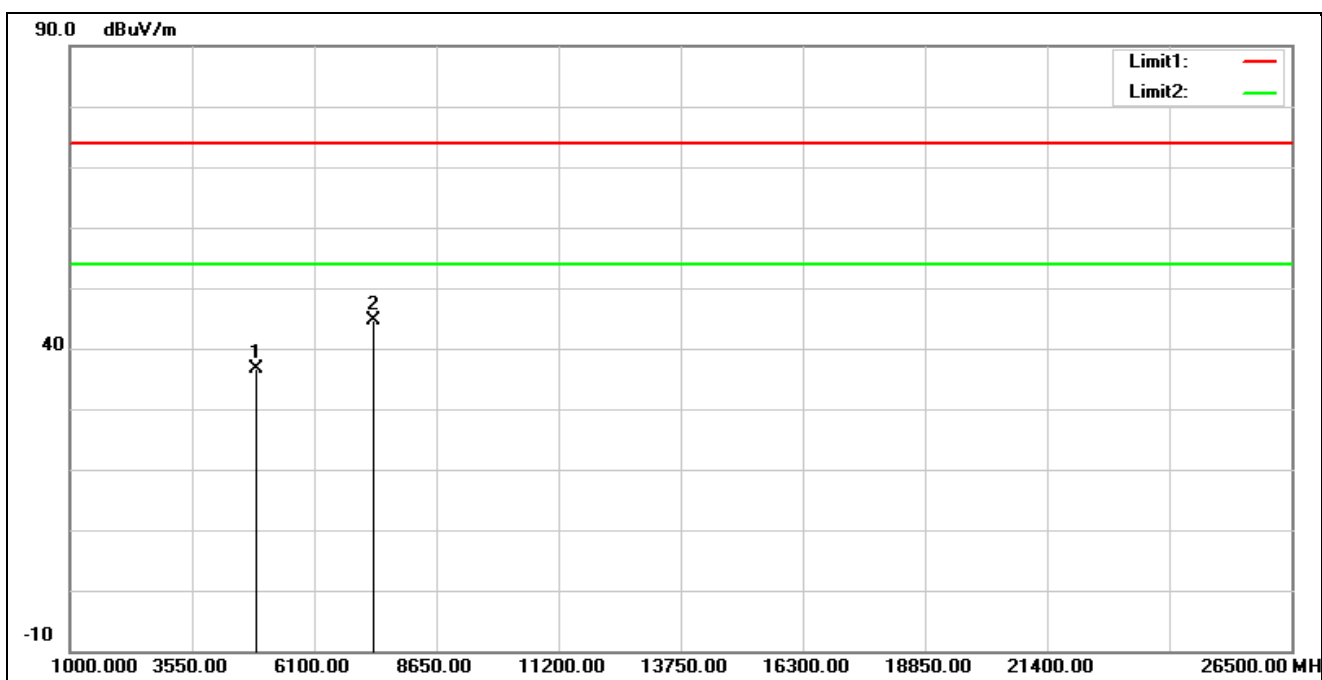

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	36.24	0.46	36.70	74.00	-37.30	peak
2*	7356.000	36.72	8.02	44.74	74.00	-29.26	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

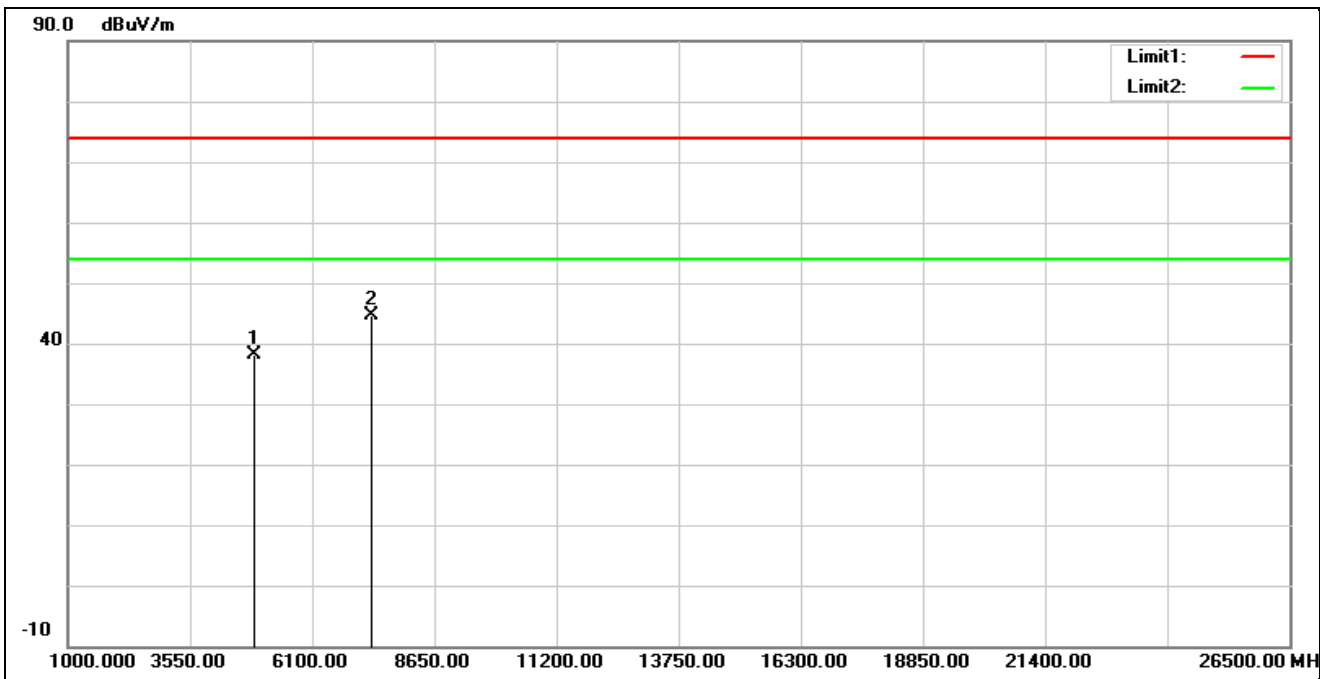


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.76	0.46	38.22	74.00	-35.78	peak
2*	7356.000	36.53	8.02	44.55	74.00	-29.45	peak

Band Edge


1X1 - Peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

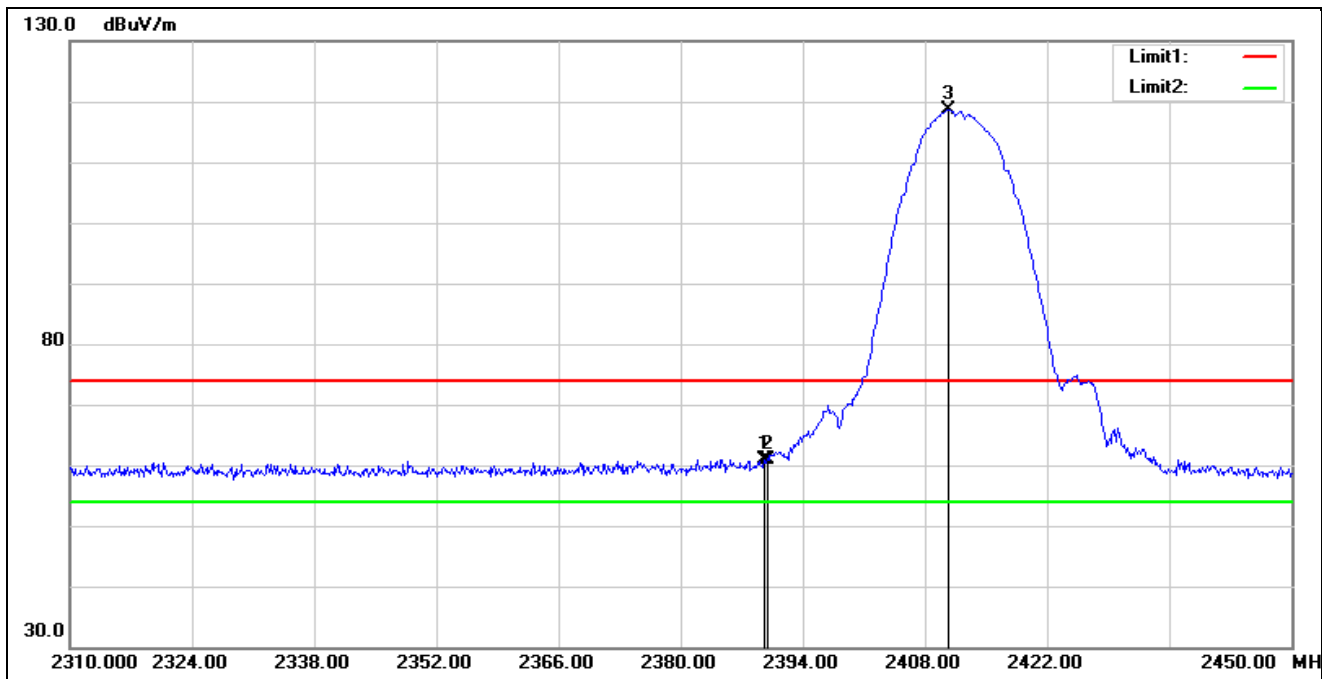


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	67.18	-6.19	60.99	74.00	-13.01	peak
2	2390.000	67.10	-6.19	60.91	74.00	-13.09	peak
3*	2410.660	124.87	-6.26	118.61	74.00	44.61	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

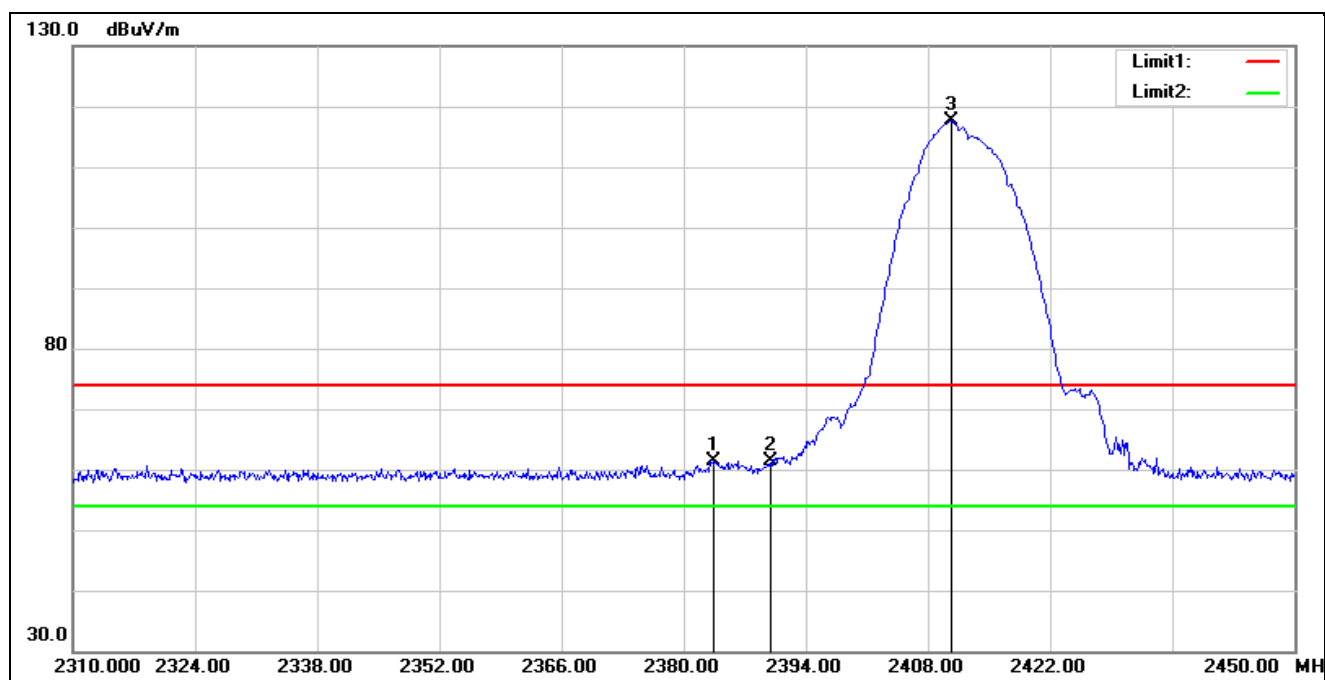


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.360	67.52	-6.16	61.36	74.00	-12.64	peak
2	2390.000	67.52	-6.19	61.33	74.00	-12.67	peak
3*	2410.660	123.83	-6.26	117.57	74.00	43.57	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

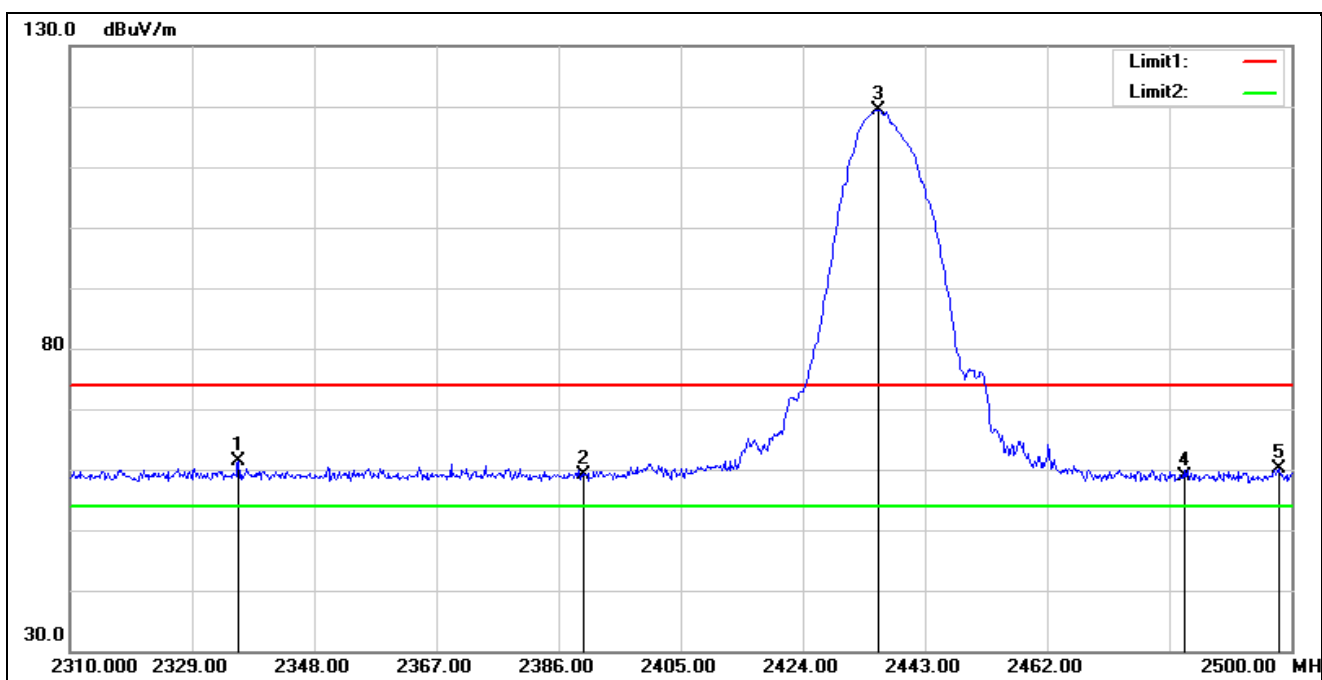


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.220	67.39	-6.04	61.35	74.00	-12.65	peak
2	2390.000	65.26	-6.19	59.07	74.00	-14.93	peak
3*	2435.780	125.77	-6.33	119.44	74.00	45.44	peak
4	2483.500	65.41	-6.46	58.95	74.00	-15.05	peak
5	2498.100	66.65	-6.50	60.15	74.00	-13.85	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

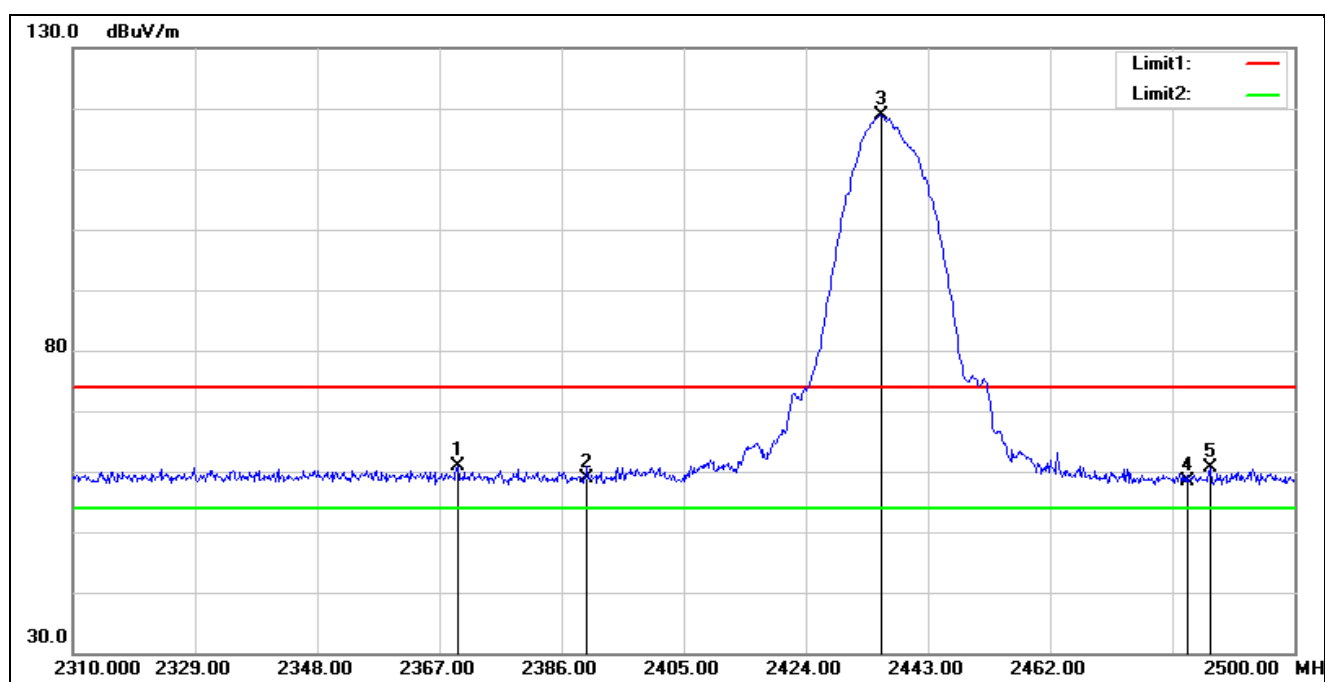


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.850	66.90	-6.09	60.81	74.00	-13.19	peak
2	2390.000	65.07	-6.19	58.88	74.00	-15.12	peak
3*	2435.780	125.20	-6.33	118.87	74.00	44.87	peak
4	2483.500	64.89	-6.46	58.43	74.00	-15.57	peak
5	2486.890	67.09	-6.47	60.62	74.00	-13.38	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

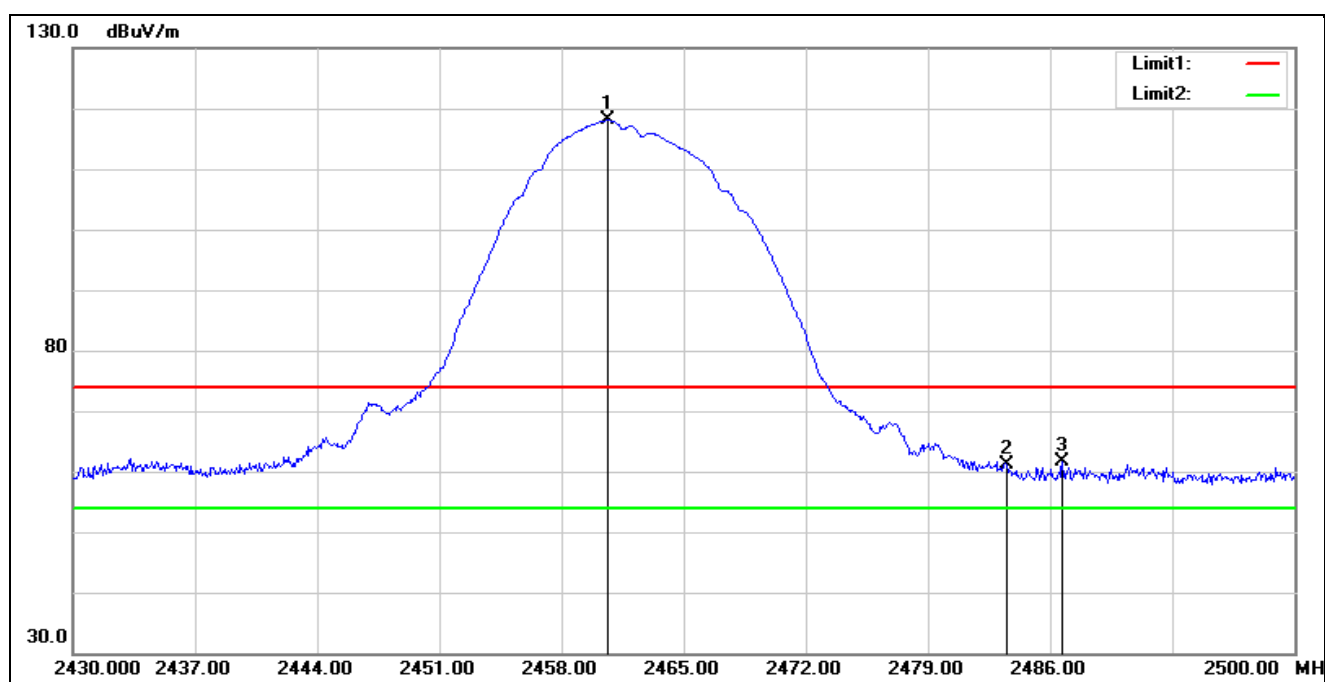

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.660	124.47	-6.40	118.07	74.00	44.07	peak
2	2483.500	67.65	-6.46	61.19	74.00	-12.81	peak
3	2486.700	68.07	-6.47	61.60	74.00	-12.40	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

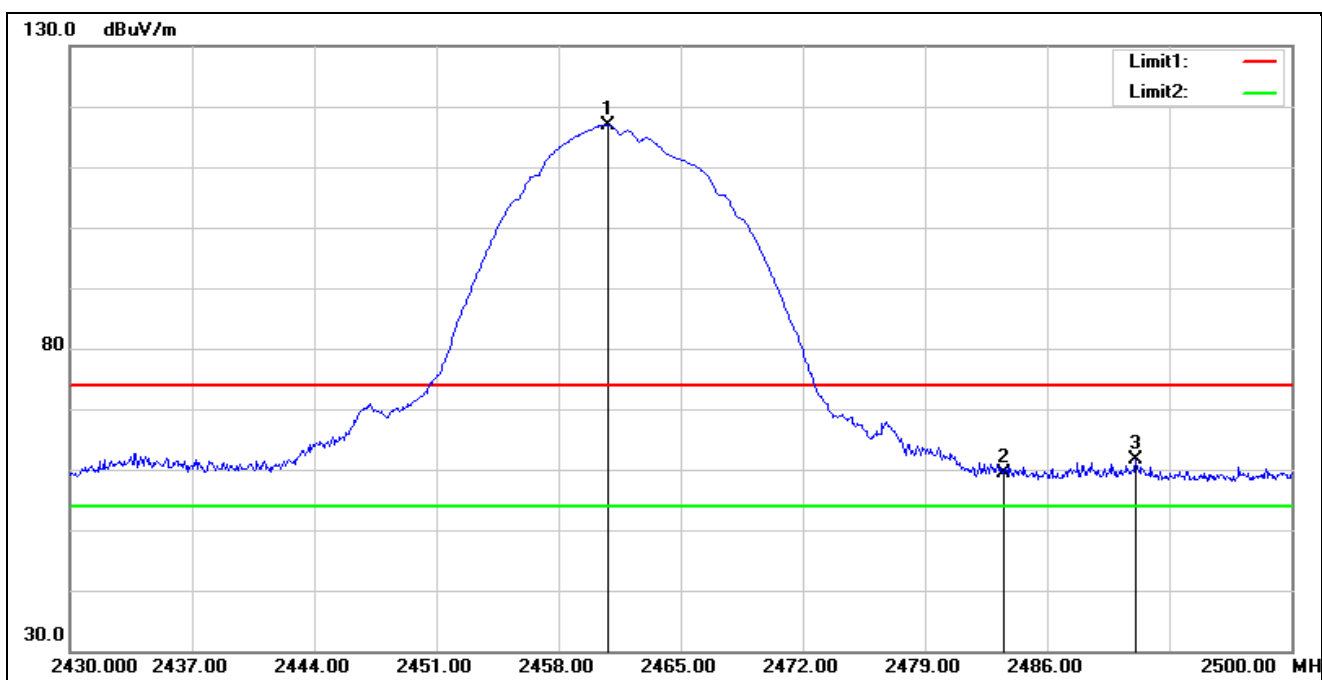

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.800	123.34	-6.40	116.94	74.00	42.94	peak
2	2483.500	65.78	-6.46	59.32	74.00	-14.68	peak
3	2491.040	68.15	-6.48	61.67	74.00	-12.33	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

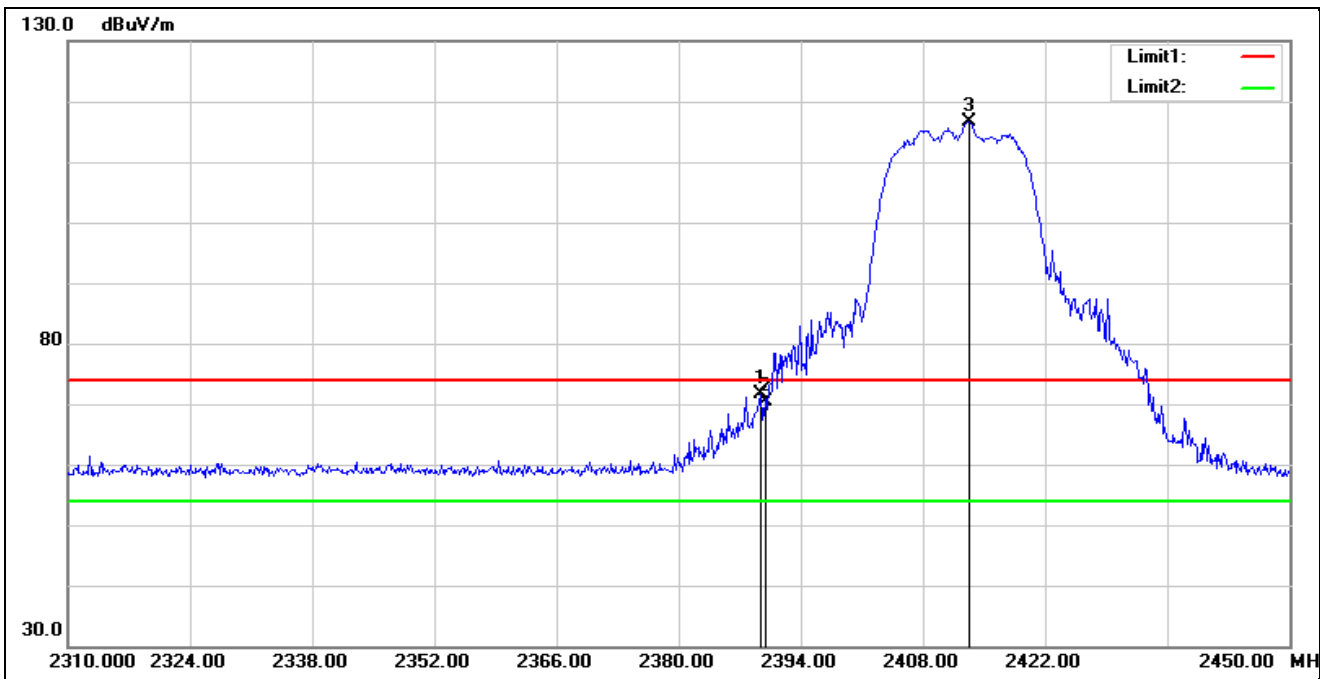


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	77.84	-6.19	71.65	74.00	-2.35	peak
2	2390.000	76.46	-6.19	70.27	74.00	-3.73	peak
3*	2413.320	123.02	-6.27	116.75	74.00	42.75	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

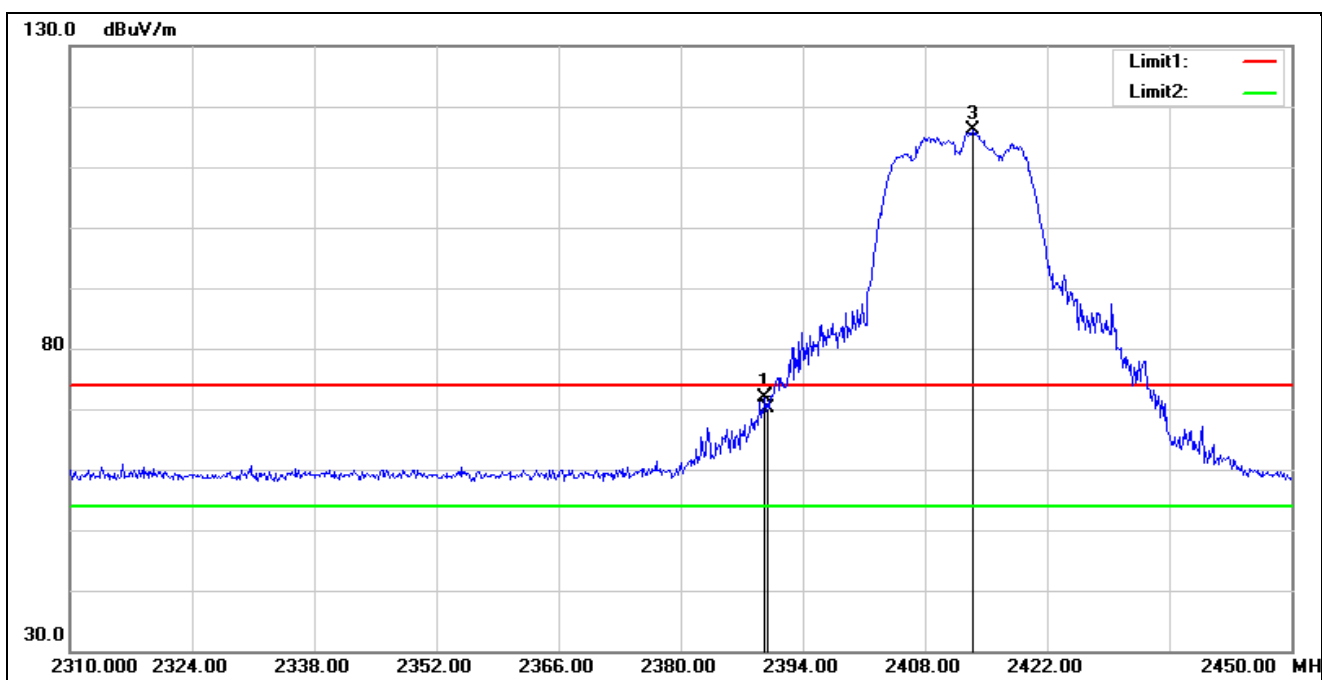


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	78.01	-6.19	71.82	74.00	-2.18	peak
2	2390.000	76.31	-6.19	70.12	74.00	-3.88	peak
3*	2413.460	122.34	-6.27	116.07	74.00	42.07	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

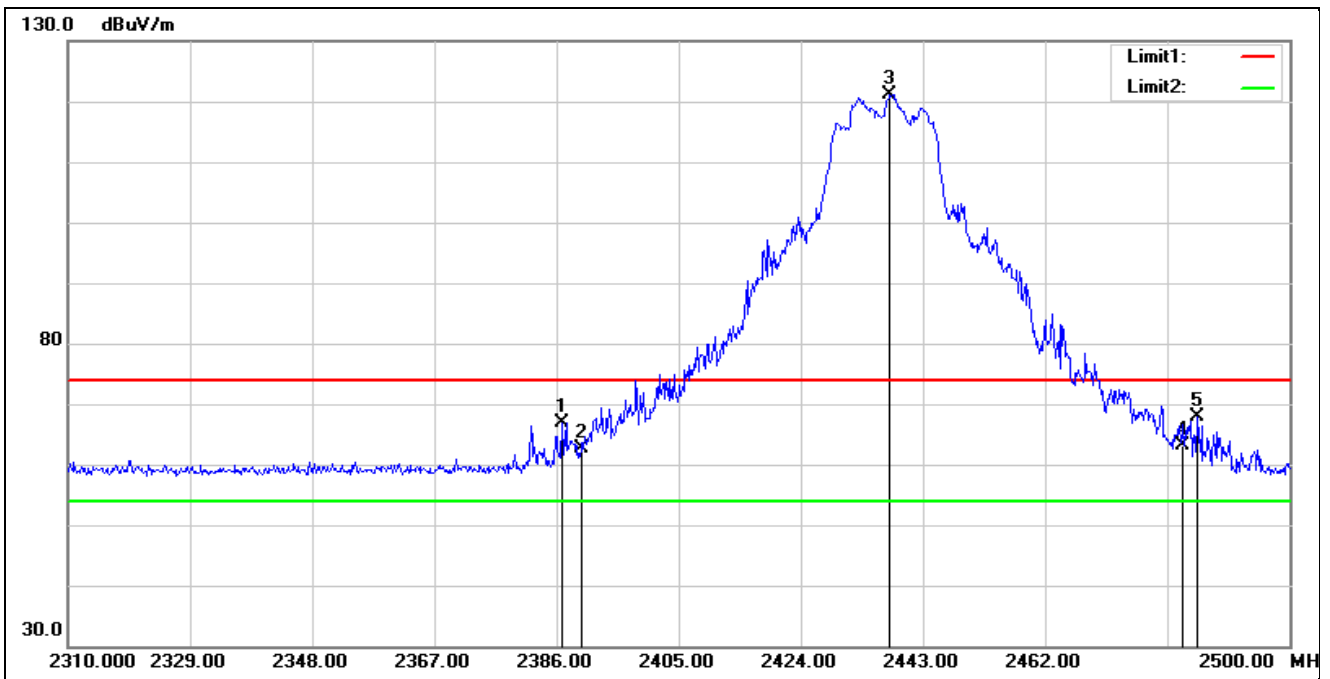


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.950	73.16	-6.17	66.99	74.00	-7.01	peak
2	2390.000	68.88	-6.19	62.69	74.00	-11.31	peak
3*	2437.870	127.51	-6.34	121.17	74.00	47.17	peak
4	2483.500	69.58	-6.46	63.12	74.00	-10.88	peak
5	2485.750	74.33	-6.46	67.87	74.00	-6.13	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

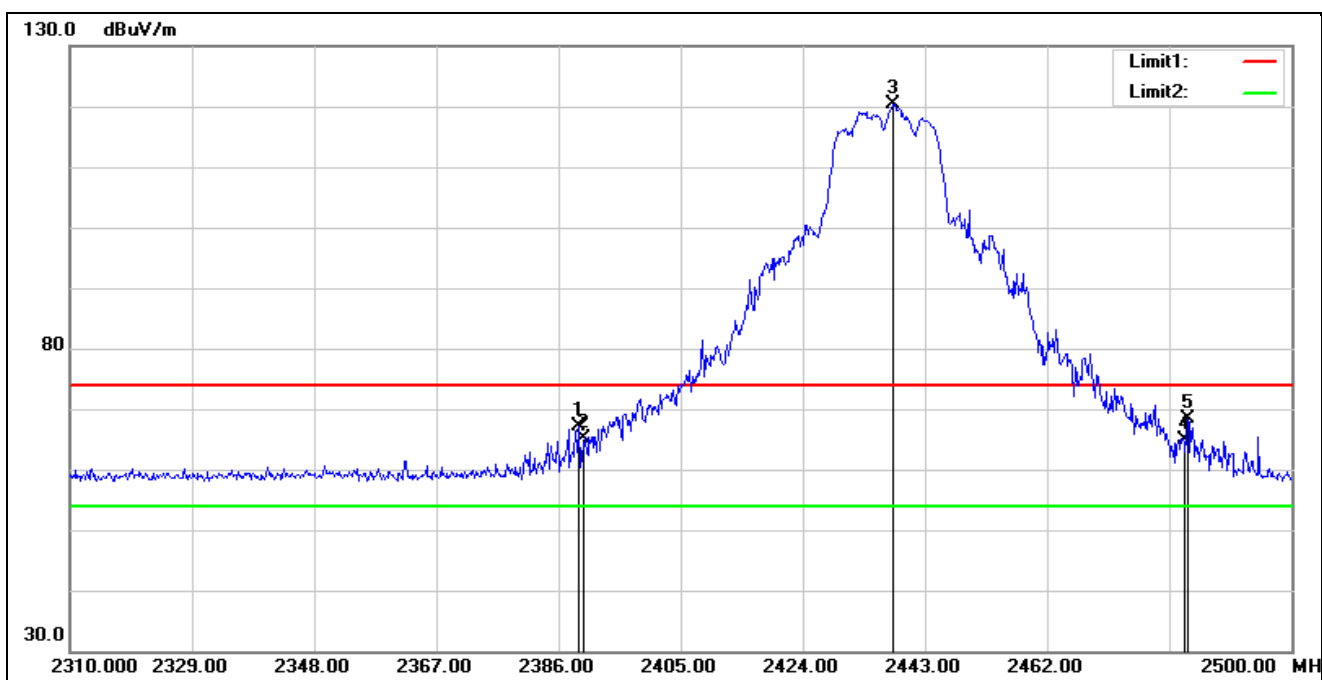


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	73.21	-6.19	67.02	74.00	-6.98	peak
2	2390.000	71.34	-6.19	65.15	74.00	-8.85	peak
3*	2438.060	126.72	-6.34	120.38	74.00	46.38	peak
4	2483.500	71.23	-6.46	64.77	74.00	-9.23	peak
5	2483.850	74.94	-6.47	68.47	74.00	-5.53	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

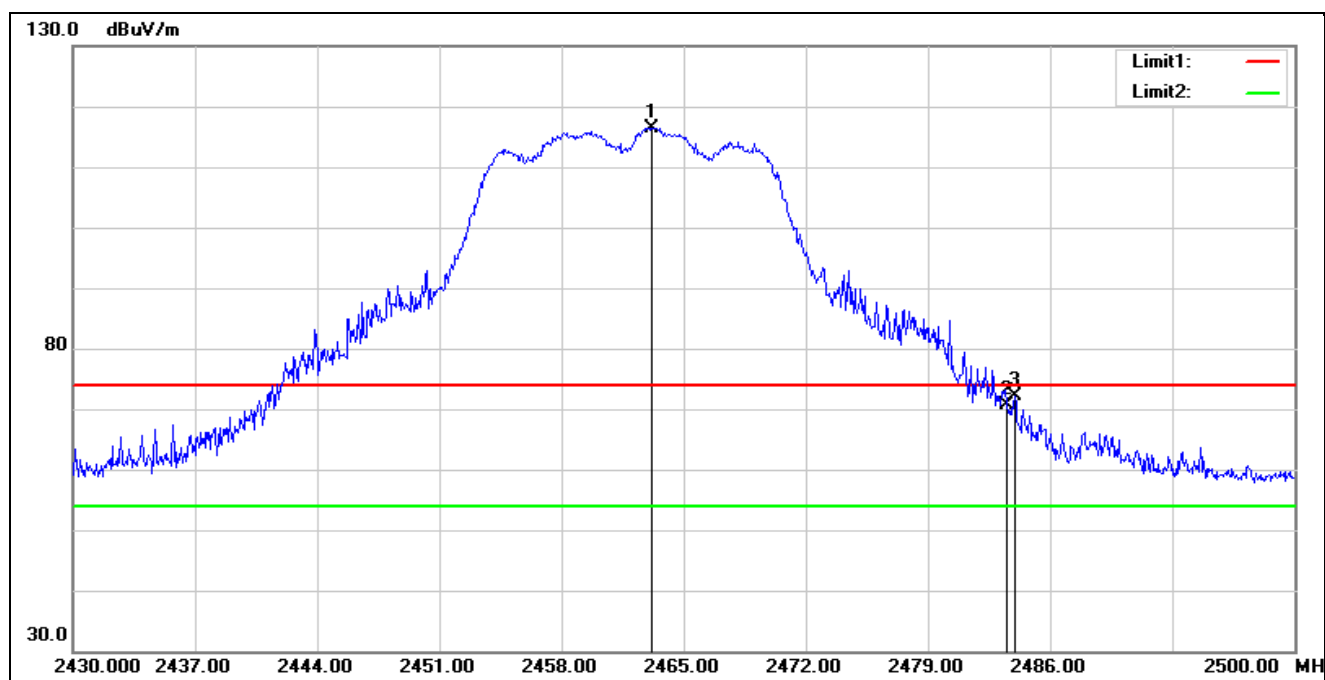


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.180	122.91	-6.41	116.50	74.00	42.50	peak
2	2483.500	77.14	-6.46	70.68	74.00	-3.32	peak
3	2483.970	78.50	-6.47	72.03	74.00	-1.97	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

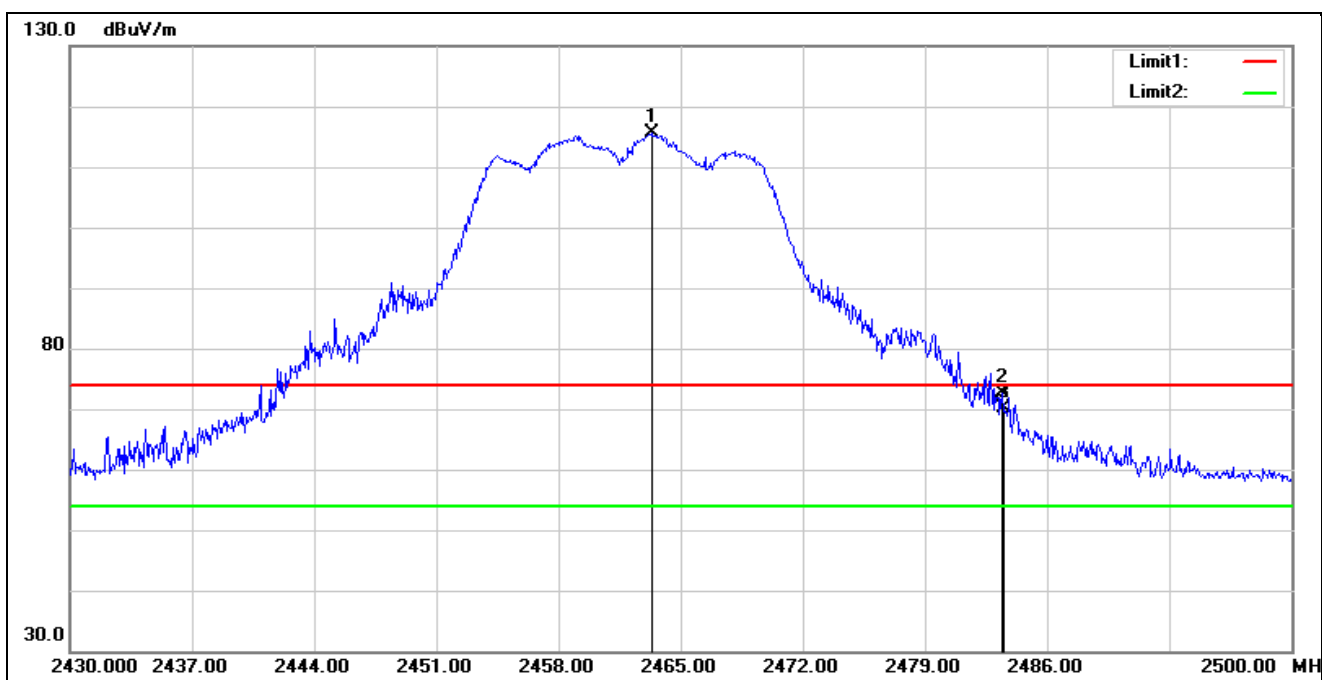


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.320	121.93	-6.41	115.52	74.00	41.52	peak
2	2483.410	79.06	-6.46	72.60	74.00	-1.40	peak
3	2483.500	76.49	-6.46	70.03	74.00	-3.97	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

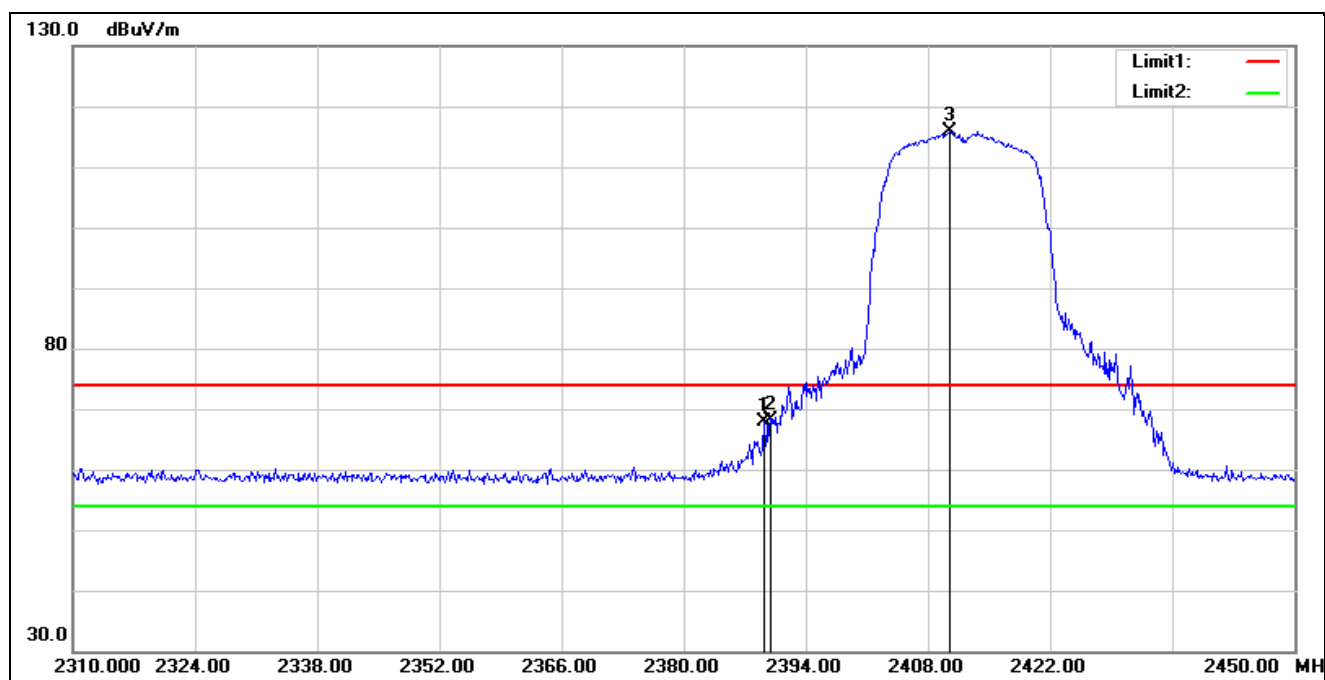

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	74.39	-6.50	67.89	74.00	-6.11	peak
2	2390.000	74.54	-6.50	68.04	74.00	-5.96	peak
3*	2410.520	122.33	-6.51	115.82	74.00	41.82	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

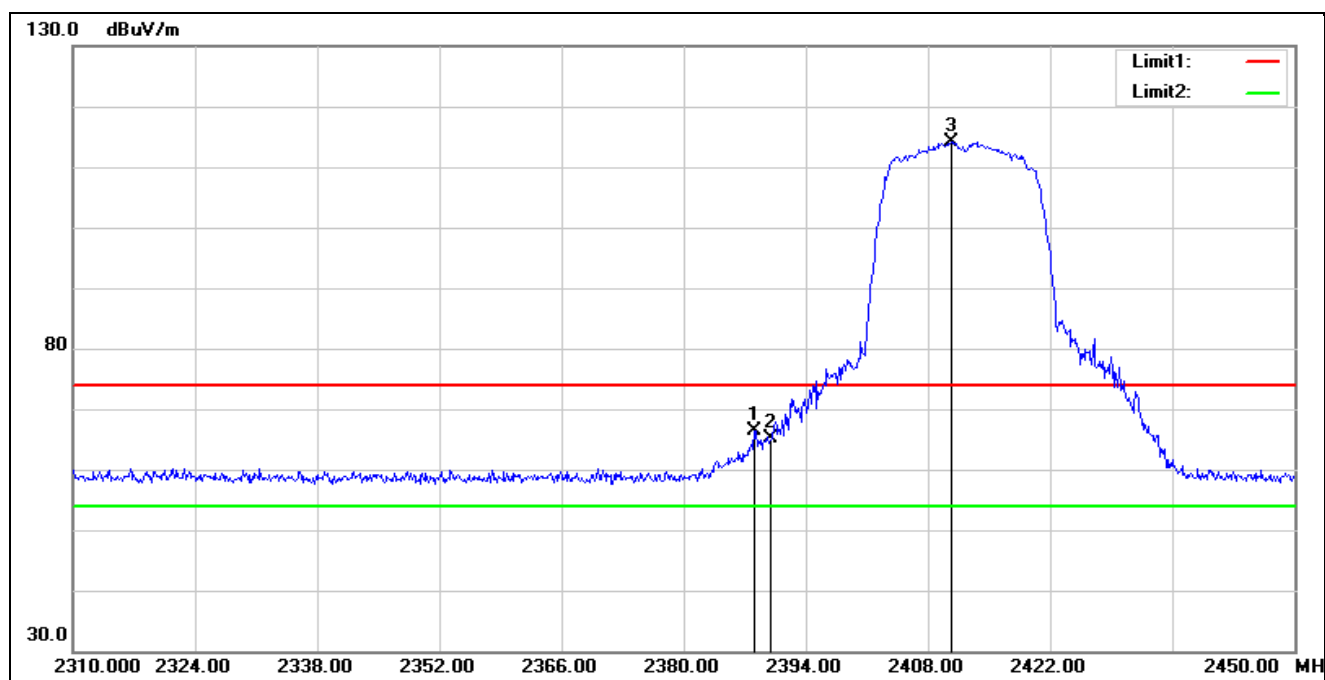

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.120	72.97	-6.50	66.47	74.00	-7.53	peak
2	2390.000	71.54	-6.50	65.04	74.00	-8.96	peak
3*	2410.660	120.76	-6.51	114.25	74.00	40.25	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

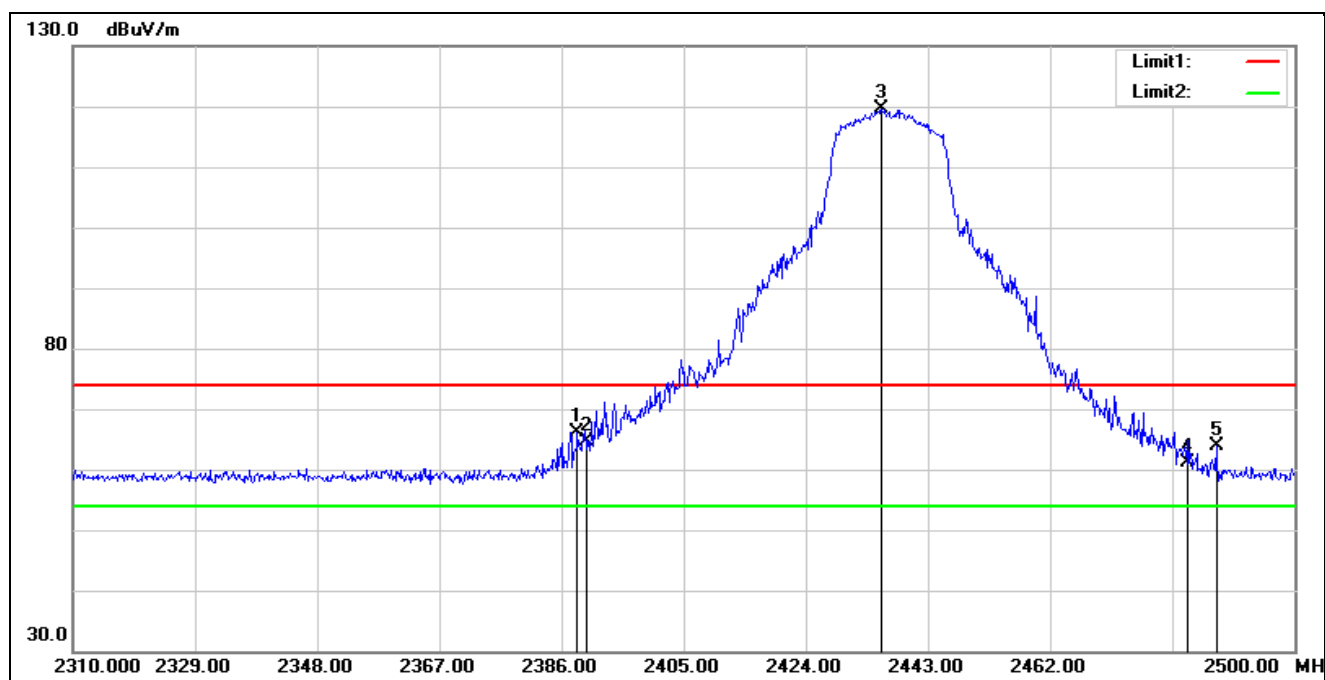


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.470	72.67	-6.50	66.17	74.00	-7.83	peak
2	2390.000	71.20	-6.50	64.70	74.00	-9.30	peak
3*	2435.780	126.24	-6.54	119.70	74.00	45.70	peak
4	2483.500	67.64	-6.57	61.07	74.00	-12.93	peak
5	2487.840	70.57	-6.58	63.99	74.00	-10.01	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

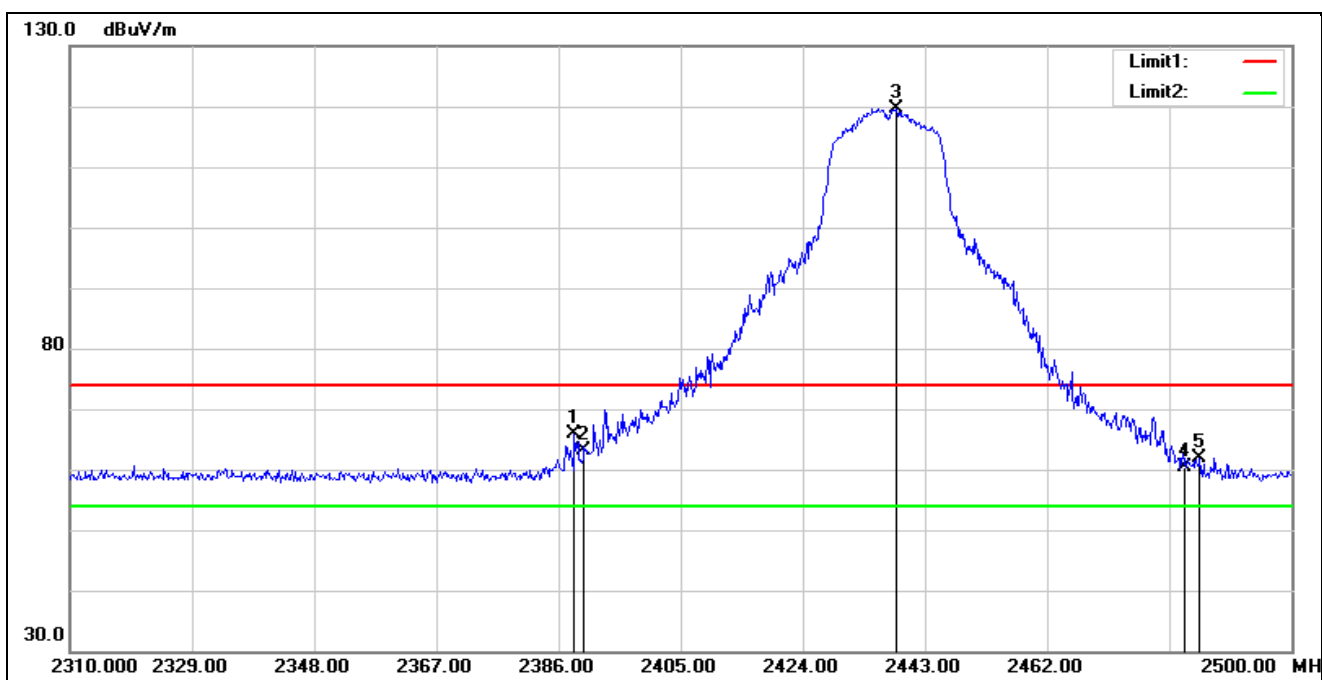


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.470	72.28	-6.50	65.78	74.00	-8.22	peak
2	2390.000	69.66	-6.50	63.16	74.00	-10.84	peak
3*	2438.440	126.18	-6.54	119.64	74.00	45.64	peak
4	2483.500	66.95	-6.57	60.38	74.00	-13.62	peak
5	2485.750	68.47	-6.57	61.90	74.00	-12.10	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

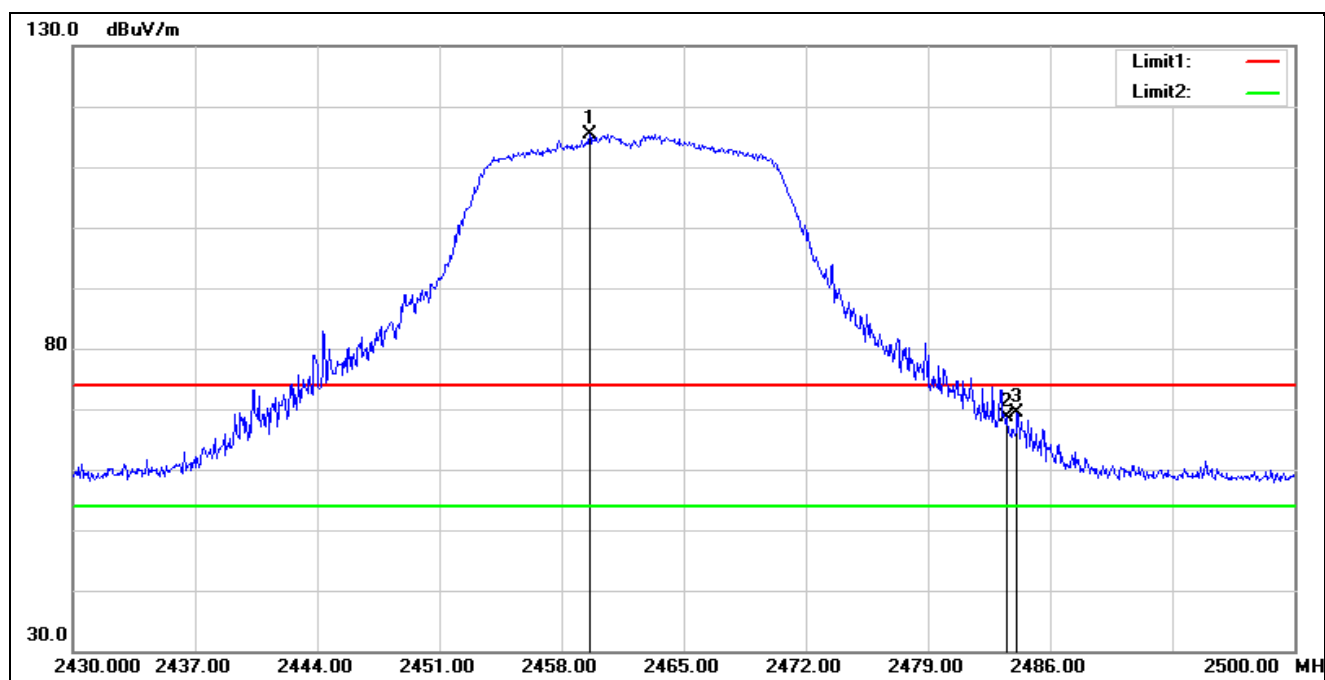


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2459.610	122.06	-6.56	115.50	74.00	41.50	peak
2	2483.500	75.14	-6.57	68.57	74.00	-5.43	peak
3	2484.110	75.83	-6.57	69.26	74.00	-4.74	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

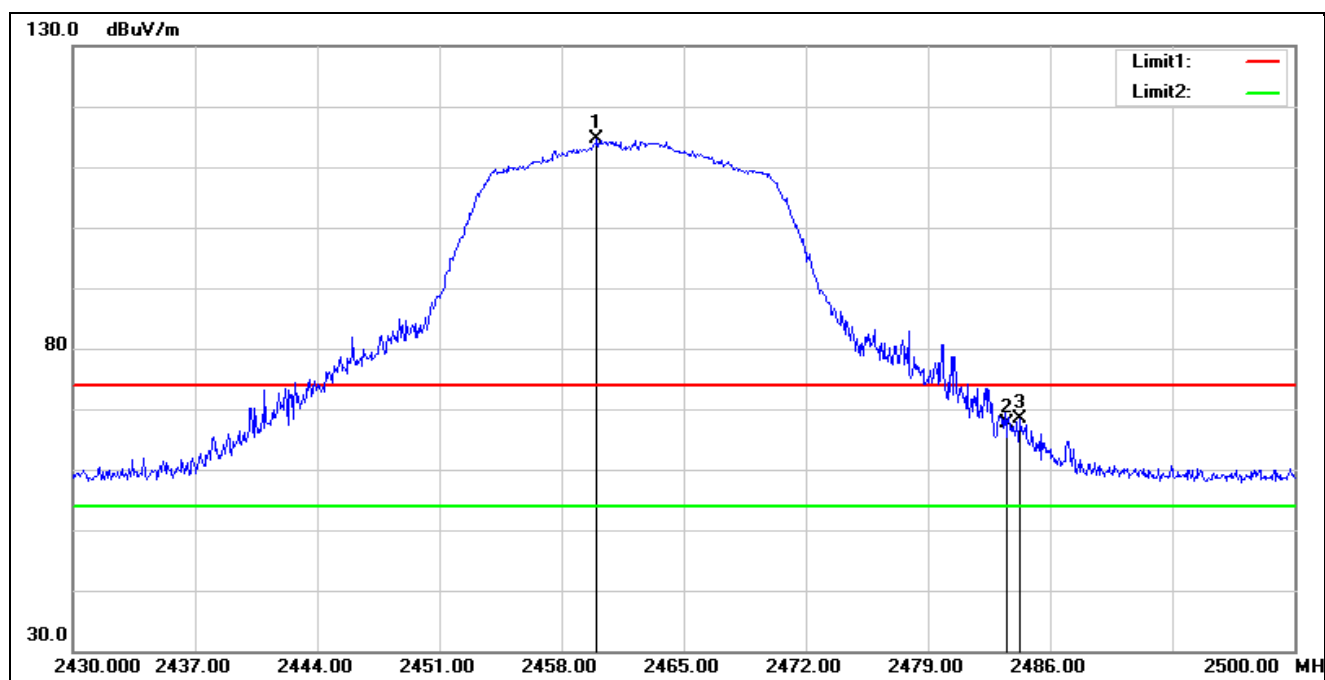


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.030	121.26	-6.56	114.70	74.00	40.70	peak
2	2483.500	74.29	-6.57	67.72	74.00	-6.28	peak
3	2484.250	75.01	-6.57	68.44	74.00	-5.56	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

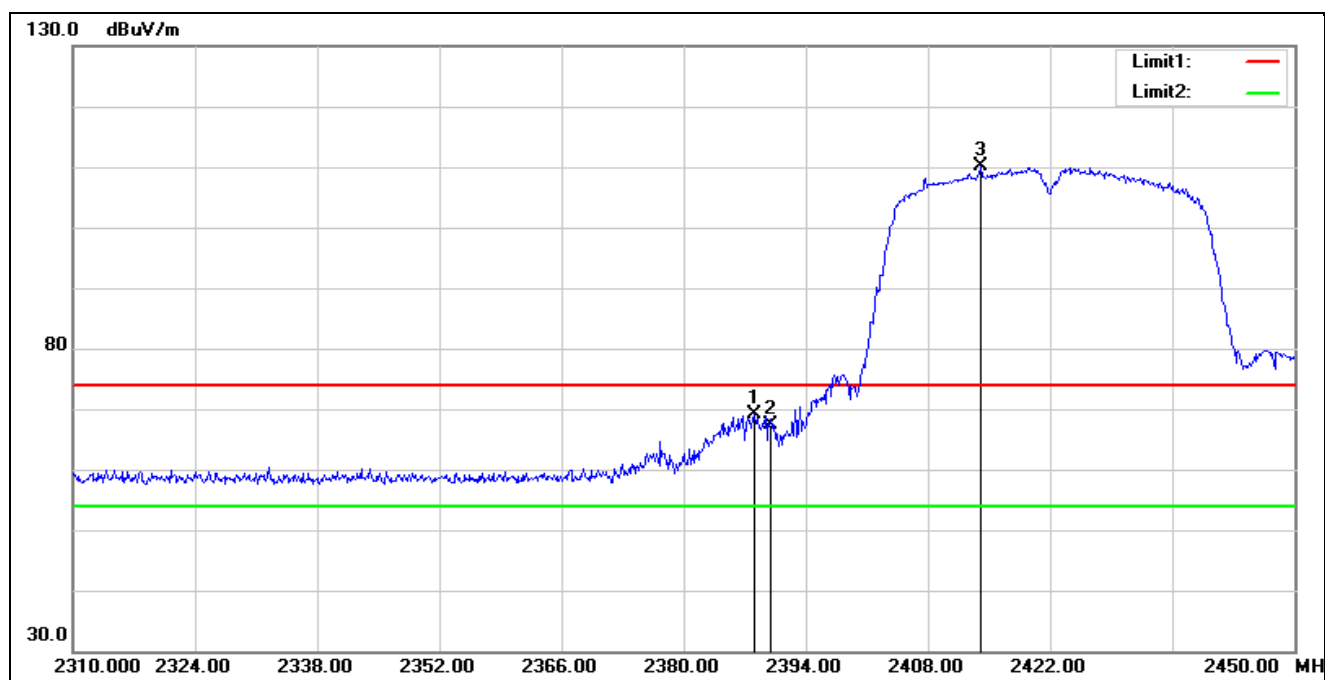


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.120	75.66	-6.50	69.16	74.00	-4.84	peak
2	2390.000	73.83	-6.50	67.33	74.00	-6.67	peak
3*	2414.020	116.55	-6.52	110.03	74.00	36.03	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

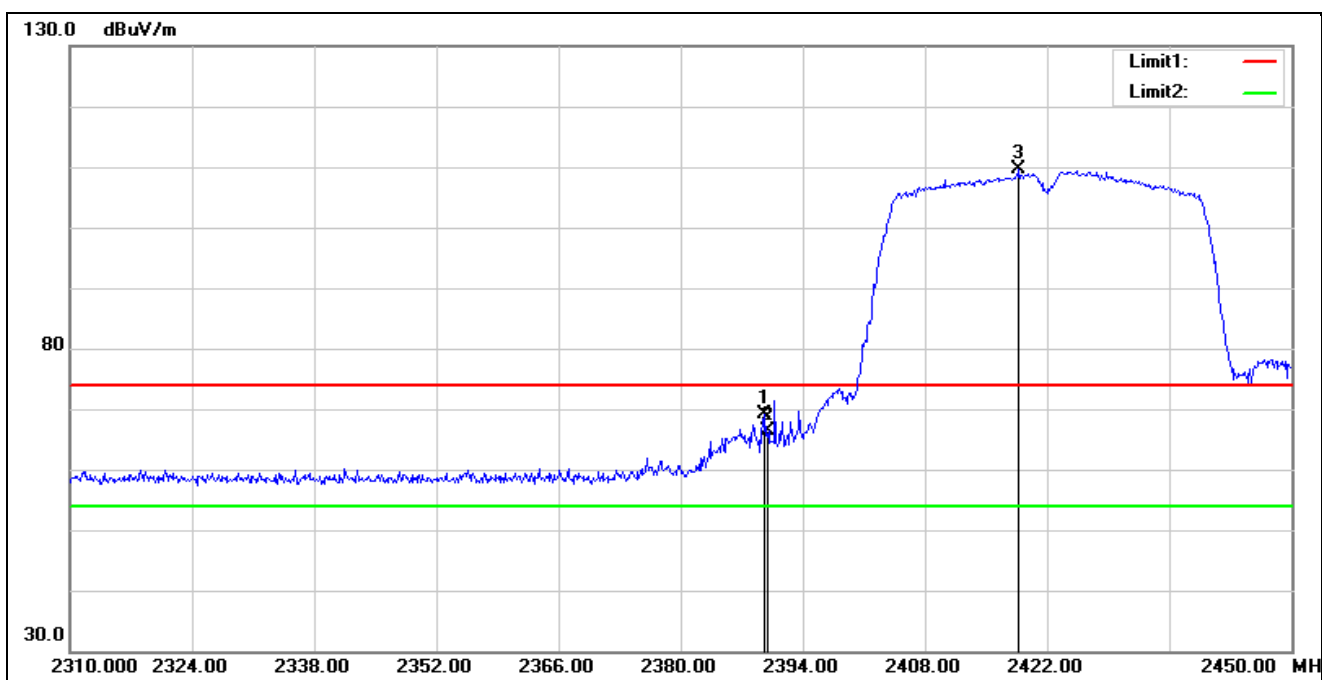


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	75.53	-6.50	69.03	74.00	-4.97	peak
2	2390.000	72.77	-6.50	66.27	74.00	-7.73	peak
3*	2418.780	116.04	-6.52	109.52	74.00	35.52	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

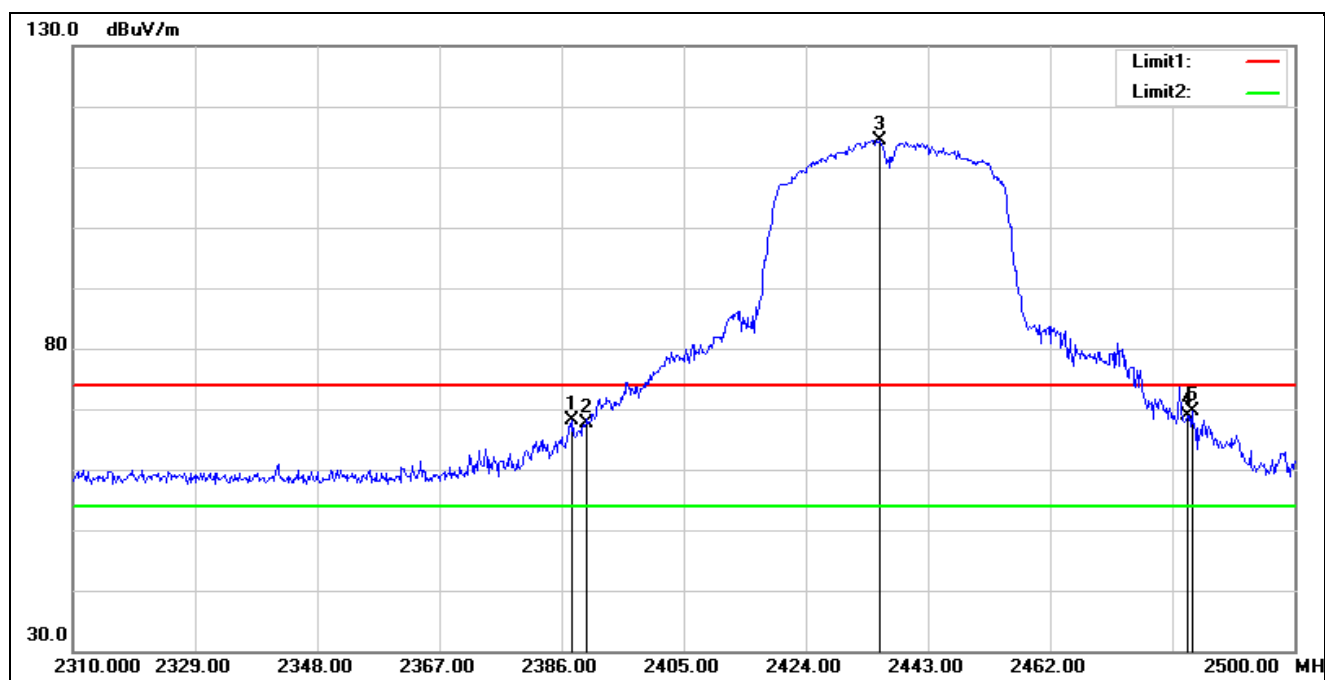

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	74.60	-6.50	68.10	74.00	-5.90	peak
2	2390.000	74.13	-6.50	67.63	74.00	-6.37	peak
3*	2435.400	121.03	-6.54	114.49	74.00	40.49	peak
4	2483.500	75.52	-6.57	68.95	74.00	-5.05	peak
5	2484.040	76.29	-6.57	69.72	74.00	-4.28	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

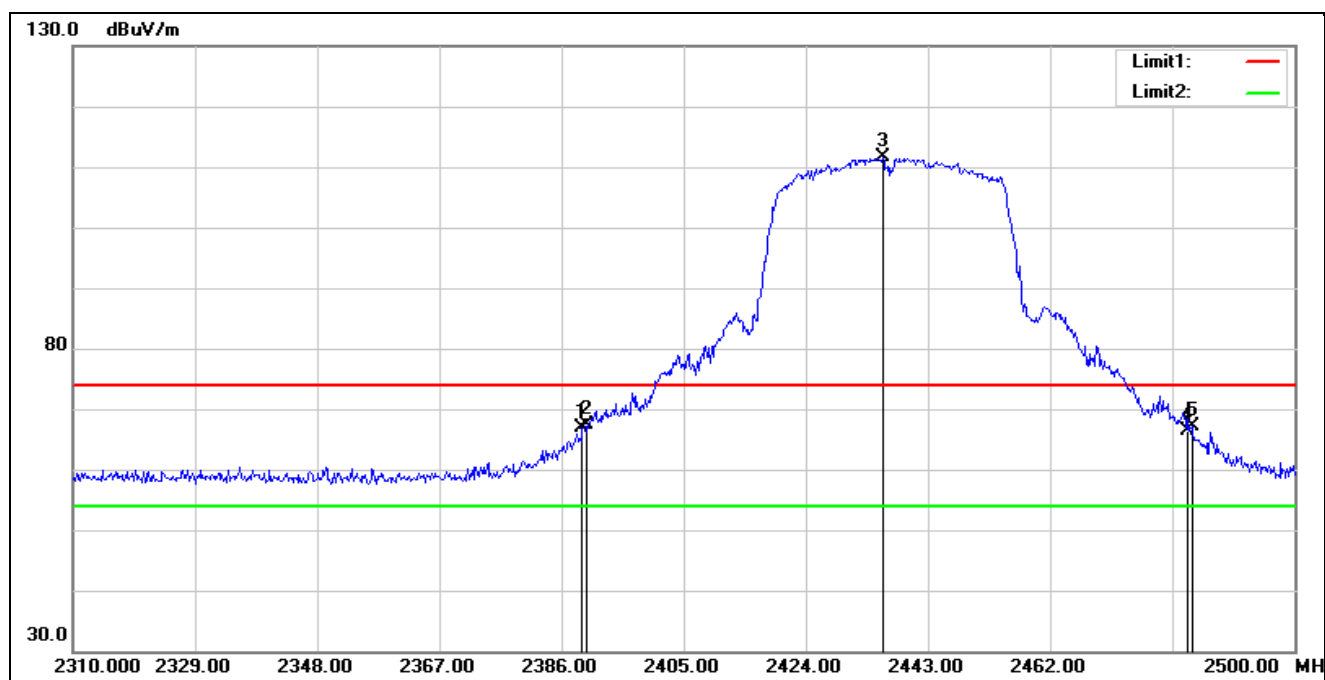

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	73.48	-6.50	66.98	74.00	-7.02	peak
2	2390.000	73.79	-6.50	67.29	74.00	-6.71	peak
3*	2435.970	118.09	-6.54	111.55	74.00	37.55	peak
4	2483.500	73.06	-6.57	66.49	74.00	-7.51	peak
5	2484.040	73.77	-6.57	67.20	74.00	-6.80	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

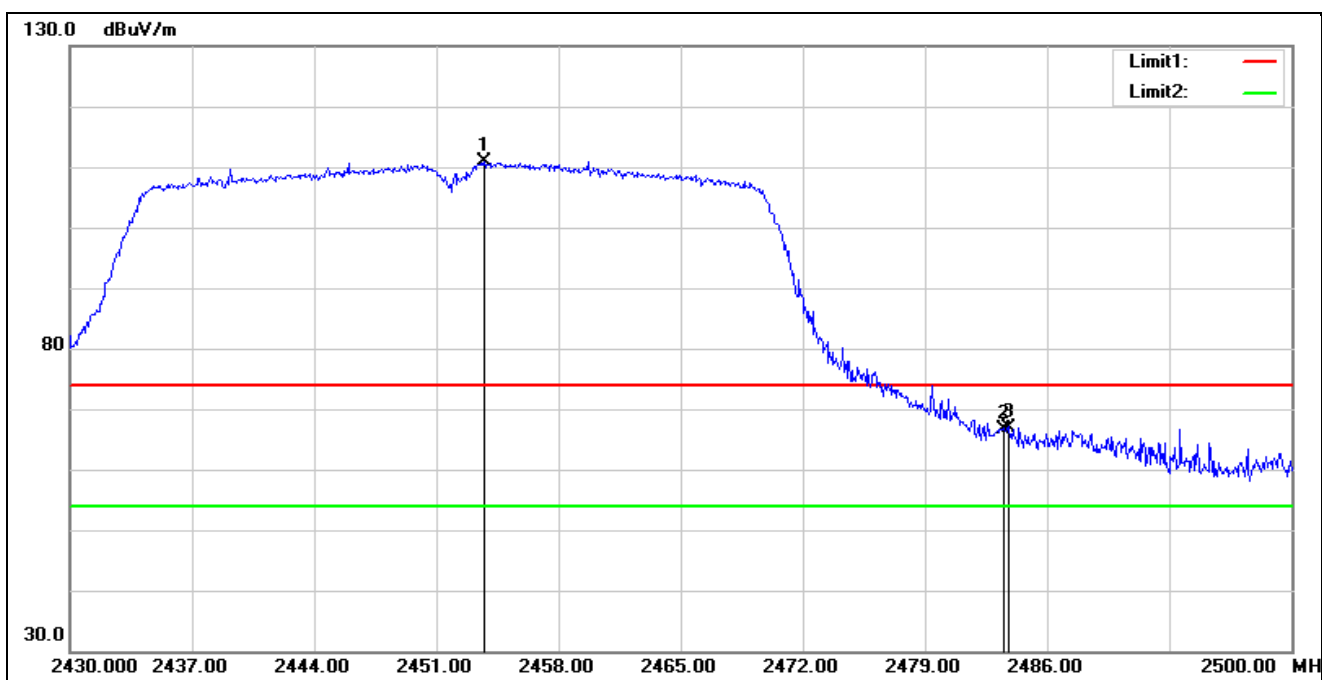


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2453.730	117.47	-6.55	110.92	74.00	36.92	peak
2	2483.500	73.08	-6.57	66.51	74.00	-7.49	peak
3	2483.830	73.43	-6.57	66.86	74.00	-7.14	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

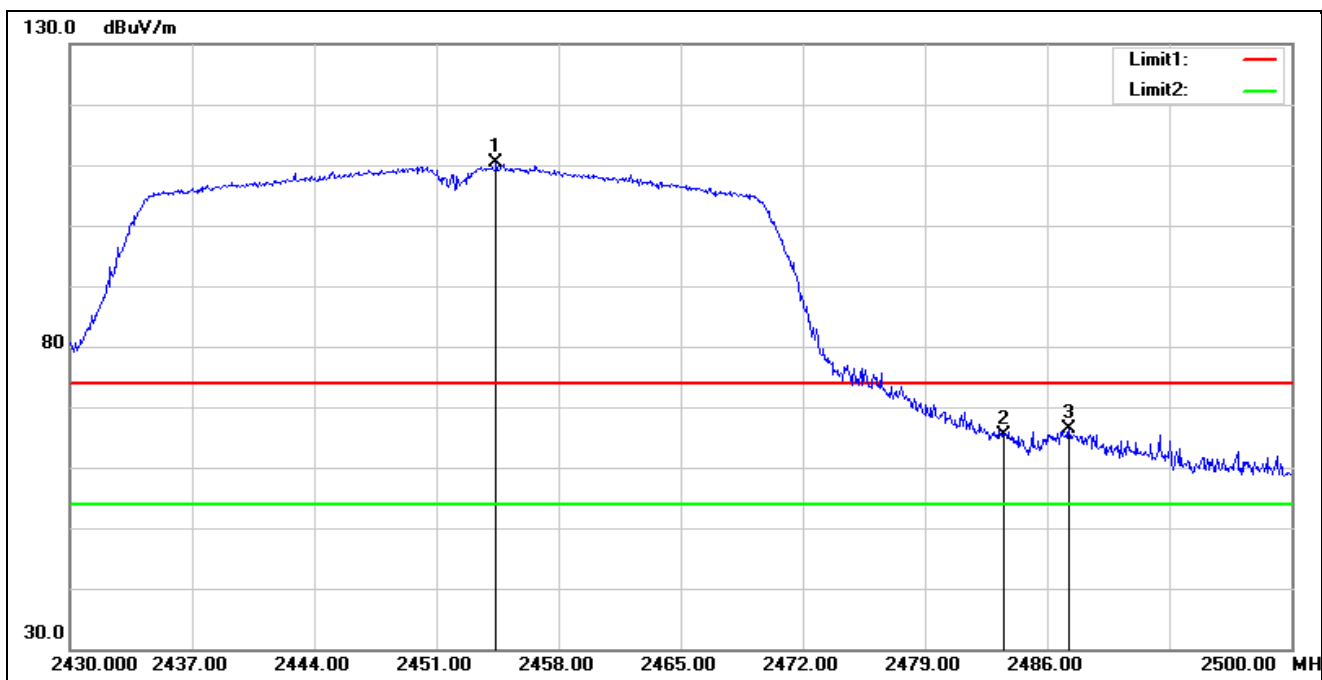


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2454.430	116.84	-6.55	110.29	74.00	36.29	peak
2	2483.500	72.01	-6.57	65.44	74.00	-8.56	peak
3	2487.260	73.00	-6.57	66.43	74.00	-7.57	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

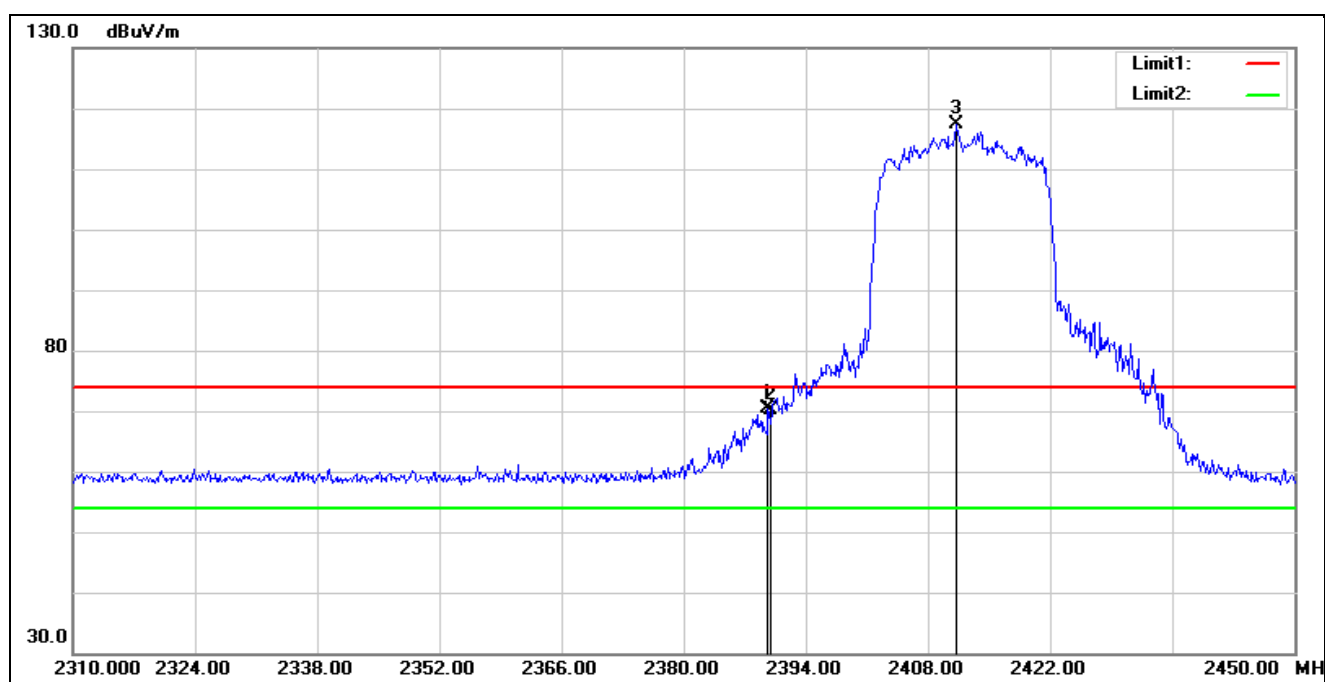


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	76.68	-6.19	70.49	74.00	-3.51	peak
2	2390.000	76.44	-6.19	70.25	74.00	-3.75	peak
3*	2411.220	123.71	-6.26	117.45	74.00	43.45	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

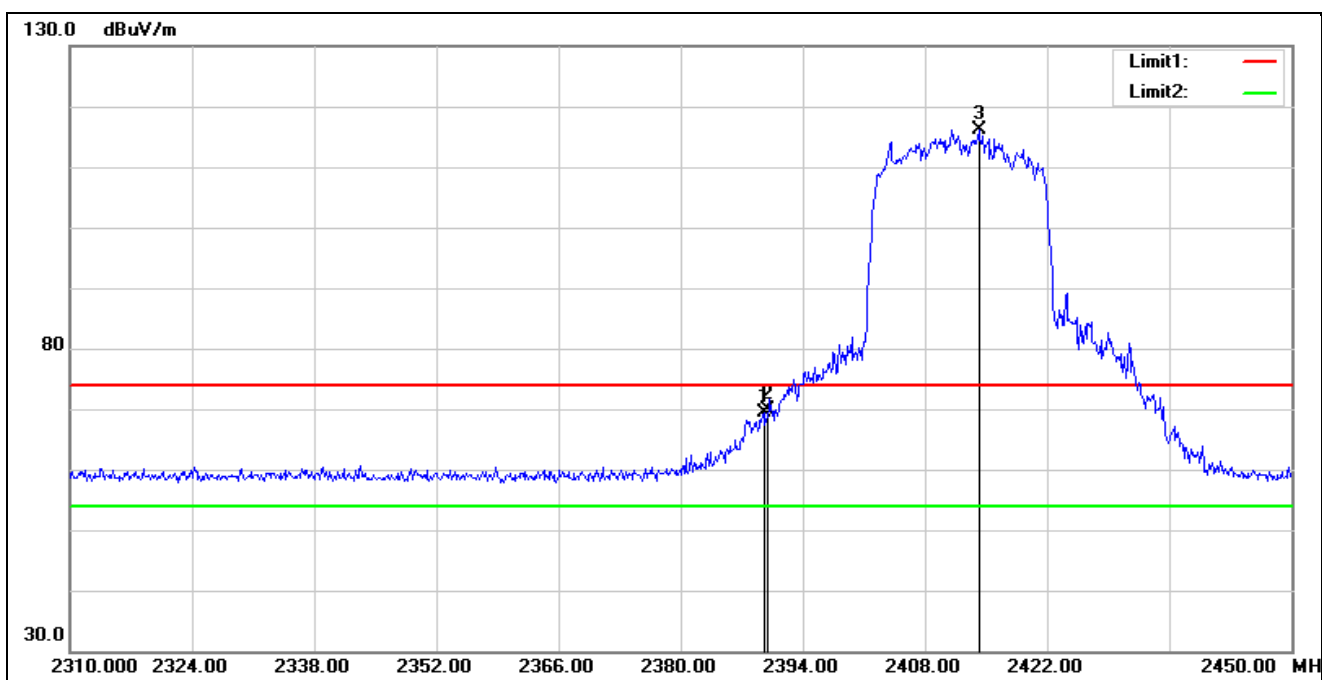


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	75.48	-6.19	69.29	74.00	-4.71	peak
2	2390.000	76.01	-6.19	69.82	74.00	-4.18	peak
3*	2414.160	122.36	-6.28	116.08	74.00	42.08	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

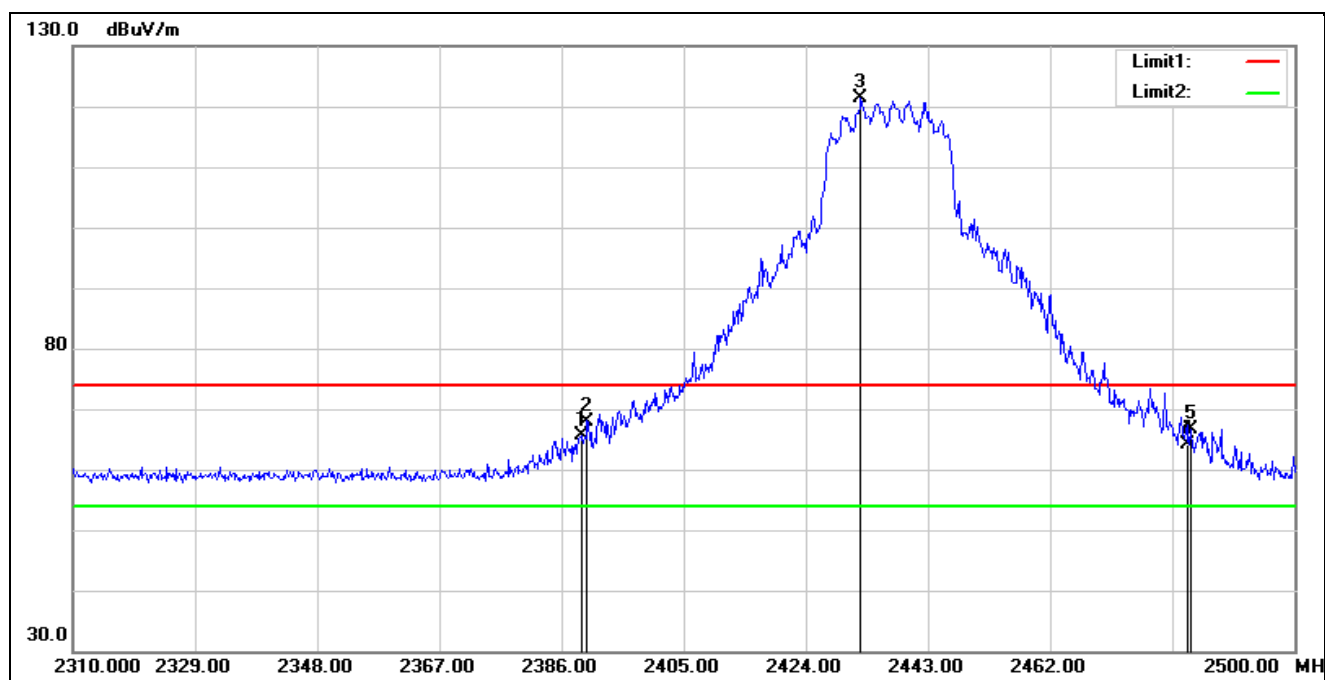


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	71.71	-6.18	65.53	74.00	-8.47	peak
2	2390.000	74.10	-6.19	67.91	74.00	-6.09	peak
3*	2432.550	127.64	-6.33	121.31	74.00	47.31	peak
4	2483.500	70.59	-6.46	64.13	74.00	-9.87	peak
5	2483.850	73.19	-6.47	66.72	74.00	-7.28	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

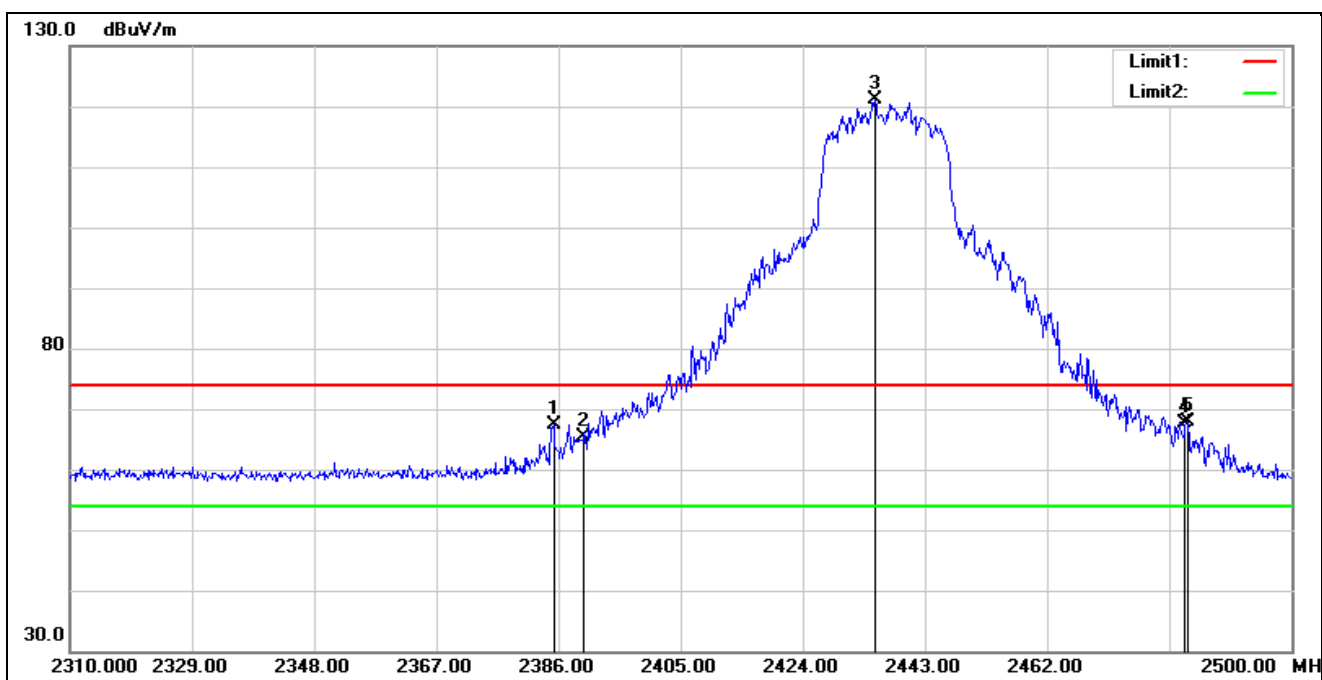


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.240	73.58	-6.16	67.42	74.00	-6.58	peak
2	2390.000	71.60	-6.19	65.41	74.00	-8.59	peak
3*	2435.210	127.58	-6.33	121.25	74.00	47.25	peak
4	2483.500	74.16	-6.46	67.70	74.00	-6.30	peak
5	2483.850	74.25	-6.47	67.78	74.00	-6.22	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

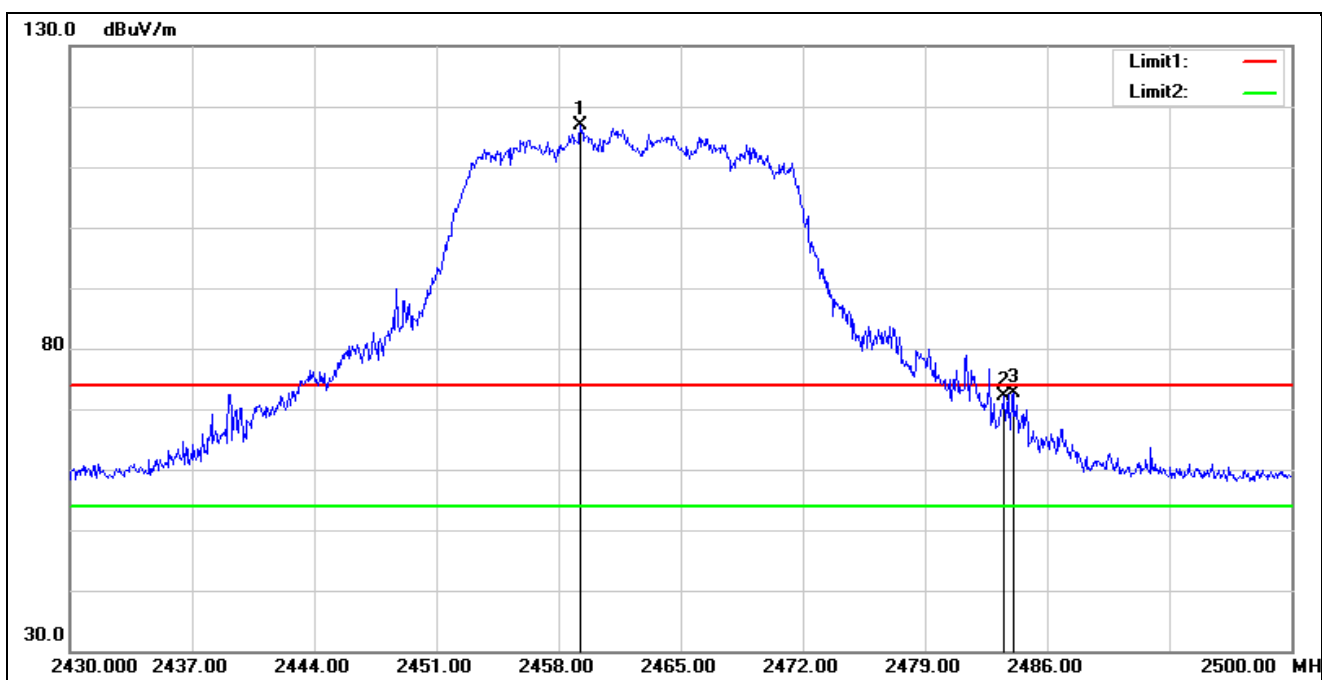

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2459.260	123.29	-6.40	116.89	74.00	42.89	peak
2	2483.500	78.48	-6.46	72.02	74.00	-1.98	peak
3	2484.040	79.15	-6.47	72.68	74.00	-1.32	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

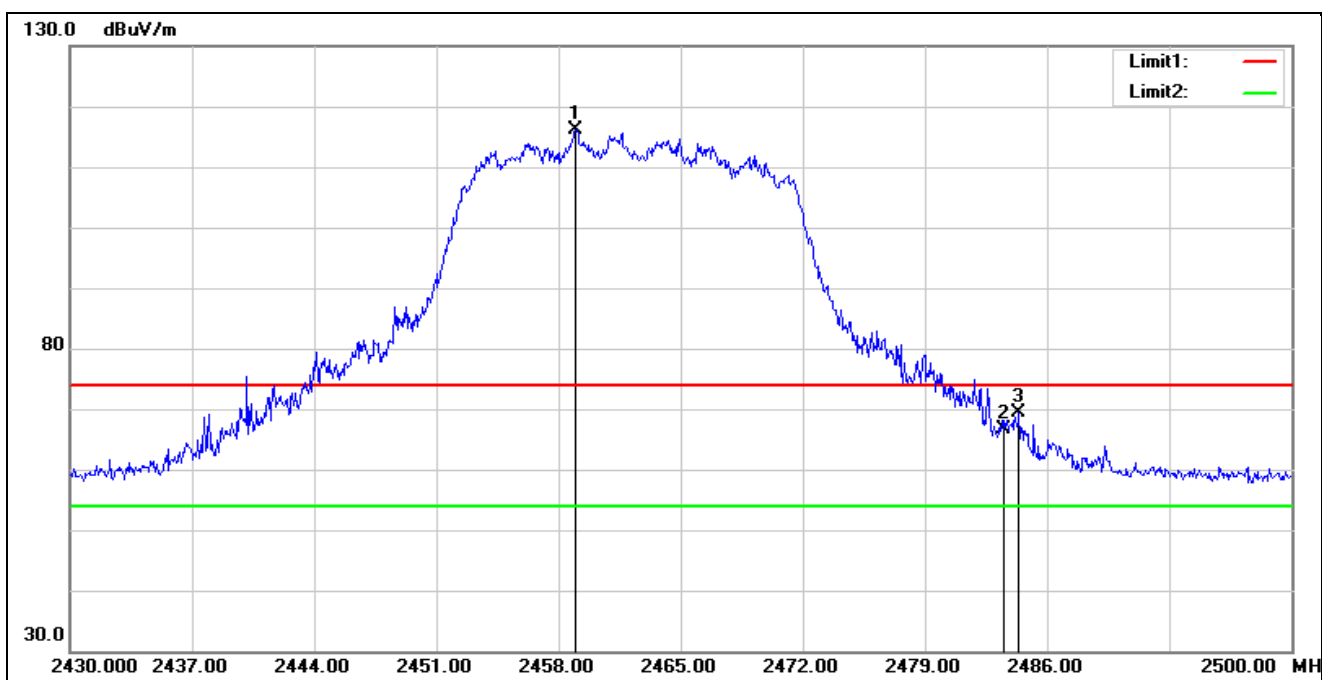

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2458.980	122.53	-6.40	116.13	74.00	42.13	peak
2	2483.500	73.20	-6.46	66.74	74.00	-7.26	peak
3	2484.390	75.96	-6.47	69.49	74.00	-4.51	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

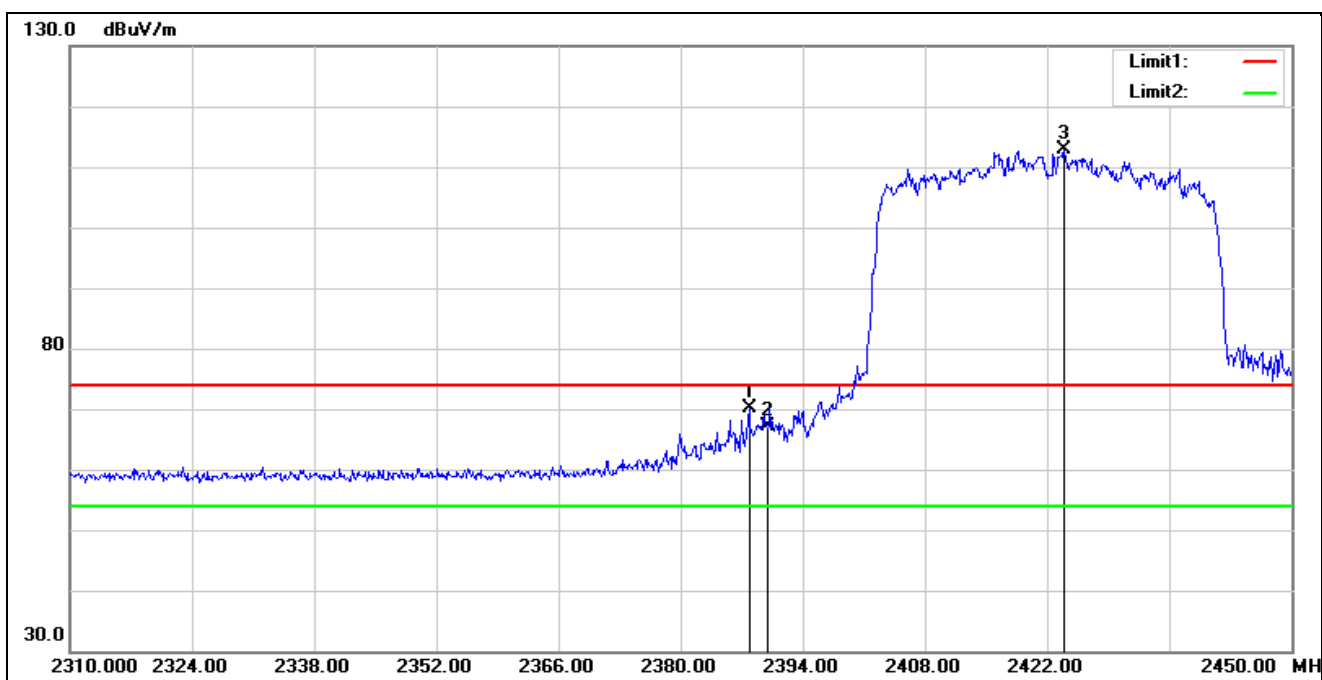


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.840	76.42	-6.18	70.24	74.00	-3.76	peak
2	2390.000	73.27	-6.19	67.08	74.00	-6.92	peak
3*	2423.960	119.29	-6.31	112.98	74.00	38.98	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

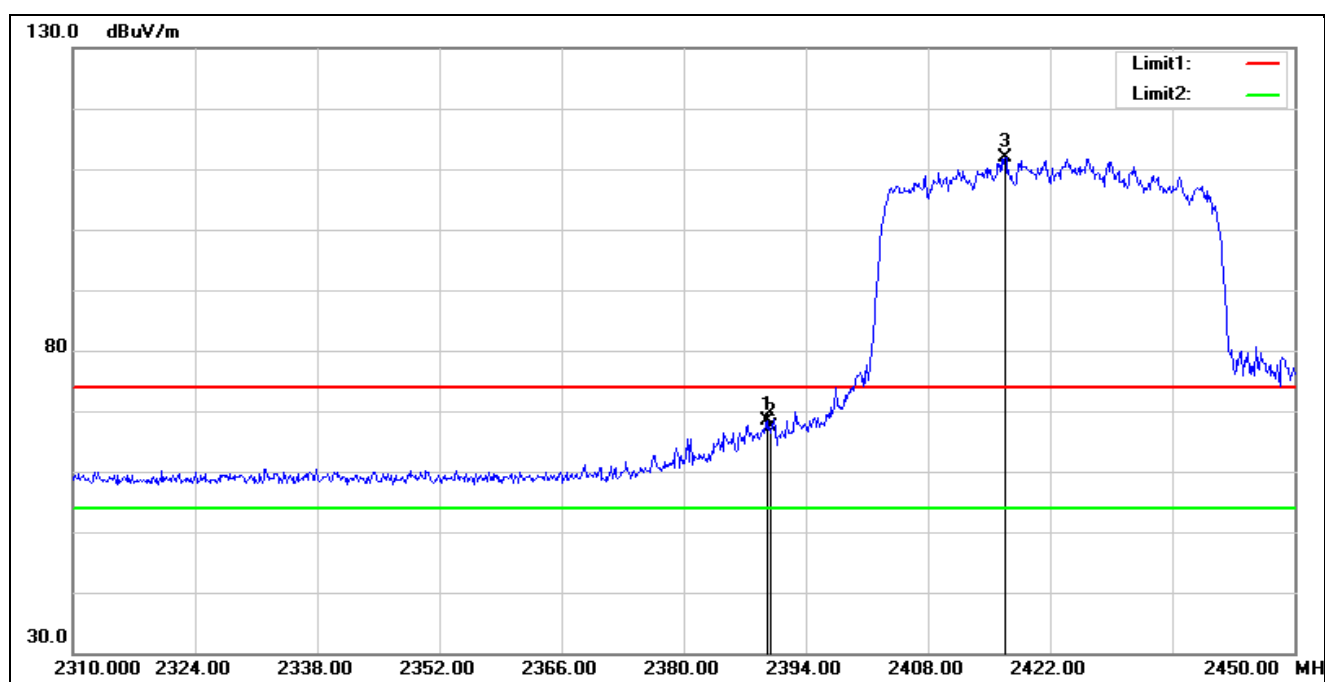


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	74.47	-6.19	68.28	74.00	-5.72	peak
2	2390.000	73.51	-6.19	67.32	74.00	-6.68	peak
3*	2416.820	118.26	-6.28	111.98	74.00	37.98	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

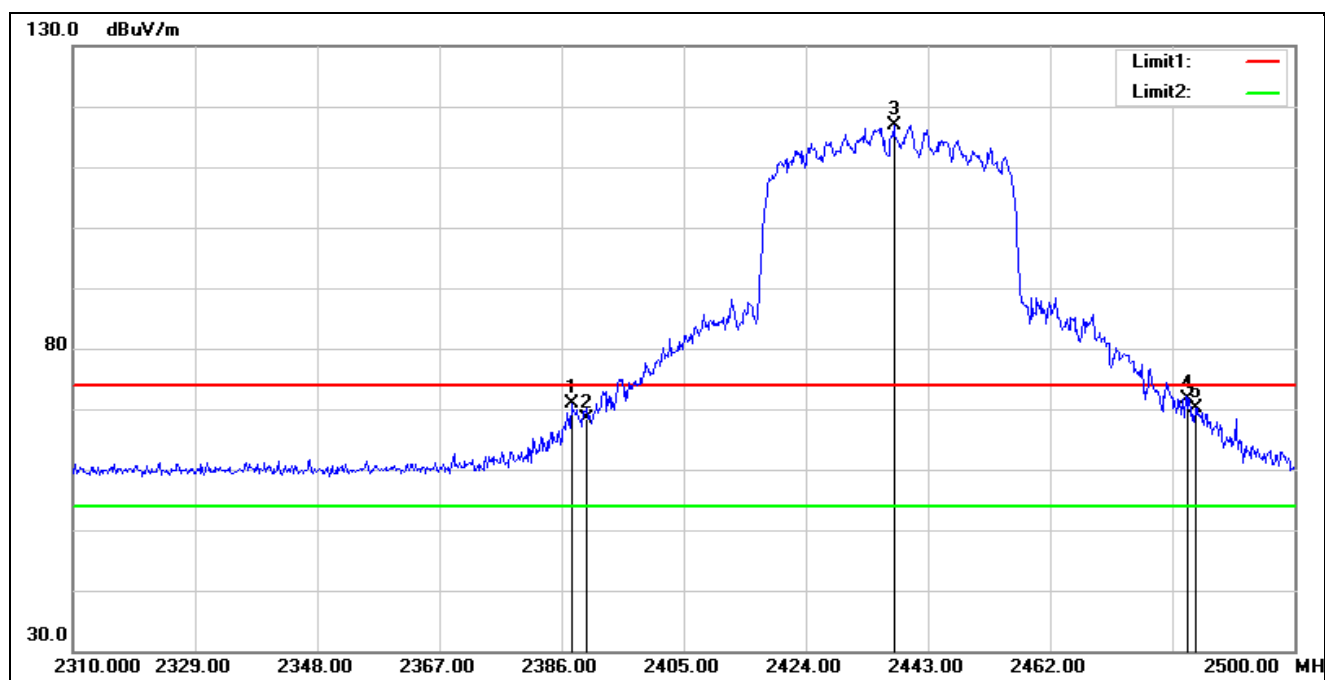


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.520	77.04	-6.18	70.86	74.00	-3.14	peak
2	2390.000	74.66	-6.19	68.47	74.00	-5.53	peak
3*	2437.680	123.34	-6.34	117.00	74.00	43.00	peak
4	2483.500	78.20	-6.46	71.74	74.00	-2.26	peak
5	2484.610	76.59	-6.47	70.12	74.00	-3.88	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

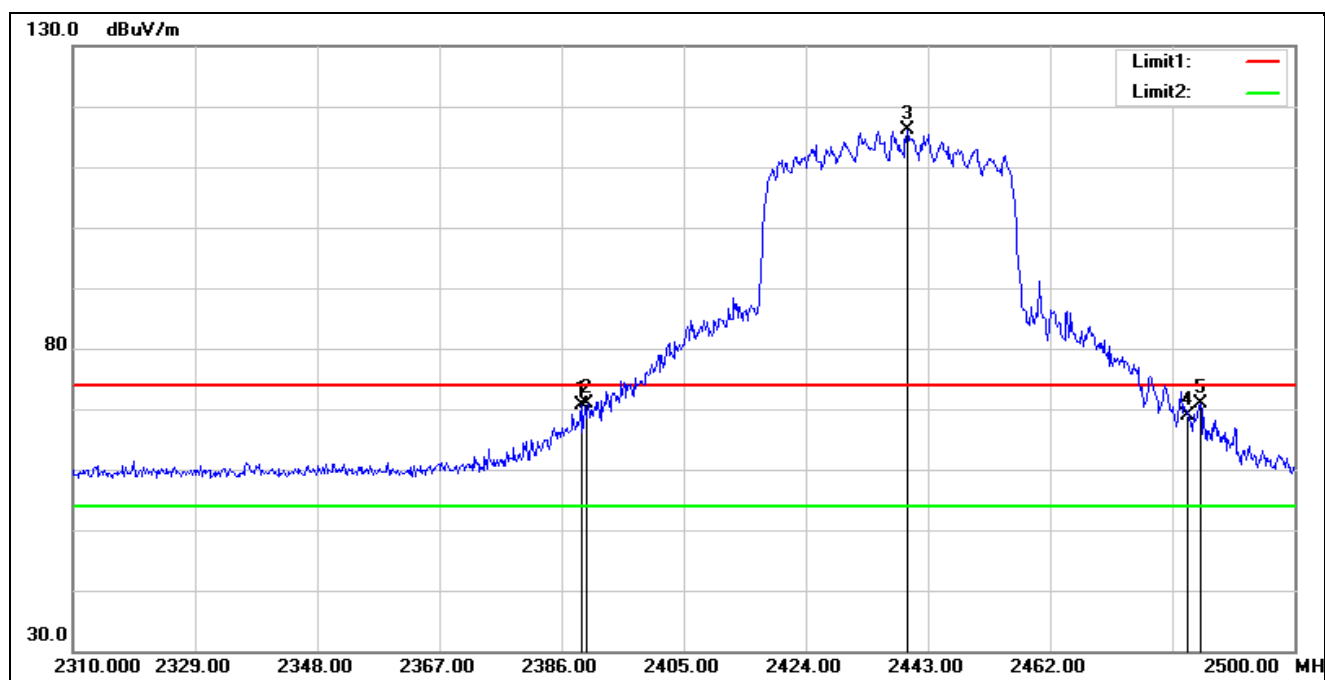


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	76.75	-6.18	70.57	74.00	-3.43	peak
2	2390.000	77.01	-6.19	70.82	74.00	-3.18	peak
3*	2439.770	122.37	-6.35	116.02	74.00	42.02	peak
4	2483.500	75.29	-6.46	68.83	74.00	-5.17	peak
5	2485.370	77.45	-6.46	70.99	74.00	-3.01	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

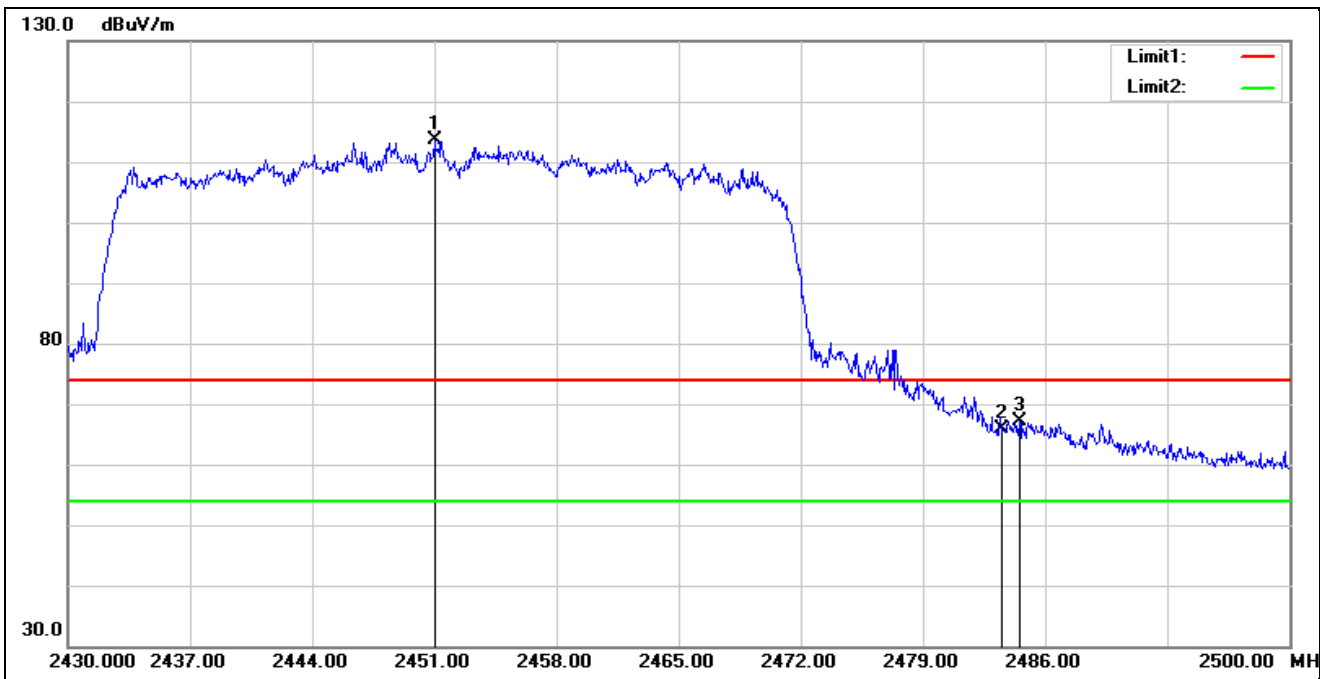

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2451.000	120.06	-6.37	113.69	74.00	39.69	peak
2	2483.500	72.44	-6.46	65.98	74.00	-8.02	peak
3	2484.530	73.66	-6.47	67.19	74.00	-6.81	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

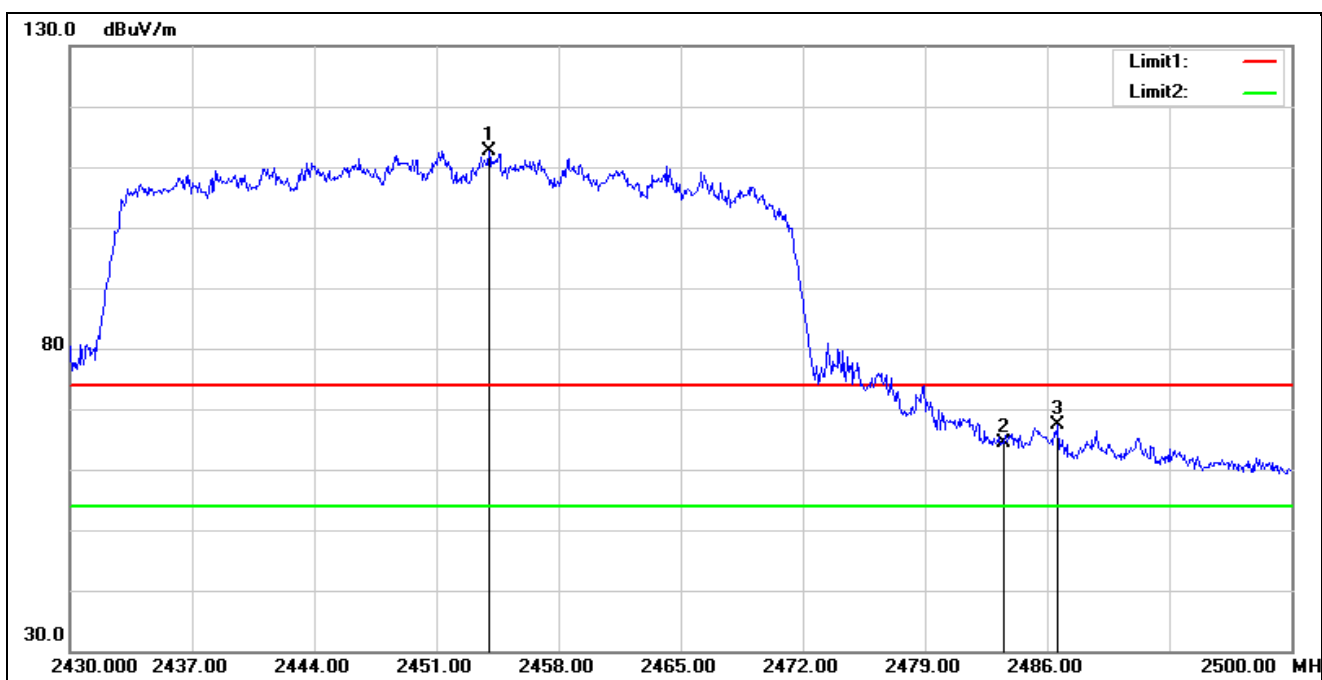

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2454.010	119.03	-6.39	112.64	74.00	38.64	peak
2	2483.500	70.94	-6.46	64.48	74.00	-9.52	peak
3	2486.630	73.88	-6.47	67.41	74.00	-6.59	peak


**1X1 - Average**

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

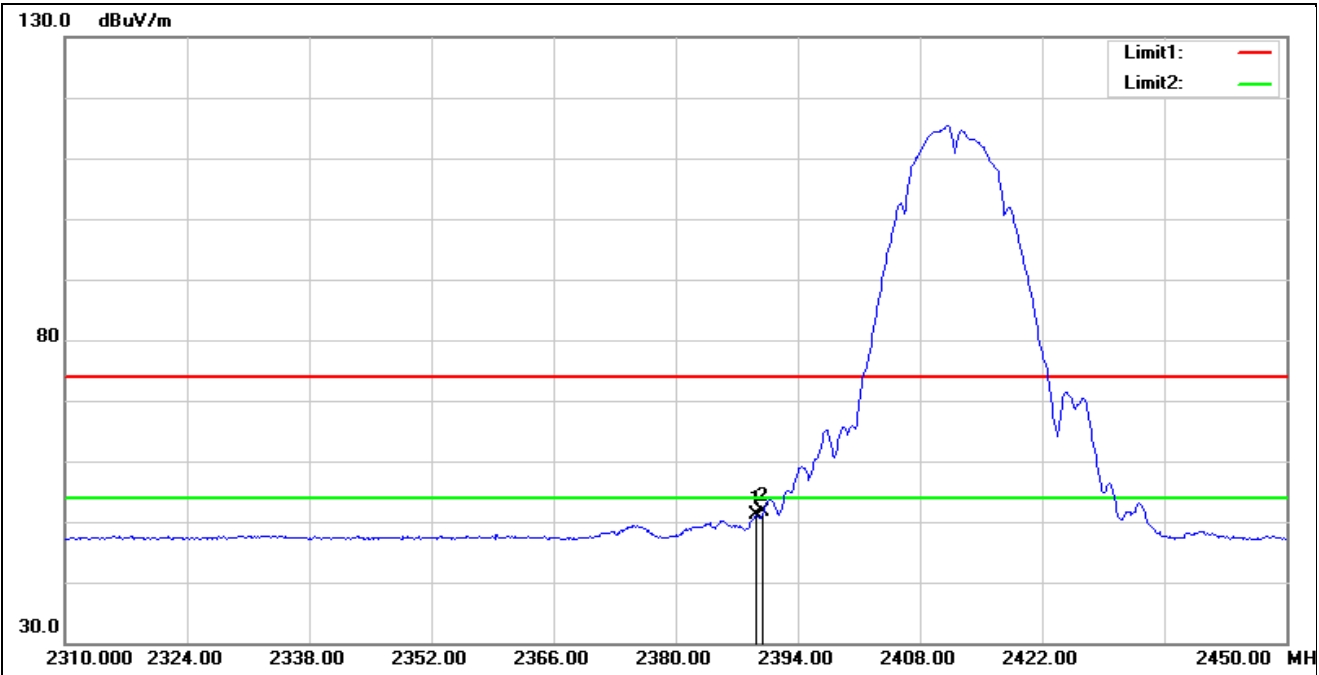

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	57.21	-6.19	51.02	54.00	-2.98	AVG
2*	2390.000	57.82	-6.19	51.63	54.00	-2.37	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

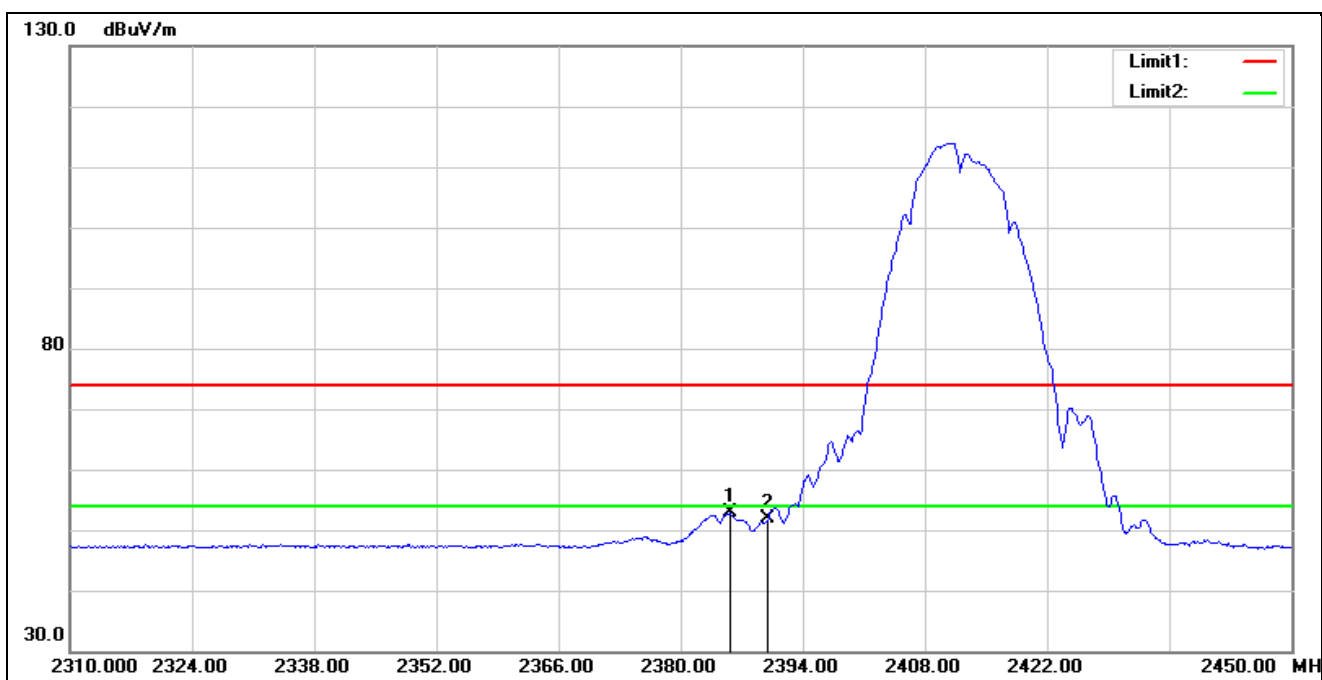

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2385.600	59.15	-6.16	52.99	54.00	-1.01	AVG
2	2390.000	58.14	-6.19	51.95	54.00	-2.05	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

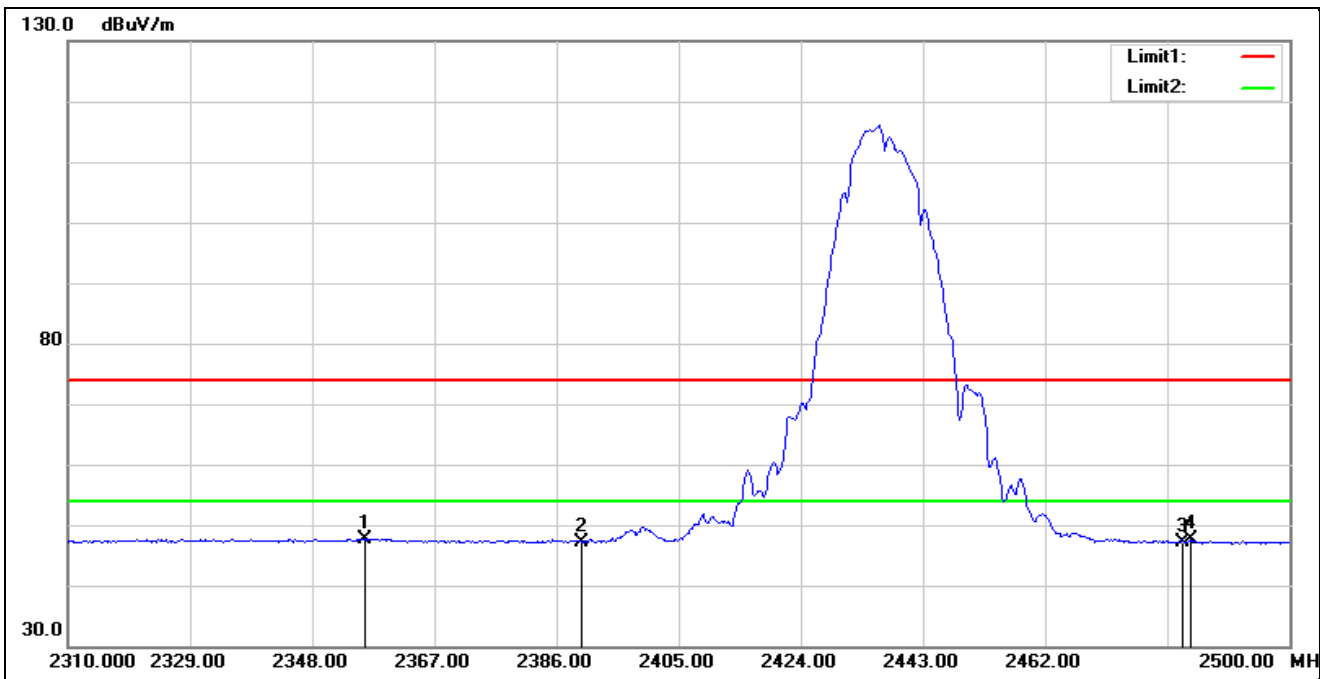


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2356.170	53.78	-6.03	47.75	54.00	-6.25	AVG
2	2390.000	53.42	-6.19	47.23	54.00	-6.77	AVG
3	2483.500	53.67	-6.46	47.21	54.00	-6.79	AVG
4	2484.610	54.03	-6.47	47.56	54.00	-6.44	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

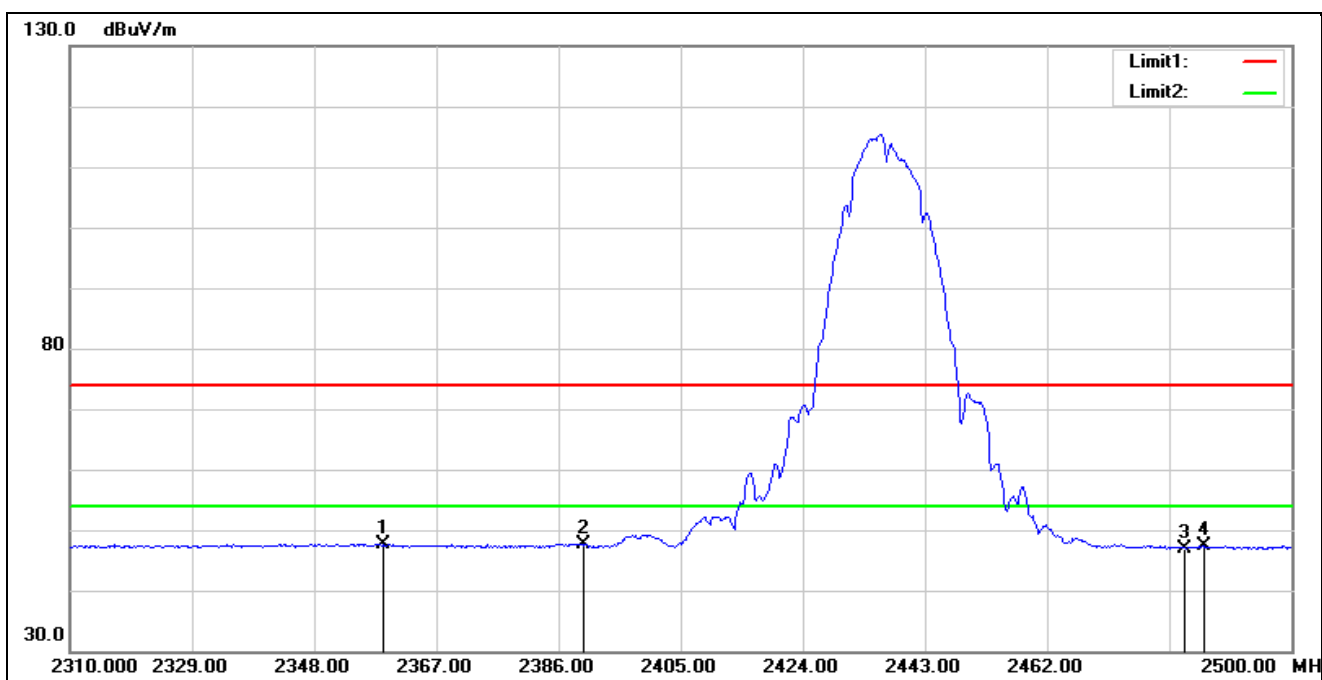


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2358.640	53.78	-6.04	47.74	54.00	-6.26	AVG
2	2390.000	53.70	-6.19	47.51	54.00	-6.49	AVG
3	2483.500	53.46	-6.46	47.00	54.00	-7.00	AVG
4	2486.320	53.92	-6.47	47.45	54.00	-6.55	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

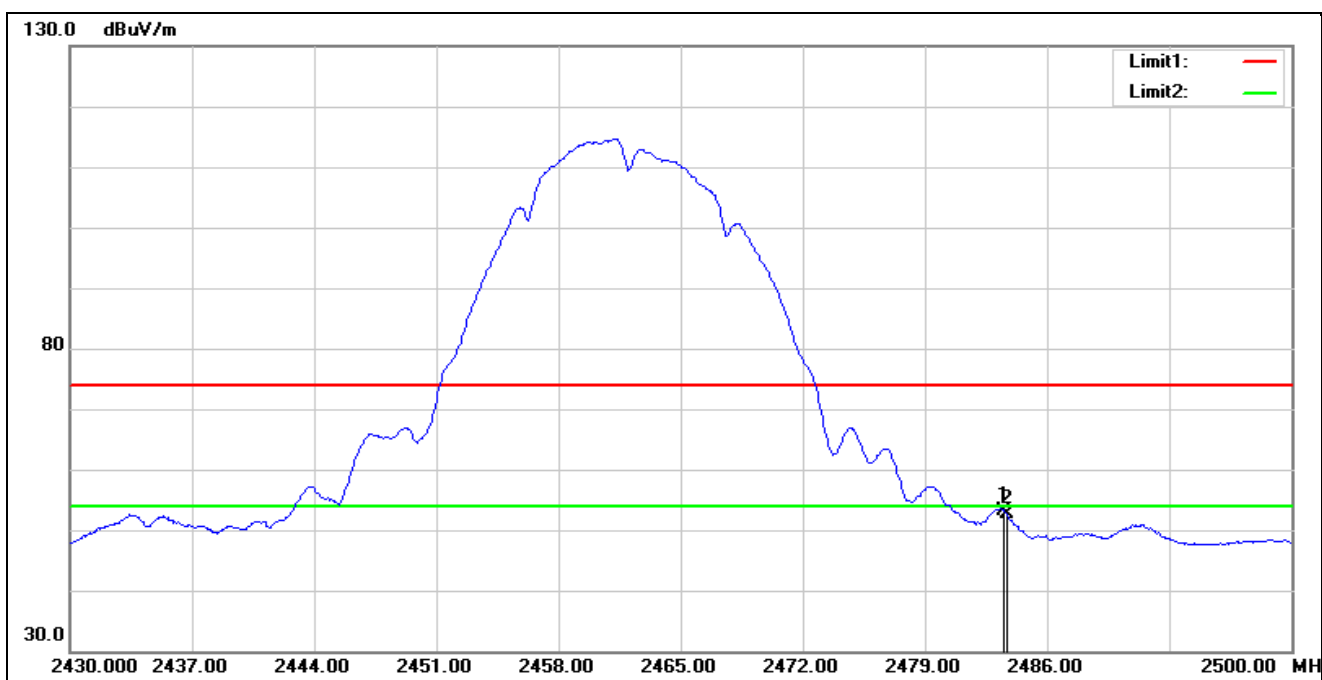


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.53	-6.46	53.07	54.00	-0.93	AVG
2	2483.690	58.97	-6.46	52.51	54.00	-1.49	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

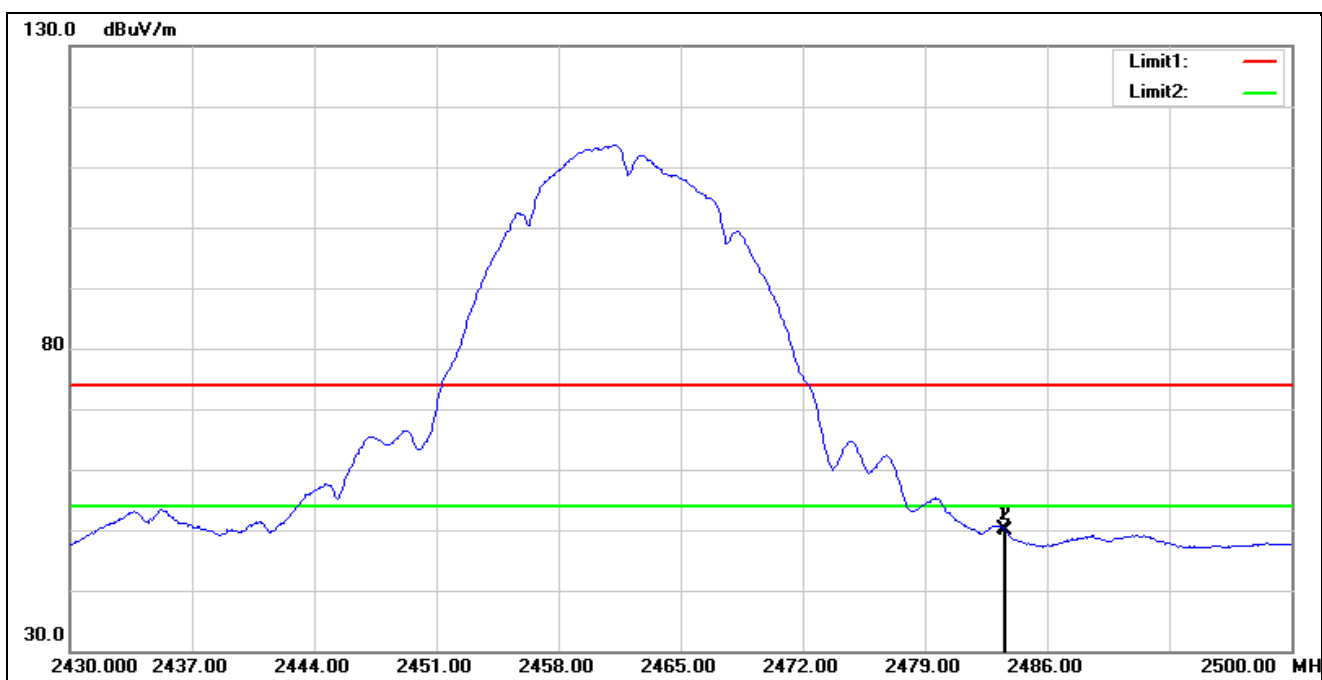


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	56.53	-6.46	50.07	54.00	-3.93	AVG
2	2483.620	56.34	-6.46	49.88	54.00	-4.12	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

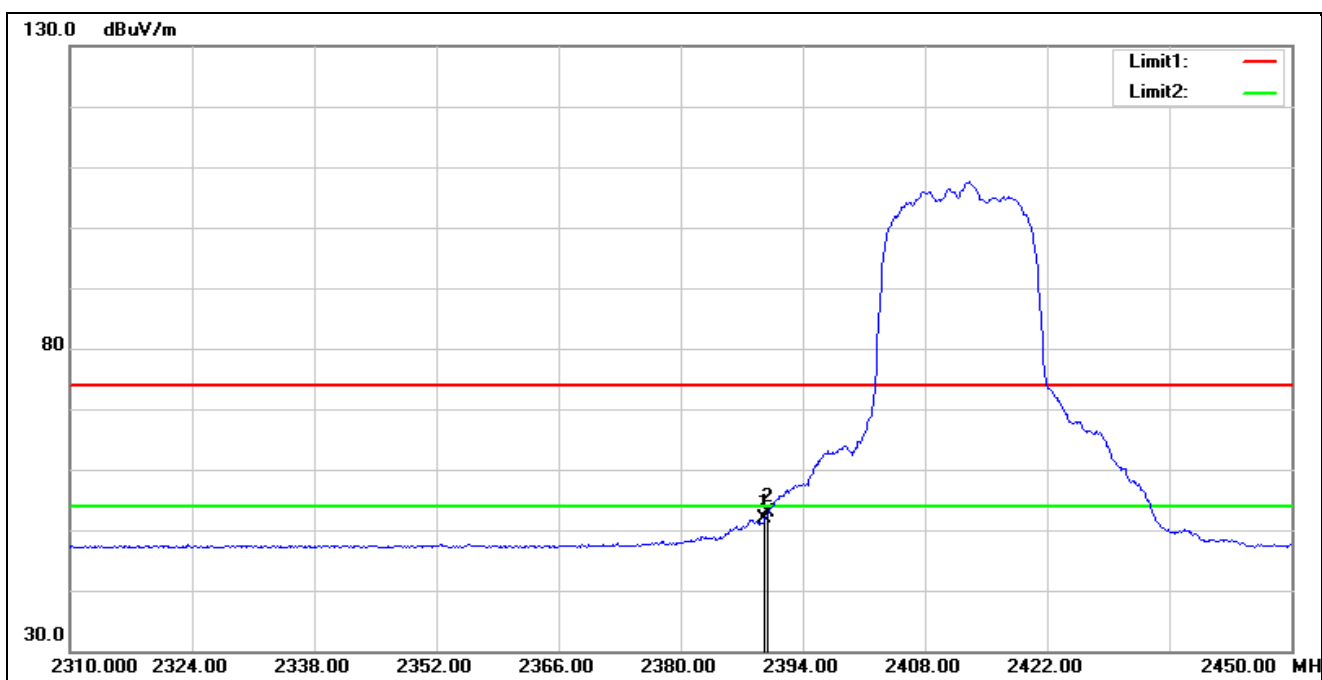


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	57.95	-6.19	51.76	54.00	-2.24	AVG
2*	2390.000	59.14	-6.19	52.95	54.00	-1.05	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

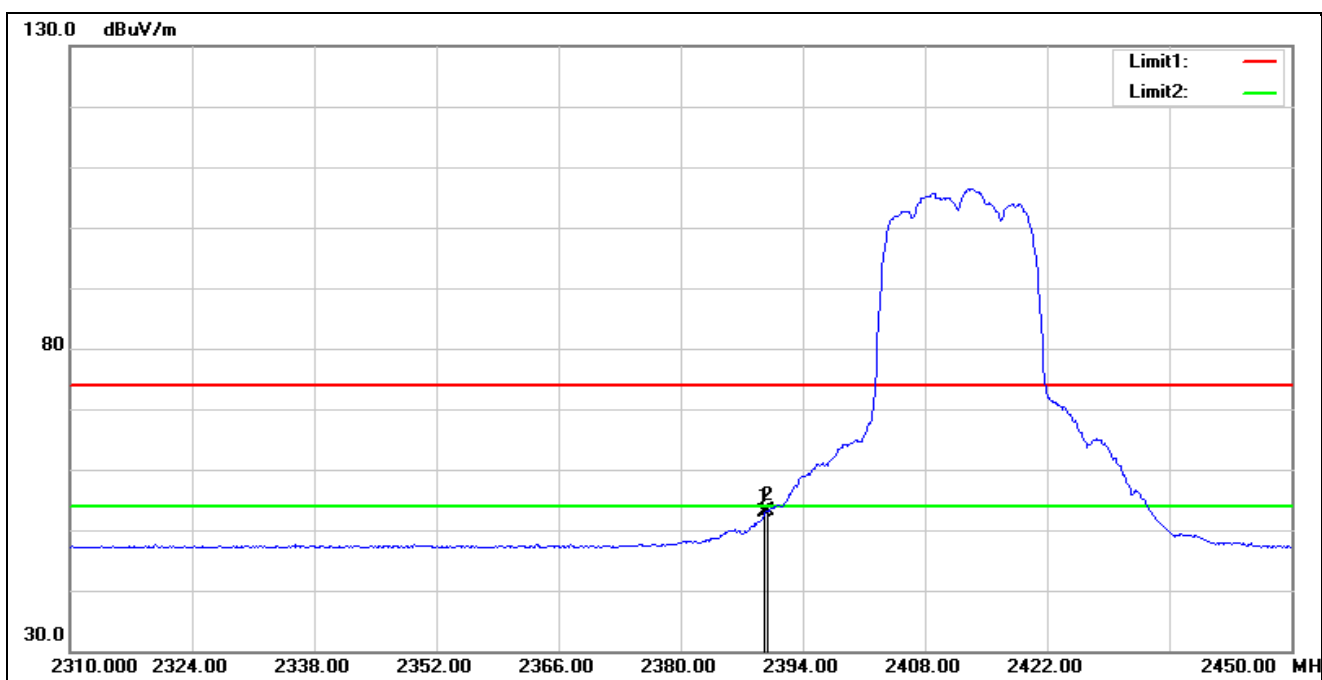


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	59.04	-6.19	52.85	54.00	-1.15	AVG
2*	2390.000	59.28	-6.19	53.09	54.00	-0.91	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

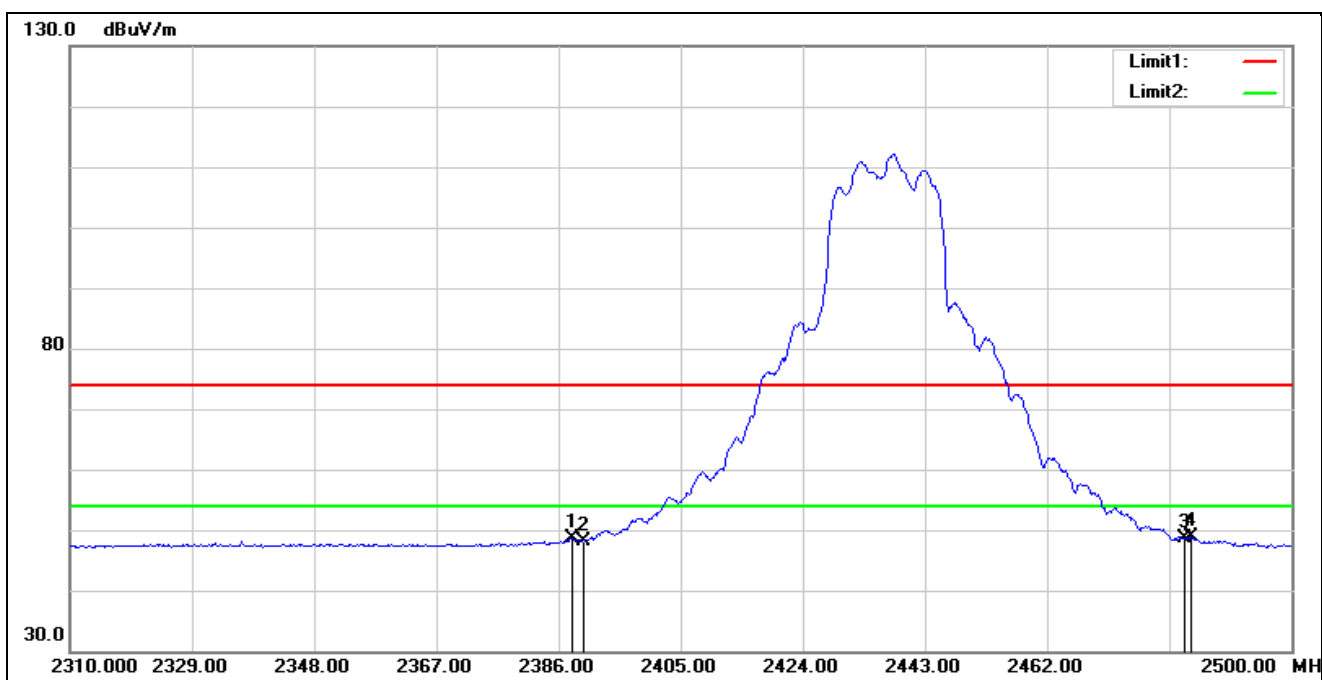

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.090	54.78	-6.18	48.60	54.00	-5.40	AVG
2	2390.000	54.33	-6.19	48.14	54.00	-5.86	AVG
3	2483.500	55.15	-6.46	48.69	54.00	-5.31	AVG
4*	2484.420	55.35	-6.47	48.88	54.00	-5.12	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

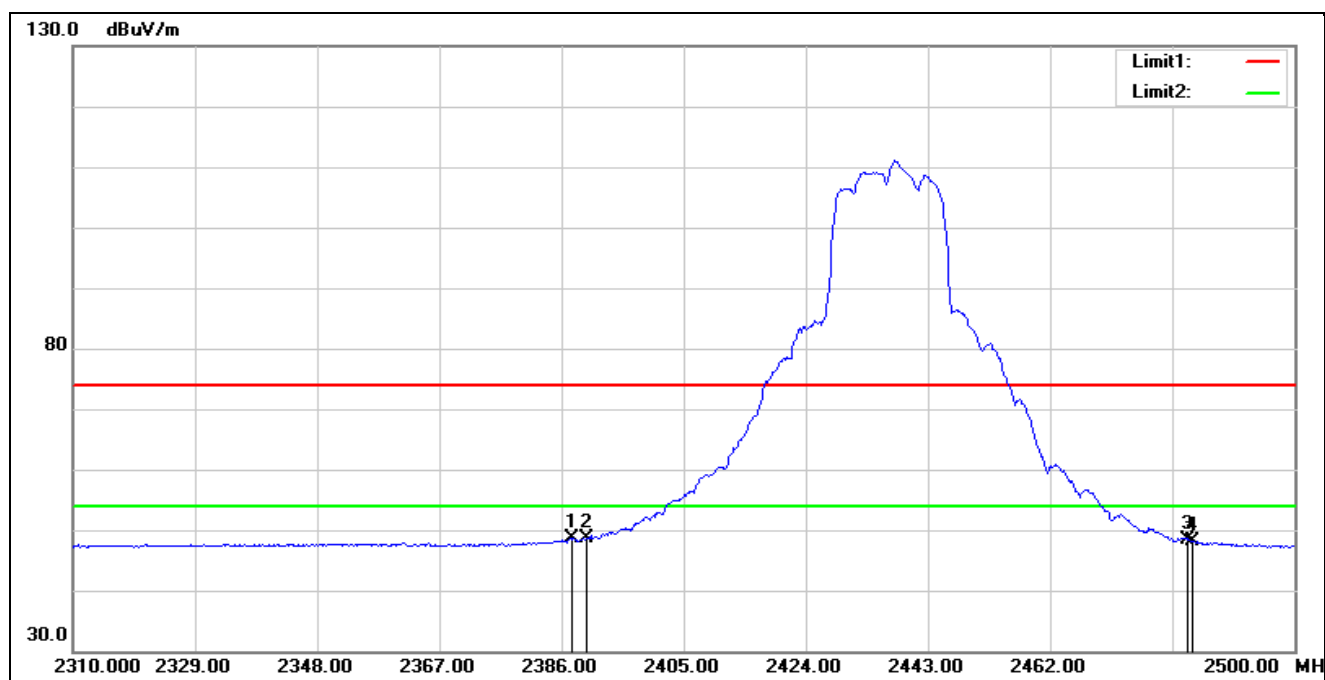

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2387.710	54.87	-6.18	48.69	54.00	-5.31	AVG
2	2390.000	54.79	-6.19	48.60	54.00	-5.40	AVG
3	2483.500	54.93	-6.46	48.47	54.00	-5.53	AVG
4	2484.040	54.70	-6.47	48.23	54.00	-5.77	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

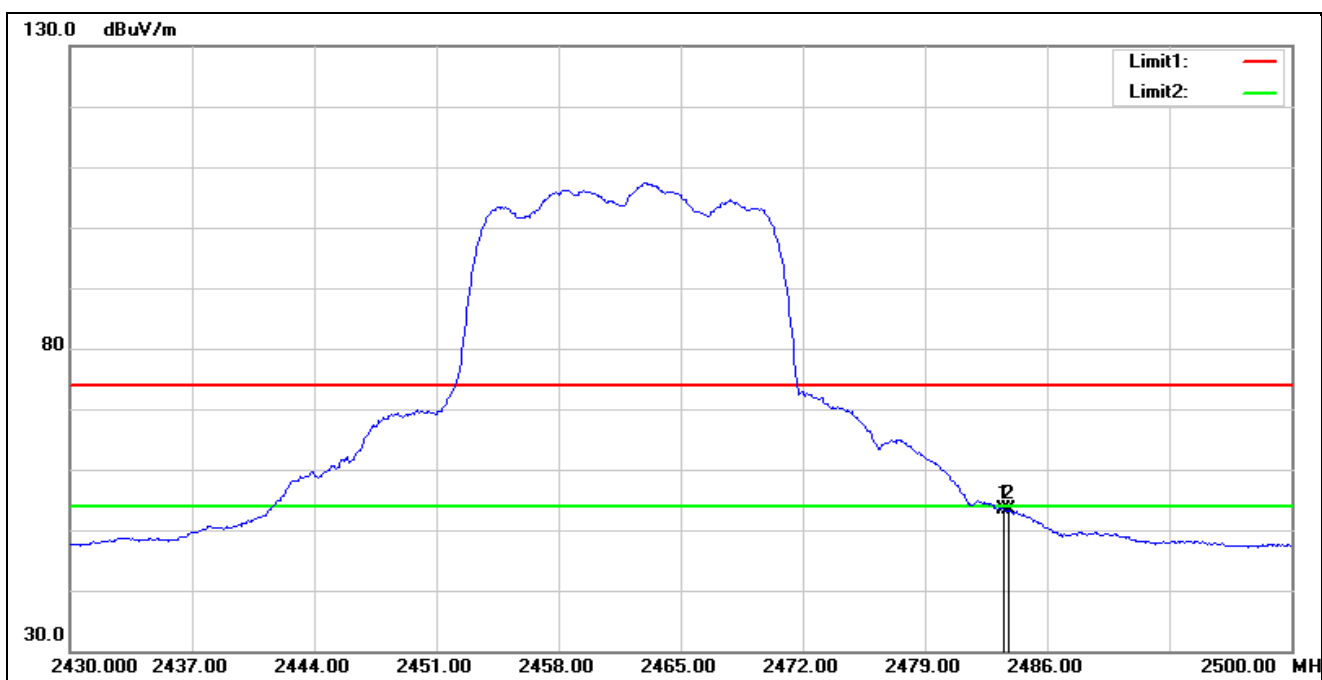


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.80	-6.46	53.34	54.00	-0.66	AVG
2	2483.830	59.76	-6.47	53.29	54.00	-0.71	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

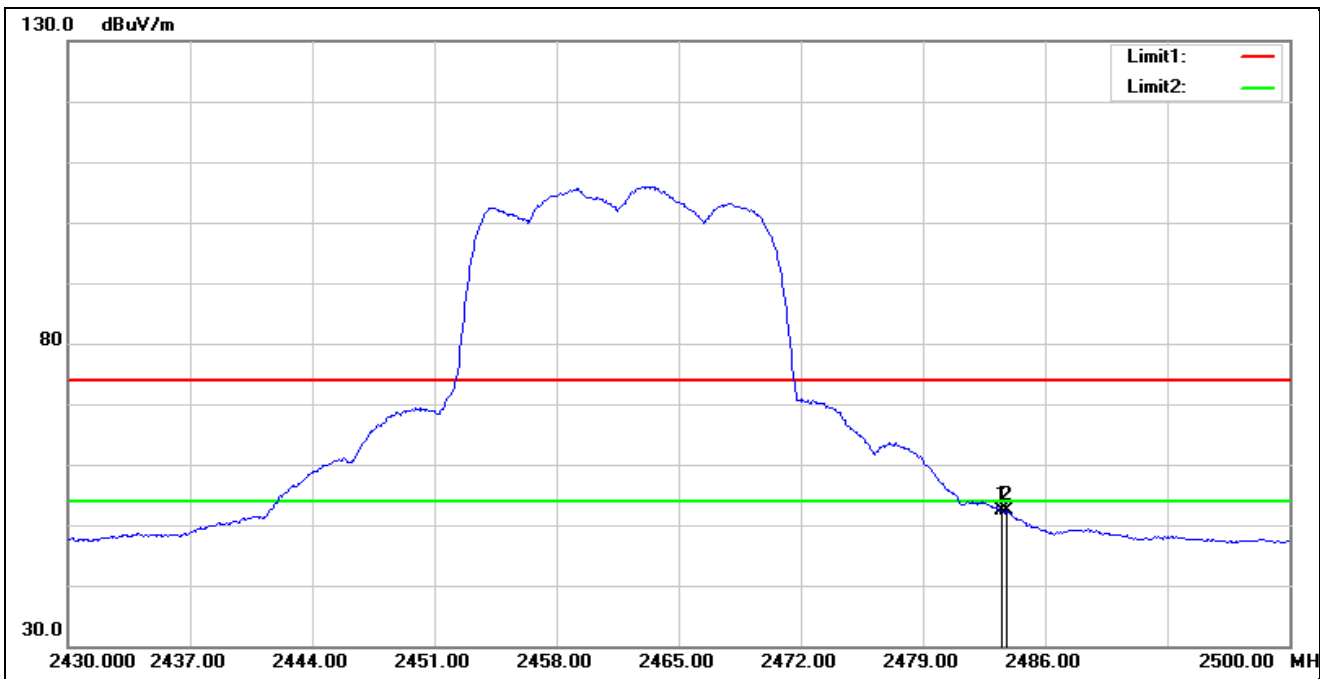


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.82	-6.46	52.36	54.00	-1.64	AVG
2	2483.830	58.73	-6.47	52.26	54.00	-1.74	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

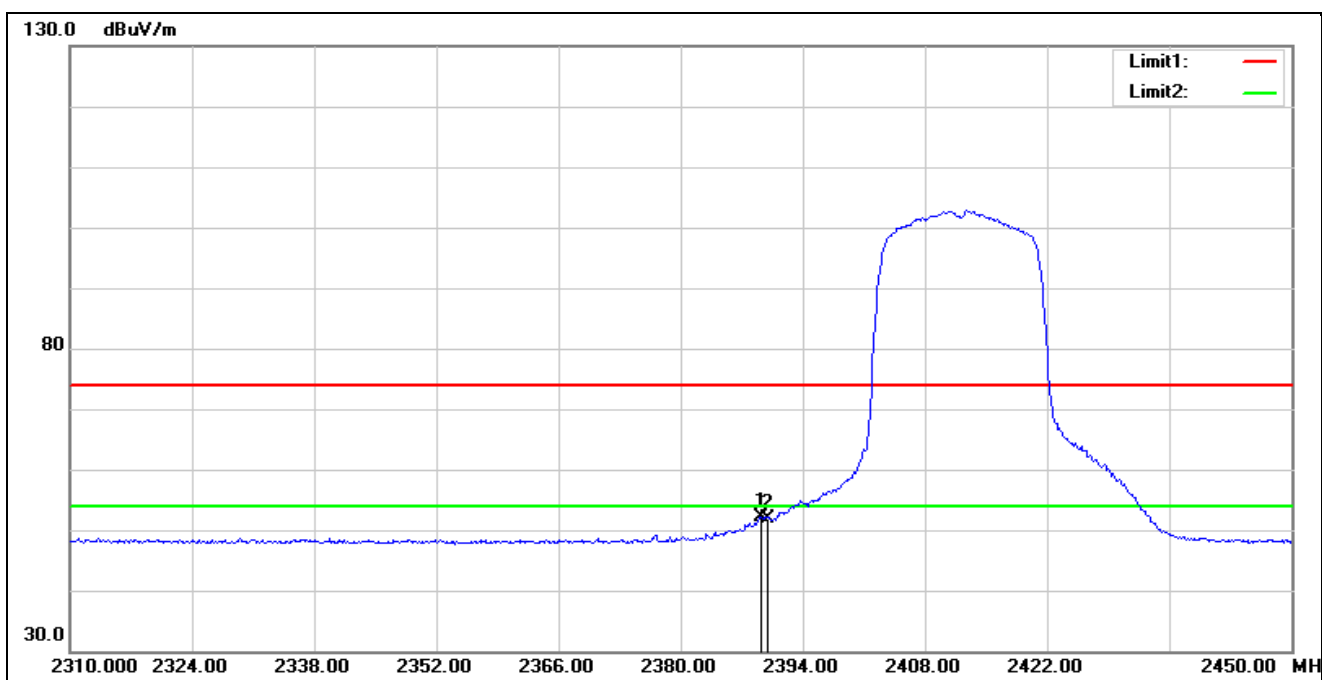


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.240	58.56	-6.50	52.06	54.00	-1.94	AVG
2	2390.000	58.43	-6.50	51.93	54.00	-2.07	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

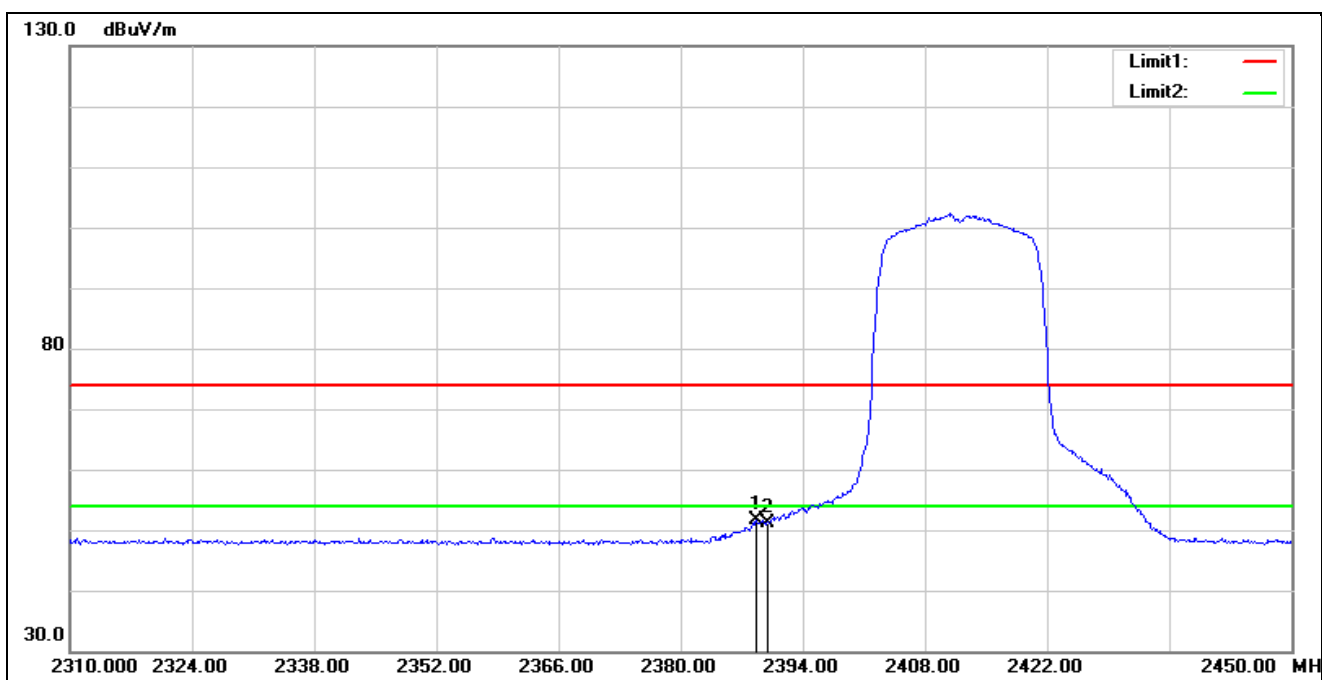


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2388.680	58.23	-6.50	51.73	54.00	-2.27	AVG
2	2390.000	57.69	-6.50	51.19	54.00	-2.81	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

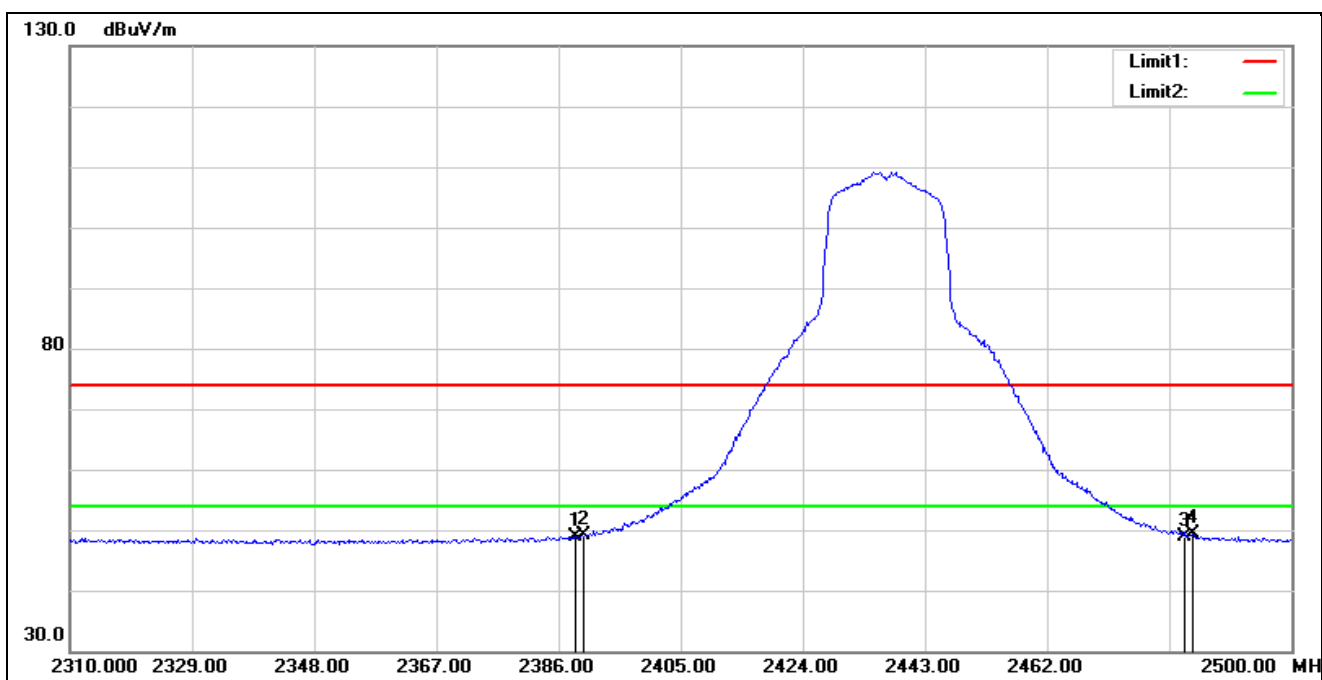


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.660	55.39	-6.50	48.89	54.00	-5.11	AVG
2	2390.000	55.60	-6.50	49.10	54.00	-4.90	AVG
3	2483.500	55.57	-6.57	49.00	54.00	-5.00	AVG
4*	2484.610	55.83	-6.57	49.26	54.00	-4.74	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

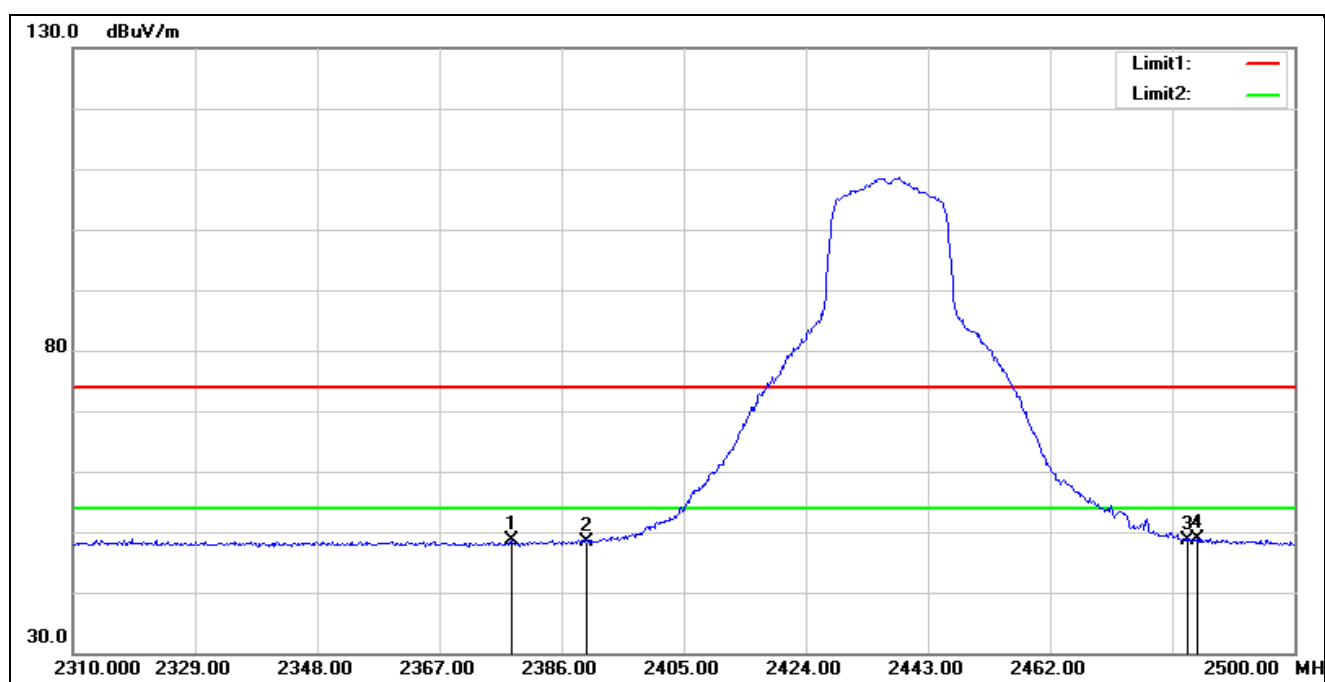


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.210	55.08	-6.49	48.59	54.00	-5.41	AVG
2	2390.000	54.93	-6.50	48.43	54.00	-5.57	AVG
3	2483.500	55.28	-6.57	48.71	54.00	-5.29	AVG
4*	2484.800	55.45	-6.57	48.88	54.00	-5.12	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

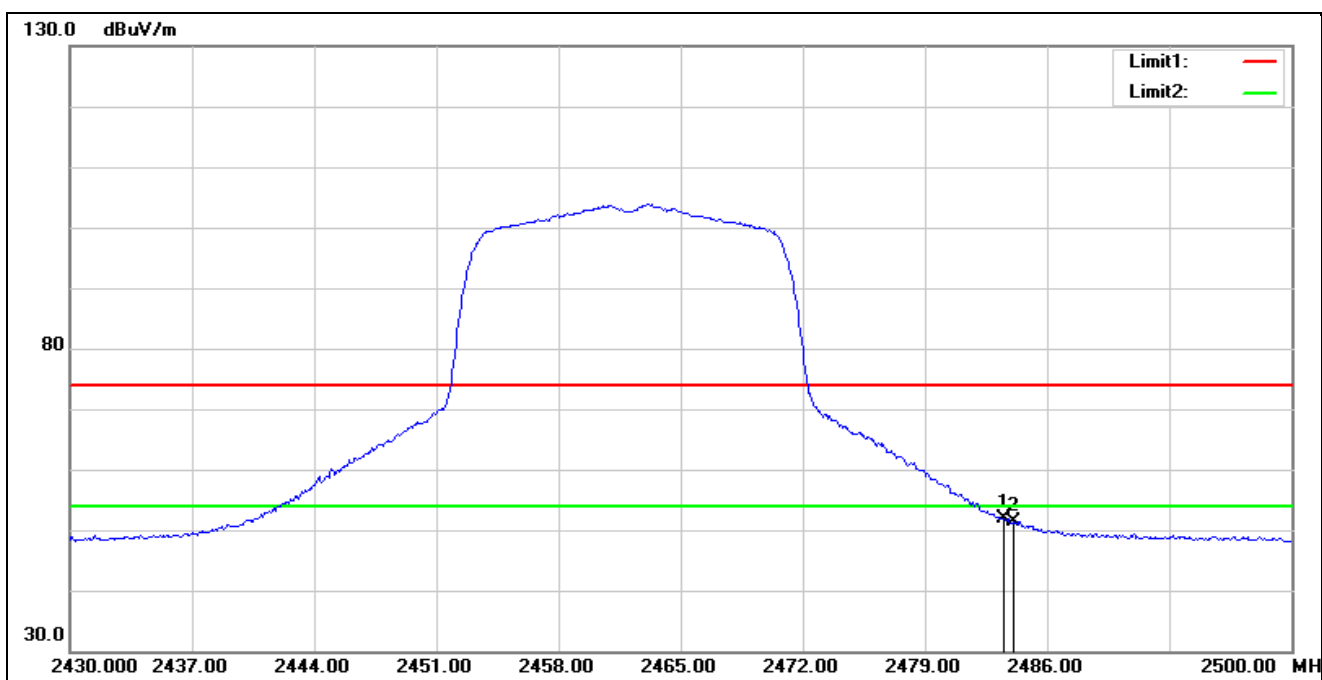

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.40	-6.57	51.83	54.00	-2.17	AVG
2	2484.040	57.91	-6.57	51.34	54.00	-2.66	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

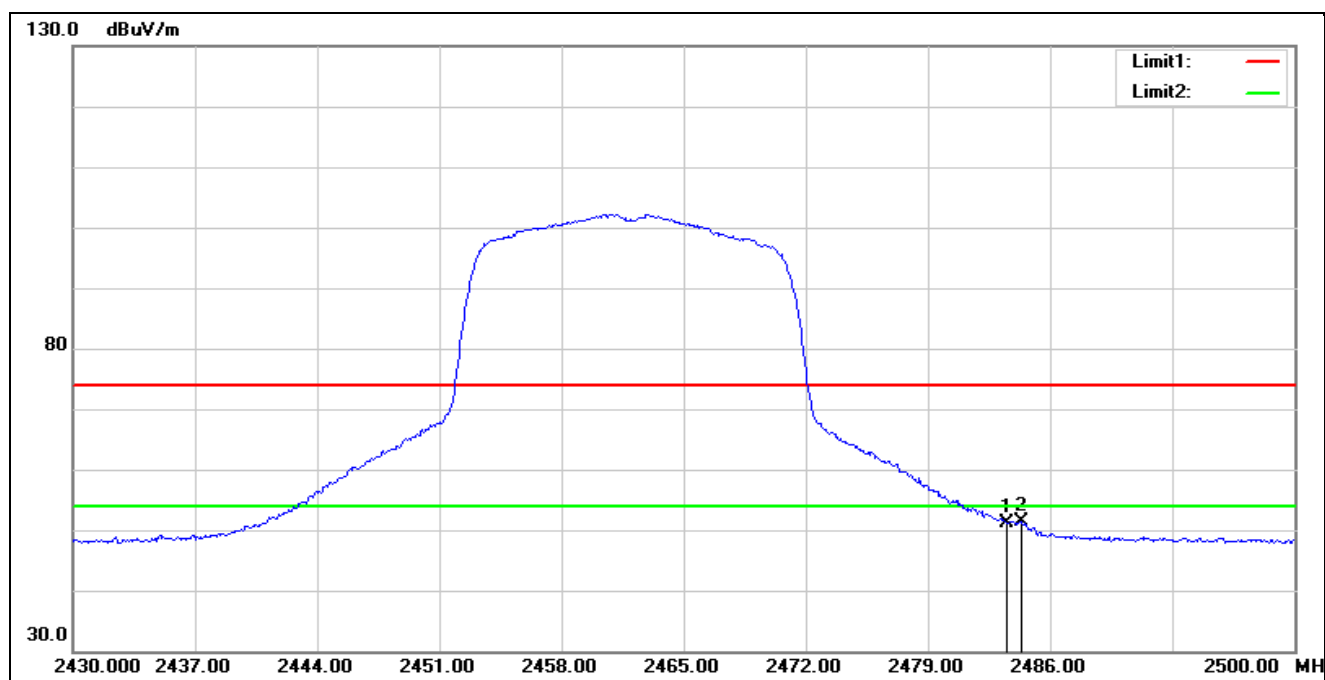

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.72	-6.57	51.15	54.00	-2.85	AVG
2*	2484.320	57.98	-6.57	51.41	54.00	-2.59	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

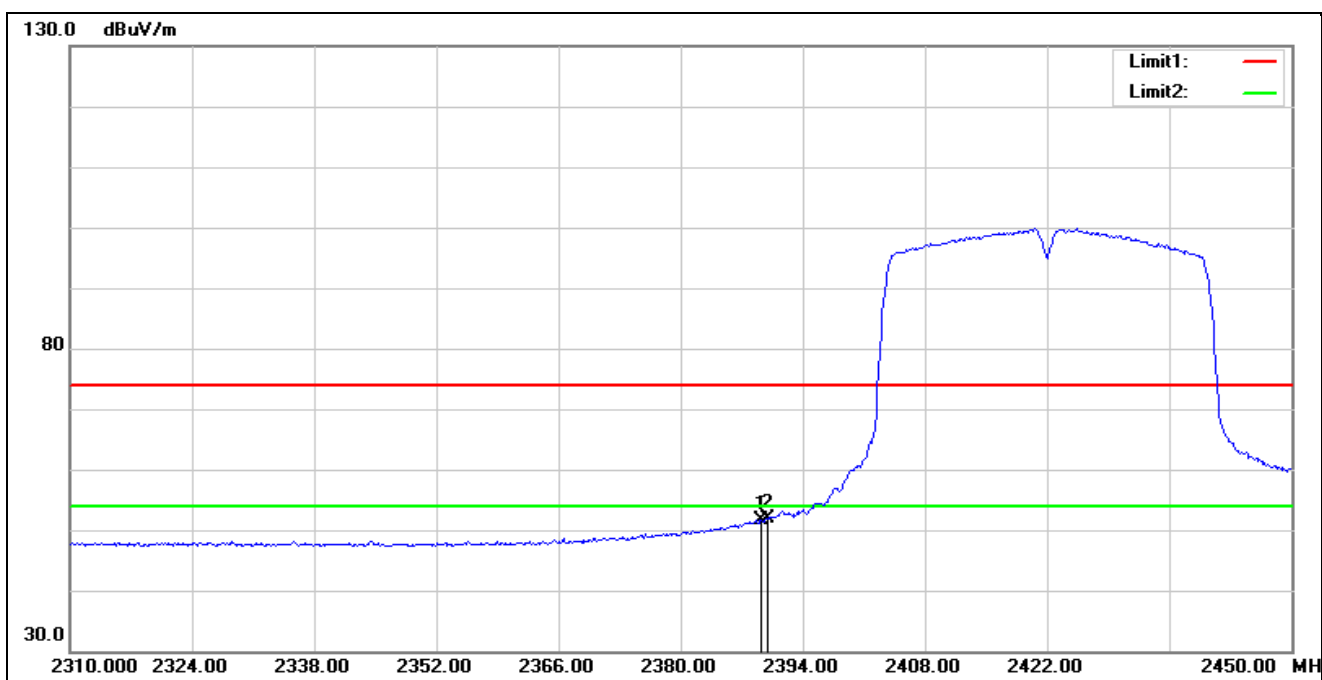


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	58.18	-6.50	51.68	54.00	-2.32	AVG
2*	2390.000	58.44	-6.50	51.94	54.00	-2.06	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

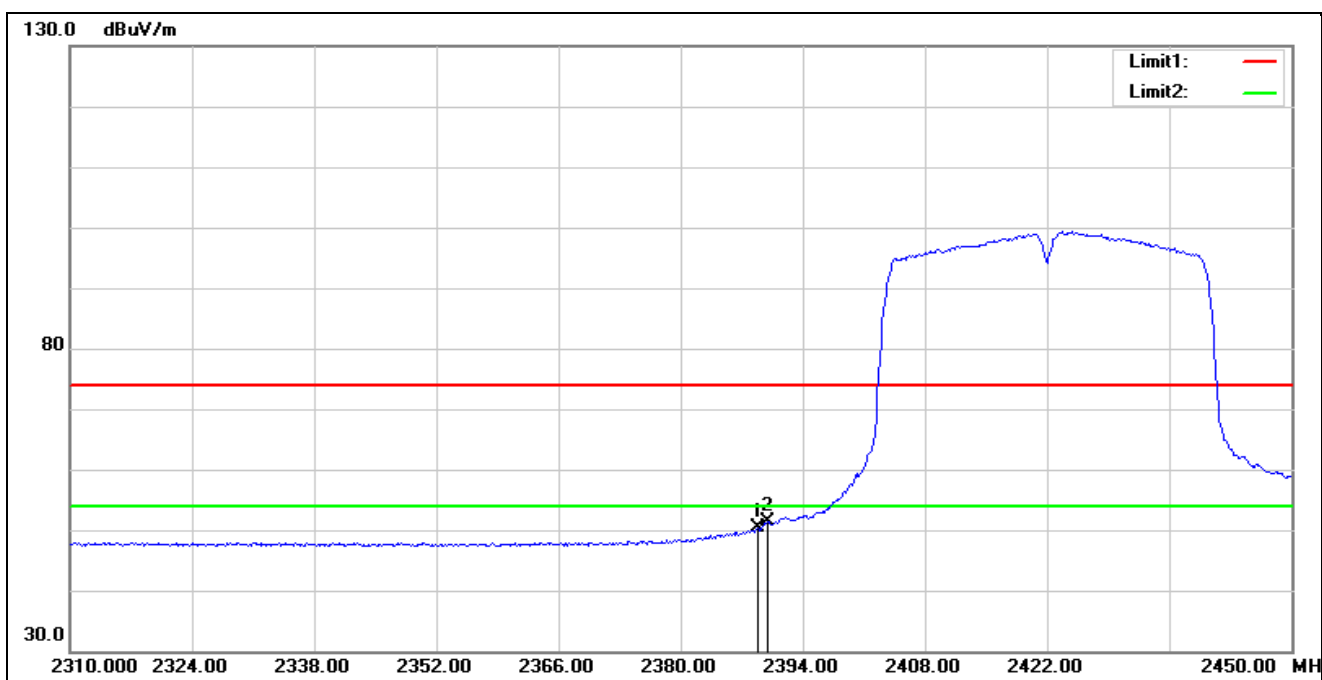


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.820	56.84	-6.50	50.34	54.00	-3.66	AVG
2*	2390.000	57.92	-6.50	51.42	54.00	-2.58	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

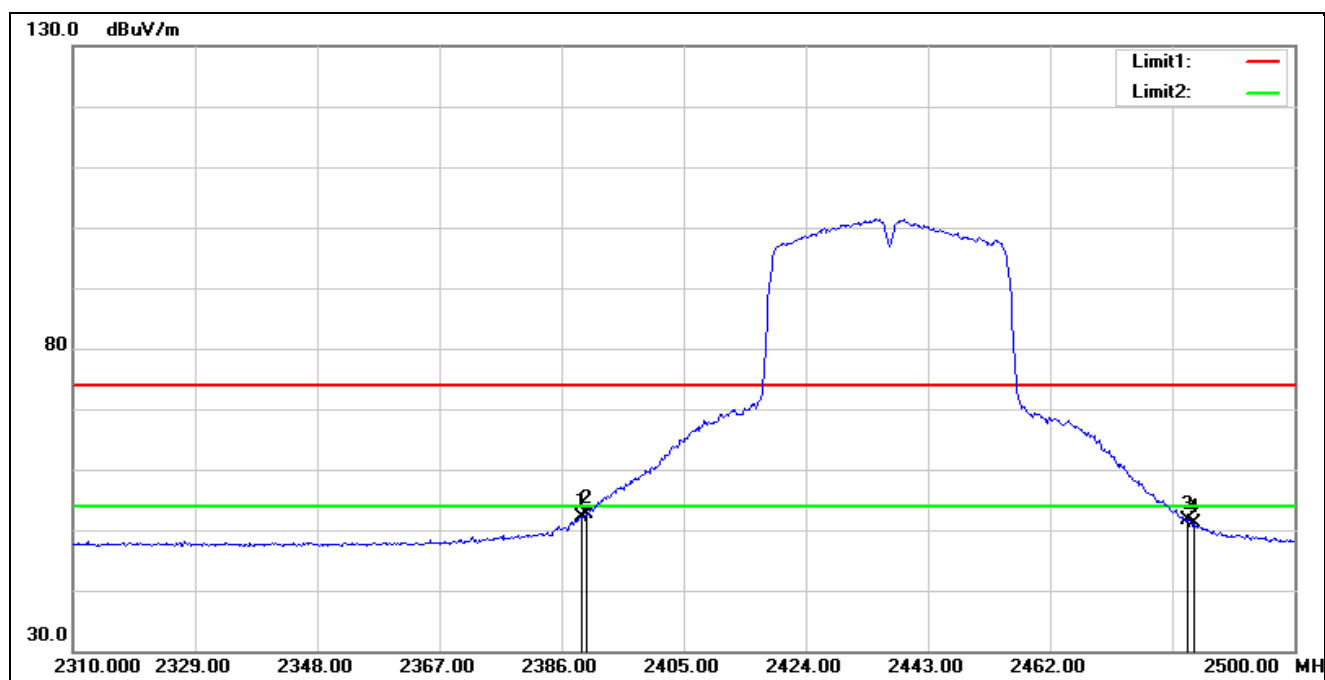


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	58.70	-6.50	52.20	54.00	-1.80	AVG
2*	2390.000	59.12	-6.50	52.62	54.00	-1.38	AVG
3	2483.500	58.12	-6.57	51.55	54.00	-2.45	AVG
4	2484.420	57.63	-6.57	51.06	54.00	-2.94	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

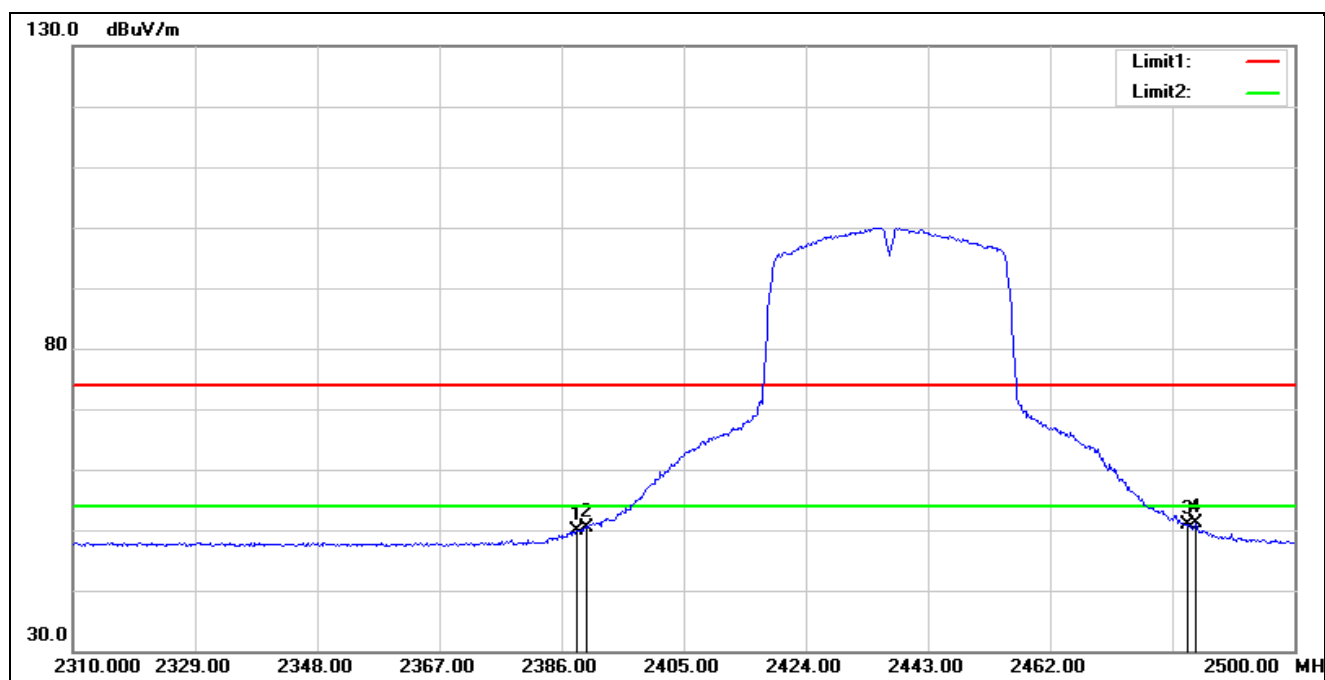


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.280	56.41	-6.50	49.91	54.00	-4.09	AVG
2	2390.000	56.92	-6.50	50.42	54.00	-3.58	AVG
3	2483.500	57.37	-6.57	50.80	54.00	-3.20	AVG
4*	2484.610	57.67	-6.57	51.10	54.00	-2.90	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

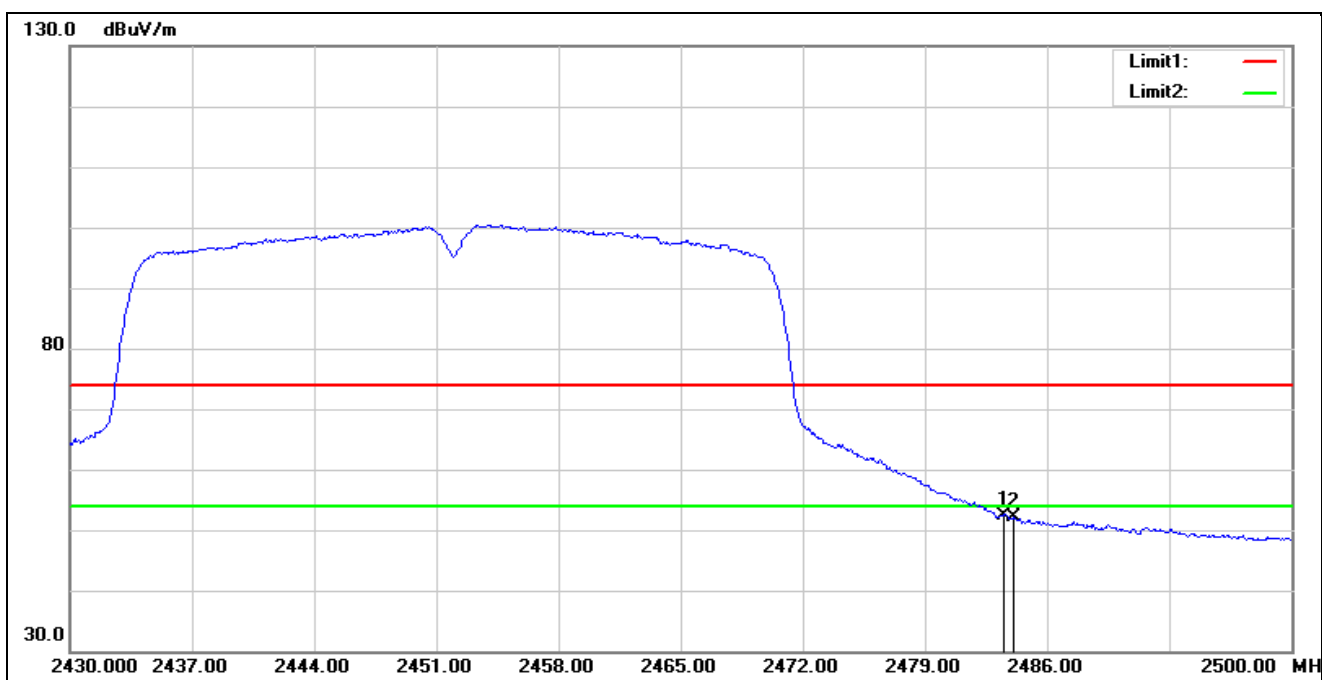


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.01	-6.57	52.44	54.00	-1.56	AVG
2	2484.110	58.69	-6.57	52.12	54.00	-1.88	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

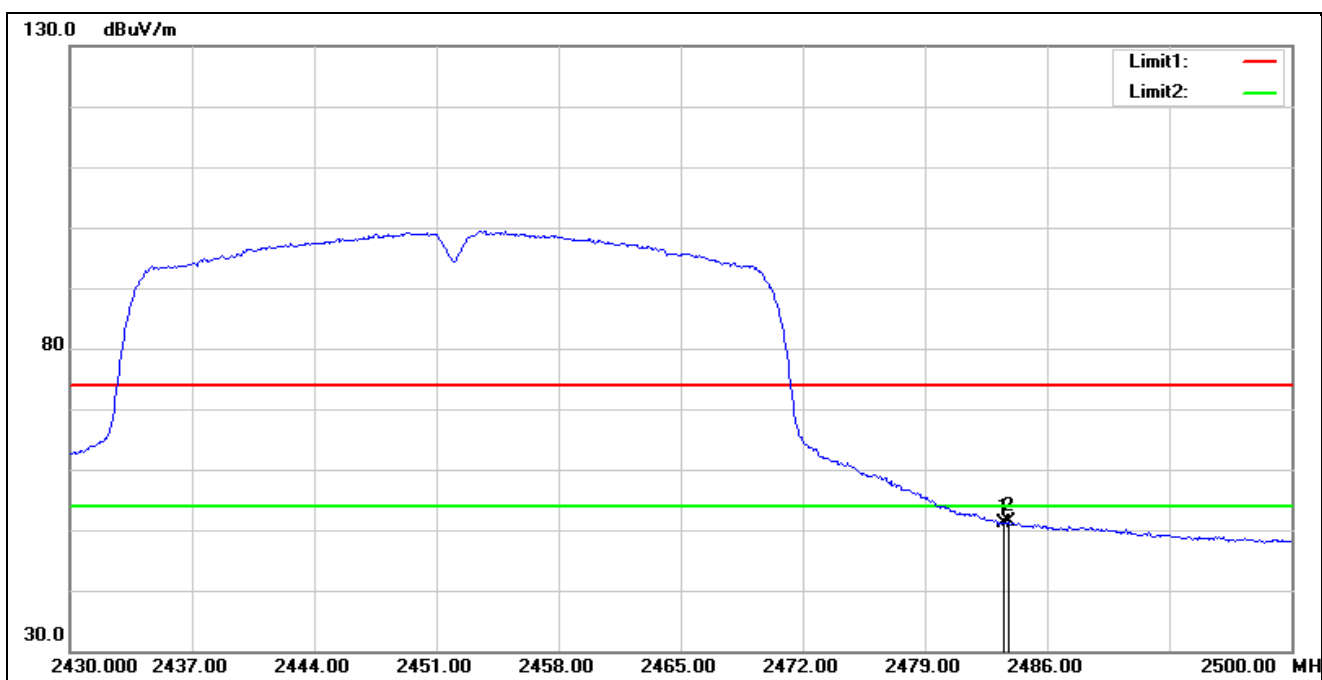


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.69	-6.57	51.12	54.00	-2.88	AVG
2*	2483.830	57.90	-6.57	51.33	54.00	-2.67	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

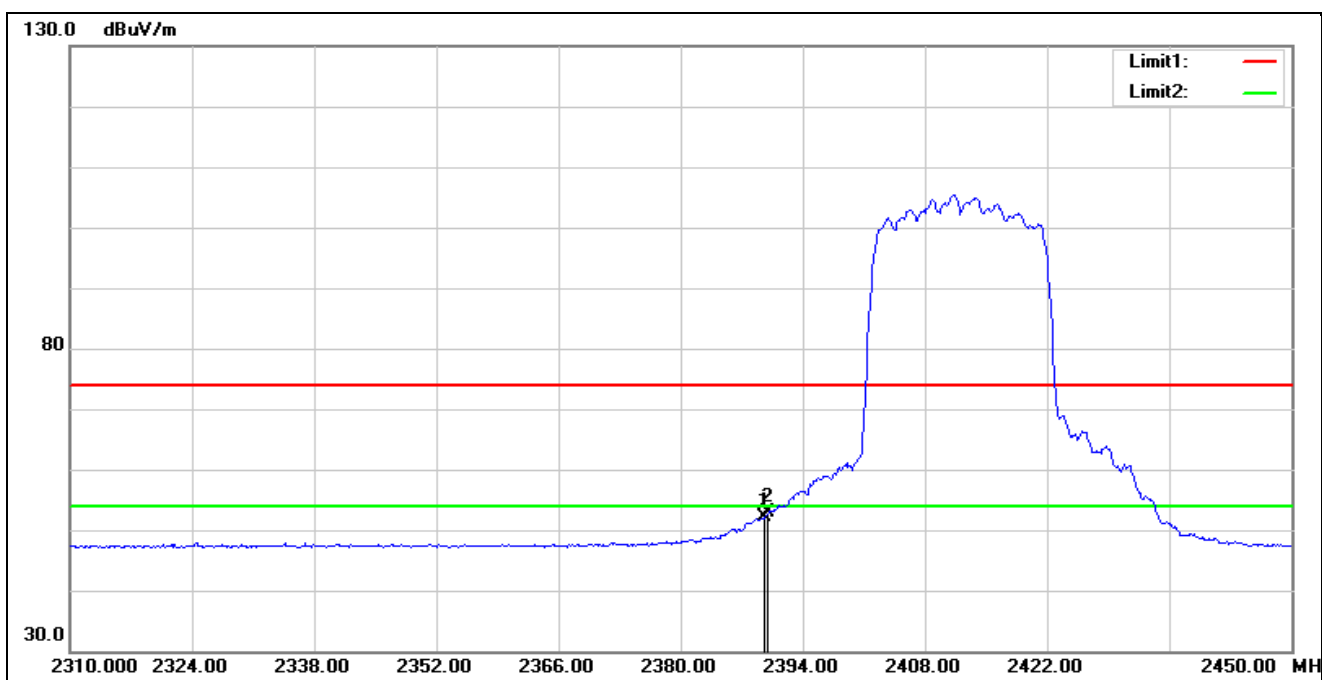

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	58.28	-6.19	52.09	54.00	-1.91	AVG
2*	2390.000	58.95	-6.19	52.76	54.00	-1.24	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

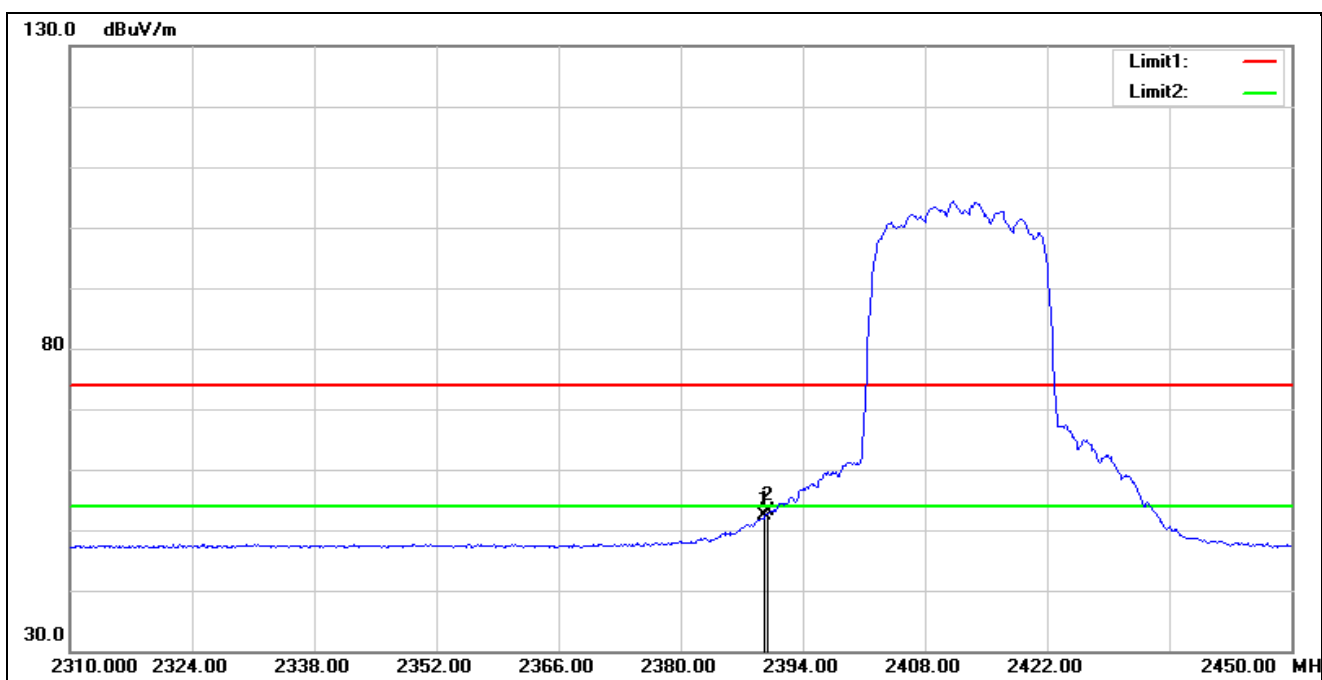

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	58.69	-6.19	52.50	54.00	-1.50	AVG
2*	2390.000	59.21	-6.19	53.02	54.00	-0.98	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

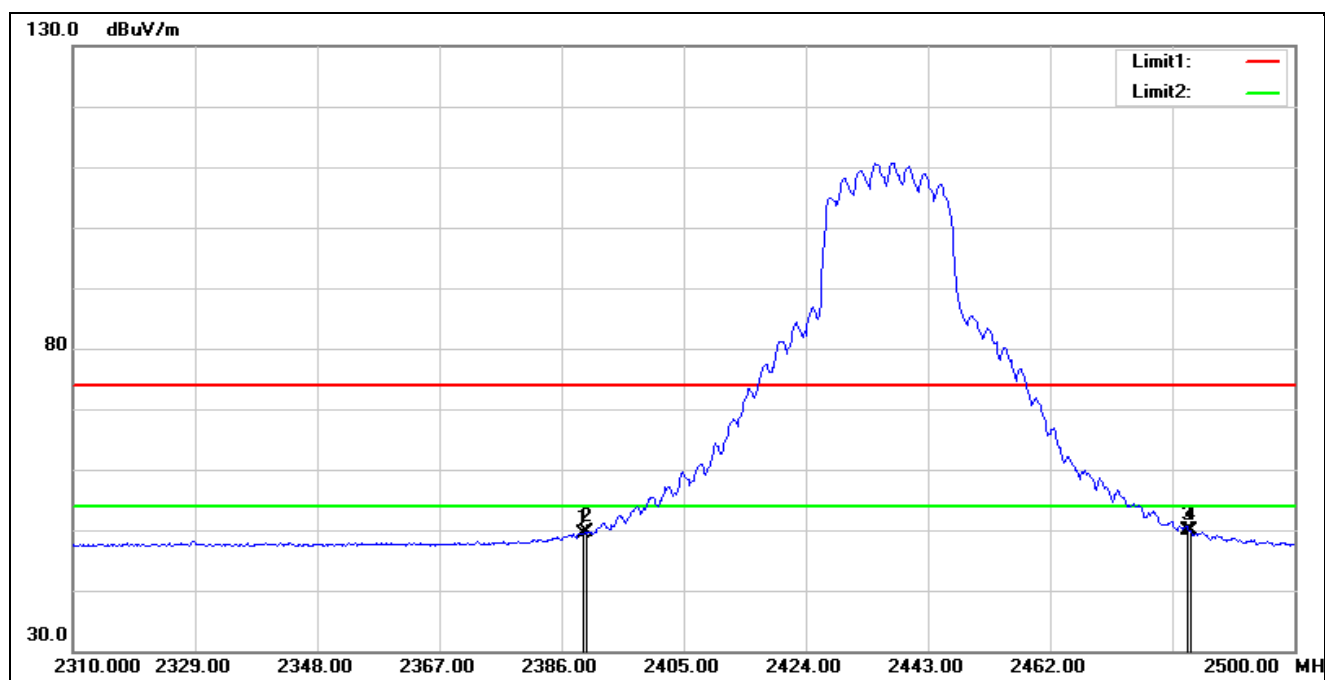


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	55.66	-6.19	49.47	54.00	-4.53	AVG
2	2390.000	55.88	-6.19	49.69	54.00	-4.31	AVG
3*	2483.500	56.37	-6.46	49.91	54.00	-4.09	AVG
4	2483.850	56.24	-6.47	49.77	54.00	-4.23	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

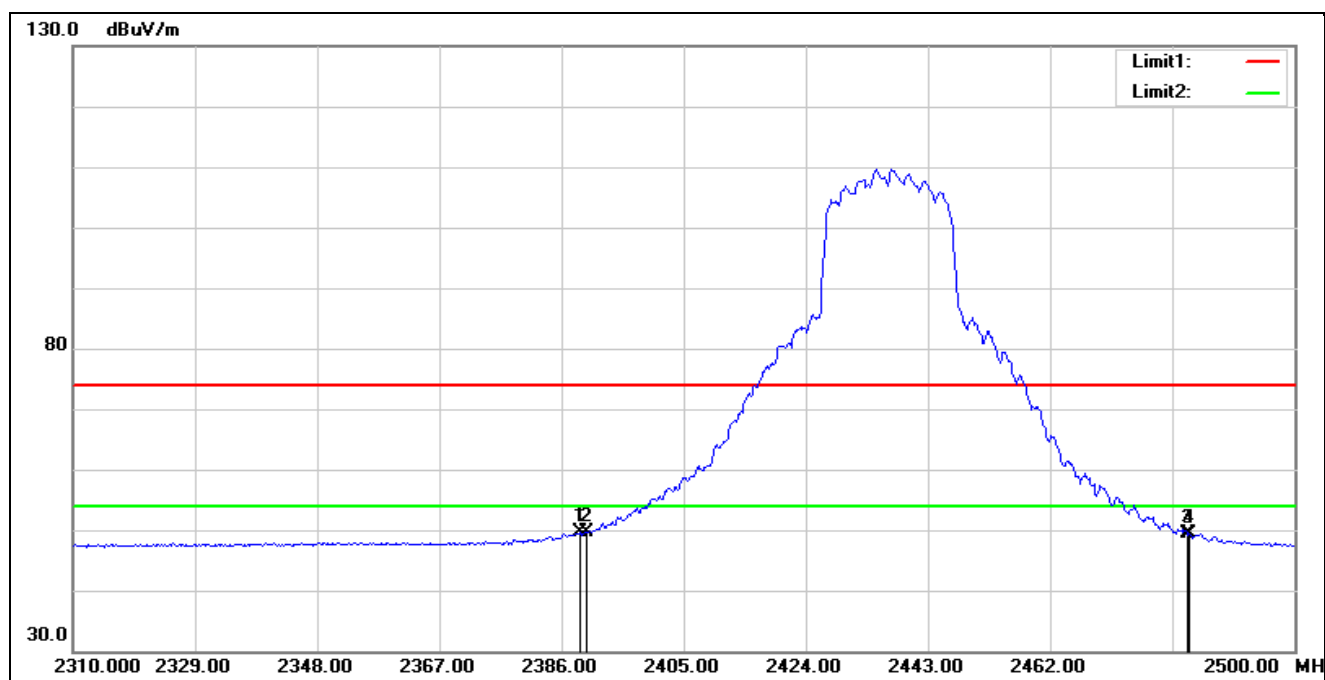


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	55.78	-6.18	49.60	54.00	-4.40	AVG
2*	2390.000	55.88	-6.19	49.69	54.00	-4.31	AVG
3	2483.500	55.74	-6.46	49.28	54.00	-4.72	AVG
4	2483.660	55.74	-6.46	49.28	54.00	-4.72	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

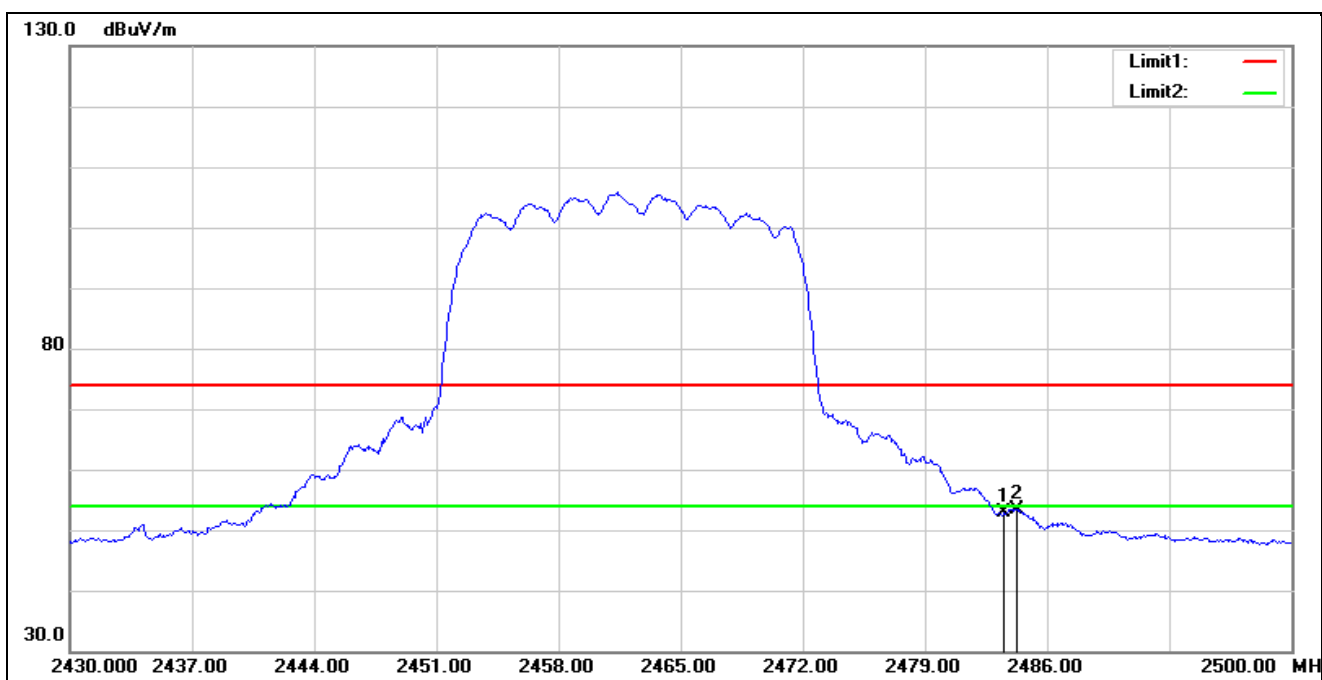


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.32	-6.46	52.86	54.00	-1.14	AVG
2*	2484.250	59.88	-6.47	53.41	54.00	-0.59	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

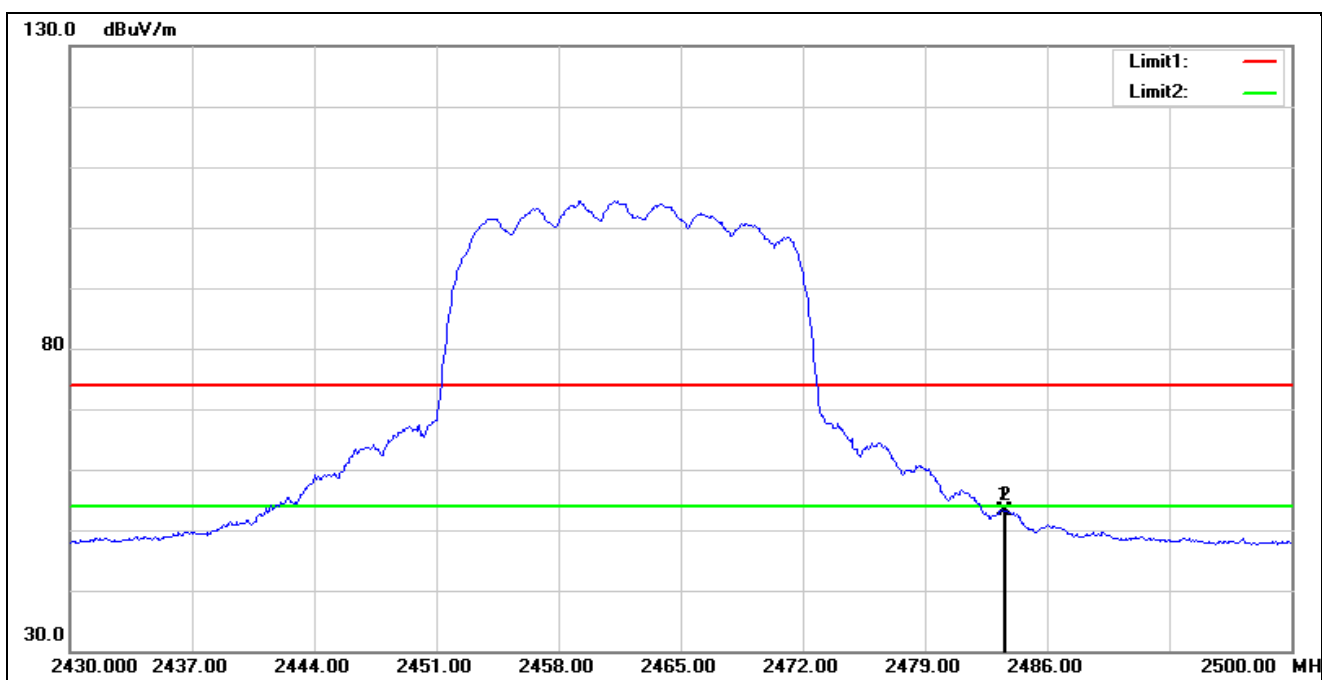


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.55	-6.46	53.09	54.00	-0.91	AVG
2*	2483.620	59.66	-6.46	53.20	54.00	-0.80	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

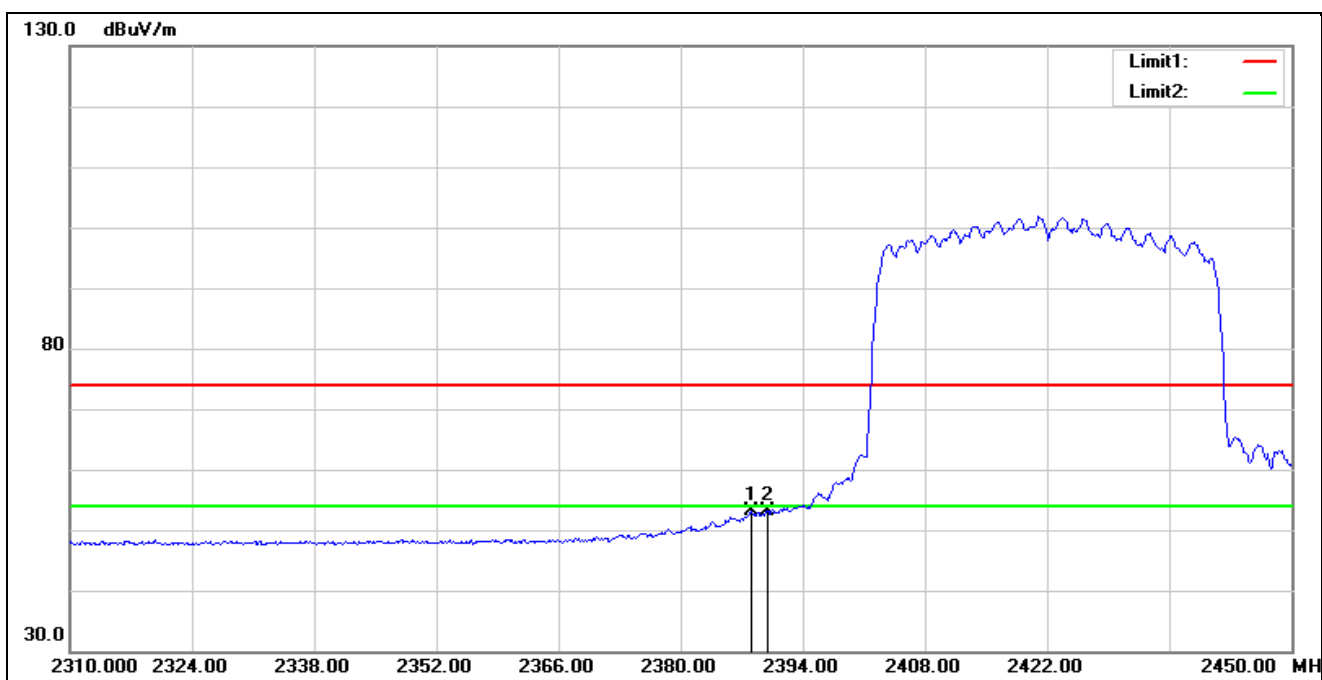


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.120	59.32	-6.18	53.14	54.00	-0.86	AVG
2*	2390.000	59.34	-6.19	53.15	54.00	-0.85	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

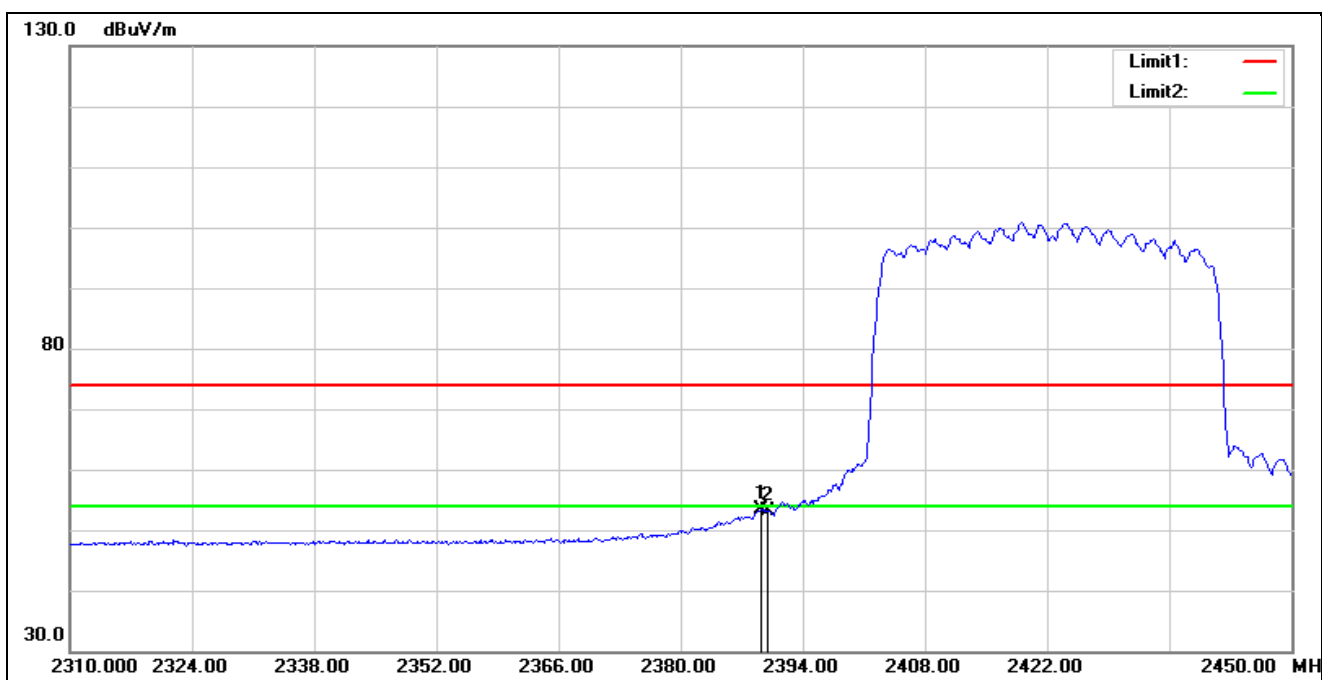


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.240	59.57	-6.19	53.38	54.00	-0.62	AVG
2	2390.000	59.29	-6.19	53.10	54.00	-0.90	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

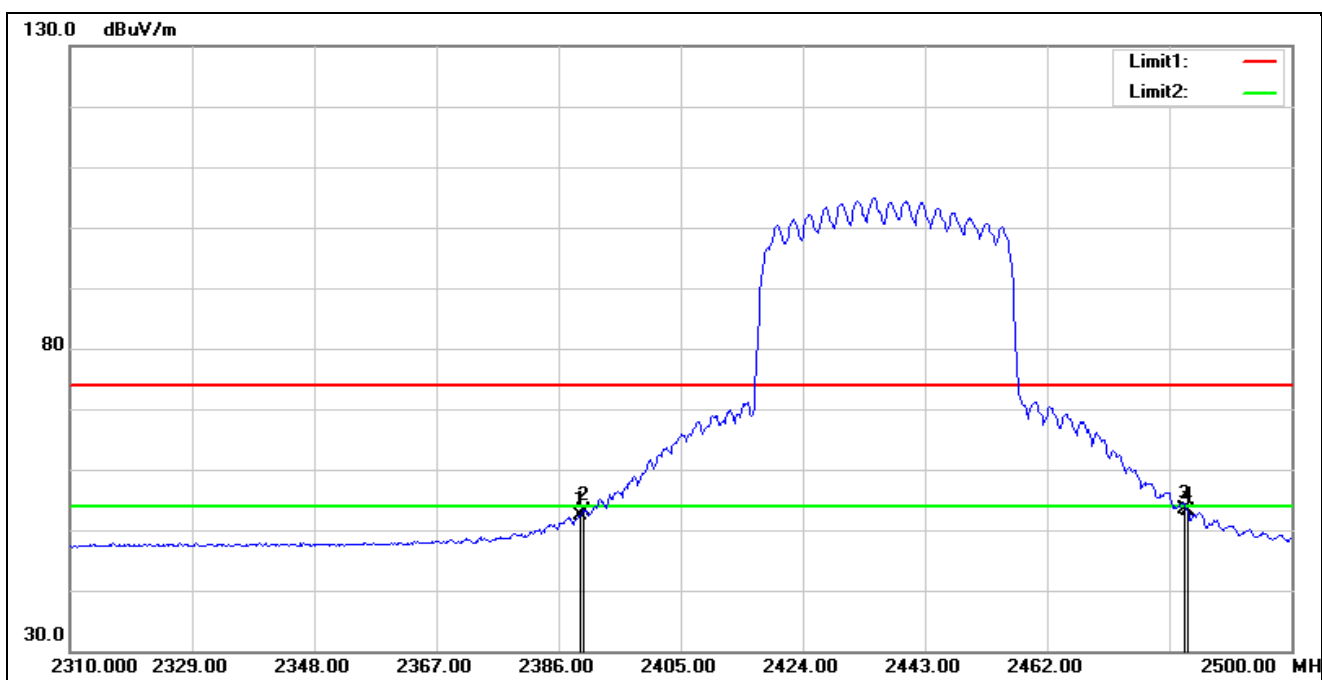

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	58.59	-6.19	52.40	54.00	-1.60	AVG
2	2390.000	59.43	-6.19	53.24	54.00	-0.76	AVG
3*	2483.500	59.95	-6.46	53.49	54.00	-0.51	AVG
4	2483.850	59.65	-6.47	53.18	54.00	-0.82	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

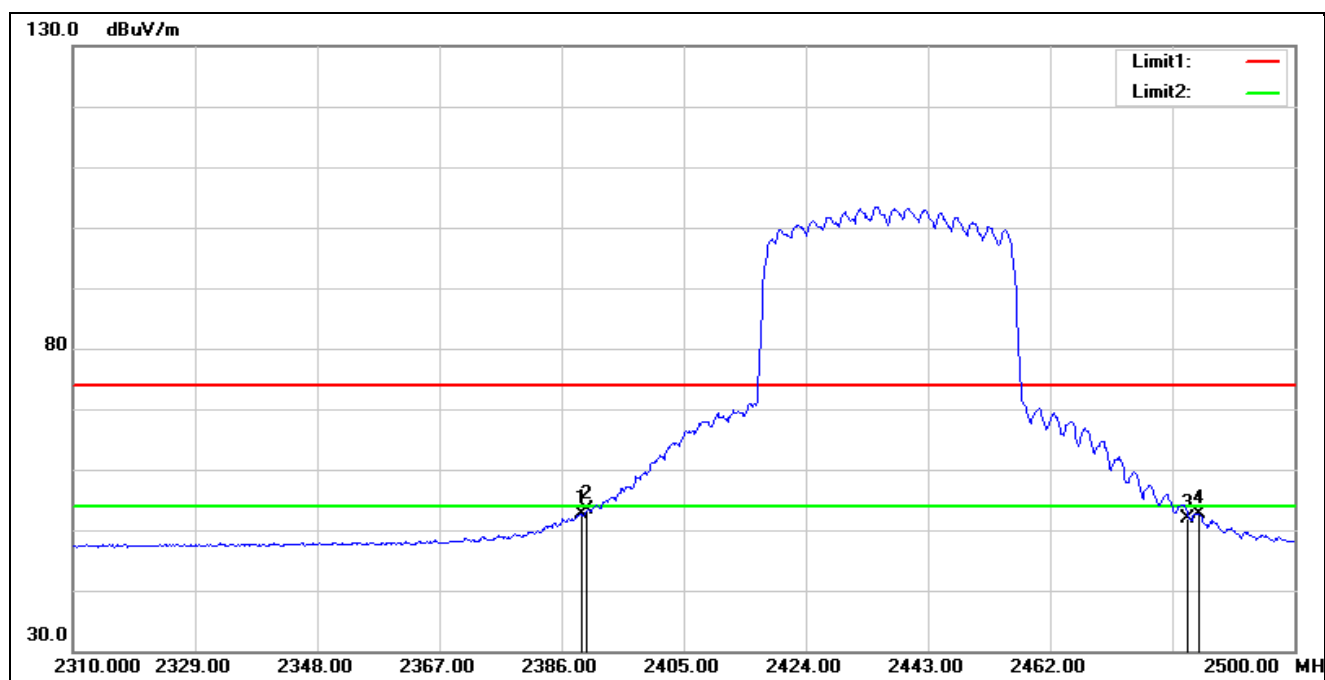

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	58.82	-6.18	52.64	54.00	-1.36	AVG
2*	2390.000	59.56	-6.19	53.37	54.00	-0.63	AVG
3	2483.500	58.29	-6.46	51.83	54.00	-2.17	AVG
4	2485.180	59.09	-6.46	52.63	54.00	-1.37	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

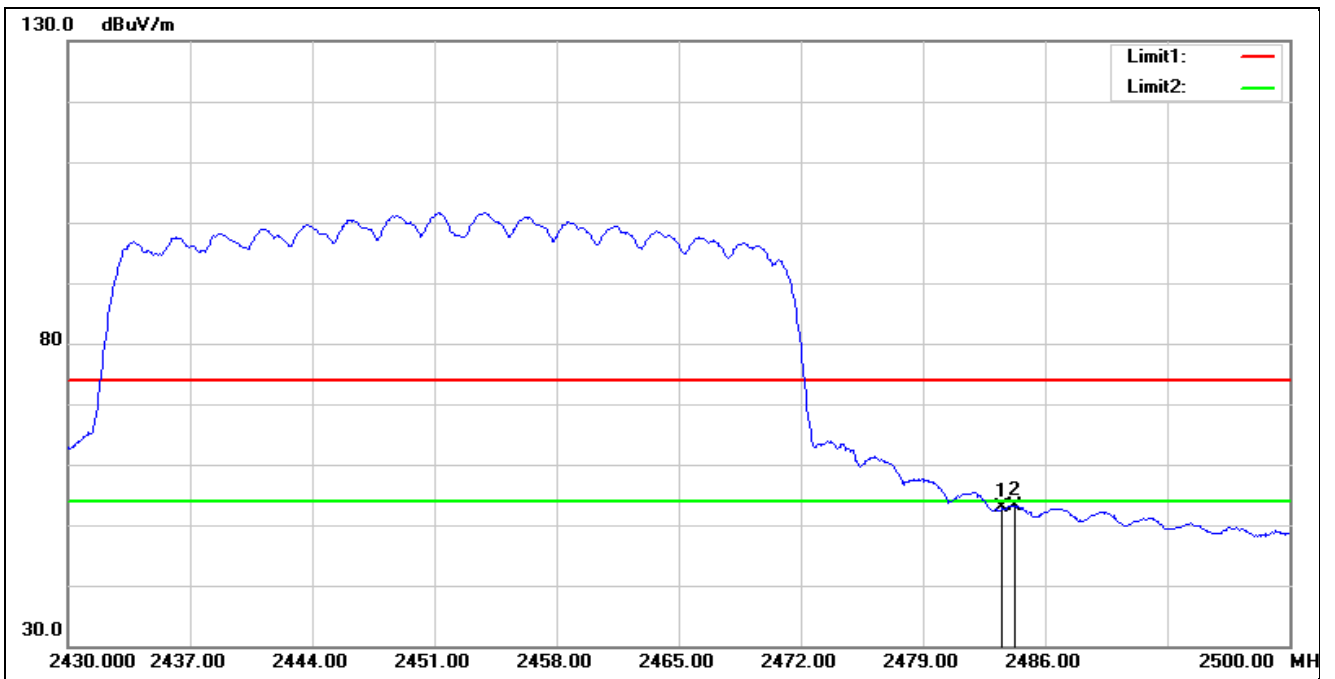

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.30	-6.46	52.84	54.00	-1.16	AVG
2*	2484.250	59.71	-6.47	53.24	54.00	-0.76	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

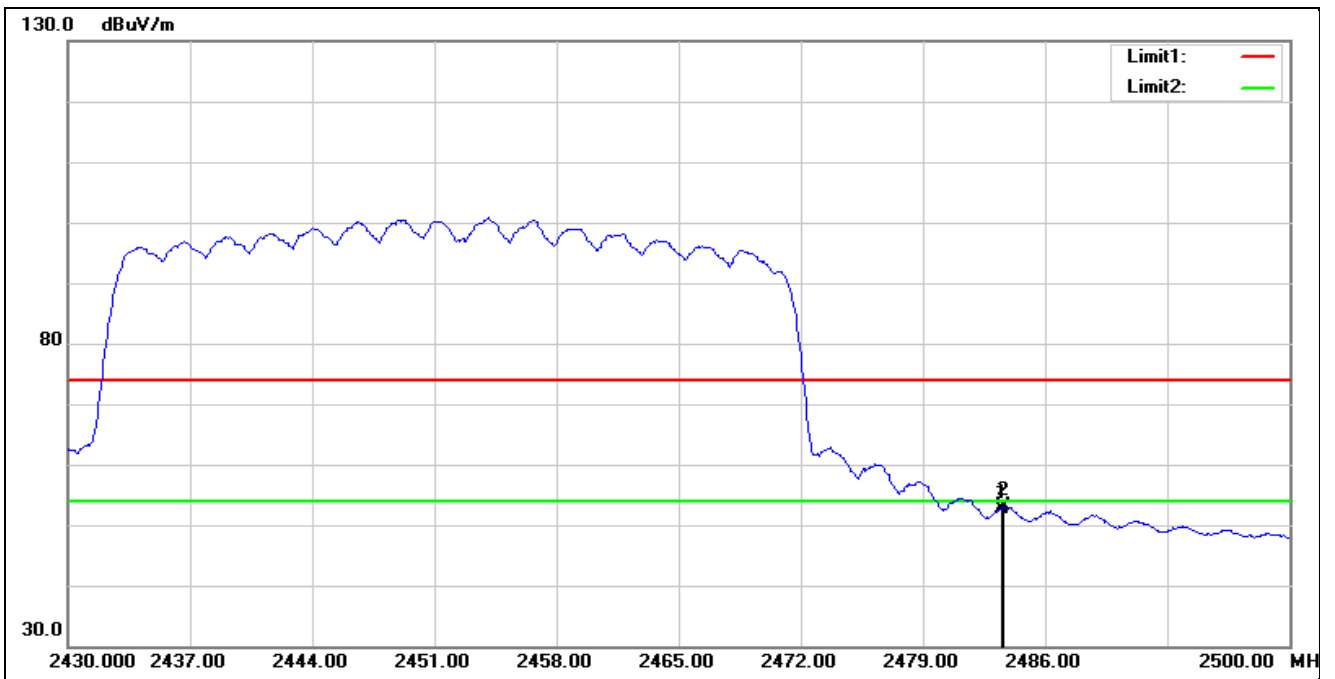


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.11	-6.46	52.65	54.00	-1.35	AVG
2*	2483.620	59.48	-6.46	53.02	54.00	-0.98	AVG

2X2

Harmonic


Above 1 GHz

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

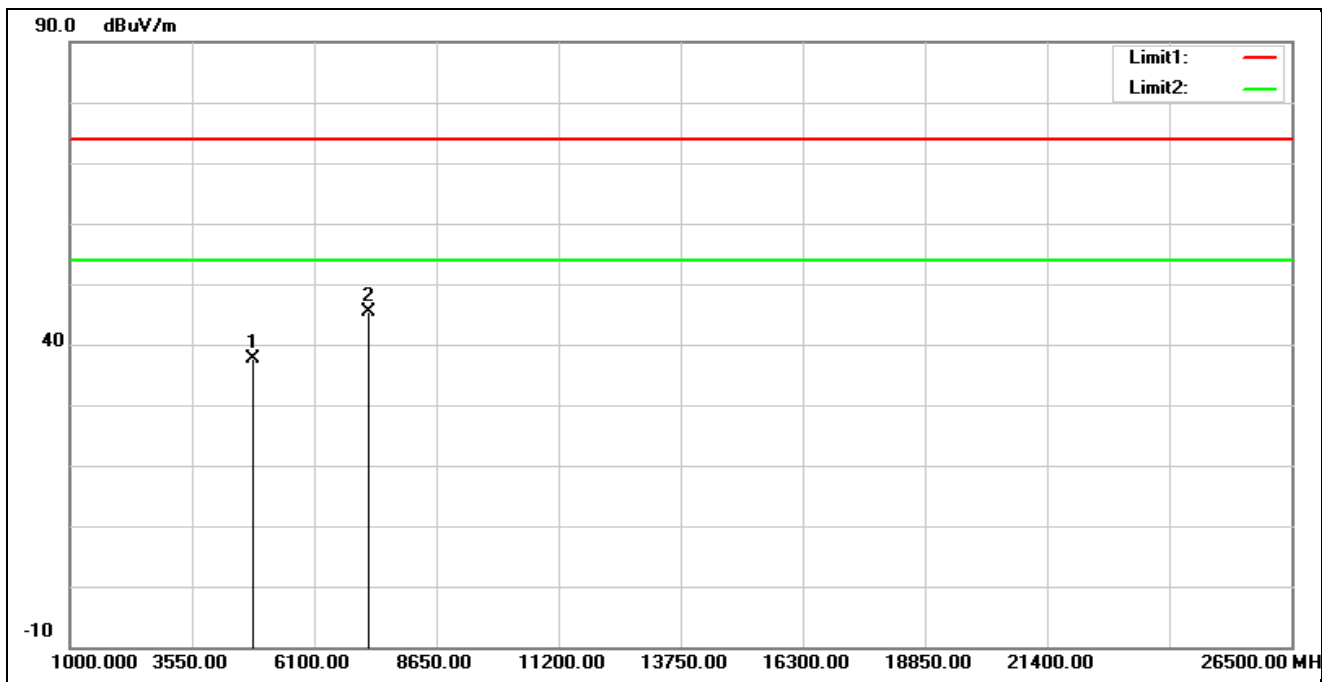


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.43	0.28	37.71	74.00	-36.29	peak
2*	7236.000	37.40	7.96	45.36	74.00	-28.64	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

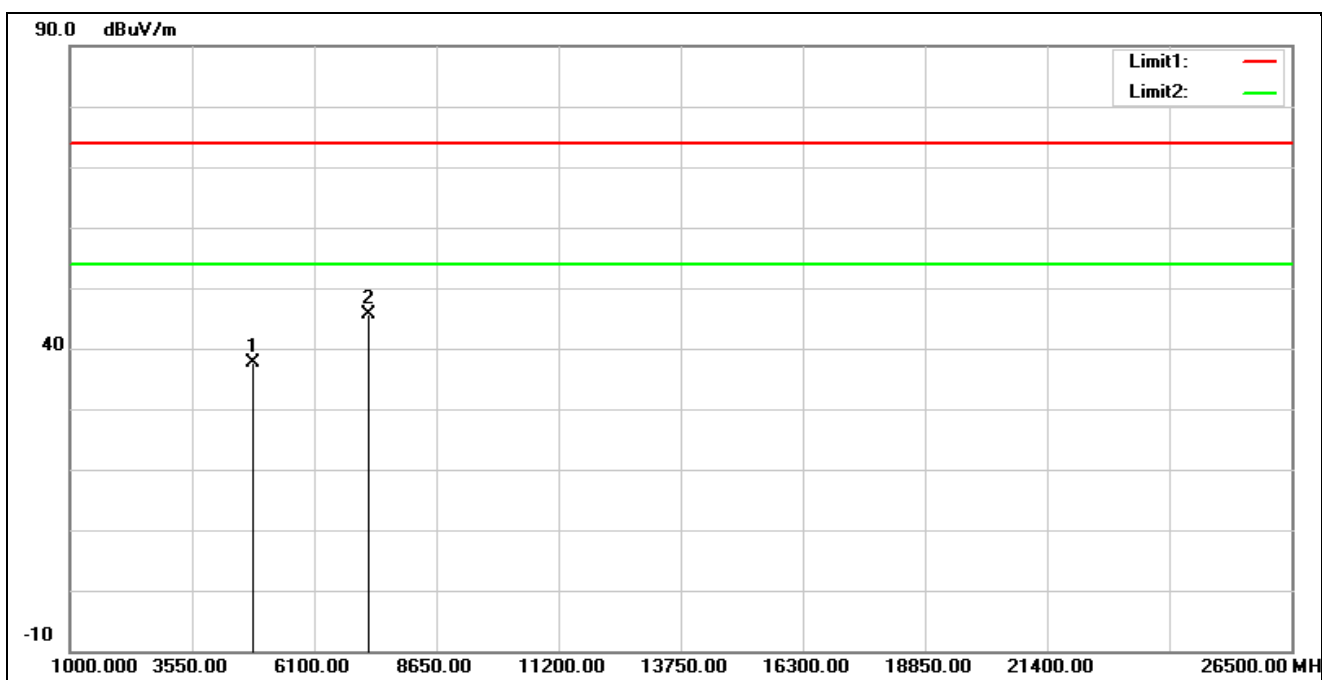


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.23	0.28	37.51	74.00	-36.49	peak
2*	7236.000	37.59	7.96	45.55	74.00	-28.45	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

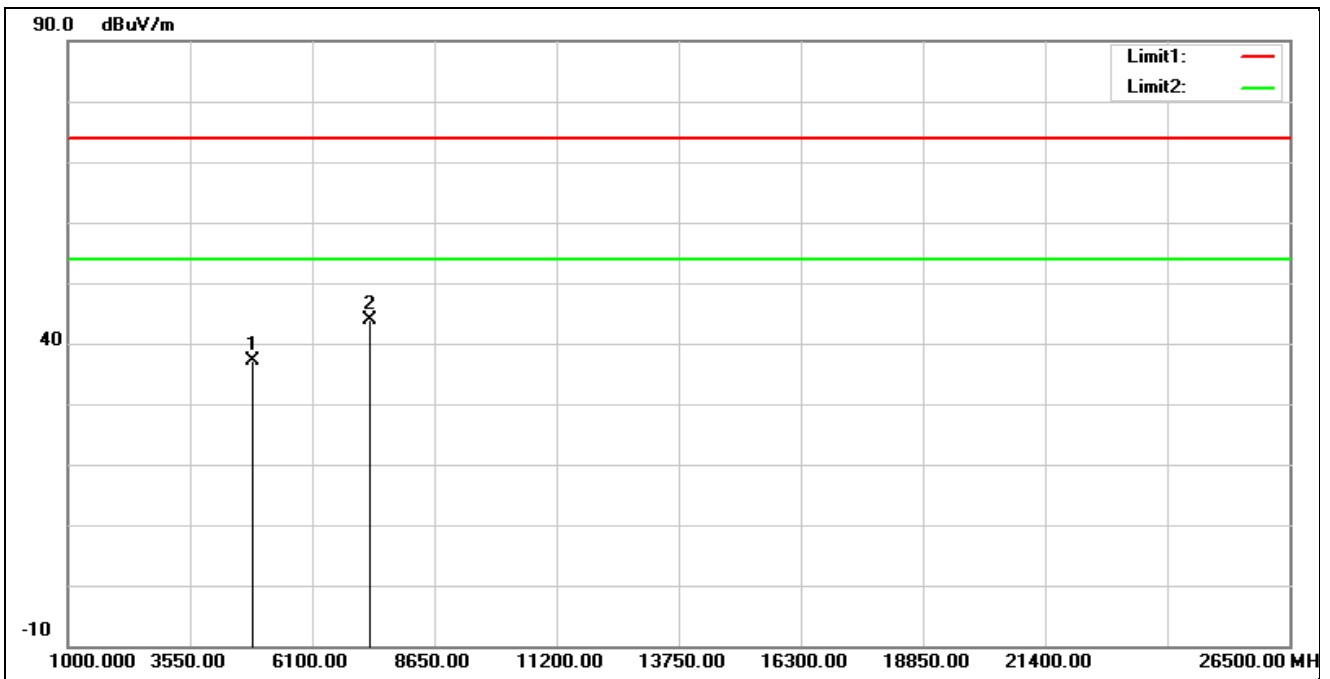


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.86	0.36	37.22	74.00	-36.78	peak
2*	7311.000	35.79	7.98	43.77	74.00	-30.23	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

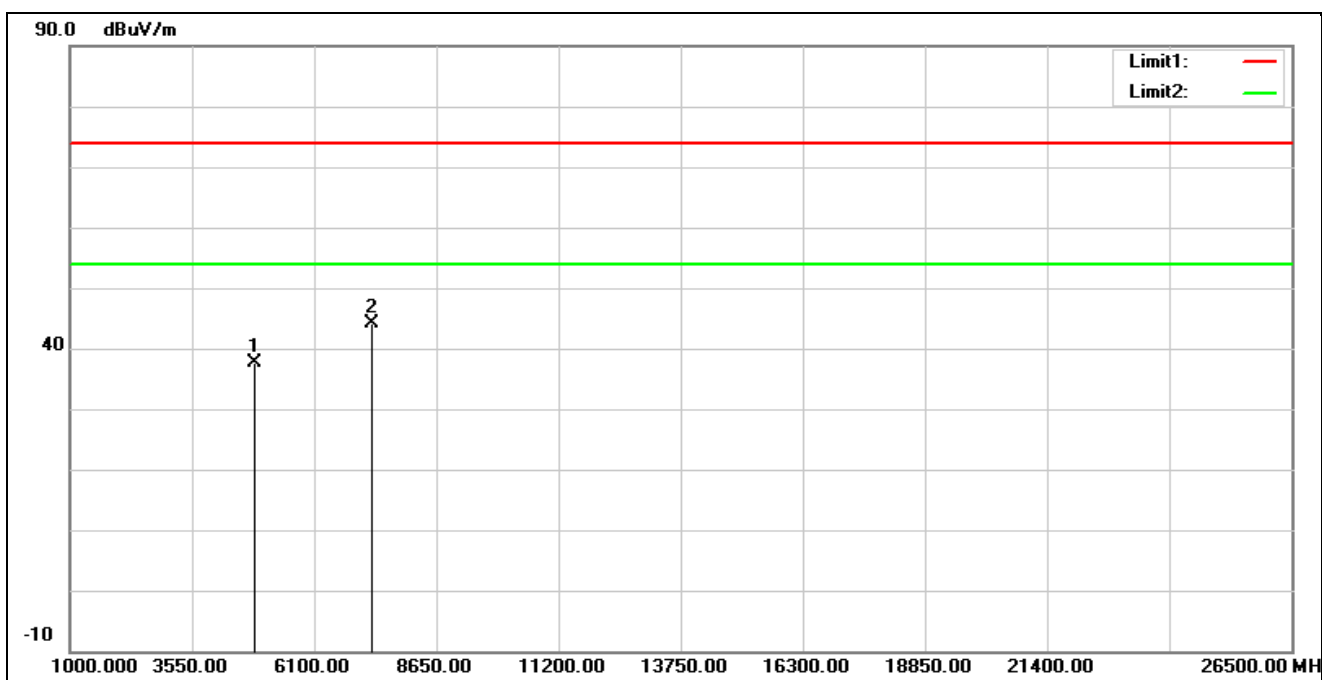


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.33	0.36	37.69	74.00	-36.31	peak
2*	7311.000	36.04	7.98	44.02	74.00	-29.98	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

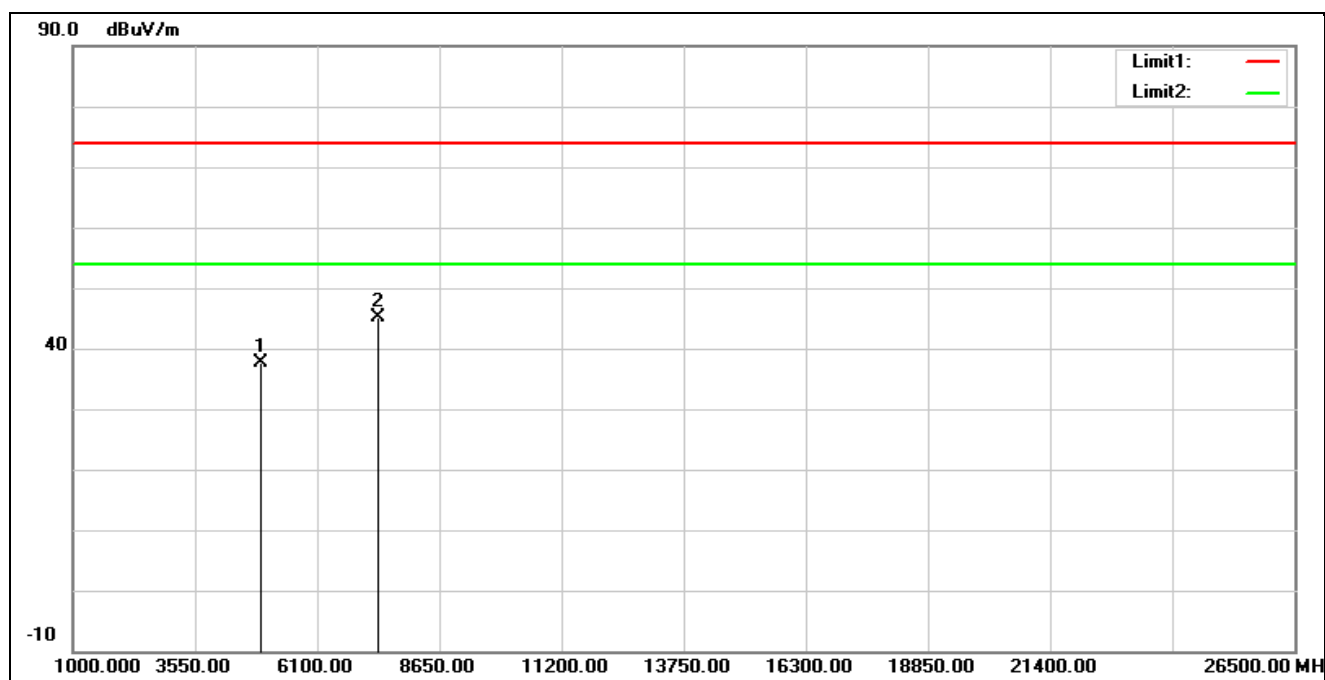

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.25	0.50	37.75	74.00	-36.25	peak
2*	7386.000	37.09	8.11	45.20	74.00	-28.80	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

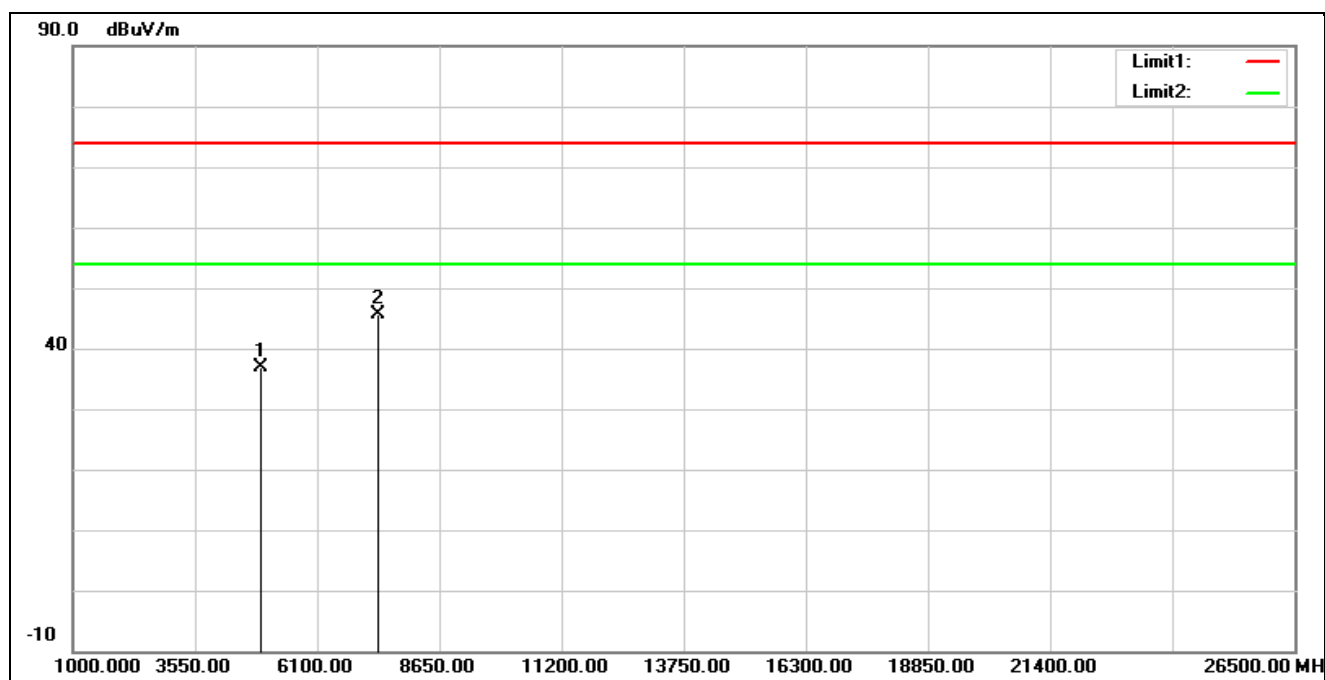

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.36	0.50	36.86	74.00	-37.14	peak
2*	7386.000	37.44	8.11	45.55	74.00	-28.45	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

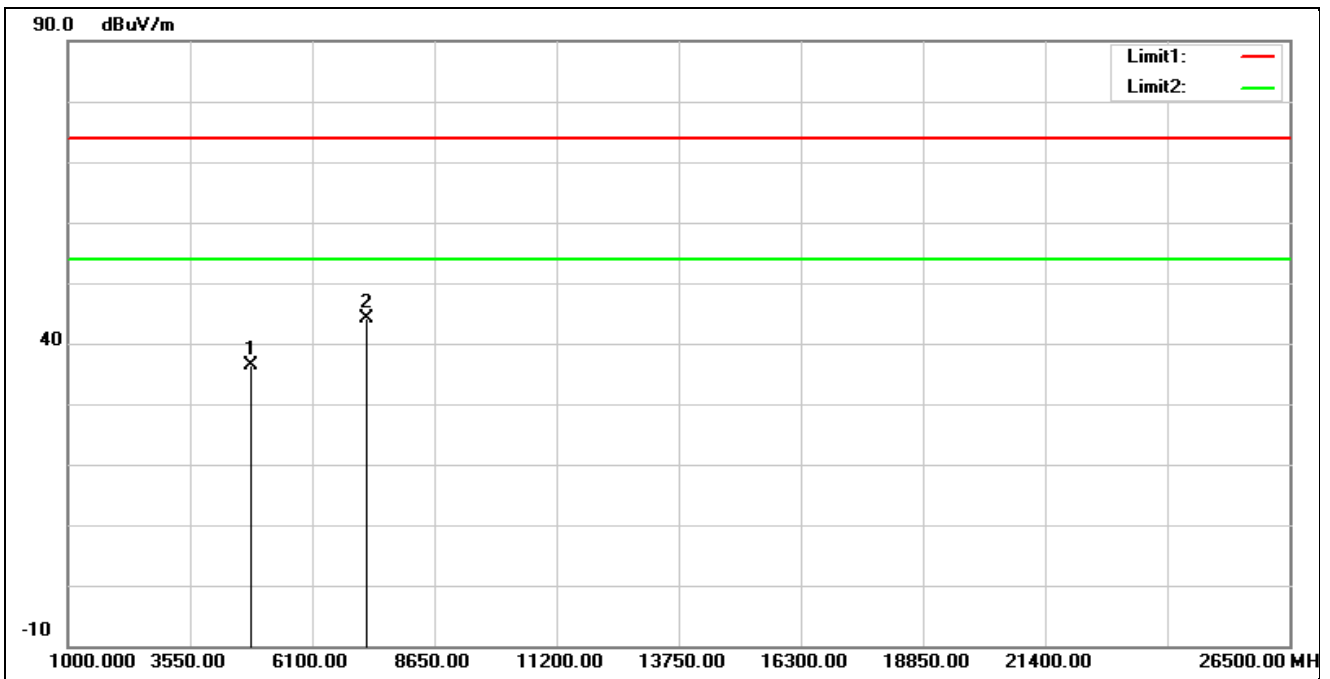


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.03	0.28	36.31	74.00	-37.69	peak
2*	7236.000	36.21	7.96	44.17	74.00	-29.83	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

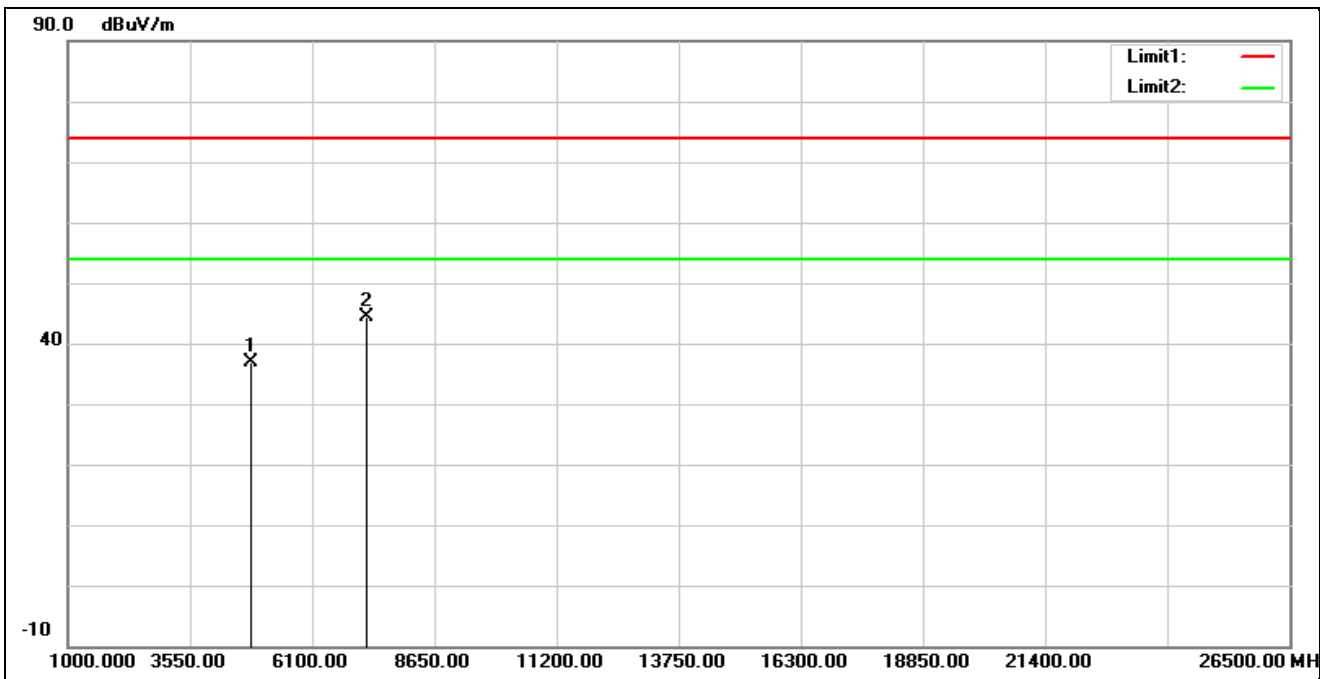


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.72	0.28	37.00	74.00	-37.00	peak
2*	7236.000	36.52	7.96	44.48	74.00	-29.52	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

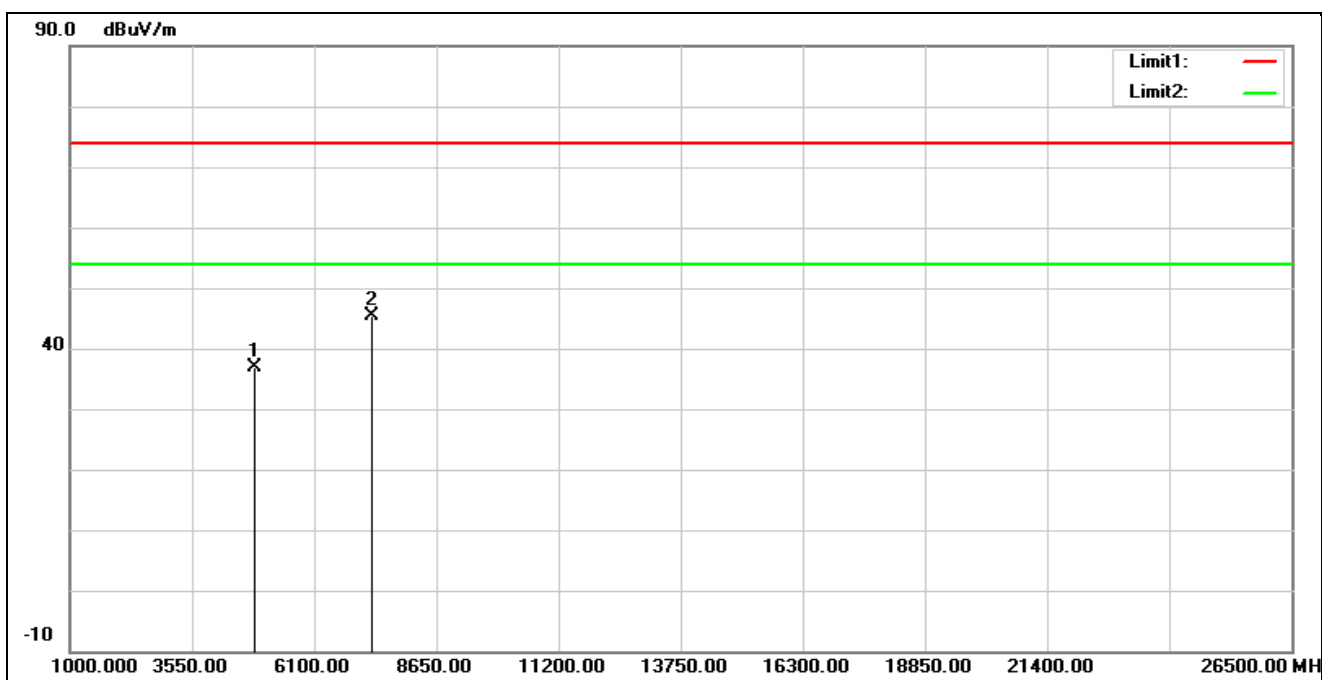


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.42	0.36	36.78	74.00	-37.22	peak
2*	7311.000	37.30	7.98	45.28	74.00	-28.72	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

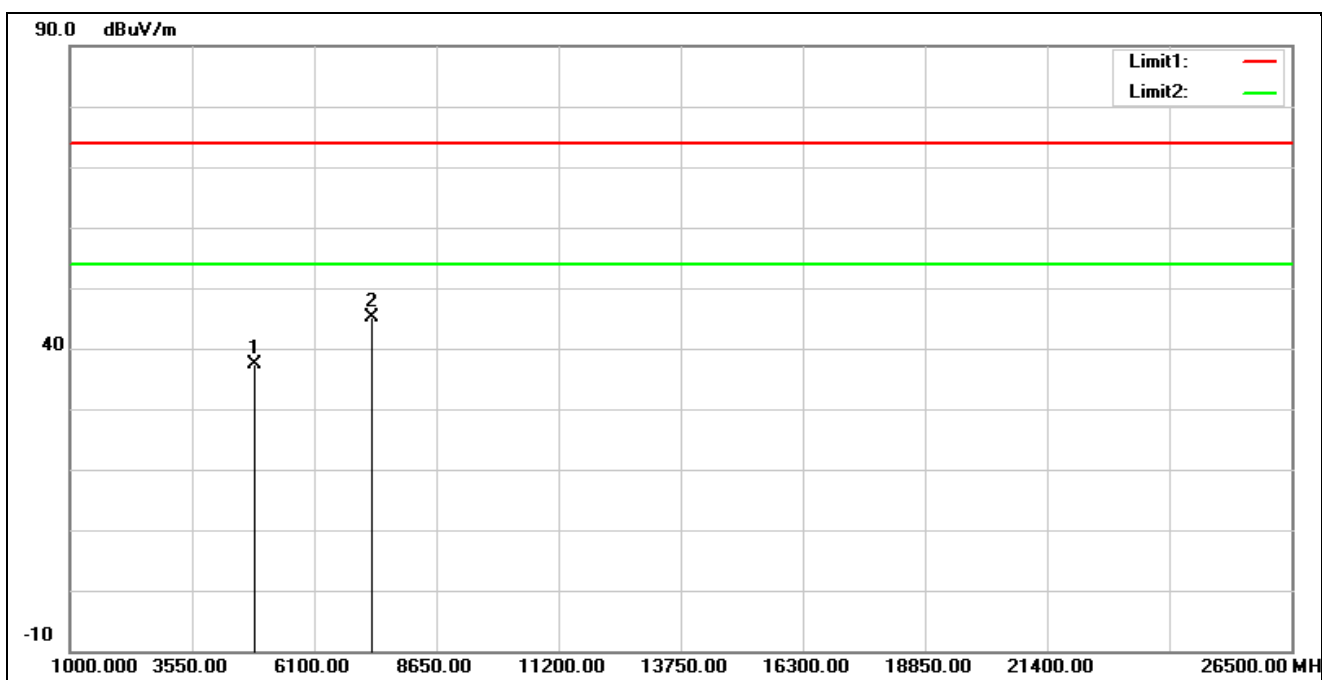


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.06	0.36	37.42	74.00	-36.58	peak
2*	7311.000	37.26	7.98	45.24	74.00	-28.76	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

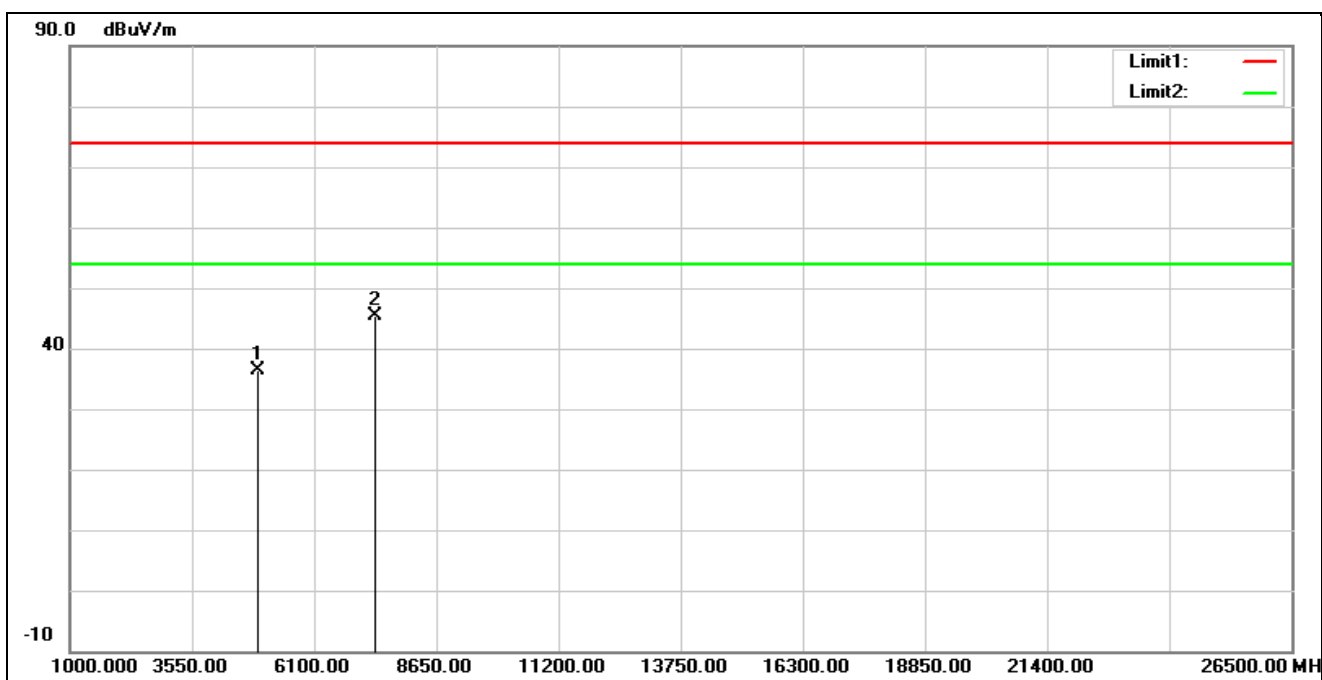


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.96	0.50	36.46	74.00	-37.54	peak
2*	7386.000	37.33	8.11	45.44	74.00	-28.56	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

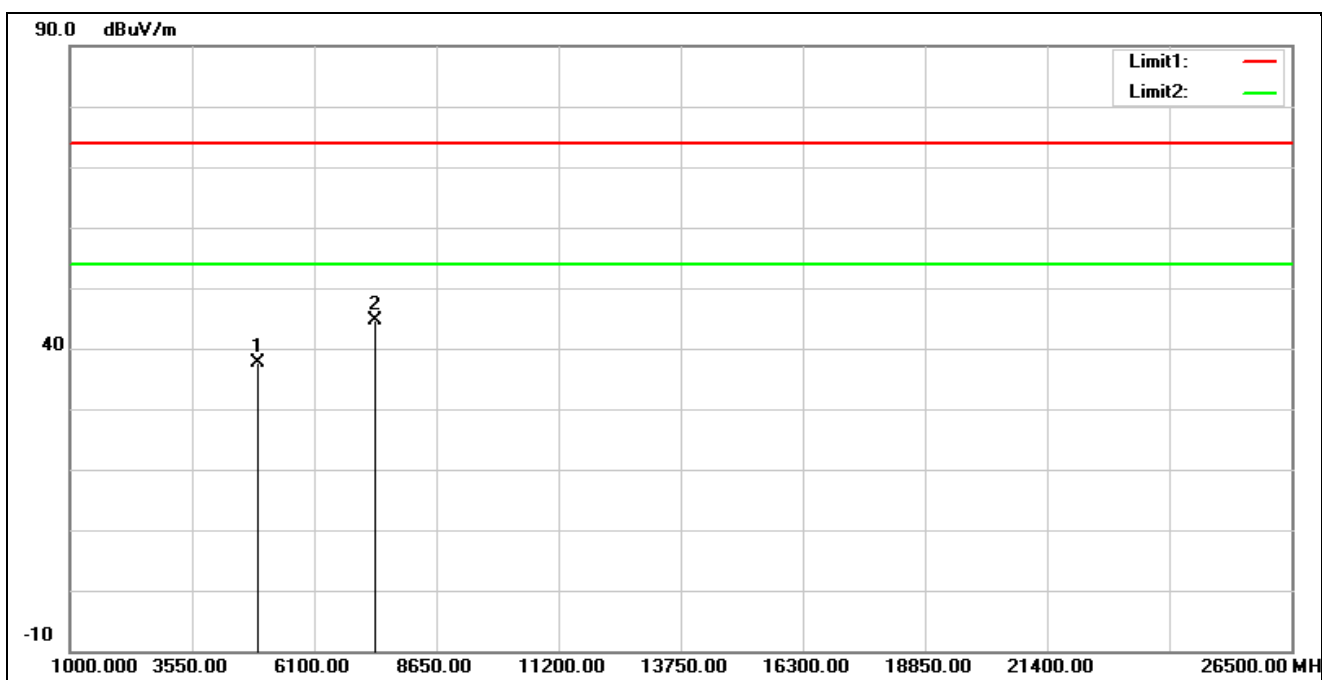


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.09	0.50	37.59	74.00	-36.41	peak
2*	7386.000	36.57	8.11	44.68	74.00	-29.32	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

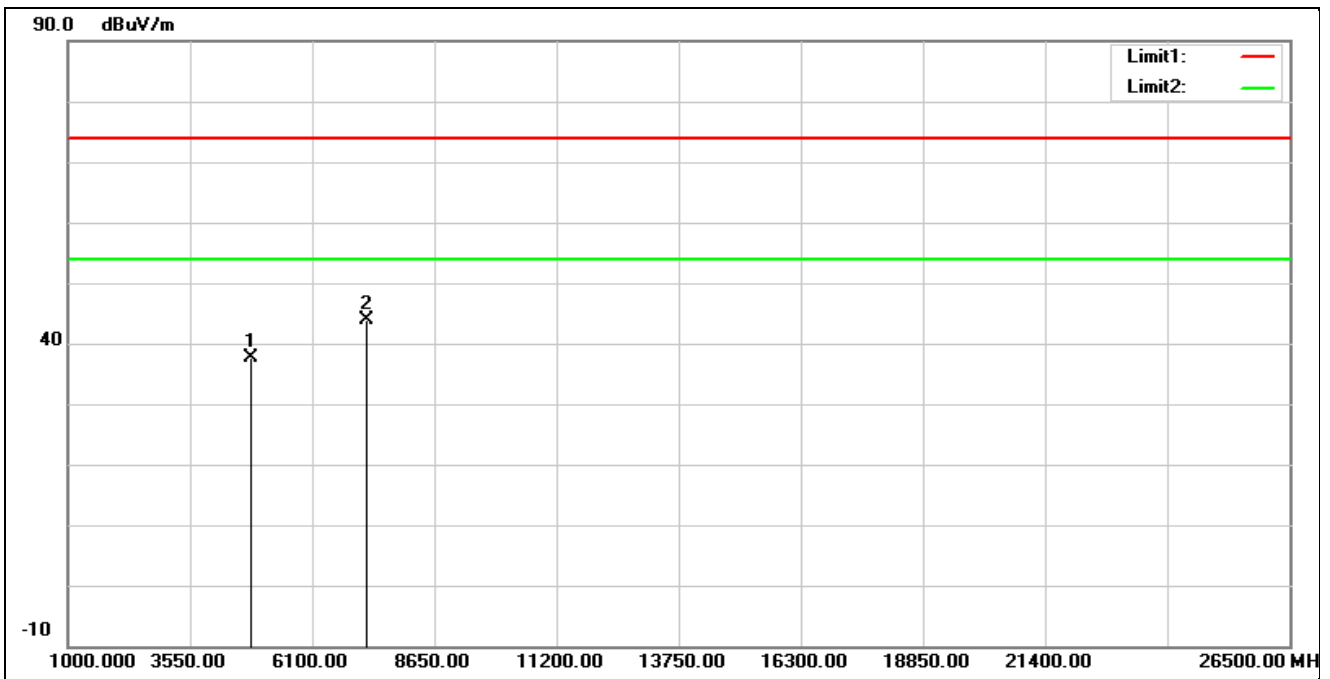

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.81	-0.23	37.58	74.00	-36.42	peak
2*	7236.000	37.42	6.52	43.94	74.00	-30.06	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

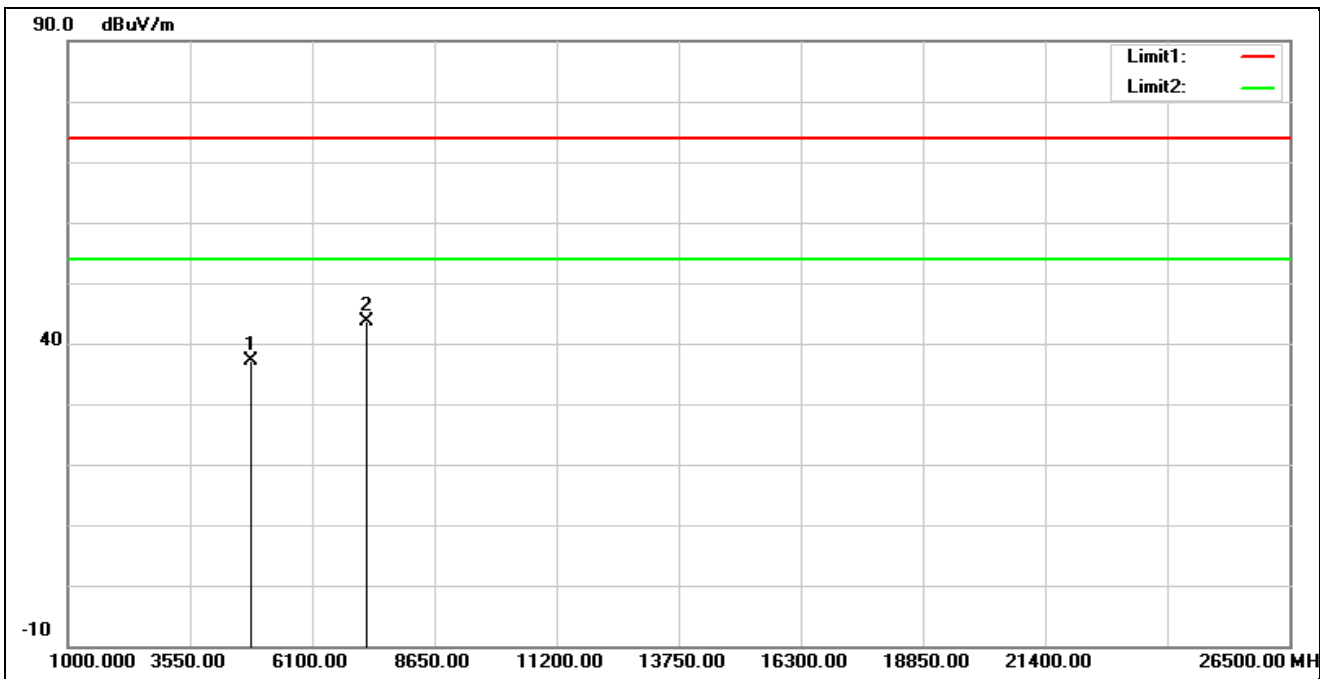

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.28	-0.23	37.05	74.00	-36.95	peak
2*	7236.000	37.07	6.52	43.59	74.00	-30.41	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

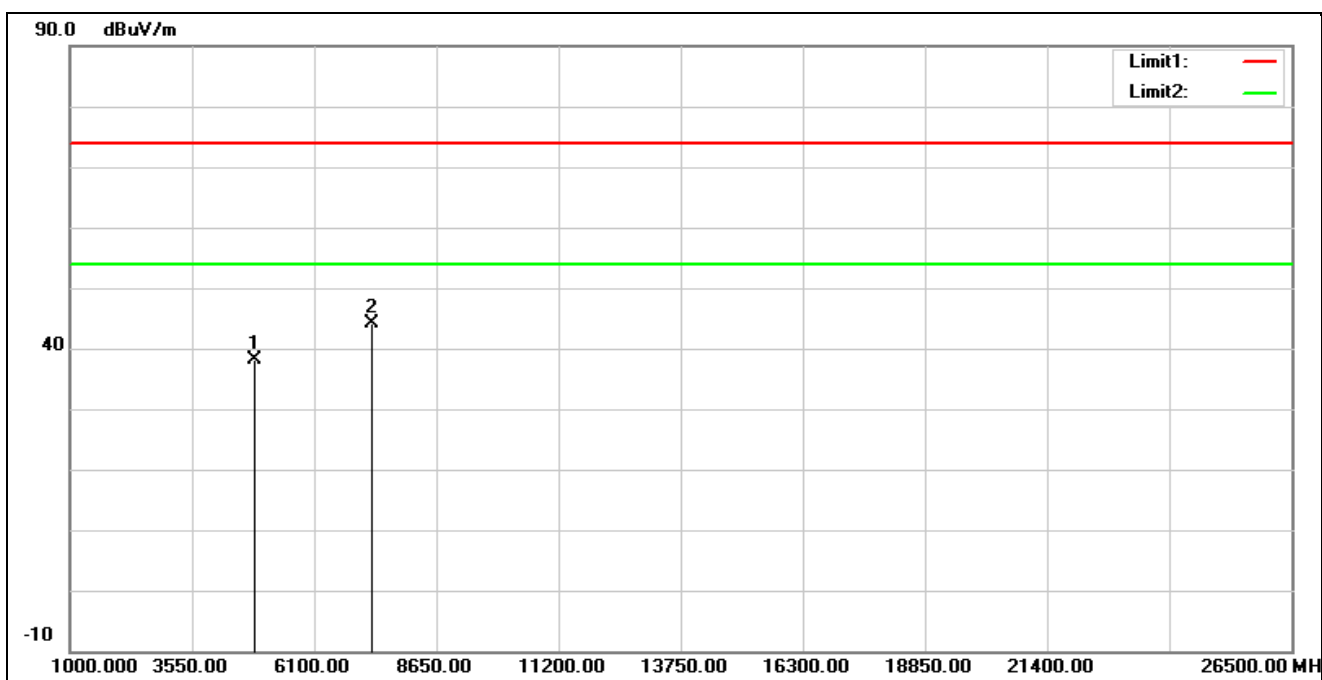


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.15	-0.13	38.02	74.00	-35.98	peak
2*	7311.000	37.94	6.23	44.17	74.00	-29.83	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

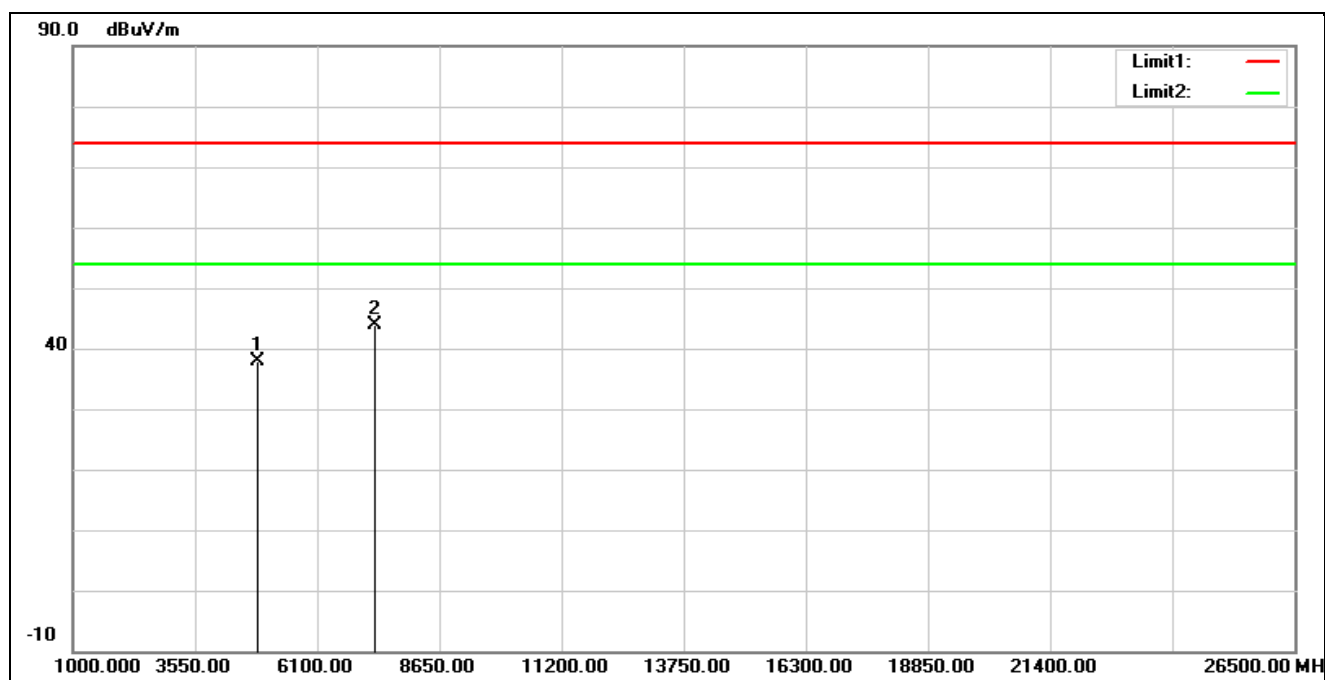


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.92	-0.13	37.79	74.00	-36.21	peak
2*	7311.000	37.63	6.23	43.86	74.00	-30.14	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

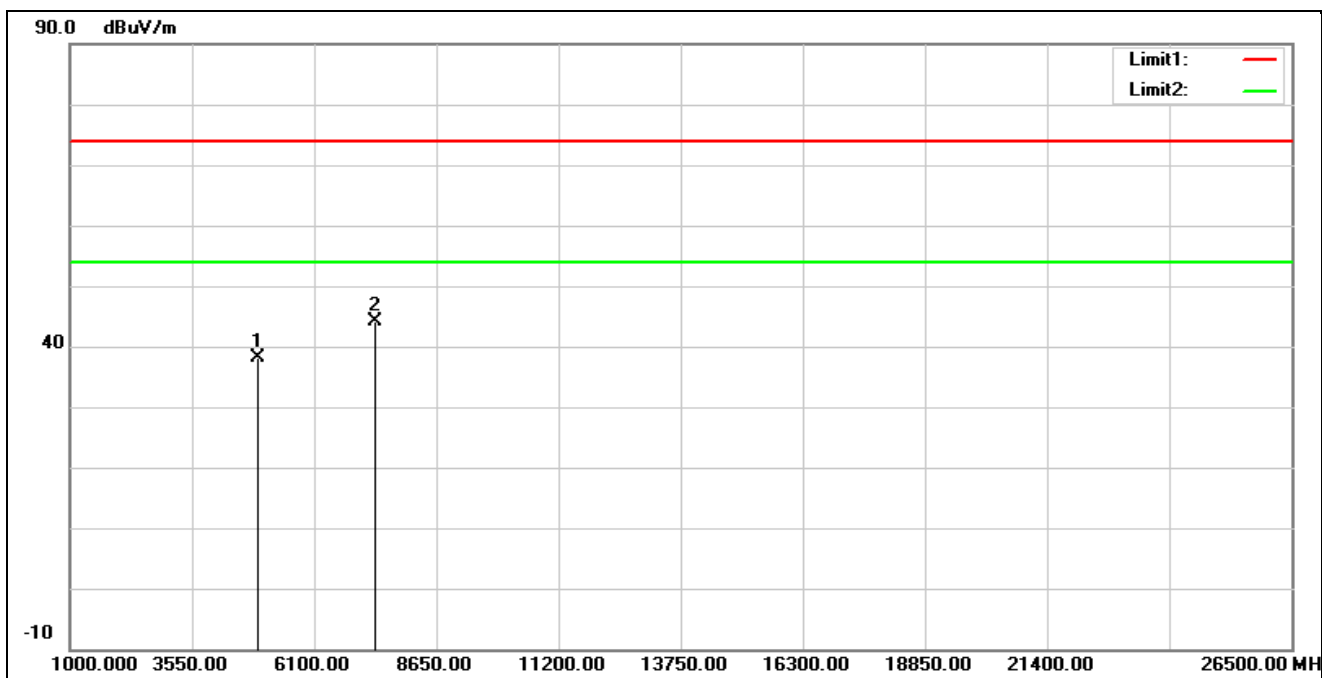


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.13	0.01	38.14	74.00	-35.86	peak
2*	7386.000	37.90	6.33	44.23	74.00	-29.77	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

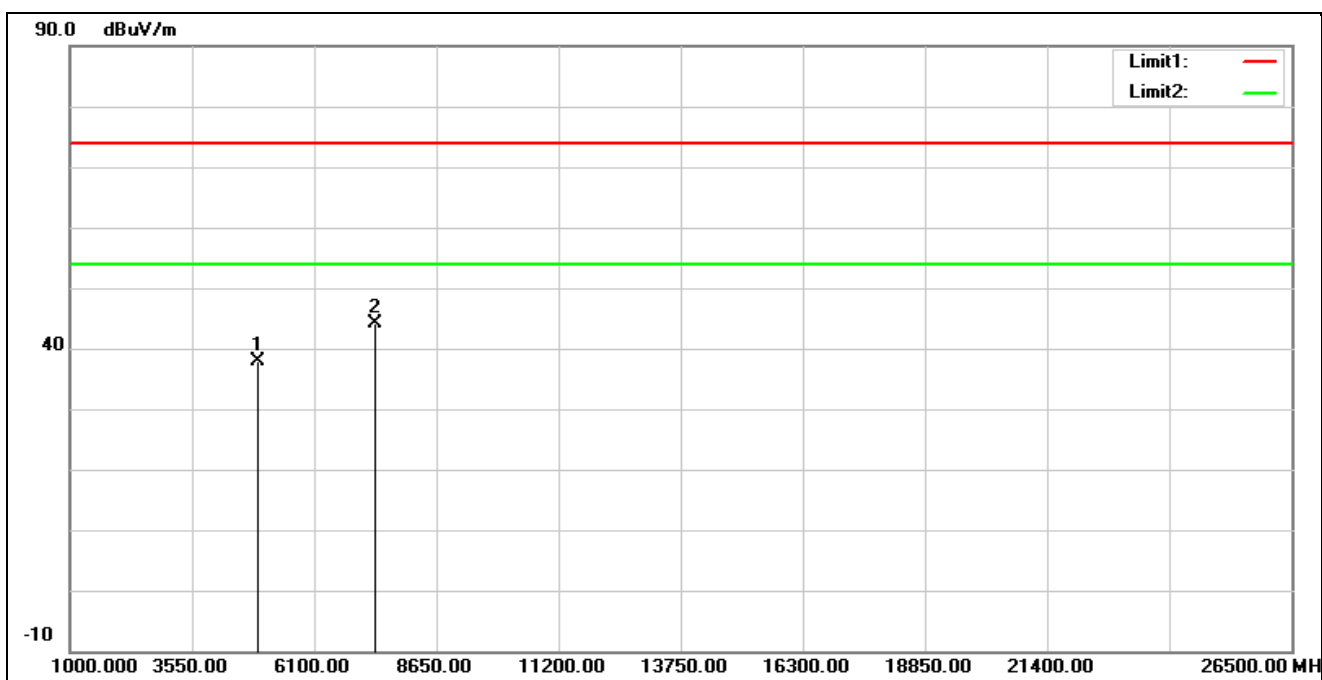


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.78	0.01	37.79	74.00	-36.21	peak
2*	7386.000	37.69	6.33	44.02	74.00	-29.98	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

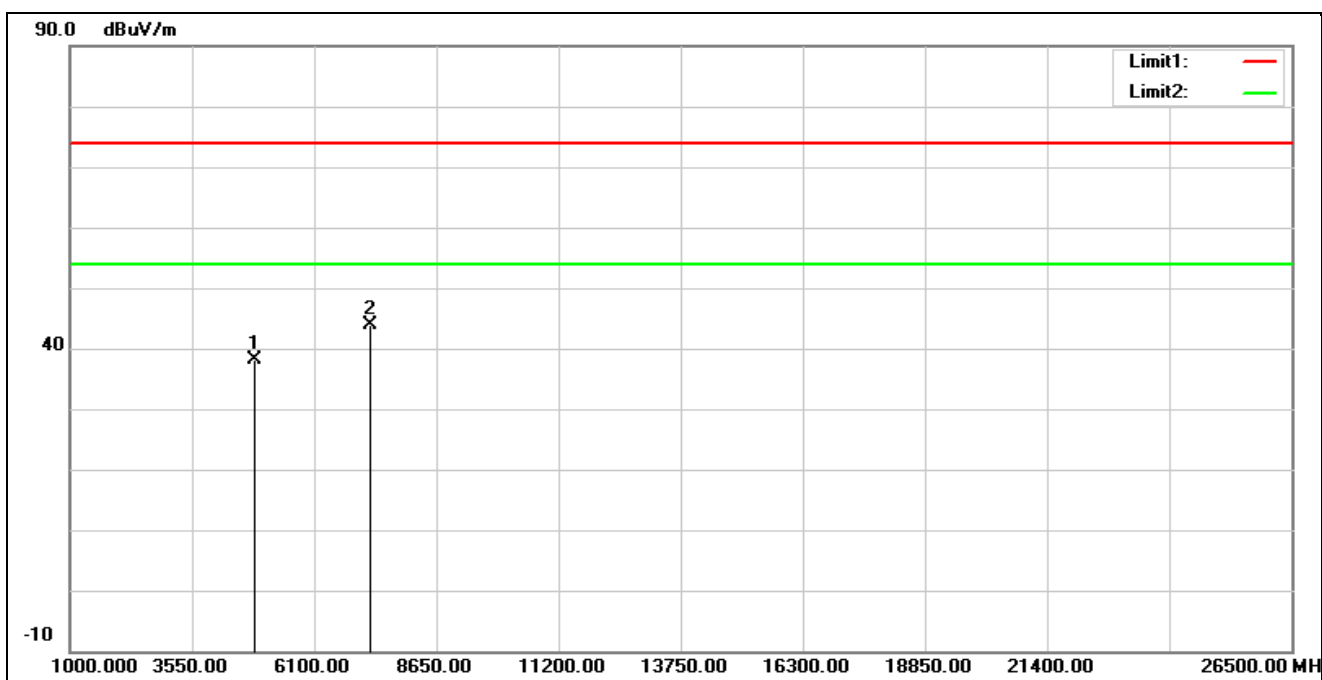


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.39	-0.15	38.24	74.00	-35.76	peak
2*	7266.000	37.52	6.45	43.97	74.00	-30.03	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

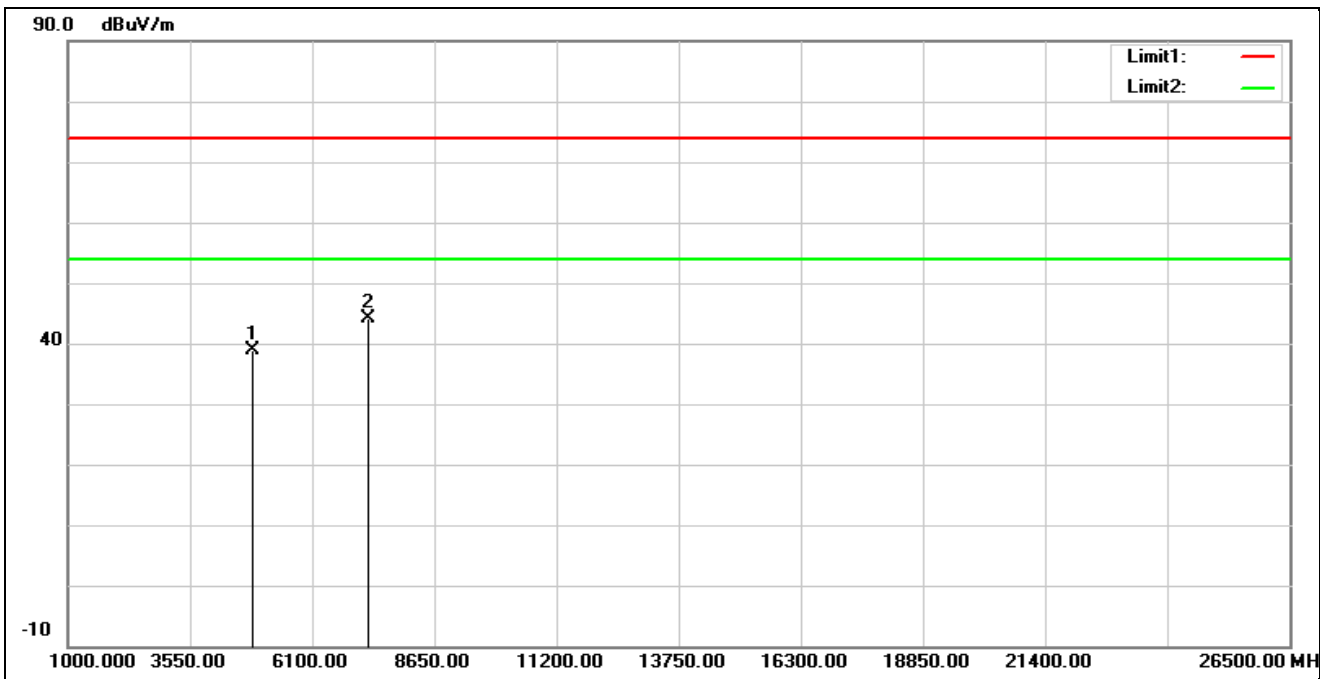


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.93	-0.15	38.78	74.00	-35.22	peak
2*	7266.000	37.70	6.45	44.15	74.00	-29.85	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

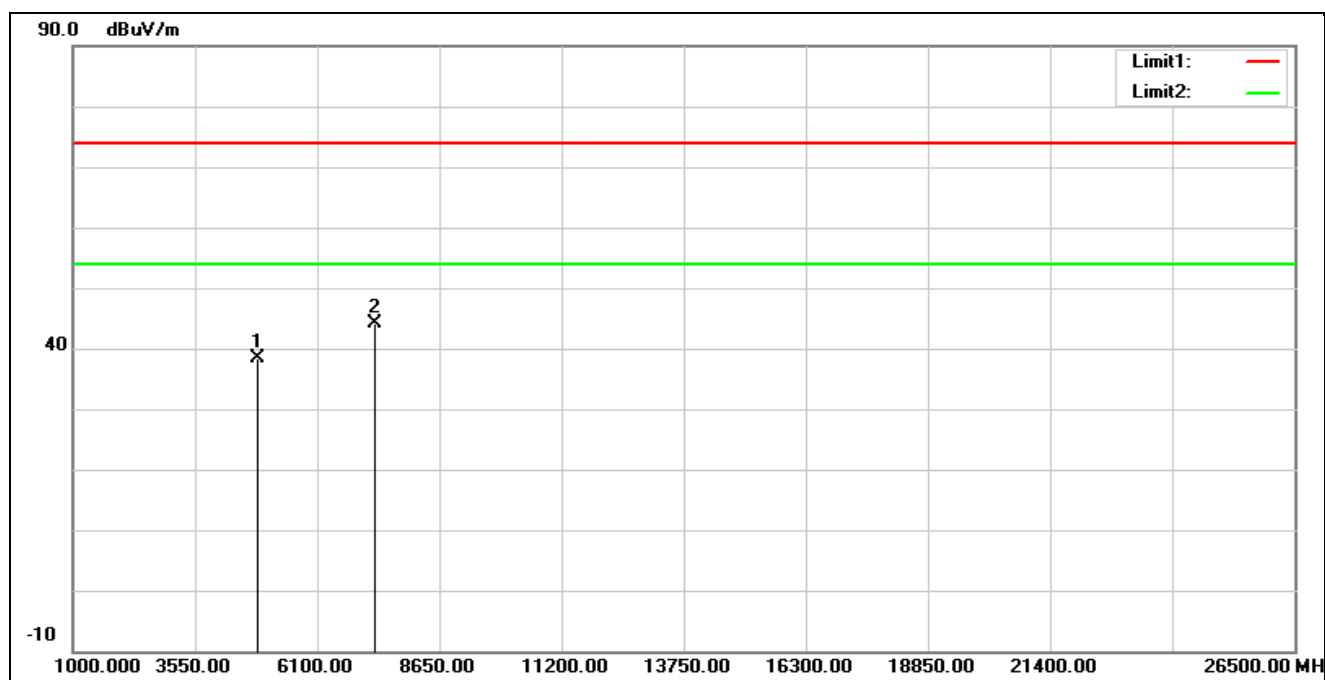

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.44	-0.13	38.31	74.00	-35.69	peak
2*	7311.000	37.83	6.23	44.06	74.00	-29.94	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

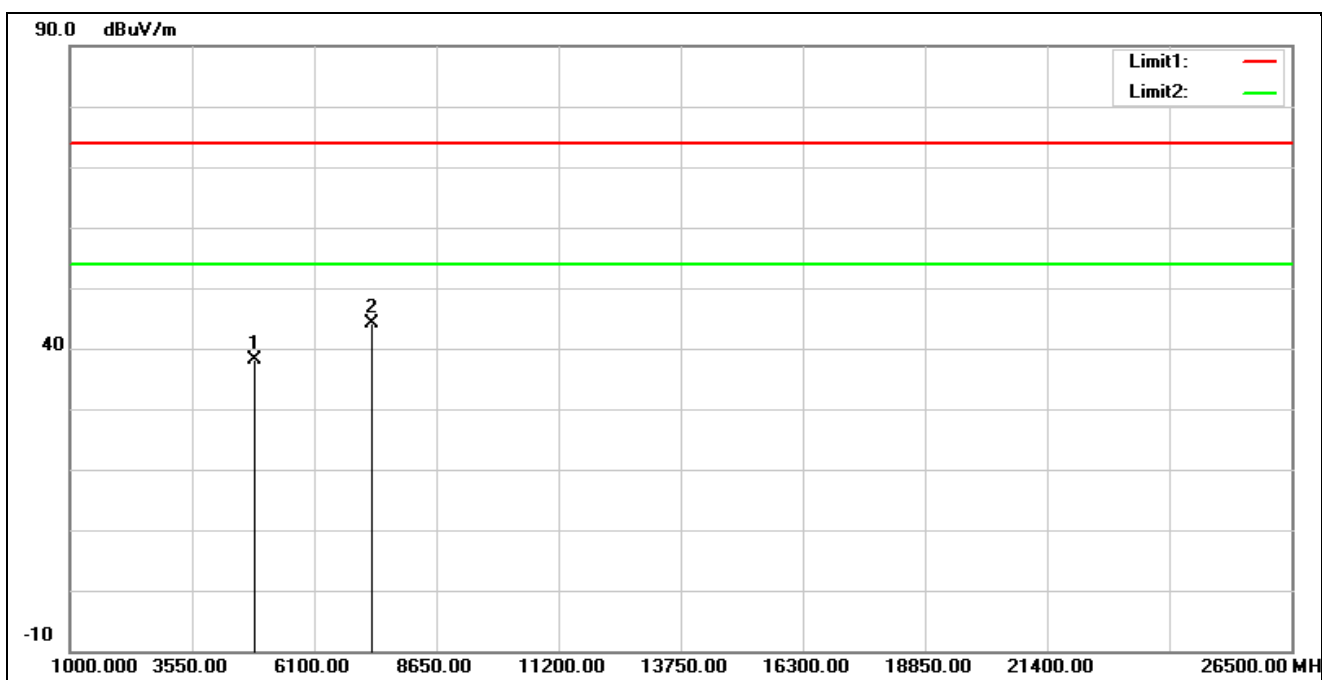

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.20	-0.13	38.07	74.00	-35.93	peak
2*	7311.000	37.99	6.23	44.22	74.00	-29.78	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

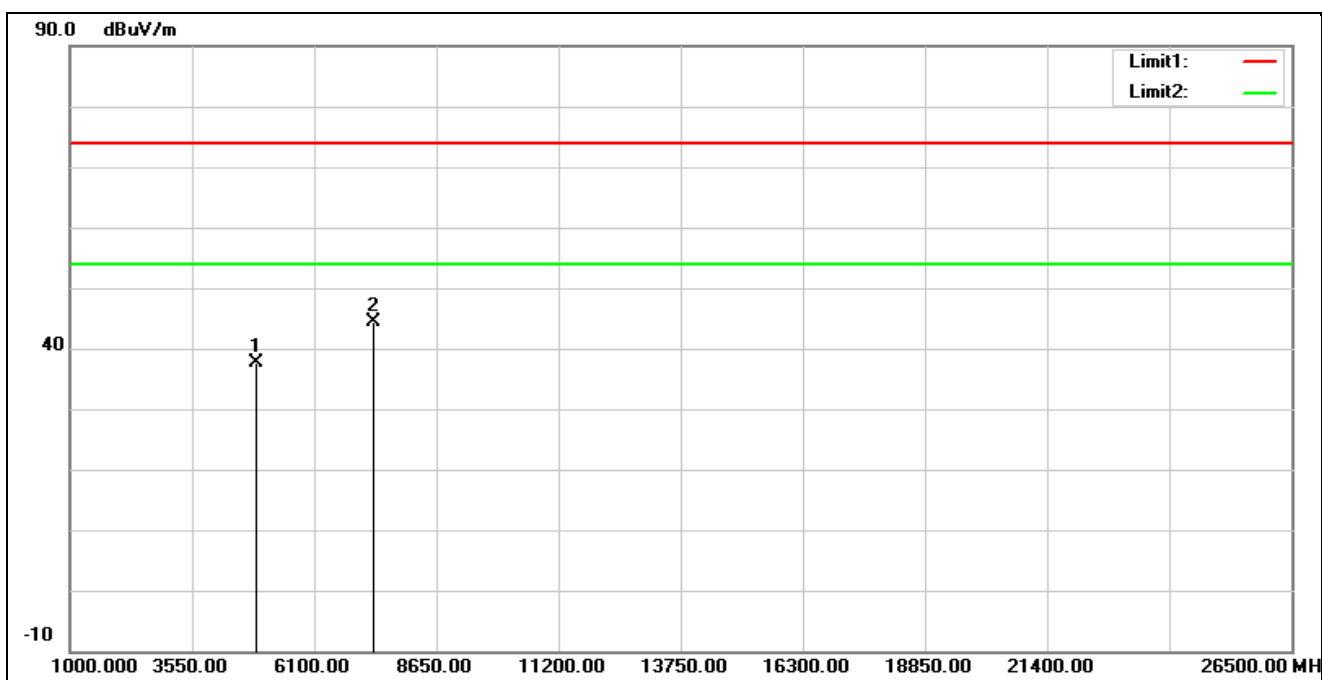


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.64	-0.11	37.53	74.00	-36.47	peak
2*	7356.000	38.07	6.19	44.26	74.00	-29.74	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

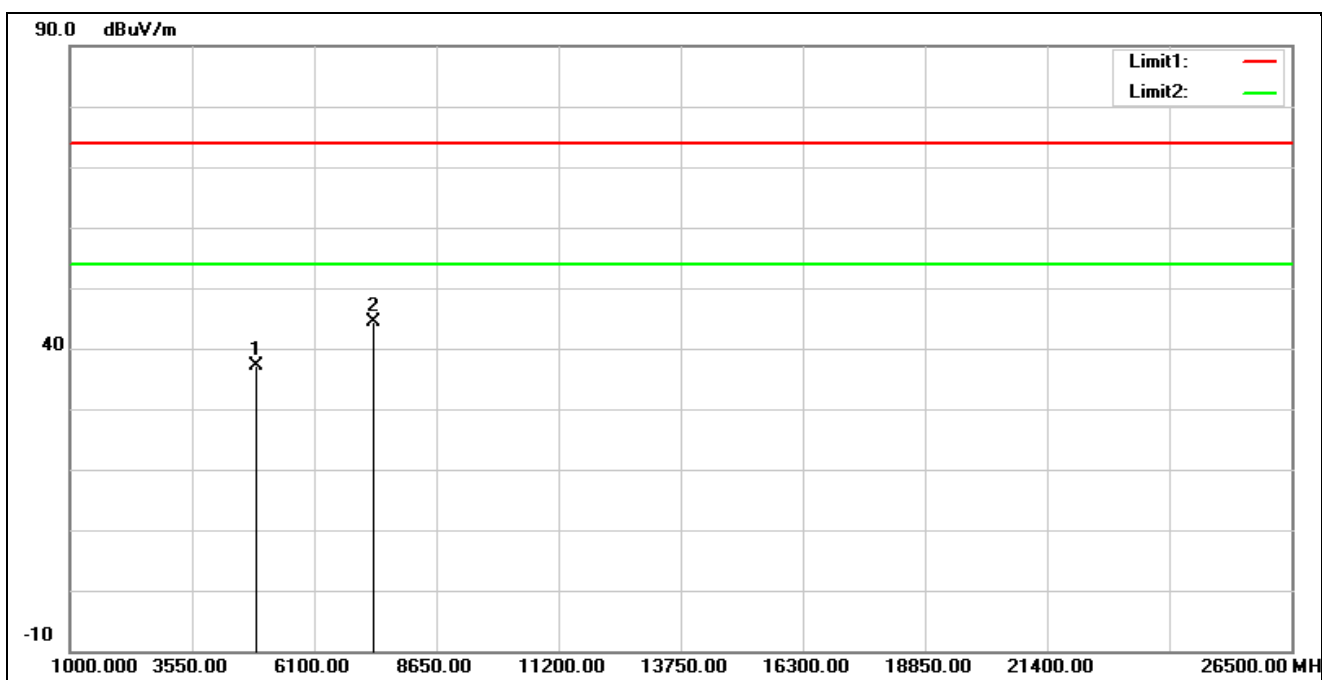


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.25	-0.11	37.14	74.00	-36.86	peak
2*	7356.000	38.10	6.19	44.29	74.00	-29.71	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

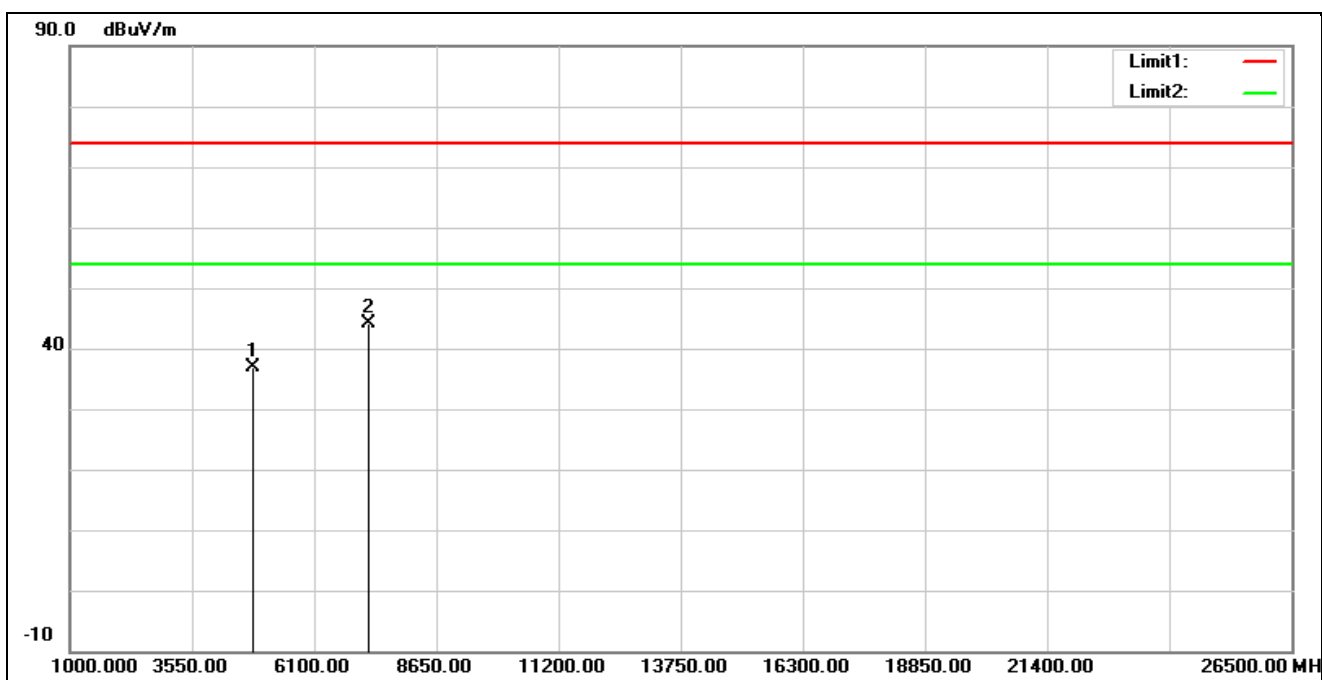


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.72	0.28	37.00	74.00	-37.00	peak
2*	7236.000	36.22	7.96	44.18	74.00	-29.82	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

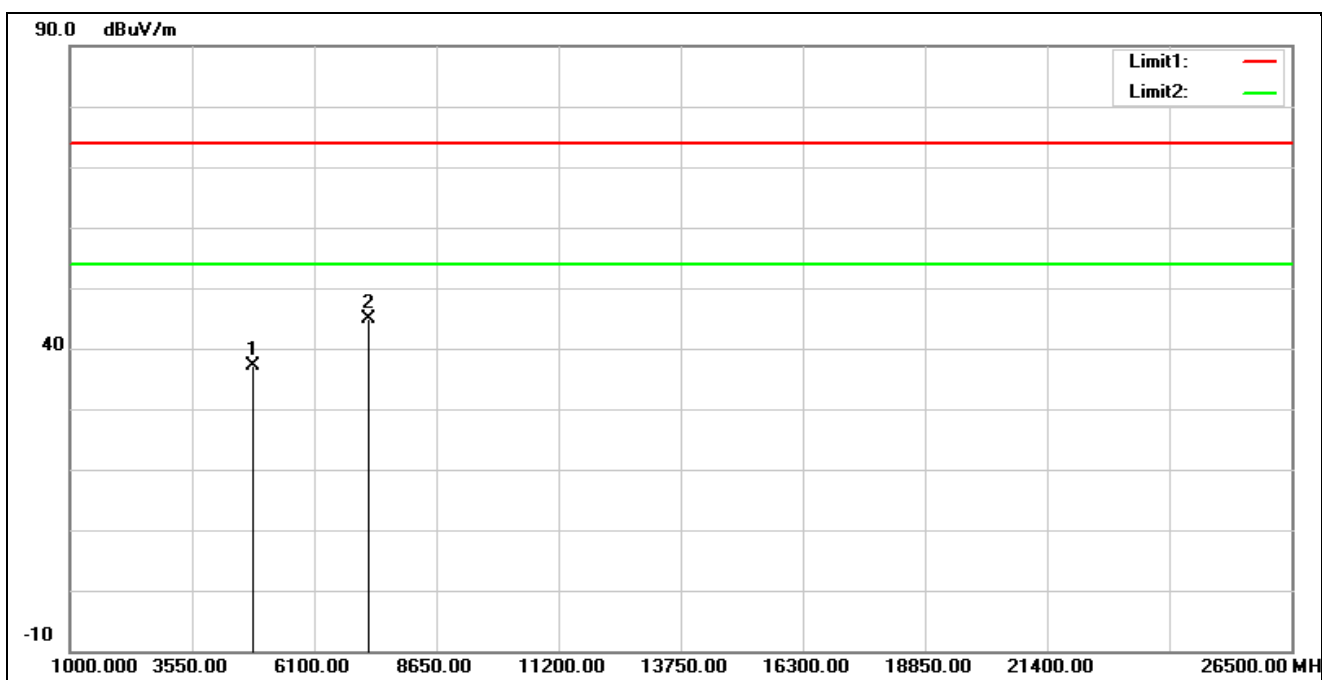


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.74	0.28	37.02	74.00	-36.98	peak
2*	7236.000	36.95	7.96	44.91	74.00	-29.09	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

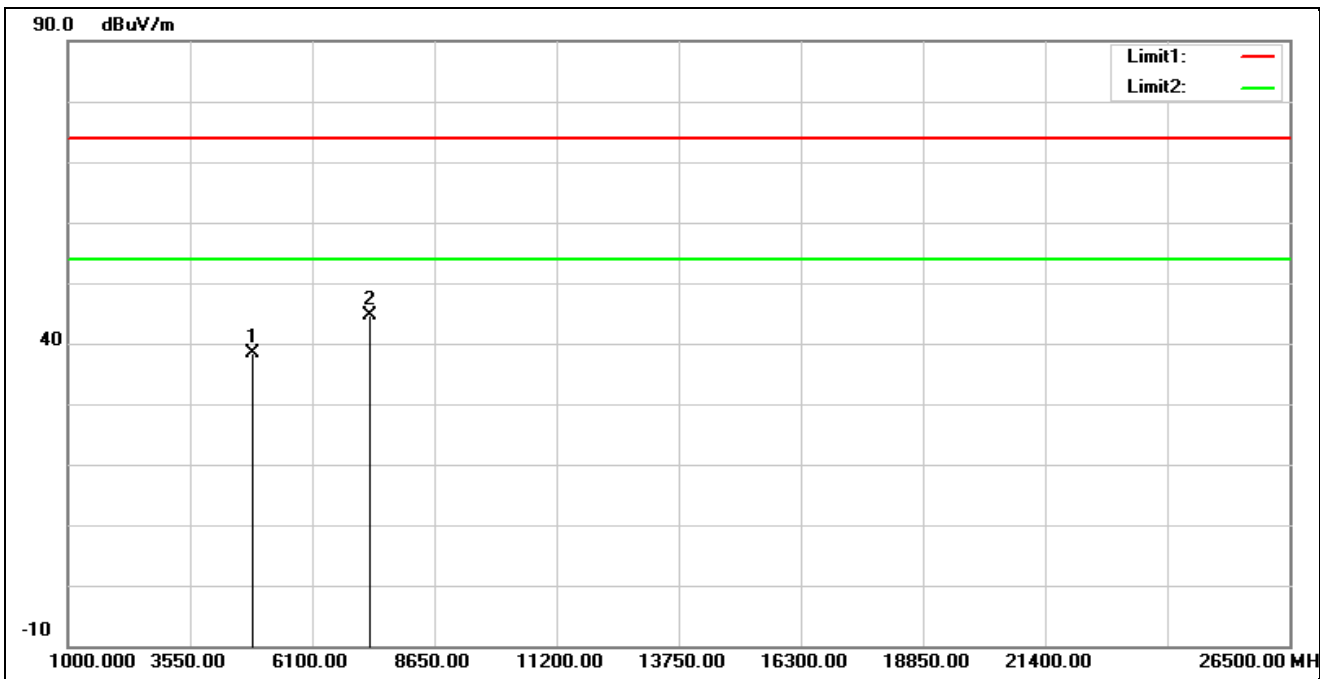


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.05	0.36	38.41	74.00	-35.59	peak
2*	7311.000	36.75	7.98	44.73	74.00	-29.27	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

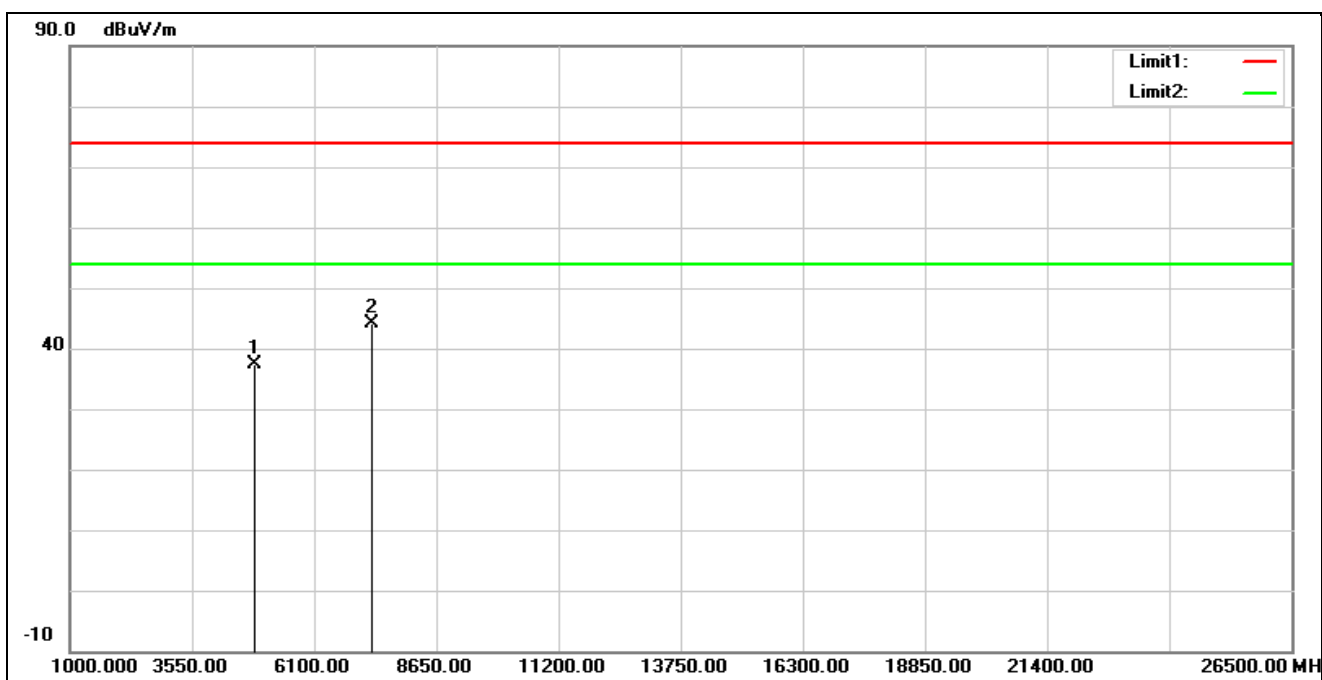


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.90	0.36	37.26	74.00	-36.74	peak
2*	7311.000	36.14	7.98	44.12	74.00	-29.88	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

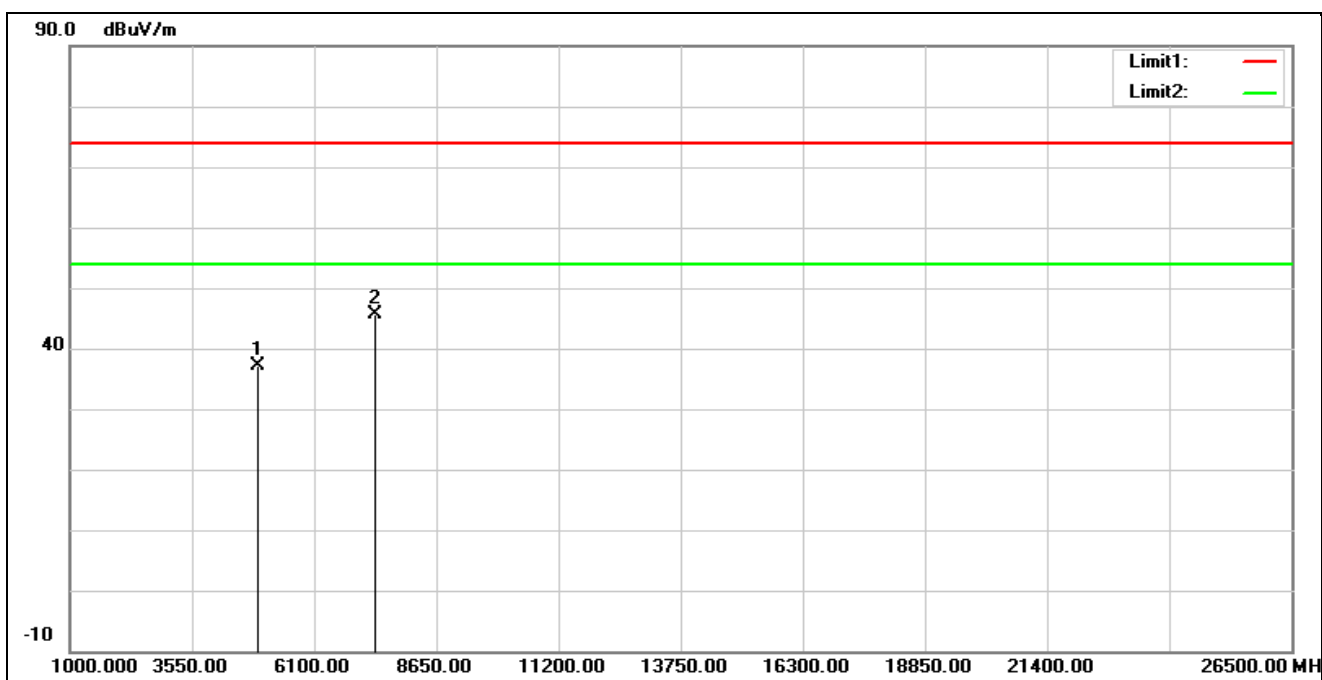

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.57	0.50	37.07	74.00	-36.93	peak
2*	7386.000	37.58	8.11	45.69	74.00	-28.31	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

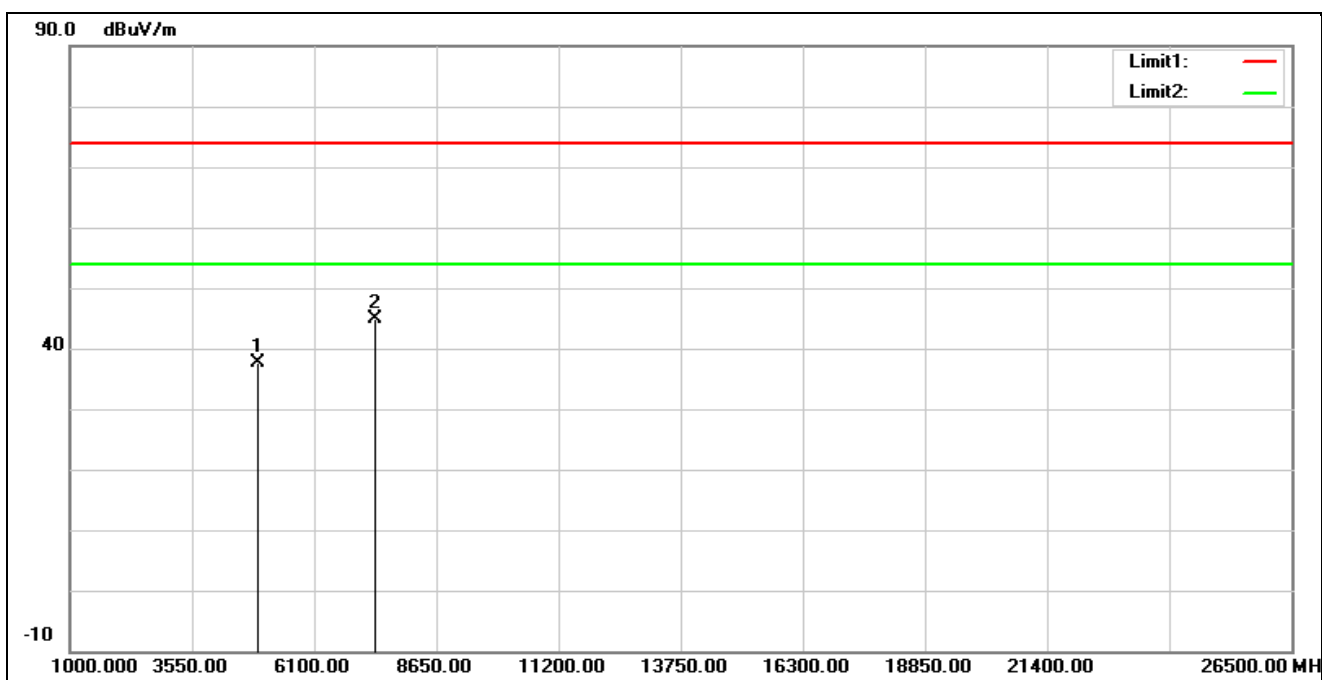

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.06	0.50	37.56	74.00	-36.44	peak
2*	7386.000	36.70	8.11	44.81	74.00	-29.19	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

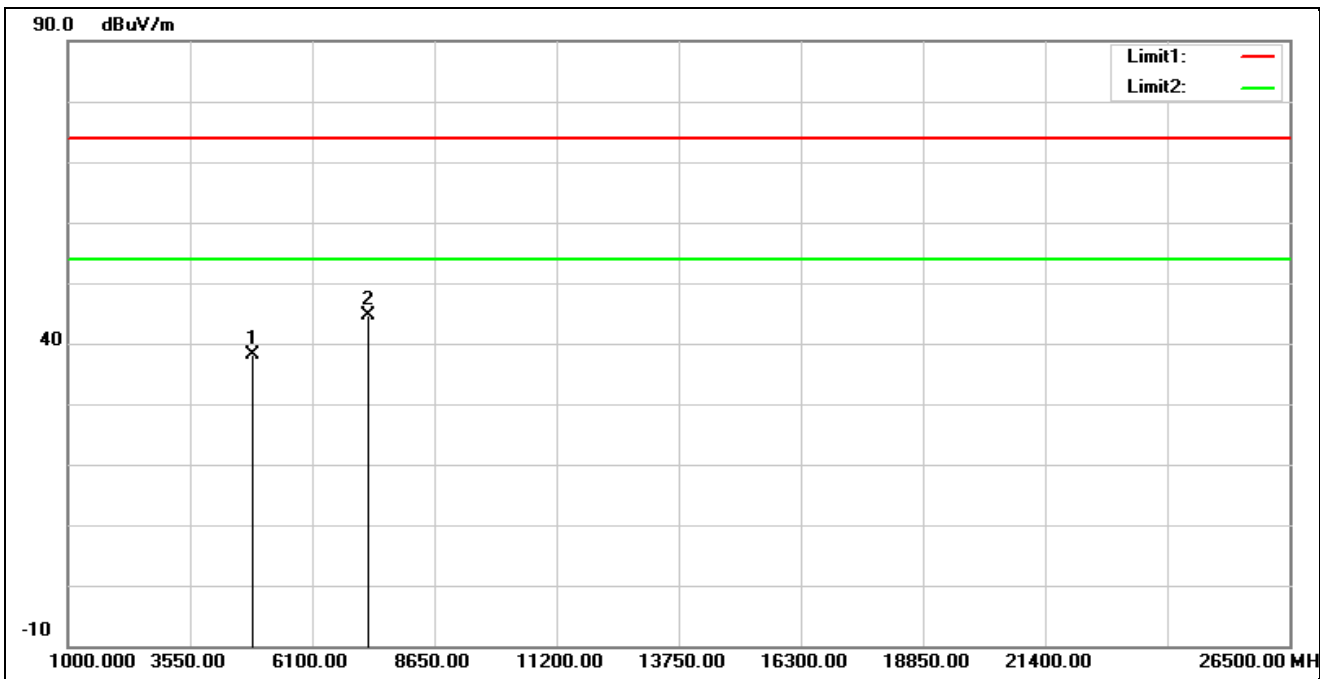


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.73	0.28	38.01	74.00	-35.99	peak
2*	7266.000	36.60	8.02	44.62	74.00	-29.38	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

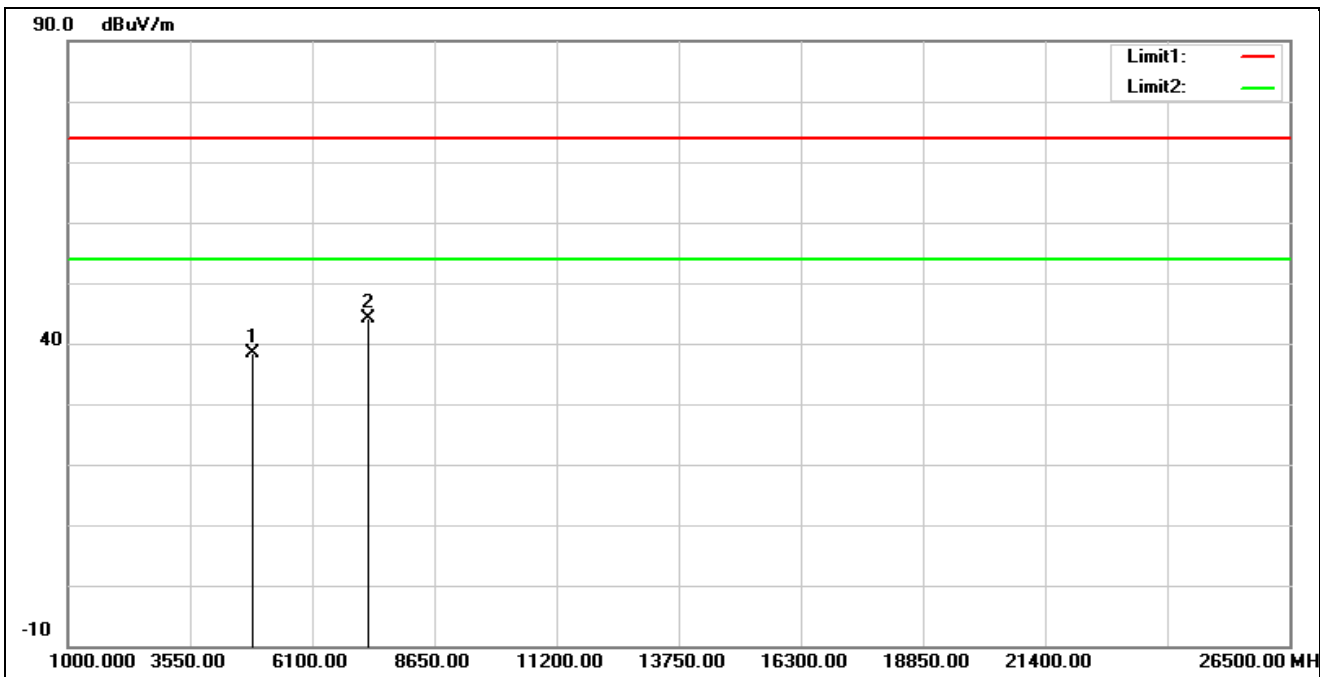


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.05	0.28	38.33	74.00	-35.67	peak
2*	7266.000	36.17	8.02	44.19	74.00	-29.81	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

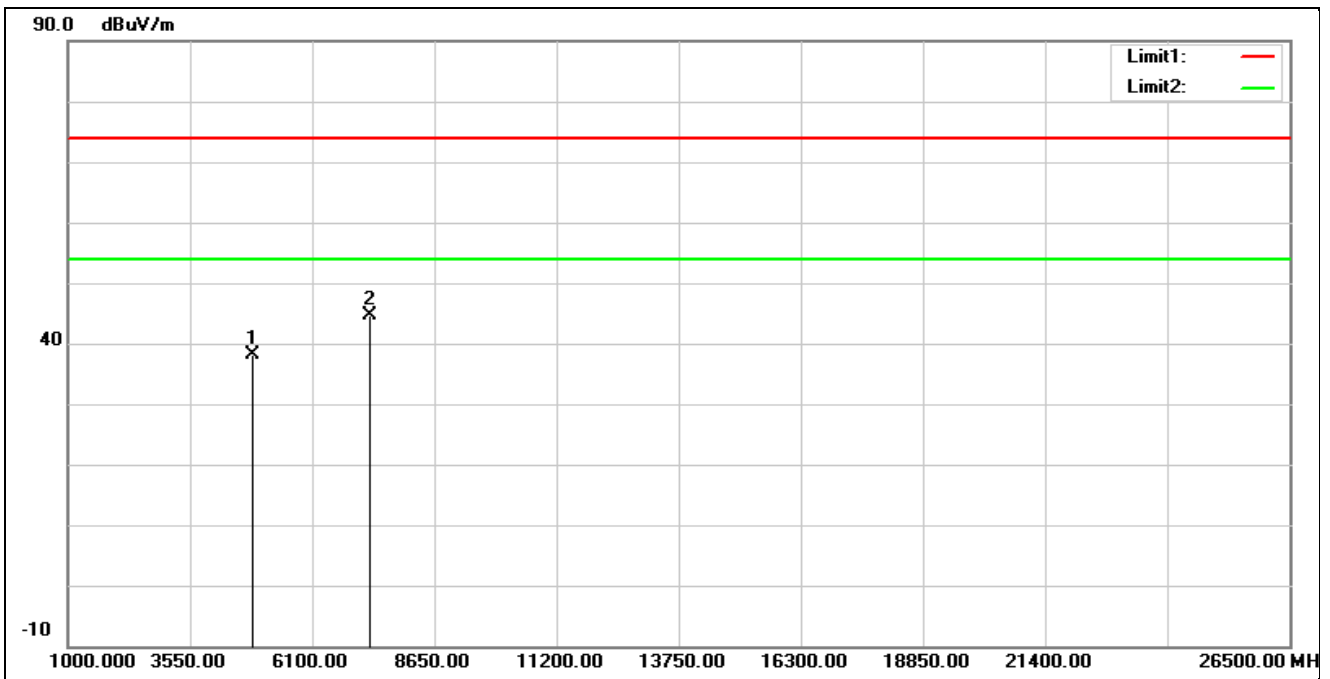


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.71	0.36	38.07	74.00	-35.93	peak
2*	7311.000	36.55	7.98	44.53	74.00	-29.47	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

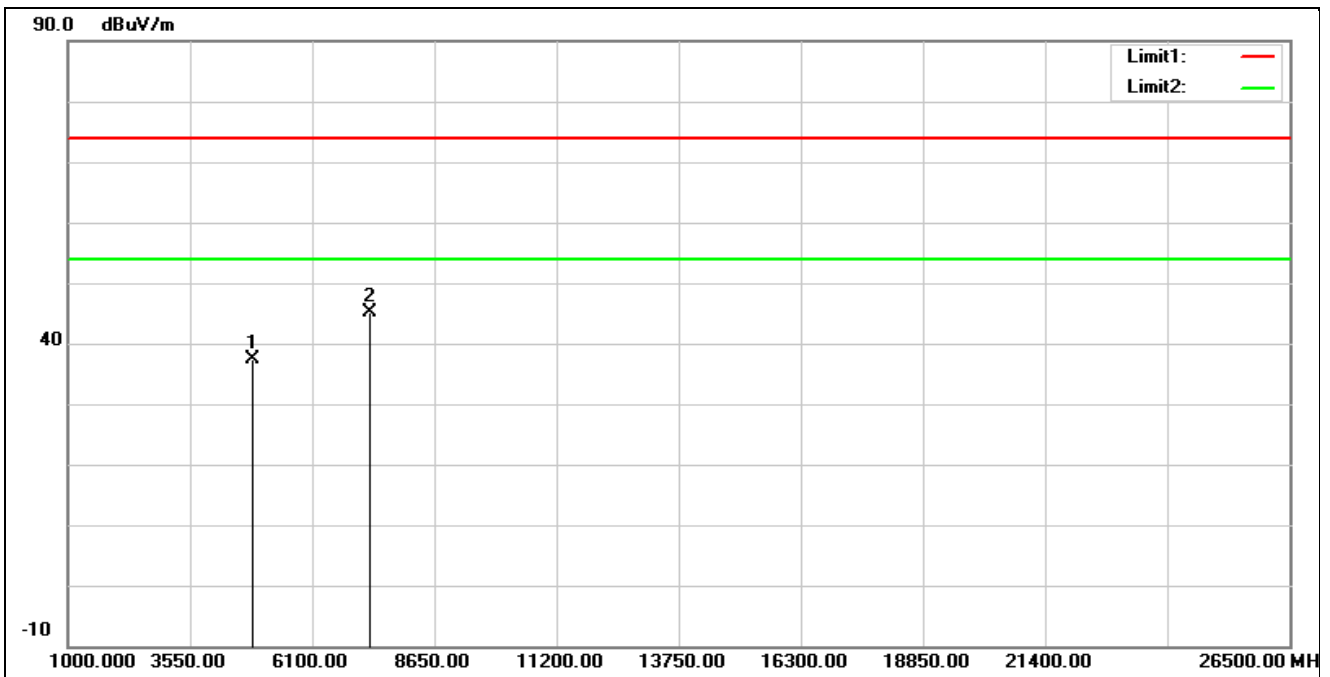


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.07	0.36	37.43	74.00	-36.57	peak
2*	7311.000	37.06	7.98	45.04	74.00	-28.96	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

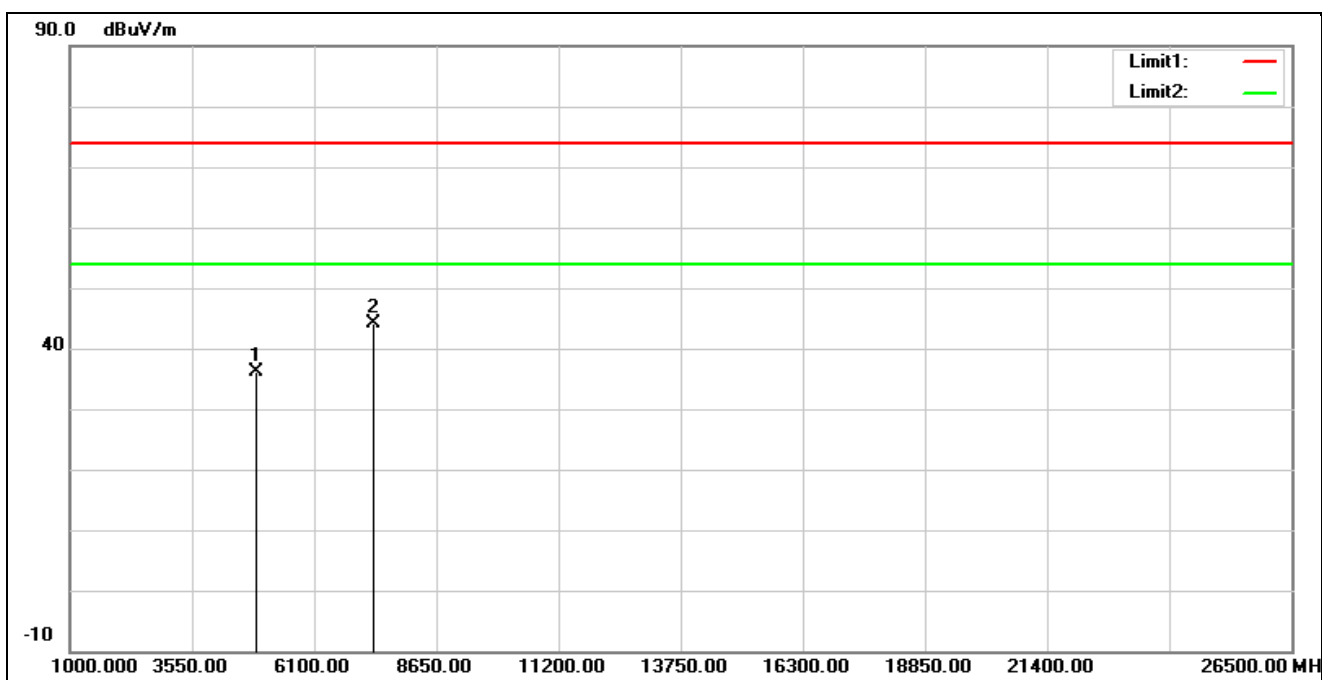


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.55	0.46	36.01	74.00	-37.99	peak
2*	7356.000	36.15	8.02	44.17	74.00	-29.83	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

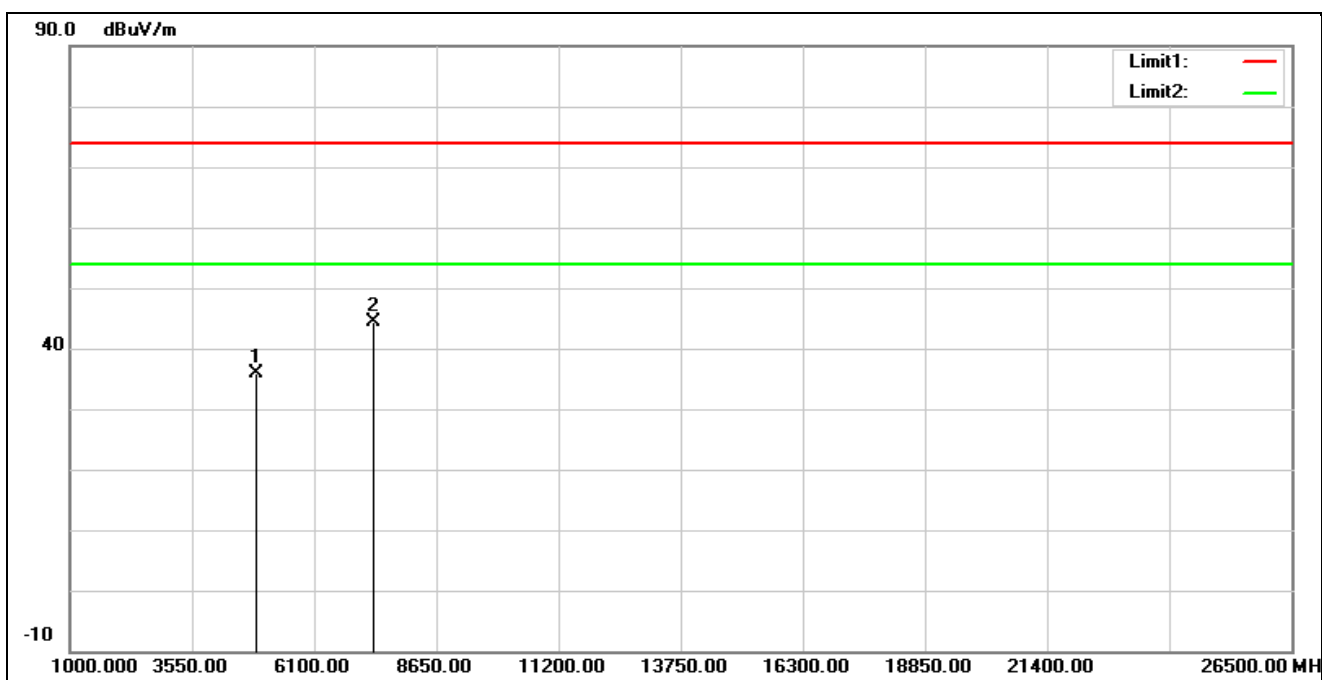

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.52	0.46	35.98	74.00	-38.02	peak
2*	7356.000	36.39	8.02	44.41	74.00	-29.59	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting Bluetooth + WLAN 2.4 GHz + 5 GHz + 6 GHz + Matter		
Remark:			

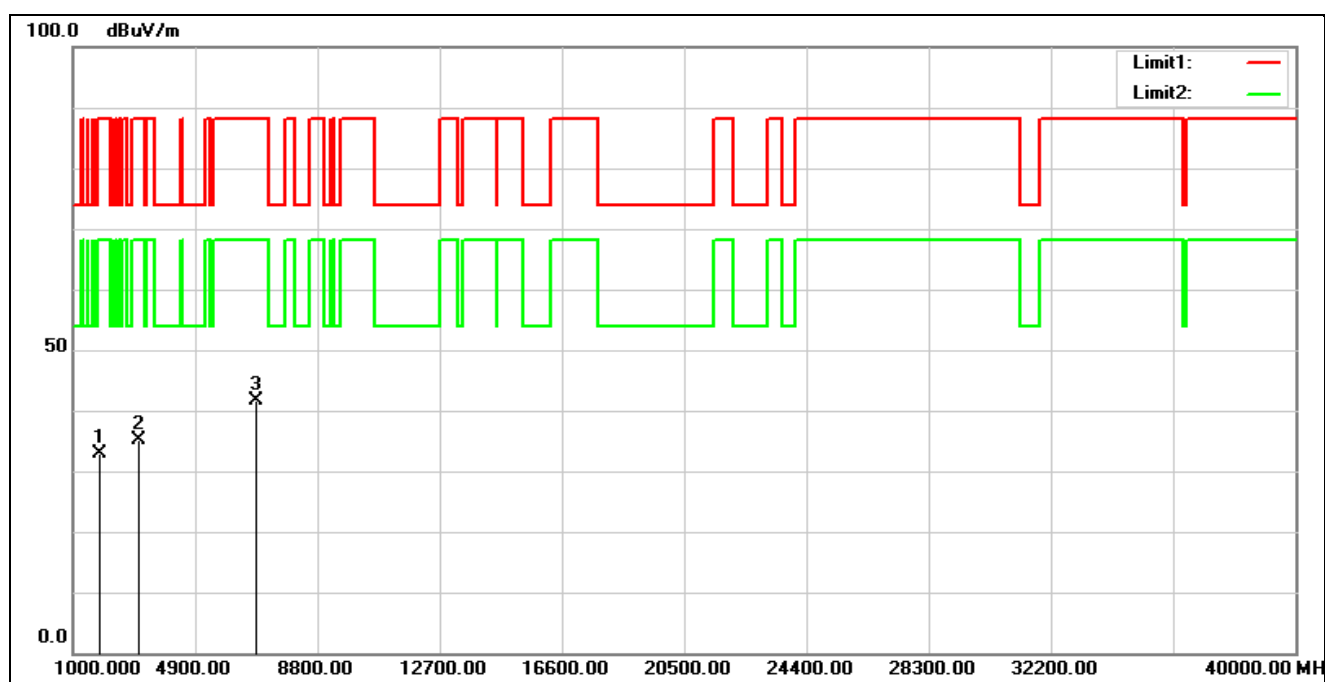

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1833.000	42.26	-9.28	32.98	68.20	-35.22	peak
2	3074.000	39.58	-4.34	35.24	68.20	-32.96	peak
3*	6831.000	35.43	6.08	41.51	68.20	-26.69	peak

Note: All unwanted emissions outside the restricted band are limited using a peak value of 68.2 dBuV/MHz to meet Bluetooth + Matter + WLAN 2.4 GHz + 5 GHz + 6 GHz RSE simultaneous transmissions.

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting Bluetooth + WLAN 2.4 GHz + 5 GHz + 6 GHz + Matter		
Remark:			

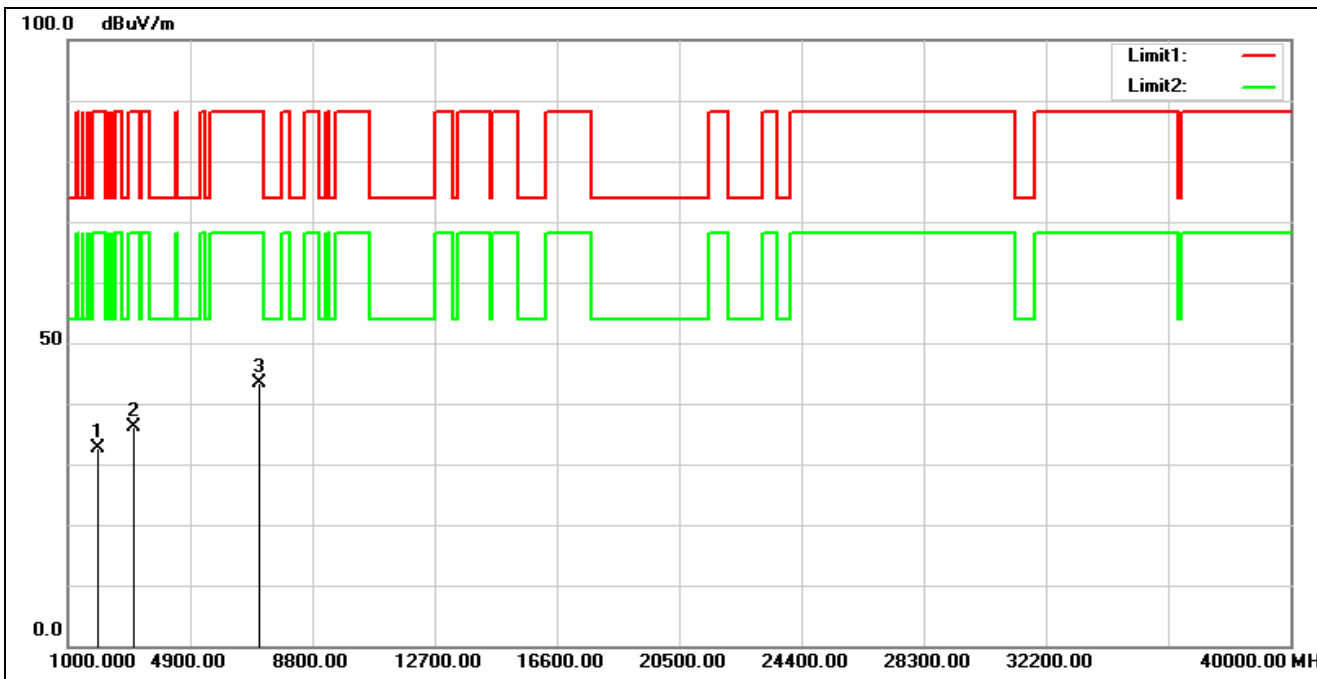

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1986.000	40.79	-8.13	32.66	68.20	-35.54	peak
2	3091.000	40.27	-4.22	36.05	68.20	-32.15	peak
3*	7103.000	35.86	7.43	43.29	68.20	-24.91	peak


Note: All unwanted emissions outside the restricted band are limited using a peak value of 68.2 dBuV/MHz to meet Bluetooth + Matter + WLAN 2.4 GHz + 5 GHz + 6 GHz RSE simultaneous transmissions.



Band Edge


2X2 - Peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

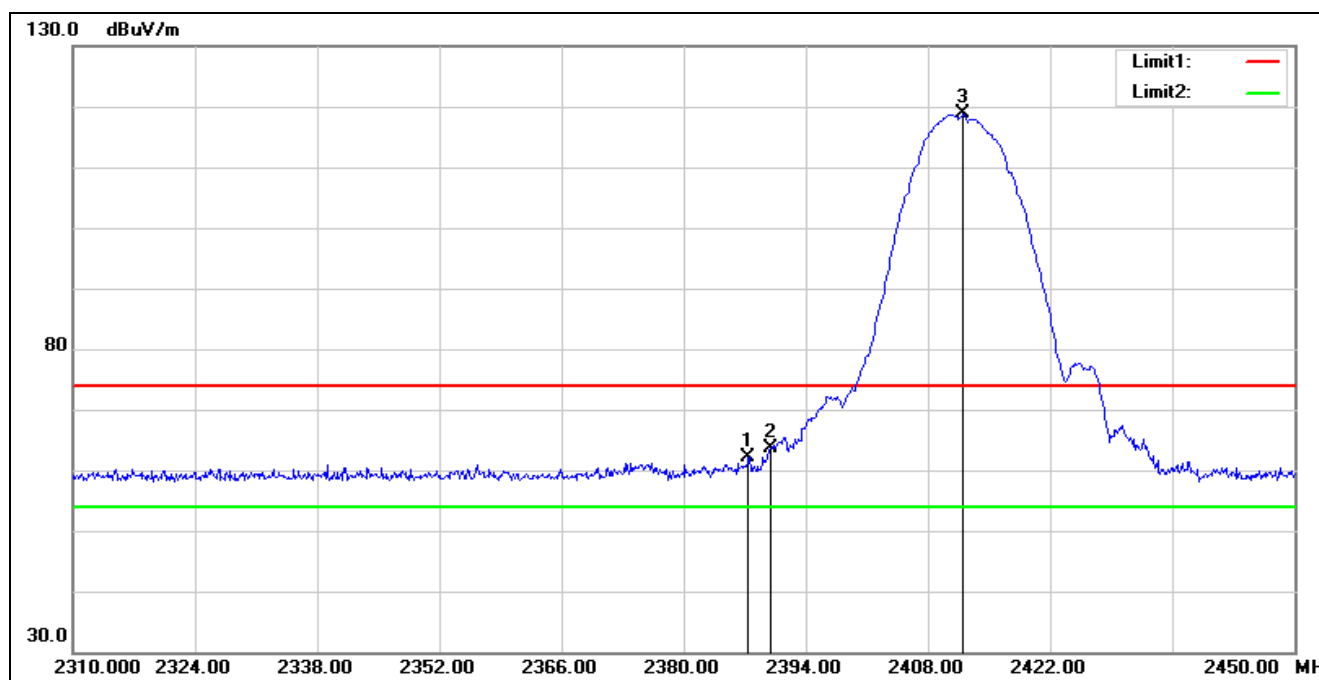


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.420	68.26	-6.17	62.09	74.00	-11.91	peak
2	2390.000	69.82	-6.19	63.63	74.00	-10.37	peak
3*	2412.060	125.06	-6.27	118.79	74.00	44.79	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

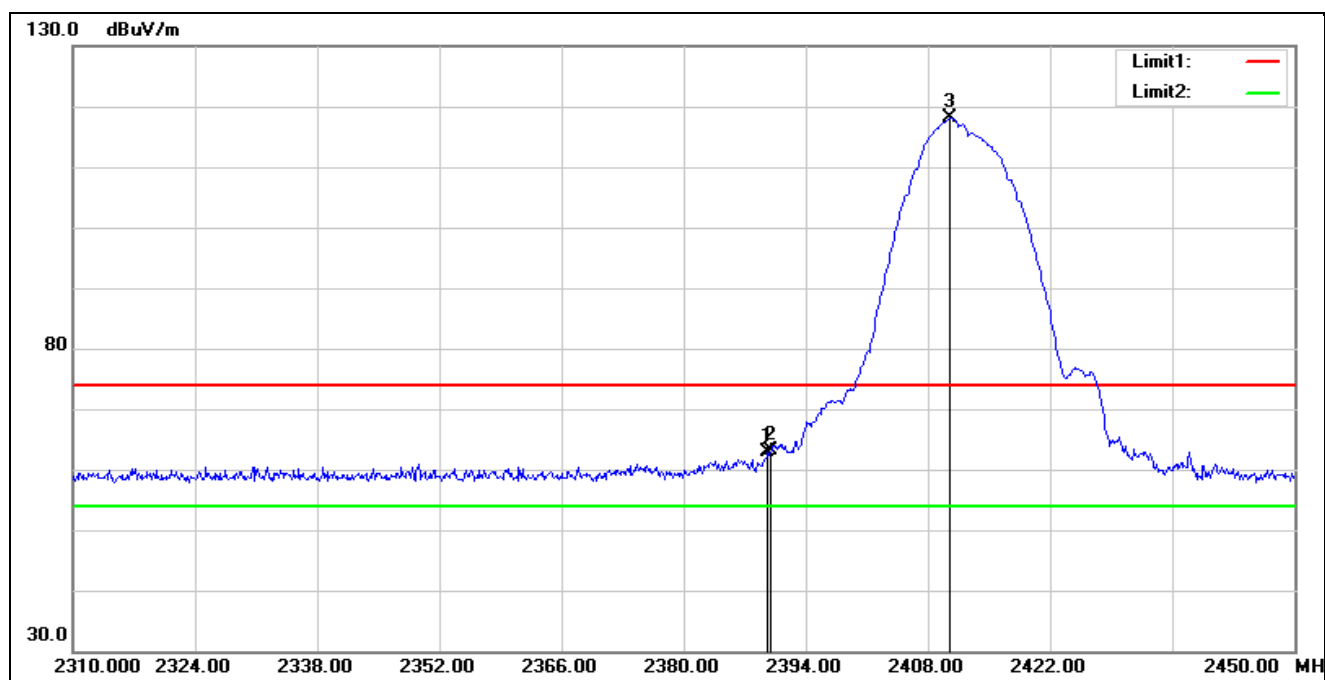


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	69.08	-6.19	62.89	74.00	-11.11	peak
2	2390.000	69.30	-6.19	63.11	74.00	-10.89	peak
3*	2410.520	124.30	-6.26	118.04	74.00	44.04	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

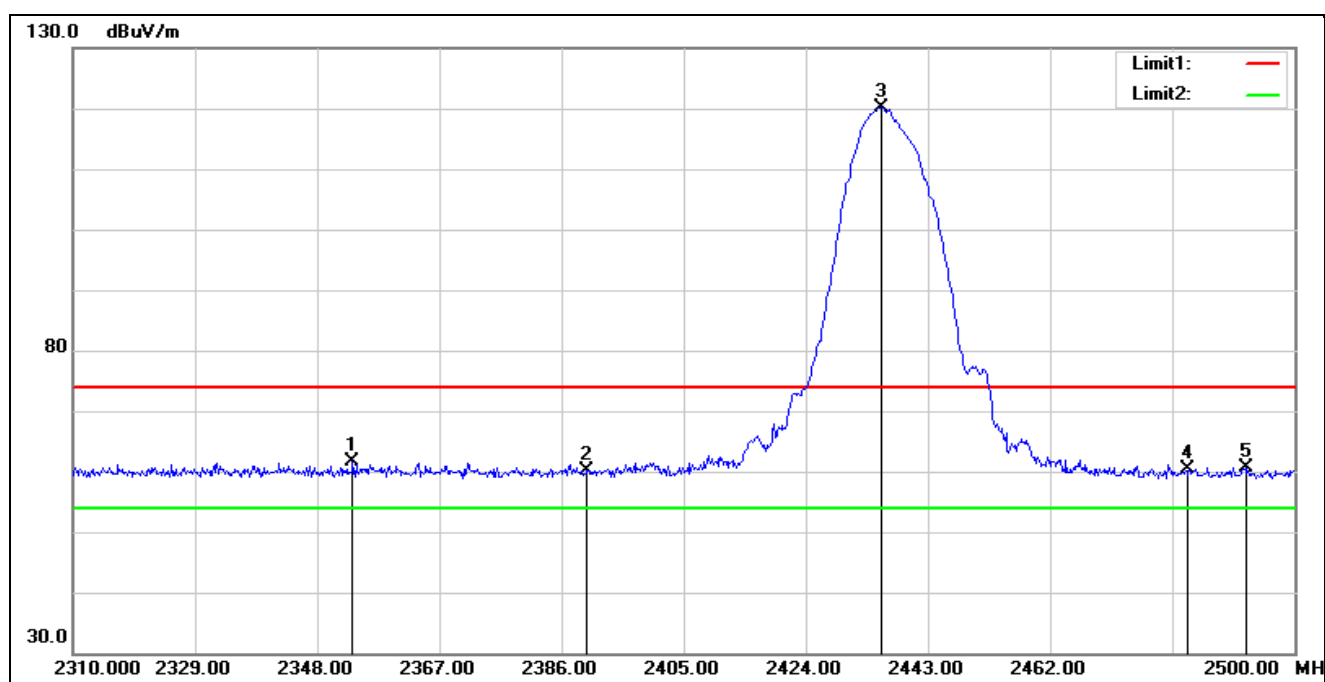


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2353.510	67.53	-6.02	61.51	74.00	-12.49	peak
2	2390.000	66.38	-6.19	60.19	74.00	-13.81	peak
3*	2435.780	126.58	-6.33	120.25	74.00	46.25	peak
4	2483.500	66.73	-6.46	60.27	74.00	-13.73	peak
5	2492.400	67.15	-6.49	60.66	74.00	-13.34	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

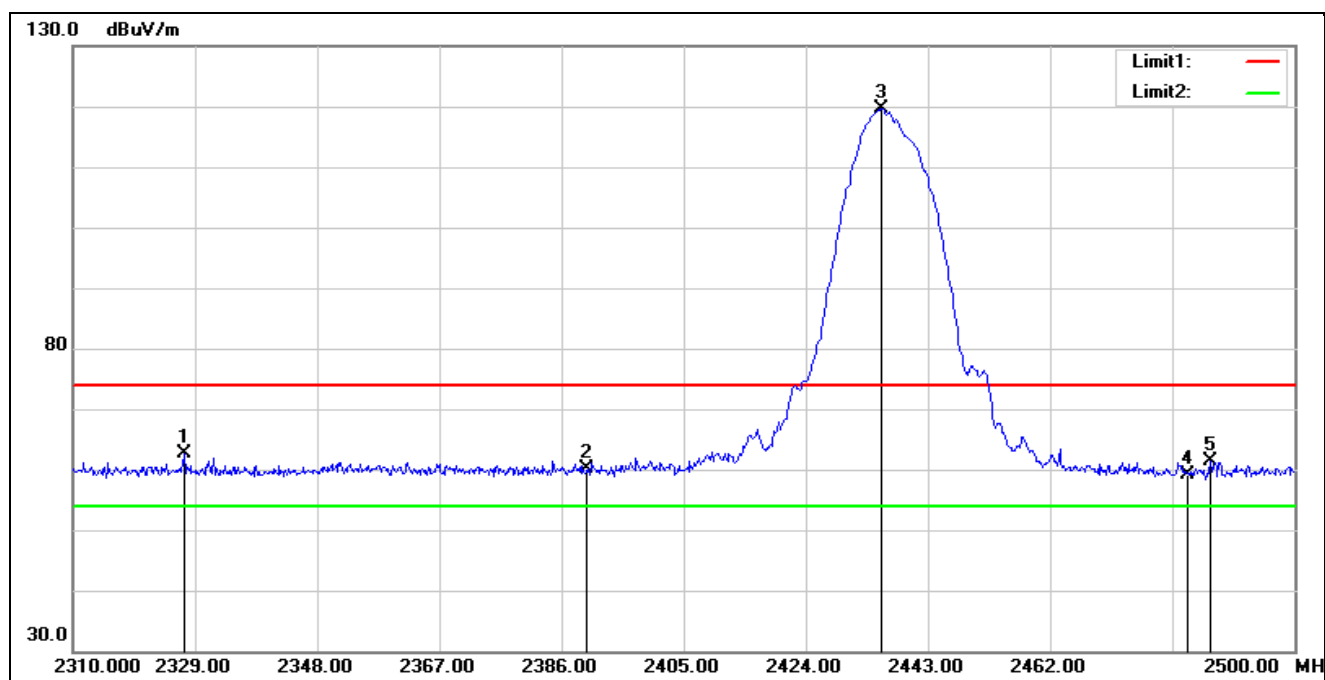


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2327.290	68.73	-6.07	62.66	74.00	-11.34	peak
2	2390.000	66.28	-6.19	60.09	74.00	-13.91	peak
3*	2435.780	125.91	-6.33	119.58	74.00	45.58	peak
4	2483.500	65.53	-6.46	59.07	74.00	-14.93	peak
5	2486.890	67.84	-6.47	61.37	74.00	-12.63	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

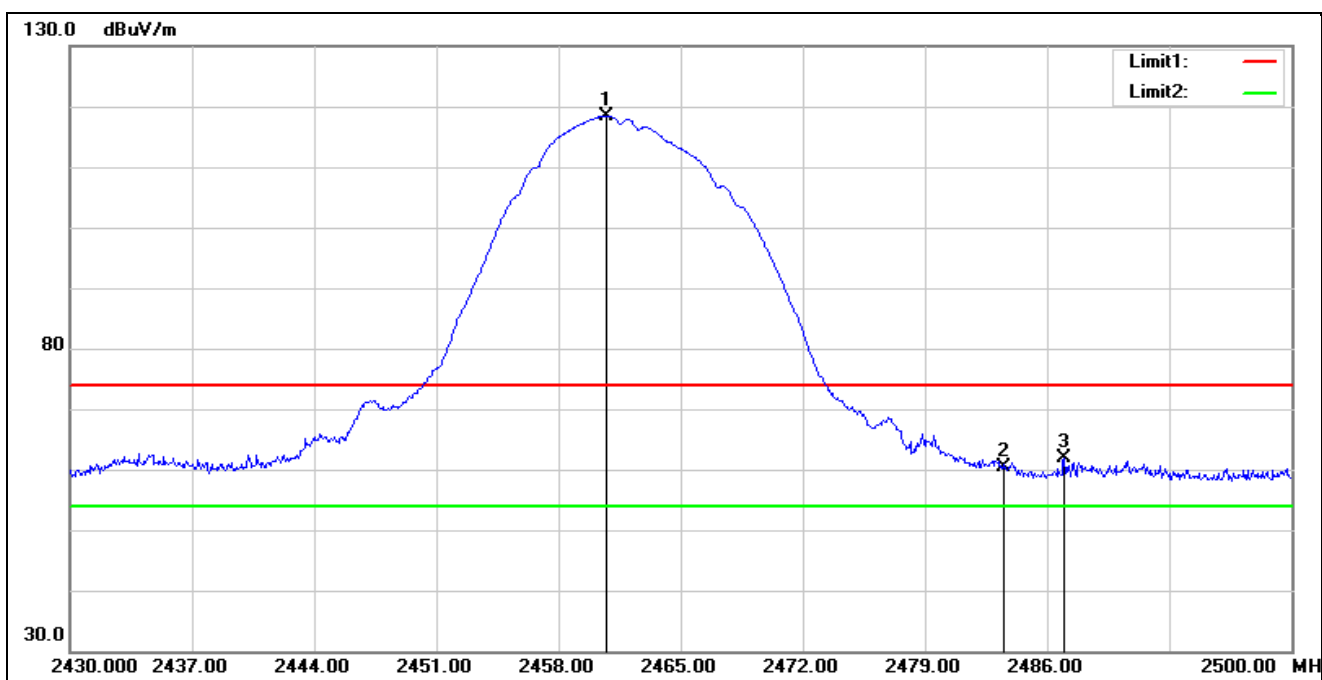


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.730	124.89	-6.40	118.49	74.00	44.49	peak
2	2483.500	66.93	-6.46	60.47	74.00	-13.53	peak
3	2486.980	68.39	-6.47	61.92	74.00	-12.08	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

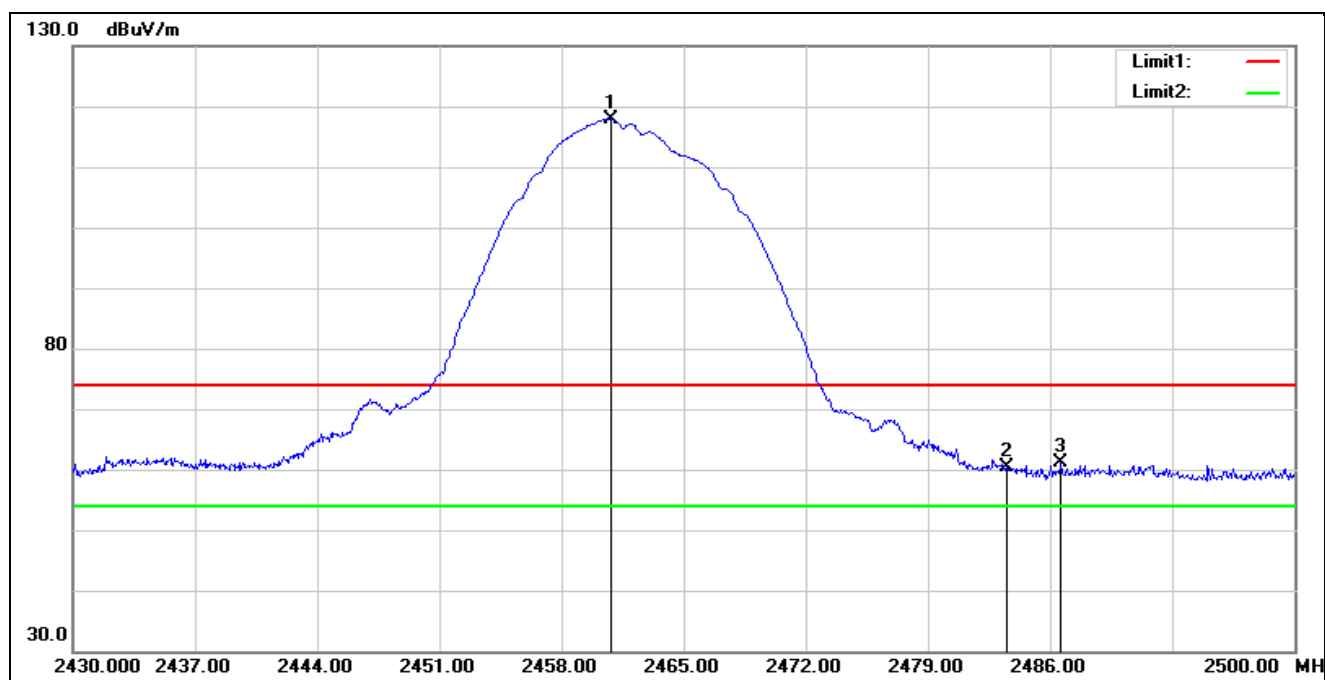


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.800	124.32	-6.40	117.92	74.00	43.92	peak
2	2483.500	66.84	-6.46	60.38	74.00	-13.62	peak
3	2486.630	67.70	-6.47	61.23	74.00	-12.77	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

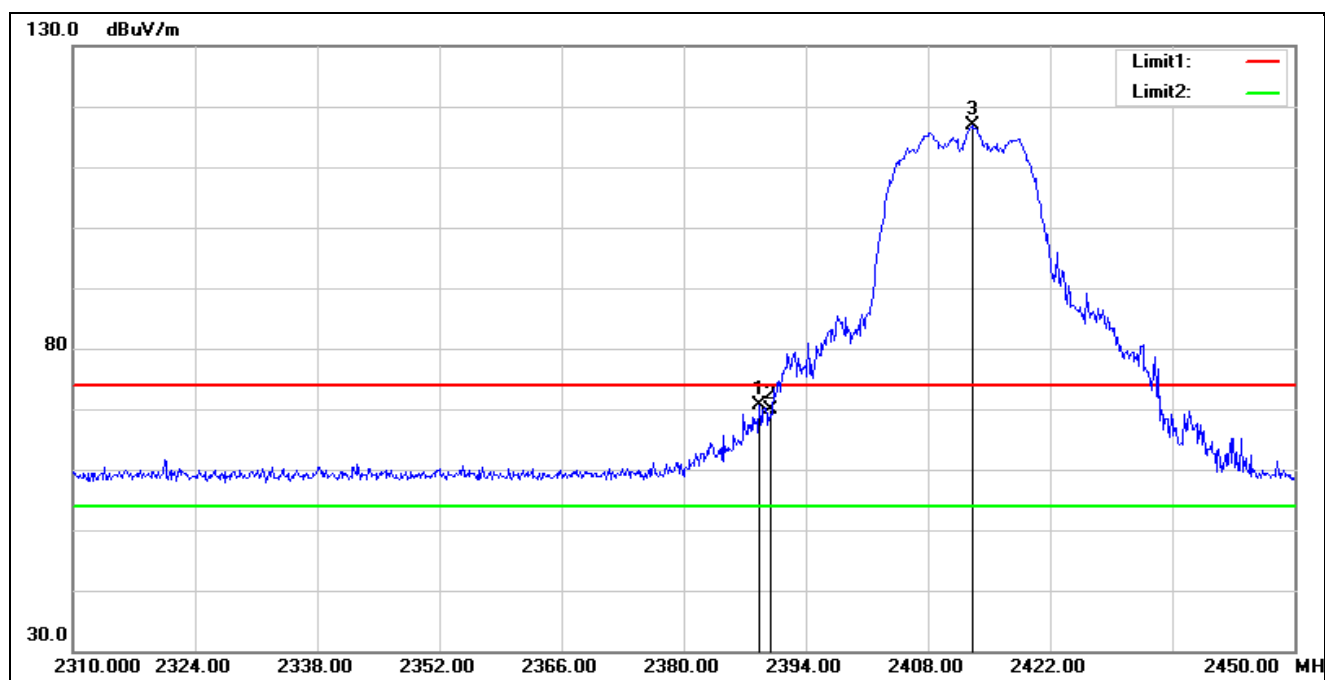

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	76.82	-6.18	70.64	74.00	-3.36	peak
2	2390.000	76.00	-6.19	69.81	74.00	-4.19	peak
3*	2413.040	123.14	-6.27	116.87	74.00	42.87	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

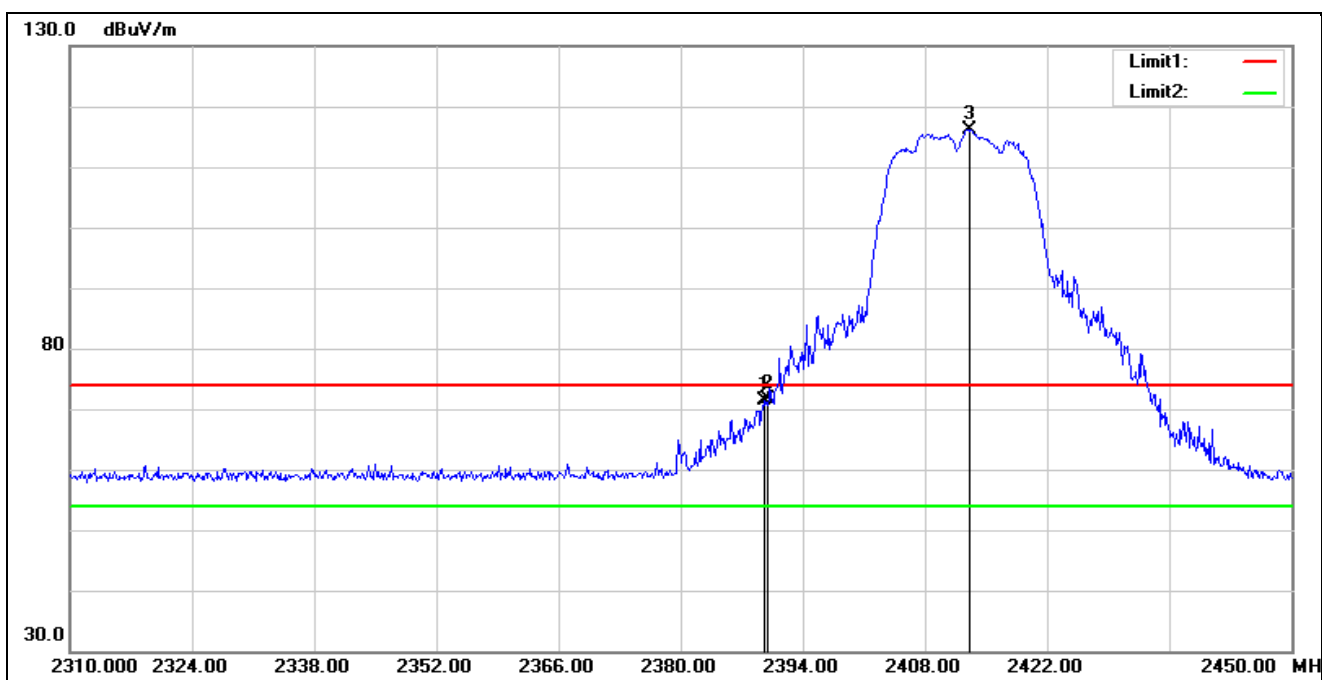

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	77.50	-6.19	71.31	74.00	-2.69	peak
2	2390.000	77.84	-6.19	71.65	74.00	-2.35	peak
3*	2413.040	122.51	-6.27	116.24	74.00	42.24	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

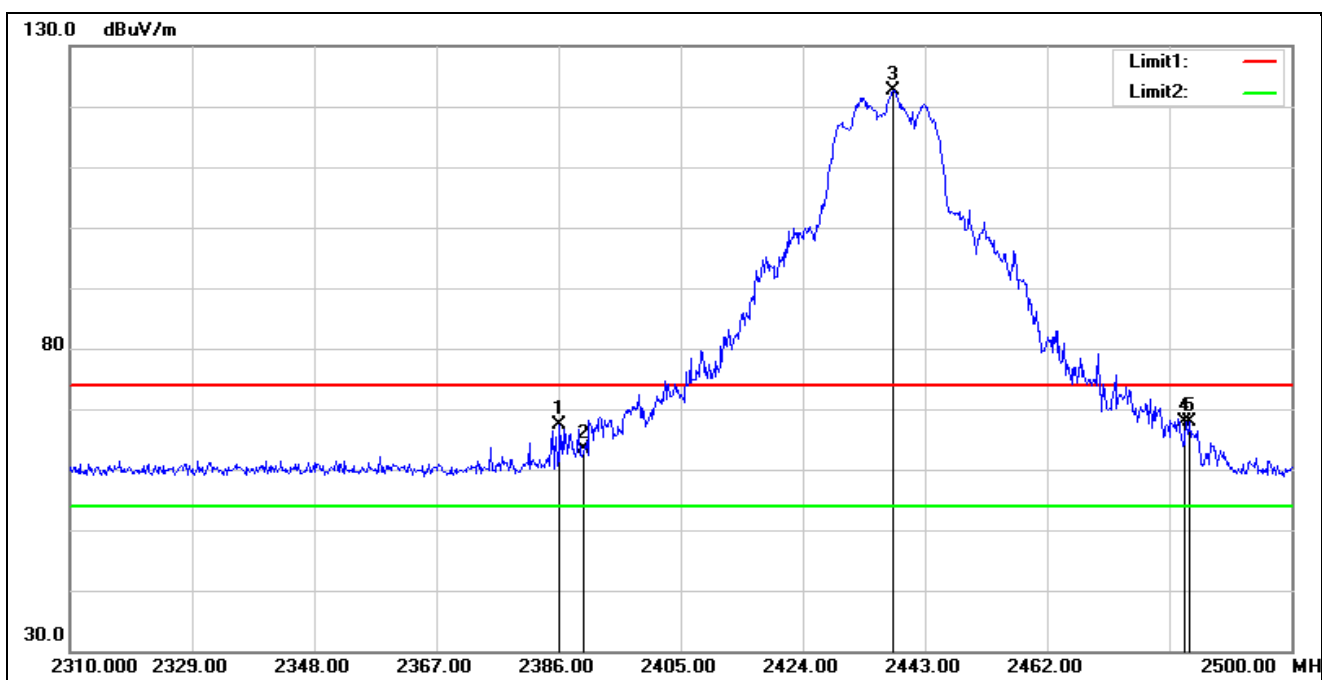


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.190	73.66	-6.17	67.49	74.00	-6.51	peak
2	2390.000	69.67	-6.19	63.48	74.00	-10.52	peak
3*	2438.060	129.09	-6.34	122.75	74.00	48.75	peak
4	2483.500	74.25	-6.46	67.79	74.00	-6.21	peak
5	2484.230	74.34	-6.47	67.87	74.00	-6.13	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

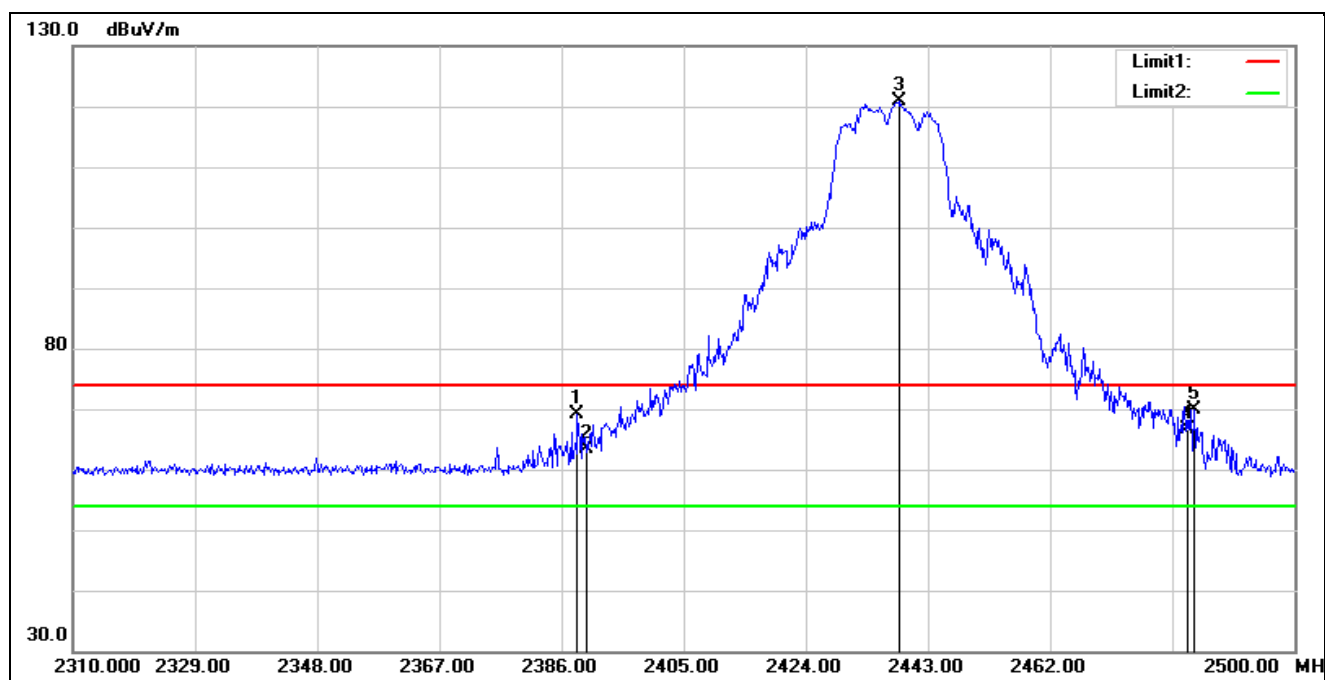


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.470	75.43	-6.18	69.25	74.00	-4.75	peak
2	2390.000	69.48	-6.19	63.29	74.00	-10.71	peak
3*	2438.440	127.23	-6.34	120.89	74.00	46.89	peak
4	2483.500	73.06	-6.46	66.60	74.00	-7.40	peak
5	2484.420	76.43	-6.47	69.96	74.00	-4.04	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

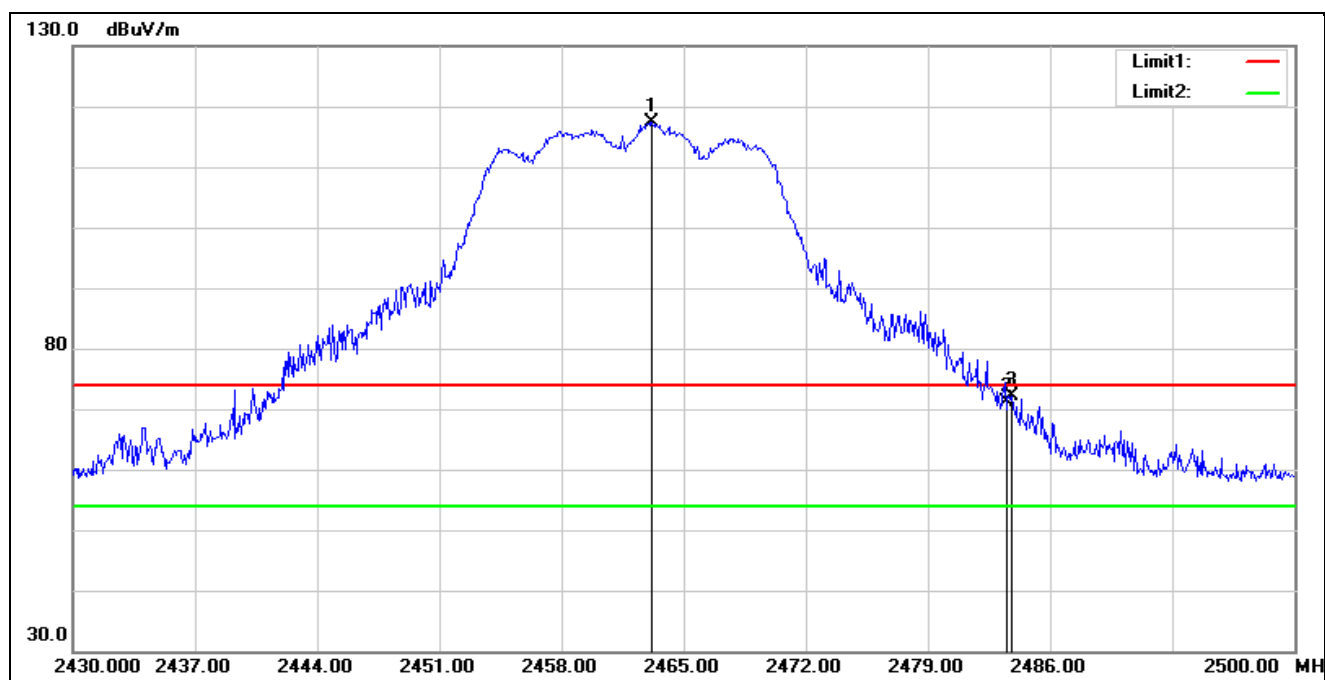


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.180	123.79	-6.41	117.38	74.00	43.38	peak
2	2483.500	77.48	-6.46	71.02	74.00	-2.98	peak
3	2483.830	78.70	-6.47	72.23	74.00	-1.77	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

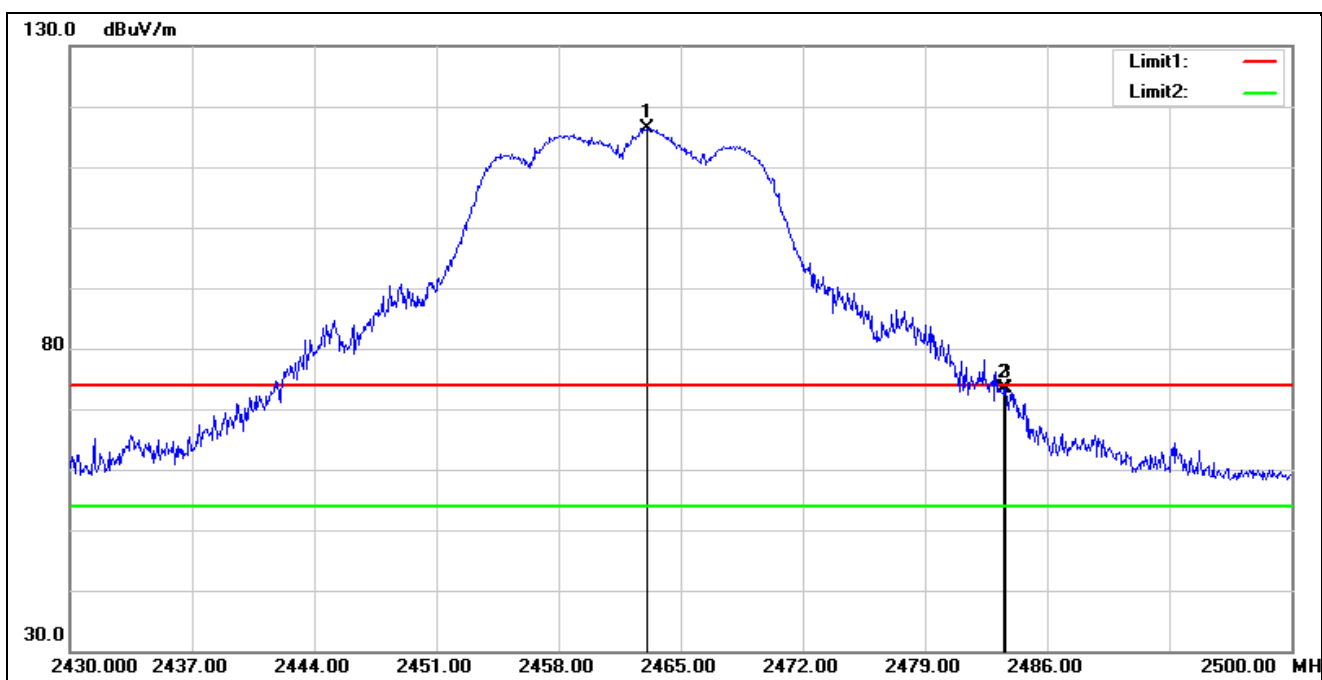


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.110	122.78	-6.41	116.37	74.00	42.37	peak
2	2483.500	79.74	-6.46	73.28	74.00	-0.72	peak
3	2483.620	79.80	-6.46	73.34	74.00	-0.66	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

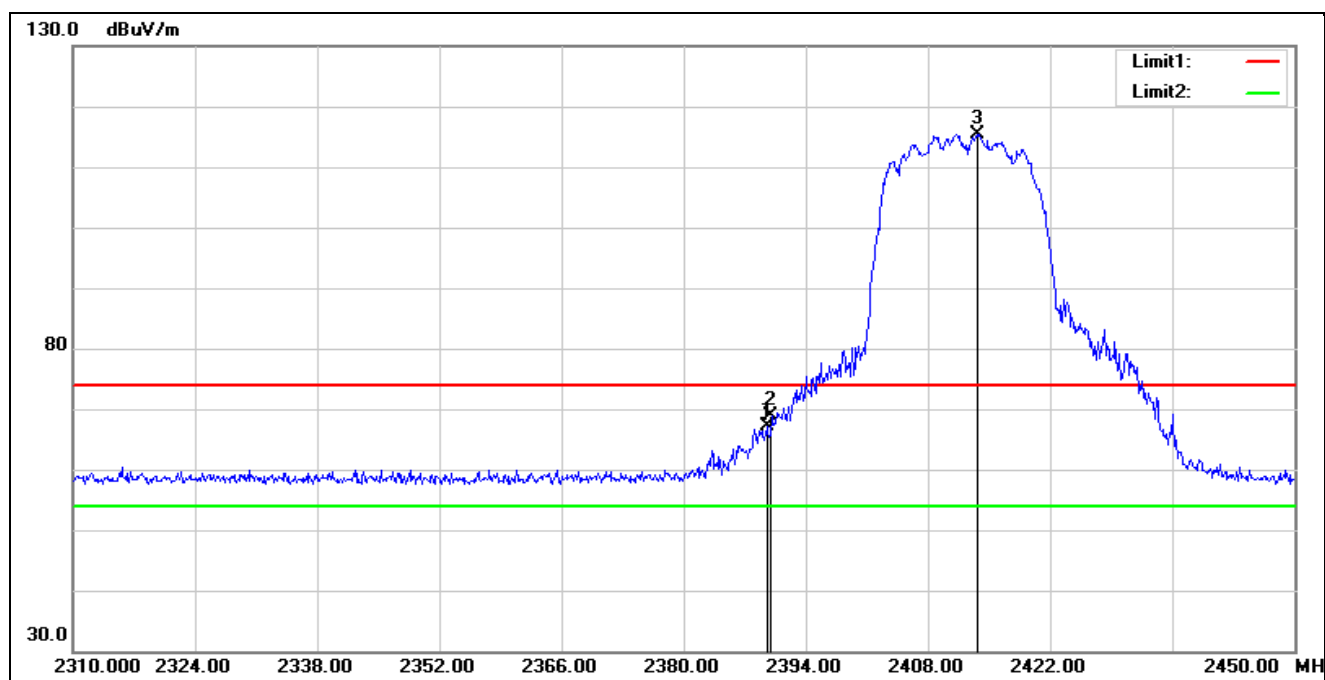


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	73.71	-6.50	67.21	74.00	-6.79	peak
2	2390.000	75.32	-6.50	68.82	74.00	-5.18	peak
3*	2413.740	121.98	-6.52	115.46	74.00	41.46	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

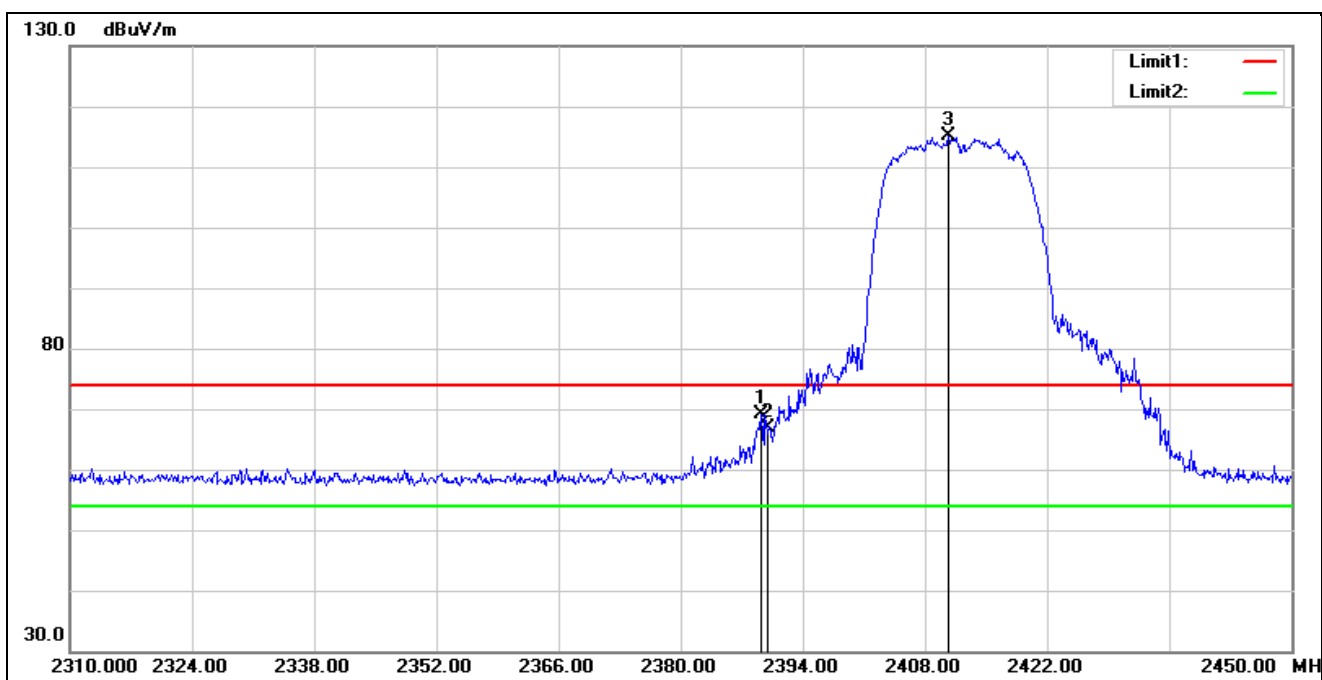


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	75.68	-6.50	69.18	74.00	-4.82	peak
2	2390.000	73.42	-6.50	66.92	74.00	-7.08	peak
3*	2410.660	121.60	-6.51	115.09	74.00	41.09	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

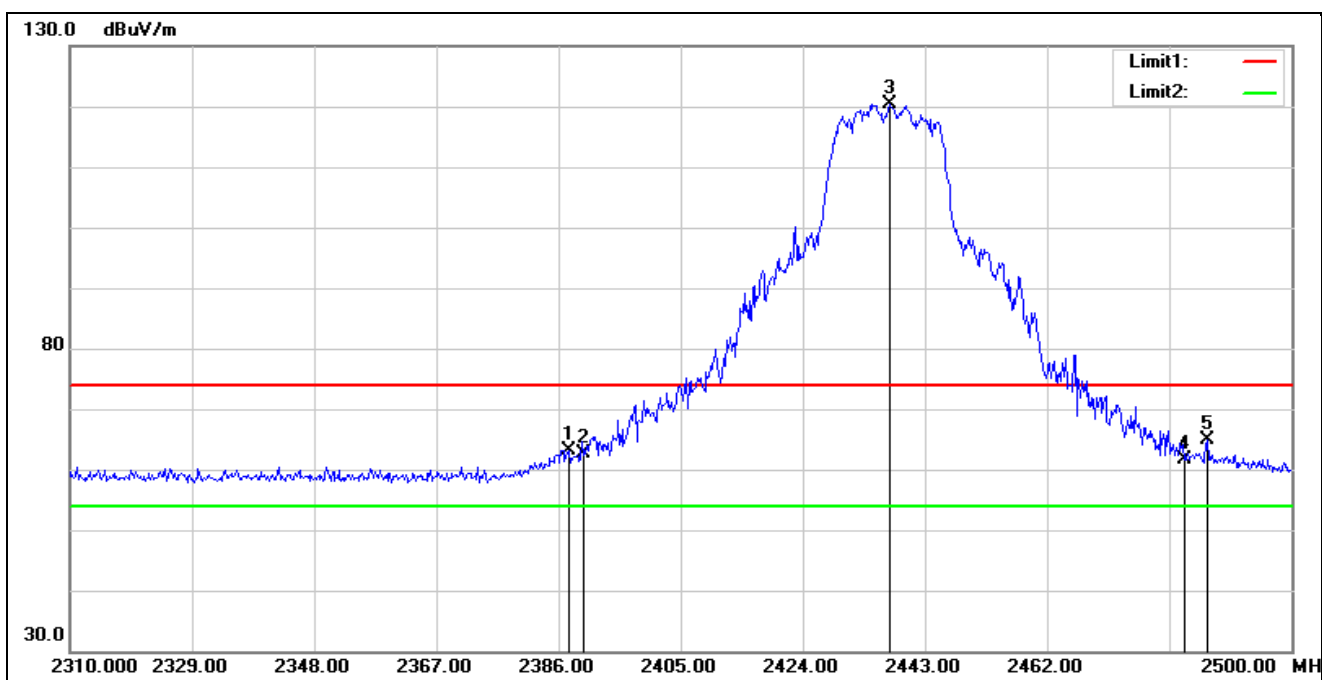

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	69.75	-6.50	63.25	74.00	-10.75	peak
2	2390.000	69.22	-6.50	62.72	74.00	-11.28	peak
3*	2437.490	126.88	-6.54	120.34	74.00	46.34	peak
4	2483.500	68.22	-6.57	61.65	74.00	-12.35	peak
5	2486.890	71.52	-6.57	64.95	74.00	-9.05	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

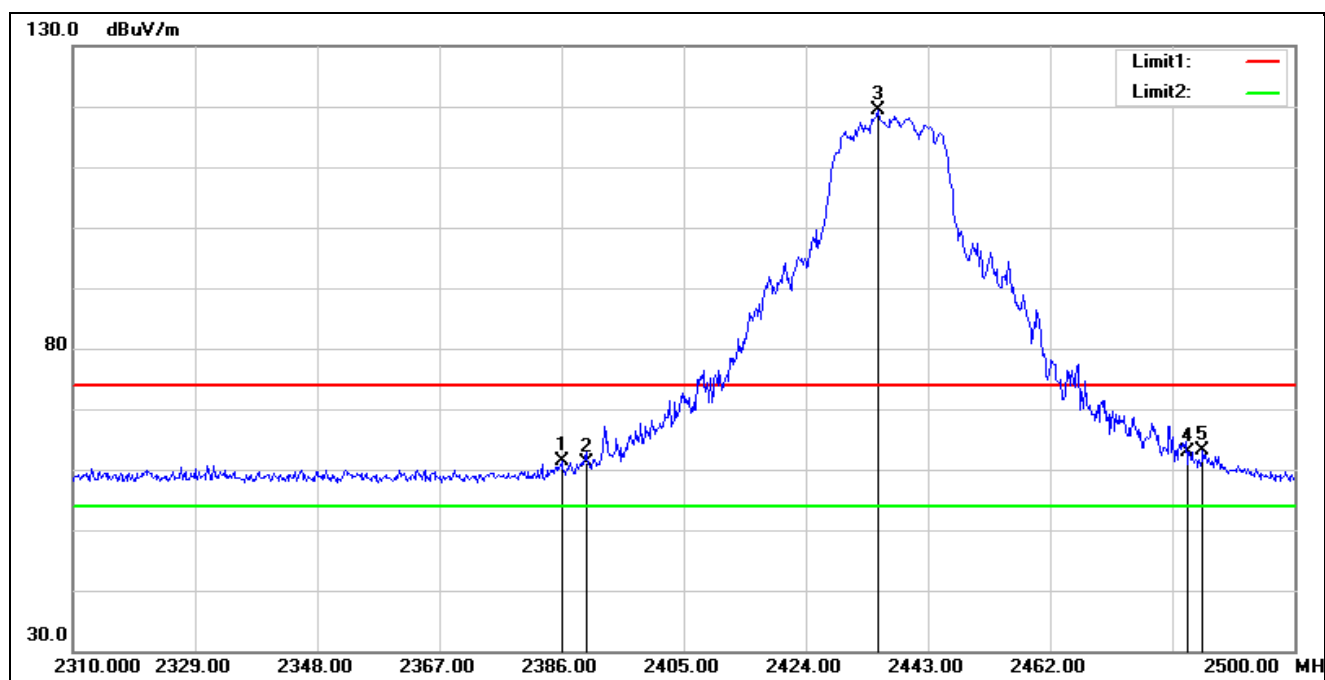

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.000	67.79	-6.49	61.30	74.00	-12.70	peak
2	2390.000	67.70	-6.50	61.20	74.00	-12.80	peak
3*	2435.210	126.01	-6.54	119.47	74.00	45.47	peak
4	2483.500	69.56	-6.57	62.99	74.00	-11.01	peak
5	2485.750	69.67	-6.57	63.10	74.00	-10.90	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

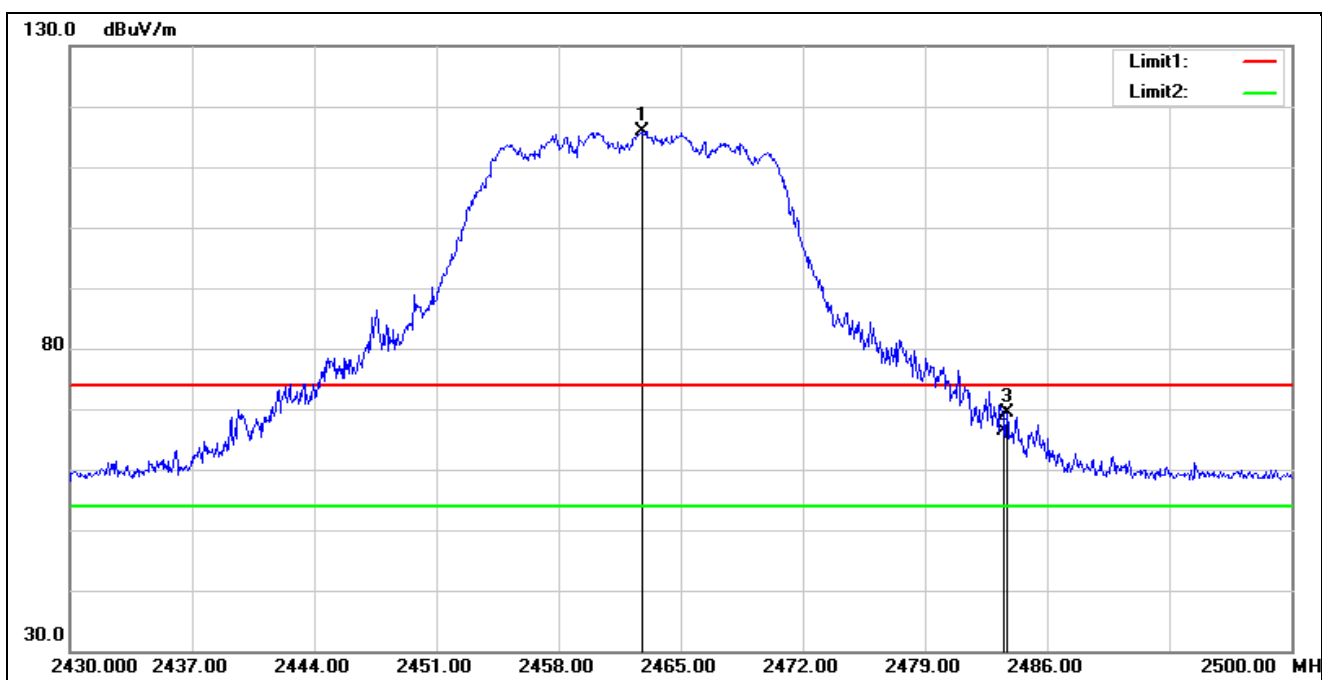


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2462.830	122.40	-6.56	115.84	74.00	41.84	peak
2	2483.500	73.06	-6.57	66.49	74.00	-7.51	peak
3	2483.690	76.05	-6.57	69.48	74.00	-4.52	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

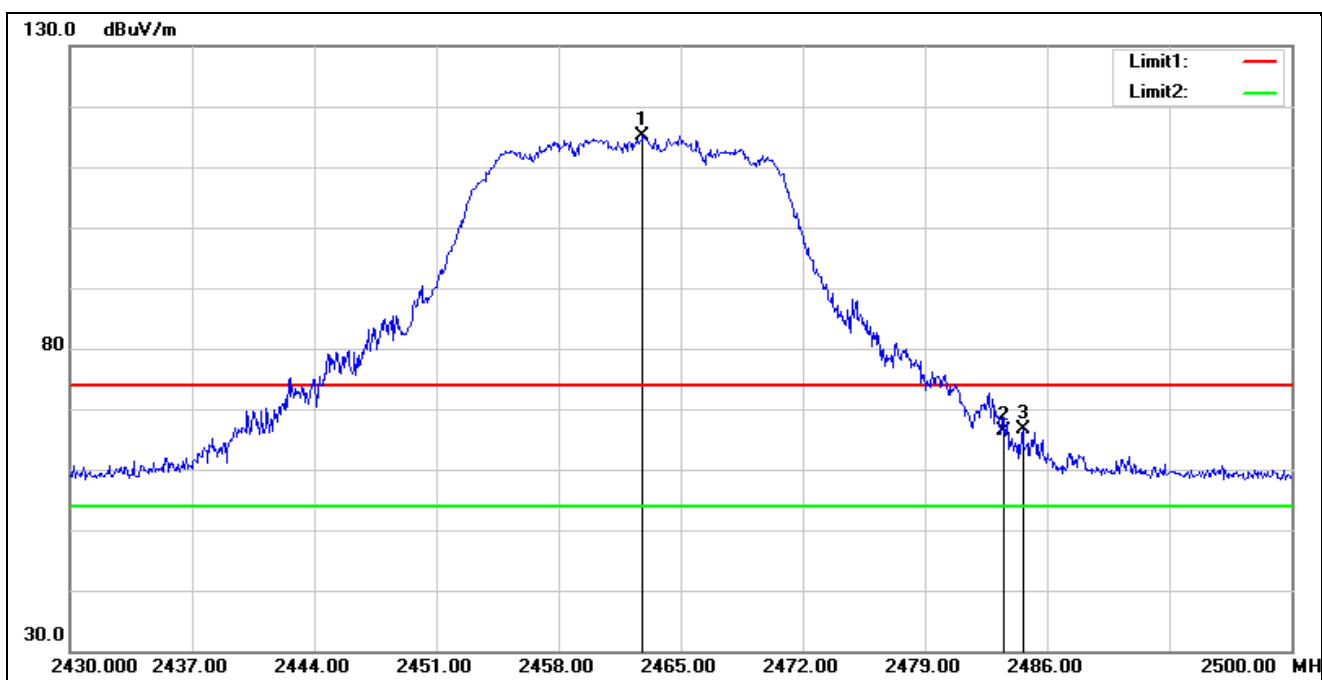


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2462.830	121.66	-6.56	115.10	74.00	41.10	peak
2	2483.500	73.01	-6.57	66.44	74.00	-7.56	peak
3	2484.600	73.11	-6.57	66.54	74.00	-7.46	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

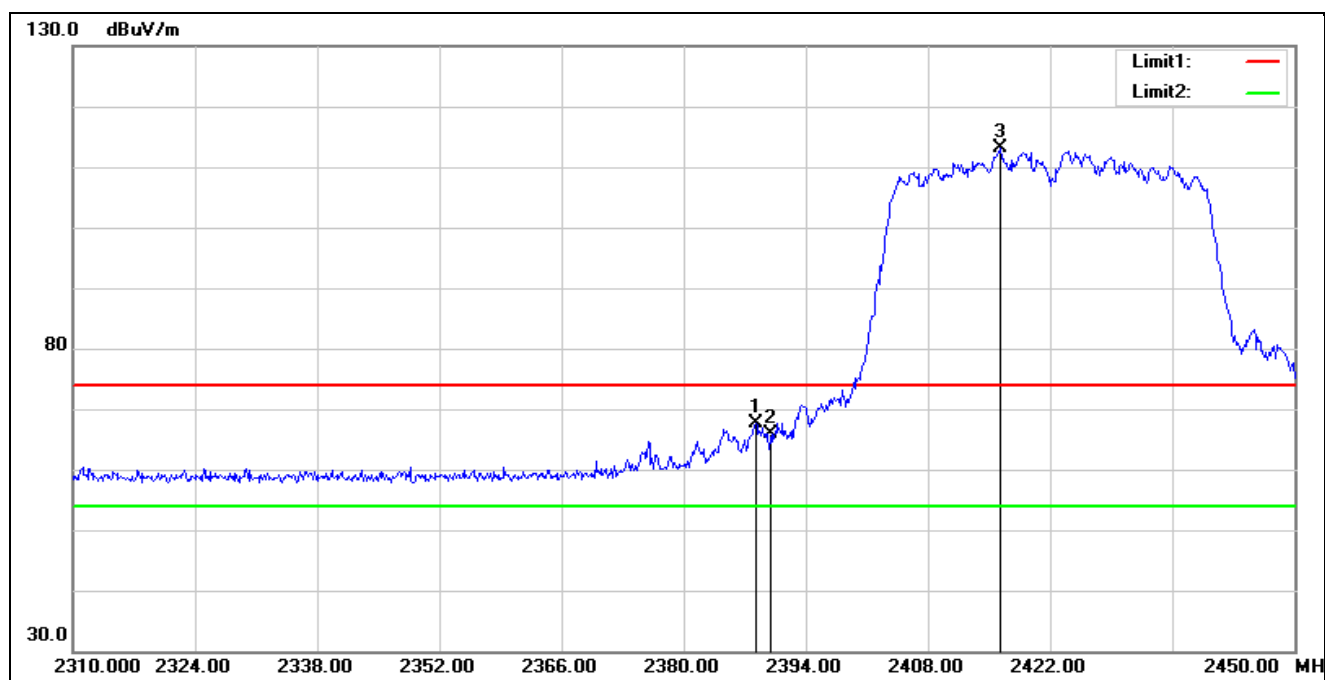


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.260	74.22	-6.50	67.72	74.00	-6.28	peak
2	2390.000	72.35	-6.50	65.85	74.00	-8.15	peak
3*	2416.260	119.64	-6.51	113.13	74.00	39.13	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

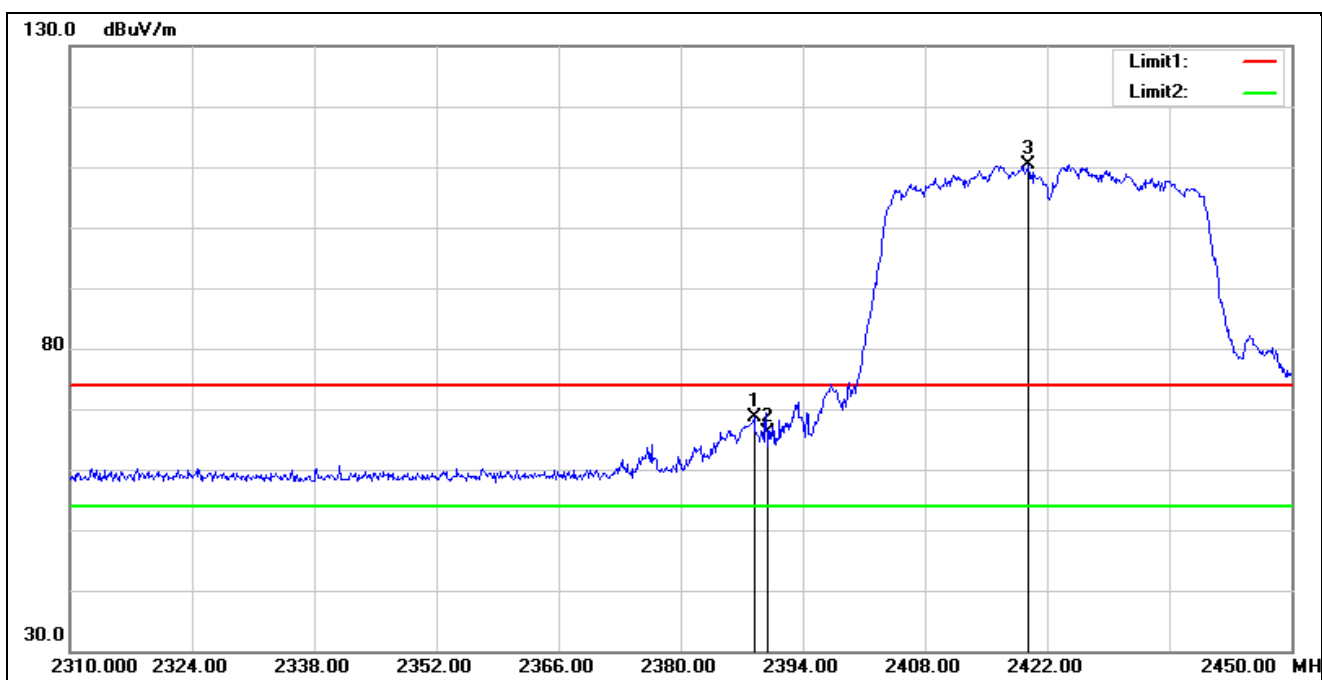


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.400	75.04	-6.50	68.54	74.00	-5.46	peak
2	2390.000	72.75	-6.50	66.25	74.00	-7.75	peak
3*	2419.900	116.85	-6.52	110.33	74.00	36.33	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

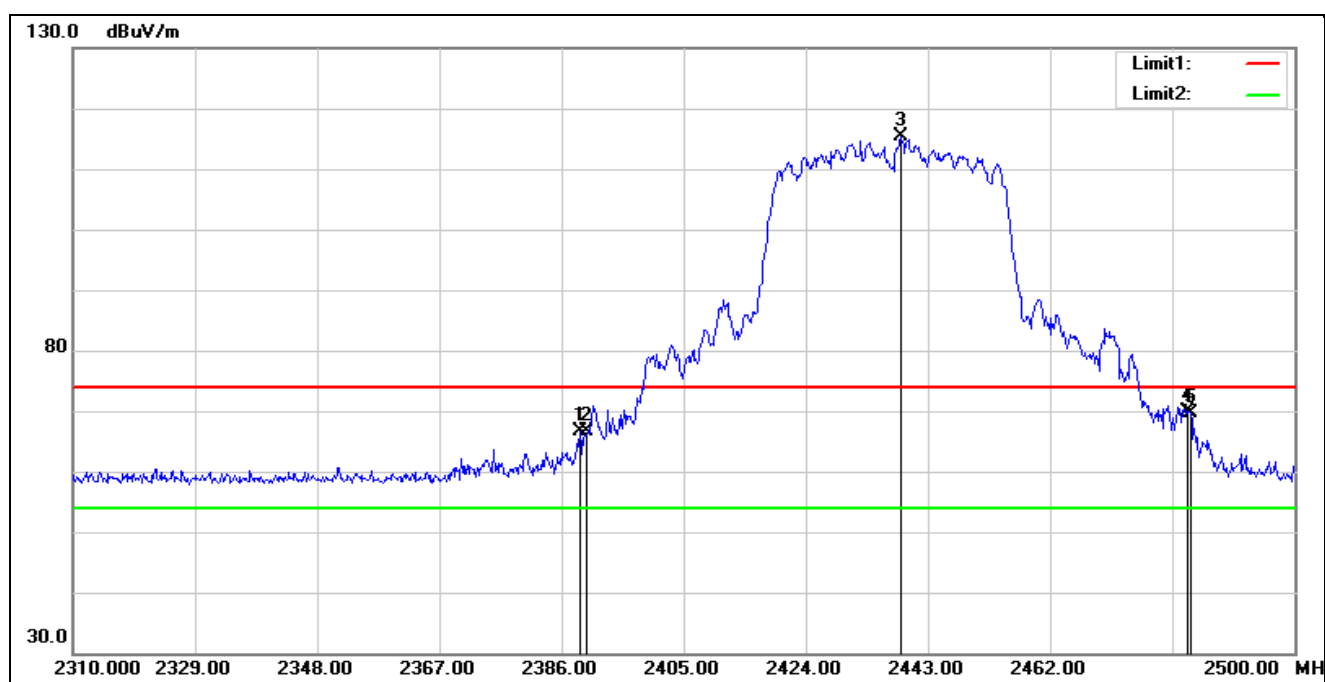


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	73.06	-6.50	66.56	74.00	-7.44	peak
2	2390.000	73.06	-6.50	66.56	74.00	-7.44	peak
3*	2438.820	121.97	-6.54	115.43	74.00	41.43	peak
4	2483.500	76.33	-6.57	69.76	74.00	-4.24	peak
5	2483.850	76.13	-6.57	69.56	74.00	-4.44	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

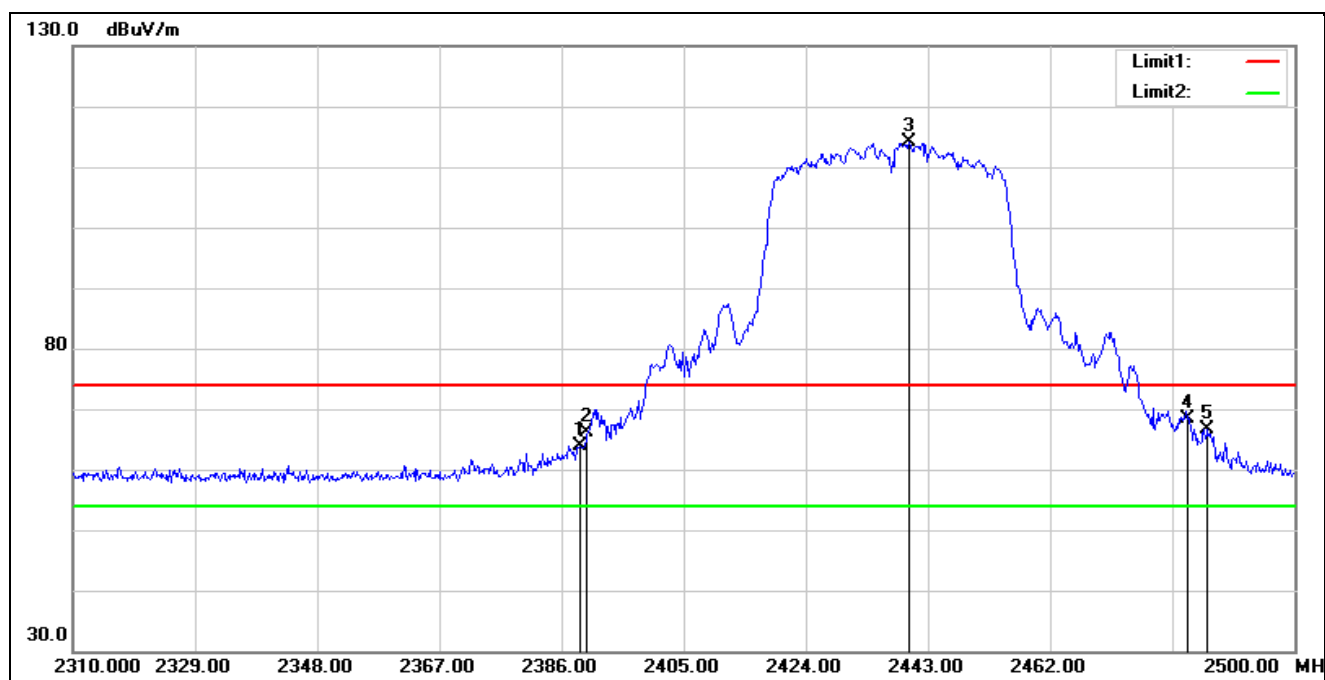


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	70.39	-6.50	63.89	74.00	-10.11	peak
2	2390.000	72.74	-6.50	66.24	74.00	-7.76	peak
3*	2439.960	120.73	-6.54	114.19	74.00	40.19	peak
4	2483.500	75.02	-6.57	68.45	74.00	-5.55	peak
5	2486.510	73.29	-6.57	66.72	74.00	-7.28	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

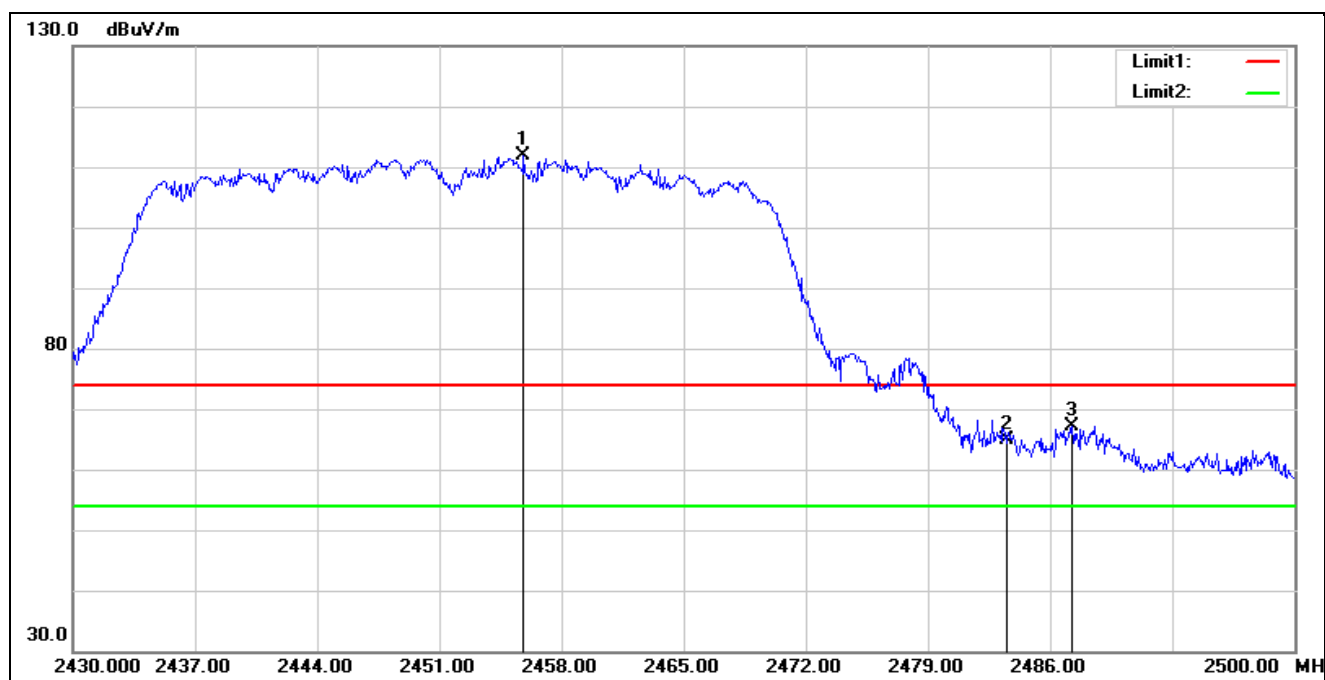

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2455.830	118.51	-6.55	111.96	74.00	37.96	peak
2	2483.500	71.38	-6.57	64.81	74.00	-9.19	peak
3	2487.260	73.81	-6.57	67.24	74.00	-6.76	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

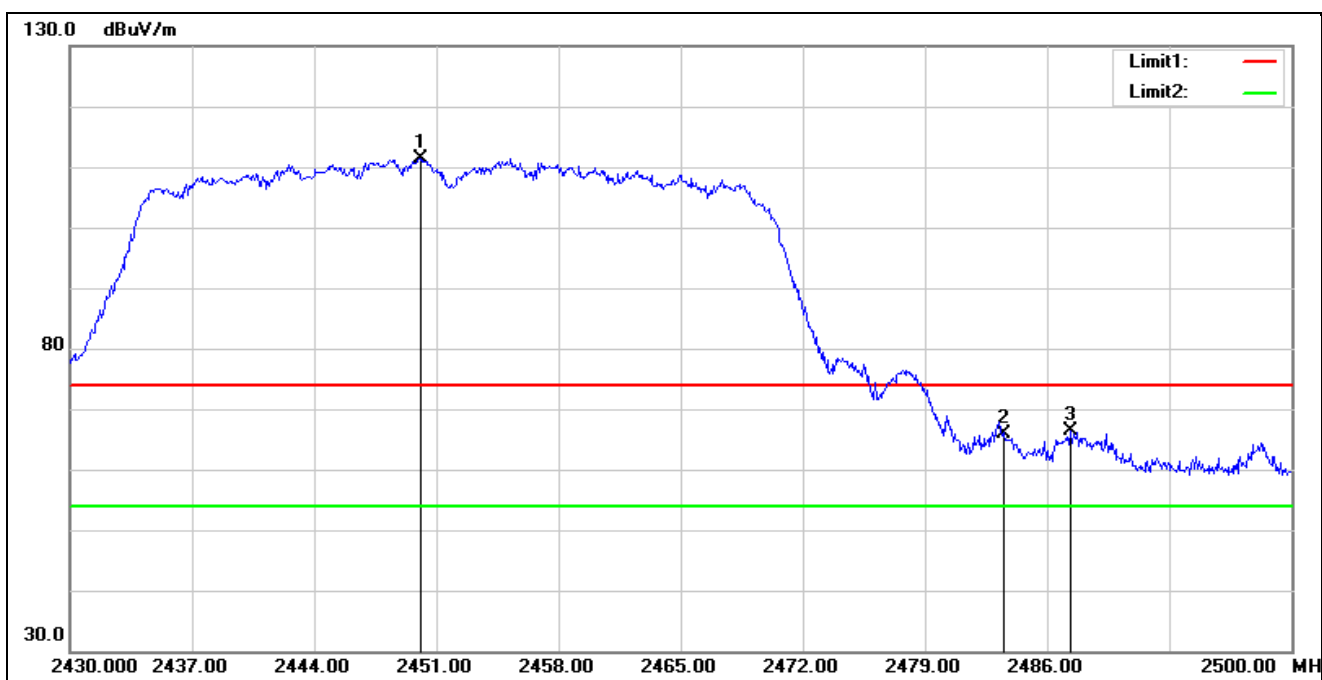

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2450.090	117.87	-6.54	111.33	74.00	37.33	peak
2	2483.500	72.39	-6.57	65.82	74.00	-8.18	peak
3	2487.330	72.89	-6.57	66.32	74.00	-7.68	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

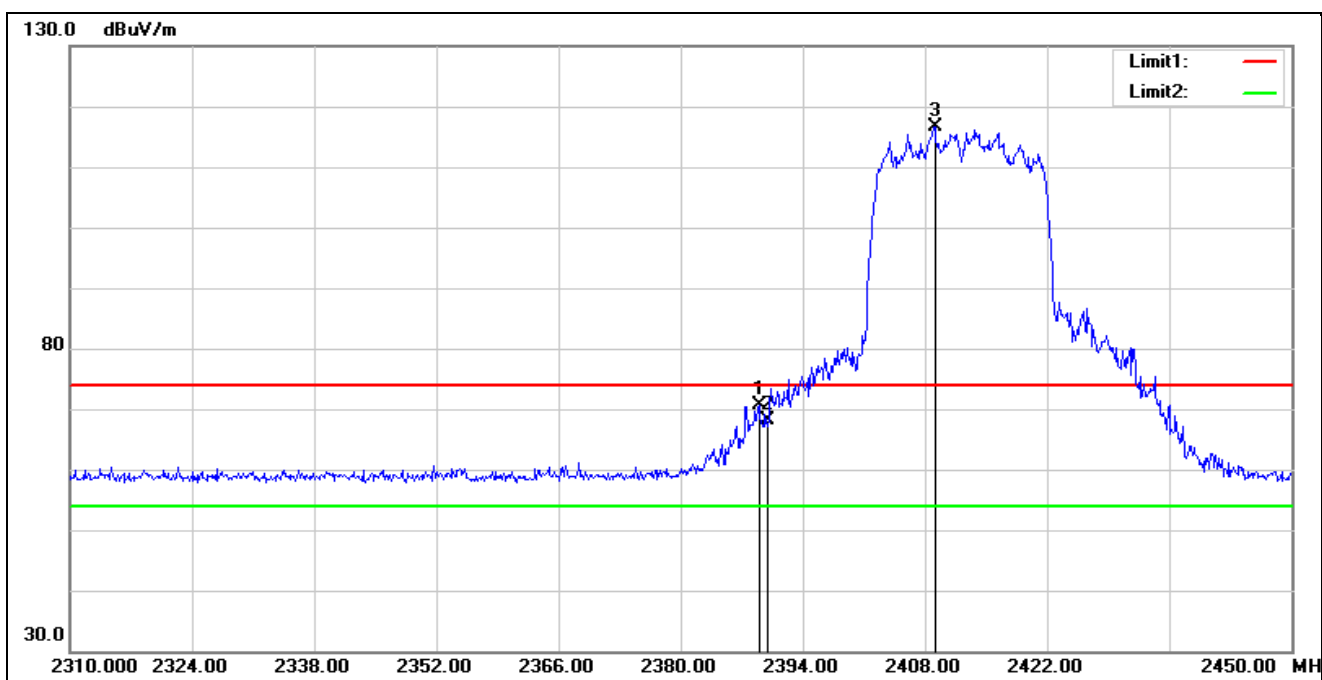


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	76.86	-6.18	70.68	74.00	-3.32	peak
2	2390.000	74.22	-6.19	68.03	74.00	-5.97	peak
3*	2409.120	122.92	-6.26	116.66	74.00	42.66	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

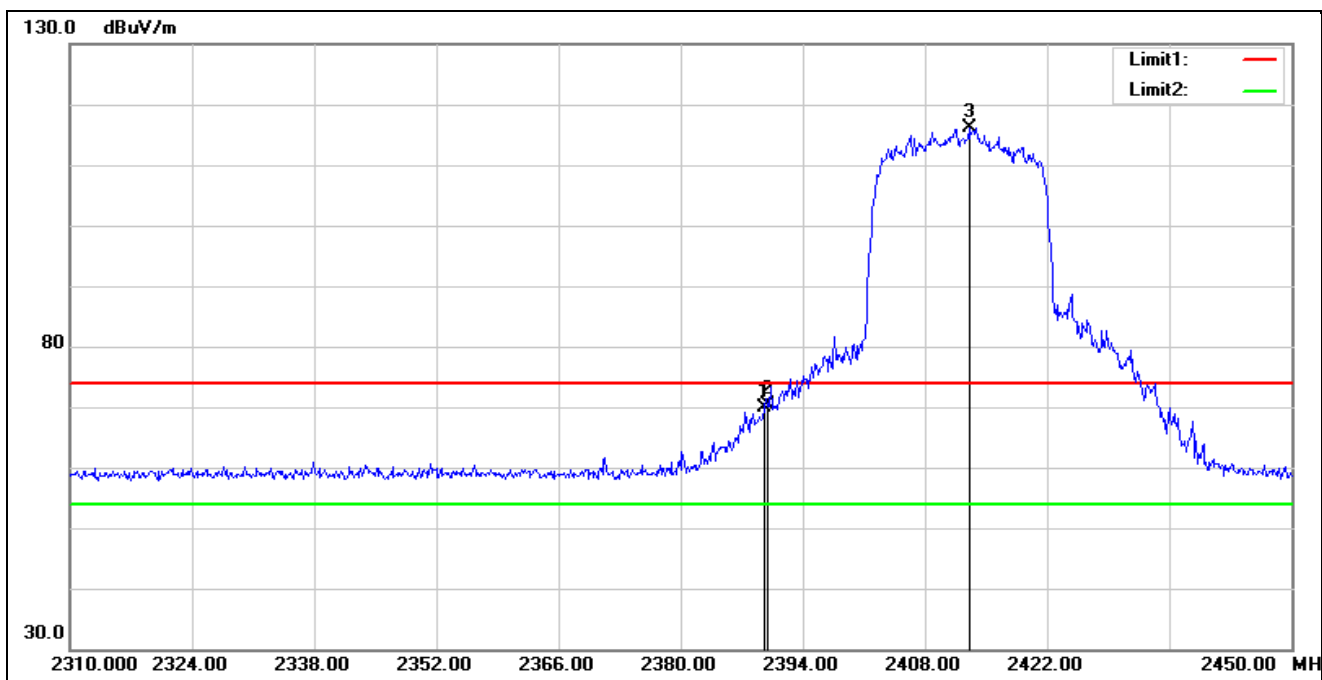


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	76.03	-6.19	69.84	74.00	-4.16	peak
2	2390.000	76.53	-6.19	70.34	74.00	-3.66	peak
3*	2413.040	122.46	-6.27	116.19	74.00	42.19	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

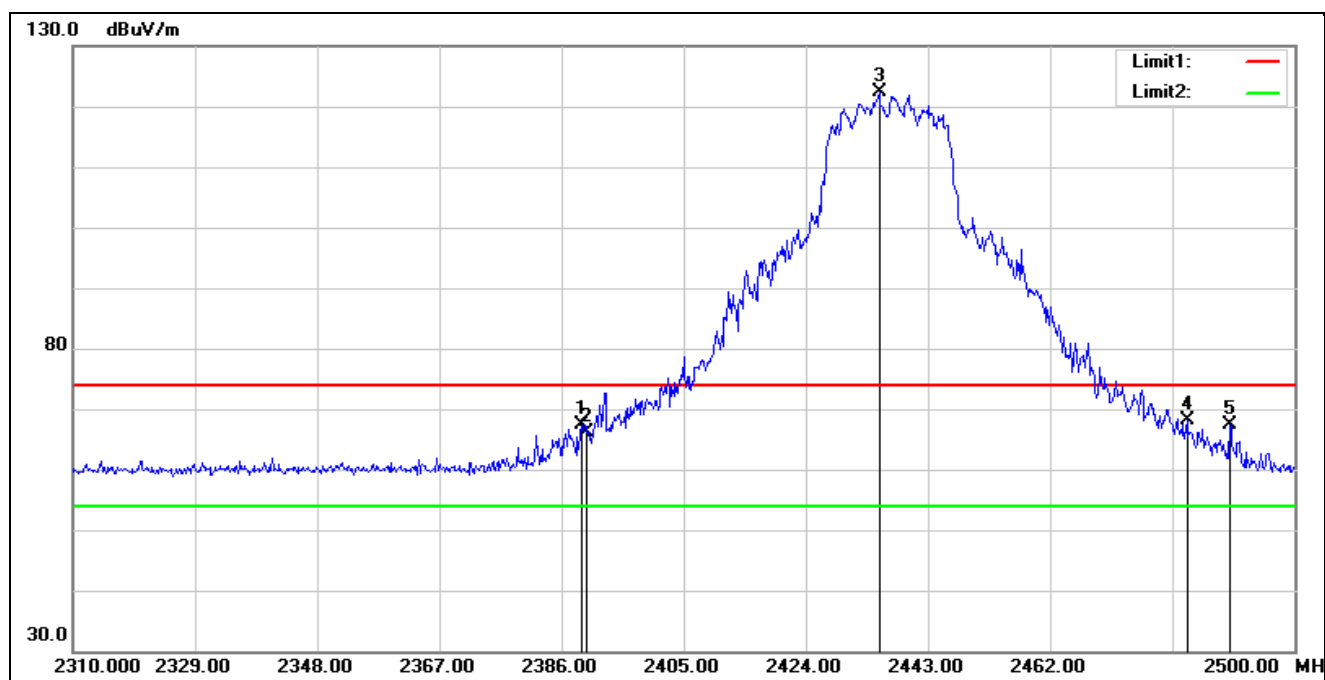


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	73.47	-6.18	67.29	74.00	-6.71	peak
2	2390.000	72.27	-6.19	66.08	74.00	-7.92	peak
3*	2435.400	128.62	-6.33	122.29	74.00	48.29	peak
4	2483.500	74.47	-6.46	68.01	74.00	-5.99	peak
5	2489.930	73.77	-6.48	67.29	74.00	-6.71	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

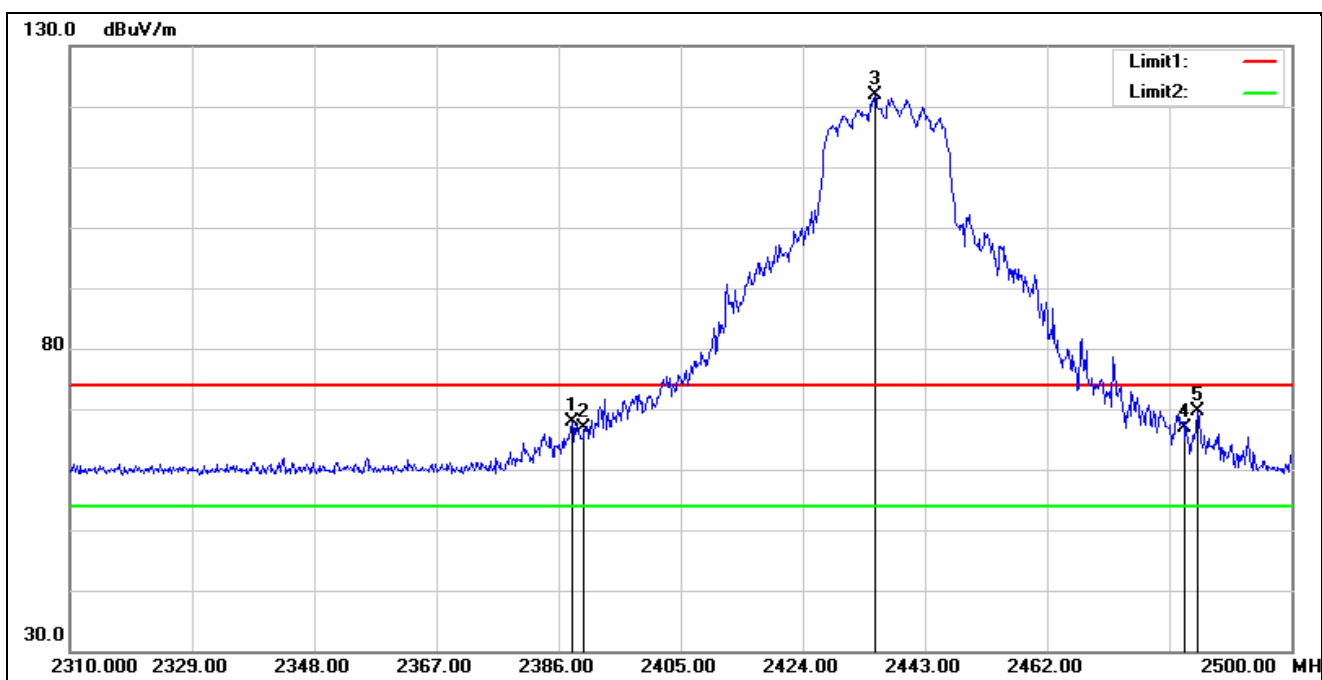


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.090	74.12	-6.18	67.94	74.00	-6.06	peak
2	2390.000	73.07	-6.19	66.88	74.00	-7.12	peak
3*	2435.210	128.11	-6.33	121.78	74.00	47.78	peak
4	2483.500	73.34	-6.46	66.88	74.00	-7.12	peak
5	2485.370	76.15	-6.46	69.69	74.00	-4.31	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

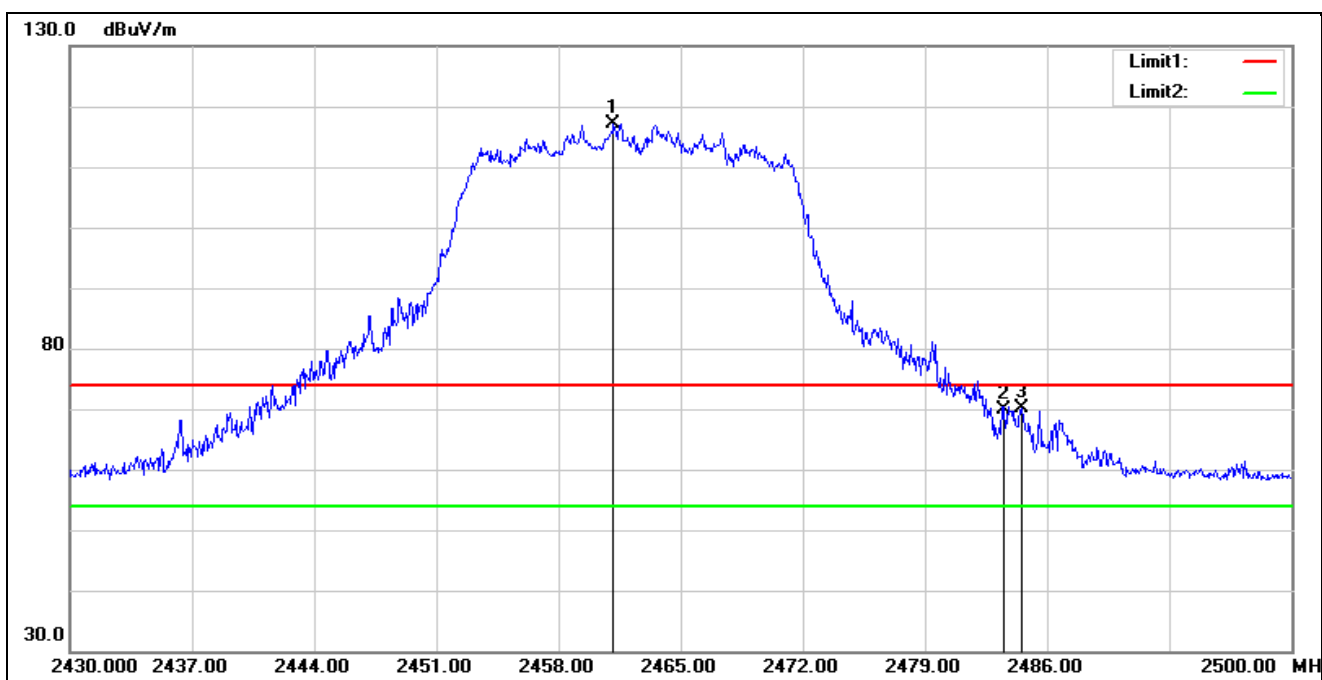


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2461.150	123.60	-6.40	117.20	74.00	43.20	peak
2	2483.500	76.40	-6.46	69.94	74.00	-4.06	peak
3	2484.530	76.64	-6.47	70.17	74.00	-3.83	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

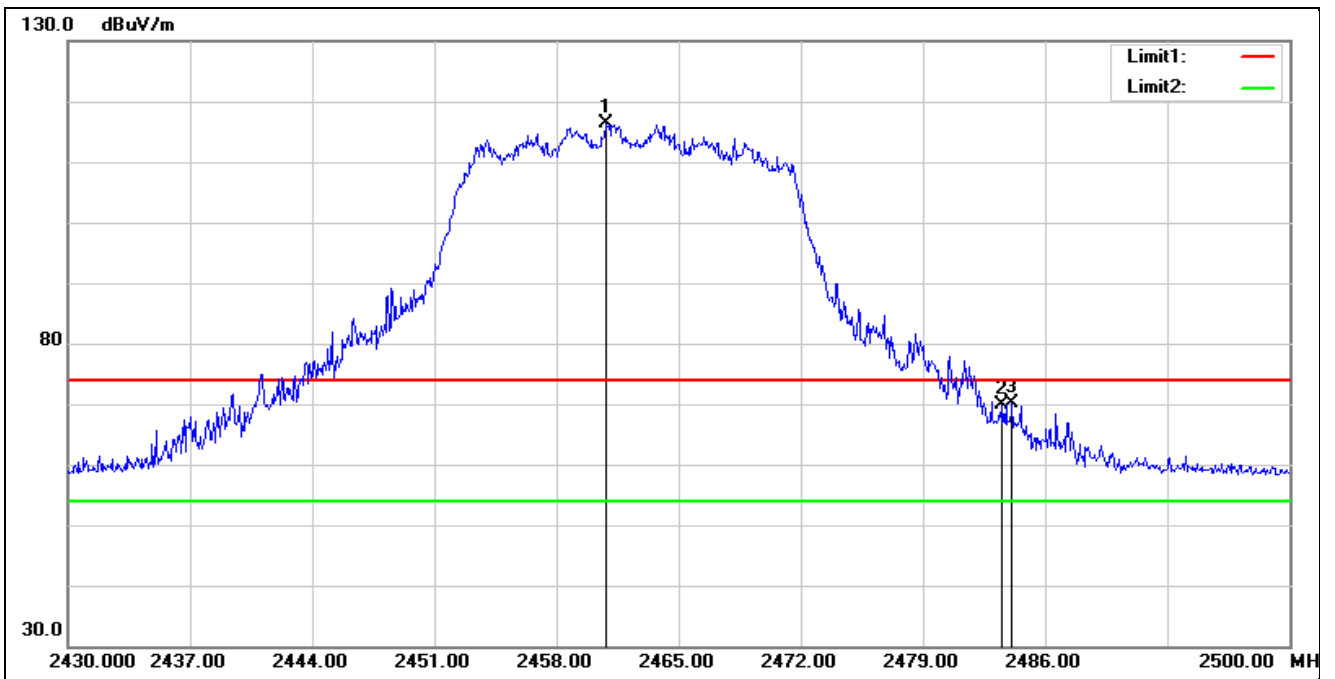


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.800	122.69	-6.40	116.29	74.00	42.29	peak
2	2483.500	76.44	-6.46	69.98	74.00	-4.02	peak
3	2484.110	76.50	-6.47	70.03	74.00	-3.97	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

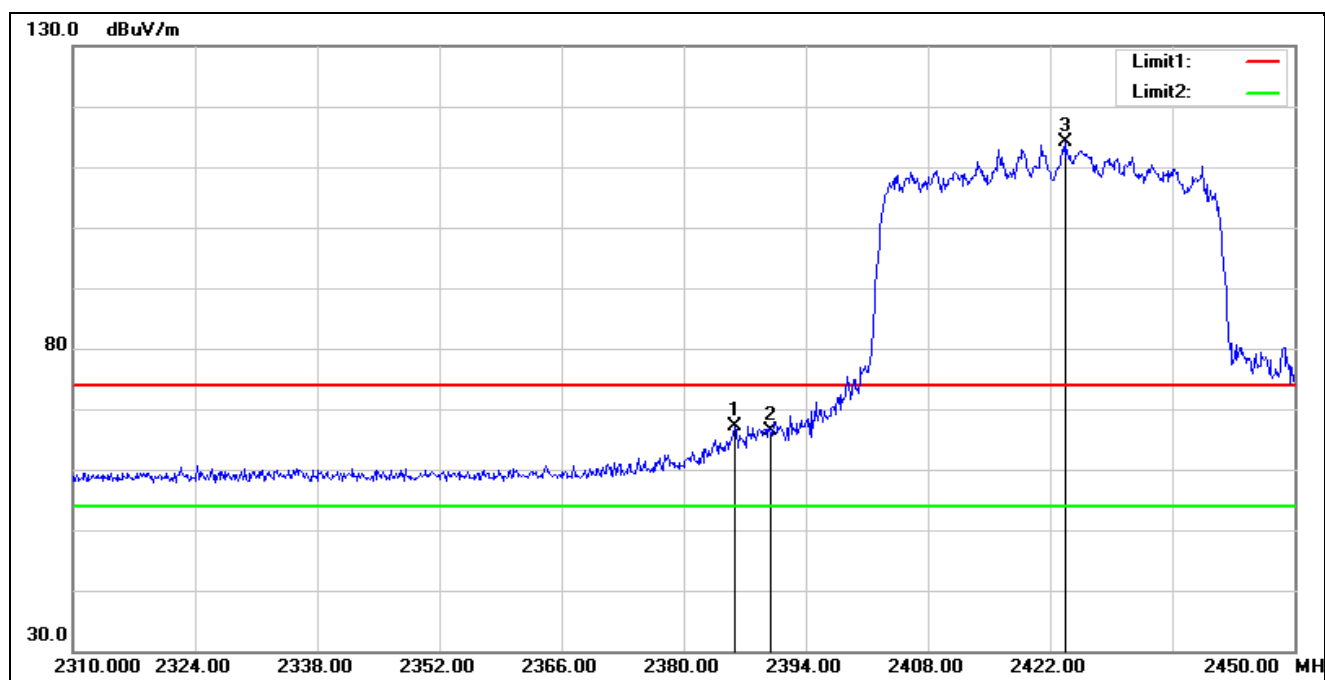

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.880	73.30	-6.17	67.13	74.00	-6.87	peak
2	2390.000	72.48	-6.19	66.29	74.00	-7.71	peak
3*	2423.680	120.54	-6.30	114.24	74.00	40.24	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

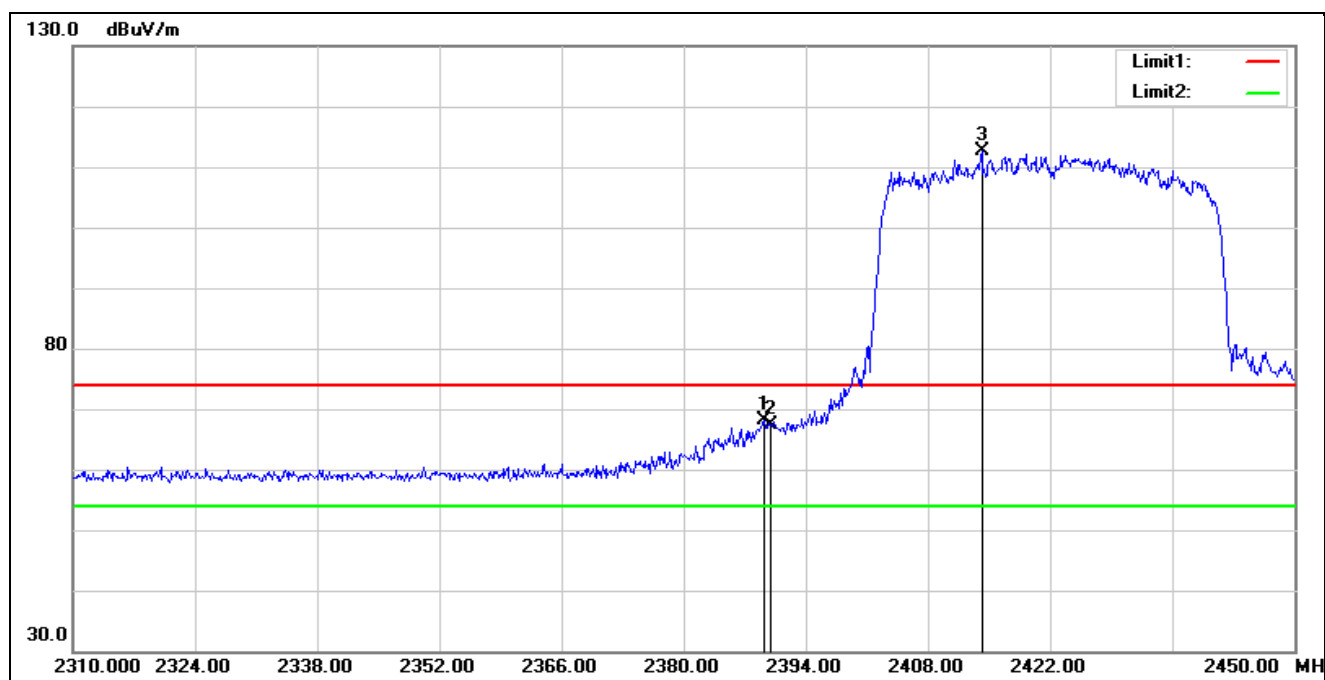

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	74.34	-6.19	68.15	74.00	-5.85	peak
2	2390.000	73.45	-6.19	67.26	74.00	-6.74	peak
3*	2414.160	118.88	-6.28	112.60	74.00	38.60	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

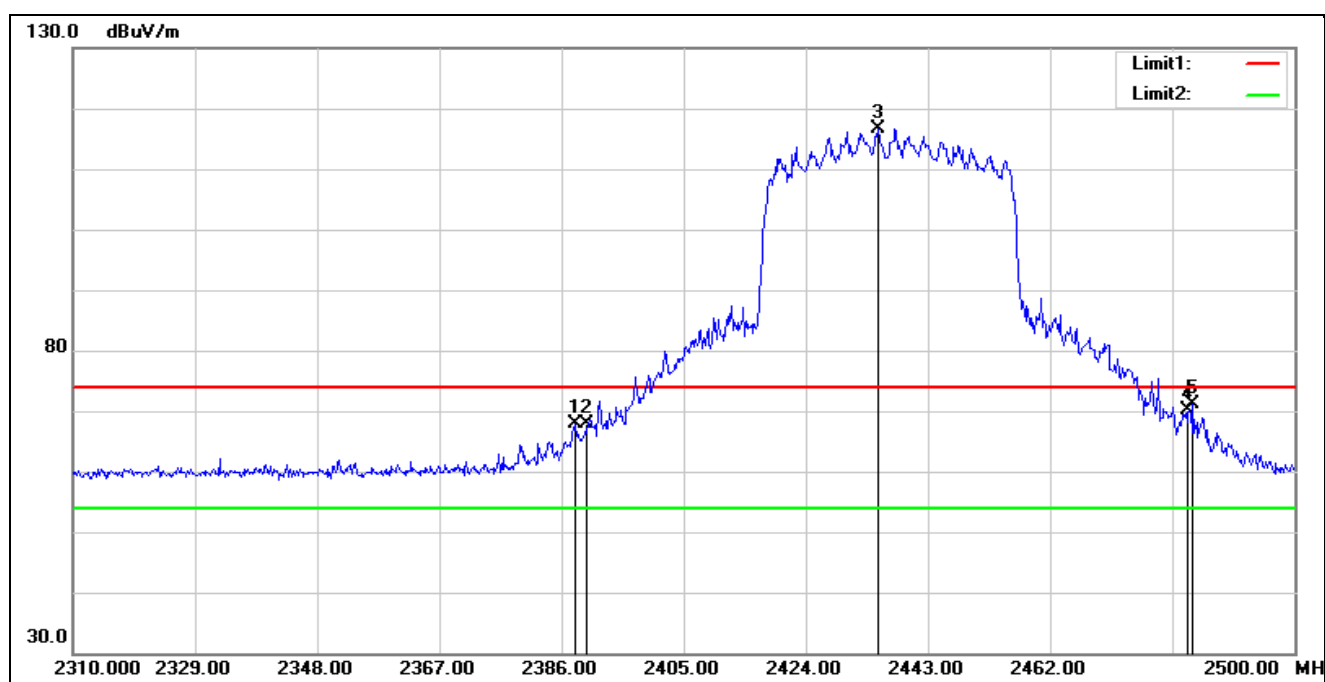


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.090	74.10	-6.18	67.92	74.00	-6.08	peak
2	2390.000	74.18	-6.19	67.99	74.00	-6.01	peak
3*	2435.210	123.08	-6.33	116.75	74.00	42.75	peak
4	2483.500	76.48	-6.46	70.02	74.00	-3.98	peak
5	2484.230	77.50	-6.47	71.03	74.00	-2.97	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

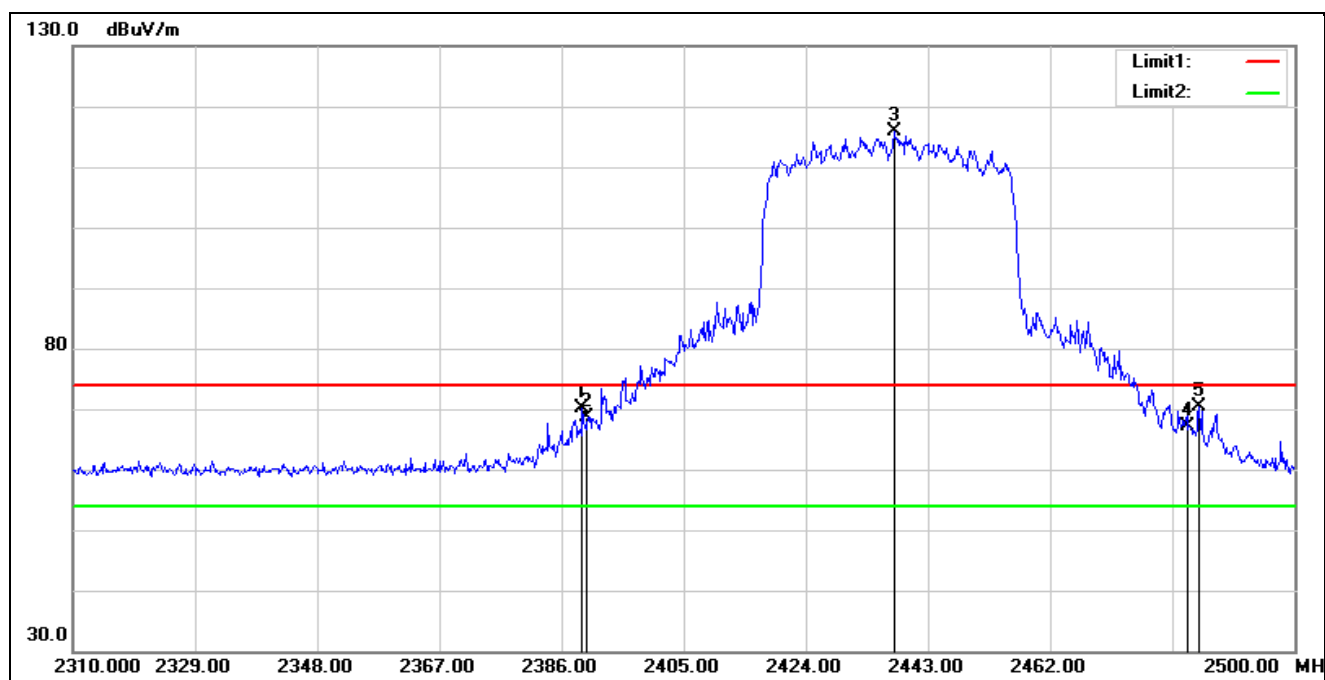


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	76.39	-6.19	70.20	74.00	-3.80	peak
2	2390.000	74.83	-6.19	68.64	74.00	-5.36	peak
3*	2437.680	122.17	-6.34	115.83	74.00	41.83	peak
4	2483.500	73.60	-6.46	67.14	74.00	-6.86	peak
5	2485.180	76.74	-6.46	70.28	74.00	-3.72	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

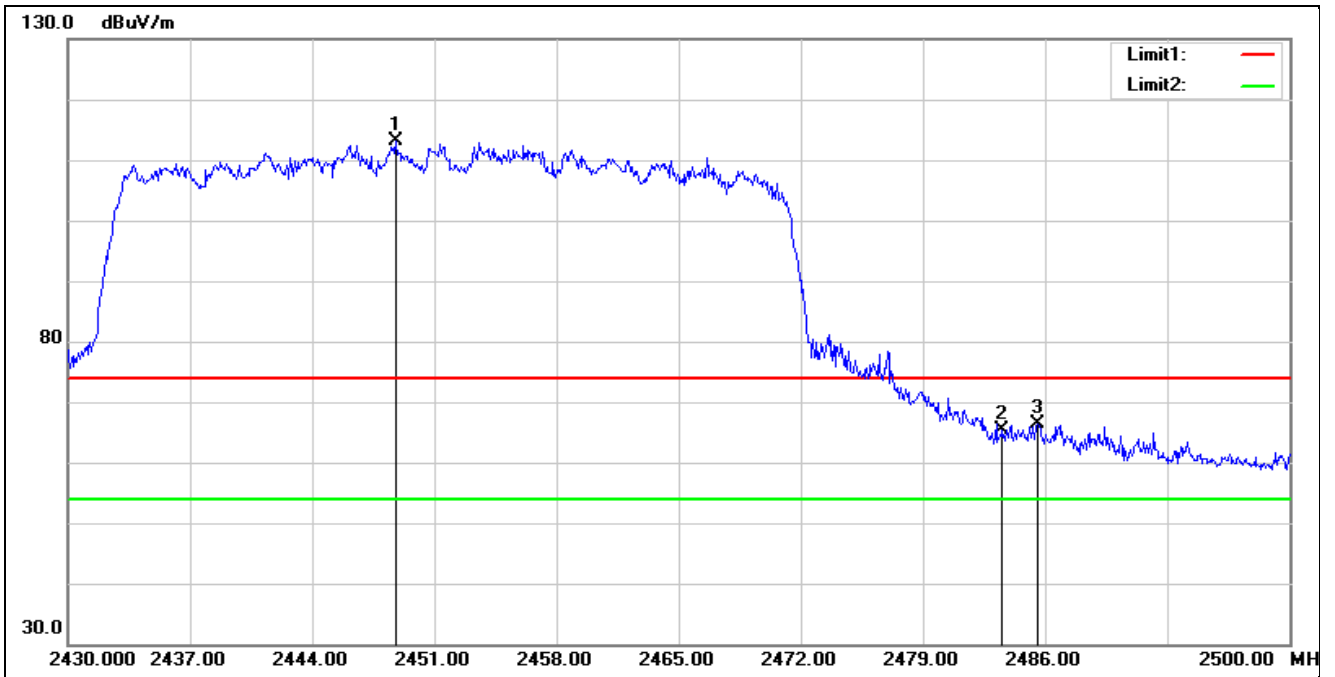

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2448.760	119.39	-6.37	113.02	74.00	39.02	peak
2	2483.500	71.73	-6.46	65.27	74.00	-8.73	peak
3	2485.580	72.85	-6.46	66.39	74.00	-7.61	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

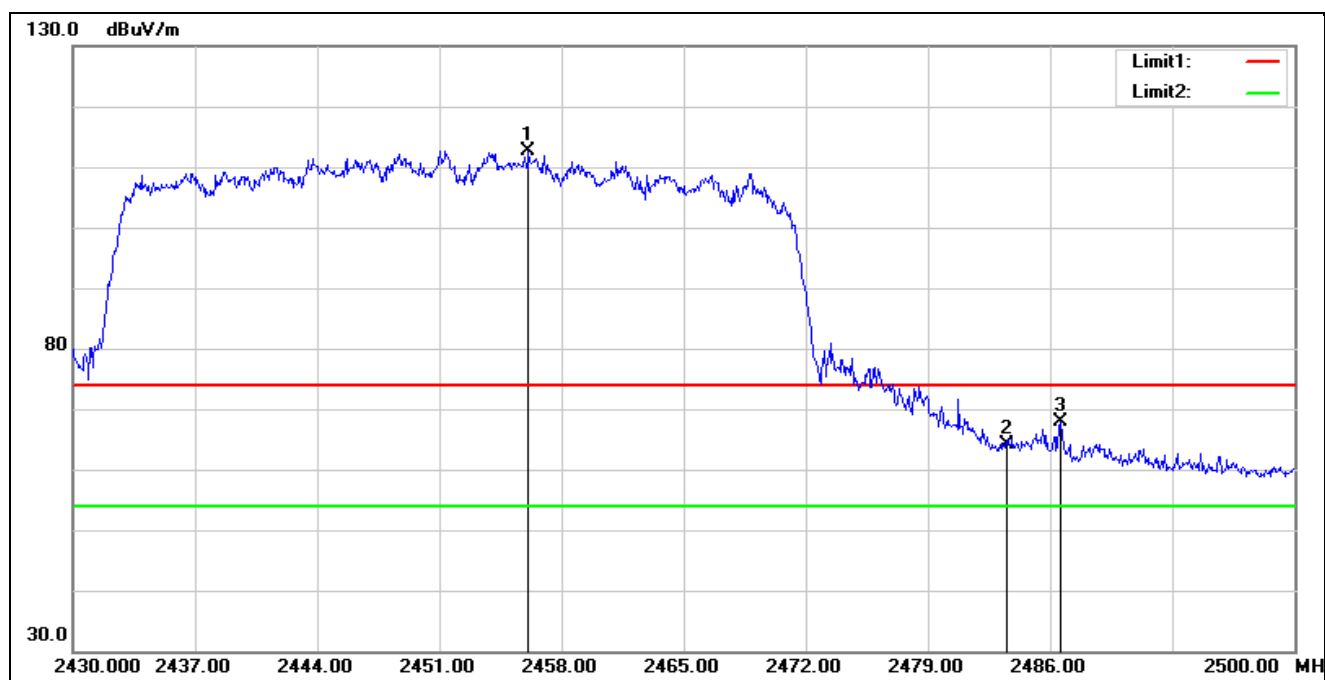

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2456.110	119.07	-6.38	112.69	74.00	38.69	peak
2	2483.500	70.57	-6.46	64.11	74.00	-9.89	peak
3	2486.560	74.40	-6.47	67.93	74.00	-6.07	peak


**2X2 - Average**

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

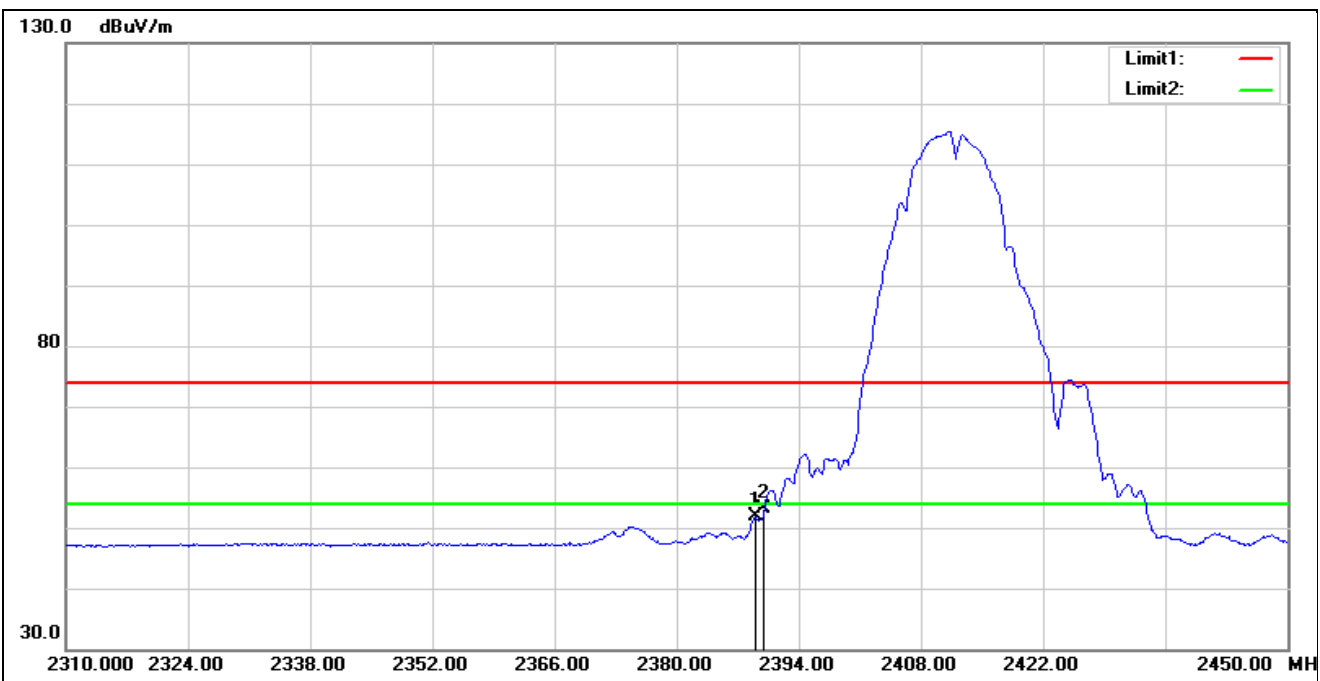


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	58.07	-6.18	51.89	54.00	-2.11	AVG
2*	2390.000	59.26	-6.19	53.07	54.00	-0.93	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

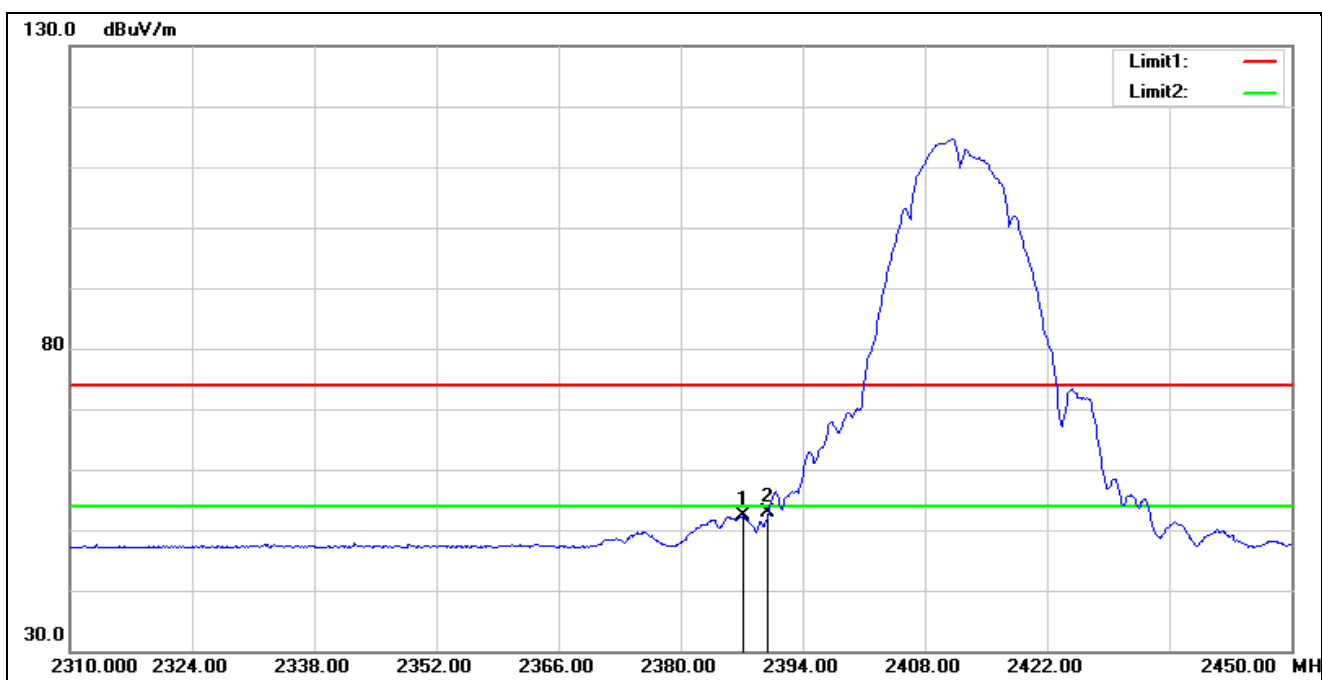


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.140	58.49	-6.17	52.32	54.00	-1.68	AVG
2*	2390.000	58.99	-6.19	52.80	54.00	-1.20	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

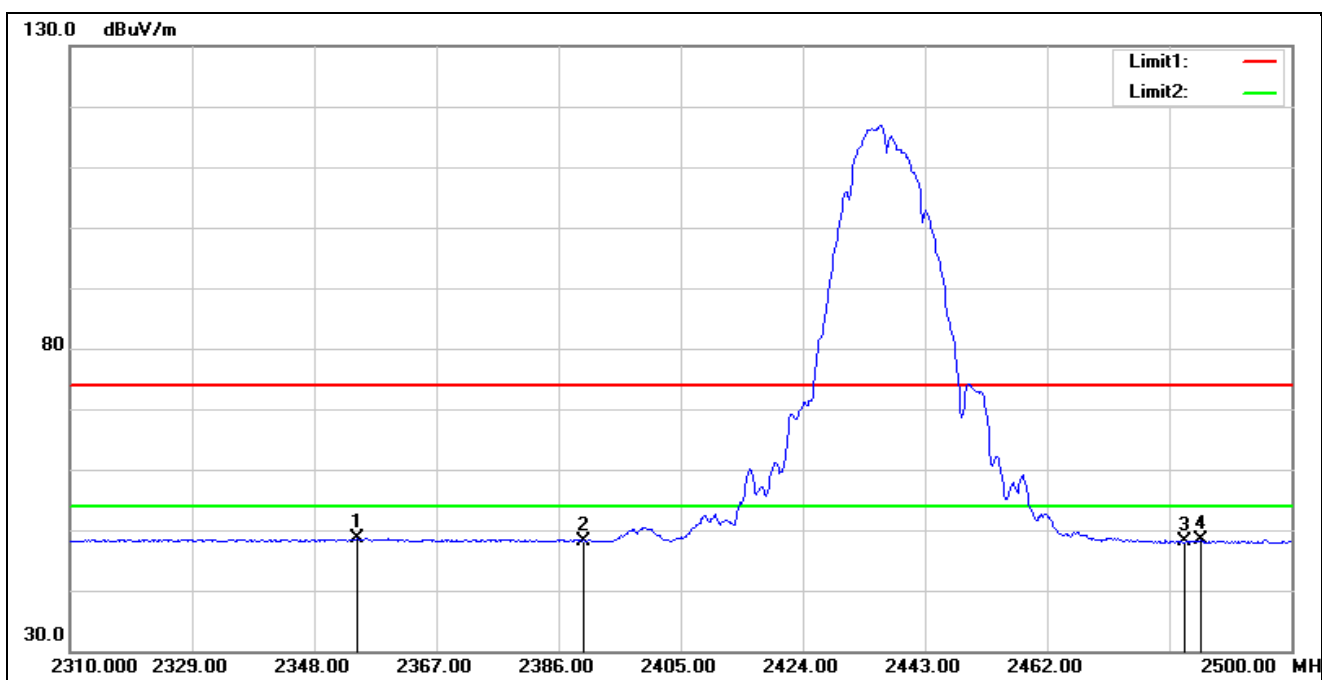

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2354.650	54.56	-6.03	48.53	54.00	-5.47	AVG
2	2390.000	54.43	-6.19	48.24	54.00	-5.76	AVG
3	2483.500	54.63	-6.46	48.17	54.00	-5.83	AVG
4	2485.940	54.79	-6.46	48.33	54.00	-5.67	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

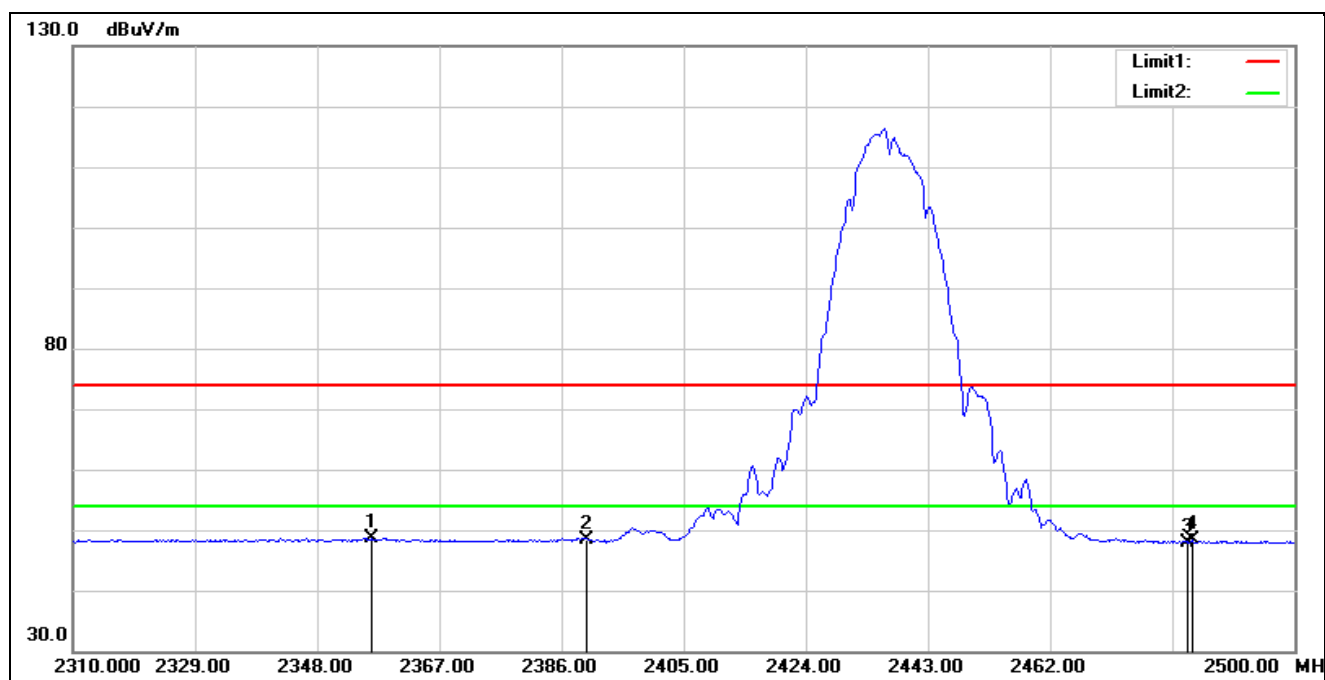

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2356.550	54.72	-6.03	48.69	54.00	-5.31	AVG
2	2390.000	54.47	-6.19	48.28	54.00	-5.72	AVG
3	2483.500	54.39	-6.46	47.93	54.00	-6.07	AVG
4	2484.040	54.73	-6.47	48.26	54.00	-5.74	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

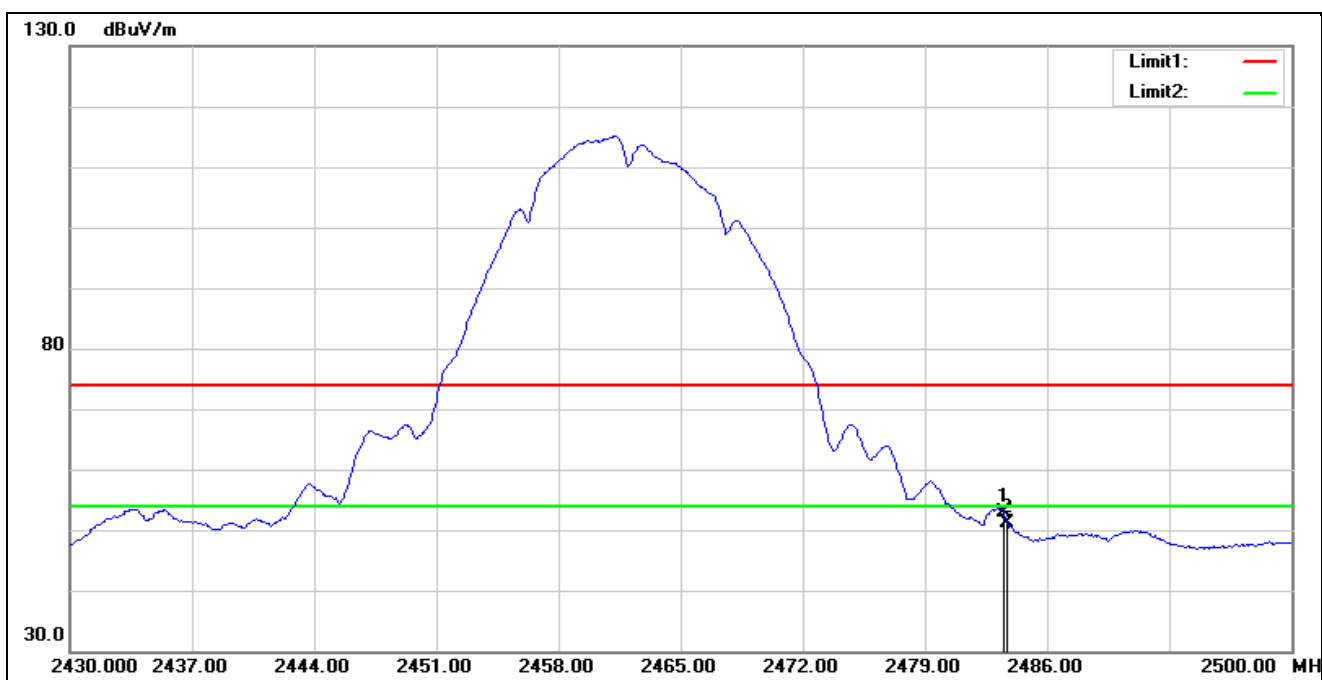


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.39	-6.46	52.93	54.00	-1.07	AVG
2	2483.690	57.71	-6.46	51.25	54.00	-2.75	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

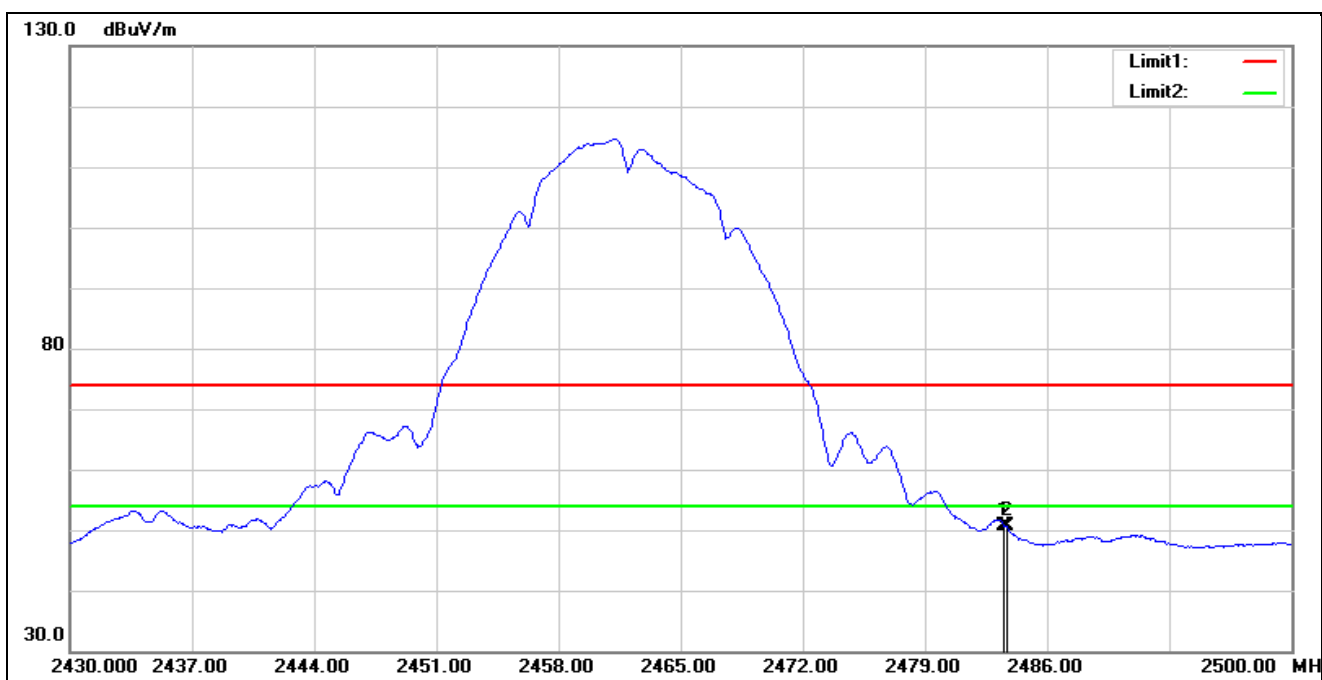


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.14	-6.46	50.68	54.00	-3.32	AVG
2	2483.690	56.97	-6.46	50.51	54.00	-3.49	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

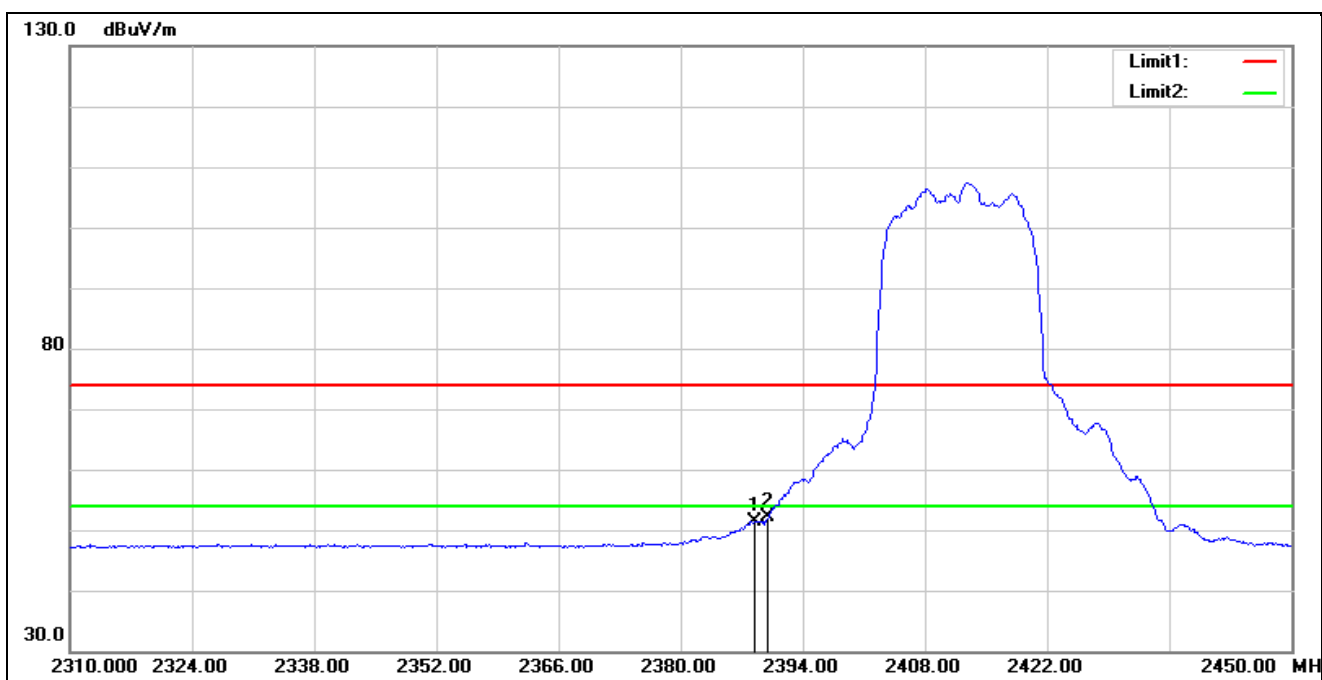


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.400	57.66	-6.18	51.48	54.00	-2.52	AVG
2*	2390.000	58.39	-6.19	52.20	54.00	-1.80	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

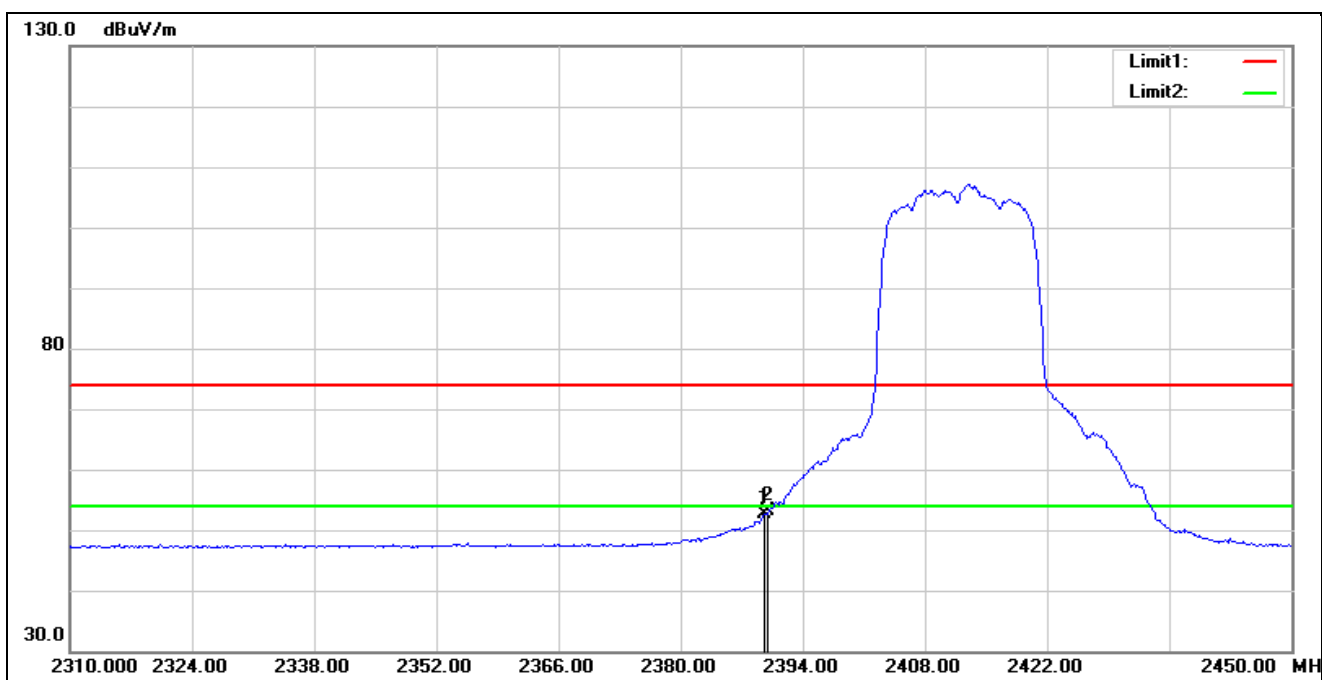


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	58.81	-6.19	52.62	54.00	-1.38	AVG
2*	2390.000	59.38	-6.19	53.19	54.00	-0.81	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

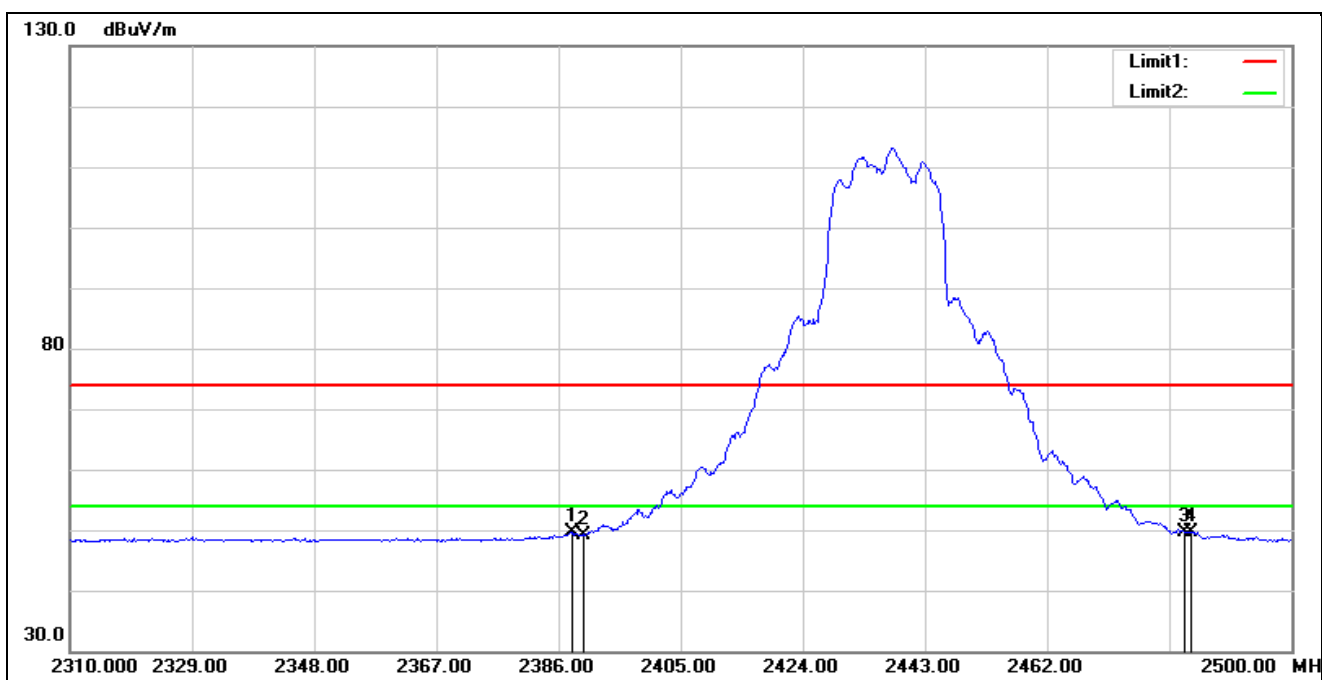


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.090	55.74	-6.18	49.56	54.00	-4.44	AVG
2	2390.000	55.44	-6.19	49.25	54.00	-4.75	AVG
3	2483.500	55.99	-6.46	49.53	54.00	-4.47	AVG
4*	2484.420	56.21	-6.47	49.74	54.00	-4.26	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

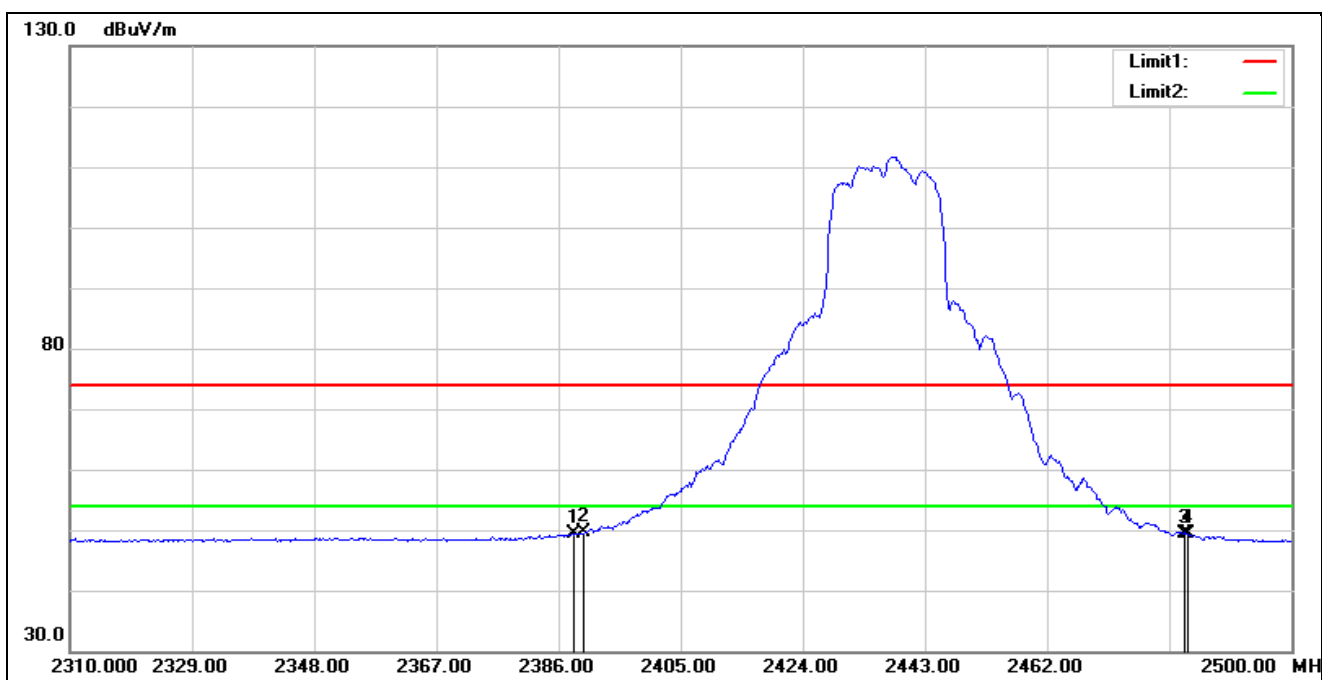


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.280	55.63	-6.18	49.45	54.00	-4.55	AVG
2*	2390.000	55.74	-6.19	49.55	54.00	-4.45	AVG
3	2483.500	55.81	-6.46	49.35	54.00	-4.65	AVG
4	2483.850	55.78	-6.47	49.31	54.00	-4.69	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

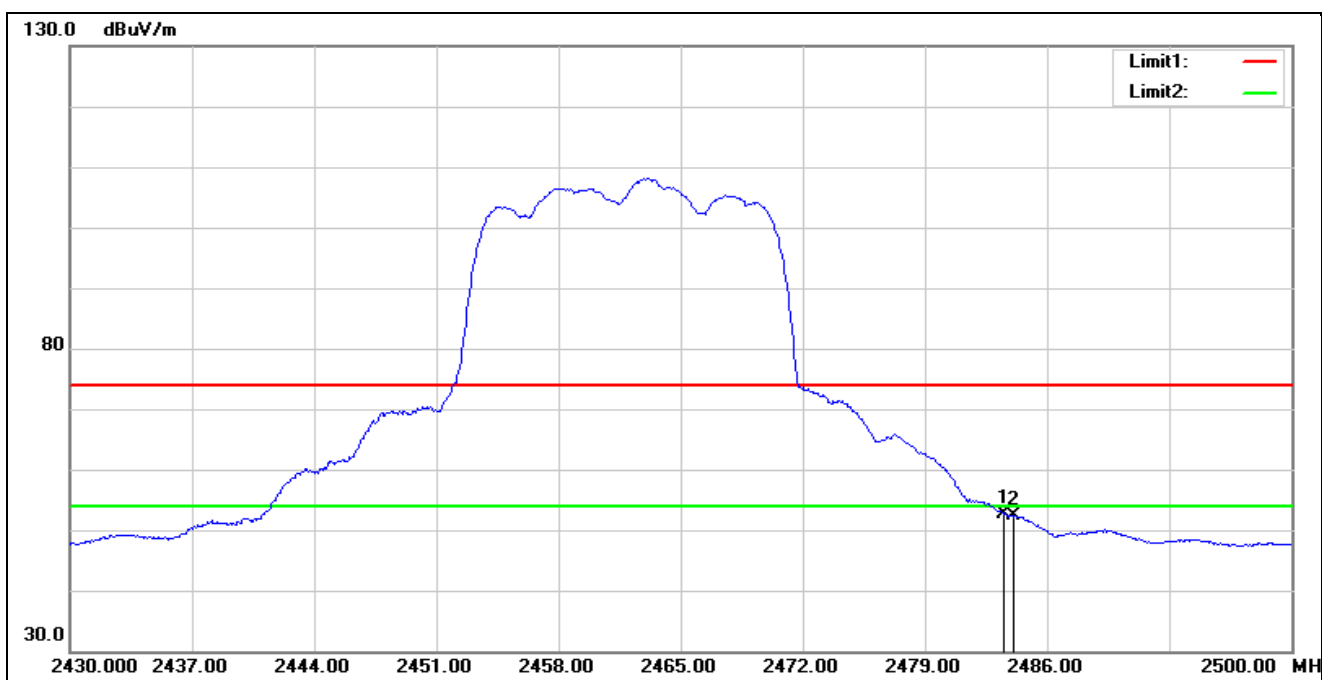

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.05	-6.46	52.59	54.00	-1.41	AVG
2	2484.110	58.89	-6.47	52.42	54.00	-1.58	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

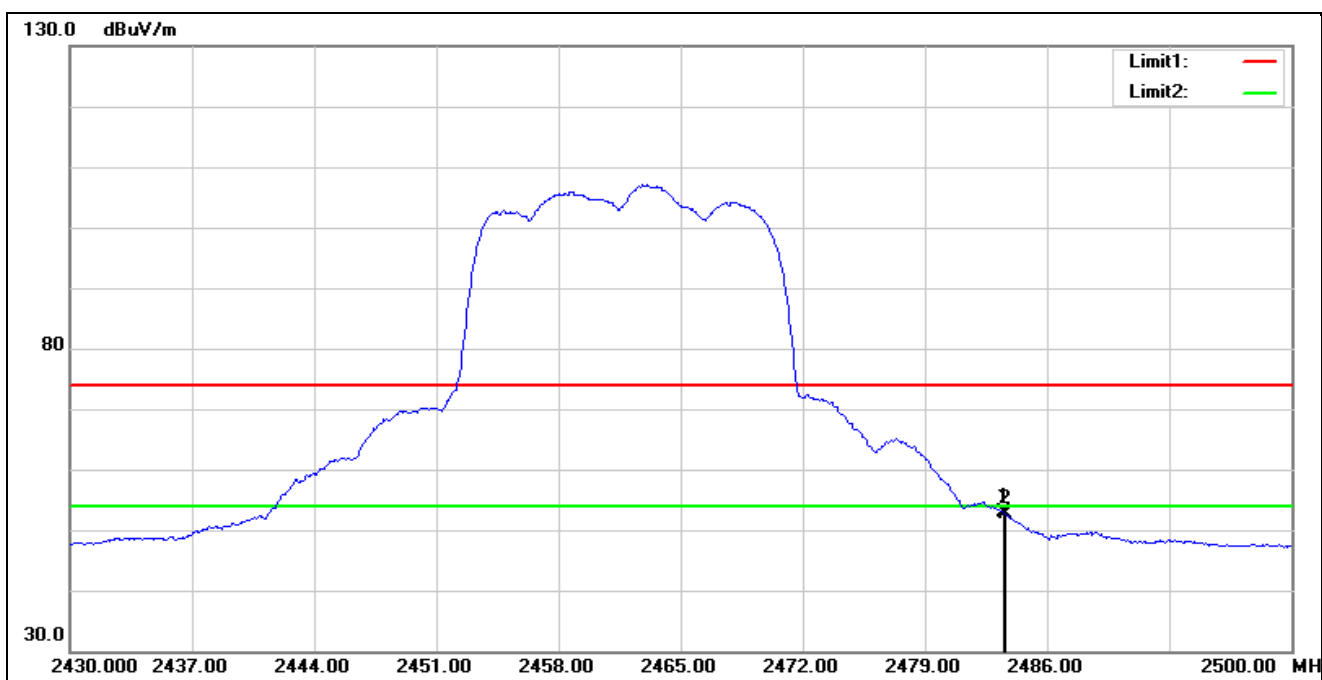

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.29	-6.46	52.83	54.00	-1.17	AVG
2	2483.620	59.13	-6.46	52.67	54.00	-1.33	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

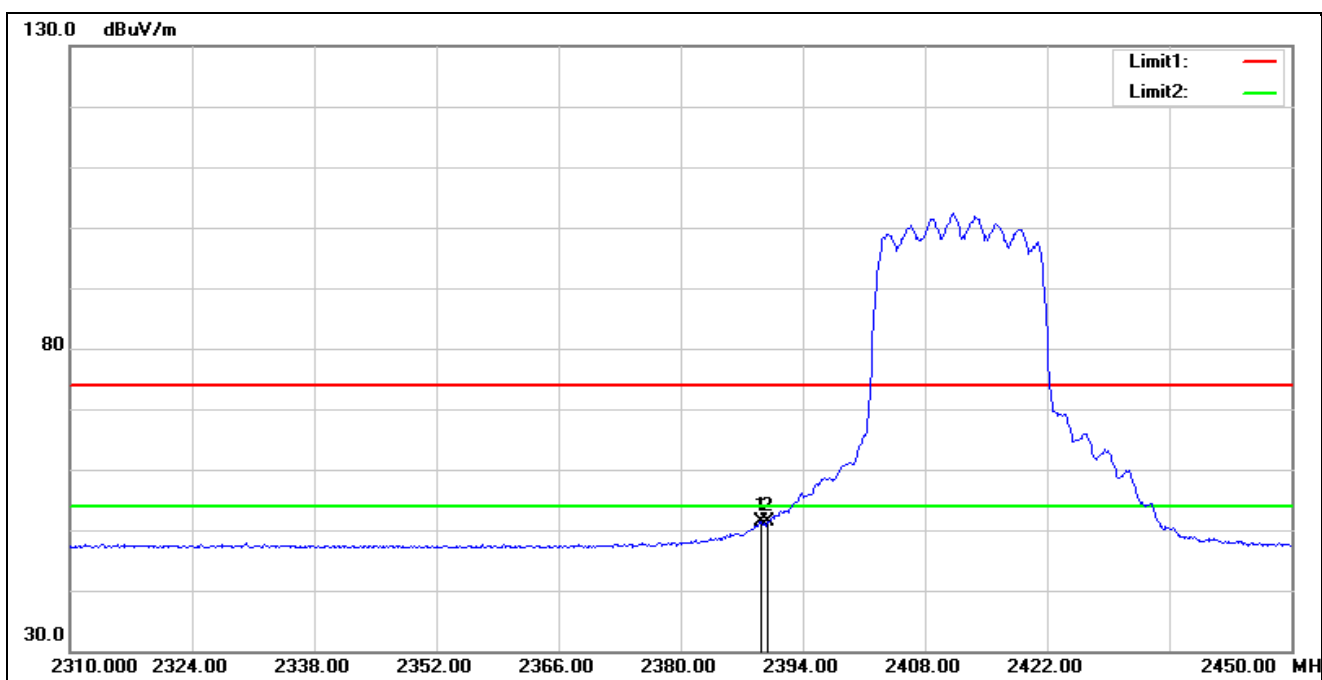


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.240	57.90	-6.50	51.40	54.00	-2.60	AVG
2	2390.000	57.80	-6.50	51.30	54.00	-2.70	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

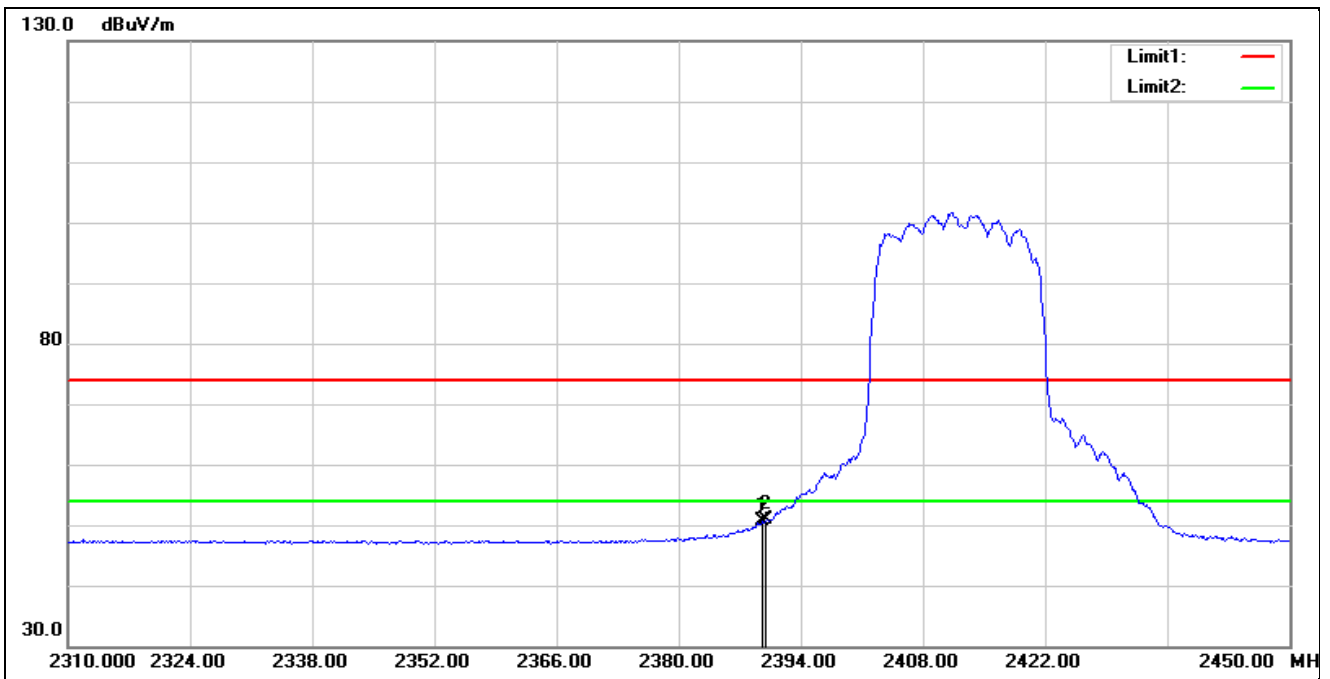


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	57.02	-6.50	50.52	54.00	-3.48	AVG
2*	2390.000	57.42	-6.50	50.92	54.00	-3.08	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

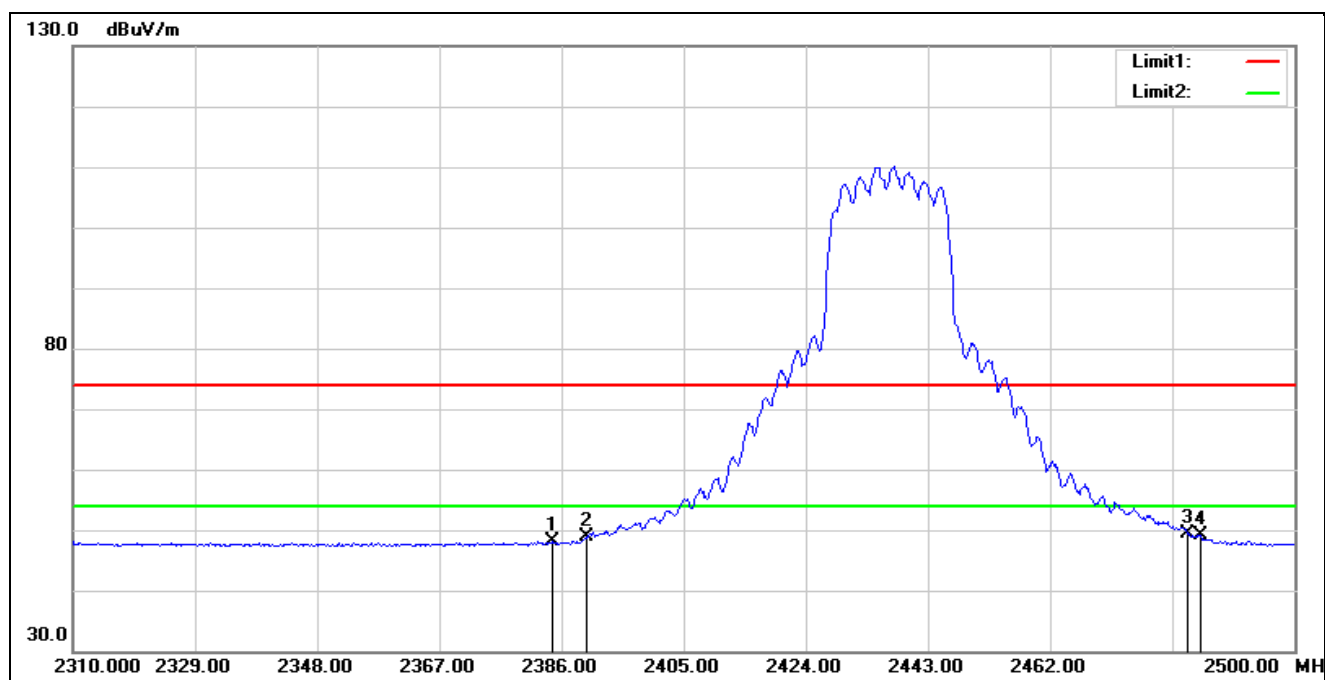


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.480	54.69	-6.49	48.20	54.00	-5.80	AVG
2	2390.000	55.40	-6.50	48.90	54.00	-5.10	AVG
3*	2483.500	56.05	-6.57	49.48	54.00	-4.52	AVG
4	2485.370	55.73	-6.57	49.16	54.00	-4.84	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

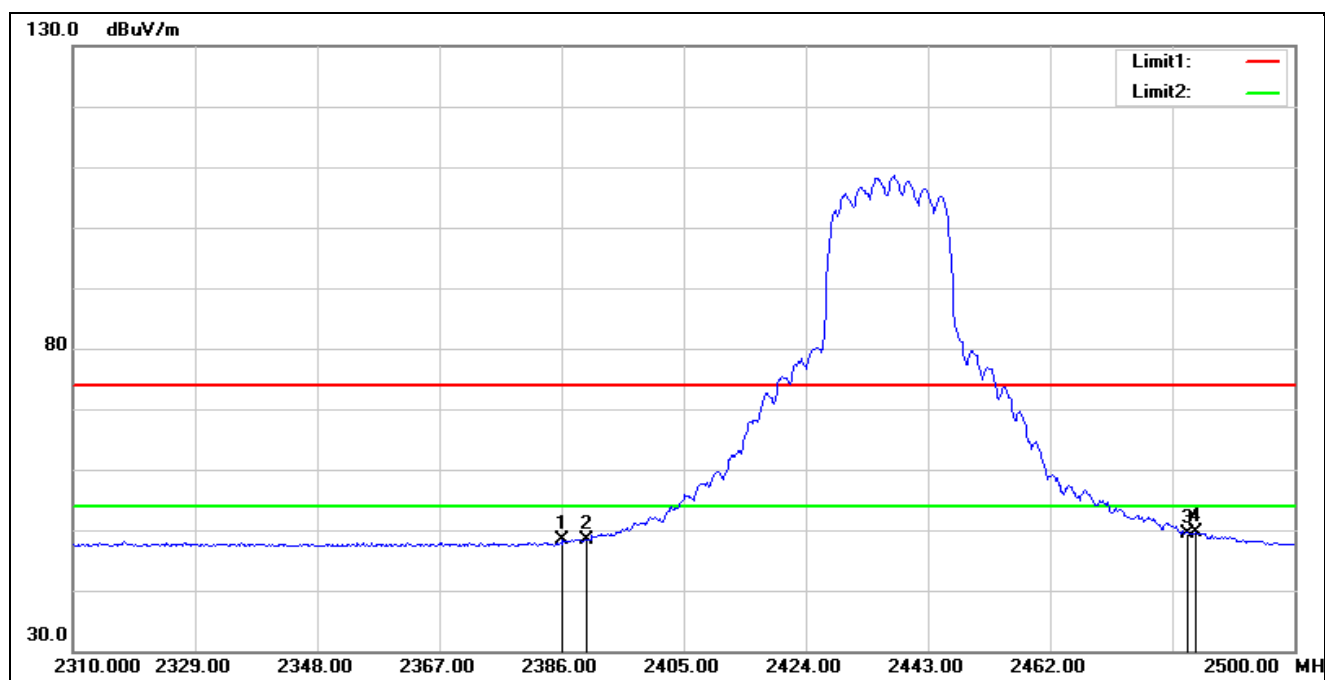


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.190	54.98	-6.49	48.49	54.00	-5.51	AVG
2	2390.000	55.00	-6.50	48.50	54.00	-5.50	AVG
3	2483.500	56.02	-6.57	49.45	54.00	-4.55	AVG
4*	2484.610	56.12	-6.57	49.55	54.00	-4.45	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

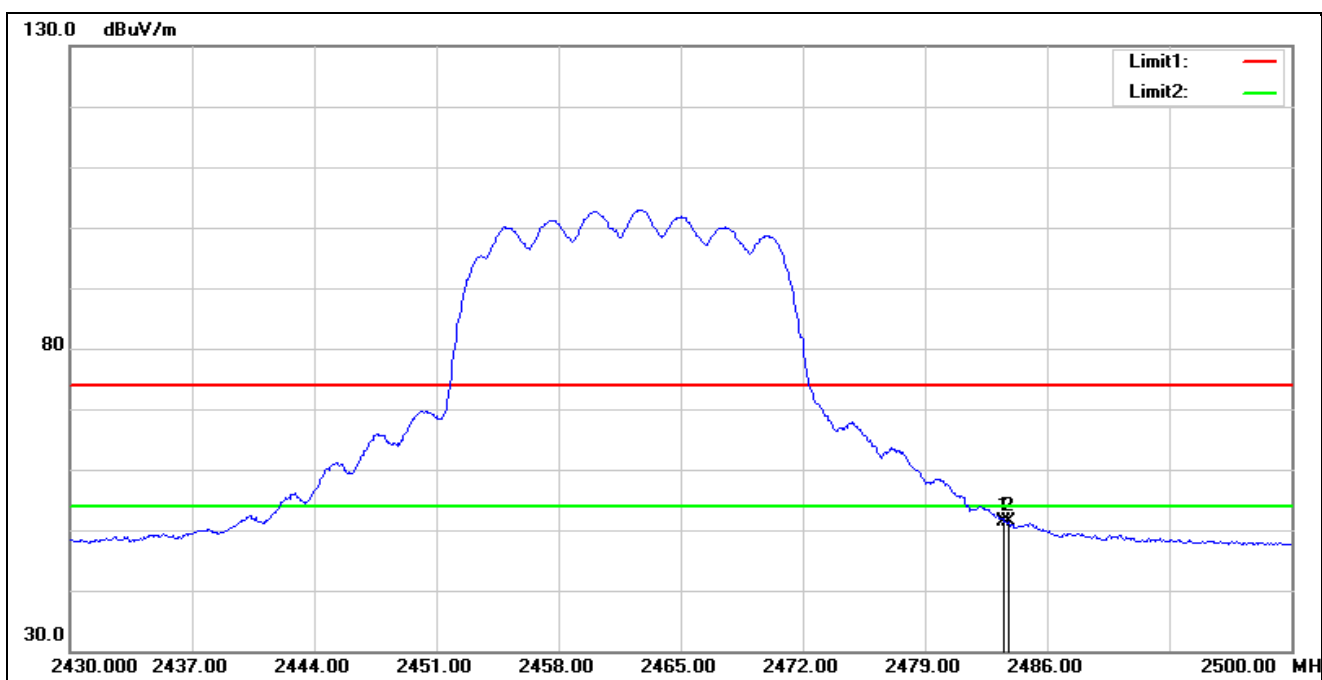


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.98	-6.57	51.41	54.00	-2.59	AVG
2	2483.830	57.87	-6.57	51.30	54.00	-2.70	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

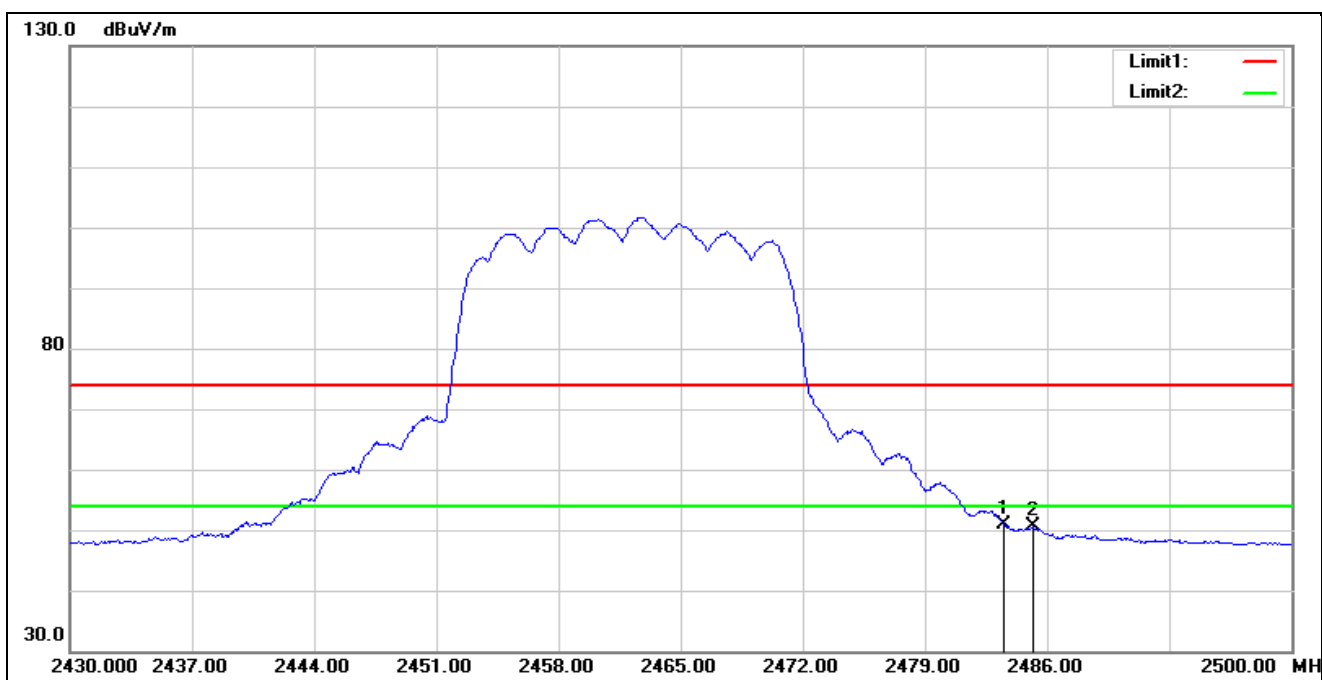


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.48	-6.57	50.91	54.00	-3.09	AVG
2	2485.160	57.28	-6.57	50.71	54.00	-3.29	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

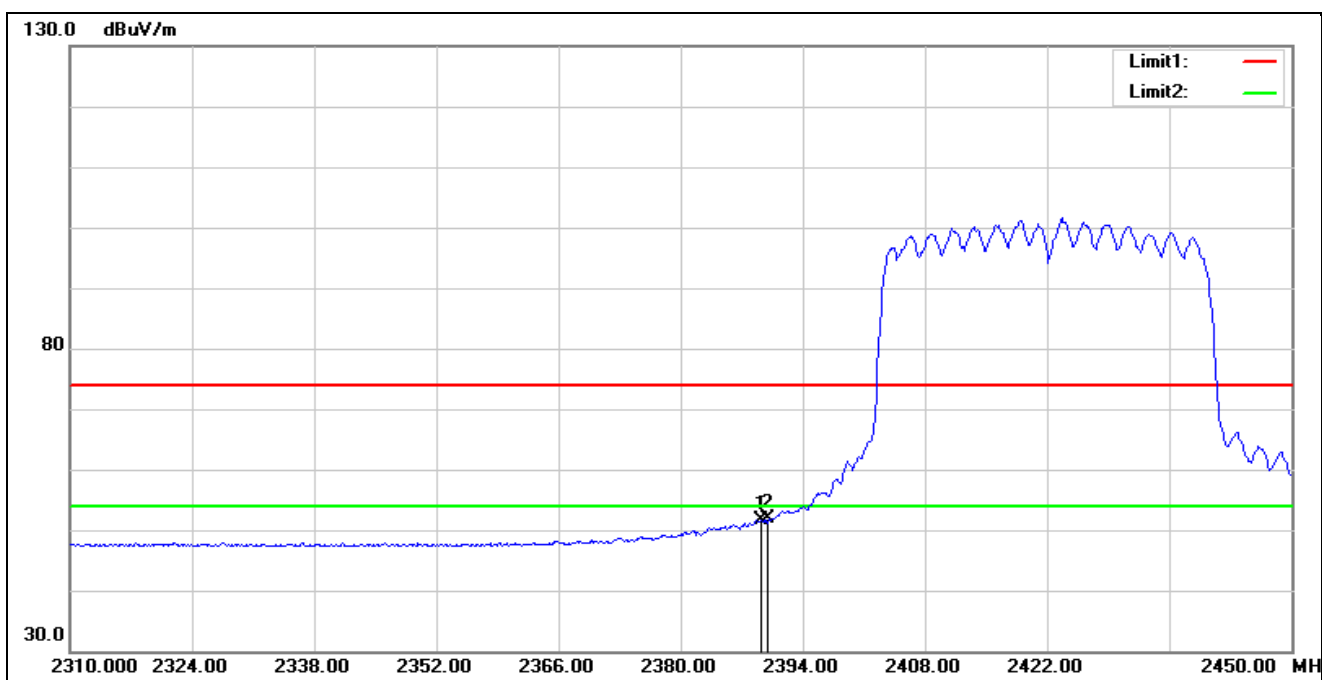

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	58.06	-6.50	51.56	54.00	-2.44	AVG
2*	2390.000	58.48	-6.50	51.98	54.00	-2.02	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

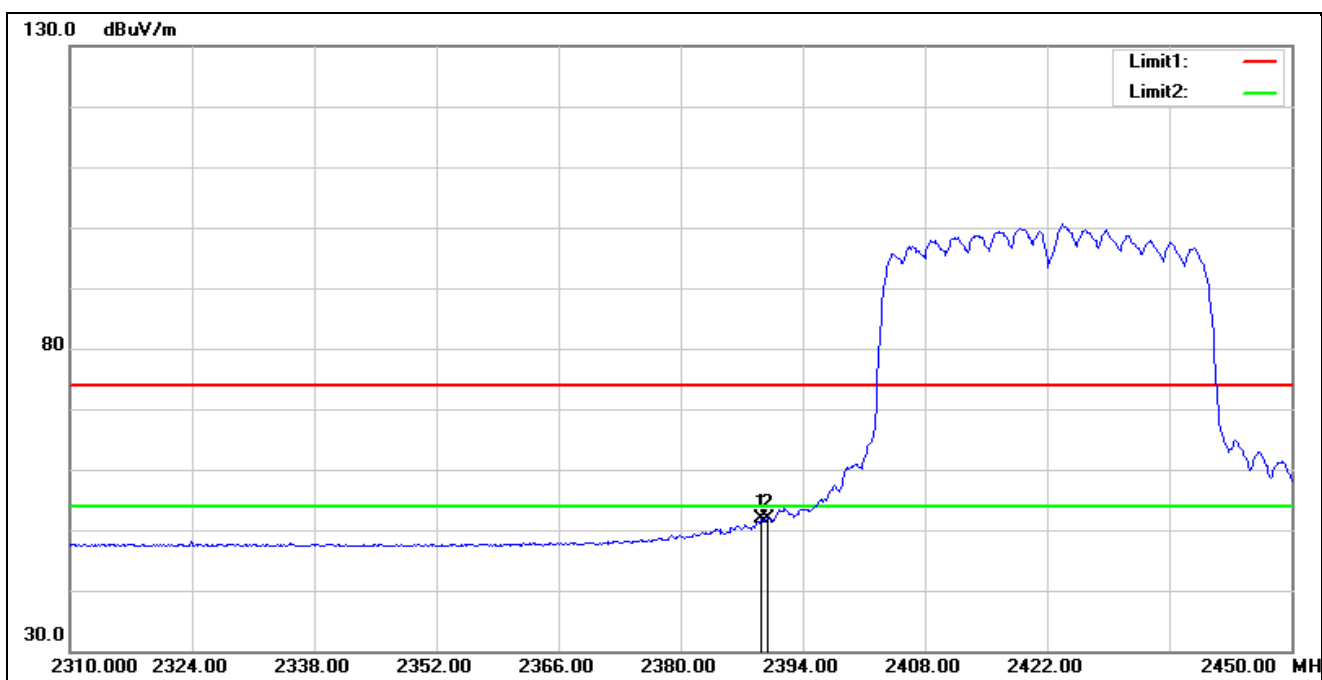

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.240	58.38	-6.50	51.88	54.00	-2.12	AVG
2	2390.000	58.38	-6.50	51.88	54.00	-2.12	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

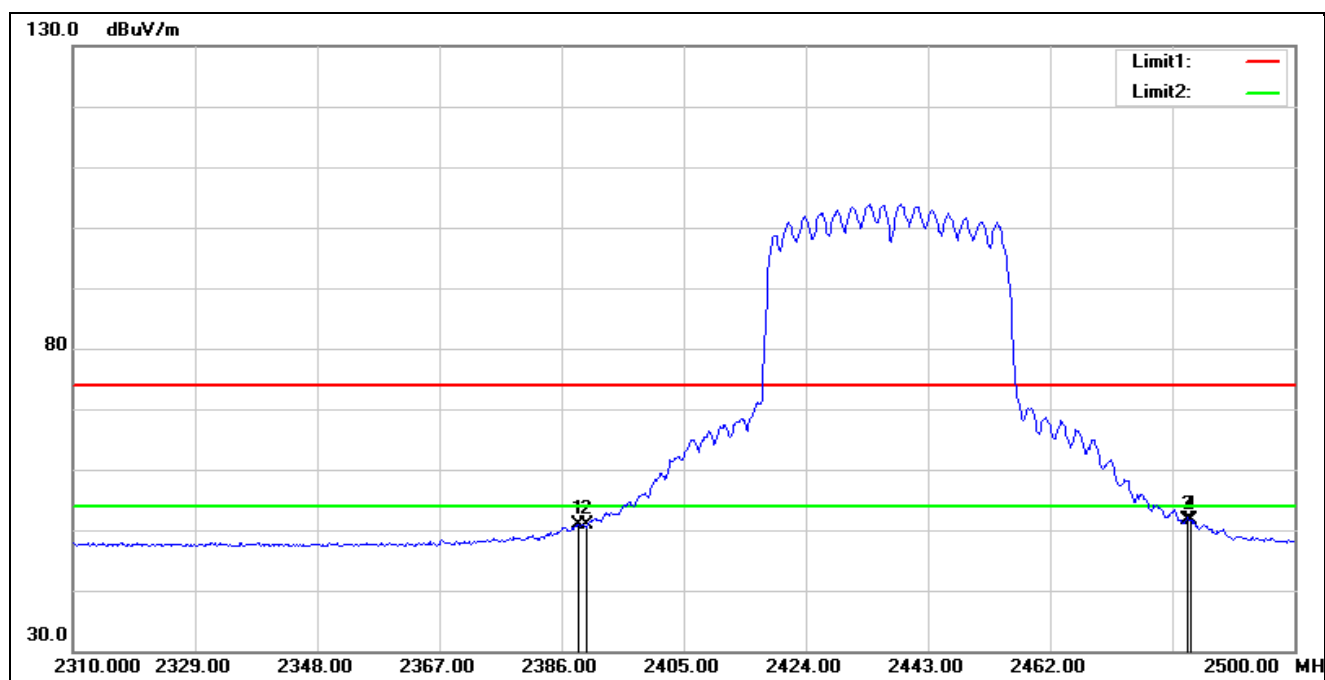


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.660	57.48	-6.50	50.98	54.00	-3.02	AVG
2	2390.000	57.32	-6.50	50.82	54.00	-3.18	AVG
3*	2483.500	58.31	-6.57	51.74	54.00	-2.26	AVG
4	2483.850	58.27	-6.57	51.70	54.00	-2.30	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

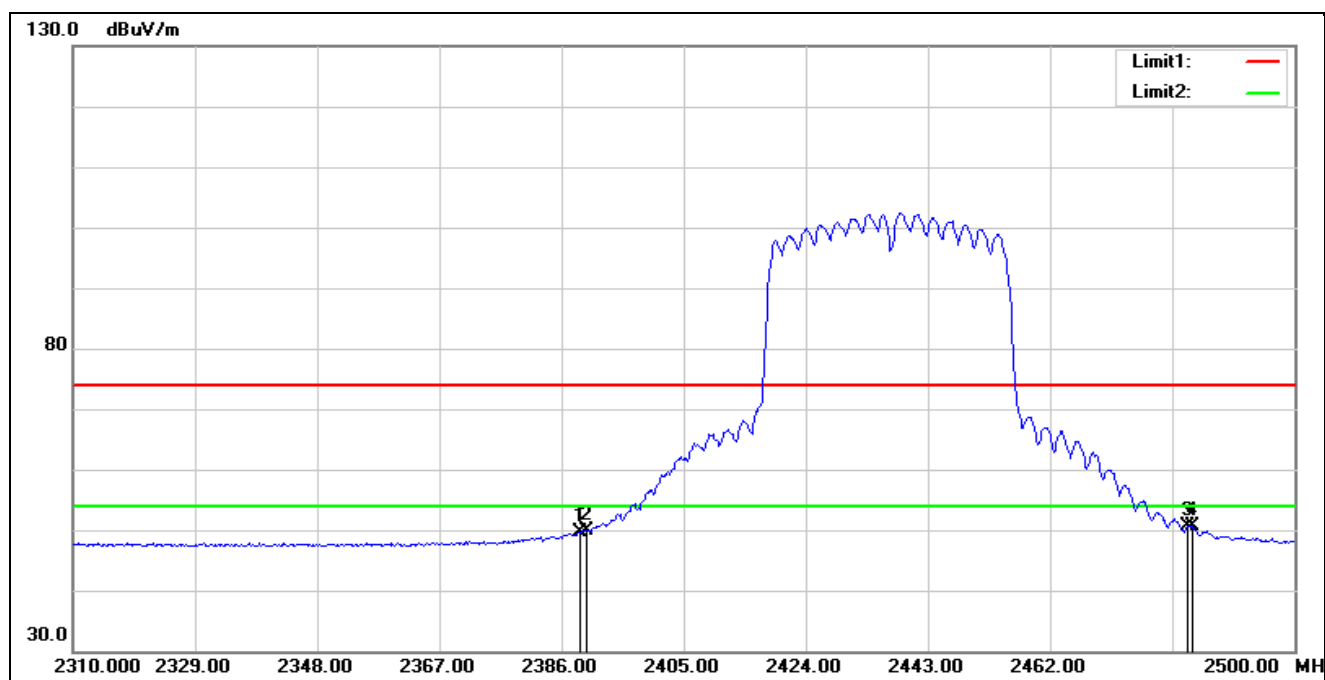


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	56.13	-6.50	49.63	54.00	-4.37	AVG
2	2390.000	56.50	-6.50	50.00	54.00	-4.00	AVG
3*	2483.500	57.23	-6.57	50.66	54.00	-3.34	AVG
4	2484.230	57.21	-6.57	50.64	54.00	-3.36	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

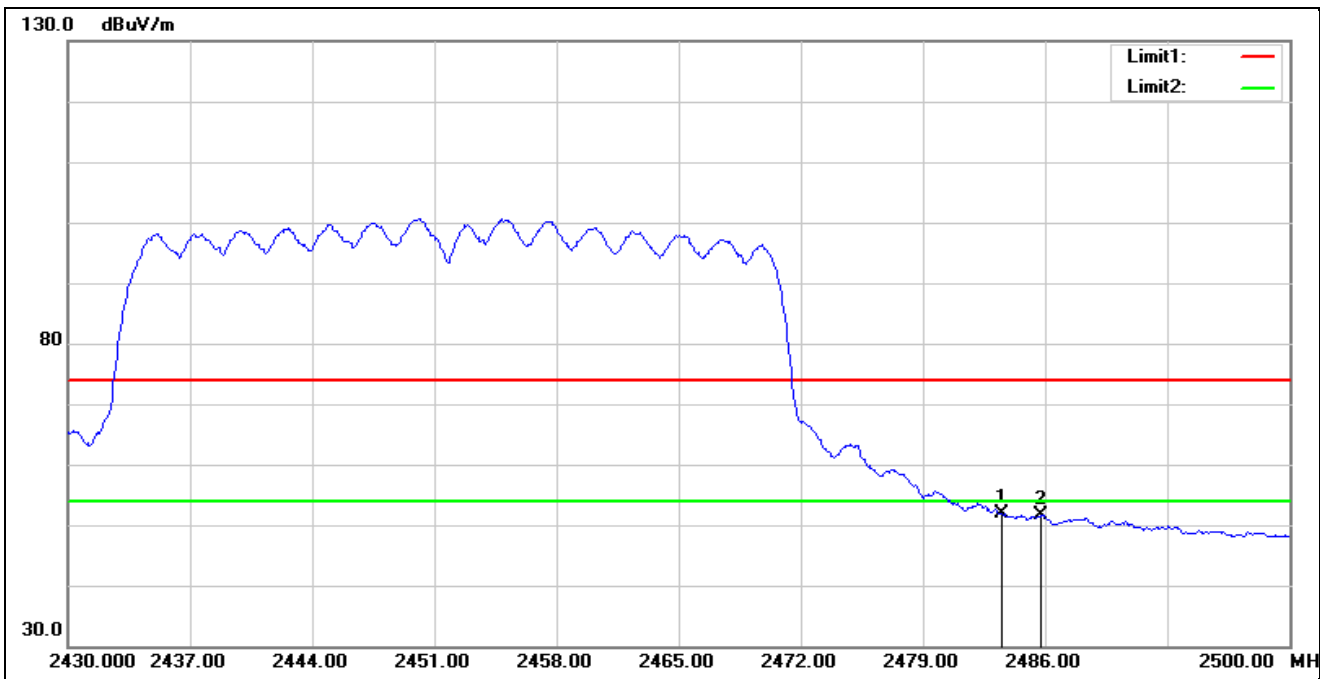


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.46	-6.57	51.89	54.00	-2.11	AVG
2	2485.790	58.27	-6.57	51.70	54.00	-2.30	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

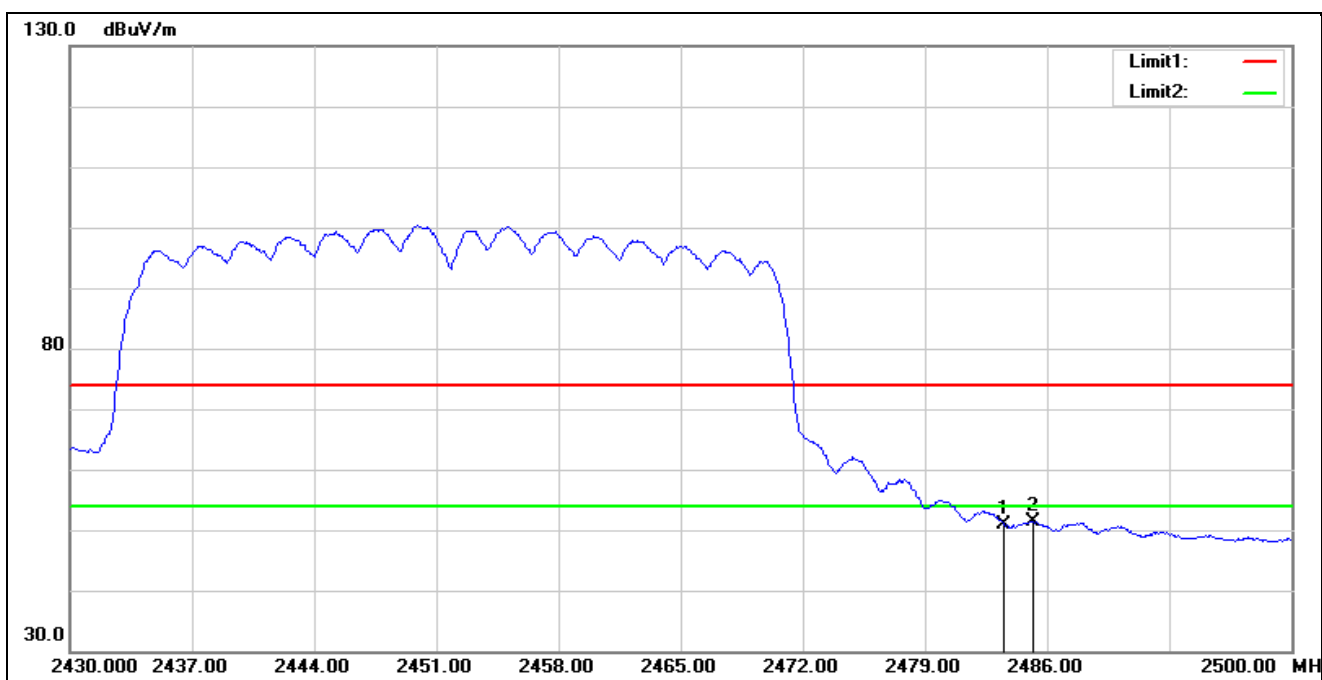


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.54	-6.57	50.97	54.00	-3.03	AVG
2*	2485.160	57.98	-6.57	51.41	54.00	-2.59	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

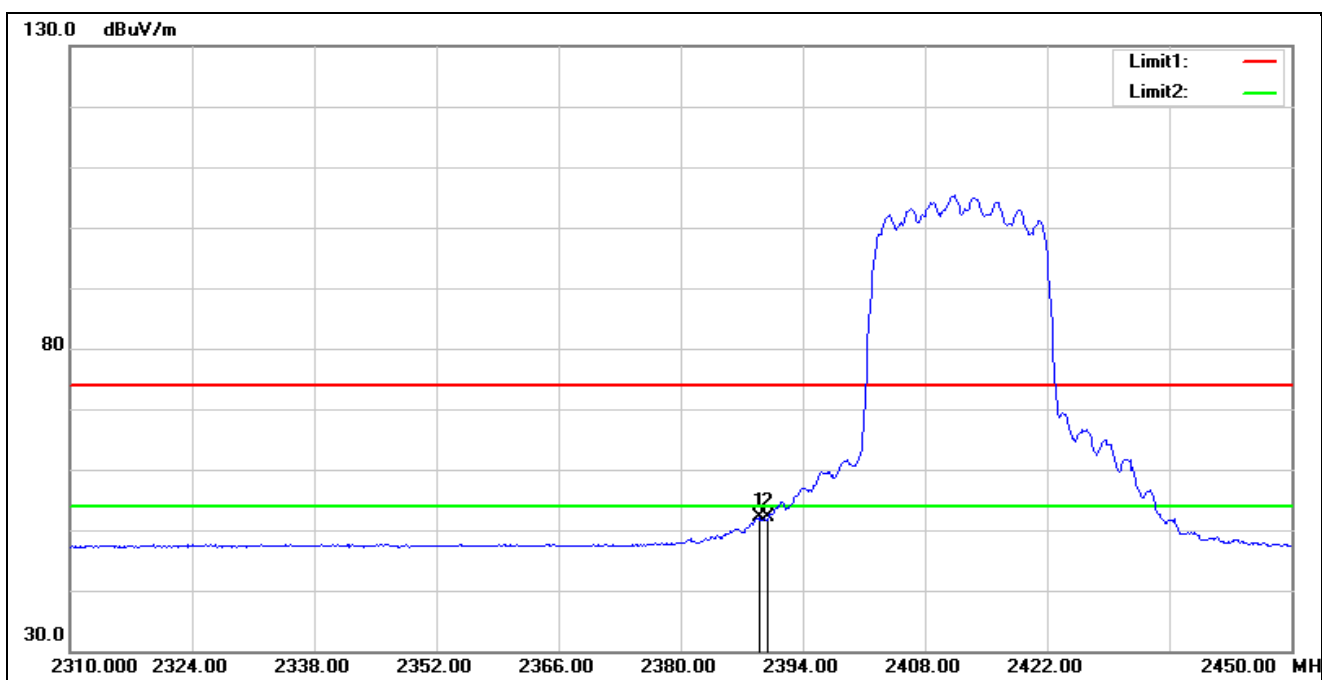


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	58.30	-6.18	52.12	54.00	-1.88	AVG
2*	2390.000	58.32	-6.19	52.13	54.00	-1.87	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

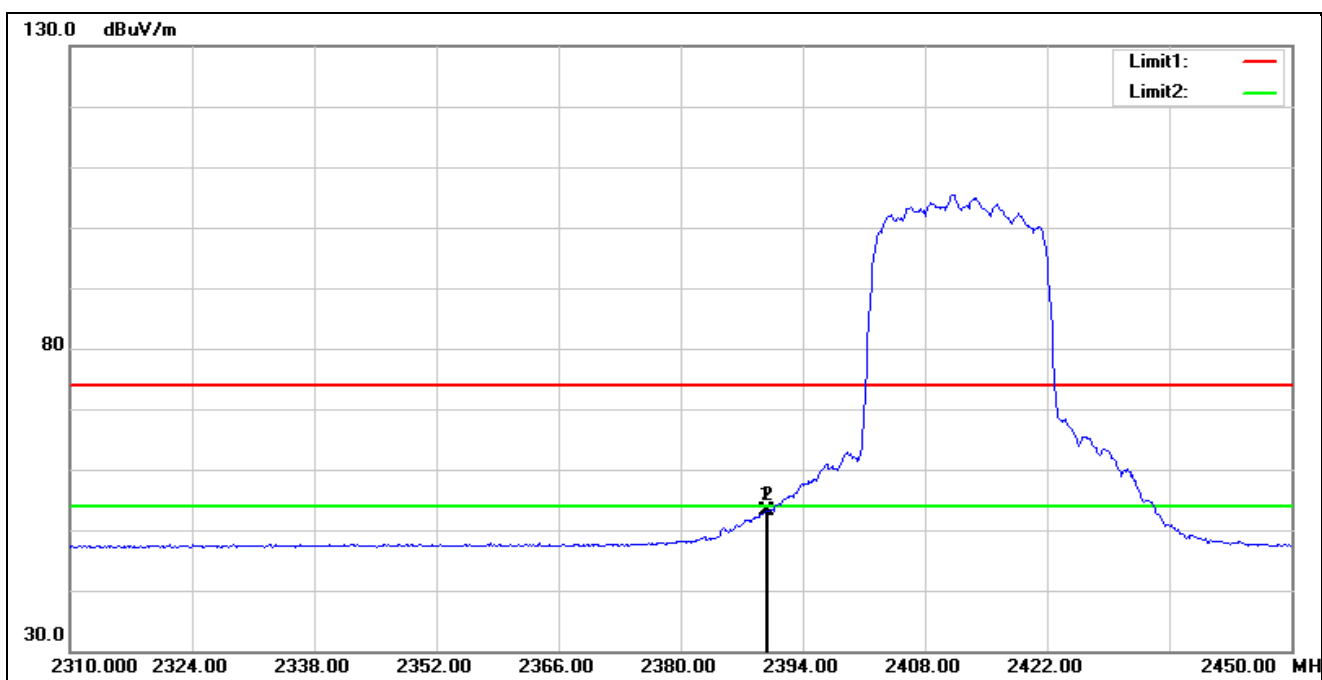


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	59.33	-6.19	53.14	54.00	-0.86	AVG
2*	2390.000	59.38	-6.19	53.19	54.00	-0.81	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

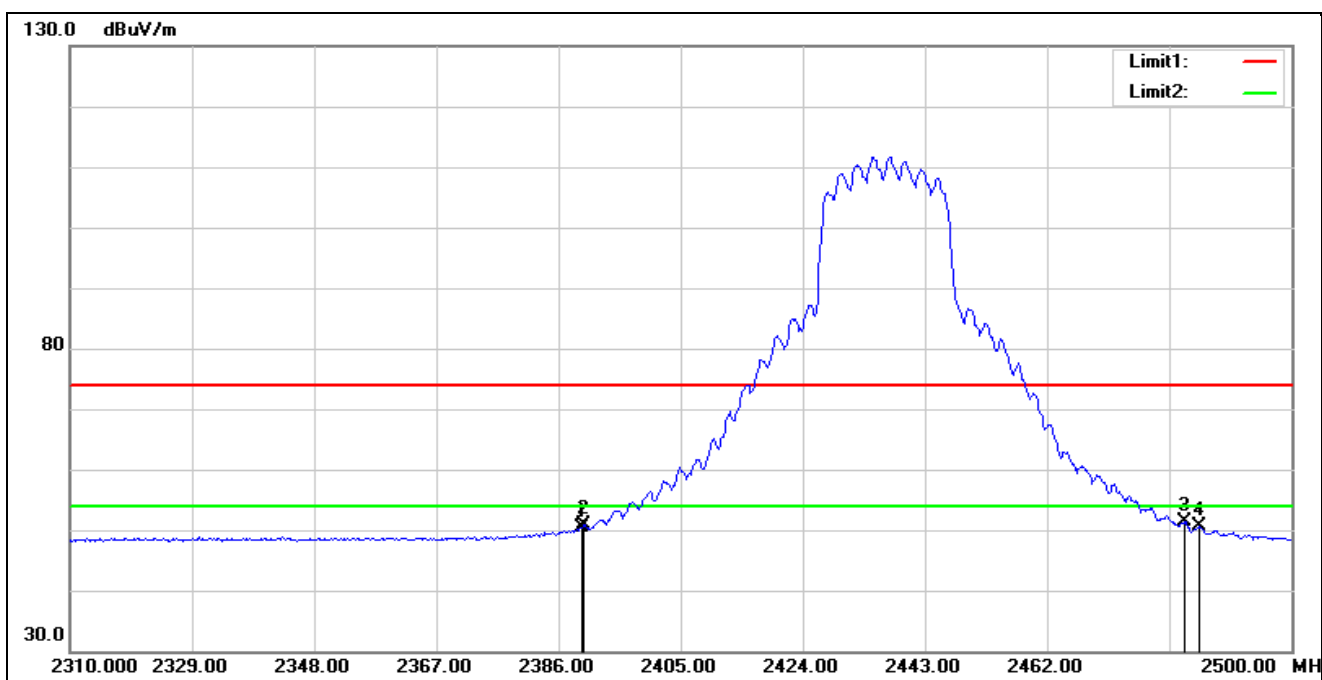

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.610	56.59	-6.19	50.40	54.00	-3.60	AVG
2	2390.000	56.98	-6.19	50.79	54.00	-3.21	AVG
3*	2483.500	57.81	-6.46	51.35	54.00	-2.65	AVG
4	2485.560	57.01	-6.46	50.55	54.00	-3.45	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

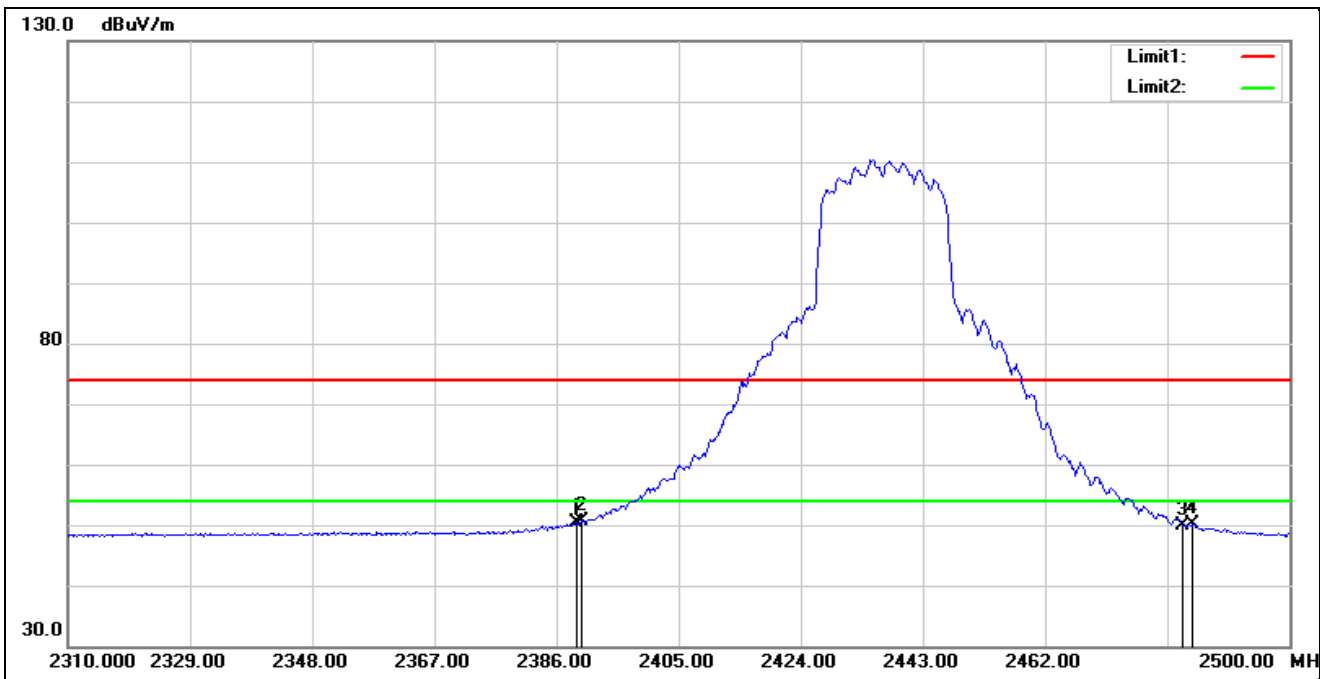

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	56.69	-6.19	50.50	54.00	-3.50	AVG
2*	2390.000	56.71	-6.19	50.52	54.00	-3.48	AVG
3	2483.500	56.28	-6.46	49.82	54.00	-4.18	AVG
4	2484.990	56.68	-6.47	50.21	54.00	-3.79	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

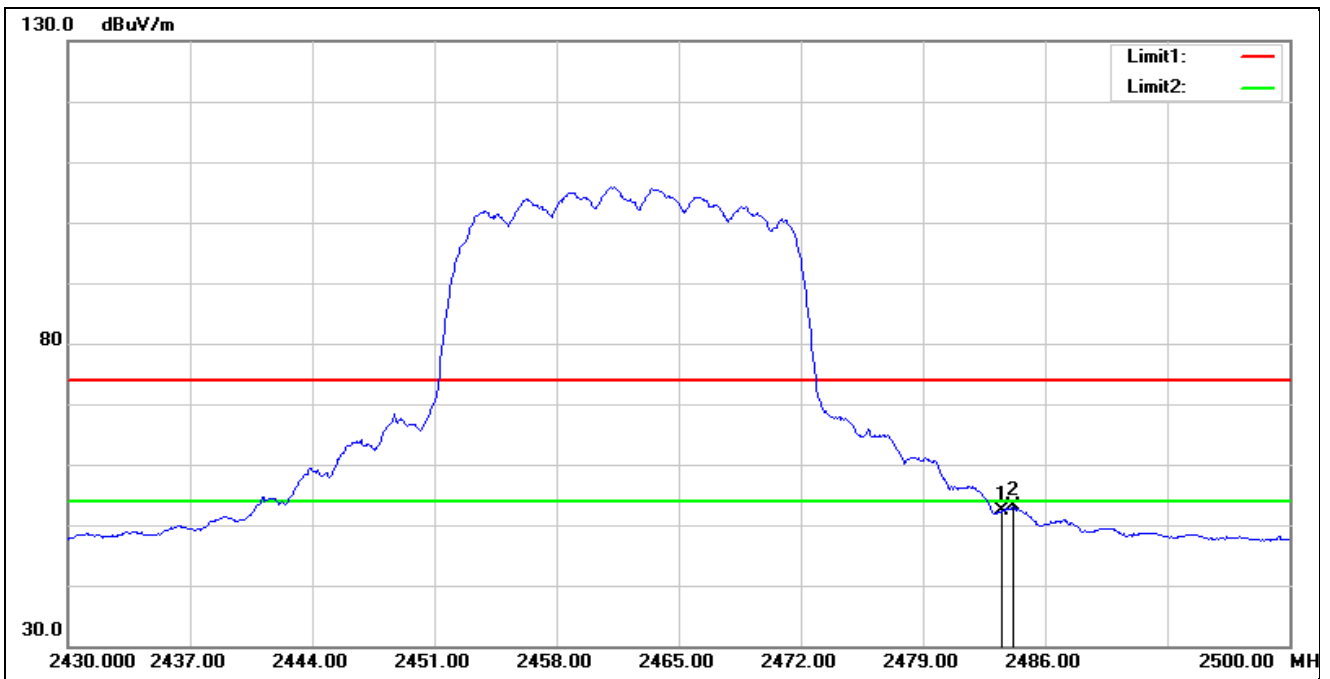


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.80	-6.46	52.34	54.00	-1.66	AVG
2*	2484.180	59.56	-6.47	53.09	54.00	-0.91	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

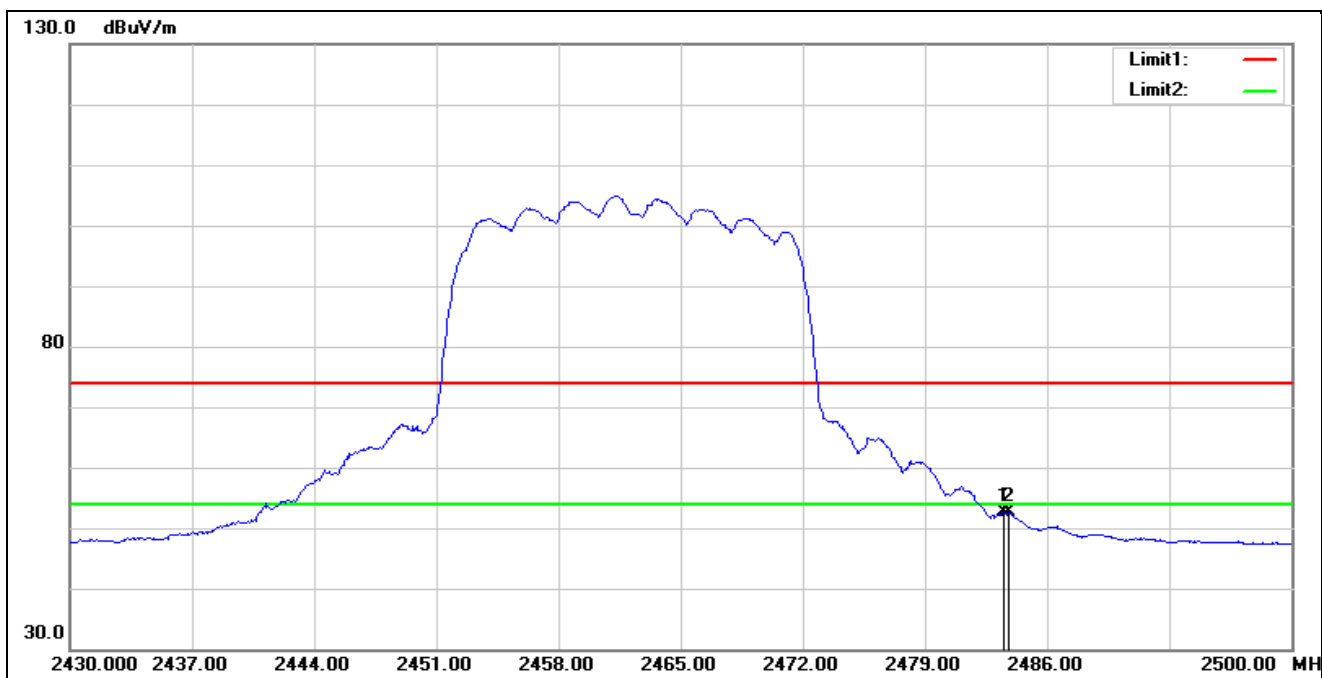


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.00	-6.46	52.54	54.00	-1.46	AVG
2*	2483.830	59.02	-6.47	52.55	54.00	-1.45	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

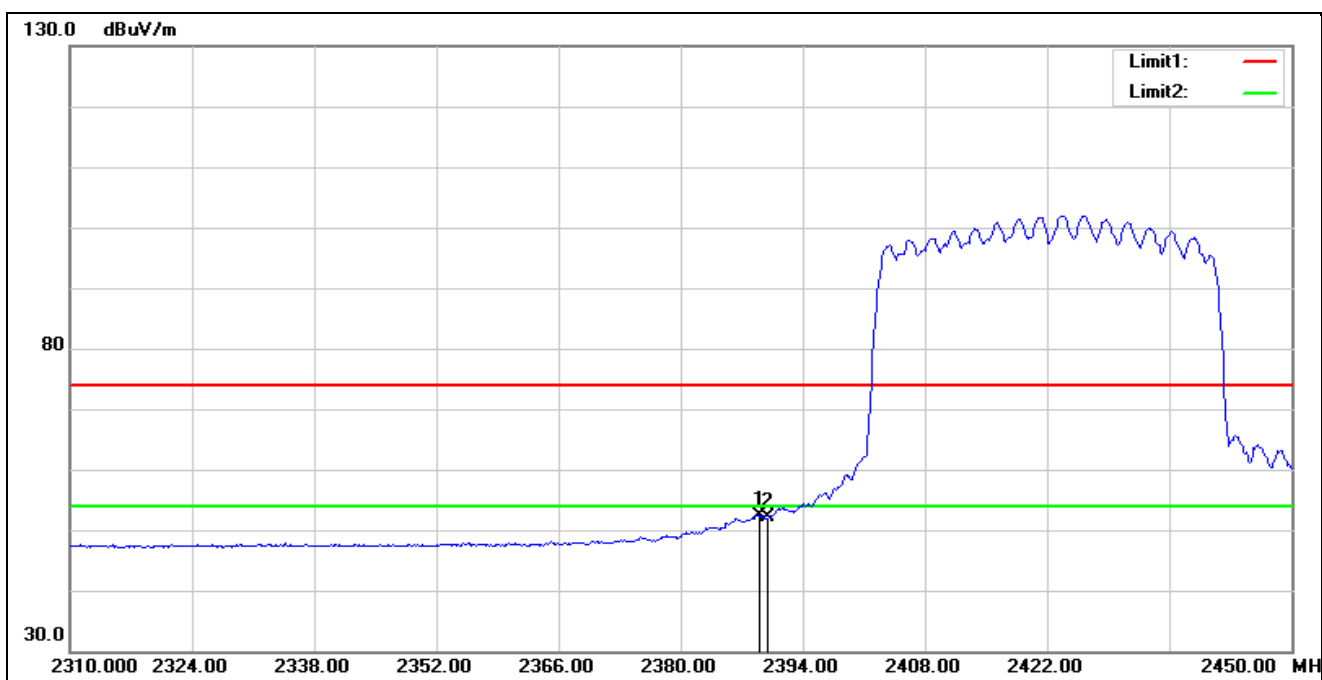


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.100	58.60	-6.18	52.42	54.00	-1.58	AVG
2	2390.000	58.25	-6.19	52.06	54.00	-1.94	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

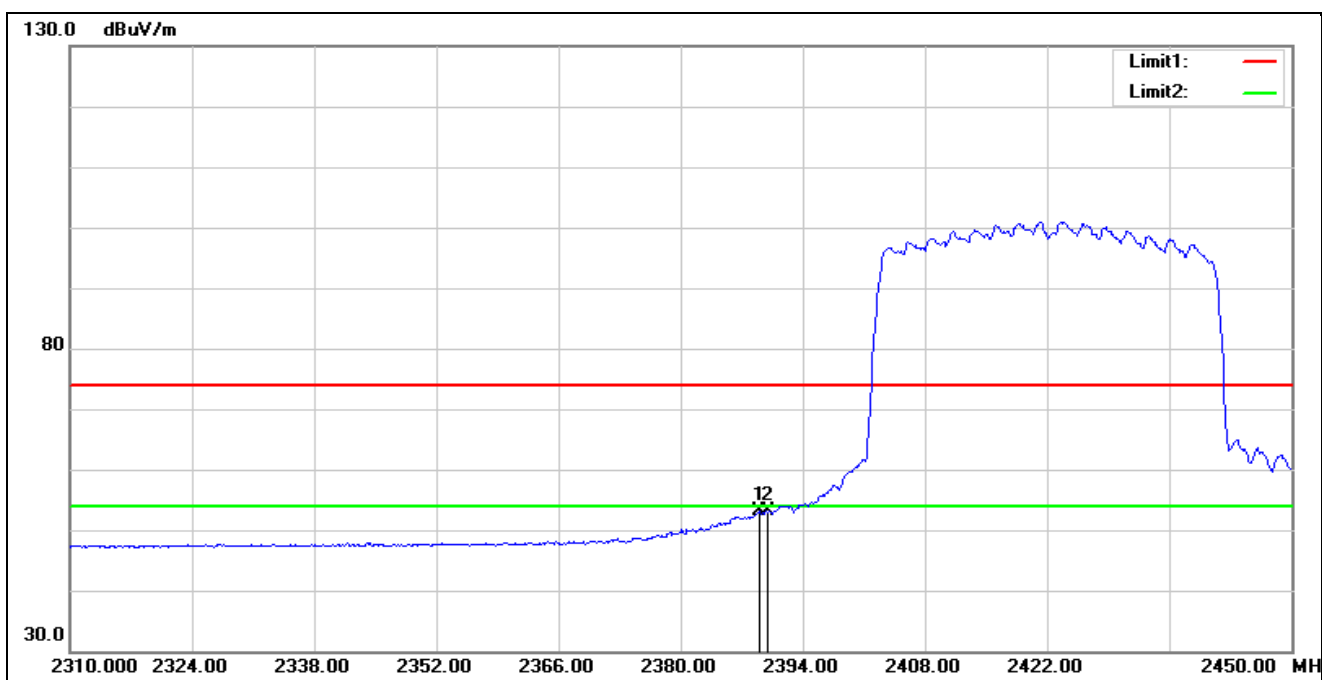


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.100	59.33	-6.18	53.15	54.00	-0.85	AVG
2	2390.000	59.34	-6.19	53.15	54.00	-0.85	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

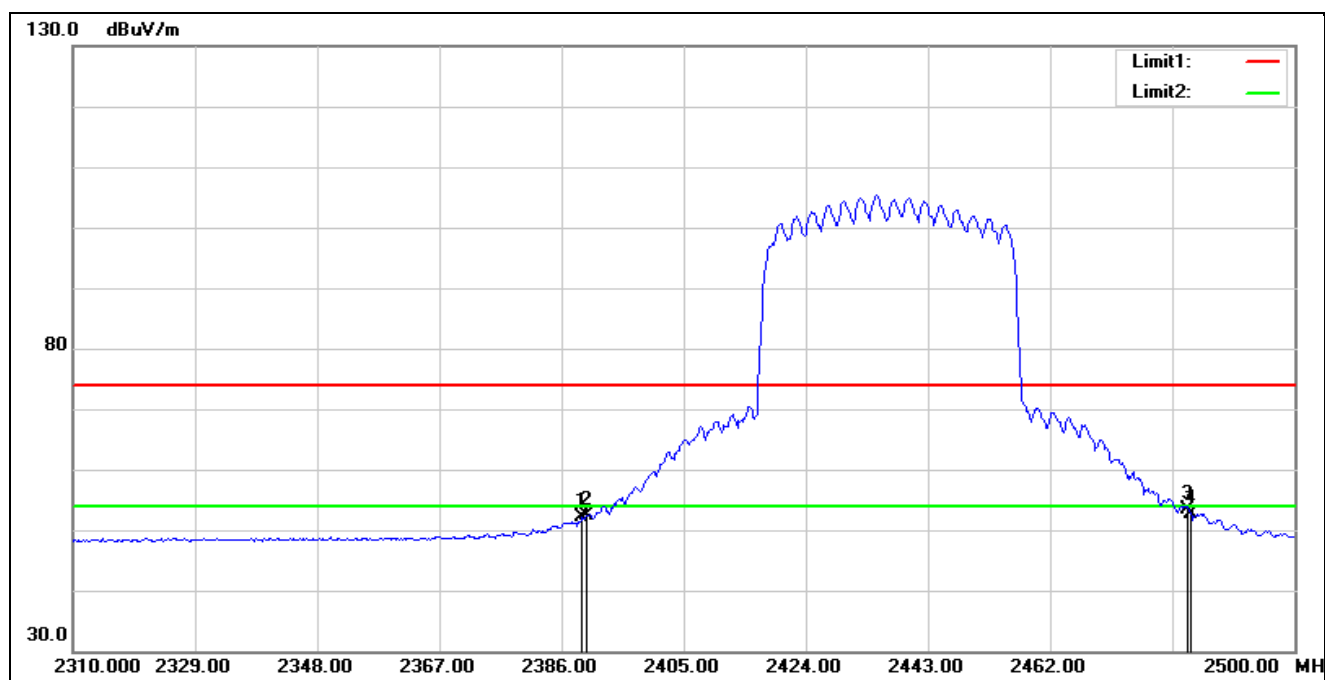


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	58.35	-6.19	52.16	54.00	-1.84	AVG
2	2390.000	58.50	-6.19	52.31	54.00	-1.69	AVG
3*	2483.500	59.95	-6.46	53.49	54.00	-0.51	AVG
4	2483.850	59.21	-6.47	52.74	54.00	-1.26	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

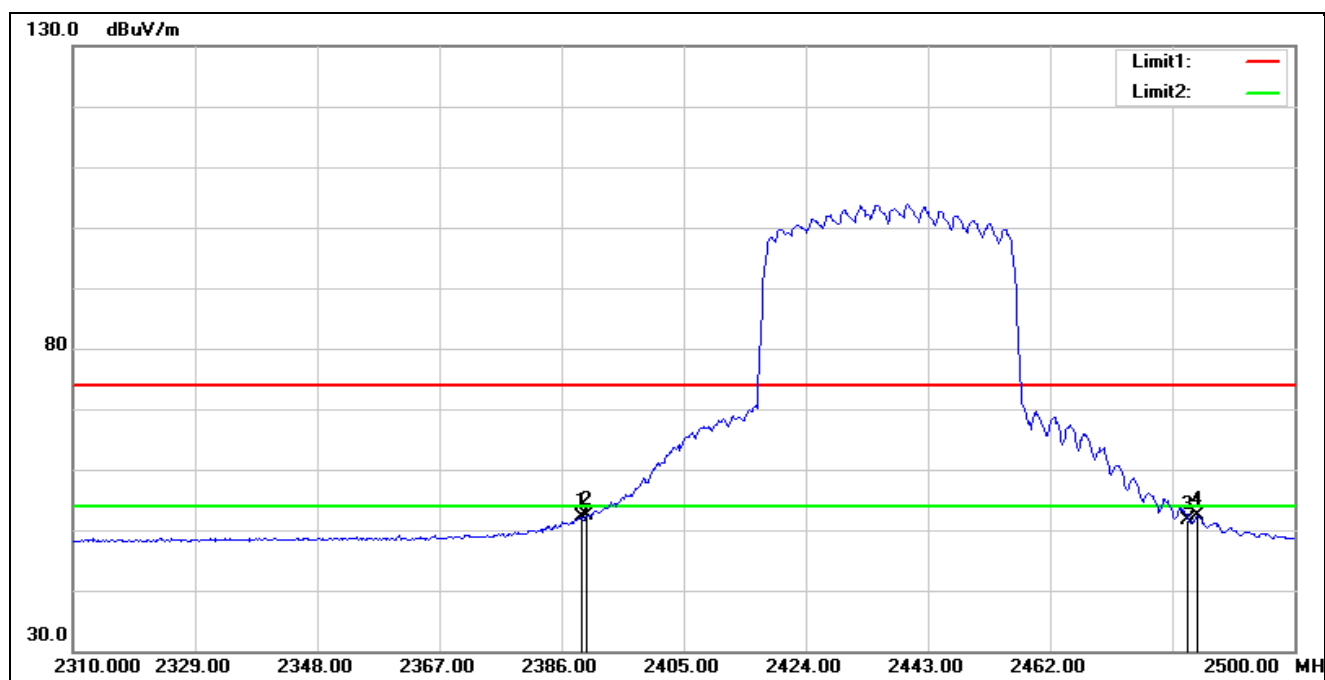


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	58.29	-6.19	52.10	54.00	-1.90	AVG
2*	2390.000	58.46	-6.19	52.27	54.00	-1.73	AVG
3	2483.500	58.05	-6.46	51.59	54.00	-2.41	AVG
4	2484.990	58.74	-6.47	52.27	54.00	-1.73	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

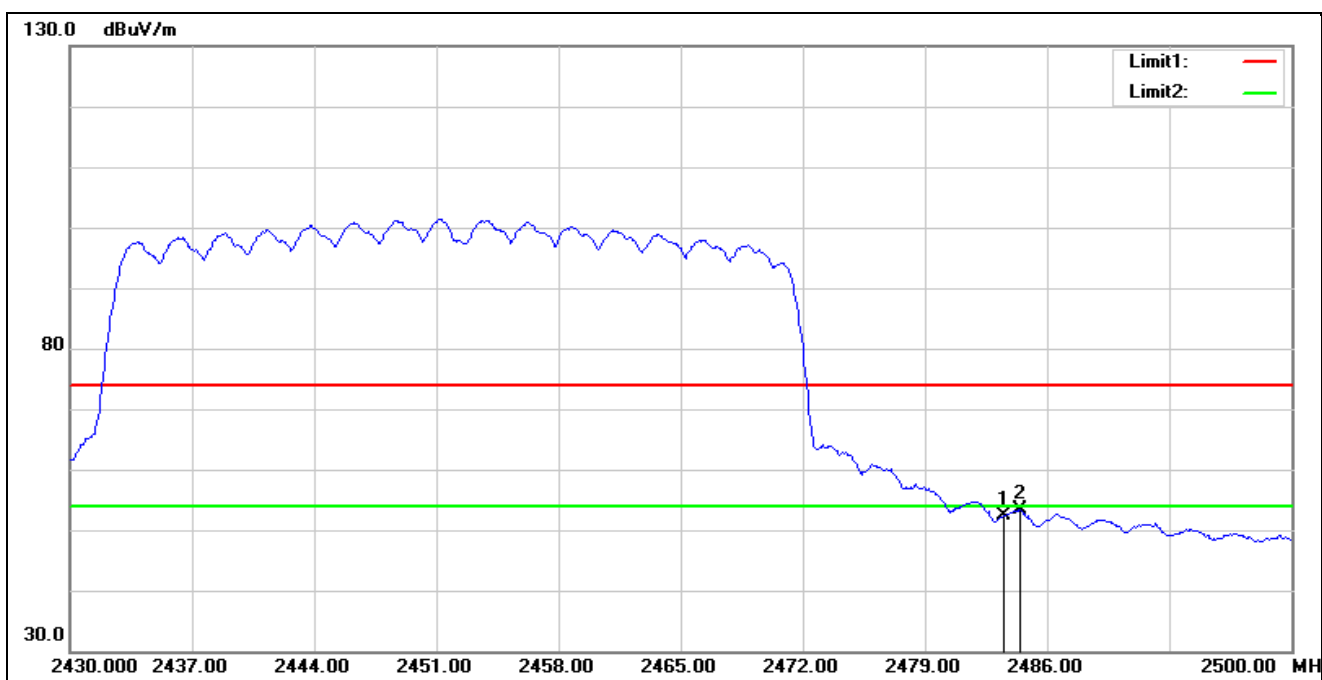

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.87	-6.46	52.41	54.00	-1.59	AVG
2*	2484.460	59.87	-6.47	53.40	54.00	-0.60	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

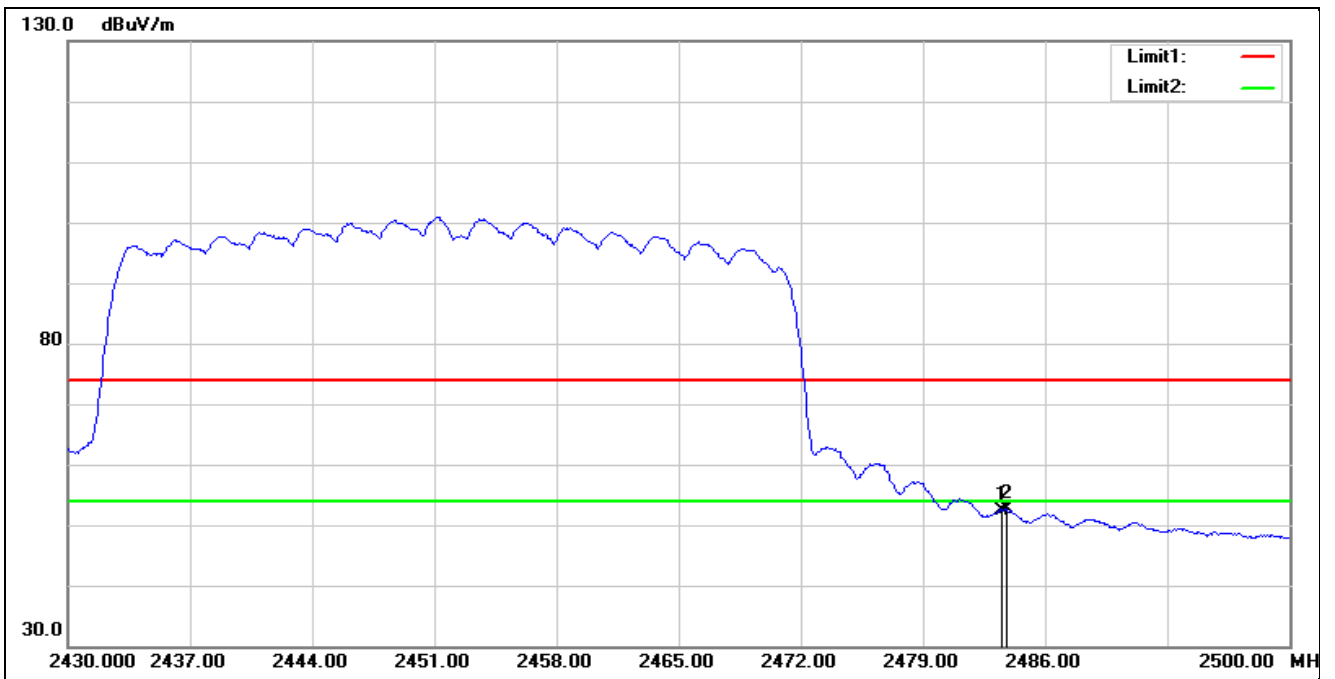

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.95	-6.46	52.49	54.00	-1.51	AVG
2*	2483.760	59.02	-6.47	52.55	54.00	-1.45	AVG




Beamforming on

Harmonic


Above 1 GHz

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

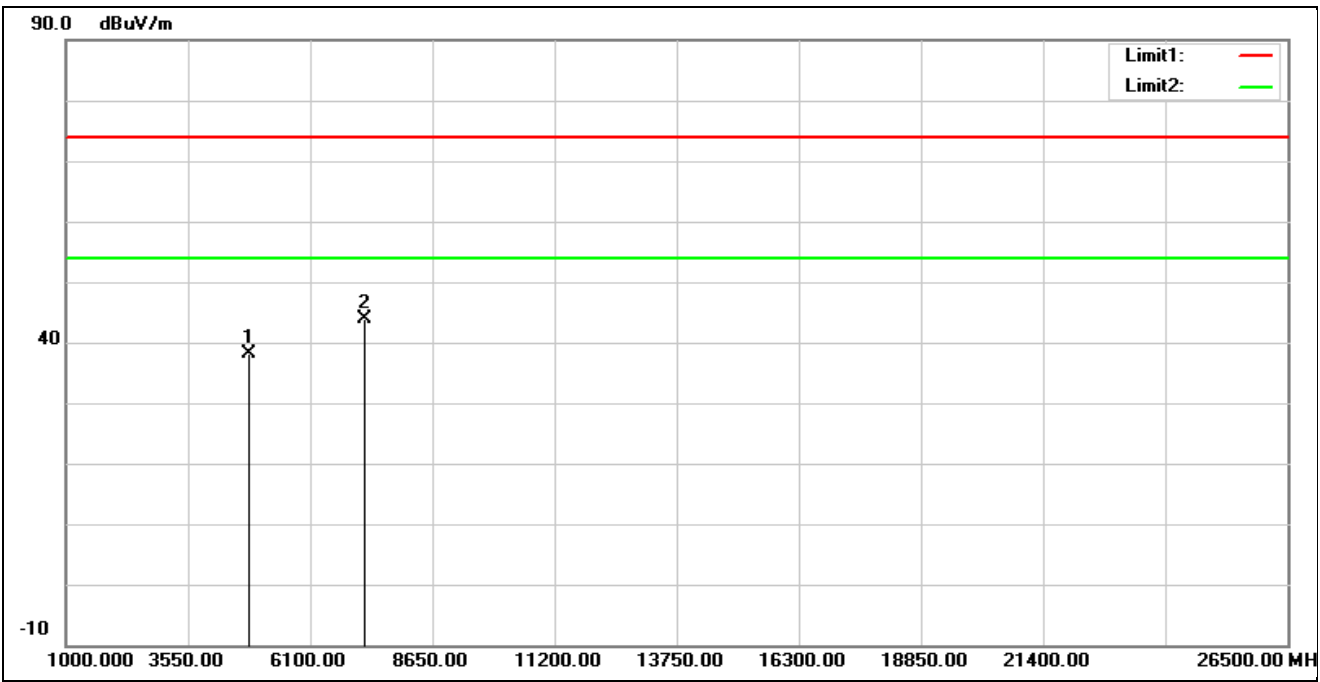


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.25	-0.23	38.02	74.00	-35.98	peak
2*	7236.000	37.31	6.52	43.83	74.00	-30.17	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

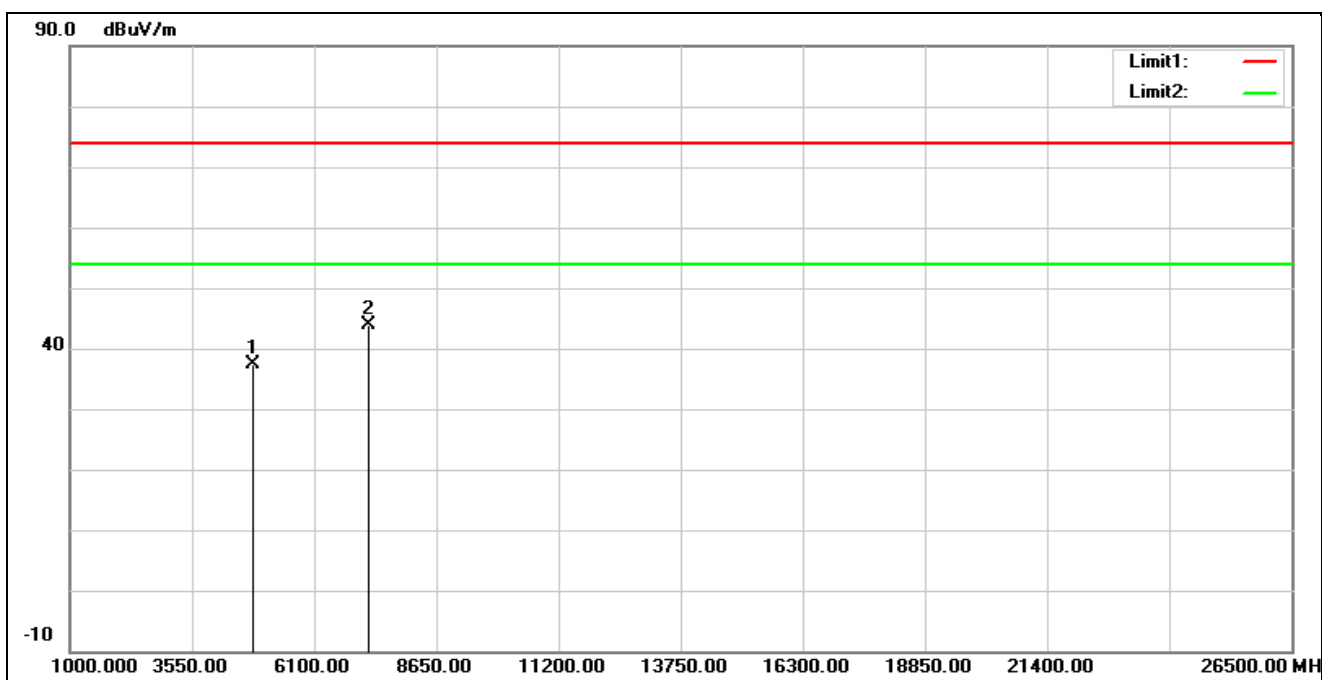


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.52	-0.23	37.29	74.00	-36.71	peak
2*	7236.000	37.32	6.52	43.84	74.00	-30.16	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

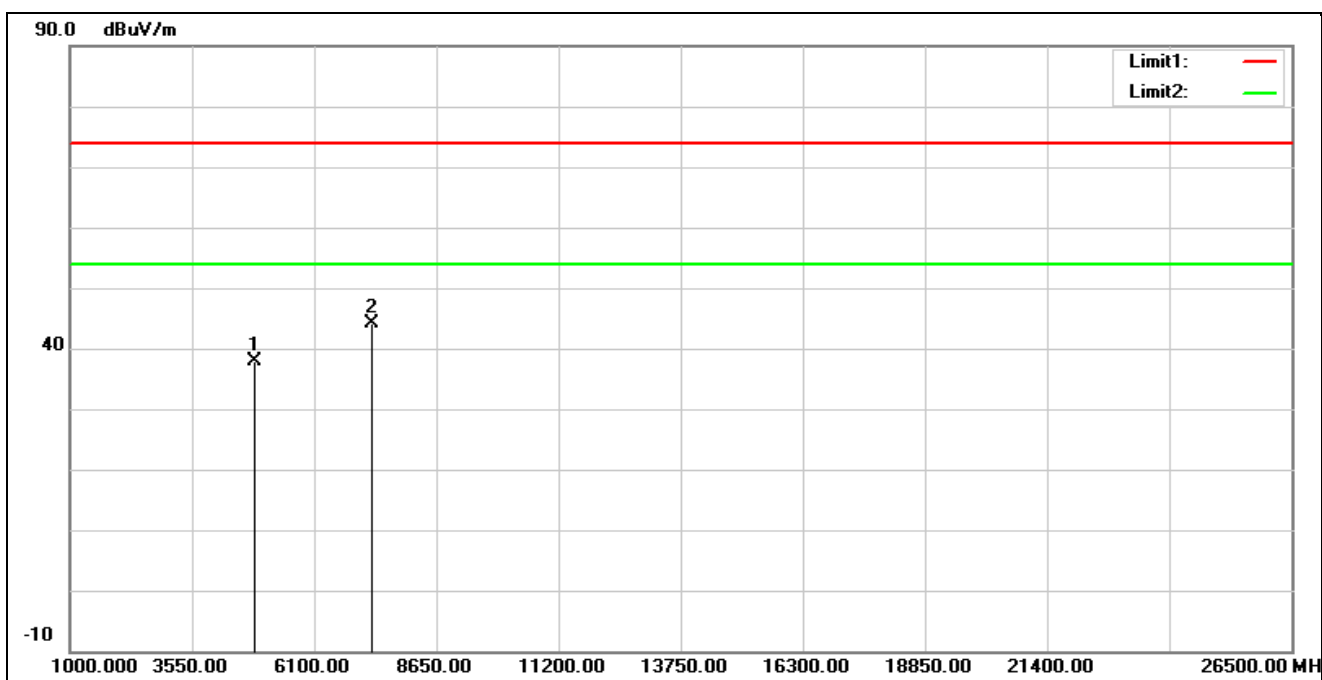


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.89	-0.13	37.76	74.00	-36.24	peak
2*	7311.000	37.79	6.23	44.02	74.00	-29.98	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

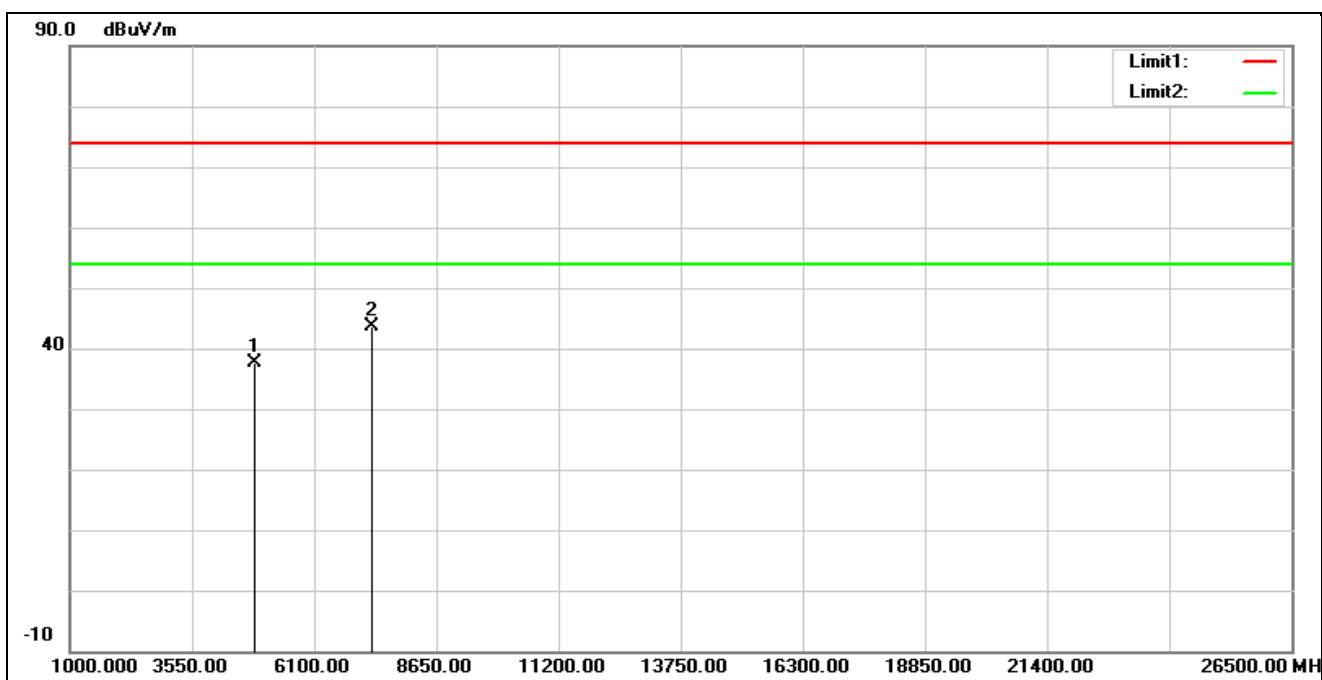


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.84	-0.13	37.71	74.00	-36.29	peak
2*	7311.000	37.41	6.23	43.64	74.00	-30.36	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

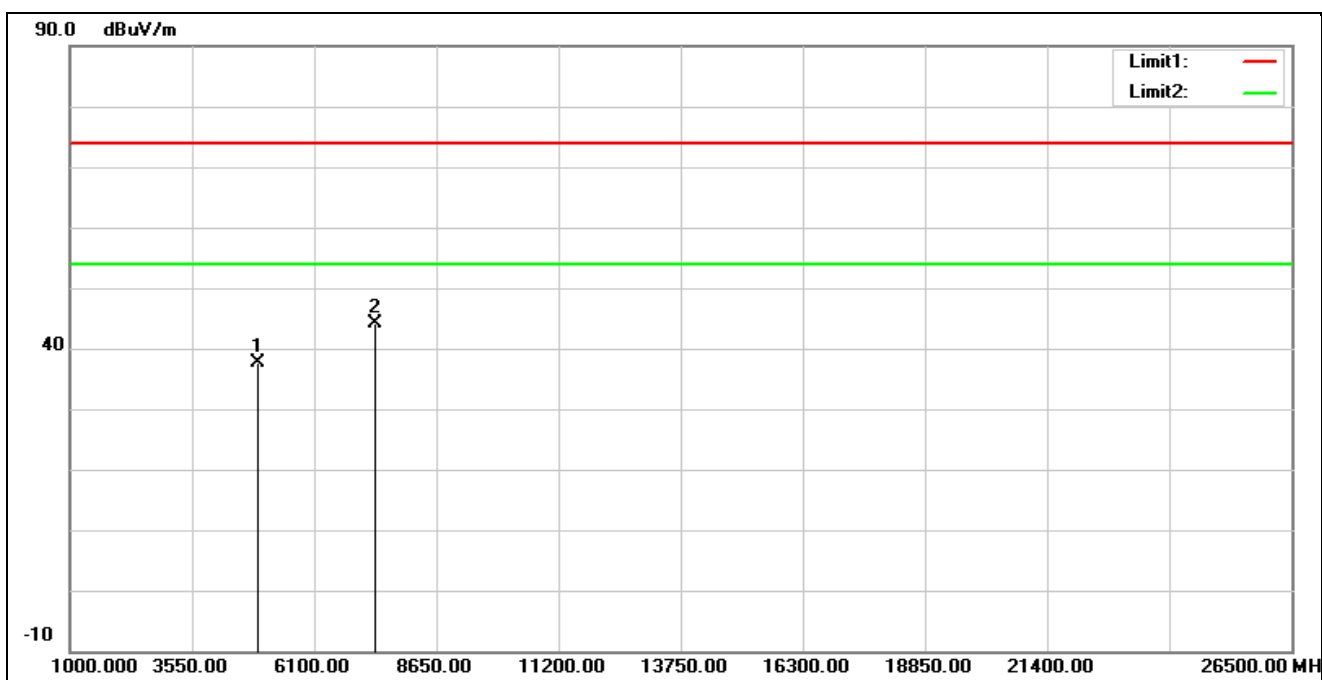


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.70	0.01	37.71	74.00	-36.29	peak
2*	7386.000	37.81	6.33	44.14	74.00	-29.86	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

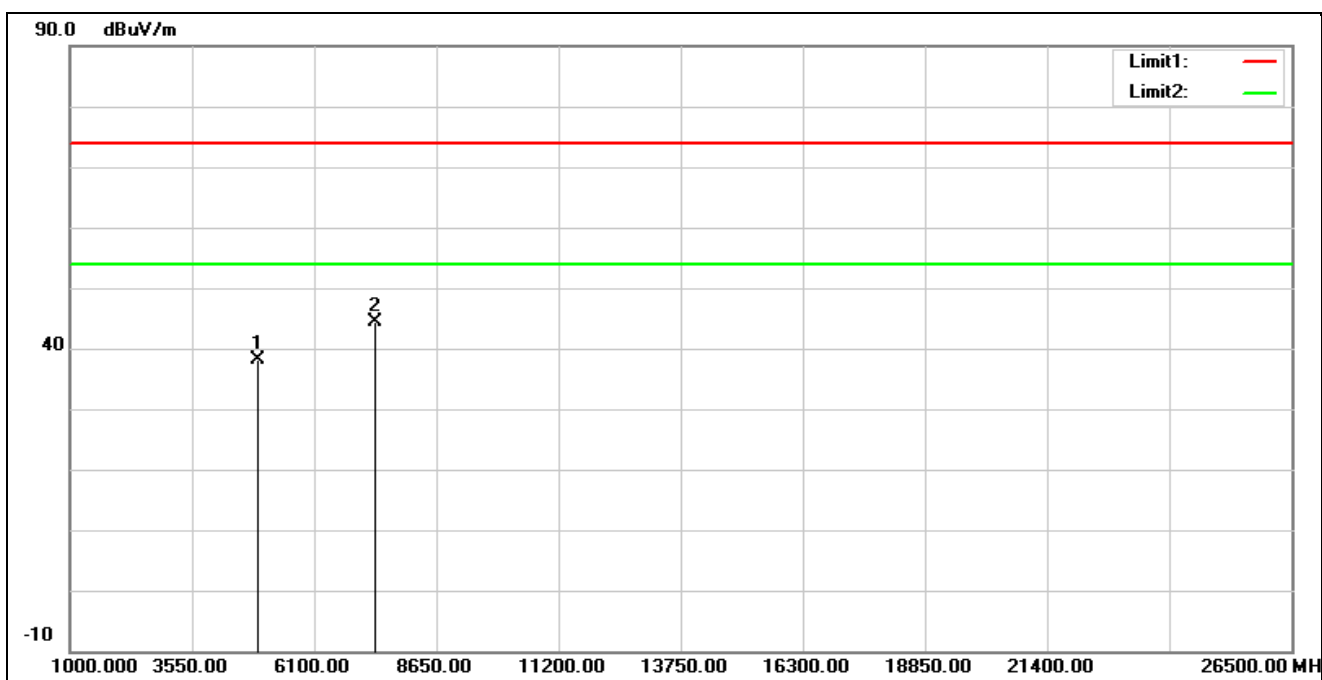


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.19	0.01	38.20	74.00	-35.80	peak
2*	7386.000	37.95	6.33	44.28	74.00	-29.72	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

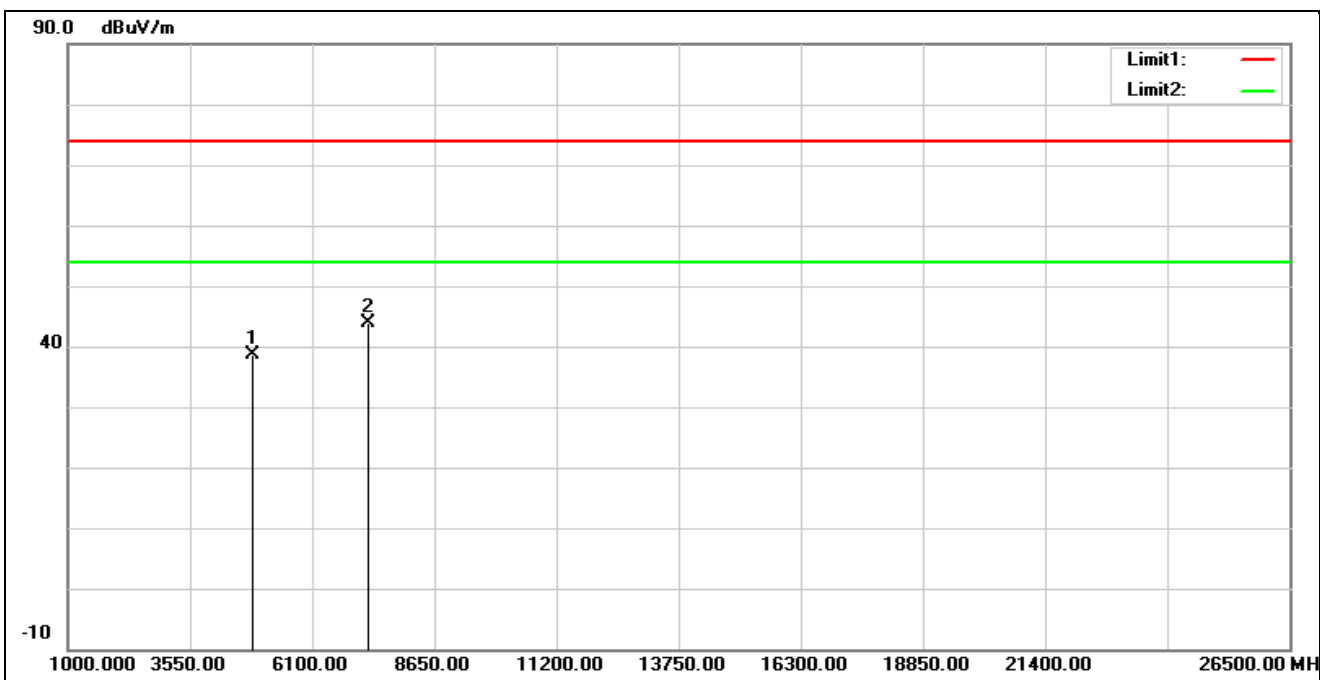

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.69	-0.15	38.54	74.00	-35.46	peak
2*	7266.000	37.51	6.45	43.96	74.00	-30.04	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

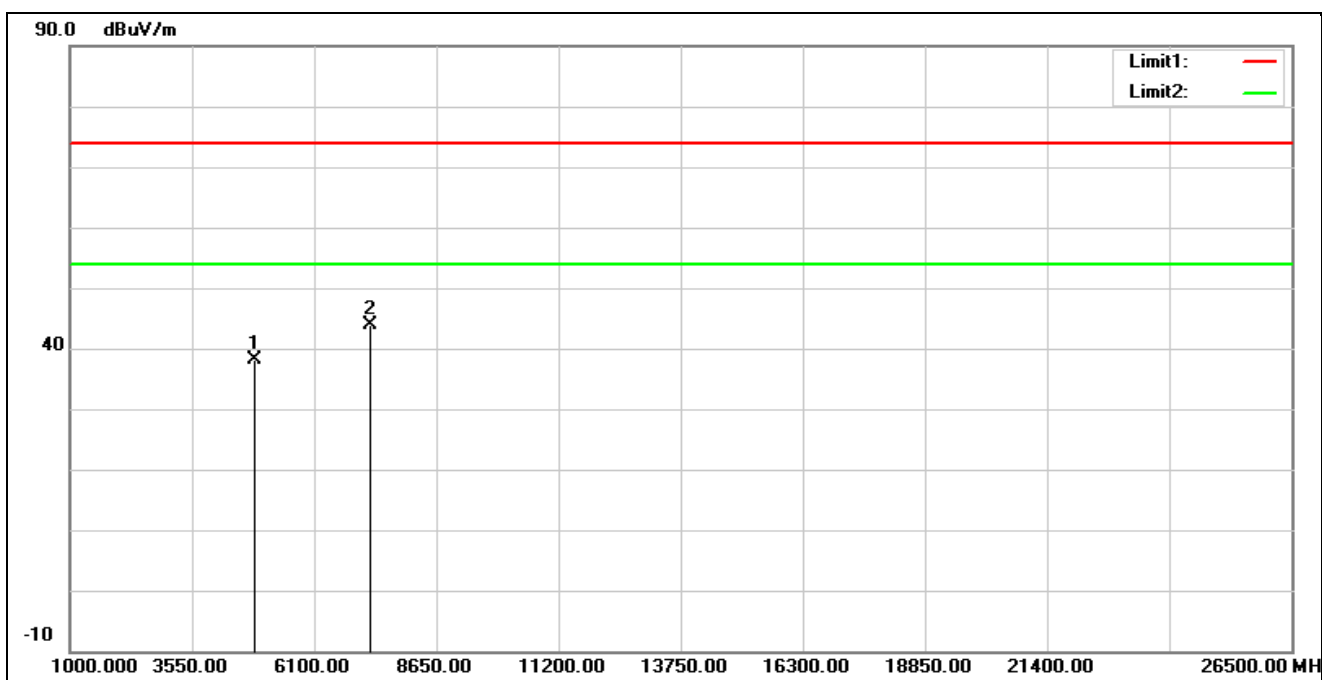

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.35	-0.15	38.20	74.00	-35.80	peak
2*	7266.000	37.34	6.45	43.79	74.00	-30.21	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

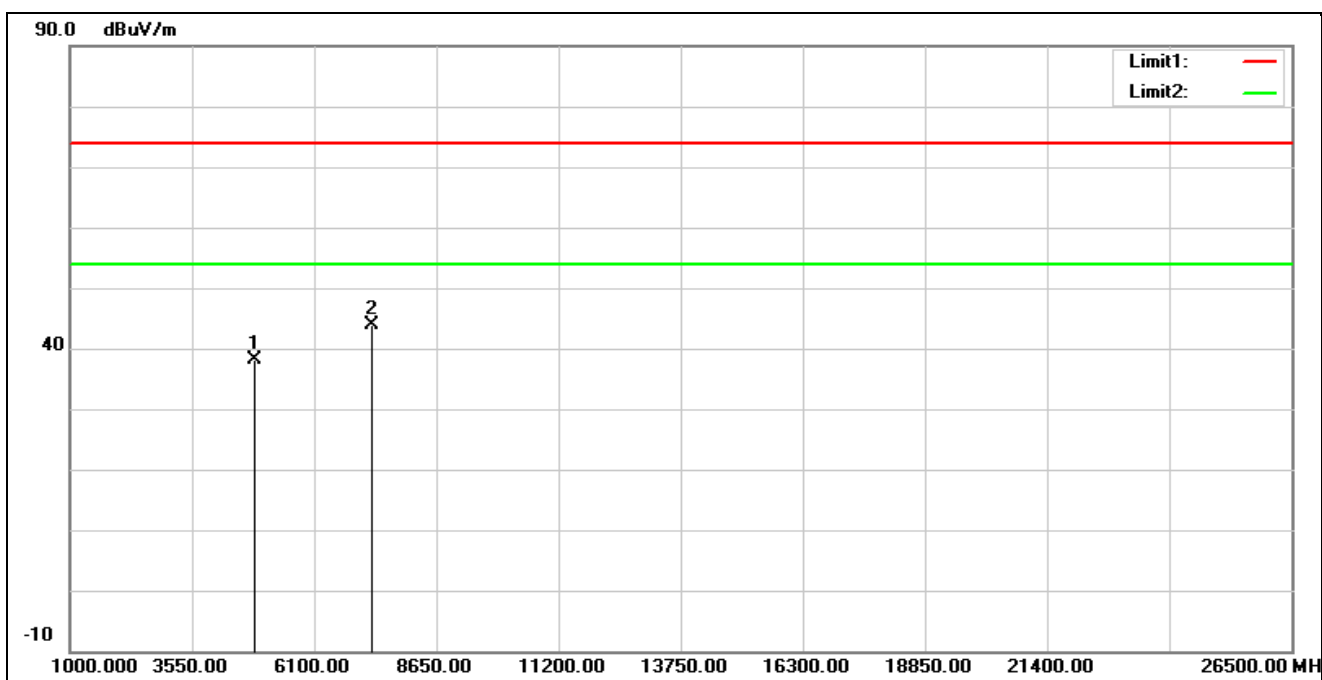


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.33	-0.13	38.20	74.00	-35.80	peak
2*	7311.000	37.72	6.23	43.95	74.00	-30.05	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

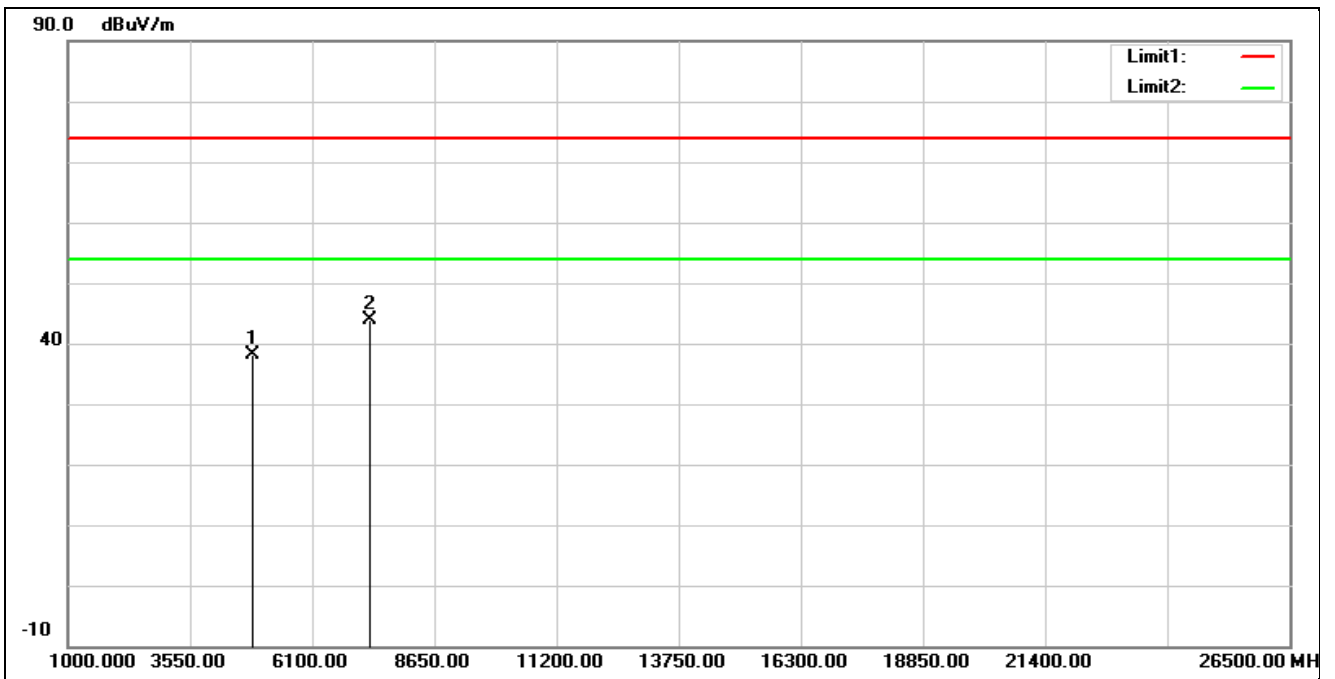


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.38	-0.13	38.25	74.00	-35.75	peak
2*	7311.000	37.60	6.23	43.83	74.00	-30.17	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

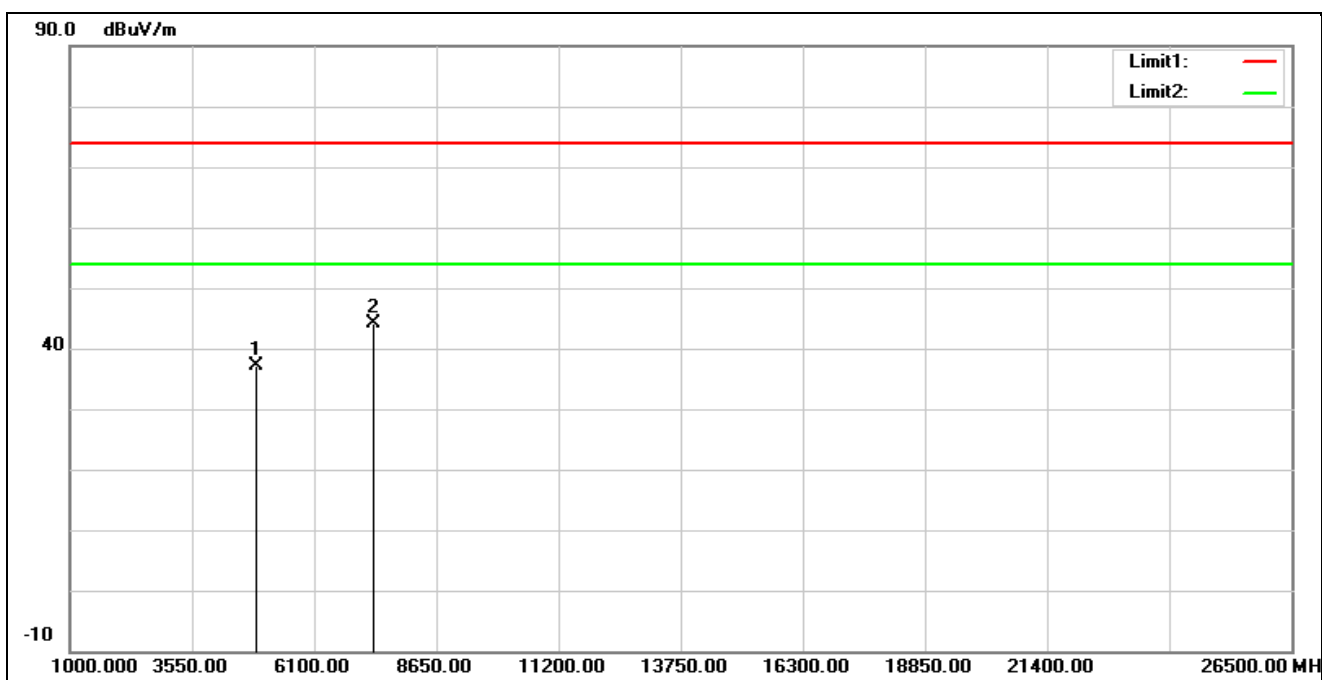


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.16	-0.11	37.05	74.00	-36.95	peak
2*	7356.000	38.01	6.19	44.20	74.00	-29.80	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

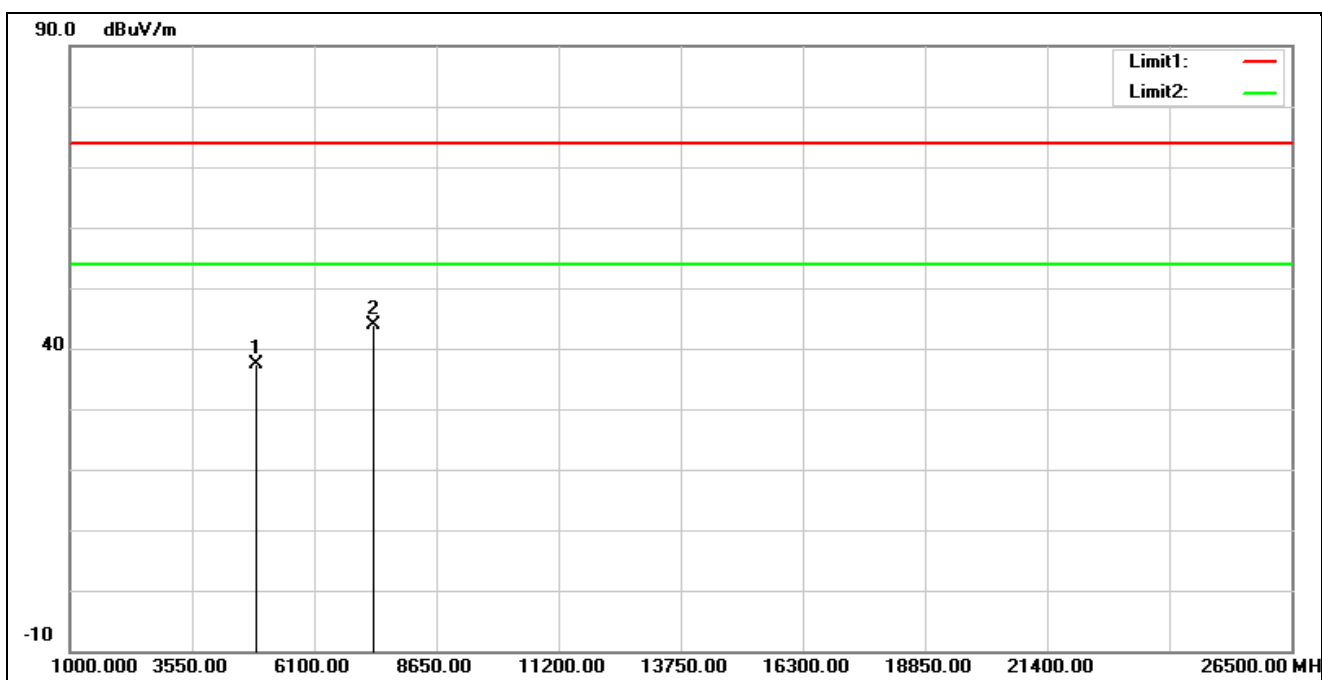


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.54	-0.11	37.43	74.00	-36.57	peak
2*	7356.000	37.80	6.19	43.99	74.00	-30.01	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

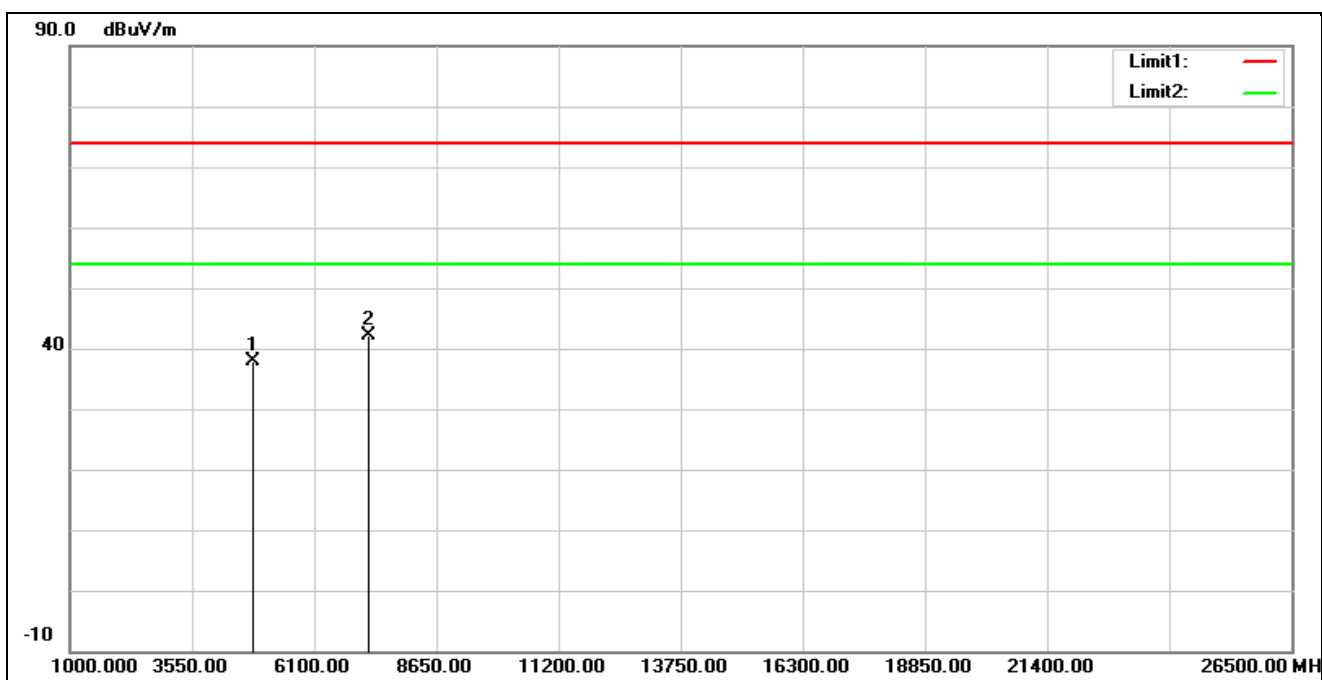


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.58	0.28	37.86	74.00	-36.14	peak
2*	7236.000	34.19	7.96	42.15	74.00	-31.85	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

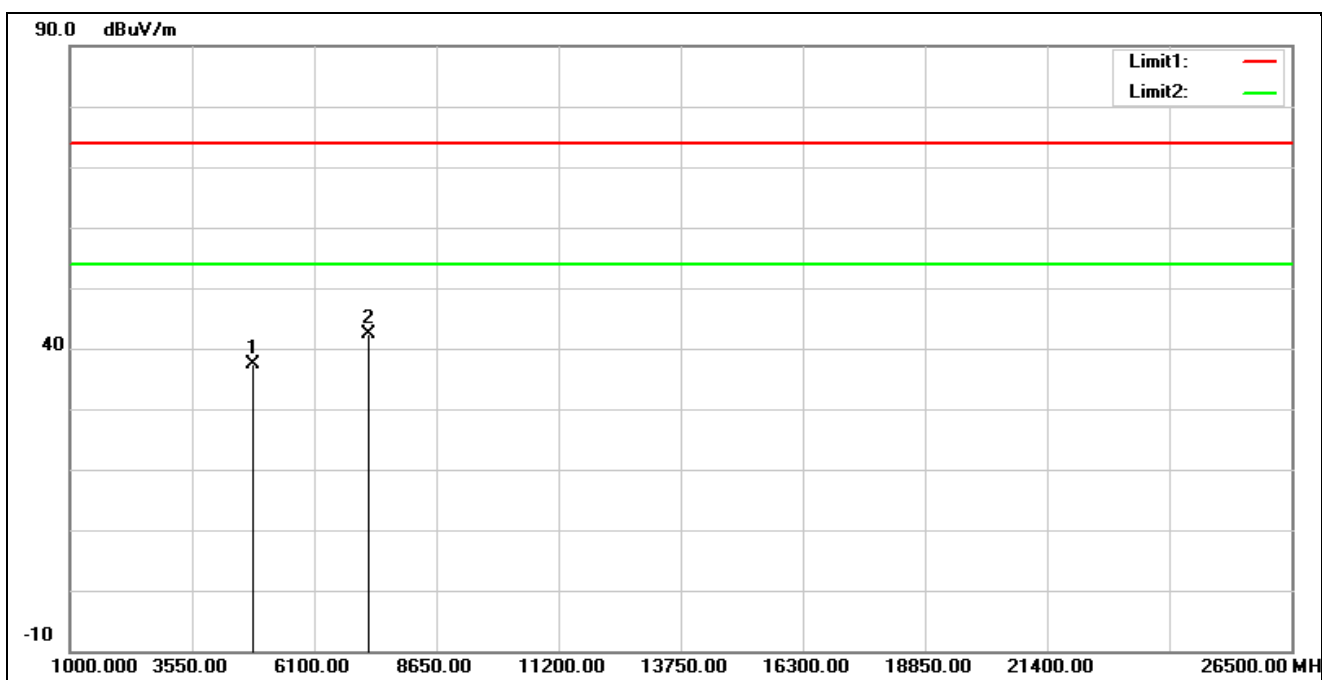


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.16	0.28	37.44	74.00	-36.56	peak
2*	7236.000	34.45	7.96	42.41	74.00	-31.59	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

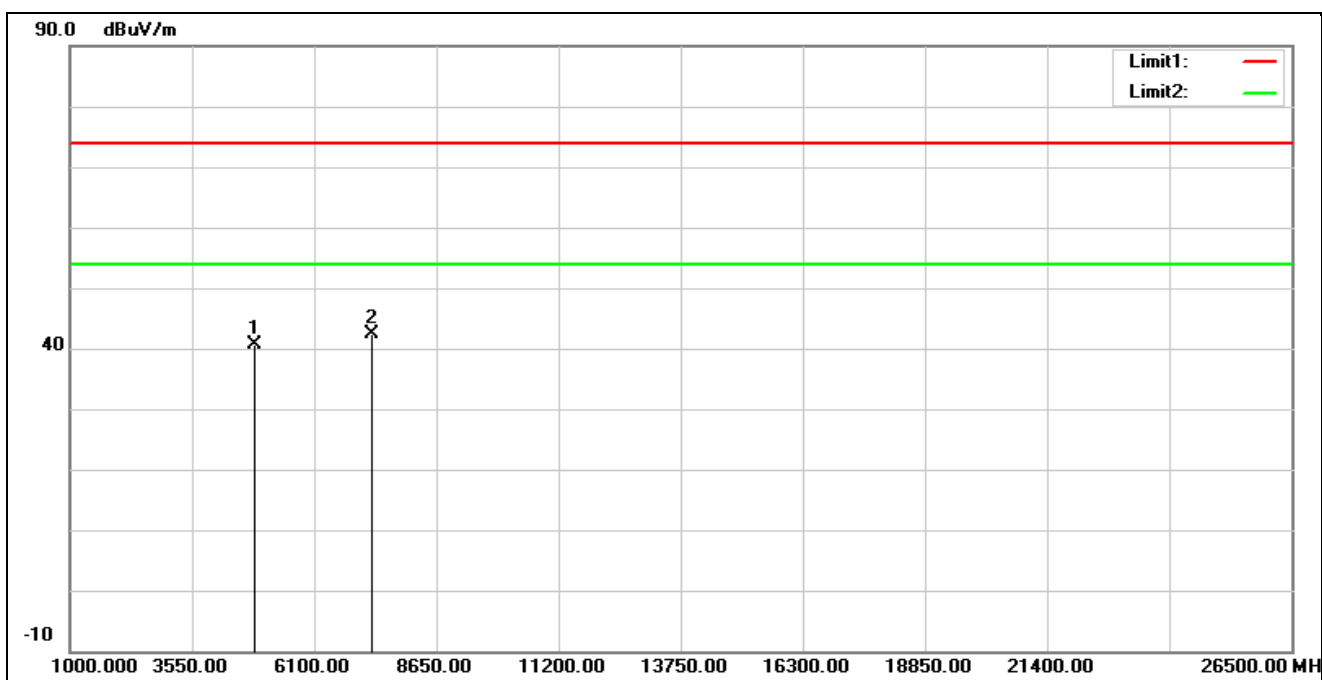

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	40.30	0.36	40.66	74.00	-33.34	peak
2*	7311.000	34.52	7.98	42.50	74.00	-31.50	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

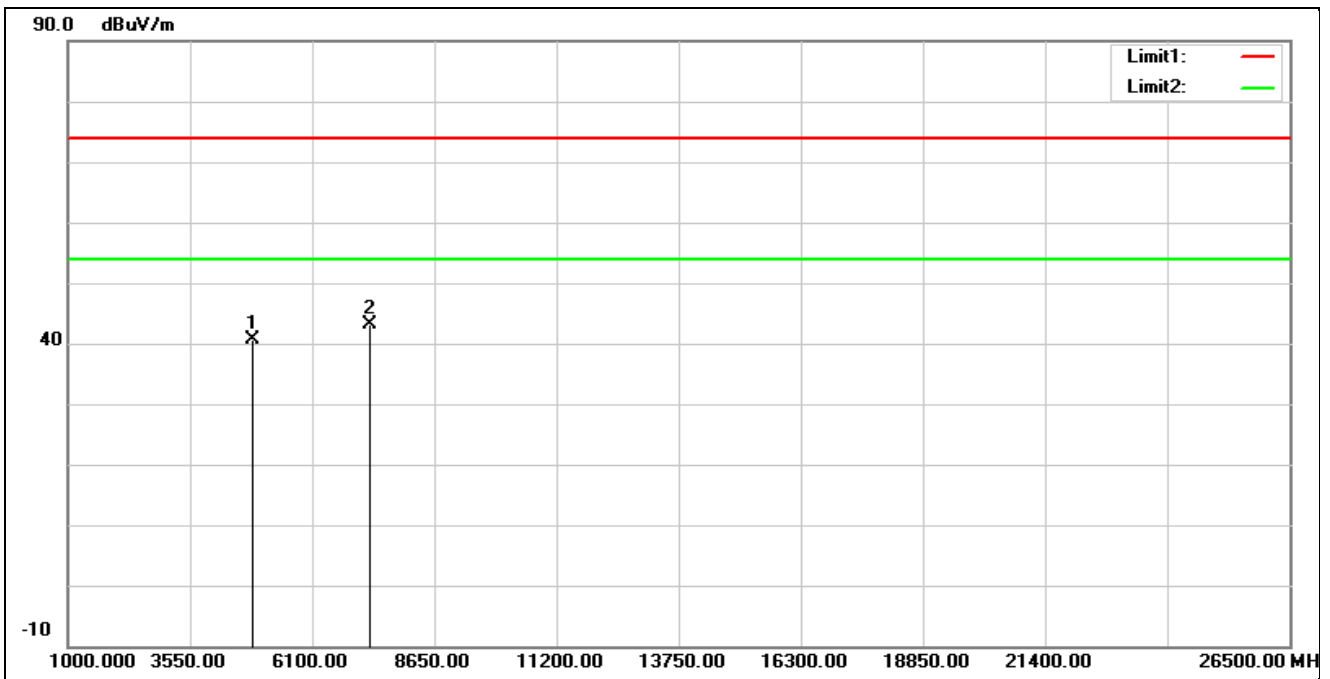

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	40.30	0.36	40.66	74.00	-33.34	peak
2*	7311.000	35.10	7.98	43.08	74.00	-30.92	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

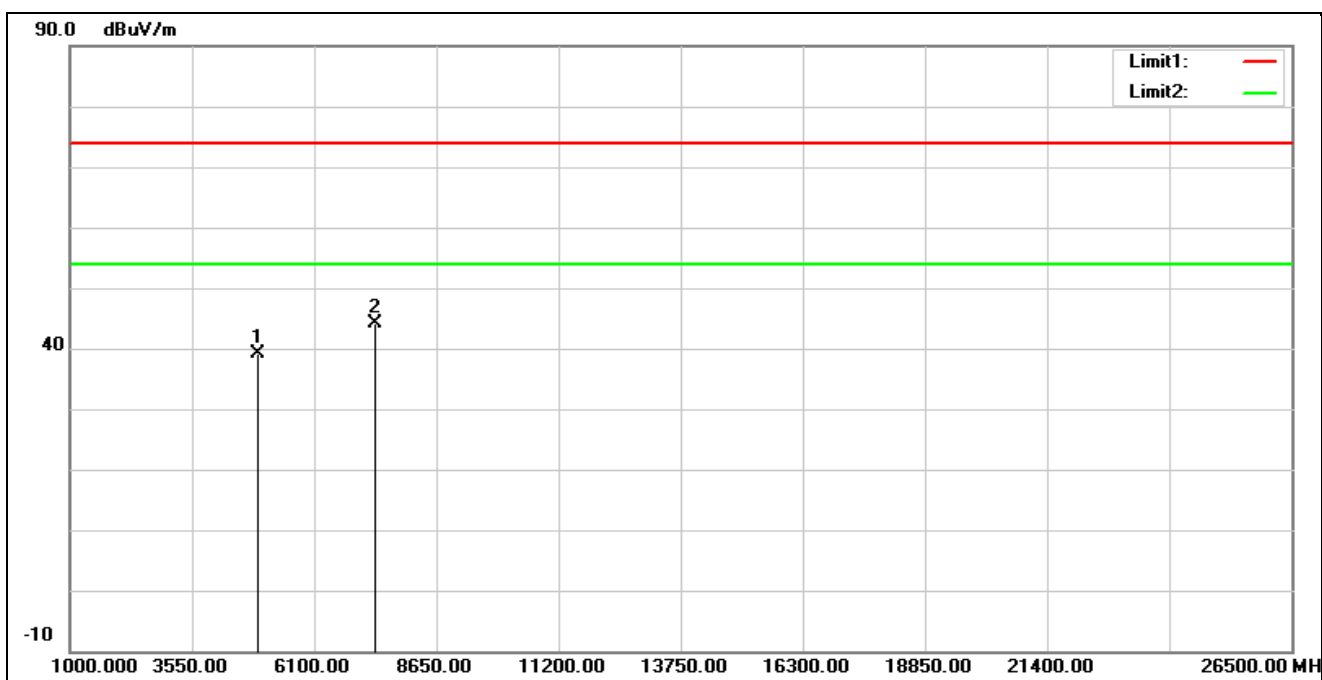


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.73	0.50	39.23	74.00	-34.77	peak
2*	7386.000	35.99	8.11	44.10	74.00	-29.90	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

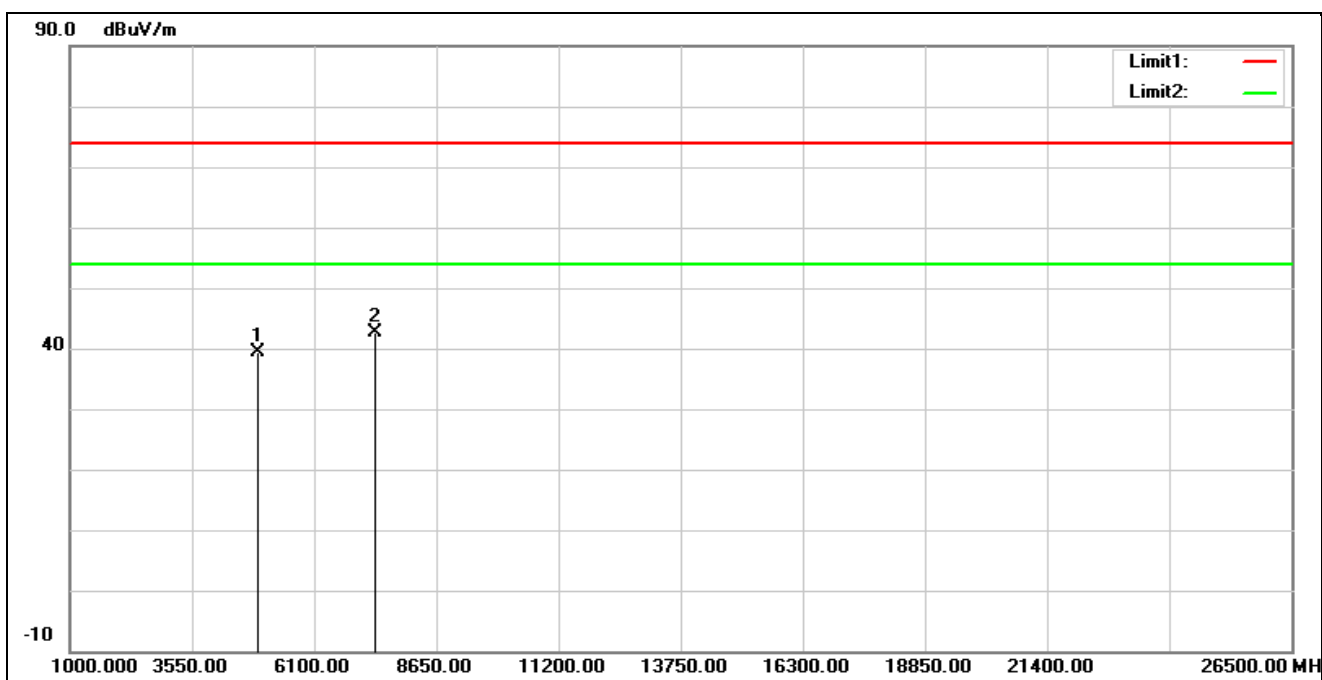


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.78	0.50	39.28	74.00	-34.72	peak
2*	7386.000	34.41	8.11	42.52	74.00	-31.48	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

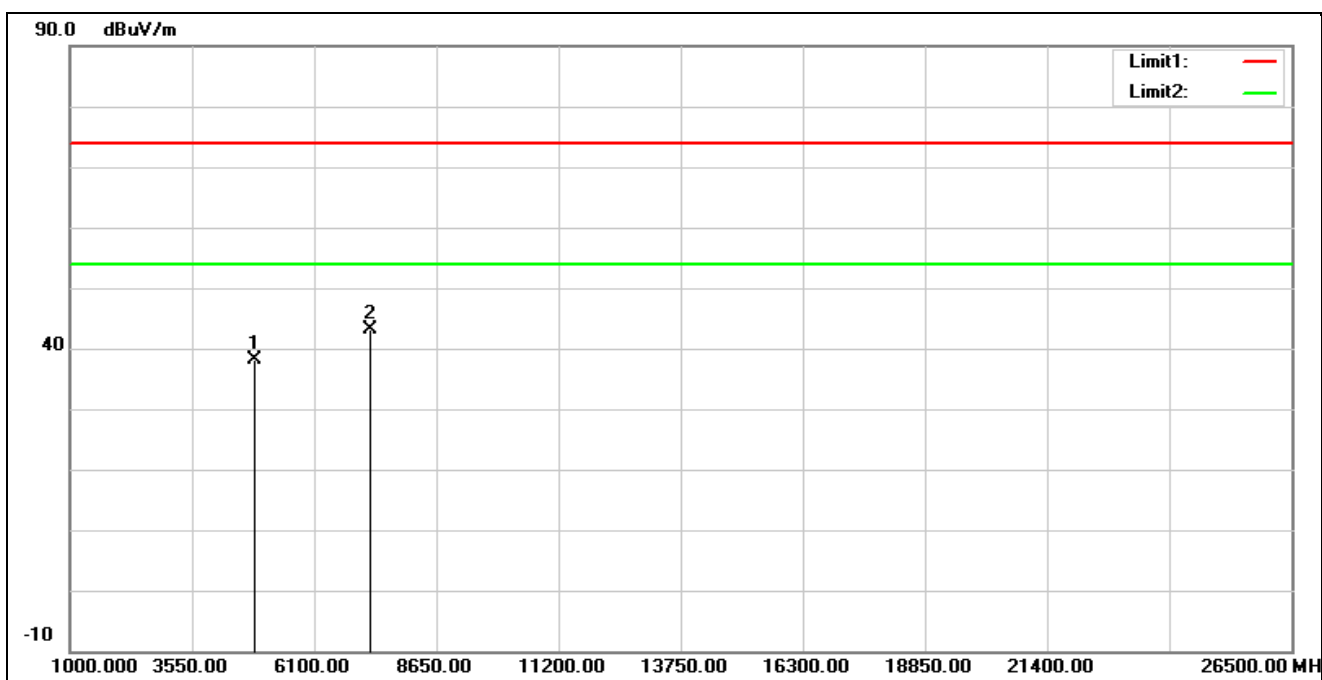


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.84	0.28	38.12	74.00	-35.88	peak
2*	7266.000	35.12	8.02	43.14	74.00	-30.86	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

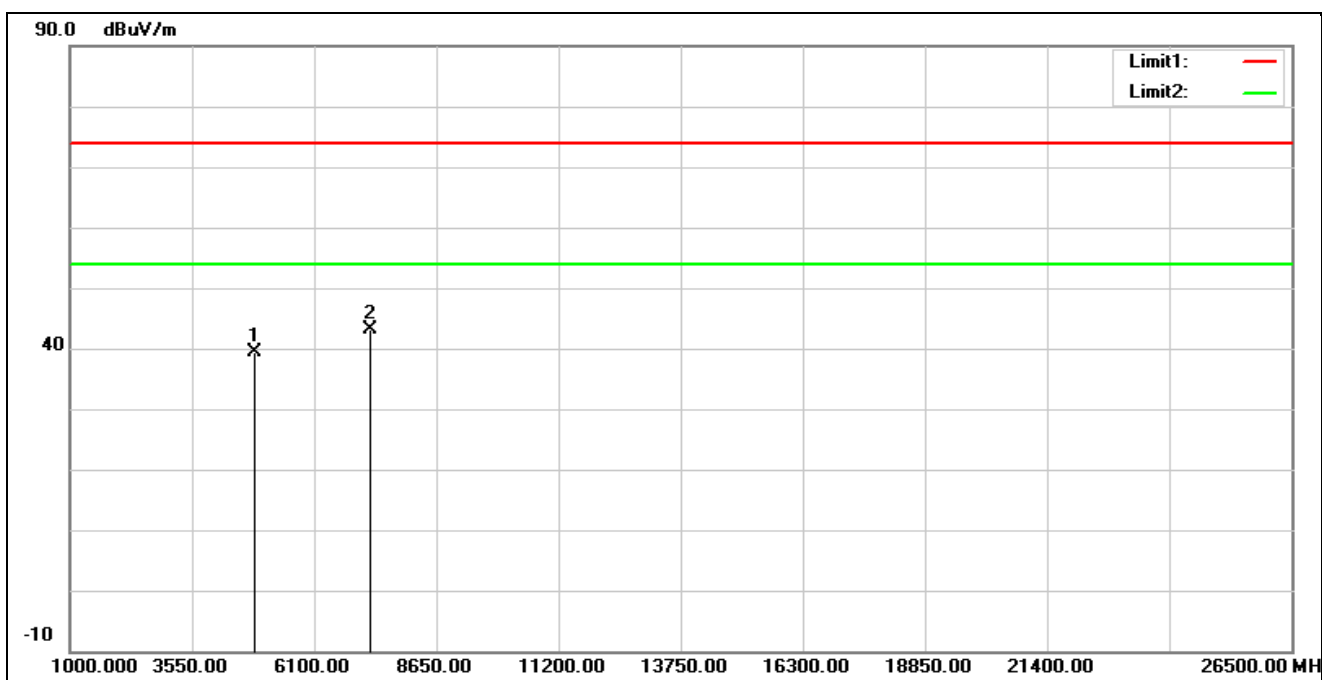


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	39.00	0.28	39.28	74.00	-34.72	peak
2*	7266.000	35.17	8.02	43.19	74.00	-30.81	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

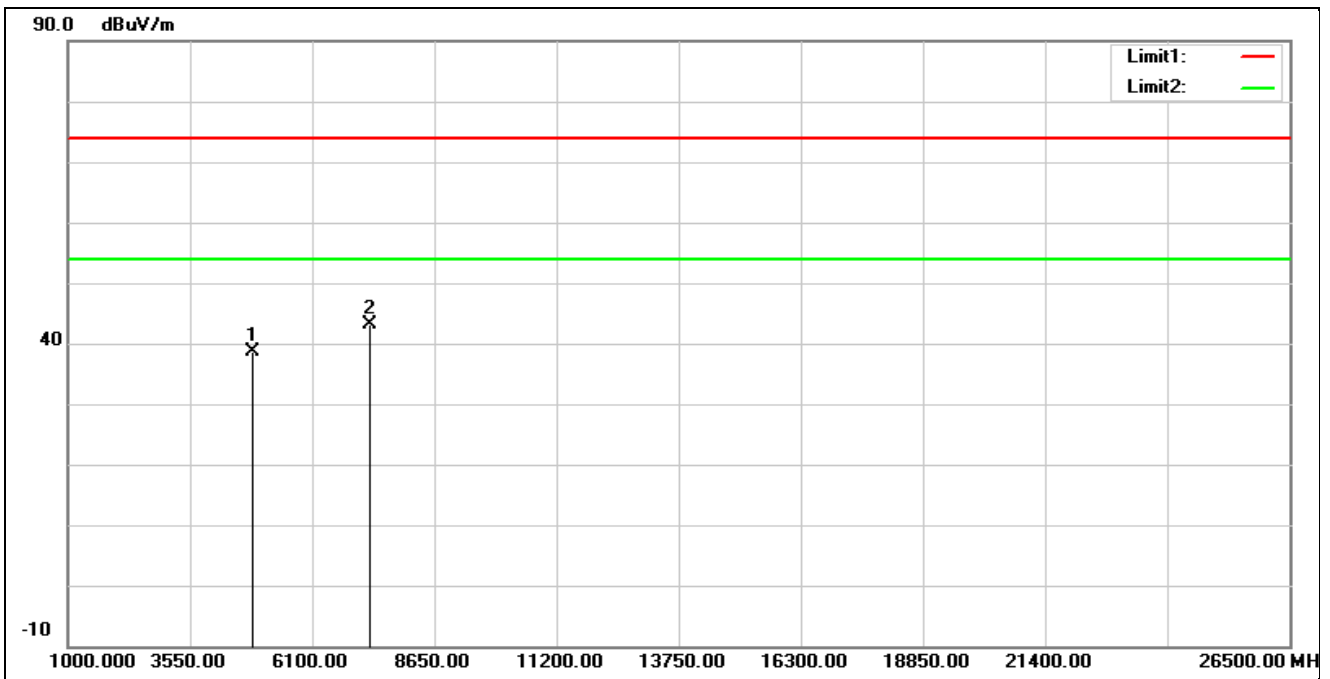


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.16	0.36	38.52	74.00	-35.48	peak
2*	7311.000	35.25	7.98	43.23	74.00	-30.77	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

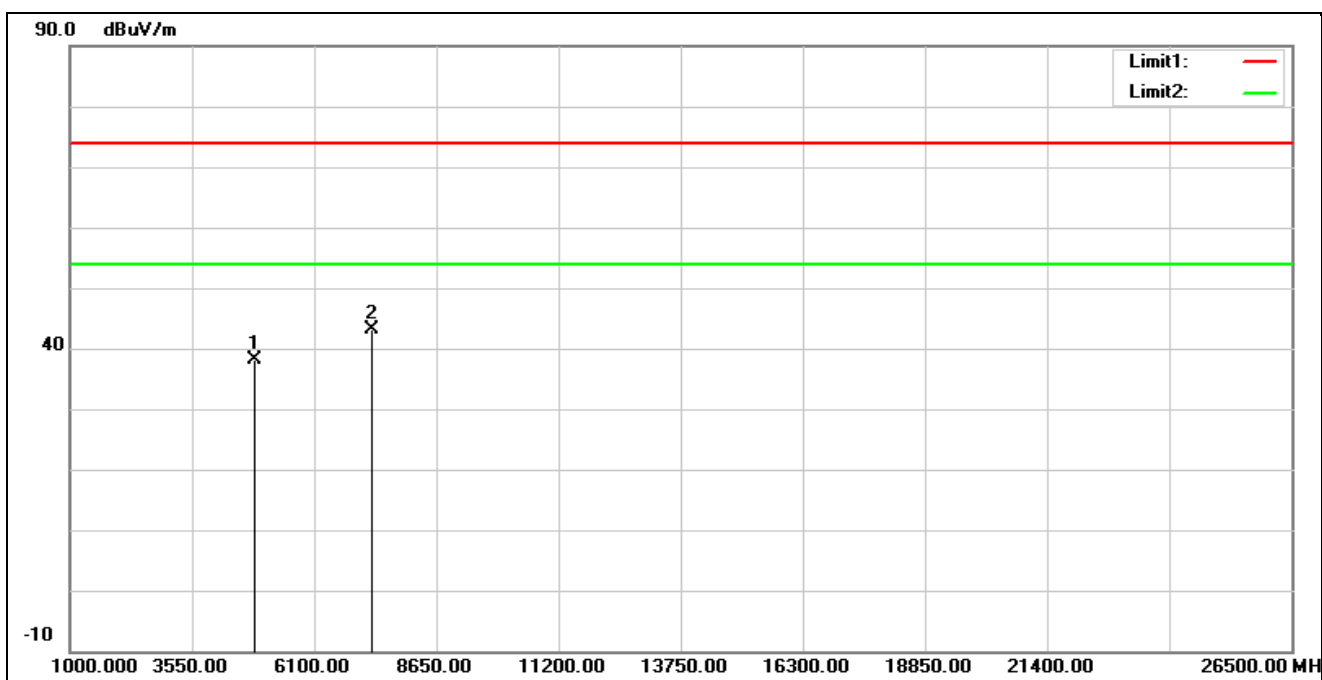


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.67	0.36	38.03	74.00	-35.97	peak
2*	7311.000	35.06	7.98	43.04	74.00	-30.96	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

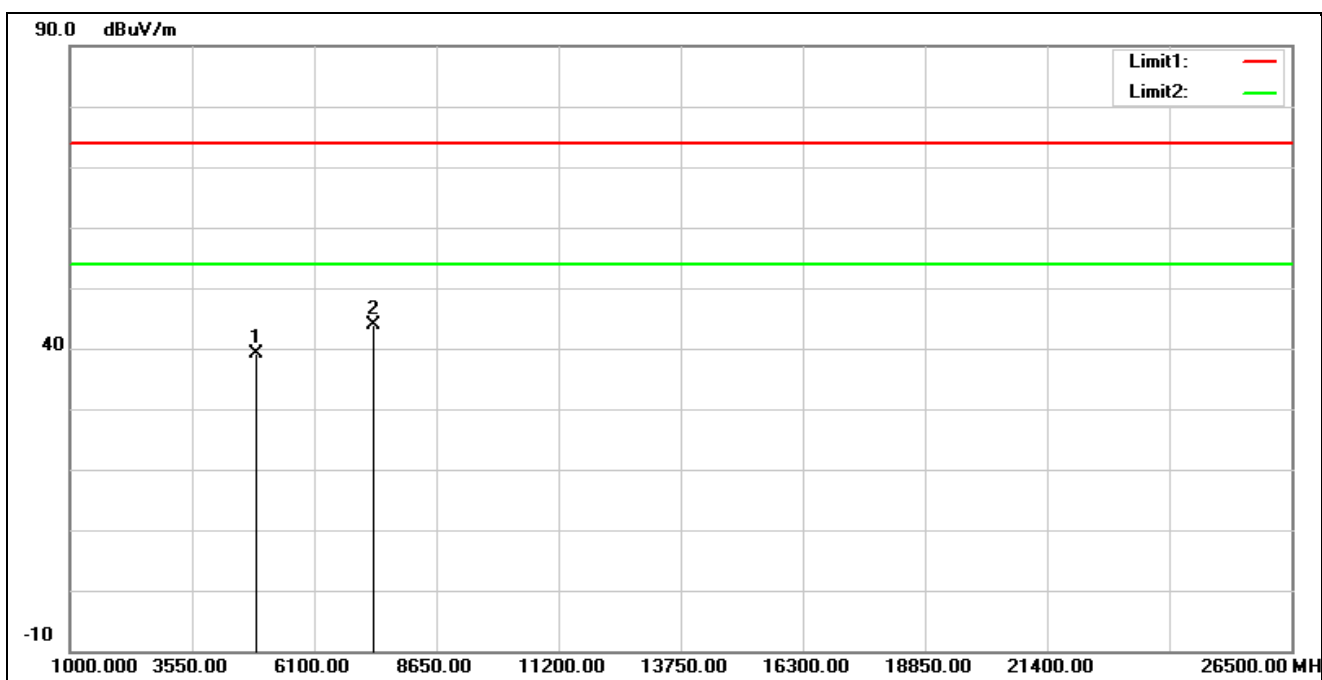

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.68	0.46	39.14	74.00	-34.86	peak
2*	7356.000	35.76	8.02	43.78	74.00	-30.22	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

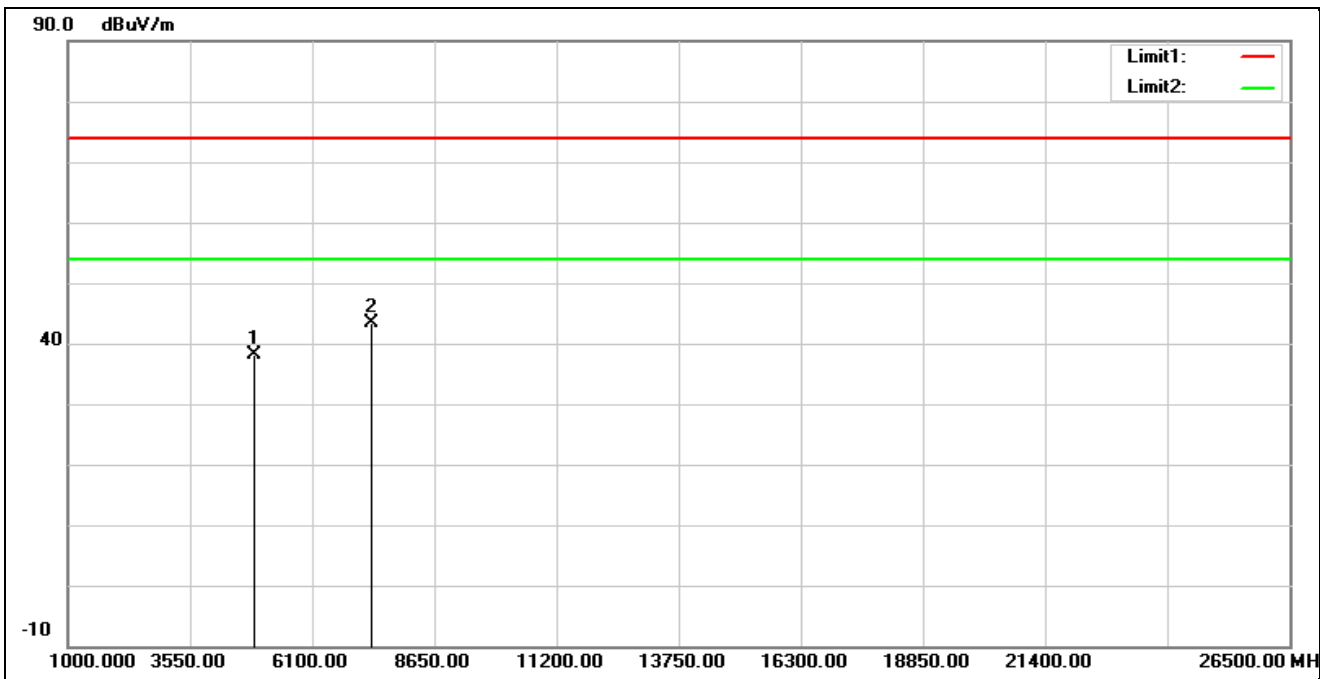


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.73	0.46	38.19	74.00	-35.81	peak
2*	7356.000	35.46	8.02	43.48	74.00	-30.52	peak



## Band Edge


Beamforming on - Peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

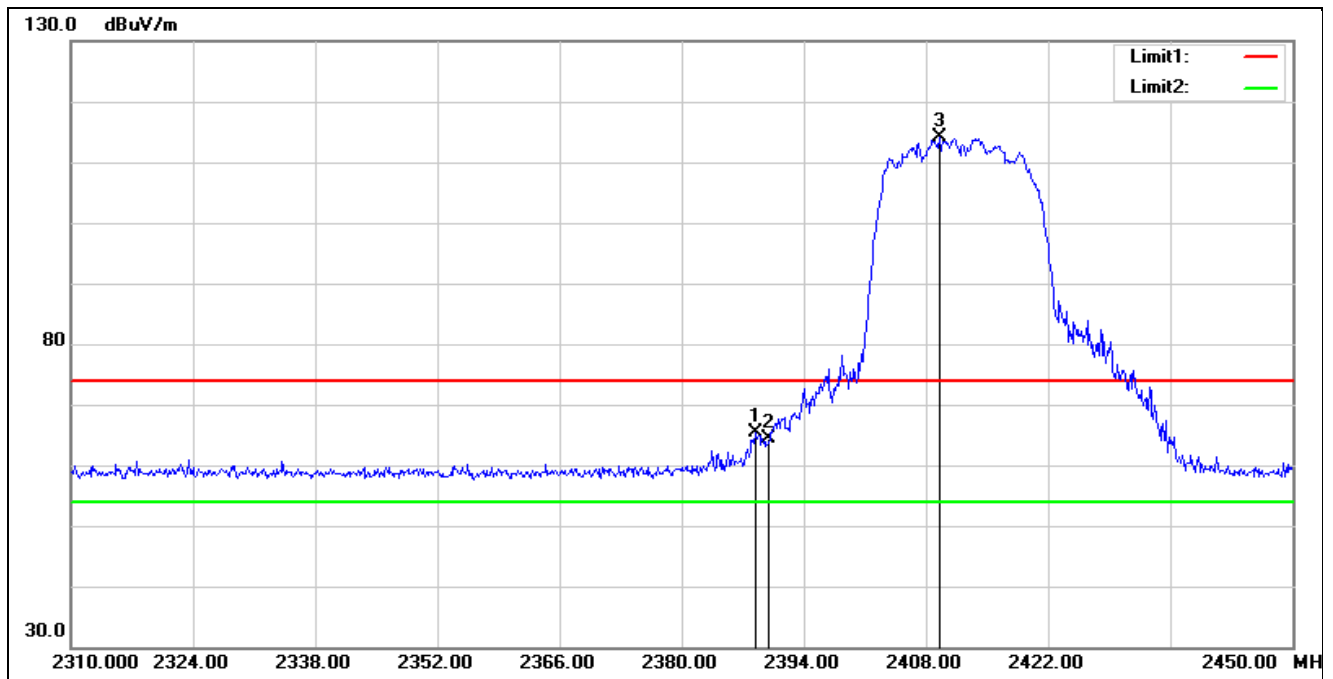


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	71.83	-6.50	65.33	74.00	-8.67	peak
2	2390.000	71.00	-6.50	64.50	74.00	-9.50	peak
3*	2409.540	120.72	-6.51	114.21	74.00	40.21	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

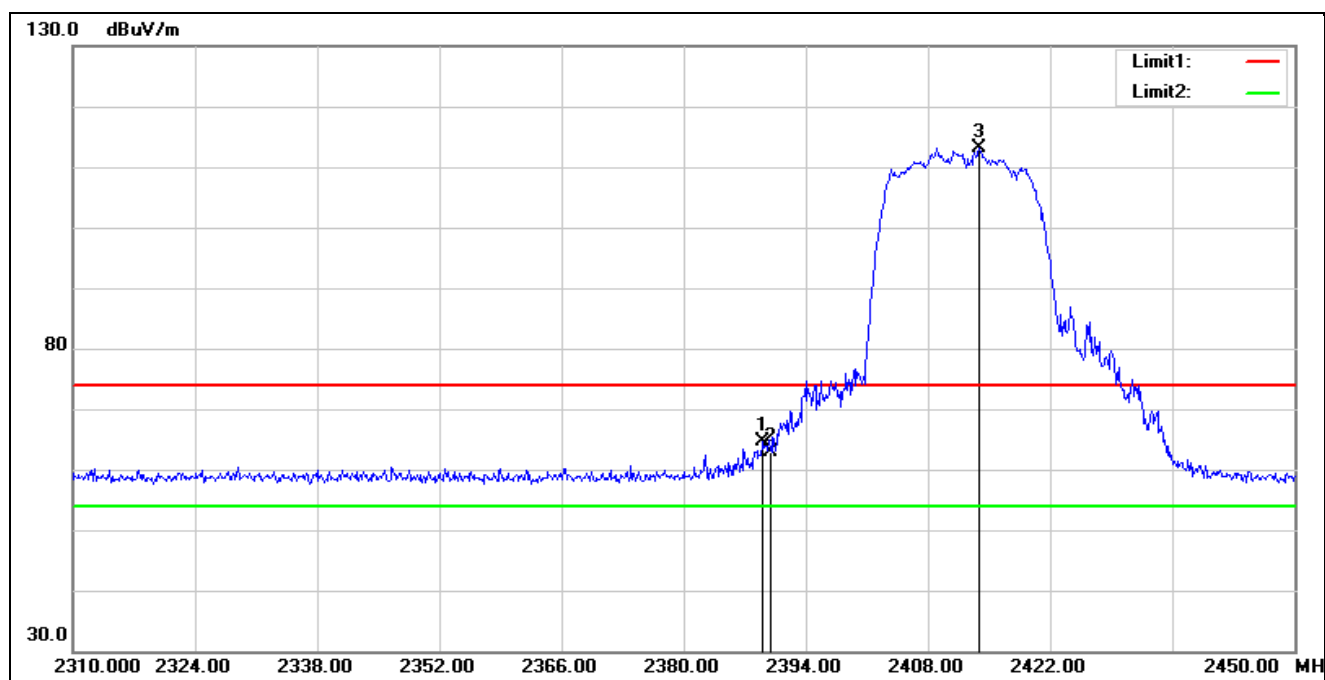


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.100	71.21	-6.50	64.71	74.00	-9.29	peak
2	2390.000	69.43	-6.50	62.93	74.00	-11.07	peak
3*	2413.880	119.67	-6.52	113.15	74.00	39.15	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

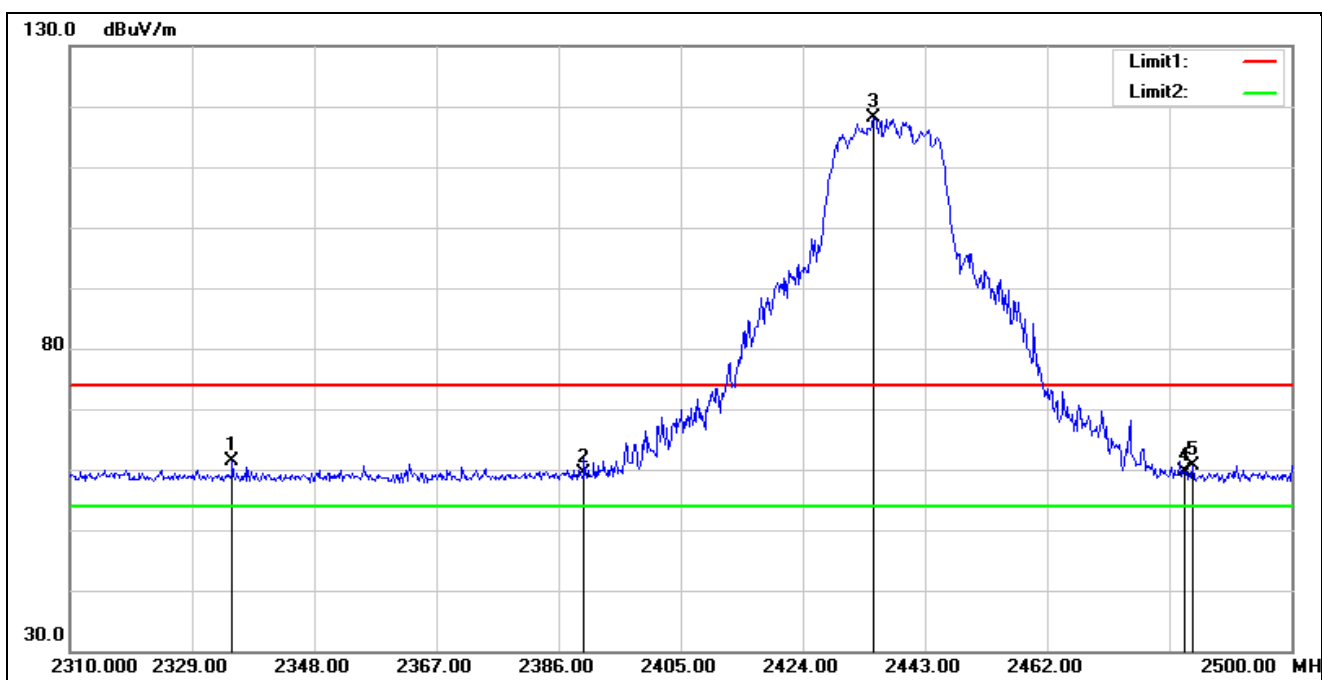


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2335.270	67.82	-6.41	61.41	74.00	-12.59	peak
2	2390.000	65.98	-6.50	59.48	74.00	-14.52	peak
3*	2435.020	124.73	-6.54	118.19	74.00	44.19	peak
4	2483.500	66.27	-6.57	59.70	74.00	-14.30	peak
5	2484.610	67.18	-6.57	60.61	74.00	-13.39	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

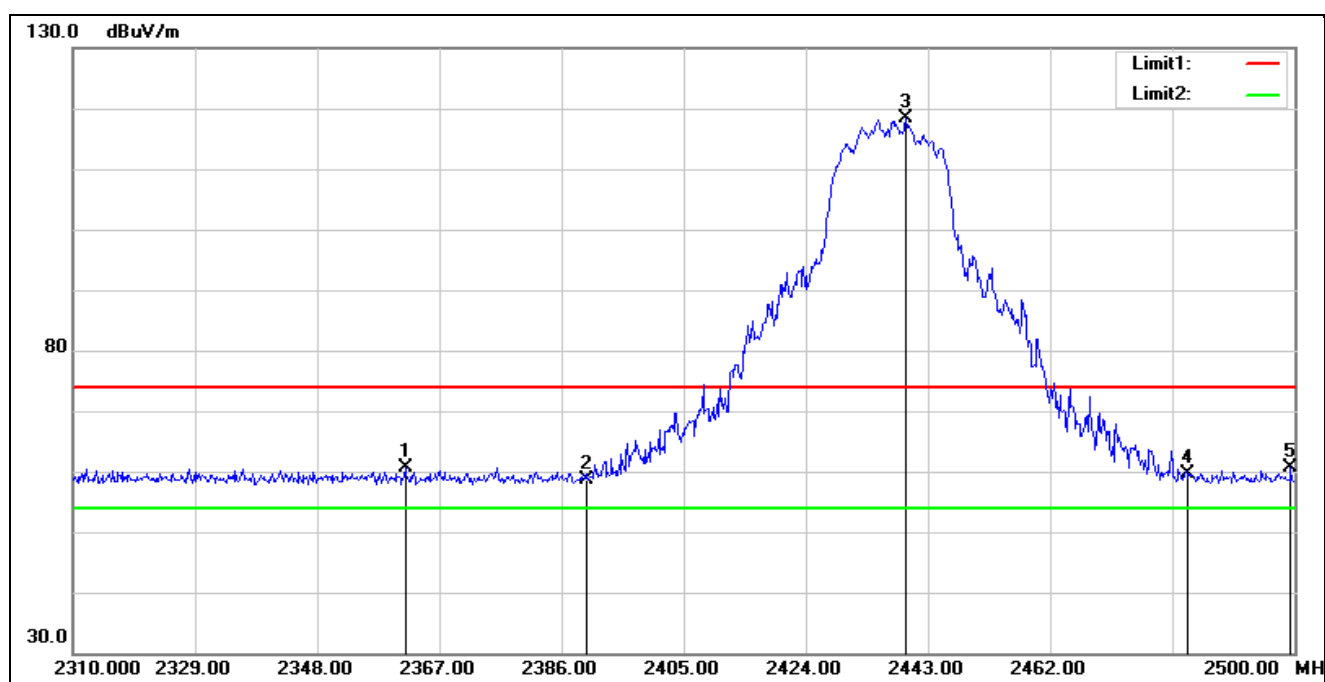


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.680	67.16	-6.47	60.69	74.00	-13.31	peak
2	2390.000	65.18	-6.50	58.68	74.00	-15.32	peak
3*	2439.580	125.04	-6.54	118.50	74.00	44.50	peak
4	2483.500	66.14	-6.57	59.57	74.00	-14.43	peak
5	2499.430	67.21	-6.59	60.62	74.00	-13.38	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

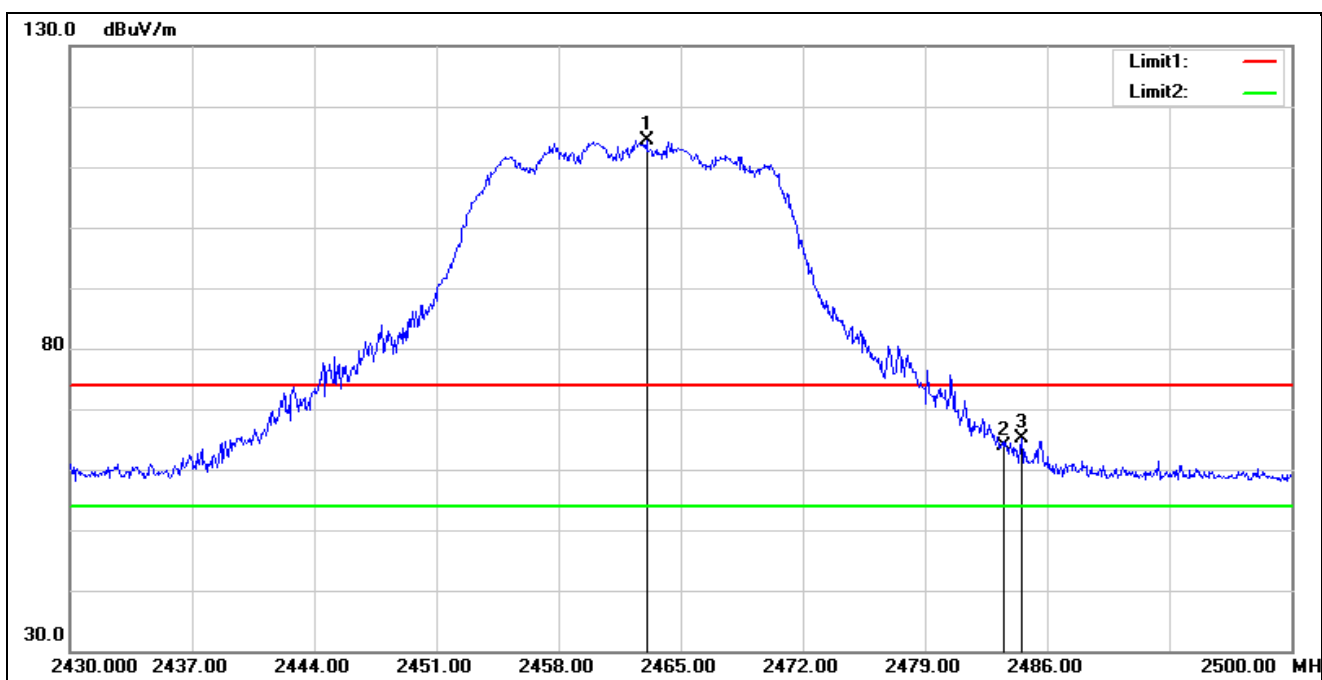


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.040	120.89	-6.56	114.33	74.00	40.33	peak
2	2483.500	70.44	-6.57	63.87	74.00	-10.13	peak
3	2484.530	71.66	-6.57	65.09	74.00	-8.91	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

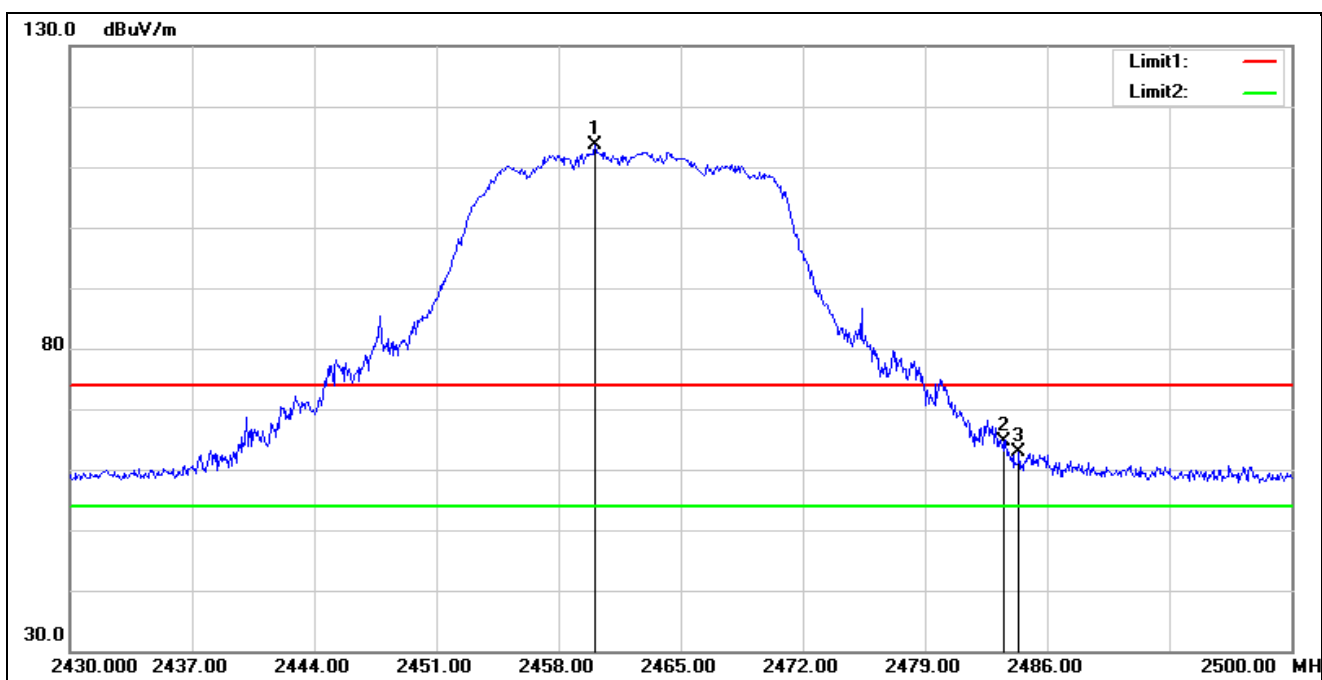


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.100	120.20	-6.56	113.64	74.00	39.64	peak
2	2483.500	71.19	-6.57	64.62	74.00	-9.38	peak
3	2484.390	69.47	-6.57	62.90	74.00	-11.10	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

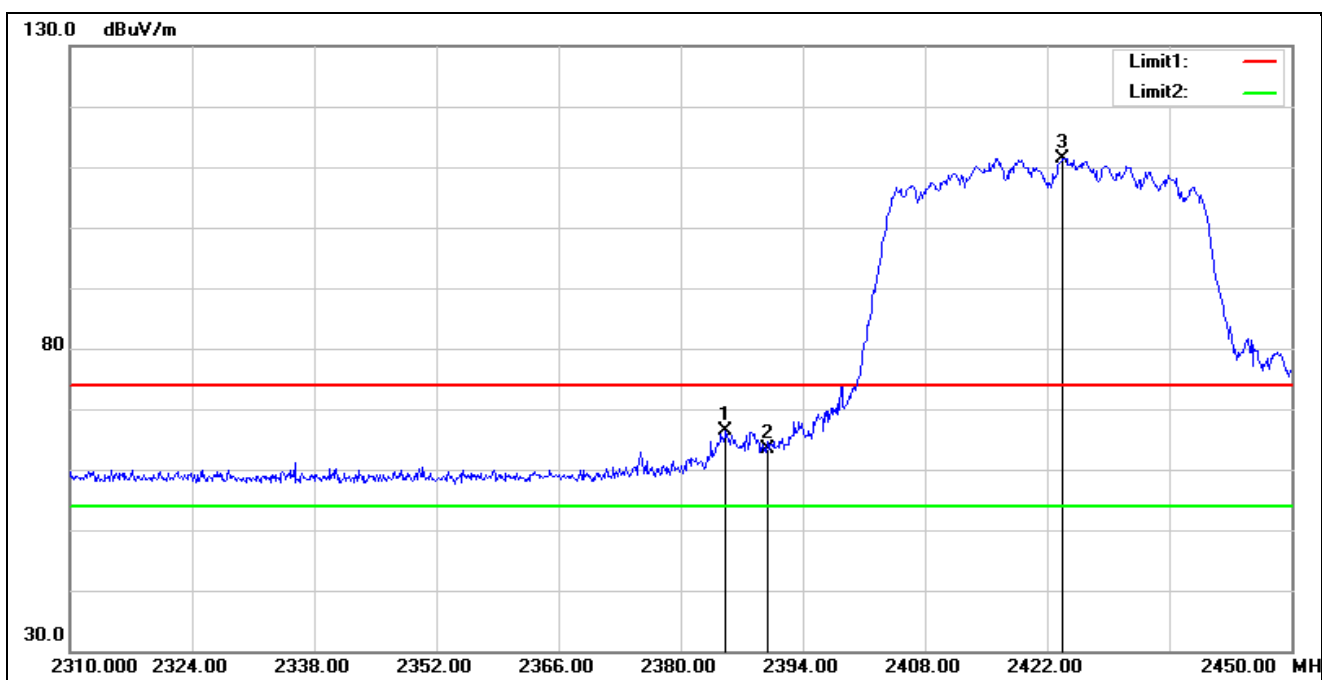

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.180	72.79	-6.49	66.30	74.00	-7.70	peak
2	2390.000	69.91	-6.50	63.41	74.00	-10.59	peak
3*	2423.820	118.03	-6.53	111.50	74.00	37.50	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

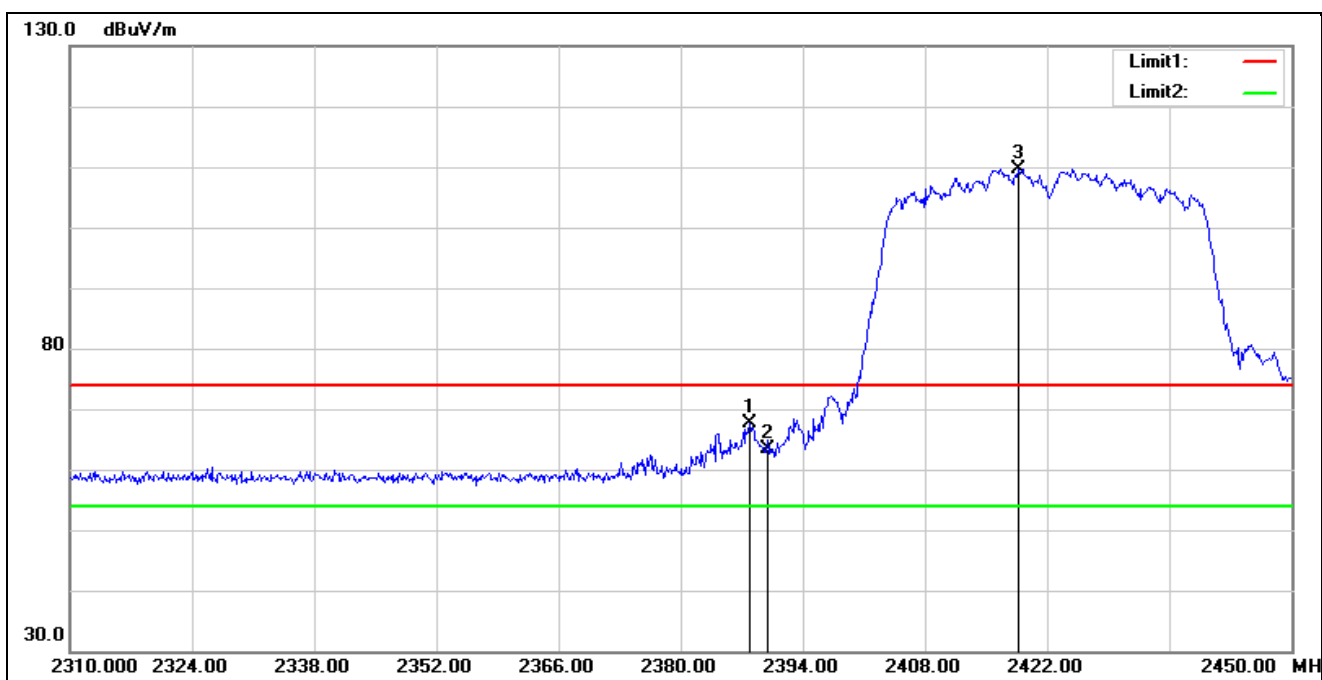

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.840	74.16	-6.50	67.66	74.00	-6.34	peak
2	2390.000	69.92	-6.50	63.42	74.00	-10.58	peak
3*	2418.640	116.25	-6.52	109.73	74.00	35.73	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

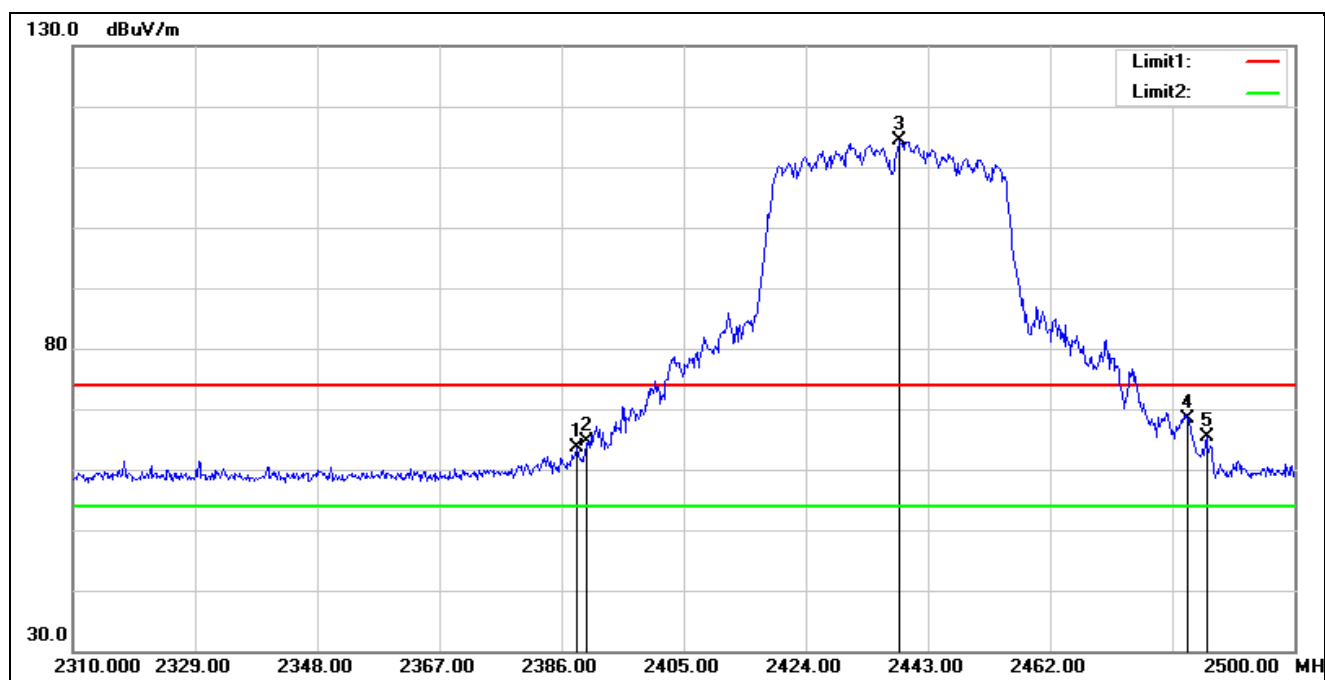


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.470	70.11	-6.50	63.61	74.00	-10.39	peak
2	2390.000	71.08	-6.50	64.58	74.00	-9.42	peak
3*	2438.440	120.98	-6.54	114.44	74.00	40.44	peak
4	2483.500	74.85	-6.57	68.28	74.00	-5.72	peak
5	2486.320	72.02	-6.57	65.45	74.00	-8.55	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

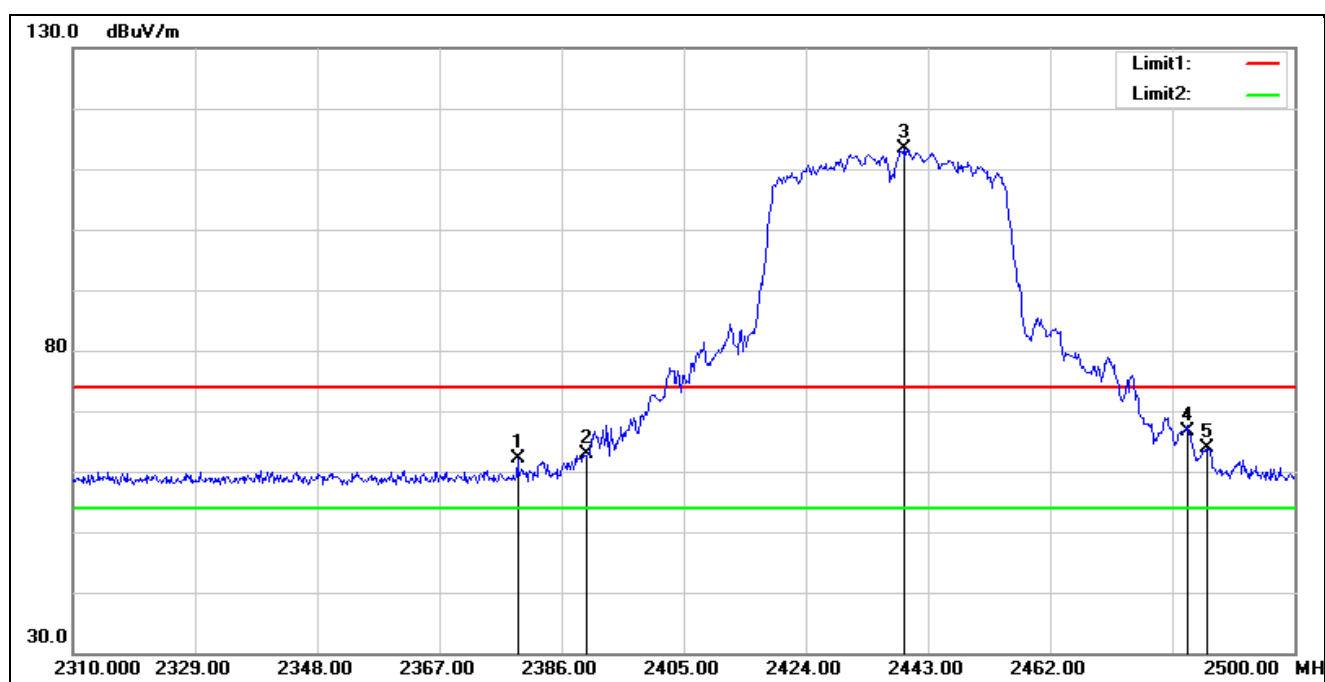


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.160	68.52	-6.49	62.03	74.00	-11.97	peak
2	2390.000	69.32	-6.50	62.82	74.00	-11.18	peak
3*	2439.200	119.80	-6.54	113.26	74.00	39.26	peak
4	2483.500	73.15	-6.57	66.58	74.00	-7.42	peak
5	2486.320	70.38	-6.57	63.81	74.00	-10.19	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

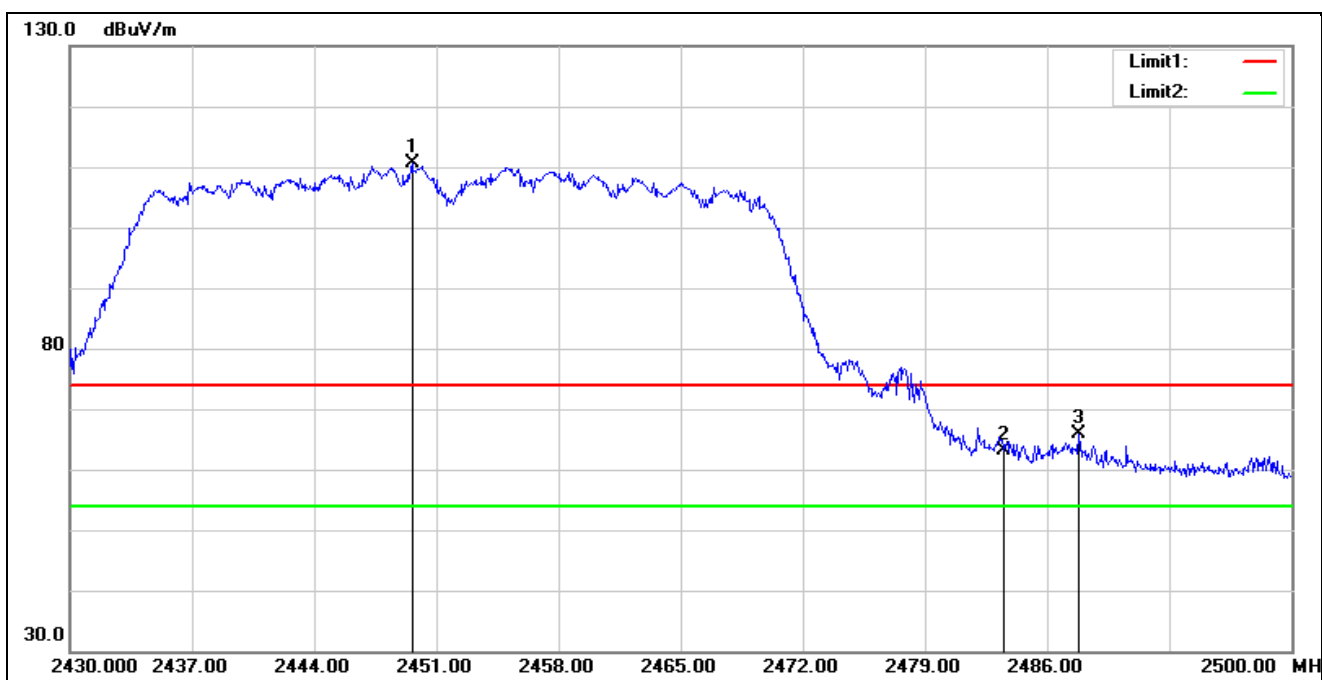


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2449.600	117.16	-6.54	110.62	74.00	36.62	peak
2	2483.500	69.76	-6.57	63.19	74.00	-10.81	peak
3	2487.820	72.47	-6.58	65.89	74.00	-8.11	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

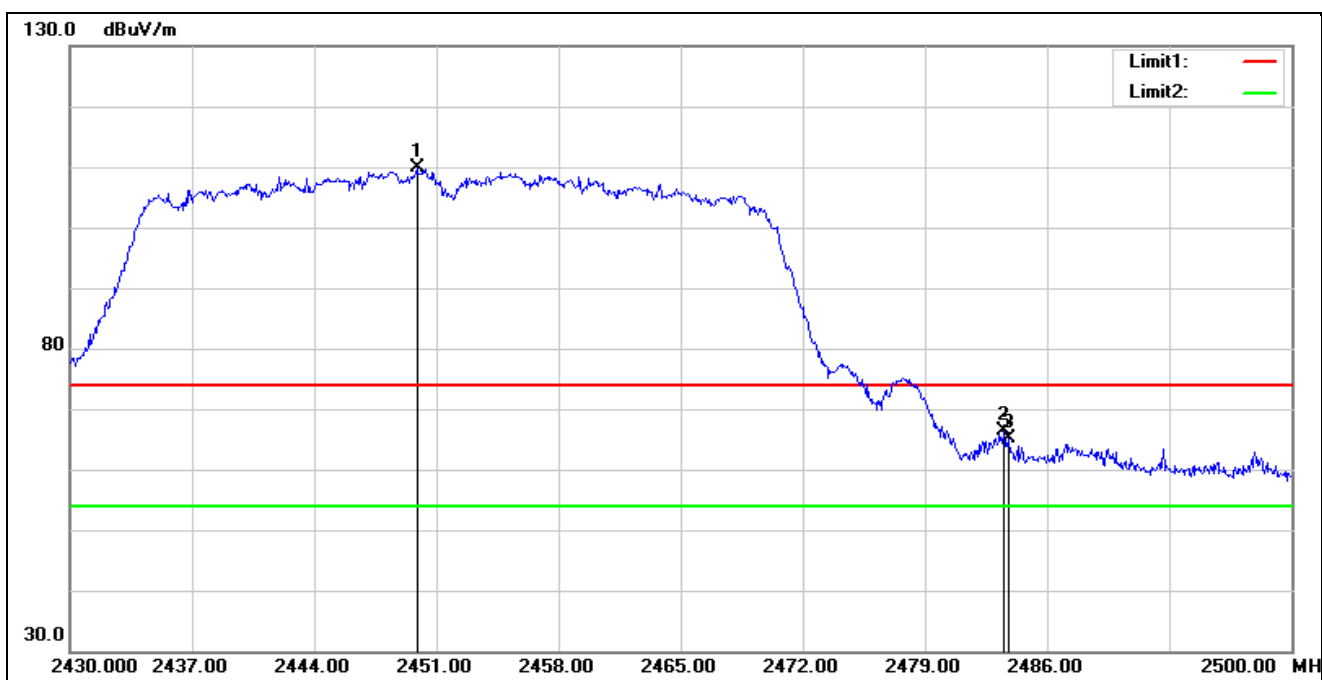


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2449.880	116.35	-6.54	109.81	74.00	35.81	peak
2	2483.500	73.00	-6.57	66.43	74.00	-7.57	peak
3	2483.760	71.65	-6.57	65.08	74.00	-8.92	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

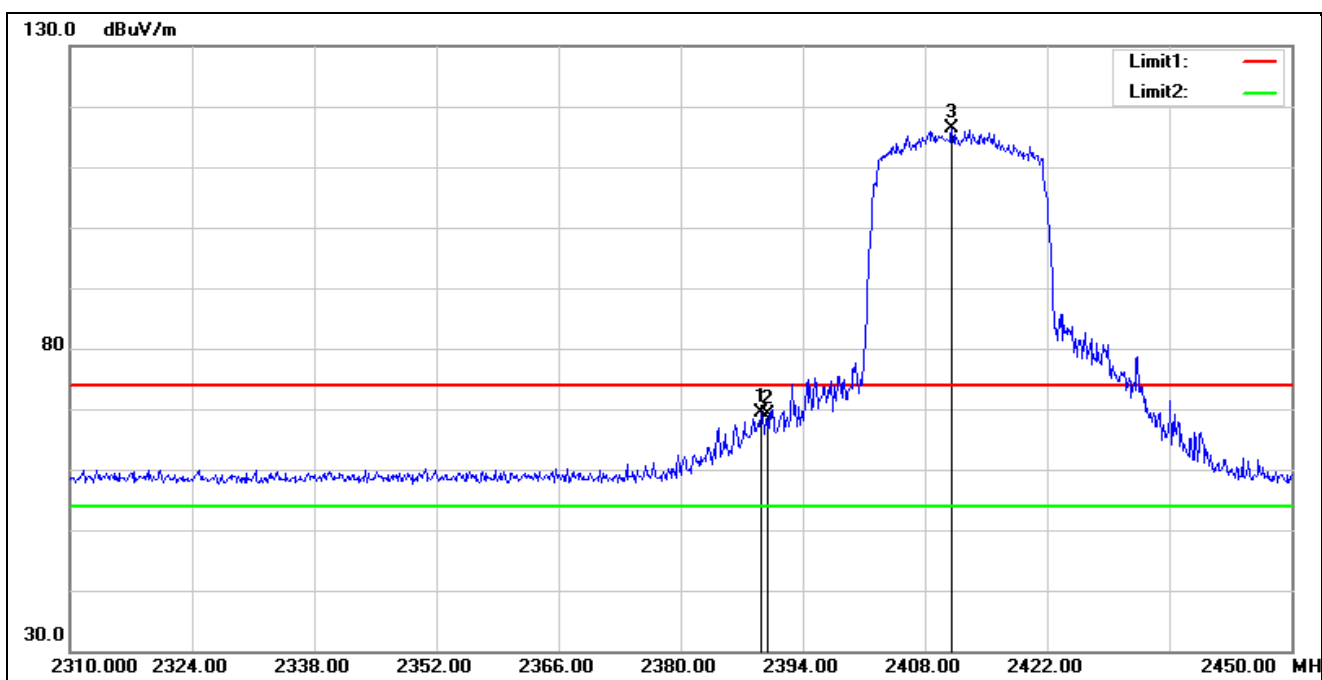


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	75.47	-6.19	69.28	74.00	-4.72	peak
2	2390.000	75.35	-6.19	69.16	74.00	-4.84	peak
3*	2411.080	122.54	-6.26	116.28	74.00	42.28	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

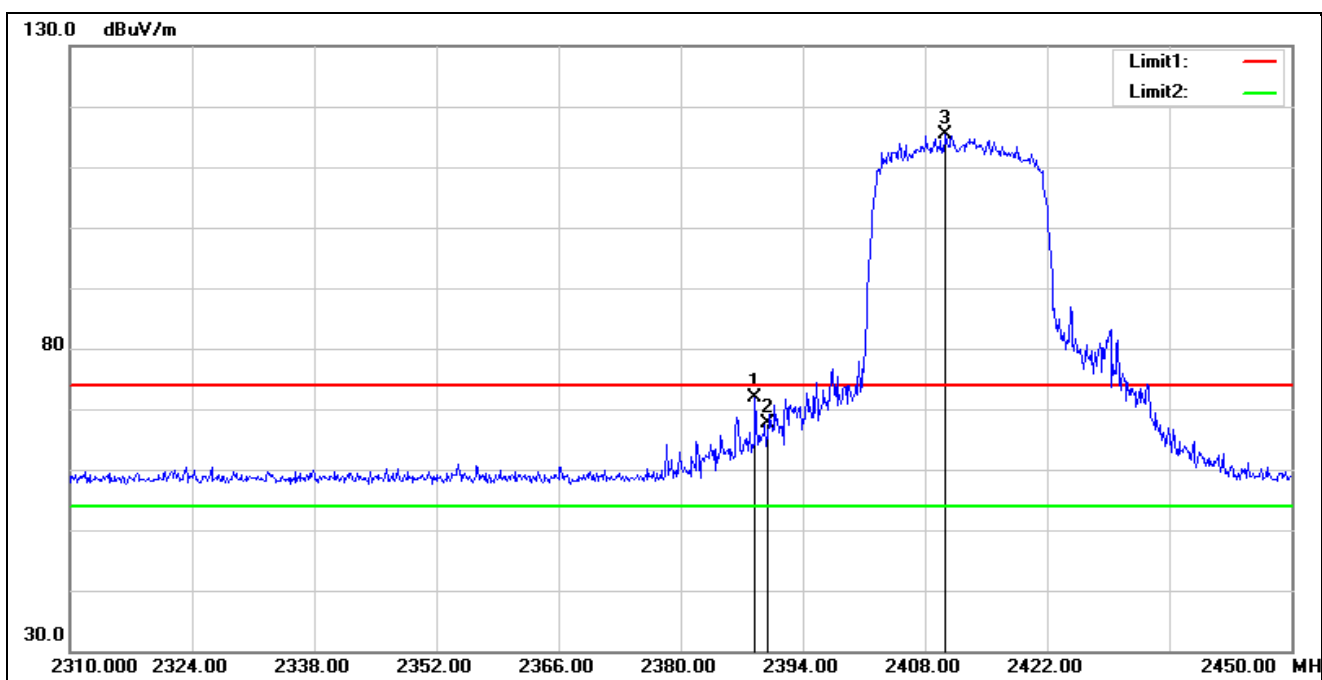


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	78.12	-6.18	71.94	74.00	-2.06	peak
2	2390.000	73.82	-6.19	67.63	74.00	-6.37	peak
3*	2410.380	121.55	-6.26	115.29	74.00	41.29	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

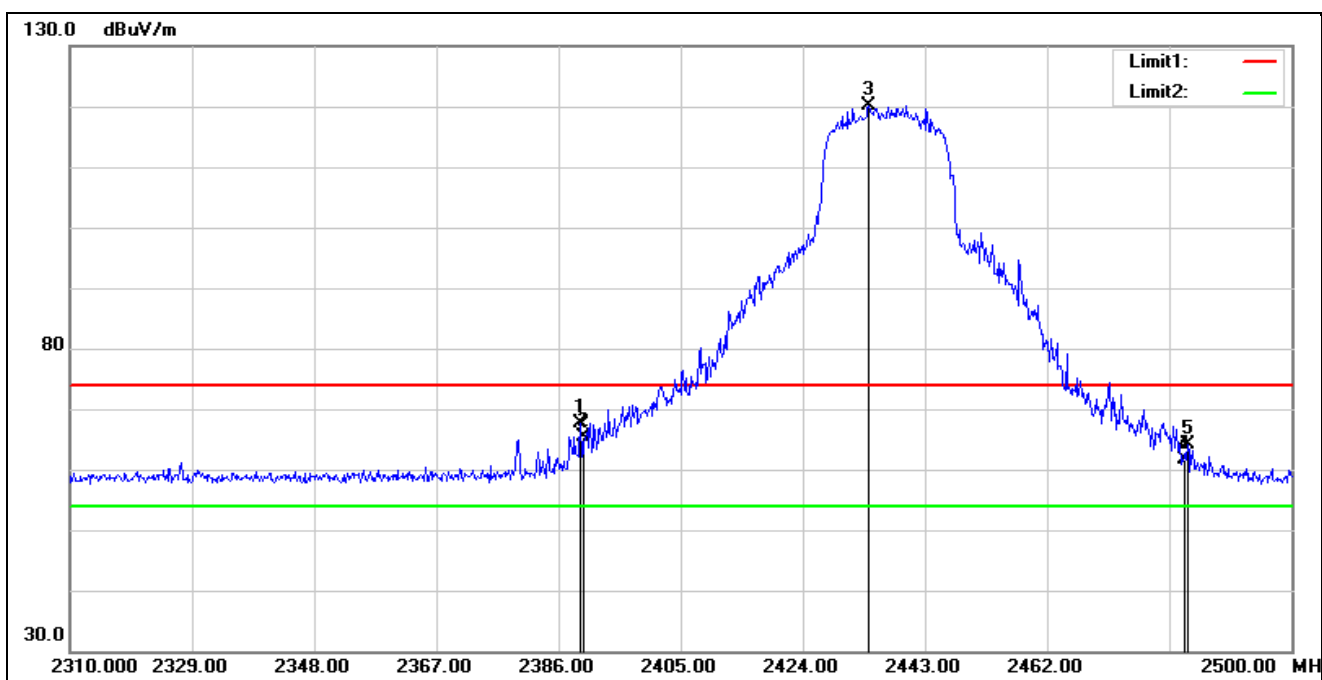

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	73.79	-6.19	67.60	74.00	-6.40	peak
2	2390.000	71.68	-6.19	65.49	74.00	-8.51	peak
3*	2434.260	126.44	-6.34	120.10	74.00	46.10	peak
4	2483.500	68.07	-6.46	61.61	74.00	-12.39	peak
5	2483.850	70.55	-6.47	64.08	74.00	-9.92	peak


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

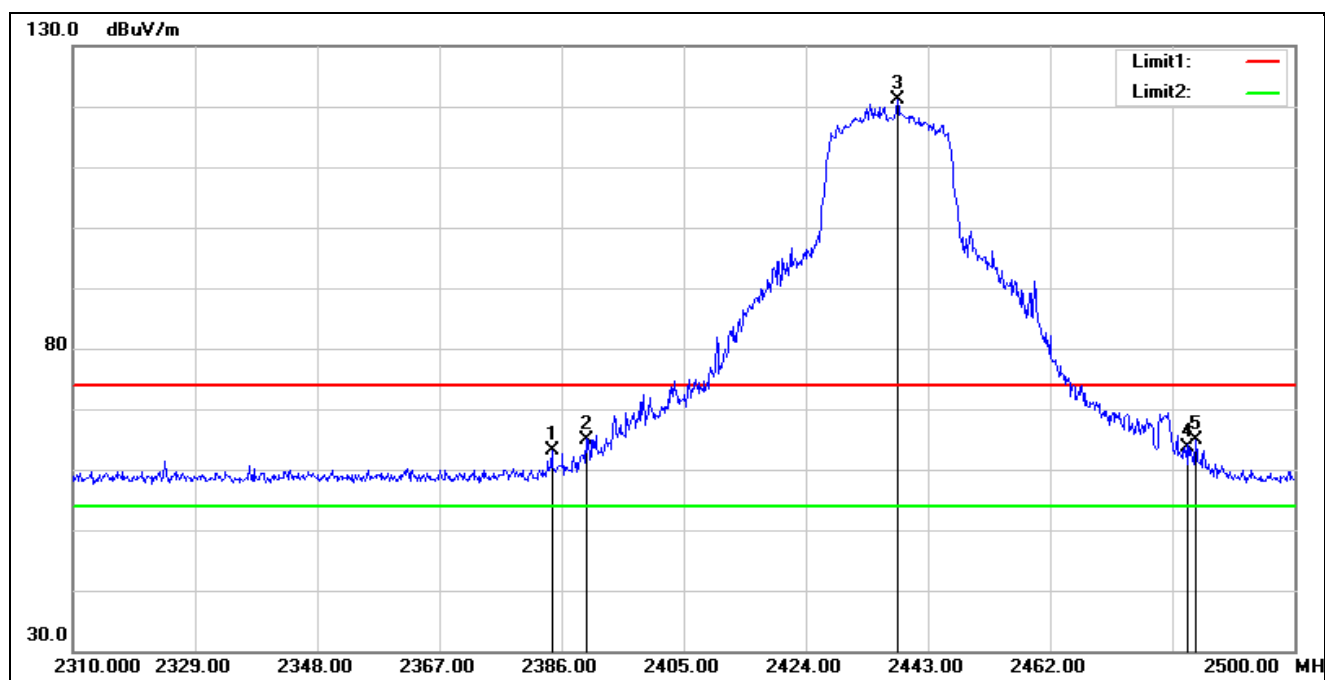

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.480	69.28	-6.17	63.11	74.00	-10.89	peak
2	2390.000	71.19	-6.19	65.00	74.00	-9.00	peak
3*	2438.250	127.39	-6.34	121.05	74.00	47.05	peak
4	2483.500	70.15	-6.46	63.69	74.00	-10.31	peak
5	2484.610	71.31	-6.47	64.84	74.00	-9.16	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

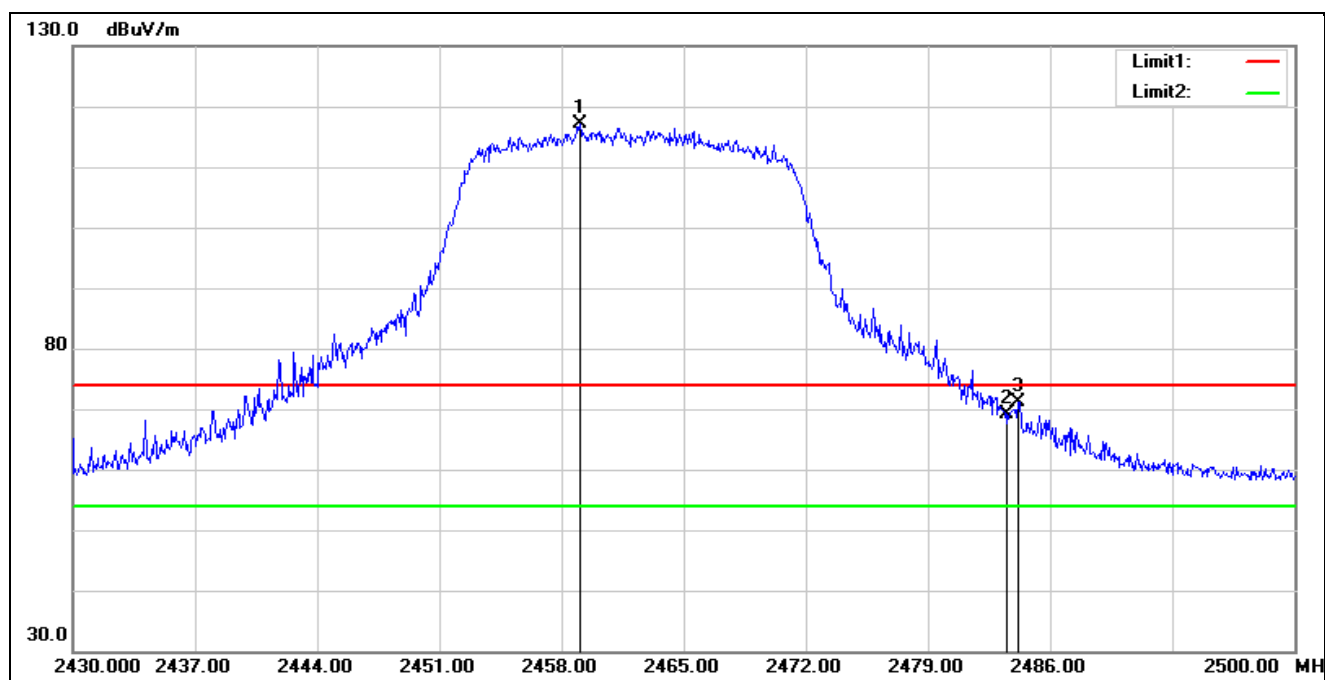


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2459.050	123.42	-6.40	117.02	74.00	43.02	peak
2	2483.500	75.69	-6.46	69.23	74.00	-4.77	peak
3	2484.180	77.68	-6.47	71.21	74.00	-2.79	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

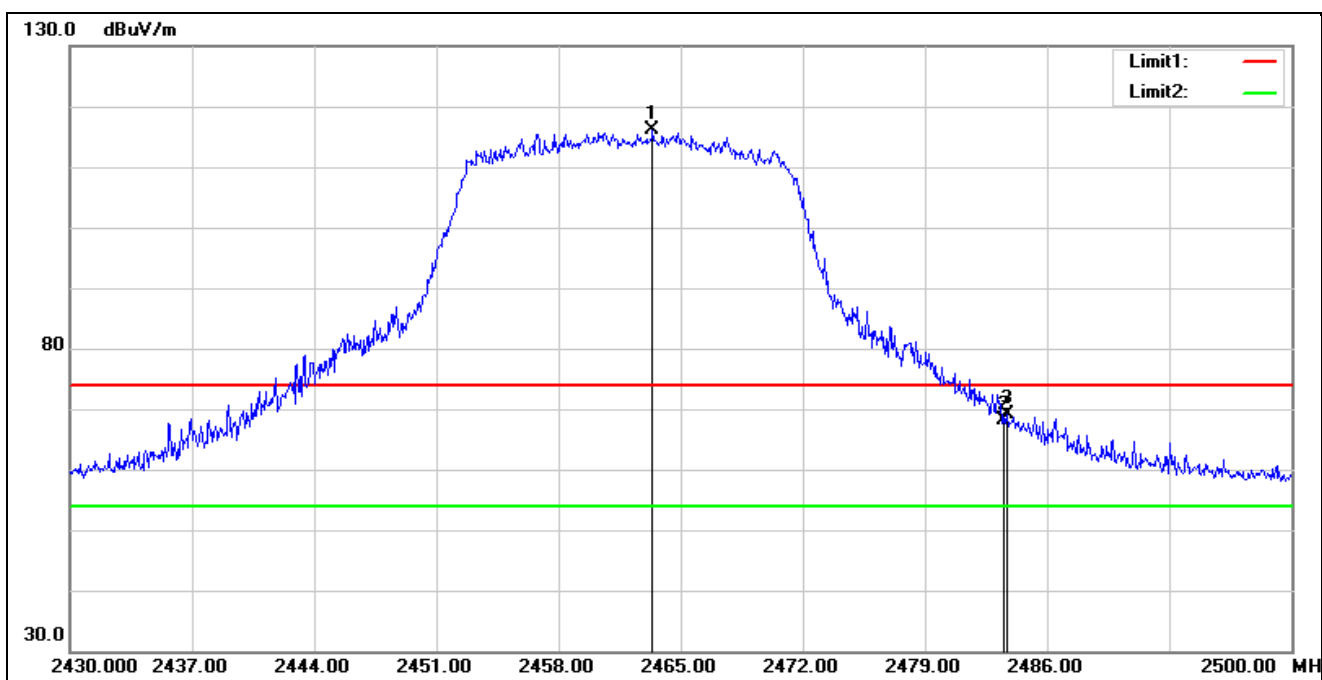


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.390	122.43	-6.41	116.02	74.00	42.02	peak
2	2483.500	74.65	-6.46	68.19	74.00	-5.81	peak
3	2483.690	75.49	-6.46	69.03	74.00	-4.97	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

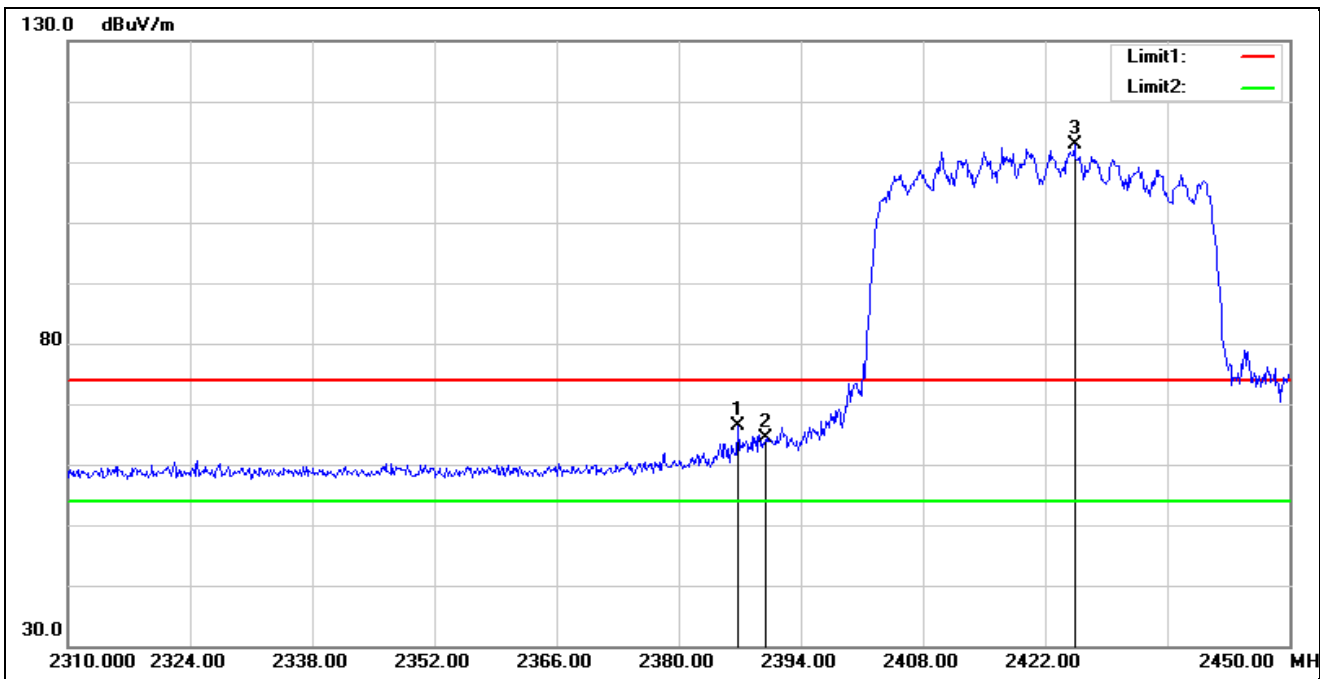


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.860	72.53	-6.17	66.36	74.00	-7.64	peak
2	2390.000	70.64	-6.19	64.45	74.00	-9.55	peak
3*	2425.360	119.10	-6.30	112.80	74.00	38.80	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

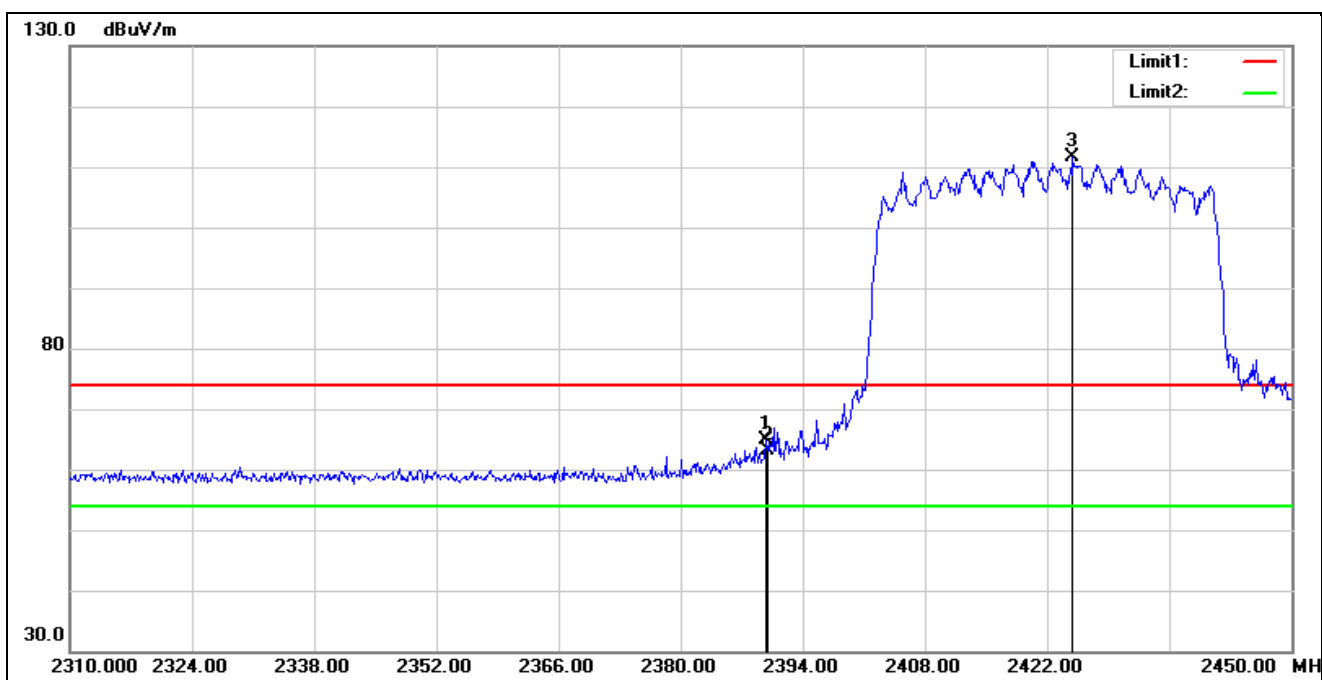


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	70.95	-6.19	64.76	74.00	-9.24	peak
2	2390.000	69.33	-6.19	63.14	74.00	-10.86	peak
3*	2424.940	117.98	-6.31	111.67	74.00	37.67	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

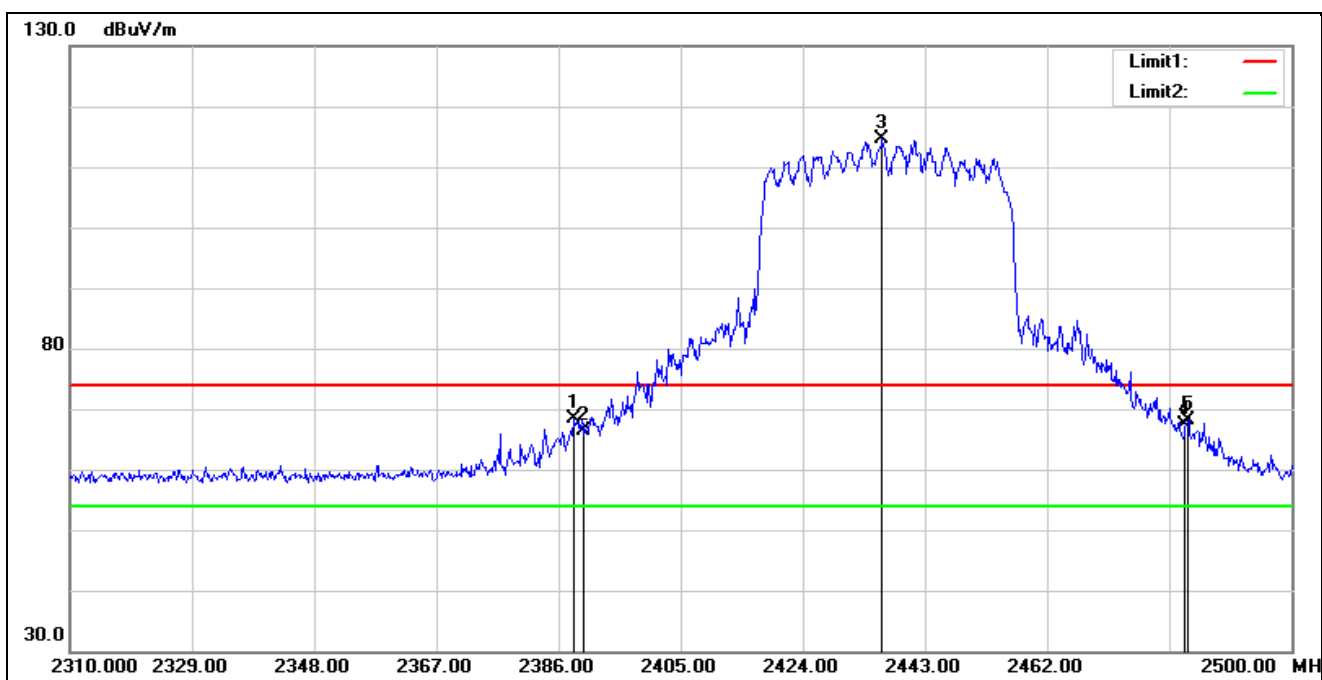


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.280	74.44	-6.18	68.26	74.00	-5.74	peak
2	2390.000	72.66	-6.19	66.47	74.00	-7.53	peak
3*	2436.350	121.00	-6.34	114.66	74.00	40.66	peak
4	2483.500	73.78	-6.46	67.32	74.00	-6.68	peak
5	2483.850	74.56	-6.47	68.09	74.00	-5.91	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

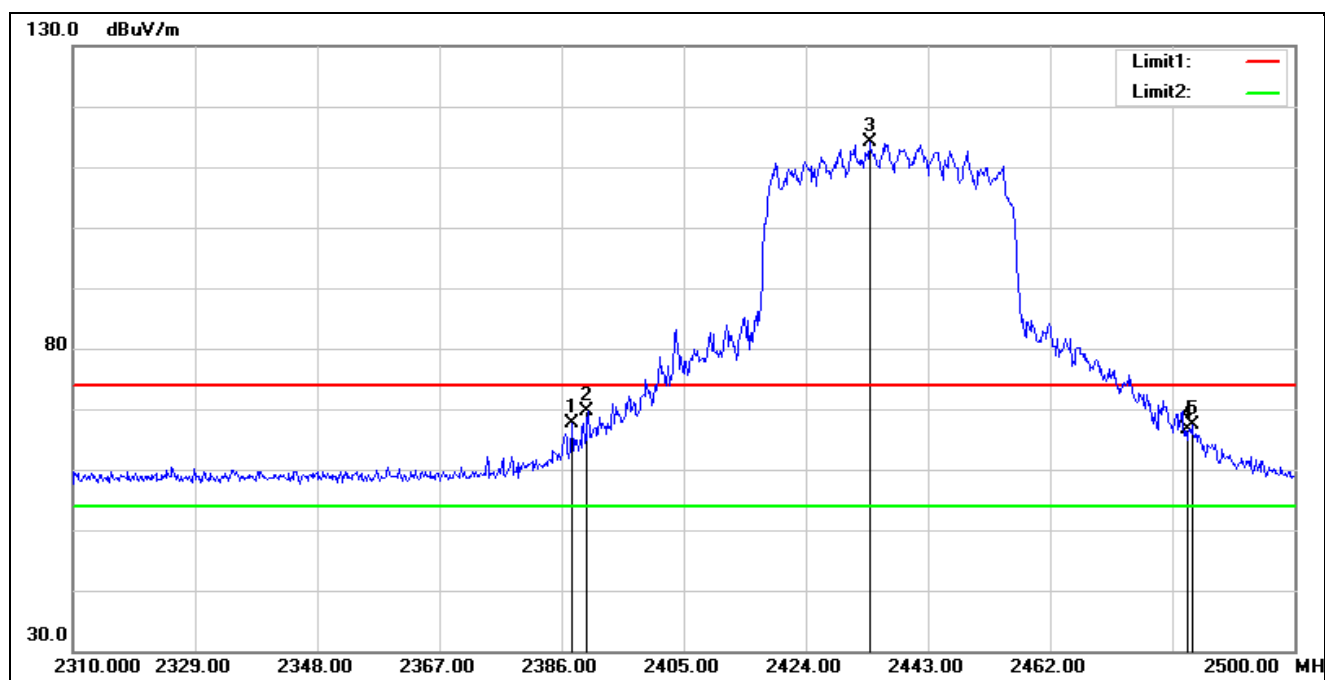


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	73.92	-6.18	67.74	74.00	-6.26	peak
2	2390.000	75.89	-6.19	69.70	74.00	-4.30	peak
3*	2433.880	120.57	-6.34	114.23	74.00	40.23	peak
4	2483.500	73.08	-6.46	66.62	74.00	-7.38	peak
5	2484.040	73.86	-6.47	67.39	74.00	-6.61	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

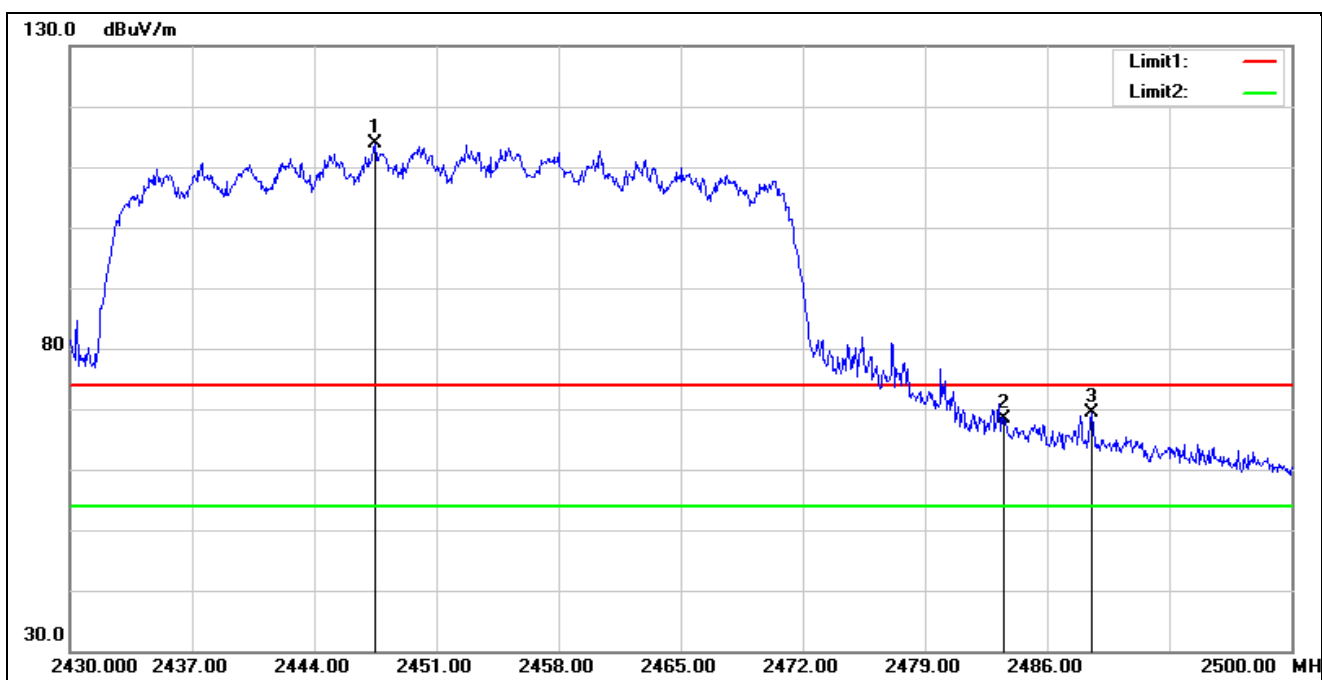

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2447.500	120.17	-6.36	113.81	74.00	39.81	peak
2	2483.500	74.79	-6.46	68.33	74.00	-5.67	peak
3	2488.520	75.89	-6.47	69.42	74.00	-4.58	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

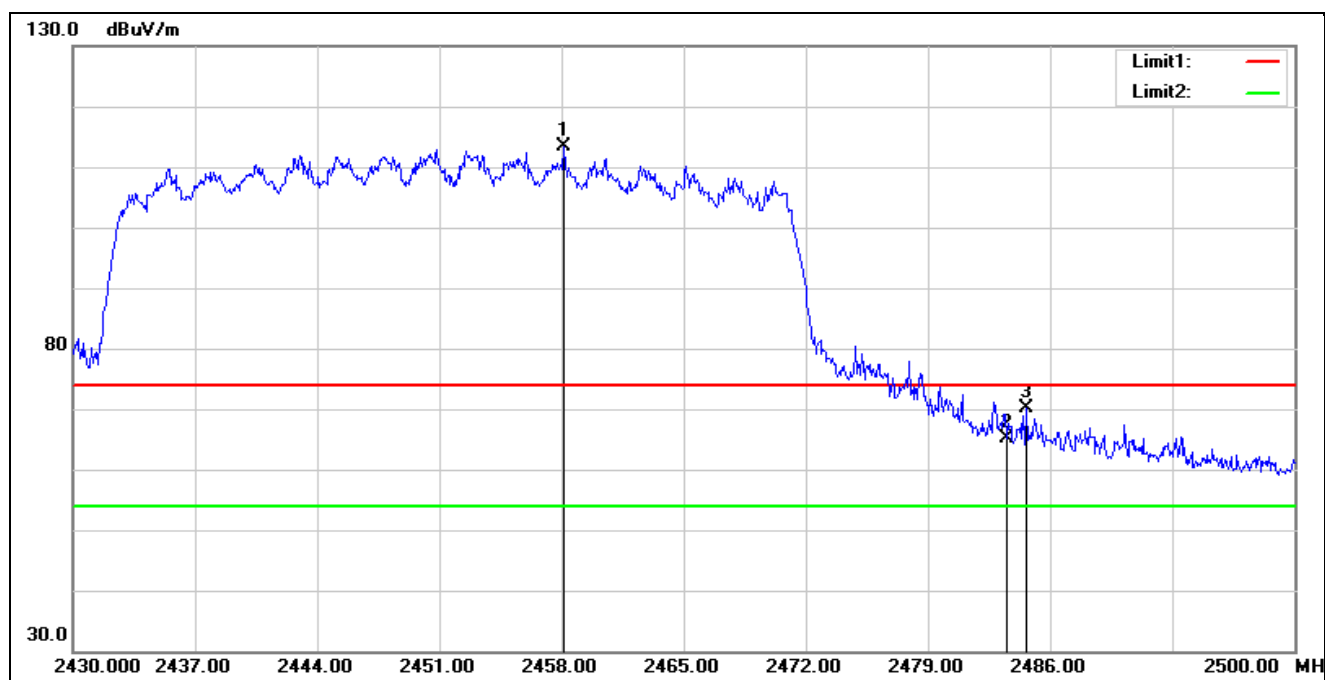


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2458.140	119.72	-6.39	113.33	74.00	39.33	peak
2	2483.500	71.62	-6.46	65.16	74.00	-8.84	peak
3	2484.600	76.68	-6.47	70.21	74.00	-3.79	peak




**Beamforming on - Average**

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

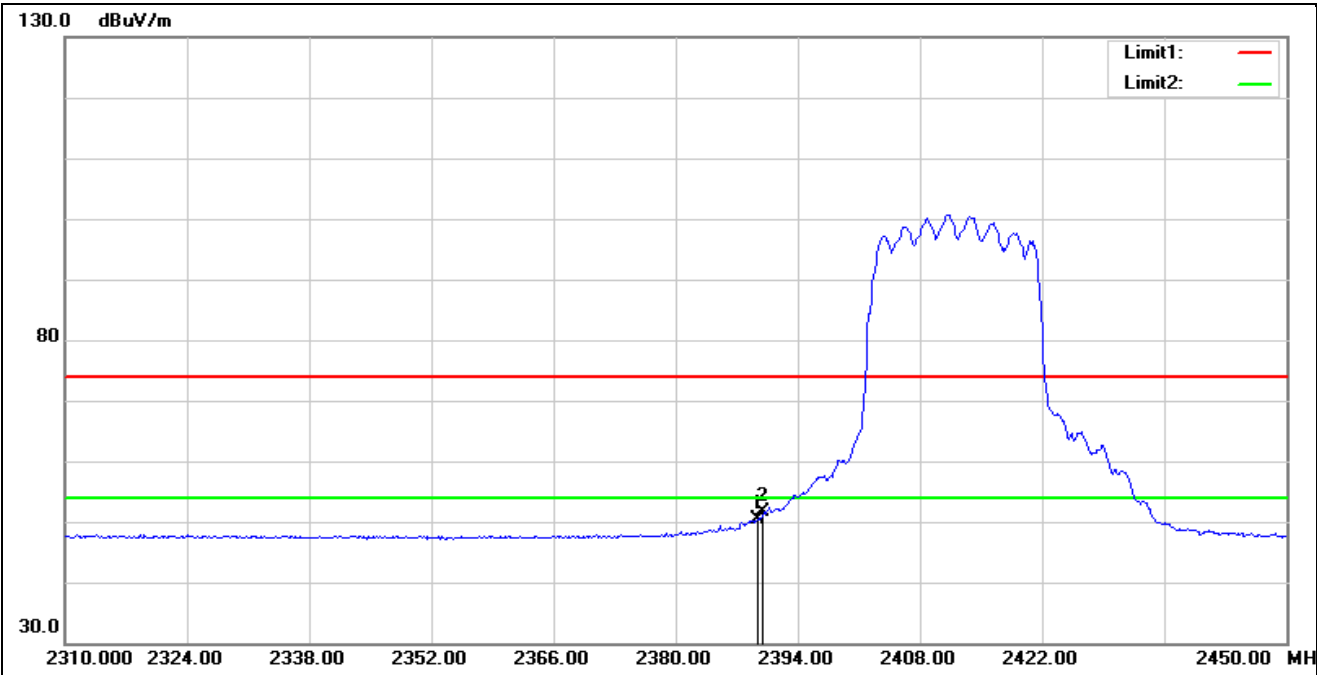


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	56.85	-6.50	50.35	54.00	-3.65	AVG
2*	2390.000	58.08	-6.50	51.58	54.00	-2.42	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2412 MHz		
Remark:			

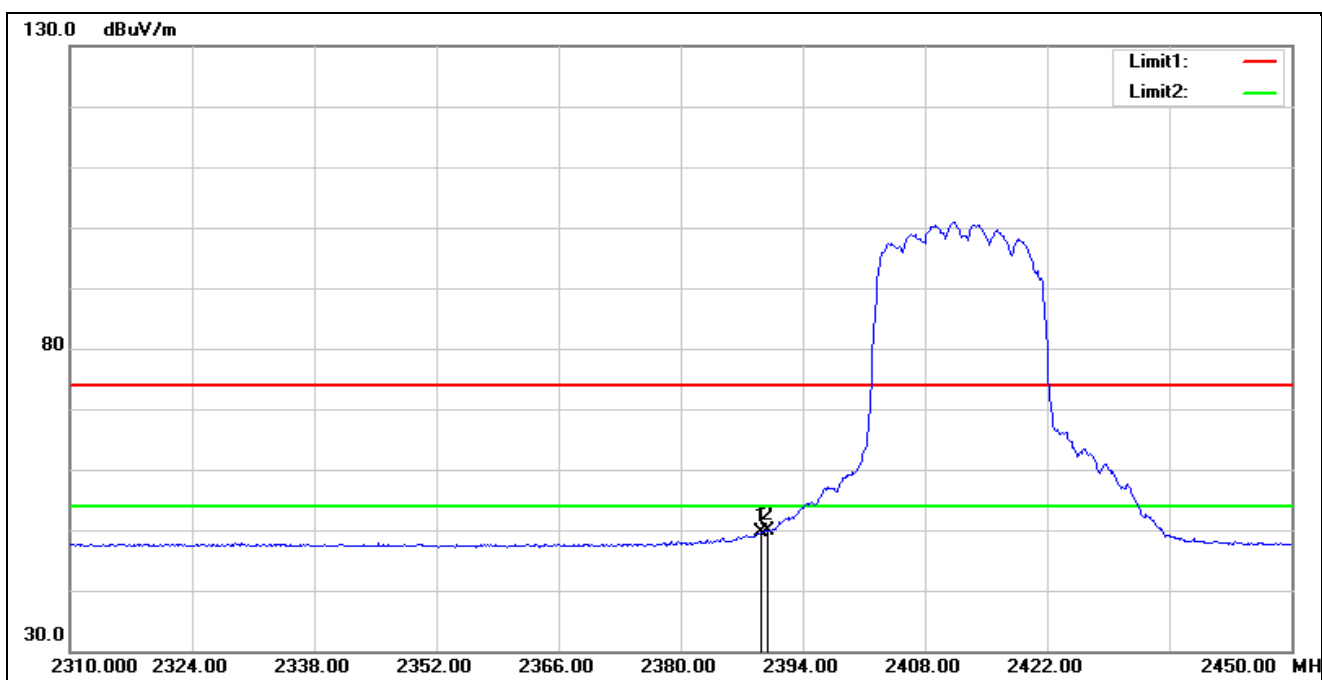


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	56.23	-6.50	49.73	54.00	-4.27	AVG
2*	2390.000	56.37	-6.50	49.87	54.00	-4.13	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

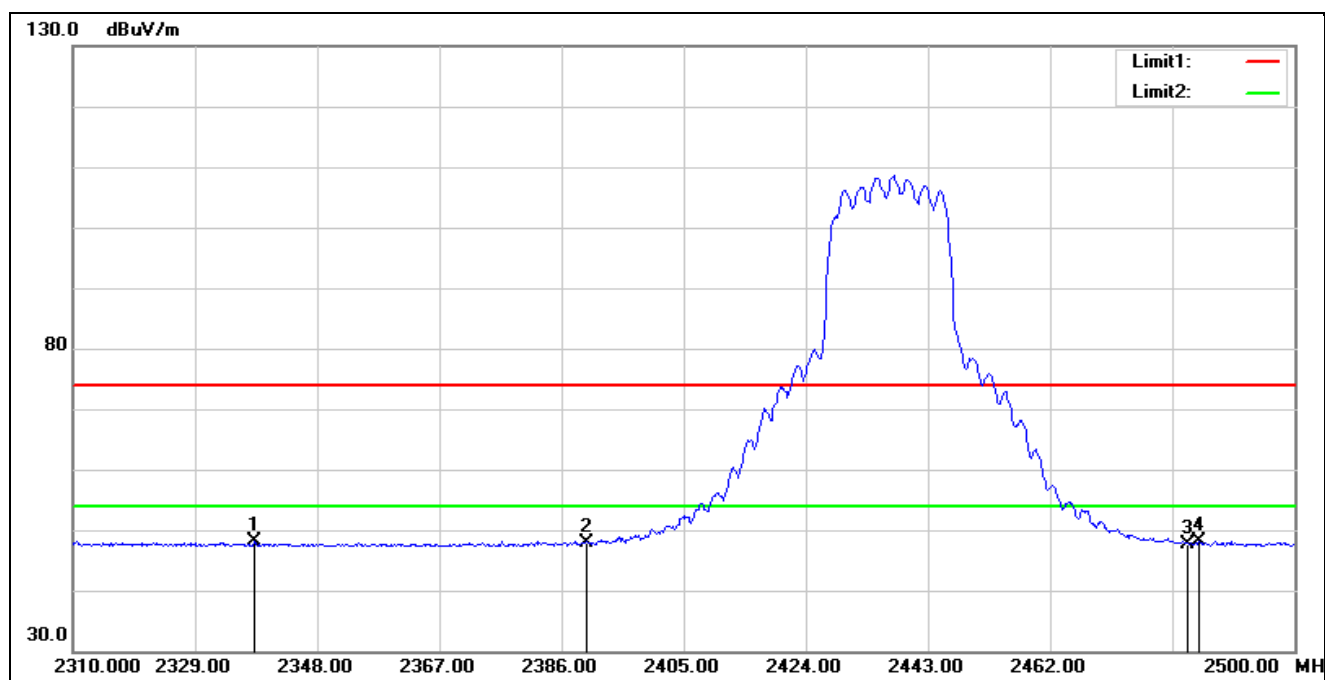


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.310	54.51	-6.42	48.09	54.00	-5.91	AVG
2	2390.000	54.31	-6.50	47.81	54.00	-6.19	AVG
3	2483.500	54.13	-6.57	47.56	54.00	-6.44	AVG
4*	2485.180	54.71	-6.57	48.14	54.00	-5.86	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2437 MHz		
Remark:			

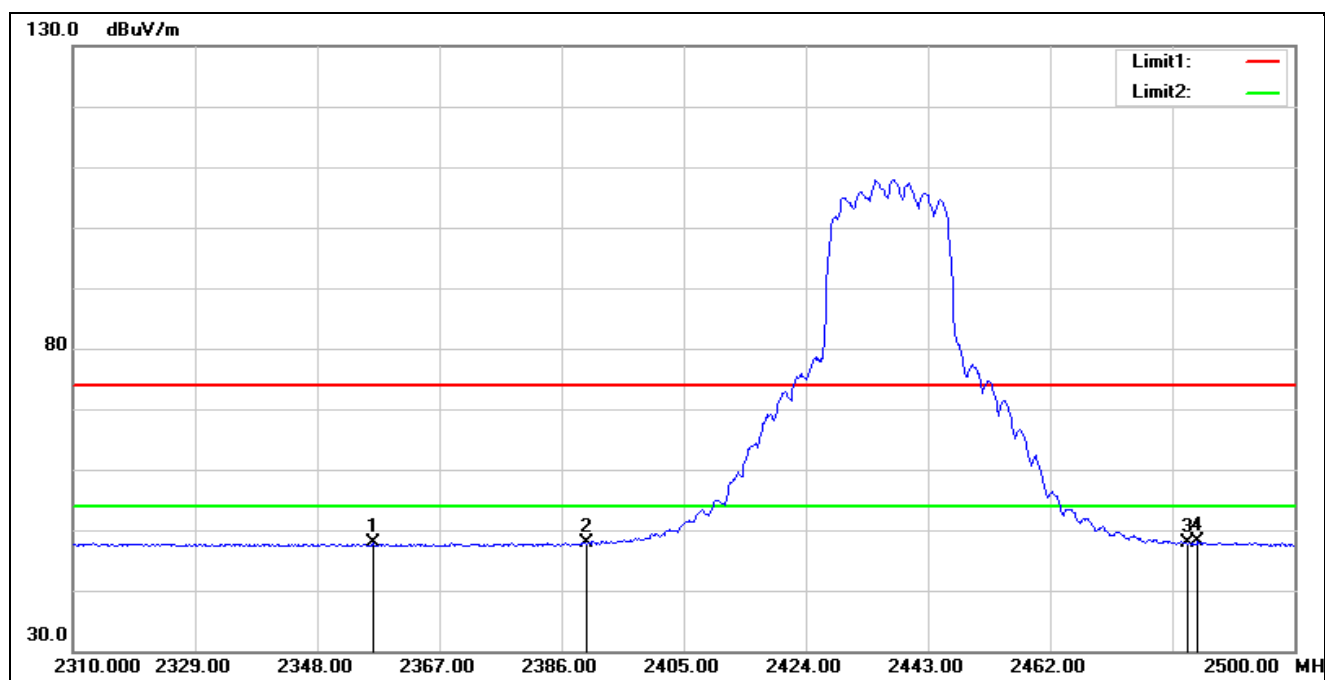


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2356.740	54.28	-6.47	47.81	54.00	-6.19	AVG
2	2390.000	54.35	-6.50	47.85	54.00	-6.15	AVG
3	2483.500	54.33	-6.57	47.76	54.00	-6.24	AVG
4*	2484.990	54.66	-6.57	48.09	54.00	-5.91	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

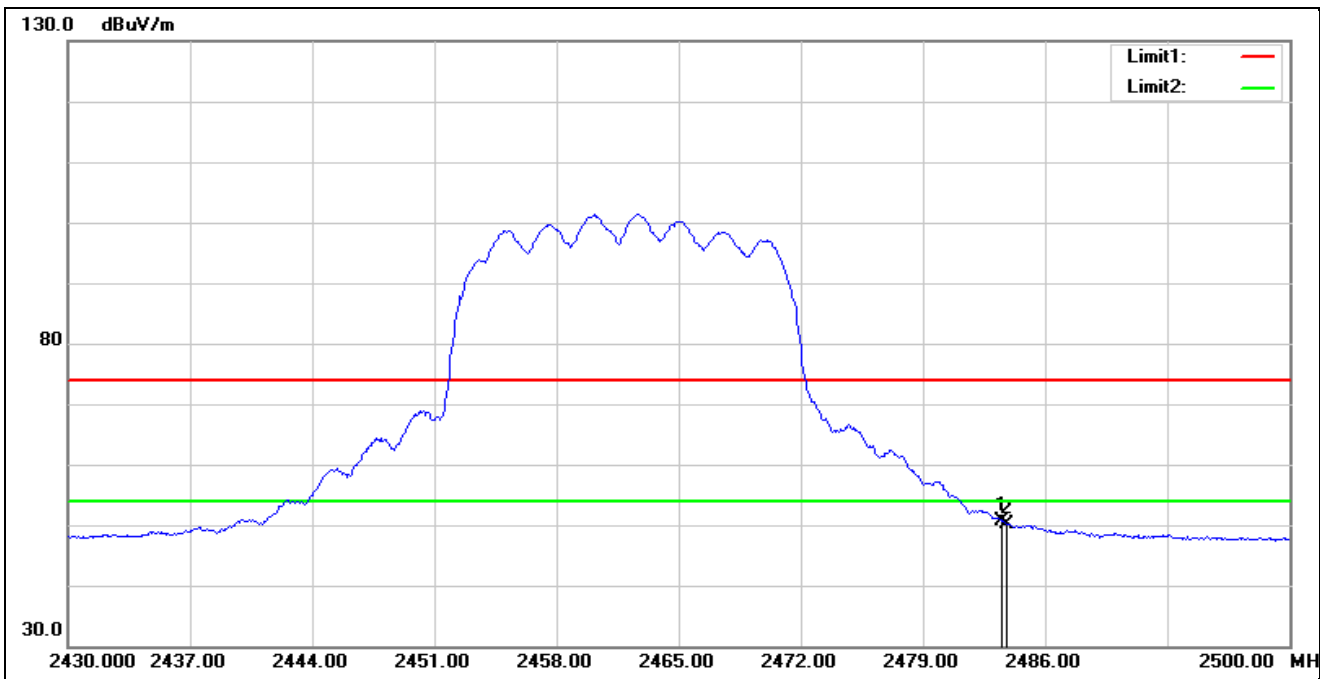


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.19	-6.57	50.62	54.00	-3.38	AVG
2	2483.830	56.65	-6.57	50.08	54.00	-3.92	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT20 2462 MHz		
Remark:			

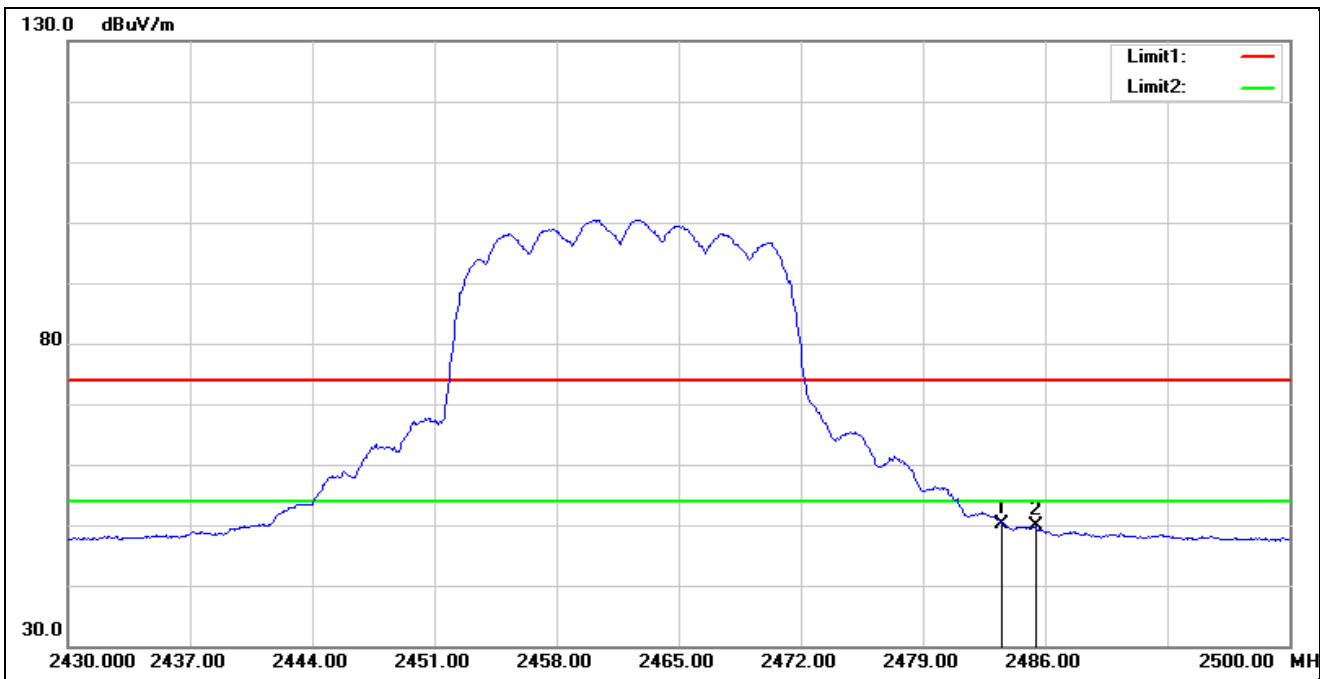


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	56.73	-6.57	50.16	54.00	-3.84	AVG
2	2485.440	56.33	-6.57	49.76	54.00	-4.24	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

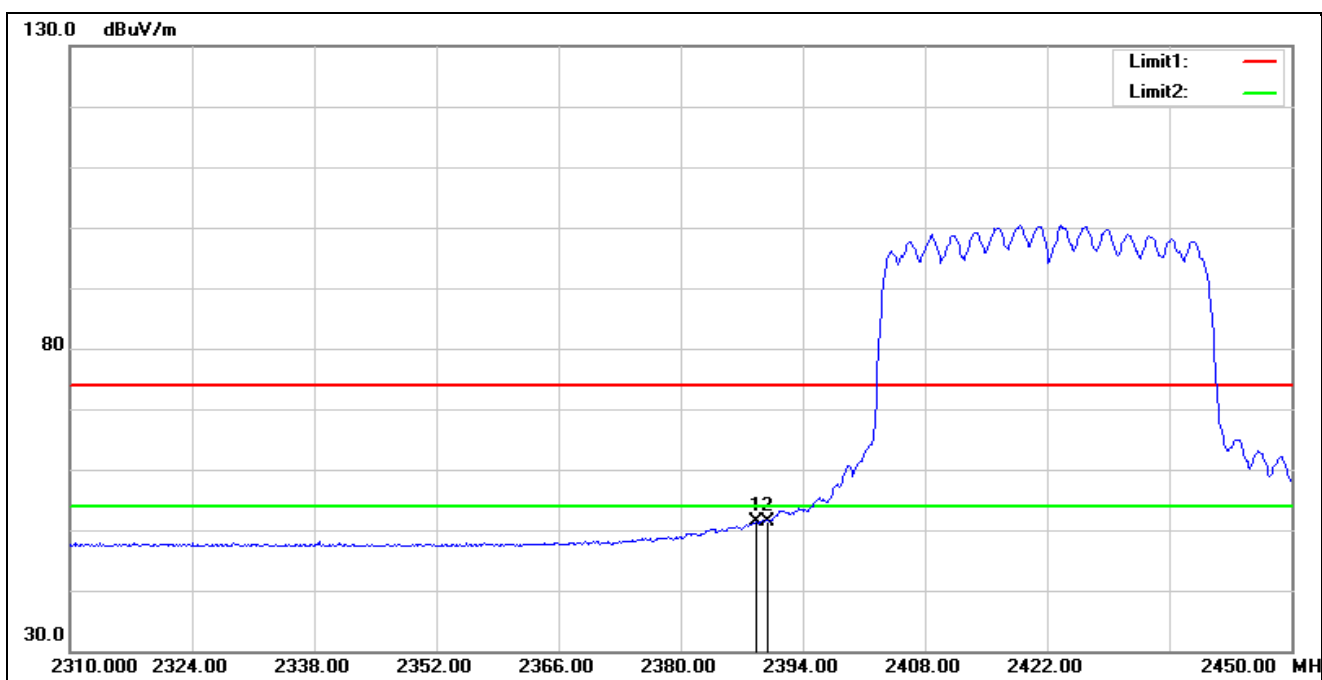

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	57.84	-6.50	51.34	54.00	-2.66	AVG
2*	2390.000	58.00	-6.50	51.50	54.00	-2.50	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2422 MHz		
Remark:			

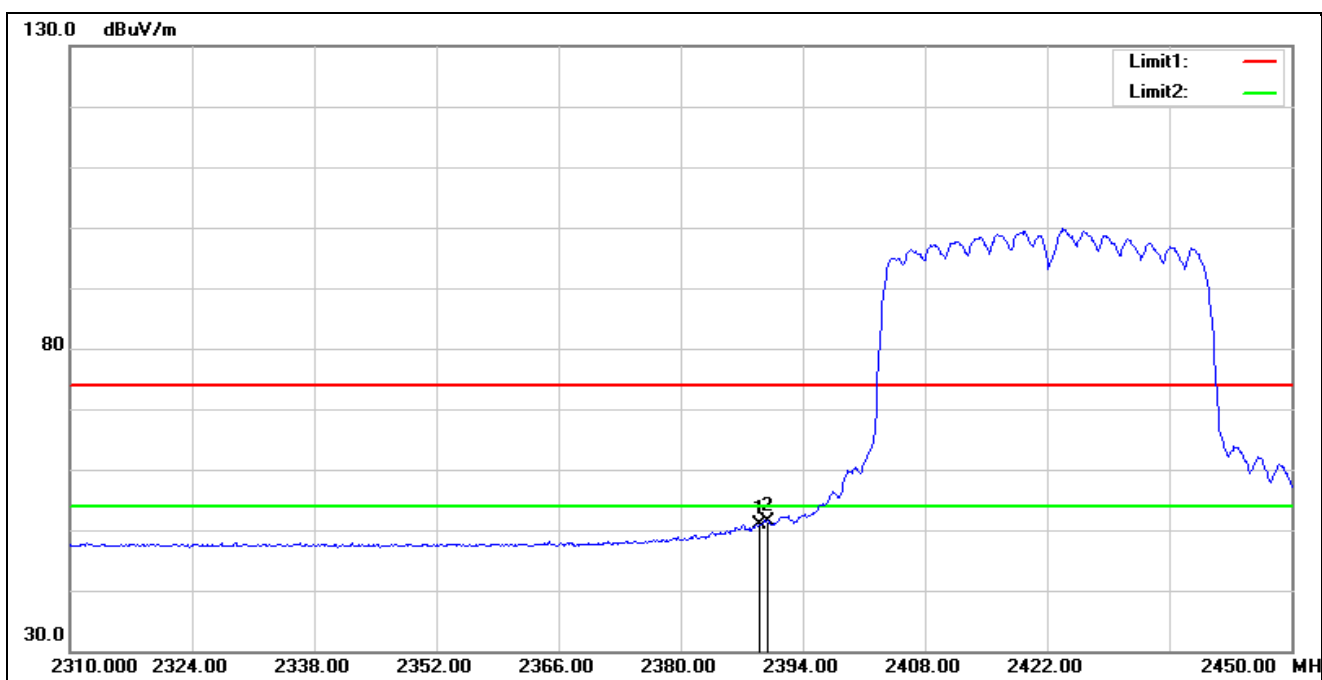

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.100	57.38	-6.50	50.88	54.00	-3.12	AVG
2*	2390.000	57.93	-6.50	51.43	54.00	-2.57	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

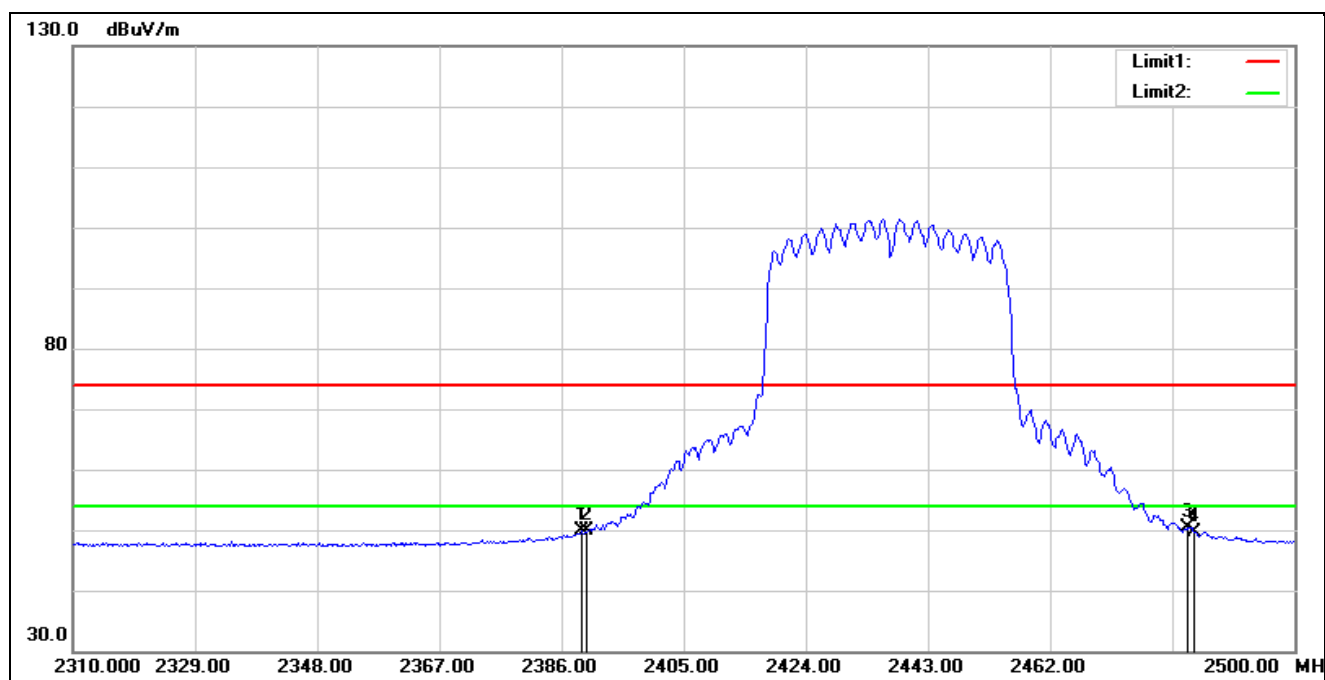


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	56.27	-6.50	49.77	54.00	-4.23	AVG
2	2390.000	56.35	-6.50	49.85	54.00	-4.15	AVG
3*	2483.500	57.05	-6.57	50.48	54.00	-3.52	AVG
4	2484.420	56.24	-6.57	49.67	54.00	-4.33	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2437 MHz		
Remark:			

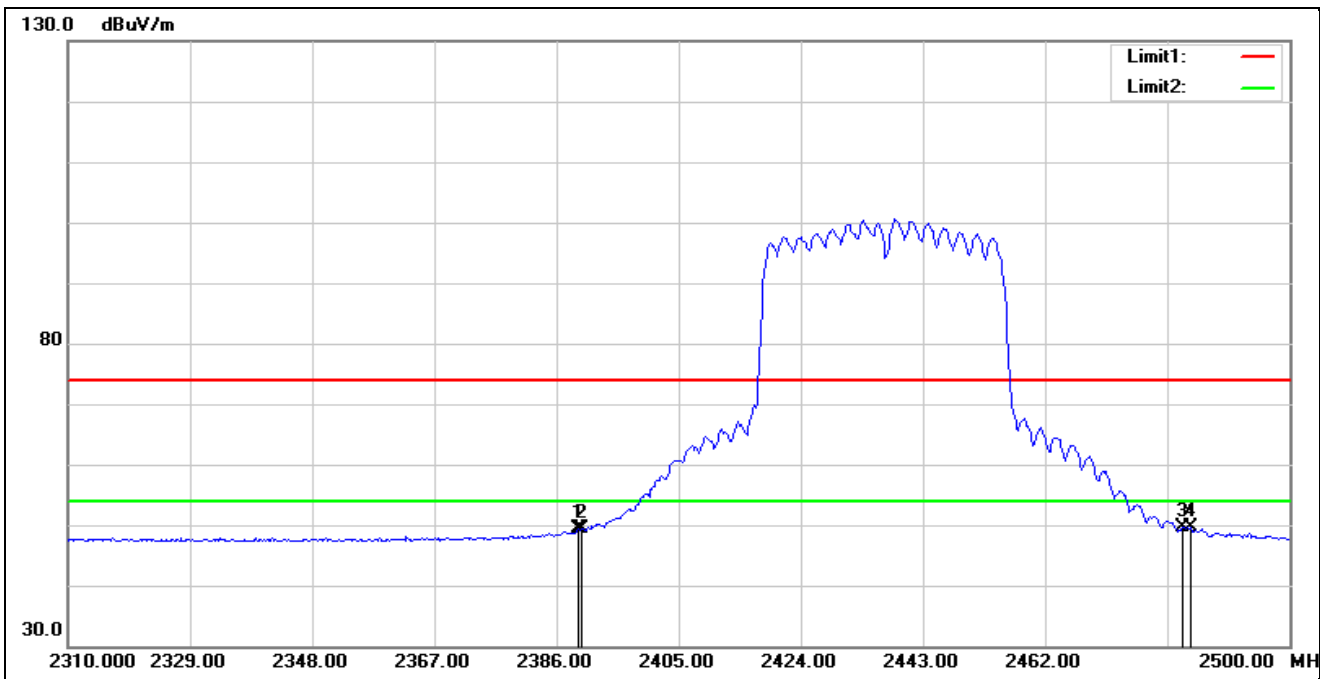


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	55.80	-6.50	49.30	54.00	-4.70	AVG
2	2390.000	55.78	-6.50	49.28	54.00	-4.72	AVG
3	2483.500	56.11	-6.57	49.54	54.00	-4.46	AVG
4*	2484.610	56.16	-6.57	49.59	54.00	-4.41	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

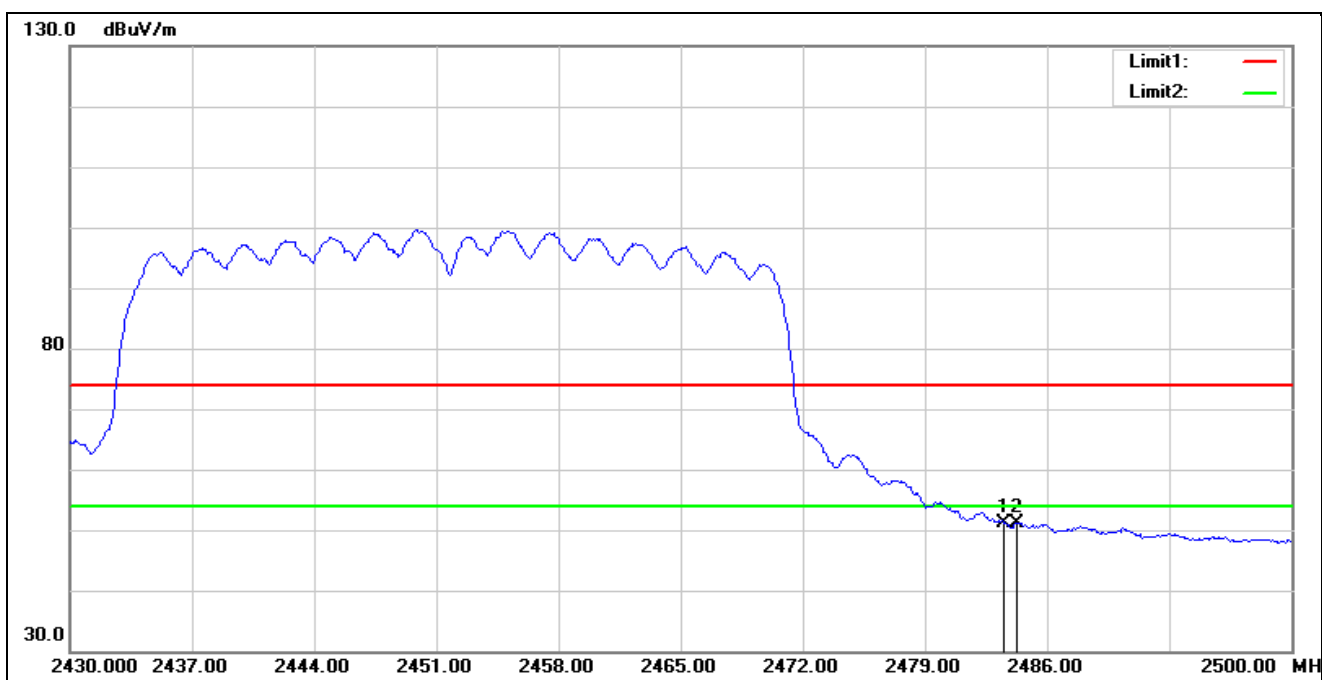


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.82	-6.57	51.25	54.00	-2.75	AVG
2	2484.250	57.77	-6.57	51.20	54.00	-2.80	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n VHT40 2452 MHz		
Remark:			

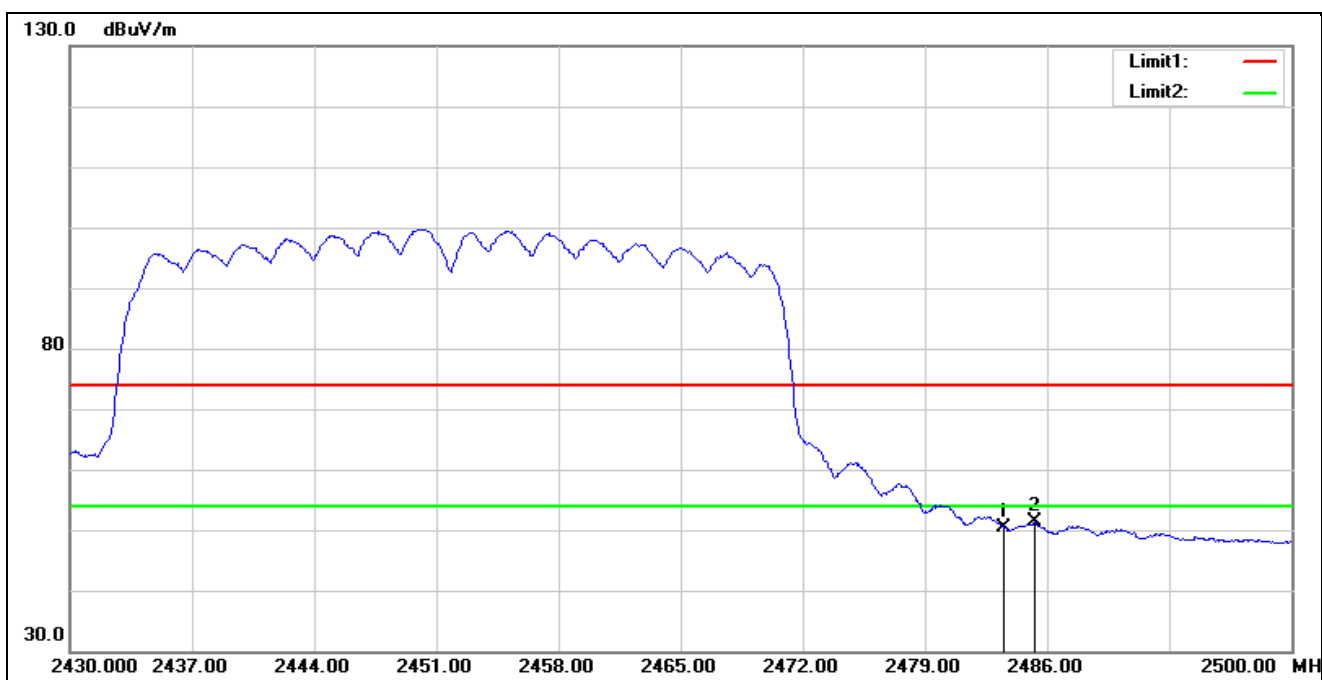


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.91	-6.57	50.34	54.00	-3.66	AVG
2*	2485.300	58.02	-6.57	51.45	54.00	-2.55	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

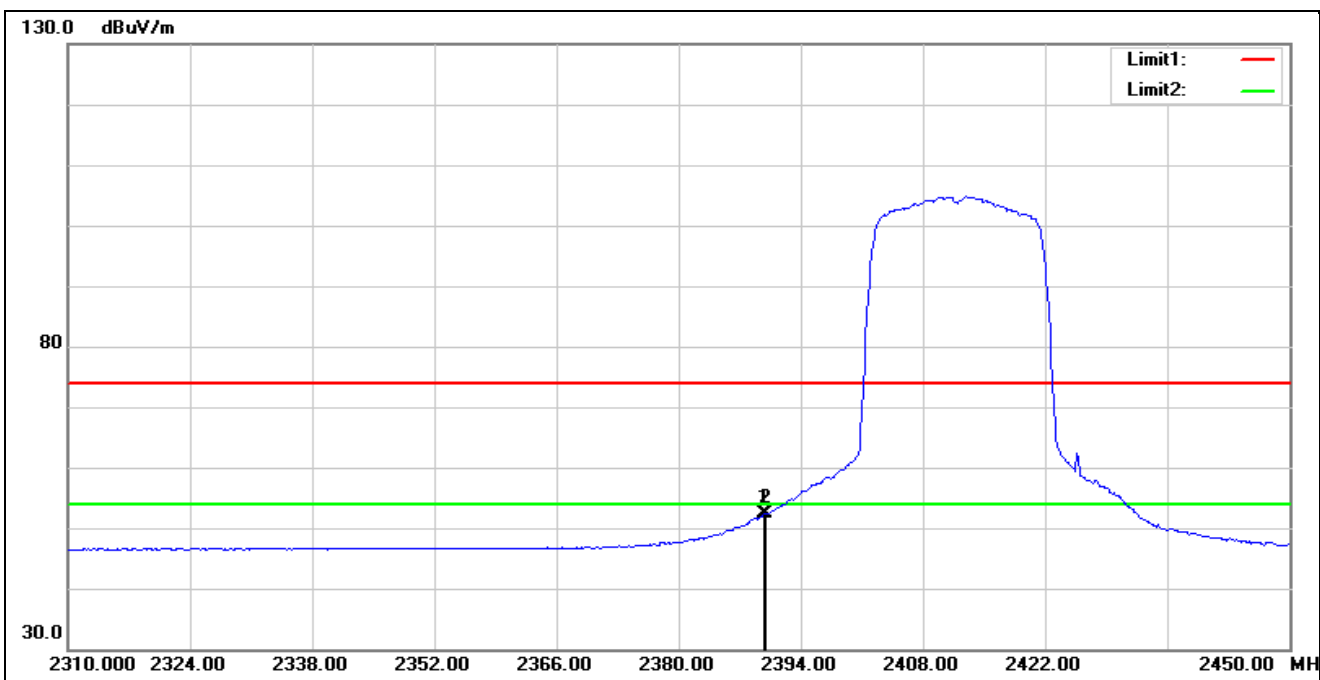


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.800	58.54	-6.19	52.35	54.00	-1.65	AVG
2	2390.000	58.54	-6.19	52.35	54.00	-1.65	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2412 MHz		
Remark:			

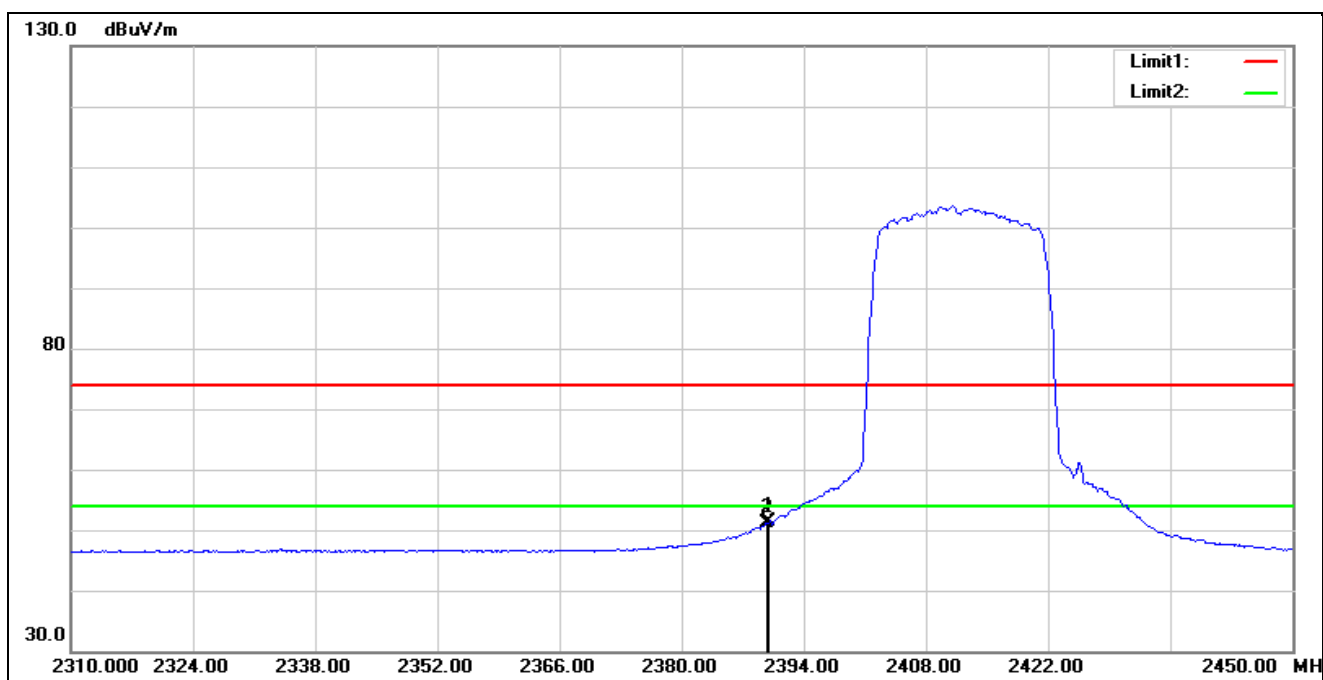


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2390.000	57.49	-6.19	51.30	54.00	-2.70	AVG
2	2389.800	57.34	-6.19	51.15	54.00	-2.85	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

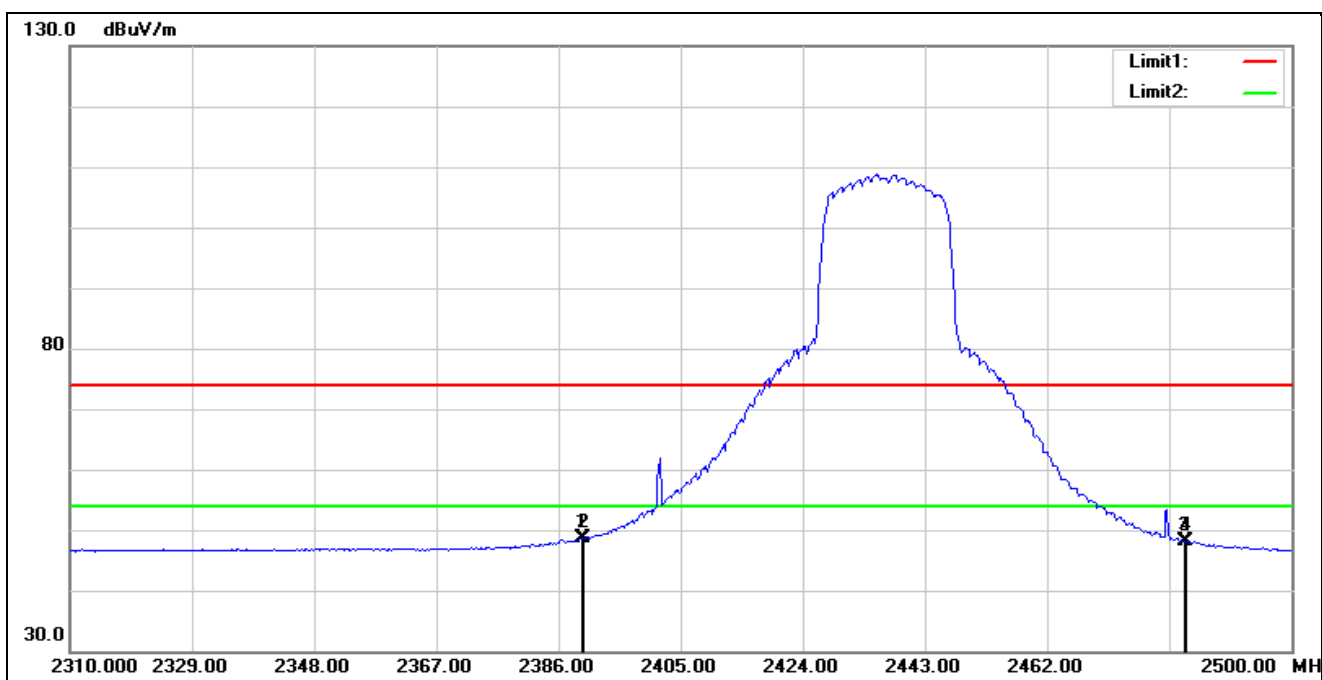

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.610	54.88	-6.19	48.69	54.00	-5.31	AVG
2*	2390.000	54.94	-6.19	48.75	54.00	-5.25	AVG
3	2483.500	54.61	-6.46	48.15	54.00	-5.85	AVG
4	2483.660	54.61	-6.46	48.15	54.00	-5.85	AVG


Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2437 MHz		
Remark:			

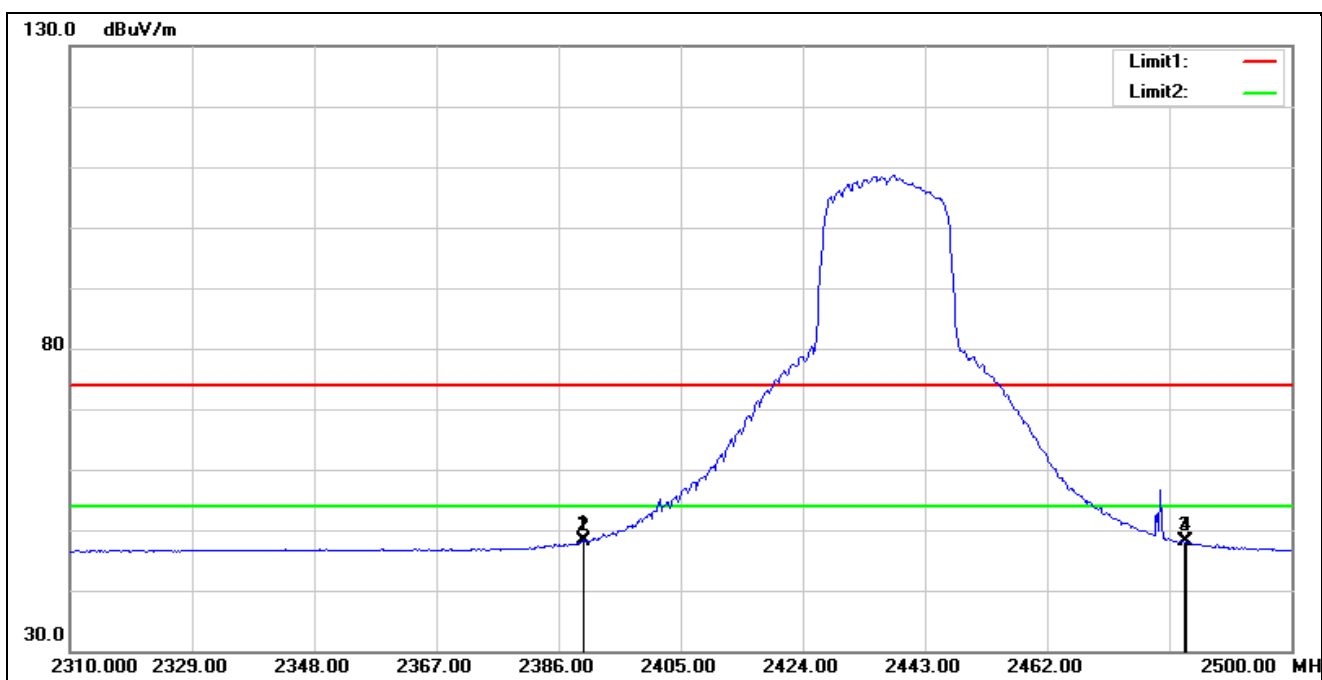

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.800	54.47	-6.19	48.28	54.00	-5.72	AVG
2	2390.000	54.27	-6.19	48.08	54.00	-5.92	AVG
3	2483.500	54.54	-6.46	48.08	54.00	-5.92	AVG
4	2483.660	54.54	-6.46	48.08	54.00	-5.92	AVG




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

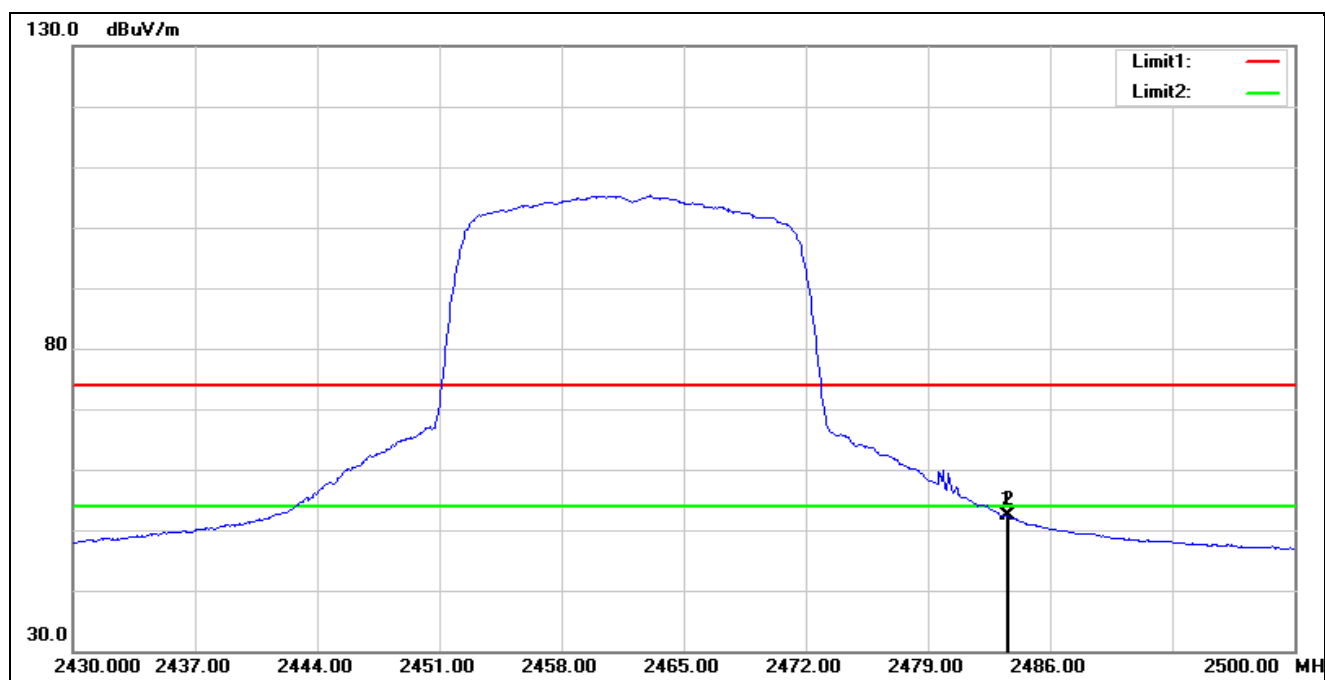


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.86	-6.46	52.40	54.00	-1.60	AVG
2	2483.620	58.75	-6.46	52.29	54.00	-1.71	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 2462 MHz		
Remark:			

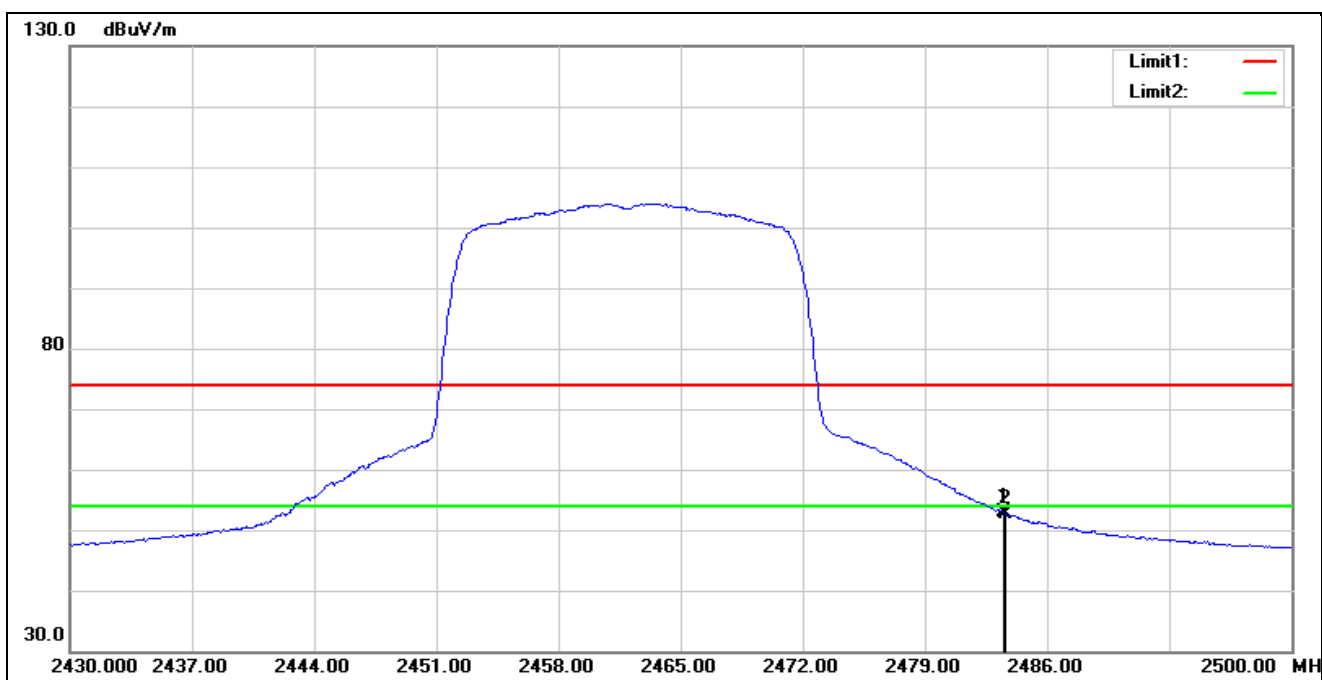


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.23	-6.46	52.77	54.00	-1.23	AVG
2	2483.620	59.18	-6.46	52.72	54.00	-1.28	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

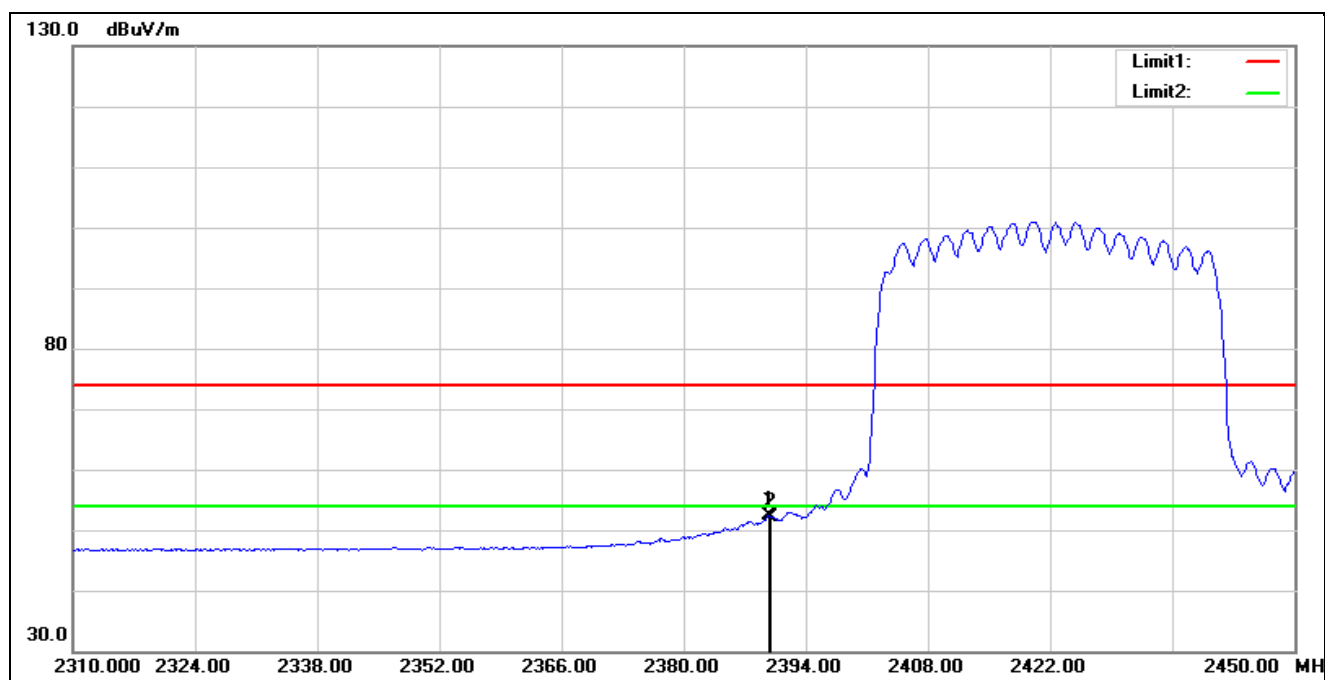


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.800	58.55	-6.19	52.36	54.00	-1.64	AVG
2	2390.000	58.25	-6.19	52.06	54.00	-1.94	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2422 MHz		
Remark:			

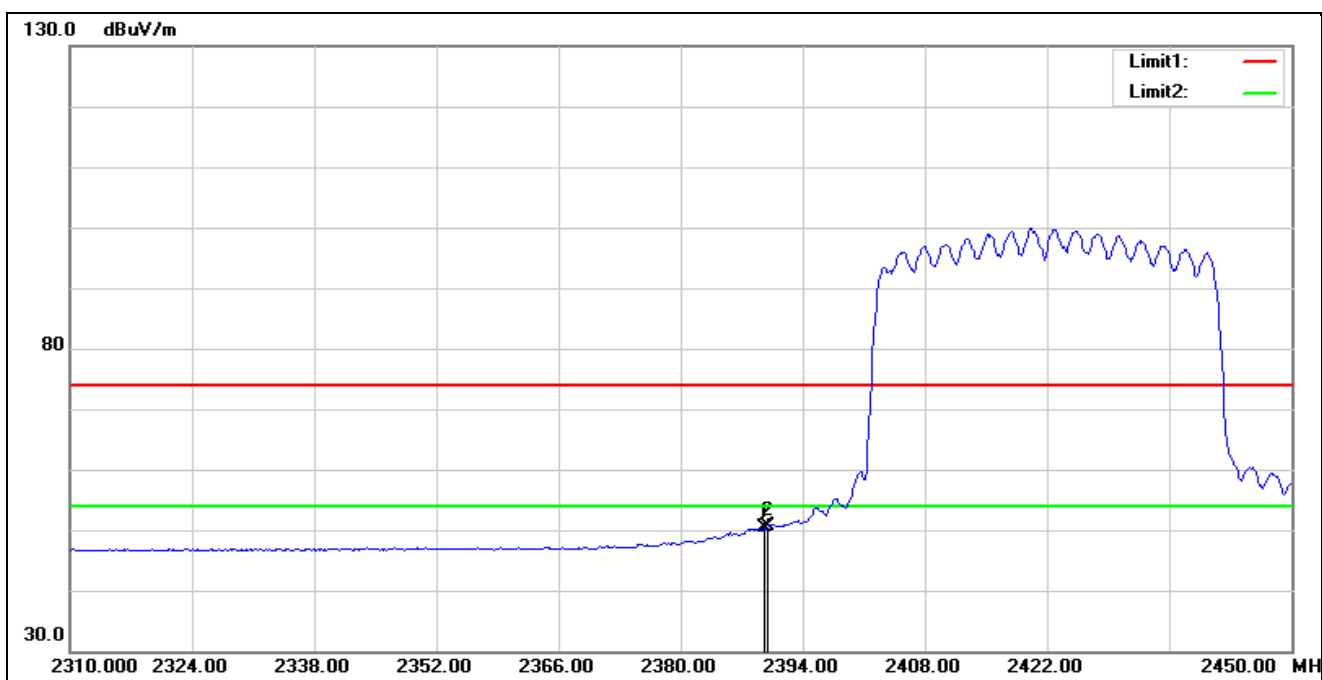


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	56.54	-6.19	50.35	54.00	-3.65	AVG
2*	2390.000	56.83	-6.19	50.64	54.00	-3.36	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

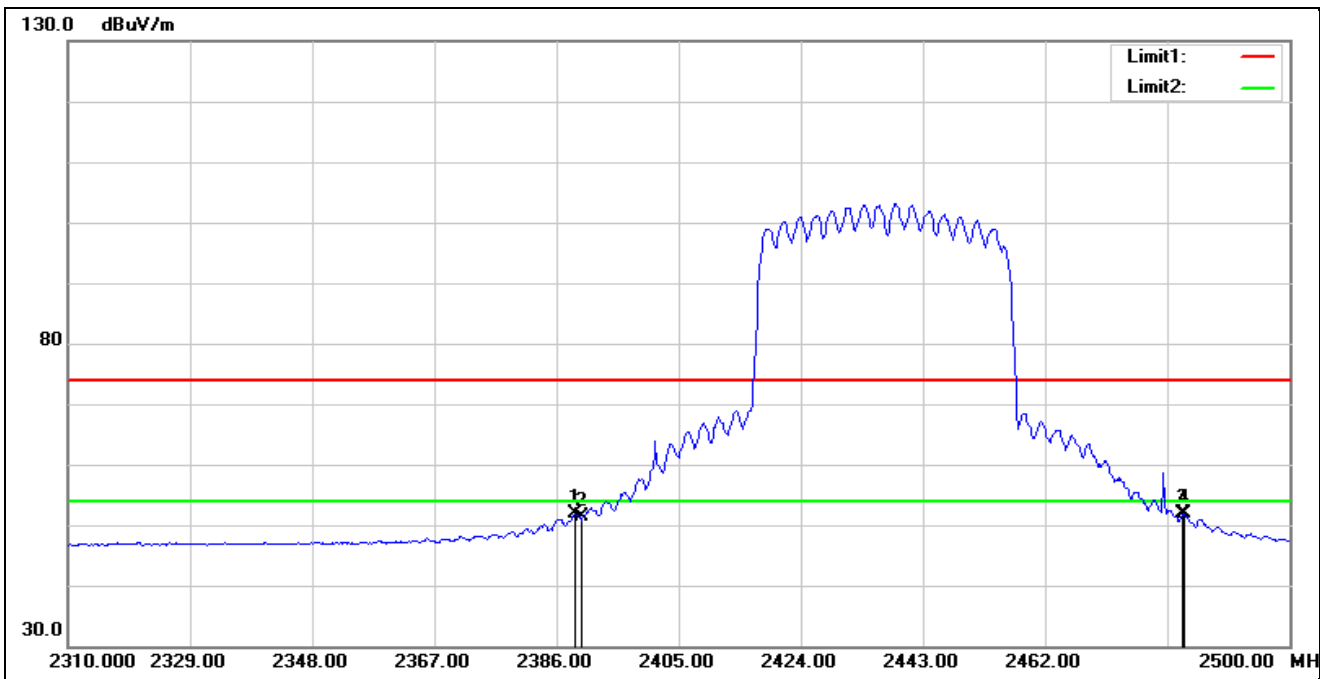


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	57.99	-6.18	51.81	54.00	-2.19	AVG
2	2390.000	57.49	-6.19	51.30	54.00	-2.70	AVG
3*	2483.500	58.30	-6.46	51.84	54.00	-2.16	AVG
4	2483.660	58.30	-6.46	51.84	54.00	-2.16	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2437 MHz		
Remark:			

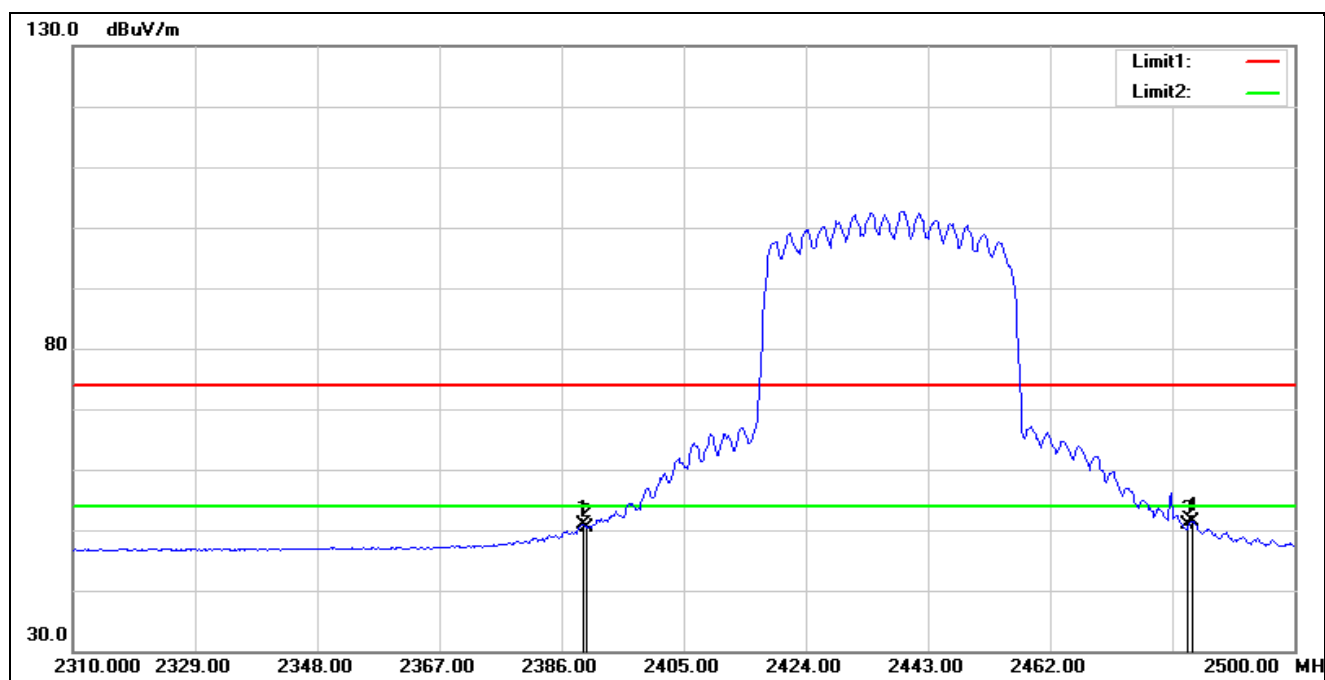


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	57.08	-6.19	50.89	54.00	-3.11	AVG
2	2390.000	56.59	-6.19	50.40	54.00	-3.60	AVG
3	2483.500	57.44	-6.46	50.98	54.00	-3.02	AVG
4*	2484.040	57.95	-6.47	51.48	54.00	-2.52	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

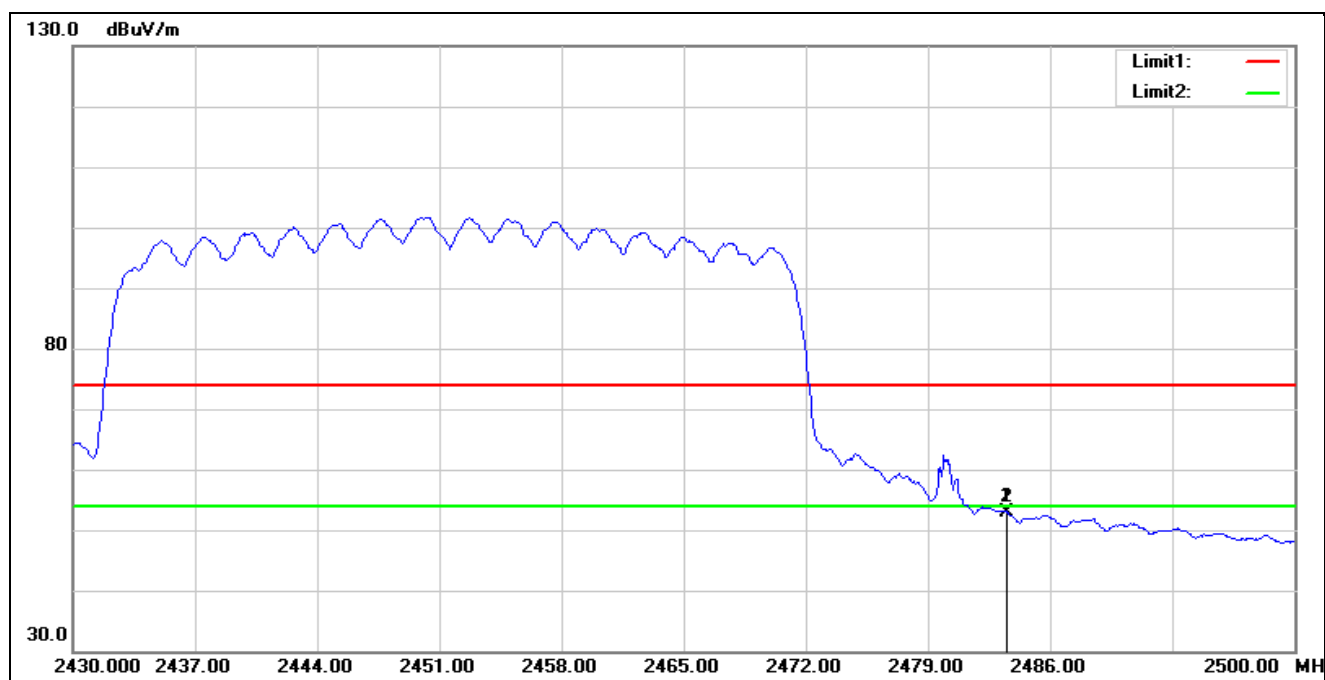

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.44	-6.46	52.98	54.00	-1.02	AVG
2	2483.550	59.43	-6.46	52.97	54.00	-1.03	AVG

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 2452 MHz		
Remark:			

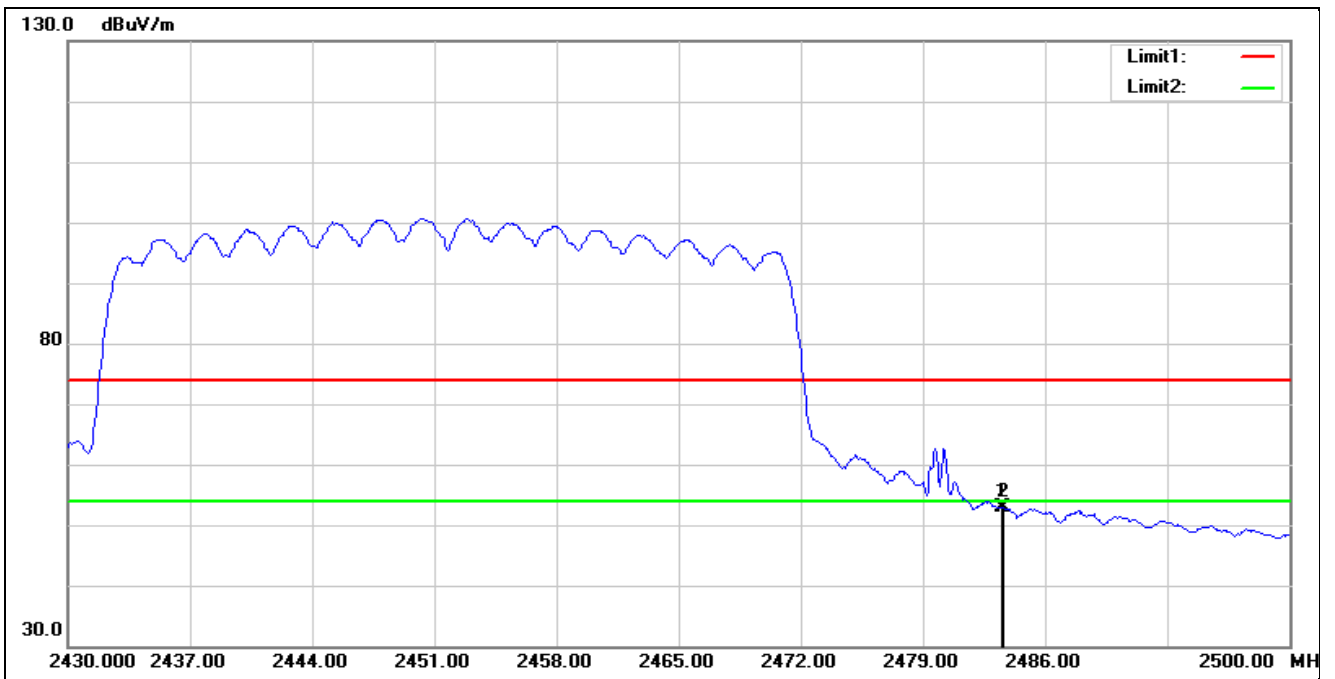

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	59.45	-6.46	52.99	54.00	-1.01	AVG
2	2483.620	59.22	-6.46	52.76	54.00	-1.24	AVG



### 5.3. Conducted Test Results

**Duty cycle**

Reference Appendix A / Appendix B

**Maximum Conducted Output Power Measurement**

Reference Appendix A

**Maximum Power Spectral Density Measurement**

Reference Appendix A / Appendix B

**6 dB RF Bandwidth Measurement**

Reference Appendix A / Appendix B

**Out of Band Conducted Emissions Measurement****Reference level**

Reference Appendix B

**Out of Band Conducted Emissions**

Reference Appendix B

**Conducted Band Edge**

Reference Appendix B

---END---