



5.5. Band Edge Measurements and Conducted Spurious Emissions Test

5.5.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.5.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|---------------|
| Detector | Peak |
| Attenuation | Auto |
| RB / VB (Emission in restricted band) | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz

The spectrum from 9 KHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Test Results of Conducted Spurious Emissions

PASS

Please refer to Appendix A.5 for Band Edge Measurements;

Please refer to Appendix A.6 for Conducted Spurious Emissions.

Remark:

- 1). Measured RF conducted spurious emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20;
- 4). “---“means that the fundamental frequency not for 15.209 limits requirement.
- 5). Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.



5.6. On Time and Duty Cycle

5.6.1. Standard Applicable

None: for reporting purpose only.


5.6.2. Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of the spectrum analyzer.

5.6.3. Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8.0MHz, VBW=8.0MHz, Sweep time=Auto
3. Detector = peak;
4. Trace mode = Single hold.

5.6.4. Test Setup Layout

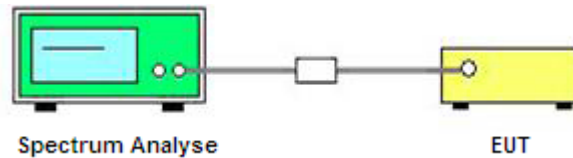

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.6.6. Test result

For reporting purpose only.

Please refer to Appendix A.7




5.7. Emissions in Restricted Bands

5.7.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.7.2. Test Setup Layout

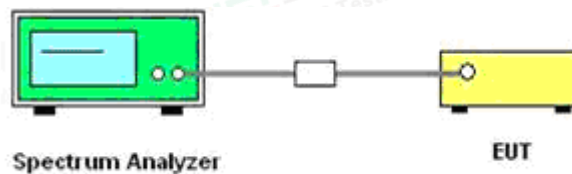

5.7.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.7.4. Test Procedures

According to KDB558074 D01 15.247 Meas Guidance v05r02 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

- 1). Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2). Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3). Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
- 4). Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5). Repeat above procedures until all measured frequencies were complete.
- 6). Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- 7). Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- 8). Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- 9). For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- 10). Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8 = \text{EIRP} + 95.26$$





Where:

E = electric field strength in dBμV/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11). Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater.

However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

12). Compare the resultant electric field strength level to the applicable regulatory limit.

13). Perform radiated spurious emission test duress until all measured frequencies were complete.

5.7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

5.7.6. Test Results

| | | | |
|---------------|-----------|----------------|----------------|
| Temperature | 23.5°C | Humidity | 52.1% |
| Test Engineer | Taylor Hu | Configurations | IEEE 802.11g/n |

PASS.


The test data please refer to following page.





IEEE 802.11g 2412 MHz 20M

Vertical

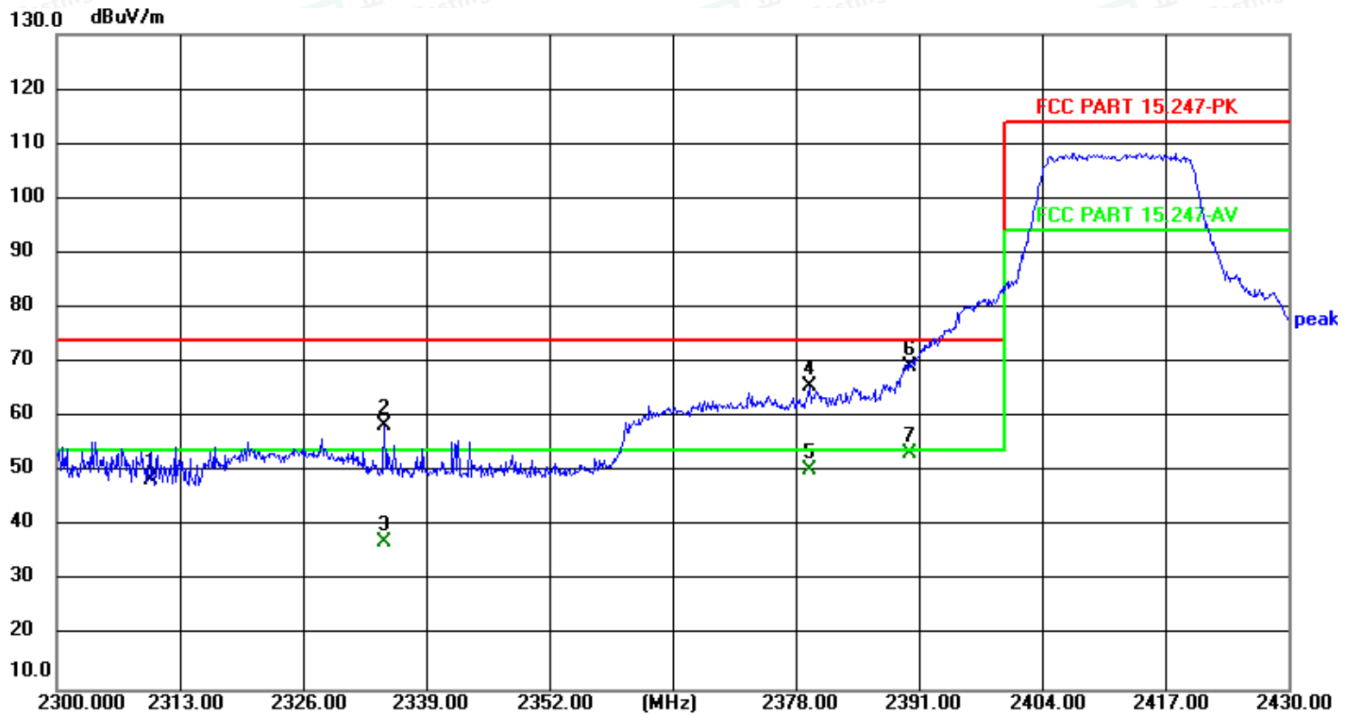


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 50.68 | -2.02 | 48.66 | 74.00 | -25.34 | peak |
| 2 | 2334.580 | 60.24 | -1.93 | 58.31 | 74.00 | -15.69 | peak |
| 3 | 2334.580 | 39.04 | -1.93 | 37.11 | 54.00 | -16.89 | AVG |
| 4 | 2379.430 | 67.34 | -1.77 | 65.57 | 74.00 | -8.43 | peak |
| 5 | 2379.430 | 52.18 | -1.77 | 50.41 | 54.00 | -3.59 | AVG |
| 6 | 2390.000 | 70.95 | -1.73 | 69.22 | 74.00 | -4.78 | peak |
| 7 | 2390.000 | 55.14 | -1.73 | 53.41 | 54.00 | -0.59 | AVG |





Horizontal

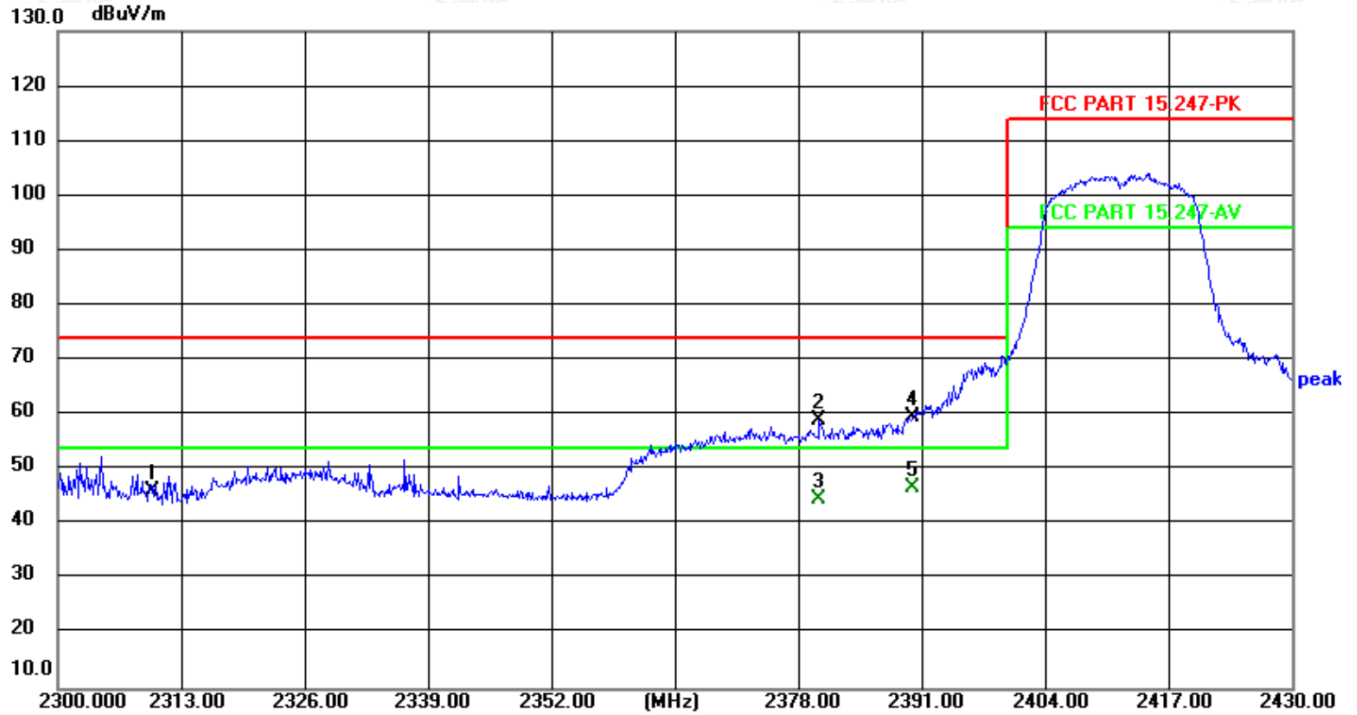


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 48.22 | -2.02 | 46.20 | 74.00 | -27.80 | peak |
| 2 | 2380.210 | 60.75 | -1.77 | 58.98 | 74.00 | -15.02 | peak |
| 3 | 2380.210 | 46.37 | -1.77 | 44.60 | 54.00 | -9.40 | AVG |
| 4 | 2390.000 | 61.40 | -1.73 | 59.67 | 74.00 | -14.33 | peak |
| 5 | 2390.000 | 48.33 | -1.73 | 46.60 | 54.00 | -7.40 | AVG |





IEEE 802.11g 2462 MHz 20M

Vertical

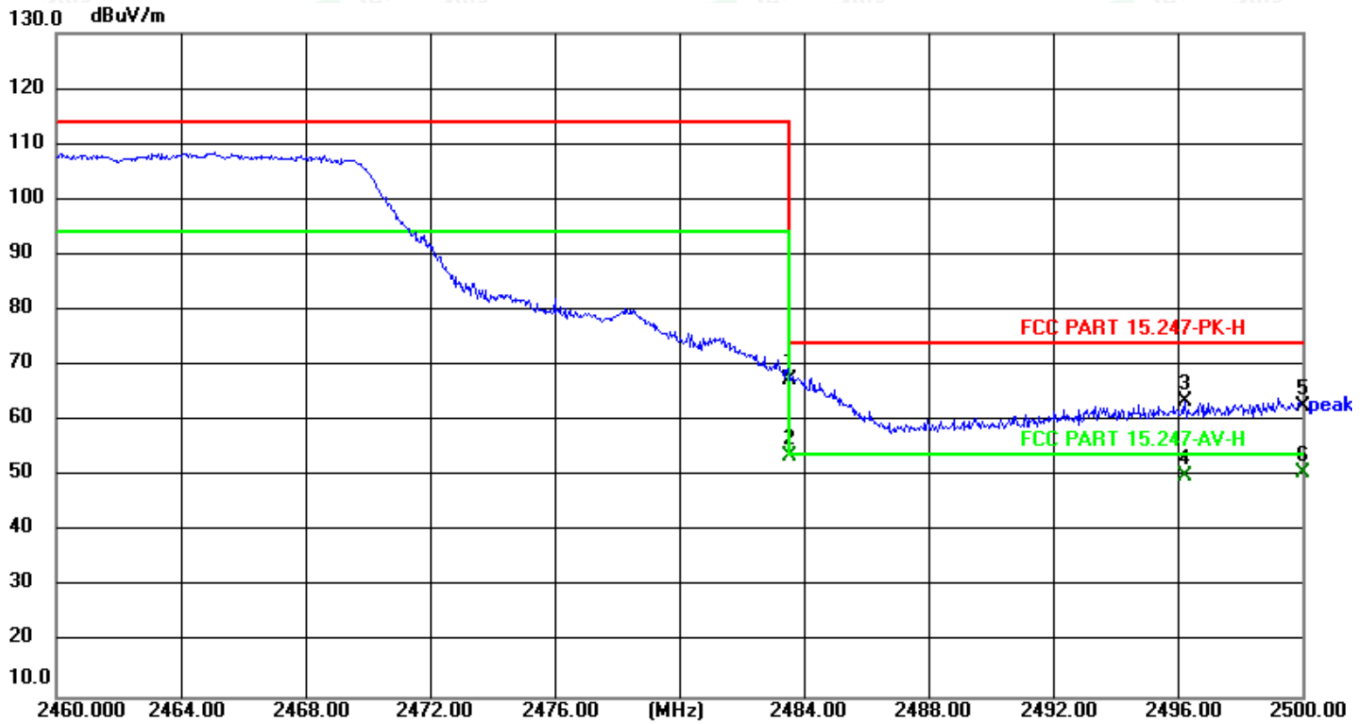


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 68.96 | -1.40 | 67.56 | 74.00 | -6.44 | peak |
| 2 | 2483.500 | 54.94 | -1.40 | 53.54 | 54.00 | -0.46 | AVG |
| 3 | 2496.240 | 65.02 | -1.36 | 63.66 | 74.00 | -10.34 | peak |
| 4 | 2496.240 | 51.38 | -1.36 | 50.02 | 54.00 | -3.98 | AVG |
| 5 | 2500.000 | 63.89 | -1.34 | 62.55 | 74.00 | -11.45 | peak |
| 6 | 2500.000 | 51.96 | -1.34 | 50.62 | 54.00 | -3.38 | AVG |





Horizontal

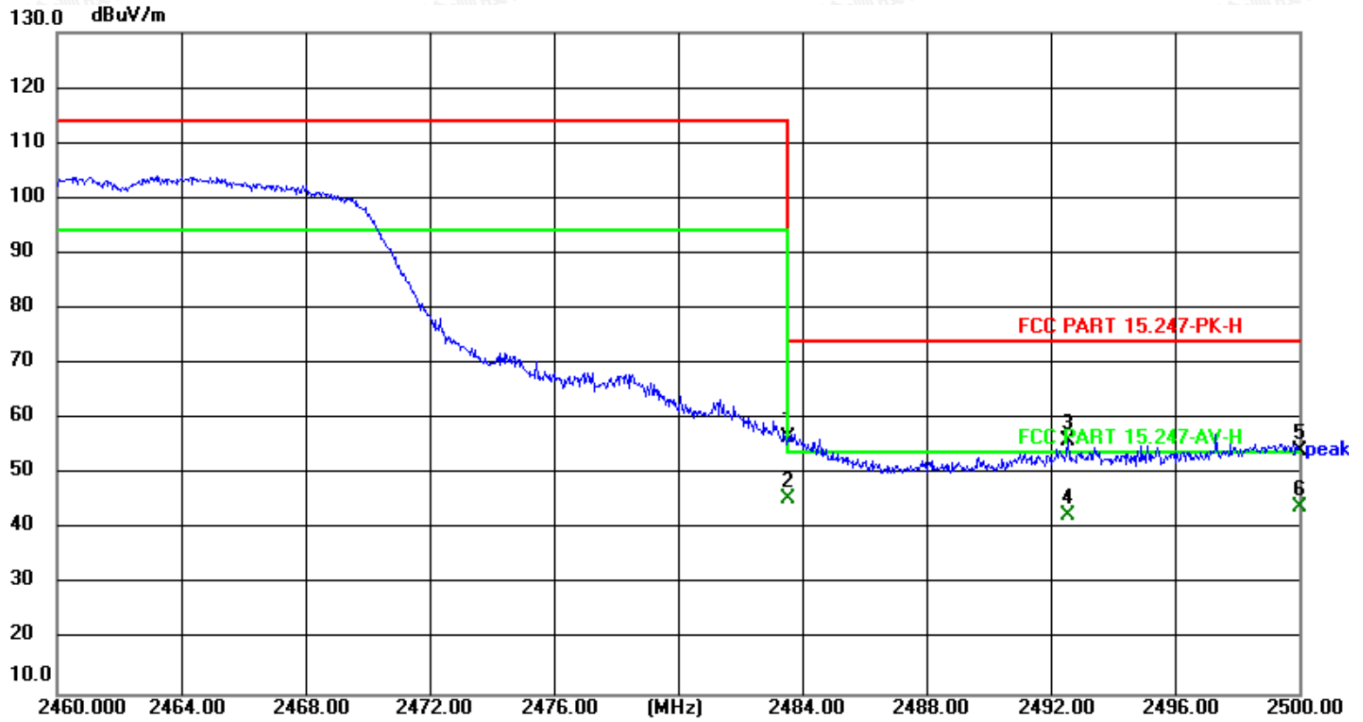

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 58.17 | -1.40 | 56.77 | 74.00 | -17.23 | peak |
| 2 | 2483.500 | 46.82 | -1.40 | 45.42 | 54.00 | -8.58 | AVG |
| 3 | 2492.560 | 57.34 | -1.37 | 55.97 | 74.00 | -18.03 | peak |
| 4 | 2492.560 | 43.84 | -1.37 | 42.47 | 54.00 | -11.53 | AVG |
| 5 | 2500.000 | 55.54 | -1.34 | 54.20 | 74.00 | -19.80 | peak |
| 6 | 2500.000 | 45.34 | -1.34 | 44.00 | 54.00 | -10.00 | AVG |






IEEE 802.11n2412 MHz 20M

Vertical

130.0 dBuV/m

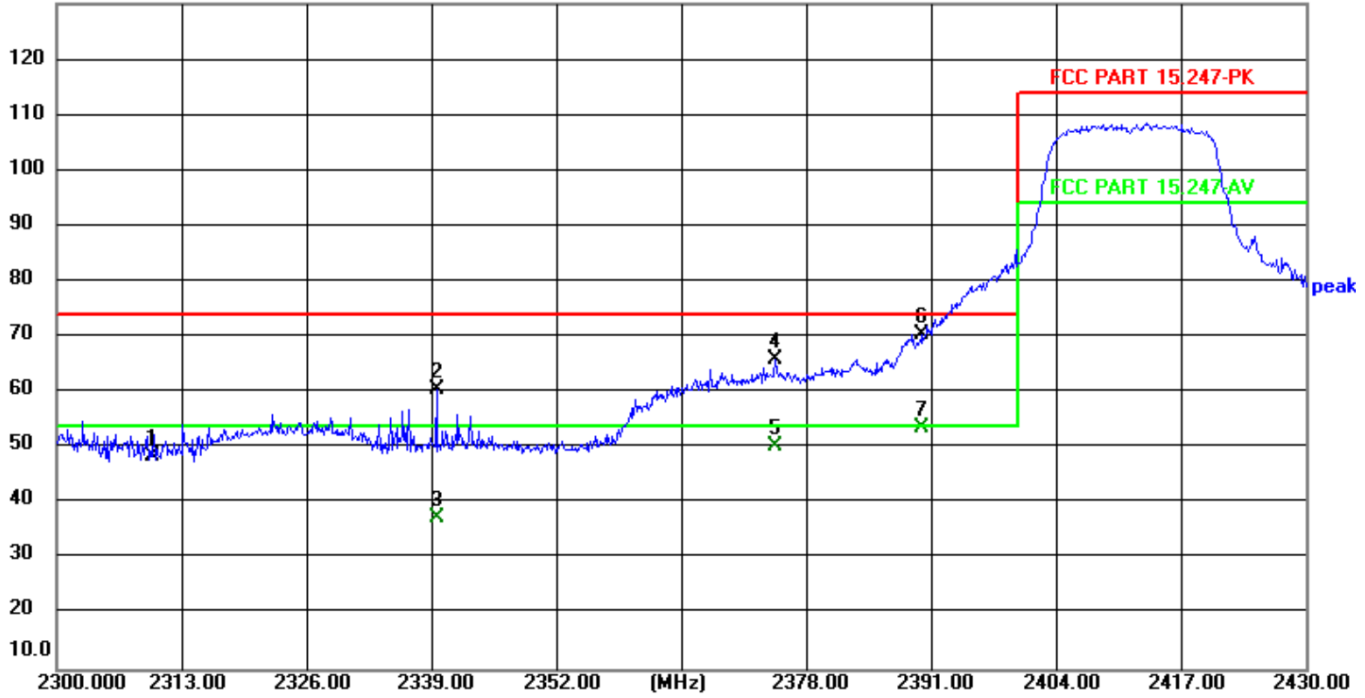


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 50.58 | -2.02 | 48.56 | 74.00 | -25.44 | peak |
| 2 | 2339.520 | 62.57 | -1.91 | 60.66 | 74.00 | -13.34 | peak |
| 3 | 2339.520 | 39.28 | -1.91 | 37.37 | 54.00 | -16.63 | AVG |
| 4 | 2374.750 | 67.80 | -1.79 | 66.01 | 74.00 | -7.99 | peak |
| 5 | 2374.750 | 52.11 | -1.79 | 50.32 | 54.00 | -3.68 | AVG |
| 6 | 2390.000 | 72.04 | -1.73 | 70.31 | 74.00 | -3.69 | peak |
| 7 | 2390.000 | 55.41 | -1.73 | 53.68 | 54.00 | -0.32 | AVG |





Horizontal

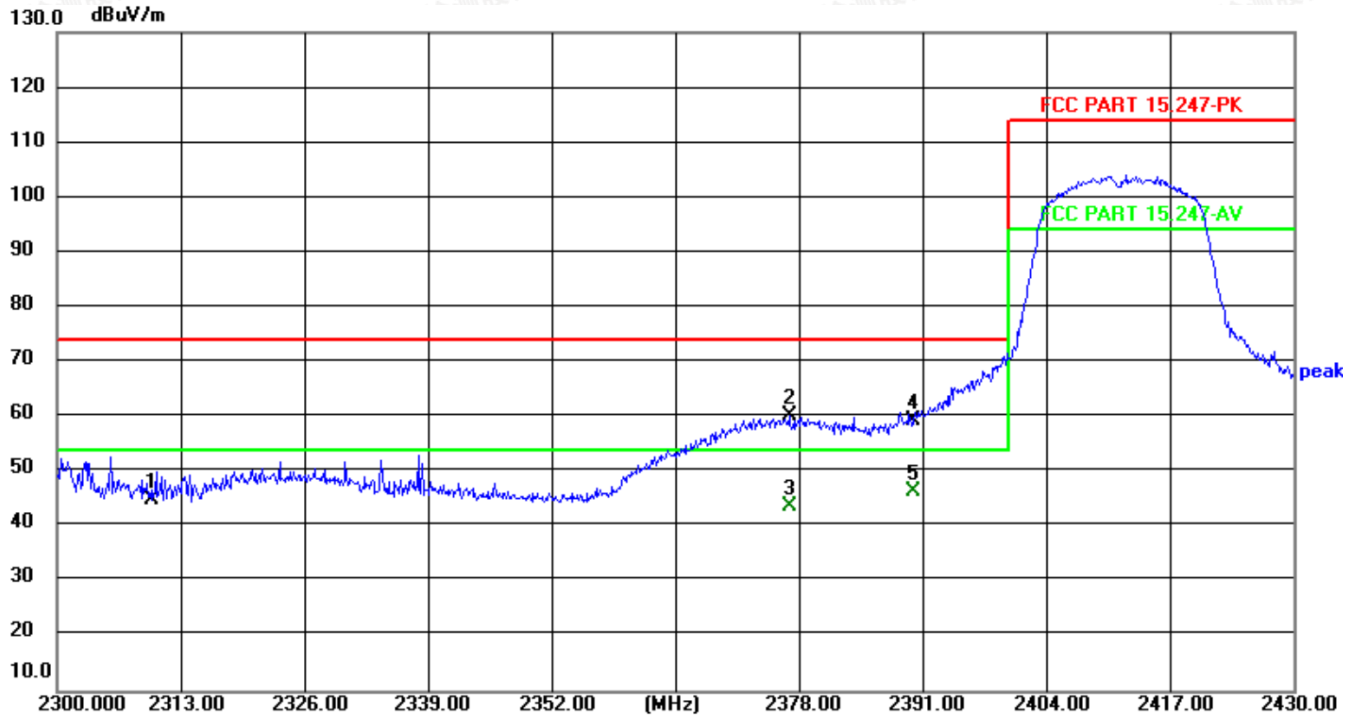

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 46.85 | -2.02 | 44.83 | 74.00 | -29.17 | peak |
| 2 | 2376.960 | 62.17 | -1.78 | 60.39 | 74.00 | -13.61 | peak |
| 3 | 2376.960 | 45.65 | -1.78 | 43.87 | 54.00 | -10.13 | AVG |
| 4 | 2390.000 | 61.04 | -1.73 | 59.31 | 74.00 | -14.69 | peak |
| 5 | 2390.000 | 48.27 | -1.73 | 46.54 | 54.00 | -7.46 | AVG |






IEEE 802.11n 2462 MHz 20M

Vertical

130.0 dBuV/m

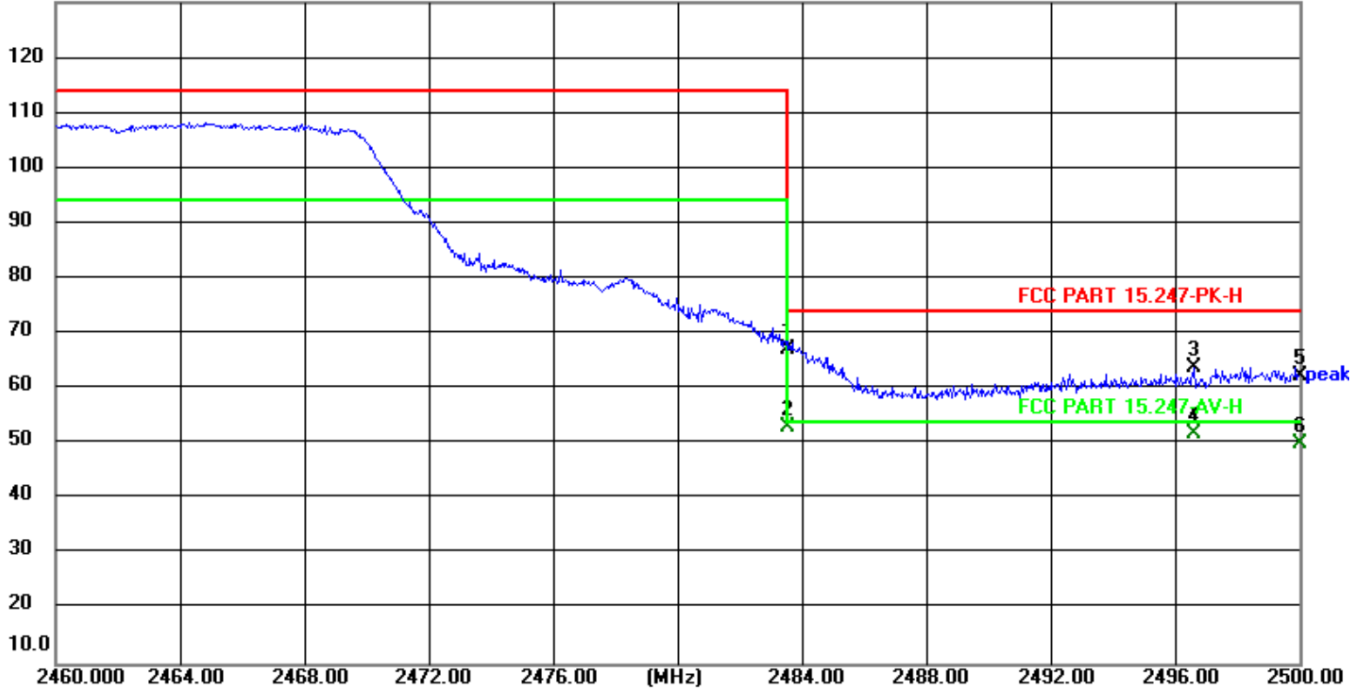


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 68.62 | -1.40 | 67.22 | 74.00 | -6.78 | peak |
| 2 | 2483.500 | 54.43 | -1.40 | 53.03 | 54.00 | -0.97 | AVG |
| 3 | 2496.600 | 65.09 | -1.36 | 63.73 | 74.00 | -10.27 | peak |
| 4 | 2496.600 | 53.15 | -1.36 | 51.79 | 54.00 | -2.21 | AVG |
| 5 | 2500.000 | 63.75 | -1.34 | 62.41 | 74.00 | -11.59 | peak |
| 6 | 2500.000 | 51.37 | -1.34 | 50.03 | 54.00 | -3.97 | AVG |





Horizontal

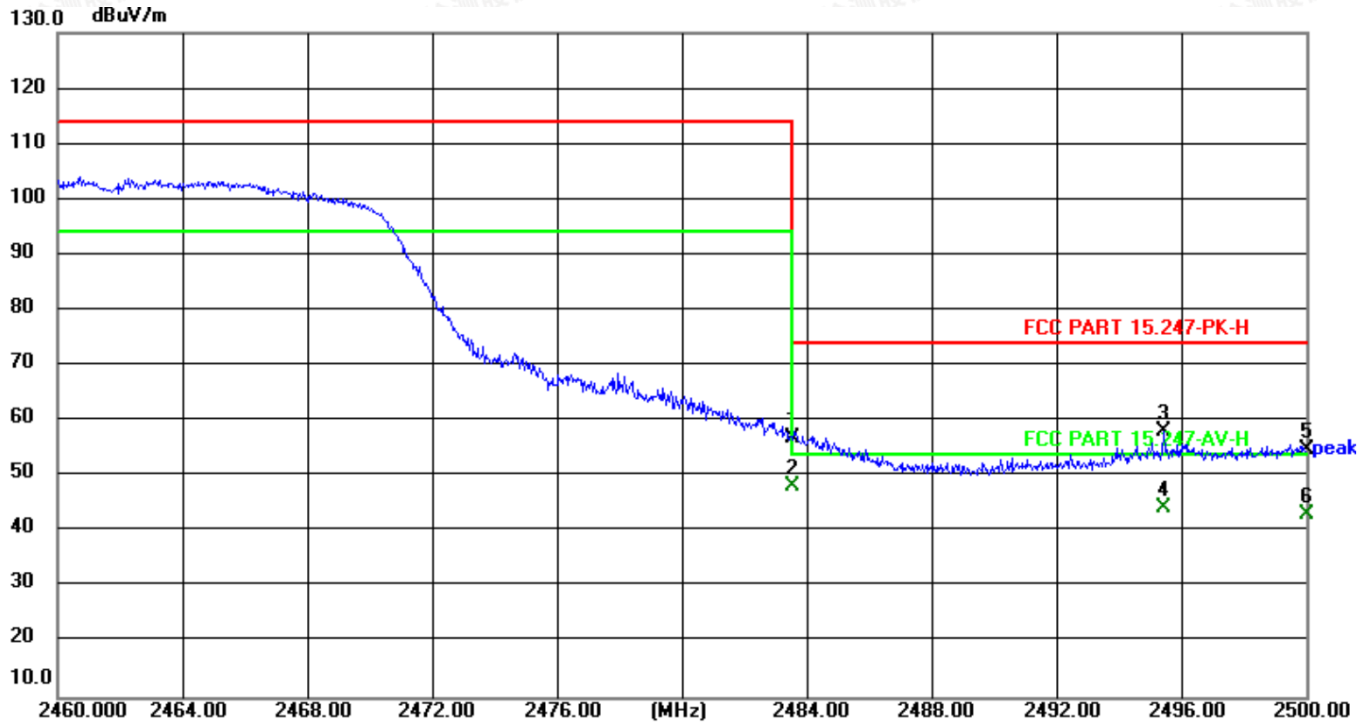


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 58.36 | -1.40 | 56.96 | 74.00 | -17.04 | peak |
| 2 | 2483.500 | 49.77 | -1.40 | 48.37 | 54.00 | -5.63 | AVG |
| 3 | 2495.440 | 59.65 | -1.36 | 58.29 | 74.00 | -15.71 | peak |
| 4 | 2495.440 | 45.60 | -1.36 | 44.24 | 54.00 | -9.76 | AVG |
| 5 | 2500.000 | 56.15 | -1.34 | 54.81 | 74.00 | -19.19 | peak |
| 6 | 2500.000 | 44.41 | -1.34 | 43.07 | 54.00 | -10.93 | AVG |





IEEE 802.11n 2412 MHz 10M

Vertical

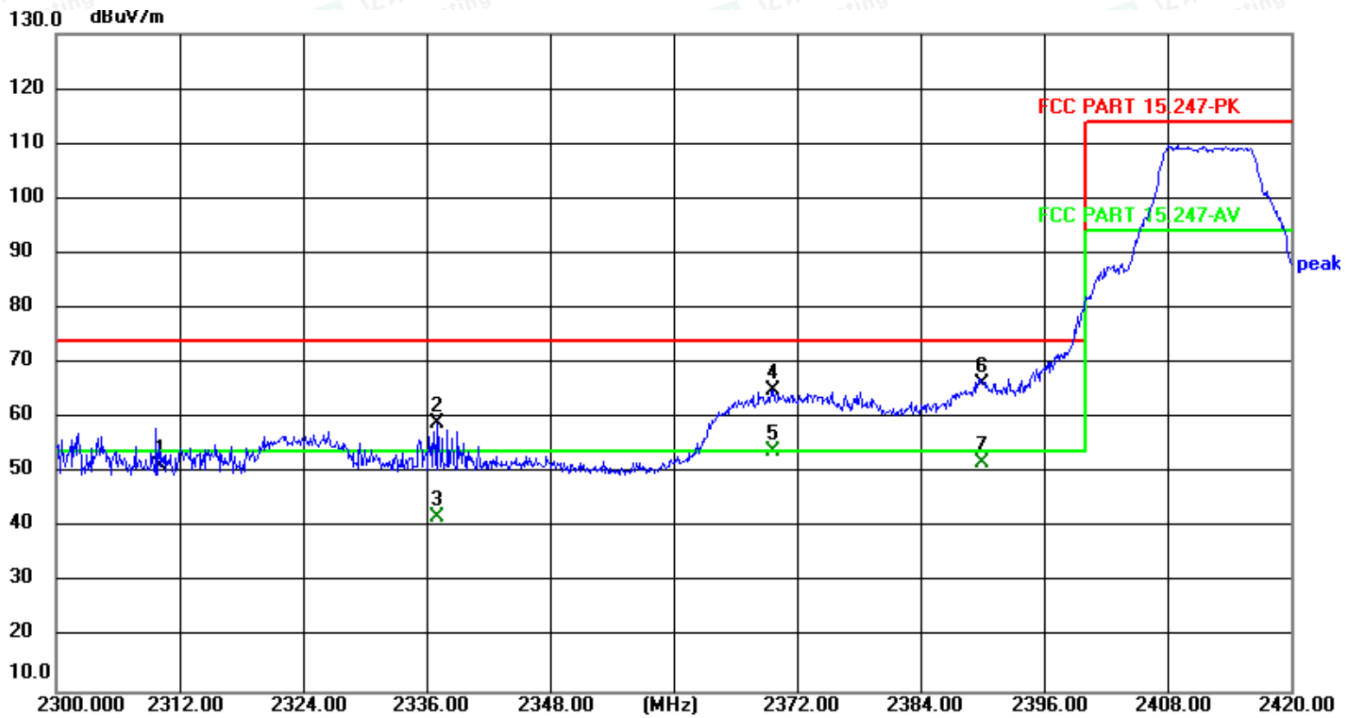


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 53.27 | -2.02 | 51.25 | 74.00 | -22.75 | peak |
| 2 | 2336.960 | 61.00 | -1.91 | 59.09 | 74.00 | -14.91 | peak |
| 3 | 2336.960 | 43.81 | -1.91 | 41.90 | 54.00 | -12.10 | AVG |
| 4 | 2369.720 | 66.90 | -1.80 | 65.10 | 74.00 | -8.90 | peak |
| 5 | 2369.720 | 55.78 | -1.80 | 53.98 | 54.00 | -0.02 | AVG |
| 6 | 2390.000 | 67.88 | -1.73 | 66.15 | 74.00 | -7.85 | peak |
| 7 | 2390.000 | 53.52 | -1.73 | 51.79 | 54.00 | -2.21 | AVG |





Horizontal

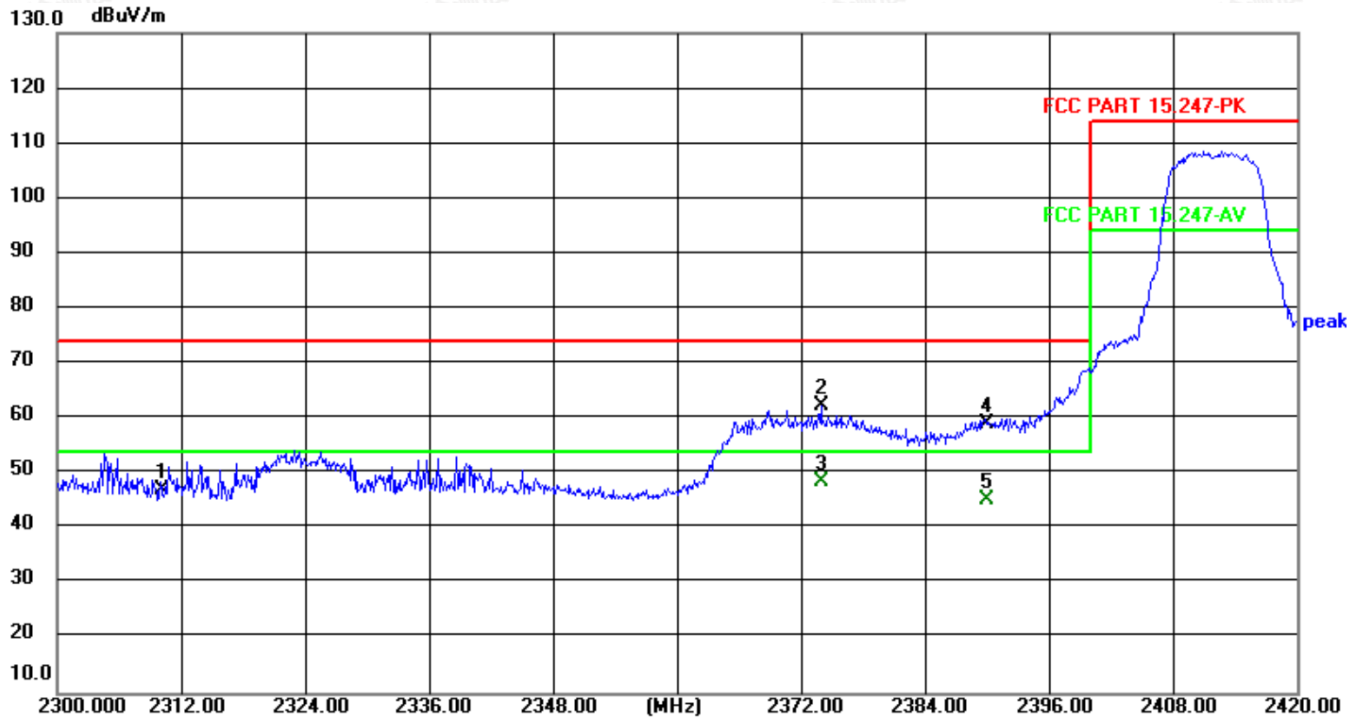


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 49.06 | -2.02 | 47.04 | 74.00 | -26.96 | peak |
| 2 | 2373.920 | 64.25 | -1.79 | 62.46 | 74.00 | -11.54 | peak |
| 3 | 2373.920 | 50.37 | -1.79 | 48.58 | 54.00 | -5.42 | AVG |
| 4 | 2390.000 | 60.85 | -1.73 | 59.12 | 74.00 | -14.88 | peak |
| 5 | 2390.000 | 47.07 | -1.73 | 45.34 | 54.00 | -8.66 | AVG |





IEEE 802.11n 2467 MHz 10M

Vertical

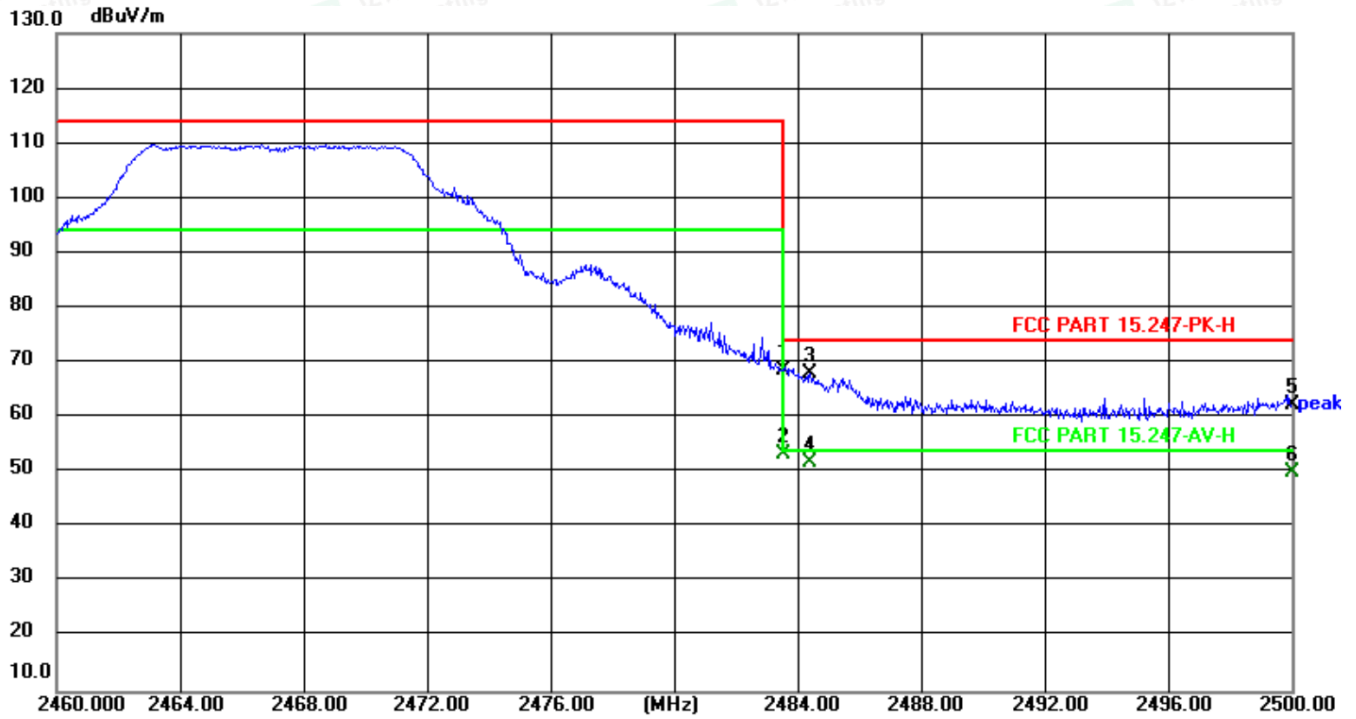


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 70.15 | -1.40 | 68.75 | 74.00 | -5.25 | peak |
| 2 | 2483.500 | 54.68 | -1.40 | 53.28 | 54.00 | -0.72 | AVG |
| 3 | 2484.400 | 69.59 | -1.40 | 68.19 | 74.00 | -5.81 | peak |
| 4 | 2484.400 | 53.32 | -1.40 | 51.92 | 54.00 | -2.08 | AVG |
| 5 | 2500.000 | 63.81 | -1.34 | 62.47 | 74.00 | -11.53 | peak |
| 6 | 2500.000 | 51.35 | -1.34 | 50.01 | 54.00 | -3.99 | AVG |





Horizontal

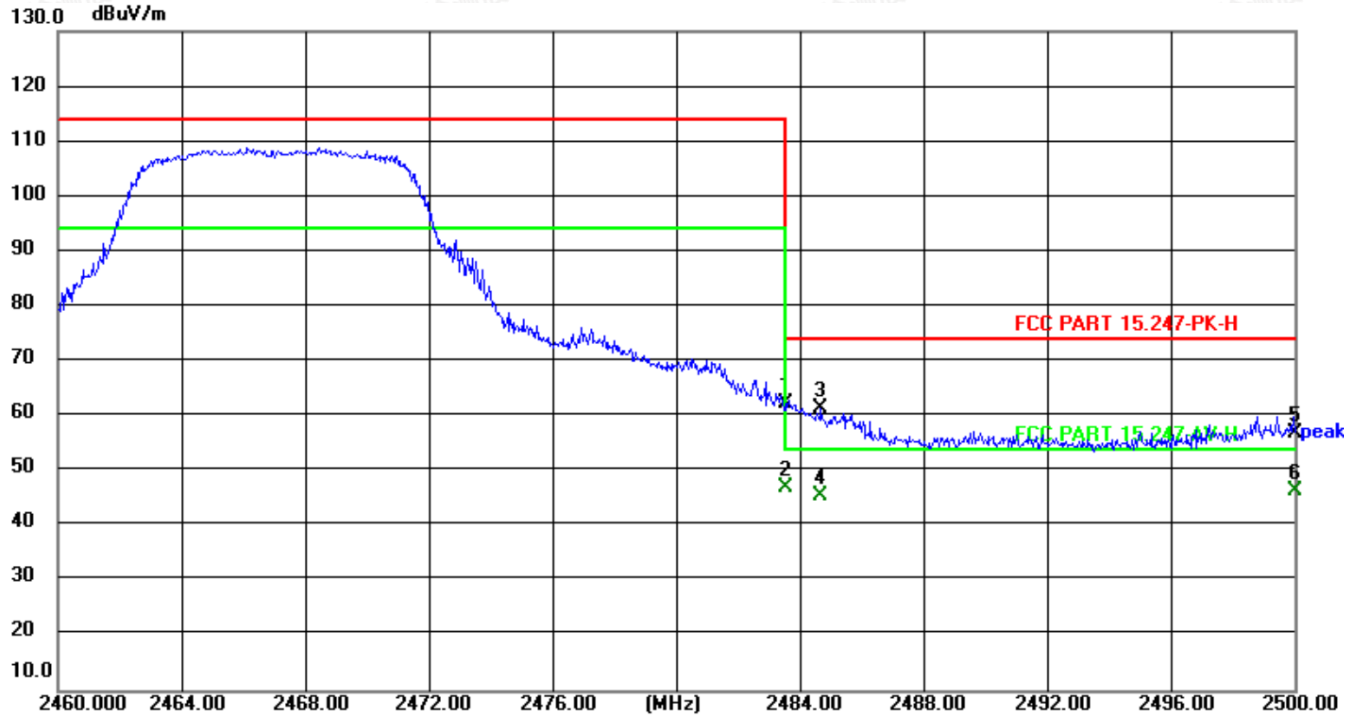

| No. | Frequency (MHz) | Reading (dBUV) | Factor (dB/m) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 63.75 | -1.40 | 62.35 | 74.00 | -11.65 | peak |
| 2 | 2483.500 | 48.55 | -1.40 | 47.15 | 54.00 | -6.85 | AVG |
| 3 | 2484.680 | 62.82 | -1.40 | 61.42 | 74.00 | -12.58 | peak |
| 4 | 2484.680 | 47.04 | -1.40 | 45.64 | 54.00 | -8.36 | AVG |
| 5 | 2500.000 | 58.24 | -1.34 | 56.90 | 74.00 | -17.10 | peak |
| 6 | 2500.000 | 47.71 | -1.34 | 46.37 | 54.00 | -7.63 | AVG |






IEEE 802.11g 2412 MHz 10M

Vertical

130.0 dBuV/m

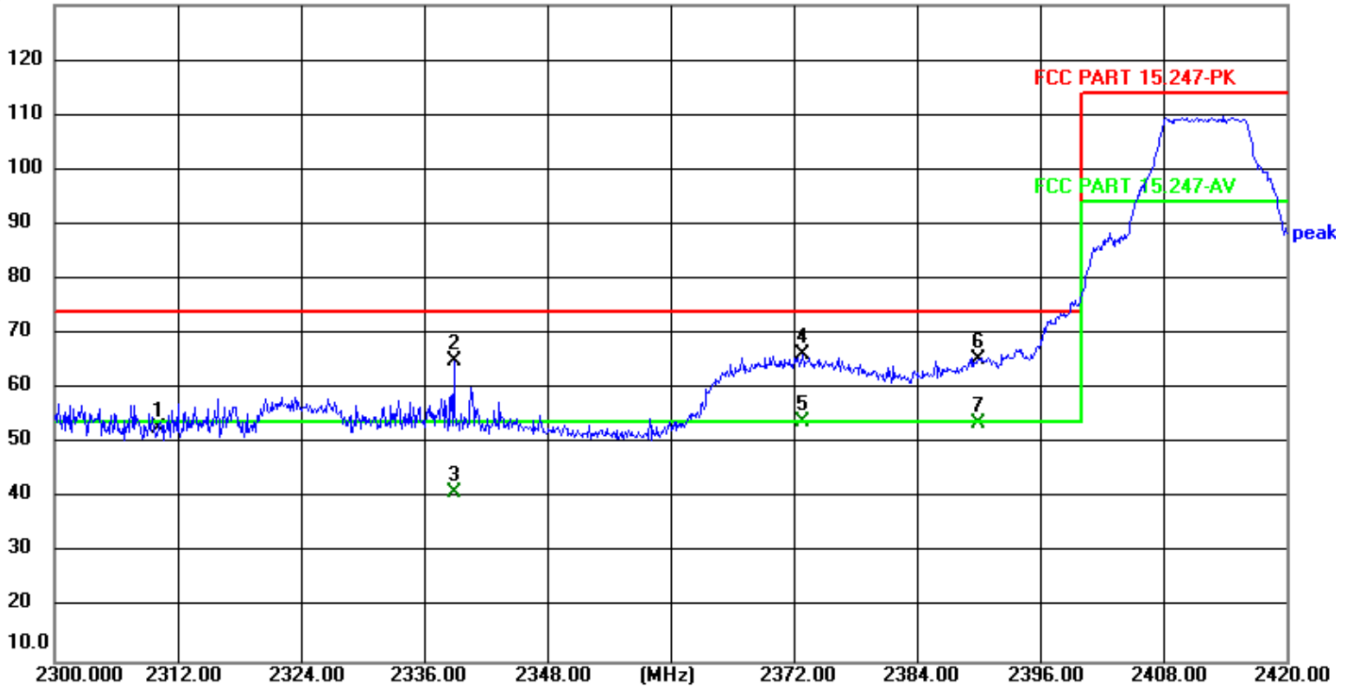


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 54.90 | -2.02 | 52.88 | 74.00 | -21.12 | peak |
| 2 | 2338.880 | 66.83 | -1.91 | 64.92 | 74.00 | -9.08 | peak |
| 3 | 2338.880 | 42.97 | -1.91 | 41.06 | 54.00 | -12.94 | AVG |
| 4 | 2372.840 | 68.18 | -1.80 | 66.38 | 74.00 | -7.62 | peak |
| 5 | 2372.840 | 55.72 | -1.80 | 53.92 | 54.00 | -0.08 | AVG |
| 6 | 2390.000 | 67.15 | -1.73 | 65.42 | 74.00 | -8.58 | peak |
| 7 | 2390.000 | 55.27 | -1.73 | 53.54 | 54.00 | -0.46 | AVG |





Horizontal

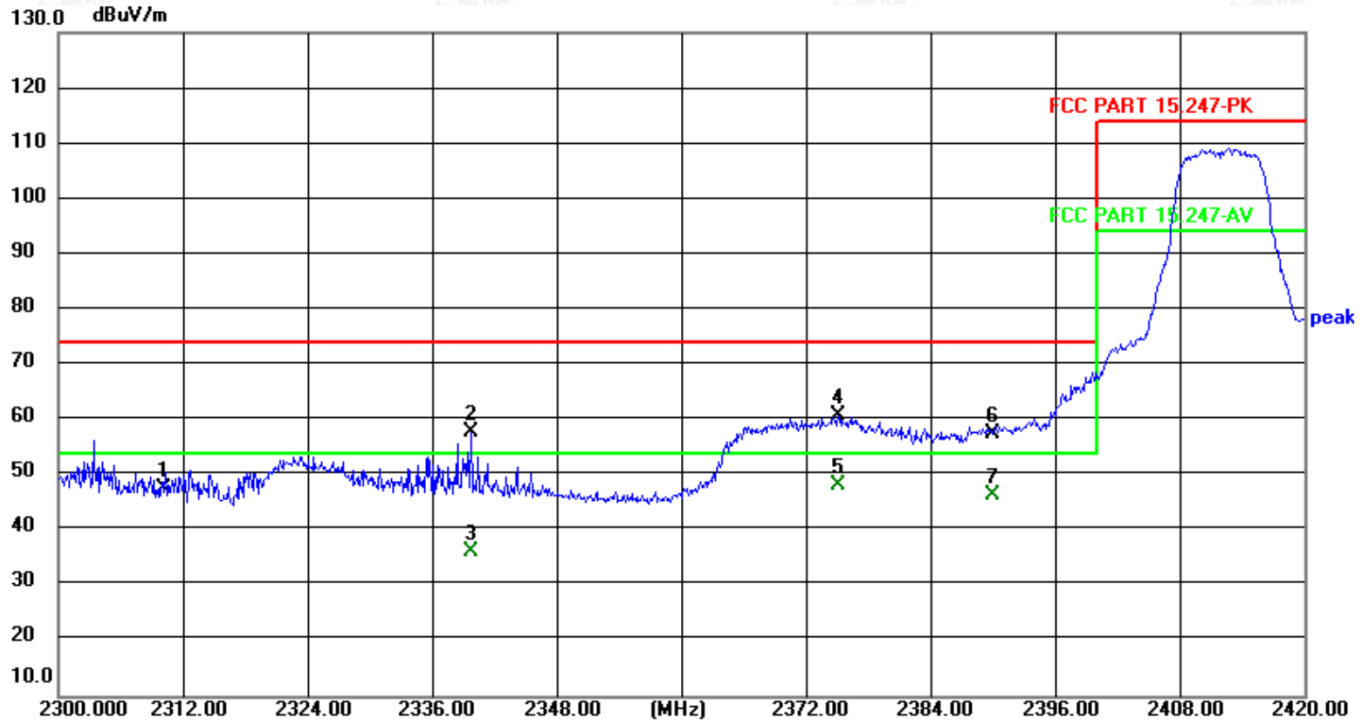

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2310.000 | 49.78 | -2.02 | 47.76 | 74.00 | -26.24 | peak |
| 2 | 2339.720 | 59.63 | -1.91 | 57.72 | 74.00 | -16.28 | peak |
| 3 | 2339.720 | 38.15 | -1.91 | 36.24 | 54.00 | -17.76 | AVG |
| 4 | 2375.120 | 62.64 | -1.79 | 60.85 | 74.00 | -13.15 | peak |
| 5 | 2375.120 | 50.06 | -1.79 | 48.27 | 54.00 | -5.73 | AVG |
| 6 | 2390.000 | 59.34 | -1.73 | 57.61 | 74.00 | -16.39 | peak |
| 7 | 2390.000 | 48.14 | -1.73 | 46.41 | 54.00 | -7.59 | AVG |






IEEE 802.11g 2467 MHz 10M

Vertical

130.0 dBuV/m

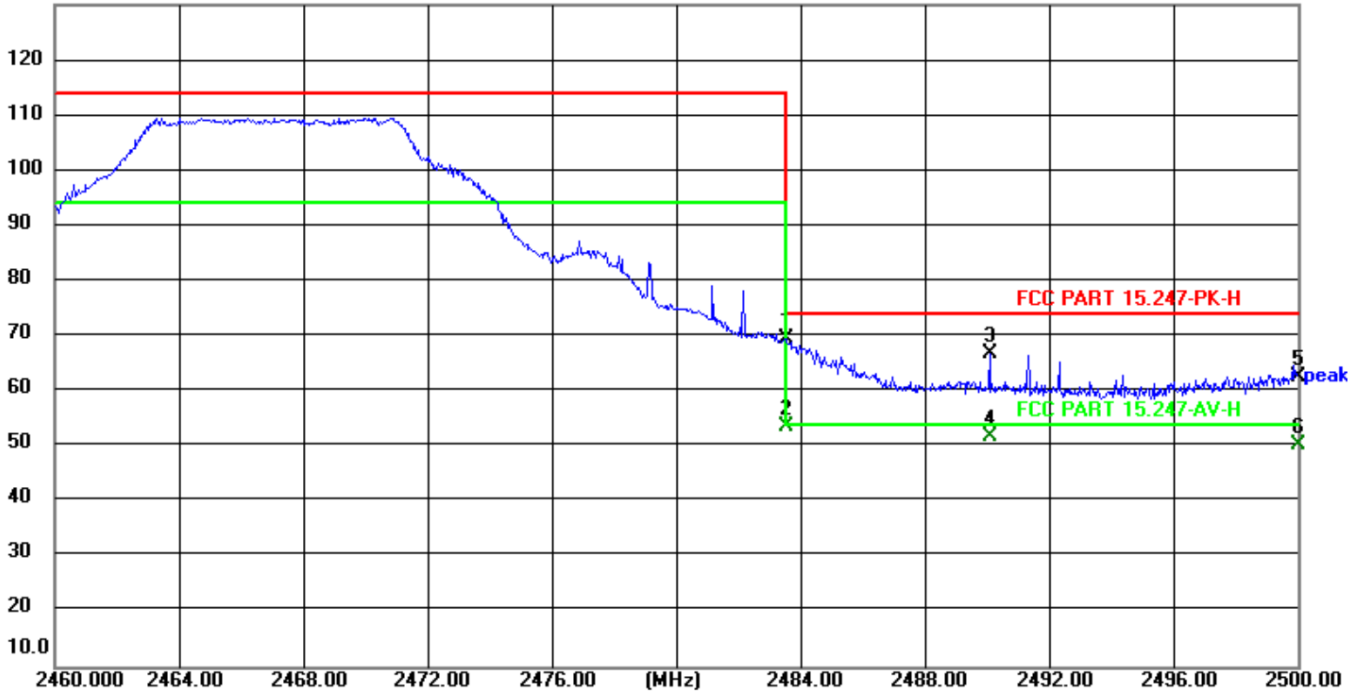


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 70.96 | -1.40 | 69.56 | 74.00 | -4.44 | peak |
| 2 | 2483.500 | 55.00 | -1.40 | 53.60 | 54.00 | -0.40 | AVG |
| 3 | 2490.080 | 68.24 | -1.38 | 66.86 | 74.00 | -7.14 | peak |
| 4 | 2490.080 | 53.14 | -1.38 | 51.76 | 54.00 | -2.24 | AVG |
| 5 | 2500.000 | 64.07 | -1.34 | 62.73 | 74.00 | -11.27 | peak |
| 6 | 2500.000 | 51.78 | -1.34 | 50.44 | 54.00 | -3.56 | AVG |





Horizontal

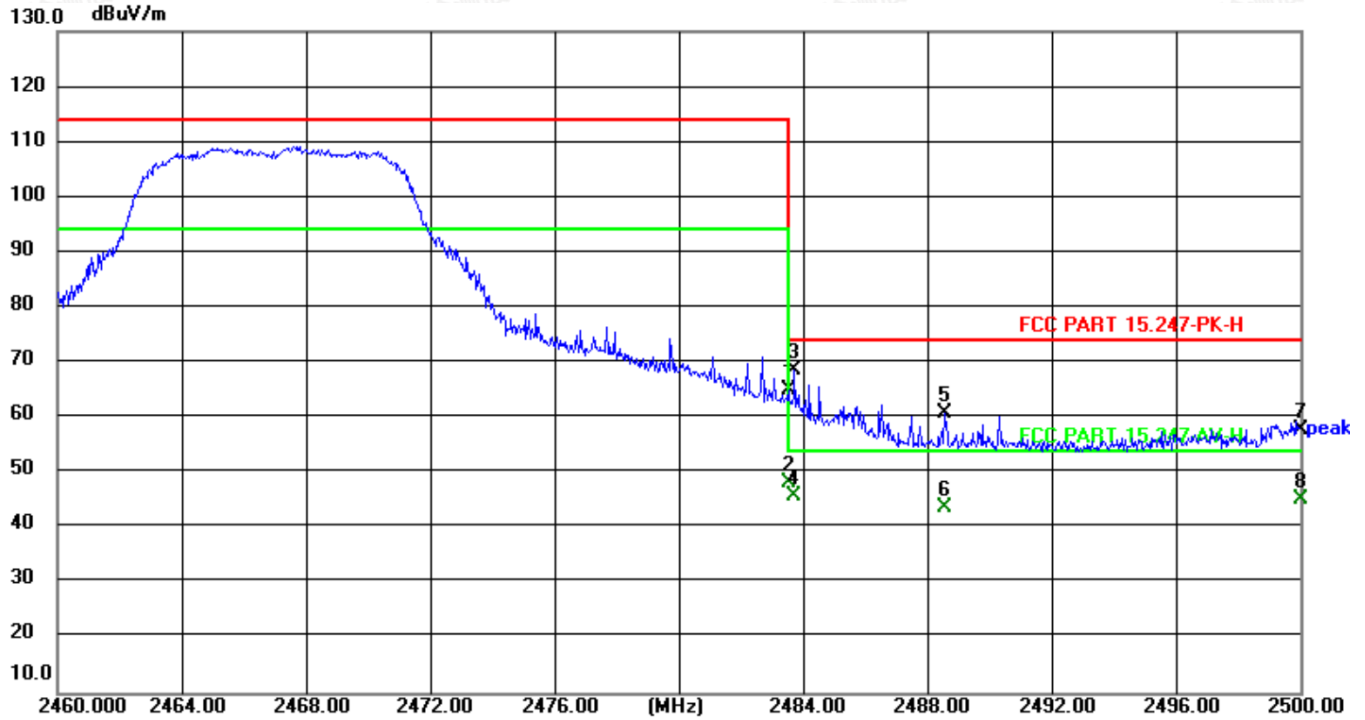

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 2483.500 | 66.31 | -1.40 | 64.91 | 74.00 | -9.09 | peak |
| 2 | 2483.500 | 49.58 | -1.40 | 48.18 | 54.00 | -5.82 | AVG |
| 3 | 2483.720 | 69.93 | -1.40 | 68.53 | 74.00 | -5.47 | peak |
| 4 | 2483.720 | 47.35 | -1.40 | 45.95 | 54.00 | -8.05 | AVG |
| 5 | 2488.560 | 62.30 | -1.39 | 60.91 | 74.00 | -13.09 | peak |
| 6 | 2488.560 | 45.02 | -1.39 | 43.63 | 54.00 | -10.37 | AVG |
| 7 | 2500.000 | 59.25 | -1.34 | 57.91 | 74.00 | -16.09 | peak |
| 8 | 2500.000 | 46.48 | -1.34 | 45.14 | 54.00 | -8.86 | AVG |

Remark:

- 1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20;



5.8. AC Power line conducted emissions


5.8.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

5.8.2 Block Diagram of Test Setup

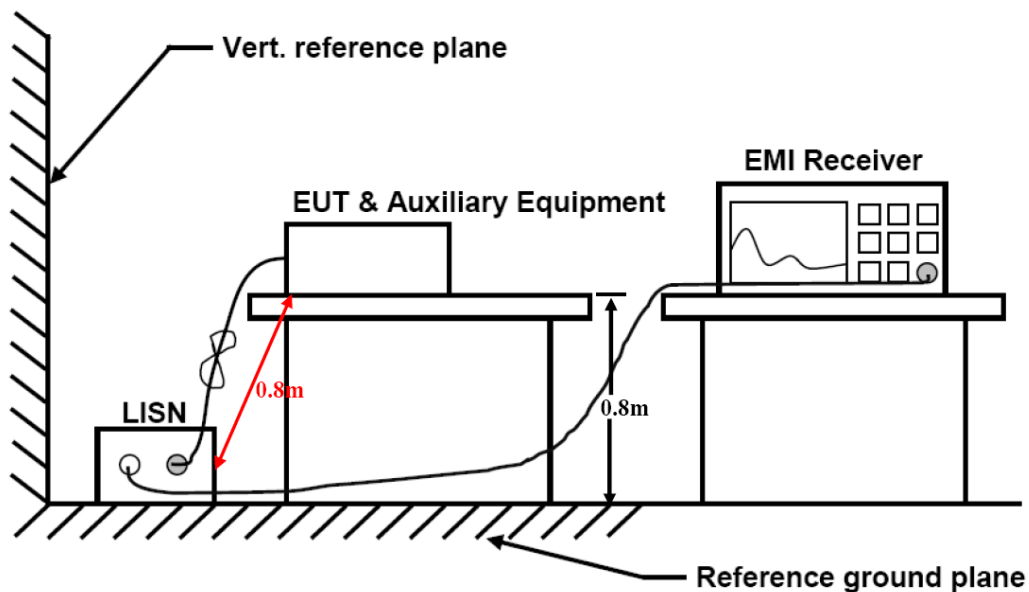

5.8.3. Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

| | | |
|-------|----------------------------|--|
| Where | CD = Conducted Disturbance | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | PL = 10 dB Pulse Limiter Factor |

5.8.4. Test Results

The test data please refer to following page.


| | | | |
|---------------|-----------|----------------|----------------|
| Temperature | 23.8°C | Humidity | 52.1% |
| Test Engineer | Taylor Hu | Configurations | IEEE 802.11g/n |





AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))

Line

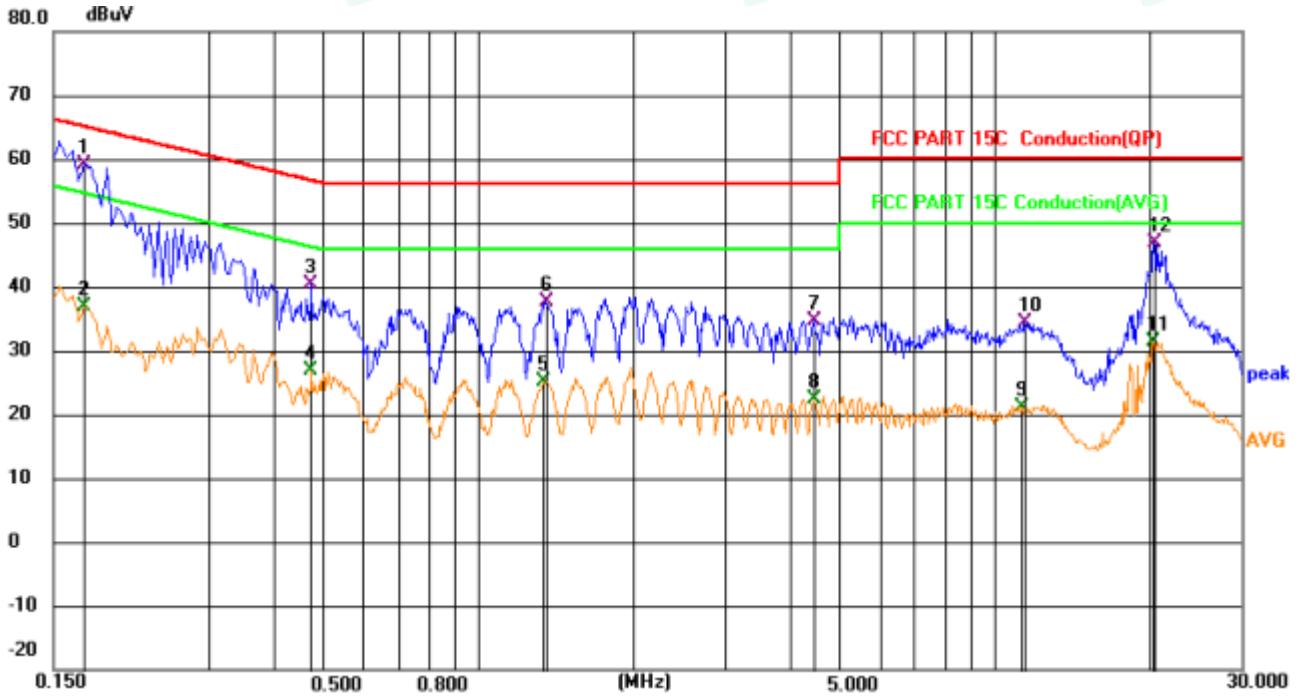


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|
| 1 | * | 0.1726 | 39.53 | 19.63 | 59.16 | 64.83 | -5.67 | QP |
| 2 | | 0.1726 | 17.36 | 19.63 | 36.99 | 54.83 | -17.84 | AVG |
| 3 | | 0.4741 | 20.81 | 19.64 | 40.45 | 56.44 | -15.99 | QP |
| 4 | | 0.4741 | 7.28 | 19.64 | 26.92 | 46.44 | -19.52 | AVG |
| 5 | | 1.3335 | 5.49 | 19.66 | 25.15 | 46.00 | -20.85 | AVG |
| 6 | | 1.3470 | 18.08 | 19.66 | 37.74 | 56.00 | -18.26 | QP |
| 7 | | 4.4701 | 14.98 | 19.70 | 34.68 | 56.00 | -21.32 | QP |
| 8 | | 4.4926 | 2.59 | 19.70 | 22.29 | 46.00 | -23.71 | AVG |
| 9 | | 11.2651 | 1.34 | 19.85 | 21.19 | 50.00 | -28.81 | AVG |
| 10 | | 11.4361 | 14.63 | 19.85 | 34.48 | 60.00 | -25.52 | QP |
| 11 | | 20.2561 | 11.11 | 20.19 | 31.30 | 50.00 | -18.70 | AVG |
| 12 | | 20.3146 | 26.75 | 20.19 | 46.94 | 60.00 | -13.06 | QP |





Neutral

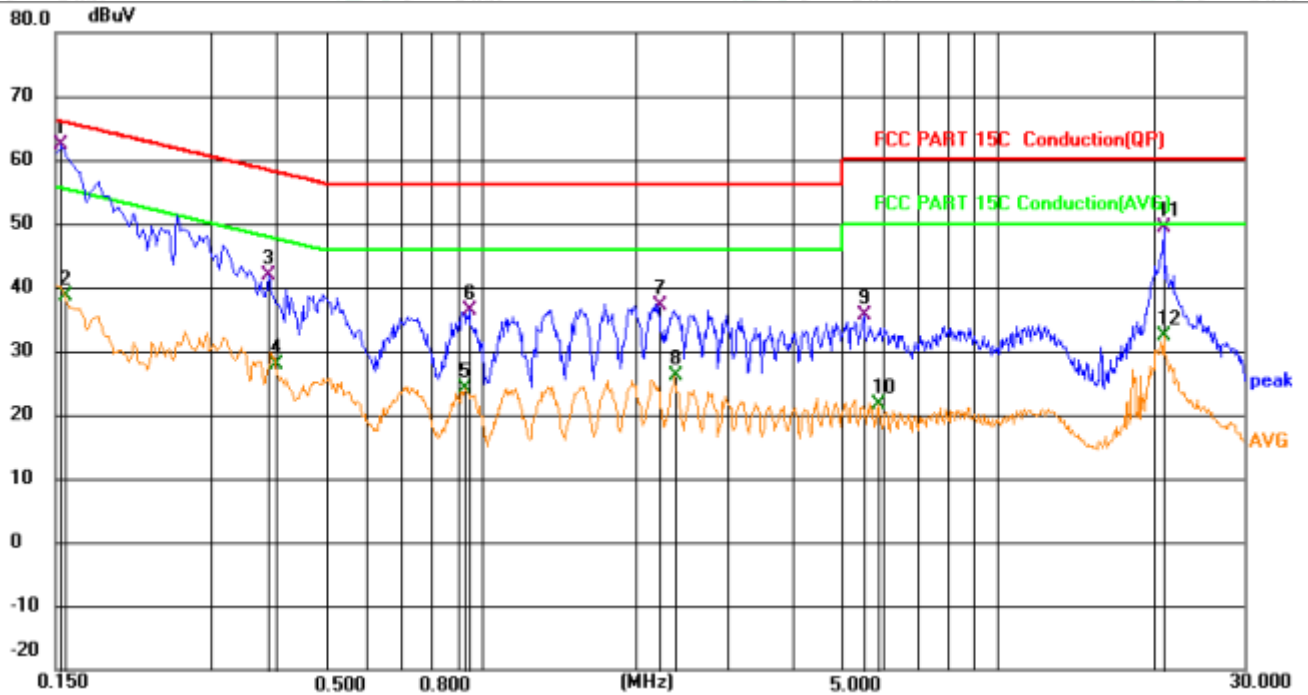

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|
| 1 | * | 0.1539 | 42.63 | 19.63 | 62.26 | 65.79 | -3.53 | QP |
| 2 | | 0.1565 | 18.99 | 19.63 | 38.62 | 55.65 | -17.03 | AVG |
| 3 | | 0.3871 | 22.15 | 19.63 | 41.78 | 58.13 | -16.35 | QP |
| 4 | | 0.3997 | 8.14 | 19.63 | 27.77 | 47.86 | -20.09 | AVG |
| 5 | | 0.9282 | 4.53 | 19.65 | 24.18 | 46.00 | -21.82 | AVG |
| 6 | | 0.9481 | 16.61 | 19.65 | 36.26 | 56.00 | -19.74 | QP |
| 7 | | 2.2015 | 17.41 | 19.69 | 37.10 | 56.00 | -18.90 | QP |
| 8 | | 2.3710 | 6.38 | 19.70 | 26.08 | 46.00 | -19.92 | AVG |
| 9 | | 5.5054 | 15.77 | 19.80 | 35.57 | 60.00 | -24.43 | QP |
| 10 | | 5.8668 | 1.94 | 19.80 | 21.74 | 50.00 | -28.26 | AVG |
| 11 | | 20.9243 | 29.24 | 20.15 | 49.39 | 60.00 | -10.61 | QP |
| 12 | | 20.9243 | 12.19 | 20.15 | 32.34 | 50.00 | -17.66 | AVG |

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit





5.9. Antenna Requirements

5.9.1 Standard Applicable

According to antenna requirement of §15.203.

According to antenna requirement of §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2 Antenna Connected Construction

5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.9.2.2. Antenna Connector Construction

The gain of antenna used for transmitting is 2.2dBi (Max.), and the antenna is External Antenna and uses unique antenna connector RP-SMA (Reverse Polarity SMA). Please see EUT photo for details.

5.9.2.3. Results: Compliance.





6. LIST OF MEASURING EQUIPMENTS

| Item | Equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|--------------------------|-------------------|-------------|-----------------|------------|------------|
| 1 | Power Meter | R&S | NRVS | 100444 | 2023-06-09 | 2024-06-08 |
| 2 | Power Sensor | R&S | NRV-Z81 | 100458 | 2023-06-09 | 2024-06-08 |
| 3 | Power Sensor | R&S | NRV-Z32 | 10057 | 2023-06-09 | 2024-06-08 |
| 4 | Test Software | Tonscend | JS1120-2 | / | N/A | N/A |
| 5 | RF Control Unit | Tonscend | JS0806-2 | N/A | 2023-10-28 | 2024-10-27 |
| | | | | | 2023-10-28 | 2024-10-27 |
| 6 | MXA Signal Analyzer | Agilent | N9020A | MY50510140 | 2023-10-28 | 2024-10-27 |
| | | | | | 2023-10-28 | 2024-10-27 |
| 7 | DC Power Supply | Agilent | E3642A | N/A | 2022-10-29 | 2024-10-27 |
| | | | | | 2023-10-28 | 2024-10-27 |
| 8 | EMI Test Software | AUDIX | E3 | / | N/A | N/A |
| 9 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2023-06-09 | 2024-06-08 |
| 10 | Positioning Controller | Max-Full | MF7802BS | MF780208586 | N/A | N/A |
| 11 | Active Loop Antenna | SCHWARZBECK | FMZB 1519B | 00005 | 2021-08-29 | 2024-08-28 |
| 12 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2021-09-12 | 2024-09-11 |
| 13 | Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-1925 | 2021-09-05 | 2024-09-04 |
| 14 | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 791 | 2021-08-29 | 2024-08-28 |
| 15 | Broadband Preampifier | SCHWARZBECK | BBV9719 | 9719-025 | 2023-06-09 | 2024-06-08 |
| 16 | EMI Test Receiver | R&S | ESR 7 | 101181 | 2023-06-09 | 2024-06-08 |
| 17 | RS SPECTRUM ANALYZER | R&S | FSP40 | 100503 | 2022-10-29 | 2024-10-27 |
| | | | | | 2023-10-28 | 2024-10-27 |
| 18 | Broadband Preampifier | / | BP-01M18G | P190501 | 2023-06-09 | 2024-06-08 |
| 19 | 6dB Attenuator | / | 100W/6dB | 1172040 | 2023-06-09 | 2024-06-08 |
| 20 | 3dB Attenuator | / | 2N-3dB | / | 2022-10-29 | 2024-10-27 |
| | | | | | 2023-10-28 | 2024-10-27 |
| 21 | EMI Test Receiver | R&S | ESPI | 101940 | 2023-08-15 | 2024-08-14 |
| 22 | Artificial Mains | R&S | ENV216 | 101288 | 2023-06-09 | 2024-06-08 |
| 23 | 10dB Attenuator | SCHWARZBECK | MTS-IMP-136 | 261115-001-0032 | 2023-06-09 | 2024-06-08 |
| 24 | EMI Test Software | Farad | EZ | / | N/A | N/A |
| 25 | Antenna Mast | Max-Full | MFA-515BSN | 1308572 | N/A | N/A |





7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----

